

Appendix C – Highest Test Plots

Test Date : 2025-06-22 | Ambient Temp : 22.4 °C | Tissue Temp : 22.1 °C

Test Mode

1_WCDMA II_RMC12.2K_Top Side_0mm_Ch9400_Ant Main_w/o Battery

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 2	WCDMA, 10011 - CAC	1880.000, 9400	7.85	1.44	39.0

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.866	0.977
psSAR-10g [W/kg]	0.461	0.516
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		58.1
Dist 3dB Peak [mm]		9.6

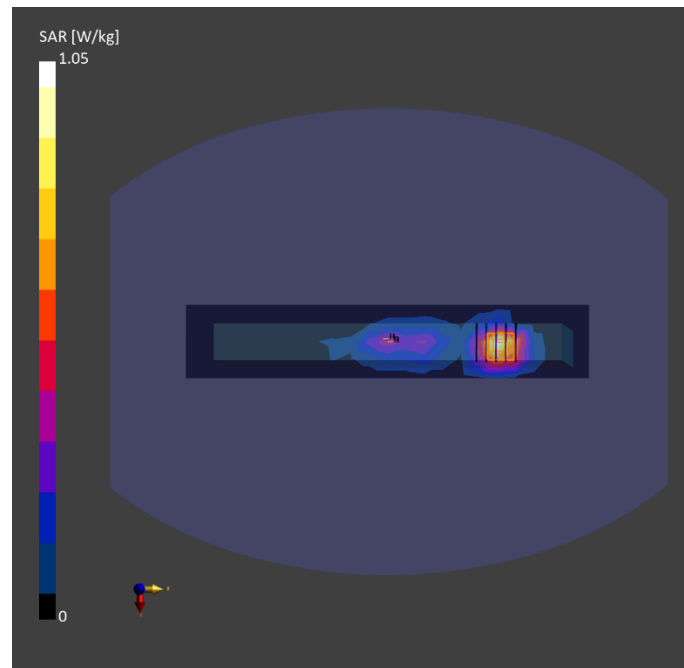

Test Date : 2025-06-24 | Ambient Temp : 22.4 °C | Tissue Temp : 21.8 °C

Test Mode**2_WCDMA IV_RMC12.2K_Top Side_0mm_Ch1312_Ant Main_w/o Battery****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 4	WCDMA, 10011 - CAC	1712.400, 1312	8.02	1.34	39.2

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.793	0.912
psSAR-10g [W/kg]	0.450	0.496
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		59.9
Dist 3dB Peak [mm]		11.2

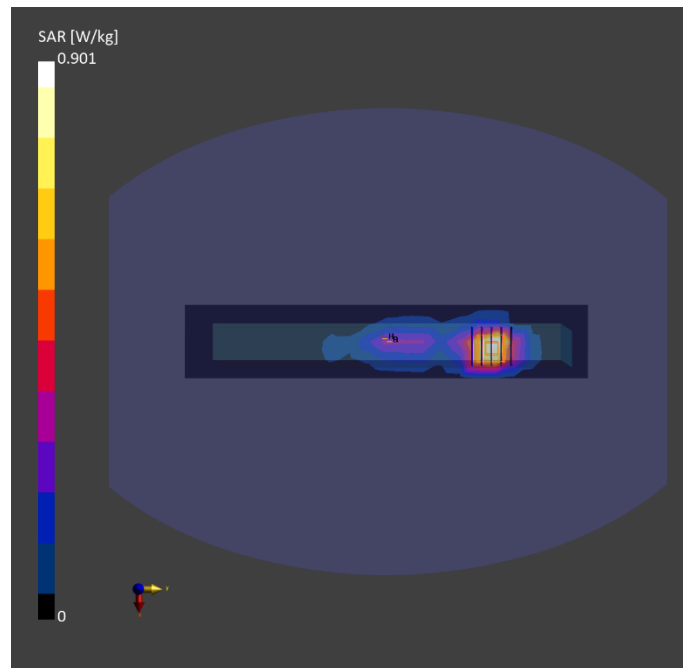

Test Date : 2025-06-25 | Ambient Temp : 22.2 °C | Tissue Temp : 21.6 °C

Test Mode

3_WCDMA V_RMC12.2K_Top Side_0mm_Ch4233_Ant Main_w/o Battery

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 5	WCDMA, 10011 - CAC	846.600, 4233	9.73	0.953	41.1

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.869	1.02
psSAR-10g [W/kg]	0.565	0.568
Power Drift [dB]		0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		55.4
Dist 3dB Peak [mm]		9.6

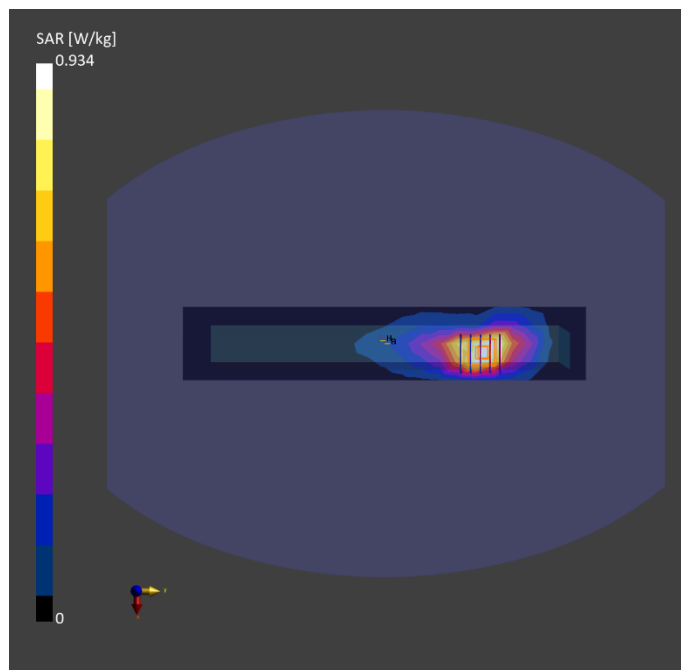

Test Date : 2025-06-26 | Ambient Temp : 21.9 °C | Tissue Temp : 21.8 °C

Test Mode**4_LTE 7_QPSK20M_Top Side_0mm_Ch20850_1RB_OS0_Ant Main_w/o Battery****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 7	LTE-FDD, 10169 - CAF	2510.000, 20850	7.31	1.92	37.0

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 300.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.870	1.11
psSAR-10g [W/kg]	0.374	0.426
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		45.4
Dist 3dB Peak [mm]		7.0

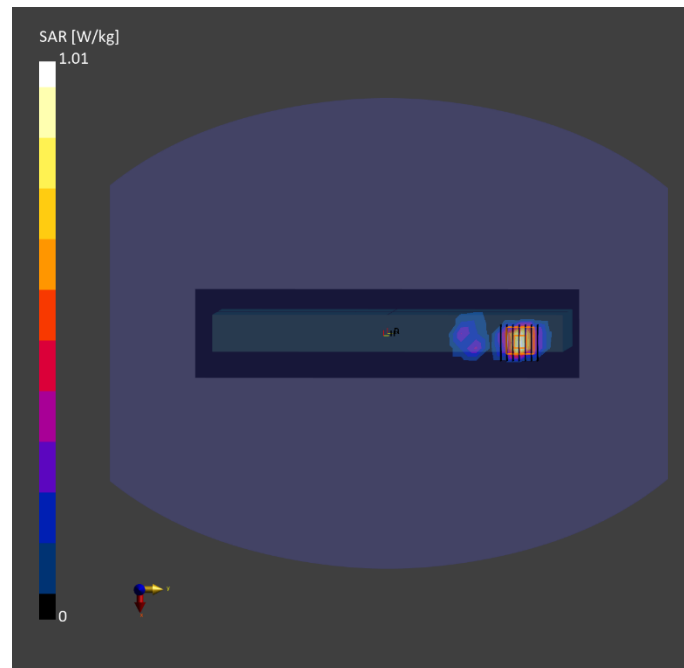

Test Date : 2025-06-21 | Ambient Temp : 22.2 °C | Tissue Temp : 21.8 °C

Test Mode**5_LTE 12_QPSK10M_Top Side_0mm_Ch23060_1RB_OS0_Ant Main_w/o Battery****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 12	LTE-FDD, 10175 - CAH	704.000, 23060	10.04	0.922	41.2

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 300.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.916	1.05
psSAR-10g [W/kg]	0.606	0.616
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		58.5
Dist 3dB Peak [mm]		11.2

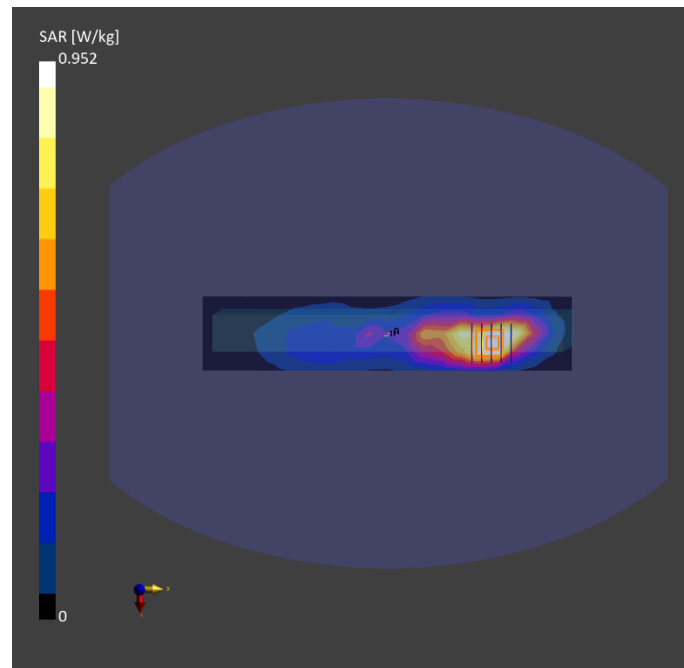

Test Date : 2025-06-21 | Ambient Temp : 22.2 °C | Tissue Temp : 21.8 °C

Test Mode**6_LTE 13_QPSK10M_Top Side_0mm_Ch23230_1RB_OS0_Ant Main_w/o Battery****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 13	LTE-FDD, 10175 - CAH	782.000, 23230	10.04	0.952	40.8

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 300.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.862	0.994
psSAR-10g [W/kg]	0.562	0.569
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		57.1
Dist 3dB Peak [mm]		9.8

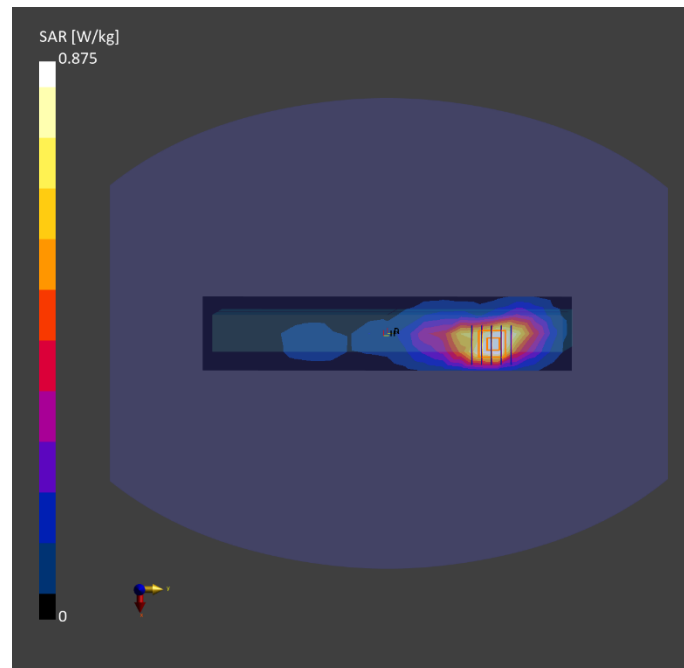

Test Date : 2025-06-21 | Ambient Temp : 22.2 °C | Tissue Temp : 21.8 °C

Test Mode**7_LTE 14_QPSK10M_Top Side_0mm_Ch23330_1RB_OS0_Ant Main_w/o Battery****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 14	LTE-FDD, 10175 - CAH	793.000, 23330	10.04	0.955	40.7

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 300.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.818	0.932
psSAR-10g [W/kg]	0.532	0.531
Power Drift [dB]		0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		56.7
Dist 3dB Peak [mm]		9.8

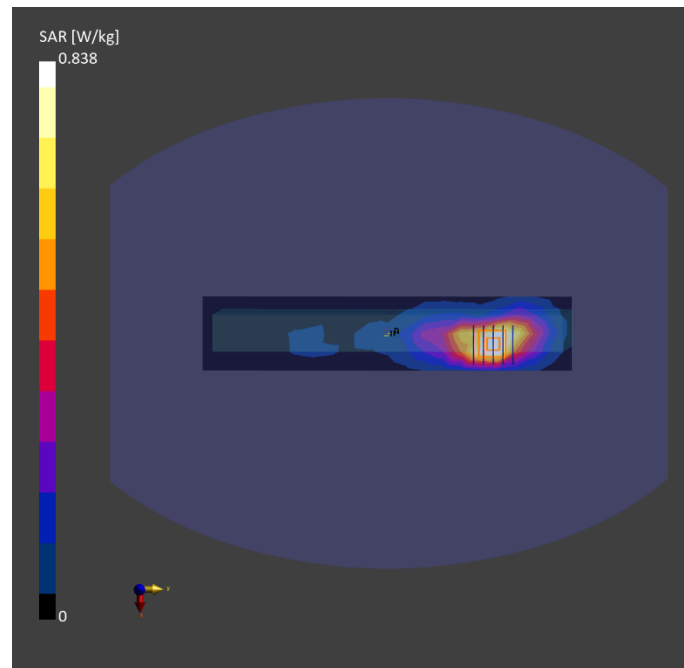

Test Date : 2025-06-22 | Ambient Temp : 22.4 °C | Tissue Temp : 22.1 °C

Test Mode**8_LTE 25_QPSK20M_Top Side_0mm_Ch26590_1RB_OS0_Ant Main_w/o Battery****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 25	LTE-FDD, 10169 - CAF	1905.000, 26590	7.85	1.45	39.0

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 300.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.902	1.07
psSAR-10g [W/kg]	0.492	0.559
Power Drift [dB]		0.03
TSL Correction	Positive only	Positive only
M2 / M1 [%]		58.6
Dist 3dB Peak [mm]		9.1

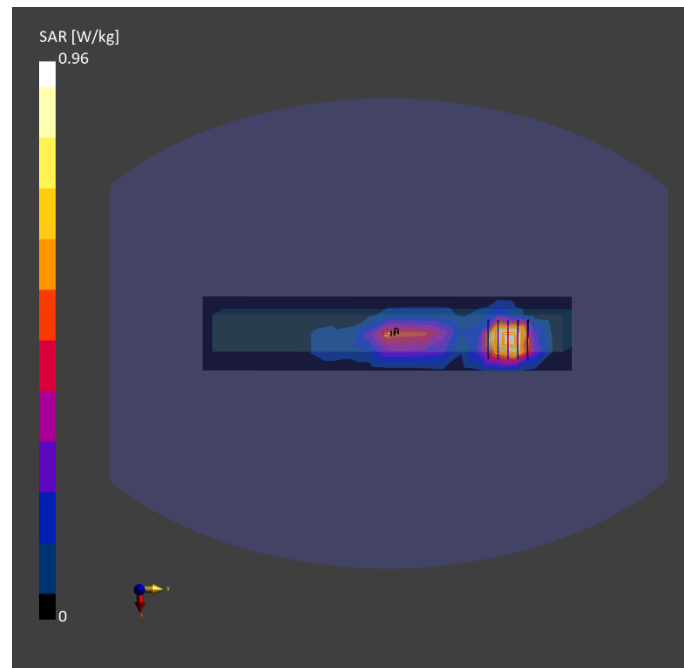

Test Date : 2025-06-25 | Ambient Temp : 22.2 °C | Tissue Temp : 21.6 °C

Test Mode

9_LTE 26_QPSK15M_Top Side_0mm_Ch26865_1RB_OS0_Ant Main_w/o Battery

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 26	LTE-FDD, 10181 - CAF	831.500, 26865	9.73	0.946	41.2

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 300.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.810	0.929
psSAR-10g [W/kg]	0.521	0.521
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		55.8
Dist 3dB Peak [mm]		9.8

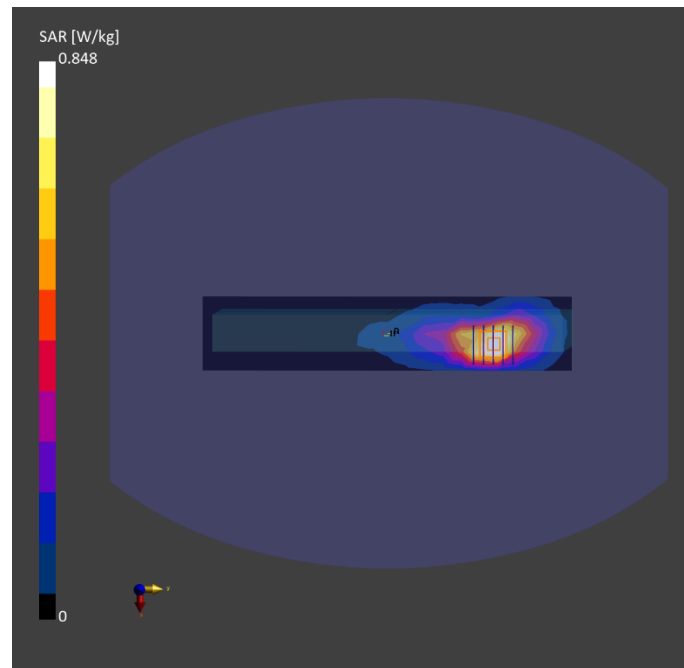

Test Date : 2025-06-26 | Ambient Temp : 21.9 °C | Tissue Temp : 21.8 °C

Test Mode**10_LTE 41-PC2_QPSK20M_Top Side_0mm_Ch39750_1RB_OS0_Ant Main_w/o Battery****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 41	LTE-TDD, 10172 - CAH	2506.000, 39750	7.31	1.92	37.0

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 300.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.853	1.08
psSAR-10g [W/kg]	0.367	0.415
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		45.7
Dist 3dB Peak [mm]		7.0

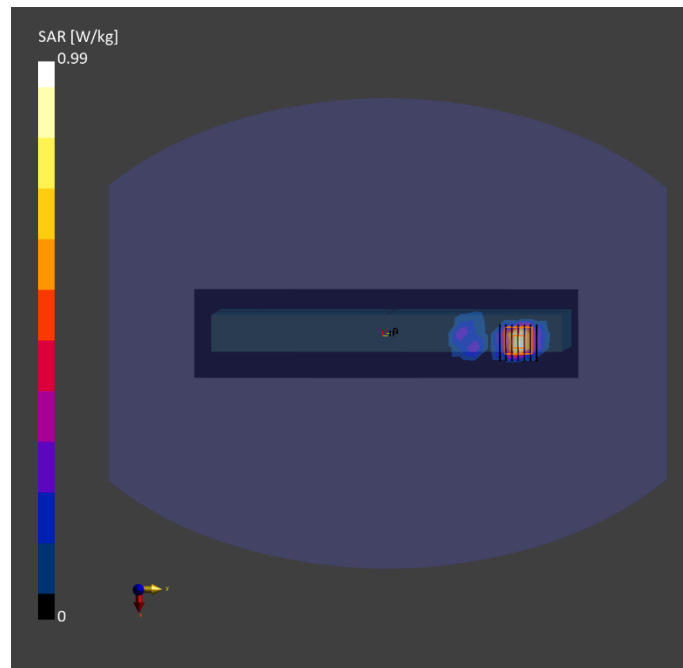

Test Date : 2025-06-27 | Ambient Temp : 22.3 °C | Tissue Temp : 21.7 °C

Test Mode

11_LTE 42_QPSK20M_Top Side_0mm_Ch42190_1RB_OS0_Ant MIMO 2_w/o Battery

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 42	LTE-TDD, 10172 - CAH	3460.000, 42190	6.74	2.80	38.0

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 300.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.664	0.967
psSAR-10g [W/kg]	0.272	0.334
Power Drift [dB]		0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		60.6
Dist 3dB Peak [mm]		5.9

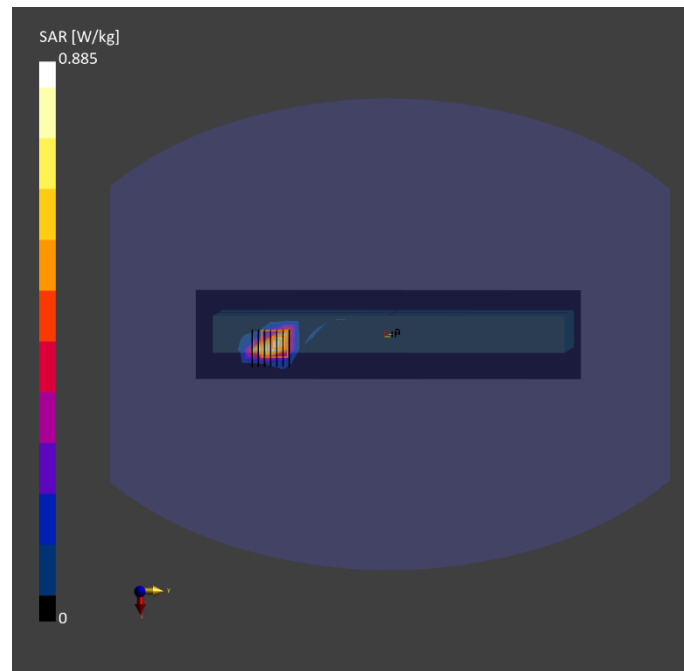

Test Date : 2025-06-27 | Ambient Temp : 22.3 °C | Tissue Temp : 21.7 °C

Test Mode**12_LTE 43_QPSK20M_Top Side_0mm_Ch44490_1RB_OS0_Ant MIMO 2_w/o Battery****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 43	LTE-TDD, 10172 - CAH	3690.000, 44490	6.66	3.02	37.6

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 300.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.587	0.856
psSAR-10g [W/kg]	0.241	0.296
Power Drift [dB]		0.04
TSL Correction	Positive only	Positive only
M2 / M1 [%]		60.8
Dist 3dB Peak [mm]		6.8

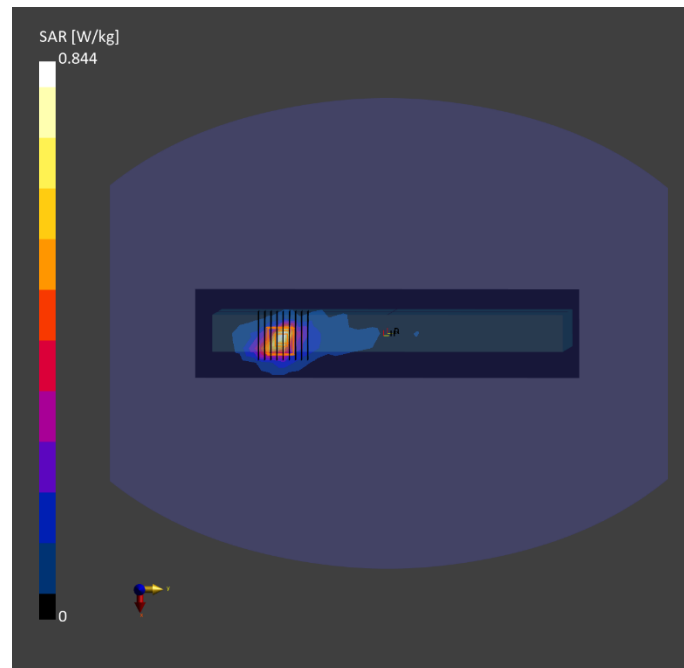

Test Date : 2025-06-27 | Ambient Temp : 22.3 °C | Tissue Temp : 21.7 °C

Test Mode

12-1_LTE 43_QPSK20M_Top Side_0mm_Ch43990_1RB_OS0_Ant MIMO 2_w/o Battery

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Permittivity	TSL Conductivity [S/m]
Flat	Band 43	LTE-TDD, 10172 - CAH	3640.000, 43990	6.66	37.7	2.97

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 300.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.822	1.07
psSAR-10g [W/kg]	0.327	0.359
Power Drift [dB]		0.03
TSL Correction	Positive only	Positive only
M2 / M1 [%]		58.8
Dist 3dB Peak [mm]		6.1

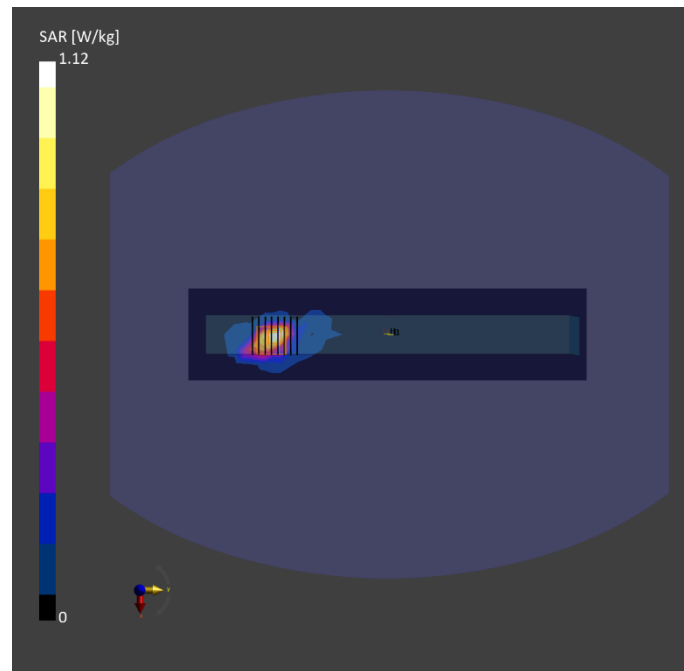

Test Date : 2025-06-27 | Ambient Temp : 22.3 °C | Tissue Temp : 21.7 °C

Test Mode**13_LTE 48_QPSK20M_Top Side_0mm_Ch55340_1RB_OS0_Ant MIMO 2_w/o Battery****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 48	LTE-TDD, 10172 - CAH	3560.000, 55340	6.74	2.89	37.8

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 300.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.594	0.926
psSAR-10g [W/kg]	0.252	0.309
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		60.4
Dist 3dB Peak [mm]		6.1

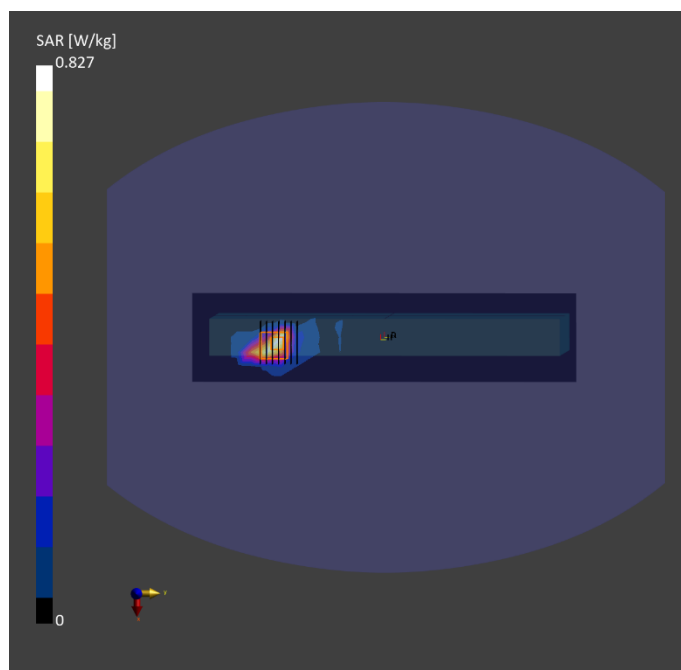

Test Date : 2025-06-24 | Ambient Temp : 22.4 °C | Tissue Temp : 21.8 °C

Test Mode

14_LTE 66_QPSK20M_Top Side_0mm_Ch132072_1RB_OS0_Ant Main_w/o Battery

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 66	LTE-FDD, 10169 - CAF	1720.000, 132072	8.02	1.34	39.2

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.851	0.987
psSAR-10g [W/kg]	0.481	0.538
Power Drift [dB]		0.04
TSL Correction	Positive only	Positive only
M2 / M1 [%]		60.5
Dist 3dB Peak [mm]		11.2

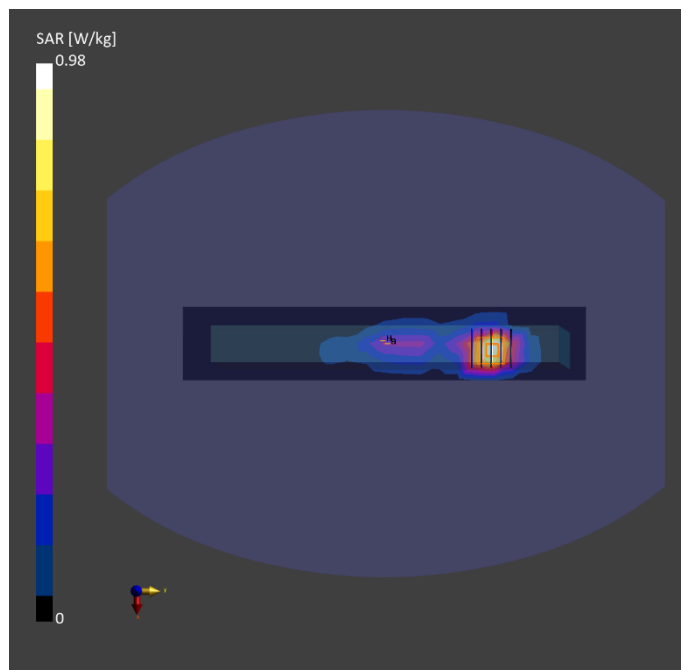

Test Date : 2025-06-23 | Ambient Temp : 22.1 °C | Tissue Temp : 21.6 °C

Test Mode

15_LTE 71_QPSK20M_Top Side_0mm_Ch133322_1RB_OS0_Ant Main_w/o Battery

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 71	LTE-FDD, 10169 - CAF	683.000, 133322	10.04	0.893	41.7

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.983	1.13
psSAR-10g [W/kg]	0.646	0.674
Power Drift [dB]		-0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		67.1
Dist 3dB Peak [mm]		11.2

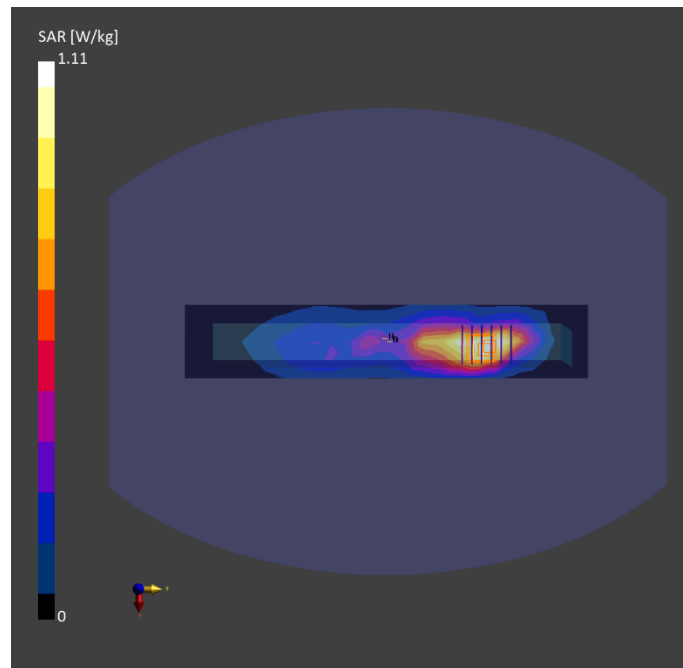

Test Date : 2025-06-25 | Ambient Temp : 22.2 °C | Tissue Temp : 21.6 °C

Test Mode

16_5G NR n5_DFT-S QPSK20M_Top Side_0mm_Ch166800_50RB_OS28_Ant Main_w/o Battery

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n5	5G NR FR1 FDD, 10939 - AAC	834.000, 166800	9.73	0.947	41.2

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.847	1.01
psSAR-10g [W/kg]	0.553	0.568
Power Drift [dB]		0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		55.1
Dist 3dB Peak [mm]		9.6

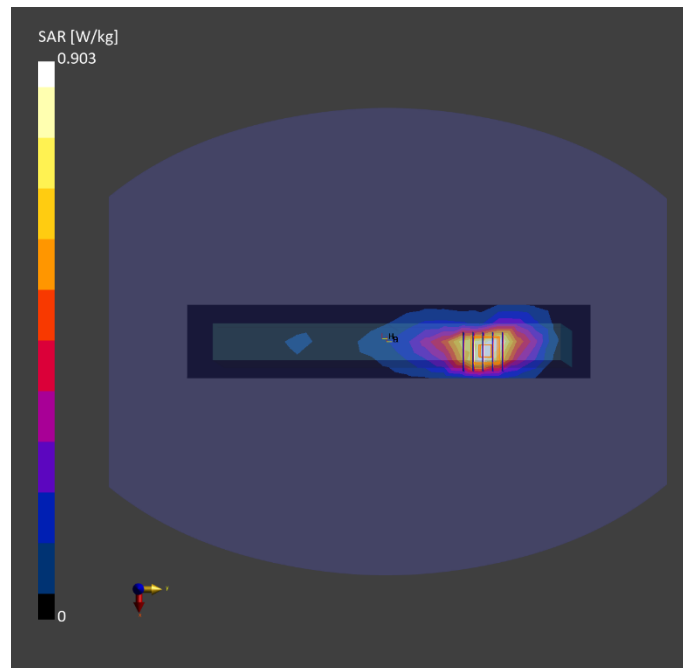

Test Date : 2025-06-23 | Ambient Temp : 22.1 °C | Tissue Temp : 21.6 °C

Test Mode

17_5GNR n7_DFT-S QPSK40M_Top Side_0mm_Ch510000_108RB_OS54_Ant Main_w/o Battery

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n7	5G NR FR1 FDD, 10942 - AAB	2550.000, 510000	7.31	1.88	38.1

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 312.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.662	0.868
psSAR-10g [W/kg]	0.294	0.330
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		44.2
Dist 3dB Peak [mm]		7.0

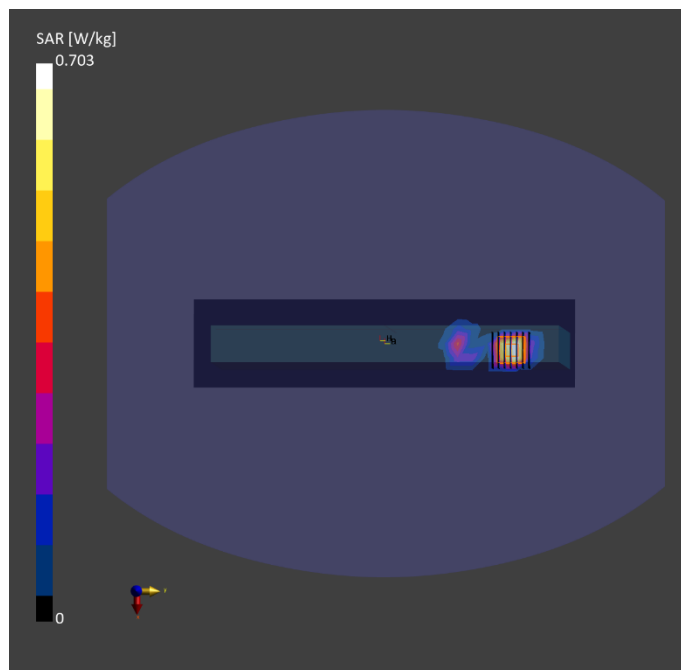

Test Date : 2025-06-23 | Ambient Temp : 22.1 °C | Tissue Temp : 21.6 °C

Test Mode**18_5G NR n12_DFT-S QPSK15M_Top Side_0mm_Ch141700_36RB_OS22_Ant Main_w/o Battery****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n12	5G NR FR1 FDD, 10938 - AAC	708.500, 141700	10.04	0.892	39.7

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.885	1.02
psSAR-10g [W/kg]	0.590	0.607
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		60.7
Dist 3dB Peak [mm]		10.2

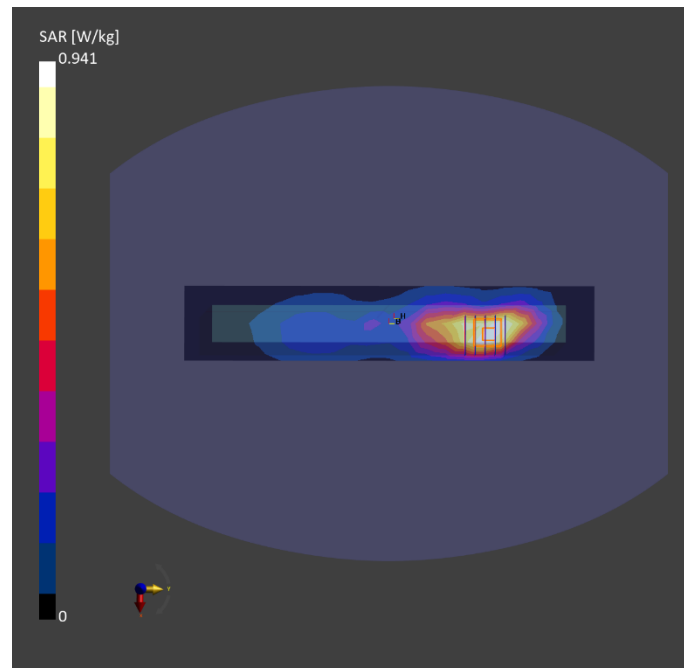

Test Date : 2025-06-23 | Ambient Temp : 22.1 °C | Tissue Temp : 21.6 °C

Test Mode**19_5G NR n13_DFT-S QPSK10M_Top Side_0mm_Ch156400_25RB_OS14_Ant Main_w/o Battery****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n13	5G NR FR1 FDD, 10937 - AAD	782.000, 156400	10.04	0.916	39.6

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.888	1.02
psSAR-10g [W/kg]	0.586	0.604
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		60.3
Dist 3dB Peak [mm]		10.8

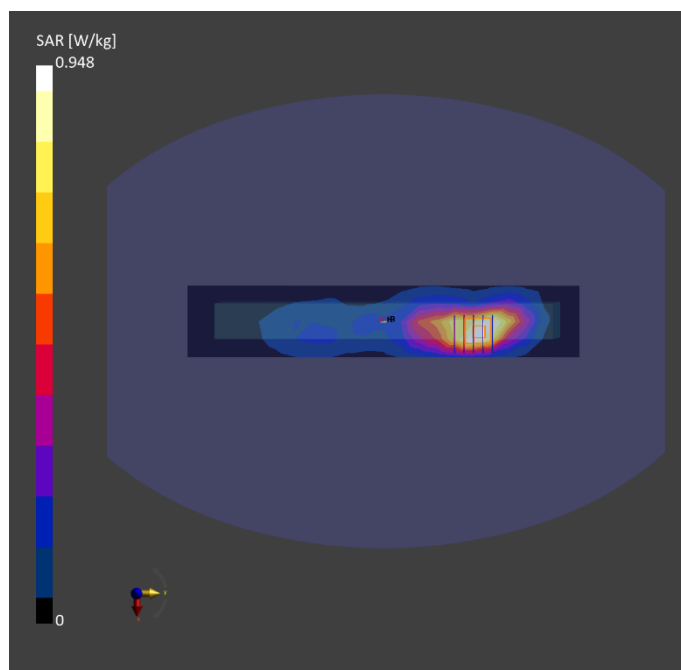

Test Date : 2025-06-23 | Ambient Temp : 21.8 °C | Tissue Temp : 21.5 °C

Test Mode**20_5G NR n14_DFT-S QPSK10M_Top Side_0mm_Ch158600_25RB_OS14_Ant Main_w/o Battery****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n14	5G NR FR1 FDD, 10937 - AAD	793.000, 158600	10.04	0.919	39.6

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.748	0.864
psSAR-10g [W/kg]	0.489	0.496
Power Drift [dB]		-0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		57.5
Dist 3dB Peak [mm]		11.2

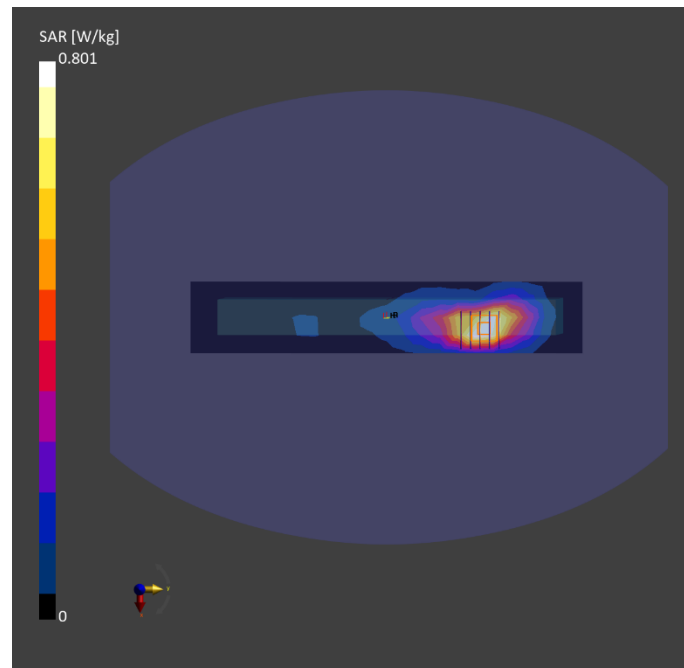

Test Date : 2025-06-22 | Ambient Temp : 22.4 °C | Tissue Temp : 22.1 °C

Test Mode

21_5G NR n25_DFT-S QPSK40M_Top Side_0mm_Ch376500_108RB_OS54_Ant Main_w/o Battery

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n25	5G NR FR1 FDD, 10942 - AAB	1882.500, 376500	7.85	1.44	39.0

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.821	0.951
psSAR-10g [W/kg]	0.441	0.501
Power Drift [dB]		0.03
TSL Correction	Positive only	Positive only
M2 / M1 [%]		58.2
Dist 3dB Peak [mm]		9.6

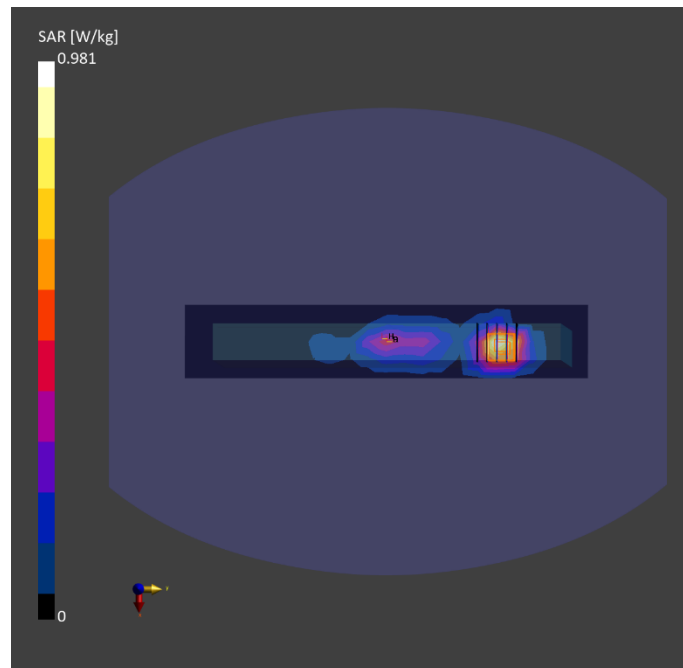

Test Date : 2025-06-14 | Ambient Temp : 21.8 °C | Tissue Temp : 21.5 °C

Test Mode**22_5G NR n26_DFT-S QPSK20M_Top Side_0mm_Ch166300_50RB_OS28_Ant Main_w/o Battery****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n26	5G NR FR1 FDD, 10939 - AAC	831.500, 166300	9.73	0.934	39.6

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.904	1.04
psSAR-10g [W/kg]	0.584	0.591
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		59.4
Dist 3dB Peak [mm]		11.2

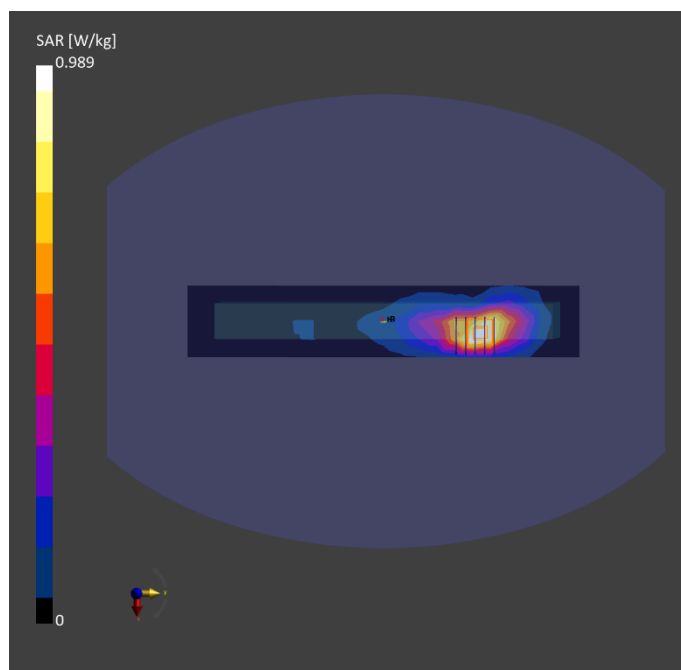

Test Date : 2025-06-24 | Ambient Temp : 22.4 °C | Tissue Temp : 21.8 °C

Test Mode**23_5G NR n66_DFT-S QPSK40M_Top Side_0mm_Ch346000_108RB_OS54_Ant Main_w/o Battery****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n66	5G NR FR1 FDD, 10942 - AAB	1730.000, 346000	8.02	1.35	39.2

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.674	0.781
psSAR-10g [W/kg]	0.381	0.424
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		60.1
Dist 3dB Peak [mm]		11.2

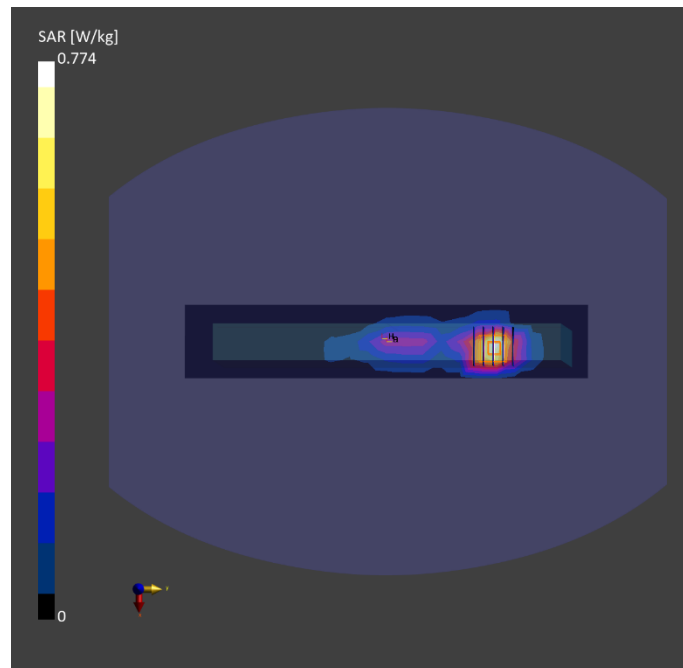

Test Date : 2025-06-23 | Ambient Temp : 22.1 °C | Tissue Temp : 21.6 °C

Test Mode

24_5G NR n71_DFT-S QPSK30M_Top Side_0mm_Ch136100_80RB_OS40_Ant Main_w/o Battery

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n71	5G NR FR1 FDD, 10941 - AAB	680.500, 136100	10.04	0.891	41.7

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.859	0.983
psSAR-10g [W/kg]	0.567	0.580
Power Drift [dB]		0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		67.4
Dist 3dB Peak [mm]		11.2

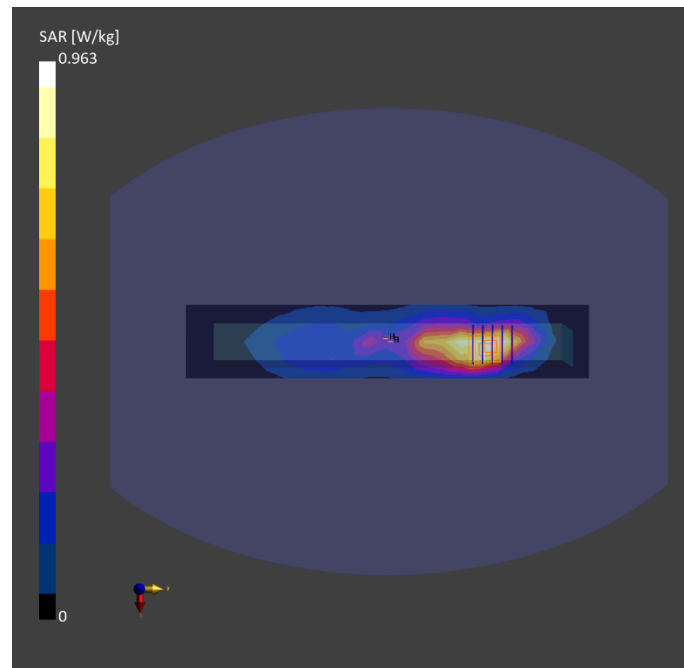

Test Date : 2025-06-28 | Ambient Temp : 22.5 °C | Tissue Temp : 22.1 °C

Test Mode

25_5GNR n38_DFT-S QPSK20M_Left Side_0mm_Ch519000_25RB_OS13_Ant Aux_w/o Battery

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n38	5G NR FR1 TDD, 10910 - AAC	2595.000, 519000	7.31	1.97	36.2

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 228.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.574	0.643
psSAR-10g [W/kg]	0.259	0.271
Power Drift [dB]		-0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		53.6
Dist 3dB Peak [mm]		7.7

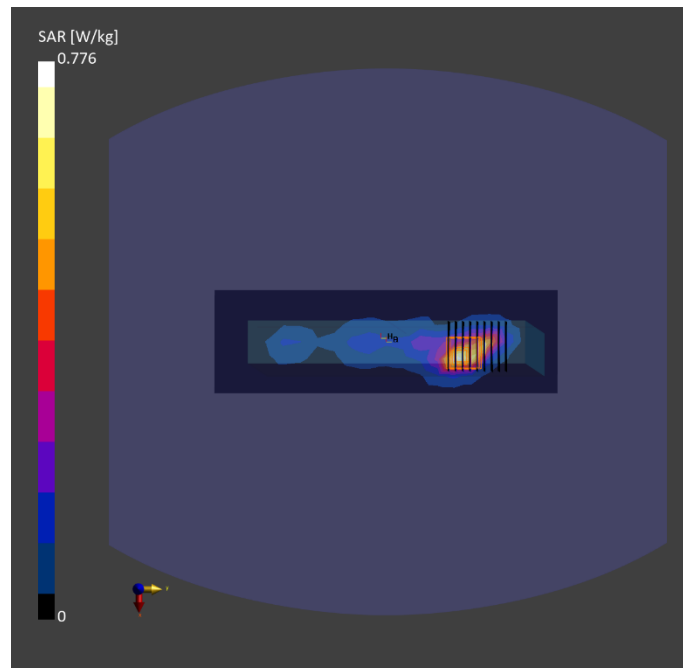

Test Date : 2025-06-28 | Ambient Temp : 22.5 °C | Tissue Temp : 22.1 °C

Test Mode**26_5G NR n41_DFT-S QPSK100M_Left Side_0mm_Ch528000_135RB_OS69_Ant Aux_w/o Battery****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n41	5G NR FR1 TDD, 10917 - AAD	2640.000, 528000	7.31	2.00	36.1

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 228.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.672	0.804
psSAR-10g [W/kg]	0.286	0.330
Power Drift [dB]		0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		51.6
Dist 3dB Peak [mm]		6.8

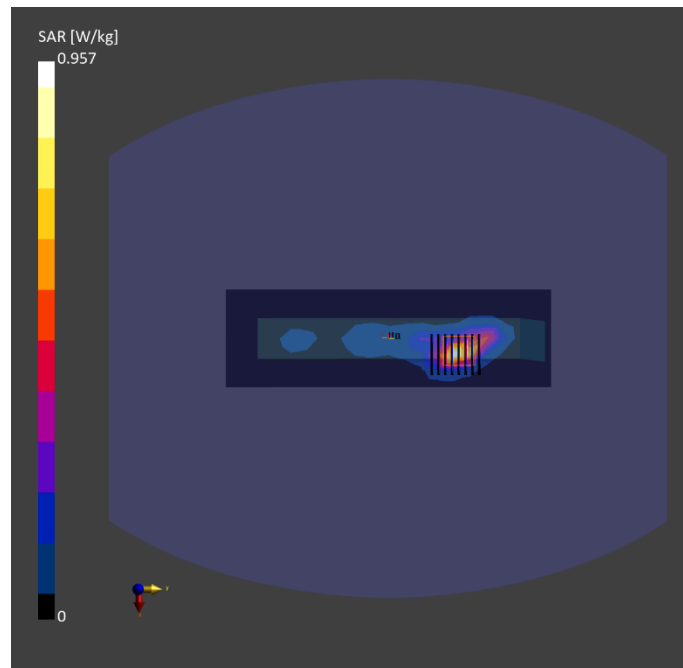

Test Date : 2025-06-28 | Ambient Temp : 22.5 °C | Tissue Temp : 22.1 °C

Test Mode

27_5GNR n48_DFT-S QPSK100M_Top Side_0mm_Ch640000_135RB_OS69_Ant MIMO 2_w/o Battery

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n48	5G NR FR1 TDD, 10917 - AAD	3600.000, 640000	6.74	2.85	38.0

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 312.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.568	0.792
psSAR-10g [W/kg]	0.215	0.263
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		61.1
Dist 3dB Peak [mm]		6.1

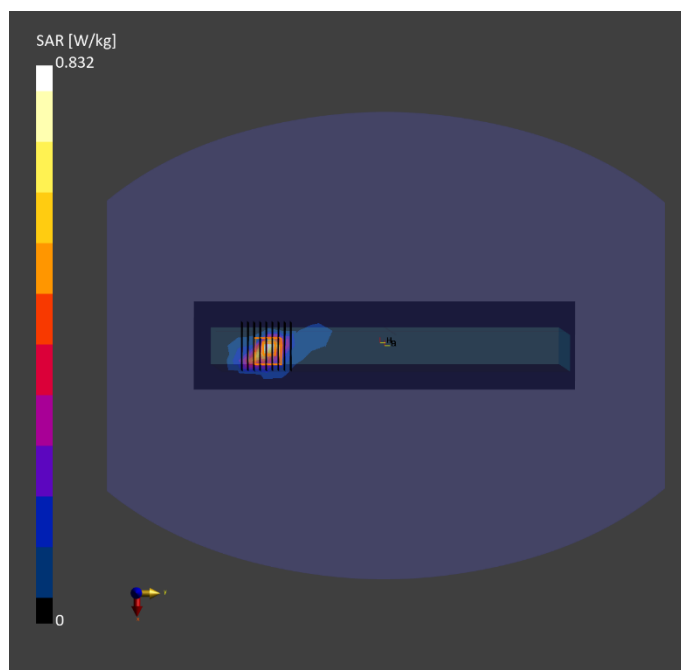

Test Date : 2025-06-29 | Ambient Temp : 22.3 °C | Tissue Temp : 21.8 °C

Test Mode**28_5G NR n77_DFT-S QPSK100M_Top Side_0mm_Ch662000_135RB_OS69_Ant MIMO 2_w/o Battery****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n77	5G NR FR1 TDD, 10917 - AAD	3930.000, 662000	6.64	3.19	36.7

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 312.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.560	0.754
psSAR-10g [W/kg]	0.232	0.282
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		59.1
Dist 3dB Peak [mm]		6.8

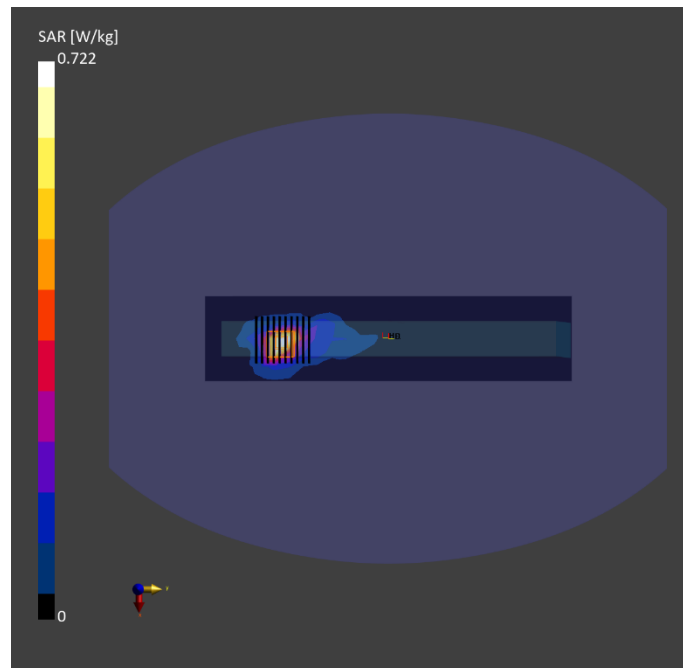

Test Date : 2025-06-10 | Ambient Temp : 22.1 °C | Tissue Temp : 21.6 °C

Test Mode

29_WLAN2.4G_802.11b_Bottom Side_0mm_Ch12_Ant 0_w/o Battery

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	WLAN 2.4GHz	WLAN, 10012 - CAB	2467.000, 12	7.18	1.82	38.2

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 336.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.556	0.597
psSAR-10g [W/kg]	0.256	0.267
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		49.9
Dist 3dB Peak [mm]		9.6

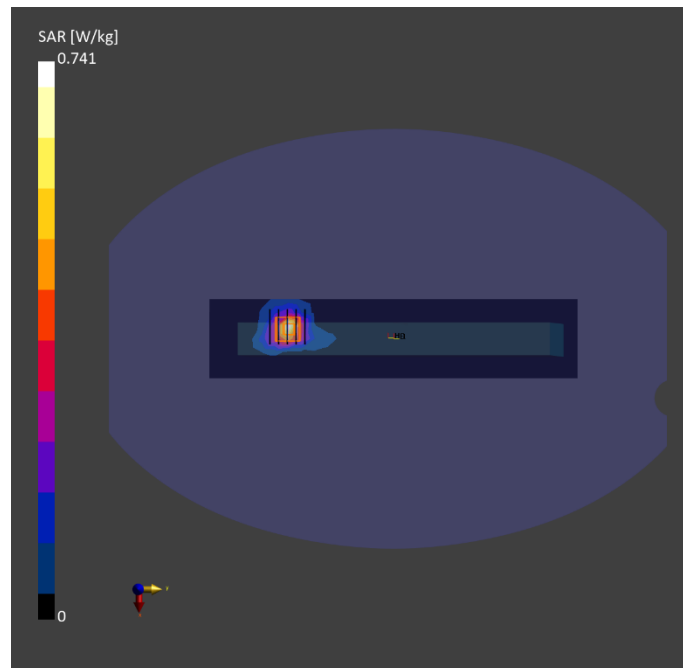

Test Date : 2025-06-11 | Ambient Temp : 22.3 °C | Tissue Temp : 21.9 °C

Test Mode

30_WLAN5.3G_802.11n HT40_Bottom Surface_0mm_Ch54_Ant 0_w/o Battery

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	WLAN 5GHz	WLAN, 10599 - AAC	5270.000, 54	5.67	4.28	34.9

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	210.0 x 110.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.499	0.538
psSAR-10g [W/kg]	0.180	0.185
Power Drift [dB]		-0.03
TSL Correction	Positive only	Positive only
M2 / M1 [%]		63.1
Dist 3dB Peak [mm]		7.9

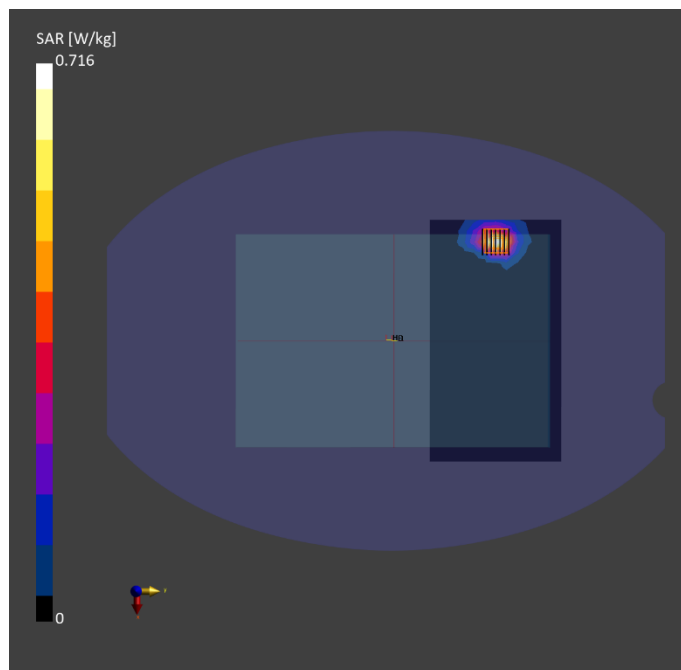

Test Date : 2025-06-11 | Ambient Temp : 22.3 °C | Tissue Temp : 21.9 °C

Test Mode

31_WLAN5.6G_802.11ac VHT160_Bottom Surface_0mm_Ch114_Ant 0_w/o Battery

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	WLAN 5GHz	WLAN, 10554 - AAD	5570.000, 114	5.31	4.58	34.4

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	220.0 x 110.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.539	0.606
psSAR-10g [W/kg]	0.183	0.193
Power Drift [dB]		-0.03
TSL Correction	Positive only	Positive only
M2 / M1 [%]		59.6
Dist 3dB Peak [mm]		7.2

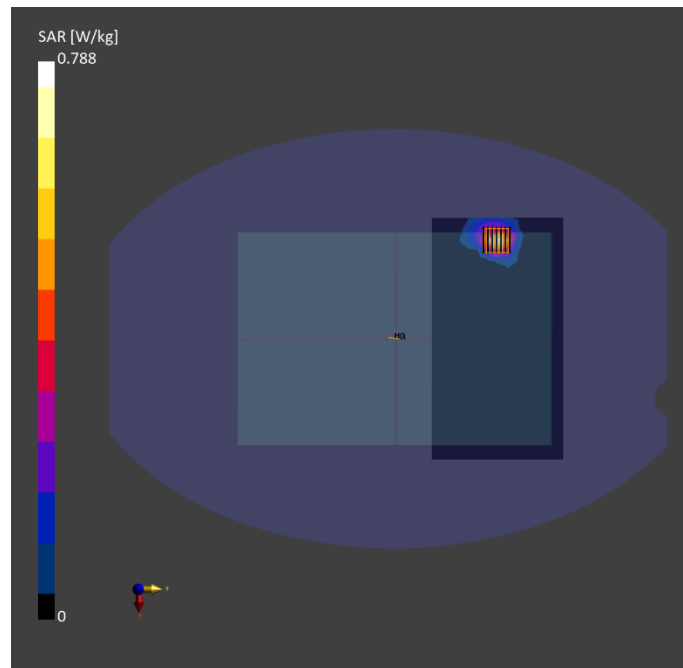

Test Date : 2025-06-12 | Ambient Temp : 21.9 °C | Tissue Temp : 21.7 °C

Test Mode

32_WLAN5.8G_802.11n HT40_Bottom Surface_0mm_Ch159_Ant 0_w/o Battery

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	WLAN 5GHz	WLAN, 10599 - AAC	5795.000, 159	5.18	4.82	34.1

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	220.0 x 110.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.839	0.952
psSAR-10g [W/kg]	0.279	0.295
Power Drift [dB]		-0.05
TSL Correction	Positive only	Positive only
M2 / M1 [%]		58.0
Dist 3dB Peak [mm]		7.2

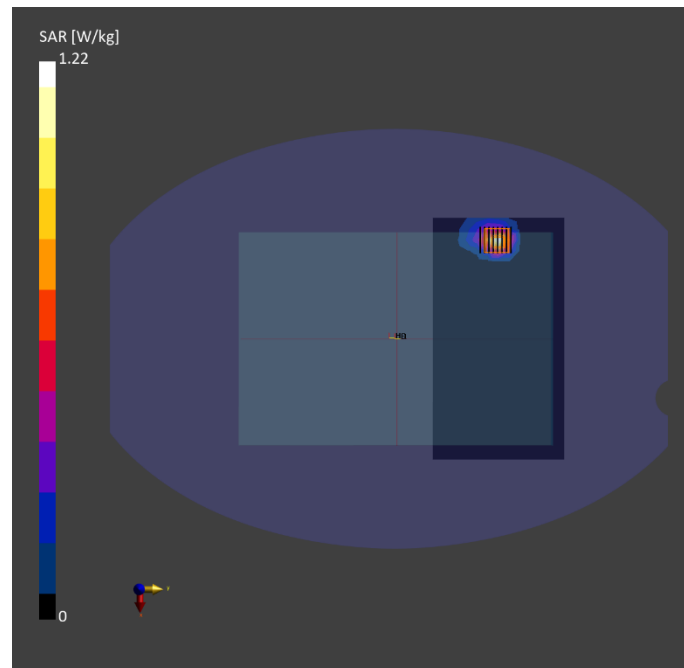

Test Date : 2025-06-12 | Ambient Temp : 21.9 °C | Tissue Temp : 21.7 °C

Test Mode

33_U-NII 5_802.11ax HE160_Bottom Surface_0mm_Ch15_Ant 0_w/o Battery

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	U-NII-5	WLAN, 10755 - AAC	6025.000, 15	5.57	5.06	33.8

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	221.0 x 119.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.482	0.527
psSAR-10g [W/kg]	0.148	0.157
Power Drift [dB]		-0.03
TSL Correction	Positive only	Positive only
M2 / M1 [%]		55.9
Dist 3dB Peak [mm]		5.9

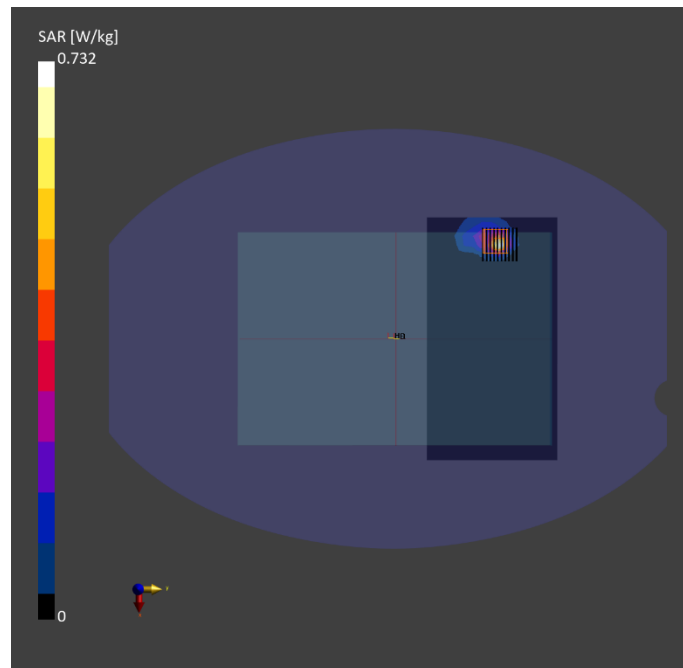

Test Date : 2025-06-10 | Ambient Temp : 22.1 °C | Tissue Temp : 21.6 °C

Test Mode

34_Bluetooth_GFSK_Bottom Surface_0mm_Ch78_Ant 1_w/o Battery

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	ISM 2.4 GHz Band	Bluetooth, 10032 - CAA	2480.000, 78	7.18	1.83	38.2

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	228.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.088	0.065
psSAR-10g [W/kg]	0.043	0.032
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		52.7
Dist 3dB Peak [mm]		9.9

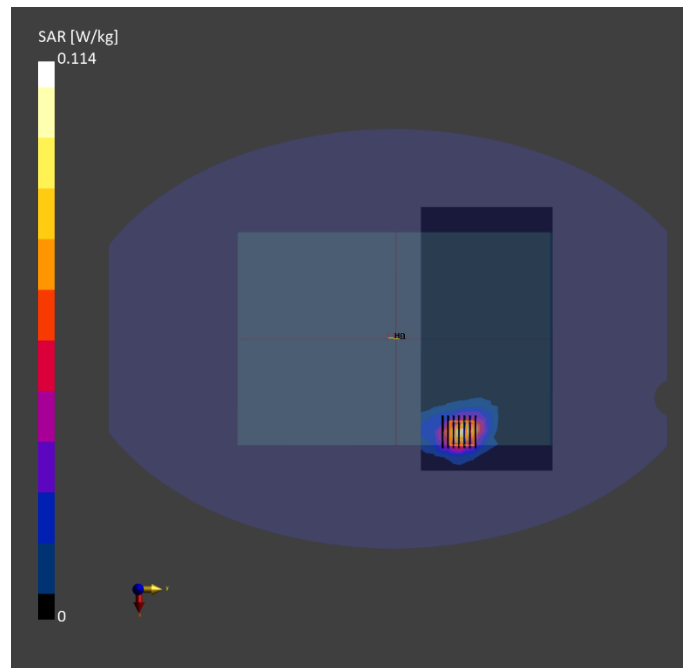

Test Date : 2025-06-12 | Ambient Temp : 22.1 °C | Tissue Temp : 21.6 °C

Test Mode**35_RFID_PSK_Bottom Surface_0mm_13.56MHz_Ant RFID_w/o Battery****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	CLA13	CW, 0 - -	13.560, 4	18.17	0.728	52.5

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7650 / 2025-06-10	DAE4 Sn1669 / 2025-05-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	75.0 x 315.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.013	0.13
psSAR-10g [W/kg]	0.008	0.004
Power Drift [dB]		0.13
TSL Correction	Positive only	Positive only
M2 / M1 [%]		36.1
Dist 3dB Peak [mm]		8.2

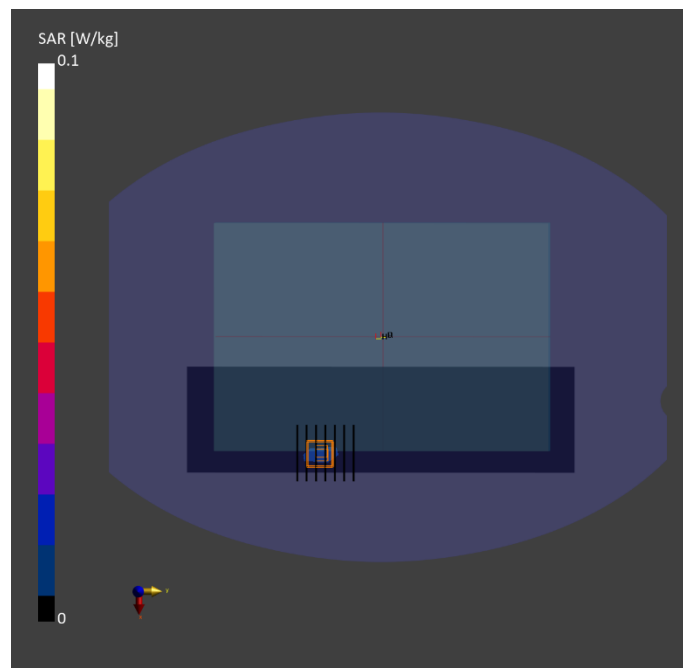

Test Date : 2025-06-18 | Ambient Temp : 22.6 °C

Test Mode**36_U-NII 5_802.11ax HE160_Bottom Surface_2mm_Ch15_Ant 0_w/o Battery****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	U-NII-5	WLAN, 10755 - AAC	6025.0, 15	1.0

Hardware Setup

Phantom	Medium	Probe Calibration Date	DAE Calibration Date
mmWave - 1102	Air	EUmmWV4 - SN9639_F1-55GHz / 2024-09-16	DAE4 Sn1742 / 2024-08-15
Measurement Software Version		3.2.2.2358	

Scan Setup

	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [mm]	0.0502 x 0.0502
Sensor Surface [mm]	2.0

Measurement Results

	5G Scan
Avg. Area [cm ²]	4.00
psPD n+ [W/m ²]	2.93
psPD tot+ [W/m ²]	3.90
psPD mod+ [W/m ²]	4.32
Peak PD tot [W/m ²]	7.25
Power Drift [dB]	-0.10

