

SAR, APD and IPD Evaluation Report for FCC

Applicant Name : Getac Technology Corporation
Applicant Address : 5F., Building A, No. 209, Sec. 1 Nangang Rd., Taipei City, 11568, Taiwan
Product Name : 5G/LTE data card
Brand Name : Getac
Model Number : FN990A28
FCC ID : QYLFN990U

Report Number : USSC255064001
Compliant Standards : FCC 47 CFR §2.1093
Sample Received Date : May 07, 2025
Date of Testing : Jun. 10, 2025 ~ Jun. 29, 2025
Report Issued Date : Aug. 08, 2025

The above equipment has been tested by **Eurofins E&E Wireless Taiwan Co., Ltd.**, and found compliance with the requirement of the above standards. The test record, data evaluation & Device Under Test (DUT) configurations represented herein are true and accurate accounts of the measurements of the sample's characteristics under the conditions specified in this report.

Note:

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Approved By :

Roy Wu / SAR Technical Director



Table of Contents

Revision History	3
1. Compliance Statement	4
2. Test Regulations.....	5
2.1. Reference Standard and Guidance.....	5
2.2. RF Exposure Limits.....	6
3. Information of Testing Laboratory	7
4. DUT (Device Under Test) Information	8
4.1. Device Overview	8
4.2. General Information for LTE	10
4.3. General Information for 5G NR FR1.....	11
4.4. Time-Averaging Feature for RF Exposure Compliance	13
4.5. DSI (Device State Index) Scenarios.....	13
5. Measurement System Description	14
5.1. SAR Definition.....	14
5.2. SAR Measurement Setup	14
5.3. SAR Test Procedures.....	18
5.4. Incident Power Density Definition.....	22
5.5. Incident Power Density Measurement Setup	22
5.6. Incident Power Density Measurement Procedure	24
6. System Verification	28
6.1. SAR Tissue Simulating Liquid Verification.....	28
6.2. SAR Test System Verification.....	29
6.3. IPD Test System Verification	31
7. Test Configurations.....	32
7.1. Description of Test Position	32
7.2. FCC General Test Procedures	33
8. RF Output Power Specification and Measurement.....	43
8.1. Nominal and Maximum Output Power Specifications.....	43
8.2. Measured Conducted Power Results for WCDMA.....	48
8.3. Measured Conducted Power Results for LTE	49
8.4. Measured Conducted Power Results for LTE Carrier Aggregation	59
8.5. Measured Conducted Power Results for 5G NR FR1	62
8.6. Measured Conducted Power Results for WLAN	69
8.7. Measured Conducted Power Results for Bluetooth.....	74
9. Evaluation for Standalone Transmission Scenario	75
9.1. Test Notes	75
9.2. Measured and Reported SAR Results for Body.....	80
9.3. Measured and Reported Power Density Results for Body	87
9.4. SAR Measurement Variability.....	87
10. Evaluation for Simultaneous Transmission Scenario	89
10.1. Simultaneous Transmission Capabilities.....	89
10.2. SAR Summation Analysis	89
10.3. SAR to Peak Location Separation Ratio (SPLSR) Analysis	92
11. Test Equipment.....	94
12. Measurement Uncertainty.....	95

Appendix A - DUT Antenna Illustration and Test Setup Photographs

Appendix B - System Check Plots

Appendix C - Highest Test Plots

Appendix D - Calibration Certificate for Probe

Appendix E - Calibration Certificate for Dipole

Appendix F - Conducted Power for LTE and NR Lower Bandwidth

Revision History

Rev.	Issued Date	Description	Revised by
00	Aug. 08, 2025	Initial Issue	Rowan Hsieh

1. Compliance Statement

This device (FCC ID: **QYLFN990U**) has been tested by **Eurofins E&E Wireless Taiwan Co., Ltd.** in accordance with the measurement procedures specified in FCC KDB procedures, and the results shown in below are capable of demonstrating compliance for localized specific absorption rate (SAR) for general population / uncontrolled environment exposure limits specified in *FCC 47 CFR §1.1310*.

Highest Reported SAR		
Equipment Class	Mode	Exposure Condition
		Body (Separation: 0 mm) SAR-1g (W/kg)
Licensed	WCDMA Band II	1.08
	WCDMA Band IV	0.96
	WCDMA Band V	1.04
	LTE B7	1.12
	LTE B12 / B17	1.05
	LTE B13	1.00
	LTE B14	0.93
	LTE B25 / B2	1.12
	LTE B26 / B5	0.95
	LTE B41 / B38	1.08
	LTE B42	0.98
	LTE B43	1.09
	LTE B48	0.99
	LTE B66 / B4	1.03
	LTE B71	1.14
	5GNR n5	1.03
	5GNR n7	0.90
	5GNR n12	1.09
	5GNR n13	1.11
	5GNR n14	1.04
	5GNR n25 / n2	0.98
	5GNR n26	1.06
	5GNR n66	0.89
	5GNR n71	1.01
	5GNR n38	0.93
	5GNR n41	0.83
	5GNR n48	0.82
	5GNR n77 / n78	0.82
DTS	WLAN 2.4 GHz	0.83
NII	WLAN 5 GHz	0.96
6XD	WLAN 6 GHz	0.54
DSS / DTS	Bluetooth	0.10
DXX	RFID	0.01
Simultaneous SAR per KDB 690783		1.59
SAR Limits		1.60

Highest Reported Total PD		
Equipment Class	Mode	Exposure Condition
		Body Averaging Area [4 cm ²] Total PD (W/m ²)
6XD	WLAN 6 GHz	4.49
Total PD Limits		10.00

2. Test Regulations

2.1. Reference Standard and Guidance

The Specific Absorption Rate (SAR) testing documented in this report were performed in accordance with following FCC published KDB guidance and standard :

KDB Publication 248227 D01 – IEEE 802.11 Wi-Fi SAR v02r02
KDB Publication 447498 D01 – General RF Exposure Guidance v06
KDB Publication 447498 D03 – Supplement C Cross-Reference v01
KDB Publication 447498 D04 – Interim General RF Exposure Guidance v01
KDB Publication 616217 D04 – SAR for Laptop and Tablets v01r02
KDB Publication 865664 D01 – SAR measurement 100 MHz to 6 GHz v01r04
KDB Publication 865664 D02 – RF Exposure Reporting v01r02
KDB Publication 941225 D01 – 3G SAR Procedures v03r01
KDB Publication 941225 D05 – SAR for LTE Devices v02r05
KDB Publication 941225 D05A – LTE Rel.10 KDB Inquiry Sheet v01r02
IEEE Std 1528-2013

In addition to the above, the following guideline was used :

TCB Workshop Oct 2014 – Guidelines for Other LTE Considerations
TCB Workshop Apr 2015 – Guidelines for Overlapping LTE Bands
TCB Workshop Oct 2015 – Guidelines for KDB 941225 D05A
TCB Workshop Apr 2016 – Guidelines for LTE DL Carrier Aggregation
TCB Workshop Oct 2016 – Guidelines for LTE UL Carrier Aggregation
TCB Workshop Oct 2016 – Guidelines for Bluetooth Duty Factor
TCB Workshop May 2017 – Guidelines for Broadband Liquid Above 3 GHz
TCB Workshop May 2017 – Guidelines for LTE Band 41 Power Class 2
TCB Workshop May 2017 – Guidelines for LTE Test Conditions
TCB Workshop Nov 2017 – Guidelines for LTE UL/DL Carrier Aggregation SAR
TCB Workshop Apr 2018 – Guidelines for LTE DL CA SAR Test Exclusion
TCB Workshop Oct 2018 – Guidelines for Near-Field Power Density
TCB Workshop Oct 2018 – Guidelines for LTE Inter-Band Uplink Carrier Aggregation
TCB Workshop Apr 2019 – Guidelines for Tissue Simulating Liquids (TSL)
TCB Workshop Apr 2019 – Guidelines for IEEE 802.11ax SAR Testing
TCB Workshop Nov 2019 – Guidelines for 5G NR FR1 NSA EN-DC SAR Evaluations
TCB Workshop Oct 2020 – Guidelines for Intra-band and Inter-band NSA EN-DC Evaluation
TCB Workshop Oct 2020 – Guidelines for U-NII 6-7 GHz SAR Testing
TCB Workshop Apr 2022 – Guidelines for 5G NR FR1 Measurement
TCB Workshop Oct 2022 – Guidelines for SAR test frequencies in multi-rule
TCB Workshop Oct 2022 – Guidelines for f-above-6 GHz Portable Devices

2.2. RF Exposure Limits

Population / Uncontrolled Environments: Defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population / uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Occupational / Controlled Environments: Defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e., as a result of employment or occupation). In general, occupational / controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

The Radiofrequency Radiation Exposure Limits Specified in FCC 47 CFR §1.1310

Exposure Scenario	Frequency Range	Local Head/Body SAR (1g-SAR, W/kg)	Local Extremity SAR (10g-SAR, W/kg)	Local Power Density (4 cm ² , mW/cm ²)
Population / Uncontrolled	100 kHz to 6 GHz	1.6	4.0	
	1.5 GHz to 100 GHz			1.0
Occupational / Controlled	100 kHz to 6 GHz	8.0	20.0	
	1.5 GHz to 100 GHz			5.0

3. Information of Testing Laboratory

Test Facilities

Company Name: Eurofins E&E Wireless Taiwan Co., Ltd.
Address No.: 140-1, Changan Street, Bade District, Taoyuan City, Taiwan
Website: <https://www.atl.com.tw>
Telephone: +886-3-271-0188
Fax: +886-3-271-0190
E-mail: infoEETW@eurofins.com

Test Site Location

- ☐ No. 140-1, Changan Street, Bade District, Taoyuan City, Taiwan
☒ No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan

Laboratory Accreditation

Location	TAF	FCC	ISED
No. 140-1, Changan Street, Bade District, Taoyuan City, Taiwan	Accreditation No.: 1330	Designation No.: TW0010	Company No.: 7381A CAB ID: TW1330
No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan	Accreditation No.: 1330	Designation No.: TW0034	Company No.: 28922 CAB ID: TW1330

4. DUT (Device Under Test) Information

4.1. Device Overview

Product Name	5G/LTE data card
Brand Name	Getac
Model Name	FN990A28
FCC ID	QYLFN990U
Host Information	Product Name: Tablet Trade Name: Getac Model Name: UX10, UX10G5, UX10G5AR, UX10Y, (Y= 10 characters, Y can be 0 to 9, A to Z, a to z, "/", "\", "-", "_" or blank for marketing purpose) All models are electrically identical, different model names are for marketing purpose.
WLAN Module Information	Product Name: Wireless Module Trade Name: Getac Model Name: AX211NGW FCC ID: QYLAX211NG
Testing Sample No.	C255064_A006

Supported Wireless Technologies	Tx Frequency (MHz)	Operating Mode
	WCDMA Band 2 : 1852.4 ~ 1907.6 Band 4 : 1712.4 ~ 1752.6 Band 5 : 826.4 ~ 846.6	UMTS Rel. 99 (Voice / Data) HSDPA (Rel. 5) HSUPA (Rel. 6) HSPA+ (Rel. 7) DC-HSDPA (Rel. 8)
	LTE Band 2 : 1850.7 ~ 1909.3 Band 4 : 1710.7 ~ 1754.3 Band 5 : 824.7 ~ 848.3 Band 7 : 2502.5 ~ 2567.5 Band 12 : 699.7 ~ 715.3 Band 13 : 779.5 ~ 784.5 Band 14 : 790.5 ~ 795.5 Band 17 : 706.5 ~ 713.5 Band 25 : 1850.7 ~ 1914.3 Band 26 : 814.7 ~ 848.3 Band 38 : 2572.5 ~ 2617.5 Band 41 : 2498.5 ~ 2687.5 Band 42 : 3452.5 ~ 3597.5 Band 43 : 3602.5 ~ 3647.5, 3652.5 ~ 3697.5 Band 48 : 3552.5 ~ 3697.5 Band 66 : 1710.7 ~ 1779.3 Band 71 : 665.5 ~ 695.5	QPSK, 16QAM, 64QAM, 256QAM
	5G NR FR1 n2 : 1852.5 ~ 1907.5 n5 : 826.5 ~ 846.5 n7 : 2502.5 ~ 2567.5 n12 : 701.5 ~ 713.5 n13 : 777 ~ 787 n14 : 790.5 ~ 795.5 n25 : 1852.5 ~ 1912.5 n26 : 816.5 ~ 846.5 n38 : 2575 ~ 2615 n41 : 2501.01 ~ 2685 n48 : 3555 ~ 3694.98 n66 : 1712.5 ~ 1777.5 n71 : 665.5 ~ 695.5 n77 : 3455.01 ~ 3544.98, 3705 ~ 3975 n78 : 3455.01 ~ 3544.98, 3705 ~ 3795	CP-OFDM $\pi/2$ BPSK, QPSK, 16QAM, 64QAM, 256QAM DFT-s-OFDM QPSK, 16QAM, 64QAM, 256QAM
	WLAN 2.4G : 2412 ~ 2462 5G : 5180 ~ 5240, 5260 ~ 5320, 5500 ~ 5720, 5745 ~ 5825 6G : 5955 ~ 7115	2.4G : 802.11b/g/n/ax 5G : 802.11a/n/ac/ax 6G : 802.11ax
	Bluetooth 2402 ~ 2480	BR, EDR, LE
	RFID 13.56	PSK

Note:

The above DUT information is declared by manufacturer and for more detailed features description please refers to the manufacturer's specifications or User's Manual.

4.2. General Information for LTE

	LTE Band 2						
	BW	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
Low Ch.		18607 / 1850.7	18615 / 1851.5	18625 / 1852.5	18650 / 1855.0	18675 / 1857.5	18700 / 1860.0
Mid Ch.		18900 / 1880.0	18900 / 1880.0	18900 / 1880.0	18900 / 1880.0	18900 / 1880.0	18900 / 1880.0
High Ch.		19193 / 1909.3	19185 / 1908.5	19175 / 1907.5	19150 / 1905.0	19125 / 1902.5	19100 / 1900.0
LTE Band 4							
BW	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
Low Ch.		19957 / 1710.7	19965 / 1711.5	19975 / 1712.5	20000 / 1715.0	20025 / 1717.5	20050 / 1720.0
Mid Ch.		20175 / 1732.5	20175 / 1732.5	20175 / 1732.5	20175 / 1732.5	20175 / 1732.5	20175 / 1732.5
High Ch.		20393 / 1754.3	20385 / 1753.5	20375 / 1752.5	20350 / 1750.0	20325 / 1747.5	20300 / 1745.0
LTE Band 5							
BW	1.4 MHz	3 MHz	5 MHz	10 MHz			
Low Ch.		20407 / 824.7	20415 / 825.5	20425 / 826.5	20450 / 829.0		
Mid Ch.		20525 / 836.5	20525 / 836.5	20525 / 836.5	20525 / 836.5		
High Ch.		20643 / 848.3	20635 / 847.5	20625 / 846.5	20600 / 844.0		
LTE Band 7							
BW	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
Low Ch.			20775 / 2502.5	20800 / 2505.0	20825 / 2507.5	20850 / 2510.0	
Mid Ch.			21100 / 2535.0	21100 / 2535.0	21100 / 2535.0	21100 / 2535.0	
High Ch.			21425 / 2567.5	21400 / 2565.0	21375 / 2562.5	21350 / 2560.0	
LTE Band 12							
BW	1.4 MHz	3 MHz	5 MHz	10 MHz			
Low Ch.		23017 / 699.7	23025 / 700.5	23035 / 701.5	23060 / 704.0		
Mid Ch.		23095 / 707.5	23095 / 707.5	23095 / 707.5	23095 / 707.5		
High Ch.		23173 / 715.3	23165 / 714.5	23155 / 713.5	23130 / 711.0		
LTE Band 13							
BW	1.4 MHz	3 MHz	5 MHz	10 MHz			
Low Ch.			23205 / 779.5				
Mid Ch.			23230 / 782.0	23230 / 782.0			
High Ch.			23255 / 784.5				
LTE Band 14							
BW	1.4 MHz	3 MHz	5 MHz	10 MHz			
Low Ch.			23305 / 790.5				
Mid Ch.			23330 / 793.0	23330 / 793.0			
High Ch.			23355 / 795.5				
LTE Band 17							
BW	1.4 MHz	3 MHz	5 MHz	10 MHz			
Low Ch.			23755 / 706.5	23780 / 709.0			
Mid Ch.			23790 / 710.0	23790 / 710.0			
High Ch.			23825 / 713.5	23800 / 711.0			
LTE Band 25							
BW	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
Low Ch.		26047 / 1850.7	26055 / 1851.5	26065 / 1852.5	26090 / 1855.0	26115 / 1857.5	26140 / 1860.0
Mid Ch.		26340 / 1880.0	26340 / 1880.0	26340 / 1880.0	26340 / 1880.0	26340 / 1880.0	26340 / 1880.0
High Ch.		26683 / 1914.3	26675 / 1913.5	26665 / 1912.5	26640 / 1910.0	26615 / 1907.5	26590 / 1905.0
LTE Band 26							
BW	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
Low Ch.		26697 / 814.7	26705 / 815.5	26715 / 816.5	26740 / 819.0	26765 / 821.5	
Mid Ch.		26865 / 831.5	26865 / 831.5	26865 / 831.5	26865 / 831.5	26865 / 831.5	
High Ch.		27033 / 848.3	27025 / 847.5	27015 / 846.5	26990 / 844.0	26965 / 841.5	
LTE Band 38							
BW	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
Low Ch.			37775 / 2572.5	37800 / 2575.0	37825 / 2577.5	37850 / 2580.0	
Mid Ch.			38000 / 2595.0	38000 / 2595.0	38000 / 2595.0	38000 / 2595.0	
High Ch.			38225 / 2617.5	38200 / 2615.0	38175 / 2612.5	38150 / 2610.0	
LTE Band 41							
BW	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
Low Ch.			39675 / 2498.5	39700 / 2501.0	39725 / 2503.5	39750 / 2506.0	
Mid-Low Ch.			40148 / 2545.8	40160 / 2547.0	40173 / 2548.3	40185 / 2549.5	
Mid Ch.			40620 / 2593.0	40620 / 2593.0	40620 / 2593.0	40620 / 2593.0	
Mid-High Ch.			41093 / 2640.3	41080 / 2639.0	41068 / 2637.8	41055 / 2636.5	
High Ch.			41565 / 2687.5	41540 / 2685.0	41515 / 2682.5	41490 / 2680.0	
LTE Band 42							
BW	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
Low Ch.			42115 / 3452.5	42140 / 3455.0	42165 / 3457.5	42190 / 3460.0	
Mid-Low Ch.			42598 / 3500.8	42607 / 3501.7	42615 / 3502.5	42623 / 3503.3	
Mid-High Ch.			43082 / 3549.2	43073 / 3548.3	43065 / 3547.5	43057 / 3546.7	
High Ch.			43565 / 3597.5	43540 / 3595.0	43515 / 3592.5	43490 / 3590.0	
LTE Band 43							
BW	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
Low Ch.			43615 / 3602.5	43640 / 3605.0	43665 / 3607.5	43690 / 3610.0	
Mid Ch.			43840 / 3625.0	43840 / 3625.0	43840 / 3625.0	43840 / 3625.0	
High Ch.			44065 / 3647.5	44040 / 3645.0	44015 / 3642.5	43990 / 3640.0	
LTE Band 43							
BW	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
Low Ch.			44115 / 3652.5	44140 / 3655.0	44165 / 3657.5	44190 / 3660.0	
Mid Ch.			44340 / 3675.0	44340 / 3675.0	44340 / 3675.0	44340 / 3675.0	
High Ch.			44565 / 3697.5	44540 / 3695.0	44515 / 3692.5	44490 / 3690.0	
LTE Band 48							
BW	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
Low Ch.			55265 / 3552.5	55290 / 3555.0	55315 / 3557.5	55340 / 3560.0	
Mid-Low Ch.			55810 / 3607.0	55815 / 3607.5	55820 / 3608.0	55830 / 3609.0	
Mid-High Ch.			56170 / 3643.0	56165 / 3642.5	56160 / 3642.0	56150 / 3641.0	
High Ch.			56715 / 3697.5	56690 / 3695.0	56665 / 3692.5	56640 / 3690.0	
LTE Band 66							
BW	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
Low Ch.		131979 / 1710.7	131987 / 1711.5	131997 / 1712.5	132022 / 1715.0	132047 / 1717.5	132072 / 1720.0
Mid Ch.		132322 / 1745.0	132322 / 1745.0	132322 / 1745.0	132322 / 1745.0	132322 / 1745.0	132322 / 1745.0
High Ch.		132665 / 1779.3	132657 / 1778.5	132647 / 1777.5	132622 / 1775.0	132597 / 1772.5	132572 / 1770.0
LTE Band 71							
BW	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
Low Ch.			133147 / 665.5	133172 / 668.0	133197 / 670.5	133222 / 673.0	
Mid Ch.			133297 / 680.5	133297 / 680.5	133297 / 680.5	133297 / 680.5	
High Ch.			133447 / 695.5	133422 / 693.0	133397 / 690.5	133372 / 688.0	
Modulations Supported in Uplink	QPSK / 16QAM / 64QAM / 256QAM						
LTE MPR Permanently Implemented per 3GPP TS 36.101 section 6.2.3~6.2.5?	Yes						
A-MPR (Additional MPR) Disabled for SAR Testing?	Yes						
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations						
LTE Additional Information	This device does not support full CA features on 3GPP Release 16. It supports carrier aggregation, downlink MIMO, LAA features as shown in the RF Conducted Powers section of this report and the Downlink LTE CA RF Conducted Powers Appendix. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. The following LTE Release 16 features are not supported: Relay, HetNet, Enhanced MIMO, eICIC, eMBMS, Cross-Carrier Scheduling, Enhanced SC-FDMA.						

4.3. General Information for 5G NR FR1

Supported Band, Frequency Range,
Channel Bandwidth, Channel Number
and Frequency

NR Band n2												
BW	5 MHz	10 MHz	15 MHz	20 MHz								
Low Ch.	370500 1852.5	371000 1855.0	371500 1857.5	372000 1860.0								
Mid Ch.	376000 1880.0	376000 1880.0	376000 1880.0	376000 1880.0								
High Ch.	381500 1907.5	381000 1905.0	380500 1902.5	380000 1900.0								
NR Band n5												
BW	5 MHz	10 MHz	15 MHz	20 MHz								
Low Ch.	165300 826.5	165800 829.0	166300 831.5	166800 834.0								
Mid Ch.	167300 836.5	167300 836.5	167300 836.5	167300 836.5								
High Ch.	169300 846.5	168800 844.0	168300 841.5	167800 839.0								
NR Band n7												
BW	5 MHz	10 MHz	15 MHz	20 MHz	25 MHz	30 MHz	40 MHz	50 MHz				
Low Ch.	500500 2502.5	501000 2505.0	501500 2507.5	502000 2510.0	502500 2512.5	503000 2515.0	504000 2520.0	505000 2525.0				
Mid Ch.	507000 2535.0	507000 2535.0	507000 2535.0	507000 2535.0	507000 2535.0	507000 2535.0	507000 2535.0	507000 2535.0				
High Ch.	513500 2567.5	513000 2565.0	512500 2562.5	512000 2560.0	511500 2557.5	511000 2555.0	510000 2550.0	509000 2545.0				
NR Band n12												
BW	5 MHz	10 MHz	15 MHz									
Low Ch.	140300 701.5	140800 704.0	141300 706.5									
Mid Ch.	141500 707.5	141500 707.5	141500 707.5									
High Ch.	142700 713.5	142200 711.0	141700 708.5									
NR Band n13												
BW	5 MHz	10 MHz										
Low Ch.	155900 779.5	156400 782.0										
Mid Ch.	156400 782.0	156400 782.0										
High Ch.	156900 784.5	156400 782.0										
NR Band n14												
BW	5 MHz	10 MHz										
Low Ch.	158100 790.5	158600 793.0										
Mid Ch.	158600 793.0	158600 793.0										
High Ch.	159100 795.5	158600 793.0										
NR Band n25												
BW	5 MHz	10 MHz	15 MHz	20 MHz	25 MHz	30 MHz	40 MHz					
Low Ch.	370500 1852.5	371000 1855.0	371500 1857.5	372000 1860.0	372500 1862.5	373000 1865.0	374000 1870.0					
Mid Ch.	376500 1882.5	376500 1882.5	376500 1882.5	376500 1882.5	376500 1882.5	376500 1882.5	376500 1882.5					
High Ch.	382500 1912.5	382000 1910.0	381500 1907.5	381000 1905.0	380500 1902.5	380000 1900.0	379000 1895.0					
NR Band n26												
BW	5 MHz	10 MHz	15 MHz	20 MHz								
Low Ch.	163300 816.5	163800 819.0	164300 821.5	164800 824.0								
Mid Ch.	166300 831.5	166300 831.5	166300 831.5	166300 831.5								
High Ch.	169300 846.5	168800 844.0	168300 841.5	167800 839.0								
NR Band n38												
BW		10 MHz	15 MHz	20 MHz		30 MHz	40 MHz					
Low Ch.		515000 2575.00	515500 2577.50	516000 2580.00		517000 2585.00	518000 2590.00					
Mid Ch.		519000 2595.00	519000 2595.00	519000 2595.00		519000 2595.00	519000 2595.00					
High Ch.		523000 2615.00	522500 2612.50	522000 2610.00		521000 2605.00	520000 2600.00					
NR Band n41												
BW		10 MHz	15 MHz	20 MHz		30 MHz	40 MHz	50 MHz	60 MHz	70 MHz	80 MHz	100 MHz
Low Ch.		500200 2501.01	500700 2503.5	501204 2506.02		502200 2511.00	503202 2516.01	504204 2521.02	505200 2526.00	506202 2531.01	507204 2536.02	508200 2541.00
Mid-Low Ch.		501400 2547.00	501952 2548.26	502608 2549.49		510402 2552.01	513468 2567.34					
Mid Ch.		518598 2592.99	518598 2592.99	518598 2592.99		518598 2592.99	518598 2592.99	518598 2592.99	518598 2592.99	518598 2592.99	518598 2592.99	518598 2592.99
Mid-High Ch.		527802 2639.01	527590 2637.75	527298 2636.49		526800 2634.00	523734 2616.67					
High Ch.		537000 2685.00	536502 2682.51	535998 2679.99		534998 2674.98	534000 2670.00	532998 2664.99	531998 2659.98	531000 2655.00	529998 2649.99	528998 2644.98
NR Band n48												
BW		10 MHz	15 MHz	20 MHz		30 MHz	40 MHz					
Low Ch.		637000 3555.00	637168 3557.52	637334 3560.01		637668 3565.02	638000 3570.00					
Mid-Low Ch.		640112 3601.68	640166 3602.49	640222 3603.33		640334 3605.01						
Mid Ch.							641666 3624.99					
Mid-High Ch.		643222 3648.33	643166 3647.49	643112 3646.68		643000 3645.00						
High Ch.		646332 3694.98	646166 3692.49	646000 3690.00		645666 3684.99	645332 3679.98					
NR Band n66												
BW	5 MHz	10 MHz	15 MHz	20 MHz	25 MHz	30 MHz	40 MHz					
Low Ch.	342500 1712.5	343000 1715.0	343500 1717.5	344000 1720.0	344500 1722.5	345000 1725.0	346000 1730.0					
Mid Ch.	349000 1745.0	349000 1745.0	349000 1745.0	349000 1745.0	349000 1745.0	349000 1745.0	349000 1745.0					
High Ch.	355500 1777.5	355000 1775.0	354500 1772.5	354000 1770.0	353500 1767.5	353000 1765.0	352000 1760.0					
NR Band n71												
BW	5 MHz	10 MHz	15 MHz	20 MHz								
Low Ch.	133100 665.5	133600 668.0	134100 670.5	134600 673.0								
Mid Ch.	136100 680.5	136100 680.5	136100 680.5	136100 680.5								
High Ch.	139100 695.5	138600 693.0	138100 690.5	137600 688.0								
NR Band n77 / n78 DoD												
BW		10 MHz	15 MHz	20 MHz	25 MHz	30 MHz	40 MHz	50 MHz	60 MHz	70 MHz	80 MHz	100 MHz
Low Ch.		630334 3455.01	630500 3457.50	630668 3460.02	630834 3462.51	631000 3465.00	631334 3470.01	631668 3475.02	632000 3480.00	632334 3485.01	632668 3490.02	633000 3495.00
Mid Ch.		633334 3500.01	633334 3500.01	633334 3500.01	633334 3500.01	633334 3500.01	633334 3500.01	633334 3500.01	633334 3500.01	633334 3500.01	633334 3500.01	633334 3500.01
High Ch.		636332 3544.98	636166 3542.49	636000 3540.00	635832 3537.48	635666 3534.99	635332 3529.98	635000 3525.00	634666 3520.00	634332 3514.98	634000 3510.00	633666 3504.99
NR Band n77												
BW		10 MHz	15 MHz	20 MHz	25 MHz	30 MHz	40 MHz	50 MHz	60 MHz	70 MHz	80 MHz	100 MHz
Low Ch.		647000 3705.00	647168 3707.52	647334 3710.01	647500 3712.50	647668 3715.02	648000 3720.00	648334 3725.01	648668 3730.02	649000 3735.00	649334 3740.01	649668 3745.02
Mid-Low Ch.		650600 3759.00	650700 3760.50	650800 3762.00	650900 3763.50	651000 3765.00	651100 3766.50	651200 3768.00	651300 3769.50	651400 3771.00	651500 3772.50	651600 3774.00
Mid Ch.		654200 3813.00	654234 3813.51	654266 3813.99	654300 3814.50	654334 3815.01	654400 3816.00	654500 3817.00	654600 3818.00	654700 3819.00	654800 3820.00	654900 3821.00
High Ch.		657800 3867.00	657766 3866.49	657734 3866.01	657700 3865.50	657666 3865.00	657632 3864.50	657600 3864.00	657566 3863.50	657532 3863.00	657500 3862.50	657466 3862.00

	Mid-High Ch.		661400	661300	661200		661000	660800	659634	658444	658334			
			3921.00	3919.50	3918.00		3915.00	3912.00	3897.51	3876.66	3875.01			
	High Ch.		665000	664832	664666	664500	664332	664000	663666	663332	663000	662666	662332	662000
			3975.00	3972.48	3969.99	3967.50	3964.98	3960.00	3954.99	3949.98	3945.00	3939.99	3934.98	3930.00
	NR Band n78													
	BW		10 MHz	15 MHz	20 MHz	25 MHz	30 MHz	40 MHz	50 MHz	60 MHz	70 MHz	80 MHz	90 MHz	100 MHz
	Low Ch.		647000	647168	647334	647500	647668	648000	648334	648668	649000	649334	649668	
			3705.00	3707.52	3710.01	3712.50	3715.02	3720.00	3725.01	3730.02	3735.00	3740.01	3745.02	
	Mid Ch.		650000	650000	650000	650000	650000	650000	650000	650000	650000	650000	650000	650000
			3750.00	3750.00	3750.00	3750.00	3750.00	3750.00	3750.00	3750.00	3750.00	3750.00	3750.00	3750.00
	High Ch.		653000	652832	652666	652500	652332	652000	651666	651332	651000	650666	650332	
			3795.00	3792.48	3789.99	3787.50	3784.98	3780.00	3774.99	3769.98	3765.00	3759.99	3754.98	
SCS	FDD : 15 kHz; TDD : 30 kHz													
Modulations Supported in Uplink	DFT-s-OFDM : $\pi/2$ BPSK, QPSK, 16QAM, 64QAM, 256QAM CP-OFDM : QPSK, 16QAM, 64QAM, 256QAM													
A-MPR (Additional MPR) Disabled for SAR Testing?	Yes													
EN-DC Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations													
LTE Anchor Bands for NR n2	LTE Band 5, 12, 13, 14, 71													
LTE Anchor Bands for NR n5	LTE Band 2, 7, 48, 66													
LTE Anchor Bands for NR n7	LTE Band 5, 12, 13, 71													
LTE Anchor Bands for NR n12	LTE Band 2, 7, 48, 66													
LTE Anchor Bands for NR n14	LTE Band 2, 66													
LTE Anchor Bands for NR n25	LTE Band 2, 12, 13, 26, 48, 71													
LTE Anchor Bands for NR n38	LTE Band 2, 4, 5, 12, 66, 71													
LTE Anchor Bands for NR n41	LTE Band 2, 4, 5, 12, 25, 26, 66, 71													
LTE Anchor Bands for NR n48	LTE Band 2, 5, 13, 66													
LTE Anchor Bands for NR n66	LTE Band 5, 12, 13, 14, 71													
LTE Anchor Bands for NR n71	LTE Band 2, 7, 48, 66													
LTE Anchor Bands for NR n77	LTE Band 2, 5, 7, 12, 13, 14, 25, 66, 71													
LTE Anchor Bands for NR n78	LTE Band 2, 4, 5, 7, 12, 13, 25, 38, 66, 71													

4.4. Time-Averaging Feature for RF Exposure Compliance

This device is enabled with Qualcomm Smart Transmit algorithm to control and manage the transmitting power in real-time to maintain the time-averaged Tx power, and in turn, to ensure that the time-averaged RF exposure from 3G/LTE/5G NR WWAN is in compliance with FCC requirements all the time. DUT contains embedded file system (EFS) version 15 configured for the first generation (GEN1). Additionally, this device supports WLAN, Bluetooth and RFID technologies, but the output power of these modems is not controlled by the Smart Transmit algorithm.

This *Part 0* report shows SAR characterization of WWAN radios for 3G/LTE/5G NR sub-6. The characterization is achieved by determining P_{limit} for 3G/LTE/5G NR sub-6 that corresponds to the exposure design targets after accounting for all device design related uncertainties. The *Part 2* report is to validate the time-averaging algorithm and compliance under the dynamic (time-varying) transmission scenario for WWAN technologies.

The purpose of this *Part 1* report is to demonstrate that the DUT meets the FCC's limits when transmitting in static transmission scenario at maximum allowable time-averaged power levels and simultaneous transmission scenario.

The Smart Transmit algorithm maintains the time-averaged transmit power, in turn, time-averaged RF exposure of SAR_{design_target} or PD_{design_target} for each characterized technology and band, and allows the device to transmit at higher power instantaneously as high as P_{max} , when needed, but enforces power limiting to maintain time-averaged transmit power to P_{limit} . The maximum time-averaged output power for any WWAN technology band and DSI is minimum of P_{limit} and P_{max} includes device uncertainty. SAR values in this report were scaled to the maximum time-averaged output power to determine compliance following KDB 447498 D01. All conducted power and SAR measurements in this report were performed by setting *Reserve_power_margin* (Smart Transmit EFS entry) to 0 dB.

4.5. DSI (Device State Index) Scenarios

This device uses different Device State Index (DSI) to configure different time-averaged power levels based on exposure scenarios. Below table lists the DSI and RF exposure condition for various transmit conditions.

Exposure Scenario	Description	SAR Test Cases
Body (DSI=0)	Device positioned against to body	Body SAR tested with DUT at 0 mm

5. Measurement System Description

5.1. SAR Definition

The Specific Absorption Rate (SAR) is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational / controlled and general population / uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational / controlled exposure limits are higher than the limits for general population / uncontrolled. The SAR is defined as the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ) as shown in the following equation:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dV} \right)$$

The SAR is expressed in units of watts per kilogram (W/kg) or equivalently milliwatts per gram (mW/g), and it is related to the E-field at a point by the following equation:

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:


σ = conductivity of the tissue (S/m)

ρ = mass density of the tissue (kg/m³)

E = RMS electrical field strength (V/m)

5.2. SAR Measurement Setup

The SAR measurements are performed using Dosimetric Assessment System (DASY) made by Schmid & Partner Engineering AG, which is a robot-based high precision electromagnetic (EM) near-field scanning platform. The DASY system measures the precise locations of the near-field radiators of highly non-isotropic fields. A sophisticated measurement system with a variety of probes (SAR, E-field, H-field etc.) combined with a high-precision 6-axis robot positioner allows for completely automated measurement scans and evaluations with both field and position information, e.g., volume averages, peak search, and extrapolations.

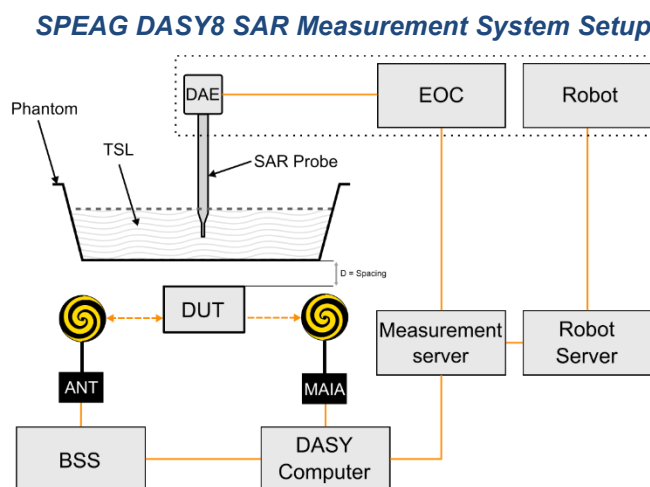

The DASY8 system for SAR measurements consists of:

- 6-axis robotic arm (Stäubli TX2-90XL) for positioning the probe.
- Mounting Platform for keeping the phantoms at a fixed location relative to the robot.
- Measurement Server for handling all time-critical tasks, such as measurement data acquisition and supervision of safety features.
- EOC (Electrical to Optical Converter) for converting the optical signal from the DAE to electrical before being transmitted to the measurement server.
- LB (Light-Beam unit) for probe alignment (measurement of the exact probe length and eccentricity).
- SAR probe (EX3D, ES3D probes) for measuring the E-field distribution in the phantom. The SAR distribution and the psSAR (peak spatial averaged SAR) are derived from the E-field measurement.
- SAR phantom that represents a physical model with an equivalent human anatomy. A Specific Anthropomorphic Mannequin (SAM) head is usually used for handheld devices, and a Flat phantom is used for body-worn devices. Specific phantoms are available if the Device Under Test (DUT) is intended for operation on different parts of the body other than the head or torso (e.g., the wrist).
- TSL (Tissue Simulating Liquid) representing the dielectric properties of used tissue.
- DAE (Data Acquisition Electronics) for reading the probe voltages and transmitting it to the DASY8 control PC.
- Device Holder for positioning the DUT beneath the phantom.
- MAIA (Modulation and Interference Analyzer) for confirming the accuracy of the probe linearization parameters.
- ANT (wide-band Antenna) for broadcasting the downlink signals emitted by base station simulators to the DUT.
- Control PC for running the DASY8 software to define/execute the measurements.
- System validation kits for system check / validation purposes.


5.2.1 E-Field Probes


Model	EX3DV4	
Construction	Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).	
Frequency	4 MHz to 10 GHz Linearity: ± 0.2 dB	
Directivity	± 0.1 dB in TSL (rotation around probe axis) ± 0.3 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

5.2.2 Data Acquisition Electronics (DAE)

Model	DAE3, DAE4	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16-bit resolution and two range settings: 4mV, 400mV)	
Input Offset Voltage	< 5 μ V (with auto zero)	
Input Bias Current	< 50 fA	
Dimensions	60 x 60 x 68 mm	

5.2.3 Phantoms

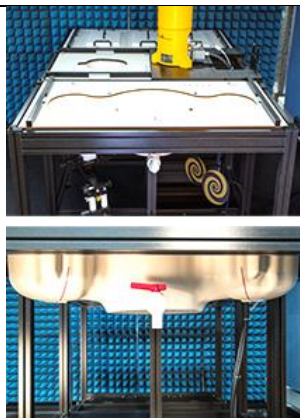Model	SAM-Twin Phantom	
Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE Std 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body-mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.	
Material	Vinylester, fiberglass reinforced (VE-GF)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	

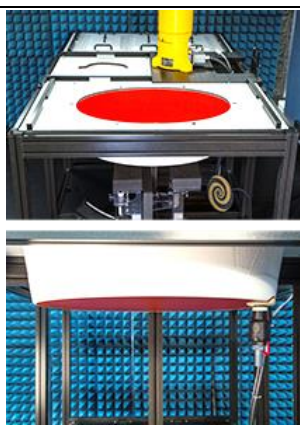Model	ELI	
Construction	The ELI phantom is used for compliance testing of handheld and body-mounted wireless devices. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
Material	Vinylester, fiberglass reinforced (VE-GF)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	

5.2.4 Device Holder

Model	MD4HHTV5 - Mounting Device for Hand-Held Transmitters	
Construction	In combination with the Twin SAM or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).	
Material	Polyoxymethylene (POM)	

Model	MD4WTV5 - Mounting Device Adaptor for Ultra-Wide Transmitters	
Construction	An upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.	
Material	Polyoxymethylene (POM)	

Model	MDA4SPV6 - Mounting Device Adaptor for Smart Phones	
Construction	The solid low-density MDA4SPV6 adaptor assuring no impact on the DUT radiation performance and is conform with any DUT design and shape.	
Material	ROHACELL	

Model	MD4LAPV5 - Mounting Device for Laptops and other Body-Worn Transmitters	
Construction	In combination with the Twin SAM or ELI phantoms, the Mounting Device (Body-Worn) enables testing of transmitter devices according to IEC 62209-2 specifications. The device holder can be locked for positioning at a flat phantom section.	
Material	Polyoxymethylene (POM), PET-G, Foam	

5.2.5 Power Source

Model	Powersource1	
Signal Type	Continuous Wave	
Operating Frequencies	600 MHz to 5850 MHz	
Output Power	-5.0 dBm to +17.0 dBm	
Power Supply	5V DC, via USB jack	
Power Consumption	<3 W	
Applications	System performance check and validation with a CW signal.	

5.2.6 System Validation Dipoles

Model	D-Serial	
Construction	Symmetrical dipole with 1/4 balun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions.	
Frequency	750 MHz to 5800 MHz	
Return Loss	> 20 dB	
Power Capability	> 100 W (f < 1GHz), > 40 W (f > 1GHz)	

5.2.7 Tissue Simulating Liquids

The dielectric properties of the tissue simulating liquids are referred to KDB 865664 D01, IEEE Std 1528 and IEC/IEEE 62209-1528. For SAR measurement of the field distribution inside the phantom, the phantom has been filled with head tissue-equivalent medium. To minimize reflections within the phantom, the depth of the homogeneous medium is greater than or equal to 15 cm. For head SAR testing, the liquid height was measured from the phantom ear reference point (ERP) to the top surface of the tissue simulating liquid. For body and extremity SAR testing, the liquid height was measured from the center of the flat phantom to the top surface of the tissue simulating liquid.

The following table gives the recipes for tissue simulating liquids.

Tissue Type	Water	Tween 20	Oxidized Mineral Oil	Diethylenglycol Monohexylether	Triton X-100	NaCl
835	50.36 %	48.39 %				1.25 %
900	50.31 %	48.34 %				1.35 %
1800	56.00 %		44.00 %			
2450	56.00 %		44.00 %			
4000	56.00 %		44.00 %			
5000	56.00 %		44.00 %			
5200	65.53 %			17.24 %	17.24 %	
5800	65.53 %			17.24 %	17.24 %	
6000	56.00 %		44.00 %			
8000	67.80 %	31.10 %				
10000	66.00 %	33.00 %				

Before SAR measurement, the dielectric properties of the tissue simulating liquid were verified using a dielectric assessment kit and a network analyzer. Since the range of $\pm 10\%$ of the required target values is used to measure relative permittivity and conductivity, the SAR correction procedure is applied to correct measured SAR for the deviations in permittivity and conductivity. Only positive correction has been used to scale up the measured SAR, and SAR result would not be corrected if the correction ΔSAR has a negative sign. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 10% are listed in below.

Frequency (MHz)	Target Permittivity	$\pm 10\%$ Range of Permittivity	Target Conductivity	$\pm 10\%$ Range of Conductivity
750	41.9	37.7 ~ 46.1	0.89	0.80 ~ 0.98
835	41.5	37.4 ~ 45.7	0.90	0.81 ~ 0.99
900	41.5	37.4 ~ 45.7	0.97	0.87 ~ 1.07
1450	40.5	36.5 ~ 44.6	1.20	1.08 ~ 1.32
1800	40.0	36.0 ~ 44.0	1.40	1.26 ~ 1.54
1900	40.0	36.0 ~ 44.0	1.40	1.26 ~ 1.54
1950	40.0	36.0 ~ 44.0	1.40	1.26 ~ 1.54
2000	40.0	36.0 ~ 44.0	1.40	1.26 ~ 1.54
2100	39.8	35.8 ~ 43.8	1.49	1.34 ~ 1.64
2450	39.2	35.3 ~ 43.1	1.80	1.62 ~ 1.98
2600	39.0	35.1 ~ 42.9	1.96	1.76 ~ 2.16
3000	38.5	34.7 ~ 42.4	2.40	2.16 ~ 2.64
3500	37.9	34.1 ~ 41.7	2.91	2.62 ~ 3.20
4000	37.4	33.7 ~ 41.1	3.43	3.09 ~ 3.77
4500	36.8	33.1 ~ 40.5	3.94	3.55 ~ 4.33
5000	36.2	32.6 ~ 39.8	4.45	4.01 ~ 4.90
5200	36.0	32.4 ~ 39.6	4.66	4.19 ~ 5.13
5400	35.8	32.2 ~ 39.4	4.86	4.37 ~ 5.35
5600	35.5	32.0 ~ 39.1	5.07	4.56 ~ 5.58
5800	35.3	31.8 ~ 38.8	5.27	4.74 ~ 5.80
6000	35.1	31.6 ~ 38.6	5.48	4.93 ~ 6.03
6500	34.5	31.1 ~ 38.0	6.07	5.46 ~ 6.68
7000	33.9	30.5 ~ 37.3	6.65	5.99 ~ 7.32
7500	33.3	30.0 ~ 36.6	7.24	6.52 ~ 7.96
8000	32.7	29.4 ~ 36.0	7.84	7.06 ~ 8.62
8500	32.1	28.9 ~ 35.3	8.46	7.61 ~ 9.31
9000	31.6	28.4 ~ 34.8	9.08	8.17 ~ 9.99
9500	31.0	27.9 ~ 34.1	9.71	8.74 ~ 10.68
10000	30.4	27.4 ~ 33.4	10.40	9.36 ~ 11.44

5.3. SAR Test Procedures

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- [1] Power Reference measurement
- [2] Area Scan
- [3] Zoom Scan
- [4] Power Drift measurement

5.3.1 Power Reference Measurement

The Power Reference measurement and Power Drift measurement are for monitoring the power drift of the DUT in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

5.3.2 Area Scan Measurement

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEC/IEEE 62209-1528. If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly. Following table provides the measurement parameters required for the area scan.

Parameter	$f \leq 3 \text{ GHz}$	$f > 3 \text{ GHz}$
Maximum distance from closest measurement point to phantom surface	$5 \pm 1 \text{ mm}$	$\frac{1}{2} \delta \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution : $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	$\leq 2 \text{ GHz} : \leq 15 \text{ mm}$ $2 \sim 3 \text{ GHz} : \leq 12 \text{ mm}$	$3 \sim 4 \text{ GHz} : \leq 12 \text{ mm}$ $4 \sim 6 \text{ GHz} : \leq 10 \text{ mm}$ $6 \sim 7 \text{ GHz} : \leq 7.5 \text{ mm}$

From the scanned SAR distribution, identify the position of the maximum SAR value, in addition identify the positions of any local maxima with SAR values within 2 dB of the maximum value that will not be within the zoom scan of other peaks. Additional peaks shall be measured only when the primary peak is within 2 dB of the SAR compliance limit (e.g., 1.0 W/kg for 1.6 W/kg 1g SAR limit; or 1.26 W/kg for 2.0 W/kg 10g SAR limit).

5.3.3 Zoom Scan Measurement

The Zoom Scan are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

The Zoom Scan (three-dimensional SAR distribution) is performed at the local maxima locations identified in previous area scan procedure. The zoom scan volume must be larger than the required minimum dimensions. When graded grids are used, which only applies in the direction normal to the phantom surface, the initial grid separation closest to the phantom surface and subsequent graded grid increment ratios must satisfy the required protocols. The 1 g SAR averaging volume must be fully contained within the zoom scan measurement volume boundaries; otherwise, the measurement must be repeated by shifting or expanding the zoom scan volume. The similar requirements also apply to 10 g SAR measurements. Following table provides the measurement parameters required for the zoom scan.

Parameter		$f \leq 3 \text{ GHz}$	$f > 3 \text{ GHz}$
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$		$\leq 2 \text{ GHz} : \leq 8 \text{ mm}$ $2 \sim 3 \text{ GHz} : \leq 5 \text{ mm}$	$3 \sim 4 \text{ GHz} : \leq 5.0 \text{ mm}$ $4 \sim 6 \text{ GHz} : \leq 4.0 \text{ mm}$ $6 \sim 7 \text{ GHz} : \leq 3.4 \text{ mm}$
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid : $\Delta z_{\text{Zoom}}(n)$	$\leq 5 \text{ mm}$	$3 \sim 4 \text{ GHz} : \leq 4.0 \text{ mm}$ $4 \sim 5 \text{ GHz} : \leq 3.0 \text{ mm}$ $5 \sim 7 \text{ GHz} : \leq 2.0 \text{ mm}$
	graded grids : $\Delta z_{\text{Zoom}}(1)$	$\leq 4 \text{ mm}$	$3 \sim 4 \text{ GHz} : \leq 3.0 \text{ mm}$ $4 \sim 5 \text{ GHz} : \leq 2.5 \text{ mm}$ $5 \sim 6 \text{ GHz} : \leq 2.0 \text{ mm}$ $6 \sim 7 \text{ GHz} : \leq 1.7 \text{ mm}$
	$\Delta z_{\text{Zoom}}(n>1)$	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1) \text{ mm}$	
Minimum zoom scan volume (x, y, z)		$\geq 30 \text{ mm}$	$3 \sim 4 \text{ GHz} : \geq 28 \text{ mm}$ $4 \sim 5 \text{ GHz} : \geq 25 \text{ mm}$ $5 \sim 7 \text{ GHz} : \geq 22 \text{ mm}$

Per IEC 62209-2 AMD1, the successively higher resolution zoom scan is required if the zoom scan measured as defined above complies with both of the following criteria, or if the peak spatial-average SAR is below 0.1 W/kg, no additional measurements are needed:

- [1] The smallest horizontal distance from the local SAR peaks to all points 3 dB below the SAR peak shall be larger than the horizontal grid steps in both x and y directions ($\Delta x, \Delta y$). This shall be checked for the measured zoom scan plane conformal to the phantom at the distance z_{M1} .
- [2] The ratio of the SAR at the second measured point (M2) to the SAR at the closest measured point (M1) at the x-y location of the measured maximum SAR value shall be at least 30 %.

If one or both of the above criteria are not met, the zoom scan measurement shall be repeated using a finer resolution. New horizontal and vertical grid steps shall be determined from the measured SAR distribution so that the above criteria are met. Compliance with the above two criteria shall be demonstrated for the new measured zoom scan.

5.3.4 Power Drift Measurement

The Power Drift measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift measurement gives the field difference in dB from the reading conducted within the last Power Reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Power Reference measurement. If the power drift more than 5 %, the SAR measurement will be retested.

5.3.5 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1 g and 10 g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1 g and 10 g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- [1] Extraction of the measured data (grid and values) from the Zoom Scan
- [2] Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- [3] Generation of a high-resolution mesh within the measured volume
- [4] Interpolation of all measured values from the measurement grid to the high-resolution grid
- [5] Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- [6] Calculation of the averaged SAR within masses of 1 g and 10 g

5.3.6 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1 % for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

5.3.7 Volume Scan Measurement

The volume scan is used for assessing overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the DUT remain in the same test position for all measurements and all volume scans use the same spatial resolution and grid spacing. When all volume scans were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

5.3.8 Absorbed Power Density Conversion

The Absorbed Power Density (APD) will be derived from the measured SAR values. According to SPEAG application note and DASY8 manual, the APD is evaluated numerically using the FDTD method of Sim4Life software and averaged over square surface areas of 1 cm² and 4 cm² in the lowermost voxel layer of a flat phantom at a frequency of 6.5 GHz. The phantom consists of a dielectric shell of 2 mm thickness and a relative permittivity 3.7.

5.4. Incident Power Density Definition

The incident power density for an electromagnetic field represents the rate of energy transfer per unit area. The local power density (i.e., Poynting vector) at a given spatial point is deduced from electromagnetic fields by the following formula:

$$S = \frac{1}{2} \text{Re}\{E \times H^*\} \cdot \vec{n}$$

Where: E is the complex electric field peak phasor and H is the complex conjugate magnetic field peak phasor.

The spatial-average power density distribution on the evaluation surface is determined per the IEC TR 63170. The spatial area, A is specified by the applicable exposure limit or regulatory requirements. The circular shape was used.


$$S = \frac{1}{2A} \Re \left(\int E \times H^* \cdot \hat{n} dA \right)$$

5.5. Incident Power Density Measurement Setup

The DASY8 system combines a sophisticated measurement system with a variety of probes (SAR, E- field, H-field, temperature, etc.) and a high-precision 6-axis robot positioner. The combination allows for completely automated measurement scans and evaluations with both field and position information, e.g., volume averages, peak search, and extrapolations. The main purpose is to perform near-field measurements of radiators of highly non-isotropic fields for which the exact measurement location is critical.

The special application area described in the system handbook is IPD measurement in the 6 GHz– 110 GHz frequency range.

SPEAG DASY8 Power Density Measurement System Setup

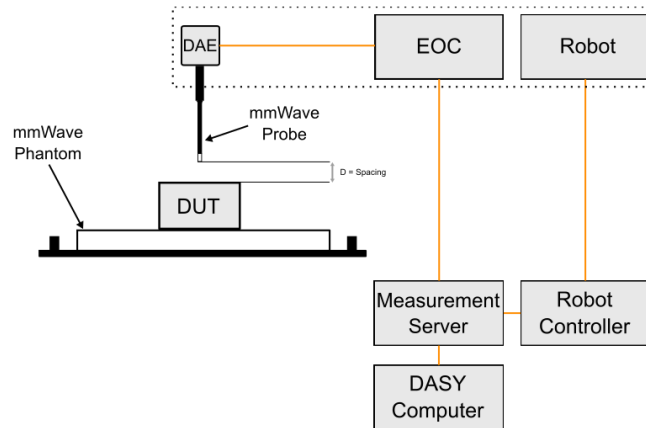

The DASY8 system for Incident Power Density measurements consists of:

- 6-axis robotic arm (Stäubli TX2-90XL) for positioning the probe.
- Mounting Platform for maintaining the phantoms at a fixed location relative to the robot.
- Measurement Server that handles all time-critical tasks, such as measurement data acquisition and supervision of safety features.
- Electrical to Optical Converter (EOC) for converting the optical signal from the DAE to electrical before being transmitted to the measurement server.
- Light Beam unit for probe alignment (measurement of the exact probe length and eccentricity).

- A millimeter Wave (mm-Wave) probe (EummWVx) for measuring the E-field magnitude. The polarization ellipses and the power density are then derived.
- A mm-Wave phantom used as the test bed.
- DAE that reads the probe voltages and transmits it to the DASY8 control PC.
- A mm-Wave Device Holder for positioning the DUT on top of the phantom.
- Control PC that runs the DASY8 software for defining / executing the measurements.
- System verification sources for system performance checks.

5.5.1 mm-Wave E-Field Probe

Model	EUmmWVx	
Frequency	750 MHz to 110 GHz	
Dynamic Range	< 20 V/m ~ 10000 V/m with PRE-10 (min < 20 V/m ~ 2000 V/m)	
Linearity	< ±0.2 dB	
Hemispherical Isotropy	< 0.5 dB	
Position Precision	< 0.2 mm	
Dimensions	Overall length: 320 mm (tip: 20 mm) Tip diameter: encapsulation 8 mm (internal sensor < 1 mm) Distance from probe tip to dipole centers: < 2 mm Sensor displacement to probe's calibration point: < 0.3 mm	


The EUmmWVx probe is an electric (E) universal (U) field probe with two dipole sensors for field measurements at frequencies up to 110 GHz and as close as 2 mm from any field source or transmitter. The sensors consist of two diode-loaded small dipoles that provide the rectified voltage from the coupled E-field. From the voltages at three different orientations in the field at known angles, both the magnitude of the field component and the field polarization can be calculated. Due to the small size of the sensors, the probe can be used for measurements over an extremely wide frequency range from 750 MHz to 110 GHz. The probe sensors are protected by non-removable 8 mm high-density foam.

The EUmmWVx probe is based on the pseudo-vector probe design, which not only measures the field magnitude but also derives its polarization ellipse. This probe concept also has the advantage that the sensor angle errors or distortions of the field by the substrate can be largely nullified by calibration. This is particularly important as, at these very high frequencies, field distortions by the substrate are dependent on the wavelength. The design entails two small 0.8 mm dipole sensors mechanically protected by high-density foam, printed on both sides of a 0.9 mm wide and 0.12 mm thick glass substrate. The body of the probe is specifically constructed to minimize distortion by the scattered fields.

The probe consists of two sensors with different angles arranged in the same plane in the probe axis. Three or more measurements of the two sensors are taken for different probe rotational angles to derive the amplitude and polarization information. These probes are the most flexible and accurate probes currently available for measuring field amplitude.


The probe design allows measurements at distances as small as 2 mm from the sensors to the surface of the device under test (DUT). The typical sensor to probe tip distance is 1.5 mm. The exact distance is calibrated.

Illustration of the Distance Sensor to the DUT Surface

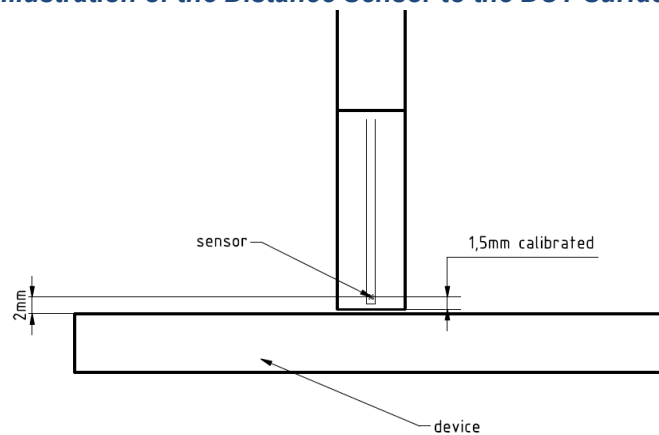

5.5.2 System Verification Sources

Model	System Verification for X-band	
Calibrated Frequency	10 GHz	
E-field Polarization	Linear	
Max Input Power	20 W	
Connector	SMA	
Operation	requires a stable source with known forward power to perform system performance check or validation	
Weight	700 g	

Model	System Verification for Ka-band, V-band, W-band	
Calibrated Frequency	30 GHz, 60 GHz	
Frequency Accuracy	± 100 MHz	
Harmonics	-20 dBc	
Total Radiated Power	14 dBm for 30 GHz, 20 dBm for 60 GHz	
Power Stability	0.05 dB for 30 GHz, 0.1 dB for 60 GHz	
Dimensions	100 x 100 x 100 mm	

5.6. Incident Power Density Measurement Procedure


Within a short distance from the transmitting source, power density is determined based on both electric and magnetic fields. Generally, the magnitude and phase of two components of either the E-field or H-field are needed on a sufficiently large surface to fully characterize the total E-field and H-field distributions. Nevertheless, solutions based on direct measurement of E-field and H-field can be used to compute power density. When the measurement surface does not correspond to the evaluation surface, reconstruction algorithms are necessary to project or transform the fields from the measurement surface to the evaluation surface. The general measurement approach is summarized in following:

- [1] Measure the E-field on the measurement surface at a reference location where the field is well above the noise level. This reference level will be used at the end of this procedure to assess output power drift of the DUT during the measurement.
- [2] Scan the electric field on the measurement surface. The requirements of measurement surface dimensions and spatial resolution are dependent on the measurement system and assessment methodology applied. Measurements are therefore conducted according to the instructions provided by the measurement system manufacturer.

- [3] Measurement spatial resolution can depend on the measured field characteristic and measurement methodology used by the system. Planar scanners typically require a step size of less than $\lambda/2$. When measurements are acquired in regions where evanescent modes are not negligible, smaller spatial resolution may be required. Similar criteria also apply to cylindrical scanning systems where the spatial resolution in the vertical direction should be less than $\lambda/2$.
- [4] Since only E-field is measured on the measurement system, the H-field is calculated from the measured field using a reconstruction algorithm. As power density requires knowledge of both amplitude and phase, reconstruction algorithms can also be used to obtain field information from the measured data (e.g., the phase from the amplitude if only the amplitude is measured). The measurement involves two planes with three different probe rotations on two measurement planes separated by $\lambda/4$. The grid steps are optimized by the software based on the test frequency. The location of the lowest measurement plane is defined by the distance of first measurement layer from device under test entered by the user. In addition, when the measurement surface does not correspond to the evaluation surface, reconstruction algorithms are employed to project or transform the fields from the measurement surface to the evaluation surface. In substance, reconstruction algorithms are the set of algorithms, mathematical techniques and procedures that are applied to the measured field on the measurement surface to determine E- and H-field (amplitude and phase) on the evaluation surface.
- [5] To determine the spatial-average power density distribution on the evaluation surface. The spatial averaging area, A , is specified by the applicable exposure limits or regulatory requirements. If the shape of the area is not provided by the relevant regulatory requirements, a circular shape is recommended.
- [6] Measure the E-field on the measurement surface position at the reference location chosen in step [1]. The power drift of the DUT is estimated as the difference between the squared amplitude of the field values taken in steps [1] and [6]. When the drift is smaller than $\pm 5\%$, this term should be considered in the uncertainty budget. Drifts larger than 5% due to the design and operating characteristics of the device should be accounted for or addressed according to regulatory requirements to determine compliance.

5.6.1 Computation of the Electric Field Polarization Ellipse

For the numerical description of an arbitrarily oriented ellipse in three-dimensional space, five parameters are needed: the semi-major axis (a), the semi-minor axis (b), two angles describing the orientation of the normal vector of the ellipse (Φ , θ), and one angle describing the tilt of the semi-major axis (ψ). For the two extreme cases, i.e., circular and linear polarizations, only three parameters (a , Φ , and θ) are sufficient for the description of the incident field.

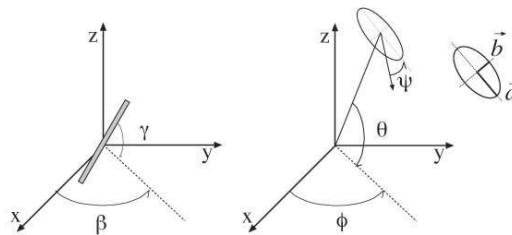

For the reconstruction of the ellipse parameters from measured data, the problem can be reformulated as a nonlinear search problem. The semi-major and semi-minor axes of an elliptical field can be expressed as functions of the three angles (Φ , θ , and ψ). The parameters can be uniquely determined to minimize the error based on least-squares for the given set of angles and the measured data. In this way, the number of free parameters is reduced from five to three, which means that at least three sensor readings are necessary to gain sufficient information for the reconstruction of the ellipse parameters. However, to suppress the noise and increase the reconstruction accuracy, it is desirable to overdetermine the system of equations. The solution to use a probe consisting of two sensors angled by γ_1 and γ_2 toward the probe axis and to perform measurements at three angular positions of the probe, i.e., at β_1 , β_2 , and β_3 , results in overdeterminations by a factor of two. If more information or increased accuracy is required, more rotation angles can be added.

The reconstruction of the ellipse parameters can be separated into linear and non-linear parts that are best solved by the Givens algorithm combined with a downhill simplex algorithm. To minimize the mutual coupling, sensor angles are set with a shift of 90° ($\gamma_2 = \gamma_1 + 90^\circ$), and, for simplification, the first rotation angle of the probe (β_1) can be set to 0° .

5.6.2 Total Field and Power Flux Density Reconstruction

Plane-to-Plane Phase Reconstruction (PTP-PR)

Computation of the IPD in general requires knowledge of the electric (E-) and magnetic (H-) field amplitudes and phases in the plane of incidence. Reconstruction of these quantities from pseudo-vector E-field measurements is feasible, as they are constrained by Maxwell's equations.

The Plane-to-Plane Phase Reconstruction (PTP-PR) reconstruction approach based on the Gerchberg-Saxton algorithm, which benefits from the availability of the E-field polarization ellipse information obtained with the EUmmWVx probe. This reconstruction algorithm, together with the ability of the probe to measure extremely close to the source without perturbing the field, permits reconstruction of the E- and H-fields and the IPD on measurement planes located as near as $\lambda/2\pi$. At closer distances, the uncertainty might be larger.

Equivalent Source Reconstruction (ESR) (Recommended)

In order to overcome the main limitations of PTP-PR at distances $d \leq \lambda/2\pi$ from the DUT, i.e., in the reactive near-field and beyond planar evaluation surfaces, SPEAG have joined forces in a research collaboration to develop a novel equivalent source reconstruction (ESR) algorithm, that models an unknown and inaccessible transmitter not anymore in terms of plane waves but as a set of distributed known auxiliary sources below the surface of the device enclosure. The locations, amplitudes, and phases of these sources are then determined to reconstruct the measured near-fields optimally. As a result, the transmitters inside any enclosure can be replaced with these equivalent sources in any radiation problem, including exposure assessment scenarios. ESR even enables back transformation within a limited range.

This approach has three main advantages:

- Lower reconstruction errors in the reactive near-field regions, which ease compliance testing of DUT operating in the 6 ~ 24 GHz frequency range.
- Evaluation of phones with non-planar surfaces, e.g., a flat surface with a protruding camera module.
- Possibility to perform phase reconstruction in any parts of the radiation region without any limitation to planar measurement domains. In other words, measurements can be done on a conformal surface or even on scattered points in the radiation domain and still obtain reliable data on the phase variations. This opens the way for evaluations on non-planar device surfaces (e.g., virtual- reality goggles) and enables full-wave simulations using measurement results only, i.e., without requiring models for the transmitters.

5.6.3 Power Flux Density Averaging

The average of the reconstructed power density is evaluated on the measurement plane. Two averaging geometries are available: a circle and a rotating square. The averaging area is defined by the user; typical values are 1 cm² and 4 cm². The three variants of the spatial-average Power Density (sPD) defined in the IEC 63195 standard are computed by integration of the Poynting vector:

- sPD_{n+} : Surface normal propagating power flux density into the phantom.
- sPD_{tot+} : Total propagating power flux density into the phantom.
- sPD_{mod+} : Total power flux density into the phantom considering near-field exposure.

6. System Verification

6.1. SAR Tissue Simulating Liquid Verification

The tissue dielectric parameters of tissue-equivalent media used for SAR measurements must be characterized within a temperature range of 18 °C to 25 °C, measured with calibrated instruments and apparatuses, such as network analyzers and temperature probes. The temperature of the tissue-equivalent medium during SAR measurement must also be within 18 °C to 25 °C and within ± 2 °C of the temperature when the tissue parameters are characterized. The tissue dielectric measurement system must be calibrated before use. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 ~ 4 days of use; or earlier if the dielectric parameters can become out of tolerance; for example, when the parameters are marginal at the beginning of the measurement series.


The dielectric constant (ϵ_r) and conductivity (σ) of typical tissue-equivalent media recipes are expected to be within ± 5 % of the required target values; but for SAR measurement systems that have implemented the SAR error compensation algorithms documented in IEEE Std 1528-2013, to automatically compensate the measured SAR results for deviations between the measured and required tissue dielectric parameters, the tolerance for ϵ_r and σ can be relaxed to ± 10 %.

Test Date	Frequency (MHz)	Tissue Temp. (°C)	Measured Permittivity (ϵ_r)	Measured Conductivity (σ)	Target Permittivity (ϵ_r)	Target Conductivity (σ)	ϵ_r Delta (± 10 %)	σ Delta (± 10 %)
Jun. 12, 2025	13.56	21.6	52.5	0.728	53.1	0.72	-1.13	1.11
Jun. 21, 2025	750	21.8	40.9	0.939	41.9	0.89	-2.39	5.51
Jun. 23, 2025	750	21.6	41.5	0.918	41.9	0.89	-0.95	3.15
Jun. 25, 2025	835	21.6	41.2	0.946	42.2	0.93	-2.37	1.72
Jun. 13, 2025	835	21.6	39.5	0.935	42.2	0.93	-6.40	0.54
Jun. 14, 2025	835	21.5	41.7	0.958	42.2	0.93	-1.18	3.01
Jun. 24, 2025	1800	21.8	39.2	1.390	40.0	1.40	-2.00	-0.71
Jun. 22, 2025	1900	22.1	38.9	1.450	40.0	1.40	-2.75	3.57
Jun. 10, 2025	2450	21.6	38.2	1.810	39.2	1.80	-2.55	0.56
Jun. 23, 2025	2600	21.6	38.4	1.700	39.0	1.96	-1.54	-13.27
Jun. 26, 2025	2600	21.8	36.9	1.980	39.0	1.96	-5.38	1.02
Jun. 28, 2025	2600	22.1	36.2	1.970	39.0	1.96	-7.18	0.51
Jun. 27, 2025	3500	21.7	37.9	2.840	37.9	2.91	0.00	-2.41
Jun. 28, 2025	3500	22.1	38.1	2.770	37.9	2.91	0.53	-4.81
Jun. 29, 2025	3500	21.8	37.9	2.780	37.9	2.91	0.00	-4.47
Jun. 27, 2025	3700	21.7	37.6	3.030	37.7	3.12	-0.27	-2.88
Jun. 28, 2025	3700	22.1	37.7	2.940	37.7	3.12	0.00	-5.77
Jun. 29, 2025	3700	21.8	37.6	2.960	37.7	3.12	-0.27	-5.13
Jun. 29, 2025	3900	21.8	36.7	3.150	37.5	3.32	-2.13	-5.12
Jun. 11, 2025	5250	21.9	34.9	4.260	35.9	4.71	-2.79	-9.55
Jun. 11, 2025	5600	21.9	34.4	4.620	35.5	5.07	-3.10	-8.88
Jun. 12, 2025	5800	21.7	34.1	4.820	35.3	5.27	-3.40	-8.54
Jun. 12, 2025	6500	21.7	33.1	5.570	34.5	6.07	-4.06	-8.24

6.2. SAR Test System Verification

The SAR system verification is required to confirm measurement accuracy, according to the tissue dielectric media, probe calibration points and other system operating parameters required for measuring the SAR of a test device. The system verification must be performed for each frequency band and within the valid range of each probe calibration point required for testing the device. The same SAR probe(s) and tissue equivalent media combinations used with each specific SAR system for system verification must be used for device testing. When multiple probe calibration points are required to cover substantially large transmission bands, independent system verifications are required for each probe calibration point. A system verification must be performed before each series of SAR measurements using the same probe calibration point and tissue-equivalent medium.

The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. For frequency ≤ 6 GHz, the SPEAG Powersource1 is used as signal source. For frequency > 6 GHz, the signal generator is used as signal source. The Powersource1 is a portable and very stable RF source providing a continuous wave (CW) signal. It is designed for conducting system checks and system validation and is compatible with international standards, and has been calibrated by SPEAG's ISO 17025 accredited calibration center. When using Powersource1, the setup can be simplified. The signal purity is warranted by design. Since the Powersource1 is calibrated, no additional equipment is needed and the Powersource1 can directly be connected to the SMA connector of the dipole without a cable as all separate components (signal generator, amplifier, coupler and power meter) are built into the unit. The system verification setup is shown as below.

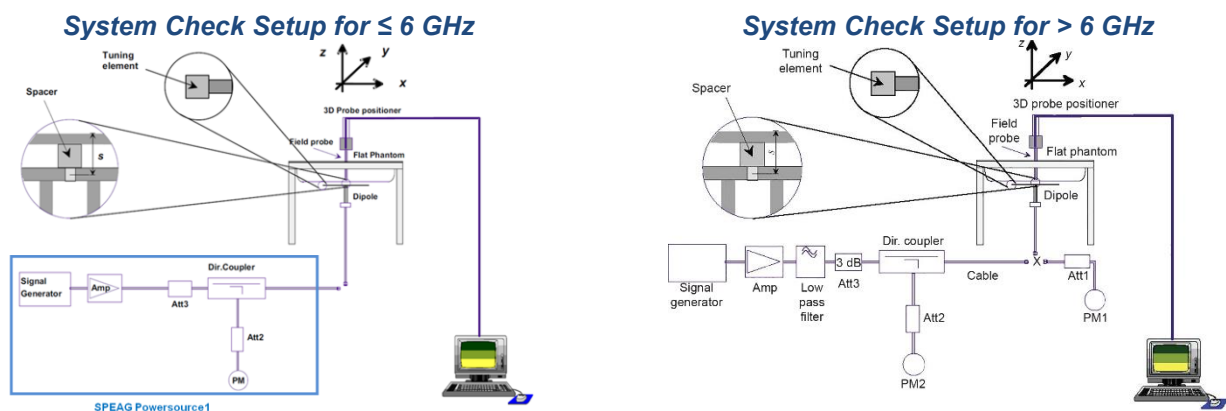

The validation dipole is placed beneath the flat phantom with the specific spacer in place. The distance spacer is touched the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. Before the system check testing, the Powersource1 will be adjusted for the desired forward power of 17 dBm (50 mW) or the signal generator will be adjusted for desired forward power of 20 dBm (100 mW) at the dipole connector and the RF output power would be turned on. After system check testing, the SAR result will be normalized to 1 W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10 %.

Test Date	Dipole S/N	Probe S/N	DAE S/N	Frequency (MHz)	Input Power (dBm)	Target 1g SAR (W/kg)	Measured 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	1g SAR Delta (±10 %)
Jun. 12, 2025	1047	7650	1669	13.56	30	0.506	0.512	0.51	1.19
Jun. 21, 2025	1222	7650	1669	750	17	8.76	0.437	8.72	-0.46
Jun. 23, 2025	1222	7650	1669	750	17	8.76	0.429	8.56	-2.29
Jun. 25, 2025	4d291	7650	1669	835	17	9.95	0.506	10.10	1.47
Jun. 13, 2025	4d291	7650	1669	835	17	9.95	0.52	10.38	4.28
Jun. 14, 2025	4d291	7650	1669	835	17	9.95	0.533	10.63	6.88
Jun. 24, 2025	2d167	7650	1669	1800	17	38.7	1.89	37.71	-2.56
Jun. 22, 2025	5d111	7650	1669	1900	17	40.2	1.92	38.31	-4.70
Jun. 10, 2025	1087	7650	1669	2450	17	53.2	2.69	53.67	0.89
Jun. 23, 2025	1197	7650	1669	2600	17	57.0	2.66	53.07	-6.89
Jun. 26, 2025	1197	7650	1669	2600	17	57.0	2.76	55.07	-3.39
Jun. 28, 2025	1197	7650	1669	2600	17	57.0	2.71	54.07	-5.14
Jun. 27, 2025	1013	7650	1669	3500	17	66.1	3.26	65.05	-1.60
Jun. 28, 2025	1013	7650	1669	3500	17	66.1	3.21	64.05	-3.10
Jun. 29, 2025	1013	7650	1669	3500	17	66.1	3.22	64.25	-2.80
Jun. 27, 2025	1034	7650	1669	3700	17	68.0	3.28	65.44	-3.76
Jun. 28, 2025	1034	7650	1669	3700	17	68.0	3.20	63.85	-6.11
Jun. 29, 2025	1034	7650	1669	3700	17	68.0	3.21	64.05	-5.81
Jun. 29, 2025	1014	7650	1669	3900	17	68.2	3.28	65.44	-4.04
Jun. 11, 2025	1358	7650	1669	5250	17	79.2	3.73	74.42	-6.03
Jun. 11, 2025	1358	7650	1669	5600	17	82.1	4.45	88.79	8.15
Jun. 12, 2025	1358	7650	1669	5800	17	79.4	3.94	78.61	-0.99
Jun. 12, 2025	1081	7650	1669	6500	20	288	29.5	295.00	2.43

6.3. IPD Test System Verification


The system was verified to be within ± 0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mm-Wave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check.

The system check provides a fast and reliable method to routinely verify that the measurement system is operational with no system component failures, including probe defects, drifts or deviation from target performance requirements. A system check also verifies the repeatability of the measurement system before compliance testing.


The measurement of a verification source is started from 5G probe installed and the phantom taught. The verification source is placed on the 5G phantom. Due to the internal distance from the horn to the outer surface of the verification source, the measurement distance set in the software should be offset by -4.45 mm; e.g., for measurement of the verification source at 10 mm, the measurement distance set in the software should be 5.55 mm (10 mm - 4.45 mm).

The system check is a complete measurement using simple well-defined reference sources. Per the DASY8 specification in the user's manual and SPEAG's recommendation, the deviation threshold of ± 0.66 dB represents the expanded standard uncertainty for system performance check. The system check is successful if the measured results are within ± 0.66 dB tolerances to the target value shown in the calibration certificate of the verification source. The instrumentation and procedures used for system check should ensure the system is ready for performing compliance tests.

System Check Setup for 10 GHz

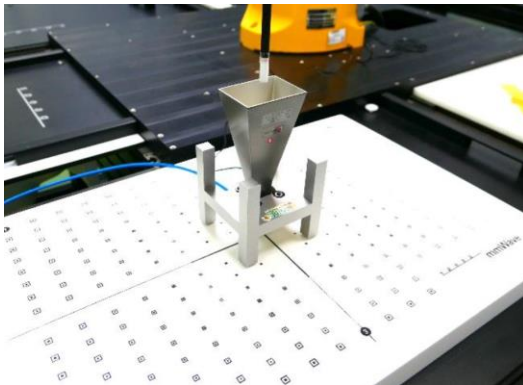

System Check Setup for 30 / 60 GHz

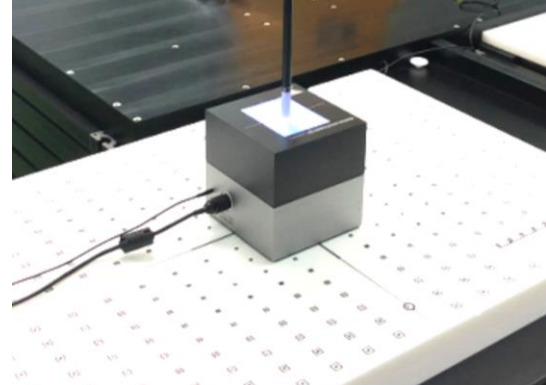

Settings for the Measurement of Verification Sources

Frequency (GHz)	Grid Step	Grid Extent X/Y (mm)	Measurement Points
10	0.125 ($\lambda/8$)	60 / 60	18 x 18
30	0.25 ($\lambda/4$)	60 / 60	26 x 26
60	0.25 ($\lambda/4$)	32.5 / 32.5	28 x 28

Test Date	Frequency (GHz)	Normal psPD (4 cm ² , W/m ²)			Total psPD (4 cm ² , W/m ²)			Note			
		Measured	Target	Delta (± 0.66 dB)	Measured	Target	Delta (± 0.66 dB)	Source S/N	Probe S/N	DAE S/N	Output Power (dBm)
Jun. 18, 2025	10G	54.2	56.2	-0.16	54.6	56.5	-0.15	1060	9639	1742	19.7


7. Test Configurations

7.1. Description of Test Position

7.1.1 Body Exposure Conditions

For full-size tablet, according to KDB Publication 616217 D04, SAR evaluation is required for back surface and edges of the devices. The back surface and edges of the tablet are tested with the tablet touching the phantom. Exposures from antennas through the front surface of the display section of a tablet are generally limited to the user's hands. Exposures to hands for typical consumer transmitters used in tablets are not expected to exceed the extremity SAR limit; therefore, SAR evaluation for the front surface of tablet display screens are generally not necessary. When voice mode is supported on a tablet and it is limited to speaker mode or headset operations only, additional SAR testing for this type of voice use is not required.

Illustration for Full-size Tablet Setup

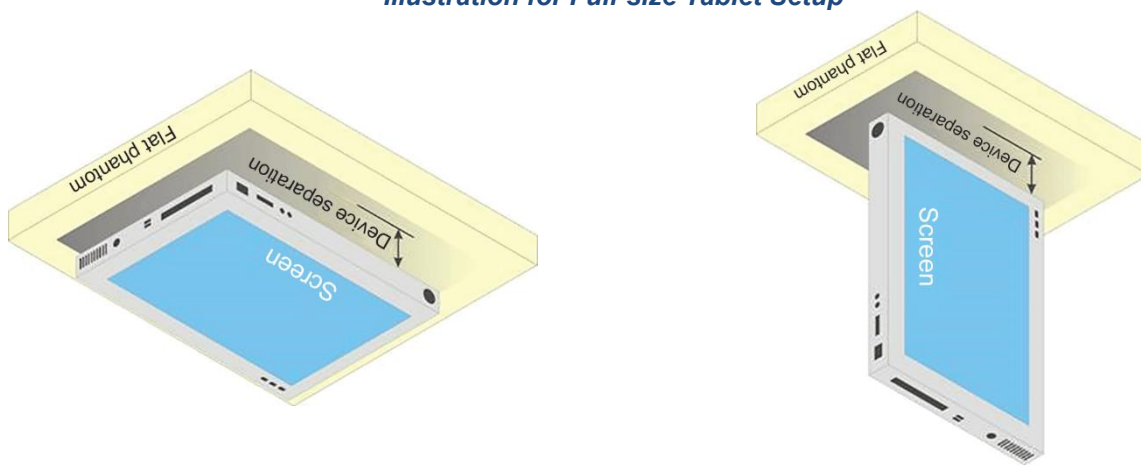

7.2. FCC General Test Procedures

7.2.1 Measured and Reported SAR

Per KDB Publication 447498 D01, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as reported SAR. The highest reported SAR results are identified on the grant of equipment authorization according to procedures in KDB Publication 690783 D01.

7.2.2 3G SAR Test Reduction Procedure

In KDB Publication 941225 D01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

7.2.3 Measurement Condition for WCDMA

Output Power Verification

Maximum output power is verified on the high, middle and low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all "1s" or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCH_n and spreading codes, HSDPA, DSPA) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

Body SAR

SAR for body-worn configurations is measured using a 12.2 kbps RMC with TPC bits configured to all "1's". The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH_n, for the highest reported SAR configuration in 12.2 kbps RMC.

Handsets with Release 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, body SAR is measured for HSDPA using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

Handsets with Release 6 HSPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA / HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

Release 5 HSDPA Data Devices

The 3G SAR test reduction procedure is applied to body SAR with 12.2 kbps RMC as the primary mode. Otherwise, body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. HSDPA is configured according to the applicable UE category of a test device. The number of HS-DSCH / HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms and a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors (β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) are set according to values indicated in below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	$\beta_{HS}^{(1)(2)}$	CM ⁽³⁾ (dB)	MPR ⁽³⁾ (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	12/15 ⁽⁴⁾	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1 : Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2 : For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3 : CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4 : For subtest 2 the β_d/β_c ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Release 6 HSUPA Data Devices

The 3G SAR test reduction procedure is applied to body SAR with 12.2 kbps RMC as the primary mode. Otherwise, body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode. Otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing. Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the β values indicated in below.

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{HS}^{(1)}$	β_{ec}	$\beta_{ed}^{(4)(5)}$	β_{ed} (SF)	β_{ed} (Codes)	CM ⁽²⁾ (dB)	MPR ⁽²⁾⁽⁶⁾ (dB)	AG ⁽⁵⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 \cdot \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{HS} = 5/15 \cdot \beta_c$.
Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCCH, HS-DPCCCH, E-DPDCH and E-DPCCCH the MPR is based on the relative CM difference.
Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.
Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.
Note 5: β_{ed} cannot be set directly; it is set by Absolute Grant Value.
Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

HSPA+ SAR Guidance

The 3G SAR test reduction procedure is applied to HSPA+ (uplink) with 12.2 kbps RMC as the primary mode. Otherwise, when SAR is required for Rel. 6 HSPA, SAR is required for Rel. 7 HSPA+. Power is measured for HSPA+ that supports uplink 16QAM according to configurations in Table C.11.1.4 of 3GPP TS 34.121-1 to determine SAR test reduction.

Sub-test	$\beta_c^{(3)}$	β_d	$\beta_{HS}^{(1)}$	β_{ec}	$\beta_{ed}^{(4)}$ (2xSF2)	$\beta_{ed}^{(4)}$ (2xSF4)	CM ⁽²⁾ (dB)	MPR ⁽²⁾ (dB)	AG ⁽⁴⁾ Index	E-TFCI ⁽⁵⁾	E-TFCI (boost)
1	1	0	30/15	30/15	$\beta_{ed1}: 30/15$ $\beta_{ed2}: 30/15$	$\beta_{ed3}: 24/15$ $\beta_{ed4}: 24/15$	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 \cdot \beta_c$.
Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).
Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.
Note 4: β_{ed} cannot be set directly; it is set by Absolute Grant Value.
Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2 ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

DC-HSDPA SAR Guidance

The 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Otherwise, when SAR is required for Rel. 5 HSDPA, SAR is required for Rel. 8 DC-HSDPA. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

7.2.4 Measurement Condition for LTE

Per KDB Publication 941225 D05, LTE establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR. The Anritsu MT8821C or MT8000 simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

The LTE Maximum Power Reduction (MPR) in accordance with 3GPP TS 36.101 is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. The MPR is enabled for this device and the allowed MPR is specified in below.

Modulation	Channel Bandwidth / Transmission Bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
256QAM	≥ 1						≤ 5

The device is compliant with Additional Maximum Power Reduction (A-MPR) requirements defined in 3GPP TS 36.101 section 6.2.4 that has been disabled for all SAR tests by setting "NS=01" on the base station simulator.


LTE SAR Test Requirement

- [1] Start SAR testing for QPSK with 1 RB allocation with the largest bandwidth using offset and required channel combination with the highest maximum output power. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- [2] For QPSK with 50% RB allocation, the 1 RB allocation procedures in step 1 are applied to measure the SAR.
- [3] For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1 RB allocations, and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- [4] For higher order modulations and lower bandwidths configurations, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is > 0.5 dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.
- [5] Per KDB Publication 941225 D05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

TDD-LTE Considerations

According to KDB Publication 941225 D05, SAR testing for TDD-LTE device must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP TDD-LTE configurations. The TDD-LTE of this device supports frame structure type 2 defined in 3GPP TS 36.211 section 4.2, and the frame structure configuration can be referred to below.

3GPP TS 36.211 Figure 4.2-1: Frame Structure Type 2

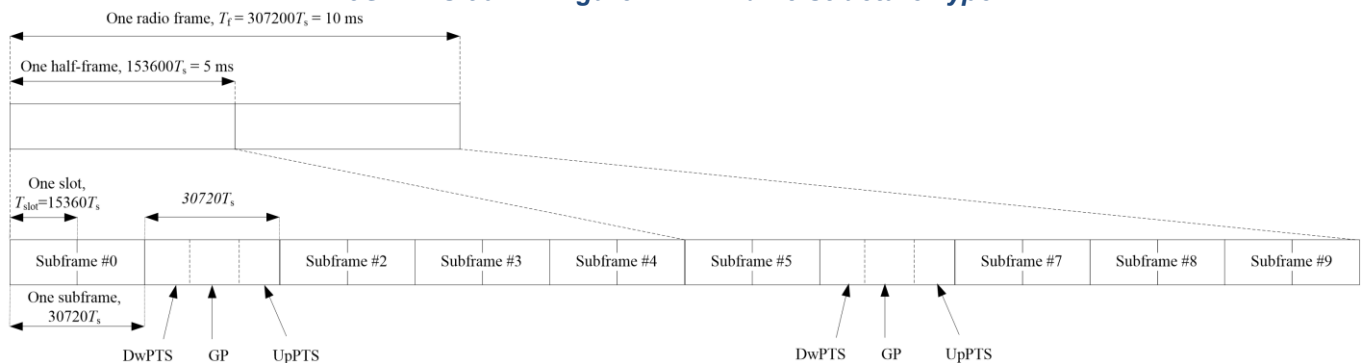

3GPP TS 36.211 Table 4.2-1: Configuration of Special Subframe

Special Subframe Configuration	Normal Cyclic Prefix in Downlink			Extended Cyclic Prefix in Downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal Cyclic Prefix in Uplink	Extended Cyclic Prefix in Uplink		Normal Cyclic Prefix in Uplink	Extended Cyclic Prefix in Uplink
0	$6592 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$	$7680 \cdot T_s$	$(1+X) \cdot 2192 \cdot T_s$	$(1+X) \cdot 2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$	$7680 \cdot T_s$	$(2+X) \cdot 2192 \cdot T_s$	$(2+X) \cdot 2560 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$	$13152 \cdot T_s$	$12800 \cdot T_s$	-	-	-
9	$13168 \cdot T_s$			-	-	-
10	$13168 \cdot T_s$			-	-	-

3GPP TS 36.211 Table 4.2-2: Uplink-Downlink Configurations

UL-DL Configuration	DL-to-UL Switch Point Periodicity	Subframe Number										Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

Note: Calculated Duty Cycle = Extended cyclic prefix in UL * (T_s) * # of S + # of U / period

Considering the highest transmission duty cycle, TDD-LTE was tested using Uplink-Downlink Configuration 0 with 6 uplink subframe and 2 special subframe. The special subframe was set to special subframe configuration 7 using extended cyclic prefix uplink. Therefore, SAR testing for TDD-LTE was performed at the maximum output power with highest transmission duty cycle of 63.33 %.

LTE Downlink Carrier Aggregation (CA) Consideration

Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in according to KDB Publication 941225 D05A. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. Additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per KDB Publication 941225 D05A, no SAR measurements are required for downlink only carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

LTE Uplink Carrier Aggregation (CA) Consideration

<LTE Intra-Band Contiguous Carrier Aggregation>

UL CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The channel BW, channel number, RB allocation, etc. would be selected to allow contiguous CA of PCC and SCC. Uplink output power for UL CA is the total power measured across the PCC and SCC. UL CA power measurements were performed for each antenna at with QPSK modulation based on the worst-case standalone SAR.

The UL CA mode power measurements represent the total power across both carriers. Measurements were made for all supported PCC bandwidths using the channel / RB combination resulting in the highest standalone output power at the least MPR (0 dB). SCCs were set to use configurations similar to the PCC to establish conservative or worst-case equivalent SAR test conditions (highest maximum output power with MPR of 0 dB and RB allocation setting).

Per November 2017 TCB Workshop, Uplink CA SAR test guidance as follows:

- [1] When the maximum output power for UL CA is $\leq$ standalone LTE mode (without CA),
 - PCC is configured according to the highest standalone SAR configuration tested.
 - SCC and subsequent CCs are configured according to procedures used for power measurement and parameters (BW, RB etc.) similar to that used for the PCC.
- [2] When the Reported SAR for UL CA configuration, described above, is > 1.2 W/kg, UL CA SAR is also required for all required test channels (PCC based).
- [3] UL CA SAR is also required for standalone SAR configurations > 1.2 W/kg when they are scaled to the UL CA power level.

<LTE Inter-Band Carrier Aggregation>

Per October 2018 TCB Workshop, Uplink CA SAR test guidance as follows:

- [1] Provide the single uplink SAR values you have obtained for the relevant SAR configurations and frequency bands that employ inter-band uplink carrier aggregation.
- [2] If the single uplink 1g SAR values for each band are both less than 0.8 W/kg and the algebraic summation of the 1g SAR values are less than 1.45 W/kg, no additional measurements need to be performed.
- [3] If one of the single Uplink 1g SAR values is greater than 0.8 W/kg, instead of algebraically summing the 1g SAR values, sum up the SAR distributions, similar to the enlarged zoom scan (volume scan) procedures found in KDB Publication 865664 D01.
- [4] If the algebraic sum of the 1g SAR values is > 1.45 W/kg, additional measurements may have to be made. Submit a KDB inquiry for additional guidance.

Maximum Output Power (Tune-up Limit) and SAR Test Exemption for LTE UL Carrier Aggregation

The maximum UL CA transmit power is reduced by 3 dB from the standalone values for both carriers therefore SAR will be reduced accordingly.

The reported 1g SAR for any standalone LTE configuration does not exceed 1.2 W/kg. The worst-case UL CA SAR per band will therefore be < 0.6 W/kg. As the SAR for each individual band is < 0.6 W/kg and the algebraic summation cannot exceed 1.2 W/kg no further measurements are needed.

The combined SAR contribution cannot exceed the highest standalone SAR :

$$(SAR_{LTE1} / 2 + SAR_{LTE2} / 2 \leq \text{Max} (SAR_{LTE1}, SAR_{LTE2}))$$

Therefore, simultaneous transmission analysis of UL CA and WLAN / BT transmitters can be done using either of the standalone LTE SAR values alone.

7.2.5 Measurement Condition for 5G NR FR1

- [1] Per October 2020 TCB Workshop guidance, 5G NR FR1 SAR evaluations are being generally based on adapting the existing LTE SAR procedures (KDB Publication 941225 D05).
- [2] Start SAR testing for $\pi/2$ BPSK with 1 RB allocation with the largest bandwidth using offset and required channel combination with the highest maximum output power. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- [3] For $\pi/2$ BPSK with 50% RB allocation, the 1 RB allocation procedures in step 1 are applied to measure the SAR.
- [4] For $\pi/2$ BPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1 RB allocations, and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- [5] For higher order modulations and lower bandwidths configurations, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is > 0.5 dB higher than the same configuration in $\pi/2$ BPSK or when the reported SAR for the $\pi/2$ BPSK configuration is > 1.45 W/kg.
- [6] Per KDB Publication 941225 D05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

7.2.6 Measurement Condition for Wi-Fi

General Considerations

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. Various vendor specific external test software and chipset based internal test modes are typically used for SAR measurement. Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 ~ 96 % is typically achievable in most test mode configurations. A minimum transmission duty factor of 85 % is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. In addition, a periodic transmission duty factor is required for current generation SAR systems to measure SAR correctly. The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

According to KDB Publication 248227 D01, this device has installed WLAN engineering testing software which can provide continuous transmitting RF signal. During WLAN SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

2.4 GHz Band

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- a) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- b) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

2.4 GHz 802.11 g/n/ax OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

U-NII-1 and U-NII-2A Bands

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

U-NII-2C and U-NII-3 Bands

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 ~ 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 ~ 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

Initial Test Position SAR Test Reduction Procedure

For exposure conditions with multiple test positions, such as handset operating next to the ear, devices with hotspot mode or UMPC mini-tablet, procedures for initial test position can be applied. Using the transmission mode determined by the DSSS procedure or initial test configuration, area scans are measured for all positions in an exposure condition. The test position with the highest extrapolated (peak) SAR is used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions is required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are tested. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

OFDM Transmission Mode SAR Test and Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. Per April 2019 TCB Workshop guidance, 802.11ax was considered the highest order 802.11 mode. When the maximum output power is the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

Initial Test Configuration Procedure

For OFDM, an initial test configuration is determined for each frequency band and aggregated band, according to the transmission mode with the highest maximum output power specified for SAR measurements. When the same maximum output power is specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration(s) with the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order IEEE 802.11 mode. The channel of the transmission mode with the highest average RF output conducted power will be the initial test configuration.

When the reported SAR is ≤ 0.8 W/kg, no additional measurements on other test channels are required. Otherwise, SAR is evaluated using the subsequent highest average RF output channel until the reported SAR result is ≤ 1.2 W/kg or all channels are measured. When there are multiple untested channels having the same subsequent highest average RF output power, the channel with higher frequency from the lowest 802.11 mode is considered for SAR measurements. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

Subsequent Test Configuration Procedure

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

MIMO SAR considerations

Per KDB Publication 248227 D01, the simultaneous SAR provisions in KDB Publication 447498 D01 should be applied to determine simultaneous transmission SAR test exclusion for Wi-Fi MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6 W/kg, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

SAR Test Exclusion for IEEE 802.11ax

To make the most efficient use of the additional available subcarriers (data tones), IEEE 802.11ax can utilize Orthogonal Frequency-Division Multiple Access (OFDMA) which divides the existing 802.11 channels into smaller subchannels called Resource Units (RUs). Possible RU sizes are: 26T, 52T, 106T, 242T, 484T, 996T and 996Tx2.

Per FCC Guidance, 802.11ax was considered a higher order 802.11 mode when compared to a/b/g/n/ac to apply KDB Publication 248227 D01 for OFDM mode selection. Therefore, SAR tests were not required for 802.11ax based on the maximum allowed output powers of OFDM modes and the reported SAR values. Per FCC Guidance, maximum conducted powers were performed for each RU size to demonstrate that the output powers would not be higher than the other OFDM 802.11 modes.

When SAR testing for 802.11ax is required, the following procedures are applied to measure the SAR.

- If the maximum output power is highest for OFDMA scenarios, choose the tone size with the maximum number of tones and the highest maximum output power.
- Otherwise, consider the fully allocated channel for SAR testing.
- When SAR testing is required on RU sizes less than the fully allocated channel, use the RU number closest to the middle of the channel, choosing the higher RU number when two RUs are equidistant to the middle of the channel.

8. RF Output Power Specification and Measurement

8.1. Nominal and Maximum Output Power Specifications

WCDMA Bands		Maximum Tune-up
WCDMA Band II	RMC12.2K	18.9
	HSDPA / DC-HSDPA	18.9
	HSUPA / HSPA+	18.9
WCDMA Band IV	RMC12.2K	18.4
	HSDPA / DC-HSDPA	18.4
	HSUPA / HSPA+	18.4
WCDMA Band V	RMC12.2K	21.5
	HSDPA / DC-HSDPA	21.5
	HSUPA / HSPA+	21.5

LTE Bands		Maximum Tune-up
LTE B2	FDD	19.3
LTE B4	FDD	18.7
LTE B5	FDD	21.6
LTE B7	FDD	14.0
LTE B12	FDD	22.2
LTE B13	FDD	21.4
LTE B14	FDD	21.7
LTE B17	FDD	22.2
LTE B25	FDD	19.3
LTE B26	FDD	21.6
LTE B38	TDD	16.1
LTE B41 (PC3)	TDD	16.1
LTE B41 (PC2)	TDD	18.0
LTE B42	TDD	15.9
LTE B43	TDD	18.0
LTE B48	TDD	17.0
LTE B66	FDD	18.7
LTE B71	FDD	23.2

NR Bands		Maximum Tune-up
5GNR n2	FDD	18.2
5GNR n5	FDD	21.8
5GNR n7	FDD	13.6
5GNR n12	FDD	23.2
5GNR n13	FDD	22.4
5GNR n14	FDD	22.3
5GNR n25	FDD	18.2
5GNR n26	FDD	22.1
5GNR n66	FDD	18.2
5GNR n71	FDD	23.1
5GNR n38	TDD	24.7
5GNR n41	TDD	23.9
5GNR n48	TDD	20.3
5GNR n77	TDD	20.9
5GNR n78	TDD	20.9

NR Bands (UL MIMO)		Maximum Tune-up
5GNR n38	TDD	23.2
5GNR n41	TDD	22.4
5GNR n48	TDD	18.8
5GNR n77	TDD	19.4
5GNR n78	TDD	19.4

WLAN 2.4 GHz MAX Tune-up Power					
Mode	Channel	Frequency	ANT 0	ANT 1	ANT 0+1
			MAX Tune-up	MAX Tune-up	MAX Tune-up
802.11b	1	2412	18.00	15.50	N/A
	6	2437	18.00	15.50	N/A
	11	2462	18.00	15.50	N/A
	12	2467	18.00	15.50	N/A
	13	2472	15.50	15.50	N/A
802.11g	1	2412	18.00	15.50	N/A
	6	2437	18.00	15.50	N/A
	11	2462	18.00	15.00	N/A
	12	2467	15.50	12.00	N/A
	13	2472	11.50	8.50	N/A
802.11n HT20	1	2412	18.00	15.00	10.50
	6	2437	18.00	15.50	14.00
	11	2462	18.00	14.00	11.50
	12	2467	15.00	11.50	6.50
	13	2472	11.50	8.00	4.00
802.11n HT40	3	2422	16.00	12.50	9.50
	6	2437	17.00	13.50	10.00
	9	2452	16.00	12.50	9.00
	10	2457	10.50	7.00	3.00
	11	2462	11.00	7.50	4.00
802.11ax HE20	1	2412	17.50	14.50	10.50
	6	2437	18.00	15.50	14.50
	11	2462	18.00	14.50	10.50
	12	2467	15.00	12.00	7.00
	13	2472	9.00	5.50	3.00
802.11ax HE40	3	2422	16.00	12.50	10.00
	6	2437	17.00	13.50	10.00
	9	2452	16.00	12.50	9.00
	10	2457	11.00	7.50	4.50
	11	2462	9.00	5.50	2.50

WLAN 5.2 GHz MAX Tune-up Power					
Mode	Channel	Frequency	ANT 0	ANT 1	ANT 0+1
			MAX Tune-up	MAX Tune-up	MAX Tune-up
802.11a	36	5180	15.00	10.50	N/A
	40	5200	15.00	10.50	N/A
	44	5220	15.00	10.50	N/A
	48	5240	15.00	10.50	N/A
	36	5180	15.00	10.50	16.00
802.11n HT20	40	5200	15.00	10.50	16.00
	44	5220	15.00	10.50	16.00
	48	5240	15.00	10.50	16.00
	38	5190	15.00	10.50	16.00
802.11n HT40	46	5230	15.00	9.00	15.25
	36	5180	15.00	10.50	16.00
	40	5200	15.00	10.50	16.00
	44	5220	15.00	10.50	16.00
802.11ac VHT20	48	5240	15.00	10.50	16.00
	38	5190	15.00	10.50	16.00
	46	5230	15.00	9.00	15.25
	42	5210	15.00	9.00	8.90
802.11ac VHT40	36	5180	15.00	7.50	8.70
	40	5200	15.00	10.50	13.50
	44	5220	15.00	10.50	13.50
	48	5240	15.00	10.50	13.00
802.11ax HE20	38	5190	15.00	10.50	11.50
	46	5230	15.00	10.50	13.50
802.11ax HE40	42	5210	15.00	9.00	12.50

WLAN 5.3 GHz MAX Tune-up Power					
Mode	Channel	Frequency	ANT 0	ANT 1	ANT 0+1
			MAX Tune-up	MAX Tune-up	MAX Tune-up
802.11a	52	5260	15.50	10.50	N/A
	56	5280	15.50	10.50	N/A
	60	5300	15.50	10.50	N/A
	64	5320	15.50	10.50	N/A
802.11n HT20	52	5260	15.50	10.50	12.50
	56	5280	15.50	10.50	12.50
	60	5300	15.50	10.50	12.50
	64	5320	15.50	10.50	12.50
802.11n HT40	54	5270	15.50	10.50	13.50
	62	5310	15.50	9.00	11.50
802.11ac VHT20	52	5260	15.50	10.50	12.50
	56	5280	15.50	10.50	12.50
	60	5300	15.50	10.50	12.50
	64	5320	15.50	10.50	12.50
802.11ac VHT40	54	5270	15.50	10.50	13.50
	62	5310	15.50	9.00	11.50
802.11ac VHT80	58	5290	15.00	9.00	8.90
802.11ac VHT160	50	5250	15.00	7.50	8.70
802.11ax HE20	52	5260	15.50	10.50	13.50
	56	5280	15.50	10.50	13.50
	60	5300	15.50	10.50	13.00
	64	5320	15.50	10.50	11.50
802.11ax HE40	54	5270	15.50	10.50	13.50
	62	5310	15.50	9.00	12.50
802.11ax HE80	58	5290	15.00	9.00	11.50
802.11ax HE160	50	5250	15.00	7.00	9.00

WLAN 5.6 GHz MAX Tune-up Power					
Mode	Channel	Frequency	ANT 0	ANT 1	ANT 0+1
			MAX Tune-up	MAX Tune-up	MAX Tune-up
802.11a	100	5500	14.50	10.00	N/A
	116	5580	14.50	10.00	N/A
	124	5620	14.50	10.00	N/A
	132	5660	14.50	10.00	N/A
	140	5700	14.50	10.00	N/A
	144	5720	14.50	10.00	N/A
802.11n HT20	100	5500	14.50	10.00	10.50
	116	5580	14.50	10.00	10.50
	124	5620	14.50	10.00	10.50
	132	5660	14.50	10.00	10.50
	140	5700	14.50	10.00	10.50
	144	5720	14.50	10.00	9.50
802.11n HT40	102	5510	14.50	10.00	9.50
	110	5550	14.50	10.00	11.00
	126	5630	14.50	10.00	11.00
	134	5670	14.50	10.00	10.00
	142	5710	14.50	10.00	10.00
	144	5720	14.50	10.00	10.00
802.11ac VHT20	100	5500	14.50	10.00	10.50
	116	5580	14.50	10.00	10.50
	124	5620	14.50	10.00	10.50
	132	5660	14.50	10.00	10.50
	140	5700	14.50	10.00	10.50
	144	5720	14.50	10.00	9.50
802.11ac VHT40	102	5510	14.50	10.00	9.50
	110	5550	14.50	10.00	11.00
	126	5630	14.50	10.00	11.00
	134	5670	14.50	10.00	10.00
	142	5710	14.50	10.00	10.00
	144	5720	14.50	10.00	10.00
802.11ac VHT80	106	5530	14.50	10.00	10.00
	122	5610	14.50	10.00	10.00
	138	5690	14.50	10.00	10.00
802.11ac VHT160	114	5570	14.50	10.00	15.25
802.11ax HE20	100	5500	14.50	10.00	10.50
	116	5580	14.50	10.00	10.50
	124	5620	14.50	10.00	10.50
	132	5660	14.50	10.00	3.50
	140	5700	14.50	10.00	9.00
	144	5720	14.50	10.00	9.50
802.11ax HE40	102	5510	14.50	10.00	9.50
	110	5550	14.50	10.00	10.50
	126	5630	14.50	10.00	10.50
	134	5670	14.50	10.00	10.50
	142	5710	14.50	10.00	10.50
802.11ax HE80	106	5530	14.50	10.00	10.00
	122	5610	14.50	10.00	10.00
	138	5690	14.50	10.00	10.00
802.11ax HE160	114	5570	14.50	10.00	15.25

WLAN 5.8 GHz MAX Tune-up Power					
Mode	Channel	Frequency	ANT 0	ANT 1	ANT 0+1
			MAX Tune-up	MAX Tune-up	MAX Tune-up
802.11a	149	5745	15.50	9.00	N/A
	157	5785	15.50	9.00	N/A
	165	5825	15.50	9.00	N/A
802.11n HT20	149	5745	15.50	9.00	8.50
	157	5785	15.50	9.00	8.50
	165	5825	15.50	9.00	8.50
802.11n HT40	151	5755	15.50	9.00	8.50
	159	5795	15.50	9.00	8.50
	149	5745	15.50	9.00	8.50
802.11ac VHT20	157	5785	15.50	9.00	8.50
	165	5825	15.50	9.00	8.50
	151	5755	15.50	9.00	8.50
802.11ac VHT40	159	5795	15.50	9.00	8.50
	155	5775	15.00	8.50	7.50
	149	5745	15.50	9.00	8.50
802.11ax HE20	157	5785	15.50	9.00	8.50
	165	5825	15.50	9.00	9.00
	151	5755	15.50	9.00	8.50
802.11ax HE40	159	5795	15.50	9.00	8.50
	155	5775	15.00	8.50	8.50

U-NII 5 MAX Tune-up Power					
Mode	Channel	Frequency	ANT 0	ANT 1	ANT 0+1
			MAX Tune-up	MAX Tune-up	MAX Tune-up
802.11ax HE20	1	5955	5.00	5.00	5.00
	45	6175	5.00	5.00	5.00
	93	6415	5.00	5.00	5.00
802.11ax HE40	3	5965	8.00	8.00	6.00
	43	6165	8.00	8.00	6.00
	91	6405	8.00	8.00	6.00
802.11ax HE80	7	5985	10.50	6.50	6.00
	39	6145	10.50	6.50	6.00
	87	6385	10.00	6.00	6.00
802.11ax HE160	15	6025	13.00	9.00	6.00
	47	6185	13.00	9.00	6.00
	79	6345	13.00	9.00	6.00

U-NII 6 MAX Tune-up Power					
Mode	Channel	Frequency	ANT 0	ANT 1	ANT 0+1
			MAX Tune-up	MAX Tune-up	MAX Tune-up
802.11ax HE20	97	6435	5.00	5.00	5.00
	105	6475	5.00	5.00	5.00
	113	6515	5.00	5.00	5.00
802.11ax HE40	99	6445	8.00	8.00	8.00
	107	6485	8.00	8.00	8.00
802.11ax HE80	103	6465	10.50	6.50	10.00
	119	6545	10.50	6.50	10.00
802.11ax HE160	111	6505	13.00	9.00	10.00

U-NII 7 MAX Tune-up Power					
Mode	Channel	Frequency	ANT 0	ANT 1	ANT 0+1
			MAX Tune-up	MAX Tune-up	MAX Tune-up
802.11ax HE20	117	6535	5.00	5.00	5.00
	149	6695	5.00	5.00	5.00
	181	6855	5.00	5.00	5.00
802.11ax HE40	115	6525	8.00	8.00	8.00
	147	6685	8.00	8.00	8.00
	179	6845	8.00	8.00	8.00
802.11ax HE80	135	6625	10.00	7.00	6.50
	151	6705	10.00	7.00	6.50
	167	6785	10.00	7.00	6.50
	183	6865	10.00	7.00	6.50
802.11ax HE160	143	6665	12.50	9.50	9.50
	175	6825	12.50	9.50	9.50

U-NII 8 MAX Tune-up Power					
Mode	Channel	Frequency	ANT 0 MAX Tune-up	ANT 1 MAX Tune-up	ANT 0+1 MAX Tune-up
802.11ax HE20	185	6875	5.00	5.00	5.00
	209	6995	5.00	5.00	5.00
	233	7115	1.00	1.00	1.00
802.11ax HE40	187	6885	8.00	8.00	6.50
	211	7005	8.00	8.00	6.50
	227	7085	8.00	8.00	6.50
802.11ax HE80	199	6945	10.50	7.00	6.50
	215	7025	10.50	7.00	6.50
802.11ax HE160	207	6985	13.00	9.50	7.00

Bluetooth MAX Tune-up Power					
Mode	Channel	Frequency	ANT 0 MAX Tune-up	ANT 1 MAX Tune-up	
BR / EDR	1Mbps (GFSK)	0	2402	N/A	10.50
		39	2441	N/A	10.50
		78	2480	N/A	10.50
	2Mbps ($\pi/4$ DQPSK)	0	2402	N/A	8.00
		39	2441	N/A	8.00
		78	2480	N/A	8.00
	3Mbps (8-DPSK)	0	2402	N/A	8.00
		39	2441	N/A	8.00
		78	2480	N/A	8.00
LE	1Mbps (GFSK)	0	2402	N/A	9.00
		19	2440	N/A	9.00
		39	2480	N/A	9.00
	2Mbps ($\pi/4$ DQPSK)	1	2404	N/A	9.00
		19	2440	N/A	9.00
		38	2478	N/A	9.00

8.2. Measured Conducted Power Results for WCDMA

Test Notes:

- [1] Per KDB Publication 941225 D01, W-CDMA maximum output power is verified on the high, middle and low channels and using the appropriate 12.2 kbps RMC with TPC (transmit power control) set to all "1's".
- [2] For Release 99 Setup Procedures used to establish the test signals, the following tests were completed according to the test requirements outlined in section 5.2 of the 3GPP TS 34.121-1. A summary of these settings is illustrated below:

Mode	Subtest	Rel. 99
WCDMA General Settings	Loopback Mode	Test Mode 2
	Rel.99 RMC	12.2 kbps RMC
	Power Control Algorithm	Algorithm 2
	β_c / β_d	8/15

Band	WCDMA II			Tune-up Limit (dBm)	3GPP MPR (dB)
Tx Channel	9262	9400	9538		
Frequency (MHz)	1852.4	1880.0	1907.6		
RMC 12.2Kbps	18.59	18.48	18.22	18.9	-
HSDPA Subtest 1	18.51	18.42	18.12	18.9	0
HSDPA Subtest 2	18.48	18.41	18.09	18.9	0
HSDPA Subtest 3	18.06	18.03	17.66	18.4	0-0.5
HSDPA Subtest 4	18.03	17.96	17.6	18.4	0-0.5
HSUPA Subtest 1	18.52	18.42	18.11	18.9	0
HSUPA Subtest 2	16.55	16.51	16.21	16.9	0-2
HSUPA Subtest 3	17.51	17.41	17.17	17.9	0-1
HSUPA Subtest 4	16.49	16.4	16.13	16.9	0-2
HSUPA Subtest 5	18.46	18.38	18.03	18.9	0
DC-HSDPA Subtest 1	18.45	18.42	18.12	18.9	0
DC-HSDPA Subtest 2	18.38	18.37	18.03	18.9	0
DC-HSDPA Subtest 3	17.98	17.91	17.65	18.4	0-0.5
DC-HSDPA Subtest 4	17.91	17.83	17.52	18.4	0-0.5
HSPA+ Subtest 1	15.92	15.92	15.52	16.4	0-2.5

Band	WCDMA IV			Tune-up Limit (dBm)	3GPP MPR (dB)
Tx Channel	1312	1413	1513		
Frequency (MHz)	1712.4	1732.6	1752.6		
RMC 12.2Kbps	18.19	18.18	18.16	18.4	-
HSDPA Subtest 1	18.01	18.11	18.01	18.4	0
HSDPA Subtest 2	17.98	18.02	17.98	18.4	0
HSDPA Subtest 3	17.58	17.59	17.62	17.9	0-0.5
HSDPA Subtest 4	17.58	17.60	17.55	17.9	0-0.5
HSUPA Subtest 1	18.04	18.04	18.04	18.4	0
HSUPA Subtest 2	16.07	16.15	16.10	16.4	0-2
HSUPA Subtest 3	17.03	17.10	17.11	17.4	0-1
HSUPA Subtest 4	16.09	16.07	16.07	16.4	0-2
HSUPA Subtest 5	18.02	18.05	18.02	18.4	0
DC-HSDPA Subtest 1	17.97	18.00	17.97	18.4	0
DC-HSDPA Subtest 2	17.92	17.89	17.96	18.4	0
DC-HSDPA Subtest 3	17.51	17.50	17.56	17.9	0-0.5
DC-HSDPA Subtest 4	17.49	17.47	17.50	17.9	0-0.5
HSPA+ Subtest 1	15.50	15.51	15.42	15.9	0-2.5

Band	WCDMA V			Tune-up Limit (dBm)	3GPP MPR (dB)
Tx Channel	4132	4182	4233		
Frequency (MHz)	826.4	836.4	846.6		
RMC 12.2Kbps	21.43	21.25	21.41	21.5	-
HSDPA Subtest 1	21.04	21.05	21.32	21.5	0
HSDPA Subtest 2	21.04	21.00	21.31	21.5	0
HSDPA Subtest 3	20.57	20.65	20.92	21.0	0-0.5
HSDPA Subtest 4	20.60	20.63	20.91	21.0	0-0.5
HSUPA Subtest 1	21.10	21.07	21.39	21.5	0
HSUPA Subtest 2	19.06	19.12	19.45	19.5	0-2
HSUPA Subtest 3	20.09	20.04	20.40	20.5	0-1
HSUPA Subtest 4	19.06	19.03	19.36	19.5	0-2
HSUPA Subtest 5	21.04	20.99	21.27	21.5	0
DC-HSDPA Subtest 1	21.03	21.04	21.26	21.5	0
DC-HSDPA Subtest 2	20.99	20.89	21.28	21.5	0
DC-HSDPA Subtest 3	20.58	20.57	20.80	21.0	0-0.5
DC-HSDPA Subtest 4	20.49	20.50	20.79	21.0	0-0.5
HSPA+ Subtest 1	18.48	18.51	18.83	19.0	0-2.5

8.3. Measured Conducted Power Results for LTE

Test Notes:

- [1] Per 3GPP standard, LTE QPSK configuration has the highest maximum average output power.
- [2] The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS 36.101 specification.
 - UE Power Class: 3 (23 ±2 dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1 of the 3GPP TS 36.101.
 - The allowed A-MPR values specified below in Table 6.2.4-1 of 3GPP TS 36.101 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".
- [3] According to April 2015 TCB workshop, SAR test exclusion can be applied for testing overlapping LTE bands as follows:
 - LTE Band 2 (1850 ~ 1910 MHz) is covered by LTE Band 25 (1850 ~ 1915 MHz)
 - LTE Band 4 (1710 ~ 1755 MHz) is covered by LTE Band 66 (1710 ~ 1780 MHz)
 - LTE Band 5 (824 ~ 849 MHz) is covered by LTE Band 26 (814 ~ 849 MHz)
 - LTE Band 17 (704 ~ 716 MHz) is covered by LTE Band 12 (699 ~ 716 MHz)
 - LTE Band 38 (2570 ~ 2620 MHz) is covered by LTE Band 41 (2496 ~ 2690 MHz)
- [4] Some LTE bands do not support three non-overlapping channels. Per KDB Publication 941225 D05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
- [5] The measured conducted power of highest bandwidth has been listed in below, and the measured conducted power for other bandwidth can be found in LTE and NR Lower Bandwidth Conducted Power Appendix.

Band					LTE B2			
BW (MHz)	Modulation	RB Size	RB Offset	3GPP MPR (dB)	18700 1860	18900 1880	19100 1900	Tune-up Limit (dBm)
20	QPSK	1	0	0	19.28	19.29	19.01	19.3
		1	49	0	19.18	19.21	18.99	19.3
		1	99	0	19.14	19.17	18.96	19.3
		50	0	1	18.26	18.30	18.08	18.3
		50	25	1	18.20	18.17	18.03	18.3
		50	50	1	18.19	18.19	18.02	18.3
		100	0	1	18.21	18.22	18.08	18.3
	16QAM	1	0	1	18.07	18.10	17.93	18.3
		1	49	1	18.05	18.12	17.94	18.3
		1	99	1	18.08	18.13	17.98	18.3
		50	0	2	17.17	17.21	17.04	17.3
		50	25	2	17.17	17.21	17.02	17.3
		50	50	2	17.19	17.24	17.08	17.3
		100	0	2	17.21	17.22	17.06	17.3
	64QAM	1	0	2	17.25	17.22	17.05	17.3
		1	49	2	17.11	17.17	16.99	17.3
		1	99	2	17.14	17.09	16.93	17.3
		50	0	3	16.20	16.16	16.05	16.3
		50	25	3	16.18	16.23	16.01	16.3
		50	50	3	16.20	16.15	16.02	16.3
		100	0	3	16.21	16.26	16.11	16.3
	256QAM	1	0	5	14.28	14.30	14.13	14.3
		1	49	5	14.27	14.25	14.11	14.3
		1	99	5	14.27	14.23	14.09	14.3
		50	0	5	14.16	14.13	14.00	14.3
		50	25	5	14.14	14.16	14.02	14.3
		50	50	5	14.16	14.16	14.07	14.3
		100	0	5	14.03	14.06	13.90	14.3

Band					LTE B4			
BW (MHz)	Modulation	RB Size	RB Offset	3GPP MPR (dB)	20050 1720.0	20175 1732.5	20300 1745.0	Tune-up Limit (dBm)
20	QPSK	1	0	0	18.41	18.35	18.31	18.7
		1	49	0	18.37	18.33	18.30	18.7
		1	99	0	18.34	18.33	18.25	18.7
		50	0	1	17.46	17.46	17.40	17.7
		50	25	1	17.41	17.33	17.33	17.7
		50	50	1	17.40	17.35	17.31	17.7
		100	0	1	17.46	17.44	17.37	17.7
	16QAM	1	0	1	17.31	17.21	17.28	17.7
		1	49	1	17.32	17.29	17.22	17.7
		1	99	1	17.36	17.27	17.36	17.7
		50	0	2	16.42	16.36	16.34	16.7
		50	25	2	16.40	16.30	16.33	16.7
		50	50	2	16.46	16.36	16.41	16.7
		100	0	2	16.44	16.34	16.39	16.7
	64QAM	1	0	2	16.43	16.40	16.37	16.7
		1	49	2	16.37	16.34	16.28	16.7
		1	99	2	16.31	16.30	16.29	16.7
		50	0	3	15.43	15.35	15.35	15.7
		50	25	3	15.39	15.31	15.35	15.7
		50	50	3	15.40	15.32	15.39	15.7
		100	0	3	15.49	15.42	15.46	15.7
	256QAM	1	0	5	13.51	13.45	13.50	13.7
		1	49	5	13.49	13.49	13.48	13.7
		1	99	5	13.47	13.39	13.46	13.7
		50	0	5	13.38	13.37	13.37	13.7
		50	25	5	13.40	13.30	13.31	13.7
		50	50	5	13.45	13.41	13.38	13.7
		100	0	5	13.28	13.20	13.26	13.7

BW (MHz)	Modulation	Band			LTE B5			
		RB Size	RB Offset	3GPP MPR (dB)	20450 829.0	20525 836.5	20600 844.0	Tune-up Limit (dBm)
10	QPSK	1	0	0	21.58	21.59	21.58	21.6
		1	24	0	21.43	21.42	21.28	21.6
		1	49	0	21.30	21.32	21.24	21.6
		25	0	1	20.51	20.57	20.41	20.6
		25	12	1	20.47	20.52	20.40	20.6
		25	25	1	20.42	20.48	20.32	20.6
	16QAM	50	0	1	20.44	20.46	20.40	20.6
		1	0	1	20.28	20.38	20.27	20.6
		1	24	1	20.36	20.26	20.27	20.6
		1	49	1	20.26	20.32	20.16	20.6
		25	0	2	19.45	19.46	19.26	19.6
		25	12	2	19.41	19.42	19.22	19.6
	64QAM	25	25	2	19.38	19.37	19.36	19.6
		50	0	2	19.47	19.38	19.32	19.6
		1	0	2	19.45	19.53	19.33	19.6
		1	24	2	19.36	19.37	19.38	19.6
		1	49	2	19.38	19.43	19.33	19.6
		25	0	3	18.48	18.51	18.36	18.6
	256QAM	25	12	3	18.39	18.46	18.37	18.6
		25	25	3	18.47	18.47	18.27	18.6
		50	0	3	18.46	18.46	18.29	18.6
		1	0	5	16.49	16.57	16.41	16.6
		1	24	5	16.50	16.54	16.26	16.6
		1	49	5	16.53	16.52	16.40	16.6
	256QAM	25	0	5	16.43	16.40	16.35	16.6
		25	12	5	16.36	16.40	16.21	16.6
		25	25	5	16.36	16.46	16.33	16.6
		50	0	5	16.32	16.35	16.19	16.6

BW (MHz)	Modulation	Band			LTE B7			Tune-up Limit (dBm)
		RB Size	RB Offset	3GPP MPR (dB)	20850 2510	21100 2535	21350 2560	
20	QPSK	1	0	0	13.98	13.97	13.99	14.0
		1	49	0	13.91	13.92	13.92	14.0
		1	99	0	13.80	13.73	13.82	14.0
		50	0	1	12.92	12.96	12.97	13.0
		50	25	1	12.89	12.83	12.92	13.0
		50	50	1	12.81	12.78	12.88	13.0
	16QAM	100	0	1	12.79	12.77	12.86	13.0
		1	0	1	12.73	12.72	12.78	13.0
		1	49	1	12.57	12.66	12.66	13.0
		1	99	1	12.62	12.64	12.72	13.0
		50	0	2	11.79	11.76	11.86	12.0
		50	25	2	11.77	11.76	11.82	12.0
	64QAM	50	50	2	11.74	11.75	11.77	12.0
		100	0	2	11.68	11.77	11.78	12.0
		1	0	2	11.86	11.86	11.93	12.0
		1	49	2	11.71	11.77	11.77	12.0
		1	99	2	11.83	11.83	11.83	12.0
		50	0	3	10.85	10.83	10.91	11.0
	256QAM	50	25	3	10.77	10.80	10.86	11.0
		50	50	3	10.79	10.83	10.87	11.0
		100	0	3	10.82	10.82	10.86	11.0
		1	0	5	8.89	8.97	8.97	9.0
		1	49	5	8.92	8.92	8.94	9.0
		1	99	5	8.92	8.83	8.92	9.0
	256QAM	50	0	5	8.75	8.74	8.80	9.0
		50	25	5	8.70	8.72	8.80	9.0
		50	50	5	8.82	8.84	8.86	9.0
		100	0	5	8.73	8.66	8.75	9.0

BW (MHz)	Modulation	Band			LTE B12			
		RB Size	RB Offset	3GPP MPR (dB)	23060 704.0	23095 707.5	23130 711.0	Tune-up Limit (dBm)
10	QPSK	1	0	0	22.19	22.15	22.10	22.2
		1	24	0	22.12	22.09	22.08	22.2
		1	49	0	22.09	22.06	22.02	22.2
		25	0	1	21.16	21.13	21.13	21.2
		25	12	1	21.08	21.04	21.02	21.2
		25	25	1	21.14	21.07	21.10	21.2
	16QAM	50	0	1	21.05	21.11	21.07	21.2
		1	0	1	21.09	21.04	21.06	21.2
		1	24	1	21.09	21.01	21.02	21.2
		1	49	1	20.98	20.88	20.98	21.2
		25	0	2	20.08	20.08	20.08	20.2
		25	12	2	20.04	19.94	20.00	20.2
	64QAM	25	25	2	20.18	20.08	20.08	20.2
		50	0	2	20.14	20.04	20.06	20.2
		1	0	2	20.15	20.11	20.10	20.2
		1	24	2	20.18	20.11	20.12	20.2
		1	49	2	20.15	20.09	20.11	20.2
		25	0	3	19.18	19.14	19.11	19.2
	256QAM	25	12	3	19.19	19.10	19.09	19.2
		25	25	3	19.09	19.00	19.04	19.2
		50	0	3	19.11	19.01	19.03	19.2
		1	0	5	17.15	17.09	17.11	17.2
		1	24	5	17.08	16.98	17.06	17.2
		1	49	5	17.13	17.08	17.08	17.2
		25	0	5	17.17	17.15	17.15	17.2
		25	12	5	17.03	16.93	17.01	17.2
		25	25	5	17.15	17.13	17.06	17.2
		50	0	5	17.01	16.91	16.95	17.2

BW (MHz)	Modulation	Band			LTE B13	
		RB Size	RB Offset	3GPP MPR (dB)	23230 782	Tune-up Limit (dBm)
10	QPSK	1	0	0	21.38	21.4
		1	24	0	21.32	21.4
		1	49	0	21.24	21.4
		25	0	1	20.38	20.4
		25	12	1	20.29	20.4
		25	25	1	20.36	20.4
	16QAM	50	0	1	20.26	20.4
		1	0	1	20.32	20.4
		1	24	1	20.26	20.4
		1	49	1	20.17	20.4
		25	0	2	19.34	19.4
		25	12	2	19.24	19.4
	64QAM	25	25	2	19.36	19.4
		50	0	2	19.31	19.4
		1	0	2	19.35	19.4
		1	24	2	19.35	19.4
		1	49	2	19.36	19.4
		25	0	3	18.35	18.4
	256QAM	25	12	3	18.32	18.4
		25	25	3	18.32	18.4
		50	0	3	18.35	18.4
		1	0	5	16.33	16.4
		1	24	5	16.32	16.4
		1	49	5	16.38	16.4
		25	0	5	16.34	16.4
		25	12	5	16.25	16.4
		25	25	5	16.33	16.4
		50	0	5	16.26	16.4

BW (MHz)	Modulation	Band			LTE B14	
		RB Size	RB Offset	3GPP MPR (dB)	23330 793	Tune-up Limit (dBm)
10	QPSK	1	0	0	21.69	21.7
		1	24	0	21.62	21.7
		1	49	0	21.54	21.7
		25	0	1	20.69	20.7
		25	12	1	20.58	20.7
		25	25	1	20.63	20.7
		50	0	1	20.58	20.7
	16QAM	1	0	1	20.60	20.7
		1	24	1	20.62	20.7
		1	49	1	20.48	20.7
		25	0	2	19.62	19.7
		25	12	2	19.54	19.7
		25	25	2	19.63	19.7
		50	0	2	19.62	19.7
	64QAM	1	0	2	19.64	19.7
		1	24	2	19.63	19.7
		1	49	2	19.68	19.7
		25	0	3	18.68	18.7
		25	12	3	18.65	18.7
		25	25	3	18.59	18.7
		50	0	3	18.66	18.7
	256QAM	1	0	5	16.65	16.7
		1	24	5	16.57	16.7
		1	49	5	16.67	16.7
		25	0	5	16.69	16.7
		25	12	5	16.54	16.7
		25	25	5	16.68	16.7
		50	0	5	16.49	16.7

BW (MHz)	Modulation	Band			LTE B17		
		RB Size	RB Offset	3GPP MPR (dB)	23780 709	23790 710	23800 711
10	QPSK	1	0	0	22.11	22.10	22.07
		1	24	0	22.08	22.06	22.05
		1	49	0	22.03	21.99	22.02
		25	0	1	21.13	21.12	21.14
		25	12	1	21.02	20.99	21.01
		25	25	1	21.10	21.08	21.08
		50	0	1	21.08	21.04	21.04
	16QAM	1	0	1	21.03	21.03	21.04
		1	24	1	21.00	21.01	21.02
		1	49	1	20.98	20.96	20.96
		25	0	2	20.07	20.07	20.09
		25	12	2	19.98	19.97	20.01
		25	25	2	20.06	20.06	20.06
		50	0	2	20.07	20.05	20.07
	64QAM	1	0	2	20.08	20.08	20.09
		1	24	2	20.12	20.12	20.12
		1	49	2	20.08	20.09	20.12
		25	0	3	19.08	19.08	19.10
		25	12	3	19.07	19.08	19.06
		25	25	3	19.05	19.02	19.04
		50	0	3	19.01	19.01	19.04
	256QAM	1	0	5	17.12	17.11	17.12
		1	24	5	17.06	17.05	17.05
		1	49	5	17.06	17.09	17.05
		25	0	5	17.12	17.15	17.15
		25	12	5	17.01	17.00	17.01
		25	25	5	17.05	17.04	17.06
		50	0	5	16.94	16.96	16.93

BW (MHz)	Modulation	Band			LTE B25			
		RB Size	RB Offset	3GPP MPR (dB)	26140 1860.0	26365 1882.5	26590 1905.0	Tune-up Limit (dBm)
20	QPSK	1	0	0	19.29	19.07	19.12	19.3
		1	49	0	19.19	19.05	19.10	19.3
		1	99	0	19.09	19.04	19.07	19.3
		50	0	1	18.29	18.23	18.28	18.3
		50	25	1	18.25	18.12	18.09	18.3
		50	50	1	18.19	18.18	18.17	18.3
		100	0	1	18.20	18.14	18.10	18.3
	16QAM	1	0	1	18.09	18.00	18.06	18.3
		1	49	1	18.07	17.99	18.05	18.3
		1	99	1	18.07	18.02	18.08	18.3
		50	0	2	17.17	17.09	17.20	17.3
		50	25	2	17.19	17.09	17.11	17.3
		50	50	2	17.17	17.09	17.21	17.3
		100	0	2	17.18	17.14	17.14	17.3
	64QAM	1	0	2	17.26	17.17	17.15	17.3
		1	49	2	17.16	17.03	17.17	17.3
		1	99	2	17.15	17.09	17.07	17.3
		50	0	3	16.22	16.10	16.11	16.3
		50	25	3	16.20	16.08	16.17	16.3
		50	50	3	16.20	16.17	16.13	16.3
		100	0	3	16.21	16.20	16.17	16.3
	256QAM	1	0	5	14.28	14.18	14.22	14.3
		1	49	5	14.25	14.19	14.21	14.3
		1	99	5	14.24	14.18	14.21	14.3
		50	0	5	14.20	14.10	14.08	14.3
		50	25	5	14.16	14.06	14.14	14.3
		50	50	5	14.17	14.12	14.10	14.3
		100	0	5	14.06	13.99	13.96	14.3

BW (MHz)	Modulation	Band			LTE B26			Tune-up Limit (dBm)
		RB Size	RB Offset	3GPP MPR (dB)	26765 821.5	26865 831.5	26965 841.5	
15	QPSK	1	0	0	21.59	21.52	21.41	21.6
		1	37	0	21.48	21.40	21.32	21.6
		1	74	0	21.38	21.36	21.26	21.6
		36	0	1	20.60	20.53	20.49	20.6
		36	19	1	20.54	20.53	20.46	20.6
		36	39	1	20.48	20.41	20.41	20.6
		75	0	1	20.49	20.48	20.46	20.6
	16QAM	1	0	1	20.38	20.29	20.27	20.6
		1	37	1	20.36	20.32	20.29	20.6
		1	74	1	20.36	20.29	20.23	20.6
		36	0	2	19.46	19.36	19.33	19.6
		36	19	2	19.48	19.40	19.31	19.6
		36	39	2	19.46	19.46	19.37	19.6
		75	0	2	19.47	19.38	19.38	19.6
	64QAM	1	0	2	19.55	19.52	19.42	19.6
		1	37	2	19.45	19.44	19.41	19.6
		1	74	2	19.44	19.39	19.33	19.6
		36	0	3	18.51	18.46	18.40	18.6
		36	19	3	18.49	18.43	18.43	18.6
		36	39	3	18.49	18.40	18.33	18.6
		75	0	3	18.50	18.47	18.38	18.6
	256QAM	1	0	5	16.57	16.52	16.46	16.6
		1	37	5	16.54	16.45	16.36	16.6
		1	74	5	16.53	16.43	16.43	16.6
		36	0	5	16.49	16.39	16.38	16.6
		36	19	5	16.45	16.35	16.25	16.6
		36	39	5	16.46	16.37	16.34	16.6
		75	0	5	16.35	16.25	16.23	16.6

BW (MHz)	Modulation	Band			LTE B38			
		RB Size	RB Offset	3GPP MPR (dB)	37850 2580	38000 2595	38150 2610	Tune-up Limit (dBm)
20	QPSK	1	0	0	16.08	16.09	16.08	16.1
		1	49	0	15.95	16.01	15.97	16.1
		1	99	0	15.91	15.86	15.92	16.1
		50	0	1	15.07	15.09	15.04	15.1
		50	25	1	15.05	15.03	15.02	15.1
		50	50	1	15.05	15.03	15.01	15.1
		100	0	1	15.05	15.06	14.98	15.1
	16QAM	1	0	1	14.91	14.94	14.98	15.1
		1	49	1	14.79	14.78	14.85	15.1
		1	99	1	14.92	14.89	14.88	15.1
		50	0	2	13.96	14.00	14.04	14.1
		50	25	2	13.93	14.02	14.02	14.1
		50	50	2	13.89	13.91	13.91	14.1
		100	0	2	13.95	13.98	13.90	14.1
	64QAM	1	0	2	14.03	14.04	14.04	14.1
		1	49	2	13.97	13.94	13.90	14.1
		1	99	2	14.00	13.93	13.99	14.1
		50	0	3	13.01	13.04	13.09	13.1
		50	25	3	12.98	13.04	13.04	13.1
		50	50	3	13.03	13.02	13.06	13.1
		100	0	3	12.96	13.05	13.03	13.1
	256QAM	1	0	5	11.06	11.08	11.05	11.1
		1	49	5	11.09	11.04	11.06	11.1
		1	99	5	11.07	11.02	11.08	11.1
		50	0	5	10.92	10.90	10.90	11.1
		50	25	5	10.92	10.91	10.90	11.1
		50	50	5	10.98	10.99	10.99	11.1
		100	0	5	10.89	10.85	10.92	11.1

Band					LTE B41 (PC3)					
BW (MHz)	Modulation	RB Size	RB Offset	3GPP MPR (dB)	39750	40185	40620	41055	41490	Tune-up Limit (dBm)
					2506.0	2549.5	2593.0	2636.5	2680.0	
20	QPSK	1	0	0	16.02	16.03	15.56	15.65	16.07	16.1
		1	49	0	15.86	15.94	15.34	15.42	15.95	16.1
		1	99	0	15.90	15.79	15.07	15.38	15.91	16.1
		50	0	1	15.08	15.06	14.54	14.66	15.09	15.1
		50	25	1	15.00	15.04	14.48	14.47	14.95	15.1
		50	50	1	14.98	14.99	14.39	14.53	15.05	15.1
		100	0	1	14.95	14.97	14.40	14.51	14.99	15.1
	16QAM	1	0	1	14.81	14.90	14.27	14.53	14.98	15.1
		1	49	1	14.74	14.70	14.16	14.34	14.82	15.1
		1	99	1	14.87	14.83	14.25	14.33	14.79	15.1
		50	0	2	13.89	13.99	13.40	13.55	14.04	14.1
		50	25	2	13.89	14.02	13.33	13.53	13.99	14.1
		50	50	2	13.82	13.91	13.27	13.37	13.85	14.1
		100	0	2	13.95	13.92	13.31	13.39	13.81	14.1
	64QAM	1	0	2	14.00	13.98	13.43	13.67	14.01	14.1
		1	49	2	13.93	13.92	13.28	13.41	13.88	14.1
		1	99	2	13.93	13.91	13.30	13.46	13.97	14.1
		50	0	3	13.07	13.00	12.43	12.58	13.04	13.1
		50	25	3	12.98	12.94	12.37	12.59	13.04	13.1
		50	50	3	12.98	12.93	12.39	12.61	13.06	13.1
		100	0	3	12.86	13.04	12.42	12.50	13.02	13.1
	256QAM	1	0	5	11.05	10.99	10.48	10.60	11.06	11.1
		1	49	5	11.08	11.04	10.39	10.54	11.04	11.1
		1	99	5	11.06	11.06	10.51	10.60	11.01	11.1
		50	0	5	10.87	10.81	10.24	10.35	10.86	11.1
		50	25	5	10.92	10.86	10.31	10.43	10.87	11.1
		50	50	5	10.96	10.94	10.38	10.48	10.93	11.1
		100	0	5	10.82	10.82	10.25	10.46	10.88	11.1

BW (MHz)	Modulation	Band			LTE B41 (PC2)					
		RB Size	RB Offset	3GPP MPR (dB)	39750 2506.0	40185 2549.5	40620 2593.0	41055 2636.5	41490 2680.0	Tune-up Limit (dBm)
20	QPSK	1	0	0	17.99	17.98	17.65	17.59	17.72	18.0
		1	49	0	17.95	17.85	17.52	17.44	17.60	18.0
		1	99	0	17.91	17.87	17.50	17.47	17.67	18.0
		50	0	1	16.96	16.88	16.54	16.58	16.71	17.0
		50	25	1	16.95	16.86	16.52	16.51	16.69	17.0
		50	50	1	16.91	16.82	16.50	16.46	16.62	17.0
		100	0	1	16.88	16.81	16.51	16.48	16.59	17.0
	16QAM	1	0	1	16.92	16.83	16.52	16.52	16.66	17.0
		1	49	1	16.85	16.68	16.45	16.41	16.56	17.0
		1	99	1	16.79	16.69	16.45	16.41	16.58	17.0
		50	0	2	15.98	15.80	15.60	15.48	15.70	16.0
		50	25	2	15.93	15.90	15.61	15.48	15.64	16.0
		50	50	2	15.85	15.69	15.46	15.40	15.57	16.0
		100	0	2	15.81	15.72	15.40	15.39	15.48	16.0
	64QAM	1	0	2	15.86	15.72	15.44	15.47	15.53	16.0
		1	49	2	15.88	15.75	15.44	15.48	15.57	16.0
		1	99	2	15.97	15.90	15.66	15.64	15.79	16.0
		50	0	3	14.94	14.79	14.45	14.51	14.59	15.0
		50	25	3	14.90	14.84	14.59	14.56	14.71	15.0
		50	50	3	14.86	14.75	14.45	14.43	14.61	15.0
		100	0	3	14.81	14.68	14.37	14.33	14.51	15.0
	256QAM	1	0	5	12.96	12.89	12.64	12.57	12.75	13.0
		1	49	5	12.93	12.84	12.60	12.50	12.73	13.0
		1	99	5	12.89	12.80	12.51	12.51	12.66	13.0
		50	0	5	12.86	12.80	12.50	12.42	12.56	13.0
		50	25	5	12.87	12.83	12.54	12.45	12.60	13.0
		50	50	5	12.93	12.75	12.46	12.47	12.62	13.0
		100	0	5	12.88	12.70	12.39	12.36	12.54	13.0

BW (MHz)	Modulation	Band			LTE B42				Tune-up Limit (dBm)
		RB Size	RB Offset	3GPP MPR (dB)	42190 3460.0	42623 3503.3	43057 3546.7	43490 3590.0	
20	QPSK	1	0	0	15.85	15.74	15.65	15.86	15.9
		1	49	0	15.81	15.58	15.49	15.82	15.9
		1	99	0	15.75	15.47	15.50	15.70	15.9
		50	0	1	14.77	14.45	14.50	14.76	14.9
		50	25	1	14.76	14.45	14.48	14.67	14.9
		50	50	1	14.65	14.44	14.39	14.63	14.9
	16QAM	100	0	1	14.63	14.42	14.41	14.70	14.9
		1	0	1	14.68	14.41	14.44	14.69	14.9
		1	49	1	14.57	14.32	14.29	14.52	14.9
		1	99	1	14.61	14.39	14.33	14.64	14.9
		50	0	2	13.74	13.47	13.43	13.68	13.9
		50	25	2	13.74	13.43	13.43	13.76	13.9
	64QAM	50	50	2	13.54	13.34	13.37	13.53	13.9
		100	0	2	13.61	13.36	13.34	13.60	13.9
		1	0	2	13.56	13.39	13.31	13.57	13.9
		1	49	2	13.59	13.35	13.39	13.62	13.9
		1	99	2	13.75	13.49	13.55	13.75	13.9
		50	0	3	12.64	12.36	12.41	12.62	12.9
	256QAM	50	25	3	12.68	12.42	12.50	12.66	12.9
		50	50	3	12.68	12.43	12.35	12.65	12.9
		100	0	3	12.49	12.30	12.26	12.57	12.9
		1	0	5	10.76	10.45	10.45	10.75	10.9
		1	49	5	10.67	10.43	10.45	10.67	10.9
		1	99	5	10.70	10.38	10.46	10.68	10.9
		50	0	5	10.64	10.38	10.35	10.64	10.9
		50	25	5	10.66	10.44	10.43	10.63	10.9
		50	50	5	10.60	10.42	10.36	10.67	10.9
		100	0	5	10.60	10.31	10.35	10.56	10.9

BW (MHz)	Modulation	Band			LTE B43 (3600 ~ 3650 MHz)			
		RB Size	RB Offset	3GPP MPR (dB)	43690	43840	43990	Tune-up Limit (dBm)
					3610	3625	3640	
20	QPSK	1	0	0	17.86	17.89	17.91	18.0
		1	49	0	17.84	17.80	17.87	18.0
		1	99	0	17.80	17.73	17.83	18.0
		50	0	1	16.91	16.89	16.91	17.0
		50	25	1	16.84	16.74	16.84	17.0
		50	50	1	16.73	16.81	16.81	17.0
		100	0	1	16.48	16.50	16.51	17.0
	16QAM	1	0	1	16.79	16.77	16.79	17.0
		1	49	1	16.65	16.62	16.68	17.0
		1	99	1	16.60	16.52	16.62	17.0
		50	0	2	15.60	15.66	15.70	16.0
		50	25	2	15.64	15.66	15.71	16.0
		50	50	2	15.56	15.54	15.64	16.0
		100	0	2	15.63	15.66	15.68	16.0
	64QAM	1	0	2	15.60	15.54	15.64	16.0
		1	49	2	15.61	15.59	15.62	16.0
		1	99	2	15.71	15.81	15.81	16.0
		50	0	3	14.72	14.63	14.72	15.0
		50	25	3	14.65	14.67	14.71	15.0
		50	50	3	14.66	14.66	14.75	15.0
		100	0	3	14.56	14.53	14.57	15.0
	256QAM	1	0	5	12.72	12.66	12.72	13.0
		1	49	5	12.69	12.70	12.77	13.0
		1	99	5	12.72	12.68	12.78	13.0
		50	0	5	12.60	12.64	12.66	13.0
		50	25	5	12.55	12.53	12.61	13.0
		50	50	5	12.70	12.69	12.71	13.0
		100	0	5	12.63	12.67	12.70	13.0

BW (MHz)	Modulation	Band			LTE B43 (3650 ~ 3700 MHz)			Tune-up Limit (dBm)
		RB Size	RB Offset	3GPP MPR (dB)	44190	44340	44490	
					3660	3675	3690	
20	QPSK	1	0	0	17.80	17.78	17.85	18.0
		1	49	0	17.75	17.72	17.72	18.0
		1	99	0	17.68	17.65	17.71	18.0
		50	0	1	16.82	16.69	16.89	17.0
		50	25	1	16.65	16.64	16.67	17.0
		50	50	1	16.67	16.62	16.61	17.0
		100	0	1	16.67	16.68	16.75	17.0
	16QAM	1	0	1	16.72	16.69	16.71	17.0
		1	49	1	16.60	16.63	16.61	17.0
		1	99	1	16.54	16.53	16.57	17.0
		50	0	2	15.75	15.77	15.69	16.0
		50	25	2	15.73	15.64	15.71	16.0
		50	50	2	15.64	15.62	15.61	16.0
		100	0	2	15.55	15.57	15.57	16.0
	64QAM	1	0	2	15.58	15.66	15.66	16.0
		1	49	2	15.64	15.63	15.59	16.0
		1	99	2	15.68	15.68	15.74	16.0
		50	0	3	14.72	14.67	14.72	15.0
		50	25	3	14.66	14.62	14.62	15.0
		50	50	3	14.58	14.56	14.65	15.0
		100	0	3	14.51	14.58	14.58	15.0
	256QAM	1	0	5	12.67	12.76	12.76	13.0
		1	49	5	12.73	12.66	12.73	13.0
		1	99	5	12.59	12.69	12.69	13.0
		50	0	5	12.60	12.57	12.60	13.0
		50	25	5	12.63	12.57	12.59	13.0
		50	50	5	12.68	12.67	12.73	13.0
		100	0	5	12.67	12.62	12.67	13.0

BW (MHz)	Modulation	Band			LTE B48				
		RB Size	RB Offset	3GPP MPR (dB)	55340 3560.0	55773 3603.3	56207 3646.7	56640 3690.0	Tune-up Limit (dBm)
20	QPSK	1	0	0	16.72	16.80	16.83	16.74	17.0
		1	49	0	16.60	16.52	16.79	16.53	17.0
		1	99	0	16.55	16.47	16.72	16.52	17.0
		50	0	1	15.71	15.48	15.83	15.58	16.0
		50	25	1	15.54	15.46	15.69	15.55	16.0
		50	50	1	15.51	15.45	15.71	15.49	16.0
		100	0	1	15.51	15.49	15.75	15.52	16.0
	16QAM	1	0	1	15.58	15.54	15.77	15.50	16.0
		1	49	1	15.39	15.47	15.63	15.50	16.0
		1	99	1	15.36	15.40	15.60	15.36	16.0
		50	0	2	14.63	14.63	14.76	14.59	15.0
		50	25	2	14.58	14.43	14.80	14.44	15.0
		50	50	2	14.53	14.49	14.63	14.49	15.0
		100	0	2	14.35	14.45	14.59	14.44	15.0
	64QAM	1	0	2	14.41	14.52	14.58	14.53	15.0
		1	49	2	14.50	14.45	14.72	14.49	15.0
		1	99	2	14.54	14.56	14.72	14.56	15.0
		50	0	3	13.53	13.46	13.73	13.56	14.0
		50	25	3	13.50	13.50	13.73	13.49	14.0
		50	50	3	13.42	13.42	13.67	13.36	14.0
		100	0	3	13.38	13.44	13.56	13.41	14.0
	256QAM	1	0	5	11.49	11.63	11.73	11.58	12.0
		1	49	5	11.59	11.45	11.79	11.53	12.0
		1	99	5	11.44	11.54	11.60	11.53	12.0
		50	0	5	11.44	11.41	11.65	11.37	12.0
		50	25	5	11.48	11.37	11.70	11.44	12.0
		50	50	5	11.57	11.48	11.75	11.50	12.0
		100	0	5	11.49	11.43	11.69	11.47	12.0

BW (MHz)	Modulation	Band			LTE B66			Tune-up Limit (dBm)
		RB Size	RB Offset	3GPP MPR (dB)	132072 1720	132322 1745	132572 1770	
20	QPSK	1	0	0	18.53	18.56	18.69	18.7
		1	49	0	18.38	18.45	18.58	18.7
		1	99	0	18.44	18.50	18.54	18.7
		50	0	1	17.46	17.66	17.69	17.7
		50	25	1	17.42	17.51	17.61	17.7
		50	50	1	17.45	17.49	17.55	17.7
		100	0	1	17.46	17.61	17.67	17.7
	16QAM	1	0	1	17.38	17.33	17.48	17.7
		1	49	1	17.35	17.45	17.50	17.7
		1	99	1	17.42	17.37	17.56	17.7
		50	0	2	16.47	16.55	16.59	16.7
		50	25	2	16.40	16.41	16.61	16.7
		50	50	2	16.56	16.46	16.63	16.7
		100	0	2	16.52	16.47	16.62	16.7
	64QAM	1	0	2	16.43	16.51	16.64	16.7
		1	49	2	16.44	16.47	16.51	16.7
		1	99	2	16.35	16.49	16.54	16.7
		50	0	3	15.49	15.50	15.64	15.7
		50	25	3	15.47	15.42	15.64	15.7
		50	50	3	15.44	15.50	15.64	15.7
		100	0	3	15.54	15.62	15.61	15.7
	256QAM	1	0	5	13.54	13.56	13.67	13.7
		1	49	5	13.50	13.61	13.67	13.7
		1	99	5	13.56	13.51	13.70	13.7
		50	0	5	13.39	13.55	13.65	13.7
		50	25	5	13.41	13.43	13.55	13.7
		50	50	5	13.54	13.56	13.60	13.7
		100	0	5	13.31	13.38	13.51	13.7

BW (MHz)	Modulation	Band			LTE B71			
		RB Size	RB Offset	3GPP MPR (dB)	133222 673	133322 683	133372 688	Tune-up Limit (dBm)
20	QPSK	1	0	0	23.19	23.18	23.17	23.2
		1	49	0	23.10	23.14	23.13	23.2
		1	99	0	23.04	23.06	23.04	23.2
		50	0	1	22.17	22.16	22.15	22.2
		50	25	1	22.13	22.09	22.10	22.2
		50	50	1	22.12	22.13	22.10	22.2
		100	0	1	22.16	22.15	22.14	22.2
	16QAM	1	0	1	22.08	22.07	22.05	22.2
		1	49	1	22.14	22.14	22.11	22.2
		1	99	1	22.03	22.05	21.96	22.2
		50	0	2	21.08	21.06	21.13	21.2
		50	25	2	21.03	21.08	21.01	21.2
		50	50	2	21.09	21.09	21.07	21.2
		100	0	2	21.16	21.12	21.12	21.2
	64QAM	1	0	2	21.08	21.05	21.14	21.2
		1	49	2	21.08	21.16	21.12	21.2
		1	99	2	21.06	21.04	21.10	21.2
		50	0	3	20.12	20.10	20.09	20.2
		50	25	3	20.12	20.15	20.10	20.2
		50	50	3	20.07	20.10	20.13	20.2
		100	0	3	20.14	20.16	20.08	20.2
	256QAM	1	0	5	18.07	18.14	18.06	18.2
		1	49	5	18.03	18.10	18.03	18.2
		1	99	5	18.07	18.04	18.05	18.2
		50	0	5	18.05	18.01	18.09	18.2
		50	25	5	18.04	18.02	18.09	18.2
		50	50	5	18.11	18.03	18.09	18.2
		100	0	5	18.07	18.01	18.07	18.2

8.4. Measured Conducted Power Results for LTE Carrier Aggregation

Power Confirmation for LTE Uplink CA

This device supports uplink carrier aggregation for CA_2C, CA_5B, CA_7C, CA_66B, CA_66C, CA_38C, CA_41C, CA_41C_PC2, CA_42C, CA_43C, CA_48C, CA_2A-5A, CA_2A-12A, CA_2A-13A, CA_2A-14A, CA_4A-5A, CA_4A-12A, CA_4A-13A, CA_5A-7A, CA_5A-66A, CA_12A-66A, CA_13A-66A, CA_14A-66A, CA_41A-42A, and CA_41A-42A_PC2 with a maximum of two component carriers. For intra-band contiguous carrier aggregation scenarios, 3GPP TS 36.101 Table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP TS 36.101 6.2.3A allows for several dB of MPR to be applied when non-contiguous RB allocation is implemented. The conducted powers and MPR settings in this device are permanently implemented per the above 3GPP requirements.

Per FCC Guidance, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers. For intra-band contiguous CA, the channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

The standalone power measurement is the power for the PCC in the non-CA mode (i.e., single carrier power). In all cases the UL CA power is less than or equal to the standalone power, which is in accordance with the tune-up limits in table below.

Uplink Carrier Aggregation Power												
E-UTRA CA Combination	PCC	SCC	Modulation	Bandwidth (MHz)	PCC		SCC		Total RB Size	Target MPR Level (dB)	Tune-up Power (dBm)	Measured Power (dBm)
	Channel	Channel			RB Size	RB Offset	RB Size	RB Offset				
CA_2C	18700	18898	QPSK	20+20	1	99	1	0	2	0	19.3	18.82
	18801	18999			1	99	1	0	2	0	19.3	18.88
	18902	19100			1	99	1	0	2	0	19.3	18.78
CA_5B	20450	20549	QPSK	10+10	1	49	1	0	2	0	21.6	20.94
	20476	20575			1	49	1	0	2	0	21.6	21.14
	20501	20600			1	49	1	0	2	0	21.6	20.89
CA_7C	20850	21048	QPSK	20+20	1	99	1	0	2	0	14.0	13.52
	21001	21199			1	99	1	0	2	0	14.0	13.38
	21350	21152			1	99	1	0	2	0	14.0	13.44
CA_66B	132047	132140	QPSK	15+5	1	74	1	0	2	0	18.7	18.22
	132398	132491			1	74	1	0	2	0	18.7	18.21
	132549	132642			1	0	1	24	2	0	18.7	18.26
CA_66C	132072	132270	QPSK	20+20	1	99	1	0	2	0	18.7	18.29
	132323	132521			1	99	1	0	2	0	18.7	18.22
	132572	132374			1	99	1	0	2	0	18.7	18.27
CA_38C	37850	38048	QPSK	20+20	1	99	1	0	2	0	16.1	15.76
	37901	38099			1	99	1	0	2	0	16.1	15.61
	38150	37952			1	99	1	0	2	0	16.1	15.79
CA_41C	39750	39948	QPSK	20+20	1	99	1	0	2	0	16.1	15.73
	40185	39987			1	99	1	0	2	0	16.1	15.44
	40620	40422			1	99	1	0	2	0	16.1	14.73
	41055	40857			1	99	1	0	2	0	16.1	15.11
	41490	41292			1	99	1	0	2	0	16.1	15.78
CA_41C_PC2	39750	39948	QPSK	20+20	1	99	1	0	2	0	18.0	17.62
	40185	39987			1	0	1	99	2	0	18.0	16.60
	40620	40422			1	0	1	99	2	0	18.0	17.47
	41055	40857			1	0	1	99	2	0	18.0	17.33
	41490	41292			1	0	1	99	2	0	18.0	17.56
CA_42C	42190	41589	QPSK	20+20	1	99	1	0	1	0	15.9	15.58
	42623	42388			1	99	1	0	1	0	15.9	15.18
	43057	43255			1	99	1	0	1	0	15.9	15.16
	43190	43388			1	99	1	0	1	0	15.9	15.27
	43340	43538			1	99	1	0	1	0	15.9	15.26
	43292	43490			1	99	1	0	1	0	15.9	15.46
CA_43C	44190	44388	QPSK	20+20	1	99	1	0	1	0	18.0	17.32
	44340	44538			1	99	1	0	1	0	18.0	17.31
	44292	44490			1	99	1	0	1	0	18.0	17.45
CA_43C	43690	43888	QPSK	20+20	1	99	1	0	1	0	18	17.38
	43741	43939			1	99	1	0	1	0	18	17.39
	43792	43990			1	99	1	0	1	0	18	17.45
CA_48C	55340	55538	QPSK	20+20	1	99	1	0	1	0	17.0	16.26
	55773	55371			1	99	1	0	1	0	17.0	16.23
	56207	56405			1	99	1	0	1	0	17.0	16.25
	56442	56640			1	99	1	0	1	0	17.0	16.17

Uplink Carrier Aggregation Power												
E-UTRA CA Combination	PCC	SCC	Modulation	Bandwidth (MHz)	PCC		SCC		Total RB Size	Target MPR Level (dB)	Tune-up Power (dBm)	Measured Power (dBm)
	Channel	Channel			RB Size	RB Offset	RB Size	RB Offset				
CA_2A-5A	18700	20525	QPSK	20+10	1	99	1	0	2	0	19.3	18.86
	18801	20525			1	99	1	0	2	0	19.3	18.99
	19100	20525			1	0	1	49	2	0	19.3	18.75
CA_2A-12A	18700	23095	QPSK	20+10	1	99	1	0	2	0	19.3	18.81
	18801	23095			1	0	1	49	2	0	19.3	18.83
	19100	23095			1	0	1	49	2	0	19.3	18.79
CA_2A-13A	18700	23230	QPSK	20+10	1	0	1	0	2	0	19.3	18.92
	18801	23230			1	99	1	0	2	0	19.3	19.01
	19100	23230			1	99	1	0	2	0	19.3	18.61
CA_2A-14A	18700	23330	QPSK	20+10	1	99	1	0	2	0	19.3	18.89
	18801	23330			1	0	1	49	2	0	19.3	18.91
	19100	23330			1	99	1	0	2	0	19.3	18.66
CA_4A-5A	20050	20525	QPSK	20+10	1	99	1	0	2	0	18.7	18.08
	20175	20525			1	99	1	0	2	0	18.7	17.95
	20300	20525			1	99	1	0	2	0	18.7	18.03
CA_4A-12A	20050	23095	QPSK	20+10	1	99	1	0	2	0	18.7	18.19
	20175	23095			1	99	1	0	2	0	18.7	18.17
	20300	23095			1	0	1	49	2	0	18.7	18.01
CA_4A-13A	20050	23230	QPSK	20+10	1	99	1	0	2	0	18.7	18.18
	20175	23230			1	99	1	0	2	0	18.7	18.11
	20300	23230			1	0	1	49	2	0	18.7	18.01
CA_5A-7A	20450	21100	QPSK	10+20	1	0	1	0	2	0	21.6	21.36
	20525	21100			1	49	1	0	2	0	21.6	21.21
	20600	21100			1	0	1	99	2	0	21.6	21.35
CA_5A-66A	20450	132322	QPSK	10+20	1	49	1	0	2	0	21.6	21.08
	20525	132322			1	0	1	0	2	0	21.6	21.43
	20600	132322			1	49	1	0	2	0	21.6	21.22
CA_12A-66A	23060	132322	QPSK	10+20	1	49	1	0	2	0	22.2	21.87
	23095	132322			1	49	1	0	2	0	22.2	21.85
	23130	132322			1	0	1	99	2	0	22.2	21.93
CA_13A-66A	23230	132322	QPSK	10+20	1	0	1	99	2	0	21.4	21.05
CA_14A-66A	23330	132322	QPSK	10+20	1	0	1	99	2	0	21.7	21.31
CA_41A-42A	39750	43340	QPSK	20+20	1	99	1	0	2	0	16.1	15.69
	40185	43340			1	99	1	0	2	0	16.1	15.41
	40620	43340			1	0	1	99	2	0	16.1	14.79
	41055	43340			1	99	1	0	2	0	16.1	15.18
	41490	43340			1	0	1	99	2	0	16.1	15.75
CA_41A-42A_PC2	39750	43340	QPSK	20+20	1	99	1	0	2	0	18.0	17.66
	40185	43340			1	99	1	0	2	0	18.0	17.69
	40620	43340			1	0	1	99	2	0	18.0	17.32
	41055	43340			1	99	1	0	2	0	18.0	17.37
	41490	43340			1	0	1	99	2	0	18.0	17.51

8.5. Measured Conducted Power Results for 5G NR FR1

Test Notes:

- [1] Per October 2020 TCB Workshop Guidance, 5G NR FR1 SAR evaluations are being generally based on adapting the existing LTE SAR procedures (KDB Publication 941225 D05).
- [2] The following tests were conducted according to the test requirements outlined in section 6.2 of the 3GPP TS 36.101 specification.
 - UE Power Class: 3 (23 $\pm$ 2 dBm). The allowed Maximum Power Reduction (MPR) for the maximum output power due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.2.3-1 of the 3GPP TS 38.521-1.
 - The allowed A-MPR values specified below in Table 6.2.3.3.1-1 of 3GPP TS 38.521-1 are in addition to the allowed MPR requirements. All the measurements below were performed with A-MPR disabled, by using Network Signaling Value of "NS_01".
- [3] According to April 2015 TCB workshop, SAR test exclusion can be applied for testing overlapping 5G NR FR1 bands as follows:
 - NR Band 2 (1850 ~ 1910 MHz) is covered by NR Band 25 (1850 ~ 1915 MHz)
 - NR Band 78 (3705 ~ 3795 MHz) is covered by NR Band 77 (3705 ~ 3975 MHz)
- [4] Some 5G NR FR1 bands do not support three non-overlapping channels. Per KDB Publication 941225 D05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
- [5] The conducted power measurement for DFT-s-OFDM was performed on $\pi/2$ BPSK and QPSK with the largest bandwidth, and higher order modulations as 16QAM / 64QAM / 256QAM has been verified using 1RB allocation.
- [6] For lower bandwidth, the conducted power has been verified for QPSK with 1RB allocation.
- [7] SAR and conducted power for CP-OFDM is not required due to the CP-OFDM tune-up limit power is not 0.5 dB higher than DFT-s-OFDM and the reported SAR of DFT-s-OFDM is ≤ 1.45 W/kg.
- [8] The measured conducted power of highest bandwidth has been listed in below, and the measured conducted power for other bandwidth can be found in LTE and NR Lower Bandwidth Conducted Power Appendix.

<5G NR FR1, SCS 15 kHz, FDD>

Band					5G NR n2			
BW (MHz)	Modulation	RB Size	RB Offset	3GPP MPR (dB)	372000	376000	380000	Tune-up Limit (dBm)
					1860	1880	1900	
20	DFT-S $\pi/2$ BPSK	1	1	0	17.88	17.87	17.88	18.2
		1	53	0	17.97	17.98	17.89	18.2
		1	104	0	17.83	17.83	17.88	18.2
		50	0	0.5	17.33	17.44	17.36	17.7
		50	28	0	17.92	17.84	17.98	18.2
		50	56	0.5	17.37	17.38	17.38	17.7
	DFT-S QPSK	100	0	0.5	17.47	17.47	17.35	17.7
		1	1	0	18.09	18.14	18.01	18.2
		1	53	0	17.83	17.97	17.98	18.2
		1	104	0	17.96	17.93	17.86	18.2
		50	0	1	16.83	16.93	16.84	17.2
		50	28	0	18.05	18.11	18.00	18.2
		50	56	1	16.93	16.96	16.98	17.2
		100	0	1	16.94	16.97	16.93	17.2
	DFT-S 16QAM	1	1	1	16.83	16.91	16.96	17.2
	DFT-S 64QAM	1	1	2.5	15.43	15.36	15.40	15.7
	DFT-S 256QAM	1	1	4.5	13.33	13.35	13.44	13.7
	CP QPSK	1	1	1.5	16.40	16.35	16.33	16.7

Band					5GNR n5			
BW (MHz)	Modulation	RB Size	RB Offset	3GPP MPR (dB)	166800	167300	167800	Tune-up Limit (dBm)
					834.0	836.5	839.0	
20	DFT-S $\pi/2$ BPSK	1	1	0	21.44	21.66	21.54	21.8
		1	53	0	21.49	21.64	21.47	21.8
		1	104	0	21.56	21.47	21.61	21.8
		50	0	0.5	21.06	20.98	21.06	21.3
		50	28	0	21.52	21.46	21.51	21.8
		50	56	0.5	20.99	21.08	21.02	21.3
	DFT-S QPSK	100	0	0.5	21.00	21.07	21.09	21.3
		1	1	0	21.77	21.76	21.71	21.8
		1	53	0	21.44	21.63	21.55	21.8
		1	104	0	21.62	21.45	21.66	21.8
		50	0	1	20.63	20.49	20.66	20.8
		50	28	0	21.71	21.69	21.67	21.8
	DFT-S 16QAM	50	56	1	20.43	20.54	20.54	20.8
		100	0	1	20.79	20.64	20.69	20.8
	DFT-S 64QAM	1	1	1	20.54	20.47	20.65	20.8
	DFT-S 256QAM	1	1	2.5	19.03	19.10	18.97	19.3
	CP QPSK	1	1	4.5	17.11	17.09	17.07	17.3
		1	1	1.5	20.15	20.05	19.97	20.3

Band					5GNR n7			
BW (MHz)	Modulation	RB Size	RB Offset	3GPP MPR (dB)	504000	507000	510000	Tune-up Limit (dBm)
					2520	2535	2550	
40	DFT-S $\pi/2$ BPSK	1	1	0	13.23	13.21	13.16	13.6
		1	108	0	13.21	13.12	13.19	13.6
		1	214	0	13.18	13.27	13.15	13.6
		108	0	0.5	12.67	12.67	12.62	13.1
		108	54	0	13.19	13.18	13.25	13.6
		108	108	0.5	12.69	12.71	12.67	13.1
	DFT-S QPSK	216	0	0.5	12.79	12.62	12.79	13.1
		1	1	0	13.54	13.57	13.31	13.6
		1	108	0	13.12	13.25	13.21	13.6
		1	214	0	13.15	13.23	13.26	13.6
		108	0	1	12.24	12.30	12.11	12.6
		108	54	0	13.51	13.54	13.46	13.6
	DFT-S 16QAM	108	108	1	12.17	12.16	12.24	12.6
		216	0	1	12.41	12.51	12.43	12.6
	DFT-S 64QAM	1	1	1	12.26	12.17	12.24	12.6
	DFT-S 256QAM	1	1	2.5	10.74	10.69	10.65	11.1
	CP QPSK	1	1	4.5	8.74	8.62	8.75	9.1
		1	1	1.5	11.64	11.61	11.75	12.1

Band					5GNR n12			
BW (MHz)	Modulation	RB Size	RB Offset	3GPP MPR (dB)	141300	141500	141700	Tune-up Limit (dBm)
					706.5	707.5	708.5	
15	DFT-S $\pi/2$ BPSK	1	1	0	22.89	22.77	22.82	23.2
		1	40	0	22.62	22.63	22.82	23.2
		1	77	0	22.73	22.88	22.73	23.2
		36	0	0.5	22.27	22.30	22.24	22.7
		36	22	0	22.82	22.70	22.84	23.2
		36	43	0.5	22.13	22.38	22.18	22.7
	DFT-S QPSK	75	0	0.5	22.12	22.38	22.38	22.7
		1	1	0	23.16	23.09	23.13	23.2
		1	40	0	22.87	22.73	22.65	23.2
		1	77	0	22.80	22.72	22.86	23.2
		36	0	1	21.62	21.80	21.88	22.2
		36	22	0	22.97	22.92	22.93	23.2
	DFT-S 16QAM	36	43	1	21.84	21.81	21.86	22.2
		75	0	1	22.08	22.02	22.05	22.2
	DFT-S 64QAM	1	1	1	21.75	21.67	21.75	22.2
	DFT-S 256QAM	1	1	2.5	20.18	20.36	20.26	20.7
	CP QPSK	1	1	4.5	18.14	18.39	18.23	18.7
		1	1	1.5	21.12	21.13	21.16	21.7

Band					5GNR n13	
BW (MHz)	Modulation	RB Size	RB Offset	3GPP MPR (dB)	156400	Tune-up Limit (dBm)
					782	
10	DFT-S $\pi/2$ BPSK	1	1	0	21.84	22.4
		1	26	0	21.97	22.4
		1	50	0	21.96	22.4
		25	0	0.5	21.28	21.9
		25	14	0	21.76	22.4
		25	27	0.5	21.30	21.9
		50	0	0.5	21.29	21.9
	DFT-S QPSK	1	1	0	22.14	22.4
		1	26	0	22.00	22.4
		1	50	0	21.79	22.4
		25	0	1	20.80	21.4
		25	14	0	22.05	22.4
		25	27	1	20.73	21.4
		50	0	1	21.12	21.4
	DFT-S 16QAM	1	1	1	20.76	21.4
	DFT-S 64QAM	1	1	2.5	19.25	19.9
	DFT-S 256QAM	1	1	4.5	17.44	17.9
	CP QPSK	1	1	1.5	20.27	20.9

Band					5GNR n14	
BW (MHz)	Modulation	RB Size	RB Offset	3GPP MPR (dB)	158600	Tune-up Limit (dBm)
					793	
10	DFT-S $\pi/2$ BPSK	1	1	0	21.32	22.3
		1	26	0	21.41	22.3
		1	50	0	21.35	22.3
		25	0	0.5	20.89	21.8
		25	14	0	21.37	22.3
		25	27	0.5	20.72	21.8
		50	0	0.5	20.79	21.8
	DFT-S QPSK	1	1	0	21.59	22.3
		1	26	0	21.44	22.3
		1	50	0	21.28	22.3
		25	0	1	20.40	21.3
		25	14	0	21.51	22.3
		25	27	1	20.31	21.3
		50	0	1	20.48	21.3
	DFT-S 16QAM	1	1	1	20.39	21.3
	DFT-S 64QAM	1	1	2.5	18.89	19.8
	DFT-S 256QAM	1	1	4.5	16.86	17.8
	CP QPSK	1	1	1.5	19.93	20.8

Band					5GNR n25		
BW (MHz)	Modulation	RB Size	RB Offset	3GPP MPR (dB)	374000	376500	379000
					1870.0	1882.5	1895.0
40	DFT-S $\pi/2$ BPSK	1	1	0	17.91	17.98	17.85
		1	108	0	17.84	17.82	18.02
		1	214	0	17.95	18.02	17.87
		108	0	0.5	17.35	17.48	17.43
		108	54	0	17.99	17.89	17.92
		108	108	0.5	17.47	17.35	17.36
		216	0	0.5	17.41	17.49	17.35
	DFT-S QPSK	1	1	0	18.19	18.16	18.11
		1	108	0	17.86	17.84	17.80
		1	214	0	17.95	17.88	17.86
		108	0	1	16.90	16.90	16.98
		108	54	0	18.14	18.08	18.06
		108	108	1	16.96	16.94	16.87
		216	0	1	17.19	17.11	17.09
	DFT-S 16QAM	1	1	1	16.87	16.94	16.94
	DFT-S 64QAM	1	1	2.5	15.49	15.42	15.33
	DFT-S 256QAM	1	1	4.5	13.32	13.51	13.37
	CP QPSK	1	1	1.5	16.46	16.31	16.51

Band					5GNR n26			
BW (MHz)	Modulation	RB Size	RB Offset	3GPP MPR (dB)	164800	166300	167800	Tune-up Limit (dBm)
					824.0	831.5	839.0	
20	DFT-S $\pi/2$ BPSK	1	1	0	21.94	21.99	21.92	22.1
		1	53	0	21.86	21.96	21.83	22.1
		1	104	0	21.94	21.95	21.76	22.1
		50	0	0.5	21.37	21.44	21.31	21.6
		50	28	0	21.76	21.79	21.77	22.1
		50	56	0.5	21.26	21.36	21.27	21.6
		100	0	0.5	21.35	21.56	21.43	21.6
	DFT-S QPSK	1	1	0	22.02	22.04	21.96	22.1
		1	53	0	21.77	21.77	21.81	22.1
		1	104	0	21.94	21.74	21.86	22.1
		50	0	1	20.73	20.92	20.71	21.1
		50	28	0	22.01	22.02	21.88	22.1
		50	56	1	20.71	20.71	20.85	21.1
		100	0	1	21.04	21.05	21.01	21.1
	DFT-S 16QAM	1	1	1	20.77	20.81	20.78	21.1
	DFT-S 64QAM	1	1	2.5	19.24	19.40	19.45	19.6
	DFT-S 256QAM	1	1	4.5	17.41	17.45	17.24	17.6
	CP QPSK	1	1	1.5	20.27	20.46	20.44	20.6

Band					5GNR n66			
BW (MHz)	Modulation	RB Size	RB Offset	3GPP MPR (dB)	346000	349000	352000	Tune-up Limit (dBm)
					1730	1745	1760	
40	DFT-S $\pi/2$ BPSK	1	1	0	17.44	17.42	17.56	18.2
		1	108	0	17.43	17.57	17.46	18.2
		1	214	0	17.40	17.59	17.59	18.2
		108	0	0.5	17.06	16.91	16.98	17.7
		108	54	0	17.46	17.45	17.52	18.2
		108	108	0.5	16.97	16.95	16.91	17.7
		216	0	0.5	16.97	17.01	16.98	17.7
	DFT-S QPSK	1	1	0	17.69	18.09	18.12	18.2
		1	108	0	17.56	17.55	17.46	18.2
		1	214	0	17.48	17.45	17.50	18.2
		108	0	1	16.42	16.58	16.41	17.2
		108	54	0	17.62	18.08	18.09	18.2
		108	108	1	16.52	16.55	16.46	17.2
		216	0	1	17.02	17.05	17.07	17.2
	DFT-S 16QAM	1	1	1	16.40	16.41	16.57	17.2
	DFT-S 64QAM	1	1	2.5	15.07	14.96	14.90	15.7
	DFT-S 256QAM	1	1	4.5	12.95	13.06	13.09	13.7
	CP QPSK	1	1	1.5	15.97	16.04	15.94	16.7

Band					5GNR n71			
BW (MHz)	Modulation	RB Size	RB Offset	3GPP MPR (dB)	135600	136100	136600	Tune-up Limit (dBm)
					678.0	680.5	683.0	
30	DFT-S $\pi/2$ BPSK	1	1	0	22.76	22.83	22.89	23.1
		1	80	0	22.87	22.90	22.81	23.1
		1	158	0	22.83	22.81	22.77	23.1
		80	0	0.5	22.38	22.28	22.46	22.6
		80	40	0	22.88	22.85	22.94	23.1
		80	80	0.5	22.44	22.37	22.43	22.6
		160	0	0.5	22.29	22.38	22.46	22.6
	DFT-S QPSK	1	1	0	23.05	23.02	23.03	23.1
		1	80	0	22.94	22.77	22.83	23.1
		1	158	0	22.90	22.81	22.96	23.1
		80	0	1	21.86	21.93	21.91	22.1
		80	40	0	23.02	22.99	23.01	23.1
		80	80	1	21.89	21.76	21.87	22.1
		160	0	1	21.98	21.91	21.93	22.1
	DFT-S 16QAM	1	1	1	21.85	21.89	21.86	22.1
	DFT-S 64QAM	1	1	2.5	20.46	20.31	20.28	20.6
	DFT-S 256QAM	1	1	4.5	18.39	18.32	18.38	18.6
	CP QPSK	1	1	1.5	21.33	21.45	21.33	21.6

<5GNR FR1, SCS 30 kHz, TDD>

Band					5GNR n38			Tune-up Limit (dBm)
BW (MHz)	Modulation	RB Size	RB Offset	3GPP MPR (dB)	516000	519000	522000	
					2580	2595	2610	
20	DFT-S $\pi/2$ BPSK	1	1	0	23.27	23.18	23.27	24.7
		1	26	0	23.07	23.13	23.21	24.7
		1	49	0	23.09	23.02	23.20	24.7
		25	0	0.5	22.65	22.74	22.72	24.2
		25	13	0	23.00	23.11	23.16	24.7
		25	26	0.5	22.60	22.63	22.66	24.2
	DFT-S QPSK	50	0	0.5	22.55	22.61	22.60	24.2
		1	1	0	23.30	23.31	23.40	24.7
		1	26	0	23.15	23.22	23.33	24.7
		1	49	0	23.05	23.01	23.28	24.7
		25	0	1	22.30	22.21	22.44	23.7
		25	13	0	23.07	23.12	23.22	24.7
	DFT-S 16QAM	25	26	1	22.31	22.30	22.41	23.7
		50	0	1	22.16	22.32	22.35	23.7
		1	1	1	22.09	22.06	22.29	23.7
		1	1	2.5	20.82	20.78	20.94	22.2
	DFT-S 256QAM	1	1	4.5	18.79	18.75	18.93	20.2
	CP QPSK	1	1	1.5	21.70	21.71	21.82	23.2

Band					5GNR n41				Tune-up Limit (dBm)
BW (MHz)	Modulation	RB Size	RB Offset	3GPP MPR (dB)	509202	513900	518598	523302	
					2546.0	2569.5	2593.0	2616.5	
100	DFT-S $\pi/2$ BPSK	1	1	0	23.17	23.31	23.20	23.36	23.18
		1	137	0	23.45	23.24	23.18	23.16	23.42
		1	271	0	23.42	23.22	23.23	23.35	23.27
		135	0	0.5	22.78	22.85	22.72	22.82	22.81
		135	69	0	23.16	23.37	23.42	23.28	23.33
		135	138	0.5	22.83	22.78	22.65	22.93	22.84
	DFT-S QPSK	270	0	0.5	22.94	22.68	22.86	22.95	22.88
		1	1	0	23.71	23.83	23.81	23.73	23.79
		1	137	0	23.32	23.44	23.40	23.20	23.21
		1	271	0	23.31	23.23	23.29	23.37	23.30
		135	0	1	22.42	22.17	22.45	22.33	22.28
		135	69	0	23.64	23.79	23.72	23.47	23.77
	DFT-S 16QAM	135	138	1	22.39	22.25	22.28	22.36	22.27
		270	0	1	22.77	22.84	22.81	22.80	22.79
		1	1	1	22.39	22.26	22.34	22.33	22.45
		1	1	2.5	20.82	20.78	20.90	20.87	20.95
	DFT-S 64QAM	1	1	4.5	18.80	18.86	18.70	18.72	18.80
	DFT-S 256QAM	1	1	4.5	18.80	18.86	18.70	18.72	18.80
	CP QPSK	1	1	1.5	21.86	21.88	21.80	21.89	21.66

Band					5GNR n48				Tune-up Limit (dBm)
BW (MHz)	Modulation	RB Size	RB Offset	3GPP MPR (dB)	640000	641110	642222	643332	
					3600.0	3616.7	3633.3	3650.0	
100	DFT-S $\pi/2$ BPSK	1	1	0	19.84	19.97	19.89	19.83	20.3
		1	137	0	19.85	19.79	19.77	19.74	20.3
		1	271	0	19.82	19.98	19.99	19.74	20.3
		135	0	0.5	19.29	19.49	19.27	19.37	19.8
		135	69	0	19.97	19.80	19.80	19.85	20.3
		135	138	0.5	19.25	19.34	19.23	19.34	19.8
	DFT-S QPSK	270	0	0.5	19.46	19.26	19.44	19.27	19.8
		1	1	0	20.18	20.09	20.17	20.08	20.3
		1	137	0	19.85	19.77	19.90	19.81	20.3
		1	271	0	19.88	19.75	19.87	19.73	20.3
		135	0	1	18.84	18.83	18.85	18.89	19.3
		135	69	0	20.17	20.07	20.16	20.01	20.3
	DFT-S 16QAM	135	138	1	18.77	18.98	18.80	18.91	19.3
		270	0	1	19.15	19.14	19.05	19.08	19.3
		1	1	1	18.96	18.75	18.81	18.74	19.3
		1	1	2.5	17.30	17.26	17.35	17.43	17.8
	DFT-S 64QAM	1	1	4.5	15.25	15.33	15.23	15.46	15.8
	DFT-S 256QAM	1	1	4.5	15.25	15.33	15.23	15.46	15.8
	CP QPSK	1	1	1.5	18.41	18.36	18.24	18.41	18.8

Band					5GNR n77 / n78 (DoD)	
BW (MHz)	Modulation	RB Size	RB Offset	3GPP MPR (dB)	633334	Tune-up Limit (dBm)
					3500.01	
100	DFT-S $\pi/2$ BPSK	1	1	0	20.38	20.9
		1	137	0	20.33	20.9
		1	271	0	20.30	20.9
		135	0	0.5	19.89	20.4
		135	69	0	20.39	20.9
		135	138	0.5	19.93	20.4
	DFT-S QPSK	270	0	0.5	19.79	20.4
		1	1	0	20.71	20.9
		1	137	0	20.36	20.9
		1	271	0	20.34	20.9
		135	0	1	19.26	19.9
		135	69	0	20.68	20.9
		135	138	1	19.39	19.9
		270	0	1	19.79	19.9
	DFT-S 16QAM	1	1	1	19.41	19.9
	DFT-S 64QAM	1	1	2.5	17.81	18.4
	DFT-S 256QAM	1	1	4.5	15.92	16.4
	CP QPSK	1	1	1.5	18.73	19.4

Band					5GNR n77						Tune-up Limit (dBm)
BW (MHz)	Modulation	RB Size	RB Offset	3GPP MPR (dB)	650000	652400	654800	657200	659600	662000	
					3750	3786	3822	3858	3894	3930	
100	DFT-S $\pi/2$ BPSK	1	1	0	20.12	20.39	20.27	20.47	20.37	20.34	20.9
		1	137	0	20.31	20.25	20.36	20.40	20.49	20.35	20.9
		1	271	0	20.30	20.47	20.45	20.35	20.30	20.38	20.9
		135	0	0.5	19.77	19.86	19.82	19.95	19.80	19.71	20.4
		135	69	0	20.24	20.31	20.23	20.43	20.38	20.12	20.9
		135	138	0.5	19.80	19.73	19.78	19.76	19.95	19.80	20.4
	DFT-S QPSK	270	0	0.5	19.68	19.89	19.77	19.94	19.89	19.66	20.4
		1	1	0	20.88	20.86	20.72	20.86	20.87	20.78	20.9
		1	137	0	20.13	20.22	20.48	20.44	20.29	20.12	20.9
		1	271	0	20.16	20.48	20.36	20.43	20.23	20.12	20.9
		135	0	1	19.47	19.46	19.35	19.28	19.36	19.35	19.9
		135	69	0	20.71	20.57	20.51	20.62	20.63	20.55	20.9
		135	138	1	19.35	19.33	19.47	19.42	19.43	19.15	19.9
		270	0	1	19.88	19.87	19.82	19.84	19.78	19.65	19.9
	DFT-S 16QAM	1	1	1	19.33	19.32	19.24	19.44	19.34	19.31	19.9
	DFT-S 64QAM	1	1	2.5	17.78	17.74	17.80	17.80	17.76	17.68	18.4
	DFT-S 256QAM	1	1	4.5	15.64	15.74	15.82	15.77	15.93	15.62	16.4
	CP QPSK	1	1	1.5	18.77	18.82	18.91	18.79	18.98	18.70	19.4

Band					5GNR n78	
BW (MHz)	Modulation	RB Size	RB Offset	3GPP MPR (dB)	650000	Tune-up Limit (dBm)
					3750	
100	DFT-S $\pi/2$ BPSK	1	1	0	20.59	20.9
		1	137	0	20.72	20.9
		1	271	0	20.60	20.9
		135	0	0.5	20.23	20.4
		135	69	0	20.42	20.9
		135	138	0.5	20.25	20.4
	DFT-S QPSK	270	0	0.5	19.98	20.4
		1	1	0	20.86	20.9
		1	137	0	20.62	20.9
		1	271	0	20.52	20.9
		135	0	1	19.44	19.9
		135	69	0	20.79	20.9
		135	138	1	19.68	19.9
		270	0	1	19.85	19.9
	DFT-S 16QAM	1	1	1	19.60	19.9
	DFT-S 64QAM	1	1	2.5	18.01	18.4
	DFT-S 256QAM	1	1	4.5	16.06	16.4
	CP QPSK	1	1	1.5	19.18	19.4

<5GNR FR1, SCS 30 kHz, UL MIMO>

5G NR n38 UL MIMO														
BW (MHz)	Modulation	RB Size	RB Offset	3GPP MPR (dB)	516000			519000			52200			Tune-up Limit (dBm)
					2580			2595			2610			
					Main	Aux	Total	Main	Aux	Total	Main	Aux	Total	
20	CP QPSK	1	1	0	18.95	19.17	22.07	19.02	19.23	22.14	19.01	19.19	22.11	23.2
		1	26	0	18.94	19.06	22.01	18.97	19.15	22.07	18.93	19.06	22.01	23.2
		1	49	0	18.85	19.04	21.96	18.91	19.11	22.02	18.83	19.08	21.97	23.2
		25	0	1	18.10	18.52	21.33	18.15	18.55	21.36	18.08	18.49	21.30	22.2
		25	13	0	18.32	18.61	21.48	18.35	18.68	21.53	18.31	18.64	21.49	23.2
		25	26	1	18.13	18.39	21.27	18.22	18.41	21.33	18.16	18.36	21.27	22.2
		50	0	1	18.01	18.11	21.07	18.11	18.19	21.16	18.10	18.09	21.11	22.2

5G NR n41 UL MIMO																				
BW (MHz)	Modulation	RB Size	RB Offset	3GPP MPR (dB)	509202			513900			518598			523302			528000			Tune-up Limit (dBm)
					2546.01			2569.50			2592.99			2616.51			2640.00			
					Main	Aux	Total	Main	Aux	Total	Main	Aux	Total	Main	Aux	Total	Main	Aux	Total	
100	CP QPSK	1	1	0	18.18	18.32	21.26	18.05	18.39	21.23	18.06	18.43	21.26	18.09	18.39	21.25	18.26	18.47	21.38	22.4
		1	137	0	17.92	18.28	21.11	18.08	18.12	21.11	18.04	18.15	21.11	18.08	18.29	21.18	18.03	18.16	21.11	22.4
		1	271	0	17.94	18.19	21.08	17.94	18.17	21.07	18.03	18.29	21.17	18.04	18.29	21.18	17.91	18.19	21.06	22.4
		135	0	1	16.98	17.12	20.06	16.91	17.13	20.03	16.99	17.18	20.10	16.99	17.19	20.10	16.91	17.22	20.08	21.4
		135	69	0	18.13	18.28	21.22	18.02	18.31	21.18	18.08	18.32	21.21	18.05	18.37	21.22	18.18	18.25	21.23	22.4
		135	138	1	16.93	17.21	20.08	16.92	17.19	20.07	16.99	17.26	20.14	17.04	17.28	20.17	17.08	17.24	20.17	21.4
		270	0	1	16.98	17.12	20.06	16.94	17.12	20.04	16.99	17.21	20.11	17.05	17.10	20.09	16.98	17.27	20.14	21.4

5GNR n41 UL MIMO																				
BW (MHz)	Modulation	RB Size	RB Offset	3GPP MPR (dB)	510000			513900			518598			523302			528000			Tune-up Limit (dBm)
					2550.00			2569.50			2592.99			2616.51			2640.00			
					Main	Aux	Total	Main	Aux	Total	Main	Aux	Total	Main	Aux	Total	Main	Aux	Total	
100	CP QPSK	1	1	0	18.19	18.34	21.28	18.05	18.39	21.23	18.06	18.43	21.26	18.09	18.39	21.25	18.26	18.47	21.38	22.4
		1	137	0	18.07	18.28	21.19	18.08	18.12	21.11	18.04	18.15	21.11	18.08	18.29	21.18	18.03	18.16	21.11	22.4
		1	271	0	17.90	18.26	21.09	17.94	18.17	21.07	18.03	18.29	21.17	18.04	18.29	21.18	17.91	18.19	21.06	22.4
		135	0	1	17.01	17.18	20.11	16.91	17.13	20.03	16.99	17.18	20.10	16.99	17.19	20.10	16.91	17.22	20.08	21.4
		135	69	0	18.11	18.29	21.21	18.02	18.31	21.18	18.08	18.32	21.21	18.05	18.37	21.22	18.18	18.25	21.23	22.4
		135	138	1	17.03	17.26	20.16	16.92	17.19	20.07	16.99	17.26	20.14	17.04	17.28	20.19	17.08	17.24	20.17	21.4
		270	0	1	17.08	17.14	20.12	16.94	17.12	20.04	16.99	17.21	20.11	17.05	17.10	20.07	16.98	17.27	20.14	21.4

5G NR n77 UL MIMO																									
BW (MHz)	Modulation	RB Size	RB Offset	3GPP MPR (dB)	650000			652400			654800			657200			659600			662000			Tune-up Limit (dBm)		
					3750			3786			3822			3858			3894			3930					
					Main	Aux	Total	Main	Aux	Total	Main	Aux	Total	Main	Aux	Total	Main	Aux	Total	Main	Aux	Total			
100	CP QPSK	1	1	0	15.27	15.41	18.35	15.31	15.48	18.41	15.32	15.44	18.39	15.21	15.43	18.33	15.09	15.32	18.22	15.35	15.49	18.43	19.4		
		1	137	0	15.05	15.25	18.16	15.04	15.30	18.18	15.09	15.23	18.17	15.05	15.21	18.14	14.93	15.22	18.09	15.06	15.17	18.13	19.4		
		1	271	0	15.03	15.28	18.17	15.01	15.23	18.13	14.93	15.10	18.03	15.00	15.26	18.14	15.00	15.18	18.10	15.04	15.12	18.09	19.4		
		135	0	1	13.91	14.29	17.11	14.01	14.25	17.14	14.08	14.23	17.13	14.05	14.18	17.13	14.08	14.15	17.10	14.01	14.23	17.13	18.4		
		135	69	0	15.24	15.37	18.32	15.15	15.39	18.28	15.13	15.32	18.24	15.08	15.31	18.21	15.02	15.27	18.16	15.23	15.48	18.37	19.4		
		135	138	1	14.06	14.24	17.16	13.94	14.19	17.08	13.93	14.18	17.07	13.91	14.25	17.09	13.92	14.13	17.04	14.03	14.22	17.14	18.4		
		270	0	1	13.92	14.30	17.12	13.97	14.19	17.09	13.97	14.12	17.06	13.91	14.21	17.07	13.99	14.22	17.12	14.08	14.24	17.17	18.4		

5GNR n77 / n78 UL MIMO								
BW (MHz)	Modulation	RB Size	RB Offset	3GPP MPR (dB)	633334			Tune-up Limit (dBm)
					3500.01			
					Main	Aux	Total	
100	CP QPSK	1	1	0	14.19	14.38	17.30	18.1
		1	137	0	13.72	13.98	16.86	18.1
		1	271	0	13.80	13.84	16.83	18.1
		135	0	1	12.74	12.94	15.85	17.1
		135	69	0	14.18	14.23	17.22	18.1
		135	138	1	12.68	13.00	15.85	17.1
		270	0	1	12.76	12.89	15.84	17.1

5G NR n78 UL MIMO									
BW (MHz)	Modulation	RB Size	RB Offset	3GPP MPR (dB)	650000				Tune-up Limit (dBm)
					3750				
					Main		Aux		
100	CP QPSK	1	1	0	15.17	15.31	18.25	19.4	
		1	137	0	14.96	15.28	18.13	19.4	
		1	271	0	15.05	15.19	18.13	19.4	
		135	0	1	13.95	14.23	17.10	18.4	
		135	69	0	15.11	15.30	18.22	19.4	
		135	138	1	14.09	14.19	17.15	18.4	
		270	0	1	14.08	14.23	17.17	18.4	

8.6. Measured Conducted Power Results for WLAN

Test Notes:

- [1] The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power was measured for the highest maximum output power configurations in each frequency band according to the default power measurement procedures.
- [2] Per KDB Publication 248227 D01, the conducted power measurement was performed for the transmission mode configuration with the highest maximum output power specified for production units.
- [3] For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- [4] For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- [5] For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.
- [6] Per April 2019 TCB Workshop guidance, general principles of KDB Publication 248227 D01 can be applied to determine the SAR Initial Test Configurations and test reduction for 802.11ax, and 802.11ax is considered as the highest order modulation mode. For the table below the 802.11ax maximum power is SU (non-OFDMA), and the SU maximum power is higher than RU (OFDMA).

WLAN 2.4 GHz										
Mode	Channel	Frequency (MHz)	ANT 0		ANT 1		ANT 0+1			
			Average Power (dBm)	Tune-Up Limit	Average Power (dBm)	Tune-Up Limit	Average Power ANT 0 (dBm)	Average Power ANT 1 (dBm)	Average Power ANT 0+1 (dBm)	Tune-Up Limit
802.11b	1	2412	17.82	18.00	15.48	15.50	N/A	N/A	N/A	N/A
	6	2437	17.87	18.00	15.44	15.50	N/A	N/A	N/A	N/A
	11	2462	17.98	18.00	15.49	15.50	N/A	N/A	N/A	N/A
	12	2467	16.61	18.00	15.42	15.50	N/A	N/A	N/A	N/A
	13	2472	15.35	15.50	15.40	15.50	N/A	N/A	N/A	N/A
802.11g	1	2412	17.89	18.00	15.28	15.50	N/A	N/A	N/A	N/A
	6	2437	17.87	18.00	15.24	15.50	N/A	N/A	N/A	N/A
	11	2462	17.76	18.00	14.87	15.00	N/A	N/A	N/A	N/A
	12	2467	15.24	15.50	11.82	12.00	N/A	N/A	N/A	N/A
	13	2472	11.35	11.50	8.39	8.50	N/A	N/A	N/A	N/A
802.11n HT20	1	2412	17.85	18.00	14.91	15.00	7.32	7.40	10.37	10.50
	6	2437	17.87	18.00	15.37	15.50	10.87	10.81	13.85	14.00
	11	2462	17.77	18.00	13.83	14.00	8.41	8.37	11.40	11.50
	12	2467	14.88	15.00	11.26	11.50	3.31	3.34	6.34	6.50
	13	2472	11.40	11.50	7.80	8.00	0.79	0.90	3.86	4.00
802.11n HT40	3	2422	15.72	16.00	12.32	12.50	6.35	6.34	9.36	9.50
	6	2437	16.87	17.00	13.28	13.50	6.81	6.89	9.86	10.00
	9	2452	15.75	16.00	12.28	12.50	5.84	5.82	8.84	9.00
	10	2457	10.41	10.50	6.80	7.00	-0.14	-0.13	2.88	3.00
	11	2462	10.78	11.00	7.34	7.50	0.84	0.89	3.88	4.00
802.11ax HE20	1	2412	17.22	17.50	14.24	14.50	7.35	7.47	10.42	10.50
	6	2437	17.76	18.00	15.34	15.50	11.46	11.48	14.48	14.50
	11	2462	17.88	18.00	14.31	14.50	7.40	7.47	10.45	10.50
	12	2467	14.90	15.00	11.83	12.00	3.92	3.93	6.94	7.00
	13	2472	8.77	9.00	5.24	5.50	-0.18	-0.11	2.87	3.00
802.11ax HE40	3	2422	15.74	16.00	12.36	12.50	6.85	6.84	9.86	10.00
	6	2437	16.75	17.00	13.36	13.50	6.73	6.83	9.79	10.00
	9	2452	15.84	16.00	12.36	12.50	5.78	5.89	8.85	9.00
	10	2457	10.75	11.00	7.24	7.50	1.40	1.39	4.41	4.50
	11	2462	8.89	9.00	5.23	5.50	-0.61	-0.67	2.37	2.50

WLAN 5.3 GHz										
Mode	Channel	Frequency (MHz)	ANT 0		ANT 1		ANT 0+1			
			Average Power (dBm)	Tune-Up Limit	Average Power (dBm)	Tune-Up Limit	Average Power ANT 0 (dBm)	Average Power ANT 1 (dBm)	Average Power ANT 0+1 (dBm)	Tune-Up Limit
802.11a	52	5260	15.24	15.50	10.42	10.50	0.00	0.00	N/A	N/A
	56	5280	15.27	15.50	10.33	10.50	0.00	0.00	N/A	N/A
	60	5300	15.35	15.50	10.30	10.50	0.00	0.00	N/A	N/A
	64	5320	15.31	15.50	10.36	10.50	0.00	0.00	N/A	N/A
802.11n HT20	52	5260	15.41	15.50	10.31	10.50	9.34	9.39	12.38	12.50
	56	5280	15.42	15.50	10.39	10.50	9.32	9.37	12.36	12.50
	60	5300	15.36	15.50	10.35	10.50	9.25	9.35	12.31	12.50
	64	5320	15.27	15.50	10.28	10.50	9.40	9.38	12.40	12.50
802.11n HT40	54	5270	15.49	15.50	10.43	10.50	10.48	10.46	13.48	13.50
	62	5310	15.46	15.50	8.97	9.00	8.47	8.44	11.47	11.50
802.11ac VHT20	52	5260	15.27	15.50	10.27	10.50	9.25	9.27	12.27	12.50
	56	5280	15.38	15.50	10.37	10.50	9.33	9.37	12.36	12.50
	60	5300	15.25	15.50	10.24	10.50	9.24	9.27	12.27	12.50
	64	5320	15.23	15.50	10.31	10.50	9.29	9.36	12.34	12.50
802.11ac VHT40	54	5270	15.25	15.50	10.42	10.50	10.30	10.36	13.34	13.50
	62	5310	15.24	15.50	8.87	9.00	8.25	8.32	11.30	11.50
802.11ac VHT80	58	5290	14.85	15.00	8.76	9.00	5.77	5.71	8.75	8.90
802.11ac VHT160	50	5250	14.77	15.00	7.22	7.50	5.51	5.45	8.49	8.70
802.11ax HE20	52	5260	15.23	15.50	10.37	10.50	10.24	10.41	13.34	13.50
	56	5280	15.37	15.50	10.28	10.50	10.30	10.32	13.32	13.50
	60	5300	15.34	15.50	10.42	10.50	9.84	9.79	12.83	13.00
	64	5320	15.42	15.50	10.30	10.50	8.36	8.35	11.37	11.50
802.11ax HE40	54	5270	15.30	15.50	10.34	10.50	10.34	10.27	13.32	13.50
	62	5310	15.37	15.50	8.86	9.00	9.29	9.25	12.28	12.50
802.11ax HE80	58	5290	14.77	15.00	8.89	9.00	8.27	8.25	11.27	11.50
802.11ax HE160	50	5250	14.81	15.00	6.78	7.00	5.75	5.89	8.83	9.00

WLAN 5.6 GHz										
Mode	Channel	Frequency (MHz)	ANT 0		ANT 1		ANT 0+1			
			Average Power (dBm)	Tune-Up Limit	Average Power (dBm)	Tune-Up Limit	Average Power ANT 0 (dBm)	Average Power ANT 1 (dBm)	Average Power ANT 0+1 (dBm)	Tune-Up Limit
802.11a	100	5500	14.22	14.50	9.87	10.00	0.00	0.00	N/A	N/A
	116	5580	14.22	14.50	9.82	10.00	0.00	0.00	N/A	N/A
	124	5620	14.27	14.50	9.81	10.00	0.00	0.00	N/A	N/A
	132	5660	14.23	14.50	9.73	10.00	0.00	0.00	N/A	N/A
	140	5700	14.39	14.50	9.80	10.00	0.00	0.00	N/A	N/A
	144	5720	14.30	14.50	9.80	10.00	0.00	0.00	N/A	N/A
802.11n HT20	100	5500	14.24	14.50	9.85	10.00	7.41	7.37	10.40	10.50
	116	5580	14.29	14.50	9.89	10.00	7.32	7.38	10.36	10.50
	124	5620	14.25	14.50	9.75	10.00	7.37	7.35	10.37	10.50
	132	5660	14.33	14.50	9.88	10.00	7.29	7.37	10.34	10.50
	140	5700	14.32	14.50	9.83	10.00	7.40	7.26	10.34	10.50
	144	5720	14.27	14.50	9.74	10.00	6.37	6.27	9.33	9.50
802.11n HT40	102	5510	14.22	14.50	9.74	10.00	6.39	6.25	9.33	9.50
	110	5550	14.42	14.50	9.83	10.00	7.79	7.89	10.85	11.00
	126	5630	14.23	14.50	9.89	10.00	7.84	7.80	10.83	11.00
	134	5670	14.22	14.50	9.83	10.00	6.74	6.79	9.78	10.00
	142	5710	14.42	14.50	9.73	10.00	6.87	6.78	9.84	10.00
	100	5500	14.27	14.50	9.83	10.00	7.41	7.27	10.35	10.50
802.11ac VHT20	116	5580	14.27	14.50	9.76	10.00	7.41	7.28	10.36	10.50
	124	5620	14.35	14.50	9.76	10.00	7.31	7.31	10.32	10.50
	132	5660	14.30	14.50	9.88	10.00	7.45	7.35	10.41	10.50
	140	5700	14.30	14.50	9.83	10.00	7.33	7.34	10.35	10.50
	144	5720	14.42	14.50	9.88	10.00	6.29	6.35	9.33	9.50
	102	5510	14.39	14.50	9.81	10.00	6.40	6.44	9.43	9.50
802.11ac VHT40	110	5550	14.35	14.50	9.78	10.00	7.29	7.33	10.32	11.00
	126	5630	14.22	14.50	9.74	10.00	7.40	7.45	10.44	11.00
	134	5670	14.29	14.50	9.86	10.00	6.89	6.95	9.93	10.00
	142	5710	14.42	14.50	9.87	10.00	6.91	6.93	9.93	10.00
	106	5530	14.44	14.50	9.96	10.00	6.89	6.88	9.90	10.00
	122	5610	14.39	14.50	9.92	10.00	6.87	6.89	9.89	10.00
802.11ac VHT80	138	5690	14.28	14.50	9.86	10.00	6.91	6.78	9.86	10.00
802.11ac VHT160	114	5570	14.46	14.50	9.97	10.00	12.24	12.18	15.22	15.25
802.11ax HE20	100	5500	14.37	14.50	9.85	10.00	7.28	7.39	10.35	10.50
	116	5580	14.37	14.50	9.76	10.00	7.36	7.33	10.36	10.50
	124	5620	14.26	14.50	9.90	10.00	7.27	7.26	10.28	10.50
	132	5660	14.42	14.50	9.78	10.00	0.24	0.39	3.33	3.50
	140	5700	14.33	14.50	9.73	10.00	5.82	5.79	8.82	9.00
	144	5720	14.37	14.50	9.75	10.00	6.31	6.27	9.30	9.50
802.11ax HE40	102	5510	14.26	14.50	9.75	10.00	6.40	6.38	9.40	9.50
	110	5550	14.42	14.50	9.86	10.00	7.26	7.24	10.26	10.50
	126	5630	14.40	14.50	9.79	10.00	7.39	7.28	10.35	10.50
	134	5670	14.26	14.50	9.88	10.00	7.39	7.28	10.35	10.50
	142	5710	14.23	14.50	9.87	10.00	7.36	7.39	10.39	10.50
	106	5530	14.42	14.50	9.77	10.00	6.84	6.82	9.84	10.00
802.11ax HE80	122	5610	14.37	14.50	9.79	10.00	6.80	6.75	9.79	10.00
	138	5690	14.42	14.50	9.89	10.00	6.84	6.76	9.81	10.00
802.11ax HE160	114	5570	14.26	14.50	9.73	10.00	12.12	12.06	15.10	15.25

WLAN 5.8 GHz										
Mode	Channel	Frequency (MHz)	ANT 0		ANT 1		ANT 0+1			
			Average Power (dBm)	Tune-Up Limit	Average Power (dBm)	Tune-Up Limit	Average Power ANT 0 (dBm)	Average Power ANT 1 (dBm)	Average Power ANT 0+1 (dBm)	Tune-Up Limit
802.11a	149	5745	15.30	15.50	8.85	9.00	0.00	0.00	N/A	N/A
	157	5785	15.27	15.50	8.80	9.00	0.00	0.00	N/A	N/A
	165	5825	15.25	15.50	8.73	9.00	0.00	0.00	N/A	N/A
802.11n HT20	149	5745	15.33	15.50	8.73	9.00	5.27	5.37	8.33	8.50
	157	5785	15.36	15.50	8.83	9.00	5.24	5.37	8.32	8.50
	165	5825	15.24	15.50	8.82	9.00	5.28	5.27	8.29	8.50
802.11n HT40	151	5755	15.45	15.50	8.98	9.00	5.32	5.37	8.36	8.50
	159	5795	15.47	15.50	8.99	9.00	5.32	5.40	8.37	8.50
802.11ac VHT20	149	5745	15.34	15.50	8.81	9.00	5.28	5.30	8.30	8.50
	157	5785	15.37	15.50	8.87	9.00	5.28	5.37	8.34	8.50
	165	5825	15.30	15.50	8.75	9.00	5.27	5.25	8.27	8.50
802.11ac VHT40	151	5755	15.23	15.50	8.84	9.00	5.32	5.25	8.30	8.50
	159	5795	15.30	15.50	8.89	9.00	5.41	5.25	8.34	8.50
802.11ac VHT80	155	5775	14.75	15.00	8.32	8.50	4.41	4.28	7.36	7.50
802.11ax HE20	149	5745	15.23	15.50	8.81	9.00	5.47	5.48	8.49	8.50
	157	5785	15.34	15.50	8.86	9.00	5.41	5.43	8.43	8.50
	165	5825	15.38	15.50	8.86	9.00	5.94	5.91	8.94	9.00
802.11ax HE40	151	5755	15.27	15.50	8.90	9.00	5.31	5.39	8.36	8.50
	159	5795	15.23	15.50	8.87	9.00	5.29	5.25	8.28	8.50
802.11ax HE80	155	5775	14.81	15.00	8.36	8.50	5.34	5.41	8.39	8.50

U-NII 5										
Mode	Channel	Frequency (MHz)	ANT 0		ANT 1		ANT 0+1			
			Average Power (dBm)	Tune-Up Limit	Average Power (dBm)	Tune-Up Limit	Average Power ANT 0 (dBm)	Average Power ANT 1 (dBm)	Average Power ANT 0+1 (dBm)	Tune-Up Limit
802.11ax HE20	1	5955	4.77	5.00	4.81	5.00	1.73	1.86	4.81	5.00
	45	6175	4.82	5.00	4.91	5.00	1.77	1.88	4.84	5.00
	93	6415	4.88	5.00	4.84	5.00	1.73	1.86	4.81	5.00
802.11ax HE40	3	5965	7.88	8.00	7.78	8.00	2.82	2.75	5.80	6.00
	43	6165	7.84	8.00	7.73	8.00	2.78	2.80	5.80	6.00
	91	6405	7.77	8.00	7.77	8.00	2.77	2.87	5.83	6.00
802.11ax HE80	7	5985	10.25	10.50	6.37	6.50	2.87	2.88	5.89	6.00
	39	6145	10.39	10.50	6.28	6.50	2.91	2.80	5.87	6.00
	87	6385	9.80	10.00	5.78	6.00	2.89	2.76	5.84	6.00
802.11ax HE160	15	6025	12.92	13.00	8.91	9.00	2.93	2.89	5.92	6.00
	47	6185	12.99	13.00	8.99	9.00	2.98	2.98	5.99	6.00
	79	6345	12.92	13.00	8.98	9.00	2.98	2.93	5.97	6.00

U-NII 6										
Mode	Channel	Frequency (MHz)	ANT 0		ANT 1		ANT 0+1			
			Average Power (dBm)	Tune-Up Limit	Average Power (dBm)	Tune-Up Limit	Average Power ANT 0 (dBm)	Average Power ANT 1 (dBm)	Average Power ANT 0+1 (dBm)	Tune-Up Limit
802.11ax HE20	97	6435	4.76	5.00	4.89	5.00	1.86	1.74	4.81	5.00
	105	6475	4.81	5.00	4.87	5.00	1.91	1.87	4.90	5.00
	113	6515	4.75	5.00	4.91	5.00	1.79	1.83	4.82	5.00
802.11ax HE40	99	6445	7.79	8.00	7.86	8.00	4.74	4.84	7.80	8.00
	107	6485	7.78	8.00	7.85	8.00	4.82	4.81	7.83	8.00
802.11ax HE80	103	6465	10.35	10.50	6.34	6.50	6.89	6.86	9.89	10.00
	119	6545	10.35	10.50	6.35	6.50	6.89	6.86	9.89	10.00
802.11ax HE160	111	6505	12.95	13.00	8.89	9.00	6.82	6.88	9.86	10.00

U-NII 7										
Mode	Channel	Frequency (MHz)	ANT 0		ANT 1		ANT 0+1			
			Average Power (dBm)	Tune-Up Limit	Average Power (dBm)	Tune-Up Limit	Average Power ANT 0 (dBm)	Average Power ANT 1 (dBm)	Average Power ANT 0+1 (dBm)	Tune-Up Limit
802.11ax HE20	117	6535	4.74	5.00	4.74	5.00	1.80	1.78	4.80	5.00
	149	6695	4.80	5.00	4.88	5.00	1.82	1.83	4.84	5.00
	181	6855	4.77	5.00	4.82	5.00	1.79	1.89	4.85	5.00
802.11ax HE40	115	6525	7.84	8.00	7.81	8.00	4.75	4.87	7.82	8.00
	147	6685	7.81	8.00	7.87	8.00	4.81	4.73	7.78	8.00
	179	6845	7.78	8.00	7.90	8.00	4.86	4.83	7.86	8.00
802.11ax HE80	135	6625	9.76	10.00	6.75	7.00	3.23	3.36	6.31	6.50
	151	6705	9.82	10.00	6.76	7.00	3.24	3.41	6.34	6.50
	167	6785	9.78	10.00	6.81	7.00	3.33	3.33	6.34	6.50
802.11ax HE160	183	6865	9.74	10.00	6.80	7.00	3.34	3.24	6.30	6.50
	143	6665	12.48	12.50	9.49	9.50	6.48	6.48	9.49	9.50
	175	6825	12.47	12.50	9.46	9.50	6.47	6.48	9.49	9.50

U-NII 8										
Mode	Channel	Frequency (MHz)	ANT 0		ANT 1		ANT 0+1			
			Average Power (dBm)	Tune-Up Limit	Average Power (dBm)	Tune-Up Limit	Average Power ANT 0 (dBm)	Average Power ANT 1 (dBm)	Average Power ANT 0+1 (dBm)	Tune-Up Limit
802.11ax HE20	185	6875	4.83	5.00	4.74	5.00	1.87	1.81	4.85	5.00
	209	6995	4.92	5.00	4.77	5.00	1.91	1.75	4.84	5.00
	233	7115	0.92	1.00	0.89	1.00	-2.17	-2.17	0.84	1.00
802.11ax HE40	187	6885	7.77	8.00	7.84	8.00	3.37	3.34	6.37	6.50
	211	7005	7.87	8.00	7.76	8.00	3.23	3.24	6.25	6.50
	227	7085	7.84	8.00	7.91	8.00	3.32	3.27	6.31	6.50
802.11ax HE80	199	6945	10.37	10.50	6.92	7.00	3.23	3.41	6.33	6.50
	215	7025	10.30	10.50	6.89	7.00	3.40	3.24	6.33	6.50
802.11ax HE160	207	6985	12.97	13.00	9.49	9.50	3.98	3.91	6.96	7.00

8.7. Measured Conducted Power Results for Bluetooth

This device has installed Bluetooth engineering testing software which can provide continuous transmitting RF signal. During Bluetooth SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

The Bluetooth call box has been used during SAR measurement and the DUT was set to DH5 mode at the maximum output power. Its duty factor was calculated as below and the measured SAR for Bluetooth would be scaled to the 100% transmission duty factor to determine compliance.

Bluetooth 2.0 / 3.0				
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit
BR / EDR 1Mbps (GFSK)	0	2402	9.15	10.50
	39	2441	9.81	10.50
	78	2480	9.99	10.50
BR / EDR 2Mbps (π/4 DQPSK)	0	2402	7.92	8.00
	39	2441	7.85	8.00
	78	2480	7.74	8.00
BR / EDR 3Mbps (8-DPSK)	0	2402	7.85	8.00
	39	2441	7.90	8.00
	78	2480	7.75	8.00

Bluetooth 4.0 / 5.0				
Mode	Channel	Frequency (MHz)	Average Power (dBm)	Tune-Up Limit
LE 1Mbps (GFSK)	0	2402	8.82	9.00
	19	2440	8.75	9.00
	39	2480	8.92	9.00
LE 2Mbps (π/4 DQPSK)	1	2404	8.79	9.00
	19	2440	8.92	9.00
	38	2478	8.92	9.00
LE Coded PHY (S=8)	0	2404	-0.18	0.00
	19	2440	-0.13	0.00
	39	2478	-0.17	0.00
LE Coded PHY (S=2)	0	2404	-0.19	0.00
	19	2440	-0.14	0.00
	39	2478	-0.23	0.00

The duty factor of Bluetooth signal has been calculated as following.

Mode	Antenna	Pulse Width (ms)	Total Period (ms)	Duty Cycle (%)	Crest Factor (1/Duty Cycle)
GFSK	ANT-1	2.89	3.76	76.86%	1.3

Note: Duty Factor = Pulse Width / Total Period

Time-domain Plot for Bluetooth Antenna-1 Transmission



9. Evaluation for Standalone Transmission Scenario

9.1. Test Notes

General Notes:

- [1] Per KDB 447498 D01, SAR results were scaled to the maximum allowed power to demonstrate compliance. When SAR is not measured at the maximum power level allowed for production units, the measured SAR will be scaled to the maximum tune-up tolerance limit to determine compliance.
- [2] The SAR has been measured with highest transmission duty factor supported by the test mode tools for WLAN and/or Bluetooth. When the transmission duty factor could not achieve 100%, the reported SAR will be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up power.
- [3] The reported SAR was calculated as below:
 - Tune-up Scaling Factor = Maximum Tune-up Limit Power (mW) / Measured Conducted Power (mW)
 - Duty Factor Scaling Factor = 100% / Transmission Duty Cycle (%)
 - WWAN Reported SAR = Measured SAR x Tune-up Scaling Factor
 - WLAN / Bluetooth Reported SAR = Measured SAR x Tune-up Scaling Factor x Duty Cycle Scaling Factor
- [4] Testing of other required channels within the operating mode of a frequency band is not required when the reported SAR for the mid-band or highest output power channel is:
 - 1g SAR ≤ 0.8 W/kg or 10g SAR ≤ 2.0 W/kg, when the transmission band is ≤ 100 MHz
 - 1g SAR ≤ 0.6 W/kg or 10g SAR ≤ 1.5 W/kg, when the transmission band is between 100 MHz and 200 MHz
 - 1g SAR ≤ 0.4 W/kg or 10g SAR ≤ 1.0 W/kg, when the transmission band is ≥ 200 MHz
- [5] Per KDB 865664 D01, variability SAR tests were performed when the measured SAR results for a frequency band were ≥ 0.8 W/kg.

WCDMA Notes:

- [1] Per KDB Publication 941225 D01, WCDMA mode was tested under RMC 12.2 kbps with TPC bits configured to all "1's". AMR and HSPA SAR was not required per the 3G Test Reduction Procedure.
- [2] The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is ≤ 0.25 dB higher than RMC 12.2 kbps or when the highest reported SAR of the RMC 12.2 kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC 12.2 kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement was not required for HSDPA / HSUPA.
- [3] Per KDB Publication 447498 D01, if the reported SAR measured at the highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g SAR, testing for other channels is not required for such test configuration.

LTE Notes:

- [1] Per KDB Publication 941225 D05, for QPSK with 1 RB and 50% RB allocation, LTE test configuration start with the largest channel bandwidth and measure SAR using the RB offset and required test channel combination with the highest maximum output power.
- [2] When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.
- [3] For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% RB and 1RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
- [4] The SAR testing for 16QAM is not required due to the output power of 16QAM for each RB allocation configuration is not > 0.5 dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg.
- [5] The SAR testing for smaller bandwidth is not required due to the output power of smaller bandwidth for each RB allocation configuration is not > 0.5 dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg.
- [6] MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS 36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
- [7] A-MPR was disabled for all SAR tests by setting NS=01 and MCC=001 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
- [8] Per KDB Publication 447498 D01, when the reported 1g SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg for LTE B41 / B48, testing at the other channels was required for such test configurations.
- [9] TDD-LTE was tested per the guidance provided in KDB Publication 941225 D05. Testing was performed using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP TS 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.
- [10] SAR for downlink only LTE CA operations was not needed since the maximum average output power in LTE CA mode was not > 0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.
- [11] This device supports Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operations is 43.3 % using UL-DL configuration 1. Per FCC Guidance, all SAR tests were performed using Power Class 3. SAR with power class 2 at the available duty factor was additionally performed for the power class 3 configuration with the highest SAR configuration for each exposure conditions.
- [12] This device supports LTE Band 41 UL CA active with Power Class 2. Highest SAR test configuration for each exposure condition in Power Class 3 with ULCA active was repeated with Power Class 2 with ULCA active.
- [13] The additional SAR measurement for LTE UL CA whit other DL CA combinations active were not required since the maximum output power for this configuration was not > 0.25 dB higher than the maximum output power for UL CA active.

- [14] For LTE B4 / B5 / B12 / B17 / B26 / B38 / B71 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
- [15] LTE band 2 / 4 / 5 / 17 / 38 SAR test was covered by band 25 / 66 / 26 / 12 / 41; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion, and the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

NR Notes:

- [1] SAR measurement is not required for the $\pi/2$ BPSK, 16QAM, 64QAM and 256QAM when the highest maximum output power is ≤ 0.5 dB higher than the QPSK or when the reported SAR for the QPSK configuration is ≤ 1.45 W/kg.
- [2] NR implementation supports SA and NSA mode. In EN-DC mode, NR operates with the LTE Bands acting as anchor bands. Per FCC guidance, SAR tests for NR bands and LTE anchors bands were performed separately due to limitations in SAR probe calibration factors.
- [3] Due to test setup limitations, SAR testing for NR TDD was performed using test mode software to establish the connection.
- [4] Simultaneous transmission analysis for EN-DC operations is addressed in the Part 2 Test Report.
- [5] This device additionally supports some EN-DC conditions where additional LTE carriers are added on the downlink only.
- [6] Per FCC Guidance, NR modulations and RB Sizes / Offsets were selected for testing such that configurations with the highest output power were evaluated for SAR tests.
- [7] Per KDB Publication 447498 D01, when the reported NR Band n41 / n48 SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg for 1g evaluations and > 1.5 W/kg for 10g evaluation, testing at the other channels was required for such test configurations.
- [8] SRS was tested with CW signal per Qualcomm guidance in 80-w2112-4.
- [9] For final implementation, NR Band n41, n48 and n77 slot configuration is synchronized using maximum duty cycle of 100%. SAR testing was performed using Factory Test Mode software with a 100 % duty cycle applied to match final duty cycle.
- [10] For NR n5 / n12 / n41 / n71 / n77, the maximum channel bandwidth does not support three non-overlapping channels in the frequency band, the middle channel of the group of overlapping channels were selected for testing.
- [11] Due to test setup limitation, SAR testing for NR TDD Power Class 3 and Power Class 2 was performed using Factory Test Mode software to establish the connection and perform SAR with 100% and 50% transmission respectively.

WLAN Notes:

- [1] Per KDB Publication 248227 D01, for held-to-ear, hotspot, and phablet (mini-tablet) operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported 1g SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
- [2] For 2.4 GHz Wi-Fi single transmission chain operations, the highest measured maximum output power channel of 802.11b for DSSS was selected for SAR measurement. SAR for OFDM modes (802.11g/n/ax) was not required due to the highest reported SAR for DSSS adjusted by the ratio of OFDM to DSSS specified maximum output power is ≤ 1.2 W/kg.
- [3] For 5 GHz Wi-Fi operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported 1g SAR for initial test configuration adjusted by the ratio of subsequent test configuration to initial test configuration specified maximum output power is 1.2 W/kg.
- [4] SAR testing for U-NII-1 is not required due to the highest reported SAR for U-NII-2A is ≤ 1.2 W/kg.
- [5] When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg for 1g evaluations or all test channels were measured.
- [6] SAR for MIMO mode was evaluated by following the simultaneous SAR provisions from KDB Publication 447498 D01 by either evaluating the sum of the 1g SAR values of each antenna transmitting independently or making a SAR measurement with both antennas transmitting simultaneously.
- [7] For scaling factor determination of the reported SAR of MIMO mode, if the hot spots are separated the scaling factors are individually determined from each transmit chain. If the hot spots are not spatially separated, the scaling factor is determined from the worst number of each transmit chain.
- [8] The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100 % transmission duty factor to determine compliance.

Wi-Fi 6E PD Notes:

- [1] The Wi-Fi 6E PD was performed according 2020 TCB workshop RF Exposure 5G RFX Policies Interim Procedures.
- [2] First, evaluate SAR using 6-7 GHz parameters per IEC/IEEE 62209-1528:2020 and using highest SAR test configurations evaluate incident PD using the mmW near-field probe and total-field / power-density reconstruction method (2 mm closest meas. plane).
- [3] Per Interim Procedures, the power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty > 30 %. Total expanded uncertainty of 1.52 dB (41.9%) was used to determine the psPD measurement scaling factor.
- [4] The manufacturer has confirmed that the devices tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
- [5] The Wi-Fi 6E RF Exposure results are used for simultaneous transmission analysis with the other transmitters and total exposure ratio, the analysis can be found in this report and PD report.
- [6] The absorbed power density (APD) using a 4 cm² averaging area is reported based on SAR measurements.

- [7] Power density was calculated by repeated E-field measurements on two measurement planes separated by $\lambda/4$.
- [8] The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools.
- [9] The measurement procedure consists of measuring the PD_{inc} at two different distances: 2 mm (compliance distance) and $\lambda/5$. The grid extents should be large enough to fully capture the transmitted energy. The grid step should be fine enough to demonstrate that the integrated Power Density iPD_n fulfill the criterion described below. Since iPD ratio between the two distances is ≥ -1 dB, the grid step (0.0625) was sufficient for determining compliance at $d = 2$ mm.

$$10 \cdot \log_{10} \frac{iPD_n(2mm)}{iPD_n(\lambda/5)} \geq -1$$

- [10] iPD testing was performed on 5 selected channels spread across all of the 6E spectrum. Channels were determined based on the highest maximum output power and transmission mode combination. No channels that could transmit below 6 GHz were selected for testing so as to use the ESR Test Methodology only.
- [11] The test position for iPD was determined using the worst-case V/m on each required test position needed for consideration.

Bluetooth Notes:

- [1] Bluetooth SAR was measured with the device connected to a callbox with hopping disabled with DH5 operation and Tx Tests test mode type. Per October 2016 TCB Workshop guidance, the reported SAR was scaled to the 78% transmission duty factor for Bluetooth and 86% transmission duty factor for Bluetooth LE to determine compliance.
- [2] Head and Hotspot Bluetooth SAR were evaluated for BT BDR tethering applications.
- [3] The highest frame average power configurations for both Bluetooth and Bluetooth LE were evaluated for SAR. The worst-case configuration was used for the remaining test positions as the most conservative scenario.
- [4] SAR measurement is not required for the 8PSK, BLE, and HDR. When the secondary mode is ≤ 0.25 dB higher than the primary mode.

RFID Notes:

- [1] RFID mainly operate in hand-held extremity exposure conditions and RFID sensing distance with other device or reading tag is about 20 cm, therefore standalone 10g extremity SAR testing for RFID was performed by test software with 100 % duty cycle at 0 mm separation distance.
- [2] RFID SAR is measured for all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge.
- [3] RFID 13.56 MHz antenna port is not available on the device to support conducted power measurement. Therefore, the measured results are referred to be as reported SAR.
- [4] RFID SAR testing tissue-simulating liquid parameter was referred to IEC/IEEE 62209-1528:2020.

9.2. Measured and Reported SAR Results for Body

Index	Band	Modulation	Test Position	Spacing (mm)	Channel	Antenna	External Battery Pack	Power Drift	Meas. Conducted Power (dBm)	Tune-up (dBm)	Tune-up Scaling Factor	SAR-1g (W/kg)	Reported SAR-1g (W/kg)
01	WCDMA II	RMC12.2K	Bottom Surface	0	9262	Ant Main	w/o	-0.06	18.59	18.9	1.074	0.44	0.47
	WCDMA II	RMC12.2K	Left Side	0	9262	Ant Main	w/o	0.00	18.59	18.9	1.074	0.001	0.00
	WCDMA II	RMC12.2K	Right Side	0	9262	Ant Main	w/o	0.13	18.59	18.9	1.074	0.181	0.19
	WCDMA II	RMC12.2K	Top Side	0	9262	Ant Main	w/o	0.01	18.59	18.9	1.074	0.757	0.81
	WCDMA II	RMC12.2K	Bottom Side	0	9262	Ant Main	w/o	0.00	18.59	18.9	1.074	0.001	0.00
	WCDMA II	RMC12.2K	Top Side	0	9400	Ant Main	w/o	0.01	18.48	18.9	1.102	0.977	1.08
	WCDMA II	RMC12.2K	Top Side	0	9538	Ant Main	w/o	-0.02	18.22	18.9	1.169	0.906	1.06
	WCDMA II	RMC12.2K	Top Side	0	9400	Ant Main	w/	0.15	18.48	18.9	1.102	0.954	1.05
	WCDMA II	RMC12.2K	Top Side	0	9400	Ant Main	w/o	0.05	18.48	18.9	1.102	0.955	1.05
	WCDMA IV	RMC12.2K	Bottom Surface	0	1312	Ant Main	w/o	-0.03	18.19	18.4	1.050	0.31	0.33
02	WCDMA IV	RMC12.2K	Left Side	0	1312	Ant Main	w/o	0.07	18.19	18.4	1.050	0.053	0.06
	WCDMA IV	RMC12.2K	Right Side	0	1312	Ant Main	w/o	-0.08	18.19	18.4	1.050	0.224	0.24
	WCDMA IV	RMC12.2K	Top Side	0	1312	Ant Main	w/o	0.01	18.19	18.4	1.050	0.912	0.96
	WCDMA IV	RMC12.2K	Bottom Side	0	1312	Ant Main	w/o	0.10	18.19	18.4	1.050	0.02	0.02
	WCDMA IV	RMC12.2K	Top Side	0	1413	Ant Main	w/o	-0.09	18.18	18.4	1.052	0.813	0.86
	WCDMA IV	RMC12.2K	Top Side	0	1513	Ant Main	w/o	0.12	18.16	18.4	1.057	0.749	0.79
	WCDMA IV	RMC12.2K	Top Side	0	1312	Ant Main	w/	-0.10	18.19	18.4	1.050	0.882	0.93
	WCDMA IV	RMC12.2K	Top Side	0	1312	Ant Main	w/o	0.07	18.19	18.4	1.050	0.881	0.92
	WCDMA V	RMC12.2K	Bottom Surface	0	4132	Ant Main	w/o	0.05	21.43	21.5	1.016	0.322	0.33
	WCDMA V	RMC12.2K	Left Side	0	4132	Ant Main	w/o	0.14	21.43	21.5	1.016	0.085	0.09
03	WCDMA V	RMC12.2K	Right Side	0	4132	Ant Main	w/o	-0.11	21.43	21.5	1.016	0.194	0.20
	WCDMA V	RMC12.2K	Top Side	0	4132	Ant Main	w/o	0.15	21.43	21.5	1.016	0.941	0.96
	WCDMA V	RMC12.2K	Bottom Side	0	4132	Ant Main	w/o	0.00	21.43	21.5	1.016	0.001	0.00
	WCDMA V	RMC12.2K	Top Side	0	4182	Ant Main	w/o	-0.01	21.25	21.5	1.059	0.953	1.01
	WCDMA V	RMC12.2K	Top Side	0	4233	Ant Main	w/o	0.02	21.41	21.5	1.021	1.02	1.04
	WCDMA V	RMC12.2K	Top Side	0	4233	Ant Main	w/	0.04	21.41	21.5	1.021	0.857	0.87
	WCDMA V	RMC12.2K	Top Side	0	4233	Ant Main	w/o	-0.13	21.41	21.5	1.021	0.985	1.01

Index	Band	Modulation	Test Position	Spacing (mm)	Channel	RB Size	RB Offset	Antenna	External Battery Pack	Power Drift	Meas. Conducted Power (dBm)	Tune-up (dBm)	Tune-up Scaling Factor	SAR-1g (W/kg)	Reported SAR-1g (W/kg)
	LTE B7	QPSK20M	Bottom Surface	0	21350	1	0	Ant Main	w/o	0.10	13.99	14.0	1.002	0.18	0.18
	LTE B7	QPSK20M	Left Side	0	21350	1	0	Ant Main	w/o	0.00	13.99	14.0	1.002	0.001	0.00
	LTE B7	QPSK20M	Right Side	0	21350	1	0	Ant Main	w/o	-0.03	13.99	14.0	1.002	0.064	0.06
	LTE B7	QPSK20M	Top Side	0	21350	1	0	Ant Main	w/o	-0.06	13.99	14.0	1.002	0.815	0.82
	LTE B7	QPSK20M	Bottom Side	0	21350	1	0	Ant Main	w/o	0.00	13.99	14.0	1.002	0.001	0.00
	LTE B7	QPSK20M	Bottom Surface	0	21350	50	0	Ant Main	w/o	-0.09	12.97	13.0	1.007	0.14	0.14
	LTE B7	QPSK20M	Left Side	0	21350	50	0	Ant Main	w/o	0.00	12.97	13.0	1.007	0.001	0.00
	LTE B7	QPSK20M	Right Side	0	21350	50	0	Ant Main	w/o	-0.11	12.97	13.0	1.007	0.052	0.05
	LTE B7	QPSK20M	Top Side	0	21350	50	0	Ant Main	w/o	-0.18	12.97	13.0	1.007	0.653	0.66
	LTE B7	QPSK20M	Bottom Side	0	21350	50	0	Ant Main	w/o	0.00	12.97	13.0	1.007	0.001	0.00
04	LTE B7	QPSK20M	Top Side	0	21350	100	0	Ant Main	w/o	0.01	12.86	13.0	1.033	0.637	0.66
	LTE B7	QPSK20M	Top Side	0	20850	1	0	Ant Main	w/o	-0.01	13.98	14.0	1.005	1.11	1.12
	LTE B7	QPSK20M	Top Side	0	21100	1	0	Ant Main	w/o	0.05	13.97	14.0	1.007	0.925	0.93
	LTE B7	QPSK20M	Top Side	0	20850	1	0	Ant Main	w/	0.02	13.98	14.0	1.005	1.10	1.11
	CA_7C	QPSK20M	Top Side	0	PCC:20850 SCC:21048	PCC:1 SCC:1	PCC:99 SCC:0	Ant Main	w/o	0.09	13.52	14.0	1.117	0.981	1.10
	LTE B7	QPSK20M	Top Side	0	20850	1	0	Ant Main	w/o	0.12	13.98	14.0	1.005	1.07	1.07
	LTE B12	QPSK10M	Bottom Surface	0	23060	1	0	Ant Main	w/o	-0.06	22.19	22.2	1.002	0.478	0.48
	LTE B12	QPSK10M	Left Side	0	23060	1	0	Ant Main	w/o	0.01	22.19	22.2	1.002	0.063	0.06
	LTE B12	QPSK10M	Right Side	0	23060	1	0	Ant Main	w/o	0.13	22.19	22.2	1.002	0.243	0.24
	LTE B12	QPSK10M	Top Side	0	23060	1	0	Ant Main	w/o	-0.01	22.19	22.2	1.002	1.05	1.05
	LTE B12	QPSK10M	Bottom Side	0	23060	1	0	Ant Main	w/o	0.00	22.19	22.2	1.002	0.001	0.00
	LTE B12	QPSK10M	Bottom Surface	0	23060	25	0	Ant Main	w/o	-0.07	21.16	21.2	1.009	0.379	0.38
	LTE B12	QPSK10M	Left Side	0	23060	25	0	Ant Main	w/o	0.13	21.16	21.2	1.009	0.06	0.06
	LTE B12	QPSK10M	Right Side	0	23060	25	0	Ant Main	w/o	0.19	21.16	21.2	1.009	0.191	0.19
	LTE B12	QPSK10M	Top Side	0	23060	25	0	Ant Main	w/o	-0.13	21.16	21.2	1.009	0.86	0.87
	LTE B12	QPSK10M	Bottom Side	0	23060	25	0	Ant Main	w/o	0.00	21.16	21.2	1.009	0.001	0.00
	LTE B12	QPSK10M	Top Side	0	23060	50	0	Ant Main	w/o	0.05	21.05	21.2	1.035	0.836	0.87
	LTE B12	QPSK10M	Top Side	0	23095	1	0	Ant Main	w/o	-0.18	22.15	22.2	1.012	0.971	0.98
	LTE B12	QPSK10M	Top Side	0	23130	1	0	Ant Main	w/o	0.11	22.10	22.2	1.023	0.978	1.00
	LTE B12	QPSK10M	Top Side	0	23095	25	0	Ant Main	w/o	-0.18	21.13	21.2	1.016	0.832	0.85
	LTE B12	QPSK10M	Top Side	0	23130	25	0	Ant Main	w/o	0.11	21.13	21.2	1.016	0.811	0.82
	LTE B12	QPSK10M	Top Side	0	23060	1	0	Ant Main	w/	0.05	22.19	22.2	1.002	1.01	1.01
	LTE B12	QPSK10M	Top Side	0	23060	1	0	Ant Main	w/o	-0.15	22.19	22.2	1.002	1.02	1.02
	LTE B13	QPSK10M	Bottom Surface	0	23230	1	0	Ant Main	w/o	0.04	21.38	21.4	1.005	0.354	0.36
	LTE B13	QPSK10M	Left Side	0	23230	1	0	Ant Main	w/o	0.08	21.38	21.4	1.005	0.069	0.07
	LTE B13	QPSK10M	Right Side	0	23230	1	0	Ant Main	w/o	0.15	21.38	21.4	1.005	0.164	0.16
06	LTE B13	QPSK10M	Top Side	0	23230	1	0	Ant Main	w/o	0.01	21.38	21.4	1.005	0.994	1.00
	LTE B13	QPSK10M	Bottom Side	0	23230	1	0	Ant Main	w/o	0.00	21.38	21.4	1.005	0.001	0.00
	LTE B13	QPSK10M	Bottom Surface	0	23230	25	0	Ant Main	w/o	0.16	20.38	20.4	1.005	0.284	0.29
	LTE B13	QPSK10M	Left Side	0	23230	25	0	Ant Main	w/o	0.19	20.38	20.4	1.005	0.055	0.06
	LTE B13	QPSK10M	Right Side	0	23230	25	0	Ant Main	w/o	0.09	20.38	20.4	1.005	0.131	0.13
	LTE B13	QPSK10M	Top Side	0	23230	25	0	Ant Main	w/o	0.13	20.38	20.4	1.005	0.772	0.78
	LTE B13	QPSK10M	Bottom Side	0	23230	25	0	Ant Main	w/o	0.00	20.38	20.4	1.005	0.001	0.00
	LTE B13	QPSK10M	Top Side	0	23230	50	0	Ant Main	w/o	-0.12	20.26	20.4	1.033	0.758	0.78
	LTE B13	QPSK10M	Top Side	0	23230	1	0	Ant Main	w/	0.18	21.38	21.4	1.005	0.98	0.98
	LTE B13	QPSK10M	Top Side	0	23230	1	0	Ant Main	w/o	0.06	21.38	21.4	1.005	0.971	0.98
	LTE B14	QPSK10M	Bottom Surface	0	23330	1	0	Ant Main	w/o	0.17	21.69	21.7	1.002	0.305	0.31
	LTE B14	QPSK10M	Left Side	0	23330	1	0	Ant Main	w/o	0.11	21.69	21.7	1.002	0.082	0.08
	LTE B14	QPSK10M	Right Side	0	23330	1	0	Ant Main	w/o	0.14	21.69	21.7	1.002	0.153	0.15
	LTE B14	QPSK10M	Top Side	0	23330	1	0	Ant Main	w/o	0.02	21.69	21.7	1.002	0.932	0.93
07	LTE B14	QPSK10M	Bottom Side	0	23330	1	0	Ant Main	w/o	0.00	21.69	21.7	1.002	0.001	0.00
	LTE B14	QPSK10M	Bottom Surface	0	23330	25	0	Ant Main	w/o	0.18	20.69	20.7	1.002	0.243	0.24
	LTE B14	QPSK10M	Left Side	0	23330	25	0	Ant Main	w/o	0.14	20.69	20.7	1.002	0.061	0.06
	LTE B14	QPSK10M	Right Side	0	23330	25	0	Ant Main	w/o	-0.09	20.69	20.7	1.002	0.121	0.12
	LTE B14	QPSK10M	Top Side	0	23330	25	0	Ant Main	w/o	-0.03	20.69	20.7	1.002	0.71	0.71
	LTE B14	QPSK10M	Bottom Side	0	23330	25	0	Ant Main	w/o	0.00	20.69	20.7	1.002	0.001	0.00
	LTE B14	QPSK10M	Top Side	0	23330	50	0	Ant Main	w/o	0.17	20.58	20.7	1.028	0.703	0.72
	LTE B14	QPSK10M	Top Side	0	23330	1	0	Ant Main	w/	-0.12	21.69	21.7	1.002	0.879	0.88
	LTE B14	QPSK10M	Top Side	0	23330	1	0	Ant Main	w/o	0.04	21.69	21.7	1.002	0.883	0.89
	LTE B14	QPSK10M	Top Side	0	23330	1	0	Ant Main	w/o	0.0					

Index	Band	Modulation	Test Position	Spacing (mm)	Channel	RB Size	RB Offset	Antenna	External Battery Pack	Power Drift	Meas. Conducted Power (dBm)	Tune-up (dBm)	Tune-up Scaling Factor	SAR-1g (W/kg)	Reported SAR-1g (W/kg)
	LTE B25	QPSK20M	Bottom Surface	0	26140	1	0	Ant Main	w/o	-0.09	19.29	19.3	1.002	0.480	0.48
	LTE B25	QPSK20M	Left Side	0	26140	1	0	Ant Main	w/o	0.00	19.29	19.3	1.002	0.001	0.00
	LTE B25	QPSK20M	Right Side	0	26140	1	0	Ant Main	w/o	-0.06	19.29	19.3	1.002	0.174	0.17
	LTE B25	QPSK20M	Top Side	0	26140	1	0	Ant Main	w/o	0.03	19.29	19.3	1.002	0.819	0.82
	LTE B25	QPSK20M	Bottom Side	0	26140	1	0	Ant Main	w/o	0.00	19.29	19.3	1.002	0.001	0.00
	LTE B25	QPSK20M	Bottom Surface	0	26140	50	0	Ant Main	w/o	-0.02	18.29	18.3	1.002	0.394	0.39
	LTE B25	QPSK20M	Left Side	0	26140	50	0	Ant Main	w/o	0.00	18.29	18.3	1.002	0.001	0.00
	LTE B25	QPSK20M	Right Side	0	26140	50	0	Ant Main	w/o	-0.16	18.29	18.3	1.002	0.146	0.15
	LTE B25	QPSK20M	Top Side	0	26140	50	0	Ant Main	w/o	0.10	18.29	18.3	1.002	0.734	0.74
	LTE B25	QPSK20M	Bottom Side	0	26140	50	0	Ant Main	w/o	0.00	18.29	18.3	1.002	0.001	0.00
	LTE B25	QPSK20M	Top Side	0	26140	100	0	Ant Main	w/o	0.05	18.20	18.3	1.023	0.755	0.77
	LTE B25	QPSK20M	Top Side	0	26365	1	0	Ant Main	w/o	-0.17	19.07	19.3	1.054	1.05	1.11
08	LTE B25	QPSK20M	Top Side	0	26590	1	0	Ant Main	w/o	0.03	19.12	19.3	1.042	1.07	1.12
	LTE B25	QPSK20M	Top Side	0	26590	1	0	Ant Main	w/	-0.14	19.12	19.3	1.042	1	1.04
	LTE B25	QPSK20M	Top Side	0	26590	1	0	Ant Main	w/o	0.13	19.12	19.3	1.042	0.991	1.03
	LTE B26	QPSK15M	Bottom Surface	0	26765	1	0	Ant Main	w/o	-0.11	21.59	21.6	1.002	0.320	0.32
	LTE B26	QPSK15M	Left Side	0	26765	1	0	Ant Main	w/o	0.09	21.59	21.6	1.002	0.066	0.07
	LTE B26	QPSK15M	Right Side	0	26765	1	0	Ant Main	w/o	0.00	21.59	21.6	1.002	0.157	0.16
	LTE B26	QPSK15M	Top Side	0	26765	1	0	Ant Main	w/o	-0.10	21.59	21.6	1.002	0.915	0.92
	LTE B26	QPSK15M	Bottom Side	0	26765	1	0	Ant Main	w/o	0.00	21.59	21.6	1.002	0.001	0.00
	LTE B26	QPSK15M	Bottom Surface	0	26765	36	0	Ant Main	w/o	0.04	20.60	20.6	1.000	0.262	0.26
	LTE B26	QPSK15M	Left Side	0	26765	36	0	Ant Main	w/o	0.17	20.60	20.6	1.000	0.053	0.05
	LTE B26	QPSK15M	Right Side	0	26765	36	0	Ant Main	w/o	0.19	20.60	20.6	1.000	0.132	0.13
	LTE B26	QPSK15M	Top Side	0	26765	36	0	Ant Main	w/o	0.18	20.60	20.6	1.000	0.784	0.78
	LTE B26	QPSK15M	Bottom Side	0	26765	36	0	Ant Main	w/o	0.00	20.60	20.6	1.000	0.001	0.00
	LTE B26	QPSK15M	Top Side	0	26765	75	0	Ant Main	w/o	0.11	20.49	20.6	1.026	0.763	0.78
09	LTE B26	QPSK15M	Top Side	0	26865	1	0	Ant Main	w/o	-0.01	21.52	21.6	1.019	0.929	0.95
	LTE B26	QPSK15M	Top Side	0	26965	1	0	Ant Main	w/o	0.02	21.41	21.6	1.045	0.901	0.94
	LTE B26	QPSK15M	Top Side	0	26865	1	0	Ant Main	w/	0.13	21.52	21.6	1.019	0.88	0.90
	LTE B26	QPSK15M	Top Side	0	26865	1	0	Ant Main	w/o	0.13	21.52	21.6	1.019	0.874	0.89

Index	Band	Modulation	Test Position	Spacing (mm)	Channel	RB Size	RB Offset	Antenna	External Battery Pack	Power Drift	Mess. Conducted Power (dBm)	Tune-up (dBm)	Tune-up Scaling Factor	Duty Cycle (%)	Duty Cycle Scaling Factor	SAR-1g (W/kg)	Reported SAR-1g (W/kg)
	LTE B41 (PC3)	QPSK20M	Bottom Surface	0	41490	1	0	Ant Main	w/o	-0.04	16.07	16.1	1.007	63.30	1.000	0.144	0.14
	LTE B41 (PC3)	QPSK20M	Left Side	0	41490	1	0	Ant Main	w/o	0.00	16.07	16.1	1.007	63.30	1.000	0.001	0.00
	LTE B41 (PC3)	QPSK20M	Right Side	0	41490	1	0	Ant Main	w/o	-0.02	16.07	16.1	1.007	63.30	1.000	0.055	0.06
	LTE B41 (PC3)	QPSK20M	Top Side	0	41490	1	0	Ant Main	w/o	-0.05	16.07	16.1	1.007	63.30	1.000	0.407	0.41
	LTE B41 (PC3)	QPSK20M	Bottom Side	0	41490	1	0	Ant Main	w/o	0.00	16.07	16.1	1.007	63.30	1.000	0.001	0.00
	LTE B41 (PC3)	QPSK20M	Bottom Surface	0	41490	50	0	Ant Main	w/o	-0.12	15.09	15.1	1.002	63.30	1.000	0.123	0.12
	LTE B41 (PC3)	QPSK20M	Left Side	0	41490	50	0	Ant Main	w/o	0.00	15.09	15.1	1.002	63.30	1.000	0.001	0.00
	LTE B41 (PC3)	QPSK20M	Right Side	0	41490	50	0	Ant Main	w/o	-0.08	15.09	15.1	1.002	63.30	1.000	0.045	0.05
	LTE B41 (PC3)	QPSK20M	Top Side	0	41490	50	0	Ant Main	w/o	0.14	15.09	15.1	1.002	63.30	1.000	0.33	0.33
	LTE B41 (PC3)	QPSK20M	Bottom Side	0	41490	50	0	Ant Main	w/o	0.00	15.09	15.1	1.002	63.30	1.000	0.001	0.00
	LTE B41 (PC3)	QPSK20M	Top Side	0	41490	100	0	Ant Main	w/o	-0.15	14.99	15.1	1.026	63.30	1.000	0.326	0.33
	LTE B41 (PC3)	QPSK20M	Top Side	0	39750	1	0	Ant Main	w/o	-0.09	16.02	16.1	1.019	63.30	1.000	0.946	0.96
	LTE B41 (PC3)	QPSK20M	Top Side	0	40185	1	0	Ant Main	w/o	-0.04	16.03	16.1	1.016	63.30	1.000	0.739	0.75
	LTE B41 (PC3)	QPSK20M	Top Side	0	40620	1	0	Ant Main	w/o	0.06	15.56	16.1	1.132	63.30	1.000	0.584	0.66
	LTE B41 (PC3)	QPSK20M	Top Side	0	41055	1	0	Ant Main	w/o	0.07	15.65	16.1	1.109	63.30	1.000	0.467	0.52
10	LTE B41 (PC2)	QPSK20M	Top Side	0	39750	1	0	Ant Main	w/o	0.01	17.99	18.0	1.002	43.30	1.000	1.08	1.08
	LTE B41 (PC2)	QPSK20M	Top Side	0	39750	1	0	Ant Main	w/	0.08	17.99	18.0	1.002	43.30	1.000	1.05	1.05
	CA_41C (PC2)	QPSK20M	Top Side	0	PCC:39750 SCC:39948	PCC:1 SCC:1	PCC:99 SCC:0	Ant Main	w/o	-0.11	17.62	18.0	1.091	43.30	1.000	0.964	1.05
	LTE B41 (PC2)	QPSK20M	Top Side	0	39750	1	0	Ant Main	w/o	0.04	17.99	18.0	1.002	43.30	1.000	1.03	1.03
	LTE B42	QPSK20M	Bottom Surface	0	43490	1	0	Ant MIMO 2	w/o	-0.07	15.86	15.9	1.009	63.30	1.000	0.041	0.04
	LTE B42	QPSK20M	Left Side	0	43490	1	0	Ant MIMO 2	w/o	-0.10	15.86	15.9	1.009	63.30	1.000	0.055	0.06
	LTE B42	QPSK20M	Right Side	0	43490	1	0	Ant MIMO 2	w/o	0.00	15.86	15.9	1.009	63.30	1.000	0.001	0.00
	LTE B42	QPSK20M	Top Side	0	43490	1	0	Ant MIMO 2	w/o	-0.11	15.86	15.9	1.009	63.30	1.000	0.887	0.89
	LTE B42	QPSK20M	Bottom Side	0	43490	1	0	Ant MIMO 2	w/o	0.00	15.86	15.9	1.009	63.30	1.000	0.001	0.00
	LTE B42	QPSK20M	Bottom Surface	0	43490	50	0	Ant MIMO 2	w/o	0.06	14.76	14.9	1.033	63.30	1.000	0.033	0.03
	LTE B42	QPSK20M	Left Side	0	43490	50	0	Ant MIMO 2	w/o	0.02	14.76	14.9	1.033	63.30	1.000	0.044	0.05
	LTE B42	QPSK20M	Right Side	0	43490	50	0	Ant MIMO 2	w/o	0.00	14.76	14.9	1.033	63.30	1.000	0.001	0.00
	LTE B42	QPSK20M	Top Side	0	43490	50	0	Ant MIMO 2	w/o	-0.04	14.76	14.9	1.033	63.30	1.000	0.526	0.54
	LTE B42	QPSK20M	Bottom Side	0	43490	50	0	Ant MIMO 2	w/o	0.00	14.76	14.9	1.033	63.30	1.000	0.001	0.00
	LTE B42	QPSK20M	Top Side	0	43490	100	0	Ant MIMO 2	w/o	0.03	14.70	14.9	1.047	63.30	1.000	0.508	0.53
11	LTE B42	QPSK20M	Top Side	0	42190	1	0	Ant MIMO 2	w/o	0.02	15.85	15.9	1.012	63.30	1.000	0.967	0.98
	LTE B42	QPSK20M	Top Side	0	42623	1	0	Ant MIMO 2	w/o	-0.14	15.74	15.9	1.038	63.30	1.000	0.768	0.80
	LTE B42	QPSK20M	Top Side	0	43057	1	0	Ant MIMO 2	w/o	0.18	15.65	15.9	1.059	63.30	1.000	0.665	0.70
	LTE B42	QPSK20M	Top Side	0	43190	1	0	Ant MIMO 2	w/o	-0.07	15.60	15.9	1.072	63.30	1.000	0.792	0.85
	LTE B42	QPSK20M	Top Side	0	43340	1	0	Ant MIMO 2	w/o	-0.13	15.62	15.9	1.067	63.30	1.000	0.786	0.84
	LTE B42	QPSK20M	Top Side	0	42190	1	0	Ant MIMO 2	w/	-0.06	15.85	15.9	1.012	63.30	1.000	0.951	0.96
	CA_42C	QPSK20M	Top Side	0	PCC:42190 SCC:41589	PCC:1 SCC:1	PCC:99 SCC:0	Ant MIMO 2	w/o	0.05	15.58	15.9	1.076	63.30	1.000	0.85	0.91
	LTE B42	QPSK20M	Top Side	0	42190	1	0	Ant MIMO 2	w/o	0.11	15.85	15.9	1.012	63.30	1.000	0.948	0.96
	LTE B43	QPSK20M	Bottom Surface	0	44490	1	0	Ant MIMO 2	w/o	0.13	17.85	18.0	1.035	63.30	1.000	0.088	0.09
	LTE B43	QPSK20M	Left Side	0	44490	1	0	Ant MIMO 2	w/o	-0.04	17.85	18.0	1.035	63.30	1.000	0.073	0.08
	LTE B43	QPSK20M	Right Side	0	44490	1	0	Ant MIMO 2	w/o	0.00	17.85	18.0	1.035	63.30	1.000	0.001	0.00
12	LTE B43	QPSK20M	Top Side	0	44490	1	0	Ant MIMO 2	w/o	0.04	17.85	18.0	1.035	63.30	1.000	0.856	0.89
	LTE B43	QPSK20M	Bottom Side	0	44490	1	0	Ant MIMO 2	w/o	0.00	17.85	18.0	1.035	63.30	1.000	0.001	0.00
	LTE B43	QPSK20M	Bottom Surface	0	44490	50	0	Ant MIMO 2	w/o	-0.06	16.89	17.0	1.026	63.30	1.000	0.070	0.07
	LTE B43	QPSK20M	Left Side	0	44490	50	0	Ant MIMO 2	w/o	0.11	16.89	17.0	1.026	63.30	1.000	0.064	0.07
	LTE B43	QPSK20M	Right Side	0	44490	50	0	Ant MIMO 2	w/o	0.00	16.89	17.0	1.026	63.30	1.000	0.001	0.00
	LTE B43	QPSK20M	Top Side	0	44490	50	0	Ant MIMO 2	w/o	-0.12	16.89	17.0	1.026	63.30	1.000	0.70	0.72
	LTE B43	QPSK20M	Bottom Side	0	44490	50	0	Ant MIMO 2	w/o	0.00	16.89	17.0	1.026	63.30	1.000	0.001	0.00
	LTE B43	QPSK20M	Top Side	0	44490	100	0	Ant MIMO 2	w/o	0.12	16.75	17.0	1.059	63.30	1.000	0.68	0.72
	LTE B43	QPSK20M	Top Side	0	44190	1	0	Ant MIMO 2	w/o	0.18	17.80	18.0	1.047	63.30	1.000	0.837	0.88
	LTE B43	QPSK20M	Top Side	0	44340	1	0	Ant MIMO 2	w/o	0.02	17.78	18.0	1.052	63.30	1.000	0.81	0.85
	LTE B43	QPSK20M	Top Side	0	44490	1	0	Ant MIMO 2	w/	0.14	17.85	18.0	1.035	63.30	1.000	0.828	0.86
	CA_43C	QPSK20M	Top Side	0	PCC:44292 SCC:44490	PCC:1 SCC:1	PCC:99 SCC:0	Ant MIMO 2	w/o	-0.14	17.45	18.0	1.135	63.30	1.000	0.766	0.87
	LTE B43	QPSK20M	Top Side	0	44490	1	0	Ant MIMO 2	w/o	0.03	17.85	18.0	1.035	63.30	1.000	0.831	0.86
	LTE B43	QPSK20M	Bottom Surface	0	43990	1	0	Ant MIMO 2	w/o	0.07	17.91	18.0	1.021	63.30	1.000	0.11	0.11
	LTE B43	QPSK20M	Left Side	0	43990	1	0	Ant MIMO 2	w/o	0.02	17.91	18.0	1.021	63.30	1.000	0.091	0.09
	LTE B43	QPSK20M	Right Side	0	43990	1	0	Ant MIMO 2	w/o	0.00	17.91	18.0	1.021	63.30	1.000	0	0.00
12-1	LTE B43	QPSK20M	Top Side	0	43990	1	0	Ant MIMO 2	w/o	0.03	17.91	18.0	1.021	63.30	1.000	1.07	1.09
	LTE B43	QPSK20M	Bottom Side	0	43990	1	0	Ant MIMO 2	w/o	0.00	17.91	18.0	1.021	63.30	1.000	0	0.00
	LTE B43	QPSK20M	Bottom Surface	0	43990	50	0	Ant MIMO 2	w/o	0.12	16.91	17.0	1.021	63.30	1.000	0.087	0.09
	LTE B43	QPSK20M	Left Side	0	43990	50	0	Ant MIMO 2	w/o	0.09	16.91	17.0	1.021	63.30	1.000	0.079	0.08
	LTE B43	QPSK20M	Right Side	0	43990	50	0	Ant MIMO 2	w/o	0.00	16.91	17.0	1.021	63.30	1.000	0	0.00
	LTE B43	QPSK20M	Top Side	0	43990	50	0	Ant MIMO 2	w/o	-0.05	16.91	17.0	1.021	63.30	1.000	0.87	0.89
	LTE B43	QPSK20M	Bottom Side	0	43990	50	0	Ant MIMO 2	w/o	0.00	16.91	17.0	1.021	63.30	1.000	0	0.00
	LTE B43	QPSK20M	Top Side	0	43990	100	0	Ant MIMO 2	w/o	0.03	16.51	17.0	1.119	63.30	1.000	0.85	0.95
	LTE B43	QPSK20M	Top Side	0	43840	1	0	Ant MIMO 2	w/o	-0.11	17.86	18.0	1.033	63.30	1.000	1.03	1.06
	LTE B43	QPSK20M	Top Side	0	43690	1	0	Ant MIMO 2	w/o	0.06	17.89	18.0	1.026	63.30	1.000	1.00	1.02
	LTE B43	QPSK20M	Top Side	0	43990	1	0	Ant MIMO 2	w/	0.04	17.91	18.0	1.021	63.30	1.000	1.03	1.05
	CA_43C	QPSK20M	Top Side	0	PCC:43792 SCC:43990	PCC:1 SCC:1	PCC:99 SCC:0	Ant MIMO 2	w/o	0.07	17.45	18.0	1.135	63.30	1.000	0.948	1.08
	LTE B43	QPSK20M	Top Side	0	43990	1	0	Ant MIMO 2	w/o	-0.15	17.91	18.0	1.021	63.30	1.000	1.05	1.07
	LTE B48	QPSK20M	Bottom Surface	0	56207	1	0	Ant MIMO 2	w/o	0.07	16.83	17.0	1.040	63.30	1.000	0.064	0.07
	LTE B48	QPSK20M	Left Side	0	56207	1	0	Ant MIMO 2	w/o	-0.10	16.83	17.0	1.040	63.30	1.000	0.074	0.08
	LTE B48	QPSK20M	Right Side	0	56207	1	0	Ant MIMO 2	w/o	0.00	16.83	17.0	1.040	63.30	1.000	0.001	0.00
	LTE B48	QPSK20M	Top Side	0	56207	1	0	Ant MIMO 2	w/o	-0.05	16.83	17.0	1.040	63.30	1.000	0.73	0.76
	LTE B48	QPSK20M	Bottom Side	0	56207	1	0	Ant MIMO 2	w/o	0.00	16.83	17.0	1.040	63.30	1.000	0.001	0.00
	LTE B48	QPSK20M	Bottom Surface	0	56207	50	0	Ant MIMO 2	w/o	-0.12	15						

Index	Band	Modulation	Test Position	Spacing (mm)	Channel	RB Size	RB Offset	Antenna	External Battery Pack	Power Drift	Meas. Conducted Power (dBm)	Tune-up (dBm)	Tune-up Scaling Factor	SAR-1g (W/kg)	Reported SAR-1g (W/kg)
	LTE B66	QPSK20M	Bottom Surface	0	132572	1	0	Ant Main	w/o	0.16	18.69	18.7	1.002	0.343	0.34
	LTE B66	QPSK20M	Left Side	0	132572	1	0	Ant Main	w/o	0.14	18.69	18.7	1.002	0.017	0.02
	LTE B66	QPSK20M	Right Side	0	132572	1	0	Ant Main	w/o	-0.08	18.69	18.7	1.002	0.182	0.18
	LTE B66	QPSK20M	Top Side	0	132572	1	0	Ant Main	w/o	0.08	18.69	18.7	1.002	0.835	0.84
	LTE B66	QPSK20M	Bottom Side	0	132572	1	0	Ant Main	w/o	0.00	18.69	18.7	1.002	0.001	0.00
	LTE B66	QPSK20M	Bottom Surface	0	132572	50	0	Ant Main	w/o	-0.06	17.69	17.7	1.002	0.29	0.29
	LTE B66	QPSK20M	Left Side	0	132572	50	0	Ant Main	w/o	0.05	17.69	17.7	1.002	0.013	0.01
	LTE B66	QPSK20M	Right Side	0	132572	50	0	Ant Main	w/o	0.17	17.69	17.7	1.002	0.142	0.14
	LTE B66	QPSK20M	Top Side	0	132572	50	0	Ant Main	w/o	0.13	17.69	17.7	1.002	0.70	0.70
	LTE B66	QPSK20M	Bottom Side	0	132572	50	0	Ant Main	w/o	0.00	17.69	17.7	1.002	0.001	0.00
14	LTE B66	QPSK20M	Top Side	0	132572	100	0	Ant Main	w/o	-0.13	17.67	17.7	1.007	0.705	0.71
	LTE B66	QPSK20M	Top Side	0	132072	1	0	Ant Main	w/o	0.04	18.53	18.7	1.040	0.987	1.03
	LTE B66	QPSK20M	Top Side	0	132322	1	0	Ant Main	w/o	-0.05	18.56	18.7	1.033	0.82	0.85
	LTE B66	QPSK20M	Top Side	0	132072	1	0	Ant Main	w/	-0.18	18.53	18.7	1.040	0.924	0.96
	CA_66C	QPSK20M	Top Side	0	PCC:132072 SCC:132270	PCC:1 SCC:1	PCC:99 SCC:0	Ant Main	w/o	0.02	18.29	18.7	1.099	0.858	0.94
	LTE B66	QPSK20M	Top Side	0	132072	1	0	Ant Main	w/o	0.05	18.53	18.7	1.040	0.944	0.98
	LTE B71	QPSK20M	Bottom Surface	0	133222	1	0	Ant Main	w/o	0.01	23.19	23.2	1.002	0.373	0.37
	LTE B71	QPSK20M	Left Side	0	133222	1	0	Ant Main	w/o	-0.17	23.19	23.2	1.002	0.071	0.07
	LTE B71	QPSK20M	Right Side	0	133222	1	0	Ant Main	w/o	-0.10	23.19	23.2	1.002	0.151	0.15
	LTE B71	QPSK20M	Top Side	0	133222	1	0	Ant Main	w/o	0.03	23.19	23.2	1.002	0.705	0.71
	LTE B71	QPSK20M	Bottom Side	0	133222	1	0	Ant Main	w/o	0.00	23.19	23.2	1.002	0.001	0.00
	LTE B71	QPSK20M	Bottom Surface	0	133222	50	0	Ant Main	w/o	0.04	22.17	22.2	1.007	0.316	0.32
	LTE B71	QPSK20M	Left Side	0	133222	50	0	Ant Main	w/o	0.18	22.17	22.2	1.007	0.053	0.05
	LTE B71	QPSK20M	Right Side	0	133222	50	0	Ant Main	w/o	-0.02	22.17	22.2	1.007	0.127	0.13
	LTE B71	QPSK20M	Top Side	0	133222	50	0	Ant Main	w/o	-0.03	22.17	22.2	1.007	0.566	0.57
	LTE B71	QPSK20M	Bottom Side	0	133222	50	0	Ant Main	w/o	0.00	22.17	22.2	1.007	0.001	0.00
	LTE B71	QPSK20M	Top Side	0	133222	100	0	Ant Main	w/o	0.14	22.16	22.2	1.009	0.591	0.60
15	LTE B71	QPSK20M	Top Side	0	133322	1	0	Ant Main	w/o	-0.02	23.18	23.2	1.005	1.13	1.14
	LTE B71	QPSK20M	Top Side	0	133372	1	0	Ant Main	w/o	0.15	23.17	23.2	1.007	0.767	0.77
	LTE B71	QPSK20M	Top Side	0	133322	1	0	Ant Main	w/	-0.09	23.18	23.2	1.005	0.972	0.98
	LTE B71	QPSK20M	Top Side	0	133322	1	0	Ant Main	w/o	0.05	23.18	23.2	1.005	1.09	1.10
	5GNR n5	DFT-s QPSK20M	Bottom Surface	0	166800	1	1	Ant Main	w/o	0.14	21.77	21.8	1.007	0.361	0.36
	5GNR n5	DFT-s QPSK20M	Left Side	0	166800	1	1	Ant Main	w/o	0.15	21.77	21.8	1.007	0.065	0.07
	5GNR n5	DFT-s QPSK20M	Right Side	0	166800	1	1	Ant Main	w/o	-0.16	21.77	21.8	1.007	0.221	0.22
	5GNR n5	DFT-s QPSK20M	Top Side	0	166800	1	1	Ant Main	w/o	0.07	21.77	21.8	1.007	0.995	1.00
	5GNR n5	DFT-s QPSK20M	Bottom Side	0	166800	1	1	Ant Main	w/o	0.00	21.77	21.8	1.007	0.001	0.00
	5GNR n5	DFT-s QPSK20M	Bottom Surface	0	166800	50	28	Ant Main	w/o	-0.18	21.71	21.8	1.021	0.357	0.36
	5GNR n5	DFT-s QPSK20M	Left Side	0	166800	50	28	Ant Main	w/o	0.19	21.71	21.8	1.021	0.051	0.05
	5GNR n5	DFT-s QPSK20M	Right Side	0	166800	50	28	Ant Main	w/o	-0.10	21.71	21.8	1.021	0.191	0.19
16	5GNR n5	DFT-s QPSK20M	Top Side	0	166800	50	28	Ant Main	w/o	0.02	21.71	21.8	1.021	1.01	1.03
	5GNR n5	DFT-s QPSK20M	Bottom Side	0	166800	50	28	Ant Main	w/o	0.00	21.71	21.8	1.021	0.001	0.00
	5GNR n5	DFT-s QPSK20M	Top Side	0	166800	100	0	Ant Main	w/o	0.18	20.79	20.8	1.002	0.785	0.79
	5GNR n5	DFT-s QPSK20M	Top Side	0	167300	1	1	Ant Main	w/o	0.09	21.76	21.8	1.009	0.975	0.98
	5GNR n5	DFT-s QPSK20M	Top Side	0	167800	1	1	Ant Main	w/o	-0.13	21.71	21.8	1.021	0.954	0.97
	5GNR n5	DFT-s QPSK20M	Top Side	0	167300	50	28	Ant Main	w/o	0.09	21.69	21.8	1.026	0.974	1.00
	5GNR n5	DFT-s QPSK20M	Top Side	0	167800	50	28	Ant Main	w/o	-0.13	21.67	21.8	1.030	0.967	1.00
	5GNR n5	DFT-s QPSK20M	Top Side	0	166800	50	28	Ant Main	w/	0.13	21.71	21.8	1.021	0.946	0.97
	5GNR n5	DFT-s QPSK20M	Top Side	0	166800	50	28	Ant Main	w/o	0.07	21.71	21.8	1.021	0.976	1.00
	5GNR n7	DFT-s QPSK40M	Bottom Surface	0	507000	1	1	Ant Main	w/o	0.14	13.57	13.6	1.007	0.166	0.17
	5GNR n7	DFT-s QPSK40M	Left Side	0	507000	1	1	Ant Main	w/o	0.00	13.57	13.6	1.007	0.001	0.00
	5GNR n7	DFT-s QPSK40M	Right Side	0	507000	1	1	Ant Main	w/o	0.01	13.57	13.6	1.007	0.049	0.05
	5GNR n7	DFT-s QPSK40M	Top Side	0	507000	1	1	Ant Main	w/o	0.15	13.57	13.6	1.007	0.819	0.82
	5GNR n7	DFT-s QPSK40M	Bottom Side	0	507000	1	1	Ant Main	w/o	0.00	13.57	13.6	1.007	0.001	0.00
	5GNR n7	DFT-s QPSK40M	Bottom Surface	0	507000	108	54	Ant Main	w/o	0.01	13.54	13.6	1.014	0.161	0.16
	5GNR n7	DFT-s QPSK40M	Left Side	0	507000	108	54	Ant Main	w/o	0.00	13.54	13.6	1.014	0.001	0.00
	5GNR n7	DFT-s QPSK40M	Right Side	0	507000	108	54	Ant Main	w/o	-0.18	13.54	13.6	1.014	0.049	0.05
	5GNR n7	DFT-s QPSK40M	Top Side	0	507000	108	54	Ant Main	w/o	0.10	13.54	13.6	1.014	0.823	0.83
	5GNR n7	DFT-s QPSK40M	Bottom Side	0	507000	108	54	Ant Main	w/o	0.00	13.54	13.6	1.014	0.001	0.00
	5GNR n7	DFT-s QPSK40M	Top Side	0	507000	216	0	Ant Main	w/o	-0.06	12.51	12.6	1.021	0.644	0.66
	5GNR n7	DFT-s QPSK40M	Top Side	0	504000	1	1	Ant Main	w/o	-0.01	13.54	13.6	1.014	0.795	0.81
	5GNR n7	DFT-s QPSK40M	Top Side	0	510000	1	1	Ant Main	w/o	-0.01	13.31	13.6	1.069	0.788	0.84
	5GNR n7	DFT-s QPSK40M	Top Side	0	504000	108	54	Ant Main	w/o	-0.02	13.51	13.6	1.021	0.604	0.62
17	5GNR n7	DFT-s QPSK40M	Top Side	0	510000	108	54	Ant Main	w/o	-0.01	13.46	13.6	1.033	0.868	0.90
	5GNR n7	DFT-s QPSK40M	Top Side	0	510000	108	54	Ant Main	w/	0.16	13.46	13.6	1.033	0.842	0.87
	5GNR n7	DFT-s QPSK40M	Top Side	0	510000	108	54	Ant Main	w/o	0.09	13.46	13.6	1.033	0.842	0.87
	5GNR n12	DFT-s QPSK15M	Bottom Surface	0	141300	1	1	Ant Main	w/o	0.19	23.16	23.2	1.009	0.786	0.79
	5GNR n12	DFT-s QPSK15M	Left Side	0	141300	1	1	Ant Main	w/o	0.12	23.16	23.2	1.009	0.052	0.05
	5GNR n12	DFT-s QPSK15M	Right Side	0	141300	1	1	Ant Main	w/o	-0.17	23.16	23.2	1.009	0.238	0.24
	5GNR n12	DFT-s QPSK15M	Top Side	0	141300	1	1	Ant Main	w/o	-0.08	23.16	23.2	1.009	0.94	0.95
	5GNR n12	DFT-s QPSK15M	Bottom Side	0	141300	1	1	Ant Main	w/o	0.00	23.16	23.2	1.009	0.001	0.00
	5GNR n12	DFT-s QPSK15M	Bottom Surface	0	141300	36	22	Ant Main	w/o	-0.04	22.97	23.2	1.054	0.748	0.79
	5GNR n12	DFT-s QPSK15M	Left Side	0	141300	36	22	Ant Main	w/o	0.14	22.97	23.2	1.054	0.06	0.06
	5GNR n12	DFT-s QPSK15M	Right Side	0	141300	36	22	Ant Main	w/o	-0.01	22.97	23.2	1.054	0.216	0.23
	5GNR n12	DFT-s QPSK15M	Top Side	0	141300	36	22	Ant Main	w/o	-0.03	22.97	23.2	1.054	1.01	1.06
	5GNR n12	DFT-s QPSK15M	Bottom Side	0	141300	36	22	Ant Main	w/o	0.00	22.97	23.2	1.054	0.001	0.00
	5GNR n12	DFT-s QPSK15M	Top Side	0	141300	75	0	Ant Main	w/o	-0.03	22.08	22.2	1.028	0.822	0.85
	5GNR n12	DFT-s QPSK15M	Top Side	0	141500	1	1	Ant Main	w/o	-0.02	23.09	23.2	1.026	0.922	0.95
	5GNR n12	DFT-s QPSK15M	Top Side	0	141700	1	1	Ant Main	w/o	-0.01	23.13	23.2	1.016	0.895	0.91
18	5GNR n12	DFT-s QPSK15M	Top Side	0	141500	36	22	Ant Main	w/o	-0.02	22.92	23.2	1.067	0.956	1.02
	5GNR n12	DFT-s QPSK15M	Top Side	0	141700	36	22	Ant Main	w/o	-0.01	22.93	23.2	1.064	1.02	1.09
	5GNR n12	DFT-s QPSK15M	Top Side	0	141700	36	22	Ant Main	w/	0.05	22.93	23.2	1.064	0.98	1.04
	5GNR n12	DFT-s QPSK15M	Top Side	0	141700	36	22	Ant Main	w/o	0.04	22.93	23.2	1.064	0.988	1.05

Index	Band	Modulation	Test Position	Spacing (mm)	Channel	RB Size	RB Offset	Antenna	External Battery Pack	Power Drift	Meas. Conducted Power (dBm)	Tune-up (dBm)	Tune-up Scaling Factor	SAR-1g (W/kg)	Reported SAR-1g (W/kg)
	5G NR n13	DFT-s QPSK10M	Bottom Surface	0	156400	1	1	Ant Main	w/o	-0.17	22.14	22.4	1.062	0.731	0.78
	5G NR n13	DFT-s QPSK10M	Left Side	0	156400	1	1	Ant Main	w/o	0.08	22.14	22.4	1.062	0.077	0.08
	5G NR n13	DFT-s QPSK10M	Right Side	0	156400	1	1	Ant Main	w/o	0.14	22.14	22.4	1.062	0.198	0.21
	5G NR n13	DFT-s QPSK10M	Top Side	0	156400	1	1	Ant Main	w/o	-0.10	22.14	22.4	1.062	1.01	1.07
	5G NR n13	DFT-s QPSK10M	Bottom Side	0	156400	1	1	Ant Main	w/o	0.00	22.14	22.4	1.062	0.001	0.00
	5G NR n13	DFT-s QPSK10M	Bottom Surface	0	156400	25	14	Ant Main	w/o	-0.04	22.05	22.4	1.084	0.732	0.79
	5G NR n13	DFT-s QPSK10M	Left Side	0	156400	25	14	Ant Main	w/o	0.02	22.05	22.4	1.084	0.077	0.08
	5G NR n13	DFT-s QPSK10M	Right Side	0	156400	25	14	Ant Main	w/o	0.05	22.05	22.4	1.084	0.17	0.18
	5G NR n13	DFT-s QPSK10M	Top Side	0	156400	25	14	Ant Main	w/o	0.01	22.05	22.4	1.084	1.02	1.11
	5G NR n13	DFT-s QPSK10M	Bottom Side	0	156400	25	14	Ant Main	w/o	0.00	22.05	22.4	1.084	0.001	0.00
	5G NR n13	DFT-s QPSK10M	Top Side	0	156400	50	0	Ant Main	w/o	-0.07	21.12	21.4	1.067	0.775	0.83
	5G NR n13	DFT-s QPSK10M	Top Side	0	156400	25	14	Ant Main	w/	0.16	22.05	22.4	1.084	0.971	1.05
5G NR n13	DFT-s QPSK10M	Top Side	0	156400	25	14	Ant Main	w/o	-0.07	22.05	22.4	1.084	0.987	1.07	
	5G NR n14	DFT-s QPSK10M	Bottom Surface	0	158600	1	1	Ant Main	w/o	0.06	21.59	22.3	1.178	0.625	0.74
	5G NR n14	DFT-s QPSK10M	Left Side	0	158600	1	1	Ant Main	w/o	-0.13	21.59	22.3	1.178	0.151	0.18
	5G NR n14	DFT-s QPSK10M	Right Side	0	158600	1	1	Ant Main	w/o	0.15	21.59	22.3	1.178	0.057	0.07
	5G NR n14	DFT-s QPSK10M	Top Side	0	158600	1	1	Ant Main	w/o	0.07	21.59	22.3	1.178	0.801	0.94
	5G NR n14	DFT-s QPSK10M	Bottom Side	0	158600	1	1	Ant Main	w/o	0.00	21.59	22.3	1.178	0.001	0.00
	5G NR n14	DFT-s QPSK10M	Bottom Surface	0	158600	25	14	Ant Main	w/o	-0.08	21.51	22.3	1.199	0.627	0.75
	5G NR n14	DFT-s QPSK10M	Left Side	0	158600	25	14	Ant Main	w/o	0.05	21.51	22.3	1.199	0.058	0.07
	5G NR n14	DFT-s QPSK10M	Right Side	0	158600	25	14	Ant Main	w/o	-0.03	21.51	22.3	1.199	0.153	0.18
	5G NR n14	DFT-s QPSK10M	Top Side	0	158600	25	14	Ant Main	w/o	-0.02	21.51	22.3	1.199	0.864	1.04
	5G NR n14	DFT-s QPSK10M	Bottom Side	0	158600	25	14	Ant Main	w/o	0.00	21.51	22.3	1.199	0.001	0.00
	5G NR n14	DFT-s QPSK10M	Top Side	0	158600	50	0	Ant Main	w/o	0.14	20.48	21.3	1.208	0.684	0.83
	5G NR n14	DFT-s QPSK10M	Top Side	0	158600	25	14	Ant Main	w/	-0.17	21.51	22.3	1.199	0.829	0.99
5G NR n14	DFT-s QPSK10M	Top Side	0	158600	25	14	Ant Main	w/o	0.02	21.51	22.3	1.199	0.843	1.01	
	5G NR n25	DFT-s QPSK40M	Bottom Surface	0	374000	1	1	Ant Main	w/o	0.04	18.19	18.2	1.002	0.427	0.43
	5G NR n25	DFT-s QPSK40M	Left Side	0	374000	1	1	Ant Main	w/o	0.00	18.19	18.2	1.002	0.001	0.00
	5G NR n25	DFT-s QPSK40M	Right Side	0	374000	1	1	Ant Main	w/o	0.14	18.19	18.2	1.002	0.141	0.14
	5G NR n25	DFT-s QPSK40M	Top Side	0	374000	1	1	Ant Main	w/o	0.02	18.19	18.2	1.002	0.673	0.67
	5G NR n25	DFT-s QPSK40M	Bottom Side	0	374000	1	1	Ant Main	w/o	0.00	18.19	18.2	1.002	0.001	0.00
	5G NR n25	DFT-s QPSK40M	Bottom Surface	0	374000	108	54	Ant Main	w/o	0.19	18.14	18.2	1.014	0.427	0.43
	5G NR n25	DFT-s QPSK40M	Left Side	0	374000	108	54	Ant Main	w/o	0.00	18.14	18.2	1.014	0.001	0.00
	5G NR n25	DFT-s QPSK40M	Right Side	0	374000	108	54	Ant Main	w/o	-0.03	18.14	18.2	1.014	0.142	0.14
	5G NR n25	DFT-s QPSK40M	Top Side	0	374000	108	54	Ant Main	w/o	-0.02	18.14	18.2	1.014	0.845	0.86
	5G NR n25	DFT-s QPSK40M	Bottom Side	0	374000	108	54	Ant Main	w/o	0.00	18.14	18.2	1.014	0.001	0.00
	5G NR n25	DFT-s QPSK40M	Top Side	0	374000	216	0	Ant Main	w/o	-0.17	17.19	17.2	1.002	0.66	0.66
	5G NR n25	DFT-s QPSK40M	Top Side	0	376500	108	54	Ant Main	w/o	0.03	18.08	18.2	1.028	0.951	0.98
5G NR n25	DFT-s QPSK40M	Top Side	0	379000	108	54	Ant Main	w/o	0.06	18.06	18.2	1.033	0.906	0.94	
5G NR n25	DFT-s QPSK40M	Top Side	0	376500	108	54	Ant Main	w/	-0.15	18.08	18.2	1.028	0.896	0.92	
5G NR n25	DFT-s QPSK40M	Top Side	0	376500	108	54	Ant Main	w/o	0.08	18.08	18.2	1.028	0.925	0.95	
	5G NR n26	DFT-s QPSK20M	Bottom Surface	0	166300	1	1	Ant Main	w/o	0.04	22.04	22.1	1.014	0.751	0.76
	5G NR n26	DFT-s QPSK20M	Left Side	0	166300	1	1	Ant Main	w/o	0.05	22.04	22.1	1.014	0.078	0.08
	5G NR n26	DFT-s QPSK20M	Right Side	0	166300	1	1	Ant Main	w/o	-0.11	22.04	22.1	1.014	0.201	0.20
	5G NR n26	DFT-s QPSK20M	Top Side	0	166300	1	1	Ant Main	w/o	-0.11	22.04	22.1	1.014	1.03	1.04
	5G NR n26	DFT-s QPSK20M	Bottom Side	0	166300	1	1	Ant Main	w/o	0.00	22.04	22.1	1.014	0.001	0.00
	5G NR n26	DFT-s QPSK20M	Bottom Surface	0	166300	50	28	Ant Main	w/o	-0.15	22.02	22.1	1.019	0.771	0.79
	5G NR n26	DFT-s QPSK20M	Left Side	0	166300	50	28	Ant Main	w/o	0.11	22.02	22.1	1.019	0.078	0.08
	5G NR n26	DFT-s QPSK20M	Right Side	0	166300	50	28	Ant Main	w/o	0.11	22.02	22.1	1.019	0.173	0.18
	5G NR n26	DFT-s QPSK20M	Top Side	0	166300	50	28	Ant Main	w/o	-0.01	22.02	22.1	1.019	1.04	1.06
	5G NR n26	DFT-s QPSK20M	Bottom Side	0	166300	50	28	Ant Main	w/o	0.00	22.02	22.1	1.019	0.001	0.00
	5G NR n26	DFT-s QPSK20M	Top Side	0	166300	100	0	Ant Main	w/o	-0.02	21.05	21.1	1.012	0.791	0.80
	5G NR n26	DFT-s QPSK20M	Top Side	0	164800	1	1	Ant Main	w/o	0.12	22.02	22.1	1.019	0.992	1.01
5G NR n26	DFT-s QPSK20M	Top Side	0	167800	1	1	Ant Main	w/o	-0.17	21.96	22.1	1.033	0.975	1.01	
5G NR n26	DFT-s QPSK20M	Top Side	0	164800	50	28	Ant Main	w/o	0.12	22.01	22.1	1.021	0.993	1.01	
5G NR n26	DFT-s QPSK20M	Top Side	0	167800	50	28	Ant Main	w/o	-0.17	21.88	22.1	1.052	0.905	0.95	
5G NR n26	DFT-s QPSK20M	Top Side	0	166300	50	28	Ant Main	w/	0.03	22.02	22.1	1.019	0.99	1.00	
5G NR n26	DFT-s QPSK20M	Top Side	0	166300	50	28	Ant Main	w/o	0.06	22.02	22.1	1.019	0.999	1.02	
	5G NR n66	DFT-s QPSK40M	Bottom Surface	0	352000	1	1	Ant Main	w/o	0.09	18.12	18.2	1.019	0.288	0.29
	5G NR n66	DFT-s QPSK40M	Left Side	0	352000	1	1	Ant Main	w/o	0.11	18.12	18.2	1.019	0.018	0.02
	5G NR n66	DFT-s QPSK40M	Right Side	0	352000	1	1	Ant Main	w/o	0.13	18.12	18.2	1.019	0.146	0.15
	5G NR n66	DFT-s QPSK40M	Top Side	0	352000	1	1	Ant Main	w/o	-0.09	18.12	18.2	1.019	0.72	0.73
	5G NR n66	DFT-s QPSK40M	Bottom Side	0	352000	1	1	Ant Main	w/o	0.00	18.12	18.2	1.019	0.001	0.00
	5G NR n66	DFT-s QPSK40M	Bottom Surface	0	352000	108	54	Ant Main	w/o	0.01	18.09	18.2	1.026	0.32	0.33
	5G NR n66	DFT-s QPSK40M	Left Side	0	352000	108	54	Ant Main	w/o	-0.09	18.09	18.2	1.026	0.02	0.02
	5G NR n66	DFT-s QPSK40M	Right Side	0	352000	108	54	Ant Main	w/o	0.02	18.09	18.2	1.026	0.152	0.16
	5G NR n66	DFT-s QPSK40M	Top Side	0	352000	108	54	Ant Main	w/o	-0.17	18.09	18.2	1.026	0.778	0.80
	5G NR n66	DFT-s QPSK40M	Bottom Side	0	352000	108	54	Ant Main	w/o	0.13	18.09	18.2	1.026	0.015	0.02
	5G NR n66	DFT-s QPSK40M	Top Side	0	352000	216	0	Ant Main	w/o	0.14	17.07	17.2	1.030	0.624	0.64
	5G NR n66	DFT-s QPSK40M	Top Side	0	346000	108	54	Ant Main	w/o	0.01	17.62	18.2	1.143	0.781	0.89
5G NR n66	DFT-s QPSK40M	Top Side	0	349000	108	54	Ant Main	w/o	-0.04	18.08	18.2	1.028	0.683	0.70	
5G NR n66	DFT-s QPSK40M	Top Side	0	346000	108	54	Ant Main	w/	-0.15	17.62	18.2	1.143	0.736	0.84	
	5G NR n71	DFT-s QPSK30M	Bottom Surface	0	135600	1	1	Ant Main	w/o	0.11	23.05	23.1	1.012	0.469	0.47
	5G NR n71	DFT-s QPSK30M	Left Side	0	135600	1	1	Ant Main	w/o	0.07	23.05	23.1	1.012	0.087	0.09
	5G NR n71	DFT-s QPSK30M	Right Side	0	135600	1	1	Ant Main	w/o	-0.05	23.05	23.1	1.012	0.186	0.19
	5G NR n71	DFT-s QPSK30M	Top Side	0	135600	1	1	Ant Main	w/o	-0.09	23.05	23.1	1.012	0.88	0.89
	5G NR n71	DFT-s QPSK30M	Bottom Side	0	135600	1	1	Ant Main	w/o	0.00	23.05	23.1	1.012	0.001	0.00
	5G NR n71	DFT-s QPSK30M	Bottom Surface	0	135600	80	40	Ant Main	w/o	0.14	23.02	23.1	1.019	0.496	0.51
	5G NR n71	DFT-s QPSK30M	Left Side	0	135600	80	40	Ant Main	w/o	0.12	23.02	23.1	1.019	0.088	0.09
	5G NR n71	DFT-s QPSK30M	Right Side	0											

Index	Band	Modulation	Test Position	Spacing (mm)	Channel	RB Size	RB Offset	Antenna	External Battery Pack	Power Drift	Mess. Conducted Power (dBm)	Tune-up (dBm)	Tune-up Scaling Factor	Duty Cycle (%)	Duty Cycle Scaling Factor	SAR-1g (W/kg)	Reported SAR-1g (W/kg)
	5G NR n38	DFT-s QPSK20M	Bottom Surface	0	522000	1	1	Ant Aux	w/o	-0.15	23.40	24.7	1.349	69.19	1.000	0.093	0.13
	5G NR n38	DFT-s QPSK20M	Left Side	0	522000	1	1	Ant Aux	w/o	0.12	23.40	24.7	1.349	69.19	1.000	0.628	0.85
	5G NR n38	DFT-s QPSK20M	Right Side	0	522000	1	1	Ant Aux	w/o	0.00	23.40	24.7	1.349	69.19	1.000	0.001	0.00
	5G NR n38	DFT-s QPSK20M	Top Side	0	522000	1	1	Ant Aux	w/o	0.00	23.40	24.7	1.349	69.19	1.000	0.001	0.00
	5G NR n38	DFT-s QPSK20M	Bottom Side	0	522000	1	1	Ant Aux	w/o	0.00	23.40	24.7	1.349	69.19	1.000	0.001	0.00
	5G NR n38	DFT-s QPSK20M	Bottom Surface	0	522000	25	13	Ant Aux	w/o	-0.02	23.22	24.7	1.406	69.19	1.000	0.099	0.14
	5G NR n38	DFT-s QPSK20M	Left Side	0	522000	25	13	Ant Aux	w/o	-0.08	23.22	24.7	1.406	69.19	1.000	0.637	0.90
	5G NR n38	DFT-s QPSK20M	Right Side	0	522000	25	13	Ant Aux	w/o	0.00	23.22	24.7	1.406	69.19	1.000	0.001	0.00
	5G NR n38	DFT-s QPSK20M	Top Side	0	522000	25	13	Ant Aux	w/o	0.00	23.22	24.7	1.406	69.19	1.000	0.001	0.00
	5G NR n38	DFT-s QPSK20M	Bottom Side	0	522000	25	13	Ant Aux	w/o	0.00	23.22	24.7	1.406	69.19	1.000	0.001	0.00
	5G NR n38	DFT-s QPSK20M	Left Side	0	522000	50	0	Ant Aux	w/o	-0.08	22.35	23.7	1.365	69.19	1.000	0.509	0.69
	5G NR n38	DFT-s QPSK20M	Left Side	0	516000	1	1	Ant Aux	w/o	0.06	23.30	24.7	1.380	69.19	1.000	0.612	0.84
	5G NR n38	DFT-s QPSK20M	Left Side	0	519000	1	1	Ant Aux	w/o	-0.02	23.31	24.7	1.377	69.19	1.000	0.602	0.83
	5G NR n38	DFT-s QPSK20M	Left Side	0	516000	25	13	Ant Aux	w/o	0.06	23.07	24.7	1.455	69.19	1.000	0.625	0.91
25	5G NR n38	DFT-s QPSK20M	Left Side	0	519000	25	13	Ant Aux	w/o	-0.02	23.12	24.7	1.439	69.19	1.000	0.643	0.93
	5G NR n38	DFT-s QPSK20M	Left Side	0	519000	25	13	Ant Aux	w/	-0.13	23.12	24.7	1.439	69.19	1.000	0.625	0.90
	5G NR n38	CP QPSK20M	Top Side	0	519000	25	13	Ant Main+Aux	w/o	0.18	21.53	23.2	1.469	69.19	1.000	0.334	0.49
	5G NR n41	DFT-s QPSK100M	Bottom Surface	0	513900	1	1	Ant Aux	w/o	-0.15	23.83	23.9	1.016	69.19	1.000	0.125	0.13
	5G NR n41	DFT-s QPSK100M	Left Side	0	513900	1	1	Ant Aux	w/o	0.06	23.83	23.9	1.016	69.19	1.000	0.678	0.69
	5G NR n41	DFT-s QPSK100M	Right Side	0	513900	1	1	Ant Aux	w/o	0.00	23.83	23.9	1.016	69.19	1.000	0.001	0.00
	5G NR n41	DFT-s QPSK100M	Top Side	0	513900	1	1	Ant Aux	w/o	0.19	23.83	23.9	1.016	69.19	1.000	0.053	0.05
	5G NR n41	DFT-s QPSK100M	Bottom Side	0	513900	1	1	Ant Aux	w/o	0.16	23.83	23.9	1.016	69.19	1.000	0.087	0.09
	5G NR n41	DFT-s QPSK100M	Bottom Surface	0	513900	135	69	Ant Aux	w/o	-0.05	23.79	23.9	1.026	69.19	1.000	0.115	0.12
	5G NR n41	DFT-s QPSK100M	Left Side	0	513900	135	69	Ant Aux	w/o	-0.03	23.79	23.9	1.026	69.19	1.000	0.701	0.72
	5G NR n41	DFT-s QPSK100M	Right Side	0	513900	135	69	Ant Aux	w/o	0.00	23.79	23.9	1.026	69.19	1.000	0.001	0.00
	5G NR n41	DFT-s QPSK100M	Top Side	0	513900	135	69	Ant Aux	w/o	0.14	23.79	23.9	1.026	69.19	1.000	0.044	0.05
	5G NR n41	DFT-s QPSK100M	Bottom Side	0	513900	135	69	Ant Aux	w/o	-0.19	23.79	23.9	1.026	69.19	1.000	0.082	0.08
	5G NR n41	DFT-s QPSK100M	Left Side	0	513900	270	0	Ant Aux	w/o	-0.06	22.84	22.9	1.014	69.19	1.000	0.492	0.50
	5G NR n41	DFT-s QPSK100M	Left Side	0	509202	135	69	Ant Aux	w/o	-0.14	23.64	23.9	1.062	69.19	1.000	0.64	0.68
	5G NR n41	DFT-s QPSK100M	Left Side	0	518598	135	69	Ant Aux	w/o	-0.16	23.72	23.9	1.042	69.19	1.000	0.677	0.71
	5G NR n41	DFT-s QPSK100M	Left Side	0	523302	135	69	Ant Aux	w/o	-0.17	23.47	23.9	1.104	69.19	1.000	0.736	0.81
26	5G NR n41	DFT-s QPSK100M	Left Side	0	528000	135	69	Ant Aux	w/o	0.02	23.77	23.9	1.030	69.19	1.000	0.804	0.83
	5G NR n41	DFT-s QPSK100M	Left Side	0	528000	135	69	Ant Aux	w/	-0.16	23.77	23.9	1.030	69.19	1.000	0.771	0.79
	5G NR n41	CP QPSK100M	Top Side	0	528000	135	69	Ant Main+Aux	w/o	-0.04	21.23	22.4	1.309	69.19	1.000	0.348	0.46
	5G NR n41	DFT-s QPSK100M	Left Side	0	528000	135	69	Ant Aux	w/o	0.07	23.77	23.9	1.030	69.19	1.000	0.781	0.80
	5G NR n48	DFT-s QPSK100M	Bottom Surface	0	640000	1	1	Ant MIMO 2	w/o	-0.08	20.18	20.3	1.028	69.19	1.000	0.054	0.06
	5G NR n48	DFT-s QPSK100M	Left Side	0	640000	1	1	Ant MIMO 2	w/o	0.08	20.18	20.3	1.028	69.19	1.000	0.072	0.07
	5G NR n48	DFT-s QPSK100M	Right Side	0	640000	1	1	Ant MIMO 2	w/o	0.00	20.18	20.3	1.028	69.19	1.000	0.001	0.00
	5G NR n48	DFT-s QPSK100M	Top Side	0	640000	1	1	Ant MIMO 2	w/o	0.02	20.18	20.3	1.028	69.19	1.000	0.781	0.80
	5G NR n48	DFT-s QPSK100M	Bottom Side	0	640000	1	1	Ant MIMO 2	w/o	0.00	20.18	20.3	1.028	69.19	1.000	0.001	0.00
	5G NR n48	DFT-s QPSK100M	Bottom Surface	0	640000	135	69	Ant MIMO 2	w/o	-0.09	20.17	20.3	1.030	69.19	1.000	0.055	0.06
	5G NR n48	DFT-s QPSK100M	Left Side	0	640000	135	69	Ant MIMO 2	w/o	0.06	20.17	20.3	1.030	69.19	1.000	0.08	0.08
	5G NR n48	DFT-s QPSK100M	Right Side	0	640000	135	69	Ant MIMO 2	w/o	0.00	20.17	20.3	1.030	69.19	1.000	0.001	0.00
27	5G NR n48	DFT-s QPSK100M	Top Side	0	640000	135	69	Ant MIMO 2	w/o	0.01	20.17	20.3	1.030	69.19	1.000	0.792	0.82
	5G NR n48	DFT-s QPSK100M	Bottom Side	0	640000	135	69	Ant MIMO 2	w/o	0.00	20.17	20.3	1.030	69.19	1.000	0.001	0.00
	5G NR n48	DFT-s QPSK100M	Top Side	0	640000	270	0	Ant MIMO 2	w/o	-0.14	19.15	19.3	1.035	69.19	1.000	0.611	0.63
	5G NR n48	DFT-s QPSK100M	Top Side	0	641110	1	1	Ant MIMO 2	w/o	-0.14	20.09	20.3	1.050	69.19	1.000	0.762	0.80
	5G NR n48	DFT-s QPSK100M	Top Side	0	642222	1	1	Ant MIMO 2	w/o	0.12	20.17	20.3	1.030	69.19	1.000	0.752	0.77
	5G NR n48	DFT-s QPSK100M	Top Side	0	643332	1	1	Ant MIMO 2	w/o	-0.11	20.08	20.3	1.052	69.19	1.000	0.758	0.80
	5G NR n48	DFT-s QPSK100M	Top Side	0	641110	135	69	Ant MIMO 2	w/o	-0.14	20.07	20.3	1.054	69.19	1.000	0.666	0.70
	5G NR n48	DFT-s QPSK100M	Top Side	0	642222	135	69	Ant MIMO 2	w/o	0.12	20.16	20.3	1.033	69.19	1.000	0.586	0.61
	5G NR n48	DFT-s QPSK100M	Top Side	0	643332	135	69	Ant MIMO 2	w/o	-0.11	20.01	20.3	1.069	69.19	1.000	0.536	0.57
	5G NR n48	DFT-s QPSK100M	Top Side	0	640000	135	69	Ant MIMO 2	w/	-0.07	20.17	20.3	1.030	69.19	1.000	0.746	0.77
	5G NR n48	CP QPSK100M	Top Side	0	640000	135	69	Ant MIMO 1+2	w/o	0.04	17.65	18.8	1.303	69.19	1.000	0.421	0.55
	5G NR n77	DFT-s QPSK100M	Bottom Surface	0	650000	1	1	Ant MIMO 2	w/o	0.12	20.88	20.9	1.005	69.19	1.000	0.097	0.10
	5G NR n77	DFT-s QPSK100M	Left Side	0	650000	1	1	Ant MIMO 2	w/o	0.06	20.88	20.9	1.005	69.19	1.000	0.095	0.10
	5G NR n77	DFT-s QPSK100M	Right Side	0	650000	1	1	Ant MIMO 2	w/o	0.00	20.88	20.9	1.005	69.19	1.000	0.001	0.00
	5G NR n77	DFT-s QPSK100M	Top Side	0	650000	1	1	Ant MIMO 2	w/o	-0.06	20.88	20.9	1.005	69.19	1.000	0.724	0.73
	5G NR n77	DFT-s QPSK100M	Bottom Side	0	650000	1	1	Ant MIMO 2	w/o	0.00	20.88	20.9	1.005	69.19	1.000	0.001	0.00
	5G NR n77	DFT-s QPSK100M	Bottom Surface	0	650000	135	69	Ant MIMO 2	w/o	-0.17	20.71	20.9	1.045	69.19	1.000	0.118	0.12
	5G NR n77	DFT-s QPSK100M	Left Side	0	650000	135	69	Ant MIMO 2	w/o	-0.14	20.71	20.9	1.045	69.19	1.000	0.099	0.10
	5G NR n77	DFT-s QPSK100M	Right Side	0	650000	135	69	Ant MIMO 2	w/o	0.00	20.71	20.9	1.045	69.19	1.000	0.001	0.00
	5G NR n77	DFT-s QPSK100M	Top Side	0	650000	135	69	Ant MIMO 2	w/o	0.10	20.71	20.9	1.045	69.19	1.000	0.727	0.76
	5G NR n77	DFT-s QPSK100M	Bottom Side	0	650000	135	69	Ant MIMO 2	w/o	0.00	20.71	20.9	1.045	69.19	1.000	0.001	0.00
	5G NR n77	DFT-s QPSK100M	Top Side	0	650000	270	0	Ant MIMO 2	w/o	0.02	19.79	19.9	1.026	69.19	1.000	0.561	0.58
	5G NR n77	DFT-s QPSK100M	Top Side	0	652400	135	69	Ant MIMO 2	w/o	0.02	20.57	20.9	1.079	69.19	1.000	0.735	0.79
	5G NR n77	DFT-s QPSK100M	Top Side	0	654800	135	69	Ant MIMO 2	w/o	0.19	20.51	20.9	1.094	69.19	1.000	0.713	0.78
	5G NR n77	DFT-s QPSK100M	Top Side	0	657200	135	69	Ant MIMO 2	w/o	0.15	20.62	20.9	1.067	69.19	1.000	0.718	0.77
	5G NR n77	DFT-s QPSK100M	Top Side	0	659600	135	69	Ant MIMO 2	w/o	-0.03	20.63	20.9	1.064	69.19	1.000	0.72	0.76
28	5G NR n77	DFT-s QPSK100M	Top Side	0	662000	135	69	Ant MIMO 2	w/o	0.01	20.55	20.9	1.084	69.19	1.000	0.754	0.82
	5G NR n77	DFT-s QPSK100M	Top Side	0	633334	135	69	Ant MIMO 2	w/o	0.01	20.68	20.9	1.052	63.30	1.000	0.697	0.73
	5G NR n77	DFT-s QPSK100M	Top Side	0	662000	135	69	Ant MIMO 2	w/	0.17	20.55	20.9	1.084	69.19	1.000	0.681	0.74
	5G NR n77	CP QPSK100M	Top Side	0	662000	135	69	Ant MIMO 1+2	w/o	-0.19	18.37	19.4	1.268	69.19	1.000	0.401	0.51

Index	Band	Modulation	Test Position	Spacing (mm)	Channel	Antenna	External Battery Pack	Power Drift	Meas. Conducted Power (dBm)	Tune-up (dBm)	Tune-up Scaling Factor	Duty Cycle (%)	Duty Cycle Scaling Factor	SAR-1g (W/kg)	Reported SAR-1g (W/kg)
29	WLAN 2.4G	802.11b	Bottom Surface	0	11	Ant 0	w/o	-0.06	17.98	18.0	1.005	99.38	1.006	0.401	0.41
	WLAN 2.4G	802.11b	Left Side	0	11	Ant 0	w/o	0.00	17.98	18.0	1.005	99.38	1.006	0.001	0.00
	WLAN 2.4G	802.11b	Right Side	0	11	Ant 0	w/o	-0.12	17.98	18.0	1.005	99.38	1.006	0.045	0.05
	WLAN 2.4G	802.11b	Top Side	0	11	Ant 0	w/o	0.00	17.98	18.0	1.005	99.38	1.006	0.001	0.00
	WLAN 2.4G	802.11b	Bottom Side	0	11	Ant 0	w/o	-0.01	17.98	18.0	1.005	99.38	1.006	0.591	0.60
	WLAN 2.4G	802.11b	Bottom Surface	0	11	Ant 1	w/o	0.06	15.49	15.5	1.002	99.38	1.006	0.396	0.40
	WLAN 2.4G	802.11b	Left Side	0	11	Ant 1	w/o	0.00	15.49	15.5	1.002	99.38	1.006	0.001	0.00
	WLAN 2.4G	802.11b	Right Side	0	11	Ant 1	w/o	0.00	15.49	15.5	1.002	99.38	1.006	0.001	0.00
	WLAN 2.4G	802.11b	Top Side	0	11	Ant 1	w/o	0.11	15.49	15.5	1.002	99.38	1.006	0.383	0.39
	WLAN 2.4G	802.11b	Bottom Side	0	11	Ant 1	w/o	0.00	15.49	15.5	1.002	99.38	1.006	0.001	0.00
	WLAN 2.4G	802.11ax HE20	Bottom Surface	0	6	Ant 0+1	w/o	0.05	14.48	14.5	1.005	99.43	1.006	0.129	0.13
	WLAN 2.4G	802.11ax HE20	Left Side	0	6	Ant 0+1	w/o	0.00	14.48	14.5	1.005	99.43	1.006	0.001	0.00
	WLAN 2.4G	802.11ax HE20	Right Side	0	6	Ant 0+1	w/o	0.00	14.48	14.5	1.005	99.43	1.006	0.001	0.00
	WLAN 2.4G	802.11ax HE20	Top Side	0	6	Ant 0+1	w/o	0.02	14.48	14.5	1.005	99.43	1.006	0.133	0.13
	WLAN 2.4G	802.11ax HE20	Bottom Side	0	6	Ant 0+1	w/o	0.06	14.48	14.5	1.005	99.43	1.006	0.144	0.15
	WLAN 2.4G	802.11b	Bottom Side	0	1	Ant 0	w/o	0.04	17.82	18.0	1.042	99.38	1.006	0.554	0.58
	WLAN 2.4G	802.11b	Bottom Side	0	6	Ant 0	w/o	-0.19	17.87	18.0	1.030	99.38	1.006	0.593	0.61
	WLAN 2.4G	802.11b	Bottom Side	0	12	Ant 0	w/o	0.01	16.61	18.0	1.377	99.38	1.006	0.597	0.83
	WLAN 2.4G	802.11b	Bottom Side	0	13	Ant 0	w/o	0.08	15.35	15.5	1.035	99.38	1.006	0.339	0.35
	WLAN 2.4G	802.11b	Bottom Side	0	12	Ant 0	w/	-0.04	16.61	18.0	1.377	99.38	1.006	0.521	0.72
30	WLAN 5.3G	802.11n HT40	Bottom Surface	0	54	Ant 0	w/o	-0.03	15.49	15.5	1.002	99.49	1.005	0.538	0.54
	WLAN 5.3G	802.11n HT40	Left Side	0	54	Ant 0	w/o	0.00	15.49	15.5	1.002	99.49	1.005	0.001	0.00
	WLAN 5.3G	802.11n HT40	Right Side	0	54	Ant 0	w/o	0.00	15.49	15.5	1.002	99.49	1.005	0.001	0.00
	WLAN 5.3G	802.11n HT40	Top Side	0	54	Ant 0	w/o	0.00	15.49	15.5	1.002	99.49	1.005	0.001	0.00
	WLAN 5.3G	802.11n HT40	Bottom Side	0	54	Ant 0	w/o	-0.14	15.49	15.5	1.002	99.49	1.005	0.418	0.42
	WLAN 5.3G	802.11n HT40	Bottom Surface	0	54	Ant 1	w/o	0.08	10.43	10.5	1.016	99.49	1.005	0.178	0.18
	WLAN 5.3G	802.11n HT40	Left Side	0	54	Ant 1	w/o	0.00	10.43	10.5	1.016	99.49	1.005	0.001	0.00
	WLAN 5.3G	802.11n HT40	Right Side	0	54	Ant 1	w/o	0.00	10.43	10.5	1.016	99.49	1.005	0.001	0.00
	WLAN 5.3G	802.11n HT40	Top Side	0	54	Ant 1	w/o	-0.05	10.43	10.5	1.016	99.49	1.005	0.204	0.21
	WLAN 5.3G	802.11n HT40	Bottom Side	0	54	Ant 1	w/o	0.00	10.43	10.5	1.016	99.49	1.005	0.001	0.00
	WLAN 5.3G	802.11n HT40	Bottom Surface	0	54	Ant 0+1	w/o	0.09	13.48	13.5	1.005	99.51	1.005	0.189	0.19
	WLAN 5.3G	802.11n HT40	Left Side	0	54	Ant 0+1	w/o	0.00	13.48	13.5	1.005	99.51	1.005	0.001	0.00
	WLAN 5.3G	802.11n HT40	Right Side	0	54	Ant 0+1	w/o	0.00	13.48	13.5	1.005	99.51	1.005	0.001	0.00
	WLAN 5.3G	802.11n HT40	Top Side	0	54	Ant 0+1	w/o	-0.02	13.48	13.5	1.005	99.51	1.005	0.21	0.21
	WLAN 5.3G	802.11n HT40	Bottom Side	0	54	Ant 0+1	w/o	0.05	13.48	13.5	1.005	99.51	1.005	0.186	0.19
	WLAN 5.3G	802.11n HT40	Bottom Surface	0	62	Ant 0	w/o	0.11	15.46	15.5	1.009	99.49	1.005	0.504	0.51
	WLAN 5.3G	802.11n HT40	Bottom Surface	0	54	Ant 0	w/	0.06	15.49	15.5	1.002	99.49	1.005	0.484	0.49
31	WLAN 5.6G	802.11ac VHT160	Bottom Surface	0	114	Ant 0	w/o	-0.03	14.46	14.5	1.009	99.28	1.007	0.606	0.62
	WLAN 5.6G	802.11ac VHT160	Left Side	0	114	Ant 0	w/o	0.00	14.46	14.5	1.009	99.28	1.007	0.001	0.00
	WLAN 5.6G	802.11ac VHT160	Right Side	0	114	Ant 0	w/o	0.00	14.46	14.5	1.009	99.28	1.007	0.001	0.00
	WLAN 5.6G	802.11ac VHT160	Top Side	0	114	Ant 0	w/o	0.00	14.46	14.5	1.009	99.28	1.007	0.001	0.00
	WLAN 5.6G	802.11ac VHT160	Bottom Side	0	114	Ant 0	w/o	0.05	14.46	14.5	1.009	99.28	1.007	0.401	0.41
	WLAN 5.6G	802.11ac VHT160	Bottom Surface	0	114	Ant 1	w/o	0.10	9.97	10.0	1.007	99.28	1.007	0.191	0.19
	WLAN 5.6G	802.11ac VHT160	Left Side	0	114	Ant 1	w/o	0.00	9.97	10.0	1.007	99.28	1.007	0.001	0.00
	WLAN 5.6G	802.11ac VHT160	Right Side	0	114	Ant 1	w/o	0.00	9.97	10.0	1.007	99.28	1.007	0.001	0.00
	WLAN 5.6G	802.11ac VHT160	Top Side	0	114	Ant 1	w/o	0.19	9.97	10.0	1.007	99.28	1.007	0.2	0.20
	WLAN 5.6G	802.11ac VHT160	Bottom Side	0	114	Ant 1	w/o	0.00	9.97	10.0	1.007	99.28	1.007	0.001	0.00
	WLAN 5.6G	802.11ac VHT160	Bottom Surface	0	114	Ant 0+1	w/o	0.12	15.22	15.25	1.007	99.43	1.006	0.389	0.39
	WLAN 5.6G	802.11ac VHT160	Left Side	0	114	Ant 0+1	w/o	0.00	15.22	15.25	1.007	99.43	1.006	0.001	0.00
	WLAN 5.6G	802.11ac VHT160	Right Side	0	114	Ant 0+1	w/o	0.00	15.22	15.25	1.007	99.43	1.006	0.001	0.00
	WLAN 5.6G	802.11ac VHT160	Top Side	0	114	Ant 0+1	w/o	-0.01	15.22	15.25	1.007	99.43	1.006	0.358	0.36
	WLAN 5.6G	802.11ac VHT160	Bottom Side	0	114	Ant 0+1	w/o	0.01	15.22	15.25	1.007	99.43	1.006	0.329	0.33
	WLAN 5.6G	802.11ac VHT160	Bottom Surface	0	114	Ant 0	w/	-0.04	14.46	14.5	1.009	99.28	1.007	0.519	0.53
32	WLAN 5.8G	802.11n HT40	Bottom Surface	0	159	Ant 0	w/o	-0.05	15.47	15.5	1.007	99.49	1.005	0.952	0.96
	WLAN 5.8G	802.11n HT40	Left Side	0	159	Ant 0	w/o	0.00	15.47	15.5	1.007	99.49	1.005	0.001	0.00
	WLAN 5.8G	802.11n HT40	Right Side	0	159	Ant 0	w/o	0.00	15.47	15.5	1.007	99.49	1.005	0.001	0.00
	WLAN 5.8G	802.11n HT40	Top Side	0	159	Ant 0	w/o	0.00	15.47	15.5	1.007	99.49	1.005	0.001	0.00
	WLAN 5.8G	802.11n HT40	Bottom Side	0	159	Ant 0	w/o	0.11	15.47	15.5	1.007	99.49	1.005	0.527	0.53
	WLAN 5.8G	802.11n HT40	Bottom Surface	0	159	Ant 1	w/o	0.03	8.99	9.0	1.002	99.49	1.005	0.193	0.19
	WLAN 5.8G	802.11n HT40	Left Side	0	159	Ant 1	w/o	0.00	8.99	9.0	1.002	99.49	1.005	0.001	0.00
	WLAN 5.8G	802.11n HT40	Right Side	0	159	Ant 1	w/o	0.00	8.99	9.0	1.002	99.49	1.005	0.001	0.00
	WLAN 5.8G	802.11n HT40	Top Side	0	159	Ant 1	w/o	0.02	8.99	9.0	1.002	99.49	1.005	0.128	0.13
	WLAN 5.8G	802.11n HT40	Bottom Side	0	159	Ant 1	w/o	0.00	8.99	9.0	1.002	99.49	1.005	0.001	0.00
	WLAN 5.8G	802.11ax HE20	Bottom Surface	0	165	Ant 0+1	w/o	0.19	8.94	9.0	1.014	99.43	1.006	0.075	0.08
	WLAN 5.8G	802.11ax HE20	Left Side	0	165	Ant 0+1	w/o	0.00	8.94	9.0	1.014	99.43	1.006	0.001	0.00
	WLAN 5.8G	802.11ax HE20	Right Side	0	165	Ant 0+1	w/o	0.00	8.94	9.0	1.014	99.43	1.006	0.001	0.00
	WLAN 5.8G	802.11ax HE20	Top Side	0	165	Ant 0+1	w/o	0.00	8.94	9.0	1.014	99.43	1.006	0.001	0.00
	WLAN 5.8G	802.11ax HE20	Bottom Side	0	165	Ant 0+1	w/o	0.00	8.94	9.0	1.014	99.43	1.006	0.001	0.00
	WLAN 5.8G	802.11n HT40	Bottom Surface	0	151	Ant 0	w/o	-0.17	15.45	15.5	1.012	99.49	1.005	0.919	0.93
	WLAN 5.8G	802.11n HT40	Bottom Surface	0	159	Ant 0	w/	-0.15	15.47	15.5	1.007	99.49	1.005	0.842	0.85
	WLAN 5.8G	802.11n HT40	Bottom Surface	0	159	Ant 0	w/o	0.07	15.47	15.5	1.007	99.49	1.005	0.916	0.93

Index	Band	Modulation	Test Position	Spacing (mm)	Channel	Antenna	External Battery Pack	Power Drift	Meas. Conducted Power (dBm)	Tune-up (dBm)	Tune-up Scaling Factor	Duty Cycle (%)	Duty Cycle Scaling Factor	SAR-1g (W/kg)	Reported SAR-1g (W/kg)	APD (4cm²/W/m²)	Reported APD (4cm²/W/m²)
33	U-NII 5	802.11ax HE160	Bottom Surface	0	47	Ant 0	w/o	0.11	12.99	13.0	1.002	99.01	1.010	0.351	0.36	2.53	2.56
	U-NII 5	802.11ax HE160	Left Side	0	47	Ant 0	w/o	0.00	12.99	13.0	1.002	99.01	1.010	0.001	0.00	0.001	0.00
	U-NII 5	802.11ax HE160	Right Side	0	47	Ant 0	w/o	0.00	12.99	13.0	1.002	99.01	1.010	0.001	0.00	0.001	0.00
	U-NII 5	802.11ax HE160	Top Side	0	47	Ant 0	w/o	0.00	12.99	13.0	1.002	99.01	1.010	0.001	0.00	0.001	0.00
	U-NII 5	802.11ax HE160	Bottom Side	0	47	Ant 0	w/o	0.03	12.99	13.0	1.002	99.01	1.010	0.182	0.18	1.46	1.48
	U-NII 5	802.11ax HE160	Bottom Surface	0	47	Ant 1	w/o	0.09	8.99	9.0	1.002	99.01	1.010	0.188	0.19	1.29	1.31
	U-NII 5	802.11ax HE160	Left Side	0	47	Ant 1	w/o	0.00	8.99	9.0	1.002	99.01	1.010	0.001	0.00	0.001	0.00
	U-NII 5	802.11ax HE160	Right Side	0	47	Ant 1	w/o	0.00	8.99	9.0	1.002	99.01	1.010	0.001	0.00	0.001	0.00
	U-NII 5	802.11ax HE160	Top Side	0	47	Ant 1	w/o	0.11	8.99	9.0	1.002	99.01	1.010	0.067	0.07	0.462	0.47
	U-NII 5	802.11ax HE160	Bottom Side	0	47	Ant 1	w/o	0.00	8.99	9.0	1.002	99.01	1.010	0.001	0.00	0.001	0.00
	U-NII 5	802.11ax HE160	Bottom Surface	0	47	Ant 0+1	w/o	-0.07	5.99	6.0	1.002	98.30	1.017	0.025	0.03	0.114	0.12
	U-NII 5	802.11ax HE160	Left Side	0	47	Ant 0+1	w/o	0.00	5.99	6.0	1.002	98.30	1.017	0.001	0.00	0.001	0.00
	U-NII 5	802.11ax HE160	Right Side	0	47	Ant 0+1	w/o	0.00	5.99	6.0	1.002	98.30	1.017	0.001	0.00	0.001	0.00
	U-NII 5	802.11ax HE160	Top Side	0	47	Ant 0+1	w/o	0.00	5.99	6.0	1.002	98.30	1.017	0.001	0.00	0.001	0.00
	U-NII 5	802.11ax HE160	Bottom Side	0	47	Ant 0+1	w/o	0.00	5.99	6.0	1.002	98.30	1.017	0.001	0.00	0.001	0.00
U-NII 5	802.11ax HE160	Bottom Surface	0	15	Ant 0	w/o	-0.03	12.92	13.0	1.019	99.01	1.010	0.527	0.54	3.59	3.69	
U-NII 5	802.11ax HE160	Bottom Surface	0	79	Ant 0	w/o	-0.16	12.92	13.0	1.019	99.01	1.010	0.315	0.32	2.31	2.38	
U-NII 6	802.11ax HE160	Bottom Surface	0	111	Ant 0	w/o	0.01	12.95	13.0	1.012	99.01	1.010	0.21	0.21	1.51	1.54	
U-NII 7	802.11ax HE160	Bottom Surface	0	143	Ant 0	w/o	0.19	12.48	12.5	1.005	99.01	1.010	0.214	0.22	1.59	1.61	
U-NII 7	802.11ax HE160	Bottom Surface	0	175	Ant 0	w/o	-0.13	12.47	12.5	1.007	99.01	1.010	0.187	0.19	1.40	1.42	
U-NII 8	802.11ax HE160	Bottom Surface	0	207	Ant 0	w/o	-0.14	12.97	13.0	1.007	99.01	1.010	0.291	0.30	2.12	2.16	
U-NII 5	802.11ax HE160	Bottom Surface	0	15	Ant 0	w/	0.09	12.92	13.0	1.019	99.01	1.010	0.396	0.41	3.07	3.16	

Index	Band	Modulation	Test Position	Spacing (mm)	Channel	Antenna	External Battery Pack	Power Drift	Meas. Conducted Power (dBm)	Tune-up (dBm)	Tune-up Scaling Factor	Duty Cycle (%)	Duty Cycle Scaling Factor	SAR-1g (W/kg)	Reported SAR-1g (W/kg)
34	Bluetooth	GFSK	Bottom Surface	0	78	Ant 1	w/o	0.01	9.99	10.5	1.125	76.86	1.301	0.065	0.10
	Bluetooth	GFSK	Left Side	0	78	Ant 1	w/o	0.00	9.99	10.5	1.125	76.86	1.301	0.001	0.00
	Bluetooth	GFSK	Right Side	0	78	Ant 1	w/o	0.00	9.99	10.5	1.125	76.86	1.301	0.001	0.00
	Bluetooth	GFSK	Top Side	0	78	Ant 1	w/o	-0.17	9.99	10.5	1.125	76.86	1.301	0.061	0.09
	Bluetooth	GFSK	Bottom Side	0	78	Ant 1	w/o	0.00	9.99	10.5	1.125	76.86	1.301	0.001	0.00
	Bluetooth	GFSK	Bottom Surface	0	0	Ant 1	w/o	0.13	9.15	10.5	1.365	76.86	1.301	0.035	0.06
	Bluetooth	GFSK	Bottom Surface	0	39	Ant 1	w/o	-0.12	9.81	10.5	1.172	76.86	1.301	0.036	0.05
	Bluetooth	GFSK	Bottom Surface	0	78	Ant 1	w/	0.14	9.99	10.5	1.125	76.86	1.301	0.053	0.08

Index	Band	Modulation	Test Position	Spacing (mm)	Channel	External Battery Pack	Power Drift	SAR-1g (W/kg)	Reported SAR-1g (W/kg)
35	RFID	PSK	Bottom Surface	0	13.56MHz	w/o	0.13	0.013	0.01
	RFID	PSK	Left Side	0	13.56MHz	w/o	0.00	0.001	0.00
	RFID	PSK	Right Side	0	13.56MHz	w/o	0.00	0.001	0.00
	RFID	PSK	Top Side	0	13.56MHz	w/o	0.00	0.001	0.00
	RFID	PSK	Bottom Side	0	13.56MHz	w/o	0.00	0.001	0.00
	RFID	PSK	Bottom Surface	0	13.56MHz	w/	0.02	0.009	0.01

9.3. Measured and Reported Power Density Results for Body

Index	Band	Modulation	Test Position	Spacing (mm)	Channel	Antenna	Battery	Power Drift	Meas. Conducted Power (dBm)	Tune-up (dBm)	Tune-up Scaling Factor	Duty Cycle (%)	Duty Cycle Scaling Factor	Scaling Factor for MU	sPDn (4 cm ² , W/m ²)	Scaling sPDn (4 cm ² , W/m ²)	sPDtot (4 cm ² , W/m ²)	Scaling sPDtot (4 cm ² , W/m ²)
36	WLAN 6G	802.11ax HE160	Bottom Surface	2	47	Ant 0	w/o	0.14	12.99	13.0	1.002	99.01	1.010	1.119	2.06	2.33	2.75	3.12
	WLAN 6G	802.11ax HE160	Left Side	2	47	Ant 0	w/o	0.08	12.99	13.0	1.002	99.01	1.010	1.119	0.00	0.00	0.00	0.00
	WLAN 6G	802.11ax HE160	Right Side	2	47	Ant 0	w/o	-0.14	12.99	13.0	1.002	99.01	1.010	1.119	0.00	0.00	0.00	0.00
	WLAN 6G	802.11ax HE160	Top Side	2	47	Ant 0	w/o	0.13	12.99	13.0	1.002	99.01	1.010	1.119	0.00	0.00	0.00	0.00
	WLAN 6G	802.11ax HE160	Bottom Side	2	47	Ant 0	w/o	0.14	12.99	13.0	1.002	99.01	1.010	1.119	1.19	1.35	1.59	1.80
	WLAN 6G	802.11ax HE160	Bottom Surface	2	47	Ant 1	w/o	0.04	8.99	9.0	1.002	99.01	1.010	1.119	0.949	1.08	1.26	1.43
	WLAN 6G	802.11ax HE160	Left Side	2	47	Ant 1	w/o	0.09	8.99	9.0	1.002	99.01	1.010	1.119	0.00	0.00	0.00	0.00
	WLAN 6G	802.11ax HE160	Right Side	2	47	Ant 1	w/o	0.14	8.99	9.0	1.002	99.01	1.010	1.119	0.00	0.00	0.00	0.00
	WLAN 6G	802.11ax HE160	Top Side	2	47	Ant 1	w/o	-0.09	8.99	9.0	1.002	99.01	1.010	1.119	0.34	0.39	0.453	0.51
	WLAN 6G	802.11ax HE160	Bottom Side	2	47	Ant 1	w/o	0.09	8.99	9.0	1.002	98.30	1.017	1.119	0.00	0.00	0.00	0.00
	WLAN 6G	802.11ax HE160	Bottom Surface	2	47	Ant 0+1	w/o	0.03	5.99	6.0	1.002	98.30	1.017	1.119	0.25	0.29	0.333	0.38
	WLAN 6G	802.11ax HE160	Left Side	2	47	Ant 0+1	w/o	0.11	5.99	6.0	1.002	98.30	1.017	1.119	0.00	0.00	0.00	0.00
	WLAN 6G	802.11ax HE160	Right Side	2	47	Ant 0+1	w/o	-0.04	5.99	6.0	1.002	98.30	1.017	1.119	0.00	0.00	0.00	0.00
	WLAN 6G	802.11ax HE160	Top Side	2	47	Ant 0+1	w/o	-0.03	5.99	6.0	1.002	98.30	1.017	1.119	0.00	0.00	0.00	0.00
	WLAN 6G	802.11ax HE160	Bottom Side	2	47	Ant 0+1	w/o	0.07	5.99	6.0	1.002	99.01	1.010	1.119	0.00	0.00	0.00	0.00
	WLAN 6G	802.11ax HE160	Bottom Surface	2	15	Ant 0	w/o	-0.10	12.92	13.0	1.019	99.01	1.010	1.119	2.93	3.37	3.90	4.49
	WLAN 6G	802.11ax HE160	Bottom Surface	2	79	Ant 0	w/o	0.01	12.92	13.0	1.019	99.01	1.010	1.119	1.88	2.16	2.51	2.89
	WLAN 6G	802.11ax HE160	Bottom Surface	2	111	Ant 0	w/o	0.16	12.95	13.0	1.012	99.01	1.010	1.119	1.23	1.41	1.65	1.89
	WLAN 6G	802.11ax HE160	Bottom Surface	2	143	Ant 0	w/o	-0.13	12.48	12.5	1.005	99.01	1.010	1.119	1.30	1.48	1.73	1.96
	WLAN 6G	802.11ax HE160	Bottom Surface	2	175	Ant 0	w/o	-0.16	12.47	12.5	1.007	99.01	1.010	1.119	1.14	1.30	1.52	1.73
	WLAN 6G	802.11ax HE160	Bottom Surface	2	207	Ant 0	w/o	-0.14	12.97	13.0	1.007	99.01	1.010	1.119	1.73	1.97	2.30	2.62
	WLAN 6G	802.11ax HE160	Bottom Surface	2	15	Ant 0	w/	0.16	12.92	13.0	1.019	99.01	1.010	1.119	2.51	2.89	3.34	3.85

9.4. SAR Measurement Variability

Per KDB Publication 865664 D01, SAR measurement variability was assessed for each frequency band, which was determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. These additional measurements were repeated after the completion of all measurements requiring the same head tissue-equivalent medium in a frequency band. The test device was returned to ambient conditions (normal room temperature) with the battery fully charged before it was re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR Measurement Variability was assessed using the following procedures for each frequency band:

- [1] The repeated measurement is not required, when the highest measured SAR is < 0.80 W/kg.
- [2] The measurement was repeated once, when the highest measured SAR is ≥ 0.80 W/kg.
- [3] A second repeated measurement was performed, if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20, or when the original or repeated measurement was ≥ 1.45 W/kg.
- [4] A third repeated measurement was performed, if the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20, and the original, first or second repeated measurement is ≥ 1.5 W/kg.

Band	Modulation	Test Position	Spacing (mm)	Channel	Antenna	Note	Original SAR-1g (W/kg)	1st SAR-1g (W/kg)	1st Ratio
WCDMA II	RMC12.2K	Top Side	0	9400	Ant Main	Index. #1 once	0.977	0.955	2.25%
WCDMA IV	RMC12.2K	Top Side	0	1312	Ant Main	Index. #2 once	0.912	0.881	3.40%
WCDMA V	RMC12.2K	Top Side	0	4233	Ant Main	Index. #3 once	1.02	0.985	3.43%

Band	Modulation	Test Position	Spacing (mm)	Channel	RB Size	RB Offset	Antenna	Note	Original SAR-1g (W/kg)	1st SAR-1g (W/kg)	1st Ratio
LTE B7	QPSK20M	Top Side	0	20850	1	0	Ant Main	Index. #4 once	1.11	1.07	3.60%
LTE B12	QPSK10M	Top Side	0	23060	1	0	Ant Main	Index. #5 once	1.05	1.02	2.86%
LTE B13	QPSK10M	Top Side	0	23230	1	0	Ant Main	Index. #6 once	0.994	0.971	2.31%
LTE B14	QPSK10M	Top Side	0	23330	1	0	Ant Main	Index. #7 once	0.932	0.883	5.26%
LTE B25	QPSK20M	Top Side	0	26590	1	0	Ant Main	Index. #8 once	1.07	0.991	7.38%
LTE B26	QPSK15M	Top Side	0	26865	1	0	Ant Main	Index. #9 once	0.929	0.874	5.92%
LTE B41(PC2)	QPSK20M	Top Side	0	39750	1	0	Ant Main	Index. #10 once	1.08	1.03	4.63%
LTE 42	QPSK20M	Top Side	0	42190	1	0	Ant MIMO 2	Index. #11 once	0.967	0.948	1.96%
LTE B43	QPSK20M	Top Side	0	44490	1	0	Ant MIMO 2	Index. #12 once	0.856	0.831	2.92%
LTE B48	QPSK20M	Top Side	0	55340	1	0	Ant MIMO 2	Index. #13 once	0.926	0.911	1.62%
LTE B66	QPSK20M	Top Side	0	132072	1	0	Ant Main	Index. #14 once	0.987	0.944	4.36%
LTE B71	QPSK20M	Top Side	0	133322	1	0	Ant Main	Index. #15 once	1.13	1.09	3.54%
5GNR n5	DFT-s QPSK20M	Top Side	0	166800	50	28	Ant Main	Index. #16 once	1.01	0.976	3.37%
5GNR n7	DFT-s QPSK40M	Top Side	0	510000	108	54	Ant Main	Index. #17 once	0.868	0.842	3.00%
5GNR n12	DFT-s QPSK15M	Top Side	0	141700	36	22	Ant Main	Index. #18 once	1.02	0.988	3.14%
5GNR n13	DFT-s QPSK10M	Top Side	0	156400	25	14	Ant Main	Index. #19 once	1.02	0.967	3.24%
5GNR n14	DFT-s QPSK10M	Top Side	0	158600	25	14	Ant Main	Index. #20 once	0.864	0.843	2.43%
5GNR n25	DFT-s QPSK40M	Top Side	0	376500	108	54	Ant Main	Index. #21 once	0.951	0.925	2.73%
5GNR n26	DFT-s QPSK20M	Top Side	0	166300	50	28	Ant Main	Index. #22 once	1.04	0.999	3.94%
5GNR n71	DFT-s QPSK30M	Top Side	0	136100	80	40	Ant Main	Index. #24 once	0.983	0.945	3.87%
5GNR n41	DFT-s QPSK100M	Left Side	0	528000	135	69	Ant Aux	Index. #26 once	0.804	0.781	2.86%

Band	Modulation	Test Position	Spacing (mm)	Channel	Antenna	Note	Original SAR-1g (W/kg)	1st SAR-1g (W/kg)	1st Ratio
WLAN 5.8G	802.11n HT40	Bottom Surface	0	159	Ant 0	Index. #32 once	0.952	0.916	3.78%

10. Evaluation for Simultaneous Transmission Scenario

10.1. Simultaneous Transmission Capabilities

The simultaneous transmission possibilities for this device are listed as below.

Simultaneous Tx Combination	Capable Transmit Configuration
1	WWAN + WLAN2.4G SISO Ant 0 + Bluetooth Ant 1 + RFID
2	WWAN + WLAN2.4G SISO Ant 1 + RFID
3	WWAN + WLAN2.4G MIMO Ant 0+1 + RFID
4	WWAN + WLAN5G SISO Ant 0 + Bluetooth Ant 1 + RFID
5	WWAN + WLAN5G SISO Ant 1 + Bluetooth Ant 1 + RFID
6	WWAN + WLAN5G MIMO Ant 0+1 + Bluetooth Ant 1 + RFID
7	WWAN + WLAN6G SISO Ant 0 + Bluetooth Ant 1 + RFID
8	WWAN + WLAN6G SISO Ant 1 + Bluetooth Ant 1 + RFID
9	WWAN + WLAN6G MIMO Ant 0+1 + Bluetooth Ant 1 + RFID

Note :

[1] The WLAN 2.4G, WLAN 5G and WLAN 6G cannot transmit simultaneously.

10.2. SAR Summation Analysis

SAR Summation Analysis

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (1.6 W/kg for SAR_{1g} and 4.0 W/kg for SAR_{10g}), the simultaneous transmission SAR is not required. When the sum of SAR is greater than the SAR limit, SAR test exclusion is determined by the SPLSR.

WWAN Band	Exposure Position	1	2	3	4	5	6	7	8	9	10	11	12	1+2+11+12	1+3+12	1+4+12	1+5+11+12	1+7+11+12	1+8+11+12	1+9+11+12	1+10+11+12	
		WWAN SAR _{1q} (W/kg)	WLAN 2.4G Ant 0 SAR _{1q} (W/kg)	WLAN 2.4G Ant 1 SAR _{1q} (W/kg)	WLAN 2.4G Ant 0+1 SAR _{1q} (W/kg)	WLAN 5G Ant 0 SAR _{1q} (W/kg)	WLAN 5G Ant 1 SAR _{1q} (W/kg)	WLAN 5G Ant 0+1 SAR _{1q} (W/kg)	WLAN 5G Ant 2 SAR _{1q} (W/kg)	WLAN 5G Ant 0+2 SAR _{1q} (W/kg)	WLAN 5G Ant 1+2 SAR _{1q} (W/kg)	Bluetooth Ant 1 SAR _{1q} (W/kg)	RFID SAR _{1q} (W/kg)	TSAR _{1q} (W/kg)	TSAR _{1q} (W/kg)	TSAR _{1q} (W/kg)	TSAR _{1q} (W/kg)	TSAR _{1q} (W/kg)	TSAR _{1q} (W/kg)	TSAR _{1q} (W/kg)	TSAR _{1q} (W/kg)	
WCDMA II	Bottom Surface	0.47	0.41	0.40	0.13	0.96	0.19	0.39	0.54	0.19	0.03	0.10	0.01	0.99	0.88	0.61	1.54	0.77	0.97	1.12	0.77	0.61
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
	Right Side	0.19	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.24	0.19	0.19	0.19	0.19	0.19	0.19	0.19	
	Top Side	1.08	0.00	0.39	0.13	0.00	0.21	0.36	0.00	0.07	0.00	0.09	0.00	1.17	1.47	1.21	1.17	1.38	1.53	1.17	1.24	1.17
	Bottom Side	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00	0.00	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00
WCDMA IV	Bottom Surface	0.33	0.41	0.40	0.13	0.96	0.19	0.39	0.54	0.19	0.03	0.10	0.01	0.85	0.74	0.47	1.40	0.63	0.83	0.98	0.63	0.47
	Left Side	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	
	Right Side	0.24	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.29	0.24	0.24	0.24	0.24	0.24	0.24	0.24	0.24
	Top Side	0.96	0.00	0.39	0.13	0.00	0.21	0.36	0.00	0.07	0.00	0.09	0.00	1.05	1.35	1.09	1.05	1.26	1.41	1.05	1.12	1.05
	Bottom Side	0.02	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00	0.00	0.00	0.85	0.02	0.17	0.55	0.02	0.35	0.20	0.02	0.02
WCDMA V	Bottom Surface	0.33	0.41	0.40	0.13	0.96	0.19	0.39	0.54	0.19	0.03	0.10	0.01	0.85	0.74	0.47	1.40	0.63	0.83	0.98	0.63	0.47
	Left Side	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	
	Right Side	0.20	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.25	0.20	0.20	0.20	0.20	0.20	0.20	0.20	
	Top Side	1.04	0.00	0.39	0.13	0.00	0.21	0.36	0.00	0.07	0.00	0.09	0.00	1.13	1.43	1.17	1.13	1.34	1.49	1.13	1.20	1.13
	Bottom Side	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00	0.00	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00
LTE B7	Bottom Surface	0.18	0.41	0.40	0.13	0.96	0.19	0.39	0.54	0.19	0.03	0.10	0.01	0.70	0.59	0.32	1.25	0.48	0.68	0.83	0.48	0.32
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
	Right Side	0.06	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.06	0.06	0.06	0.06	0.06	0.06	0.06	
	Top Side	1.12	0.00	0.39	0.13	0.00	0.21	0.36	0.00	0.07	0.00	0.09	0.00	1.21	1.51	1.25	1.21	1.42	1.57	1.21	1.28	1.21
	Bottom Side	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00	0.00	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00
LTE B12 / B17	Bottom Surface	0.48	0.41	0.40	0.13	0.96	0.19	0.39	0.54	0.19	0.03	0.10	0.01	1.00	0.89	0.62	1.55	0.78	0.98	1.13	0.78	0.62
	Left Side	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	
	Right Side	0.24	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.29	0.24	0.24	0.24	0.24	0.24	0.24	0.24	
	Top Side	1.05	0.00	0.39	0.13	0.00	0.21	0.36	0.00	0.07	0.00	0.09	0.00	1.14	1.44	1.18	1.14	1.35	1.50	1.14	1.21	1.14
	Bottom Side	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00	0.00	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00
LTE B13	Bottom Surface	0.36	0.41	0.40	0.13	0.96	0.19	0.39	0.54	0.19	0.03	0.10	0.01	0.88	0.77	0.50	1.43	0.66	0.86	1.01	0.66	0.50
	Left Side	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	
	Right Side	0.16	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.21	0.16	0.16	0.16	0.16	0.16	0.16	0.16	
	Top Side	1.00	0.00	0.39	0.13	0.00	0.21	0.36	0.00	0.07	0.00	0.09	0.00	1.09	1.39	1.13	1.09	1.30	1.45	1.09	1.16	1.09
	Bottom Side	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00	0.00	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00
LTE B14	Bottom Surface	0.31	0.41	0.40	0.13	0.96	0.19	0.39	0.54	0.19	0.03	0.10	0.01	0.83	0.72	0.45	1.38	0.61	0.81	0.96	0.61	0.45
	Left Side	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	
	Right Side	0.15	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.20	0.15	0.15	0.15	0.15	0.15	0.15	0.15	
	Top Side	0.93	0.00	0.39	0.13	0.00	0.21	0.36	0.00	0.07	0.00	0.09	0.00	1.02	1.32	1.06	1.02	1.23	1.38	1.02	1.09	1.02
	Bottom Side	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00	0.00	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00
LTE B25	Bottom Surface	0.48	0.41	0.40	0.13	0.96	0.19	0.39	0.54	0.19	0.03	0.10	0.01	1.00	0.89	0.62	1.55	0.78	0.98	1.13	0.78	0.62
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
	Right Side	0.17	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.22	0.17	0.17	0.17	0.17	0.17	0.17	0.17	
	Top Side	1.12	0.00	0.39	0.13	0.00	0.21	0.36	0.00	0.07	0.00	0.09	0.00	1.21	1.51	1.25	1.21	1.42	1.57	1.21	1.28	1.21
	Bottom Side	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00	0.00	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00
LTE B26 / B5	Bottom Surface	0.32	0.41	0.40	0.13	0.96	0.19	0.39	0.54	0.19	0.03	0.10	0.01	0.84	0.73	0.46	1.39	0.62	0.82	0.97	0.62	0.46
	Left Side	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	
	Right Side	0.16	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.21	0.16	0.16	0.16	0.16	0.16	0.16	0.16	
	Top Side	0.95	0.00	0.39	0.13	0.00	0.21	0.36	0.00	0.07	0.00	0.09	0.00	1.04	1.34	1.08	1.04	1.25	1.40	1.04	1.11	1.04
	Bottom Side	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00	0.00	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00
LTE B41 / B38	Bottom Surface	0.14	0.41	0.40	0.13	0.96	0.19	0.39	0.54	0.19	0.03	0.10	0.01	0.66	0.55	0.28	1.21	0.44	0.64	0.79	0.44	0.28
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	
	Right Side	0.06	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.11	0.06	0.06	0.06	0.06	0.06	0.06	0.06	
	Top Side	1.08	0.00	0.39	0.13	0.00	0.21	0.36	0.00	0.07	0.00	0.09	0.00	1.17	1.47	1.21	1.17	1.38	1.53	1.17	1.24	1.17
	Bottom Side	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00	0.00	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00
LTE B42	Bottom Surface	0.04	0.41	0.40	0.13	0.96	0.19	0.39	0.54	0.19	0.03	0.10	0.01	0.56	0.45	0.18	1.11	0.34	0.54	0.69	0.34	0.18
	Left Side	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	
	Right Side	0.00	0.05	0.00	0.00	0.00	0.00															

WWAN Band	Exposure Position	1	2	3	4	5	6	7	8	9	10	11	12	1+2+11+12	1+3+12	1+4+12	1+5+11+12	1+6+11+12	1+7+11+12	1+8+11+12	1+9+11+12	1+10+11+12
		WWAN SAR _{1q} (W/kg)	WLAN 2.4G Ant 0 SAR _{1q} (W/kg)	WLAN 2.4G Ant 1 SAR _{1q} (W/kg)	WLAN 2.4G Ant 0+1 SAR _{1q} (W/kg)	WLAN 5G Ant 0 SAR _{1q} (W/kg)	WLAN 5G Ant 1 SAR _{1q} (W/kg)	WLAN 5G Ant 0+1 SAR _{1q} (W/kg)	WLAN 5G Ant 2 SAR _{1q} (W/kg)	WLAN 5G Ant 0 SAR _{1q} (W/kg)	WLAN 5G Ant 1 SAR _{1q} (W/kg)	Bluetooth Ant 1 SAR _{1q} (W/kg)	RFID SAR _{1q} (W/kg)	TSAR _{1q} (W/kg)	TSAR _{1q} (W/kg)	TSAR _{1q} (W/kg)	TSAR _{1q} (W/kg)	TSAR _{1q} (W/kg)	TSAR _{1q} (W/kg)	TSAR _{1q} (W/kg)	TSAR _{1q} (W/kg)	TSAR _{1q} (W/kg)
SGNR n5	Bottom Surface	0.36	0.41	0.40	0.13	0.96	0.19	0.39	0.54	0.19	0.03	0.10	0.01	0.88	0.77	0.50	1.43	0.66	0.86	1.01	0.66	0.50
	Left Side	0.07	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.07	0.07	0.07	0.07	0.07	0.07	0.07	0.07	
	Right Side	0.22	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.27	0.22	0.22	0.22	0.22	0.22	0.22	0.22	
	Top Side	1.03	0.00	0.39	0.13	0.00	0.21	0.36	0.00	0.07	0.00	0.09	0.00	1.12	1.42	1.16	1.12	1.33	1.48	1.12	1.19	1.12
	Bottom Side	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00	0.00	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00
SGNR n7	Bottom Surface	0.17	0.41	0.40	0.13	0.96	0.19	0.39	0.54	0.19	0.03	0.10	0.01	0.69	0.58	0.31	1.24	0.47	0.67	0.82	0.47	0.31
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.05	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.10	0.05	0.05	0.05	0.05	0.05	0.05	0.05	0.05
	Top Side	0.90	0.00	0.39	0.13	0.00	0.21	0.36	0.00	0.07	0.00	0.09	0.00	0.99	1.29	1.03	0.99	1.20	1.35	0.99	1.06	0.99
	Bottom Side	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00	0.00	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00
SGNR n12	Bottom Surface	0.79	0.41	0.40	0.13	0.96	0.19	0.39	0.54	0.19	0.03	0.10	0.01	1.31	1.20	0.93	1.06	1.09	1.29	1.44	1.09	0.93
	Left Side	0.06	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06	0.06
	Right Side	0.24	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.29	0.24	0.24	0.24	0.24	0.24	0.24	0.24	0.24
	Top Side	1.09	0.00	0.39	0.13	0.00	0.21	0.36	0.00	0.07	0.00	0.09	0.00	1.18	1.48	1.22	1.18	1.39	1.54	1.18	1.25	1.18
	Bottom Side	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00	0.00	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00
SGNR n13	Bottom Surface	0.79	0.41	0.40	0.13	0.96	0.19	0.39	0.54	0.19	0.03	0.10	0.01	1.31	1.20	0.93	1.06	1.09	1.29	1.44	1.09	0.93
	Left Side	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08
	Right Side	0.21	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.26	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21
	Top Side	1.11	0.00	0.39	0.13	0.00	0.21	0.36	0.00	0.07	0.00	0.09	0.00	1.20	1.50	1.24	1.20	1.41	1.56	1.20	1.27	1.20
	Bottom Side	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00	0.00	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00
SGNR n14	Bottom Surface	0.75	0.41	0.40	0.13	0.96	0.19	0.39	0.54	0.19	0.03	0.10	0.01	1.27	1.16	0.89	1.02	1.05	1.25	1.40	1.05	0.89
	Left Side	0.18	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18
	Right Side	0.18	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.23	0.18	0.18	0.18	0.18	0.18	0.18	0.18	0.18
	Top Side	1.04	0.00	0.39	0.13	0.00	0.21	0.36	0.00	0.07	0.00	0.09	0.00	1.13	1.43	1.17	1.13	1.34	1.49	1.13	1.20	1.13
	Bottom Side	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00	0.00	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00
SGNR n25 / n2	Bottom Surface	0.43	0.41	0.40	0.13	0.96	0.19	0.39	0.54	0.19	0.03	0.10	0.01	0.95	0.84	0.57	1.50	0.73	0.93	1.08	0.73	0.57
	Left Side	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Right Side	0.14	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.19	0.14	0.14	0.14	0.14	0.14	0.14	0.14	0.14
	Top Side	0.98	0.00	0.39	0.13	0.00	0.21	0.36	0.00	0.07	0.00	0.09	0.00	1.07	1.37	1.11	1.07	1.28	1.43	1.07	1.14	1.07
	Bottom Side	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00	0.00	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00
SGNR n26	Bottom Surface	0.79	0.41	0.40	0.13	0.96	0.19	0.39	0.54	0.19	0.03	0.10	0.01	1.31	1.20	0.93	1.06	1.09	1.29	1.44	1.09	0.93
	Left Side	0.08	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08	0.08
	Right Side	0.20	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.25	0.20	0.20	0.20	0.20	0.20	0.20	0.20	0.20
	Top Side	1.06	0.00	0.39	0.13	0.00	0.21	0.36	0.00	0.07	0.00	0.09	0.00	1.15	1.45	1.19	1.15	1.36	1.51	1.15	1.22	1.15
	Bottom Side	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00	0.00	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00
SGNR n66	Bottom Surface	0.33	0.41	0.40	0.13	0.96	0.19	0.39	0.54	0.19	0.03	0.10	0.01	0.85	0.74	0.47	1.40	0.63	0.83	0.98	0.63	0.47
	Left Side	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02	0.02
	Right Side	0.16	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.21	0.16	0.16	0.16	0.16	0.16	0.16	0.16	0.16
	Top Side	0.89	0.00	0.39	0.13	0.00	0.21	0.36	0.00	0.07	0.00	0.09	0.00	0.98	1.28	1.02	0.98	1.19	1.34	0.98	1.05	0.98
	Bottom Side	0.02	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00	0.00	0.00	0.85	0.02	0.17	0.55	0.02	0.35	0.20	0.02	0.02
SGNR n71	Bottom Surface	0.51	0.41	0.40	0.13	0.96	0.19	0.39	0.54	0.19	0.03	0.10	0.01	1.03	0.92	0.65	1.58	0.81	1.01	1.16	0.81	0.65
	Left Side	0.09	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09	0.09
	Right Side	0.21	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.26	0.21	0.21	0.21	0.21	0.21	0.21	0.21	0.21
	Top Side	1.01	0.00	0.39	0.13	0.00	0.21	0.36	0.00	0.07	0.00	0.09	0.00	1.10	1.40	1.14	1.10	1.31	1.46	1.10	1.17	1.10
	Bottom Side	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00	0.00	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00
SGNR n38	Bottom Surface	0.14	0.41	0.40	0.13	0.96	0.19	0.39	0.54	0.19	0.03	0.10	0.01	0.66	0.55	0.28	1.21	0.44	0.64	0.79	0.44	0.28
	Left Side	0.93	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93	0.93
	Right Side	0.00	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	Top Side	0.49	0.00	0.39	0.13	0.00	0.21	0.36	0.00	0.07	0.00	0.09	0.00	0.58	0.88	0.62	0.58	0.79	0.94	0.58	0.65	0.58
	Bottom Side	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00	0.00	0.00	0.83	0.00	0.15	0.53	0.00	0.33	0.18	0.00	0.00
SGNR n41	Bottom Surface	0.13	0.41	0.40	0.13	0.96	0.19	0.39	0.54	0.19	0.03	0.10	0.01	0.65	0.54	0.27	1.20	0.43	0.63	0.78	0.43	0.27
	Left Side	0.83	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.83	0.83	0.83	0.83	0.83	0.83	0.83	0.83	0.83
	Right Side	0.00	0.05	0.00	0.00	0.00																

10.3. SAR to Peak Location Separation Ratio (SPLSR) Analysis

The simultaneous transmitting antennas in each operating mode and exposure condition combination are considered one pair at a time to determine the SPLSR. When SAR is measured for both antennas in the pair, the peak location separation distance is computed by the following formula :

$$\text{Peak Location Separation Distance} = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

Where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the area or zoom scans.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna. Due to curvatures on the SAM phantom, when SAR is estimated for one of the antennas in an antenna pair, the measured peak SAR location will be translated onto the test device to determine the peak location separation for the antenna pair.

The SPLSR is determined by the following formula :

$$\text{SPLSR} = \frac{(\text{SAR}_1 + \text{SAR}_2)^{1.5}}{R_i}$$

Where SAR_1 and SAR_2 are the highest reported or estimated SAR for each antenna in the pair, and R_i is the separation distance between the peak SAR locations for the antenna pair in mm.

When the SPLSR is ≤ 0.04 , the simultaneous transmission SAR is not required. Otherwise, the enlarged zoom scan and volume scan post-processing procedures will be performed.

5GNR n12 Ant Main + WLAN 5.8G Ant 0						
Band		Modulation	Test Position	Frequency (MHz)	Antenna	Peak Location Separation Ratio
5GNR n12		DFT-s QPSK15M	Bottom Surface	706.5	Ant Main	0.013
WLAN 5.8G		802.11n HT40	Bottom Surface	5795	Ant 0	
Exposure Value		Σ Reported SAR-1g (W/Kg)	X (mm)	Y (mm)	Z (mm)	Antenna Pair (mm)
SAR-1g (W/kg)	0.79	1.75	98.50	94.80	-177.00	185
SAR-1g (W/kg)	0.96		-86.80	96.60	-177.10	

5GNR n12 Ant Main + Bluetooth Ant 1						
Band		Modulation	Test Position	Frequency (MHz)	Antenna	Peak Location Separation Ratio
5GNR n12		DFT-s QPSK15M	Bottom Surface	706.5	Ant Main	0.022
Bluetooth		GFSK	Bottom Surface	2480	Ant 1	
Exposure Value		Σ Reported SAR-1g (W/Kg)	X (mm)	Y (mm)	Z (mm)	Antenna Pair (mm)
SAR-1g (W/kg)	0.79	0.89	98.50	94.80	-177.00	38
SAR-1a (W/ka)	0.1		86.20	58.00	-177.00	

5GNR n12 Ant Main + RFID						
Band		Modulation	Test Position	Frequency (MHz)	Antenna	Peak Location Separation Ratio
5GNR n12		DFT-s QPSK15M	Bottom Surface	706.5	Ant Main	0.002
RFID		PSK	Bottom Surface	13.56	Ant RFID	
Exposure Value		Σ Reported SAR-1g (W/Kg)	X (mm)	Y (mm)	Z (mm)	Antenna Pair (mm)
SAR-1g (W/kg)	0.79	0.50	98.50	94.80	-177.00	147
SAR-1g (W/kg)	0.01		96.90	-52.90	-177.00	

WLAN 5.8G Ant 0 + Bluetooth Ant 1						
Band		Modulation	Test Position	Frequency (MHz)	Antenna	Peak Location Separation Ratio
WLAN 5.8G		802.11n HT40	Bottom Surface	5795	Ant 0	0.003
Bluetooth		GFSK	Bottom Surface	2480	Ant 1	
Exposure Value		Σ Reported SAR-1g (W/Kg)	X (mm)	Y (mm)	Z (mm)	Antenna Pair (mm)
SAR-1g (W/kg)	0.96	0.66	-86.80	96.60	-177.10	177
SAR-1g (W/kg)	0.1		86.20	58.00	-177.00	

WLAN 5.8G Ant 0 + RFID						
Band		Modulation	Test Position	Frequency (MHz)	Antenna	Peak Location Separation Ratio
WLAN 5.8G		802.11n HT40	Bottom Surface	5795	Ant 0	0.004
RFID		PSK	Bottom Surface	13.56	Ant RFID	
Exposure Value		Σ Reported SAR-1g (W/Kg)	X (mm)	Y (mm)	Z (mm)	Antenna Pair (mm)
SAR-1g (W/kg)	0.96	0.97	-86.80	96.60	-177.10	236
SAR-1g (W/kg)	0.01		96.90	-52.90	-177.00	

Bluetooth Ant 1 + RFID						
Band		Modulation	Test Position	Frequency (MHz)	Antenna	Peak Location Separation Ratio
Bluetooth		GFSK	Bottom Surface	2480	Ant 1	0.0003
RFID		PSK	Bottom Surface	13.56	Ant RFID	
Exposure Value		Σ Reported SAR-1g (W/Kg)	X (mm)	Y (mm)	Z (mm)	Antenna Pair (mm)
SAR-1g (W/kg)	0.1	0.11	86.20	58.00	-177.00	111
SAR-1g (W/kg)	0.01		96.90	-52.90	-177.00	

Note:

Since the maximum transmission combination calculated based on the minimum distance exceeds the threshold defined by the SPLSR, all transmission combinations are instead presented in pairwise form.

11. Test Equipment

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Cal. Date	Cal. Period
SPEAG	13 MHz System Validation Kit	CLA13	1047	Oct. 07, 2024	1 year
SPEAG	750 MHz System Validation Kit	D750V3	1222	Jun. 03, 2025	1 year
SPEAG	835 MHz System Validation Kit	D835V2	4d291	Jun. 03, 2025	1 year
SPEAG	1800 MHz System Validation Kit	D1800V2	2d167	Jun. 04, 2025	1 year
SPEAG	1900 MHz System Validation Kit	D1900V2	5d111	Jun. 03, 2025	1 year
SPEAG	2450 MHz System Validation Kit	D2450V2	1087	Jun. 03, 2025	1 year
SPEAG	2600 MHz System Validation Kit	D2600V2	1197	Jun. 03, 2025	1 year
SPEAG	3500 MHz System Validation Kit	D3500V2	1013	Aug. 22, 2024	1 year
SPEAG	3700 MHz System Validation Kit	D3700V2	1034	Aug. 19, 2024	1 year
SPEAG	3900 MHz System Validation Kit	D3900V2	1014	Aug. 20, 2024	1 year
SPEAG	5 GHz System Validation Kit	D5GHzV2	1358	Jun. 02, 2025	1 year
SPEAG	6.5 GHz System Validation Kit	D6.5GHzV2	1081	Jun. 02, 2025	1 year
SPEAG	5G Verification Source	H10GVx	1060	Sep. 17, 2024	1 year
SPEAG	Dosimetric E-Field Probe	EUmmWV4	9639	Sep. 16, 2024	1 year
SPEAG	Dosimetric E-Field Probe	EX3DV4	7650	Jun. 10, 2025	1 year
SPEAG	Data Acquisition Electronics	DAE4	1669	May 19, 2025	1 year
SPEAG	Data Acquisition Electronics	DAE4	1742	Aug. 15, 2024	1 year
SPEAG	cDASY8 SAR Measurement System	Software Version	v16.4.0.5005	NCR	
SPEAG	cDASY8 IPD Measurement System	Software Version	v3.2.2.2358	NCR	
R&S	Spectrum Analyzer	FSV3013	101701	Oct. 11, 2024	1 year
Anritsu	Radio Communication Analyzer	MT8821C	6272459653	Aug. 15, 2024	1 year
Anritsu	Radio Communication Analyzer	MT8000A	6272524702	Sep. 06, 2024	1 year
Anritsu	Radio Communication Analyzer	MT8870A	6272488631	Jan. 13, 2025	1 year
Keysight	UXM 5G Wireless Test Platform	E7515B	MY59020225	Mar. 06, 2025	1 year
Keysight	Network Analyzer	E5080B	MY59202160	Jan. 20, 2025	1 year
SPEAG	Dielectric Probe Kit	DAK-3.5	1219	Mar. 13, 2025	1 year
SPEAG	Dielectric Probe Kit	DAKS VNA R140	0010318	May 19, 2025	1 year
SPEAG	POWERSOURCE1	SE UMS 160 CA	4283	Aug. 15, 2024	1 year
HILA	Digital Thermometer	TM-906A	1500033	Oct. 24, 2024	1 year
R&S	Signal Generator	SMB100A03	183594	Dec. 11, 2024	1 year
Testo	Thermometer	608-H1	83837935	Dec. 06, 2024	1 year
Mini-Circuits	Dual Directional Coupler	ZCDC20-5R263-S+	E69806	NCR	
EMCI	Power Amplifier	EMC0618-P	980833	NCR	
Woken	RF Splitter	0120A02208001S	DDTD17W3G2	NCR	
Woken	RF Cable	SS402	-	NCR	
Attenuator	INMET	18AH-03	S180301	NCR	

Test Engineer : Chih Chen

12. Measurement Uncertainty

Per KDB Publication 865664 D01, SAR measurement uncertainty analysis is required when the highest measured 1g SAR is ≥ 1.5 W/kg and the highest measured 10g SAR is ≥ 3.75 W/kg. The expanded SAR measurement uncertainty must be ≤ 30 %, for a confidence interval of $k = 2$. Since the highest measured SAR was < 1.5 W/kg for 1g and < 3.75 W/kg for 10g for all frequency bands, the measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

***** End of Report *****