

Appendix C – Highest Test Plots

Test Date : 2025-07-15 | Ambient Temp : 21.9 °C | Tissue Temp : 21.2 °C

Test Mode

1_WLAN2.4G_802.11n_HT40_Right Side_0mm_Ch6_Ant 0+1_Sample 1

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Permittivity	TSL Conductivity [S/m]
Flat	WLAN 2.4GHz	WLAN, 10599 - AAC	2437.000, 6	6.64	37.9	1.77

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7757 / 2024-09-18	DAE4 Sn1743 / 2024-09-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 228.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.963	1.04
psSAR-10g [W/kg]	0.441	0.434
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		33.9
Dist 3dB Peak [mm]		5.4

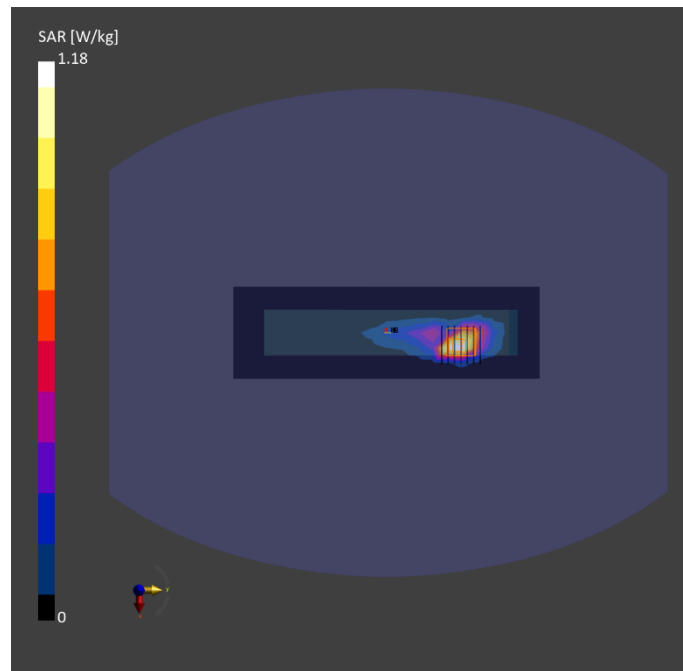

Test Date : 2025-07-16 | Ambient Temp : 22.1 °C | Tissue Temp : 21.4 °C

Test Mode

2_WLAN5.3G_802.11ac VHT160_Right Side_0mm_Ch50_Ant 0+1_Sample 1

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Permittivity	TSL Conductivity [S/m]
Flat	WLAN 5GHz	WLAN, 10554 - AAD	5250.000, 50	5.05	34.5	4.46

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7757 / 2024-09-18	DAE4 Sn1743 / 2024-09-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 220.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.915	1.04
psSAR-10g [W/kg]	0.256	0.250
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		59.9
Dist 3dB Peak [mm]		4.6

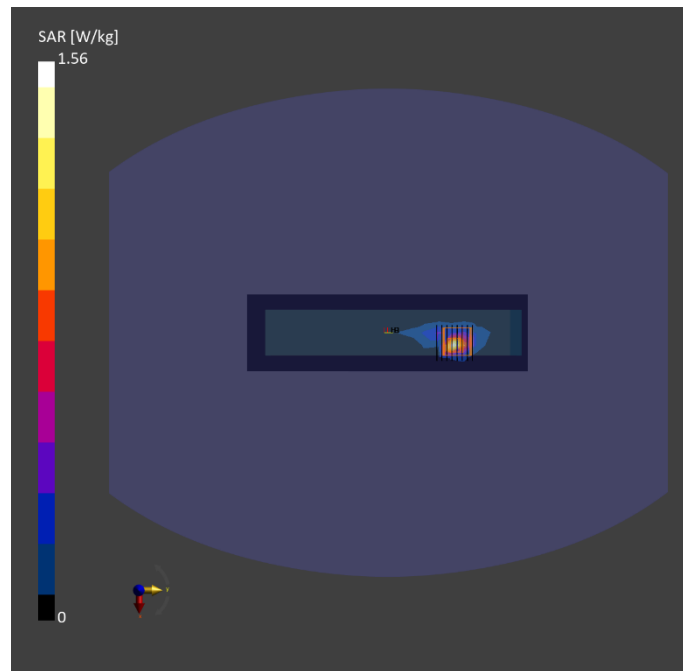

Test Date : 2025-07-17 | Ambient Temp : 22.2 °C | Tissue Temp : 21.6 °C

Test Mode

3_WLAN5.6G_802.11ac VHT160_Right Side_0mm_Ch114_Ant 1_Sample 1

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Permittivity	TSL Conductivity [S/m]
Flat	WLAN 5GHz	WLAN, 10554 - AAD	5570.000, 114	4.56	33.9	4.79

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7757 / 2024-09-18	DAE4 Sn1743 / 2024-09-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 220.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.920	1.05
psSAR-10g [W/kg]	0.247	0.240
Power Drift [dB]		-0.07
TSL Correction	Positive only	Positive only
M2 / M1 [%]		56.4
Dist 3dB Peak [mm]		4.7

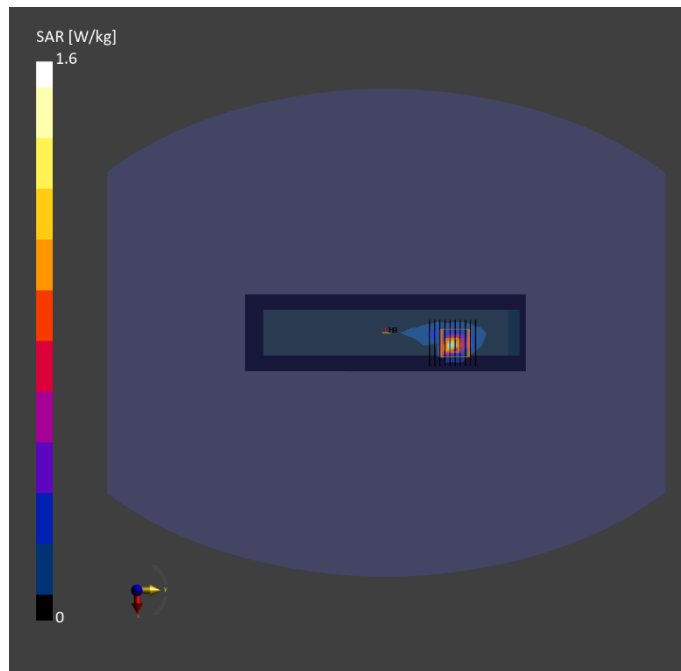

Test Date : 2025-07-16 | Ambient Temp : 22.1 °C | Tissue Temp : 21.4 °C

Test Mode

4_WLAN5.8G_802.11ac VHT160_Right Side_0mm_Ch163_Ant 0+1_Sample 1

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Permittivity	TSL Conductivity [S/m]
Flat	WLAN 5GHz	WLAN, 10554 - AAD	5815.000, 163	4.51	33.5	5.05

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7757 / 2024-09-18	DAE4 Sn1743 / 2024-09-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 220.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.871	0.959
psSAR-10g [W/kg]	0.203	0.197
Power Drift [dB]		-0.03
TSL Correction	Positive only	Positive only
M2 / M1 [%]		54.4
Dist 3dB Peak [mm]		4.3

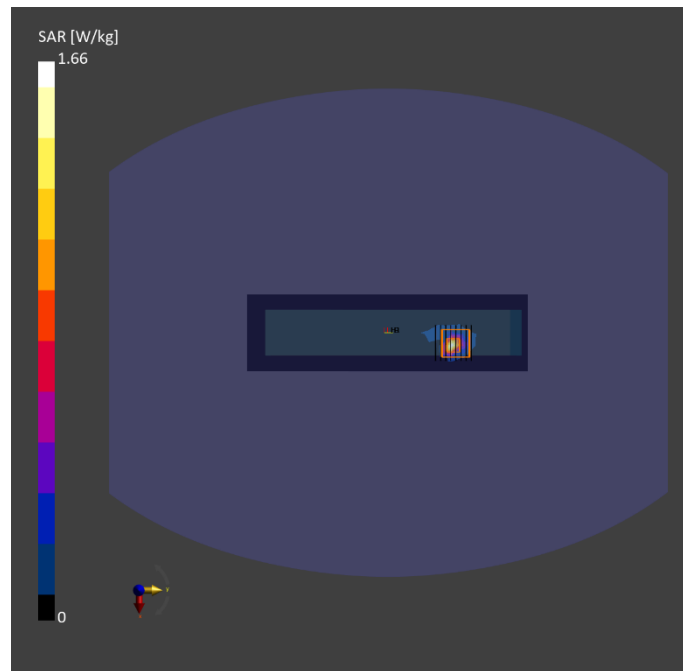

Test Date : 2025-07-18 | Ambient Temp : 22.3 °C | Tissue Temp : 22.1 °C

Test Mode

5_U-NII 5_802.11be EHT320_Top Side_0mm_Ch31_Ant 0_Sample 1

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Permittivity	TSL Conductivity [S/m]
Flat	U-NII-5	WLAN, 11026 - AAA	6105.000, 31	4.49	33.0	5.38

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7757 / 2024-09-18	DAE4 Sn1743 / 2024-09-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	68.0 x 306.0	22.0 x 22.0 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.750	0.867
psSAR-10g [W/kg]	0.158	0.192
psAPD (1.0 cm ² , sq) [W/m ²]		6.15
psAPD (4.0 cm ² , sq) [W/m ²]		4.33
Power Drift [dB]		0.05
TSL Correction	Positive only	Positive only
M2 / M1 [%]		54.7
Dist 3dB Peak [mm]		6.5

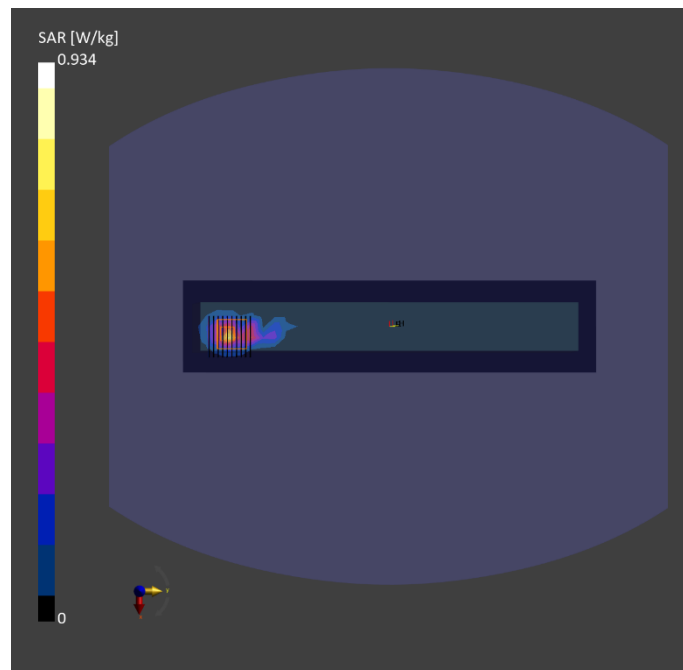

Test Date : 2025-07-15 | Ambient Temp : 21.9 °C | Tissue Temp : 21.2 °C

Test Mode

6_Bluetooth_GFSK_Right Side_0mm_Ch0_Ant 1_Sample 1

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A006	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Permittivity	TSL Conductivity [S/m]
Flat	ISM 2.4 GHz Band	Bluetooth, 10032 - CAA	2402.000, 0	6.64	37.9	1.75

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2180	HBBL-600-10000	EX3DV4 - SN7757 / 2024-09-18	DAE4 Sn1743 / 2024-09-19
Measurement Software Version		16.4.0.5005	

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	60.0 x 228.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.247	0.262
psSAR-10g [W/kg]	0.114	0.111
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		38.1
Dist 3dB Peak [mm]		5.4

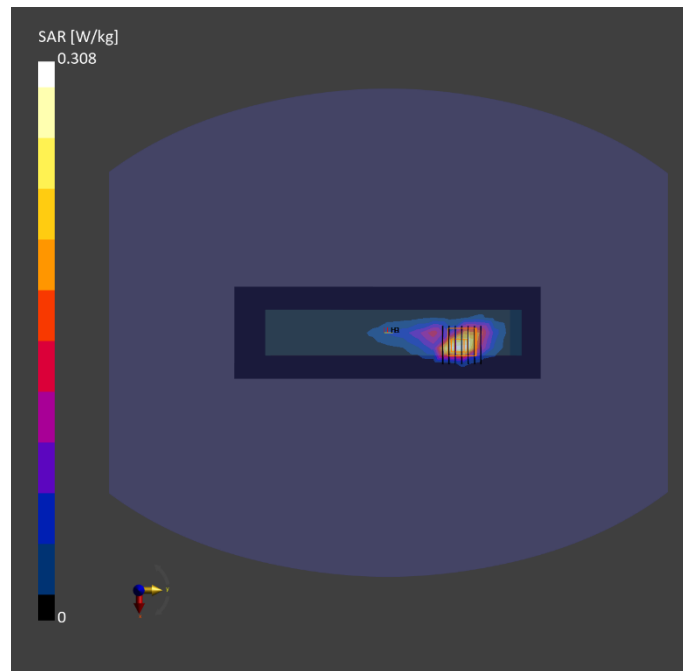

Test Date : 2025-07-22 | Ambient Temp : 21.9 °C

Test Mode

7_U-NII 5_802.11be EHT320_Top Side_2mm_Ch31_Ant 0_Sample 1

Device Under Test Properties

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	UX10	A20	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	U-NII-5	WLAN, 11026 - AAA	6105.000, 31	1.0

Hardware Setup

Phantom	Medium	Probe Calibration Date	DAE Calibration Date
mmWave - 1102	Air	EUmmWV4 - SN9639_F1-55GHz / 2024-09-16	DAE4 Sn1742 / 2024-08-15
Measurement Software Version		3.2.2.2358	

Scan Setup

	5G Scan
Grid Extents [mm]	100.0 x 100.0
Grid Steps [mm]	0.0502 x 0.0502
Sensor Surface [mm]	2.0

Measurement Results

	5G Scan
Avg. Area [cm ²]	4.00
psPD n+ [W/m ²]	4.56
psPD tot+ [W/m ²]	7.62
psPD mod+ [W/m ²]	10.2
Peak PD tot [W/m ²]	29.4
Power Drift [dB]	-0.14

