

Date: 2025-06-12

#01_WLAN2.4GHz_802.11b 1Mbps_Top Edge_0mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2462.000 MHz

Medium: HSL_2450_250612 Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(6.42, 6.59, 6.79); Calibrated: 2025-02-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn577; Calibrated: 2025-03-14
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1227; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10415-AAA

Area Scan (100.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.651 W/kg; SAR (10g) = 0.327 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.00 dB

SAR (1g) = 0.681 W/kg; SAR (8g) = 0.362 W/kg; SAR (10g) = 0.329 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 82.0 %

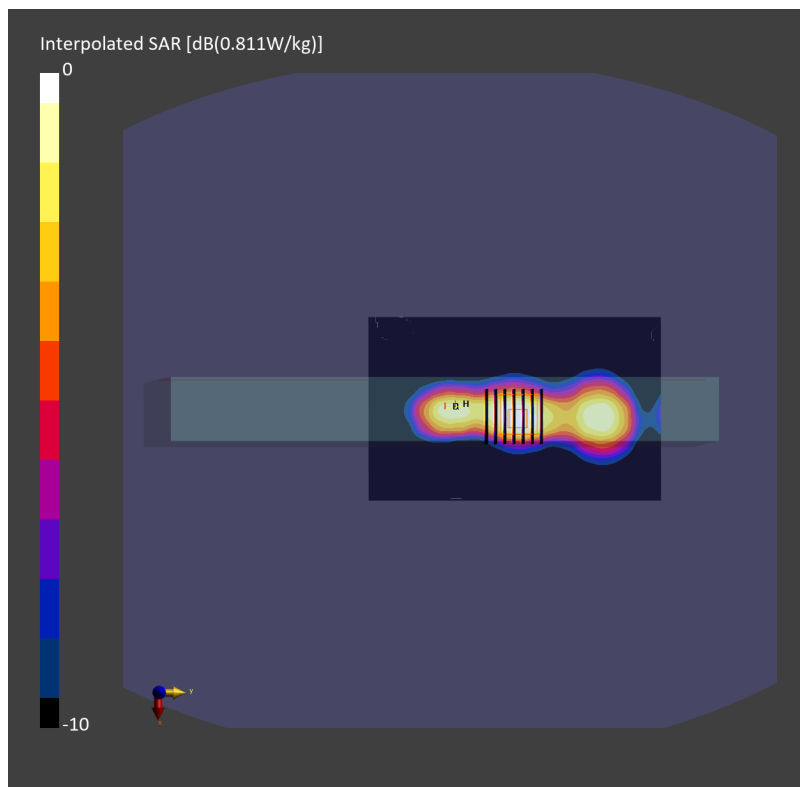

Date: 2025-06-14

#02_WLAN5GHz_802.11ac-VHT160 MCS0_Top Edge_0mm_Ch50

Communication System: IEEE 802.11ac WiFi; Frequency: 5250.000 MHz

Medium: HSL_5G_250614 Medium parameters used: $f = 5250.000$ MHz; $\sigma = 4.68$ S/m; $\epsilon_r = 36.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.98, 5.11, 5.27); Calibrated: 2025-02-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn577; Calibrated: 2025-03-14
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1227; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10554-AAE

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.624 W/kg; SAR (10g) = 0.198 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 0.707 W/kg; SAR (8g) = 0.245 W/kg; SAR (10g) = 0.212 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 64.0 %

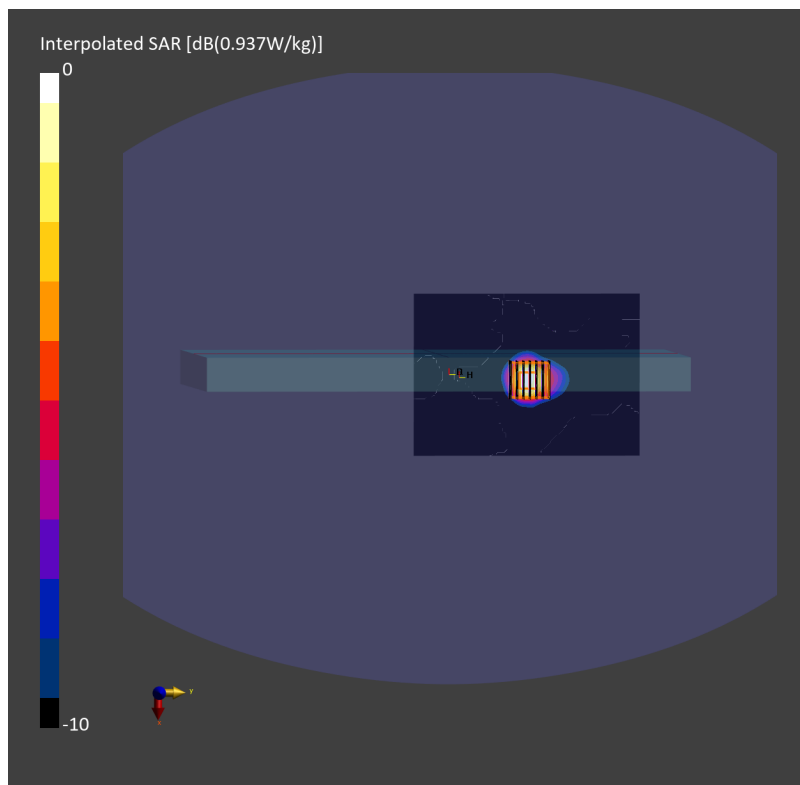

Date: 2025-06-14

#03_WLAN5GHz_802.11ac-VHT160 MCS0_Top Edge_0mm_Ch114

Communication System: IEEE 802.11ac WiFi; Frequency: 5570.000 MHz

Medium: HSL_5G_250614 Medium parameters used: $f = 5570.000$ MHz; $\sigma = 5.00$ S/m; $\epsilon_r = 36.1$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.56, 4.69, 4.83); Calibrated: 2025-02-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn577; Calibrated: 2025-03-14
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1227; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10554-AAE

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.602 W/kg; SAR (10g) = 0.187 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.03 dB

SAR (1g) = 0.675 W/kg; SAR (8g) = 0.232 W/kg; SAR (10g) = 0.200 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 60.8 %

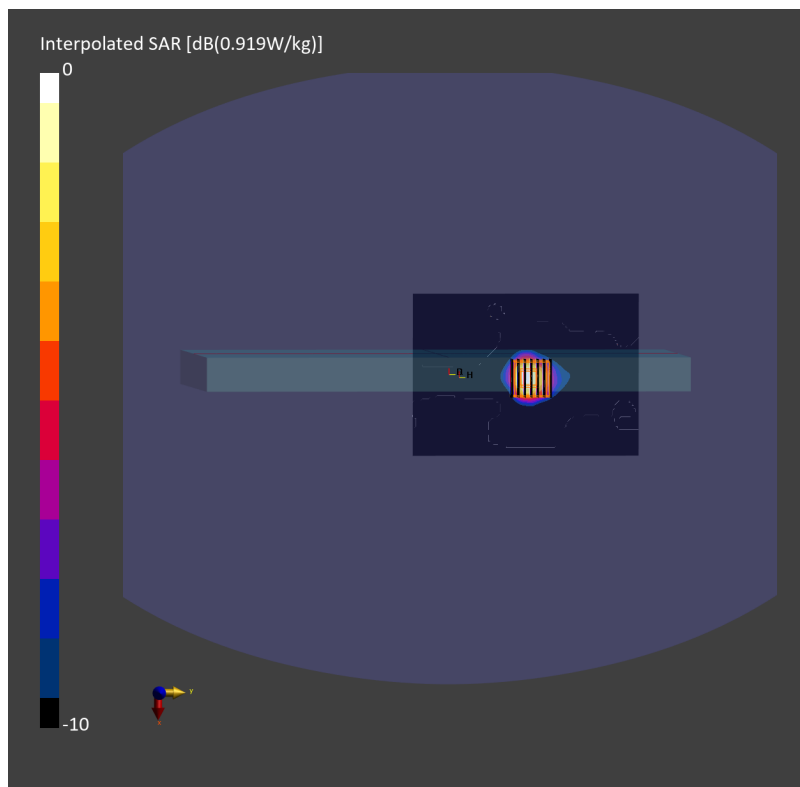

Date: 2025-06-14

#04_WLAN5GHz_802.11ac-VHT80 MCS0_Top Edge_0mm_Ch155

Communication System: IEEE 802.11ac WiFi; Frequency: 5775.000 MHz

Medium: HSL_5G_250614 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.22$ S/m; $\epsilon_r = 35.9$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.56, 4.69, 4.83); Calibrated: 2025-02-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn577; Calibrated: 2025-03-14
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1227; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10544-AAD

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.597 W/kg; SAR (10g) = 0.178 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.00 dB

SAR (1g) = 0.662 W/kg; SAR (8g) = 0.228 W/kg; SAR (10g) = 0.197 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 59.1 %

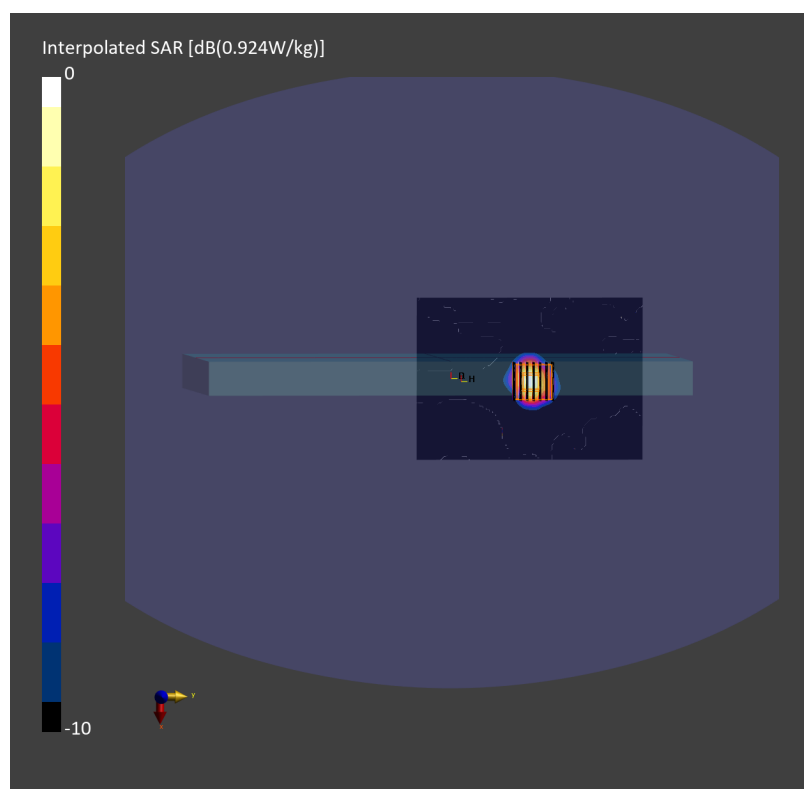

Date: 2025-06-14

#05_WLAN5GHz_802.11ac-VHT160 MCS0_Top Edge_0mm_Ch163

Communication System: IEEE 802.11ac WiFi; Frequency: 5815.000 MHz

Medium: HSL_5G_250614 Medium parameters used: $f = 5815.000$ MHz; $\sigma = 5.26$ S/m; $\epsilon_r = 35.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.56, 4.69, 4.83); Calibrated: 2025-02-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn577; Calibrated: 2025-03-14
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1227; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 10554-AAE

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.627 W/kg; SAR (10g) = 0.188 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.03 dB

SAR (1g) = 0.687 W/kg; SAR (8g) = 0.236 W/kg; SAR (10g) = 0.203 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 59.4 %

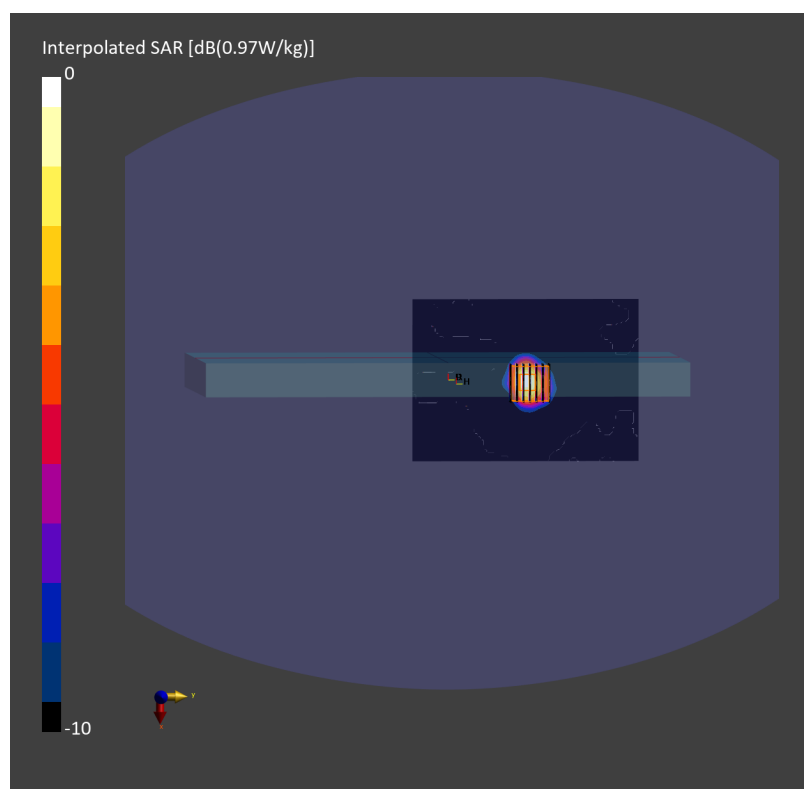

Date: 2025-06-15

#06_WLAN6GHz_802.11be-EHT320 MCS0_Top Edge_0mm_Ch95

Communication System: IEEE 802.11be; Frequency: 6425.000 MHz

Medium: HSL_6G_250615 Medium parameters used: $f = 6425.000$ MHz; $\sigma = 6.01$ S/m; $\epsilon_r = 34.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.79, 4.92, 5.07); Calibrated: 2025-02-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn577; Calibrated: 2025-03-14
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1227; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: CW, 11026-AAB

Area Scan (102.0 mm x 153.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.680 W/kg; SAR (10g) = 0.208 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.685 W/kg; SAR (8g) = 0.242 W/kg; SAR (10g) = 0.209 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 53.1 %

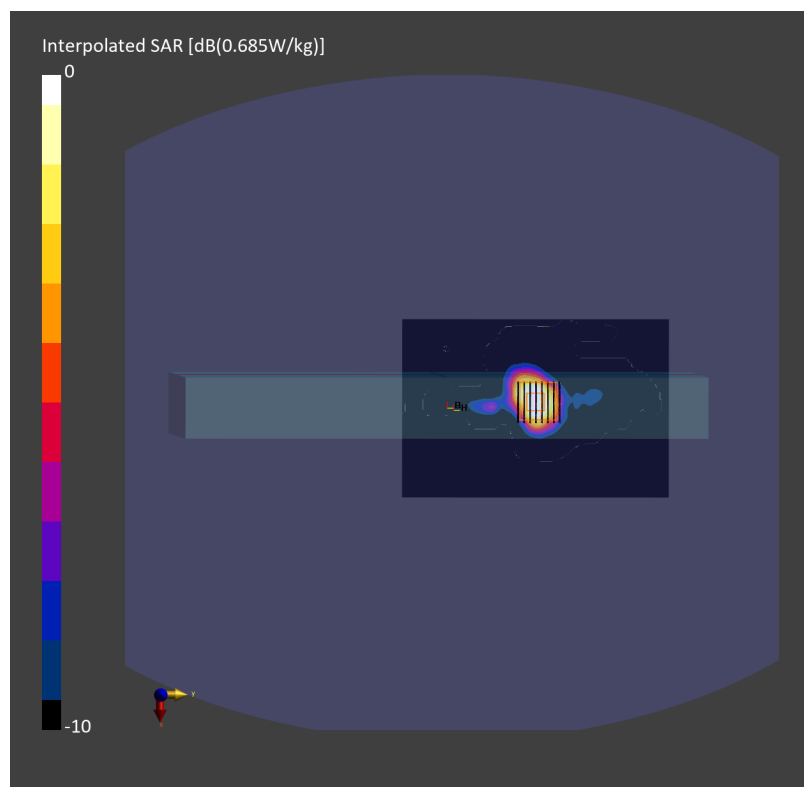psAPD (1.0cm², sq) = 6.85 [W/m²]; psAPD (4.0cm², sq) = 4.84 [W/m²]

Date: 2025-06-15

#07_WLAN6GHz_802.11ax-HE160 MCS0_Top Edge_0mm_Ch143

Communication System: IEEE 802.11ax; Frequency: 6665.000 MHz

Medium: HSL_6G_250615 Medium parameters used: $f = 6665.000$ MHz; $\sigma = 6.30$ S/m; $\epsilon_r = 34.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7793; ConvF(4.79, 4.92, 5.07); Calibrated: 2025-02-18
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn577; Calibrated: 2025-03-14
- Phantom: ELI V5.0 (20deg probe tilt); Serial: 1227; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: WLAN, 10755-AAC

Area Scan (102.0 mm x 153.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.634 W/kg; SAR (10g) = 0.193 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.647 W/kg; SAR (8g) = 0.225 W/kg; SAR (10g) = 0.194 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 53.7 %

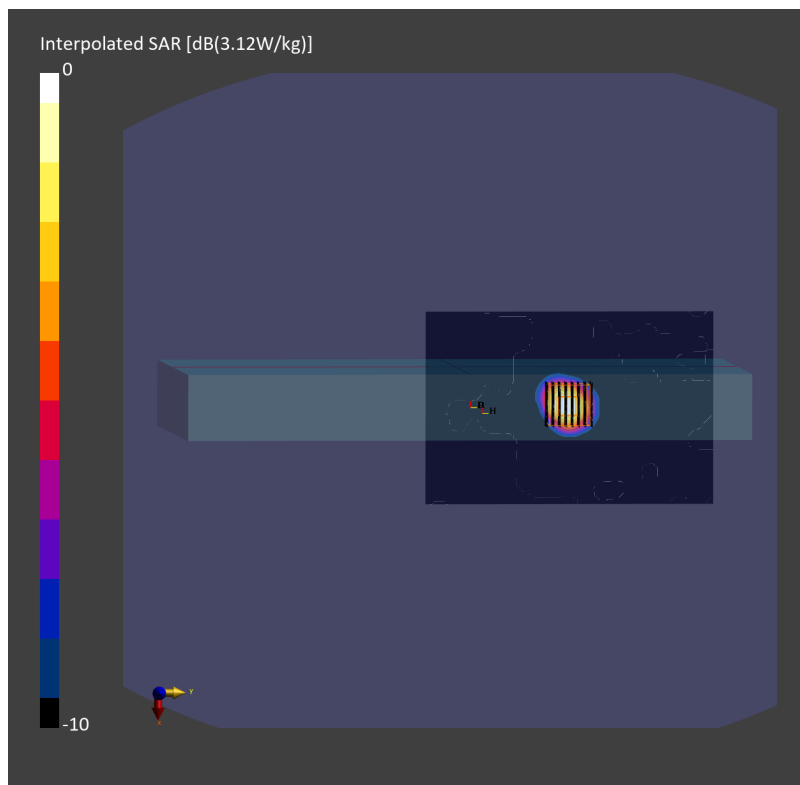psAPD (1.0cm², sq) = 6.47 [W/m²]; psAPD (4.0cm², sq) = 4.50 [W/m²]

Date: 2025-06-21

#08_Bluetooth_1Mbps_Left Edge_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_2450_250621 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7625; ConvF(7.0, 6.83, 7.4); Calibrated: 2024-12-13
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2024-10-15
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2196; Section: Flat
- Measurement Software: 16.2.4.2524
- UID: Bluetooth, 10032-CAA

Area Scan (100.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.307 W/kg; SAR (10g) = 0.134 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.318 W/kg; SAR (8g) = 0.155 W/kg; SAR (10g) = 0.139 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.8 %

