



FCC RADIO TEST REPORT

FCC ID : QYLBE201NG
Equipment : Wireless Module
Model Name : BE201NGW
Applicant : Getac Technology Corporation.
5F., Building A, No. 209, Sec. 1, Nangang Rd.,
Nangang Dist., Taipei City 115018, Taiwan, R.O.C.
Standard : FCC Part 15 Subpart C §15.247

The product was received on May 22, 2025 and testing was performed from Jun. 06, 2025 to Jun. 10, 2025. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sportun International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description.....	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	6
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test.....	7
2.1 Carrier Frequency Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	9
2.5 EUT Operation Test Setup	9
3 Test Result.....	10
3.1 Output Power Measurement.....	10
3.2 Radiated Band Edges and Spurious Emission Measurement	11
3.3 AC Conducted Emission Measurement.....	15
3.4 Antenna Requirements	17
4 List of Measuring Equipment	18
5 Measurement Uncertainty	20
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Result	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
-	15.247(a)(1)	Number of Channels	Pass	See Note
-	15.247(a)(1)	Hopping Channel Separation	Pass	See Note
-	15.247(a)(1)	Dwell Time of Each Channel	Pass	See Note
-	15.247(a)(1)	20dB Bandwidth	Pass	See Note
-	2.1049	99% Occupied Bandwidth	Pass	See Note
3.1	15.247(b)(1) 15.247(b)(4)	Peak Output Power	Pass	-
-	15.247(d)	Conducted Band Edges	Pass	See Note
-	15.247(d)	Conducted Spurious Emission	Pass	See Note
3.2	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	-
3.3	15.207	AC Conducted Emission	Pass	-
3.4	15.203	Antenna Requirement	Pass	-

Note:

The module has undergone multiple transmissions assessments, and the antenna gain of the host device is lower than that of the module. Therefore, the host device was spot-checked for conducted output power and radiated spurious emissions per band. The conducted output power shows no difference compared to the module (Model: BE201NGW), and the radiated spurious emissions comply with the limits specified in this test report.

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang

Report Producer: Dara Chiu



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature		
General Specs Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax/be, Wi-Fi 5GHz 802.11a/n/ac/ax/be, and Wi-Fi 6GHz 802.11ax/be		
Antenna Type Bluetooth: PIFA Antenna		
Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	0.96

The product was installed into Tablet (Brand Name: Getac, Model Name:F120, F120Y (Y= 10 characters, Y can be 0-9, a-z, A-Z, “-”, “_” or blank for marketing purpose and no impact safety related critical components and constructions.)) during test, and the host information was recorded in the following table.

Sample Information for Host			
	SKU A	SKU B	SKU C
CPU	ULTRA5-226V	ULTRA5-236V	ULTRA7-268V
DDR	INTEGRATED 16GB	INTEGRATED 16GB	INTEGRATED 32GB
SSD	256GB	512GB	1TB
PANEL	Full FHD AUO	Full FHD AUO	Full FHD AUO
DIGITIZER	Not Support	EMRright Digitizer	EMRright Digitizer
OPTION BAY	LAN	Barcode Reader	Barcode Reader
Expansion Bay	N/A	HID RFID	SMART CARD
Right side option	USB2.0	Fingerprinter	RFID (SN-NSVG7-C01)
WLAN/BT	Intel BE201NGW	Intel BE201NGW	Intel BE201NGW
WWAN	N/A	LN920A12-WW	LN920A12-WW
GNSS	SE868K5-D (L1+L5)	LN920A12-WW	LN920A12-WW
Rear 8M Camera	Support	Support	Support
Webcam FHD	Support	Support	Support
USB3.2 Gen2 x 1 Type-A	Support	Support	Support
Type-C (thunder bolt)	Support	Support	Support

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.



1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sportun International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sportun Site No. TH05-HY, CO07-HY, 03CH21-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.247
- FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- FCC KDB 414788 D01 Radiated Test Site v01r01
- ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	27	2429	54	2456
	1	2403	28	2430	55	2457
	2	2404	29	2431	56	2458
	3	2405	30	2432	57	2459
	4	2406	31	2433	58	2460
	5	2407	32	2434	59	2461
	6	2408	33	2435	60	2462
	7	2409	34	2436	61	2463
	8	2410	35	2437	62	2464
	9	2411	36	2438	63	2465
	10	2412	37	2439	64	2466
	11	2413	38	2440	65	2467
	12	2414	39	2441	66	2468
	13	2415	40	2442	67	2469
	14	2416	41	2443	68	2470
	15	2417	42	2444	69	2471
	16	2418	43	2445	70	2472
	17	2419	44	2446	71	2473
	18	2420	45	2447	72	2474
	19	2421	46	2448	73	2475
	20	2422	47	2449	74	2476
	21	2423	48	2450	75	2477
	22	2424	49	2451	76	2478
	23	2425	50	2452	77	2479
	24	2426	51	2453	78	2480
	25	2427	52	2454	-	-
	26	2428	53	2455	-	-




2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst plane, and the worst mode of radiated spurious emissions is Bluetooth 1Mbps mode, and recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth BR 1Mbps GFSK
	Mode 1: CH00_2402 MHz
AC Conducted Emission	Mode 1 :Bluetooth Tx (1Mbps Ch00) + Adapter 1 + Battery 1 for SKU A
Remark:	
1. For Radiated Test Cases, the tests were performed with Adapter 1, Battery 1, and SKU B. 2. The detailed Radiated test modes are shown in Appendix C.	

2.3 Connection Diagram of Test System

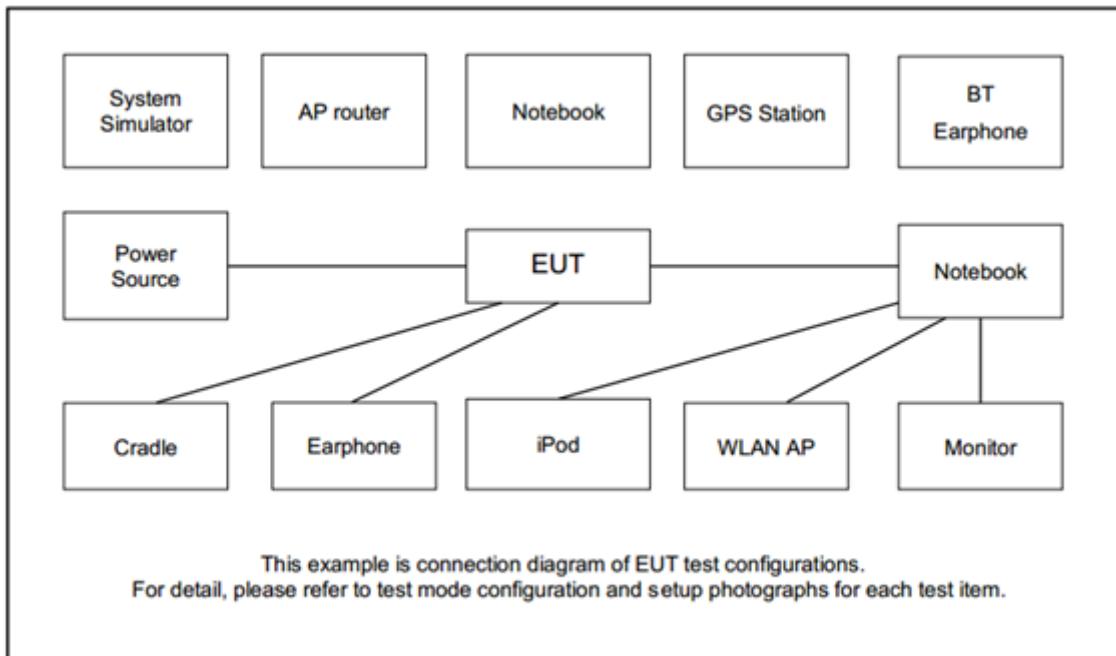

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	ASUS	RT-AC52	MSQ-RTAC4A00	N/A	Unshielded, 1.8m
2.	USB HD	ADATA	HV620S-1T	FCC DoC	Shielded, 0.5m	N/A
3.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0m	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “DRTU.07983.23.120.0” was installed in Host which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 Output Power Measurement

3.1.1 Limit of Output Power

The maximum peak conducted output power of the intentional radiator shall not exceed the following:

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band:

1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band 0.125 watts.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 7.8.5.
1. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
2. Set the maximum power setting and enable the EUT to transmit continuously.
3. Measure the conducted output power with cable loss and record the results in the test report.
4. Measure and record the results in the test report.

3.1.4 Test Setup

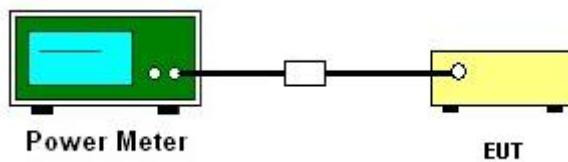

3.1.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.1.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.



3.2 Radiated Band Edges and Spurious Emission Measurement

3.2.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics / spurious must be at least 20 dB below the highest emission level within the authorized band. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




3.2.3 Test Procedures

1. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
3. For each suspected emission, the EUT is arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW = 100 kHz for $f < 1$ GHz, RBW = 1 MHz for $f > 1$ GHz ; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold for peak
 - (3) For average measurement: use duty cycle correction factor method per 15.35(c).
Duty cycle = On time/100 milliseconds
On time = $N_1 \cdot L_1 + N_2 \cdot L_2 + \dots + N_{n-1} \cdot L_{n-1} + N_n \cdot L_n$
Where N_1 is number of type 1 pulses, L_1 is length of type 1 pulses, etc.
Average Emission Level = Peak Emission Level + $20 \cdot \log_{10}$ (Duty cycle)
6. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
7. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as "-".
8. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as "-".


Note: The average levels are calculated from the peak level corrected with duty cycle correction factor (-24.79dB) derived from $20 \cdot \log_{10}$ (dwell time/100ms). This correction is only for signals that hop with the fundamental signal, such as band-edge and harmonic. Other spurious signals that are independent of the hopping signal would not use this correction.

3.2.4 Test Setup


For radiated test below 30MHz

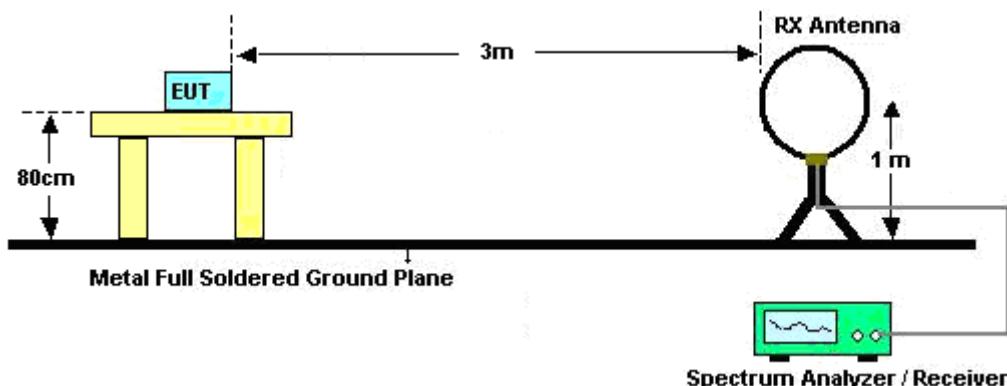


For radiated test from 30MHz to 1GHz

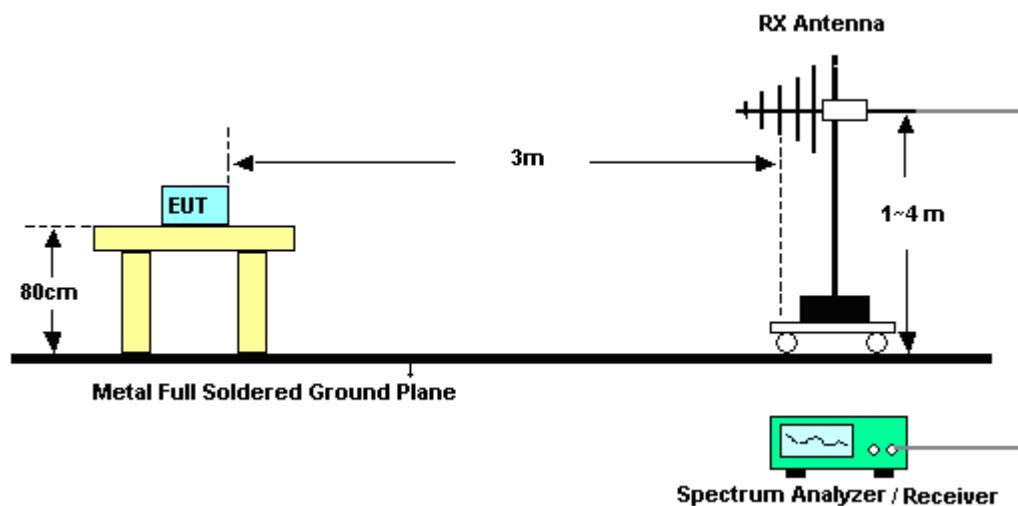

For radiated test from 1GHz to 18GHz

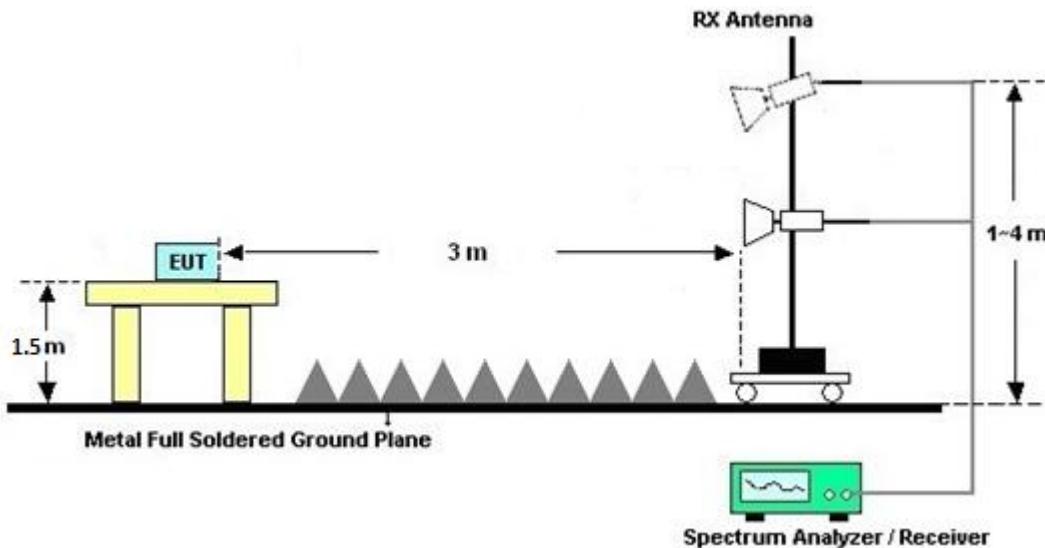

For radiated test above 18GHz

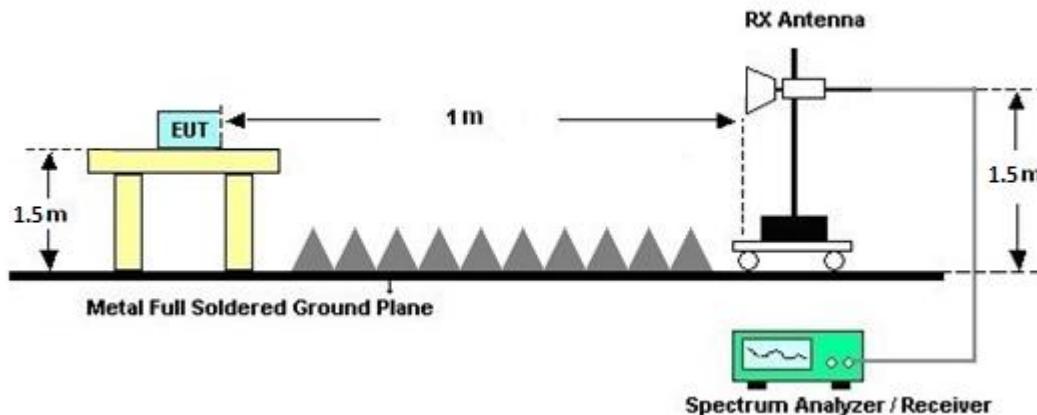

3.2.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.2.7 Duty Cycle

Please refer to Appendix D.

3.2.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix C.



3.3 AC Conducted Emission Measurement

3.3.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9 kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.3.4 Test Setup

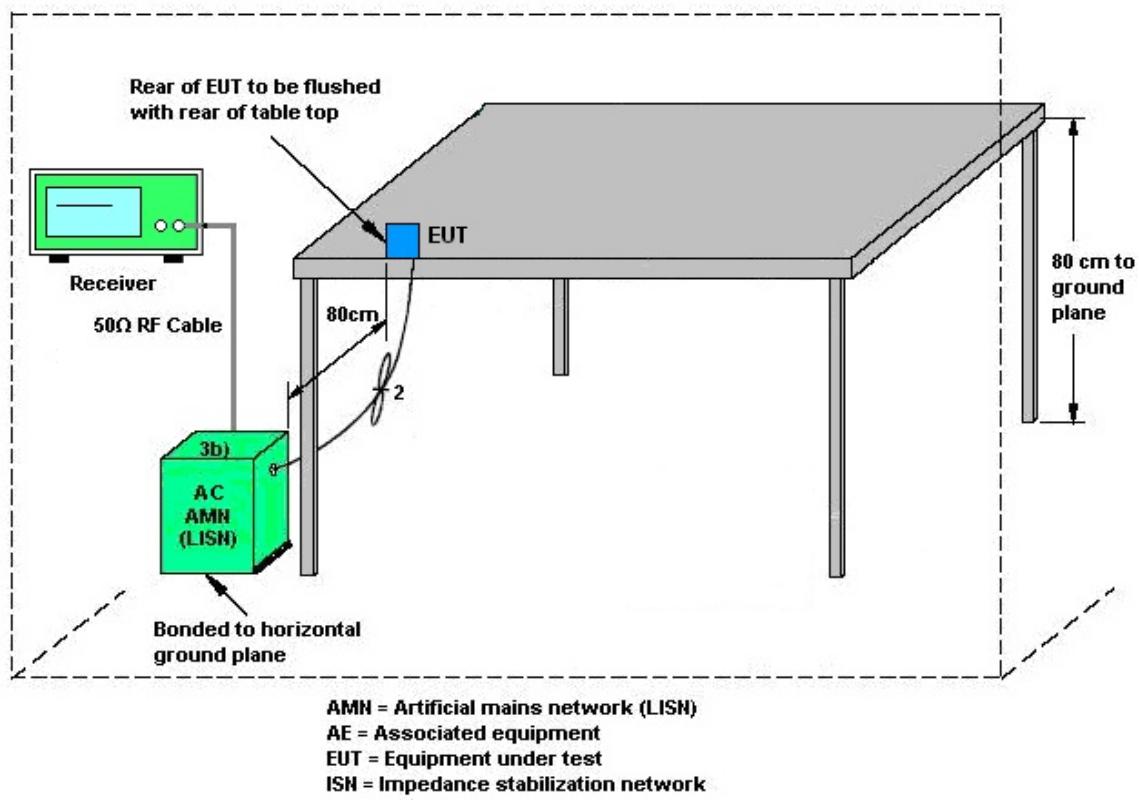

3.3.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.4 Antenna Requirements

3.4.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.4.2 Antenna Anti-Replacement Construction

Unique (non-standard) antenna connector.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LOOP Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Jun. 09, 2025 ~ Jun. 10, 2025	Aug. 28, 2025	Radiation (03CH21-HY)
Bilog Antenna	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63303 & 001	30MHz~1GHz	Dec. 17, 2024	Jun. 09, 2025 ~ Jun. 10, 2025	Dec. 16, 2025	Radiation (03CH21-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C03A1 8EN	1GHz~18GHz	Jul. 11, 2024	Jun. 09, 2025 ~ Jun. 10, 2025	Jul. 10, 2025	Radiation (03CH21-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz~40GHz	Jun. 24, 2024	Jun. 09, 2025 ~ Jun. 10, 2025	Jun. 23, 2025	Radiation (03CH21-HY)
Amplifier	SONOMA	310N	421580	30MHz~1GHz	Jul. 14, 2024	Jun. 09, 2025 ~ Jun. 10, 2025	Jul. 13, 2025	Radiation (03CH21-HY)
Amplifier	EMEC	EM01G18GA	060876	1GHz~18GHz	Sep. 27, 2024	Jun. 09, 2025 ~ Jun. 10, 2025	Sep. 26, 2025	Radiation (03CH21-HY)
Preamplifier	EMEC	EM18G40G	060873	18GHz~40GHz	Sep. 02, 2024	Jun. 09, 2025 ~ Jun. 10, 2025	Sep. 01, 2025	Radiation (03CH21-HY)
Spectrum Analyzer	Keysight	N9010B	MY621703 58	10Hz~44GHz	Sep. 06, 2024	Jun. 09, 2025 ~ Jun. 10, 2025	Sep. 05, 2025	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 05, 2025	Jun. 09, 2025 ~ Jun. 10, 2025	Mar. 04, 2026	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804397/2,8 04612/2,80 3954/2	30MHz~40GHz	Aug. 12, 2024	Jun. 09, 2025 ~ Jun. 10, 2025	Aug. 11, 2025	Radiation (03CH21-HY)
Hygrometer	TECPEL	DTM-303A	TP211568	N/A	Oct. 21, 2024	Jun. 09, 2025 ~ Jun. 10, 2025	Oct. 20, 2025	Radiation (03CH21-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Jun. 09, 2025 ~ Jun. 10, 2025	N/A	Radiation (03CH21-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Jun. 09, 2025 ~ Jun. 10, 2025	N/A	Radiation (03CH21-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jun. 09, 2025 ~ Jun. 10, 2025	N/A	Radiation (03CH21-HY)
Software	Audix	E3 6.2009-8-24	RK-00105 3	N/A	N/A	Jun. 09, 2025 ~ Jun. 10, 2025	N/A	Radiation (03CH21-HY)
AC Power Source	ACPOWER	AFC-11003G	F3170400 33	N/A	N/A	Jun. 09, 2025	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jun. 09, 2025	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 23, 2024	Jun. 09, 2025	Oct. 22, 2025	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 03, 2025	Jun. 09, 2025	Mar. 02, 2026	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 24, 2025	Jun. 09, 2025	Mar. 23, 2026	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 26, 2025	Jun. 09, 2025	Mar. 25, 2026	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 23, 2024	Jun. 09, 2025	Sep. 22, 2025	Conduction (CO07-HY)

**FCC RADIO TEST REPORT****Report No. : FR552229A**

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 01, 2024	Jun. 06, 2025	Oct. 31, 2025	Conducted (TH05-HY)
Power Meter	Agilent	E4416A	GB412923 44	N/A	Jun. 26, 2024	Jun. 06, 2025	Jun. 25, 2025	Conducted (TH05-HY)
Power Sensor	Agilent	E9327A	US404415 48	50MHz~18GHz	Jun. 25, 2024	Jun. 06, 2025	Jun. 24, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101467	10HZ~44GHZ	Jan. 14, 2025	Jun. 06, 2025	Jan. 13, 2026	Conducted (TH05-HY)
Switch Control Mainframe	E-Instument	ETF-1405-0	EC190015 7 (BOX6)	N/A	Feb. 10, 2025	Jun. 06, 2025	Feb. 09, 2026	Conducted (TH05-HY)
Software	Sporton	BTWIFI_Final _version_240 513	N/A	Conducted Other Test Item	N/A	Jun. 06, 2025	N/A	Conducted (TH05-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.7 dB
--	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.6 dB
--	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
--	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.7 dB
--	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.3 dB
--	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Shiming Liu	Temperature:	21~25	°C
Test Date:	2025/6/6	Relative Humidity:	51~54	%

<u>TEST RESULTS DATA</u>					
<u>Peak Power Table</u>					
DH	CH.	NTX	Peak Power (dBm)	Power Limit (dBm)	Test Result
DH5	0	1	14.02	20.97	Pass

<u>TEST RESULTS DATA</u>					
<u>Average Power Table</u>					
<i>(Reporting Only)</i>					
DH	CH.	NTX	Average Power (dBm)	Duty Factor (dB)	
DH5	0	1	13.87	1.15	




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	22.8~25.6°C
		Relative Humidity :	46.2~52.3%

EUT Information

Report NO : 552229
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

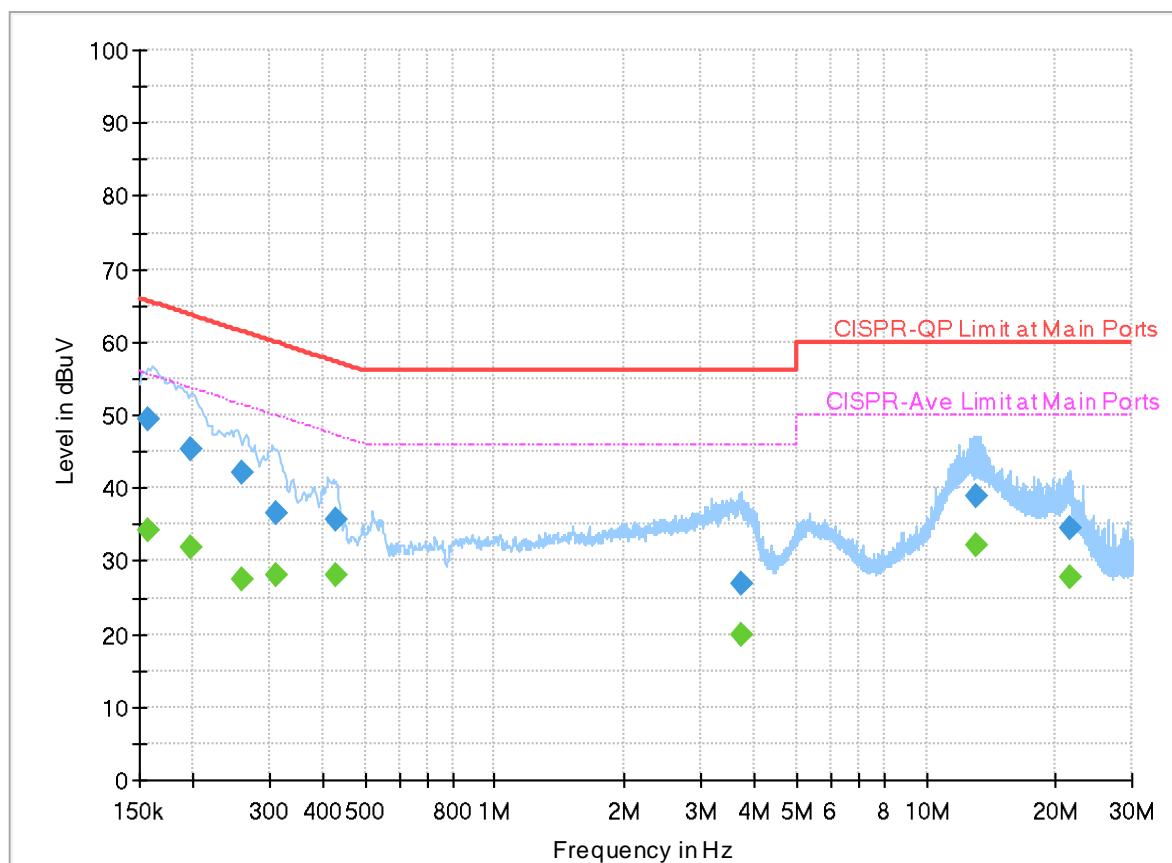


Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.156750	---	34.08	55.63	21.55	L1	FLO	20.0
0.156750	49.28	---	65.63	16.35	L1	FLO	20.0
0.197250	---	31.81	53.73	21.92	L1	FLO	20.0
0.197250	45.29	---	63.73	18.44	L1	FLO	20.0
0.260250	---	27.42	51.42	24.00	L1	FLO	20.0
0.260250	42.16	---	61.42	19.26	L1	FLO	20.0
0.311640	---	28.12	49.93	21.81	L1	FLO	20.0
0.311640	36.55	---	59.93	23.38	L1	FLO	20.0
0.425850	---	28.13	47.33	19.20	L1	FLO	20.0
0.425850	35.74	---	57.33	21.59	L1	FLO	20.0
3.724980	---	19.96	46.00	26.04	L1	FLO	20.1
3.724980	26.95	---	56.00	29.05	L1	FLO	20.1
13.129710	---	32.20	50.00	17.80	L1	FLO	20.5
13.129710	39.00	---	60.00	21.00	L1	FLO	20.5
21.516270	---	27.75	50.00	22.25	L1	FLO	20.9
21.516270	34.38	---	60.00	25.62	L1	FLO	20.9

EUT Information

Report NO : 552229
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

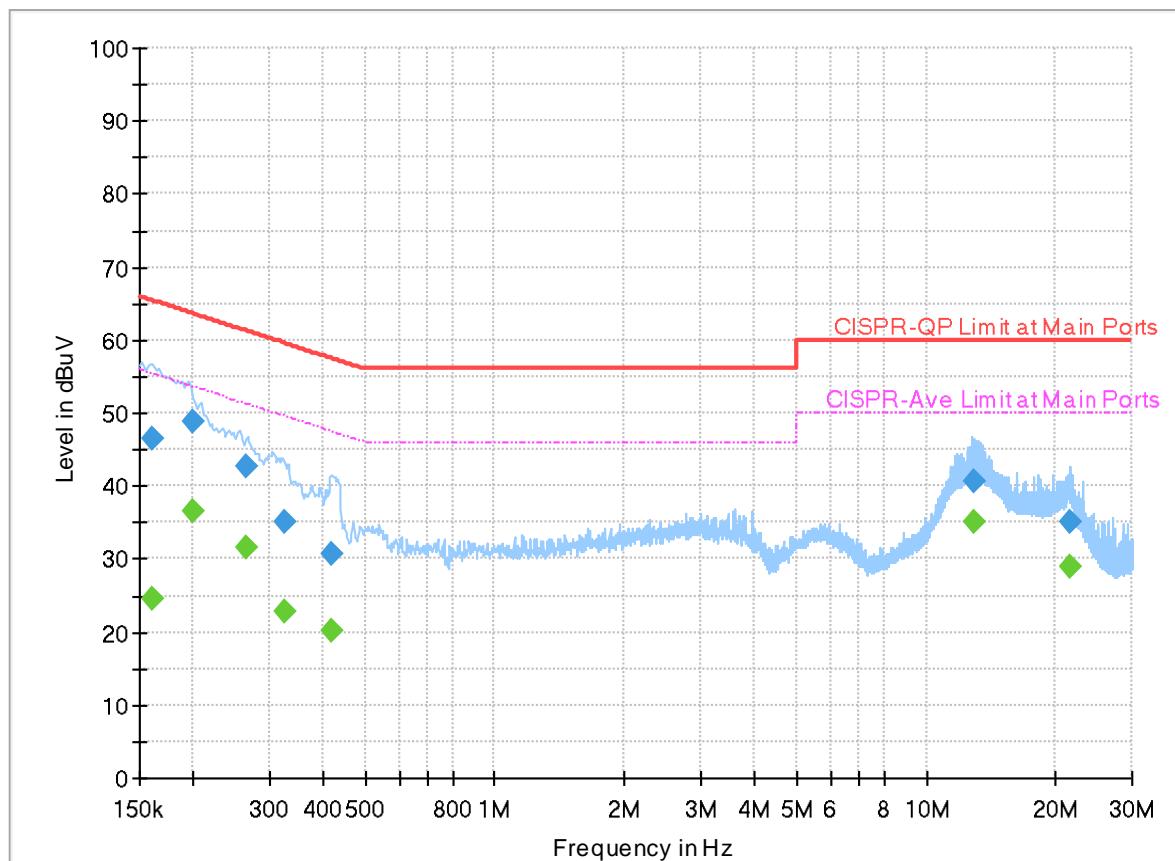

Final Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	PE	Corr. (dB)
0.161430	---	24.53	55.39	30.86	N	FLO	20.0
0.161430	46.39	---	65.39	19.00	N	FLO	20.0
0.199860	---	36.55	53.62	17.07	N	FLO	20.0
0.199860	48.96	---	63.62	14.66	N	FLO	20.0
0.264750	---	31.61	51.28	19.67	N	FLO	20.0
0.264750	42.59	---	61.28	18.69	N	FLO	20.0
0.325500	---	22.82	49.57	26.75	N	FLO	20.0
0.325500	35.02	---	59.57	24.55	N	FLO	20.0
0.417750	---	20.13	47.49	27.36	N	FLO	20.0
0.417750	30.79	---	57.49	26.70	N	FLO	20.0
12.941250	---	35.02	50.00	14.98	N	FLO	20.5
12.941250	40.60	---	60.00	19.40	N	FLO	20.5
21.512130	---	28.95	50.00	21.05	N	FLO	20.9
21.512130	34.96	---	60.00	25.04	N	FLO	20.9



Appendix C. Radiated Spurious Emission Test Data

Test Engineer:	Fred Zeng, Ray Lung, and Sky Chang	Temperature(°C):	18 ~ 23
		Relative Humidity(%):	50 ~ 65

Note symbol


-L	Low channel location
-R	High channel location

C1. Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	Bluetooth BR_GFSK	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	1	Bluetooth BR_GFSK	00	2402	1Mbps	-	SHF
Mode 3	2400-2483.5	1	Bluetooth BR_GFSK	00	2402	1Mbps	-	LF


C2. Summary of each worse mode


Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	Bluetooth BR_GFSK	00	2389.95	51.39	74.00	-22.61	H	Peak	Pass	-	Band Edge
	Bluetooth BR_GFSK	00	4804.00	45.18	74.00	-28.82	H	Peak	Pass	-	Harmonic
2	Bluetooth BR_GFSK	00	23340.73	39.62	74.00	-34.38	H	Peak	Pass	-	SHF
3	Bluetooth BR_GFSK	00	162.89	32.22	43.50	-11.28	H	Peak	Pass	-	LF

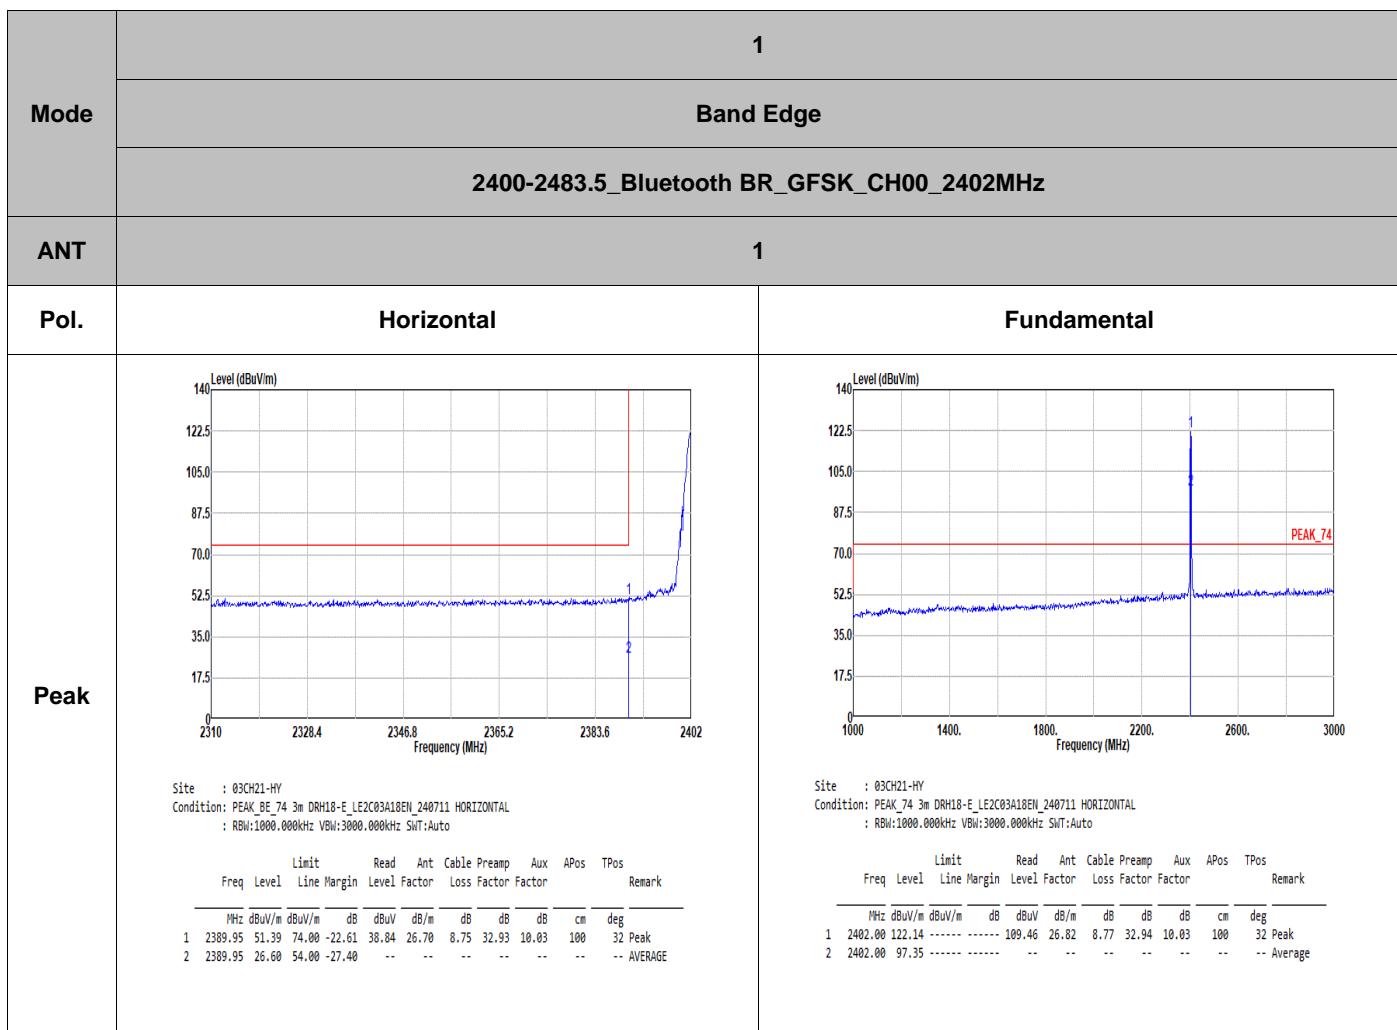






Mode	1																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																	
ANT	1																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_L2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr></thead><tbody><tr><td>1</td><td>2384.80</td><td>51.29</td><td>74.00</td><td>-22.71</td><td>38.75</td><td>26.70</td><td>8.74</td><td>32.93</td><td>10.03</td></tr><tr><td>2</td><td>2384.80</td><td>26.50</td><td>54.00</td><td>-27.50</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		1	2384.80	51.29	74.00	-22.71	38.75	26.70	8.74	32.93	10.03	2	2384.80	26.50	54.00	-27.50	--	--	--	--	-- AVERAGE	<p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>Site : 03CH21-HY Condition: PEAK_74 3m DRH18-E_L2C03A18EN_240711 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th></tr></thead><tbody><tr><td>1</td><td>2402.00</td><td>119.17</td><td>-----</td><td>-----</td><td>106.49</td><td>26.82</td><td>8.77</td><td>32.94</td><td>10.03</td></tr><tr><td>2</td><td>2402.00</td><td>94.38</td><td>-----</td><td>-----</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor		1	2402.00	119.17	-----	-----	106.49	26.82	8.77	32.94	10.03	2	2402.00	94.38	-----	-----	--	--	--	--	-- Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																										
1	2384.80	51.29	74.00	-22.71	38.75	26.70	8.74	32.93	10.03																																																																									
2	2384.80	26.50	54.00	-27.50	--	--	--	--	-- AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																										
1	2402.00	119.17	-----	-----	106.49	26.82	8.77	32.94	10.03																																																																									
2	2402.00	94.38	-----	-----	--	--	--	--	-- Average																																																																									

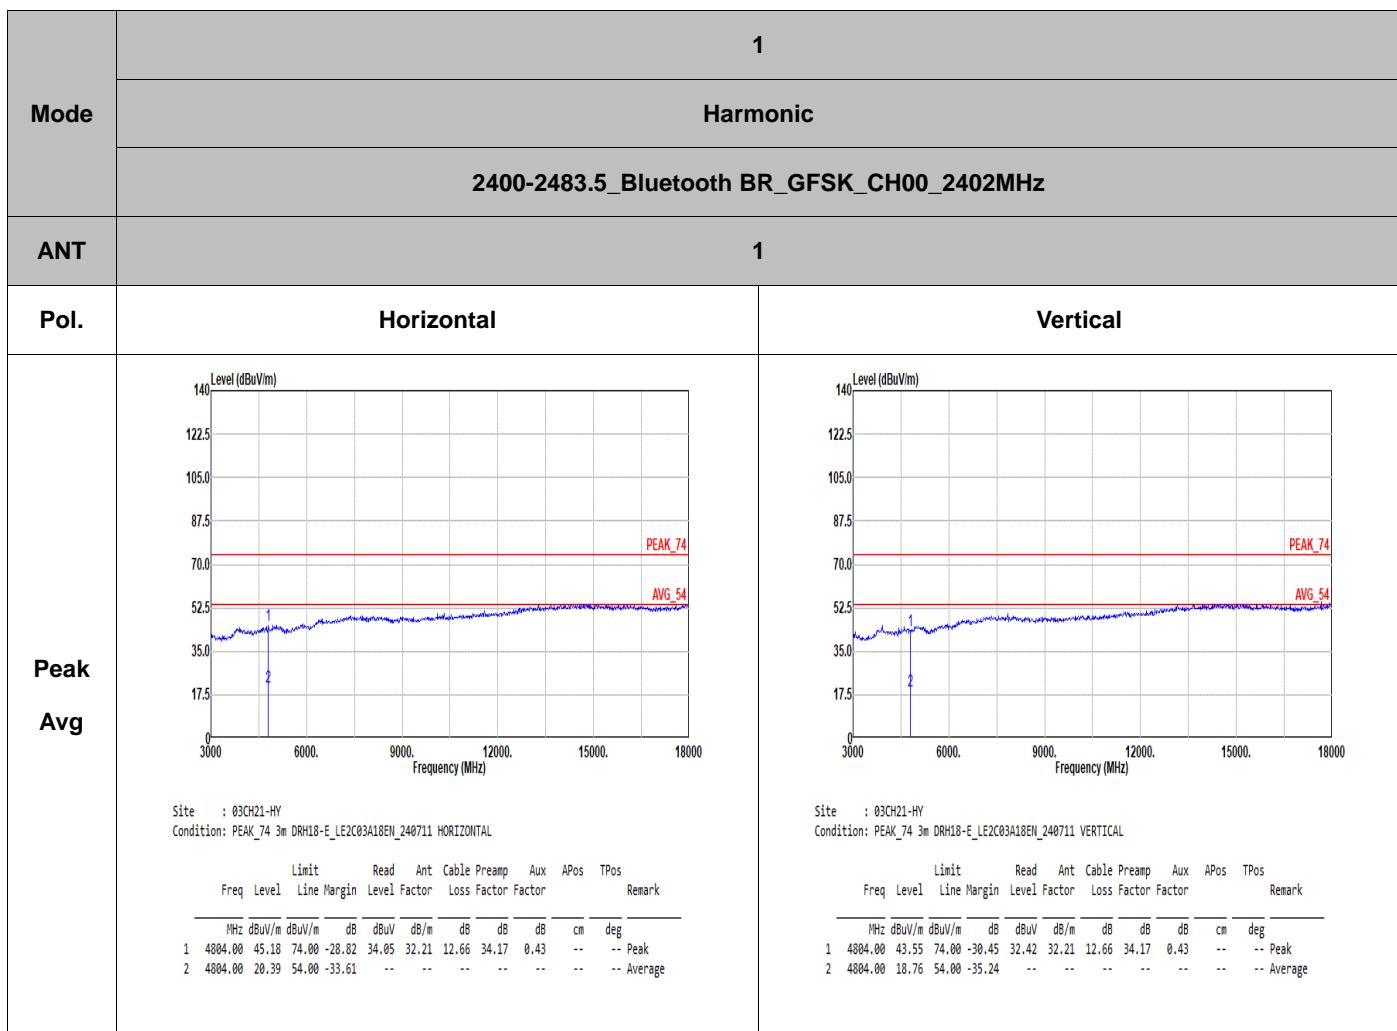

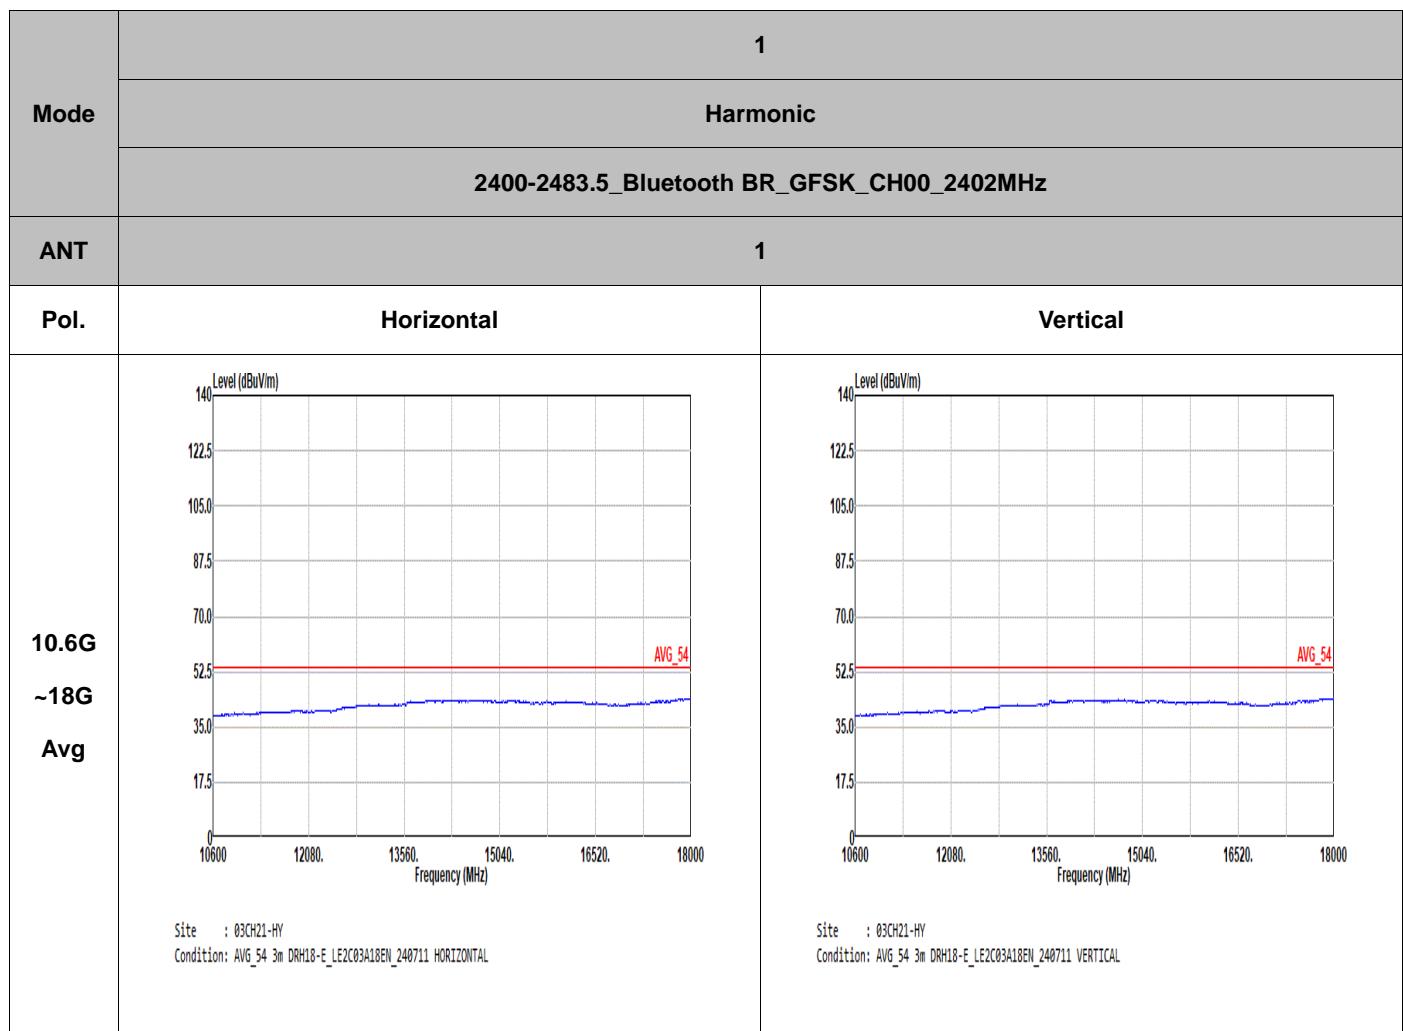

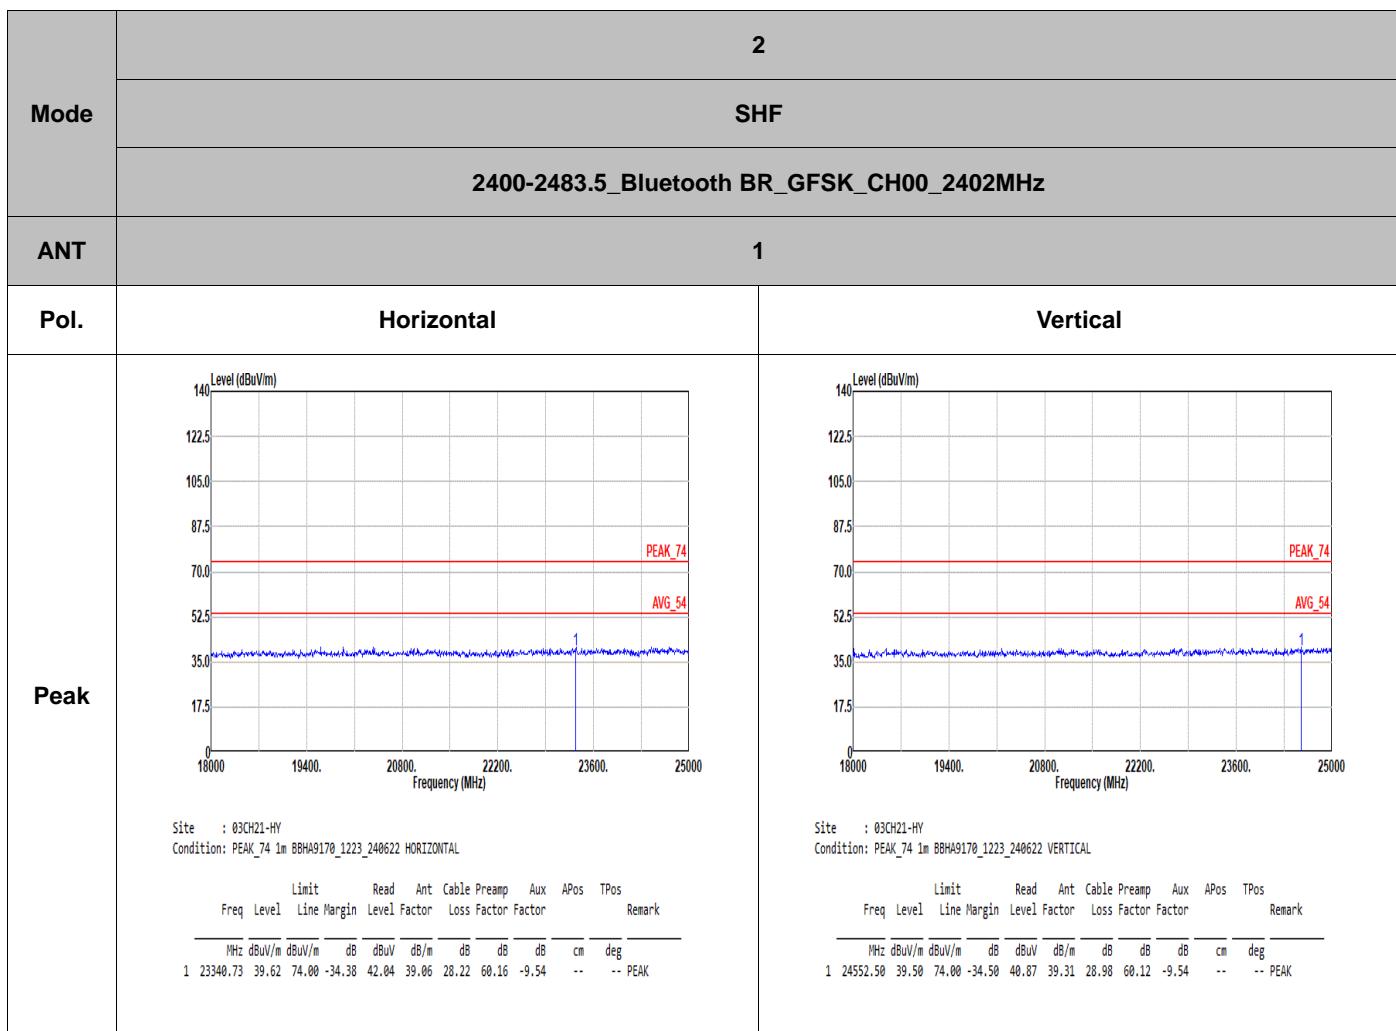


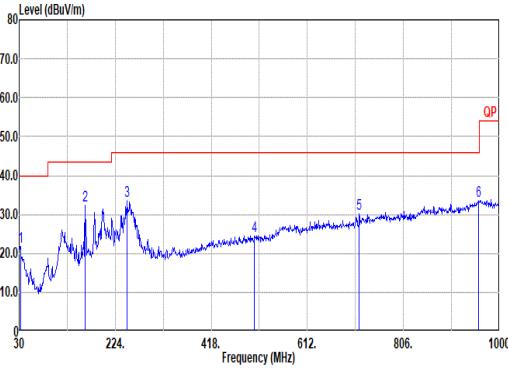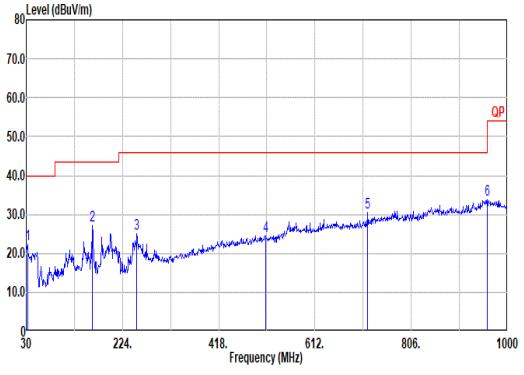

Mode	3																																																																																																																																																																															
	LF																																																																																																																																																																															
	2400-2483.5_Bluetooth BR_GFSK_CH00_2402MHz																																																																																																																																																																															
ANT	1																																																																																																																																																																															
Pol.	Horizontal 																																																																																																																																																																															
QP/ Peak	 Site : 03CH21-HY Condition: QP 3m LF_63303&001_241217 HORIZONTAL <table border="1" data-bbox="282 1021 770 1208"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>32.91</td><td>21.75</td><td>40.00</td><td>-18.25</td><td>30.13</td><td>23.36</td><td>0.90</td><td>32.64</td><td>0.00</td><td>-- Peak</td></tr> <tr><td>2</td><td>162.89</td><td>32.22</td><td>43.50</td><td>-11.28</td><td>46.46</td><td>16.20</td><td>2.19</td><td>32.63</td><td>0.00</td><td>-- Peak</td></tr> <tr><td>3</td><td>248.25</td><td>33.46</td><td>46.00</td><td>-12.54</td><td>44.89</td><td>18.45</td><td>2.74</td><td>32.62</td><td>0.00</td><td>-- Peak</td></tr> <tr><td>4</td><td>505.30</td><td>24.51</td><td>46.00</td><td>-21.49</td><td>29.32</td><td>24.10</td><td>3.93</td><td>32.84</td><td>0.00</td><td>-- Peak</td></tr> <tr><td>5</td><td>716.76</td><td>30.14</td><td>46.00</td><td>-15.86</td><td>31.22</td><td>27.07</td><td>4.70</td><td>32.85</td><td>0.00</td><td>-- Peak</td></tr> <tr><td>6</td><td>958.29</td><td>33.44</td><td>46.00</td><td>-12.56</td><td>27.88</td><td>31.50</td><td>5.47</td><td>31.33</td><td>0.00</td><td>-- Peak</td></tr> </tbody> </table> Site : 03CH21-HY Condition: QP 3m LF_63303&001_241217 VERTICAL <table border="1" data-bbox="933 1021 1421 1208"> <thead> <tr> <th rowspan="2">Freq</th> <th colspan="2">Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>32.91</td><td>22.22</td><td>40.00</td><td>-17.78</td><td>30.60</td><td>23.36</td><td>0.90</td><td>32.64</td><td>0.00</td><td>-- Peak</td></tr> <tr><td>2</td><td>163.86</td><td>27.15</td><td>43.50</td><td>-16.35</td><td>41.47</td><td>16.11</td><td>2.20</td><td>32.63</td><td>0.00</td><td>-- Peak</td></tr> <tr><td>3</td><td>253.18</td><td>25.12</td><td>46.00</td><td>-20.88</td><td>35.91</td><td>19.07</td><td>2.77</td><td>32.63</td><td>0.00</td><td>-- Peak</td></tr> <tr><td>4</td><td>512.09</td><td>24.58</td><td>46.00</td><td>-21.42</td><td>29.32</td><td>24.14</td><td>3.96</td><td>32.84</td><td>0.00</td><td>-- Peak</td></tr> <tr><td>5</td><td>718.70</td><td>30.36</td><td>46.00</td><td>-15.64</td><td>31.34</td><td>27.15</td><td>4.71</td><td>32.84</td><td>0.00</td><td>-- Peak</td></tr> <tr><td>6</td><td>959.26</td><td>33.69</td><td>46.00</td><td>-12.31</td><td>28.04</td><td>31.50</td><td>5.47</td><td>31.32</td><td>0.00</td><td>-- Peak</td></tr> </tbody> </table>		Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	32.91	21.75	40.00	-18.25	30.13	23.36	0.90	32.64	0.00	-- Peak	2	162.89	32.22	43.50	-11.28	46.46	16.20	2.19	32.63	0.00	-- Peak	3	248.25	33.46	46.00	-12.54	44.89	18.45	2.74	32.62	0.00	-- Peak	4	505.30	24.51	46.00	-21.49	29.32	24.10	3.93	32.84	0.00	-- Peak	5	716.76	30.14	46.00	-15.86	31.22	27.07	4.70	32.85	0.00	-- Peak	6	958.29	33.44	46.00	-12.56	27.88	31.50	5.47	31.33	0.00	-- Peak	Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	32.91	22.22	40.00	-17.78	30.60	23.36	0.90	32.64	0.00	-- Peak	2	163.86	27.15	43.50	-16.35	41.47	16.11	2.20	32.63	0.00	-- Peak	3	253.18	25.12	46.00	-20.88	35.91	19.07	2.77	32.63	0.00	-- Peak	4	512.09	24.58	46.00	-21.42	29.32	24.14	3.96	32.84	0.00	-- Peak	5	718.70	30.36	46.00	-15.64	31.34	27.15	4.71	32.84	0.00	-- Peak	6	959.26	33.69	46.00	-12.31	28.04	31.50	5.47	31.32	0.00	-- Peak
Freq	Limit			Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																						
1	32.91	21.75	40.00	-18.25	30.13	23.36	0.90	32.64	0.00	-- Peak																																																																																																																																																																						
2	162.89	32.22	43.50	-11.28	46.46	16.20	2.19	32.63	0.00	-- Peak																																																																																																																																																																						
3	248.25	33.46	46.00	-12.54	44.89	18.45	2.74	32.62	0.00	-- Peak																																																																																																																																																																						
4	505.30	24.51	46.00	-21.49	29.32	24.10	3.93	32.84	0.00	-- Peak																																																																																																																																																																						
5	716.76	30.14	46.00	-15.86	31.22	27.07	4.70	32.85	0.00	-- Peak																																																																																																																																																																						
6	958.29	33.44	46.00	-12.56	27.88	31.50	5.47	31.33	0.00	-- Peak																																																																																																																																																																						
Freq	Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm		deg																																																																																																																																																																					
1	32.91	22.22	40.00	-17.78	30.60	23.36	0.90	32.64	0.00	-- Peak																																																																																																																																																																						
2	163.86	27.15	43.50	-16.35	41.47	16.11	2.20	32.63	0.00	-- Peak																																																																																																																																																																						
3	253.18	25.12	46.00	-20.88	35.91	19.07	2.77	32.63	0.00	-- Peak																																																																																																																																																																						
4	512.09	24.58	46.00	-21.42	29.32	24.14	3.96	32.84	0.00	-- Peak																																																																																																																																																																						
5	718.70	30.36	46.00	-15.64	31.34	27.15	4.71	32.84	0.00	-- Peak																																																																																																																																																																						
6	959.26	33.69	46.00	-12.31	28.04	31.50	5.47	31.32	0.00	-- Peak																																																																																																																																																																						



Appendix D. Duty Cycle Plots

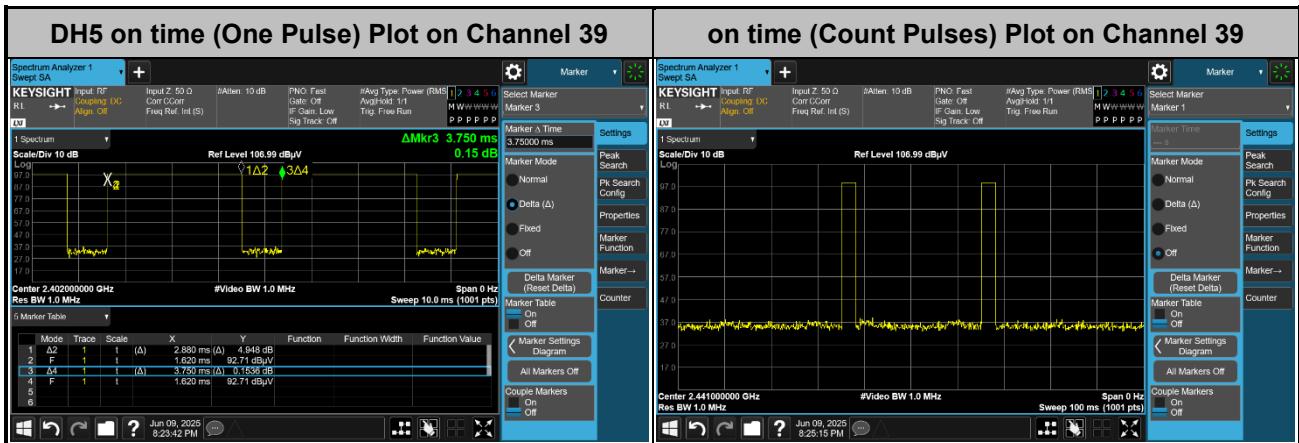

Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.88 / 100 = 5.76 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.79 \text{ dB}$
3. DH5 has the highest duty cycle worst case and is reported.

Duty Cycle Correction Factor Consideration for AFH mode:

Bluetooth normal hopping rate is 1600Hz and reduced to 800Hz in AFH mode; due to the reduced number of hopping frequencies, with the same packet configuration the dwell time in each channel frequency within 100msec period is longer in AFH mode than normal mode.

In AFH mode, the minimum hopping frequencies are 20, to get the longest dwell time DH5 packet is observed; the on time period to have DH5 packet completing one hopping sequence is

$$2.88 \text{ ms} \times 20 \text{ channels} = 57.6 \text{ ms}$$

There cannot be 2 complete hopping sequences within 100ms period, considering the random hopping behavior, maximum 2 hops can be possibly observed within the period. $[100 \text{ ms} / 57.6 \text{ ms}] = 2 \text{ hops}$
Thus, the maximum possible ON time:

$$2.88 \text{ ms} \times 2 = 5.76 \text{ ms}$$

Worst case Duty Cycle Correction factor, which is derived from the maximum possible ON time,

$$20 \times \log(5.76 \text{ ms}/100 \text{ ms}) = -24.79 \text{ dB}$$