

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 96
47 CFR FCC Part 2

Report No.: RFCDVB-WTW-P25040437-1

FCC ID: QYLFN990V12

Product: 5G NR Module

Brand: Getac

Model No.: FN990A28

Received Date: 2025/4/21

Test Date: 2025/6/14 ~ 2025/6/26

Issued Date: 2025/7/11

Applicant: Getac Technology Corporation.

Address: 5F., Building A, No. 209, Sec.1, Nangang Rd., Nangang Dist., Taipei City 115018, Taiwan, R.O.C.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: (1) No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kewi Shan Dist., Taoyuan City 33383, Taiwan
(2) No. 70, Wenming Rd., Guishan Dist., Taoyuan City 333, Taiwan

FCC Registration / (1) 788550 / TW0003

Designation Number: (2) 281270 / TW0032

Approved by: Jeremy Lin, Date: 2025/7/11
Jeremy Lin / Project Engineer

This test report consists of 39 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Vera Huang / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate.....	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Supplementary Information	5
3 General Information	6
3.1 General Description of EUT	6
3.2 Antenna Description of EUT	8
3.3 Test Mode Applicability and Tested Channel Detail.....	8
3.3.1 LTE Band 48	8
3.4 Test Program Used and Operation Descriptions	9
3.5 Connection Diagram of EUT and Peripheral Devices	9
3.6 Configuration of Peripheral Devices and Cable Connections	9
4 Test Instruments	10
4.1 Maximum EIRP.....	10
4.2 Radiated Spurious Emissions below 1GHz.....	10
4.3 Radiated Spurious Emissions above 1GHz	11
5 Limits of Test Items.....	12
5.1 Maximum EIRP.....	12
5.2 Radiated Spurious Emissions below 1GHz.....	12
5.3 Radiated Spurious Emissions above 1GHz	12
6 Test Arrangements.....	13
6.1 Maximum EIRP.....	13
6.1.1 Test Setup	13
6.1.2 Test Procedure.....	13
6.2 Radiated Spurious Emissions below 1GHz.....	15
6.2.1 Test Setup	15
6.2.2 Test Procedure.....	16
6.3 Radiated Spurious Emissions above 1GHz	17
6.3.1 Test Setup	17
6.3.2 Test Procedure.....	17
7 Test Results of Test Item	18
7.1 Maximum EIRP.....	18
7.1.1 LTE Band 48	18
7.2 Radiated Spurious Emissions below 1GHz.....	30
7.2.1 LTE Band 48	30
7.3 Radiated Spurious Emissions above 1GHz	32
7.3.1 LTE Band 48	32
8 Pictures of Test Arrangements	38
9 Information of the Testing Laboratories	39

Release Control Record

Issue No.	Description	Date Issued
RFCDVB-WTW-P25040437-1	Original Release	2025/7/11

1 Certificate

Product: 5G NR Module

Brand: Getac

Test Model: FN990A28

Sample Status: Engineering sample

Applicant: Getac Technology Corporation.

Test Date: 2025/6/14 ~ 2025/6/26

Standard: 47 CFR FCC Part 96
47 CFR FCC Part 2

Measurement ANSI/TIA/EIA-603-E 2016

procedure: ANSI C63.26-2015

KDB 971168 D01 Power Meas License Digital Systems v03r01

KDB 940660 D01 Part 96 CBRS Eqpt v03

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

Standard / Clause	Test Item	Result	Remark
Part 2.1046 Part 96.41(b)	Maximum EIRP	Pass	Meet the requirement of limit.
Part 2.1047	Modulation Characteristics	N/A	Refer to Note
Part 2.1046 Part 96.41(b)	Maximum Power Spectral Density	N/A	This device is End User Device.
Part 96.41(g)	Peak to Average Ratio	N/A	Refer to Note
Part 2.1049	Bandwidth	N/A	Refer to Note
Part 2.1051 Part 96.41(e)	Conducted Spurious Emissions	N/A	Refer to Note
Part 2.1053 Part 96.41(e)	Radiated Spurious Emissions below 1GHz	Pass	Minimum passing margin is -12.86 dB at 353.98 MHz
Part 2.1053 Part 96.41(e)	Radiated Spurious Emissions above 1GHz	Pass	Minimum passing margin is -1.62 dB at 7250.00 MHz
Part 2.1055	Frequency Stability	N/A	Refer to Note

Note:

- Only test item of Maximum EIRP and Radiated Spurious Emissions were performed for this report. Other testing data please refer to WWAN module (FCC ID: RI7FN990A28) certified report.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Specification	Uncertainty (±)
Effective Radiated Power and Equivalent Isotropically Radiated Power	-	1.371 dB
Radiated Spurious Emissions below 1GHz	9 kHz ~ 30 MHz	3 dB
	30 MHz ~ 1 GHz	2.93 dB
Radiated Spurious Emissions above 1GHz	1 GHz ~ 18 GHz	1.76 dB
	18 GHz ~ 40 GHz	1.77 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	5G NR Module
Brand	Getac
Test Model	FN990A28
Status of EUT	Engineering sample
Power Supply Rating	Refer to note
Modulation Type	QPSK, 16QAM, 64QAM, 256QAM
Support Bands	LTE B42, B43, B48
Band Covered Information	LTE B48 cover LTE B42 and B43

Note:

1. The EUT is authorized for use in specific End-product.

Product	Brand	Model	Difference
Notebook	Getac	V120	marketing purpose
		V120Y (Y= 10 characters, Y can be 0 to 9, A to Z, a to z, "/", "\", "-", "_" or blank for marketing purpose)	

2. The End-product uses following accessories.

Item	Brand	Model	Specification
Battery 1	Getac	BP2S1P4070P	Power Rating : Rating: 7.74Vdc , 3800mAh, 29.42Wh Typical Capacity: 4070mAh, 31.51Wh
Battery 2	Getac	BP3S1P4070P	Power Rating : Rating: 11.61Vdc , 3800mAh, 44.12Wh Typical Capacity: 4070mAh, 47.26Wh
AC Adapter	FSP	FSP065-RBBN3	AC Input : 100-240 Vac ; 50-60 Hz ; 1.5 A DC Output : 19.0Vdc ; 3.42A, 65.0W DC Output Cable : 1.45M / 1core AC Power Cord : 1.75M
Touch Pen	Getac	340GA8900001	-

3. EUT Overview

LTE Band 48

Bandwidth	TX Frequency Range (MHz)	Modulation	Max. EIRP (W)	Max. EIRP (dBm)
5 MHz	3552.5 ~ 3697.5	QPSK	0.062	17.93
		16QAM	0.049	16.91
		64QAM	0.039	15.96
		256QAM	0.02	12.95
10 MHz	3555 ~ 3695	QPSK	0.063	17.98
		16QAM	0.049	16.93
		64QAM	0.039	15.93
		256QAM	0.02	12.93
15 MHz	3557.5 ~ 3692.5	QPSK	0.063	17.99
		16QAM	0.05	17.03
		64QAM	0.04	15.98
		256QAM	0.02	13.02
20 MHz	3560 ~ 3690	QPSK	0.064	18.09
		16QAM	0.051	17.07
		64QAM	0.04	16.07
		256QAM	0.02	13.08

4. For detailed information about frequency range, bandwidth mode of the product, please refer to section 3.3 of the report.
5. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

Antenna Type	Antenna Connector	Band	Peak Gain (dBi)			
			Ant 0 (MAIN)	Ant 2 (AUX)	Ant 1 (MIMO1)	Ant 3 (MIMO2)
PIFA	Ant 0/2/3: IPEX I	LTE Band 42	1.46	0.03	2.57	1.8
	Ant 1: IPEX (NGFF)	LTE Band 43	1.46	0.03	2.57	1.8
		LTE Band 48	1.46	0.03	2.57	1.8

*The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

*LTE Band 42/43/48 were fixed on Ant. 3

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. EUT can be used in the following ways: X-axis / Y-axis / Z-axis / NB-axis. Pre-scan these ways and find the worst case as a representative test condition. 2. Pre-scan Battery 1 / Battery 2 and find the worst case as a representative test condition.
Worst Case:	1. X-axis / Y-axis / Z-axis / NB-axis Worst Condition: NB-axis 2. Battery Worst Condition: Battery 1


3.3.1 LTE Band 48

Test Item	Tested Channel	Channel Bandwidth	Modulation	Mode
Equivalent Isotropically Radiated Power	55265(3552.50 MHz) 55990(3625.00 MHz) 56715(3697.50 MHz)	5 MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB Half RB Full RB
	55290(3555.00 MHz) 55990(3625.00 MHz) 56690(3695.00 MHz)	10 MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB Half RB Full RB
	55315(3557.50 MHz) 55990(3625.00 MHz) 56665(3692.50 MHz)	15 MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB Half RB Full RB
	55340(3560.00 MHz) 55990(3625.00 MHz) 56640(3690.00 MHz)	20 MHz	QPSK / 16QAM / 64QAM / 256QAM	1 RB Half RB Full RB
Radiated Spurious Emissions below 1GHz	55340(3560.00 MHz)	20 MHz	QPSK	1 RB
Radiated Spurious Emissions above 1GHz	55265(3552.50 MHz) 55990(3625.00 MHz) 56715(3697.50 MHz)	5 MHz	QPSK	1 RB
	55340(3560.00 MHz) 55990(3625.00 MHz) 56640(3690.00 MHz)	20 MHz	QPSK	1 RB

3.4 Test Program Used and Operation Descriptions

There is no need to controlling software during the test, and the EUT can be paired with the Radio Communication Analyzer to test the connection when it is powered on.

3.5 Connection Diagram of EUT and Peripheral Devices

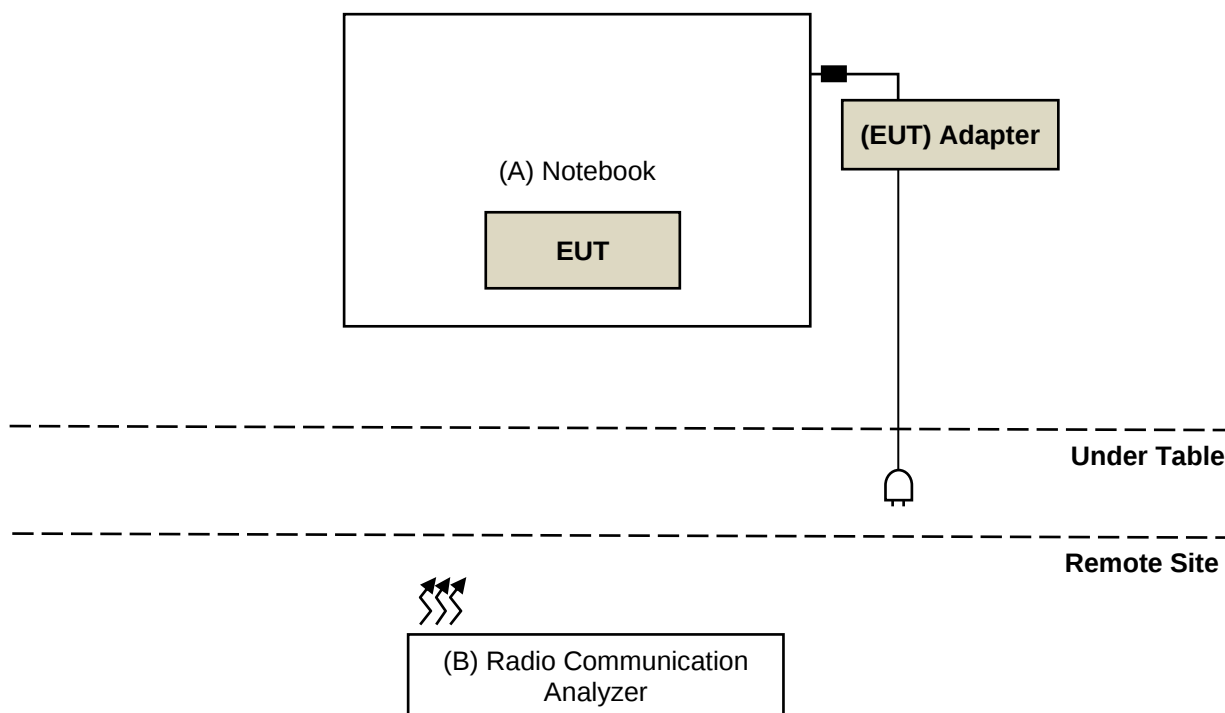

3.6 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Notebook	Getac	V120	N/A	N/A	Supplied by applicant
B	Radio Communication Analyzer	Anritsu	MT8821C	6201462755	N/A	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 Maximum EIRP

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fixed Attenuator Woken	00800A1K01A-10	00800A1K01A-10-01	2025/5/23	2026/5/22
PXA Signal Analyzer Keysight	N9030B	MY57140938	2025/3/24	2026/3/23
Radio Communication Analyzer Anritsu	MT8821C	6261806803	2025/2/19	2026/2/18
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2025/6/23 ~ 2025/6/26

4.2 Radiated Spurious Emissions below 1GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	MFA-515BSN	N/A	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-1214	2024/10/15	2025/10/14
EXA Signal Analyzer Agilent	N9010A	MY52220207	2024/12/30	2025/12/29
Loop Antenna TESEQ	HLA 6121	45745	2024/8/21	2025/8/20
MXE EMI Receiver Agilent	N9038A	MY52260177	2024/9/19	2025/9/18
Preamplifier EMCI	EMC330N	980798	2025/1/14	2026/1/13
RF Coaxial Cable EMCI	EMCCFD400-NM-NM-500	201248	2025/1/14	2026/1/13
	EMCCFD400-NM-NM-3000	201249	2025/1/14	2026/1/13
	EMCCFD400-NM-NM-9000	201251(with PAD)	2025/1/14	2026/1/13
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table Max-Full	MFT-201SS	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802BS	MF780208676	N/A	N/A

Notes:

1. The test was performed in WM - 966 chamber 9.
2. Tested Date: 2025/6/15

4.3 Radiated Spurious Emissions above 1GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower Max-Full	MFA-515BSN	N/A	N/A	N/A
EXA Signal Analyzer Agilent	N9010A	MY52220207	2024/12/30	2025/12/29
Horn Antenna RFSPIN	DRH18-E	210104A18E	2024/11/10	2025/11/9
Horn Antenna Schwarzbeck	BBHA 9170	9170-1049	2024/11/10	2025/11/9
MXE EMI Receiver Agilent	N9038A	MY52260177	2024/9/19	2025/9/18
Preamplifier Agilent	83017A	MY39501357	2025/6/11	2026/6/10
Preamplifier EMCI	EMC184045SE	980788	2025/1/14	2026/1/13
RF Coaxial Cable EMCI	EMC101G-KM-KM-2000	201254	2025/1/14	2026/1/13
	EMC101G-KM-KM-3000	201258	2025/1/14	2026/1/13
	EMC101G-KM-KM-5000	201261	2025/1/14	2026/1/13
	EMC104-SM-SM-1000	210103	2025/1/14	2026/1/13
	EMC104-SM-SM-3000	201241	2025/1/14	2026/1/13
	EMC104-SM-SM-9000	201244	2025/1/14	2026/1/13
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table Max-Full	MFT-201SS	N/A	N/A	N/A
Turn Table Controller Max-Full	MF-7802BS	MF780208676	N/A	N/A

Notes:

1. The test was performed in WM - 966 chamber 9.
2. Tested Date: 2025/6/14

5 Limits of Test Items

5.1 Maximum EIRP

For LTE Band 48:

Device Category	Maximum EIRP (dBm/10 MHz)
End User Device	23
Category A CBSD	30
Category B CBSD	47

5.2 Radiated Spurious Emissions below 1GHz

For LTE Band 48:

The power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz.

5.3 Radiated Spurious Emissions above 1GHz

For LTE Band 48:


The power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

6 Test Arrangements


6.1 Maximum EIRP

6.1.1 Test Setup

Conducted Power Measurement:

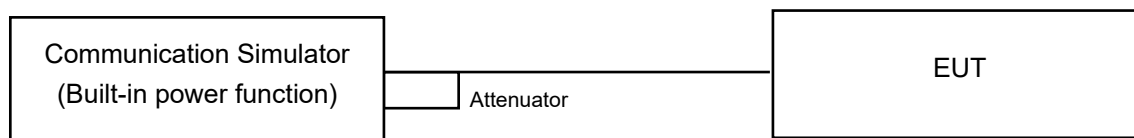

For measuring output power using spectrum

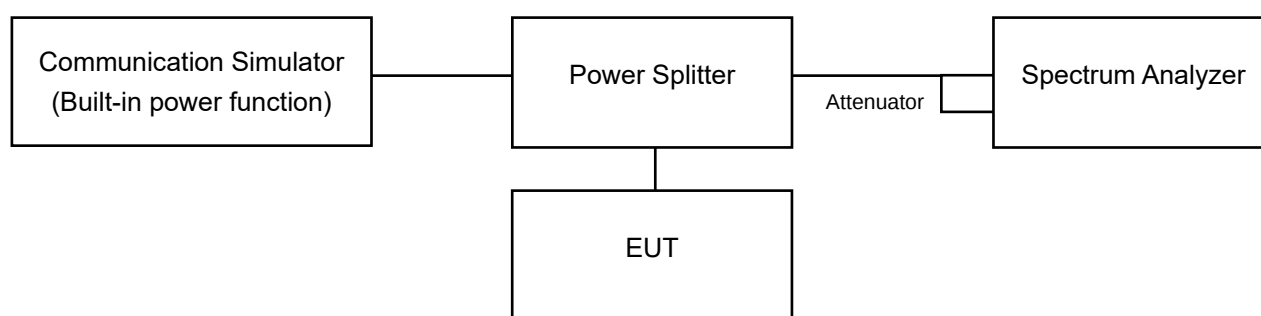

6.1.2 Test Procedure

Conducted Power Measurement:

The EUT is configured by emulator to set data modulation and maximum power using WWAN technology. The average (rms) power measurement was performed on emulator and power value was measured from power function on emulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

For measuring output power using spectrum

The EUT is configured by emulator to set data modulation and maximum power using WWAN technology and link to spectrum analyzer measurements. Set the EUT to transmit under low, middle and high channel and record the power level shown on spectrum analyzer. Power measurements use detector average (rms).

For measuring output power using spectrum

Measurement method refers to ANSI C63.26 section 5.2.4.4.

- Set span to $2 \times$ to $3 \times$ the OBW.
- Set RBW = 1% to 5% of the OBW.
- Set VBW $\geq 3 \times$ RBW.
- Set number of measurement points in sweep $\geq 2 \times$ span / RBW.
- Set Sweep time = auto-couple.
- Detector = power averaging (rms).
- Set sweep trigger to "free run."
- Trace average at least 100 traces in power averaging (rms) mode.
- Use the Band/Channel Power function to determine the integrated power per 10 MHz bandwidth and full bandwidth, according to the 47 CFR FCC Part 96 standard.
- If Duty cycle < 98%, Add $10 \log (1/\text{duty cycle})$ to the measured power level to compute the average power during continuous transmission.

Maximum EIRP / ERP

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation as follows:

$$\text{EIRP} = P_{\text{Meas}} + G_T$$

$$\text{ERP} = P_{\text{Meas}} + G_T - 2.15$$

where

ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively

(expressed in the same units as P_{Meas} , e.g., dBm or dBW)


P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_T gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)


6.2 Radiated Spurious Emissions below 1GHz

6.2.1 Test Setup

For Radiated emission below 30 MHz

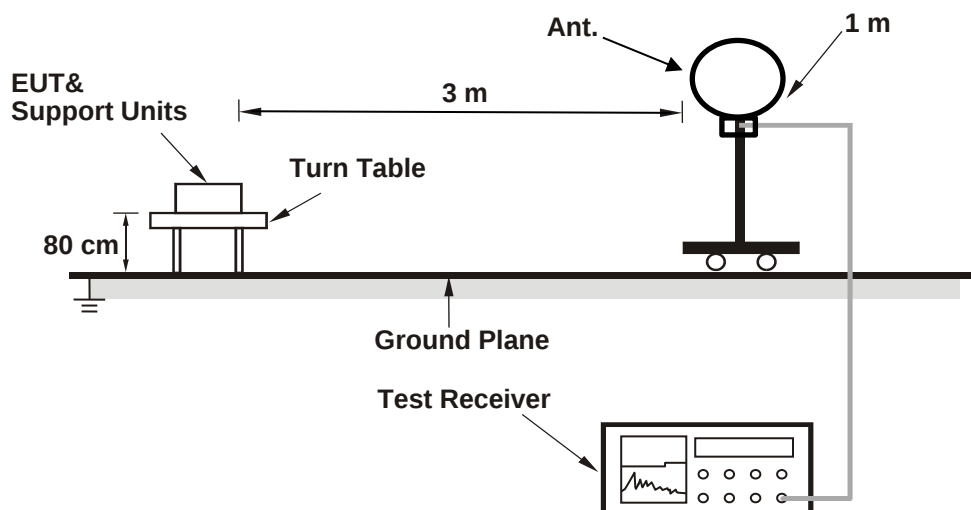

For Radiated emission above 30 MHz

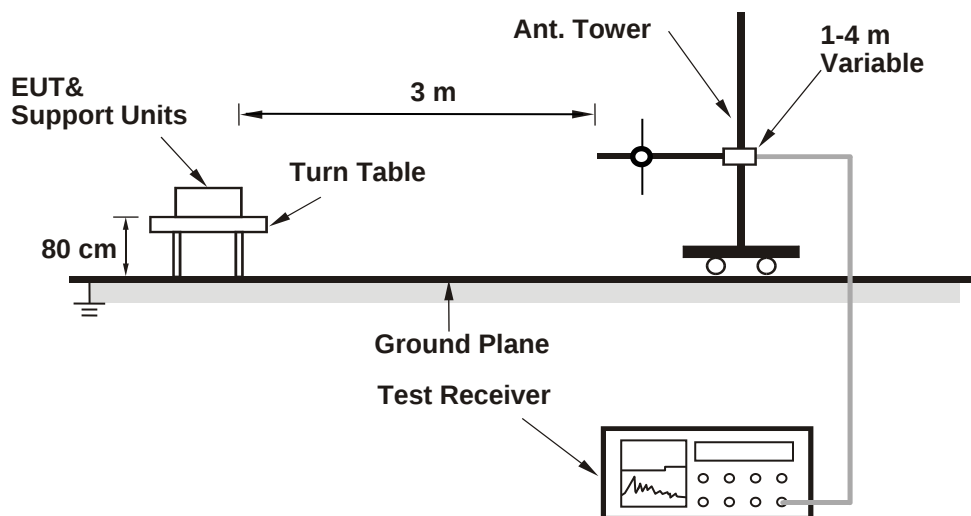

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.2.2 Test Procedure

The EUT is configured to set data modulation and maximum power using WWAN technology.

- a. In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) height of turn table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following ANSI C63.26 section 5.5 and 5.2.7
- e. $EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
- f. $ERP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.


Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz. Set detector = average.
2. The amplitude of spurious emissions in the range 9 kHz to 30 MHz which are attenuated more than 20 dB below the permissible value need not be reported.

6.3 Radiated Spurious Emissions above 1GHz

6.3.1 Test Setup

For radiated emission above 1 GHz

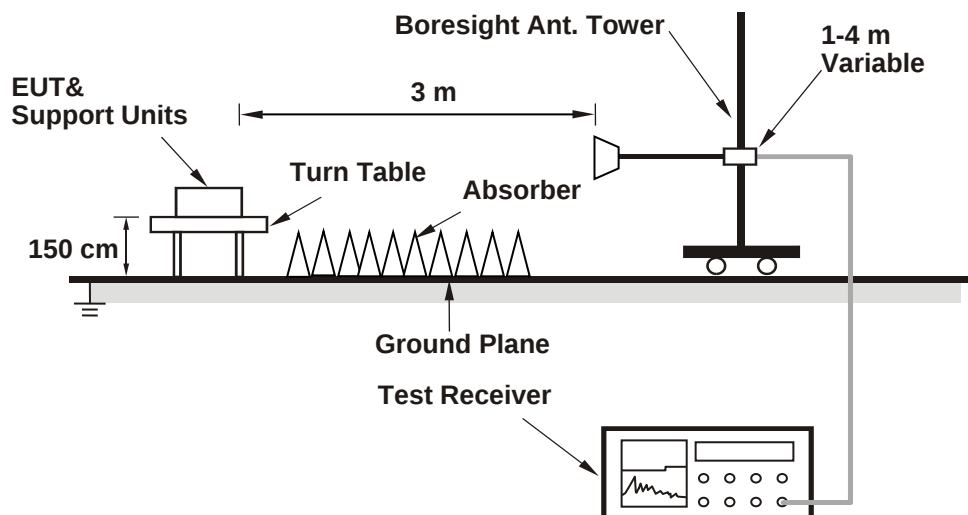

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.3.2 Test Procedure

The EUT is configured to set data modulation and maximum power using WWAN technology.

- In the semi-anechoic chamber, EUT placed on the 1.5 m height of turn table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- Following ANSI C63.26 section 5.5 and 5.2.7
- $EIRP \text{ (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
- $ERP \text{ (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz. Set detector = average.

7 Test Results of Test Item

7.1 Maximum EIRP

Input Power:	7.74 Vdc	Environmental Conditions:	23°C, 62% RH	Tested By:	Charles Hsiao
--------------	----------	---------------------------	--------------	------------	---------------

7.1.1 LTE Band 48

LTE Band 48, Channel Bandwidth: 5 MHz

LTE Band 48 (3550-3700 MHz) 5M					
Modulation	RB Size	RB Offset	Measurement Conducted Power (dBm)		
			CH 55265	CH 55990	CH 56715
			3552.5 MHz	3625 MHz	3697.5 MHz
QPSK	1	0	16.10	16.04	16.13
	1	12	15.98	15.80	15.96
	1	24	16.06	15.80	15.95
	12	0	15.16	14.95	15.11
	12	6	15.12	14.96	15.05
	12	13	15.04	14.87	14.96
	25	0	15.08	14.94	15.07
16QAM	1	0	15.01	15.02	15.04
	1	12	15.11	14.91	15.03
	1	24	15.10	14.98	14.98
	12	0	14.00	13.95	13.96
	12	6	14.15	13.88	14.09
	12	13	14.08	13.88	14.03
	25	0	14.02	13.91	13.95
64QAM	1	0	14.14	13.80	14.05
	1	12	14.16	14.00	14.12
	1	24	14.16	13.90	14.07
	12	0	13.11	12.95	13.03
	12	6	13.12	13.01	12.95
	12	13	13.06	12.82	13.08
	25	0	13.02	12.95	13.05
256QAM	1	0	11.07	10.98	10.98
	1	12	11.14	10.86	10.96
	1	24	11.02	10.89	11.03
	12	0	11.05	10.92	11.07
	12	6	11.14	10.83	11.05
	12	13	11.15	10.91	11.05
	25	0	11.10	10.96	11.03

Output Power					
Modulation	Minimum Cond. Power (dBm)	Maximum Cond. Power (dBm)	Minimum EIRP (dBm)	Maximum EIRP (dBm)	EIRP Limit (dBm)
QPSK	14.87	16.13	16.67	17.93	23
16QAM	13.88	15.11	15.68	16.91	23
64QAM	12.82	14.16	14.62	15.96	23
256QAM	10.83	11.15	12.63	12.95	23

Note: EIRP (dBm) = Cond. Power (dBm) + Antenna Gain (dBi) + Array Gain (if applicable)

LTE Band 48, Channel Bandwidth: 10 MHz

LTE Band 48 (3550-3700 MHz) 10M					
Modulation	RB Size	RB Offset	Measurement Conducted Power (dBm)		
			CH 55290	CH 55990	CH 56690
			3555 MHz	3625 MHz	3695 MHz
QPSK	1	0	16.18	16.03	16.14
	1	24	16.09	15.90	16.03
	1	49	16.00	15.91	15.97
	25	0	15.18	15.11	15.10
	25	12	15.10	14.95	15.05
	25	25	15.05	14.91	14.99
	50	0	15.08	15.03	15.05
16QAM	1	0	15.05	14.95	15.13
	1	24	15.10	15.09	15.03
	1	49	15.02	15.05	15.10
	25	0	14.14	14.01	14.00
	25	12	14.03	13.96	14.08
	25	25	14.12	14.05	13.98
	50	0	14.15	13.98	14.12
64QAM	1	0	14.13	13.92	14.08
	1	24	14.00	14.05	14.04
	1	49	14.07	13.98	14.07
	25	0	13.17	13.06	13.02
	25	12	13.03	12.97	13.02
	25	25	13.16	12.93	12.98
	50	0	13.07	12.94	13.08
256QAM	1	0	11.13	10.93	10.96
	1	24	11.09	10.96	11.06
	1	49	11.03	11.04	11.08
	25	0	11.02	11.03	11.10
	25	12	11.03	11.04	11.02
	25	25	11.03	11.08	11.06
	50	0	11.00	11.03	11.08

Output Power					
Modulation	Minimum Cond. Power (dBm)	Maximum Cond. Power (dBm)	Minimum EIRP (dBm)	Maximum EIRP (dBm)	EIRP Limit (dBm)
QPSK	14.91	16.18	16.71	17.98	23
16QAM	13.96	15.13	15.76	16.93	23
64QAM	12.93	14.13	14.73	15.93	23
256QAM	10.93	11.13	12.73	12.93	23

Note: EIRP (dBm) = Cond. Power (dBm) + Antenna Gain (dBi) + Array Gain (if applicable)

LTE Band 48, Channel Bandwidth: 15 MHz, Output Power: Full Power

LTE Band 48 (3550-3700 MHz) 15M					
Modulation	RB Size	RB Offset	Measurement Conducted Power (dBm)		
			CH 55315	CH 55990	CH 56665
			3557.5 MHz	3625 MHz	3692.5 MHz
QPSK	1	0	16.19	16.08	16.15
	1	37	16.07	16.00	16.05
	1	74	16.04	16.08	15.96
	36	0	15.22	15.11	15.12
	36	19	15.13	15.11	15.10
	36	39	15.08	14.98	15.00
	75	0	15.17	15.09	15.04
16QAM	1	0	15.20	15.10	15.10
	1	37	15.11	14.97	15.14
	1	74	15.23	15.09	15.02
	36	0	14.19	13.98	14.11
	36	19	14.08	14.06	13.98
	36	39	14.18	14.03	14.14
	75	0	14.18	13.99	14.03
64QAM	1	0	14.17	14.07	13.97
	1	37	14.18	14.01	14.07
	1	74	14.13	14.06	14.08
	36	0	13.08	13.14	13.02
	36	19	13.13	13.04	13.00
	36	39	13.08	13.10	13.10
	75	0	13.16	13.15	13.08
256QAM	1	0	11.20	11.12	11.02
	1	37	11.15	11.11	11.05
	1	74	11.20	11.13	11.11
	36	0	11.20	11.15	11.12
	36	19	11.18	10.98	11.01
	36	39	11.18	11.02	10.99
	75	0	11.22	11.12	11.13

Output Power					
Modulation	Minimum Cond. Power (dBm)	Maximum Cond. Power (dBm)	Minimum EIRP (dBm)	Maximum EIRP (dBm)	EIRP Limit (dBm)
QPSK	14.98	16.19	16.78	17.99	23
16QAM	13.98	15.23	15.78	17.03	23
64QAM	13.00	14.18	14.80	15.98	23
256QAM	10.98	11.22	12.78	13.02	23

Note: EIRP (dBm) = Cond. Power (dBm) + Antenna Gain (dBi) + Array Gain (if applicable)

LTE Band 48, Channel Bandwidth: 20 MHz, Output Power: Full Power

LTE Band 48 (3550-3700 MHz) 20M					
Modulation	RB Size	RB Offset	Measurement Conducted Power (dBm)		
			CH 55340	CH 55990	CH 56640
			3560 MHz	3625 MHz	3690 MHz
QPSK	1	0	16.29	16.29	16.19
	1	50	16.15	16.11	16.09
	1	99	16.16	16.14	15.99
	50	0	15.25	15.21	15.14
	50	25	15.23	15.12	15.13
	50	50	15.11	15.09	15.03
	100	0	15.17	15.17	15.09
16QAM	1	0	15.27	15.17	15.17
	1	50	15.26	15.11	15.11
	1	99	15.10	15.22	15.14
	50	0	14.27	14.13	14.16
	50	25	14.28	14.08	14.01
	50	50	14.22	14.09	14.13
	100	0	14.15	14.24	14.09
64QAM	1	0	14.27	14.20	14.13
	1	50	14.24	14.12	14.09
	1	99	14.12	14.11	14.00
	50	0	13.19	13.09	13.12
	50	25	13.20	13.14	13.05
	50	50	13.13	13.22	13.08
	100	0	13.22	13.12	13.17
256QAM	1	0	11.28	11.02	11.14
	1	50	11.24	11.11	11.03
	1	99	11.12	11.25	11.03
	50	0	11.13	11.12	11.09
	50	25	11.10	11.18	11.06
	50	50	11.28	11.10	11.16
	100	0	11.27	11.12	11.15

Output Power					
Modulation	Minimum Cond. Power (dBm)	Maximum Cond. Power (dBm)	Minimum EIRP (dBm)	Maximum EIRP (dBm)	EIRP Limit (dBm)
QPSK	15.03	16.29	16.83	18.09	23
16QAM	14.01	15.27	15.81	17.07	23
64QAM	13.05	14.27	14.85	16.07	23
256QAM	11.02	11.28	12.82	13.08	23

Note: EIRP (dBm) = Cond. Power (dBm) + Antenna Gain (dBi) + Array Gain (if applicable)

LTE Band 48, Channel Bandwidth: 15 MHz, Output Power: dBm/10 MHz

LTE Band 48 (3550-3700 MHz) 15M					
Modulation	RB Size	RB Offset	Measurement Conducted Power (dBm)		
			CH 55315	CH 55990	CH 56665
			3557.5 MHz	3625 MHz	3692.5 MHz
QPSK	1	0	16.17	15.95	15.98
	1	37	16.01	15.97	16.02
	1	74	15.95	16.04	15.88
	36	0	15.09	15.08	14.93
	36	19	15.04	15.02	15.04
	36	39	14.99	14.87	14.89
	75	0	13.78	13.73	13.71
16QAM	1	0	15.16	14.99	14.94
	1	37	15.06	14.88	14.99
	1	74	15.09	14.89	14.94
	36	0	14.02	13.85	13.91
	36	19	13.89	13.94	13.81
	36	39	14.08	13.89	14.05
	75	0	12.87	12.73	12.75
64QAM	1	0	14.01	14.03	13.94
	1	37	14.05	13.89	14.05
	1	74	13.97	13.88	13.95
	36	0	13	13.04	12.88
	36	19	13.12	12.85	12.83
	36	39	13.07	12.91	13.05
	75	0	11.75	11.87	11.65
256QAM	1	0	11.15	11.02	10.9
	1	37	11.03	11.03	11.02
	1	74	11.19	11	10.94
	36	0	11.04	10.96	11.11
	36	19	11.09	10.93	10.83
	36	39	11.07	10.91	10.98
	75	0	9.81	9.71	9.69

Output Power					
Modulation	Minimum Cond. Power (dBm)	Maximum Cond. Power (dBm)	Minimum EIRP (dBm)	Maximum EIRP (dBm)	EIRP Limit (dBm)
QPSK	13.71	16.17	15.51	17.97	23
16QAM	12.73	15.16	14.53	16.96	23
64QAM	11.65	14.05	13.45	15.85	23
256QAM	9.69	11.19	11.49	12.99	23


Note: EIRP (dBm) = Cond. Power (dBm) + Antenna Gain (dBi) + Array Gain (if applicable)

LTE Band 48, Channel Bandwidth: 20 MHz, Output Power: dBm/10 MHz

LTE Band 48 (3550-3700 MHz) 20M					
Modulation	RB Size	RB Offset	Measurement Conducted Power (dBm)		
			CH 55340	CH 55990	CH 56640
			3560 MHz	3625 MHz	3690 MHz
QPSK	1	0	16.13	16.20	16.06
	1	50	16.11	15.93	16.03
	1	99	16.1	15.98	15.88
	50	0	15.16	15.16	14.94
	50	25	15.16	14.95	15.01
	50	50	14.92	14.93	14.85
	100	0	12.53	12.54	12.5
16QAM	1	0	15.24	15.02	15.09
	1	50	15.23	15.03	15.1
	1	99	14.9	15.03	15.09
	50	0	14.18	13.93	14.06
	50	25	14.27	13.9	13.96
	50	50	14.2	13.93	14.01
	100	0	11.59	11.61	11.55
64QAM	1	0	14.25	14.06	14.11
	1	50	14.12	14.04	13.9
	1	99	14.04	14.06	13.9
	50	0	13.02	12.93	13.02
	50	25	13.17	13.07	12.86
	50	50	13.08	13.02	12.9
	100	0	10.65	10.43	10.64
256QAM	1	0	11.22	11.01	10.96
	1	50	11.08	10.94	10.97
	1	99	10.93	11.19	10.91
	50	0	10.96	11.02	10.99
	50	25	11.03	11.09	10.91
	50	50	11.15	11.08	11.05
	100	0	8.68	8.58	8.47

Output Power					
Modulation	Minimum Cond. Power (dBm)	Maximum Cond. Power (dBm)	Minimum EIRP (dBm)	Maximum EIRP (dBm)	EIRP Limit (dBm)
QPSK	12.5	16.20	14.3	18.00	23
16QAM	11.55	15.24	13.35	17.04	23
64QAM	10.43	14.25	12.23	16.05	23
256QAM	8.47	11.22	10.27	13.02	23

Note: EIRP (dBm) = Cond. Power (dBm) + Antenna Gain (dBi) + Array Gain (if applicable)

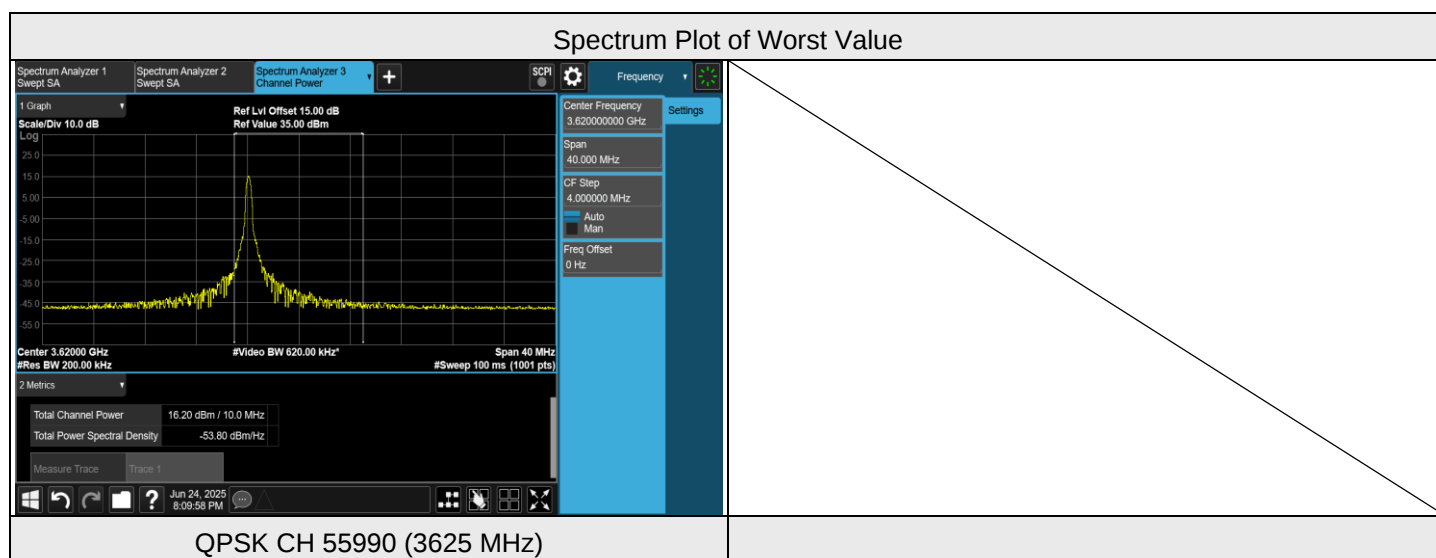

Note: For the channel bandwidth is less than or equal to 10 MHz, the full power test data please refer to the power per 10 MHz corresponding to the channel bandwidth.

7.2 Radiated Spurious Emissions below 1GHz


7.2.1 LTE Band 48

RF Mode	LTE Band 48 Channel Bandwidth: 20MHz	Channel	CH 55340 : 3560 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	57.16	-57.80	-40.00	-17.80	1.50 H	145	51.12	-108.92
2	209.45	-58.73	-40.00	-18.73	1.00 H	266	52.78	-111.51
3	328.76	-55.73	-40.00	-15.73	1.00 H	221	50.82	-106.55
4	353.98	-52.86	-40.00	-12.86	2.00 H	218	53.53	-106.39
5	409.27	-57.80	-40.00	-17.80	1.00 H	203	47.18	-104.98
6	874.87	-58.26	-40.00	-18.26	1.00 H	352	38.21	-96.47

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

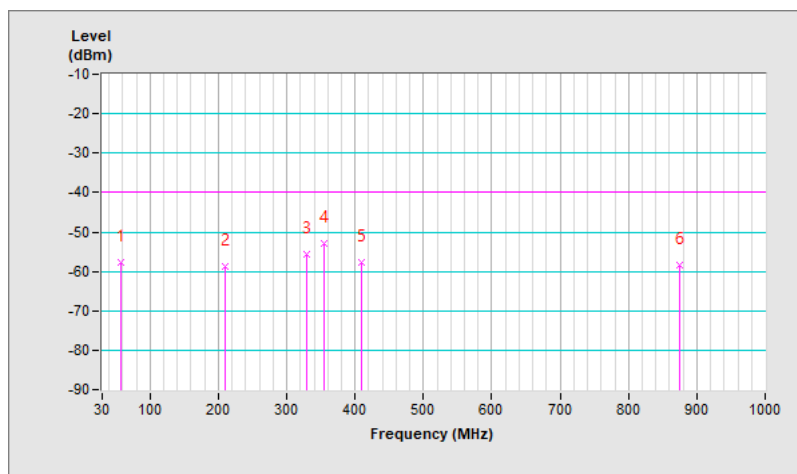


RF Mode	LTE Band 48 Channel Bandwidth: 20MHz	Channel	CH 55340 : 3560 MHz
Frequency Range	30 MHz ~ 1 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	47.46	-54.11	-40.00	-14.11	1.50 V	224	54.25	-108.36
2	117.30	-57.31	-40.00	-17.31	1.00 V	138	53.28	-110.59
3	236.61	-55.35	-40.00	-15.35	1.00 V	63	54.53	-109.88
4	367.56	-56.03	-40.00	-16.03	1.49 V	222	49.94	-105.97
5	601.33	-59.68	-40.00	-19.68	2.00 V	179	40.56	-100.24
6	893.30	-57.48	-40.00	-17.48	1.49 V	57	38.60	-96.08

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit of frequency range 30 MHz ~ 1 GHz.
5. The frequency range 9 kHz ~ 30 MHz: all emissions are more than 20 dB below the limit, therefore do not be recorded in this report.

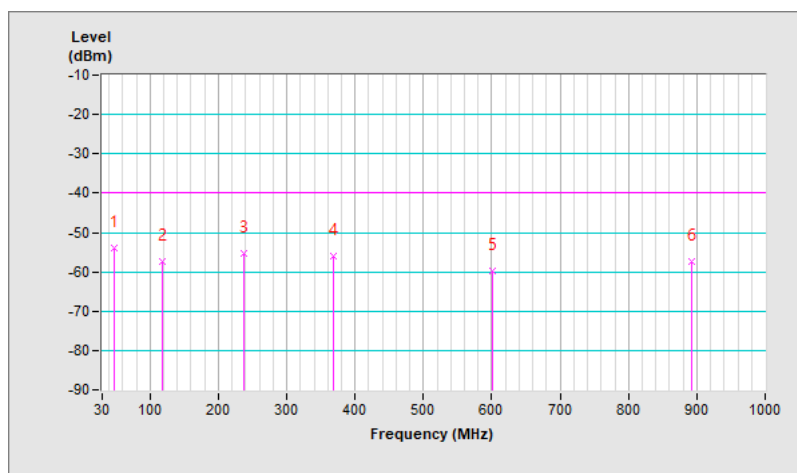

7.3 Radiated Spurious Emissions above 1GHz

7.3.1 LTE Band 48

RF Mode	LTE Band 48 Channel Bandwidth: 5MHz	Channel	CH 55265 : 3552.5 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7105.00	-42.32	-40.00	-2.32	3.68 H	112	43.33	-85.65
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7105.00	-41.97	-40.00	-1.97	3.46 V	184	43.68	-85.65

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 48 Channel Bandwidth: 5MHz	Channel	CH 55990 : 3625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7250.00	-42.20	-40.00	-2.20	3.65 H	113	43.32	-85.52
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7250.00	-41.77	-40.00	-1.77	3.52 V	186	43.75	-85.52

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 48 Channel Bandwidth: 5MHz	Channel	CH 56715 : 3697.5 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7395.00	-42.41	-40.00	-2.41	3.69 H	114	43.25	-85.66
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7395.00	-42.08	-40.00	-2.08	3.48 V	191	43.58	-85.66

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 48 Channel Bandwidth: 20MHz	Channel	CH 55340 : 3560 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7120.00	-42.49	-40.00	-2.49	3.63 H	102	43.21	-85.70
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7120.00	-42.26	-40.00	-2.26	3.33 V	189	43.44	-85.70

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 48 Channel Bandwidth: 20MHz	Channel	CH 55990 : 3625 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7250.00	-42.02	-40.00	-2.02	3.67 H	116	43.50	-85.52
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7250.00	-41.62	-40.00	-1.62	3.48 V	184	43.90	-85.52

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

RF Mode	LTE Band 48 Channel Bandwidth: 20MHz	Channel	CH 56640 : 3690 MHz
Frequency Range	1 GHz ~ 40 GHz	Detector Function & Bandwidth	1 MHz/3 MHz (RMS)
Input Power	120 Vac, 60 Hz	Environmental Conditions	22 °C, 68% RH
Tested By	Edison Lee		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7380.00	-42.40	-40.00	-2.40	3.70 H	117	43.30	-85.70
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	7380.00	-42.07	-40.00	-2.07	3.46 V	190	43.63	-85.70

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

8 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---