

Digitizer installation manual

The detailed installation process is as follows :

1 、 Antenna plate :

1.1. Use amorphous laminating machine, adjust the parameters

before use ;

- 1.2. Ensure that the neatness of antenna plate, shielding materials, and platform can't offset the shielding material. Do not fold or beyond the edge, the intracrystalline shrinkage is less than 1.0 mm.

Figure 1 and 2 :



Figure 1

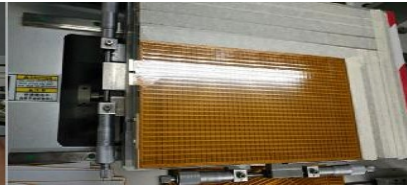


Figure 2

- 2 、 Split control card :

The control card is placed in the fixed slot, press the work button, and separate the control card. As shown in

figure 3:



figure3

- 3 . Installation control card :

Insert the gold finger ends of FPC at the connector opening at the same time and insert the connector flatly.

Push the line to the bottom of the connector and press down the connector cover, as shown in figure 4 :



figure 4

4 、 The performance test :

Test the electromagnetic panel to be tested by connecting the test equipment to the test equipment:

Observe whether there are bending, line breaking, cursor not in position, shake and other fault defects.

As shown in figure 5 :



figure 5

5 、 Clean the PCB :

Wipe the front and back of the antenna plate with a dust-free cloth dipped in alcohol ◦

6 、 Fixed control panel :

The FPC of the antenna plate is folded by using the folding tooling, and the control card is fixed on the back of the antenna plate, as shown in figure 6:



figure 6

7 、 Appearance check :

Inspect the appearance of the finished product, screen and label the defective products with defects such as the edge of PCB, the edge of the board and the dirty surface of the board.

A. inspection and packing

Send the good products to the inspection, after the inspection qualified, packaging into the warehouse.

Federal Communication Commission Interference Statement

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Caution:

- Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.
- This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Radiation Exposure Statement:

The product is a low power device and its output power is lower than FCC SAR exemption level. This module can only work with ZX10, ZX10-Ex, ZX10G2, ZX10Y (Y= 10 characters, Y can be 0 to 9, A to Z, a to z, "/", "\", "-", "_" or blank for marketing purpose).

Declaration the Restriction of this Limited Module Approval:

According to FCC Part 15 Subpart C Section 15.212, the radio elements of the modular transmitter must have their own shielding. However, due to there is no shielding for this module, this module is granted as a Limited Modular Approval. A Class II/III Permissive Change or a New FCC ID submission is necessary for each host specific installation to ensure the full compliance of FCC relevant requirements."

This device is intended only for OEM integrators under the following conditions:

- 1) The transmitter module may not be co-located with any other transmitter or antenna. The co-transmitting with other radio will need a separate evaluation.
- 2) Limited module approval valid only when this module is installed in the tested host ZX10, ZX10-Ex, ZX10G2, ZX10Y (Y= 10 characters, Y can be 0 to 9, A to Z, a to z, "/", "\", "-", "_" or blank for marketing purpose).

As long as 2 conditions above are met, further transmitter test will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed

IMPORTANT NOTE: In the event that these conditions cannot be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization is no longer considered valid and the FCC ID cannot be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization.

End Product Labeling

The final end product must be labeled in a visible area with the following: "**Contains FCC ID: QYLGET101AZ12**". The grantee's FCC ID can be used only when all FCC compliance requirements are met.

Manual Information to the End User

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module.

The end user manual shall include all required regulatory information/warning as show in this manual.

Test Plan referenced to show continued compliance for Host Devices

This module does not contain a shield and cannot demonstrate compliance in a standalone configuration, therefore is limited. The host integrator will be required to file a Class II Permissive Change for each host specific installation. the module shall be installed within the host which will not allow access by the end user. The following testing should be performed to demonstrate continued compliance:

- Compliance for 510.6kHz under a specific rules part (15.209 and 2.1091)
- Compliance for all modulation modes (PDM)
- AC Power Line Conducted Emission be confirmed from different power Adapter. [\(15.207\)](#)
- Host's AC Conducted emissions (15.207) and radiated spurious emissions (15.209) shall be test to be confirm no parasitic emissions.
- If change platforms, it will need to implement fully RF Exposure retest.
- ANSI C63.10 can be used as guidance for such test plan.

Industry Canada statement

- 1** This device complies with Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:
 - 1) this device may not cause interference, and
 - 2) this device must accept any interference, including interference that may cause undesired operation of the device.
- 1** Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- 1) l'appareil ne doit pas produire de brouillage, et
- 2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

② This Class B digital apparatus complies with Canadian ICES-003.

② Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

③ This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter, except tested built-in radios.

③ Cet appareil et son antenne ne doivent pas être situés ou fonctionner en conjonction avec une autre antenne ou un autre émetteur, exception faites des radios intégrées qui ont été testées.

④ The County Code Selection feature is disabled for products marketed in the US/ Canada.

④ La fonction de sélection de l'indicatif du pays est désactivée pour les produits commercialisés aux États-Unis et au Canada.

Cet appareil est conçu uniquement pour les intégrateurs OEM dans les conditions suivantes: (Pour utilisation de dispositif module)

Le module émetteur peut ne pas être co-implanté avec un autre émetteur ou antenne.

Tant que les conditions ci-dessus sont remplies, des essais supplémentaires sur l'émetteur ne seront pas nécessaires. Toutefois, l'intégrateur OEM est toujours responsable des essais sur son produit final pour toutes exigences de conformité supplémentaires requis pour ce module installé.

IMPORTANT NOTE:

In the event that these conditions can not be met (for example certain laptop configurations or co-location with another transmitter), then the Canada authorization is no longer considered valid and the IC ID can not be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate Canada authorization.

NOTE IMPORTANTE:

Dans le cas où ces conditions ne peuvent être satisfaites (par exemple pour certaines configurations d'ordinateur portable ou de certaines co-localisation avec un autre émetteur), l'autorisation du Canada n'est plus considérée comme valide et l'ID IC ne peut pas être utilisé sur le produit final. Dans ces circonstances, l'intégrateur OEM sera chargé de réévaluer le produit final (y compris l'émetteur) et l'obtention d'une autorisation distincte au Canada.

End Product Labeling

The product can be kept as far as possible from the user body or set the device to lower output power if such function is available. The final end product must be labeled in a visible area with the following: **"Contains IC: 10301A-GET101AZ12"**.

Plaque signalétique du produit final

L'appareil peut être conservé aussi loin que possible du corps de l'utilisateur ou que le dispositif est réglé sur la puissance de sortie la plus faible si une telle fonction est disponible. Le produit final doit être étiqueté dans un endroit visible avec l'inscription suivante: "Contient des IC: **10301A-GET101AZ12**".

Manual Information To the End User

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module.

The end user manual shall include all required regulatory information/warning as show in this manual.

Manuel d'information à l'utilisateur final

L'intégrateur OEM doit être conscient de ne pas fournir des informations à l'utilisateur final quant à la façon d'installer ou de supprimer ce module RF dans le manuel de l'utilisateur du produit final qui intègre ce module.

Le manuel de l'utilisateur final doit inclure toutes les informations réglementaires requises et avertissements comme indiqué dans ce manuel.