



FCC RADIO TEST REPORT

FCC ID : QYLLN920F12
Equipment : WWAN Module
Model Name : LN920A12-WW
Applicant : Getac Technology Corporation.
5F., Building A, No. 209, Sec.1, Nangang Rd., Nangang
Dist., Taipei City 115018, Taiwan, R.O.C.
Standard : FCC 47 CFR Part 2, 22(H), 24(E), 27(L)

The product was received on May 22, 2025 and testing was performed from Jun. 10, 2025 to Jun. 13, 2025. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this partial report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

Sportun International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Modification of EUT	6
1.3 Testing Location	7
1.4 Applicable Standards	7
2 Test Configuration of Equipment Under Test	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration	9
2.4 Frequency List of Low/Middle/High Channels.....	10
3 Conducted Test Result	11
3.1 Measuring Instruments.....	11
3.2 Conducted Output Power and ERP/EIRP	12
4 Radiated Test Items	13
4.1 Measuring Instruments.....	13
4.2 Test Setup	13
4.3 Test Result of Radiated Test.....	14
4.4 Field Strength of Spurious Radiation Measurement	15
5 List of Measuring Equipment.....	16
6 Measurement Uncertainty	17
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Pass	-
	§22.913 (a)(5)	Effective Radiated Power (WCDMA Band V)		
	§24.232 (c)	Equivalent Isotropic Radiated Power (WCDMA Band II)		
	§27.50 (d)(4)	Equivalent Isotropic Radiated Power (WCDMA Band IV)		
4.4	§2.1053 §22.917 (a) §24.238 (a) §27.53 (h)	Field Strength of Spurious Radiation (WCDMA Band V) (WCDMA Band II) (WCDMA Band IV)	Pass	-

Note: The test plans were by manufacturer definition.

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang

Report Producer: Clio Lo



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs WCDMA/LTE, and GNSS	
Antenna Type WWAN: PIFA Antenna	
Sample 1	EUT with Host 1
Sample 2	EUT with Host 2

Antenna information	
Band	Main
WCDMA B2	2.58
WCDMA B4	2.25
WCDMA B5	0.92

Remark: The above EUT's information was declared by manufacturer. Please refer to Disclaimer in report summary.



The product was installed into Tablet (Brand Name: Getac, Model Name: F120, F120Y (Y= 10 characters, Y can be 0-9, a-z, A-Z, “-”, “_” or blank for marketing purpose and no impact safety related critical components and constructions.)) during test, and the host information was recorded in the following table.

Host Information	
Host 1	Host with SKU B
Host 2	Host with SKU C

DVT SKUs	SKU B	SKU C
CPU	ULTRA5-236V	ULTRA7-268V
DDR	INTEGRATED 16GB	INTEGRATED 32GB
SSD	512GB	1TB
PANEL	Full FHD AUO	Full FHD AUO
DIGITIZER	EMRright Digitizer	EMRright Digitizer
OPTION BAY	Barcode Reader	Barcode Reader
Expansion Bay	HID RFID	SMART CARD
Right side option	Fingerprinter	RFID (SN-NSVG7-C01)
WLAN/BT	Intel BE201NGW	Intel BE201NGW
WWAN	LN920A12-WW	LN920A12-WW
GNSS	LN920A12-WW	LN920A12-WW
Rear 8M Camera	Support	Support
Webcam FHD	Support	Support
USB3.2 Gen2 x 1 Type-A	Support	Support
Type-C (thunder bolt)	Support	Support

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Test Site	Sportun International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sportun Site No. TH03-HY
Test Engineer	Eric Wu
Temperature (°C)	19.3~21.3
Relative Humidity (%)	53.4~55.4

Test Site	Sportun International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sportun Site No. 03CH21-HY (TAF Code: 3786)
Test Engineer	Fred Tseng, Ray Lung and Sky Chang
Temperature (°C)	18~23
Relative Humidity (%)	50~65
Remark	The Radiated Spurious Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC Designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ FCC 47 CFR Part 2, 22(H), 24(E), 27(L)
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items were performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.26 exploratory test procedures and only the worst case emissions were reported in this report.

Radiated emissions were investigated as following frequency range:

1. 30 MHz to 9000 MHz for WCDMA Band V
2. 30 MHz to 18000 MHz for WCDMA Band IV
3. 30 MHz to 19100 MHz for WCDMA Band II


All modes, data rates and positions were investigated.

Test modes are chosen to be reported as the worst case configuration below:

Test Modes	
Band	Radiated TCs
WCDMA Band V	■ RMC 12.2Kbps Link
WCDMA Band II	■ RMC 12.2Kbps Link
WCDMA Band IV	■ RMC 12.2Kbps Link

Remark: All the radiated test cases were performed with Adapter 1, Battery 1, Power cable 1 and Sample 1.

2.2 Connection Diagram of Test System

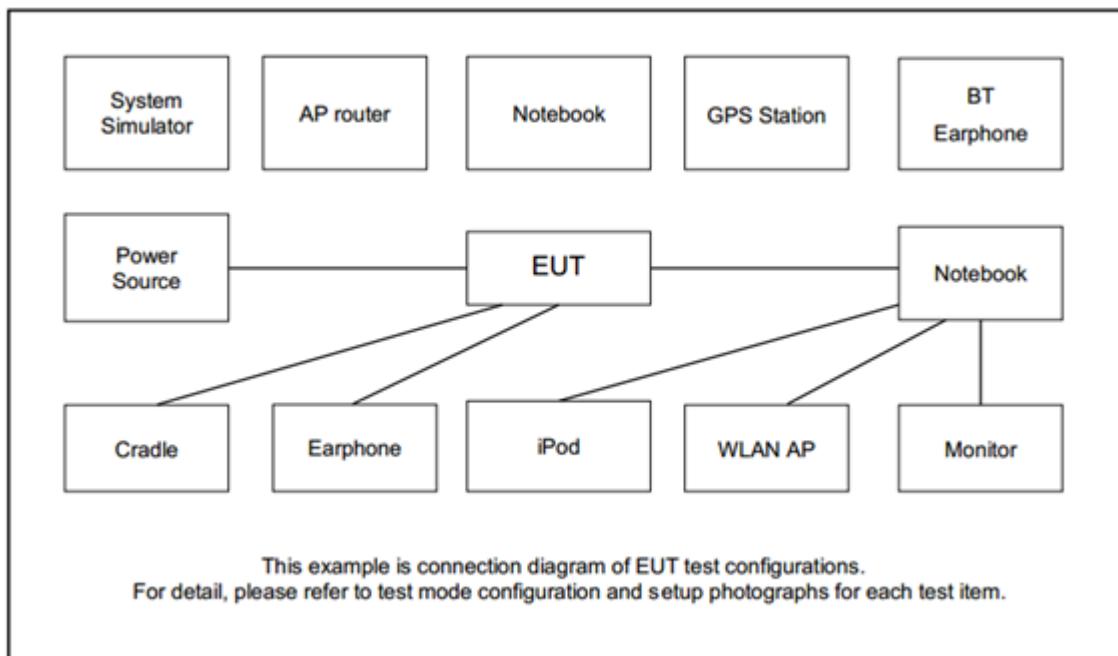

2.3 Support Unit used in test configuration

Item	Equipment	Brand Name	Model No.	FCC ID	Data Cable	Power Cord
1.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A
2.	System Simulator	Rohde & Schwarz	CMU200	N/A	N/A	Unshielded, 1.8 m
3.	System Simulator	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m



2.4 Frequency List of Low/Middle/High Channels

Frequency List				
Band	Channel/Frequency(MHz)	Lowest	Middle	Highest
WCDMA Band V	Channel	4132	4182	4233
	Frequency	826.4	836.4	846.6
WCDMA Band II	Channel	9262	9400	9538
	Frequency	1852.4	1880.0	1907.6
WCDMA Band IV	Channel	1312	1413	1513
	Frequency	1712.4	1732.6	1752.6


3 Conducted Test Result

3.1 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.1 Test Setup

3.1.2 Conducted Output Power

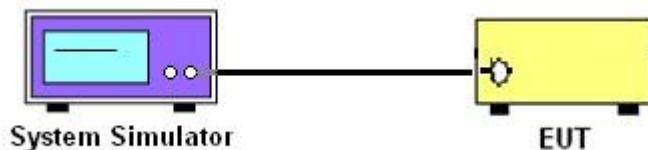

3.1.3 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power and ERP/EIRP

3.2.1 Description of the Conducted Output Power and ERP/EIRP

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for WCDMA Band V

The EIRP of mobile transmitters must not exceed 2 Watts for WCDMA Band II

The EIRP of mobile transmitters must not exceed 1 Watts for WCDMA Band IV

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_c$, $ERP = EIRP - 2.15$, where

P_T = transmitter output power in dBm

G_T = gain of the transmitting antenna in dBi

L_c = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.2.2 Test Procedures

1. The transmitter output port is connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select the lowest, middle, and the highest channels for each band and different modulation.
4. Measure the maximum burst average power for GSM and maximum average power for other modulation signal.


4 Radiated Test Items

4.1 Measuring Instruments


Please refer to the measuring equipment list in this test report.

4.2 Test Setup


For radiated test below 30MHz

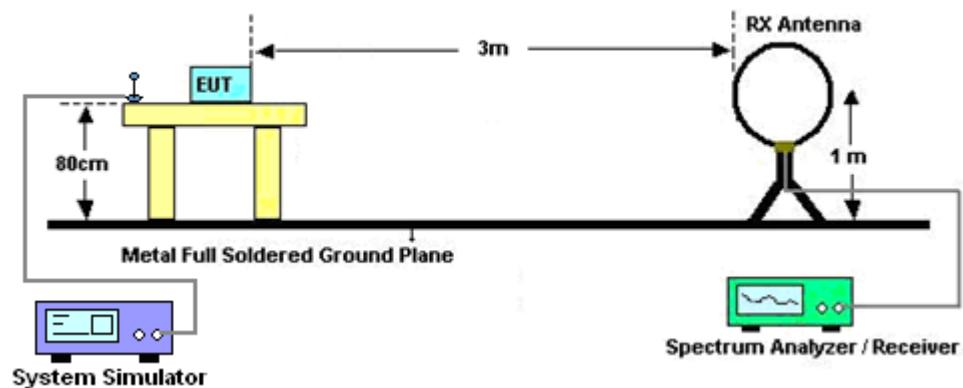


For radiated test from 30MHz to 1GHz

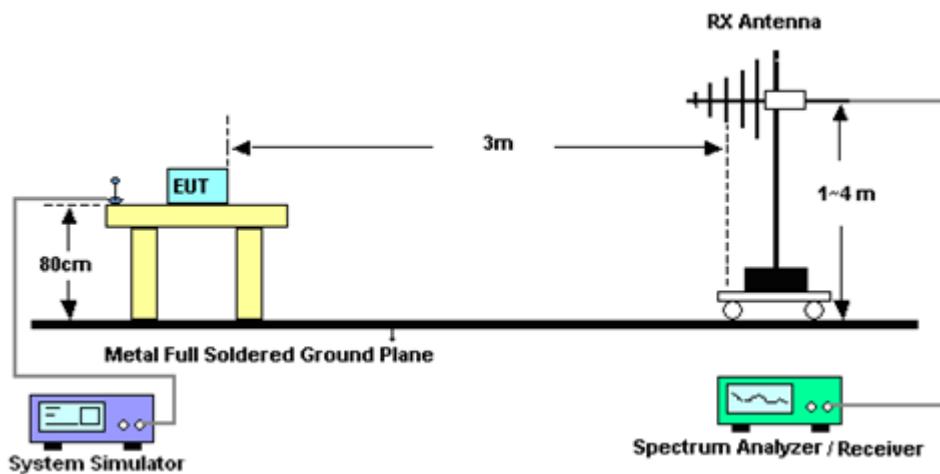

For radiated test from 1GHz to 18GHz

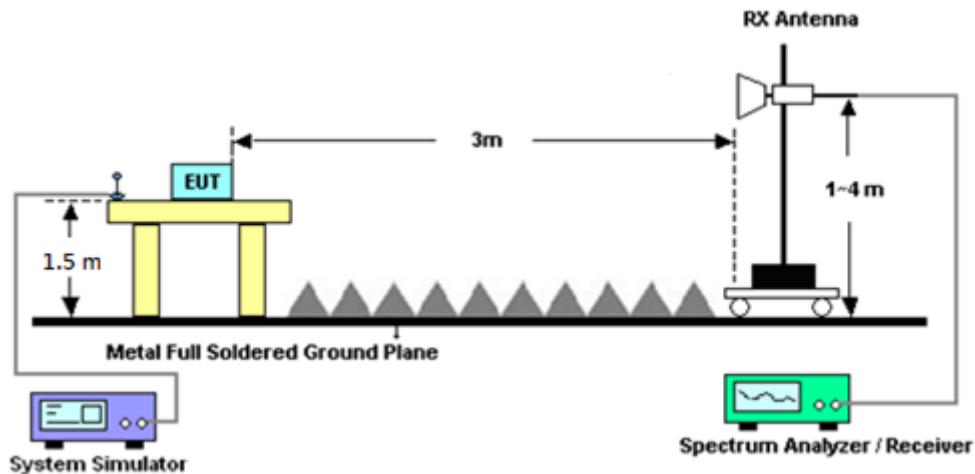

For radiated test above 18GHz

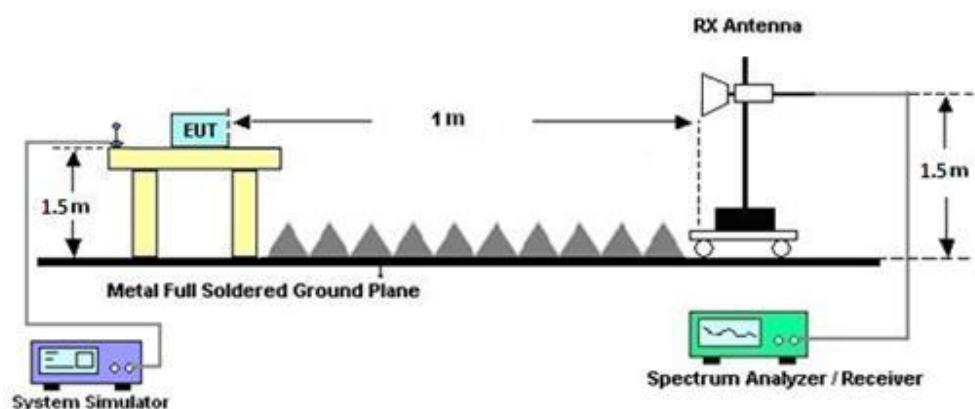

4.3 Test Result of Radiated Test

Please refer to Appendix B.

Note:

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



4.4 Field Strength of Spurious Radiation Measurement

4.4.1 Description of Field Strength of Spurious Radiated Measurement

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least $43 + 10 \log (P)$ dB. The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 7 and ANSI C63.26-2015 section 5.5.4 Radiated measurement using the field strength method.

1. The EUT is placed on a rotatable wooden table 0.8 meters for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz above the ground.
2. The EUT is set 3 meters away from the receiving antenna, which is mounted on the antenna tower.
3. The table is rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between one meter and four meters to search for the maximum spurious emission for both horizontal and vertical polarizations.
5. Make the measurement with the spectrum analyzer's RBW = 1 MHz, VBW = 3 MHz, taking record of maximum spurious emission.
6. To convert spectrum reading $E(\text{dBuV/m})$ to $\text{EIRP}(\text{dBm})$
$$\text{EIRP}(\text{dBm}) = \text{Level} (\text{dBuV/m}) + 20\log(d) - 104.77,$$
where d is the distance at which field strength limit is specified in the rules
7. Field Strength Level (dBm) = Spectrum Reading (dBm) + Antenna Factor + Cable Loss + Read Level - Preamplifier Factor.
8. $\text{ERP} (\text{dBm}) = \text{EIRP} (\text{dBm}) - 2.15$
9. The RF fundamental frequency shall be excluded against the limit line in the operating frequency band.
10. The limit line is derived from $43 + 10\log(P)$ dB below the transmitter power P(Watts)



5 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
LOOP Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Jun. 10, 2025~Jun. 13, 2025	Aug. 28, 2025	Radiation (03CH21-HY)
Bilog Antenna	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63303 & 001	30MHz~1GHz	Dec. 17, 2024	Jun. 10, 2025~Jun. 13, 2025	Dec. 16, 2025	Radiation (03CH21-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C03A18EN	1GHz~18GHz	Jul. 11, 2024	Jun. 10, 2025~Jun. 13, 2025	Jul. 10, 2025	Radiation (03CH21-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz~40GHz	Jun. 24, 2024	Jun. 10, 2025~Jun. 13, 2025	Jun. 23, 2025	Radiation (03CH21-HY)
Amplifier	SONOMA	310N	421580	30MHz~1GHz	Jul. 14, 2024	Jun. 10, 2025~Jun. 13, 2025	Jul. 13, 2025	Radiation (03CH21-HY)
Amplifier	EMEC	EM01G18GA	060876	1GHz~18GHz	Sep. 27, 2024	Jun. 10, 2025~Jun. 13, 2025	Sep. 26, 2025	Radiation (03CH21-HY)
Preamplifier	EMEC	EM18G40G	060873	18GHz~40GHz	Sep. 02, 2024	Jun. 10, 2025~Jun. 13, 2025	Sep. 01, 2025	Radiation (03CH21-HY)
Spectrum Analyzer	Keysight	N9010B	MY62170358	10Hz~44GHz	Sep. 06, 2024	Jun. 10, 2025~Jun. 13, 2025	Sep. 05, 2025	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 05, 2025	Jun. 10, 2025~Jun. 13, 2025	Mar. 04, 2026	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804397/2,8046 12/2,803954/2	30MHz~40GHz	Aug. 12, 2024	Jun. 10, 2025~Jun. 13, 2025	Aug. 11, 2025	Radiation (03CH21-HY)
Hygrometer	TECPEL	DTM-303A	TP211568	N/A	Oct. 21, 2024	Jun. 10, 2025~Jun. 13, 2025	Oct. 20, 2025	Radiation (03CH21-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Jun. 10, 2025~Jun. 13, 2025	N/A	Radiation (03CH21-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Jun. 10, 2025~Jun. 13, 2025	N/A	Radiation (03CH21-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jun. 10, 2025~Jun. 13, 2025	N/A	Radiation (03CH21-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Jun. 10, 2025~Jun. 13, 2025	N/A	Radiation (03CH21-HY)
Base Station	Rohde & Schwarz	CMU200	117995	GSM / GPRS / WCDMA / CDMA	Aug. 08, 2024	Jun. 12, 2025	Aug. 07, 2025	Conducted (TH03-HY)
Spectrum Analyzer	Rohde & Schwarz	FSP30	101329	9kHz~30GHz	Sep. 25, 2024	Jun. 12, 2025	Sep. 24, 2025	Conducted (TH03-HY)
DC Power Supply	GW Insteck	PSS-2005	EL890089	1V~20V 0.5A~5A	Feb. 07, 2025	Jun. 12, 2025	Feb. 06, 2026	Conducted (TH03-HY)
Temperature & Humidity Cabinet Chamber	ESPEC	LHU-113	1012005860	-20°C~85°C	Dec. 10, 2024	Jun. 12, 2025	Dec. 09, 2025	Conducted (TH03-HY)
Hygrometer	TECPEL	DTM-303B	TP200886	N/A	Mar. 03, 2025	Jun. 12, 2025	Mar. 02, 2026	Conducted (TH03-HY)



6 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	6.6 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 6 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (6 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.7 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.3 dB
---	--------



Appendix A. Test Results of Conducted Test

Conducted Output Power(Average power) & ERP / EIRP

WCDMA Band V Maximum Average Power [dBm] (GT - LC = 0.92 dB)					
Channel	4132	4182	4233	ERP (dBm)	ERP (W)
Frequency	826.4	836.4	846.6		
RMC 12.2K	23.86	23.92	23.78	22.69	0.1858
HSDPA Subtest-1	22.91	22.94	22.86		
HSDPA Subtest-2	22.87	23.02	22.80		
HSDPA Subtest-3	22.42	22.44	22.34		
HSDPA Subtest-4	22.45	22.47	22.30		
HSUPA Subtest-1	22.96	22.94	22.80		
HSUPA Subtest-2	20.94	21.01	20.87		
HSUPA Subtest-3	21.86	21.99	21.80		
HSUPA Subtest-4	20.89	21.02	20.84		
HSUPA Subtest-5	22.86	22.95	22.84		
Limit	ERP < 7W			Result	Pass

WCDMA Band II Maximum Average Power [dBm] (GT - LC = 2.58 dB)					
Channel	9262	9400	9538	EIRP (dBm)	EIRP (W)
Frequency	1852.4	1880	1907.6		
RMC 12.2K	23.64	23.79	23.77	26.37	0.4335
HSDPA Subtest-1	22.68	22.83	22.82		
HSDPA Subtest-2	22.73	22.83	22.81		
HSDPA Subtest-3	22.17	22.32	22.36		
HSDPA Subtest-4	22.17	22.38	22.28		
HSUPA Subtest-1	22.69	22.79	22.86		
HSUPA Subtest-2	20.69	20.89	20.85		
HSUPA Subtest-3	21.72	21.84	21.86		
HSUPA Subtest-4	20.67	20.84	20.86		
HSUPA Subtest-5	22.65	22.84	22.82		
Limit	EIRP < 2W			Result	Pass

WCDMA Band IV Maximum Average Power [dBm] (GT - LC = 2.25 dB)					
Channel	1312	1413	1513	EIRP (dBm)	EIRP (W)
Frequency	1712.4	1732.6	1752.6		
RMC 12.2K	23.67	23.76	23.71	26.01	0.3990
HSDPA Subtest-1	22.69	22.79	22.75		
HSDPA Subtest-2	22.73	22.76	22.78		
HSDPA Subtest-3	22.22	22.35	22.26		
HSDPA Subtest-4	22.17	22.26	22.26		
HSUPA Subtest-1	22.68	22.79	22.80		
HSUPA Subtest-2	20.74	20.82	20.81		
HSUPA Subtest-3	21.69	21.84	21.79		
HSUPA Subtest-4	20.74	20.83	20.76		
HSUPA Subtest-5	22.67	22.82	22.74		
Limit	EIRP < 1W			Result	Pass



Appendix B. Test Results of Radiated Test

B1. Summary of each worse mode

Mode	Part	Band	Ch	Freq (MHz)	Level (dBm)	Det	Ant Factor (dB)	Amp\Cbl (dB)	Filter (dB)	EIRPCF (dB)	Reading (dBuV)	Limit (dBm)	Margin (dB)	Pol	Ant
1	Part 22H	WCDMA B5	H	2540	-60.46	RMS	26.90	-23.96	0.47	-95.23	31.36	-13.00	-47.46	H	Main
2	Part 24E	WCDMA B2	M	3760	-53.82	RMS	30.02	-22.18	0.28	-95.23	33.29	-13.00	-40.82	V	Main
3	Part 27L	WCDMA B4	M	3465	-53.40	RMS	28.59	-22.57	0.53	-95.23	35.28	-13.00	-40.40	V	Main




Main Antenna

Part 22H Mode 1

WCDMA B5 Ch4132


L

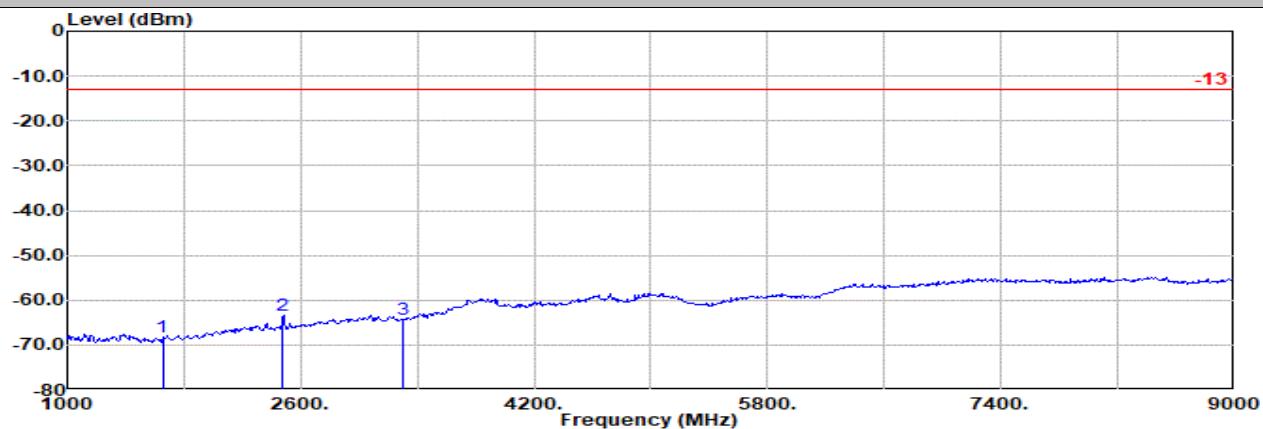

Site : 03CH21-HY

Condition: -13 3m DRH18-E LE2C03A18EN_240711 Horizontal
: WCDMA B5 Ch4132

Freq	Level	Detector	Ant Amp\Cb		Filter 1	EIRPCF	Readin		Margin	Limit Pol
			Factor	dB/m			dB	dBm		
1 1653.00	-68.08	RMS		24.67	-25.14	0.60	-95.23	27.02	-13.00	-55.08
2 2479.00	-63.53	RMS		26.59	-24.06	0.47	-95.23	28.70	-13.00	-50.53
3 3306.00	-64.18	RMS		28.02	-22.72	0.45	-95.23	25.30	-13.00	-51.18

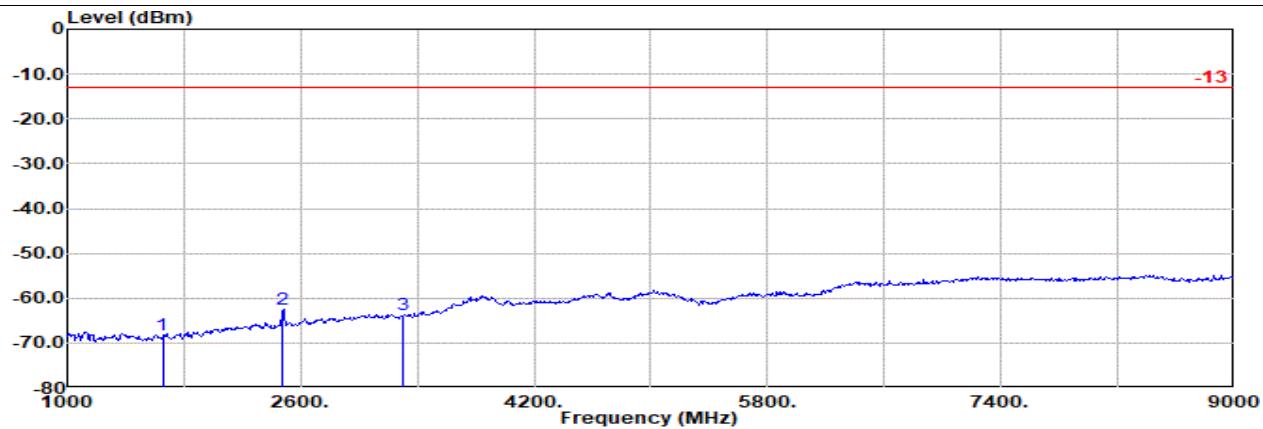

Site : 03CH21-HY

Condition: -13 3m DRH18-E LE2C03A18EN_240711 Vertical
: WCDMA B5 Ch4132

Freq	Level	Detector	Ant Amp\Cb		Filter 1	EIRPCF	Readin		Margin	Limit Pol
			Factor	dB/m			dB	dBm		
1 1653.00	-68.33	RMS		24.67	-25.14	0.60	-95.23	26.77	-13.00	-55.33
2 2479.00	-62.38	RMS		26.59	-24.06	0.47	-95.23	29.85	-13.00	-49.38
3 3306.00	-63.78	RMS		28.02	-22.72	0.45	-95.23	25.70	-13.00	-50.78




Main Antenna

Part 22H Mode 1

WCDMA B5 Ch4182


M

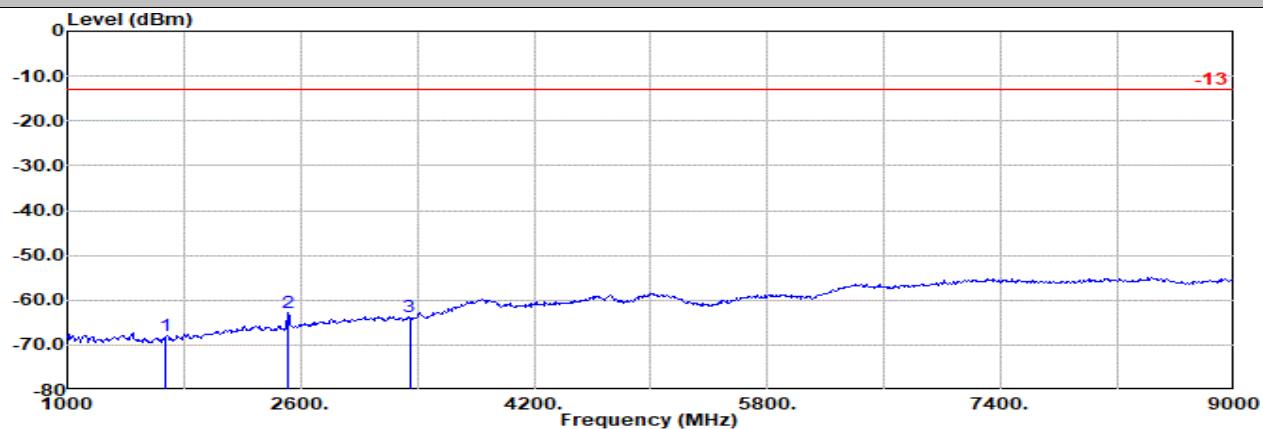

Site : 03CH21-HY

Condition: -13 3m DRH18-E LE2C03A18EN_240711 Horizontal
: WCDMA B5 Ch4182

Freq	Level	Detector	Ant Factor	Amp\Cb		Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
				dB/m	dB						
1 1673.00	-67.88	RMS		24.66	-25.12	0.60	-95.23	27.21	-13.00	-54.88	Horizontal
2 2509.00	-62.73	RMS		26.79	-24.02	0.47	-95.23	29.26	-13.00	-49.73	Horizontal
3 3346.00	-63.69	RMS		28.18	-22.68	0.45	-95.23	25.59	-13.00	-50.69	Horizontal

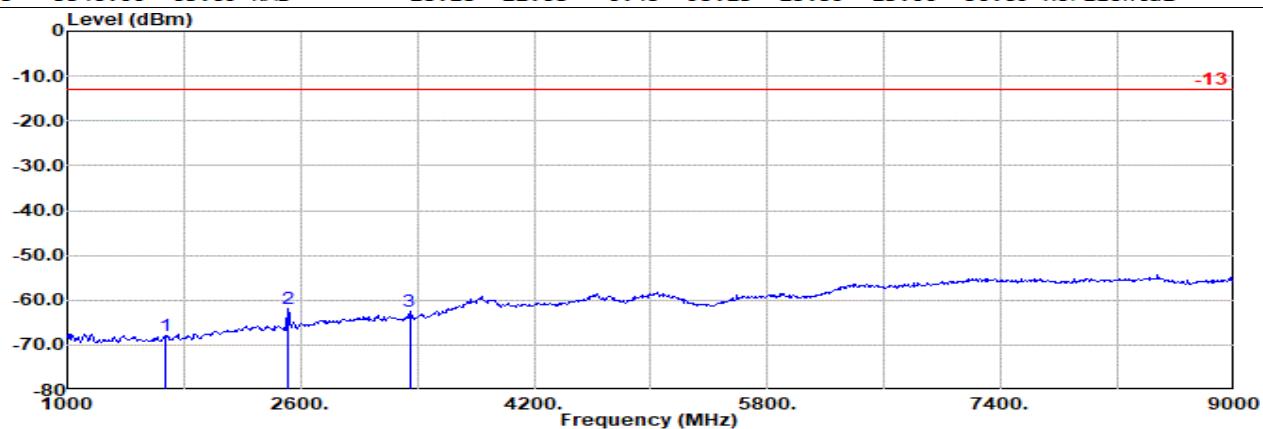

Site : 03CH21-HY

Condition: -13 3m DRH18-E LE2C03A18EN_240711 Vertical
: WCDMA B5 Ch4182

Freq	Level	Detector	Ant Factor	Amp\Cb		Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
				dB/m	dB						
1 1673.00	-67.83	RMS		24.66	-25.12	0.60	-95.23	27.26	-13.00	-54.83	Vertical
2 2509.00	-61.94	RMS		26.79	-24.02	0.47	-95.23	30.05	-13.00	-48.94	Vertical
3 3346.00	-62.63	RMS		28.18	-22.68	0.45	-95.23	26.65	-13.00	-49.63	Vertical




Main Antenna

Part 22H Mode 1

WCDMA B5 Ch4233


H

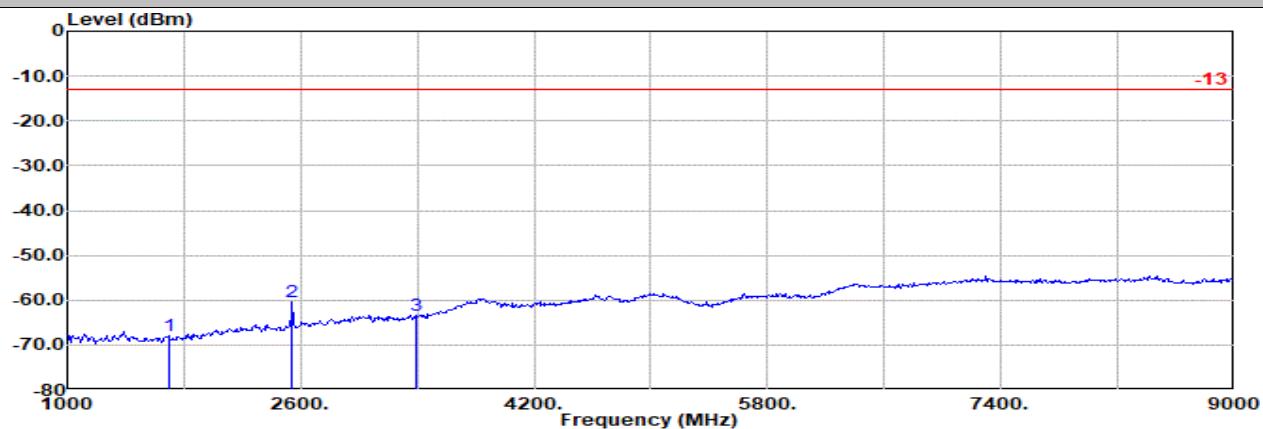

Site : 03CH21-HY

Condition: -13 3m DRH18-E LE2C03A18EN_240711 Horizontal
: WCDMA B5 Ch4233

Freq	Level	Detector	Ant Factor	Amp\Cb		Filter 1	EIRPCF	Readin		Margin	Limit	Pol
				dB/m	dB			dB	dBm			
1 1693.00	-67.92	RMS		24.77	-25.09	0.60	-95.23	27.03	-13.00	-54.92	Horizontal	
2 2540.00	-60.46	RMS		26.90	-23.96	0.47	-95.23	31.36	-13.00	-47.46	Horizontal	
3 3386.00	-63.50	RMS		28.27	-22.63	0.44	-95.23	25.65	-13.00	-50.50	Horizontal	

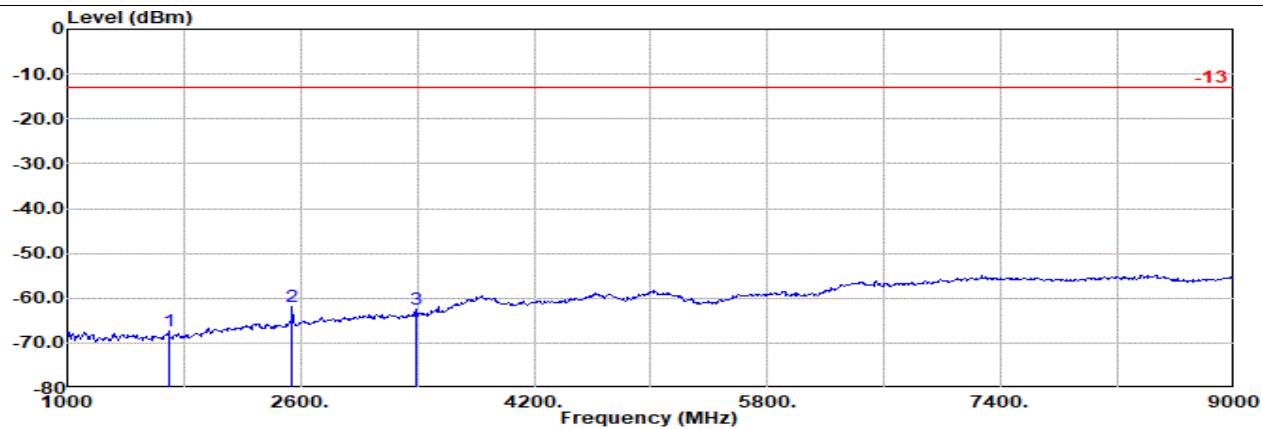

Site : 03CH21-HY

Condition: -13 3m DRH18-E LE2C03A18EN_240711 Vertical
: WCDMA B5 Ch4233

Freq	Level	Detector	Ant Factor	Amp\Cb		Filter 1	EIRPCF	Readin		Margin	Limit	Pol
				dB/m	dB			dB	dBm			
1 1693.00	-67.20	RMS		24.77	-25.09	0.60	-95.23	27.75	-13.00	-54.20	Vertical	
2 2540.00	-61.80	RMS		26.90	-23.96	0.47	-95.23	30.02	-13.00	-48.80	Vertical	
3 3386.00	-62.64	RMS		28.27	-22.63	0.44	-95.23	26.51	-13.00	-49.64	Vertical	




Main Antenna

Part 24E Mode 2

WCDMA B2 Ch9262


L

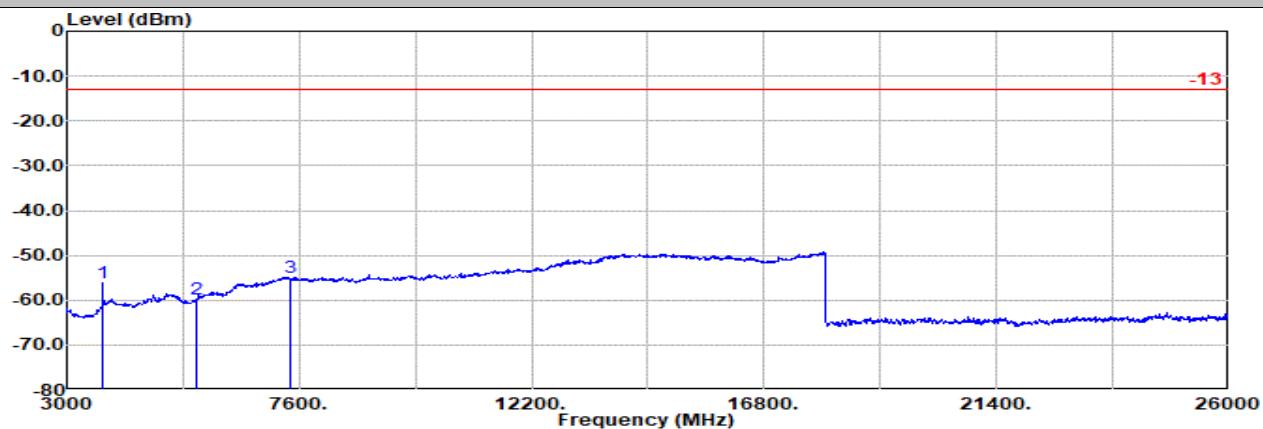

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_240624 Horizontal
: WCDMA B2 Ch9262

Freq	Level	Detector	Ant Factor	Amp\Cb Filter		EIRPCF	Readin		Margin	Limit	Pol
				1	2		g	dBm			
1 3705.00	-56.01	RMS		29.64	-22.25	0.26	-95.23	31.57	-13.00	-43.01	Horizontal
2 5557.00	-59.82	RMS		32.81	-21.78	0.66	-95.23	23.72	-13.00	-46.82	Horizontal
3 7410.00	-54.94	RMS		36.80	-20.72	0.74	-95.23	23.47	-13.00	-41.94	Horizontal

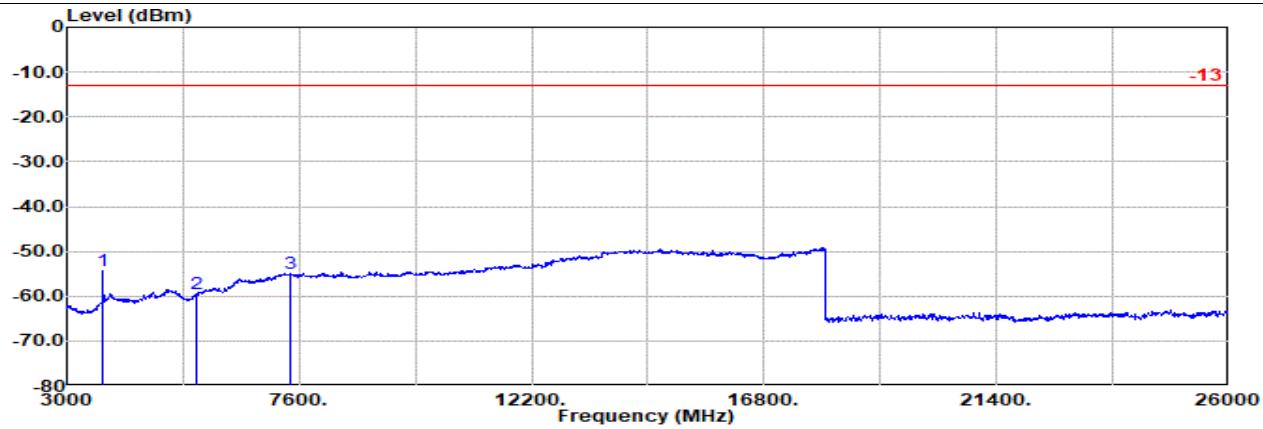

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_240624 Vertical
: WCDMA B2 Ch9262

Freq	Level	Detector	Ant Factor	Amp\Cb Filter		EIRPCF	Readin		Margin	Limit	Pol
				1	2		g	dBm			
1 3705.00	-54.23	RMS		29.64	-22.25	0.26	-95.23	33.35	-13.00	-41.23	Vertical
2 5557.00	-59.44	RMS		32.81	-21.78	0.66	-95.23	24.10	-13.00	-46.44	Vertical
3 7410.00	-55.02	RMS		36.80	-20.72	0.74	-95.23	23.39	-13.00	-42.02	Vertical




Main Antenna

Part 24E Mode 2

WCDMA B2 Ch9400


M

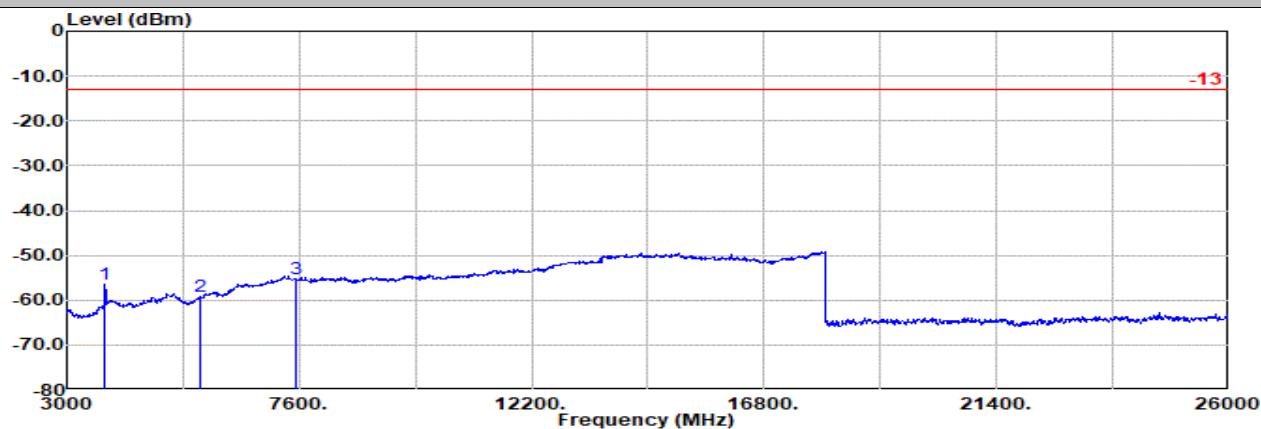

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_240624 Horizontal
: WCDMA B2 Ch9400

Freq	Level	Detector	Ant Factor	Amp\Cb Filter		EIRPCF	Readin		Margin	Limit	Pol
				1	2		g	dBm			
1 3760.00	-56.45	RMS		30.02	-22.18	0.28	-95.23	30.66	-13.00	-43.45	Horizontal
2 5640.00	-59.11	RMS		33.14	-21.73	0.67	-95.23	24.04	-13.00	-46.11	Horizontal
3 7520.00	-55.19	RMS		36.66	-20.69	0.70	-95.23	23.37	-13.00	-42.19	Horizontal

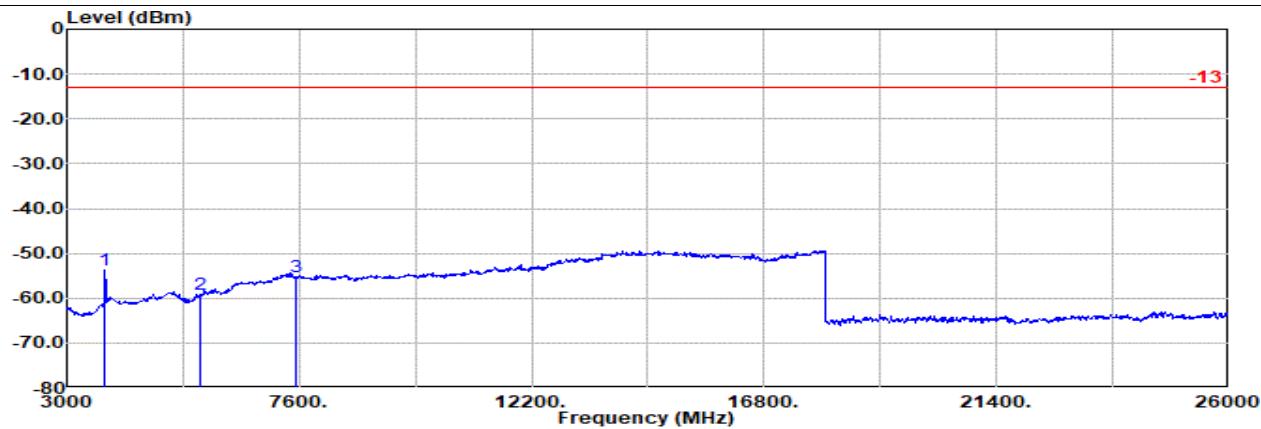

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_240624 Vertical
: WCDMA B2 Ch9400

Freq	Level	Detector	Ant Factor	Amp\Cb Filter		EIRPCF	Readin		Margin	Limit	Pol
				1	2		g	dBm			
1 3760.00	-53.82	RMS		30.02	-22.18	0.28	-95.23	33.29	-13.00	-40.82	Vertical
2 5640.00	-59.14	RMS		33.14	-21.73	0.67	-95.23	24.01	-13.00	-46.14	Vertical
3 7520.00	-55.32	RMS		36.66	-20.69	0.70	-95.23	23.24	-13.00	-42.32	Vertical




Main Antenna

Part 24E Mode 2

WCDMA B2 Ch9538


H

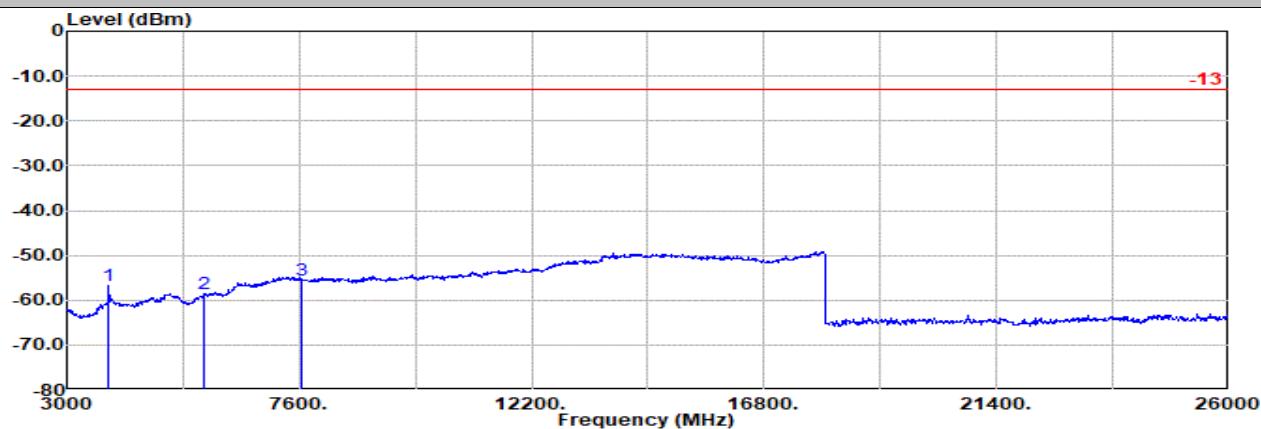

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_240624 Horizontal
: WCDMA B2 Ch9538

Freq	Level	Detector	Ant Factor	Amp\Cb		Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
				dB/m	dB						
1 3815.00	-56.62	RMS		30.28	-22.12	0.33	-95.23	30.12	-13.00	-43.62	Horizontal
2 5723.00	-58.48	RMS		33.59	-21.67	0.64	-95.23	24.19	-13.00	-45.48	Horizontal
3 7630.00	-55.56	RMS		36.60	-20.72	0.64	-95.23	23.15	-13.00	-42.56	Horizontal

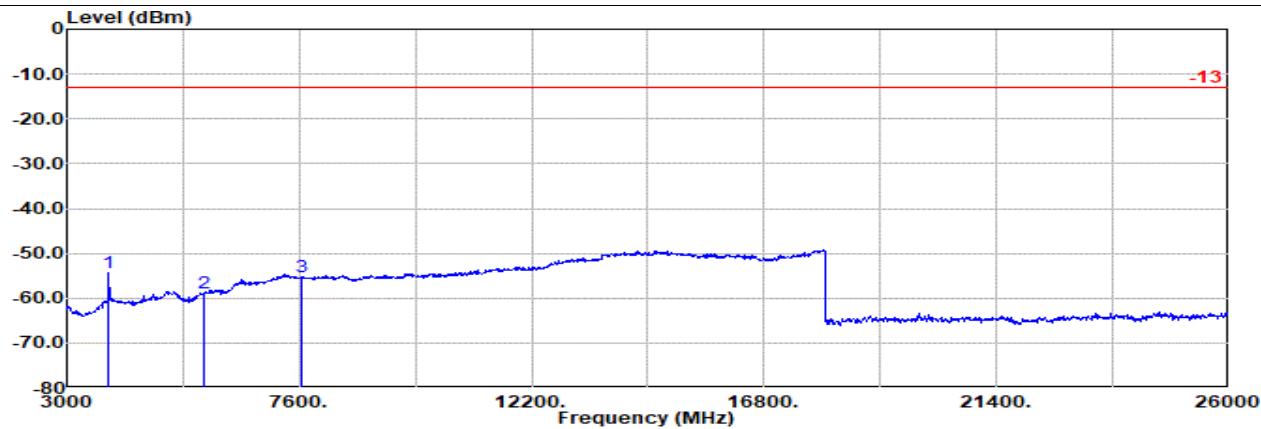

Site : 03CH21-HY

Condition: -13 1m BBHA9170_1223_240624 Vertical
: WCDMA B2 Ch9538

Freq	Level	Detector	Ant Factor	Amp\Cb		Filter 1	EIRPCF	Readin g	Limit	Margin	Pol
				dB/m	dB						
1 3815.00	-54.21	RMS		30.28	-22.12	0.33	-95.23	32.53	-13.00	-41.21	Vertical
2 5723.00	-58.74	RMS		33.59	-21.67	0.64	-95.23	23.93	-13.00	-45.74	Vertical
3 7630.00	-55.34	RMS		36.60	-20.72	0.64	-95.23	23.37	-13.00	-42.34	Vertical




Main Antenna

Part 27L Mode 3

WCDMA B4 Ch1312

L

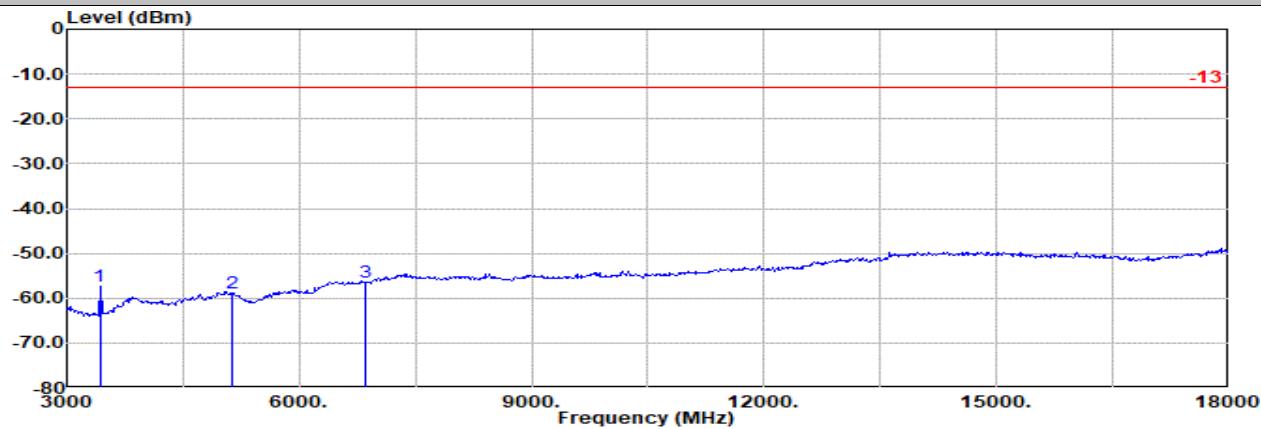


Site : 03CH21-HY

Condition: -13 3m DRH18-E LE2C03A18EN_240711 Horizontal

: WCDMA B4 Ch1312

Freq	Level	Detector	Ant Factor	Amp\Cb		Filter 1	EIRPCF	Readin		Margin	Limit Pol
				dB/m	dB			dB	dBuV	dBm	
1 3425.00	-57.49	RMS		28.40	-22.60	0.63	-95.23	31.31	-13.00	-44.49	Horizontal
2 5137.00	-58.87	RMS		32.67	-21.47	0.39	-95.23	24.77	-13.00	-45.87	Horizontal
3 6850.00	-56.48	RMS		36.30	-20.94	0.33	-95.23	23.06	-13.00	-43.48	Horizontal

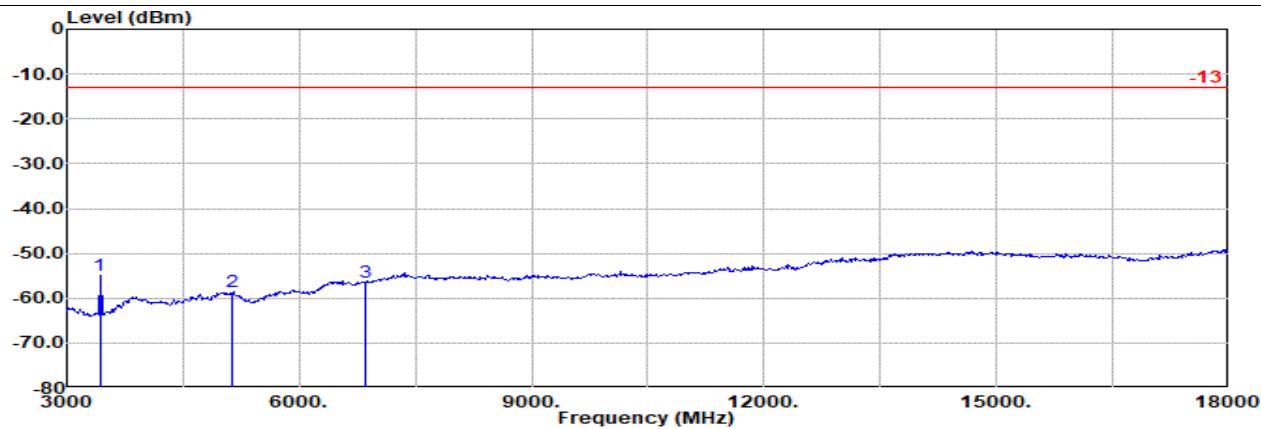

Site : 03CH21-HY

Condition: -13 3m DRH18-E LE2C03A18EN_240711 Vertical

: WCDMA B4 Ch1312

Freq	Level	Detector	Ant Factor	Amp\Cb		Filter 1	EIRPCF	Readin		Margin	Limit Pol
				dB/m	dB			dB	dBuV	dBm	
1 3425.00	-54.99	RMS		28.40	-22.60	0.63	-95.23	33.81	-13.00	-41.99	Vertical
2 5137.00	-58.57	RMS		32.67	-21.47	0.39	-95.23	25.07	-13.00	-45.57	Vertical
3 6850.00	-56.42	RMS		36.30	-20.94	0.33	-95.23	23.12	-13.00	-43.42	Vertical




Main Antenna

Part 27L Mode 3

WCDMA B4 Ch1413

M

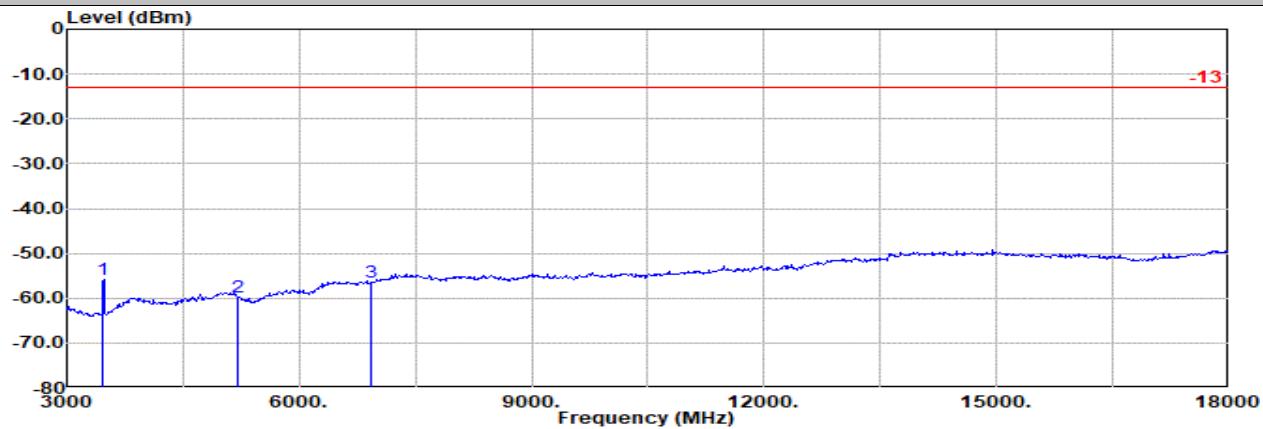


Site : 03CH21-HY

Condition: -13 3m DRH18-E LE2C03A18EN_240711 Horizontal

: WCDMA B4 Ch1413

Freq	Level	Detector	Ant Factor	Amp\Cb		Filter 1	EIRPCF	Readin		Margin	Limit Pol
				dB/m	dB			dB	dBuV	dBm	
1 3465.00	-55.92	RMS		28.59	-22.57	0.53	-95.23	32.76	-13.00	-42.92	Horizontal
2 5198.00	-59.86	RMS		32.60	-21.53	0.39	-95.23	23.91	-13.00	-46.86	Horizontal
3 6930.00	-56.39	RMS		36.30	-20.93	0.35	-95.23	23.12	-13.00	-43.39	Horizontal

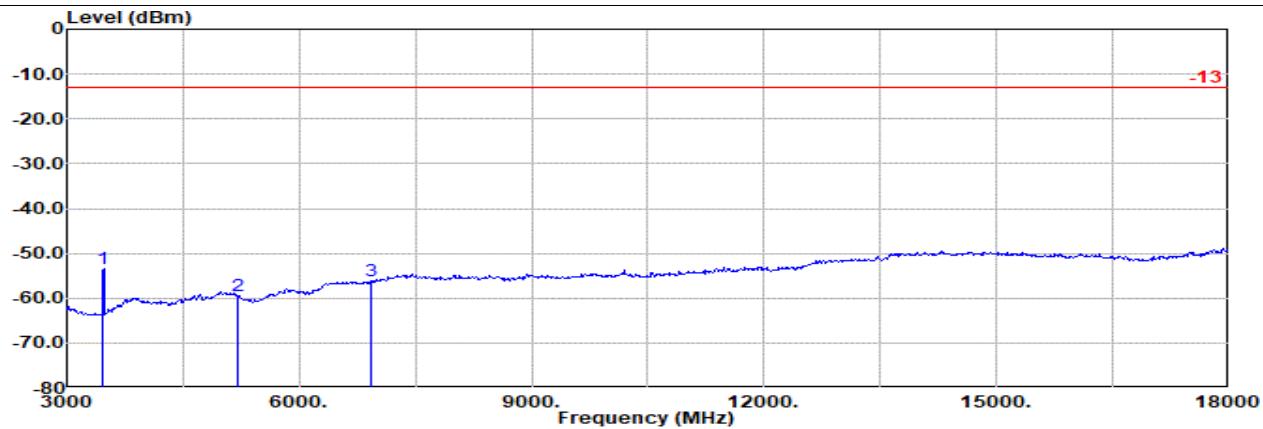

Site : 03CH21-HY

Condition: -13 3m DRH18-E LE2C03A18EN_240711 Vertical

: WCDMA B4 Ch1413

Freq	Level	Detector	Ant Factor	Amp\Cb		Filter 1	EIRPCF	Readin		Margin	Limit Pol
				dB/m	dB			dB	dBuV	dBm	
1 3465.00	-53.40	RMS		28.59	-22.57	0.53	-95.23	35.28	-13.00	-40.40	Vertical
2 5198.00	-59.53	RMS		32.60	-21.53	0.39	-95.23	24.24	-13.00	-46.53	Vertical
3 6930.00	-56.18	RMS		36.30	-20.93	0.35	-95.23	23.33	-13.00	-43.18	Vertical




Main Antenna

Part 27L Mode 3

WCDMA B4 Ch1513


H

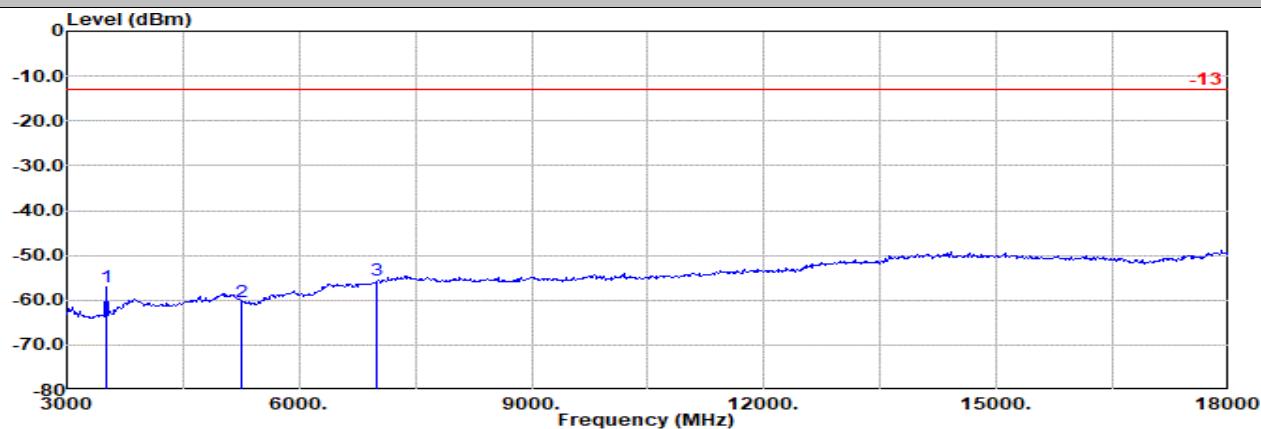

Site : 03CH21-HY

Condition: -13 3m DRH18-E LE2C03A18EN_240711 Horizontal
: WCDMA B4 Ch1513

Freq	Level	Detector	Ant Factor	Amp\Cb		Filter 1	EIRPCF	Readin		Margin	Limit Pol
				dB/m	dB			dB	dBuV	dBm	
1 3505.00	-56.96	RMS		28.84	-22.54	0.44	-95.23	31.53	-13.00	-43.96	Horizontal
2 5258.00	-60.23	RMS		32.38	-21.59	0.44	-95.23	23.77	-13.00	-47.23	Horizontal
3 7010.00	-55.49	RMS		36.30	-20.92	0.37	-95.23	23.99	-13.00	-42.49	Horizontal

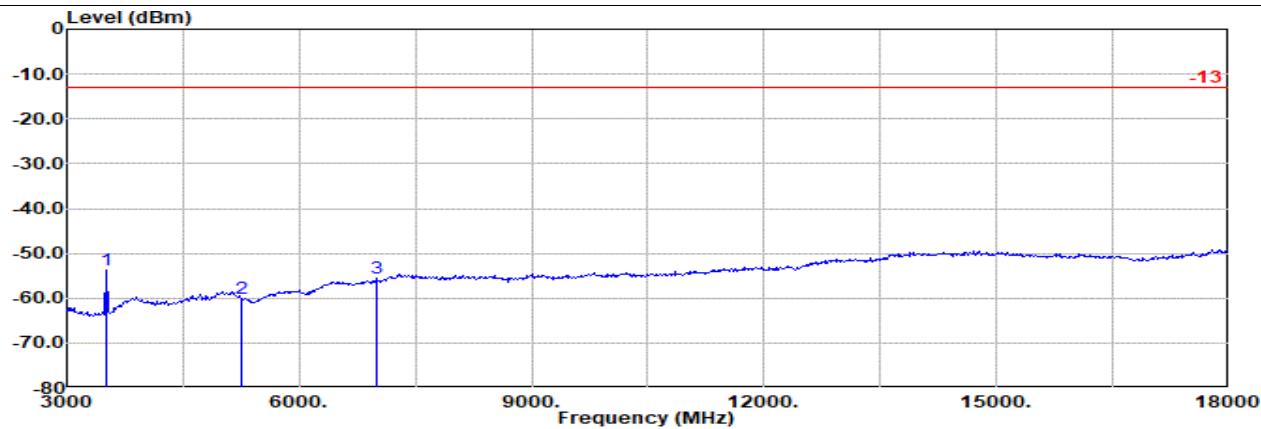

Site : 03CH21-HY

Condition: -13 3m DRH18-E LE2C03A18EN_240711 Vertical
: WCDMA B4 Ch1513

Freq	Level	Detector	Ant Factor	Amp\Cb		Filter 1	EIRPCF	Readin		Margin	Limit Pol
				dB/m	dB			dB	dBuV	dBm	
1 3505.00	-53.64	RMS		28.84	-22.54	0.44	-95.23	34.85	-13.00	-40.64	Vertical
2 5258.00	-60.10	RMS		32.38	-21.59	0.44	-95.23	23.90	-13.00	-47.10	Vertical
3 7010.00	-55.68	RMS		36.30	-20.92	0.37	-95.23	23.80	-13.00	-42.68	Vertical




Main Antenna

Part 27L Mode 3

WCDMA B4 Ch1413

M

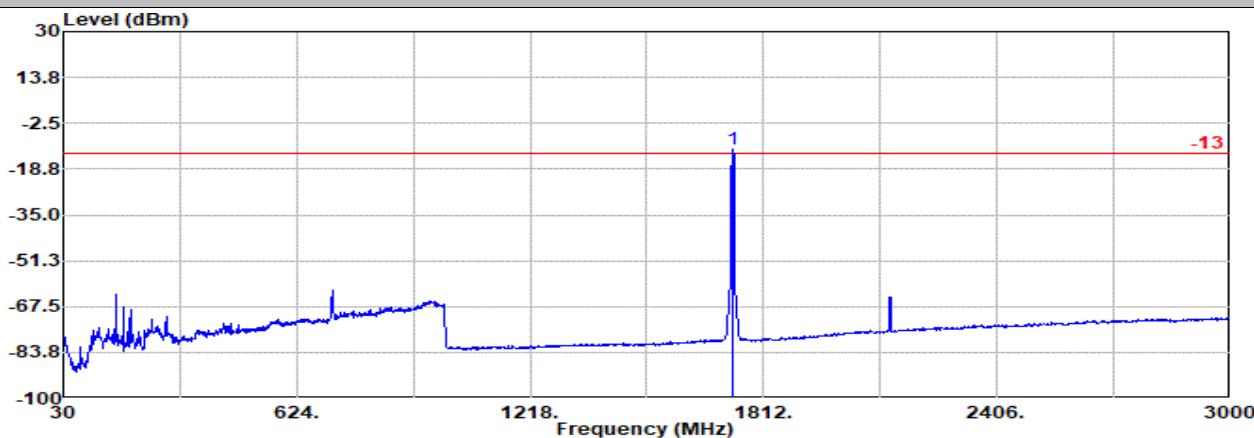


Site : 03CH21-HY

Condition: -13 3m DRH18-E LE2C03A18EN_240711 Horizontal

: WCDMA B4 Ch1413

: #1 is fundamental signal which can be ignored.

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol	
1	1733.00	-11.78	RMS	24.67	-25.04	0.59	-95.23	83.23	-13.00	1.22	Horizontal

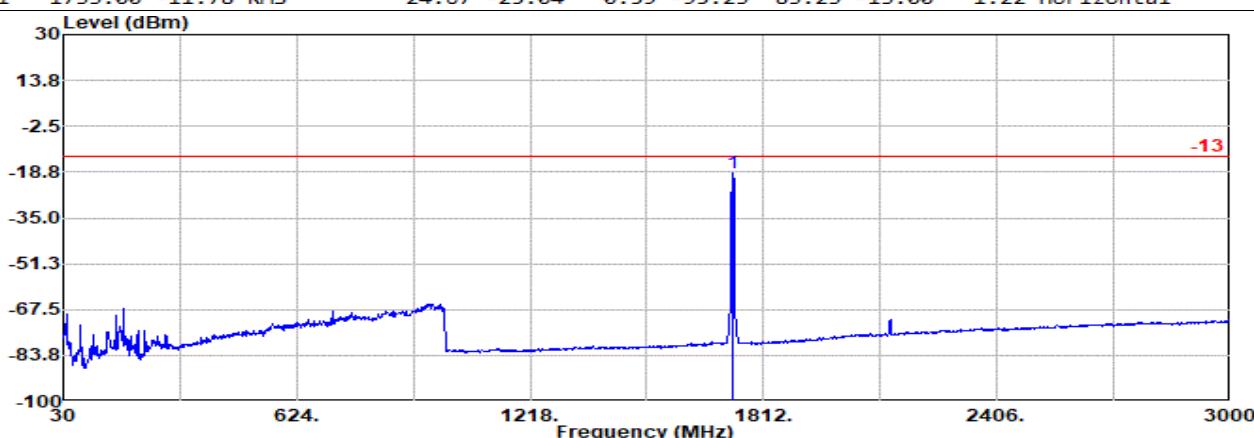

Site : 03CH21-HY

Condition: -13 3m DRH18-E LE2C03A18EN_240711 Vertical

: WCDMA B4 Ch1413

: #1 is fundamental signal which can be ignored.

Freq	Level	Detector	Ant Factor	Amp\Cb	Filter 1	EIRPCF	Readin g	Limit	Margin	Pol	
1	1733.00	-19.24	RMS	24.67	-25.04	0.59	-95.23	75.77	-13.00	-6.24	Vertical

Remark: #1 is fundamental signal which can be ignored.