

FCC Test Report

FCC ID : QYLPN7462A
Equipment : RFID module
Brand Name : infoThink
Model Name : PN7462
Applicant : Getac Technology Corporation.
5F., Building A, No. 209, Sec.1, Nangang Rd., Nangang
Dist., Taipei City 11568, Taiwan, R.O.C.
Standard : 47 CFR FCC Part 15.225

The product was received on Jul. 03, 2019, and testing was started from Jul. 03, 2019 and completed on Jul. 04, 2019. We, SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2013 and shown compliance with the applicable technical standards.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of United States government.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.


Approved by: Allen Lin

SPORTON INTERNATIONAL INC. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)

Table of Contents

HISTORY OF THIS TEST REPORT	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Information.....	5
1.2 Testing Applied Standards	7
1.3 Testing Location Information	7
1.4 Measurement Uncertainty	7
2 TEST CONFIGURATION OF EUT.....	8
2.1 Test Condition	8
2.2 The Worst Case Modulation Configuration	8
2.3 Test Channel Frequencies Configuration.....	8
2.4 The Worst Case Measurement Configuration	9
2.5 Support Equipment.....	10
2.6 Test Setup Diagram	11
3 TRANSMITTER TEST RESULT	12
3.1 AC Power-line Conducted Emissions	12
3.2 Emission Bandwidth	16
3.3 Field Strength of Fundamental Emissions and Spectrum Mask	18
3.4 Transmitter Radiated Unwanted Emissions	20
3.5 Frequency Stability	31
4 TEST EQUIPMENT AND CALIBRATION DATA	33

Appendix A. Test Photos

Photographs of EUT V01

[illegible]

Summary of Test Result

Report Clause	Ref. Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	FCC 15.203
3.1	15.207	AC Power-line Conducted Emissions	PASS	FCC 15.207
3.2	15.215(c)	Emission Bandwidth	PASS	Fall in band $F_L \geq 13.553 \text{ MHz}$ $F_H \leq 13.567 \text{ MHz}$
3.3	15.225(a)~(d)	Field Strength of Fundamental Emissions and Spectrum Mask	PASS	124 dBuV/m at 3m
3.4	15.225(d)	Transmitter Radiated Unwanted Emissions	PASS	FCC 15.209
3.5	15.225(e)	Frequency Stability	PASS	$\pm 0.01\%$ (100ppm)

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and explanations:

None

Reviewed by: Jackson Tsai

Report Producer: Jenny Yang

1 General Description

1.1 Information

1.1.1 RF General Information

RF General Information				
Frequency Range	Modulation Mode	Ch. Frequency (MHz)	Channel Number	Field Strength (dBuV/m)
13.553 – 13.567 MHz	ISO 14443-3B (ASK)	13.56	1	62.20
Note 1: Field strength performed peak level at 3m.				

1.1.2 Antenna Information

Antenna Category	
☐	Equipment placed on the market without antennas
☒	Integral antenna (antenna permanently attached)
☐	Temporary RF connector provided
☒	No temporary RF connector provided Transmit chains bypass antenna and soldered temporary RF connector provided for connected measurement. In case of conducted measurements the transmitter shall be connected to the measuring equipment via a suitable attenuator and correct for all losses in the RF path.
☐	External antenna (dedicated antennas)

Antenna General Information		
No.	Ant. Cat.	Ant. Type
1	Integral	Loop

1.1.3 EUT Information

Operational Condition	
EUT Power Type	From Host System
Type of EUT	
☐	Stand-alone
☐	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.:
☒	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: Tablet - Getac / A140, A140G2
☐	Other:

1.1.4 Test Signal Duty Cycle

Duty Cycle Operation Restriction	
The transmitter is used for	The transmitter is operated
☒ Inductive applications	☒ Automatically triggered
☐ Duty cycle fixed mode	☒ Duty cycle random mode
☒ Duty cycle mode - NFC-A (ISO 14443-3A)	
Declare transmitter duty cycle / 1 hour =	100%
☒ Duty cycle mode - NFC-B (ISO 14443-3B)	
Declare transmitter duty cycle / 1 hour =	100%
☒ Duty cycle mode - NFC-F (ISO 18092)	
Declare transmitter duty cycle / 1 hour =	100%
☒ Duty cycle mode - NFC-V (ISO 15693)	
Declare transmitter duty cycle / 1 hour =	100%

1.2 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2013
- ♦ KDB 174176 D01 v01r01

1.3 Testing Location Information

Testing Location			
☒	HWA YA	ADD : No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City, Taiwan (R.O.C.)	
		TEL : 886-3-327-3456	FAX : 886-3-327-0973
Test site Designation No. TW1190 with FCC.			

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO01-HY	Edward	25.3~26.0°C / 58.2~62.7%	04/Jul/2019
RF Conducted	TH06-HY	Gary	23.2~24.8°C / 62~65%	03/Jul/2019
Radiated Emission	03CH02-HY	Patrick	23.5~25.9°C / 53.2~55.7%	04/Jul/2019

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.54 dB	Confidence levels of 95%
Radiated Emission (9kHz ~ 30MHz)	1.6 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	4.3 dB	Confidence levels of 95%
Conducted Emission	1.3 dB	Confidence levels of 95%
Temperature	0.7 °C	Confidence levels of 95%
Humidity	4 %	Confidence levels of 95%

2 Test Configuration of EUT

2.1 Test Condition

Condition Item	Abbreviation/Remark	Remark
Frequency Stability	Tnom	20°C
-	Tmin	-20°C
-	Tmax	50°C
-	Vnom	120V
-	Vmin	102V
-	Vmax	138V

2.2 The Worst Case Modulation Configuration

Modulation Used for Conformance Testing	
Modulation Mode	Field Strength (dBuV/m at 3 m)
NFC	62.20

2.3 Test Channel Frequencies Configuration

Modulation Mode	Test Channel Frequencies (MHz)
NFC	13.56

2.4 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral
Operating Mode	☒ 1. Adapter Mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth, Frequency Stability
Test Condition	Conducted measurement

The Worst Case Mode for Following Conformance Tests			
Tests Item	Field Strength of Fundamental Emissions Spectrum Mask, Transmitter Radiated Unwanted Emissions		
Test Condition	Radiated measurement		
Pretest Mode	☒ 1. NFC-A (ISO 14443-3A)		
	☒ 2. NFC-B (ISO 14443-3B)		
	☒ 3. NFC-F (ISO 18092)		
	☒ 4. NFC-V (ISO 15693)		
Mode 2 configuration was pretested and found to be the worst case and measured during the test.			
Operating Mode	☒ 1. Adapter Mode		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT	V		


2.5 Support Equipment

Support Equipment - AC Conduction			
No.	Equipment	Brand Name	Model Name
1	Mouse	DELL	MS111-L
2	Earphone	APPLE	MD827FE/A
3	Host	Getac	A140
4	NFC Card	-	-
5	AC Adapter	FSP	FSP065-RBBN3

Support Equipment - RF Conducted			
No.	Equipment	Brand Name	Model Name
1	DC Power Supply	GW	GPR-3510HD
2	Host	Getac	A140

Support Equipment - Radiated			
No.	Equipment	Brand Name	Model Name
1	Mouse	DELL	MS111-L
2	Earphone	APPLE	MD827FE/A
3	Host	Getac	A140
4	NFC Card	-	-
5	AC Adapter	FSP	FSP065-RBBN3

2.6 Test Setup Diagram

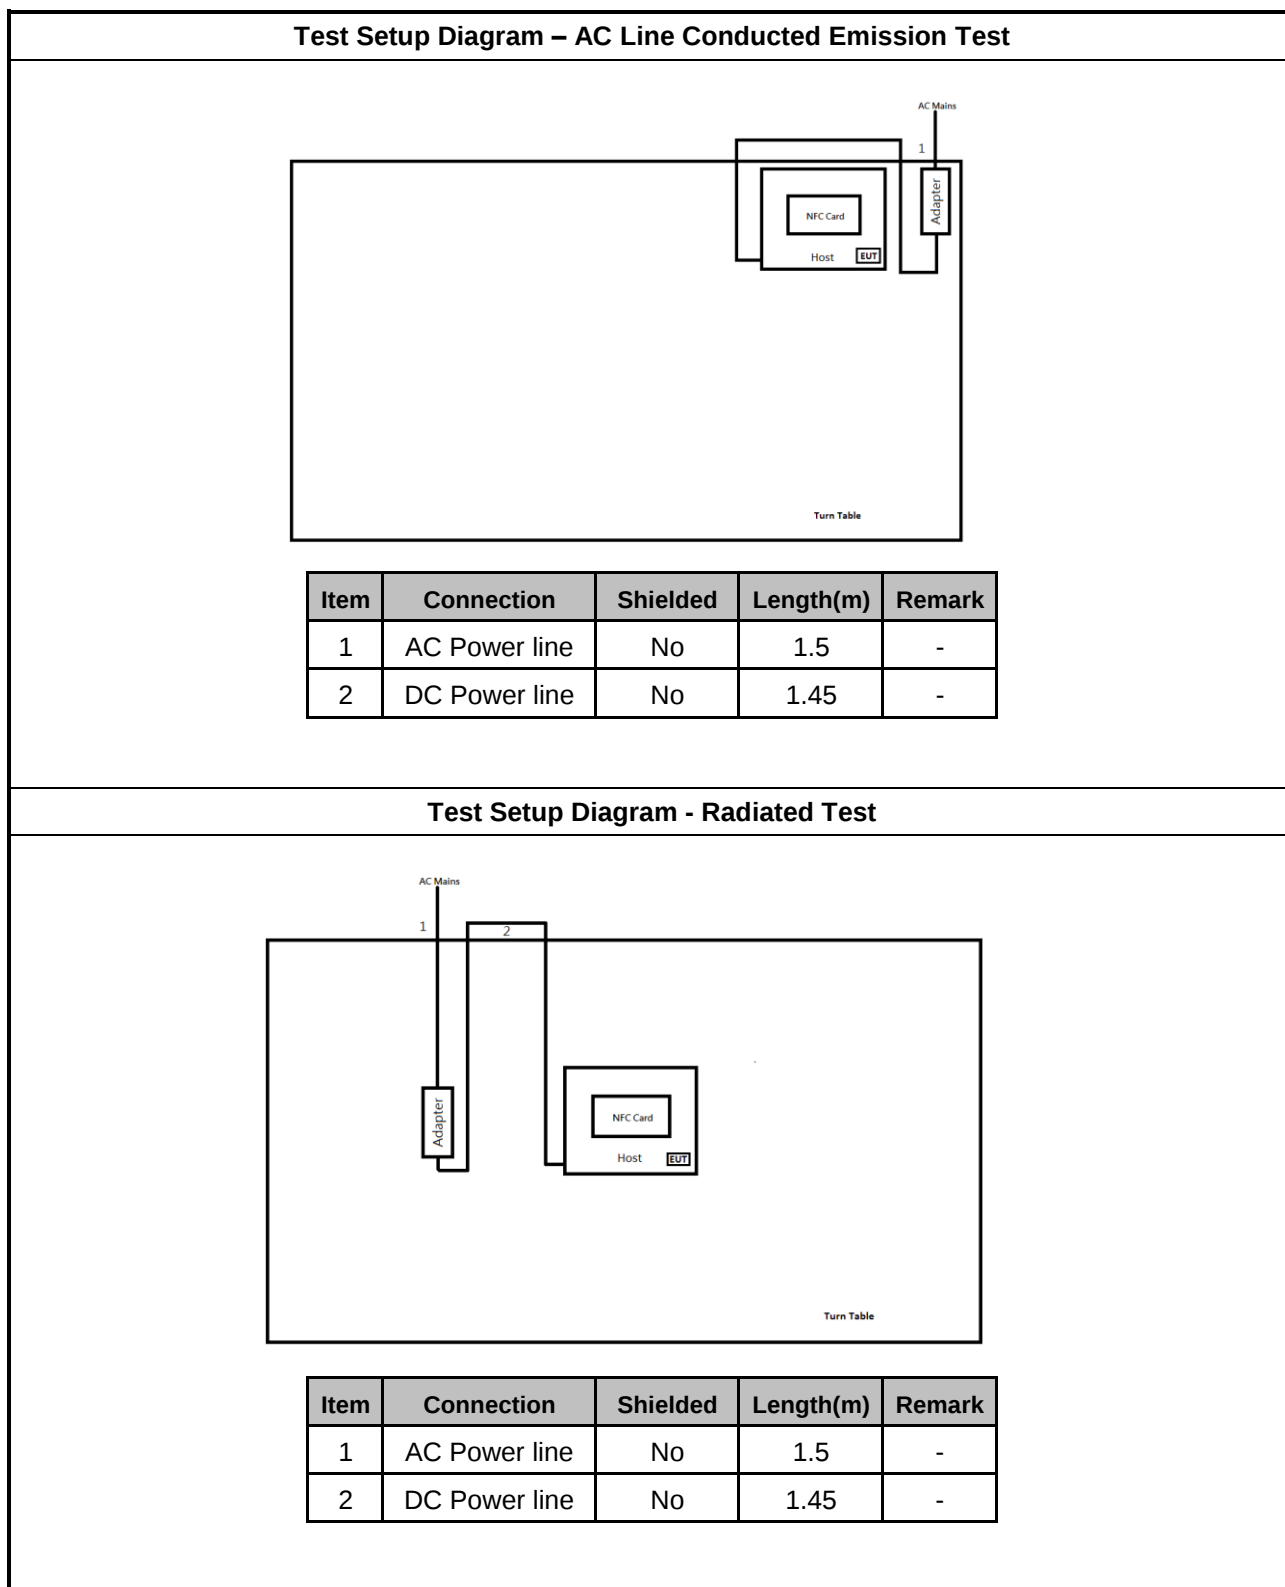

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.


3.1.3 Test Procedures

Test Method	
☒	Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.
☒	If AC conducted emissions fall in operating band, then following below test method confirm final result.
☐	Accept measurements done with a suitable dummy load replacing the antenna under the following conditions: (1) Perform the AC line conducted tests with the antenna connected to determine compliance with FCC 15.207 limits outside the transmitter's fundamental emission band; (2) Retest with a dummy load to determine compliance with FCC 15.207 limits within the transmitter's fundamental emission band.
☒	For a device with a permanent antenna operating at or below 30 MHz, accept measurements done with a suitable dummy load, in lieu of the permanent antenna under the following conditions: (1) Perform the AC line conducted tests with the permanent antenna to determine compliance with the FCC 15.207 limits outside the transmitter's fundamental emission band; (2) Retest with a dummy load in lieu of the permanent antenna to determine compliance with the FCC 15.207 limits within the transmitter's fundamental emission band.

3.1.4 Test Setup

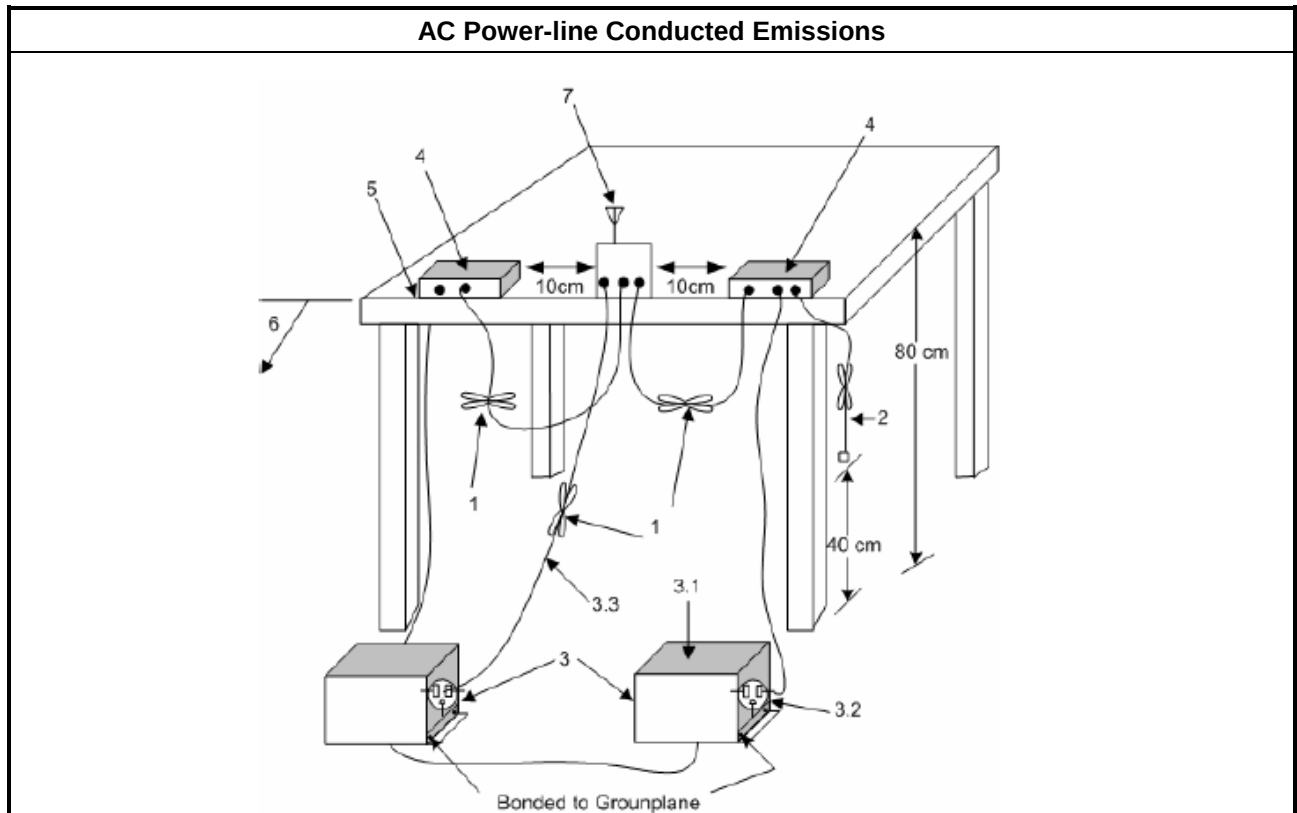


3.1.5 Test Result of AC Power-line Conducted Emissions

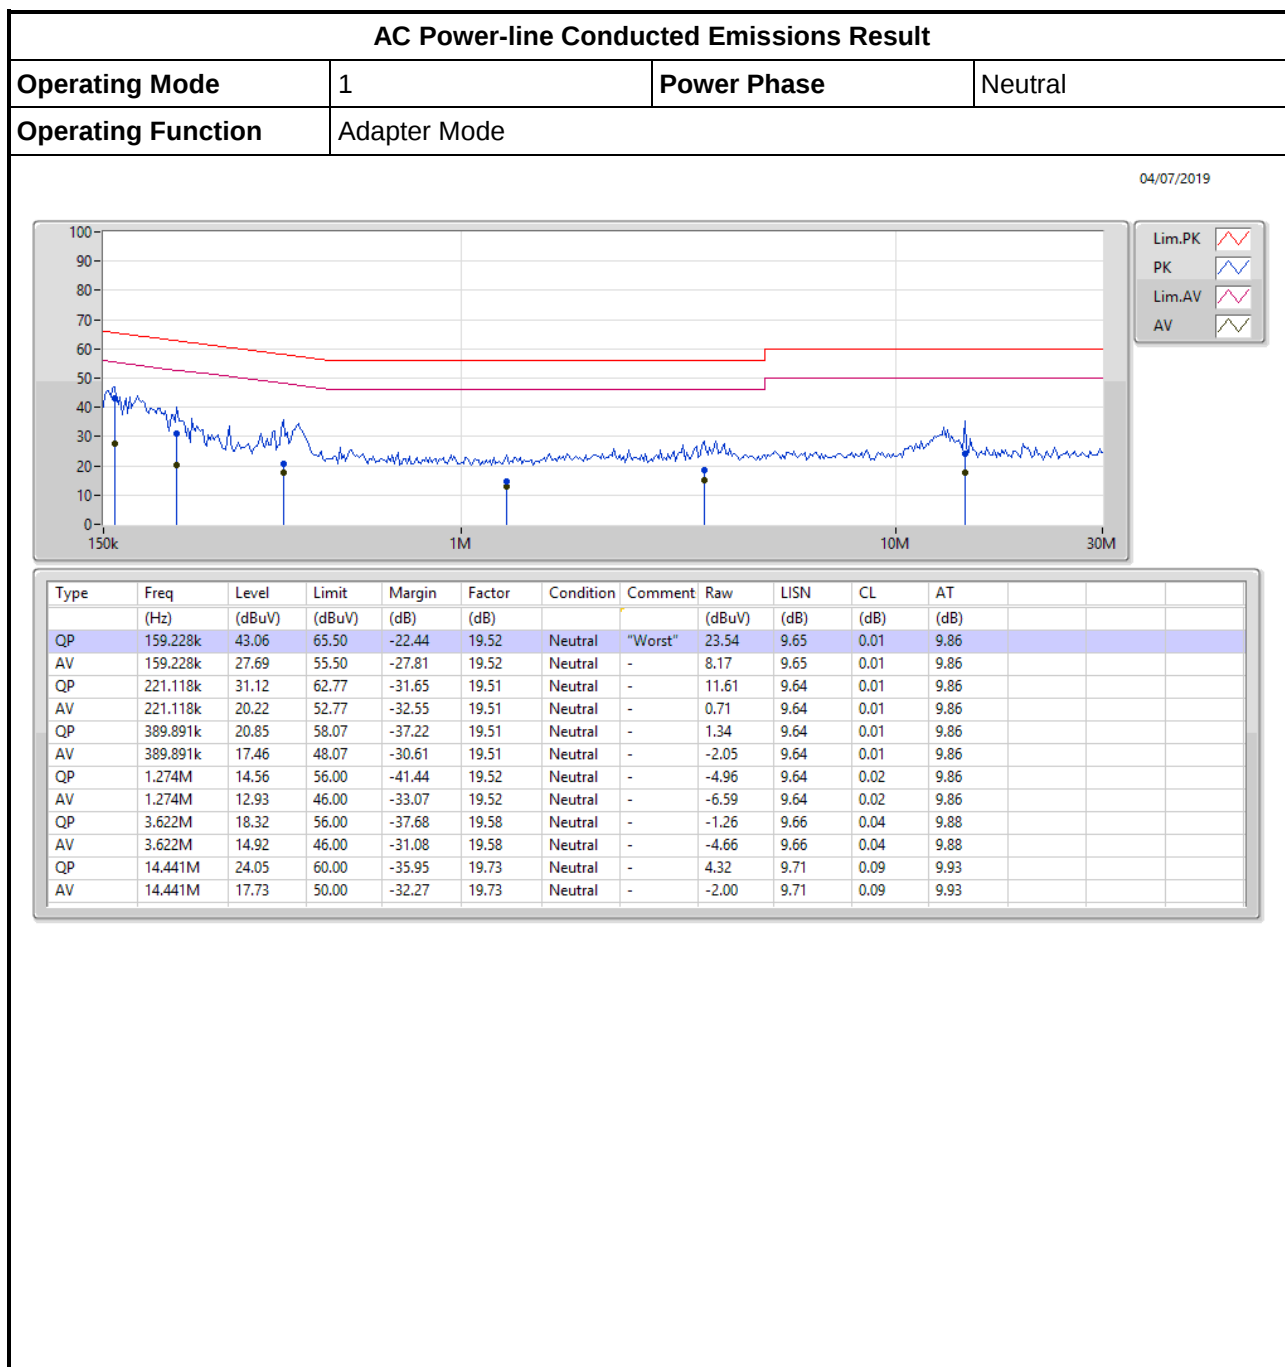

AC Power-line Conducted Emissions Result

Operating Mode	1	Power Phase	Line
Operating Function	Adapter Mode		

04/07/2019

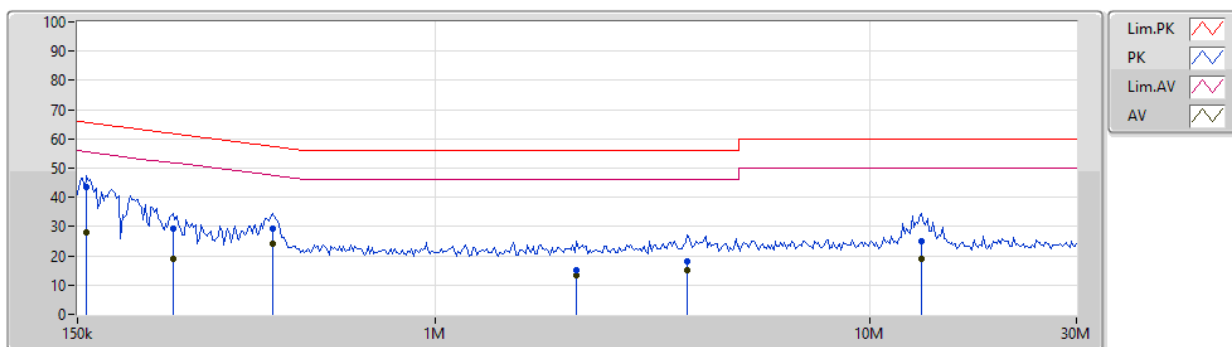

Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Factor (dB)	Condition	Comment	Raw (dBuV)	LISN (dB)	CL (dB)	AT (dB)			
QP	157.652k	43.66	65.58	-21.92	19.48	Line	"Worst"	24.18	9.61	0.01	9.86			
AV	157.652k	27.88	55.58	-27.70	19.48	Line	-	8.40	9.61	0.01	9.86			
QP	249.162k	29.28	61.79	-32.51	19.48	Line	-	9.80	9.61	0.01	9.86			
AV	249.162k	19.13	51.79	-32.66	19.48	Line	-	-0.35	9.61	0.01	9.86			
QP	422.196k	29.23	57.40	-28.17	19.48	Line	-	9.75	9.61	0.01	9.86			
AV	422.196k	24.16	47.40	-23.24	19.48	Line	-	4.68	9.61	0.01	9.86			
QP	2.116M	15.18	56.00	-40.82	19.52	Line	-	-4.34	9.62	0.03	9.87			
AV	2.116M	13.42	46.00	-32.58	19.52	Line	-	-6.10	9.62	0.03	9.87			
QP	3.807M	18.15	56.00	-37.85	19.55	Line	-	-1.40	9.63	0.04	9.88			
AV	3.807M	15.08	46.00	-30.92	19.55	Line	-	-4.47	9.63	0.04	9.88			
QP	13.204M	25.13	60.00	-34.87	19.66	Line	-	5.47	9.65	0.08	9.93			
AV	13.204M	19.08	50.00	-30.92	19.66	Line	-	-0.58	9.65	0.08	9.93			

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

20dB Bandwidth Limit	
☒	Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (13.553 – 13.567 MHz).


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
☒	For the emission bandwidth refer ANSI C63.10, clause 6.9.1 for occupied bandwidth testing.
☒	For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.


3.2.4 Test Setup

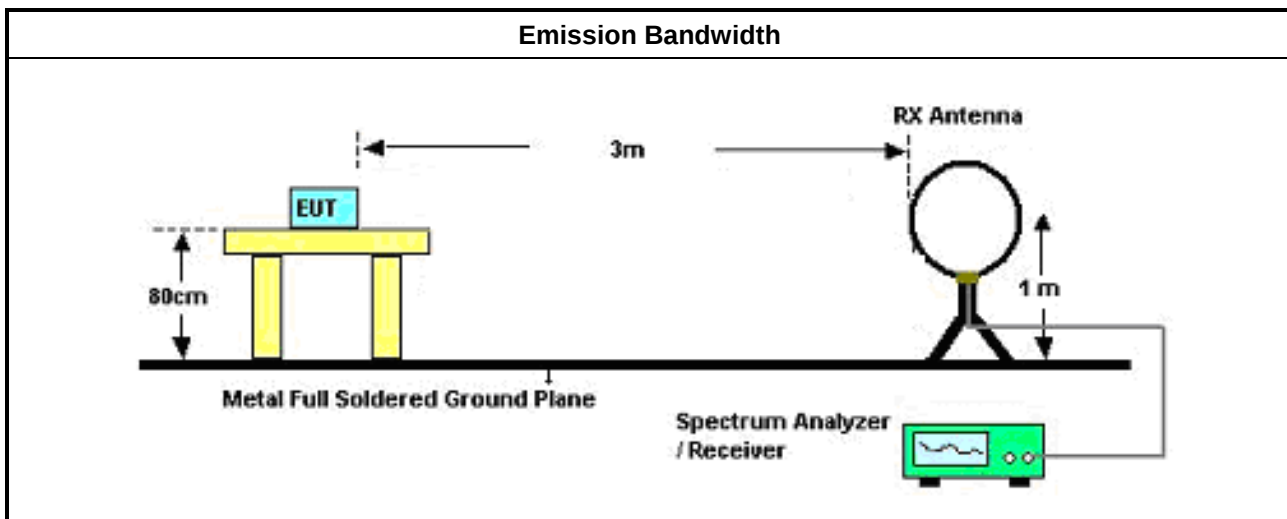

3.2.5 Test Result of Emission Bandwidth

Occupied Channel Bandwidth Result					
Modulation Mode	Frequency (MHz)	20dB Bandwidth (kHz)	99% Bandwidth (kHz)	F _L at 20dB BW (MHz)	F _H at 20dB BW (MHz)
NFC	13.56	2.46000	2.09841	13.55933	13.56180
Limit		N/A	N/A	13.553	13.567
Result		Complied			

Emission Bandwidth Plot - 20dB Bandwidth

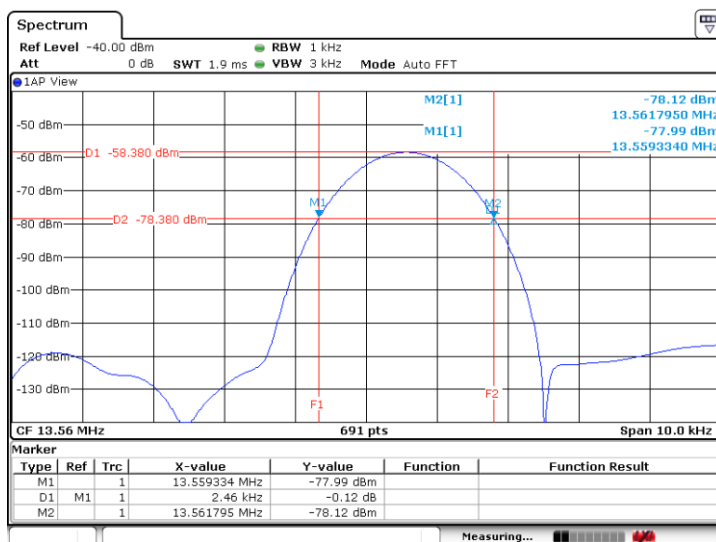

Emission Bandwidth Plot - 99% Bandwidth



3.3 Field Strength of Fundamental Emissions and Spectrum Mask

3.3.1 Field Strength of Fundamental Emissions and Spectrum Mask Limit

Field Strength of Fundamental Emissions For FCC					
Emissions	(uV/m)@30m	(dBuV/m)@30m	(dBuV/m)@10m	(dBuV/m)@3m	(dBuV/m)@1m
fundamental	15848	84.0	103.1	124.0	143.1
Quasi peak measurement of the fundamental.					

Spectrum Mask For FCC					
Freq. of Emission (MHz)	(uV/m)@30m	(dBuV/m)@30m	(dBuV/m)@10m	(dBuV/m)@3m	(dBuV/m)@1m
1.705~13.110	30	29.5	48.6	69.5	88.6
13.110~13.410	106	40.5	59.6	80.5	99.6
13.410~13.553	334	50.5	69.6	90.5	109.6
13.553~13.567	15848	84.0	103.1	124.0	143.1
13.567~13.710	334	50.5	69.6	90.5	109.6
13.710~14.010	106	40.5	59.6	80.5	99.6
14.010~30.000	30	29.5	48.6	69.5	88.6


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
☒	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz and test distance is 3m.
☒	At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the requirements; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be following below methods.
☐	The results shall be extrapolated to the specified distance by making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.
☒	The results shall be by using the square of an inverse linear distance extrapolation factor (40 dB/decade).
☒	For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.


3.3.4 Test Setup

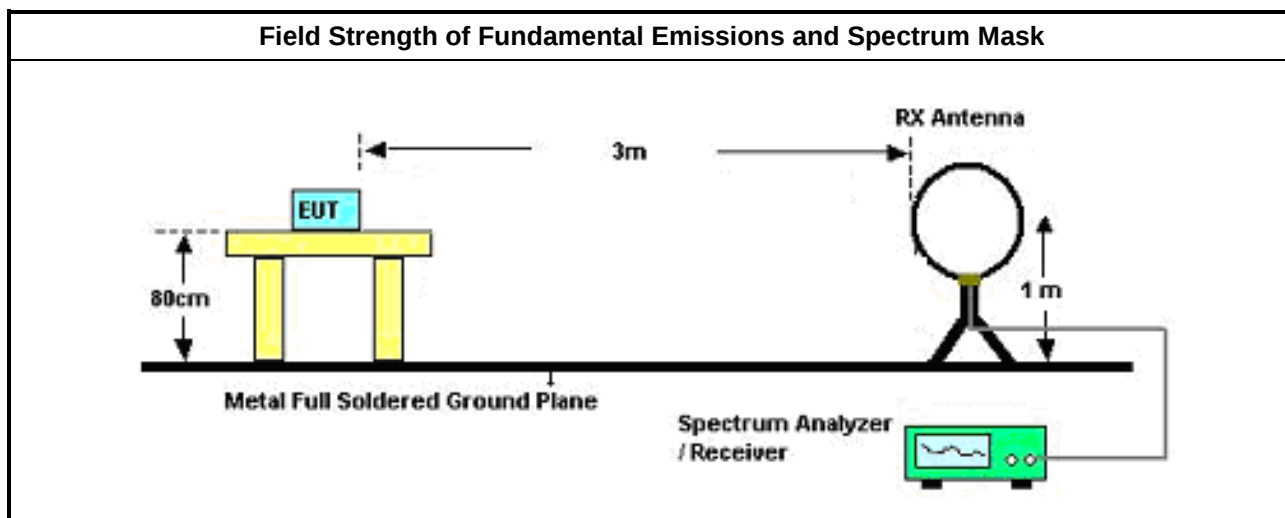

3.3.5 Test Result of Field Strength of Fundamental Emissions and Spectrum Mask

Field Strength of Fundamental Emissions Result					
Modulation Mode	Frequency (MHz)	Fundamental (dBuV/m)@3m	Polarization	Margin (dB)	Limit (dBuV/m)@3m
NFC	13.56	62.20	H	-61.80	124.00
Result		Complied			

Note 1: Measurement worst emissions of receive antenna polarization: H(Horizontal).

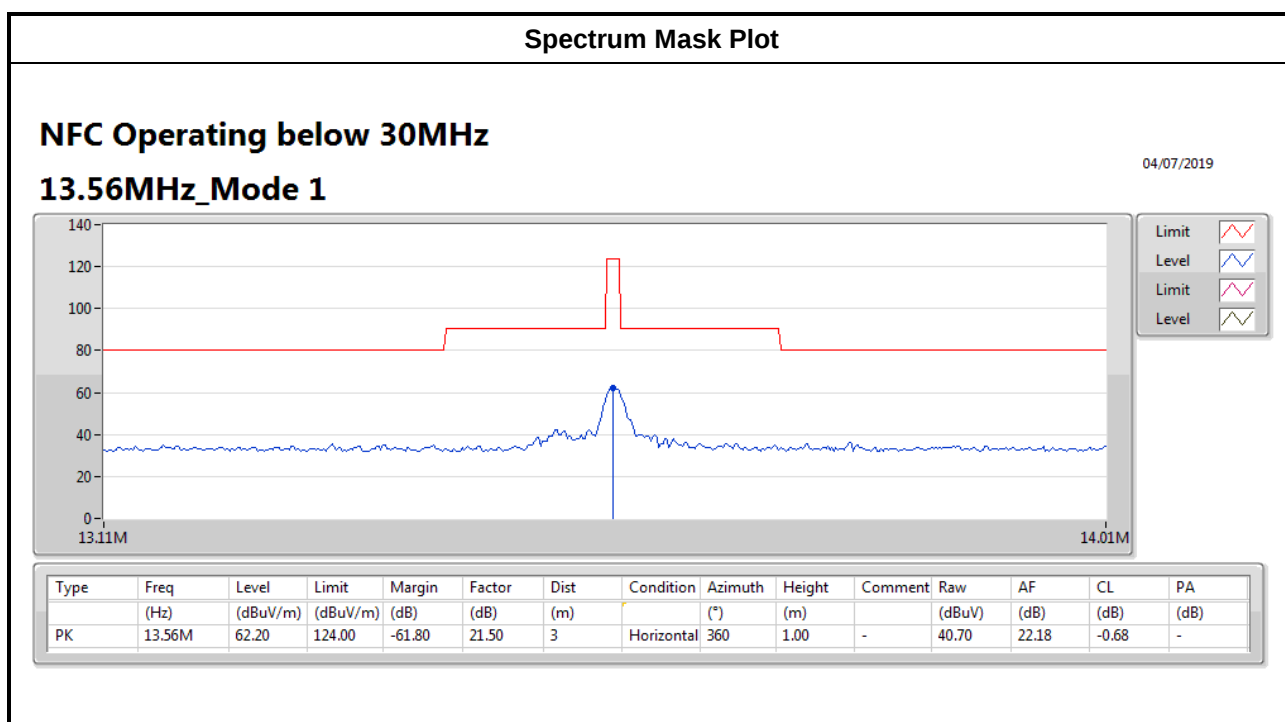

3.4 Transmitter Radiated Unwanted Emissions

3.4.1 Transmitter Radiated Unwanted Emissions Limit

Transmitter Radiated Unwanted Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.



3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures

Test Method	
☒	Refer as ANSI C63.10, clause 6.5 for radiated emissions from 30 MHz to 1 GHz and test distance is 3m.
☒	Refer as ANSI C63.10, clause 6.4 for radiated emissions from below 30 MHz and test distance is 3m.
☒	At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the requirements; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be following below methods.
☐	The results shall be extrapolated to the specified distance by making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor.
☒	The results shall be by using the square of an inverse linear distance extrapolation factor (40 dB/decade).
☒	For radiated measurement. Loop antenna was rotated about the horizontal and vertical axis and the equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted field strength level.
☒	The any unwanted emissions level shall not exceed the fundamental emission level.
☒	All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

3.4.4 Test Setup

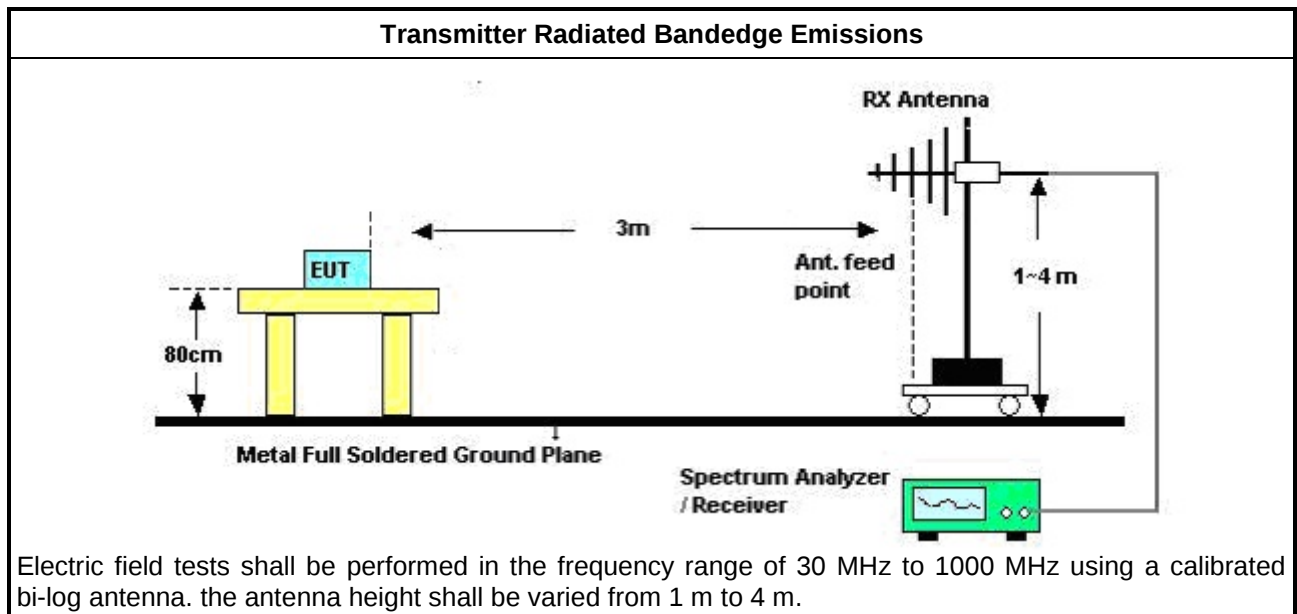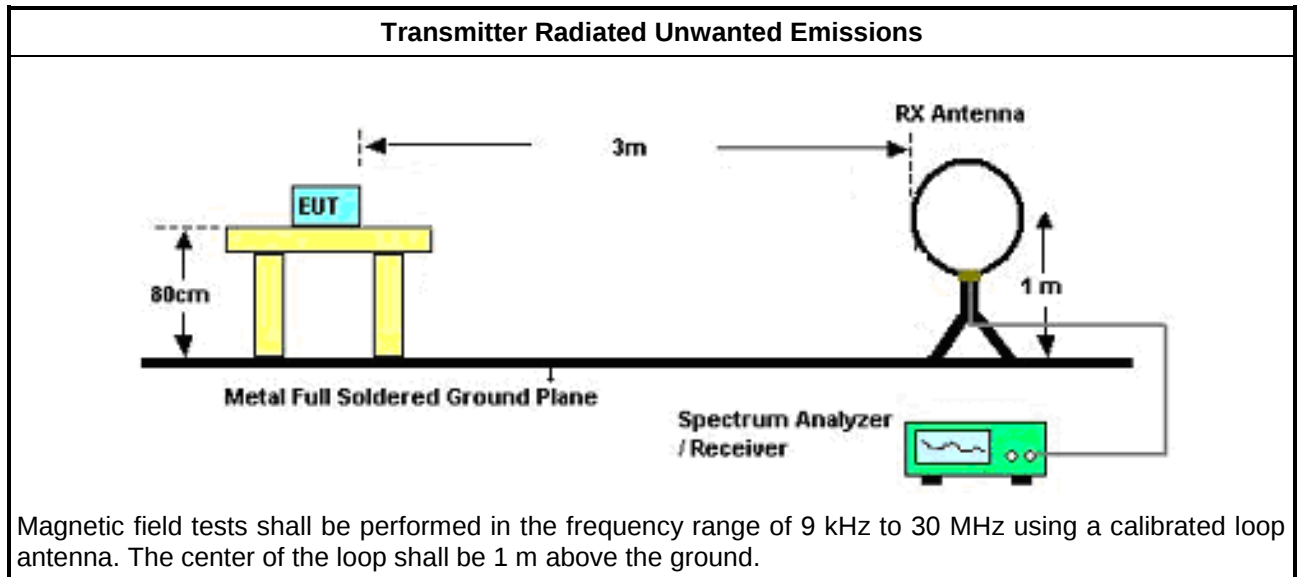

**3.4.5 Transmitter Radiated Unwanted Emissions (Below 30MHz)****Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Azimuth (°)	Height (m)	Comments
13.553-13.567MHz	-	-	-	-	-	-	-	-	-	-	-
NFC	Pass	PK	2.001M	53.14	69.50	-16.36	17.19	3	360	1.00	-

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Azimuth (°)	Height (m)	Comments
NFC	-	-	-	-	-	-	-	-	-	-	-
13.56MHz_Mode 1	Pass	PK	9.846k	51.28	127.72	-76.44	10.89	3	0	1.00	-
13.56MHz_Mode 1	Pass	PK	20.562k	43.96	121.32	-77.36	12.28	3	0	1.00	-
13.56MHz_Mode 1	Pass	PK	37.482k	44.35	116.11	-71.76	13.36	3	0	1.00	-
13.56MHz_Mode 1	Pass	PK	209.7k	44.73	101.16	-56.43	14.62	3	360	1.00	-
13.56MHz_Mode 1	Pass	PK	388.8k	52.09	95.80	-43.71	15.55	3	360	1.00	-
13.56MHz_Mode 1	Pass	PK	2.001M	53.14	69.50	-16.36	17.19	3	360	1.00	-

NFC Operating below 30MHz

04/07/2019

13.56MHz_Mode 1




Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	9.846k	51.28	127.72	-76.44	10.89	3	Horizontal	0	1.00	-	40.39	20.39	-9.50	-
PK	20.562k	43.96	121.32	-77.36	12.28	3	Horizontal	0	1.00	-	31.68	20.88	-8.60	-
PK	37.482k	44.35	116.11	-71.76	13.36	3	Horizontal	0	1.00	-	30.99	21.22	-7.86	-

NFC Operating below 30MHz

04/07/2019

13.56MHz_Mode 1

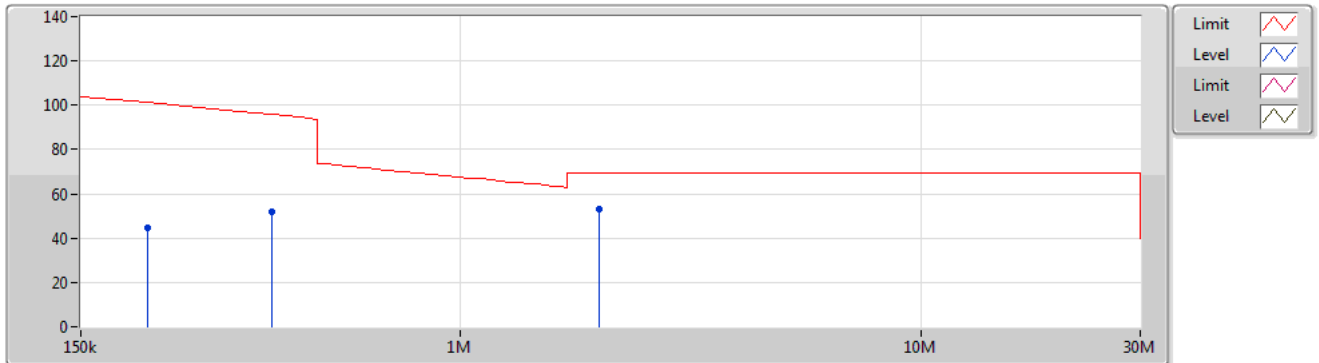

Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comment	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
PK	209.7k	44.73	101.16	-56.43	14.62	3	Horizontal	360	1.00	-	30.11	20.38	-5.76	-
PK	388.8k	52.09	95.80	-43.71	15.55	3	Horizontal	360	1.00	-	36.54	20.56	-5.01	-
PK	2.001M	53.14	69.50	-16.36	17.19	3	Horizontal	360	1.00	-	35.95	20.20	-3.01	-

**3.4.6 Transmitter Radiated Unwanted Emissions (Above 30MHz)****Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Azimuth (°)	Height (m)	Comments
13.553-13.567MHz	-	-	-	-	-	-	-	-	-	-	-
NFC	Pass	PK	39.7M	29.64	40.00	-10.36	-9.61	3	0	1.00	-


Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Azimuth (°)	Height (m)	Comments
NFC	-	-	-	-	-	-	-	-	-	-	-
13.56MHz_Mode 1	Pass	PK	39.7M	29.64	40.00	-10.36	-9.61	3	0	1.00	-
13.56MHz_Mode 1	Pass	PK	66.86M	25.68	40.00	-14.32	-15.49	3	0	1.00	-
13.56MHz_Mode 1	Pass	PK	309.36M	25.94	46.00	-20.06	-5.69	3	0	1.00	-
13.56MHz_Mode 1	Pass	PK	491.72M	25.94	46.00	-20.06	-2.37	3	0	1.00	-
13.56MHz_Mode 1	Pass	PK	623.64M	29.05	46.00	-16.95	-0.45	3	0	1.00	-
13.56MHz_Mode 1	Pass	PK	672.14M	31.60	46.00	-14.40	-0.28	3	0	1.00	-
13.56MHz_Mode 1	Pass	PK	39.7M	29.11	40.00	-10.89	-9.61	3	360	1.00	-
13.56MHz_Mode 1	Pass	PK	66.86M	23.55	40.00	-16.45	-15.49	3	360	1.00	-
13.56MHz_Mode 1	Pass	PK	227.88M	25.73	46.00	-20.27	-9.63	3	360	1.00	-
13.56MHz_Mode 1	Pass	PK	577.08M	28.49	46.00	-17.51	-1.37	3	360	1.00	-
13.56MHz_Mode 1	Pass	PK	672.14M	32.10	46.00	-13.90	-0.28	3	360	1.00	-
13.56MHz_Mode 1	Pass	PK	747.8M	32.73	46.00	-13.27	0.87	3	360	1.00	-

NFC Operating above 30MHz

04/07/2019

13.56MHz_Mode 1

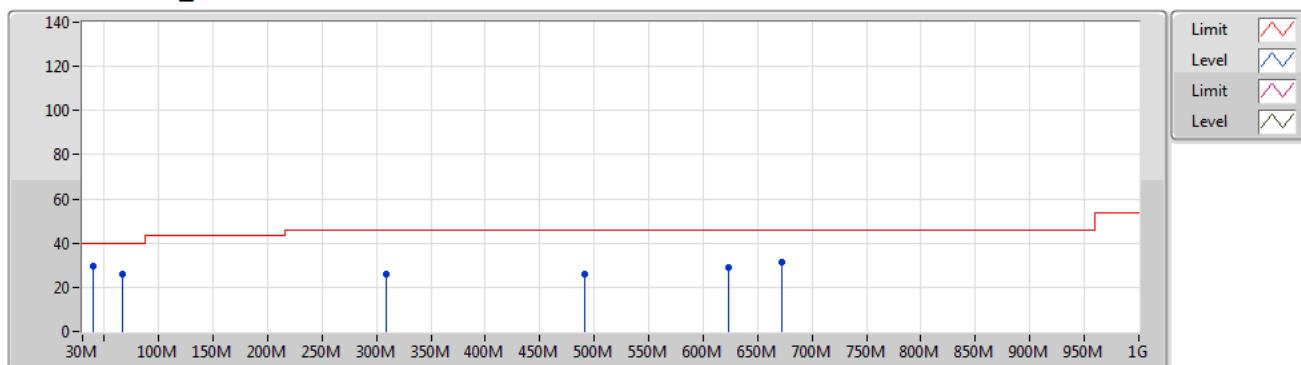


Type	Freq	Level	Limit	Margin	Factor	Dist	Condition	Azimuth	Height	Comment	Raw	AF	CL	PA
	(Hz)	(dBuV/m)	(dBuV/m)	(dB)	(dB)	(m)		(°)	(m)		(dBuV)	(dB)	(dB)	(dB)
PK	39.7M	29.64	40.00	-10.36	-9.61	3	Vertical	0	1.00	-	39.25	17.62	0.64	27.87
PK	66.86M	25.68	40.00	-14.32	-15.49	3	Vertical	0	1.00	-	41.17	11.27	1.03	27.79
PK	309.36M	25.94	46.00	-20.06	-5.69	3	Vertical	0	1.00	-	31.63	18.48	3.02	27.19
PK	491.72M	25.94	46.00	-20.06	-2.37	3	Vertical	0	1.00	-	28.31	22.67	3.29	28.33
PK	623.64M	29.05	46.00	-16.95	-0.45	3	Vertical	0	1.00	-	29.50	24.23	3.73	28.41
PK	672.14M	31.60	46.00	-14.40	-0.28	3	Vertical	0	1.00	-	31.88	24.14	3.91	28.33

NFC Operating above 30MHz

04/07/2019

13.56MHz_Mode 1

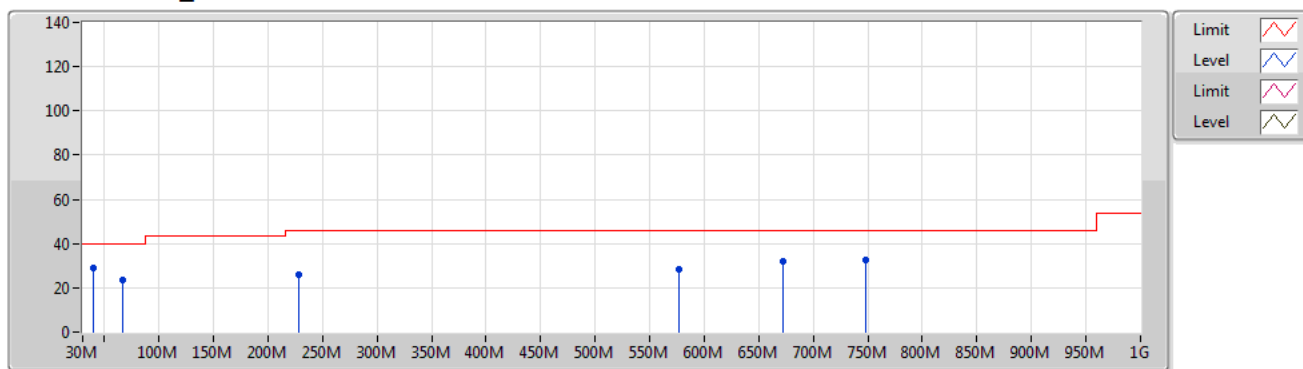

Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB)	CL (dB)	PA (dB)
PK	39.7M	29.11	40.00	-10.89	-9.61	3	Horizontal	360	1.00	-	38.72	17.62	0.64	27.87
PK	66.86M	23.55	40.00	-16.45	-15.49	3	Horizontal	360	1.00	-	39.04	11.27	1.03	27.79
PK	227.88M	25.73	46.00	-20.27	-9.63	3	Horizontal	360	1.00	-	35.36	15.10	2.58	27.31
PK	577.08M	28.49	46.00	-17.51	-1.37	3	Horizontal	360	1.00	-	29.86	23.44	3.63	28.44
PK	672.14M	32.10	46.00	-13.90	-0.28	3	Horizontal	360	1.00	-	32.38	24.14	3.91	28.33
PK	747.8M	32.73	46.00	-13.27	0.87	3	Horizontal	360	1.00	-	31.86	24.89	4.12	28.14

3.5 Frequency Stability

3.5.1 Frequency Stability Limit

Frequency Stability Limit	
☒	Carrier frequency stability shall be maintained to $\pm 0.01\%$ (± 100 ppm).


3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
☒	Refer as ANSI C63.10, clause 6.8 for frequency stability tests
☒	Frequency stability with respect to ambient temperature
☒	Frequency stability when varying supply voltage
☐	For conducted measurement.
☒	For radiated measurement. The equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted power level.

3.5.4 Test Setup

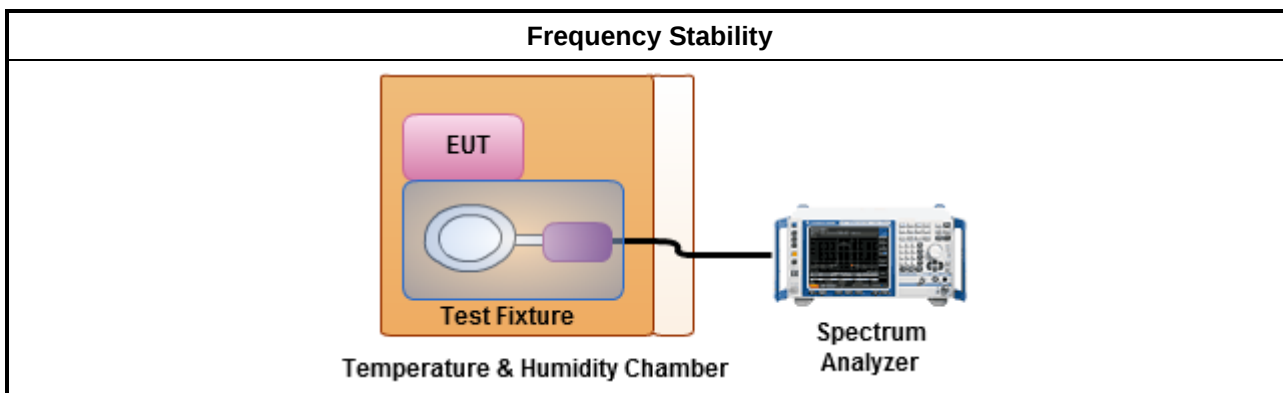

3.5.5 Test Result of Frequency Stability

Frequency Stability Result									
Condition	Ch. Freq. (MHz)	Frequency Stability (ppm)							
		Test Frequency (MHz)				Frequency Stability (ppm)			
		0 min	2 min	5 min	10 min	0 min	2 min	5 min	10 min
T _{20°C} V _{max}	13.56	13.56058	13.56055	13.56055	13.56052	42.48	40.27	40.71	38.50
T _{20°C} V _{min}	13.56	13.56053	13.56114	13.56053	13.56054	39.09	84.14	38.86	39.97
T _{50°C} V _{nom}	13.56	13.56052	13.56049	13.56051	13.56051	38.50	35.99	37.39	37.61
T _{40°C} V _{nom}	13.56	13.56053	13.56054	13.56051	13.56053	39.23	39.82	37.24	38.79
T _{30°C} V _{nom}	13.56	13.56054	13.56053	13.56053	13.56055	40.04	39.16	38.79	40.56
T _{20°C} V _{nom}	13.56	13.56050	13.56050	13.56050	13.56051	36.73	36.95	36.50	37.61
T _{10°C} V _{nom}	13.56	13.56056	13.56053	13.56055	13.56057	40.93	38.94	40.34	42.33
T _{0°C} V _{nom}	13.56	13.56056	13.56054	13.56054	13.56054	41.00	39.60	40.12	40.04
T _{-10°C} V _{nom}	13.56	13.56054	13.56052	13.56053	13.56055	40.04	38.35	39.01	40.63
T _{-20°C} V _{nom}	13.56	13.55936	13.56055	13.56052	13.56052	-47.12	40.41	38.42	38.50
Limit (ppm)		-				100			
Result		Complied							
Note 1: Measure at 85 % [Vmin] and 115 % [Vmax] of the nominal voltage [Vnom]. The nominal voltage refer test report clause 2.1 for EUT operational condition.									
Note 2: Measure maximum deviation frequency at operating frequency at startup and two, five, and ten min.									

4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date
EMC Receiver	R&S	ESR3	102052	9kHz ~ 3.6GHz	09/Apr/2019	08/Apr/2020
LISN	R&S	ENV 216	101274	9kHz ~ 30MHz	03/Jun/2019	02/Jun/2020
RF Cable-CON	MTJ	RG142	CB001-CO	9kHz ~ 30MHz	17/Sep/2018	16/Sep/2019
AC POWER	APC	AFC-11003G	F308010045	47Hz~63Hz 5~300V	NCR	NCR
Impuls Begrenzer Pulse Limiter	SCHWARZBECK	VTSD 9561F	9495	9kHz ~ 30MHz	11/Oct/2018	10/Oct/2019

NCR : Non-Calibration Require

Instrument for Conducted Test

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSV 40	101013	9kHz~40GHz	13/Mar/2019	12/Mar/2020
Loop Antenna	TESEQ	HLA 6120	31244	9kHz ~ 30MHz	15/Mar/2019	14/Mar/2020
TEMP & humidity Chamber	Giant Force	GTH-225-40-CP-AR	MAA1611-005	-40~100℃ 10~98%RH	04/Dec/2018	03/Dec/2019

Instrument for Radiated Test

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH02-HY	30MHz ~ 1GHz 3m	19/Oct/2018	18/Oct/2019
Amplifier	COM -POWER	PA-103	161046	1-1000MHz	13/Dec/2018	12/Dec/2019
Signal Analyzer	R&S	FSV40	101500	10Hz ~ 40GHz	18/Jul/2018	17/Jul/2019
RF Cable-R03m	Jye Bao	RG142	CB017	9kHz ~ 1GHz	18/Jan/2019	17/Jan/2020
Bilog Antenna & 5dB Attenuator	SCHAFFNER / MTJ	CBL 6112B / MTJ6102-05	2723 / 2	30MHz ~ 1GHz	08/Sep/2018	07/Sep/2019
EMI Test Receiver	R&S	ESR	102052	9kHz ~ 3.6GHz	09/Apr/2019	08/Apr/2020
Loop Antenna	TESEQ	HLA 6120	31244	9k-30MHz	15/Mar/2019	14/Mar/2020