

Modular Approval  
 Test Report  
 And Application for Grant of Equipment Authorization

*TEST REPORT PERTAINING TO:*

Equipment Under Test	Model Number(s)
Intel® Centrino® Ultimate-N 6200	622ANHMW

**CONFIGURATION**

IEEE 802.11a / 802.11b / 802.11g / 802.11n with a set of  
 Shanghai Universe Communication Electron Co.,Ltd. Antennas

*MEASUREMENTS PERFORMED IN ACCORDANCE WITH THE FOLLOWING STANDARD (S)*

Regulatory Standard(s)
47 CFR Part 15, Subpart C Section 15.247

Test Method:  
 ANSI C63.4: 2003 American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz



Certificate Number: 1111.01

**PREPARED FOR:**

Intel Corporation  
 2111 NE 25<sup>th</sup> Avenue  
 Hillsboro, Oregon 97124  
 Contact(s): Mr. Steve Hackett

**PREPARED BY:**

Aegis Labs, Inc.  
 8 Rancho Circle  
 Lake Forest, CA 92630  
 Agent(s): Mr. Rick Candelas  
 Mr. Johnny Candelas



Test Report #: INTEL-090601F

Test Report Revision: NONE

	REPORT BODY	APPENDICES		TOTAL PAGES
		A	B	
PAGES	24	182	1	207

The contents of this report shall not be reproduced except in full, without the written approval of Aegis Labs, Inc.  
 The Intel logo is used for identification purposes only and is a registered trademark of Intel Corporation



## TABLE OF CONTENTS

SECTION	TITLE	PAGE
	<b>COVER SHEET</b> .....	<b>01</b>
	<b>TABLE OF CONTENTS</b> .....	<b>02</b>
<b>1.0</b>	<b>REGULATORY COMPLIANCE GUIDELINES</b> .....	<b>03</b>
1.1	Guidelines For Testing To Emissions Standards.....	03
<b>2.0</b>	<b>SUMMARY OF REGULATORY LIMITS</b> .....	<b>04</b>
<b>3.0</b>	<b>ADMINISTRATIVE DATA AND TEST DESCRIPTION</b> .....	<b>18</b>
<b>4.0</b>	<b>DESCRIPTION OF EUT CONFIGURATION</b> .....	<b>19</b>
4.1	EUT Description .....	19
4.2	EUT Configuration.....	20
4.3	List of EUT Sub-Assemblies and Host Equipment .....	20
4.4	I/O Cabling Diagram and Description .....	21
4.5	EMC Test Hardware and Software Measurement Equipment.....	22
<b>5.0</b>	<b>CONDITIONS DURING EMISSIONS MEASUREMENTS</b> .....	<b>23</b>
5.1	General.....	23
5.2	Conducted Emissions Test Setup.....	23
5.3	Radiated Emissions Test Setup.....	24

## APPENDICES

<b>A</b>	Test Data
<b>B</b>	Modifications And Recommendations

## 1.0 REGULATORY COMPLIANCE GUIDELINES

Aegis Labs, Inc. operates as both a Nevada and California Corporation with no organizational or financial relationship with any company, institution, or private individual. Testing and engineering functions provided by Aegis Labs were furnished by RF technicians and engineers with accredited qualifications and training credentials to carry out their duties.

The object of this report was to publish verifiable test results of an EUT subjected to the tests outlined in the standard listed on the cover page of this report.

### 1.1 Guidelines For Testing To Emissions Standards

This standard for EMC emission requirements apply to electrical equipment for Information Technology Equipment (ITE). Compliance to these standards and in combination with the other standards listed in this test report can be used to demonstrate presumption of compliance with the protection requirements of the appropriate agency standard.

The purpose of this standard is to specify minimum requirements for emissions regarding electromagnetic compatibility (EMC) and protect the radio frequency spectrum 9 kHz. – 400 GHz. from unwanted interference generated from electrical/digital systems that intentionally or unintentionally generated RF energy. The emissions standards, normative documents and/or publications were used to conduct all tests performed on the equipment herein referred to as “Equipment Under Test”.

## 2.0 SUMMARY OF TEST RESULTS

### 802.11a Mode (5745-5825 MHz) Chain A EMISSIONS STANDARD

FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	5745 MHz = 16.25 MHz 5785 MHz = 16.25 MHz 5825 MHz = 16.00 MHz
15.247(b)(3)	The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	5745 MHz = 16.74 dBm = 47.25 mW 5785 MHz = 16.94 dBm = 49.47 mW 5825 MHz = 16.64 dBm = 46.17 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	5745 MHz = -8.77 dB 5785 MHz = -8.63 dB 5825 MHz = -9.49 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	

## 2.0    Summary of Test Results (Continued)

**802.11a Mode (5745-5825 MHz) Chain B**  
**EMISSIONS STANDARD**

<b>FCC Part 15 Section</b>	<b>Description</b>	<b>Results</b>	<b>Comments</b>
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	5745 MHz = 16.25 MHz 5785 MHz = 16.17 MHz 5825 MHz = 16.58 MHz
15.247(b)(3)	The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	5745 MHz = 16.64 dBm = 46.17 mW 5785 MHz = 16.84 dBm = 48.35 mW 5825 MHz = 16.94 dBm = 49.47 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	5745 MHz = -9.58 dB 5785 MHz = -10.40 dB 5825 MHz = -9.52 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	

## 2.0    Summary of Test Results (Continued)

**802.11b Mode (2400-2483.5 MHz) Chain A**  
**EMISSIONS STANDARD**

<b>FCC Part 15 Section</b>	<b>Description</b>	<b>Results</b>	<b>Comments</b>
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	2412 MHz = 10.33 MHz 2437 MHz = 10.33 MHz 2462 MHz = 10.33 MHz
15.247(b)(3)	The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	2412 MHz = 16.60 dBm = 45.71 mW 2437 MHz = 16.80 dBm = 44.67 mW 2462 MHz = 16.70 dBm = 46.77 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	2412 MHz = -5.12 dB 2437 MHz = -11.60 dB 2462 MHz = -11.90 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	

## 2.0    Summary of Test Results (Continued)

**802.11b Mode (2400-2483.5 MHz) Chain B**  
**EMISSIONS STANDARD**

<b>FCC Part 15 Section</b>	<b>Description</b>	<b>Results</b>	<b>Comments</b>
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	2412 MHz = 10.33 MHz 2437 MHz = 10.33 MHz 2462 MHz = 10.33 MHz
15.247(b)(3)	The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	2412 MHz = 16.80 dBm = 47.86 mW 2437 MHz = 16.60 dBm = 45.71 mW 2462 MHz = 16.80 dBm = 47.86 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	2412 MHz = -14.32 dB 2437 MHz = -11.65 dB 2462 MHz = -10.93 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	

## 2.0    Summary of Test Results (Continued)

**802.11g Mode (2400-2483.5 MHz) Chain A**  
**EMISSIONS STANDARD**

<b>FCC Part 15 Section</b>	<b>Description</b>	<b>Results</b>	<b>Comments</b>
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	2412 MHz = 13.42 MHz 2437 MHz = 10.67 MHz 2462 MHz = 14.17 MHz
15.247(b)(3)	The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	2412 MHz = 15.54 dBm = 35.84 mW 2437 MHz = 16.74 dBm = 47.25 mW 2462 MHz = 15.64 dBm = 36.67 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	2412 MHz = -10.26 dB 2437 MHz = -9.35 dB 2462 MHz = -9.54 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	

## 2.0    Summary of Test Results (Continued)

**802.11g Mode (2400-2483.5 MHz) Chain B**  
**EMISSIONS STANDARD**

FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	2412 MHz = 13.50 MHz 2437 MHz = 14.42 MHz 2462 MHz = 10.33 MHz
15.247(b)(3)	The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	2412 MHz = 15.84 dBm = 38.40 mW 2437 MHz = 16.64 dBm = 46.17 mW 2462 MHz = 15.84 dBm = 38.40 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	2412 MHz = -11.04 dB 2437 MHz = -11.10 dB 2462 MHz = -10.37 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	

## 2.0    Summary of Test Results (Continued)

**802.11n Mode 20MHz Wide (2400-2483.5 MHz) Chain A**  
**EMISSIONS STANDARD**

FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	2412 MHz = 12.92 MHz 2437 MHz = 10.25 MHz 2462 MHz = 13.67 MHz
15.247(b)(3)	The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	2412 MHz = 14.94 dBm = 31.22 mW 2437 MHz = 16.74 dBm = 47.25 mW 2462 MHz = 14.64 dBm = 29.13 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	2412 MHz = -11.48 dB 2437 MHz = -9.65 dB 2462 MHz = -12.01 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	

## 2.0    Summary of Test Results (Continued)

**802.11n Mode 20MHz Wide (2400-2483.5 MHz) Chain B**  
**EMISSIONS STANDARD**

FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	2412 MHz = 10.75 MHz 2437 MHz = 11.92 MHz 2462 MHz = 10.50 MHz
15.247(b)(3)	The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	2412 MHz = 14.74 dBm = 29.81 mW 2437 MHz = 16.64 dBm = 46.17 mW 2462 MHz = 14.54 dBm = 28.47 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	2412 MHz = -11.63 dB 2437 MHz = -10.50 dB 2462 MHz = -12.55 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	

## 2.0    Summary of Test Results (Continued)

**802.11n Mode 40MHz Wide (2400-2483.5 MHz) Chain A**  
**EMISSIONS STANDARD**

FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	2422 MHz = 32.50 MHz 2437 MHz = 26.83 MHz 2452 MHz = 27.00 MHz
15.247(b)(3)	The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	2422 MHz = 12.44 dBm = 17.55 mW 2437 MHz = 16.54 dBm = 45.12 mW 2452 MHz = 12.54 dBm = 17.96 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	2422 MHz = -18.34 dB 2437 MHz = -14.67 dB 2452 MHz = -18.49 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	

## 2.0    Summary of Test Results (Continued)

**802.11n Mode 40MHz Wide (2400-2483.5 MHz) Chain B**  
**EMISSIONS STANDARD**

FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	2422 MHz = 27.00 MHz 2437 MHz = 26.33 MHz 2452 MHz = 26.33 MHz
15.247(b)(3)	The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	2422 MHz = 12.44 dBm = 17.55 mW 2437 MHz = 16.44 dBm = 44.09 mW 2452 MHz = 12.44 dBm = 17.55 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	2422 MHz = -19.06 dB 2437 MHz = -16.37 dB 2452 MHz = -17.67 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	

## 2.0    Summary of Test Results (Continued)

**802.11n Mode 20MHz Wide (5745-5825 MHz) Chain A**  
**EMISSIONS STANDARD**

<b>FCC Part 15 Section</b>	<b>Description</b>	<b>Results</b>	<b>Comments</b>
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	5745 MHz = 16.75 MHz 5785 MHz = 17.75 MHz 5825 MHz = 17.50 MHz
15.247(b)(3)	The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	5745 MHz = 16.64 dBm = 46.17 mW 5785 MHz = 16.54 dBm = 45.12 mW 5825 MHz = 16.64 dBm = 46.17 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	5745 MHz = -10.83 dB 5785 MHz = -11.34 dB 5825 MHz = -11.56 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	

## 2.0    Summary of Test Results (Continued)

**802.11n Mode 20MHz Wide (5745-5825 MHz) Chain B**  
**EMISSIONS STANDARD**

FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	5745 MHz = 17.58 MHz 5785 MHz = 16.91 MHz 5825 MHz = 17.25 MHz
15.247(b)(3)	The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	5745 MHz = 16.84 dBm = 48.35 mW 5785 MHz = 16.64 dBm = 46.17 mW 5825 MHz = 16.74 dBm = 47.25 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	5745 MHz = -11.07 dB 5785 MHz = -11.04 dB 5825 MHz = -11.06 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	

## 2.0    Summary of Test Results (Continued)

**802.11n Mode 40MHz Wide (5745-5825 MHz) Chain A**  
**EMISSIONS STANDARD**

<b>FCC Part 15 Section</b>	<b>Description</b>	<b>Results</b>	<b>Comments</b>
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	5755 MHz = 28.17 MHz 5795 MHz = 26.33 MHz
15.247(b)(3)	The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	5755 MHz = 16.89 dBm = 48.84 mW 5795 MHz = 16.79 dBm = 47.73 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	5755 MHz = -14.86 dB 5795 MHz = -14.75 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	

## 2.0 Summary of Test Results (Continued)

**802.11n Mode 40MHz Wide (5745-5825 MHz) Chain B**
**EMISSIONS STANDARD**

FCC Part 15 Section	Description	Results	Comments
15.247(a)(2)	The minimum 6dB bandwidth shall be at least 500 kHz.	PASSED	5755 MHz = 25.83 MHz 5795 MHz = 26.83 MHz
15.247(b)(3)	The maximum conducted output power is the highest total transmit power occurring in any mode	PASSED	5755 MHz = 16.79 dBm = 47.73 mW 5795 MHz = 16.79 dBm = 47.73 mW
15.247(b)(5)	The intentional radiator shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the FCC guidelines per Section 1.1307(b)(1).	PASSED	Refer to MPE Calculations
15.247(d)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.	PASSED	See Data Sheets (Appendix A)
15.247(d)	Radiated emissions, which fall in the restricted bands, as defined in Sec. 15.205(a), must also comply with the radiated emission limits specified in Sec. 15.209(a). All others must be < -20dBc.	PASSED	See Data Sheets (Appendix A)
15.247(e)	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.	PASSED	5755 MHz = -14.76 dB 5795 MHz = -14.04 dB
15.207	AC Conducted Emissions	PASSED	See Data Sheets (Appendix A)
15.209	Radiated Emissions (30-1000 MHz)	PASSED	See Data Sheets (Appendix A)

**ANALYSIS AND CONCLUSIONS**

Based upon the measurement results we find that this equipment is within the limits of the global standards listed on the cover page of this test report. All results are based on a test of one sample. If any significant changes are made to the unit, the changes shall be evaluated and a retest may be required.

**Approval Signatories**
**Report Completed By:**


Johnny Candelas 9/10/2009  
 Senior Test Engineer  
 Aegis Labs, Inc.

**Report Approved By:**


Rick Candelas 9/10/2009  
 Quality Assurance  
 Aegis Labs, Inc.

### 3.0 ADMINISTRATIVE DATA AND TEST DESCRIPTION

<b>DEVICE TESTED:</b>	ITE Type: Intel® Centrino® Ultimate-N 6200 Model Number(s): 622ANHMW Serial Number: 0015005A3C7C FCC ID: PD9622ANH
<b>DATE EUT RECEIVED:</b>	June 18 <sup>th</sup> , 2009
<b>TEST DATE(S):</b>	July 21 <sup>st</sup> – Sept 4 <sup>th</sup> , 2009
<b>ORIGIN OF TEST SAMPLE(S):</b>	Production
<b>EQUIPMENT CLASS:</b>	EUT tested as CLASS B device
<b>RESPONSIBLE PARTY:</b>	Intel Corporation 2111 NE 25 <sup>th</sup> Avenue Hillsboro, Oregon 97124
<b>CLIENT CONTACT:</b>	Mr. Steve Hackett
<b>MANUFACTURER:</b>	Intel Corporation
<b>TEST LOCATION:</b>	Aegis Labs, Inc. 32231 Trabuco Creek Road Trabuco Canyon, CA 92678 Open Area Test Site #1 & #2
<b>ACCREDITATION CERTIFICATE(s):</b>	A2LA Certificate Number: 1111.01, Valid through February 10, 2010
<b>PURPOSE OF TEST:</b>	To demonstrate compliance with the standards as described in Sections 1.0 & 2.0 of this report.
<b>UNCERTAINTY BUDGET:</b>	Proficiency Testing and Uncertainty Calculations for all tests indicated in this report have been conducted in accordance with ISO 17025: 2005 requirements Section 5.4.6, and 5.9. Uncertainty Budgets and Proficiency Test results available upon request.
<b>STATEMENT OF CALIBRATION:</b>	All accredited equipment calibrations were performed by Liberty Labs, Inc. and World Cal. with typical calibration uncertainty estimates derived from ISO Guide to the determination of uncertainties with a Coverage Factor of k=2 for 95% level of confidence.

## 4.0 DESCRIPTION OF EUT CONFIGURATION

### 4.1 EUT Description

<b>Equipment Under Test (EUT)</b>	
<b>Trade Name:</b>	Intel® Centrino® Ultimate-N 6200
<b>Model Number:</b>	622ANHMW
<b>Frequency Range:</b>	802.11a = 5745 – 5825 MHz 802.11b/g = 2412 – 2462MHz 802.11n = 2412 – 2462MHz & 5745 – 5825 MHz
<b>Type of Transmission:</b>	Direct Sequence Spread Spectrum
<b>Transfer Rate:</b>	1/5.5/11 Mbps for 802.11b mode 6/36/54 Mbps for 802.11g and 802.11a modes Up to 450 Mbps for 802.11n mode
<b>Number of Channels:</b>	802.11a mode (5725-5850 MHz) = 5 802.11b mode (2400-2483.5 MHz) = 11 802.11g mode (2400-2483.5 MHz)= 11 802.11n mode (5725-5850 MHz) = 5 802.11n mode (2400-2483.5 MHz) = 11
<b>Modulation Type:</b>	DBPSK, DQPSK, CCK, OFDM
<b>Antenna Type:</b>	<u>Shanghai Universe Communication Electron Co., Ltd Antennas:</u> PIFA
<b>Antenna Gain (See Note 2):</b>	4.97dBi @ 5 GHz / 3.24dBi @ 2.4 GHz
<b>Transmit Output Power:</b>	Please see Appendix A (Data Sheets) for actual output power.
<b>Power Supply:</b>	3.3VDC from external source
<b>Number of External Test Ports Exercised:</b>	2 Antenna Ports (Chain A & B)

The Intel® Centrino® Ultimate-N 6200 is an embedded IEEE 802.11a/b/g/n wireless network adapter that operates in the 2.4 GHz and 5.0 GHz spectrum. The adapter is capable of delivering up to 450 Mbps Tx/Rx.

**NOTE 1:** For a more detailed description, please refer to the manufacturer's specifications or User's Manual.

**NOTE 2:** The EUT was tested with a set of Shanghai Universe Communication Electron Co., Ltd Antennas.  
(Refer to the antenna information exhibits).

#### 4.2 EUT Configuration

The EUT was tested installed in the Mini PCI-E slot of an extender board which is then connected to the host computer. The EUT was then connected to a set of antennas via its Chain A & B antenna ports. Data for a set of Shanghai Universe Communication Electron Co., Ltd Antennas can be found in Appendix A (Data Sheets)

The low, middle, and high channels were tested in 802.11a, b, g, & n modes. Also, the EUT was tested once transmitting from each chain individually (Chain A & B) and then tested with all chains transmitting simultaneously (Chain AB). The EUT was placed in continuous transmit mode by a program provided by the manufacturer (*CRTU Version 5.15.36.0*).

#### 4.3 List of EUT, Sub-Assemblies and Host Equipment

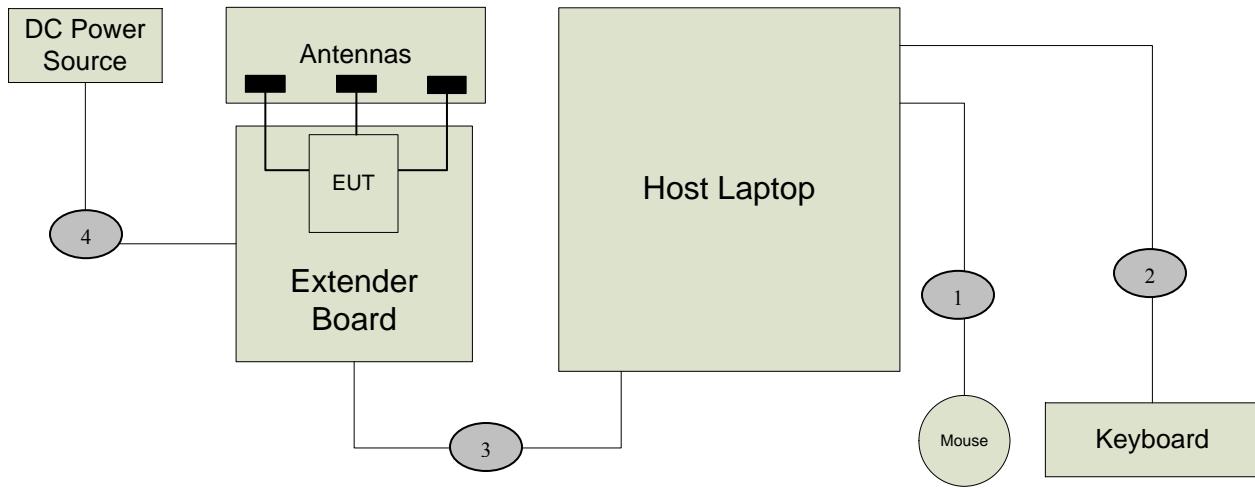
Equipment Under Test			
Manufacturer	Equipment Name	Model or Part Number	Serial Number
Intel Corporation	Intel® Centrino® Ultimate-N 6200	622ANHMW	0015005A3C7C

EUT Sub Assemblies			
Manufacturer	Equipment Name	Model or Part Number	Serial Number
Shanghai Universe Communication Electron Co.,Ltd	Chain A Antenna	SUC ANT S11	N/A
	Chain B Antenna	SUC ANT S11	N/A

HOST EQUIPMENT LIST			
Manufacturer	Equipment Name	Model or Part Number	Serial Number
Generic	Host Laptop	ENG001	None
Protek	DC Power Source	3006B	AC2018
Logitech	Keyboard	Y-BF37	MCT25200581
Logitech	Mouse	M-BJ58	LNA22802012

NOTE: All the power cords of the above support equipment are standard and non-shielded.

## 4.4 I/O Cabling Diagram and Description



## Signal Line Cable Description

Cable	Length	Construction	Source Connector	Destination Connector	Bundled Length	Ferrite Attached	Note
1	1.5m	Round, Braid & Foil Shielded	Host Computer: USB Port	Keyboard: Hardwired	N/A	N/A	N/A
2	1.5m	Round, Braid & Foil Shielded	Host Computer: USB Port	Mouse: Hardwired	N/A	N/A	N/A
3	0.5m	Flat, Braid & Foil Shielded	Extender Board: Mini PCIe slot	Host Laptop: Mini PCIe slot	N/A	N/A	N/A
4	0.5m	Round Unshielded	Extender Board: Power Input	DC Power Source: Power Output	N/A	N/A	N/A

## 4.5 EMC Test Hardware and Software Measurement Equipment

TEST EQUIPMENT LIST - Emissions					
Equipment Name	Manufacturer	Model Number	Serial Number	Calibration Due Date	Maintenance Calibration Cycle
Spectrum Analyzer	Agilent	8565EC	3946A00245	07/24/10	1 Year
PSA Spectrum Analyzer	Agilent	E4440A	MY46186811	07/02/11	2 Years
Antenna – Horn	ETS	3117	00057423	12/23/09	1 Year
Preamp	Miteq	JS42-01001800-25-10P	815980	12/23/09	1 Year
30 Foot Coax	Semflex	S130SFBS10360	0619	07/26/10	1 Year
2.4 GHz Notch Filter	Micro-Tronics	BRM50702-02	003	NCR	NCR
5.725-5.850 GHz Notch Filter	Microwave Circuits	N0257881	3173-01	NCR	NCR
Antenna - 18-26.5 GHz Pre-amplified Horn	Aegis Labs, Inc.	H042	SLK-35-3W	02/08/10	1 Year
Antenna - 26.5-40 GHz Pre-amplified Horn	Aegis Labs, Inc.	H028	GM1260-10	02/08/10	1 Year
EMI Receiver - RF Section	Hewlett Packard	8546A	3325A00137	04/26/10	1 Year
EMI Receiver - RF Filter Section	Hewlett Packard	85460A	3330A00138	04/26/10	1 Year
10 dB Attenuator	Pasternack	PE7014-10	N/A	09/05/09	1 Year
LISN (EUT)	Fisher Custom Communications	FCC-LISN-50-25-2	9931	06/03/10	1 Year
LISN (Access)	EMCO	3825/2	9108-1848	06/03/10	1 Year
Antenna - Biconical	EMCO	3110	9108-1421	06/05/10	1 Year
Antenna - Log Periodic	EMCO	3148	4947	06/12/10	1 Year
Power Meter	Anritsu	ML2487A	6K00001785	05/29/10	1 Year
Wide Bandwidth Sensor	Anritsu	MA2491A	31193	05/29/10	1 Year
12dB Attenuator	Narda	4779-12	203	06/09/10	1 Year
Temperature/Humidity Monitor	Dickson	TH550	7255185	04/13/10	1 Year

NCR – No Calibration Required.

## 5.0 CONDITIONS DURING EMISSIONS MEASUREMENTS

### 5.1 General

All measurements were made according to the procedures defined in or referred to by the standard listed on the cover page of this report. The measurements were made in the operating mode producing the largest emissions consistent with normal operation and connected to the minimum configuration of auxiliary devices.

### 5.2 Conducted Emissions Test Setup

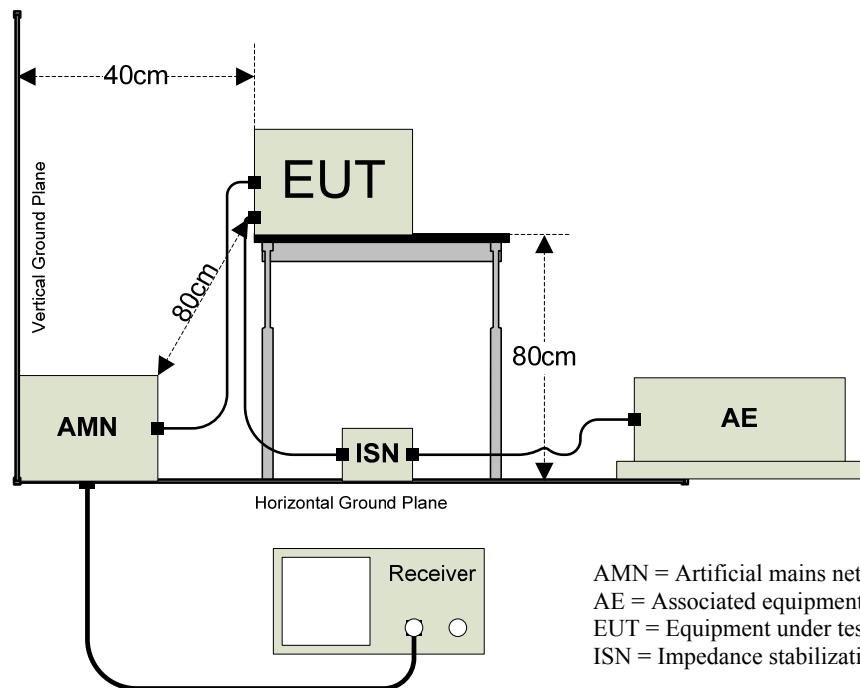
The following was the test configuration.

EUT signal cables that hung closer than 40 cm to the horizontal metal ground plane were folded back and forth forming a bundle 30 cm to 40 cm long. The power cord of the EUT was also bundled in the center and plugged into one of the artificial mains network (AMN). All peripheral equipment was powered from a second AMN via a multiple outlet strip placed at a distance on 10cm from each other. The AMN and ISN were positioned 80cm from the EUT. Signal cables that were not connected to an AE were terminated using the correct termination. If applicable, the current probe was placed at 0.1 m from the ISN.

Peak, quasi-peak and/or average detectors were used for testing performed between 150 kHz and 30 MHz. A swept frequency scan was performed for both Line 1 and Line 2. The six highest readings were compared against the limit and recorded in the data sheet along with a snapshot image of the sweep scan. The graphical scans in Appendix A only reflect peak readings while the tabulated data sheets reflect peak, average, and/or quasi-peak measurements.

#### Climatic Conditions:

The EUT was tested within its intended operating and climatic conditions.



AMN = Artificial mains network  
AE = Associated equipment  
EUT = Equipment under test  
ISN = Impedance stabilization network


### 5.3 Radiated Emissions Test Setup

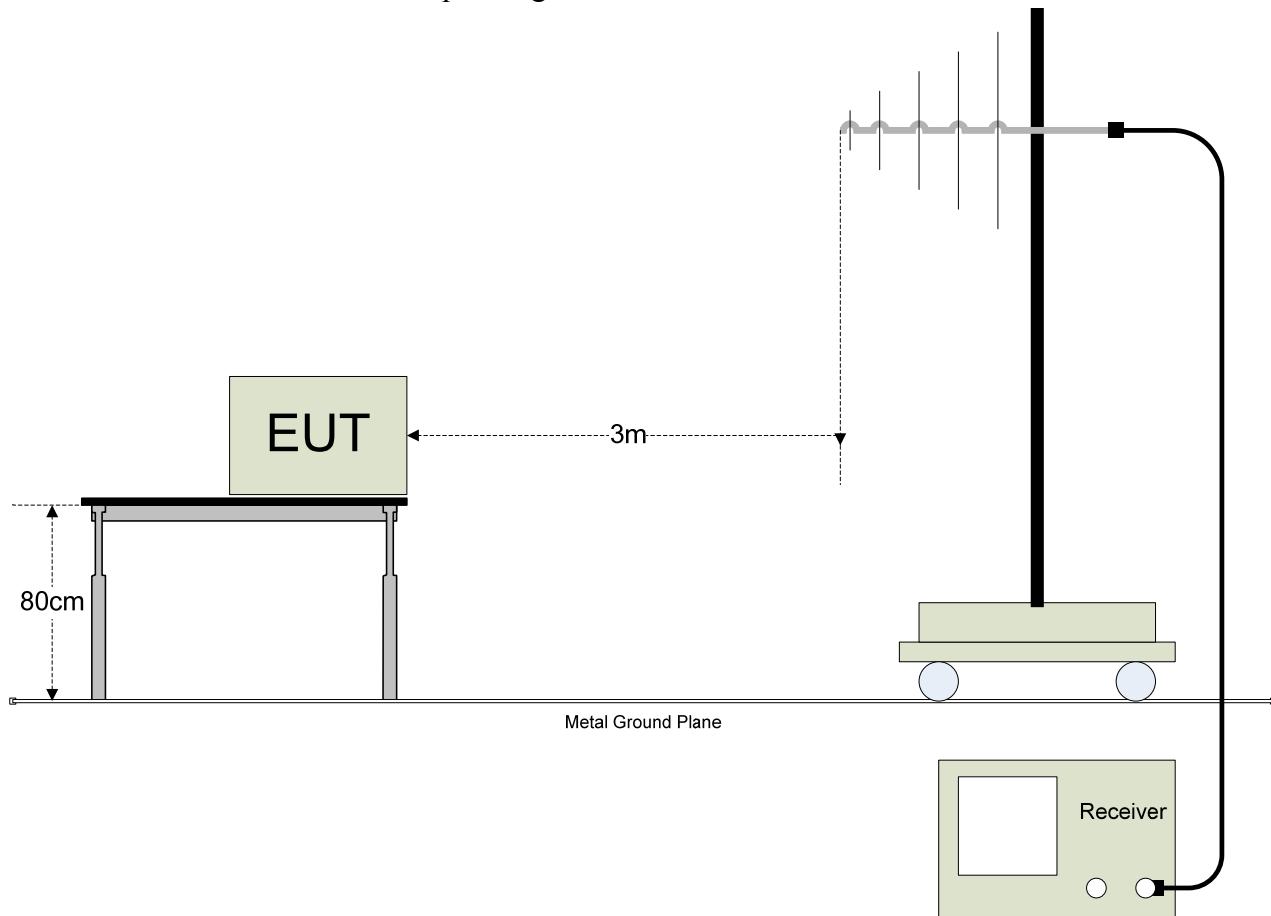The Open Area Test Site (OATS) was used for radiated emission testing. The receiving (Rx) antenna(s) was placed 10m from the nearest side of the EUT facing the Rx antenna. The EUT (if floor-standing) was placed directly on the flush-mounted 360 degree rotating turntable. The EUT (if table-top) was placed directly on an 80cm high non-metallic table, and the table was placed on the rotating turntable. During the initial EMI scan, all the suspect frequencies, i.e.; harmonics, broadband signals were checked with the Rx broadband antennas in both vertical and horizontal polarities. The biconical Rx, log periodic Rx, and horn Rx antennas were used from 30MHz – 299.99MHz, 300MHz – 1000MHz, and 1GHz – 18GHz respectively.

Upon completion of all harmonic and broadband measurements, the balance of any remaining frequencies was checked between 30MHz – 18GHz. Any signals appearing within 20 dB of the classification limit was measured. Each signal was maximized by first rotating the turntable at least 360 degrees and recording the azimuth in the data sheet. Lastly, the Rx antenna was raised and/or lowered to maximize the signal elevation. If the measured signal was obtained using the peak detector and that signal appeared within 3 dB of the regulatory limit line, then the same signal was re-measured using the quasi-peak detector on the EMI receiver. Both meter readings if necessary were recorded on the data sheet.

#### Climatic Conditions:

The EUT was tested within its intended operating and climatic conditions.





8 RANCHO CIRCLE, LAKE FOREST, CA 92630    T (949)454-8295    AegisLabsInc.com  
F (949)829-6903

## **APPENDIX A**

### ***TEST DATA***



## AC POWER PORT - CONDUCTED EMISSIONS TEST RESULTS

<b>CLIENT:</b>	Intel Corporation	<b>DATE:</b>	07/24/09
<b>EUT:</b>	Intel® Centrino® Ultimate-N 6200	<b>PROJECT NUMBER:</b>	INTEL-090601
<b>MODEL NUMBER:</b>	622ANHMW	<b>TEST ENGINEER:</b>	JC
<b>SERIAL NUMBER:</b>	0015005A3C7C	<b>SITE #:</b>	1
<b>CONFIGURATION:</b>	Tested installed in an extender board connected to the host laptop's mini PCI slot	<b>TEMPERATURE:</b>	22 deg. C
		<b>HUMIDITY:</b>	49%
		<b>TIME:</b>	2:00 PM

<b>Description:</b>	Conducted Power RF Emissions (150 kHz – 30 MHz)
<b>Results:</b>	<b>PASSED</b> LINE 1 and LINE 2 Limits
<b>Note:</b>	Conducted Emissions Measurements were performed on the EUT with the power supply set at the following voltage and frequency. <ul style="list-style-type: none"><li>• 120VAC / 60 Hz</li></ul>

Conducted Limits		
Frequency (MHz)	Quasi-Peak Limit (dBuV)	Average Limit (dBuV)
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

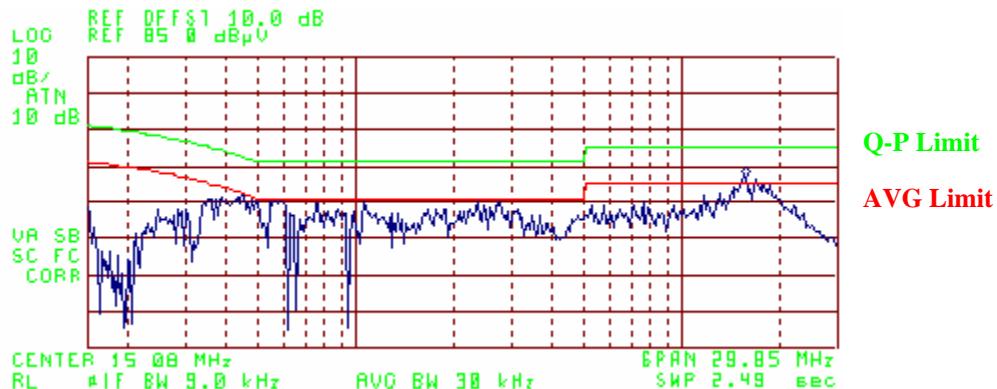
\*Decreases with the logarithm of the frequency.

## AC Power Port – Conducted Emissions Test Results (Continued)

## Continuously Transmitting @ 120VAC/60Hz (INTEL-090601-10)

## FCC CLASS B CONDUCTED EMISSIONS – LINE 1


Freq. (MHz)	Meter Reading (dBuV)	Detector (PK/QP/AV)	Average Limit (dBuV)	Average Delta(dB)	Quasi-Peak Limit (dBuV)	Quasi-Peak Delta(dB)
0.4500	47.42	PK	47.43	-0.01	57.43	-10.01
0.4500	28.39	AV	47.43	-19.04	57.43	-29.04
0.5900	45.85	PK	46.00	-0.15	56.00	-10.15
0.5900	25.01	AV	46.00	-20.99	56.00	-30.99
1.0700	45.11	PK	46.00	-0.89	56.00	-10.89
1.0700	23.59	AV	46.00	-22.41	56.00	-32.41
7.5800	45.18	PK	50.00	-4.82	60.00	-14.82
11.5900	46.92	PK	50.00	-3.08	60.00	-13.08
15.6800	52.02	PK	50.00	2.02	60.00	-7.98
15.6800	34.53	AV	50.00	-15.47	60.00	-25.47



## AC Power Port – Conducted Emissions Test Results (Continued)

## Continuously Transmitting @ 120VAC/60Hz (INTEL-090601-10)

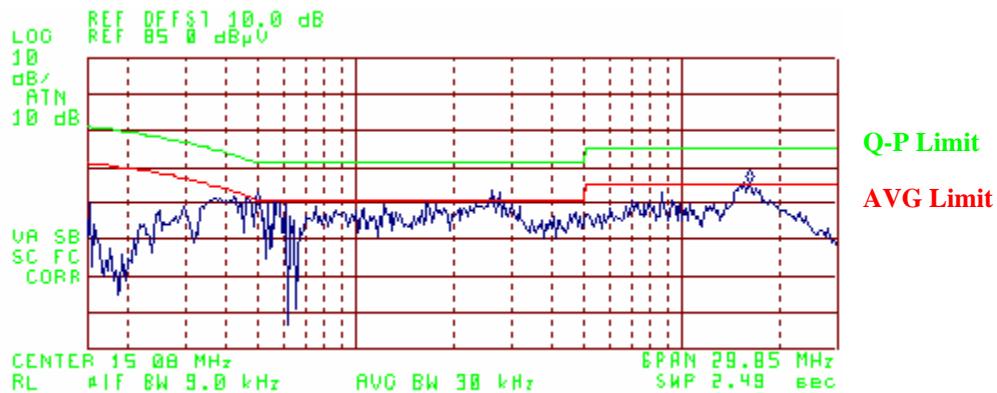FCC CLASS B CONDUCTED EMISSIONS - LINE 2						
Freq. (MHz)	Meter Reading (dBuV)	Detector (PK/QP/AV)	Average Limit (dBuV)	Average Delta(dB)	Quasi-Peak Limit (dBuV)	Quasi-Peak Delta(dB)
0.4300	46.69	PK	48.00	-1.31	58.00	-11.31
0.4300	25.39	AV	48.00	-22.61	58.00	-32.61
0.4700	46.90	PK	46.85	0.05	56.85	-9.95
0.4700	26.54	AV	46.85	-20.31	56.85	-30.31
0.5000	48.09	PK	46.00	2.09	56.00	-7.91
0.5000	24.08	AV	46.00	-21.92	56.00	-31.92
2.6300	48.19	PK	46.00	2.19	56.00	-7.81
2.6300	31.72	AV	46.00	-14.28	56.00	-24.28
8.6900	48.09	PK	50.00	-1.91	60.00	-11.91
8.6900	26.84	AV	50.00	-23.16	60.00	-33.16
16.1400	50.88	PK	50.00	0.88	60.00	-9.12
16.1400	33.76	AV	50.00	-16.24	60.00	-26.24



## RADIATED EMISSIONS TEST RESULTS

<b>CLIENT:</b>	Intel Corporation	<b>DATE:</b>	07/24/09
<b>EUT:</b>	Intel® Centrino® Ultimate-N 6200	<b>PROJECT NUMBER:</b>	INTEL-090601
<b>MODEL NUMBER:</b>	622ANHMW	<b>TEST ENGINEER:</b>	JC
<b>SERIAL NUMBER:</b>	0015005A3C7C	<b>SITE #:</b>	1
<b>CONFIGURATION:</b>	Tested installed in an extender board connected to the host laptop's mini PCI slot	<b>TEMPERATURE:</b>	19 deg. C
		<b>HUMIDITY:</b>	57%
		<b>TIME:</b>	9:00 AM

<b>Description:</b>	Radiated RF Emissions (30 MHz – 1000 MHz)
<b>Results:</b>	<b>PASSED</b> Horizontal and Vertical Antenna Polarizations Class B Limits
<b>Note:</b>	Radiated Emissions Measurements were performed on the EUT with the power supply set at the following voltage and frequency. <ul style="list-style-type: none"> <li>• 120VAC / 60 Hz.</li> </ul>

### Radiated Emissions Sample Calculations

Corrected Meter Reading = Meter Reading + F +C - D

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

CML = Specification Limit - F - C + D

## Radiated Emissions Test Results (Continued)

## Continuously Transmitting @ 120VAC/60Hz (INTEL-090601-11)

Horizontal Open Field Maximized Data										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Cable Factor (dB)	Antenna Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL
48.02	8.58	400	45		2.65	10.32	10.46	32.01	40.00	-7.99
120.00	14.23	400	90	11.03	Q	2.39	11.20	10.46	35.08	43.50
250.01	10.96	350	90			2.91	17.40	10.46	41.73	46.00
305.09	11.32	300	270			3.07	14.49	10.46	39.33	46.00
375.00	10.53	250	45			3.35	15.10	10.46	39.44	46.00
386.00	11.63	225	45			3.39	15.54	10.46	41.02	46.00
										-4.98

## Vertical Open Field Maximized Data

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Cable Factor (dB)	Antenna Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL
48.01	11.12	100	45		2.65	10.52	10.46	34.75	40.00	-5.25
119.98	18.40	100	90	14.65	Q	2.39	10.80	10.46	38.30	43.50
250.03	8.51	100	45			2.91	18.30	10.46	40.18	46.00
306.35	13.06	100	45			3.07	14.78	10.46	41.37	46.00
358.01	7.94	100	0			3.27	15.44	10.46	37.11	46.00
375.05	8.85	100	90			3.35	15.30	10.46	37.96	46.00
386.01	15.71	100	180	13.62	Q	3.39	15.61	10.46	43.08	46.00
										-2.92

## RADIATED EMISSIONS TEST RESULTS

<b>CLIENT:</b>	Intel Corporation	<b>DATE:</b>	08/17/09
<b>EUT:</b>	Intel® Centrino® Ultimate-N 6200	<b>PROJECT NUMBER:</b>	INTEL-090601
<b>MODEL NUMBER:</b>	622ANHMW	<b>TEST ENGINEER:</b>	JC
<b>SERIAL NUMBER:</b>	0015005A3C7C	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested installed in an extender board connected to the host laptop's mini PCI slot in <b>802.11a (5745-5825 MHz) mode.</b>	<b>TEMPERATURE:</b>	24° C
		<b>HUMIDITY:</b>	46% RH
		<b>TIME:</b>	9:30 AM

<b>Description:</b>	Radiated RF Emissions (1 GHz – 18 GHz)
<b>Results:</b>	<b>PASSED</b> Horizontal and Vertical Antenna Polarizations Class B Limits
<b>Note:</b>	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"><li>• 120VAC / 60 Hz.</li></ul>

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

### Radiated Emissions Sample Calculations

Corrected Meter Reading = Meter Reading + F + C - D

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

CML = Specification Limit - F - C + D

## Radiated Emissions Test Results (Continued)

## Fundamental Measurements in 802.11a mode (5745-5825 MHz)

Channels 149, 157, &amp; 165

Continuous TX at Chain A Antenna port with Shanghai Universe Antennas

Aegis Labs, Inc. File #: INTEL-090601-02

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL	Comments
5745.00	60.89	100	45		3.98	34.89	99.77			Ch. 149
5745.00				53.62 A	3.98	34.89	92.50			
5785.00	58.63	100	45		4.00	34.94	97.57			Ch. 157
5785.00				51.68 A	4.00	34.94	90.62			
5825.00	55.22	100	45		4.01	34.99	94.22			Ch. 165
5825.00				48.52 A	4.01	34.99	87.52			

## RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL	Comments
5745.00	63.88	100	315		3.98	35.05	102.91			Ch. 149
5745.00				54.42 A	3.98	35.05	93.45			
5785.00	62.75	100	315		4.00	35.09	101.83			Ch. 157
5785.00				53.69 A	4.00	35.09	92.77			
5825.00	61.24	100	315		4.01	35.13	100.38			Ch. 165
5825.00				51.50 A	4.01	35.13	90.64			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".

## Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11a mode (5745-5825 MHz)*

*Channels 149 & 165*

*Continuous TX at Chain A Antenna port with Shanghai Universe Antennas*

*Aegis Labs, Inc. File #: INTEL-090601-02*

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL	Comments
5725.00	30.24	100	45		3.98	34.87	69.09	79.77	-10.68	Ch. 149
5850.00	26.50	100	45		4.02	35.02	65.54	74.22	-8.68	Ch. 165

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL	Comments
5725.00	32.91	100	315		3.98	35.03	71.91	82.91	-11.00	Ch. 149
5850.00	30.74	100	315		4.02	35.15	69.91	80.38	-10.47	Ch. 165

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

$\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

## Radiated Emissions Test Results (Continued)

## Fundamental Measurements in 802.11a mode (5745-5825 MHz)

Channels 149, 157, &amp; 165

Continuous TX at Chain B Antenna port with Shanghai Universe Antennas

Aegis Labs, Inc. File #: INTEL-090601-04

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL	Comments
5745.00	63.83	100	315		3.98	34.89	102.71			Ch. 149
5745.00				53.83	A	3.98	34.89	92.71		
5785.00	63.00	100	315		4.00	34.94	101.94			Ch. 157
5785.00				53.17	A	4.00	34.94	92.11		
5825.00	60.17	100	315		4.01	34.99	99.17			Ch. 165
5825.00				51.00	A	4.01	34.99	90.00		

## RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL	Comments
5745.00	64.17	100	315		3.98	35.05	103.20			Ch. 149
5745.00				54.50	A	3.98	35.05	93.53		
5785.00	62.83	100	315		4.00	35.09	101.91			Ch. 157
5785.00				53.83	A	4.00	35.09	92.91		
5825.00	61.33	100	315		4.01	35.13	100.47			Ch. 165
5825.00				51.67	A	4.01	35.13	90.81		

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".

## Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11a mode (5745-5825 MHz)*

*Channels 149 & 165*

*Continuous TX at Chain B Antenna port with Shanghai Universe Antennas*

*Aegis Labs, Inc. File #: INTEL-090601-04*

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL	Comments
5725.00	35.00	100	315		3.98	34.87	73.85	82.71	-8.86	Ch. 149
5850.00	32.17	100	315		4.02	35.02	71.21	79.17	-7.96	Ch. 165

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL	Comments
5725.00	36.33	100	315		3.98	35.03	75.33	83.20	-7.87	Ch. 149
5850.00	31.83	100	315		4.02	35.15	71.00	80.47	-9.47	Ch. 165

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

$\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

## Radiated Emissions Test Results (Continued)

**Spurious Emissions Measurements in 802.11a mode (5745-5825 MHz)****Channels 149, 157, & 165****Continuous TX at Chain A & B Antenna ports with Shanghai Universe Antennas**

Aegis Labs, Inc. File #: INTEL-090601-06

**RADIATED EMISSIONS - Horizontal Antenna Polarization**

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested	
7713.32	52.33	100	270		45.55	4.67	35.83	47.28	74.00	-26.72	<b>Ch. 157/</b>	
7713.32		100	270	44.84	A	45.55	4.67	35.83	39.79	54.00	-14.21	<b>A</b>
11569.98	51.00	100	0		45.34	5.93	38.36	49.94	74.00	-24.06		
11569.98		100	0	38.13	A	45.34	5.93	38.36	37.07	54.00	-16.93	
3856.66	51.83	100	315		47.58	3.22	33.23	40.70	74.00	-33.30	<b>Ch. 157/</b>	
7713.32	52.67	100	315		45.55	4.67	35.83	47.62	74.00	-26.38	<b>B</b>	
7713.32		100	315	40.99	A	45.55	4.67	35.83	35.94	54.00	-18.06	
3830.00	52.00	100	315		47.56	3.23	33.20	40.87	74.00	-33.13	<b>Ch. 149/</b>	
7660.00	52.00	100	315		45.57	4.65	35.80	46.87	74.00	-27.13	<b>A</b>	
7660.00		100	315	40.90	A	45.57	4.65	35.80	35.77	54.00	-18.23	
3883.33	51.83	100	270		47.60	3.22	33.26	40.71	74.00	-33.29	<b>Ch.165/</b>	
7666.66	52.67	100	315		45.57	4.65	35.80	47.55	74.00	-26.45	<b>A</b>	
7666.66		100	315	40.81	A	45.57	4.65	35.80	35.69	54.00	-18.31	

**RADIATED EMISSIONS - Vertical Antenna Polarization**

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested	
3856.66	52.83	100	0		47.58	3.22	33.17	41.64	74.00	-32.36	<b>Ch. 157/</b>	
7713.32	52.00	100	315		45.55	4.67	35.79	46.90	74.00	-27.10	<b>A</b>	
7713.32		100	315	43.98	A	45.55	4.67	35.79	38.88	54.00	-15.12	
11569.98	50.83	100	0		45.34	5.93	38.36	49.77	74.00	-24.23		
11569.98		100	0	40.13	A	45.34	5.93	38.36	39.07	54.00	-14.93	
3856.66	53.83	100	0		47.58	3.22	33.17	42.64	74.00	-31.36	<b>Ch. 157/</b>	
7713.32	53.50	100	0		45.55	4.67	35.79	48.40	74.00	-25.60	<b>B</b>	
7713.32		100	0	44.17	A	45.55	4.67	35.79	39.07	54.00	-14.93	
3830.00	52.83	100	0		47.56	3.23	33.13	41.63	74.00	-32.37	<b>Ch. 149/</b>	
7660.00	53.33	100	0		45.57	4.65	35.76	48.17	74.00	-25.83	<b>A</b>	
7660.00		100	0	43.91	A	45.57	4.65	35.76	38.75	54.00	-15.25	
3883.33	52.50	100	0		47.60	3.22	33.21	41.33	74.00	-32.67	<b>Ch.165/</b>	
7666.66	54.17	100	0		45.57	4.65	35.77	49.02	74.00	-24.98	<b>A</b>	
7666.66		100	0	45.79	A	45.57	4.65	35.77	40.64	54.00	-13.36	

## RADIATED EMISSIONS TEST RESULTS

<b>CLIENT:</b>	Intel Corporation	<b>DATE:</b>	08/17/09
<b>EUT:</b>	Intel® Centrino® Ultimate-N 6200	<b>PROJECT NUMBER:</b>	INTEL-090601
<b>MODEL NUMBER:</b>	622ANHMW	<b>TEST ENGINEER:</b>	JC
<b>SERIAL NUMBER:</b>	0015005A3C7C	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested installed in an extender board connected to the host laptop's mini PCI slot in <b>802.11b (2400-2483.5 MHz) mode.</b>	<b>TEMPERATURE:</b>	24° C
		<b>HUMIDITY:</b>	46% RH
		<b>TIME:</b>	9:30 AM

<b>Description:</b>	Radiated RF Emissions (1 GHz – 18 GHz)
<b>Results:</b>	<b>PASSED</b> Horizontal and Vertical Antenna Polarizations Class B Limits
<b>Note:</b>	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> <li>• 120VAC / 60 Hz.</li> </ul>

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

### Radiated Emissions Sample Calculations

Corrected Meter Reading = Meter Reading + F + C - D

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

CML = Specification Limit - F - C + D

## Radiated Emissions Test Results (Continued)

## Fundamental Measurements in 802.11b mode (2400-2483.5 MHz)

Channels 1, 6, &amp; 11

Continuous TX at Chain A Antenna port with Shanghai Universe Antennas

Aegis Labs, Inc. File #: INTEL-090601-02

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL	Comments	
2412.00	68.32	100	225		2.53	32.18	103.02			Ch. 1	
2412.00				66.12	A	2.53	32.18	100.82			
2437.00	66.68	100	225		2.54	32.21	101.43			Ch. 6	
2437.00				64.94	A	2.54	32.21	99.69			
2462.00	66.24	100	225		2.55	32.25	101.04			Ch. 11	
2462.00				64.69	A	2.55	32.25	99.49			

RADIATED EMISSIONS - Vertical Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL	Comments	
2412.00	68.42	100	0		2.53	31.89	102.84			Ch. 1	
2412.00				65.68	A	2.53	31.89	100.10			
2437.00	69.38	100	0		2.54	31.92	103.84			Ch. 6	
2437.00				66.45	A	2.54	31.92	100.91			
2462.00	68.12	100	0		2.55	31.95	102.63			Ch. 11	
2462.00				65.27	A	2.55	31.95	99.78			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".

## Radiated Emissions Test Results (Continued)

## Band Edge Field Strength Measurements in 802.11b mode (2400-2483.5 MHz)

Channels 1 &amp; 11

Continuous TX at Chain A Antenna port with Shanghai Universe Antennas

Aegis Labs, Inc. File #: INTEL-090601-02

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL	Comments
2390.00							46.36	74.00	-27.64	<b>Ch. 1</b>
2390.00							42.69	74.00	-31.31	
2390.00				A			39.48	54.00	-14.52	
2390.00				A			40.49	54.00	-13.51	
2397.00	35.46	100	225		2.52	32.16	70.13	83.02	-12.89	
2483.50							44.37	74.00	-29.63	<b>Ch. 11</b>
2483.50							41.87	74.00	-32.13	
2483.50				A			37.32	54.00	-16.68	
2483.50				A			40.32	54.00	-13.68	

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV/m)	Limits (dBuV/m)	Diff (dB) +=FAIL	Comments
2390.00							46.18	74.00	-27.82	<b>Ch. 1</b>
2390.00							42.51	74.00	-31.49	
2390.00				A			38.76	54.00	-15.24	
2390.00				A			39.77	54.00	-14.23	
2397.00	37.67	100	0		2.52	31.88	72.07	82.84	-10.77	
2483.50							45.96	74.00	-28.04	<b>Ch. 11</b>
2483.50							43.46	74.00	-30.54	
2483.50				A			37.61	54.00	-16.39	
2483.50				A			40.61	54.00	-13.39	

NOTE: The "Band Edge Field Strength" was calculated using the "Fundamental" and "Conducted Band Edge" measurements per the "Marker-Delta Method" with the following formula:

$$BE = Fm - \Delta m$$

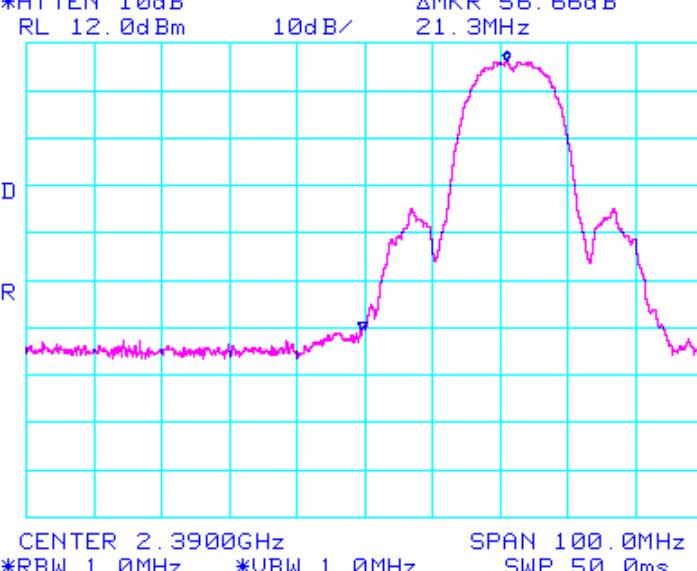
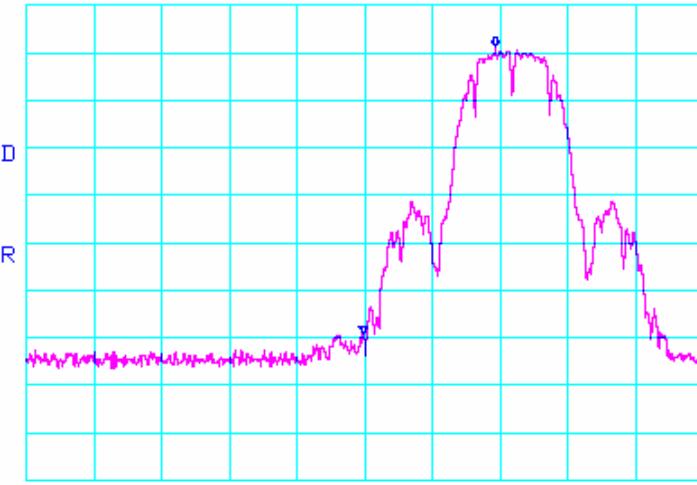
Where

BE = Band Edge Field Strength



Fm = Measured Fundamental (Peak or Average)

 $\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)



## Band-Edge Plots (Continued)

Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090601-01a	Cond BE, Ch. 1, PK (1MHz/1MHz)	JC
		
		
Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090601-01b	Cond BE, Ch. 1, PK (100kHz/100kHz)	JC

## Band-Edge Plots (Continued)

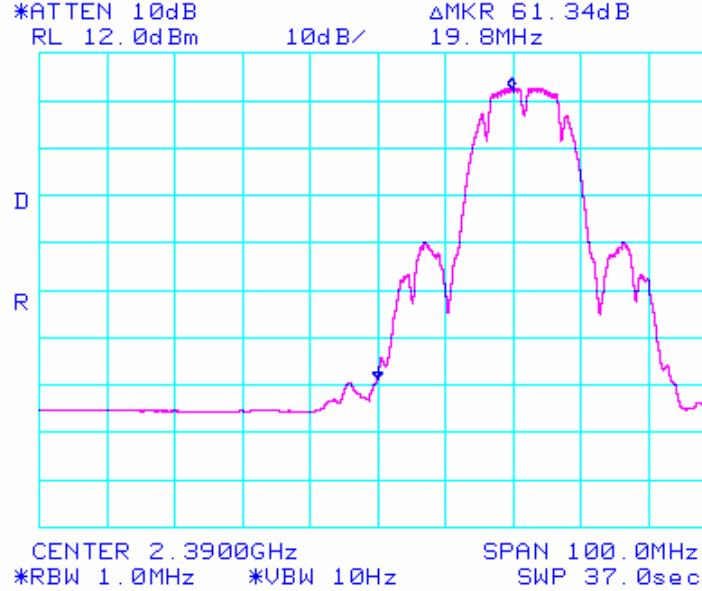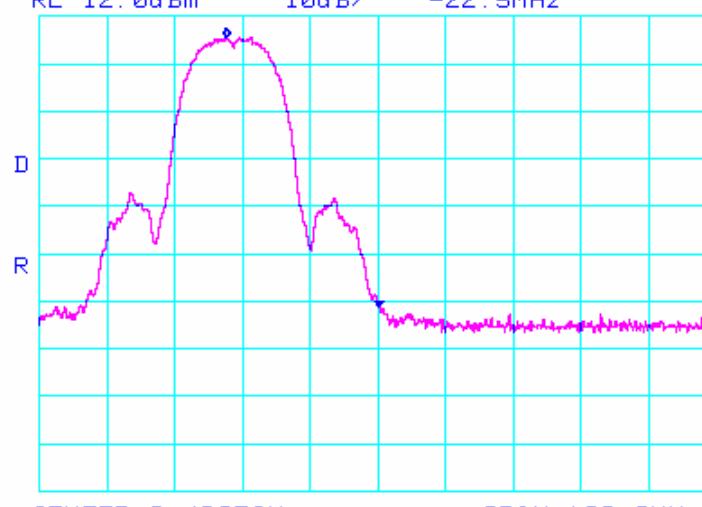Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090601-01c	Cond BE, Ch. 1, AV (1MHz/10Hz)	JC
		
		
INTEL-090601-01d	Cond BE, Ch. 11, PK (1MHz/1MHz)	JC

## Band-Edge Plots (Continued)

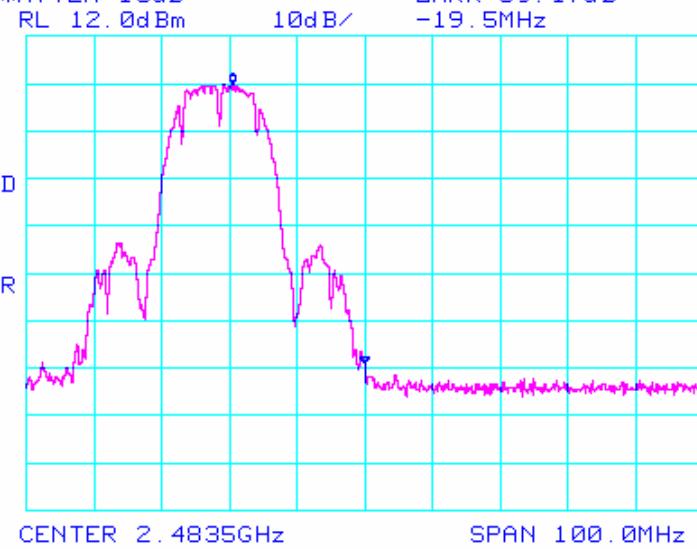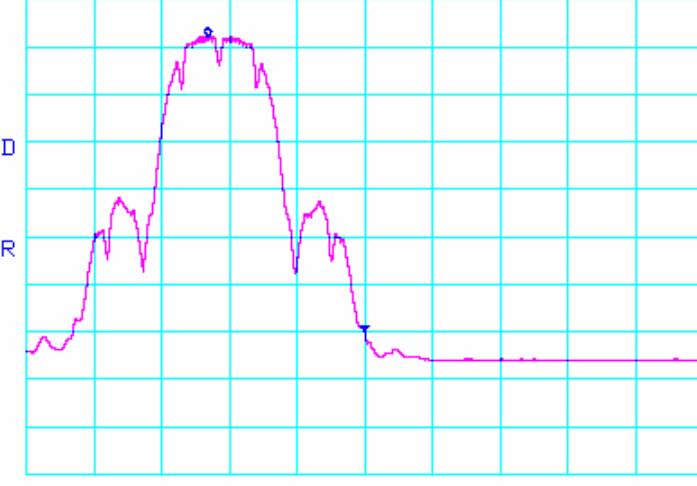Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090601-01e	Cond BE, Ch. 11, PK (100kHz/100kHz)	JC
 <p> <b>*ATTEN</b> 10dB      <b>RL</b> 12.0dBm      <b>10dB/</b>      <b>ΔMKR</b> 59.17dB  <b>*RBW</b> 100kHz      <b>*VBW</b> 100kHz      <b>SPAN</b> 100.0MHz  <b>CENTER</b> 2.4835GHz      <b>SWP</b> 55.0ms     </p>		
 <p> <b>*ATTEN</b> 10dB      <b>RL</b> 12.0dBm      <b>10dB/</b>      <b>ΔMKR</b> 62.17dB  <b>*RBW</b> 1.0MHz      <b>*VBW</b> 10Hz      <b>SPAN</b> 100.0MHz  <b>CENTER</b> 2.4835GHz      <b>SWP</b> 37.0sec     </p>		
INTEL-090601-01f	Cond BE, Ch. 11, AV (1MHz/10Hz)	JC

## Radiated Emissions Test Results (Continued)

## Fundamental Measurements in 802.11b mode (2400-2483.5 MHz)

Channels 1, 6, &amp; 11

Continuous TX at Chain B Antenna port with Shanghai Universe Antennas

Aegis Labs, Inc. File #: INTEL-090601-04

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
2412.00	69.29	100	315		2.53	32.18	103.99			Ch. 1
2412.00				66.73 A	2.53	32.18	101.43			
2437.00	68.76	100	315		2.54	32.21	103.51			Ch. 6
2437.00				66.24 A	2.54	32.21	100.99			
2462.00	67.68	100	315		2.55	32.25	102.48			Ch. 11
2462.00				65.49 A	2.55	32.25	100.29			

## RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
2412.00	69.28	100	180		2.53	31.89	103.70			Ch. 1
2412.00				65.96 A	2.53	31.89	100.38			
2437.00	70.39	100	180		2.54	31.92	104.85			Ch. 6
2437.00				66.43 A	2.54	31.92	100.89			
2462.00	68.45	100	180		2.55	31.95	102.96			Ch. 11
2462.00				65.18 A	2.55	31.95	99.69			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".

## Radiated Emissions Test Results (Continued)

## Band Edge Field Strength Measurements in 802.11b mode (2400-2483.5 MHz)

Channels 1 &amp; 11

Continuous TX at Chain B Antenna port with Shanghai Universe Antennas

Aegis Labs, Inc. File #: INTEL-090601-04

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							47.33	74.00	-26.67	<b>Ch. 1</b>
2390.00							44.99	74.00	-29.01	
2390.00				A			40.09	54.00	-13.91	
2390.00				A			42.43	54.00	-11.57	
2397.00	36.83	100	315		2.52	32.16	71.50	83.99	-12.49	
2483.50							45.64	74.00	-28.36	<b>Ch. 11</b>
2483.50							42.82	74.00	-31.18	
2483.50				A			36.46	54.00	-17.54	
2483.50				A			40.63	54.00	-13.37	

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							47.04	74.00	-26.96	<b>Ch. 1</b>
2390.00							44.70	74.00	-29.30	
2390.00				A			39.04	54.00	-14.96	
2390.00				A			41.38	54.00	-12.62	
2397.00	38.76	100	180		2.52	31.88	73.16	83.70	-10.54	
2483.50							46.12	74.00	-27.88	<b>Ch. 11</b>
2483.50							43.30	74.00	-30.70	
2483.50				A			35.86	54.00	-18.14	
2483.50				A			40.03	54.00	-13.97	

NOTE: The "Band Edge Field Strength" was calculated using the "Fundamental" and "Conducted Band Edge" measurements per the "Marker-Delta Method" with the following formula:

$$BE = Fm - \Delta m$$

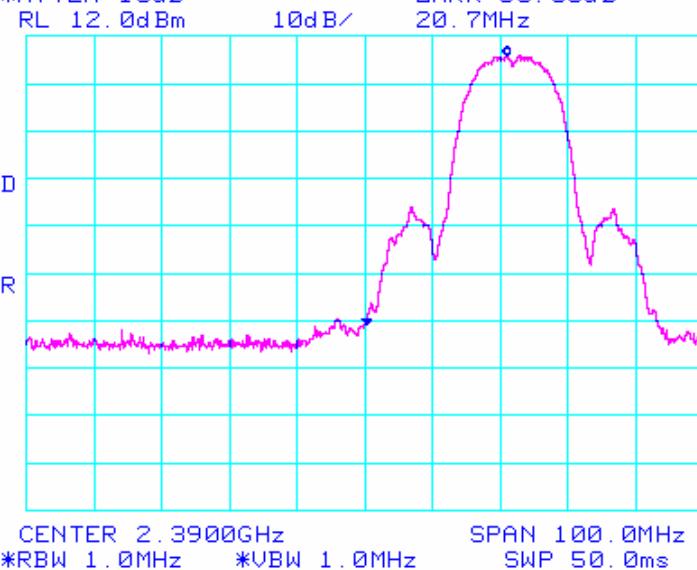
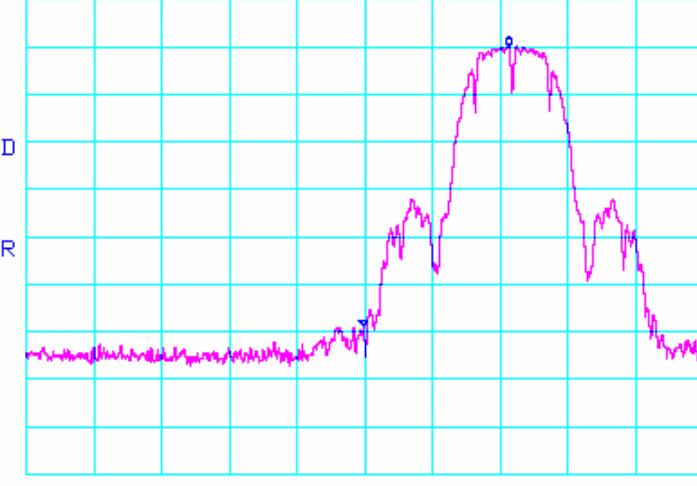
Where

BE = Band Edge Field Strength



Fm = Measured Fundamental (Peak or Average)

 $\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)



## Band-Edge Plots (Continued)

Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090526-08a	Cond BE, Ch. 1, PK (1MHz/1MHz)	JC
		
		
INTEL-090526-08b	Cond BE, Ch. 1, PK (100kHz/100kHz)	JC

## Band-Edge Plots (Continued)

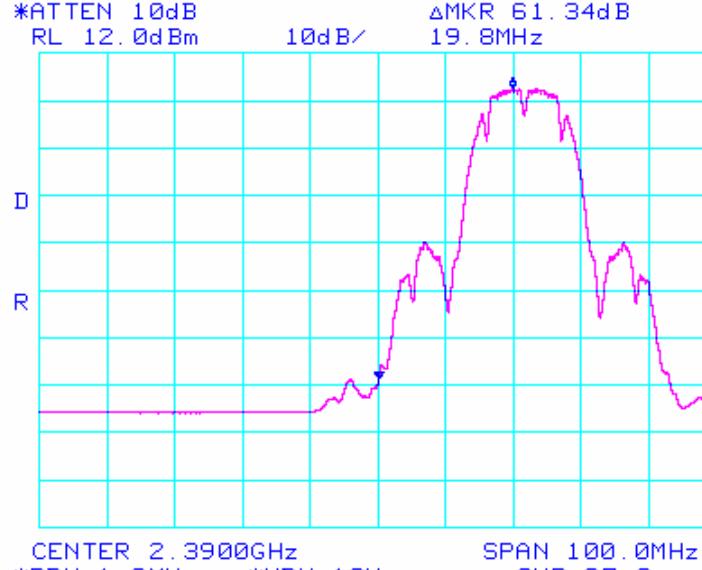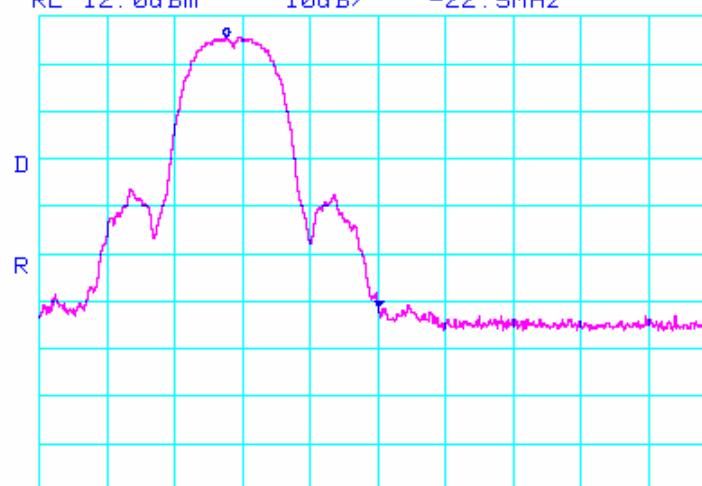Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090526-08c	Cond BE, Ch. 1, AV (1MHz/10Hz)	JC
		
		
INTEL-090526-08d	Cond BE, Ch. 11, PK (1MHz/1MHz)	JC

## Band-Edge Plots (Continued)

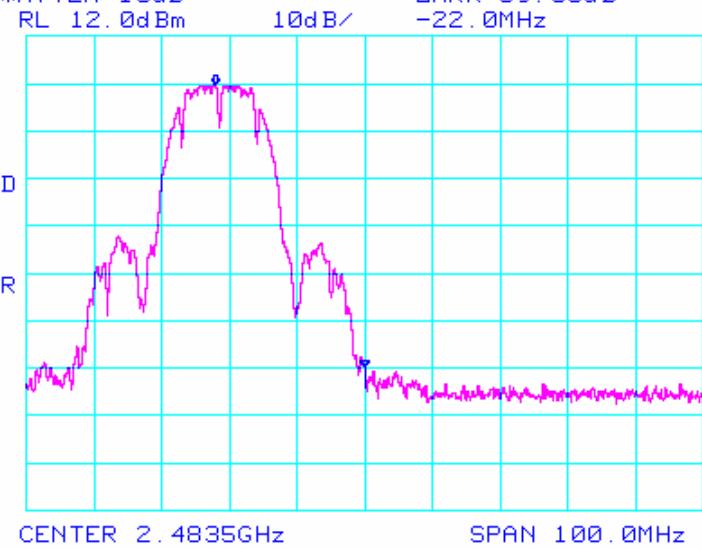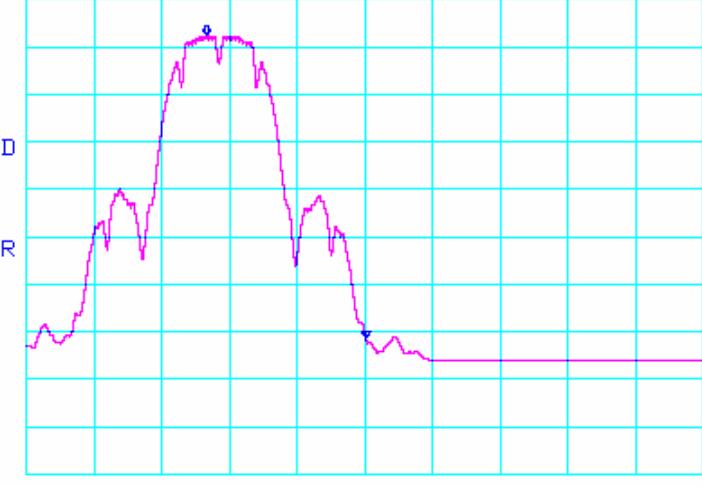Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090526-08e	Cond BE, Ch. 11, PK (100kHz/100kHz)	JC
 <p> <b>*ATTEN</b> 10dB      <b>RL</b> 12.0dBm      <b>10dB/</b>      <b>ΔMKR</b> 59.66dB  <b>RL</b> 12.0dBm      <b>10dB/</b>      <b>-22.0MHz</b>  <b>CENTER</b> 2.4835GHz      <b>SPAN</b> 100.0MHz  <b>*RBW</b> 100kHz      <b>*VBW</b> 100kHz      <b>SWP</b> 55.0ms     </p>		
 <p> <b>*ATTEN</b> 10dB      <b>RL</b> 12.0dBm      <b>10dB/</b>      <b>ΔMKR</b> 63.83dB  <b>RL</b> 12.0dBm      <b>10dB/</b>      <b>-23.5MHz</b>  <b>CENTER</b> 2.4835GHz      <b>SPAN</b> 100.0MHz  <b>*RBW</b> 1.0MHz      <b>*VBW</b> 10Hz      <b>SWP</b> 37.0sec     </p>		
INTEL-090526-08f	Cond BE, Ch. 11, AV (1MHz/10Hz)	JC

## Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11b mode (2400-2483.5 MHz)*

*Channels 1, 6, & 11*

**Continuous TX at Chain A & B Antenna ports with Shanghai Universe Antennas**

Aegis Labs, Inc. File #: INTEL-090601-06

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
4873.98	54.50	100	90		47.50	3.64	34.13	44.76	74.00	-29.24	<b>Ch. 6/</b>
4873.98		100	90	45.79	A	47.50	3.64	34.13	36.05	54.00	-17.95
4873.98	55.67	100	45		47.50	3.64	34.13	45.93	74.00	-28.07	<b>Ch. 6/</b>
4873.98		100	45	48.94	A	47.50	3.64	34.13	39.20	54.00	-14.80
3216.00	53.83	100	315		47.60	2.91	32.74	41.89	74.00	-32.11	<b>Ch. 1/</b>
4824.00	56.83	100	315		47.51	3.59	34.14	47.04	74.00	-26.96	<b>B</b>
4824.00		100	315	50.71	A	47.51	3.59	34.14	40.92	54.00	-13.08
4923.99	54.83	100	45		47.49	3.67	34.12	45.13	74.00	-28.87	<b>Ch. 11/</b>
4923.99		100	45	45.63	A	47.49	3.67	34.12	35.93	54.00	-18.07
											<b>B</b>

RADIATED EMISSIONS - Vertical Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
4873.98	56.67	100	315		47.50	3.64	34.30	47.11	74.00	-26.89	<b>Ch. 6/</b>
4873.98				46.40	A	47.50	3.64	34.30	36.84	54.00	-17.16
6498.64	52.50	100	270		46.93	4.22	35.50	45.29	74.00	-28.71	
4873.98	58.50	100	45		47.50	3.64	34.30	48.94	74.00	-25.06	<b>Ch. 6/</b>
4873.98		100	45	53.44	A	47.50	3.64	34.30	43.88	54.00	-10.12
6498.64	52.50	100	90		46.93	4.22	35.50	45.29	74.00	-28.71	
4824.00	57.00	100	270		47.51	3.59	34.30	47.38	74.00	-26.62	<b>Ch. 1/</b>
4824.00		100	270	52.42	A	47.51	3.59	34.30	42.80	54.00	-11.20
6432.00	52.33	100	0		46.99	4.20	35.47	45.02	74.00	-28.98	
4923.92	55.00	100	270		47.49	3.67	34.30	45.49	74.00	-28.51	<b>Ch. 11/</b>
4923.92		100	270	48.09	A	47.49	3.67	34.30	38.58	54.00	-15.42
6565.16	51.50	100	90		46.83	4.25	35.51	44.43	74.00	-29.57	

## RADIATED EMISSIONS TEST RESULTS

<b>CLIENT:</b>	Intel Corporation	<b>DATE:</b>	08/17/09
<b>EUT:</b>	Intel® Centrino® Ultimate-N 6200	<b>PROJECT NUMBER:</b>	INTEL-090601
<b>MODEL NUMBER:</b>	622ANHMW	<b>TEST ENGINEER:</b>	JC
<b>SERIAL NUMBER:</b>	0015005A3C7C	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested installed in an extender board connected to the host laptop's mini PCI slot in <b>802.11g (2400-2483.5 MHz) mode.</b>	<b>TEMPERATURE:</b>	24° C
		<b>HUMIDITY:</b>	46% RH
		<b>TIME:</b>	9:30 AM

<b>Description:</b>	Radiated RF Emissions (1 GHz – 18 GHz)
<b>Results:</b>	<b>PASSED</b> Horizontal and Vertical Antenna Polarizations Class B Limits
<b>Note:</b>	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> <li>• 120VAC / 60 Hz.</li> </ul>

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

### Radiated Emissions Sample Calculations

Corrected Meter Reading = Meter Reading + F +C - D

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

CML = Specification Limit - F - C + D

## Radiated Emissions Test Results (Continued)

## Fundamental Measurements in 802.11g mode (2400-2483.5 MHz)

Channels 1, 6, &amp; 11

Continuous TX at Chain A Antenna port with Shanghai Universe Antennas

Aegis Labs, Inc. File #: INTEL-090601-02

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
2412.00	70.74	100	225		2.53	32.18	105.44			Ch. 1
2412.00				63.96 A	2.53	32.18	98.66			
2437.00	72.26	100	225		2.54	32.21	107.01			Ch. 6
2437.00				66.25 A	2.54	32.21	101.00			
2462.00	71.72	100	225		2.55	32.25	106.52			Ch. 11
2462.00				65.17 A	2.55	32.25	99.97			

## RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
2412.00	69.71	100	0		2.53	31.89	104.13			Ch. 1
2412.00				61.46 A	2.53	31.89	95.88			
2437.00	72.42	100	0		2.54	31.92	106.88			Ch. 6
2437.00				64.80 A	2.54	31.92	99.26			
2462.00	70.84	100	0		2.55	31.95	105.35			Ch. 11
2462.00				62.09 A	2.55	31.95	96.60			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".

## Radiated Emissions Test Results (Continued)

## Band Edge Field Strength Measurements in 802.11g mode (2400-2483.5 MHz)

Channels 1 &amp; 11

Continuous TX at Chain A Antenna port with Shanghai Universe Antennas

Aegis Labs, Inc. File #: INTEL-090601-02

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							62.11	74.00	-11.89	<b>Ch. 1</b>
2390.00							55.44	74.00	-18.56	
2390.00				A			47.66	54.00	-6.34	
2390.00				A			48.66	54.00	-5.34	
2400.00	41.85	100	225		2.52	32.16	76.53	85.44	-8.91	
2483.50							62.69	74.00	-11.31	<b>Ch. 11</b>
2483.50							56.02	74.00	-17.98	
2483.50				A			47.30	54.00	-6.70	
2483.50				A			49.47	54.00	-4.53	

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							60.80	74.00	-13.20	<b>Ch. 1</b>
2390.00							54.13	74.00	-19.87	
2390.00				A			44.88	54.00	-9.12	
2390.00				A			45.88	54.00	-8.12	
2400.00	42.50	100	0		2.52	31.88	76.90	84.13	-7.23	
2483.50							61.52	74.00	-12.48	<b>Ch. 11</b>
2483.50							54.85	74.00	-19.15	
2483.50				A			43.93	54.00	-10.07	
2483.50				A			46.10	54.00	-7.90	

NOTE: The "Band Edge Field Strength" was calculated using the "Fundamental" and "Conducted Band Edge" measurements per the "Marker-Delta Method" with the following formula:

$$BE = Fm - \Delta m$$

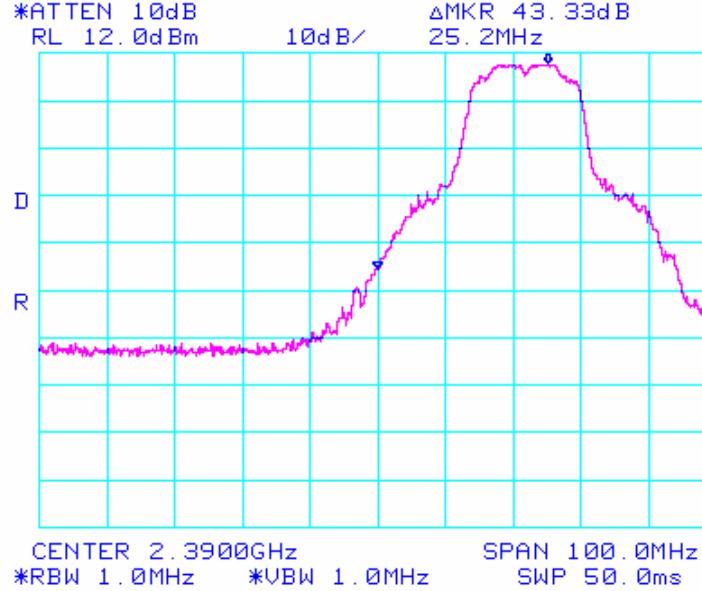
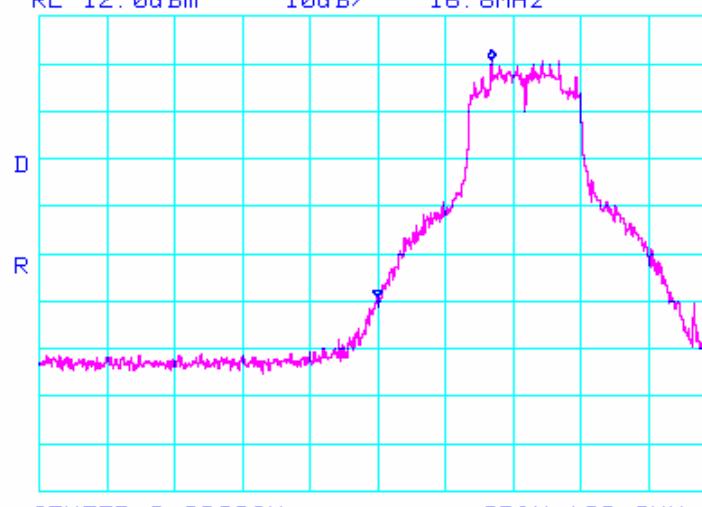
Where

BE = Band Edge Field Strength



Fm = Measured Fundamental (Peak or Average)

 $\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)



## Band-Edge Plots (Continued)

Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090601-02a	Cond BE, Ch. 1, PK (1MHz/1MHz)	JC
		
		
INTEL-090601-02b	Cond BE, Ch. 1, PK (100kHz/100kHz)	JC

## Band-Edge Plots (Continued)

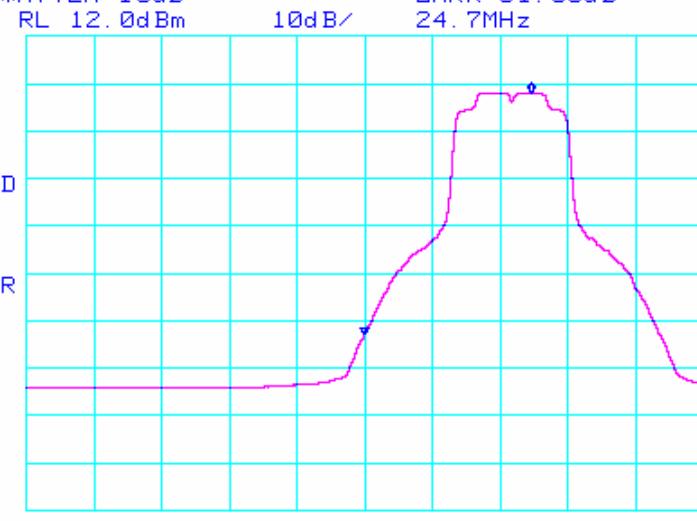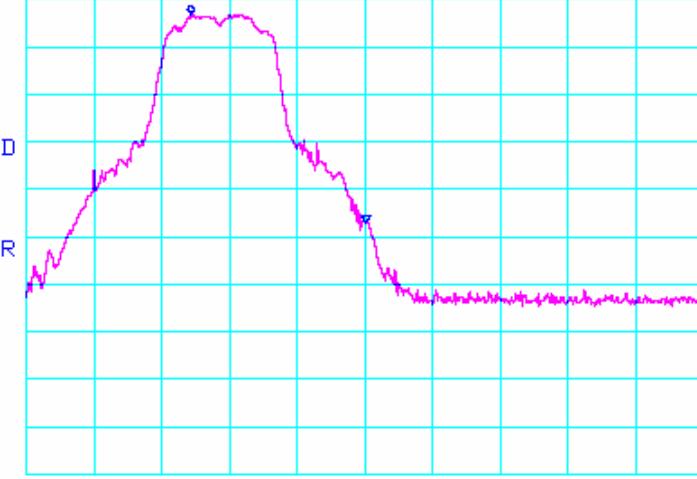Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090601-02c	Cond BE, Ch. 1, AV (1MHz/10Hz)	JC
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>    <b>10dB/</b>    <b>ΔMKR 51.00dB</b>  <b>CENTER 2.3900GHz</b>    <b>SPAN 100.0MHz</b>  <b>*RBW 1.0MHz</b>    <b>*VBW 10Hz</b>    <b>SWP 37.0sec</b> </p>		
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>    <b>10dB/</b>    <b>ΔMKR 43.83dB</b>  <b>CENTER 2.4835GHz</b>    <b>SPAN 100.0MHz</b>  <b>*RBW 1.0MHz</b>    <b>*VBW 1.0MHz</b>    <b>SWP 50.0ms</b> </p>		

## Band-Edge Plots (Continued)
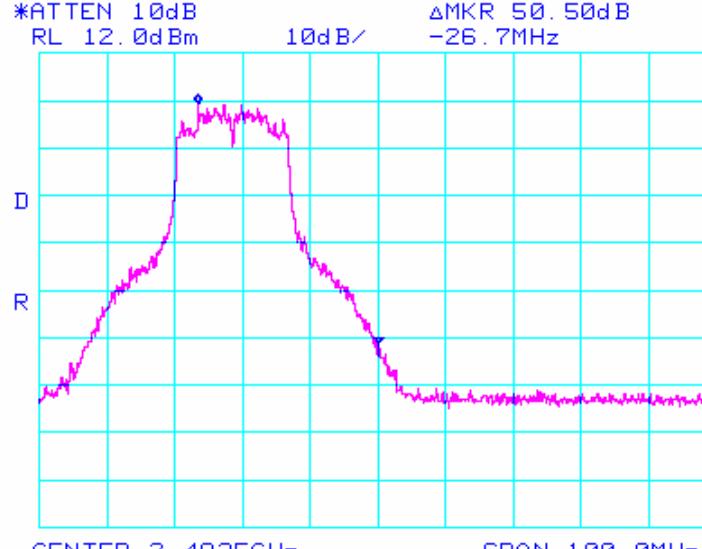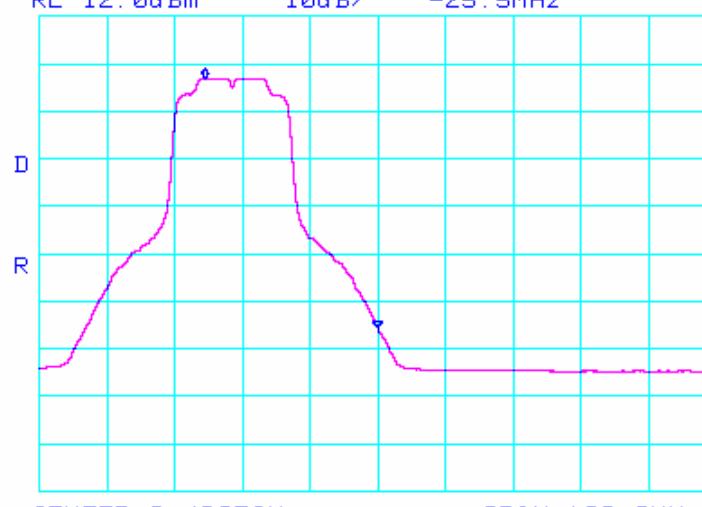
<b>Plot File Name</b>	<b>Description (RBW/VBW)</b>	<b>Test Eng.</b>
INTEL-090601-02e	Cond BE, Ch. 11, PK (100kHz/100kHz)	JC
 <p> <b>*ATTEN</b> 10dB      <b>ΔMKR</b> 50.50dB  <b>RL</b> 12.0dBm      <b>-26.7MHz</b>  <b>10dB/</b>      <b>10dB/</b>  <b>D</b>  <b>R</b> </p> <p> <b>CENTER</b> 2.4835GHz      <b>SPAN</b> 100.0MHz  <b>*RBW</b> 100kHz      <b>*VBW</b> 100kHz      <b>SWP</b> 55.0ms     </p>		
 <p> <b>*ATTEN</b> 10dB      <b>ΔMKR</b> 52.67dB  <b>RL</b> 12.0dBm      <b>-25.5MHz</b>  <b>10dB/</b>      <b>10dB/</b>  <b>D</b>  <b>R</b> </p> <p> <b>CENTER</b> 2.4835GHz      <b>SPAN</b> 100.0MHz  <b>*RBW</b> 1.0MHz      <b>*VBW</b> 10Hz      <b>SWP</b> 37.0sec     </p>		
INTEL-090601-02f	Cond BE, Ch. 11, AV (1MHz/10Hz)	JC

## Radiated Emissions Test Results (Continued)

## Fundamental Measurements in 802.11g mode (2400-2483.5 MHz)

Channels 1, 6, &amp; 11

Continuous TX at Chain B Antenna port with Shanghai Universe Antennas

Aegis Labs, Inc. File #: INTEL-090601-04

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
2412.00	71.05	100	315		2.53	32.18	105.75			Ch. 1
2412.00				64.95 A	2.53	32.18	99.65			
2437.00	73.31	100	315		2.54	32.21	108.06			Ch. 6
2437.00				67.02 A	2.54	32.21	101.77			
2462.00	70.44	100	315		2.55	32.25	105.24			Ch. 11
2462.00				64.56 A	2.55	32.25	99.36			

## RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
2412.00	69.72	100	180		2.53	31.89	104.14			Ch. 1
2412.00				61.27 A	2.53	31.89	95.69			
2437.00	72.86	100	180		2.54	31.92	107.32			Ch. 6
2437.00				64.89 A	2.54	31.92	99.35			
2462.00	69.25	100	180		2.55	31.95	103.76			Ch. 11
2462.00				61.15 A	2.55	31.95	95.66			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".

## Radiated Emissions Test Results (Continued)

## Band Edge Field Strength Measurements in 802.11g mode (2400-2483.5 MHz)

Channels 1 &amp; 11

Continuous TX at Chain B Antenna port with Shanghai Universe Antennas

Aegis Labs, Inc. File #: INTEL-090601-04

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							60.92	74.00	-13.08	<b>Ch. 1</b>
2390.00							53.75	74.00	-20.25	
2390.00				A			46.65	54.00	-7.35	
2390.00				A			47.65	54.00	-6.35	
2400.00	46.42	100	315		2.52	32.16	81.10	85.75	-4.65	
2483.50							60.41	74.00	-13.59	<b>Ch. 11</b>
2483.50							52.41	74.00	-21.59	
2483.50				A			46.20	54.00	-7.80	
2483.50				A			46.53	54.00	-7.47	

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							59.31	74.00	-14.69	<b>Ch. 1</b>
2390.00							52.14	74.00	-21.86	
2390.00				A			42.69	54.00	-11.31	
2390.00				A			43.69	54.00	-10.31	
2400.00	43.21	100	180		2.52	31.88	77.61	84.14	-6.53	
2483.50							58.93	74.00	-15.07	<b>Ch. 11</b>
2483.50							50.93	74.00	-23.07	
2483.50				A			42.50	54.00	-11.50	
2483.50				A			42.83	54.00	-11.17	

NOTE: The "Band Edge Field Strength" was calculated using the "Fundamental" and "Conducted Band Edge" measurements per the "Marker-Delta Method" with the following formula:

$$BE = Fm - \Delta m$$

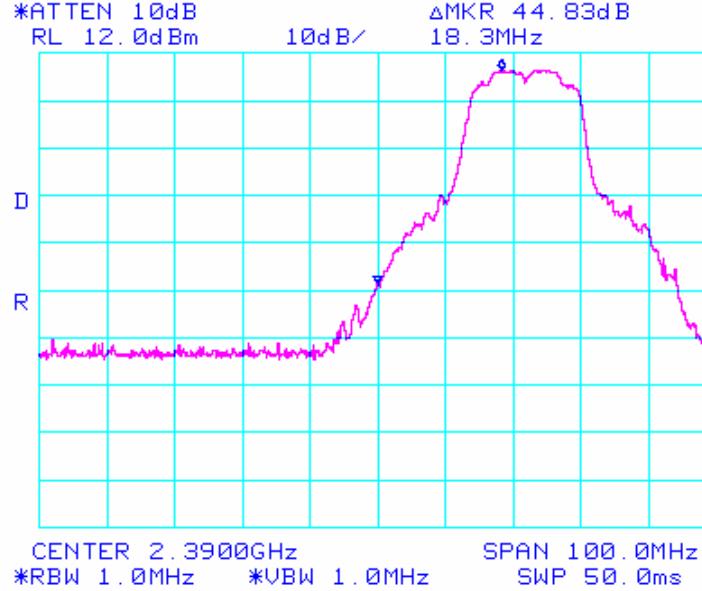
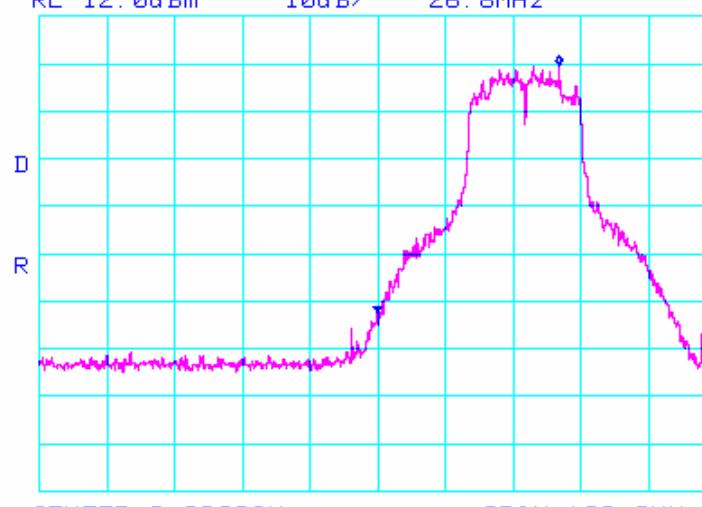
Where

BE = Band Edge Field Strength


Fm = Measured Fundamental (Peak or Average)

 $\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)



## Band-Edge Plots (Continued)

Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090526-09a	Cond BE, Ch. 1, PK (1MHz/1MHz)	JC
		
		
INTEL-090526-09b	Cond BE, Ch. 1, PK (100kHz/100kHz)	JC

## Band-Edge Plots (Continued)

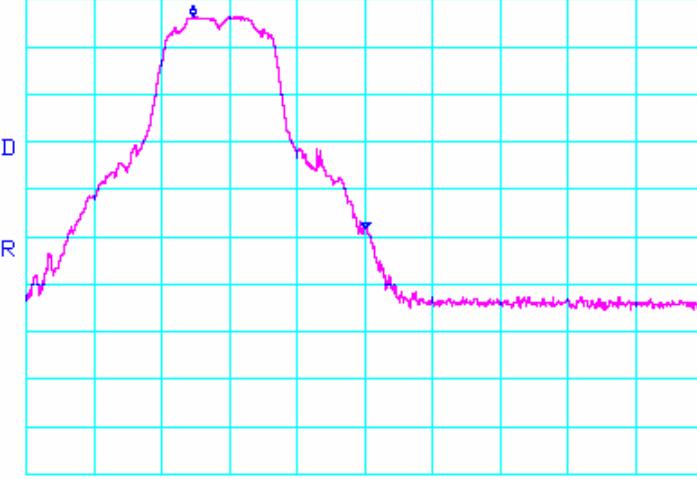Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090526-09c	Cond BE, Ch. 1, AV (1MHz/10Hz)	JC
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 53.00dB</b>  <b>24.5MHz</b> </p> <p> <b>CENTER 2.3900GHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 10Hz</b>      <b>SPAN 100.0MHz</b>  <b>SWP 37.0sec</b> </p>		
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 44.83dB</b>  <b>-25.5MHz</b> </p> <p> <b>CENTER 2.4835GHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 1.0MHz</b>      <b>SPAN 100.0MHz</b>  <b>SWP 50.0ms</b> </p>		

## Band-Edge Plots (Continued)

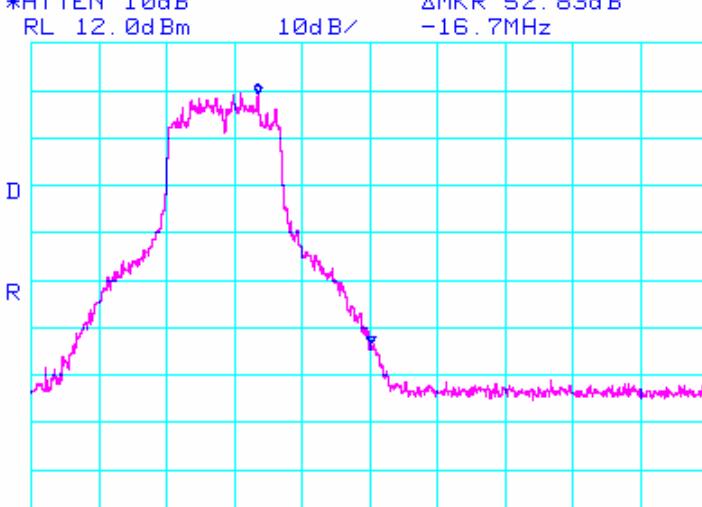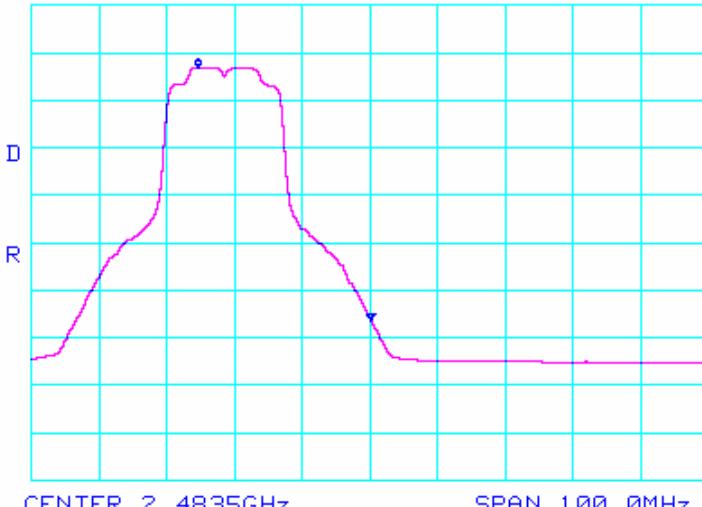Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090526-09e	Cond BE, Ch. 11, PK (100kHz/100kHz)	JC
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 52.83dB</b>  <b>CENTER 2.4835GHz</b>      <b>SPAN 100.0MHz</b>  <b>*RBW 100kHz</b>      <b>*VBW 100kHz</b>      <b>SWP 55.0ms</b> </p>		
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 53.16dB</b>  <b>CENTER 2.4835GHz</b>      <b>SPAN 100.0MHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 10Hz</b>      <b>SWP 37.0sec</b> </p>		

## Radiated Emissions Test Results (Continued)

*Spurious Emissions Measurements in 802.11g mode (2400-2483.5 MHz)*

*Channels 1, 6, & 11*

**Continuous TX at Chain A & B Antenna ports with Shanghai Universe Antennas**

Aegis Labs, Inc. File #: INTEL-090601-06

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested	
3249.33	51.83	315	315		47.61	2.94	32.75	39.91	74.00	-34.09	Ch. 6/	
9748.00	51.17	100	315		45.52	5.31	36.75	47.71	74.00	-26.29	A	
3249.33	52.33	100	0		47.61	2.94	32.75	40.41	74.00	-33.59	Ch. 6/B	
3216.00	52.00	100	315		47.60	2.91	32.74	40.06	74.00	-33.94	Ch. 1/A	
3282.66	53.33	100	315		47.62	2.97	32.76	41.43	74.00	-32.57	Ch. 11/	
4924.00	52.00	100	315		47.49	3.67	34.30	42.49	74.00	-31.51	A	
4924.00		100	315	40.13	A	47.49	3.67	34.30	30.62	54.00	-23.38	

RADIATED EMISSIONS - Vertical Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
3249.33	52.83	315	0		47.61	2.94	32.75	40.91	74.00	-33.09	Ch. 6/
9748.00	52.33	100	315		45.52	5.31	36.75	48.87	74.00	-25.13	A
3249.33	53.67	100	0		47.61	2.94	32.75	41.75	74.00	-32.25	Ch. 6/B
3216.00	52.50	100	315		47.60	2.91	32.74	40.56	74.00	-33.44	Ch. 1/A
3282.66	53.67	100	315		47.62	2.97	32.76	41.77	74.00	-32.23	Ch. 11/A

## RADIATED EMISSIONS TEST RESULTS

<b>CLIENT:</b>	Intel Corporation	<b>DATE:</b>	08/17/09
<b>EUT:</b>	Intel® Centrino® Ultimate-N 6200	<b>PROJECT NUMBER:</b>	INTEL-090601
<b>MODEL NUMBER:</b>	622ANHMW	<b>TEST ENGINEER:</b>	JC
<b>SERIAL NUMBER:</b>	0015005A3C7C	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested installed in an extender board connected to the host laptop's mini PCI slot in <b>802.11n (2400-2483.5 MHz) mode 20MHz Wide.</b>	<b>TEMPERATURE:</b>	24° C
		<b>HUMIDITY:</b>	46% RH
		<b>TIME:</b>	9:30 AM

<b>Description:</b>	Radiated RF Emissions (1 GHz – 18 GHz)
<b>Results:</b>	<b>PASSED</b> Horizontal and Vertical Antenna Polarizations Class B Limits
<b>Note:</b>	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> <li>• 120VAC / 60 Hz.</li> </ul>

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

### Radiated Emissions Sample Calculations

Corrected Meter Reading = Meter Reading + F +C - D

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

CML = Specification Limit - F - C + D

## Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 20MHz Wide (2400-2483.5 MHz)*

*Channels 1, 6, & 11*

*Continuous TX at Chain A Antenna port with Shanghai Universe Antennas*

*Aegis Labs, Inc. File #: INTEL-090601-02*

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2412.00	70.40	100	225		2.53	32.18	105.10			<b>Ch. 1</b>
2412.00				63.61 A	2.53	32.18	98.31			
2437.00	71.78	100	225		2.54	32.21	106.53			<b>Ch. 6</b>
2437.00				65.02 A	2.54	32.21	99.77			
2462.00	70.61	100	180		2.55	32.25	105.41			<b>Ch. 11</b>
2462.00				63.97 A	2.55	32.25	98.77			

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2412.00	70.63	100	0		2.53	31.89	105.05			<b>Ch. 1</b>
2412.00				62.37 A	2.53	31.89	96.79			
2437.00	71.59	100	0		2.54	31.92	106.05			<b>Ch. 6</b>
2437.00				63.48 A	2.54	31.92	97.94			
2462.00	70.37	100	0		2.55	31.95	104.88			<b>Ch. 11</b>
2462.00				62.39 A	2.55	31.95	96.90			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.

## Radiated Emissions Test Results (Continued)

## Band Edge Field Strength Measurements in 802.11n mode 20MHz Wide (2400-2483.5 MHz)

Channels 1 &amp; 11

Continuous TX at Chain A Antenna port with Shanghai Universe Antennas

Aegis Labs, Inc. File #: INTEL-090601-02

## RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							67.60	74.00	-6.40	<b>Ch. 1</b>
2390.00							57.60	74.00	-16.40	
2390.00				A			49.81	54.00	-4.19	
2390.00				A			50.81	54.00	-3.19	
2400.00	40.78	100	225		2.52	32.16	75.46	85.10	-9.64	
2483.50							63.24	74.00	-10.76	<b>Ch. 11</b>
2483.50							55.74	74.00	-18.26	
2483.50				A			48.93	54.00	-5.07	
2483.50				A			49.10	54.00	-4.90	

## RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							67.55	74.00	-6.45	<b>Ch. 1</b>
2390.00							57.55	74.00	-16.45	
2390.00				A			48.29	54.00	-5.71	
2390.00				A			49.29	54.00	-4.71	
2400.00	41.33	100	0		2.52	31.88	75.73	85.05	-9.32	
2483.50							62.71	74.00	-11.29	<b>Ch. 11</b>
2483.50							55.21	74.00	-18.79	
2483.50				A			47.06	54.00	-6.94	
2483.50				A			47.23	54.00	-6.77	

NOTE: The "Band Edge Field Strength" was calculated using the "Fundamental" and "Conducted Band Edge" measurements per the "Marker-Delta Method" with the following formula:

$$BE = Fm - \Delta m$$

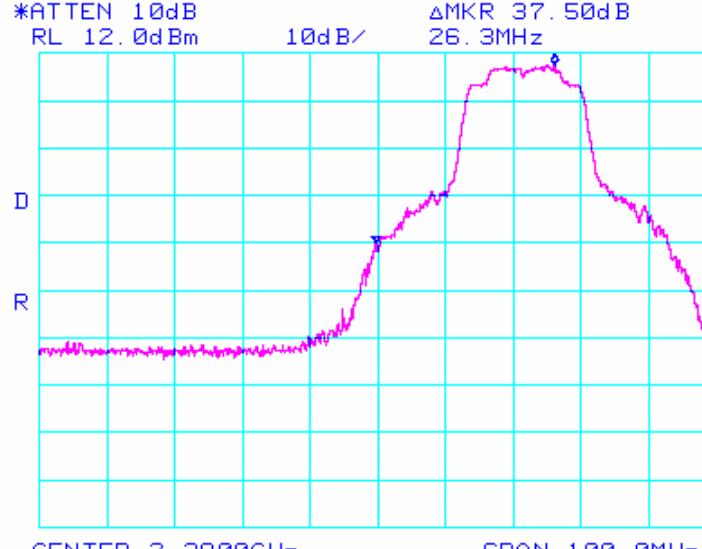
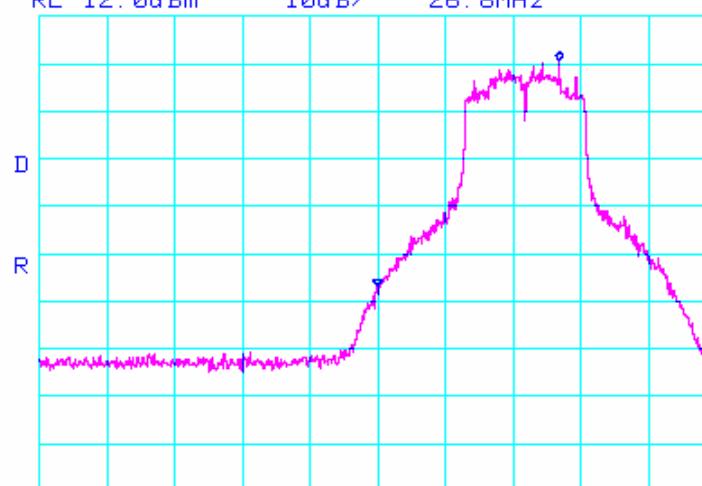
Where

BE = Band Edge Field Strength



Fm = Measured Fundamental (Peak or Average)

 $\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)



## Band-Edge Plots (Continued)

Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090601-03a	Cond BE, Ch. 1, PK (1MHz/1MHz)	JC
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>      <b>10dB/</b>      <b>△MKR 37.50dB</b>  <b>26.3MHz</b> </p> <p> <b>CENTER 2.3900GHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 1.0MHz</b>      <b>SPAN 100.0MHz</b>  <b>SWP 50.0ms</b> </p>		
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>      <b>10dB/</b>      <b>△MKR 47.50dB</b>  <b>26.8MHz</b> </p> <p> <b>CENTER 2.3900GHz</b>  <b>*RBW 100kHz</b>      <b>*VBW 100kHz</b>      <b>SPAN 100.0MHz</b>  <b>SWP 55.0ms</b> </p>		
INTEL-090601-03b	Cond BE, Ch. 1, PK (100kHz/100kHz)	JC

## Band-Edge Plots (Continued)

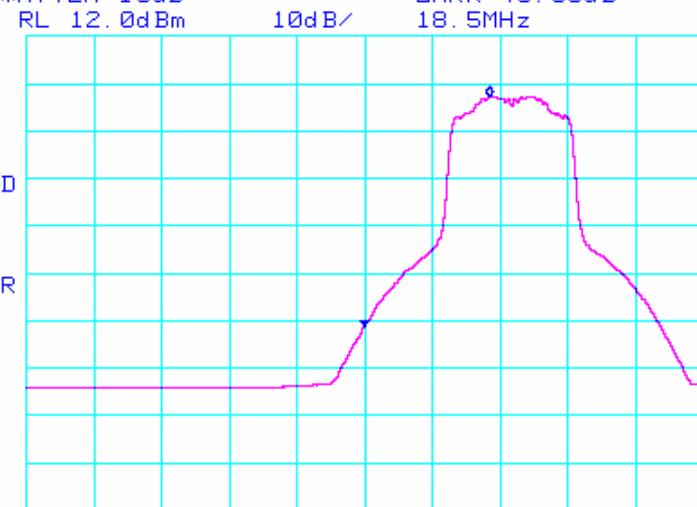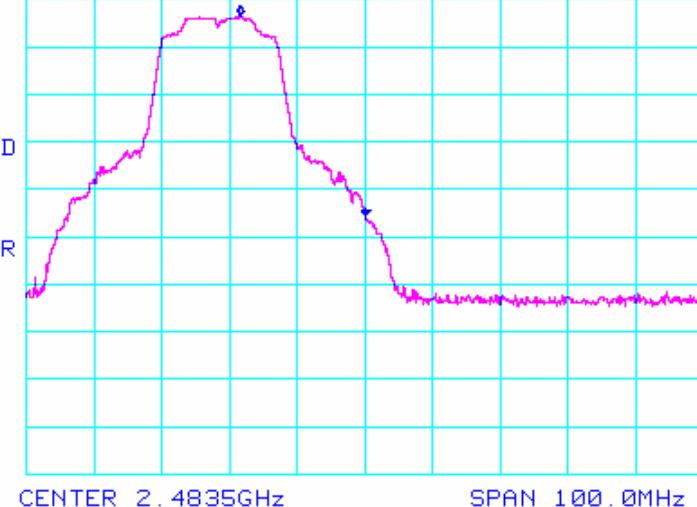Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090601-03c	Cond BE, Ch. 1, AV (1MHz/10Hz)	JC
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 48.50dB</b>  <b>18.5MHz</b> </p> <p> <b>CENTER 2.3900GHz</b>      <b>SPAN 100.0MHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 10Hz</b>      <b>SWP 37.0sec</b> </p>		
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 42.17dB</b>  <b>-18.5MHz</b> </p> <p> <b>CENTER 2.4835GHz</b>      <b>SPAN 100.0MHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 1.0MHz</b>      <b>SWP 50.0ms</b> </p>		

## Band-Edge Plots (Continued)

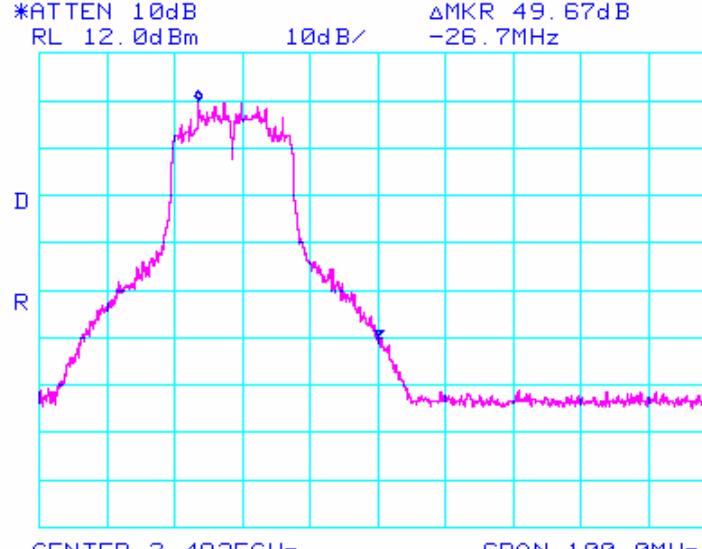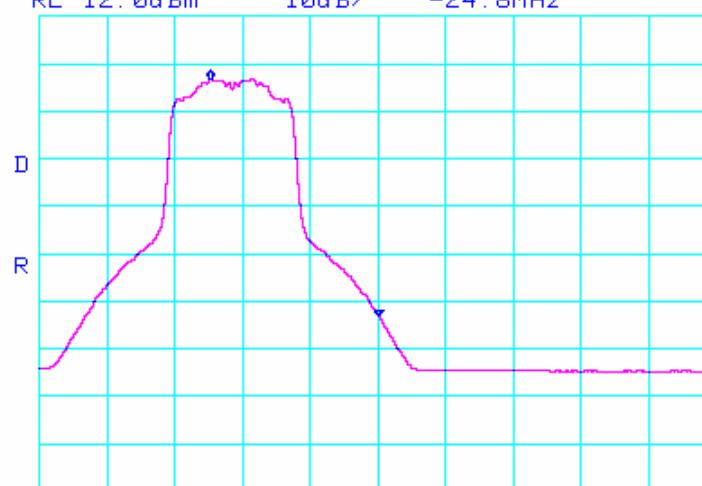Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090601-03e	Cond BE, Ch. 11, PK (100kHz/100kHz)	JC
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.00 dBm</b>      <b>10dB/</b>      <b>ΔMKR 49.67dB</b>  <b>-26.7MHz</b> </p> <p> <b>CENTER 2.4835GHz</b>      <b>SPAN 100.0MHz</b>  <b>*RBW 100kHz</b>      <b>*VBW 100kHz</b>      <b>SWP 55.0ms</b> </p>		
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.00 dBm</b>      <b>10dB/</b>      <b>ΔMKR 49.84dB</b>  <b>-24.8MHz</b> </p> <p> <b>CENTER 2.4835GHz</b>      <b>SPAN 100.0MHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 10Hz</b>      <b>SWP 37.0sec</b> </p>		
INTEL-090601-03f	Cond BE, Ch. 11, AV (1MHz/10Hz)	JC

## Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 20MHz Wide (2400-2483.5 MHz)*

*Channels 1, 6, & 11*

*Continuous TX at Chain B Antenna port with Shanghai Universe Antennas*

*Aegis Labs, Inc. File #: INTEL-090601-04*

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2412.00	70.26	100	315		2.53	32.18	104.96			<b>Ch. 1</b>
2412.00				64.11 A	2.53	32.18	98.81			
2437.00	72.54	100	315		2.54	32.21	107.29			<b>Ch. 6</b>
2437.00				66.20 A	2.54	32.21	100.95			
2462.00	69.81	100	315		2.55	32.25	104.61			<b>Ch. 11</b>
2462.00				63.45 A	2.55	32.25	98.25			

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2412.00	69.63	100	180		2.53	31.89	104.05			<b>Ch. 1</b>
2412.00				60.77 A	2.53	31.89	95.19			
2437.00	70.42	100	180		2.54	31.92	104.88			<b>Ch. 6</b>
2437.00				61.06 A	2.54	31.92	95.52			
2462.00	69.59	100	180		2.55	31.95	104.10			<b>Ch. 11</b>
2462.00				60.45 A	2.55	31.95	94.96			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.

## Radiated Emissions Test Results (Continued)

## Band Edge Field Strength Measurements in 802.11n mode 20MHz Wide (2400-2483.5 MHz)

Channels 1 &amp; 11

Continuous TX at Chain B Antenna port with Shanghai Universe Antennas

Aegis Labs, Inc. File #: INTEL-090601-04

## RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							66.96	74.00	-7.04	<b>Ch. 1</b>
2390.00							56.80	74.00	-17.20	
2390.00				A			50.14	54.00	-3.86	
2390.00				A			50.65	54.00	-3.35	
2400.00	43.61	100	315		2.52	32.16	78.29	84.96	-6.67	
2483.50							62.78	74.00	-11.22	<b>Ch. 11</b>
2483.50							56.45	74.00	-17.55	
2483.50				A			49.09	54.00	-4.91	
2483.50				A			50.09	54.00	-3.91	

## RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							66.05	74.00	-7.95	<b>Ch. 1</b>
2390.00							55.89	74.00	-18.11	
2390.00				A			46.52	54.00	-7.48	
2390.00				A			47.03	54.00	-6.97	
2400.00	41.33	100	180		2.52	31.88	75.73	84.05	-8.32	
2483.50							62.27	74.00	-11.73	<b>Ch. 11</b>
2483.50							55.94	74.00	-18.06	
2483.50				A			45.80	54.00	-8.20	
2483.50				A			46.80	54.00	-7.20	

NOTE: The "Band Edge Field Strength" was calculated using the "Fundamental" and "Conducted Band Edge" measurements per the "Marker-Delta Method" with the following formula:

$$BE = Fm - \Delta m$$

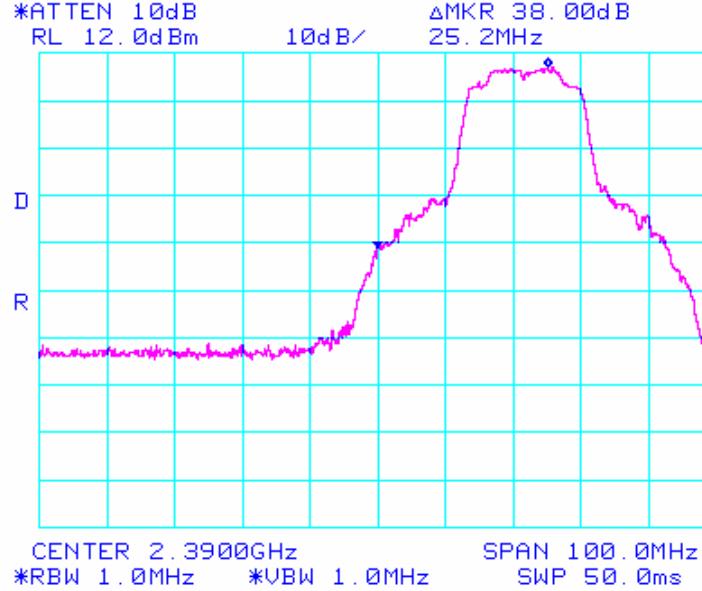
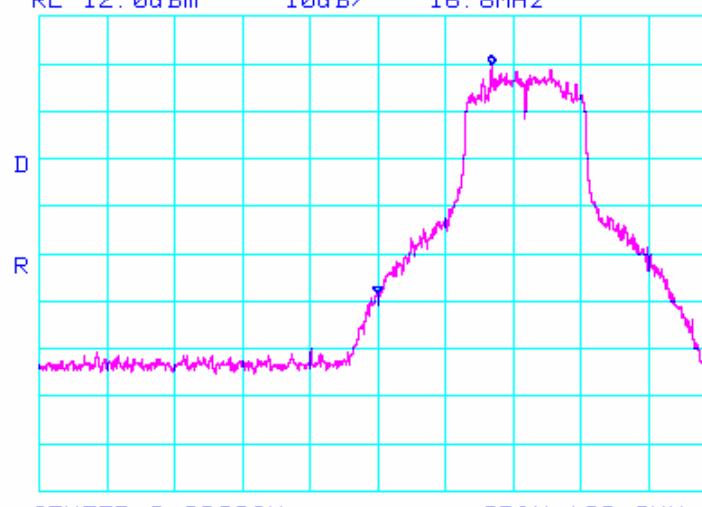
Where

BE = Band Edge Field Strength


Fm = Measured Fundamental (Peak or Average)

 $\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)



## Band-Edge Plots (Continued)

Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090526-10a	Cond BE, Ch. 1, PK (1MHz/1MHz)	JC
		
		
Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090526-10b	Cond BE, Ch. 1, PK (100kHz/100kHz)	JC

## Band-Edge Plots (Continued)

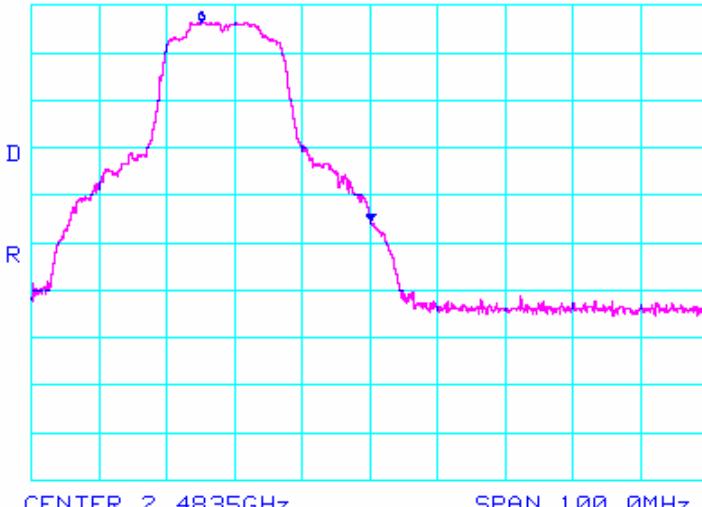Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090526-10c	Cond BE, Ch. 1, AV (1MHz/10Hz)	JC
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>    <b>10dB/</b>    <b>ΔMKR 48.67dB</b>  <b>18.5MHz</b> </p> <p> <b>CENTER 2.3900GHz</b>    <b>SPAN 100.0MHz</b>  <b>*RBW 1.0MHz</b>    <b>*VBW 10Hz</b>    <b>SWP 37.0sec</b> </p>		
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>    <b>10dB/</b>    <b>ΔMKR 41.83dB</b>  <b>-25.0MHz</b> </p> <p> <b>CENTER 2.4835GHz</b>    <b>SPAN 100.0MHz</b>  <b>*RBW 1.0MHz</b>    <b>*VBW 1.0MHz</b>    <b>SWP 50.0ms</b> </p>		
INTEL-090526-10d	Cond BE, Ch. 11, PK (1MHz/1MHz)	JC

## Band-Edge Plots (Continued)

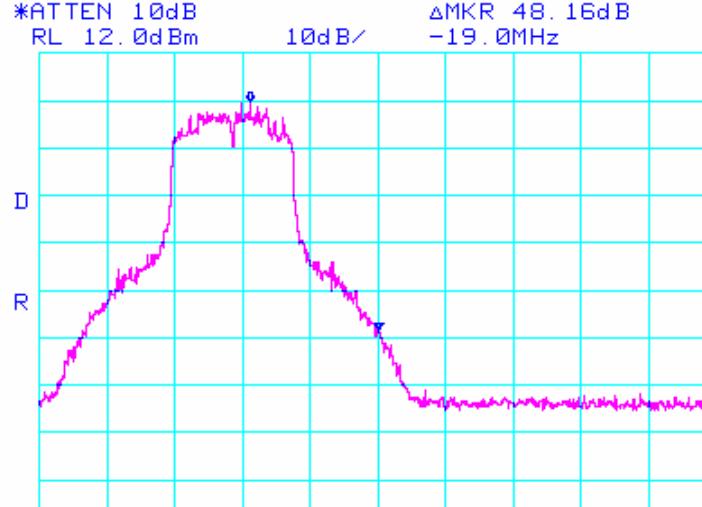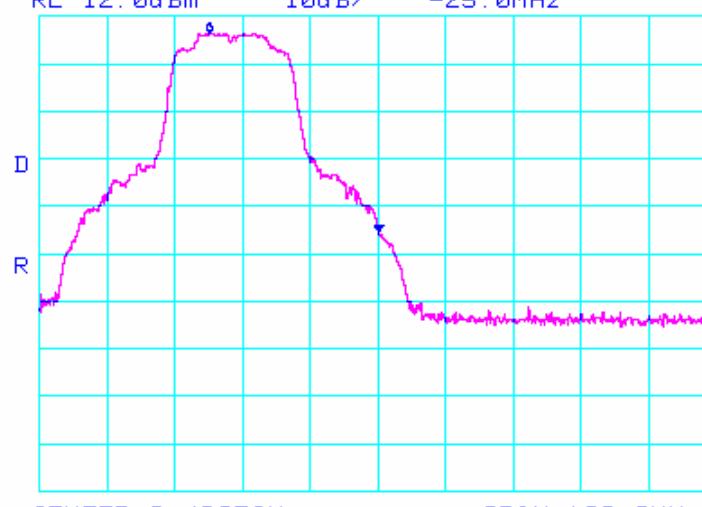Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090526-10e	Cond BE, Ch. 11, PK (100kHz/100kHz)	JC
 <p>         *ATTEN 10dB          RL 12.0dBm 10dB/  <math>\Delta</math>MKR 48.16dB          -19.0MHz       </p> <p>         CENTER 2.4835GHz SPAN 100.0MHz          *RBW 100kHz *VBW 100kHz SWP 55.0ms       </p>		
 <p>         *ATTEN 10dB          RL 12.0dBm 10dB/  <math>\Delta</math>MKR 41.83dB          -25.0MHz       </p> <p>         CENTER 2.4835GHz SPAN 100.0MHz          *RBW 1.0MHz *VBW 1.0MHz SWP 50.0ms       </p>		
INTEL-090526-10f	Cond BE, Ch. 11, AV (1MHz/10Hz)	JC

## Radiated Emissions Test Results (Continued)

**Spurious Emissions Measurements in 802.11n mode 20MHz Wide (2400-2483.5 MHz)**

**Channels 1, 6, & 11**

**Continuous TX at Chain A & B Antenna ports with Shanghai Universe Antennas**

**Aegis Labs, Inc. File #: INTEL-090601-07**

RADIATED EMISSIONS - Horizontal Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested	
3249.32	52.50	100	0		47.61	2.94	32.75	40.58	74.00	-33.42	<b>Ch. 6/A</b>	
3249.32	53.17	100	0		47.61	2.94	32.75	41.25	74.00	-32.75	<b>Ch. 6/B</b>	
3216.00	51.50	100	0		47.60	2.91	32.74	39.56	74.00	-34.44	<b>Ch. 1/</b>	
4873.98	51.83	100	0		47.50	3.64	34.13	42.09	74.00	-31.91	<b>B</b>	
4873.98		100	0	40.23	A	47.50	3.64	34.13	30.49	54.00	-23.51	
3282.66	52.50	100			47.62	2.97	32.76	40.60	74.00	-33.40	<b>Ch. 11/</b>	
4923.99	51.17	100	315		47.49	3.67	34.12	41.47	74.00	-32.53	<b>B</b>	
4923.99		100	315	39.82	A	47.49	3.67	34.12	30.12	54.00	-23.88	

RADIATED EMISSIONS - Vertical Antenna Polarization												
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested	
3249.32	53.67	100	0		47.61	2.94	32.55	41.55	74.00	-32.45	<b>Ch. 6/</b>	
4873.98	54.00	100	0		47.50	3.64	34.30	44.44	74.00	-29.56	<b>A</b>	
4873.98		100	0	41.44	A	47.50	3.64	34.30	31.88	54.00	-22.12	
6498.64	51.17	100	90		46.93	4.22	35.50	43.96	74.00	-30.04		
3249.32	53.83	100	0		47.61	2.94	32.55	41.71	74.00	-32.29	<b>Ch. 6/</b>	
6498.64	51.67	100	90		46.93	4.22	35.50	44.46	74.00	-29.54	<b>B</b>	
3216.00	52.67	100	0		47.60	2.91	32.54	40.53	74.00	-33.47	<b>Ch. 1/A</b>	
3282.66	54.00	100	45		47.62	2.97	32.56	41.90	74.00	-32.10	<b>Ch. 11/</b>	
4923.99	52.50	100	0		47.49	3.67	34.30	42.99	74.00	-31.01	<b>A</b>	
4923.99		100	0	40.81	A	47.49	3.67	34.30	31.30	54.00	-22.70	

## Radiated Emissions Test Results (Continued)

**Spurious Emissions Measurements in 802.11n mode 20MHz Wide (2400-2483.5 MHz)**

**Channels 1, 6, & 11**

**Continuous TX at Dual Chain AB Antenna ports with Shanghai Universe Antennas**

**Aegis Labs, Inc. File #: INTEL-090601-07**

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
3216.00	52.67	100	315		47.60	2.91	32.74	40.73	74.00	-33.27	<b>Ch. 1</b>
6432.00	55.67	100	45		46.99	4.20	35.63	48.52	74.00	-25.48	
3249.33	51.67	100	315		47.61	2.94	32.75	39.75	74.00	-34.25	<b>Ch. 6</b>
6498.66	55.67	100	45		46.93	4.22	35.70	48.66	74.00	-25.34	
3282.66	53.50	100	315		47.62	2.97	32.76	41.60	74.00	-32.40	<b>Ch. 11</b>
4924.00	52.17	100	315		47.49	3.67	34.12	42.47	74.00	-31.53	
4924.00		100	315	43.58	A	47.49	3.67	34.12	33.88	54.00	-20.12
6565.33	56.00	100	270		46.83	4.25	35.71	49.13	74.00	-24.87	

RADIATED EMISSIONS - Vertical Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
3216.00	52.17	100	0		47.60	2.91	32.54	40.03	74.00	-33.97	<b>Ch. 1</b>
6432.00	57.83	100	45		46.99	4.20	35.47	50.52	74.00	-23.48	
3249.32	53.00	100	0		47.61	2.94	32.55	40.88	74.00	-33.12	<b>Ch. 6</b>
4873.98	52.17	100	90		47.50	3.64	34.30	42.61	74.00	-31.39	
4873.98		100	90	40.62	A	47.50	3.64	34.30	31.06	54.00	-22.94
6498.85	58.67	100	90		46.93	4.22	35.50	51.46	74.00	-22.54	
9747.89	52.17	100	0		45.52	5.31	36.75	48.71	74.00	-25.29	
3282.66	53.00	100	45		47.62	2.97	32.56	40.90	74.00	-33.10	<b>Ch. 11</b>
4924.00	52.33	100	90		47.49	3.67	34.30	42.82	74.00	-31.18	
4924.00		100	90	40.13	A	47.49	3.67	34.30	30.62	54.00	-23.38
6565.33	59.83	100	90		46.83	4.25	35.51	52.76	74.00	-21.24	

## RADIATED EMISSIONS TEST RESULTS

<b>CLIENT:</b>	Intel Corporation	<b>DATE:</b>	08/17/09
<b>EUT:</b>	Intel® Centrino® Ultimate-N 6200	<b>PROJECT NUMBER:</b>	INTEL-090601
<b>MODEL NUMBER:</b>	622ANHMW	<b>TEST ENGINEER:</b>	JC
<b>SERIAL NUMBER:</b>	0015005A3C7C	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested installed in an extender board connected to the host laptop's mini PCI slot in <b>802.11n (2400-2483.5 MHz) mode 40MHz Wide.</b>	<b>TEMPERATURE:</b>	24° C
		<b>HUMIDITY:</b>	46% RH
		<b>TIME:</b>	9:30 AM

<b>Description:</b>	Radiated RF Emissions (1 GHz – 18 GHz)
<b>Results:</b>	<b>PASSED</b> Horizontal and Vertical Antenna Polarizations Class B Limits
<b>Note:</b>	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> <li>• 120VAC / 60 Hz.</li> </ul>

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

### Radiated Emissions Sample Calculations

Corrected Meter Reading = Meter Reading + F +C - D

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

CML = Specification Limit - F - C + D

## Radiated Emissions Test Results (Continued)

## Fundamental Measurements in 802.11n mode 40MHz Wide (2400-2483.5 MHz)

Channels 3, 4, 6, 8, &amp; 9

Continuous TX at Chain A Antenna port with Shanghai Universe Antennas

Aegis Labs, Inc. File #: INTEL-090601-02

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2422.00	63.35	100	225		2.53	32.19	98.07			Ch. 3
2422.00				53.41 A	2.53	32.19	88.13			
2427.00	65.34	100	225		2.53	32.20	100.07			Ch. 4
2427.00				54.62 A	2.53	32.20	89.35			
2437.00	66.85	100	225		2.54	32.21	101.60			Ch. 6
2437.00				56.93 A	2.54	32.21	91.68			
2447.00	64.46	100	225		2.54	32.23	99.23			Ch. 8
2447.00				55.84 A	2.54	32.23	90.61			
2452.00	62.75	100	225		2.55	32.23	97.53			Ch. 9
2452.00				52.65 A	2.55	32.23	87.43			

## RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2422.00	62.89	100	0		2.53	31.91	97.33			Ch. 3
2422.00				52.87 A	2.53	31.91	87.31			
2427.00	64.25	100	0		2.53	31.91	98.70			Ch. 4
2427.00				54.56 A	2.53	31.91	89.01			
2437.00	67.00	100	0		2.54	31.92	101.46			Ch. 6
2437.00				57.81 A	2.54	31.92	92.27			
2447.00	65.03	100	0		2.54	31.94	99.51			Ch. 8
2447.00				54.92 A	2.54	31.94	89.40			
2452.00	62.11	100	0		2.55	31.94	96.60			Ch. 9
2452.00				52.26 A	2.55	31.94	86.75			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".

## Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11n mode 40MHz Wide (2400-2483.5 MHz)*

*Channels 3, 4, 8, & 9*

**Continuous TX at Chain A Antenna port with Shanghai Universe Antennas**

Aegis Labs, Inc. File #: INTEL-090601-02

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							65.24	74.00	-8.76	<b>Ch. 3</b>
2390.00							60.57	74.00	-13.43	
2390.00				A			48.46	54.00	-5.54	
2390.00				A			50.63	54.00	-3.37	
2400.00	32.96	100	225		2.52	32.16	67.64	78.07	-10.43	
2390.00							66.07	74.00	-7.93	<b>Ch. 4</b>
2390.00							61.57	74.00	-12.43	
2390.00				A			49.68	54.00	-4.32	
2390.00				A			50.85	54.00	-3.15	
2400.00	35.52	100	225		2.52	32.16	70.20	80.07	-9.87	
2483.50							63.23	74.00	-10.77	<b>Ch. 8</b>
2483.50							58.56	74.00	-15.44	
2483.50				A			49.44	54.00	-4.56	
2483.50				A			49.94	54.00	-4.06	
2483.50							61.86	74.00	-12.14	<b>Ch. 9</b>
2483.50							61.03	74.00	-12.97	
2483.50				A			47.43	54.00	-6.57	
2483.50				A			50.93	54.00	-3.07	

## Radiated Emissions Test Results (Continued)

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							64.50	74.00	-9.50	<b>Ch. 3</b>
2390.00							59.83	74.00	-14.17	
2390.00				A			47.64	54.00	-6.36	
2390.00				A			49.81	54.00	-4.19	
2400.00	33.67	100	0		2.52	31.88	68.07	77.33	-9.26	
2390.00							64.70	74.00	-9.30	<b>Ch. 4</b>
2390.00							60.20	74.00	-13.80	
2390.00				A			49.34	54.00	-4.66	
2390.00				A			50.51	54.00	-3.49	
2400.00	31.00	100	0		2.52	31.88	65.40	72.27	-6.87	
2483.50							63.51	74.00	-10.49	<b>Ch. 8</b>
2483.50							58.84	74.00	-15.16	
2483.50				A			48.23	54.00	-5.77	
2483.50				A			48.73	54.00	-5.27	
2483.50							60.93	74.00	-13.07	<b>Ch. 9</b>
2483.50							60.10	74.00	-13.90	
2483.50				A			46.75	54.00	-7.25	
2483.50				A			50.25	54.00	-3.75	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

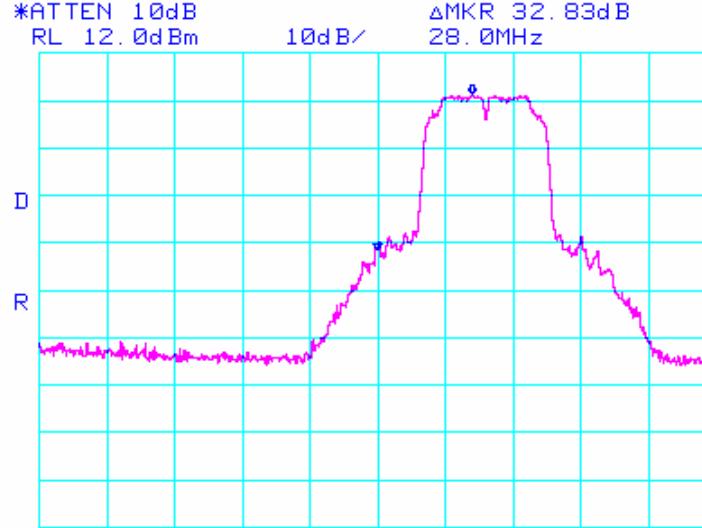
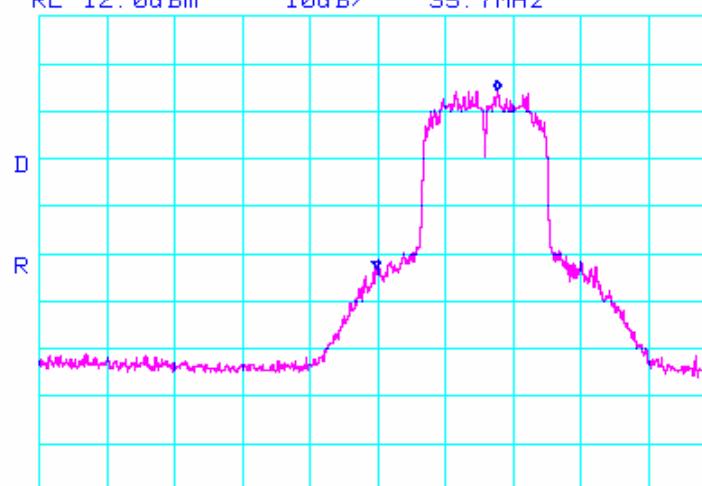
Where

BE = Band Edge Field Strength



Fm = Measured Fundamental (Peak or Average)

$\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)



## Band-Edge Plots (Continued)

Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090601-04a	Cond BE, Ch. 3, PK (1MHz/1MHz)	JC
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>      <b>10dB/</b>      <b>△MKR 32.83dB</b>  <b>28.0MHz</b> </p> <p> <b>CENTER 2.3900GHz</b>      <b>SPAN 200.0MHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 1.0MHz</b>      <b>SWP 50.0ms</b> </p>		
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>      <b>10dB/</b>      <b>△MKR 37.50dB</b>  <b>35.7MHz</b> </p> <p> <b>CENTER 2.3900GHz</b>      <b>SPAN 200.0MHz</b>  <b>*RBW 100kHz</b>      <b>*VBW 100kHz</b>      <b>SWP 110ms</b> </p>		
INTEL-090601-04b	Cond BE, Ch. 3, PK (100kHz/100kHz)	JC



## Band-Edge Plots (Continued)

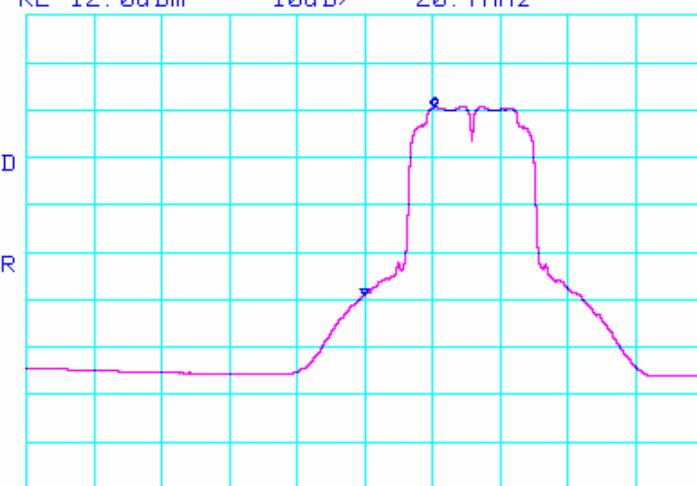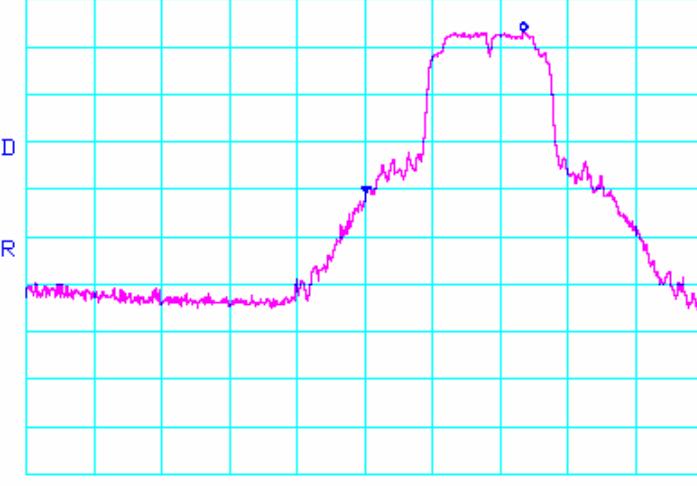Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090601-04c	Cond BE, Ch. 3, AV (1MHz/10Hz)	JC
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 39.67dB</b>  <b>20.7MHz</b> </p> <p> <b>CENTER 2.3900GHz</b>      <b>SPAN 200.0MHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 10Hz</b>      <b>SWP 74.0sec</b> </p>		
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 34.00dB</b>  <b>46.7MHz</b> </p> <p> <b>CENTER 2.3900GHz</b>      <b>SPAN 200.0MHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 1.0MHz</b>      <b>SWP 50.0ms</b> </p>		
Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090601-04d	Cond BE, Ch. 4, PK (1MHz/1MHz)	JC



## Band-Edge Plots (Continued)

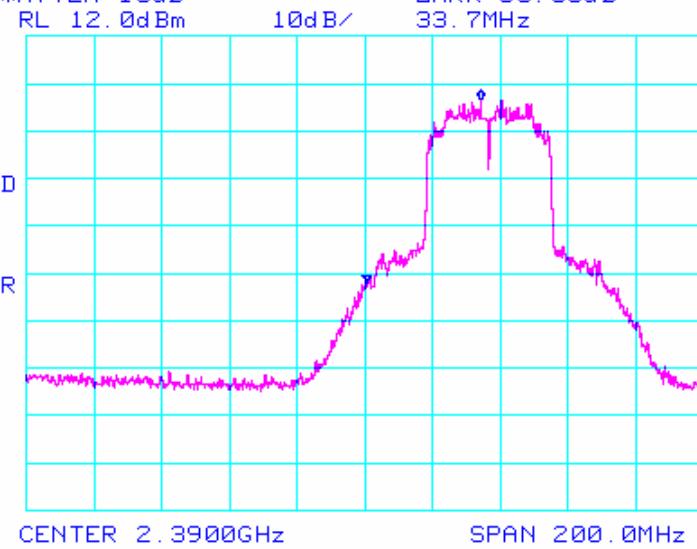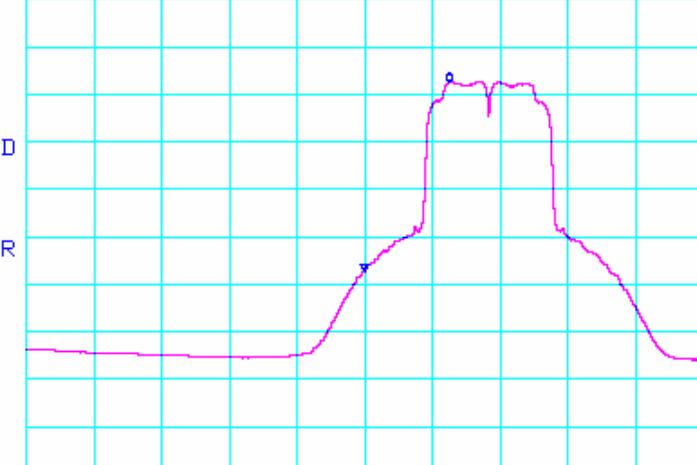Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090601-04e	Cond BE, Ch. 4, PK (100kHz/100kHz)	JC
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 38.50dB</b>  <b>33.7MHz</b> </p> <p> <b>CENTER 2.3900GHz</b>  <b>*RBW 100kHz</b>      <b>*VBW 100kHz</b>      <b>SPAN 200.0MHz</b>  <b>SWP 110ms</b> </p>		
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 39.67dB</b>  <b>25.0MHz</b> </p> <p> <b>CENTER 2.3900GHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 10Hz</b>      <b>SPAN 200.0MHz</b>  <b>SWP 74.0sec</b> </p>		



## Band-Edge Plots (Continued)

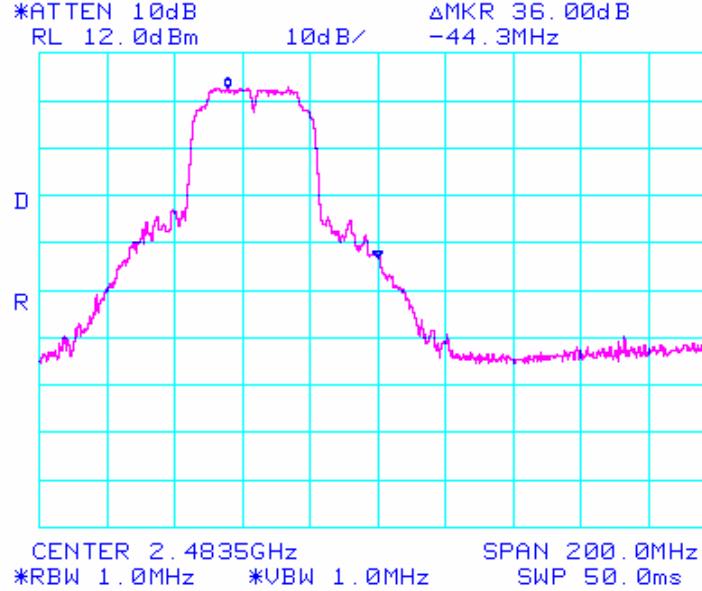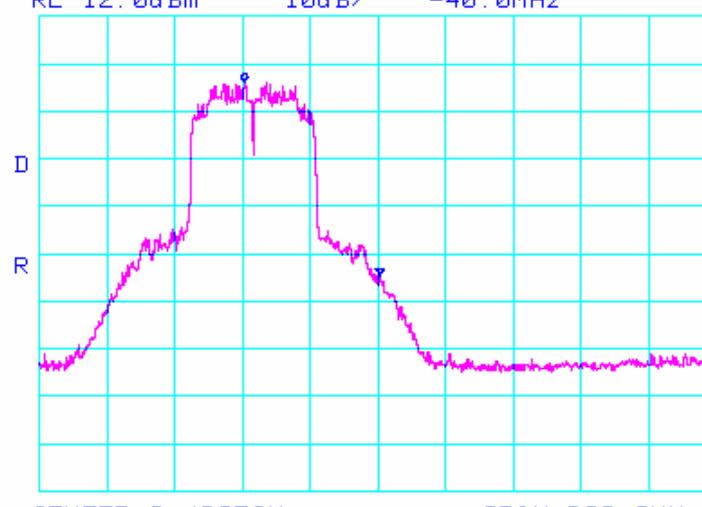Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090601-04g	Cond BE, Ch. 8, PK (1MHz/1MHz)	JC
		
		
INTEL-090601-04h	Cond BE, Ch. 8, PK (100kHz/100kHz)	JC

## Band-Edge Plots (Continued)

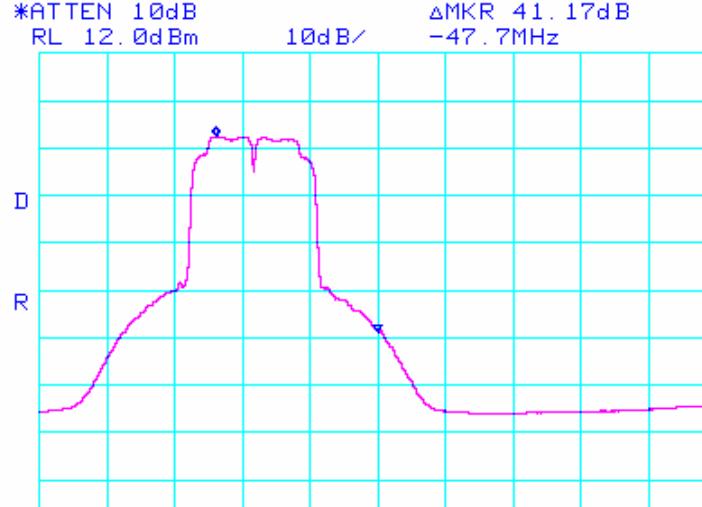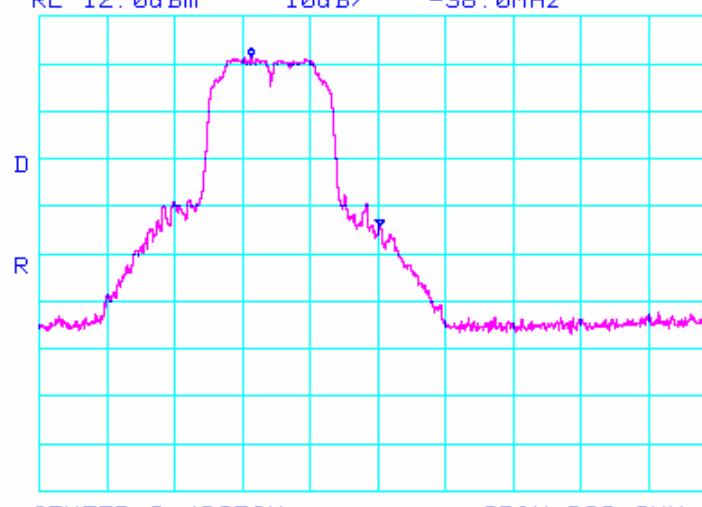Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090601-04i	Cond BE, Ch. 8, AV (1MHz/10Hz)	JC
 <p>         *ATTEN 10dB          RL 12.0dBm      10dB/          ΔMKR 41.17dB          -47.7MHz       </p> <p>         CENTER 2.4835GHz      SPAN 200.0MHz          *RBW 1.0MHz      *VBW 10Hz      SWP 74.0sec       </p>		
 <p>         *ATTEN 10dB          RL 12.0dBm      10dB/          ΔMKR 35.67dB          -38.0MHz       </p> <p>         CENTER 2.4835GHz      SPAN 200.0MHz          *RBW 1.0MHz      *VBW 1.0MHz      SWP 50.0ms       </p>		
INTEL-090601-04j	Cond BE, Ch. 9, PK (1MHz/1MHz)	JC

## Band-Edge Plots (Continued)

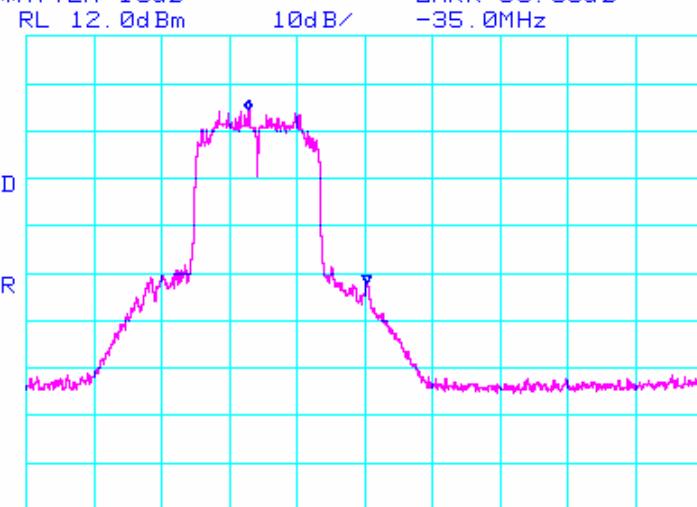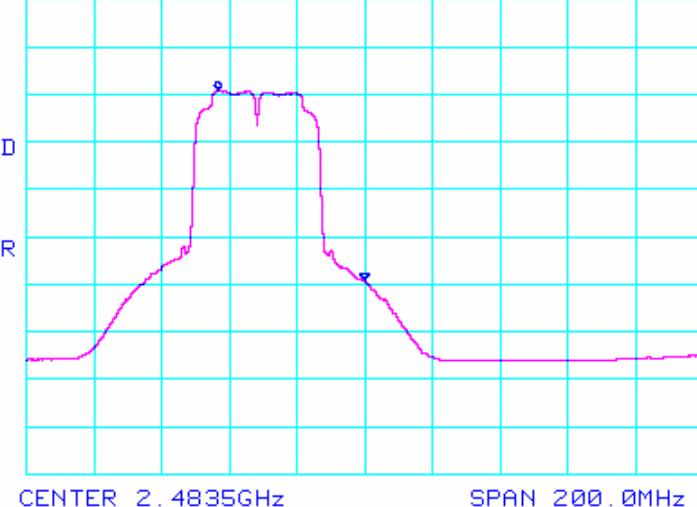Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090601-04k	Cond BE, Ch. 9, PK (100kHz/100kHz)	JC
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 36.50dB</b>  <b>-35.0MHz</b> </p> <p> <b>CENTER 2.4835GHz</b>      <b>SPAN 200.0MHz</b>  <b>*RBW 100kHz</b>      <b>*VBW 100kHz</b>      <b>SWP 110ms</b> </p>		
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 40.00dB</b>  <b>-43.3MHz</b> </p> <p> <b>CENTER 2.4835GHz</b>      <b>SPAN 200.0MHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 10Hz</b>      <b>SWP 74.0sec</b> </p>		

## Radiated Emissions Test Results (Continued)

**Fundamental Measurements in 802.11n mode 40MHz Wide (2400-2483.5 MHz)**

Channels 3, 4, 6, 8, &amp; 9

Continuous TX at Chain B Antenna port with Shanghai Universe Antennas

Aegis Labs, Inc. File #: INTEL-090601-04

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2422.00	62.76	100	315		2.53	32.19	97.48			<b>Ch. 3</b>
2422.00				52.19	A	2.53	32.19	86.91		
2427.00	64.53	100	315		2.53	32.20	99.26			<b>Ch. 4</b>
2427.00				55.37	A	2.53	32.20	90.10		
2437.00	67.34	100	315		2.54	32.21	102.09			<b>Ch. 6</b>
2437.00				56.83	A	2.54	32.21	91.58		
2447.00	64.91	100	315		2.54	32.23	99.68			<b>Ch. 8</b>
2447.00				56.74	A	2.54	32.23	91.51		
2452.00	63.23	100	315		2.55	32.23	98.01			<b>Ch. 9</b>
2452.00				54.69	A	2.55	32.23	89.47		

**RADIATED EMISSIONS - Vertical Antenna Polarization**

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2422.00	61.76	100	180		2.53	31.91	96.20			<b>Ch. 3</b>
2422.00				51.46	A	2.53	31.91	85.90		
2427.00	63.95	100	180		2.53	31.91	98.40			<b>Ch. 4</b>
2427.00				53.76	A	2.53	31.91	88.21		
2437.00	67.08	100	180		2.54	31.92	101.54			<b>Ch. 6</b>
2437.00				56.81	A	2.54	31.92	91.27		
2447.00	64.87	100	180		2.54	31.94	99.35			<b>Ch. 8</b>
2447.00				54.69	A	2.54	31.94	89.17		
2452.00	62.36	100	180		2.55	31.94	96.85			<b>Ch. 9</b>
2452.00				52.42	A	2.55	31.94	86.91		

NOTE: Fundamental signals measured to calculate the band edge field strengths using the "Marker Delta Method".

## Radiated Emissions Test Results (Continued)

*Band Edge Field Strength Measurements in 802.11n mode 40MHz Wide (2400-2483.5 MHz)*  
*Channels 3, 4, 8, & 9*

**Continuous TX at Chain B Antenna port with Shanghai Universe Antennas**  
**Aegis Labs, Inc. File #: INTEL-090601-04**

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							64.65	74.00	-9.35	<b>Ch. 3</b>
2390.00							61.14	74.00	-12.86	
2390.00				A			47.75	54.00	-6.25	
2390.00				A			50.57	54.00	-3.43	
2400.00	31.96	100	315		2.52	32.16	66.64	77.48	-10.84	
2390.00							63.76	74.00	-10.24	<b>Ch. 4</b>
2390.00							59.93	74.00	-14.07	
2390.00				A			50.10	54.00	-3.90	
2390.00				A			50.77	54.00	-3.23	
2400.00	33.46	100	315		2.52	32.16	68.14	71.58	-3.44	
2483.50							63.34	74.00	-10.66	<b>Ch. 8</b>
2483.50							58.68	74.00	-15.32	
2483.50				A			49.84	54.00	-4.16	
2483.50				A			50.51	54.00	-3.49	
2483.50							62.85	74.00	-11.15	<b>Ch. 9</b>
2483.50							57.84	74.00	-16.16	
2483.50				A			49.64	54.00	-4.36	
2483.50				A			49.30	54.00	-4.70	

## Radiated Emissions Test Results (Continued)

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Comments
2390.00							63.37	74.00	-10.63	<b>Ch. 3</b>
2390.00							59.86	74.00	-14.14	
2390.00				A			46.74	54.00	-7.26	
2390.00				A			49.56	54.00	-4.44	
2400.00	34.83	100	180		2.52	31.88	69.23	76.20	-6.97	
2390.00							62.90	74.00	-11.10	<b>Ch. 4</b>
2390.00							59.07	74.00	-14.93	
2390.00				A			48.21	54.00	-5.79	
2390.00				A			48.88	54.00	-5.12	
2400.00	31.67	100	180		2.52	31.88	66.07	71.27	-5.20	
2483.50							63.01	74.00	-10.99	<b>Ch. 8</b>
2483.50							58.35	74.00	-15.65	
2483.50				A			47.50	54.00	-6.50	
2483.50				A			48.17	54.00	-5.83	
2483.50							61.69	74.00	-12.31	<b>Ch. 9</b>
2483.50							56.68	74.00	-17.32	
2483.50				A			47.08	54.00	-6.92	
2483.50				A			46.74	54.00	-7.26	

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

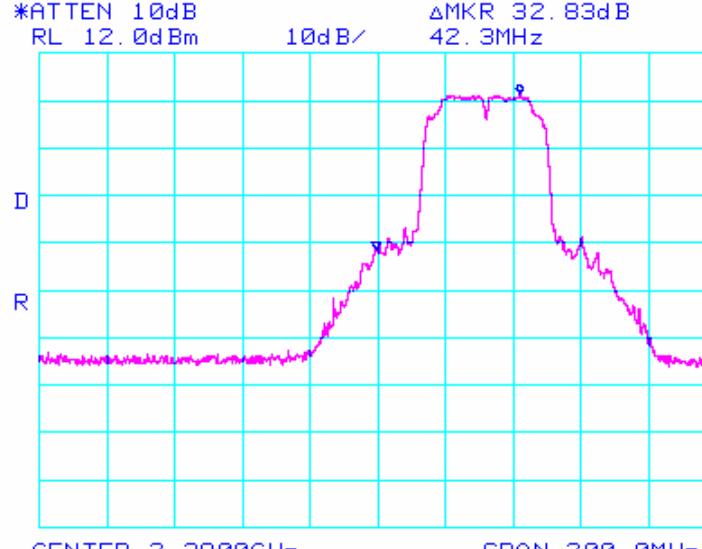
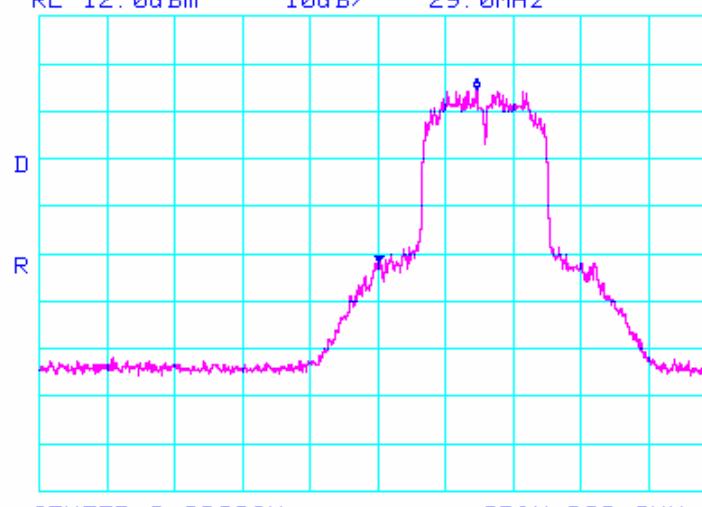
Where

BE = Band Edge Field Strength



Fm = Measured Fundamental (Peak or Average)

$\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)



## Band-Edge Plots (Continued)

Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090526-11a	Cond BE, Ch. 3, PK (1MHz/1MHz)	JC
 *ATTEN 10dB    RL 12.0dBm    10dB/100MHz    ΔMKR 32.83dB 42.3MHz CENTER 2.3900GHz    SPAN 200.0MHz *RBW 1.0MHz    *VBW 1.0MHz    SWP 50.0ms		
 *ATTEN 10dB    RL 12.0dBm    10dB/100MHz    ΔMKR 36.34dB 29.0MHz CENTER 2.3900GHz    SPAN 200.0MHz *RBW 100kHz    *VBW 100kHz    SWP 110ms		
INTEL-090526-11b	Cond BE, Ch. 3, PK (100kHz/100kHz)	JC



## Band-Edge Plots (Continued)

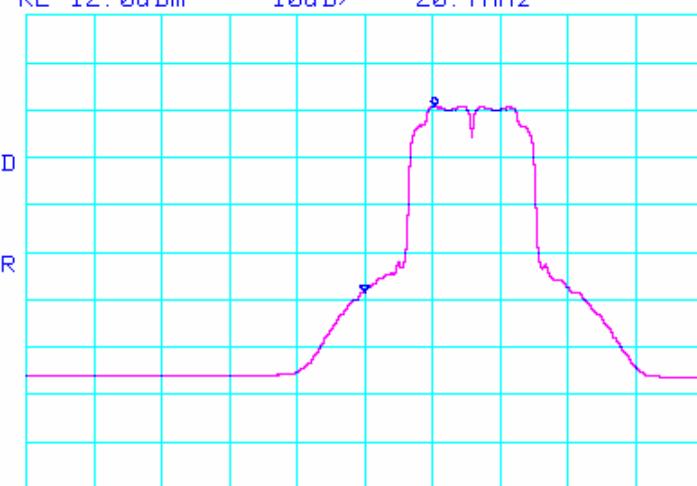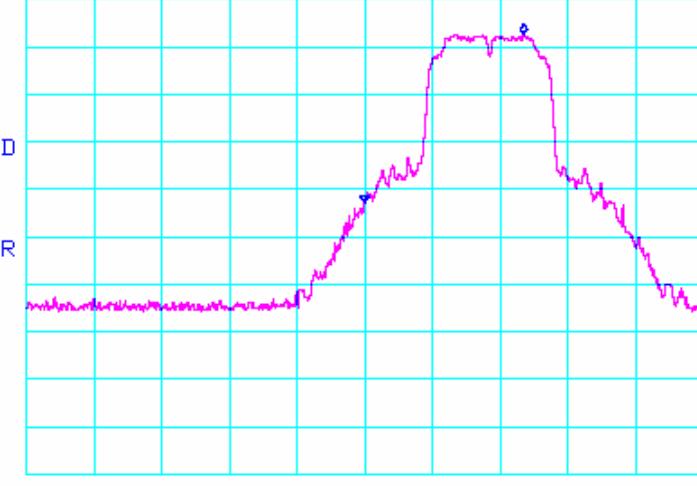Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090526-11c	Cond BE, Ch. 3, AV (1MHz/10Hz)	JC
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 39.16dB</b>  <b>20.7MHz</b> </p> <p> <b>CENTER 2.3900GHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 10Hz</b>      <b>SPAN 200.0MHz</b>  <b>SWP 74.0sec</b> </p>		
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 35.50dB</b>  <b>47.0MHz</b> </p> <p> <b>CENTER 2.3900GHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 1.0MHz</b>      <b>SPAN 200.0MHz</b>  <b>SWP 50.0ms</b> </p>		



## Band-Edge Plots (Continued)

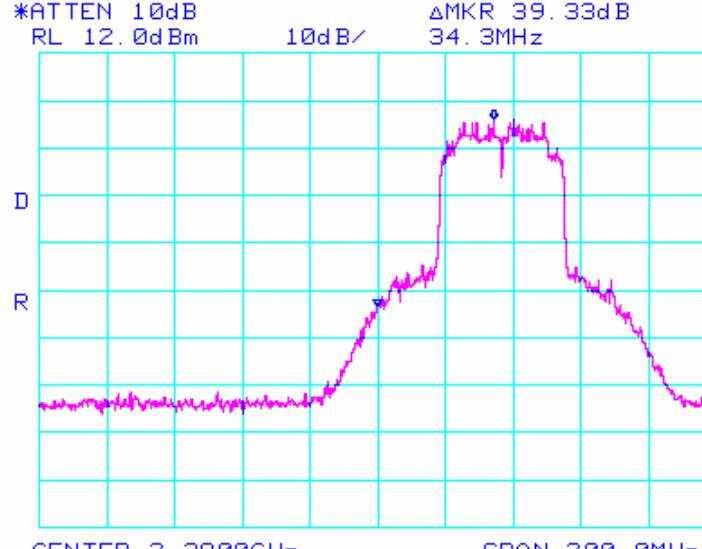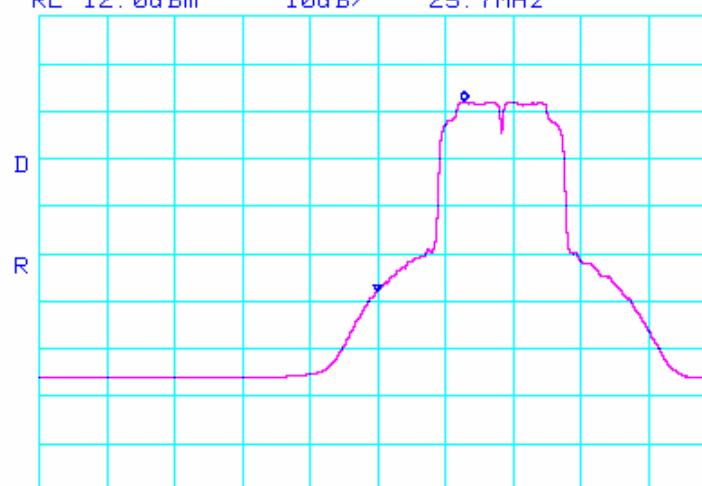Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090526-11e	Cond BE, Ch. 4, PK (100kHz/100kHz)	JC
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 39. 33dB</b>  <b>CENTER 2.3900GHz</b>      <b>SPAN 200.0MHz</b>  <b>*RBW 100kHz</b>      <b>*VBW 100kHz</b>      <b>SWP 110ms</b> </p>		
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 40. 00dB</b>  <b>CENTER 2.3900GHz</b>      <b>SPAN 200.0MHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 10Hz</b>      <b>SWP 74.0sec</b> </p>		
INTEL-090526-11f	Cond BE, Ch. 4, AV (1MHz/10Hz)	JC



## Band-Edge Plots (Continued)

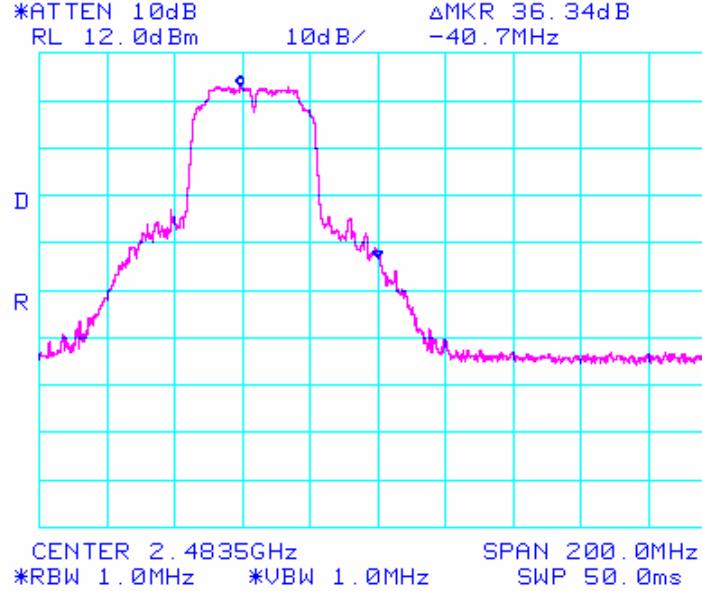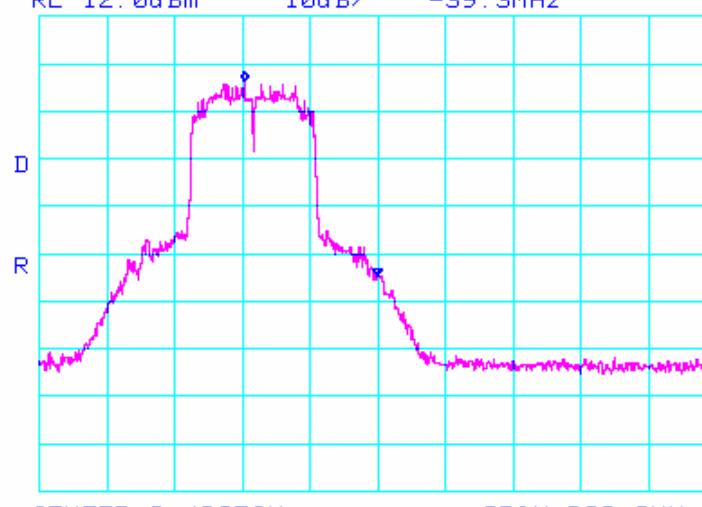Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090526-11g	Cond BE, Ch. 8, PK (1MHz/1MHz)	JC
		
		
INTEL-090526-11h	Cond BE, Ch. 8, PK (100kHz/100kHz)	JC

## Band-Edge Plots (Continued)

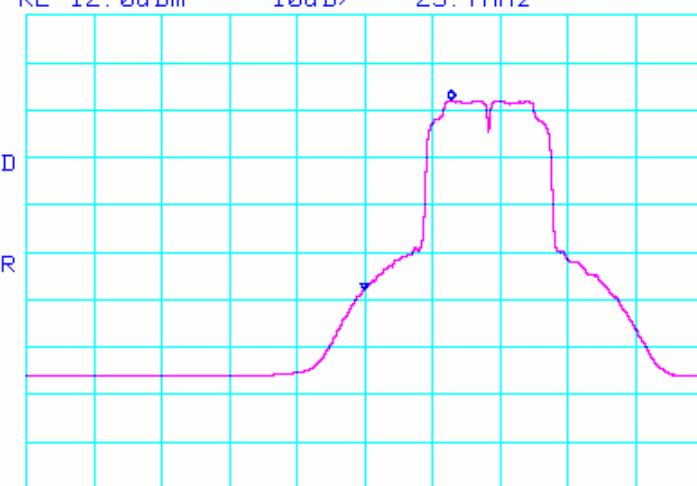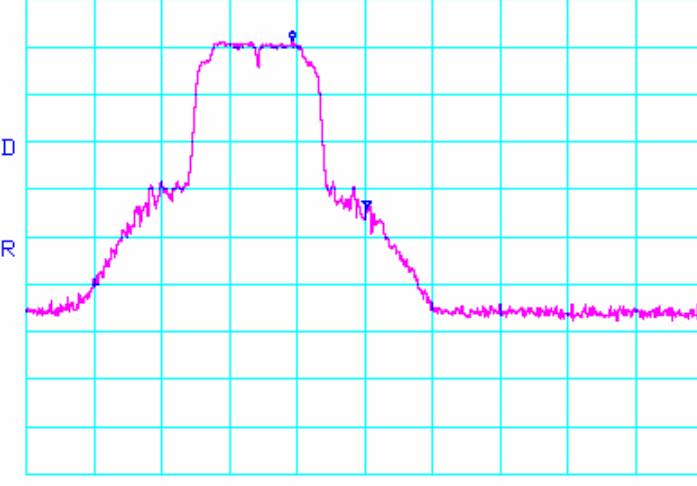Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090526-11i	Cond BE, Ch. 8, AV (1MHz/10Hz)	JC
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 40.00dB</b>  <b>25.7MHz</b> </p> <p> <b>CENTER 2.3900GHz</b>      <b>SPAN 200.0MHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 10Hz</b>      <b>SWP 74.0sec</b> </p>		
 <p> <b>*ATTEN 10dB</b>  <b>RL 12.0dBm</b>      <b>10dB/</b>      <b>ΔMKR 35.16dB</b>  <b>-22.0MHz</b> </p> <p> <b>CENTER 2.4835GHz</b>      <b>SPAN 200.0MHz</b>  <b>*RBW 1.0MHz</b>      <b>*VBW 1.0MHz</b>      <b>SWP 50.0ms</b> </p>		

## Band-Edge Plots (Continued)

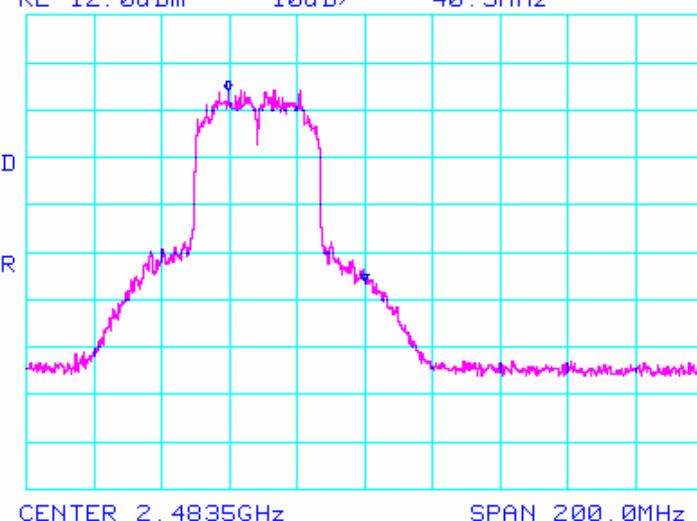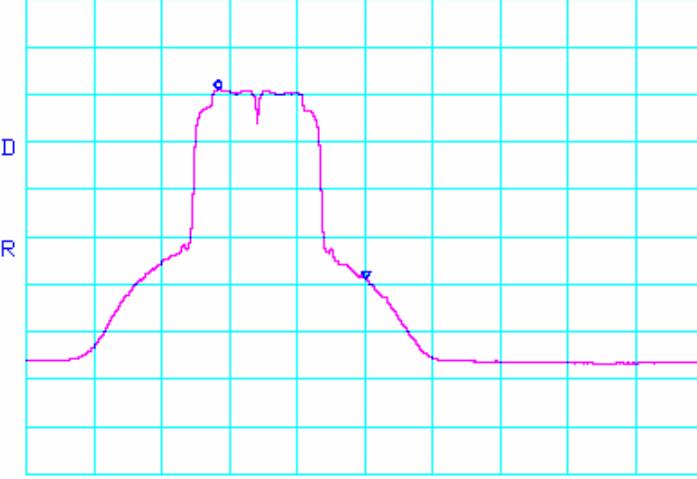Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090526-11k	Cond BE, Ch. 9, PK (100kHz/100kHz)	JC
 *ATTEN 10dB RL 12.0dBm 10dB/ ΔMKR 40. 17dB -40. 3MHz		
CENTER 2.4835GHz SPAN 200.0MHz *RBW 100kHz *VBW 100kHz SWP 110ms		
Plot File Name	Description (RBW/VBW)	Test Eng.
INTEL-090526-11l	Cond BE, Ch. 9, AV (1MHz/10Hz)	JC
 *ATTEN 10dB RL 12.0dBm 10dB/ ΔMKR 39. 83dB -43. 7MHz		
CENTER 2.4835GHz SPAN 200.0MHz *RBW 1.0MHz *VBW 10Hz SWP 74.0sec		

## Radiated Emissions Test Results (Continued)

## Spurious Emissions Measurements in 802.11n mode 40MHz Wide (2400-2483.5 MHz)

Channels 3, 6, &amp; 9

 Continuous TX at **Chain A & B** Antenna ports with **Shanghai Universe Antennas**

Aegis Labs, Inc. File #: INTEL-090601-07

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
3249.32	52.67	100	315		47.61	2.94	32.75	40.75	74.00	-33.25	<b>Ch. 6/A</b>
3249.32	51.67	100	315		47.61	2.94	32.75	39.75	74.00	-34.25	<b>Ch. 6/B</b>
3229.32	51.50	100	315		47.60	2.92	32.75	39.57	74.00	-34.43	<b>Ch. 3/</b>
4843.98	52.83	100	315		47.51	3.61	34.13	43.06	74.00	-30.94	<b>A</b>
4843.98		100	315	40.42	A	47.51	3.61	34.13	30.65	54.00	-23.35
3269.32	52.17	100	315		47.62	2.96	32.75	40.26	74.00	-33.74	<b>Ch. 9/</b>
4903.98	51.50	100	0		47.49	3.66	34.12	41.79	74.00	-32.21	<b>A</b>
4903.98		100	0	39.50	A	47.49	3.66	34.12	29.79	54.00	-24.21

## RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
3249.32	54.17	100	0		47.61	2.94	32.55	42.05	74.00	-31.95	<b>Ch. 6/</b>
6498.64	51.33	100	90		46.93	4.22	35.50	44.12	74.00	-29.88	<b>A</b>
3249.32	53.83	100	45		47.61	2.94	32.55	41.71	74.00	-32.29	<b>Ch. 6/</b>
4873.98	54.50	100	90		47.50	3.64	34.30	44.94	74.00	-29.06	<b>B</b>
4873.98		100	90	41.61	A	47.50	3.64	34.30	32.05	54.00	-21.95
6498.64	51.50	100	90		46.93	4.22	35.50	44.29	74.00	-29.71	
3229.32	54.00	100	45		47.60	2.92	32.55	41.87	74.00	-32.13	<b>Ch. 3/</b>
6458.64	52.67	100	90		46.96	4.21	35.48	45.40	74.00	-28.60	<b>B</b>
3269.32	54.00	100	45		47.62	2.96	32.55	41.89	54.00	-12.11	<b>Ch. 9/B</b>

## Radiated Emissions Test Results (Continued)

**Spurious Emissions Measurements in 802.11n mode 40MHz Wide (2400-2483.5 MHz)**

**Channels 3, 6, & 9**

**Continuous TX at Dual Chain AB Antenna ports with Shanghai Universe Antennas**

**Aegis Labs, Inc. File #: INTEL-090601-07**

RADIATED EMISSIONS - Horizontal Antenna Polarization											
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
3229.33	52.17	100	315		47.60	2.92	32.75	40.24	74.00	-33.76	<b>Ch. 3</b>
6458.66	55.83	100	45		46.96	4.21	35.66	48.73	74.00	-25.27	
3249.32	50.83	100	315		47.61	2.94	32.75	38.91	74.00	-35.09	<b>Ch. 6</b>
6498.64	55.67	100	45		46.93	4.22	35.70	48.66	74.00	-25.34	
3269.32	52.50	100	315		47.62	2.96	32.75	40.59	74.00	-33.41	<b>Ch. 9</b>
6538.64	55.50	100	45		46.87	4.24	35.71	48.58	74.00	-25.42	

**RADIATED EMISSIONS - Vertical Antenna Polarization**

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
3229.32	52.50	100	315		47.60	2.92	32.55	40.37	74.00	-33.63	<b>Ch. 1</b>
6458.64	59.50	100			46.96	4.21	35.48	52.23	74.00	-21.77	
3249.32	52.17	100	0		47.61	2.94	32.55	40.05	74.00	-33.95	<b>Ch. 6</b>
4873.98	51.67	100	90		47.50	3.64	34.30	42.11	74.00	-31.89	
4873.98		100	90	40.32	A	47.50	3.64	34.30	30.76	54.00	-23.24
6498.85	58.50	100	90		46.93	4.22	35.50	51.29	74.00	-22.71	
3269.32	52.33	100	45		47.62	2.96	32.55	40.22	74.00	-33.78	<b>Ch. 11</b>
4904.00	51.83	100	90		47.49	3.66	34.30	42.30	74.00	-31.70	
4904.00		100	90	40.62	A	47.49	3.66	34.30	31.09	54.00	-22.91
6538.66	59.67	100	90		46.87	4.24	35.51	52.55	74.00	-21.45	

## RADIATED EMISSIONS TEST RESULTS

<b>CLIENT:</b>	Intel Corporation	<b>DATE:</b>	08/17/09
<b>EUT:</b>	Intel® Centrino® Ultimate-N 6200	<b>PROJECT NUMBER:</b>	INTEL-090601
<b>MODEL NUMBER:</b>	622ANHMW	<b>TEST ENGINEER:</b>	JC
<b>SERIAL NUMBER:</b>	0015005A3C7C	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested installed in an extender board connected to the host laptop's mini PCI slot in <b>802.11n (5745-5825 MHz) mode 20MHz Wide.</b>	<b>TEMPERATURE:</b>	24° C
		<b>HUMIDITY:</b>	46% RH
		<b>TIME:</b>	9:30 AM

<b>Description:</b>	Radiated RF Emissions (1 GHz – 18 GHz)
<b>Results:</b>	<b>PASSED</b> Horizontal and Vertical Antenna Polarizations Class B Limits
<b>Note:</b>	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> <li>• 120VAC / 60 Hz.</li> </ul>

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

### Radiated Emissions Sample Calculations

Corrected Meter Reading = Meter Reading + F +C - D

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

CML = Specification Limit - F - C + D

## Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 20MHz Wide (5745-5825 MHz)*  
*Channels 149, 157, & 165*

**Continuous TX at Chain A Antenna port with Shanghai Universe Antennas**  
**Aegis Labs, Inc. File #: INTEL-090601-02**

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
5745.00	61.75	100	45		3.98	34.89	100.63			<b>Ch. 149</b>
5745.00				53.15 A	3.98	34.89	92.03			
5785.00	62.34	100	45		4.00	34.94	101.28			<b>Ch. 157</b>
5785.00				53.68 A	4.00	34.94	92.62			
5825.00	61.36	100	45		4.01	34.99	100.36			<b>Ch. 165</b>
5825.00				54.33 A	4.01	34.99	93.33			

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
5745.00	63.39	100	315		3.98	35.05	102.42			<b>Ch. 149</b>
5745.00				52.51 A	3.98	35.05	91.54			
5785.00	62.23	100	315		4.00	35.09	101.31			<b>Ch. 157</b>
5785.00				51.28 A	4.00	35.09	90.36			
5825.00	60.99	100	315		4.01	35.13	100.13			<b>Ch. 165</b>
5825.00				50.73 A	4.01	35.13	89.87			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.

## Radiated Emissions Test Results (Continued)

**Band Edge Field Strength Measurements in 802.11n mode 20MHz Wide (5745-5825 MHz)**

**Channels 149 & 165**

**Continuous TX at Chain A Antenna port with Shanghai Universe Antennas**

**Aegis Labs, Inc. File #: INTEL-090601-02**

<b>RADIATED EMISSIONS - Horizontal Antenna Polarization</b>										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5725.00	31.59	100	45		3.98	34.87	70.44	80.63	-10.19	<b>Ch. 149</b>
5850.00	28.94	100	45		4.02	35.02	67.98	80.36	-12.38	<b>Ch. 165</b>

<b>RADIATED EMISSIONS - Vertical Antenna Polarization</b>										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5725.00	32.03	100	315		3.98	35.03	71.03	82.42	-11.39	<b>Ch. 149</b>
5850.00	29.48	100	315		4.02	35.15	68.65	80.13	-11.48	<b>Ch. 165</b>

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

$\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

## Radiated Emissions Test Results (Continued)

*Fundamental Measurements in 802.11n mode 20MHz Wide (5745-5825 MHz)*

*Channels 149, 157, & 165*

*Continuous TX at Chain B Antenna port with Shanghai Universe Antennas*

*Aegis Labs, Inc. File #: INTEL-090601-04*

RADIATED EMISSIONS - Horizontal Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
5745.00	63.67	100	315		3.98	34.89	102.55			<b>Ch. 149</b>
5745.00				53.83	A	3.98	34.89	92.71		
5785.00	62.83	100	315		4.00	34.94	101.77			<b>Ch. 157</b>
5785.00				53.00	A	4.00	34.94	91.94		
5825.00	62.17	100	315		4.01	34.99	101.17			<b>Ch. 165</b>
5825.00				52.50	A	4.01	34.99	91.50		

RADIATED EMISSIONS - Vertical Antenna Polarization										
Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) + = FAIL	Comments
5745.00	63.67	100	315		3.98	35.05	102.70			<b>Ch. 149</b>
5745.00				52.83	A	3.98	35.05	91.86		
5785.00	62.50	100	315		4.00	35.09	101.58			<b>Ch. 157</b>
5785.00				51.67	A	4.00	35.09	90.75		
5825.00	60.83	100	315		4.01	35.13	99.97			<b>Ch. 165</b>
5825.00				50.83	A	4.01	35.13	89.97		

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.

## Radiated Emissions Test Results (Continued)

***Band Edge Field Strength Measurements in 802.11n mode 20MHz Wide (5745-5825 MHz)***

***Channels 149 & 165***

***Continuous TX at Chain B Antenna port with Shanghai Universe Antennas***

***Aegis Labs, Inc. File #: INTEL-090601-04***

<b>RADIATED EMISSIONS - Horizontal Antenna Polarization</b>										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5725.00	35.00	100	45		3.98	34.87	73.85	82.55	-8.70	<b>Ch. 149</b>
5850.00	31.83	100	45		4.02	35.02	70.87	81.17	-10.30	<b>Ch. 165</b>

<b>RADIATED EMISSIONS - Vertical Antenna Polarization</b>										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5725.00	36.50	100	315		3.98	35.03	75.50	82.70	-7.20	<b>Ch. 149</b>
5850.00	31.67	100	315		4.02	35.15	70.84	79.97	-9.13	<b>Ch. 165</b>

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

$\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

## Radiated Emissions Test Results (Continued)

**Spurious Emissions Measurements in 802.11n mode 20MHz Wide (5745-5825 MHz)****Channels 149, 157, & 165****Continuous TX at Chain A & B Antenna ports with Shanghai Universe Antennas**

Aegis Labs, Inc. File #: INTEL-090601-07

**RADIATED EMISSIONS - Horizontal Antenna Polarization**

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +FAIL	Channel/Chain Tested	
3856.66	52.67	100	0		47.58	3.22	33.23	41.54	74.00	-32.46	<b>Ch. 157/</b>	
3856.66		100	0	40.71	A	47.58	3.22	33.23	29.58	54.00	-24.42	<b>A</b>
7713.32	53.17	100	0		45.55	4.67	35.83	48.12	74.00	-25.88		
7713.32		100	0	44.11	A	45.55	4.67	35.83	39.06	54.00	-14.94	
3856.66	53.50	100	0		47.58	3.22	33.23	42.37	74.00	-31.63	<b>Ch. 157/</b>	
3856.66		100	0	42.80	A	47.58	3.22	33.23	31.67	54.00	-22.33	<b>B</b>
7713.32	53.00	100	0		45.55	4.67	35.83	47.95	74.00	-26.05		
7713.32		100	0	44.36	A	45.55	4.67	35.83	39.31	54.00	-14.69	
3830.00	53.00	100	0		47.56	3.23	33.20	41.87	74.00	-32.13	<b>Ch. 149/</b>	
3830.00		100	0	42.42	A	47.56	3.23	33.20	31.29	54.00	-22.71	<b>B</b>
7660.00	53.83	100	0		45.57	4.65	35.80	48.70	74.00	-25.30		
7660.00		100	0	45.99	A	45.57	4.65	35.80	40.86	54.00	-13.14	
3883.33	53.67	100	0		47.60	3.22	33.26	42.55	74.00	-31.45	<b>Ch.165/</b>	
3883.33		100	0	43.02	A	47.60	3.22	33.26	31.90	54.00	-22.10	<b>B</b>
7766.66	52.00	100	0		45.52	4.68	35.86	47.02	74.00	-26.98		
7766.66		100	0	42.73	A	45.52	4.68	35.86	37.75	54.00	-16.25	

**RADIATED EMISSIONS - Vertical Antenna Polarization**

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +FAIL	Channel/Chain Tested	
3856.66	54.00	100	0		47.58	3.22	33.17	42.81	74.00	-31.19	<b>Ch. 157/</b>	
3856.66		100	0	42.65	A	47.58	3.22	33.17	31.46	54.00	-22.54	<b>A</b>
7713.32	52.67	100	315		45.55	4.67	35.79	47.57	74.00	-26.43		
7713.32		100	315	42.87	A	45.55	4.67	35.79	37.77	54.00	-16.23	
11569.98	52.50	100	0		45.34	5.93	38.36	51.44	74.00	-22.56		
11569.98		100	0	40.02	A	45.34	5.93	38.36	38.96	54.00	-15.04	
3856.66	53.17	100	0		47.58	3.22	33.17	41.98	74.00	-32.02	<b>Ch. 157/</b>	
3856.66		100	0	44.30	A	47.58	3.22	33.17	33.11	54.00	-20.89	<b>B</b>
7713.32	53.33	100	0		45.55	4.67	35.79	48.23	74.00	-25.77		
7713.32		100	0	44.54	A	45.55	4.67	35.79	39.44	54.00	-14.56	
3830.00	54.17	100	0		47.56	3.23	33.13	42.97	74.00	-31.03	<b>Ch. 149/</b>	
3830.00		100	0	42.80	A	47.56	3.23	33.13	31.60	54.00	-22.40	<b>B</b>
7660.00	53.67	100	0		45.57	4.65	35.76	48.51	74.00	-25.49		
7660.00		100	0	45.07	A	45.57	4.65	35.76	39.91	54.00	-14.09	
3883.33	53.67	100	0		47.60	3.22	33.21	42.50	74.00	-31.50	<b>Ch.165/</b>	
3883.33		100	0	44.78	A	47.60	3.22	33.21	33.61	54.00	-20.39	<b>B</b>
7766.66	52.67	100	0		45.52	4.68	35.81	47.63	74.00	-26.37		
7766.66		100	0	42.87	A	45.52	4.68	35.81	37.83	54.00	-16.17	

## RADIATED EMISSIONS TEST RESULTS

<b>CLIENT:</b>	Intel Corporation	<b>DATE:</b>	08/17/09
<b>EUT:</b>	Intel® Centrino® Ultimate-N 6200	<b>PROJECT NUMBER:</b>	INTEL-090601
<b>MODEL NUMBER:</b>	622ANHMW	<b>TEST ENGINEER:</b>	JC
<b>SERIAL NUMBER:</b>	0015005A3C7C	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested installed in an extender board connected to the host laptop's mini PCI slot in <b>802.11n (5745-5825 MHz) mode 40MHz Wide.</b>	<b>TEMPERATURE:</b>	24° C
		<b>HUMIDITY:</b>	46% RH
		<b>TIME:</b>	9:30 AM

<b>Description:</b>	Radiated RF Emissions (1 GHz – 18 GHz)
<b>Results:</b>	<b>PASSED</b> Horizontal and Vertical Antenna Polarizations Class B Limits
<b>Note:</b>	Radiated Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> <li>• 120VAC / 60 Hz.</li> </ul>

Unwanted Spurious Emissions Limits			
Frequency (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m) (Emissions in the restricted bands)	Field Strength (dBm/MHz) (Emissions outside the restricted bands)
Above 960	500	54.00 (Average) 74.00 (Peak)	< -20 dBc

### Radiated Emissions Sample Calculations

Corrected Meter Reading = Meter Reading + F +C - D

Where, F = Antenna Factor

C = Cable Factor

G = Amplifier Gain

D = Distance Factor (if applicable)

Therefore, the equation for determining the Corrected Meter Reading Limit (CML) is:

CML = Specification Limit - F - C + D



## Radiated Emissions Test Results (Continued)

**Fundamental Measurements in 802.11n mode 40MHz Wide (5745-5825 MHz)**

**Channels 151 & 159**

**Continuous TX at Chain A Antenna port with Shanghai Universe Antennas**

**Aegis Labs, Inc. File #: INTEL-090601-02**

<b>RADIATED EMISSIONS - Horizontal Antenna Polarization</b>										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5755.00	59.46	100	45		3.99	34.91	98.35			<b>Ch. 151</b>
5755.00				51.04	A	3.99	34.91	89.93		
5795.00	60.37	100	0		4.00	34.95	99.33			<b>Ch. 159</b>
5795.00				51.39	A	4.00	34.95	90.35		

### RADIATED EMISSIONS - Vertical Antenna Polarization

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5755.00	61.26	100	315		3.99	35.06	100.30			<b>Ch. 151</b>
5755.00				51.74	A	3.99	35.06	90.78		
5795.00	59.39	100	315		4.00	35.10	98.49			<b>Ch. 159</b>
5795.00				50.11	A	4.00	35.10	89.21		

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.

## Radiated Emissions Test Results (Continued)

**Band Edge Field Strength Measurements in 802.11n mode 40MHz Wide (5745-5825 MHz)**

**Channels 151 & 159**

**Continuous TX at Chain A Antenna port with Shanghai Universe Antennas**

**Aegis Labs, Inc. File #: INTEL-090601-02**

<b>RADIATED EMISSIONS - Horizontal Antenna Polarization</b>										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5725.00	29.68	100	45		3.98	34.87	68.53	78.35	-9.83	<b>Ch. 151</b>
5850.00	29.51	100	0		4.02	35.02	68.55	79.33	-10.77	<b>Ch. 159</b>

<b>RADIATED EMISSIONS - Vertical Antenna Polarization</b>										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5725.00	30.67	100	315		3.98	35.03	69.67	80.30	-10.63	<b>Ch. 151</b>
5850.00	31.16	100	315		4.02	35.15	70.33	78.49	-8.15	<b>Ch. 159</b>

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

$\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

## Radiated Emissions Test Results (Continued)

**Fundamental Measurements in 802.11n mode 40MHz Wide (5745-5825 MHz)**

**Channels 151 & 159**

**Continuous TX at Chain B Antenna port with Shanghai Universe Antennas**

**Aegis Labs, Inc. File #: INTEL-090601-04**

<b>RADIATED EMISSIONS - Horizontal Antenna Polarization</b>										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5755.00	60.17	100	315		3.99	34.91	99.06			<b>Ch. 151</b>
5755.00				51.00 A	3.99	34.91	89.89			
5795.00	59.50	100	315		4.00	34.95	98.46			<b>Ch. 159</b>
5795.00				50.17 A	4.00	34.95	89.13			

**RADIATED EMISSIONS - Vertical Antenna Polarization**

<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5755.00	62.50	100	90		3.99	35.06	101.54			<b>Ch. 151</b>
5755.00				52.17 A	3.99	35.06	91.21			
5795.00	59.17	100	90		4.00	35.10	98.27			<b>Ch. 159</b>
5795.00				49.50 A	4.00	35.10	88.60			

NOTE: Fundamental signals measured to calculate the band edge field strengths using the “Marker Delta Method”.

## Radiated Emissions Test Results (Continued)

**Band Edge Field Strength Measurements in 802.11n mode 40MHz Wide (5745-5825 MHz)**

**Channels 151 & 159**

**Continuous TX at Chain B Antenna port with Shanghai Universe Antennas**

**Aegis Labs, Inc. File #: INTEL-090601-04**

<b>RADIATED EMISSIONS - Horizontal Antenna Polarization</b>										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5725.00	34.17	100	315		3.98	34.87	73.02	79.06	-6.05	<b>Ch. 151</b>
5850.00	30.50	100	315		4.02	35.02	69.54	78.46	-8.91	<b>Ch. 159</b>

<b>RADIATED EMISSIONS - Vertical Antenna Polarization</b>										
<i>Freq. (MHz)</i>	<i>Meter Reading (dBuV)</i>	<i>Antenna Height (cm)</i>	<i>Azimuth (degrees)</i>	<i>Quasi pk or AVG (dBuV)</i>	<i>Cable Factor (dB)</i>	<i>Ant. Factor (dB)</i>	<i>Corrected Reading (dBuV)</i>	<i>Limits (dBuV)</i>	<i>Diff (dB) +=FAIL</i>	<i>Comments</i>
5725.00	36.50	100	90		3.98	35.03	75.50	81.54	-6.04	<b>Ch. 151</b>
5850.00	33.83	100	90		4.02	35.15	73.00	78.27	-5.26	<b>Ch. 159</b>

NOTE: The “Band Edge Field Strength” was calculated using the “Fundamental” and “Conducted Band Edge” measurements per the “Marker-Delta Method” with the following formula:

$$BE = Fm - \Delta m$$

Where

BE = Band Edge Field Strength

Fm = Measured Fundamental (Peak or Average)

$\Delta m$  = Measured Conducted Band Edge Delta (Peak or Average)

## Radiated Emissions Test Results (Continued)

Spurious Emissions Measurements in 802.11n mode 40MHz Wide (5745-5825 MHz)

Channels 151 &amp; 159

Continuous TX at Dual Chain AB Antenna ports with Shanghai Universe Antennas

Aegis Labs, Inc. File #: INTEL-090601-07

## RADIATED EMISSIONS - Horizontal Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
3836.66	54.17	100	315		47.57	3.23	33.20	43.04	74.00	-30.96	<b>Ch. 151</b>
3836.66		100	315	42.18	A	47.57	3.23	33.20	31.05	54.00	-22.95
7673.33	53.00	100	0		45.57	4.66	35.80	47.89	74.00	-26.11	
7673.33		100	0	44.17	A	45.57	4.66	35.80	39.06	54.00	-14.94
11510.00	52.83	100	45		45.32	5.91	38.31	51.73	74.00	-22.27	
11510.00		100	45	43.09	A	45.32	5.91	38.31	41.99	54.00	-12.01
3863.33	53.33	100	315		47.58	3.22	33.24	42.20	74.00	-31.80	<b>Ch.159</b>
3863.33		100	315	41.17	A	47.58	3.22	33.24	30.04	54.00	-23.96
7726.66	51.83	100	315		45.54	4.67	35.84	46.79	74.00	-27.21	
7726.66		100	315	40.23	A	45.54	4.67	35.84	35.19	54.00	-18.81
11590.00	56.50	100	45		45.34	5.93	38.37	55.46	74.00	-18.54	
11590.00		100	45	46.40	A	45.34	5.93	38.37	45.36	54.00	-8.64

## RADIATED EMISSIONS - Vertical Antenna Polarization

Freq. (MHz)	Meter Reading (dBuV)	Antenna Height (cm)	Azimuth (degrees)	Quasi pk or AVG (dBuV)	Preamp Factor (dB)	Cable Factor (dB)	Ant. Factor (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Diff (dB) +=FAIL	Channel/Chain Tested
3836.66	53.17	100	0		47.57	3.23	33.14	41.97	74.00	-32.03	<b>Ch. 151</b>
3836.66		100	0	41.44	A	47.57	3.23	33.14	30.24	54.00	-23.76
7673.33	56.33	100	0		45.57	4.66	35.77	51.19	74.00	-22.81	
7673.33		100	0	51.94	A	45.57	4.66	35.77	46.80	54.00	-7.20
11510.00	52.67	100	0		45.32	5.91	38.31	51.57	74.00	-22.43	
11510.00		100	0	42.42	A	45.32	5.91	38.31	41.32	54.00	-12.68
3863.33	53.00	100	0		47.58	3.22	33.18	41.82	74.00	-32.18	<b>Ch.159</b>
3863.33		100	0	41.69	A	47.58	3.22	33.18	30.51	54.00	-23.49
7726.66	55.50	100	0		45.54	4.67	35.79	50.42	74.00	-23.58	
7726.66		100	0	49.17	A	45.54	4.67	35.79	44.09	54.00	-9.91
11590.00	54.50	100	0		45.34	5.93	38.37	53.46	74.00	-20.54	
11590.00		100	0	45.84	A	45.34	5.93	38.37	44.80	54.00	-9.20

## MAXIMUM CONDUCTED OUTPUT POWER

<b>CLIENT:</b>	Intel Corporation	<b>DATE:</b>	07/30/09
<b>EUT:</b>	Intel® Centrino® Ultimate-N 6200	<b>PROJECT NUMBER:</b>	INTEL-090601
<b>MODEL NUMBER:</b>	622ANHMW	<b>TEST ENGINEER:</b>	JC
<b>SERIAL NUMBER:</b>	0015005A3C7C	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested installed in an extender board connected to the host laptop's mini PCI slot	<b>TEMPERATURE:</b>	22 deg. C
		<b>HUMIDITY:</b>	54% RH
		<b>TIME:</b>	8:00 AM

<b>Description:</b>	The maximum conducted output power is the highest total transmit power occurring in any mode
<b>Results:</b>	Passed (See Data Sheet)
<b>Note:</b>	Conducted Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"> <li>• 120VAC / 60 Hz.</li> </ul>

## Maximum Conducted Output Power (Continued)

Mode	Channel	Frequency (MHz)	Chain	Data Rate (Mbps)	Average Power* (dBm)	Average Power* (mW)	Output Power** (dBm)	Output Power** (mW)
<b>802.11a</b>	149	5745	A	6	16.53	<b>45.02</b>	16.74	<b>47.25</b>
<b>802.11a</b>	157	5785	A	6	16.72	<b>47.03</b>	16.94	<b>49.47</b>
<b>802.11a</b>	165	5825	A	6	16.33	<b>42.99</b>	16.64	<b>46.17</b>
<b>802.11a</b>	149	5745	B	6	16.46	<b>44.30</b>	16.64	<b>46.17</b>
<b>802.11a</b>	157	5785	B	6	16.56	<b>45.33</b>	16.84	<b>48.35</b>
<b>802.11a</b>	165	5825	B	6	16.62	<b>45.96</b>	16.94	<b>49.47</b>
<b>802.11b</b>	1	2412	A	1	16.47	<b>44.36</b>	16.60	<b>45.71</b>
<b>802.11b</b>	6	2437	A	1	16.34	<b>43.05</b>	16.50	<b>44.67</b>
<b>802.11b</b>	11	2462	A	1	16.51	<b>44.77</b>	16.70	<b>46.77</b>
<b>802.11b</b>	1	2412	B	1	16.60	<b>45.71</b>	16.80	<b>47.86</b>
<b>802.11b</b>	6	2437	B	1	16.43	<b>43.95</b>	16.60	<b>45.71</b>
<b>802.11b</b>	11	2462	B	1	16.64	<b>46.13</b>	16.80	<b>47.86</b>
<b>802.11g</b>	1	2412	A	6	15.36	<b>34.38</b>	15.54	<b>35.84</b>
<b>802.11g</b>	6	2437	A	6	16.53	<b>45.02</b>	16.74	<b>47.25</b>
<b>802.11g</b>	11	2462	A	6	15.45	<b>35.10</b>	15.64	<b>36.67</b>
<b>802.11g</b>	1	2412	B	6	15.62	<b>36.51</b>	15.84	<b>38.40</b>
<b>802.11g</b>	6	2437	B	6	16.41	<b>43.79</b>	16.64	<b>46.17</b>
<b>802.11g</b>	11	2462	B	6	15.65	<b>36.76</b>	15.84	<b>38.40</b>
<b>802.11n</b>	1	2412	A	HT0	14.70	<b>29.54</b>	14.94	<b>31.22</b>
<b>802.11n</b>	6	2437	A	HT0	16.49	<b>44.60</b>	16.74	<b>47.25</b>
<b>802.11n</b>	11	2462	A	HT0	14.40	<b>27.57</b>	14.64	<b>29.13</b>
<b>802.11n</b>	1	2412	B	HT0	14.53	<b>28.40</b>	14.74	<b>29.81</b>
<b>802.11n</b>	6	2437	B	HT0	16.40	<b>43.69</b>	16.64	<b>46.17</b>
<b>802.11n</b>	11	2462	B	HT0	14.27	<b>26.75</b>	14.54	<b>28.47</b>
<b>802.11n</b>	149	5745	A	HT0	16.55	<b>45.22</b>	16.64	<b>46.17</b>
<b>802.11n</b>	157	5785	A	HT0	16.38	<b>43.49</b>	16.54	<b>45.12</b>
<b>802.11n</b>	165	5825	A	HT0	16.45	<b>44.19</b>	16.64	<b>46.17</b>
<b>802.11n</b>	149	5745	B	HT0	16.60	<b>45.75</b>	16.84	<b>48.35</b>
<b>802.11n</b>	157	5785	B	HT0	16.38	<b>43.49</b>	16.64	<b>46.17</b>
<b>802.11n</b>	165	5825	B	HT0	16.45	<b>44.19</b>	16.74	<b>47.25</b>

\*NOTE: The Average power is measured conducted, using power meter with average power sensor.

\*\*NOTE: The output power is measured conducted, using spectrum analyzer.

## Peak Transmit Power (Continued)

Mode	Channel	Frequency (MHz)	Chain	Data Rate (Mbps)	Average Power* (dBm)	Average Power* (mW)	Output Power** (dBm)	Output Power** (mW)
<b>802.11n (40MHz)</b>	3(F)	2422	A	HT0	12.15	<b>16.42</b>	12.44	<b>17.55</b>
<b>802.11n (40MHz)</b>	4(F)	2427	A	HT0	13.72	<b>23.57</b>	13.94	<b>24.80</b>
<b>802.11n (40MHz)</b>	6(F)	2437	A	HT0	16.35	<b>43.19</b>	16.54	<b>45.12</b>
<b>802.11n (40MHz)</b>	8(F)	2447	A	HT0	13.67	<b>23.30</b>	13.84	<b>24.23</b>
<b>802.11n (40MHz)</b>	9(F)	2452	A	HT0	12.17	<b>16.50</b>	12.54	<b>17.96</b>
<b>802.11n (40MHz)</b>	3(F)	2422	B	HT0	12.14	<b>16.38</b>	12.44	<b>17.55</b>
<b>802.11n (40MHz)</b>	4(F)	2427	B	HT0	13.68	<b>23.35</b>	13.84	<b>24.23</b>
<b>802.11n (40MHz)</b>	6(F)	2437	B	HT0	16.19	<b>41.63</b>	16.44	<b>44.09</b>
<b>802.11n (40MHz)</b>	8(F)	2447	B	HT0	13.60	<b>22.93</b>	13.84	<b>24.23</b>
<b>802.11n (40MHz)</b>	9(F)	2452	B	HT0	12.26	<b>16.84</b>	12.44	<b>17.55</b>
<b>802.11n (40MHz)</b>	151(F)	5755	A	HT0	16.54	<b>45.06</b>	16.89	<b>48.84</b>
<b>802.11n (40MHz)</b>	159(F)	5795	A	HT0	16.40	<b>43.63</b>	16.79	<b>47.73</b>
<b>802.11n (40MHz)</b>	151(F)	5755	B	HT0	16.58	<b>45.48</b>	16.79	<b>47.73</b>
<b>802.11n (40MHz)</b>	159(F)	5795	B	HT0	16.62	<b>45.90</b>	16.79	<b>47.73</b>

**Dual Chain AB Aggregate Power**

Mode	Channel	Frequency (MHz)	Chain	Data Rate (Mbps)	Average Power* (dBm)	Average Power* (mW)	Output Power** (dBm)	Output Power** (mW)
<b>802.11n (20MHz)</b>	1	2412	AB	HT8	14.29	<b>26.88</b>	14.50	<b>28.21</b>
<b>802.11n (20MHz)</b>	6	2437	AB	HT8	16.60	<b>45.75</b>	16.76	<b>47.37</b>
<b>802.11n (20MHz)</b>	11	2462	AB	HT8	14.27	<b>26.70</b>	14.46	<b>27.92</b>
<b>802.11n (40MHz)</b>	3(F)	2422	AB	HT8	12.21	<b>16.63</b>	12.46	<b>17.60</b>
<b>802.11n (40MHz)</b>	6(F)	2437	AB	HT8	16.61	<b>45.82</b>	16.80	<b>47.91</b>
<b>802.11n (40MHz)</b>	9(F)	2452	AB	HT8	12.25	<b>16.79</b>	12.50	<b>17.80</b>
<b>802.11n (20MHz)</b>	149	5745	AB	HT8	16.72	<b>47.04</b>	16.90	<b>49.03</b>
<b>802.11n (20MHz)</b>	157	5785	AB	HT8	16.59	<b>45.65</b>	16.76	<b>47.37</b>
<b>802.11n (20MHz)</b>	165	5825	AB	HT8	16.69	<b>46.71</b>	16.80	<b>47.91</b>
<b>802.11n (40MHz)</b>	151(F)	5755	AB	HT8	16.66	<b>46.34</b>	16.80	<b>47.85</b>
<b>802.11n (40MHz)</b>	159(F)	5795	AB	HT8	16.57	<b>45.43</b>	16.80	<b>47.84</b>

\*NOTE: The Average power is measured conducted, using power meter with average power sensor.

\*\*NOTE: The output power is measured conducted, using spectrum analyzer.

(F) = Fat Channel

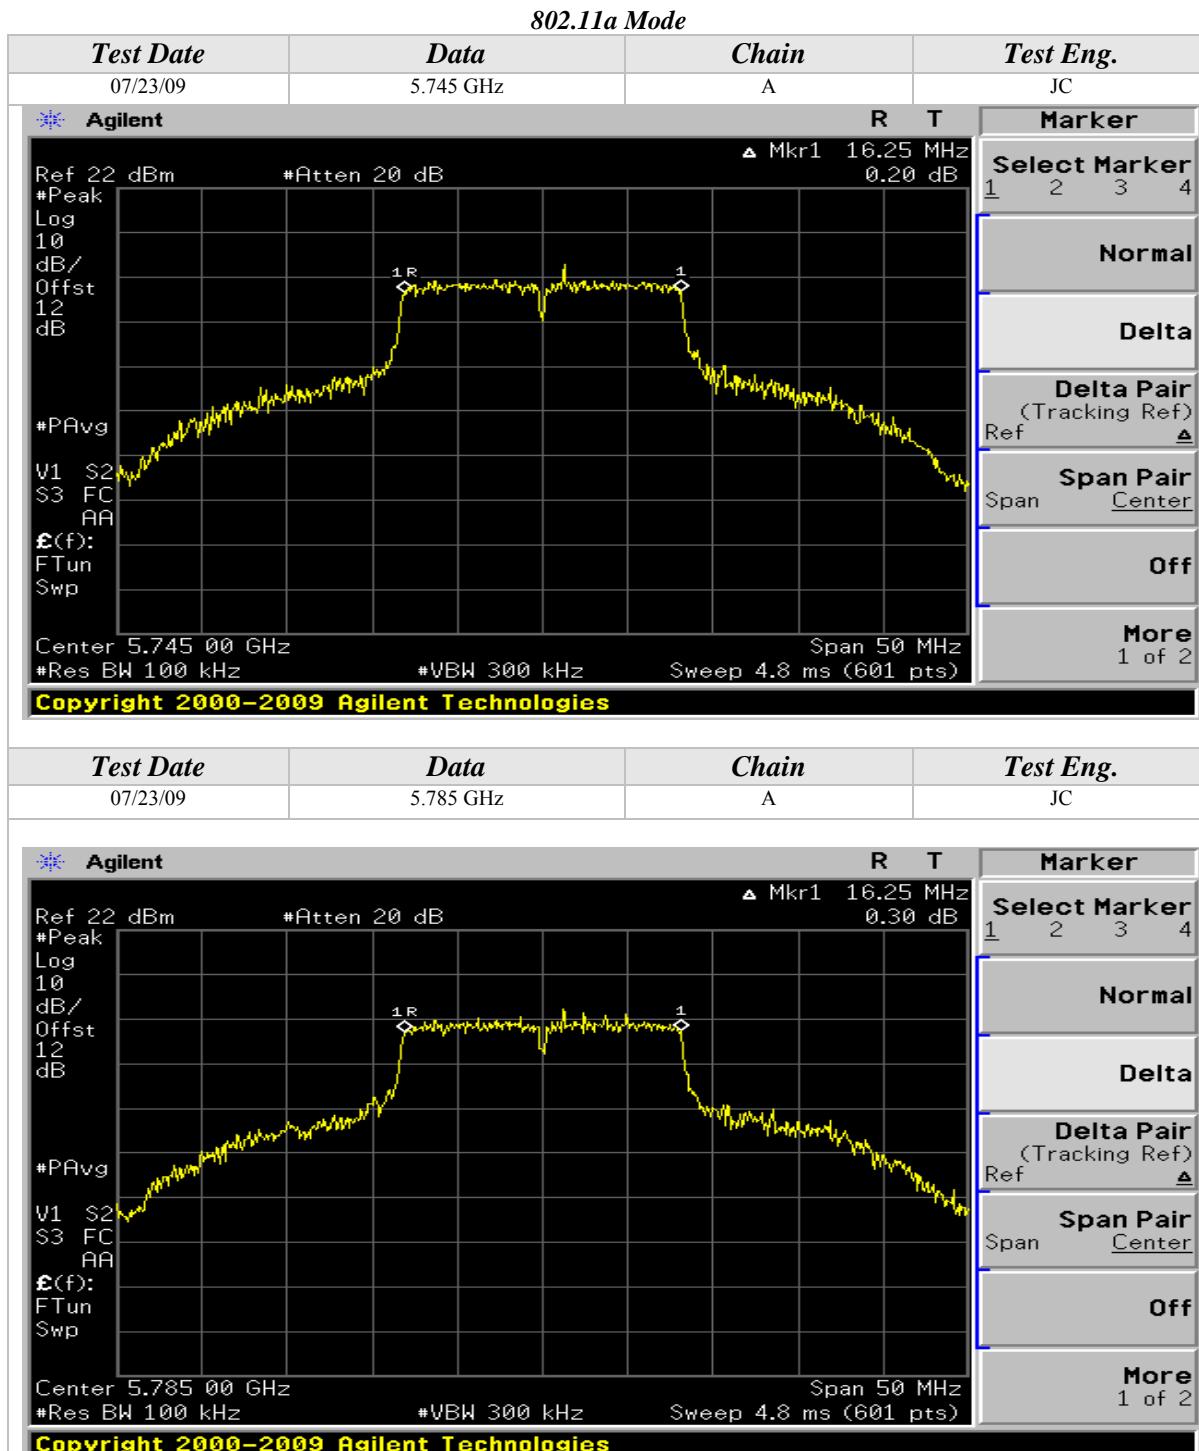


## 6dB EMISSIONS BANDWIDTH

<b>CLIENT:</b>	Intel Corporation	<b>DATE:</b>	08/10/09
<b>EUT:</b>	Intel WiFi Link 6300	<b>PROJECT NUMBER:</b>	INTEL-090601
<b>MODEL NUMBER:</b>	622ANHMW	<b>TEST ENGINEER:</b>	JC
<b>SERIAL NUMBER:</b>	0015005A3C7C	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested installed in an extender board connected to the host laptop's mini PCI slot	<b>TEMPERATURE:</b>	25 deg. C
		<b>HUMIDITY:</b>	45% RH
		<b>TIME:</b>	10:00 AM


<b>Description:</b>	The minimum 6dB bandwidth shall be at least 500 kHz.
<b>Results:</b>	See Data Sheet
<b>Note:</b>	Conducted Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"><li>• 120VAC / 60 Hz.</li></ul>

## 6dB Emissions Bandwidth (Continued)



## 6dB Emissions Bandwidth (Continued)
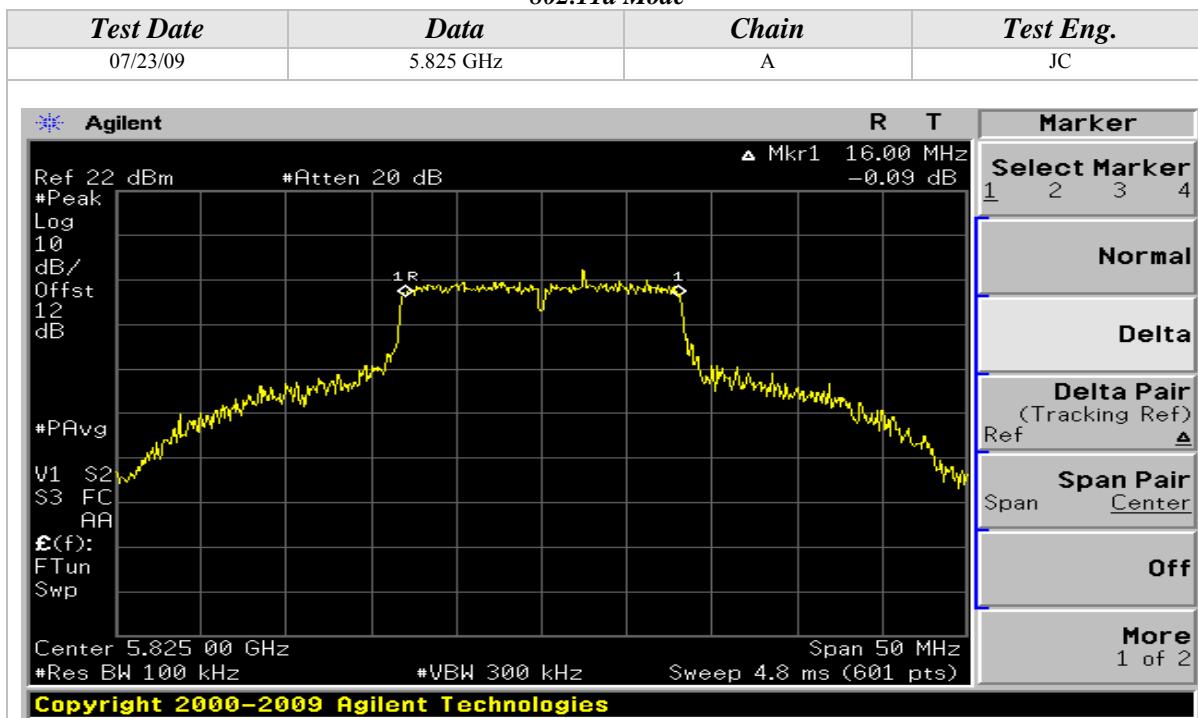
## 802.11a Mode



## 802.11b Mode



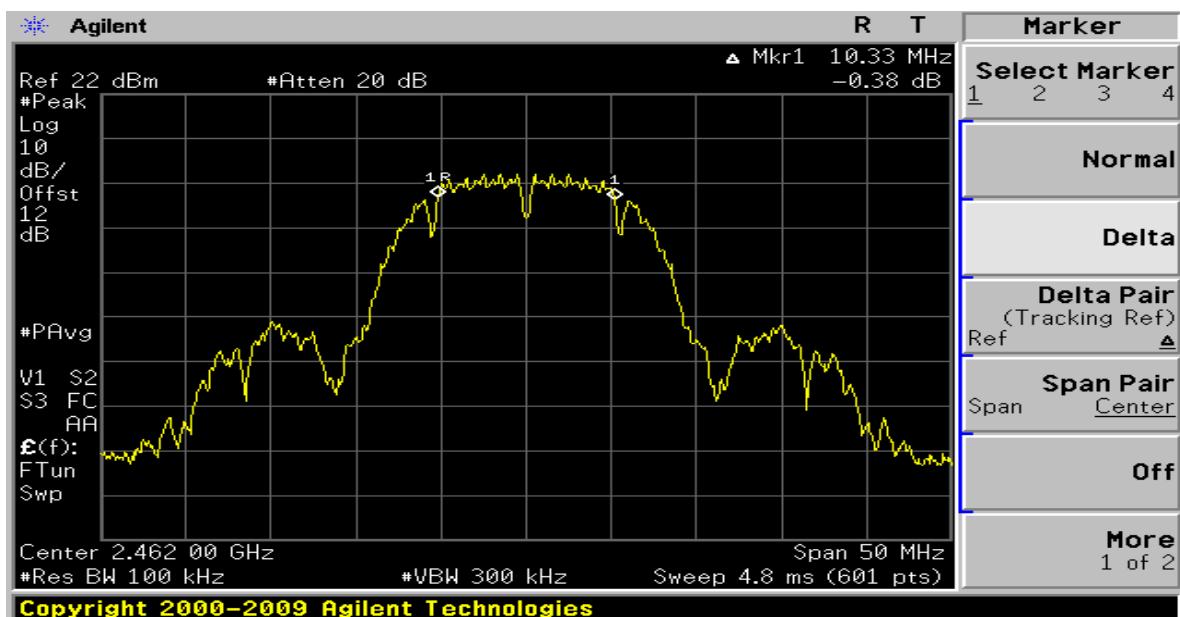
## 6dB Emissions Bandwidth (Continued)

## 802.11b Mode


Test Date	Data	Chain	Test Eng.
07/23/09	2.437 GHz	A	JC





Test Date	Data	Chain	Test Eng.
07/23/09	2.462 GHz	A	JC



## 6dB Emissions Bandwidth (Continued)

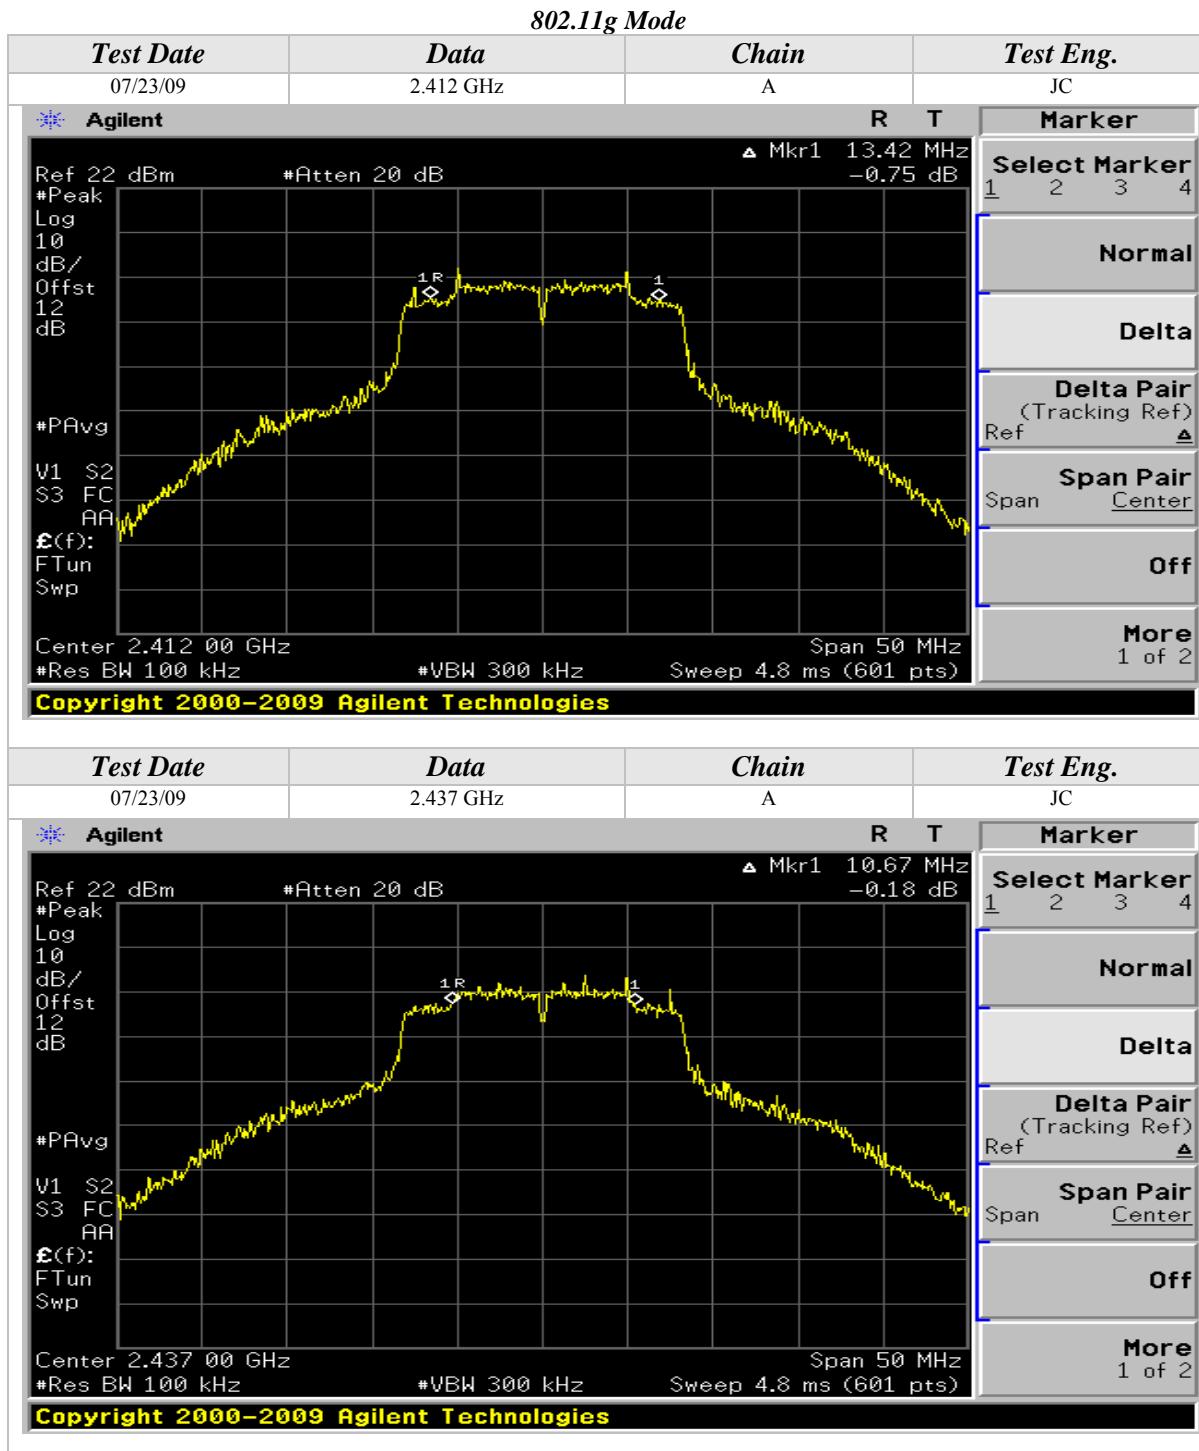

## 6dB Emissions Bandwidth (Continued)

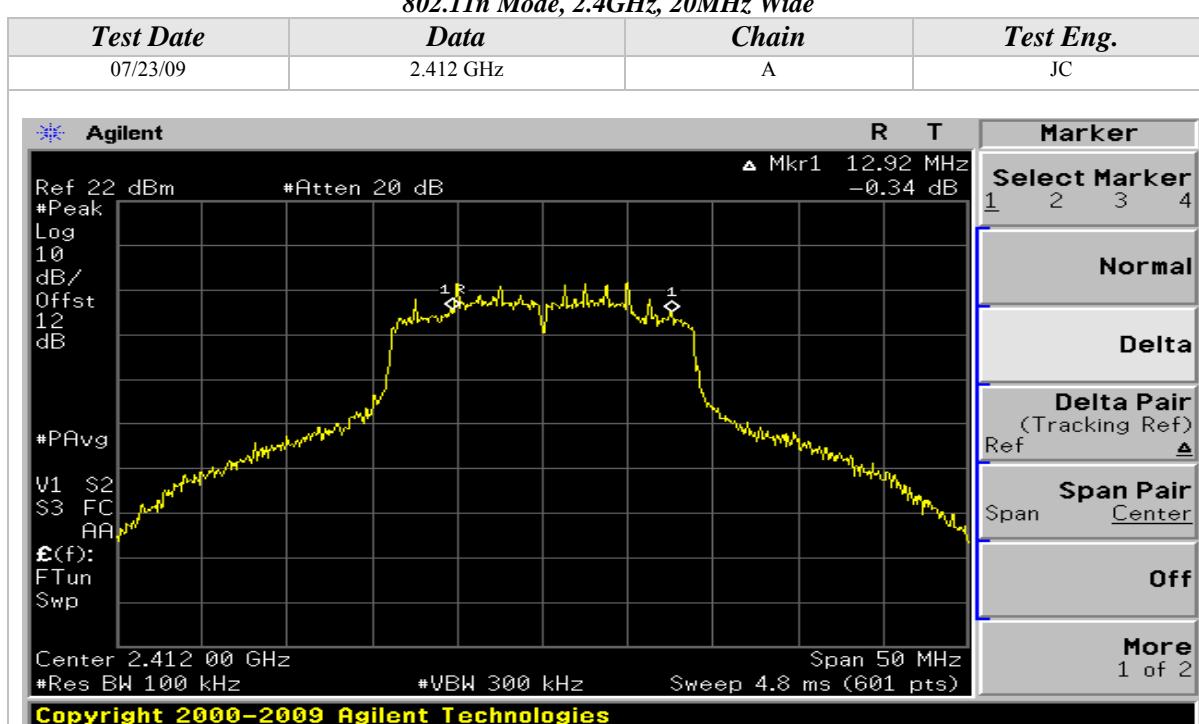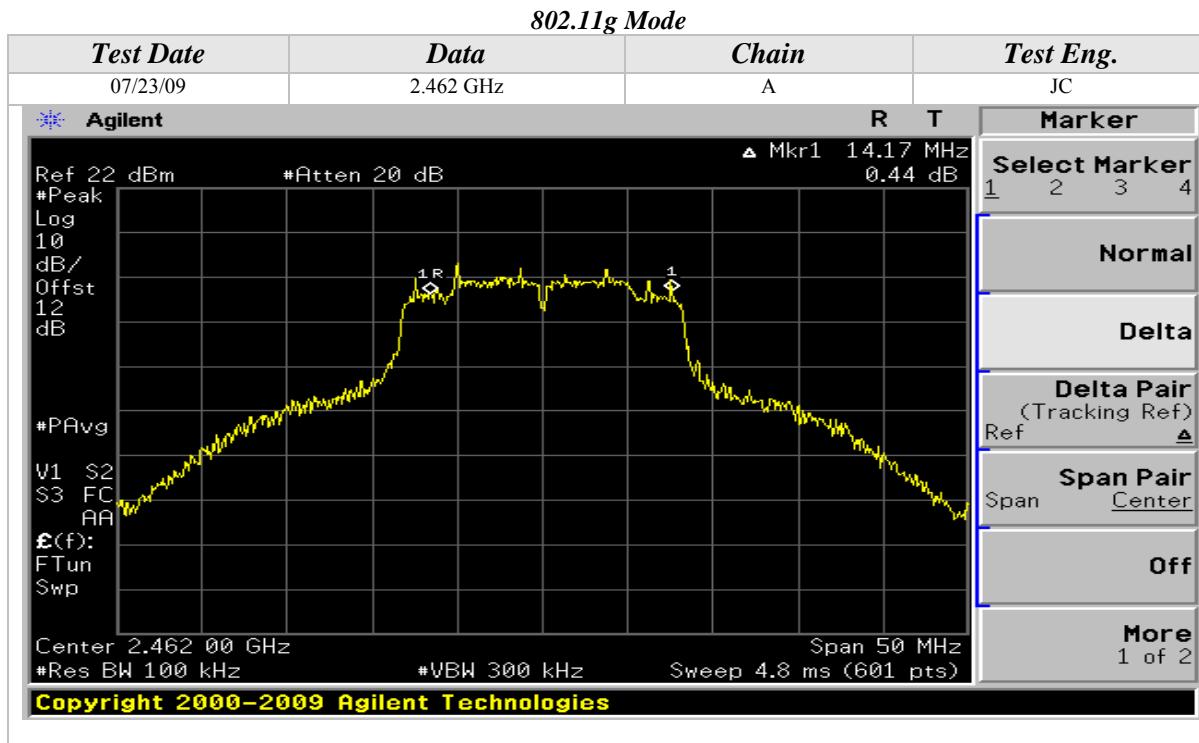

## 6dB Emissions Bandwidth (Continued)

802.11n Mode, 2.4GHz, 20MHz Wide

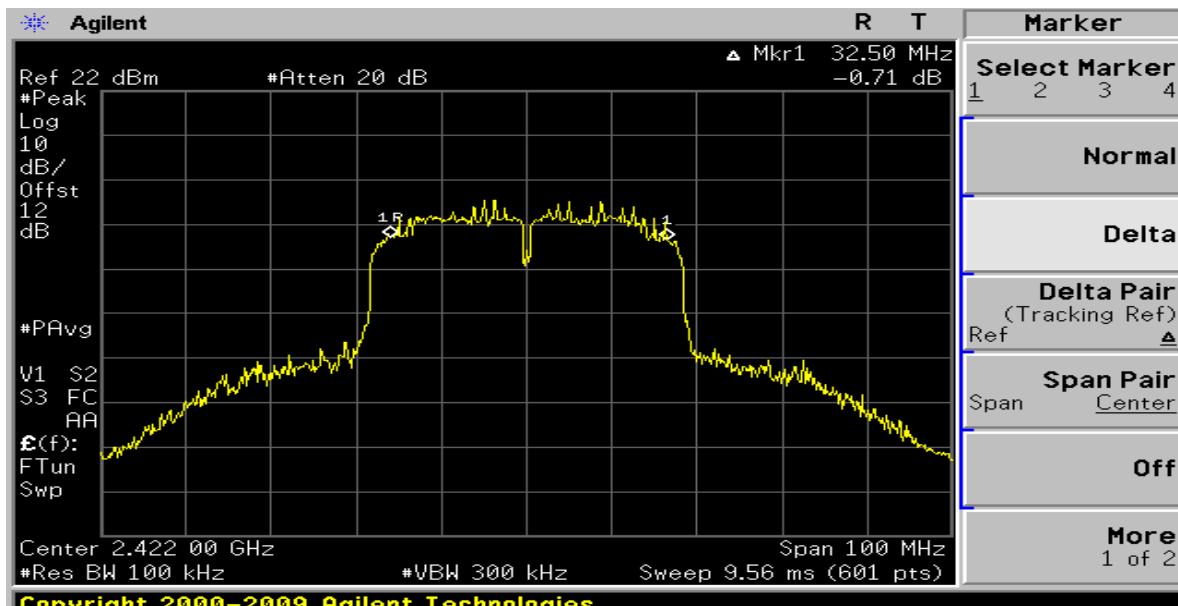
Test Date	Data	Chain	Test Eng.
07/23/09	2.437 GHz	A	JC




## 6dB Emissions Bandwidth (Continued)

802.11n Mode, 2.4GHz, 40MHz Wide



Test Date	Data	Chain	Test Eng.
07/23/09	2.422 GHz	A	JC




Test Date	Data	Chain	Test Eng.
07/23/09	2.437 GHz	A	JC

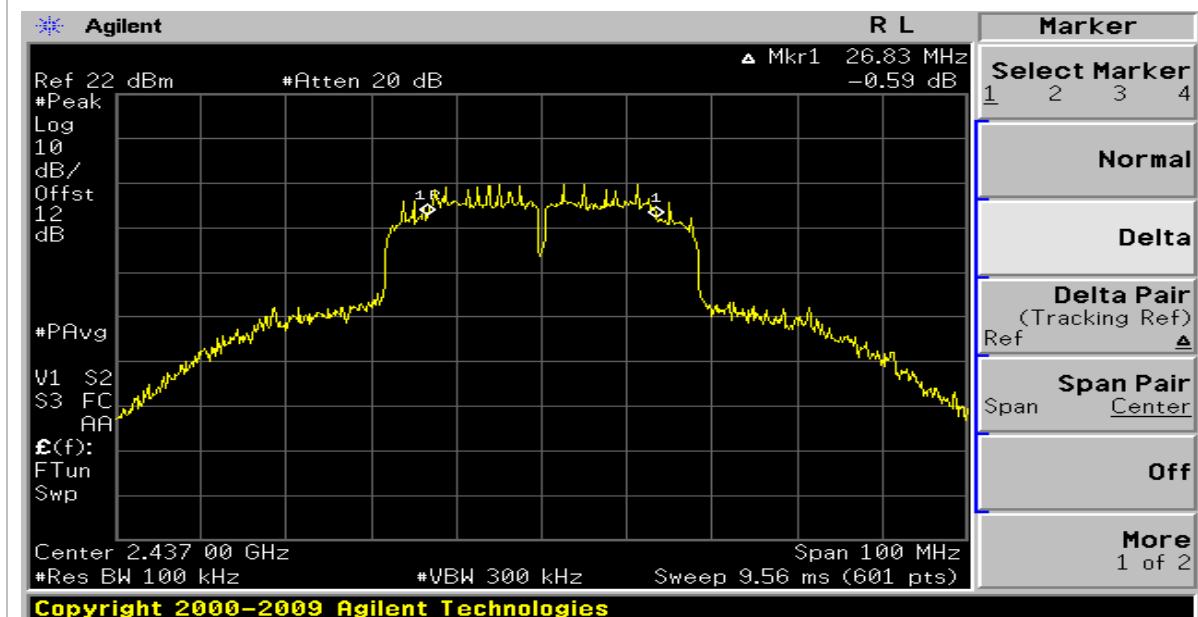



## 6dB Emissions Bandwidth (Continued)

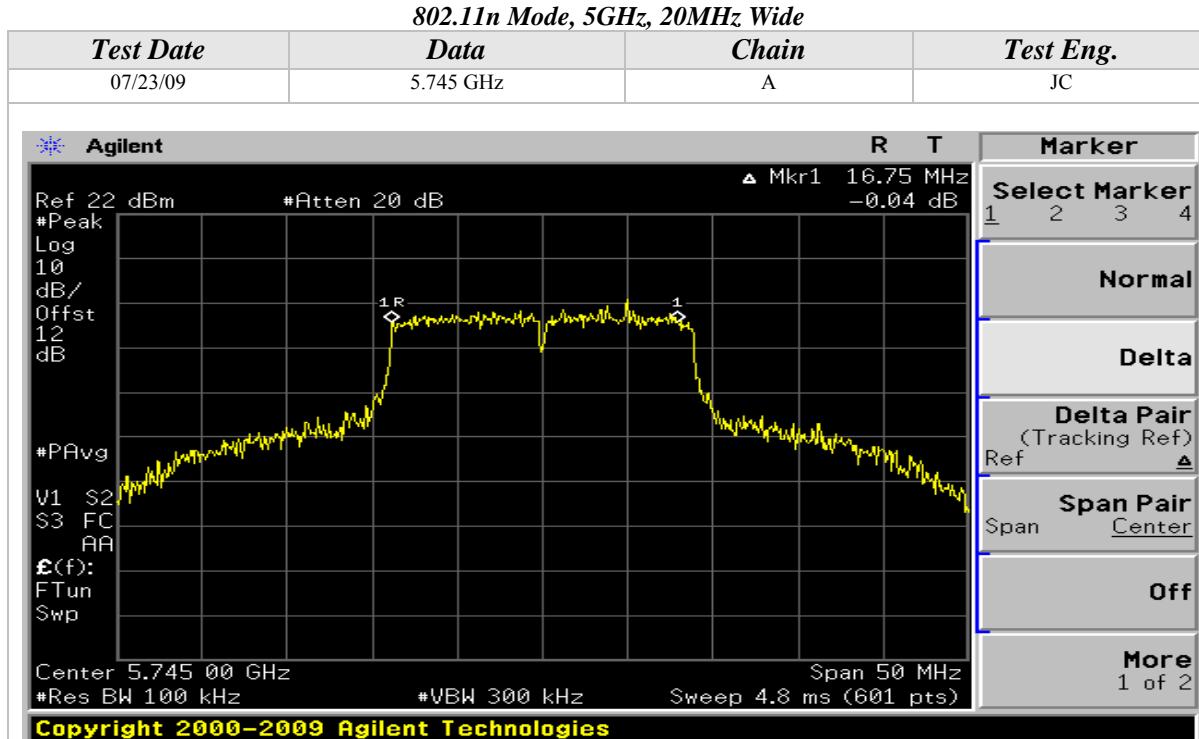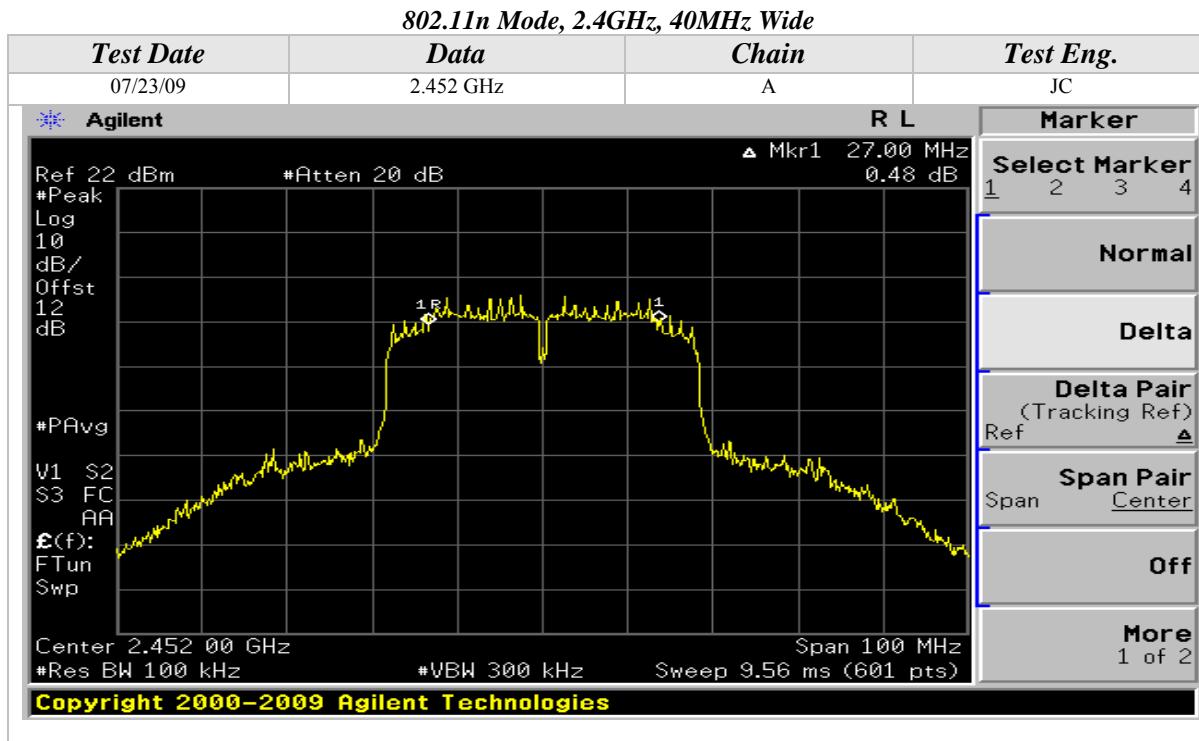

## 6dB Emissions Bandwidth (Continued)

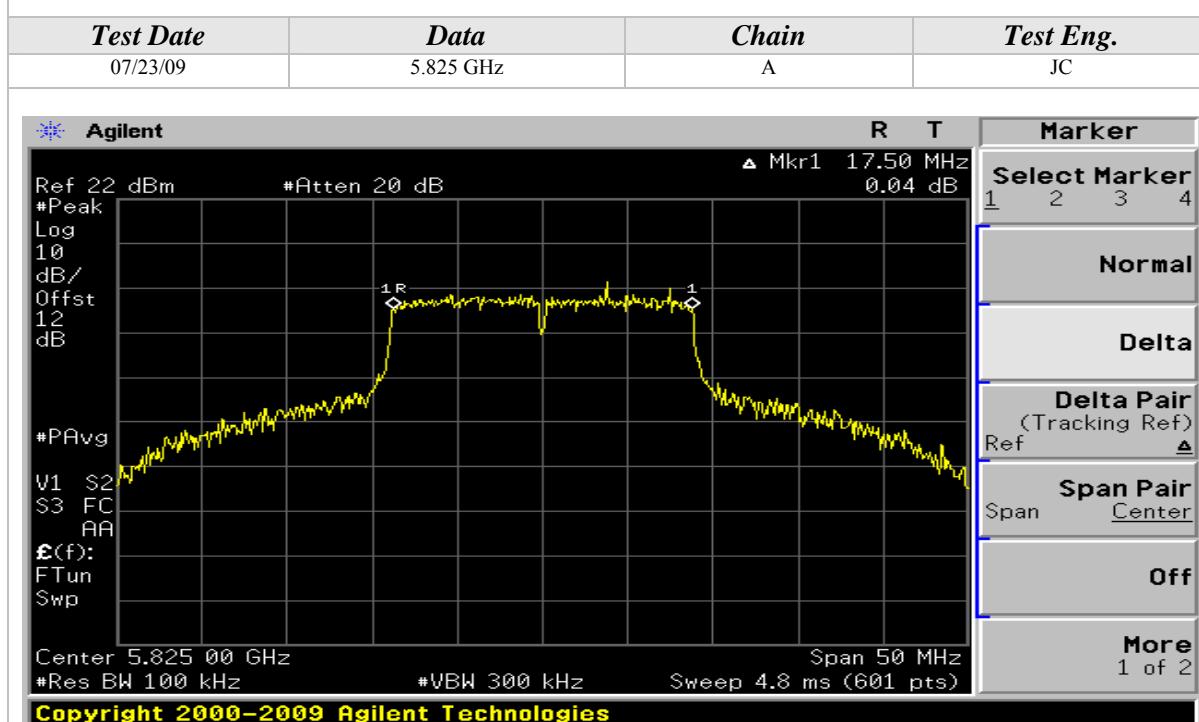



## 6dB Emissions Bandwidth (Continued)

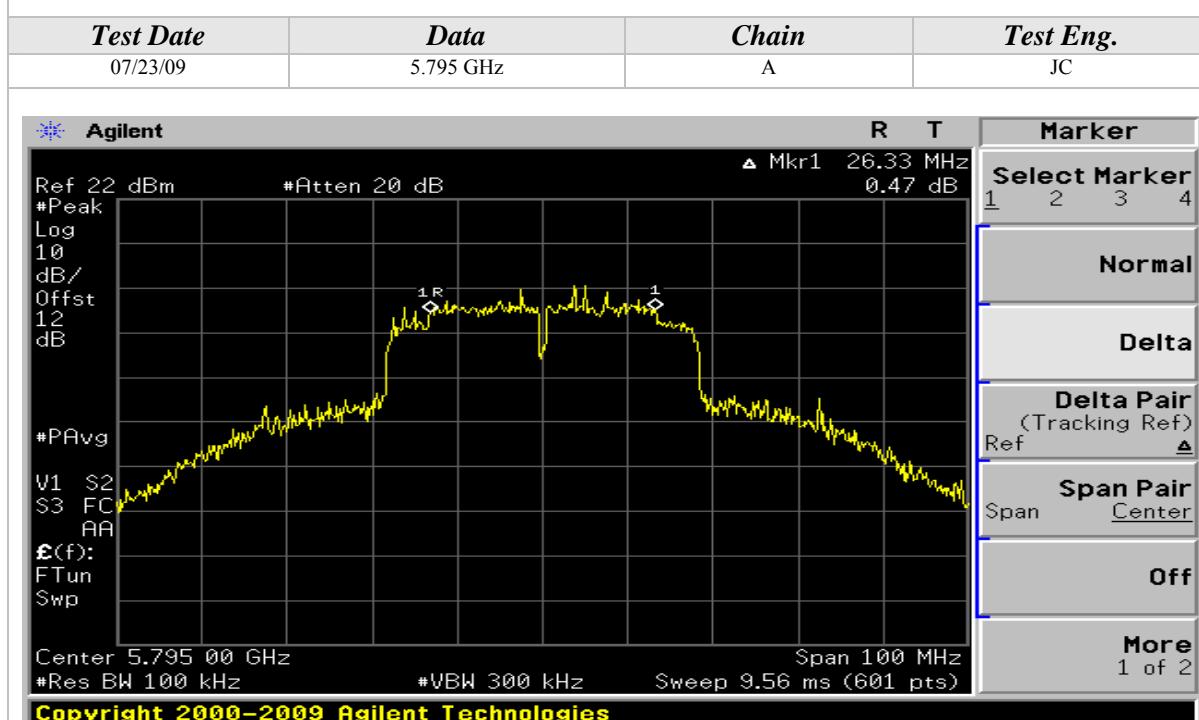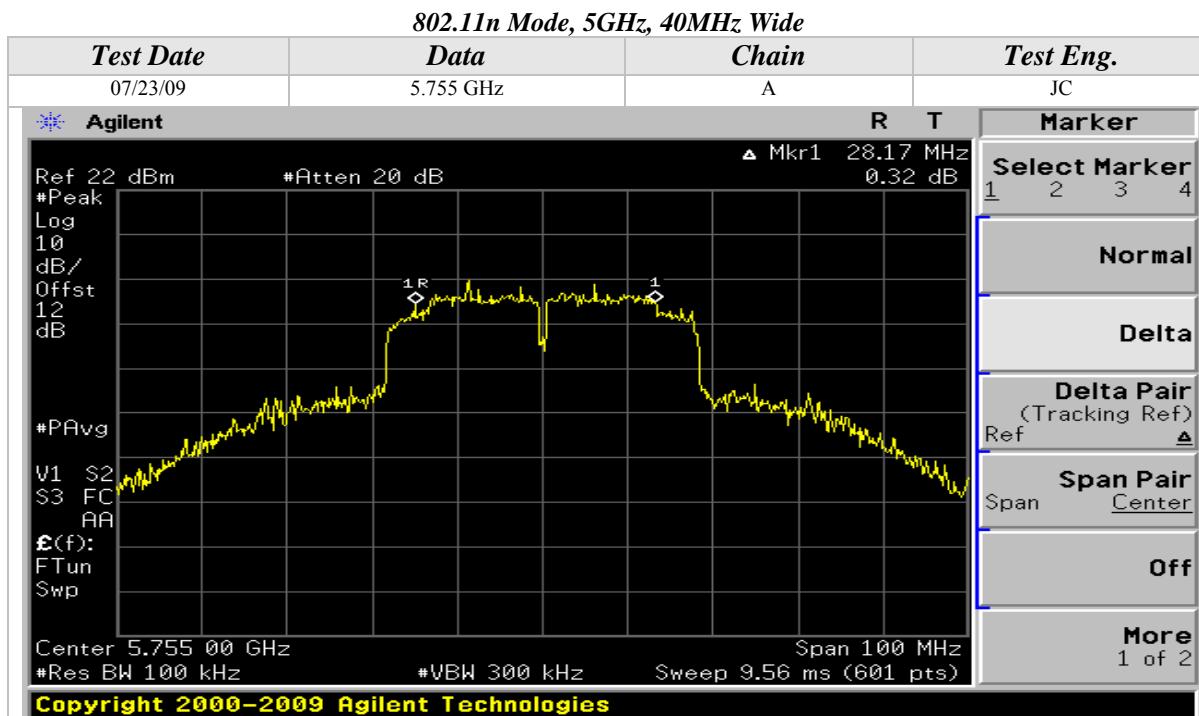

## 6dB Emissions Bandwidth (Continued)


## 802.11a Mode

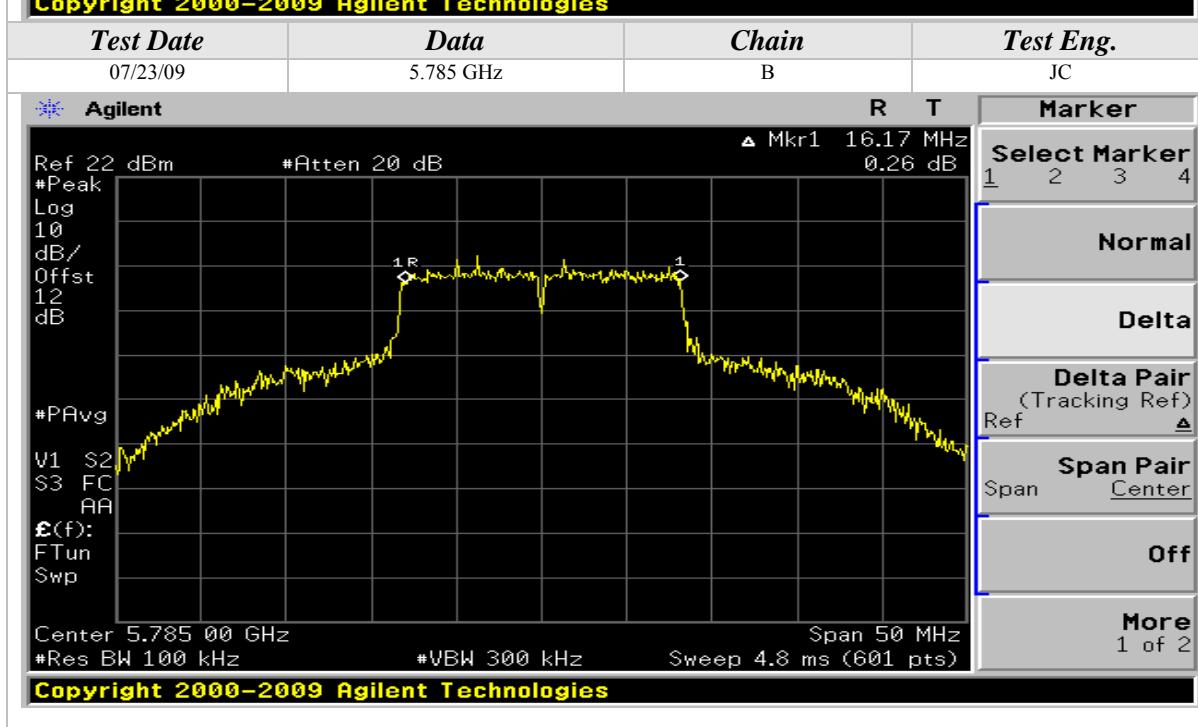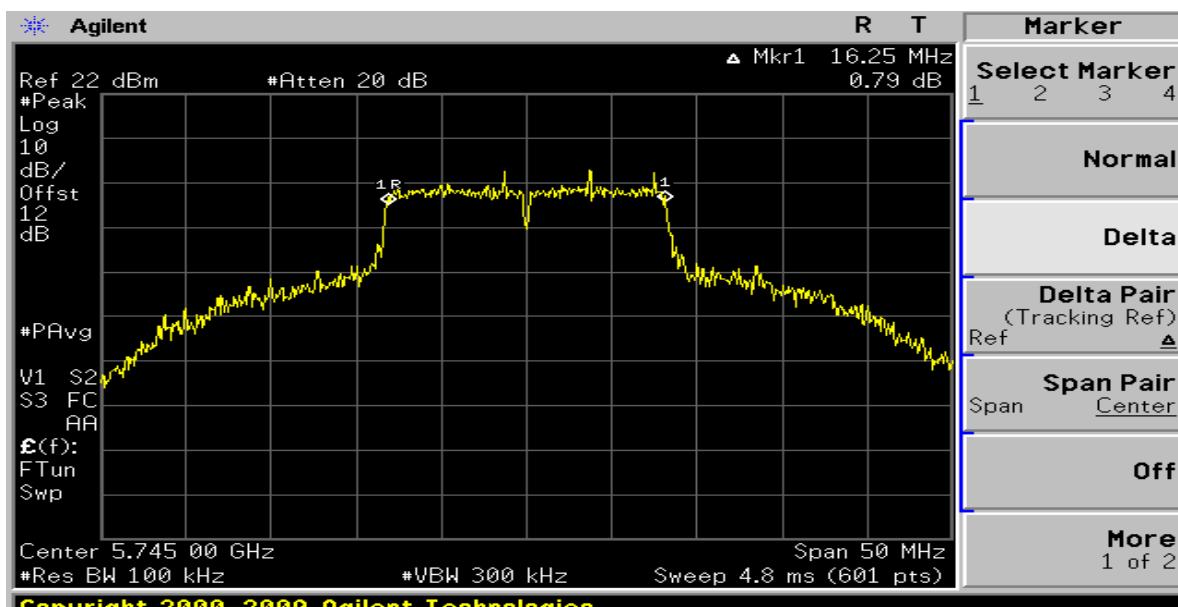Test Date	Data	Chain	Test Eng.
07/23/09	5.745 GHz	B	JC



## 6dB Emissions Bandwidth (Continued)

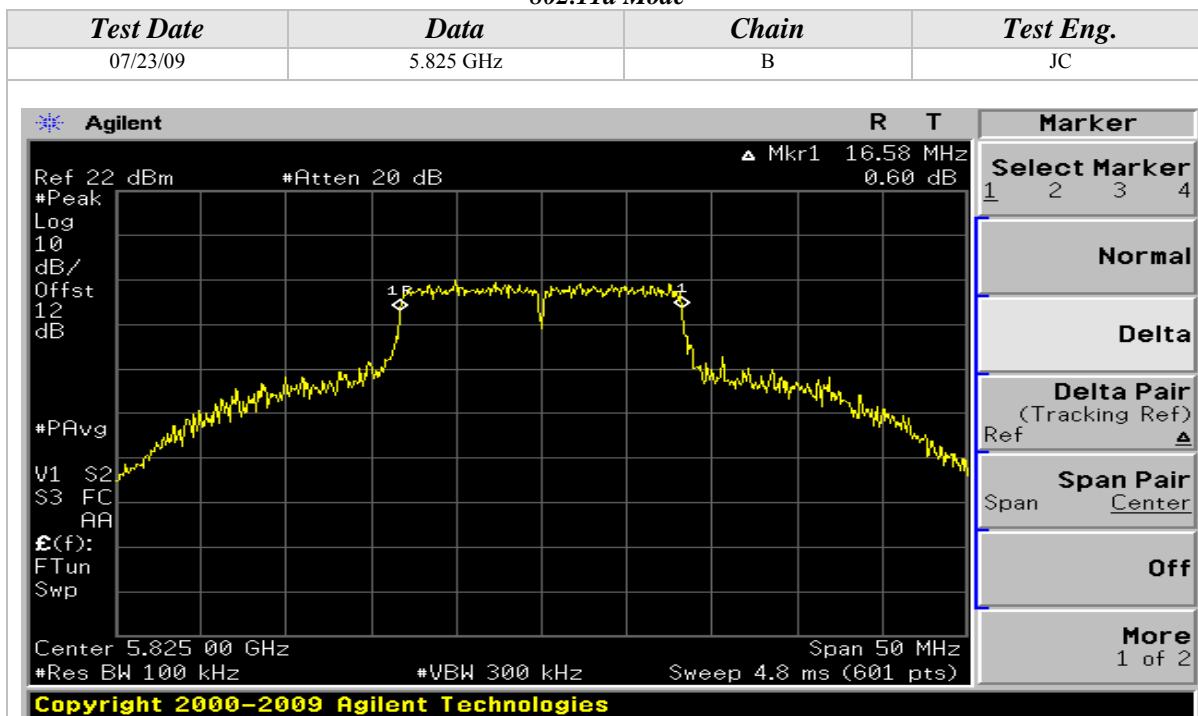
## 802.11a Mode



## 802.11b Mode




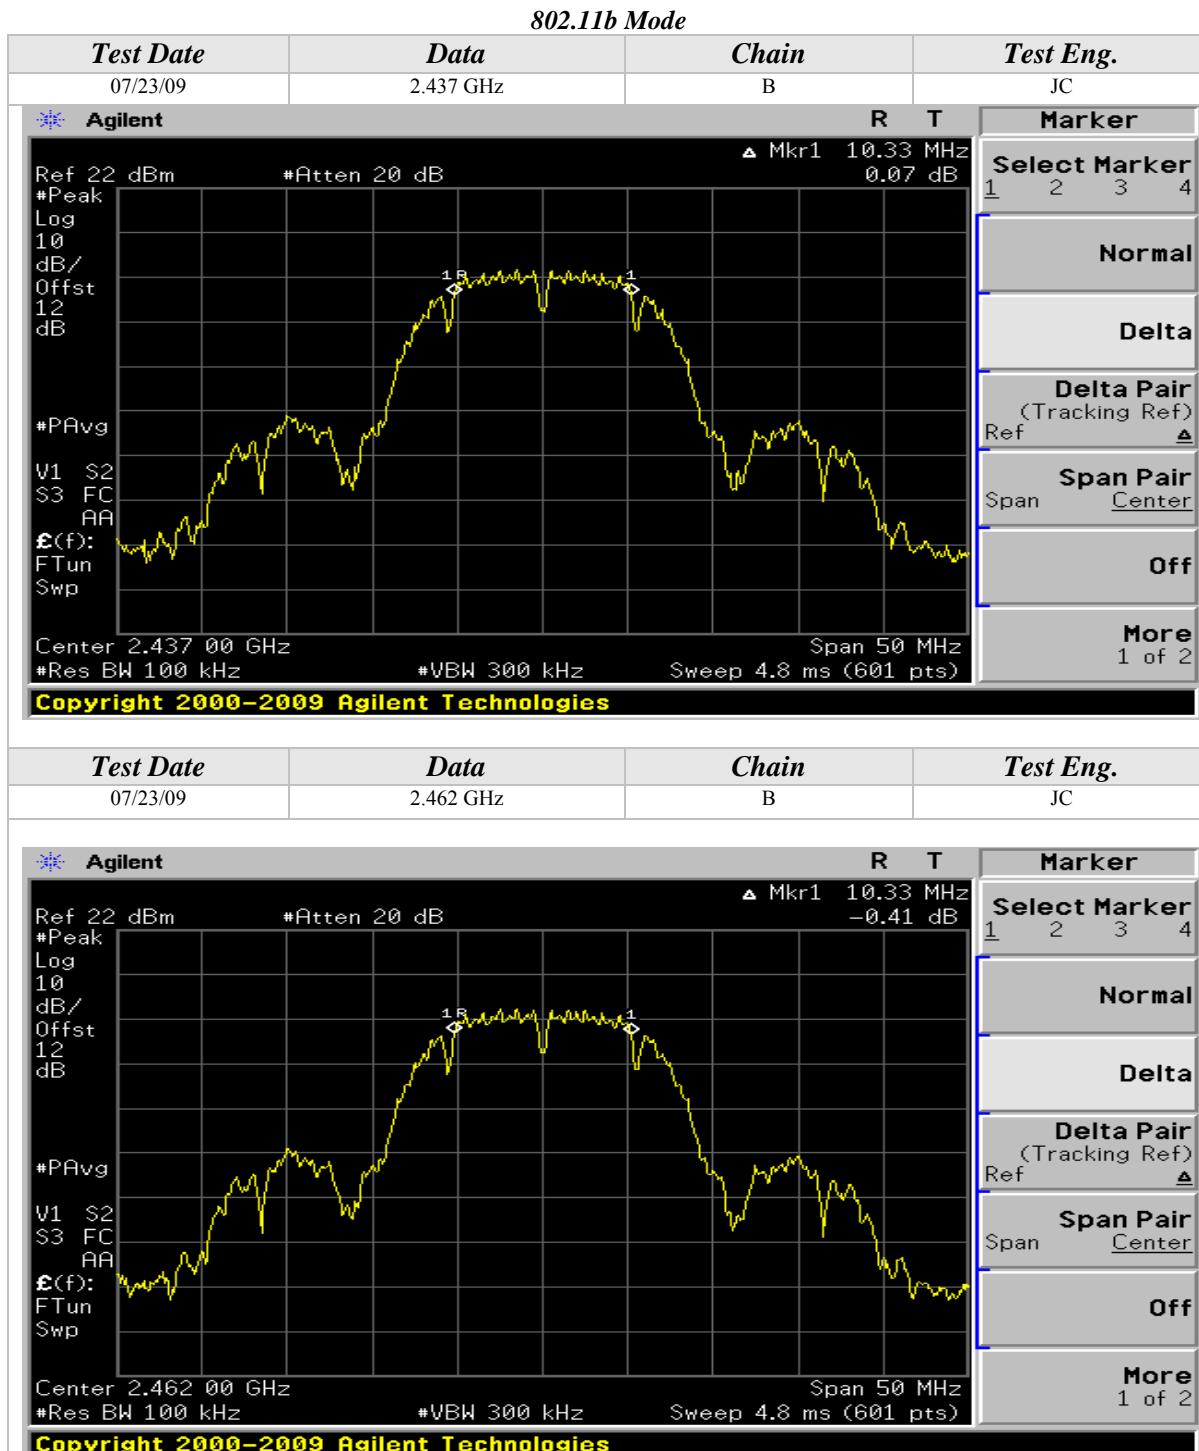
## 6dB Emissions Bandwidth (Continued)




## 6dB Emissions Bandwidth (Continued)

## 802.11g Mode

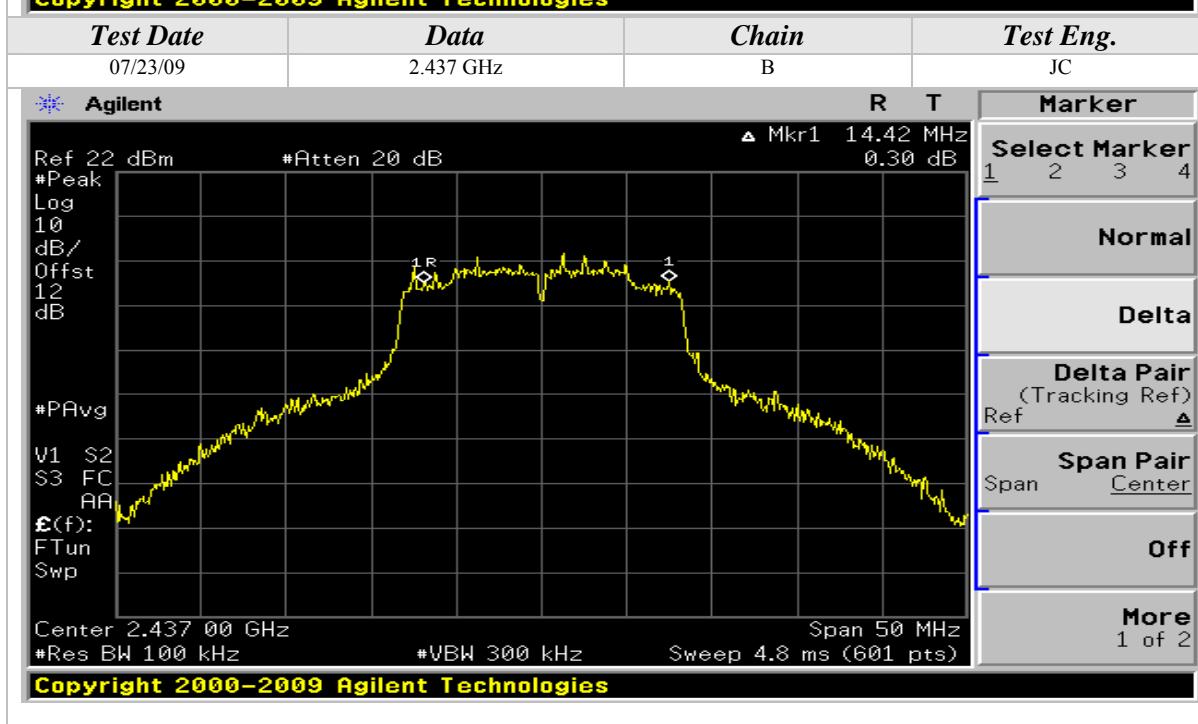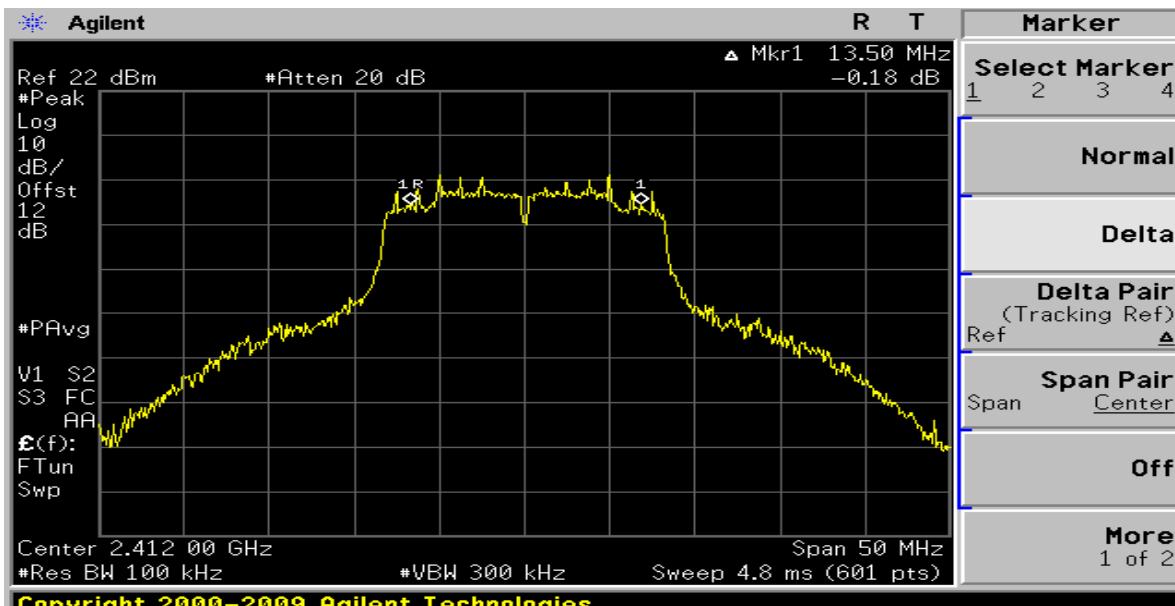
Test Date	Data	Chain	Test Eng.
07/23/09	2.412 GHz	B	JC



## 6dB Emissions Bandwidth (Continued)

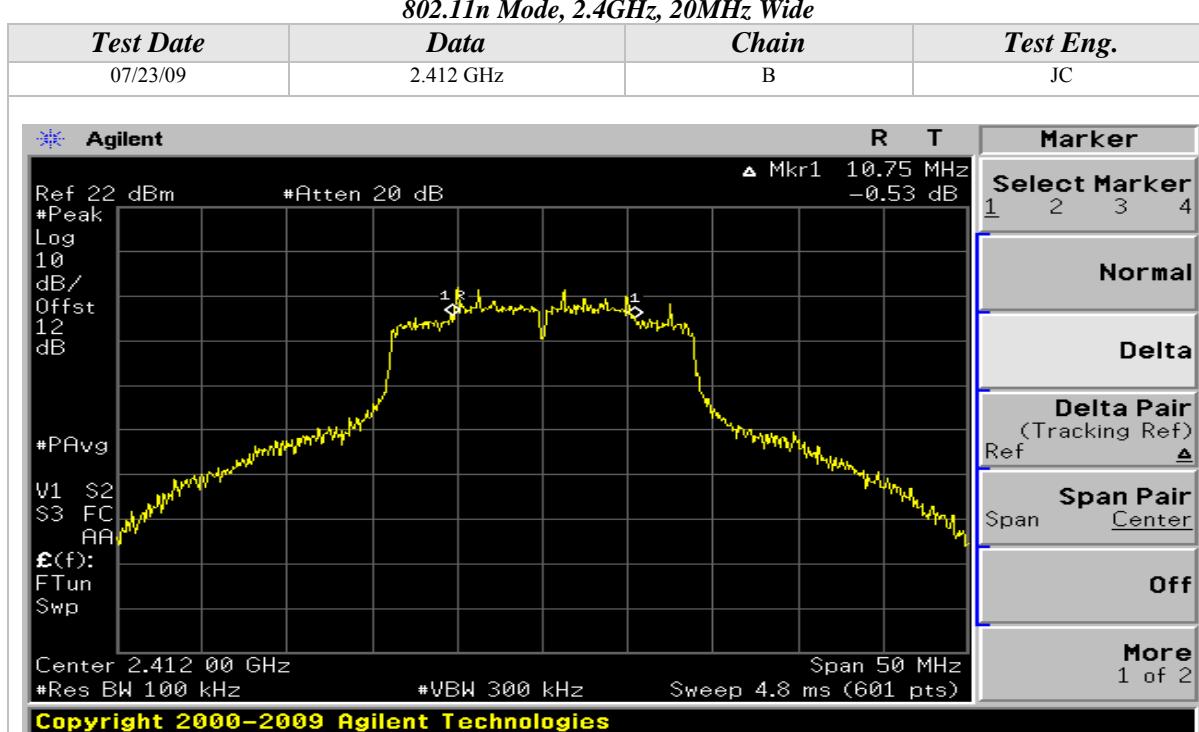

## 6dB Emissions Bandwidth (Continued)

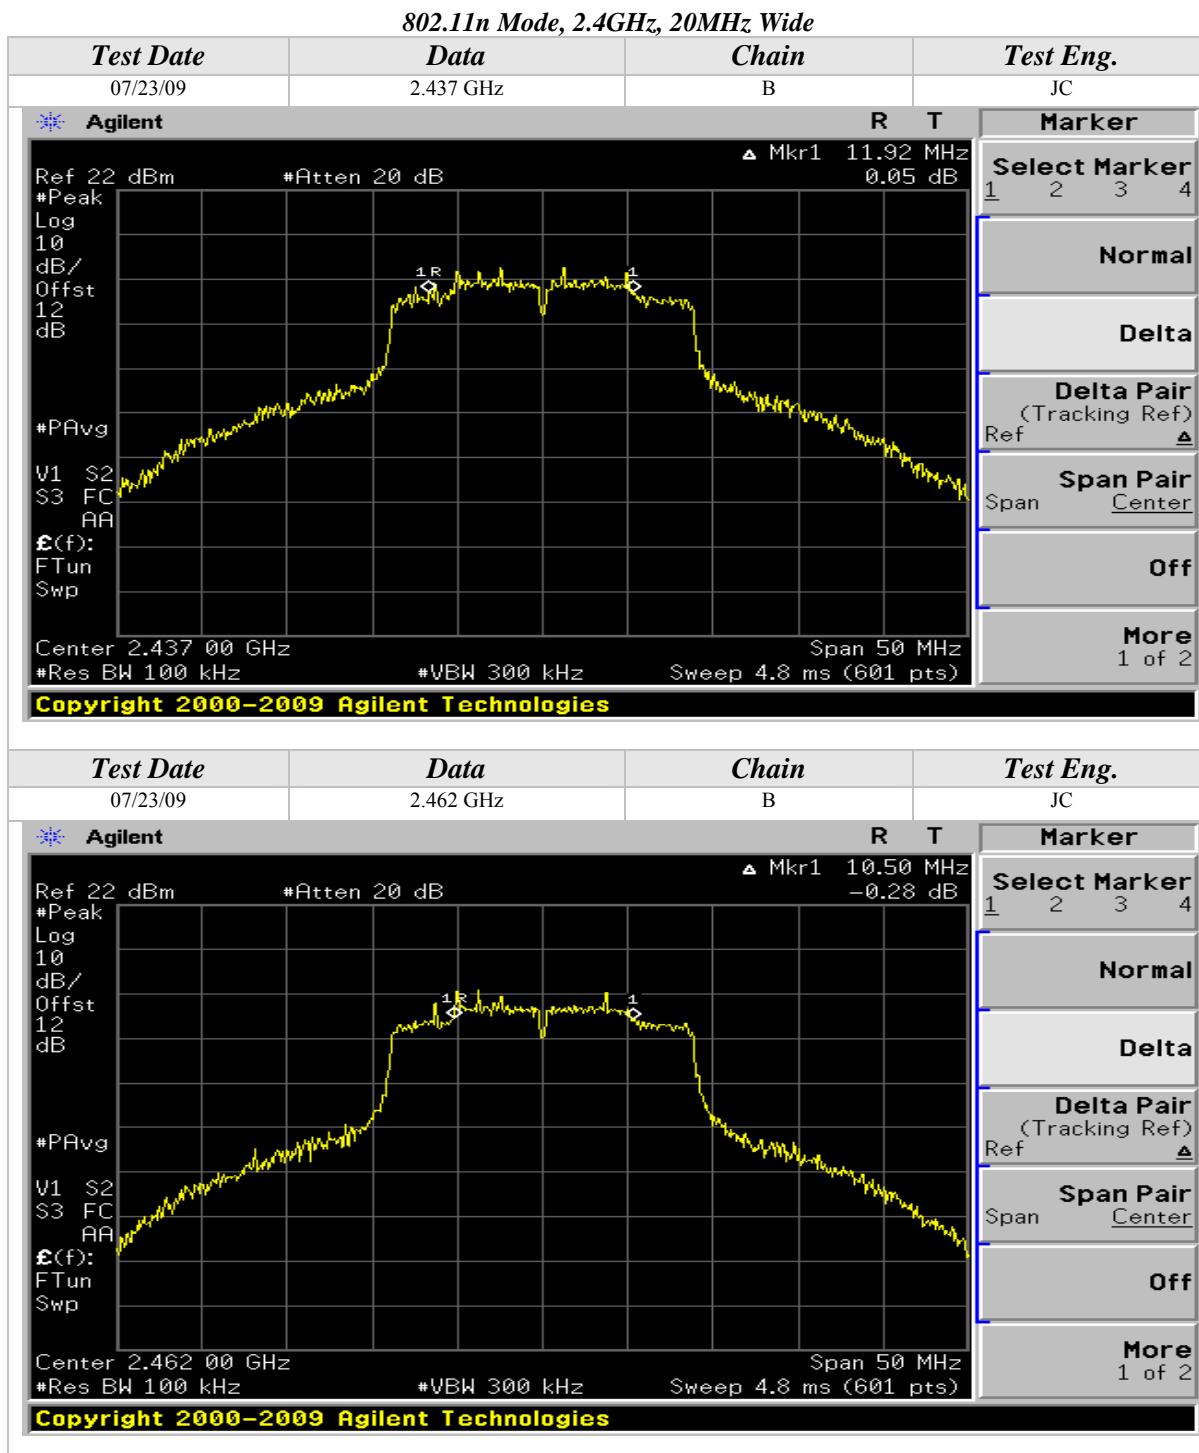


## 6dB Emissions Bandwidth (Continued)



## 802.11n Mode, 2.4GHz, 40MHz Wide




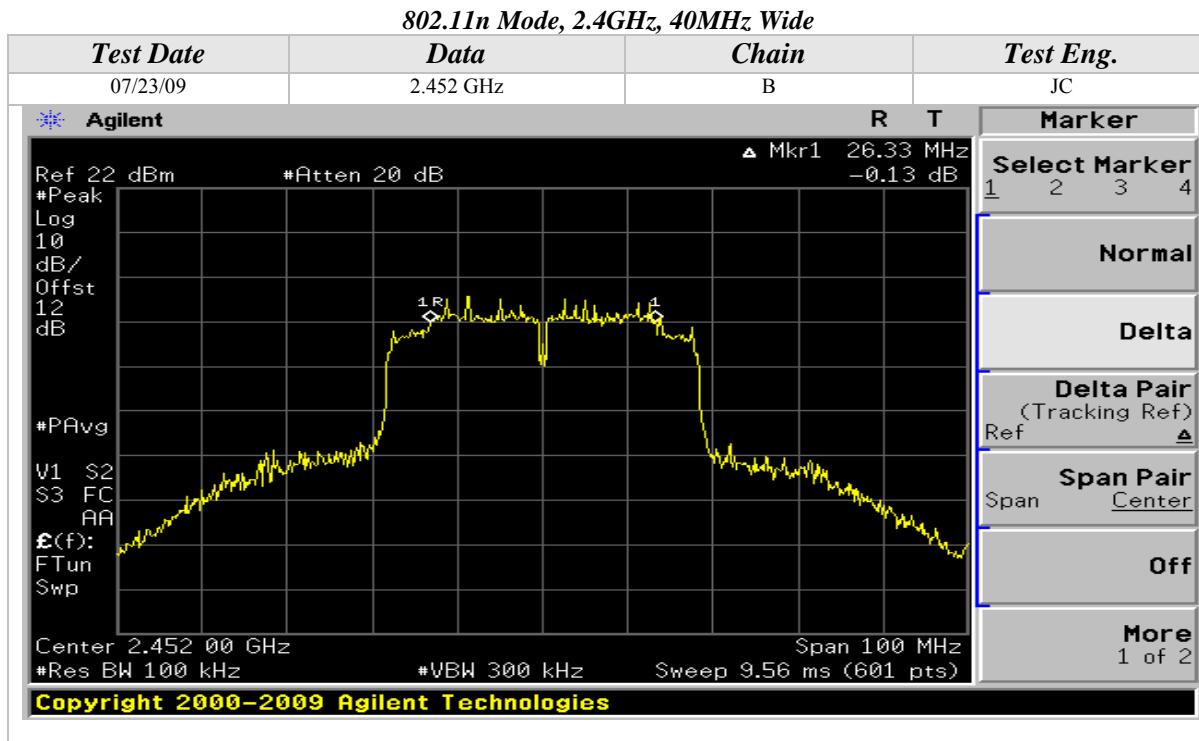
## 6dB Emissions Bandwidth (Continued)



## 6dB Emissions Bandwidth (Continued)

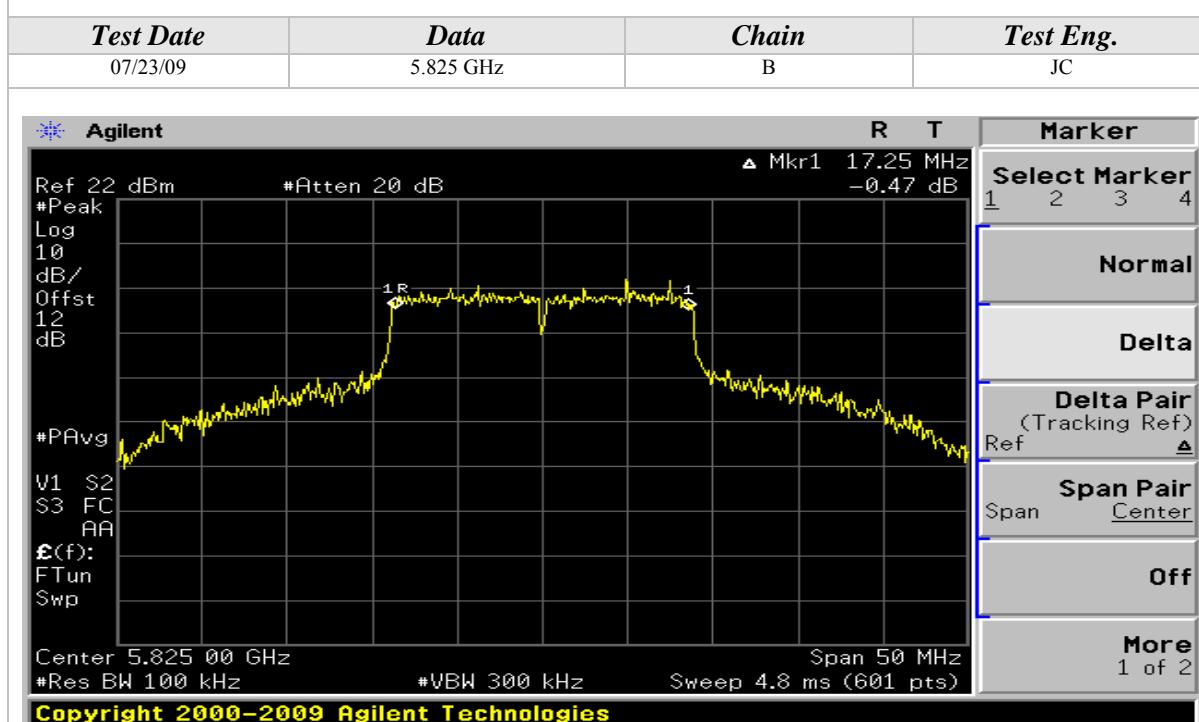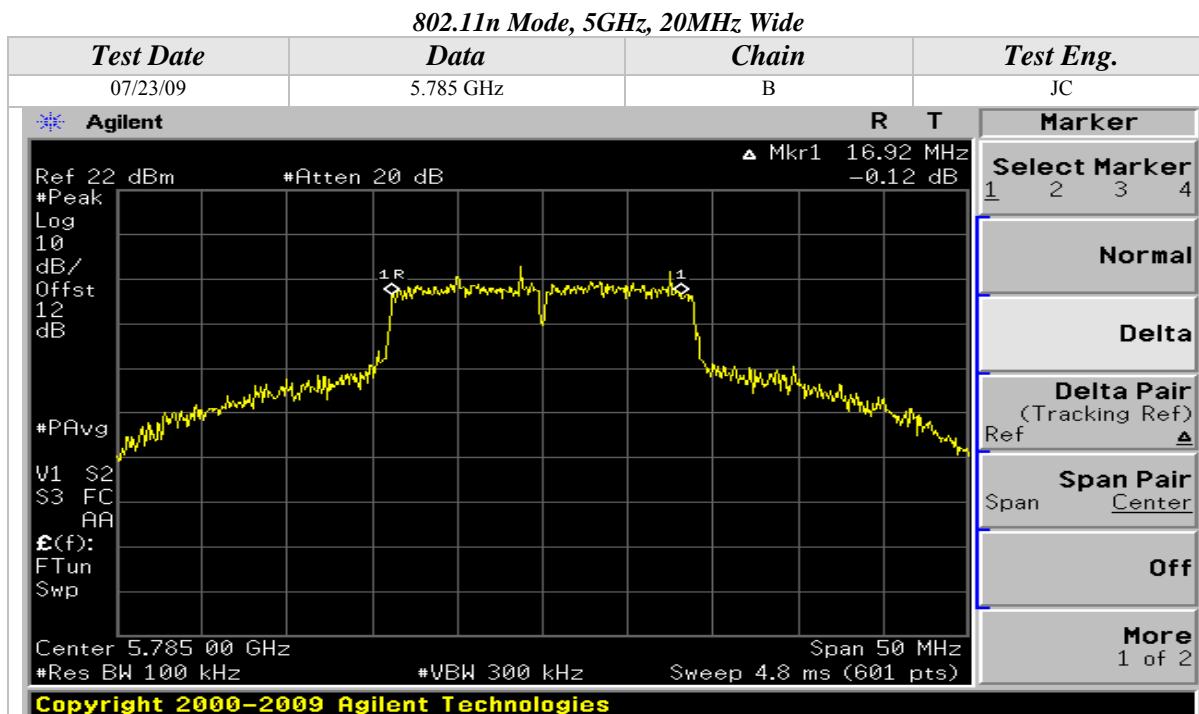

## 6dB Emissions Bandwidth (Continued)

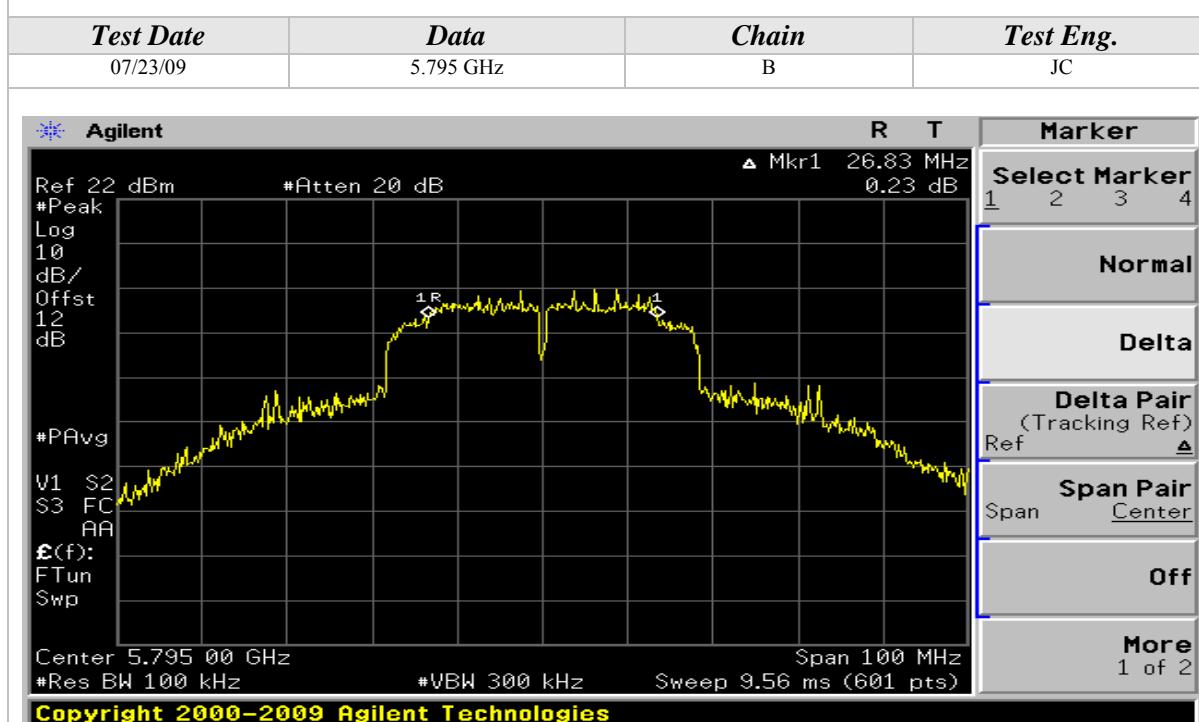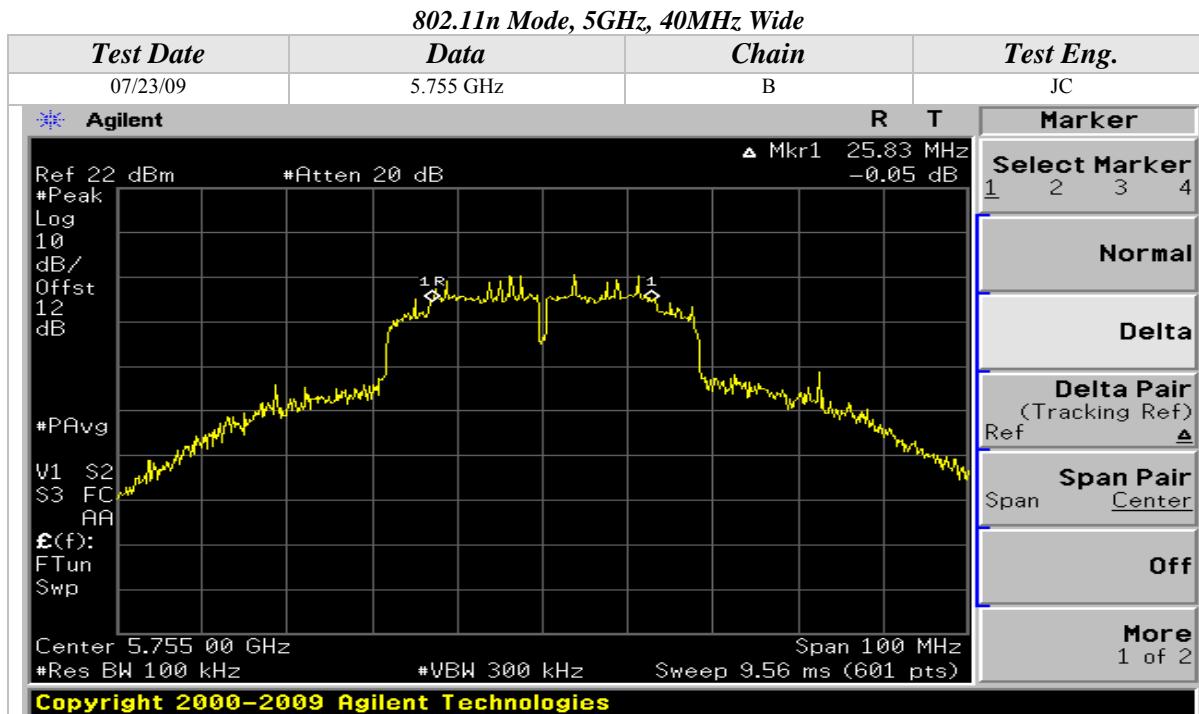




## PEAK POWER SPECTRAL DENSITY

<b>CLIENT:</b>	Intel Corporation	<b>DATE:</b>	08/12/09
<b>EUT:</b>	Intel WiFi Link 6300	<b>PROJECT NUMBER:</b>	INTEL-090601
<b>MODEL NUMBER:</b>	622ANHMW	<b>TEST ENGINEER:</b>	JC
<b>SERIAL NUMBER:</b>	0015005A3C7C	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested installed in an extender board connected to the host laptop's mini PCI slot	<b>TEMPERATURE:</b>	23 deg. C
		<b>HUMIDITY:</b>	56% RH
		<b>TIME:</b>	10:30 AM



<b>Description:</b>	The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
<b>Results:</b>	See Data Sheet
<b>Note:</b>	Conducted Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"><li>• 120VAC / 60 Hz.</li></ul>

<b>Peak Power Spectral Density Limits</b>	
<b>Frequency (MHz)</b>	<b>Limit (dBm)</b>
5725-5850	8
2412-2462	8

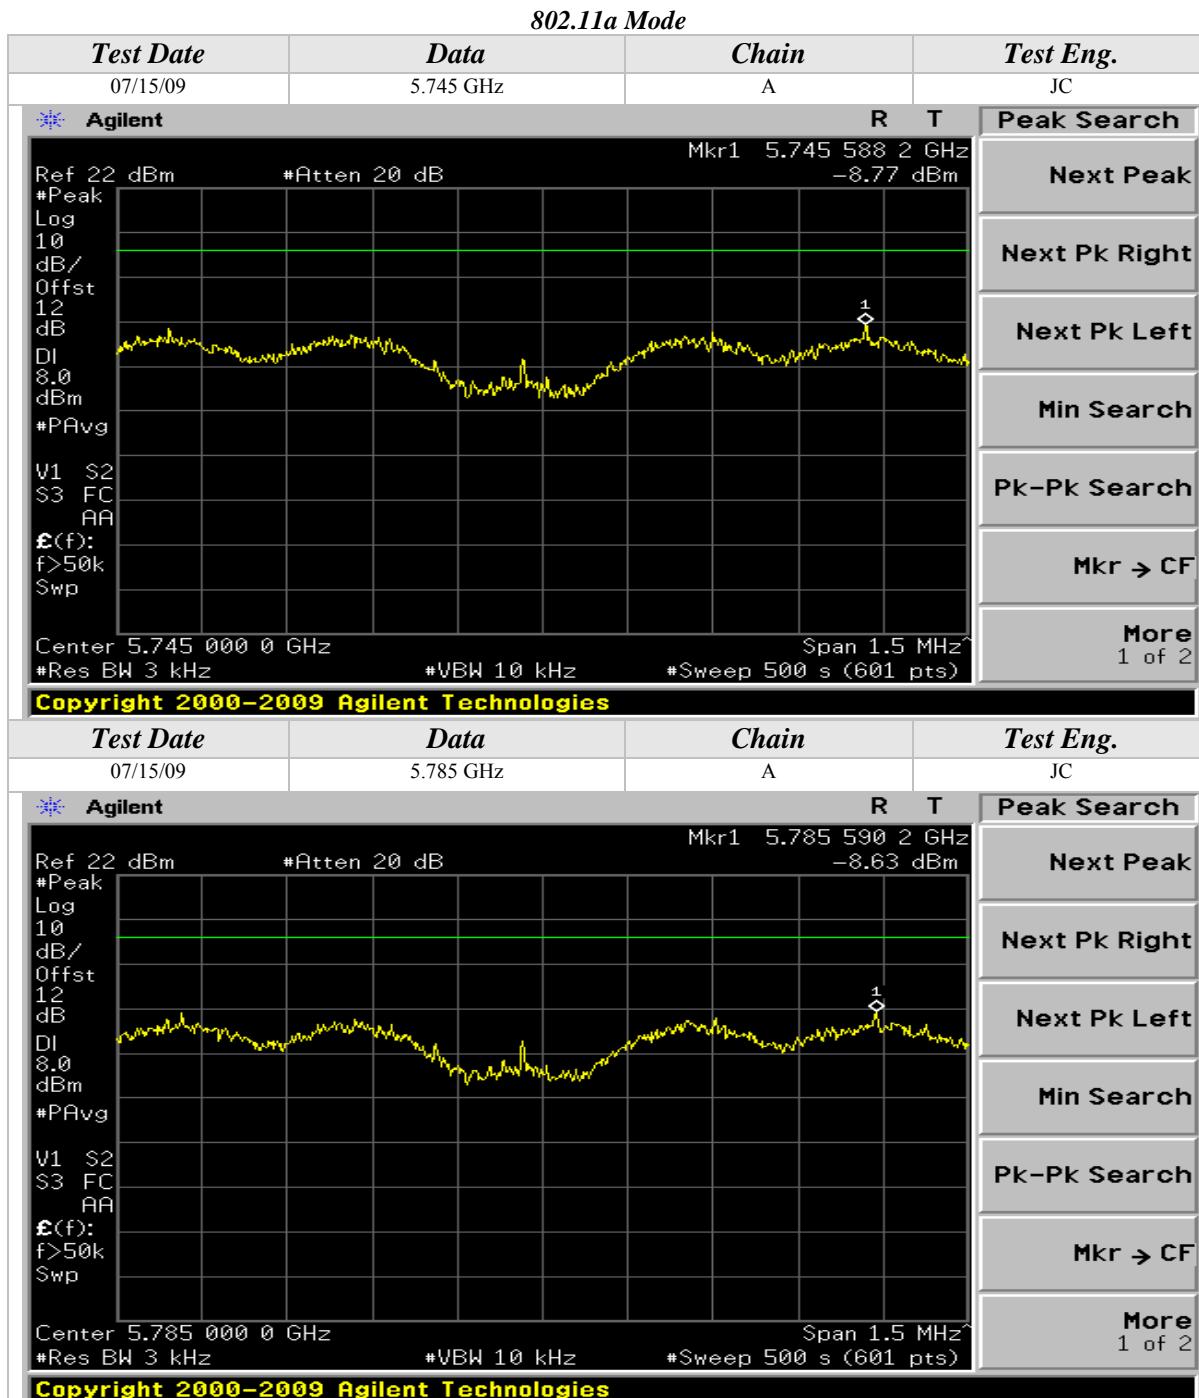
## Peak Power Spectral Density (Continued)




## Peak Power Spectral Density (Continued)

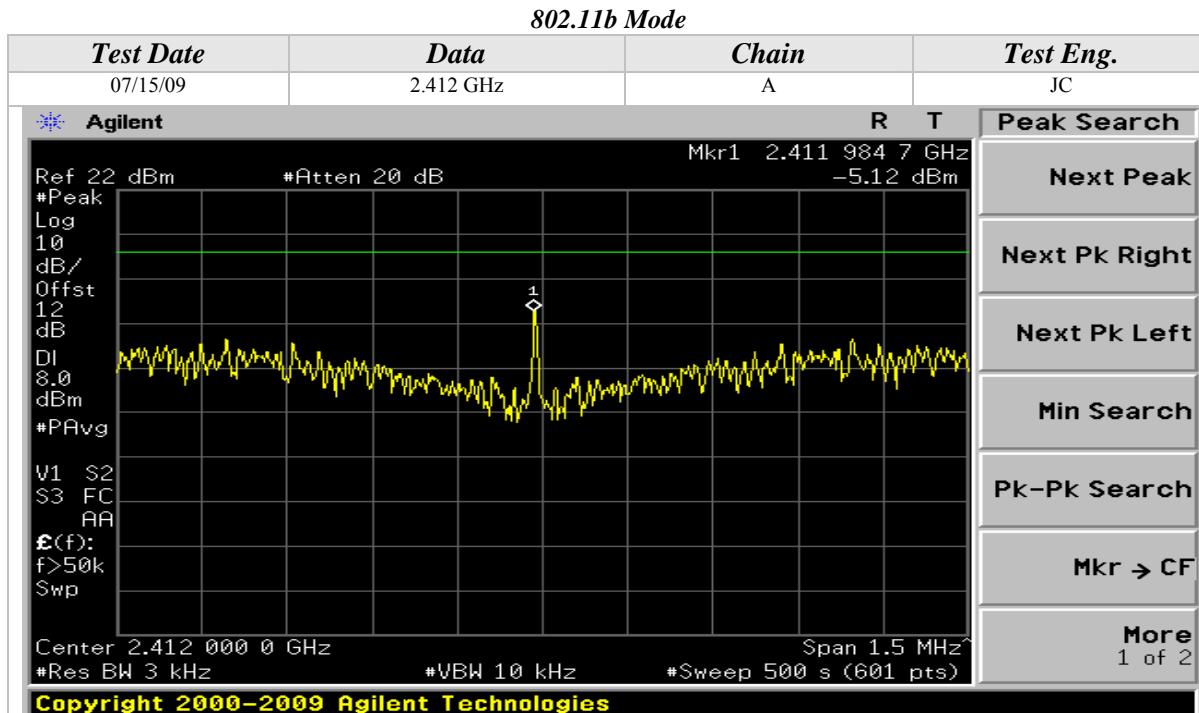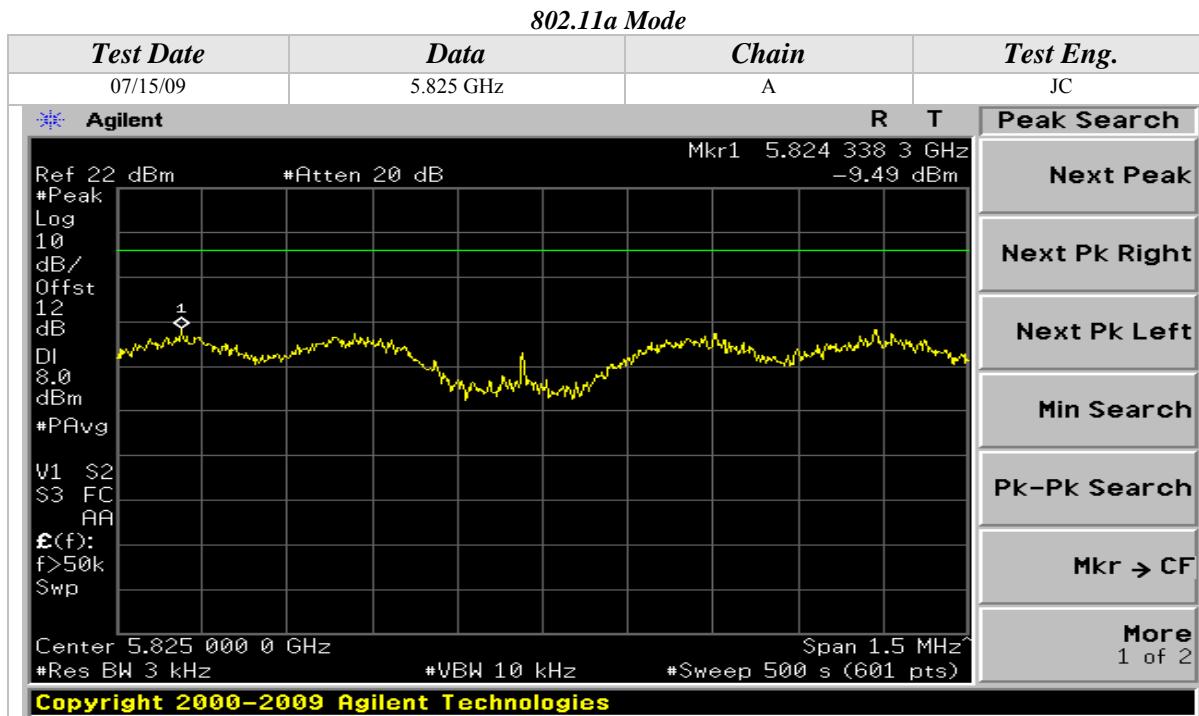



## Peak Power Spectral Density (Continued)

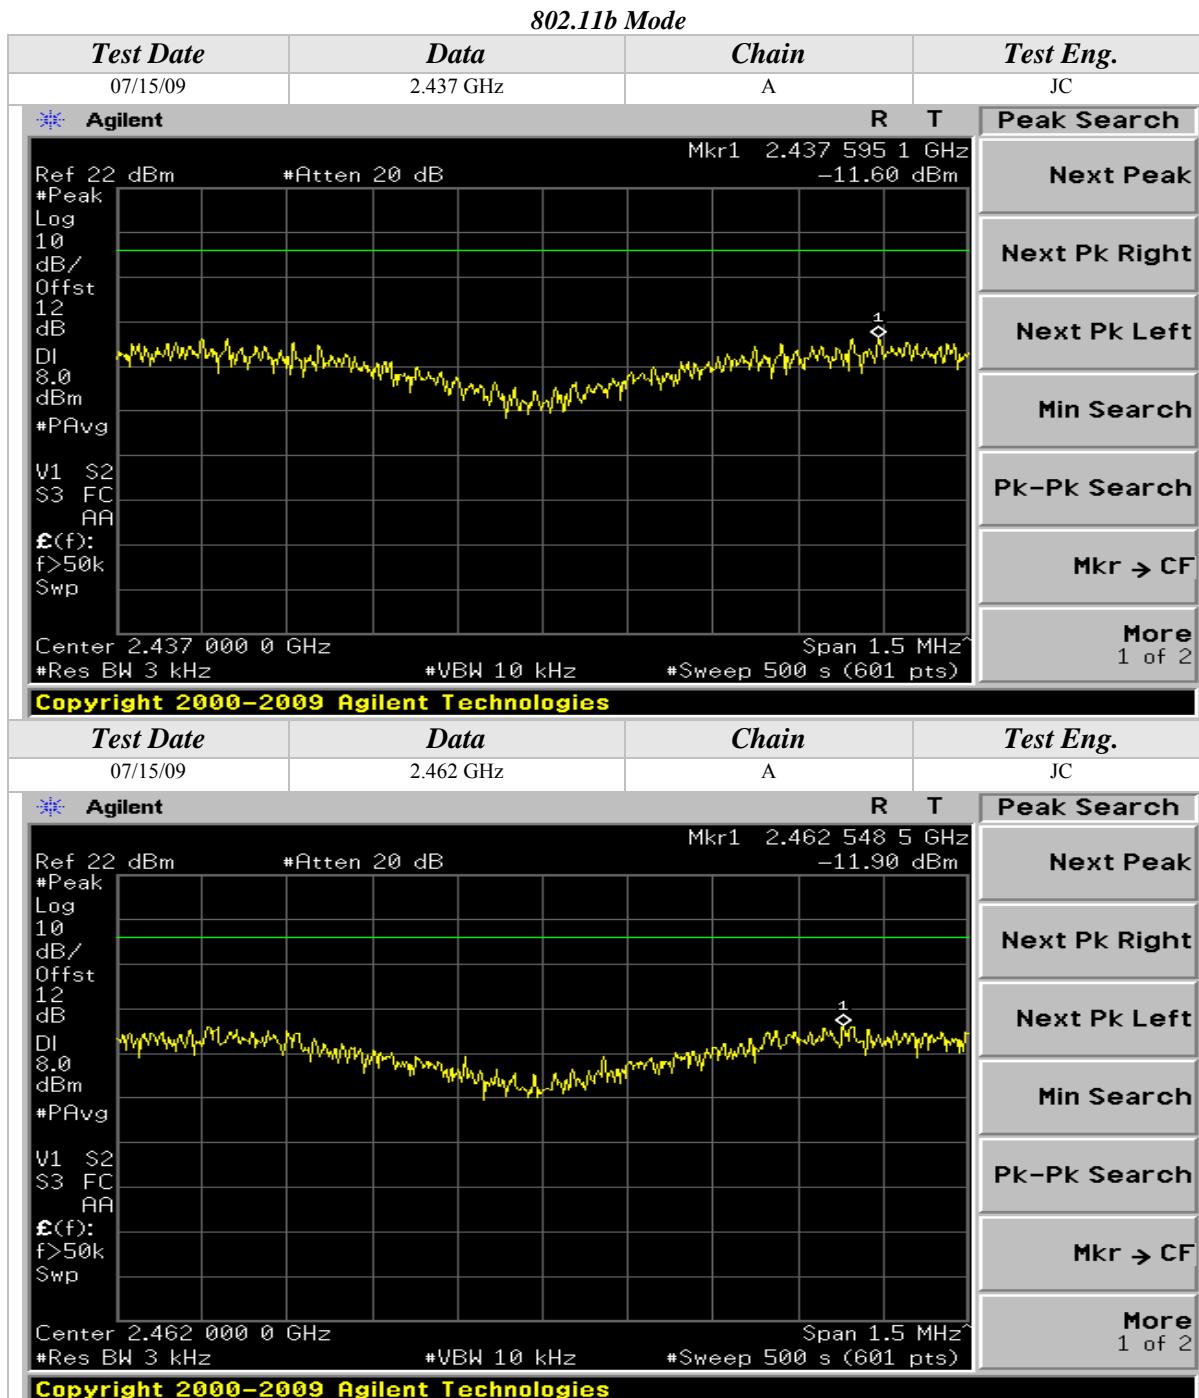


## Peak Power Spectral Density (Continued)

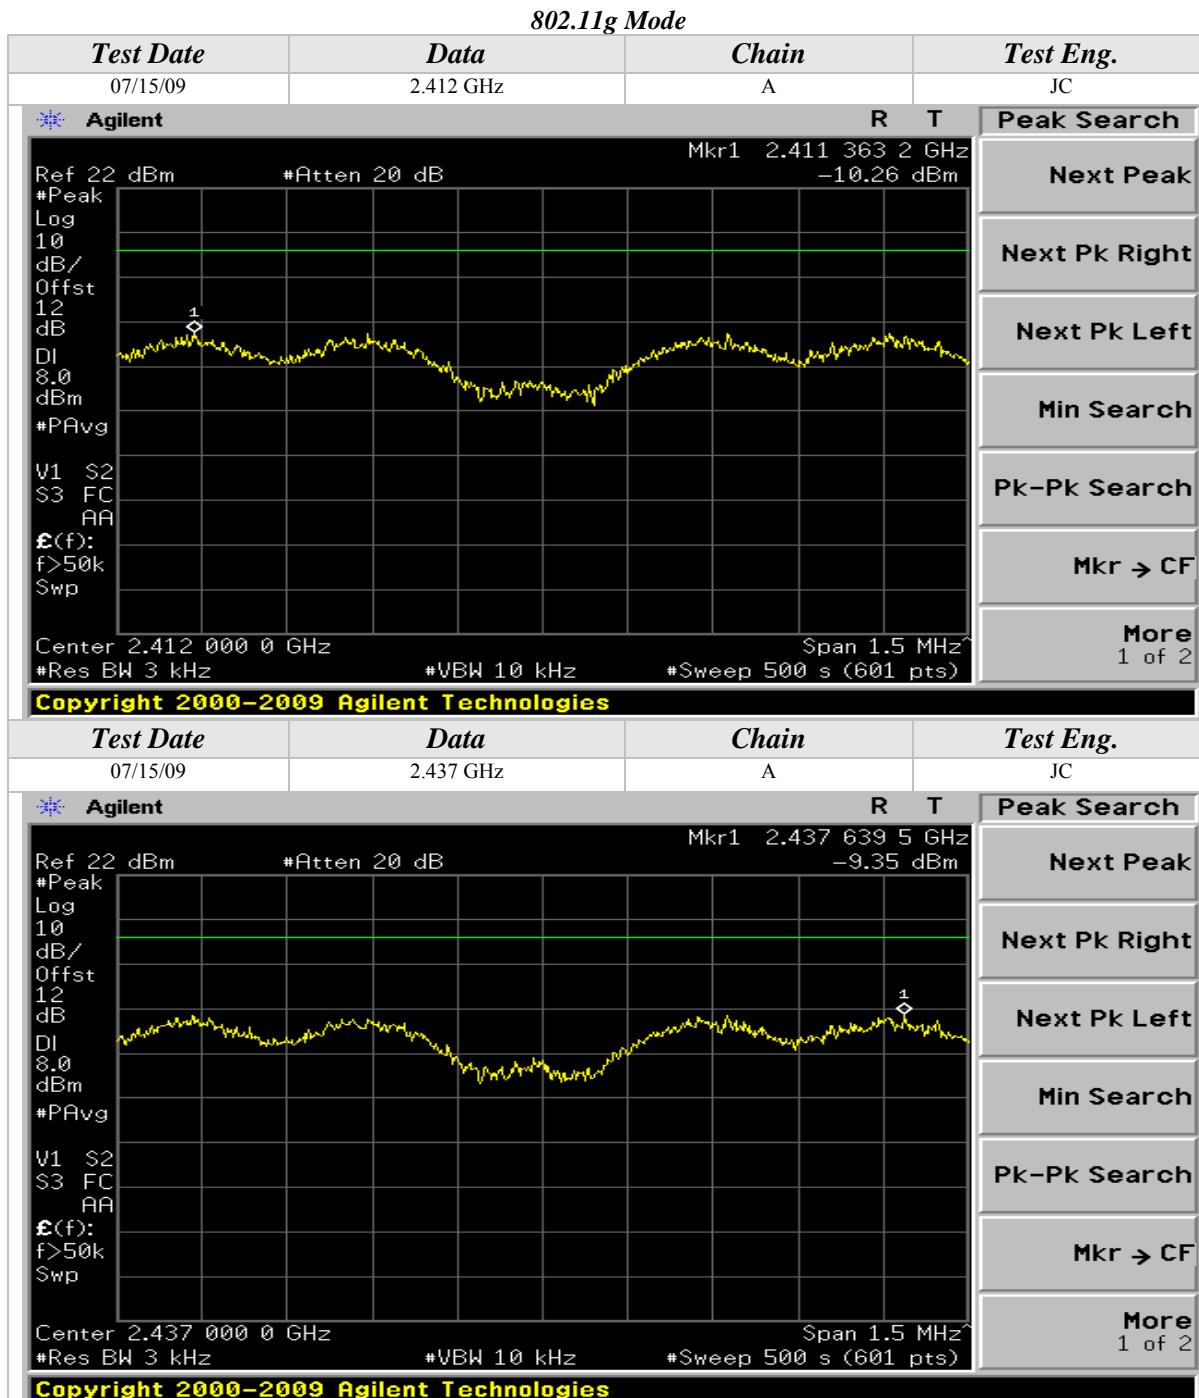


## Peak Power Spectral Density (Continued)

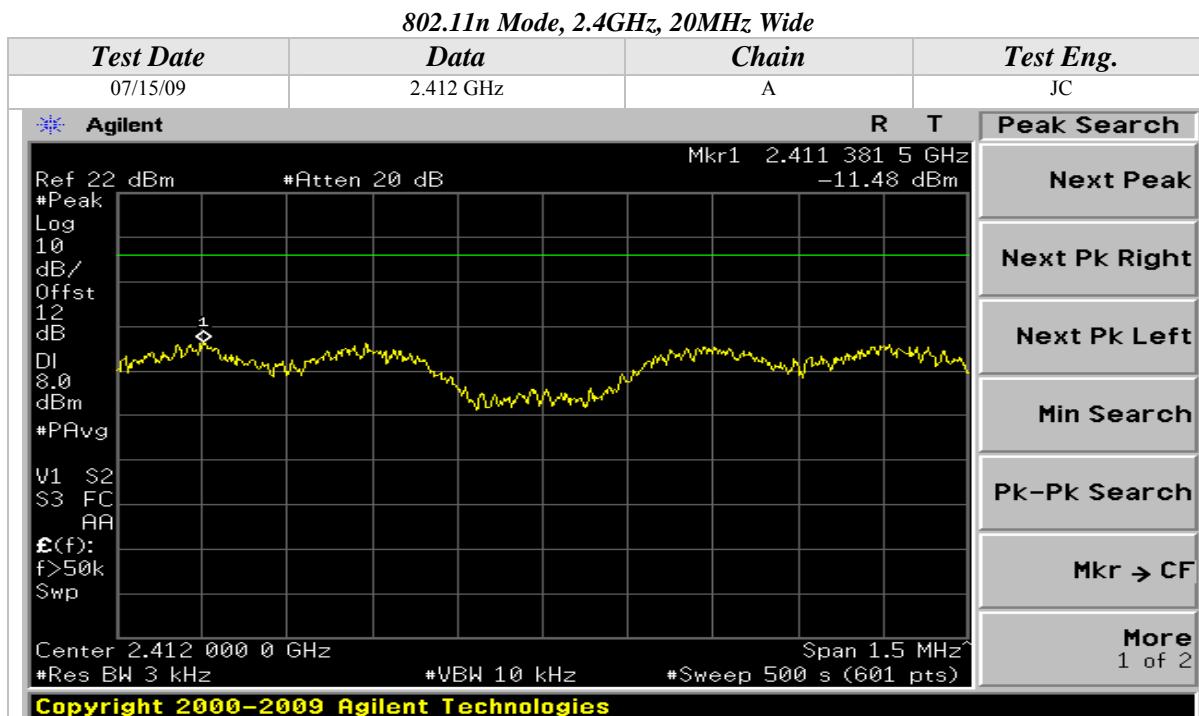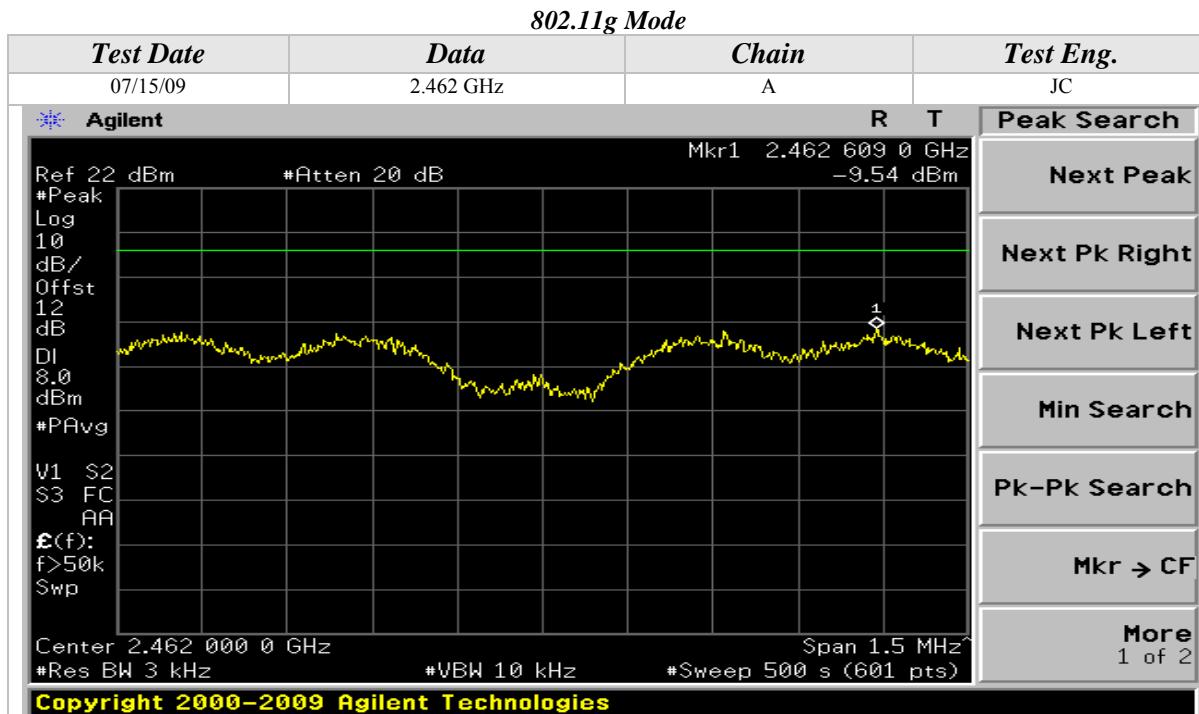



## Peak Power Spectral Density (Continued)

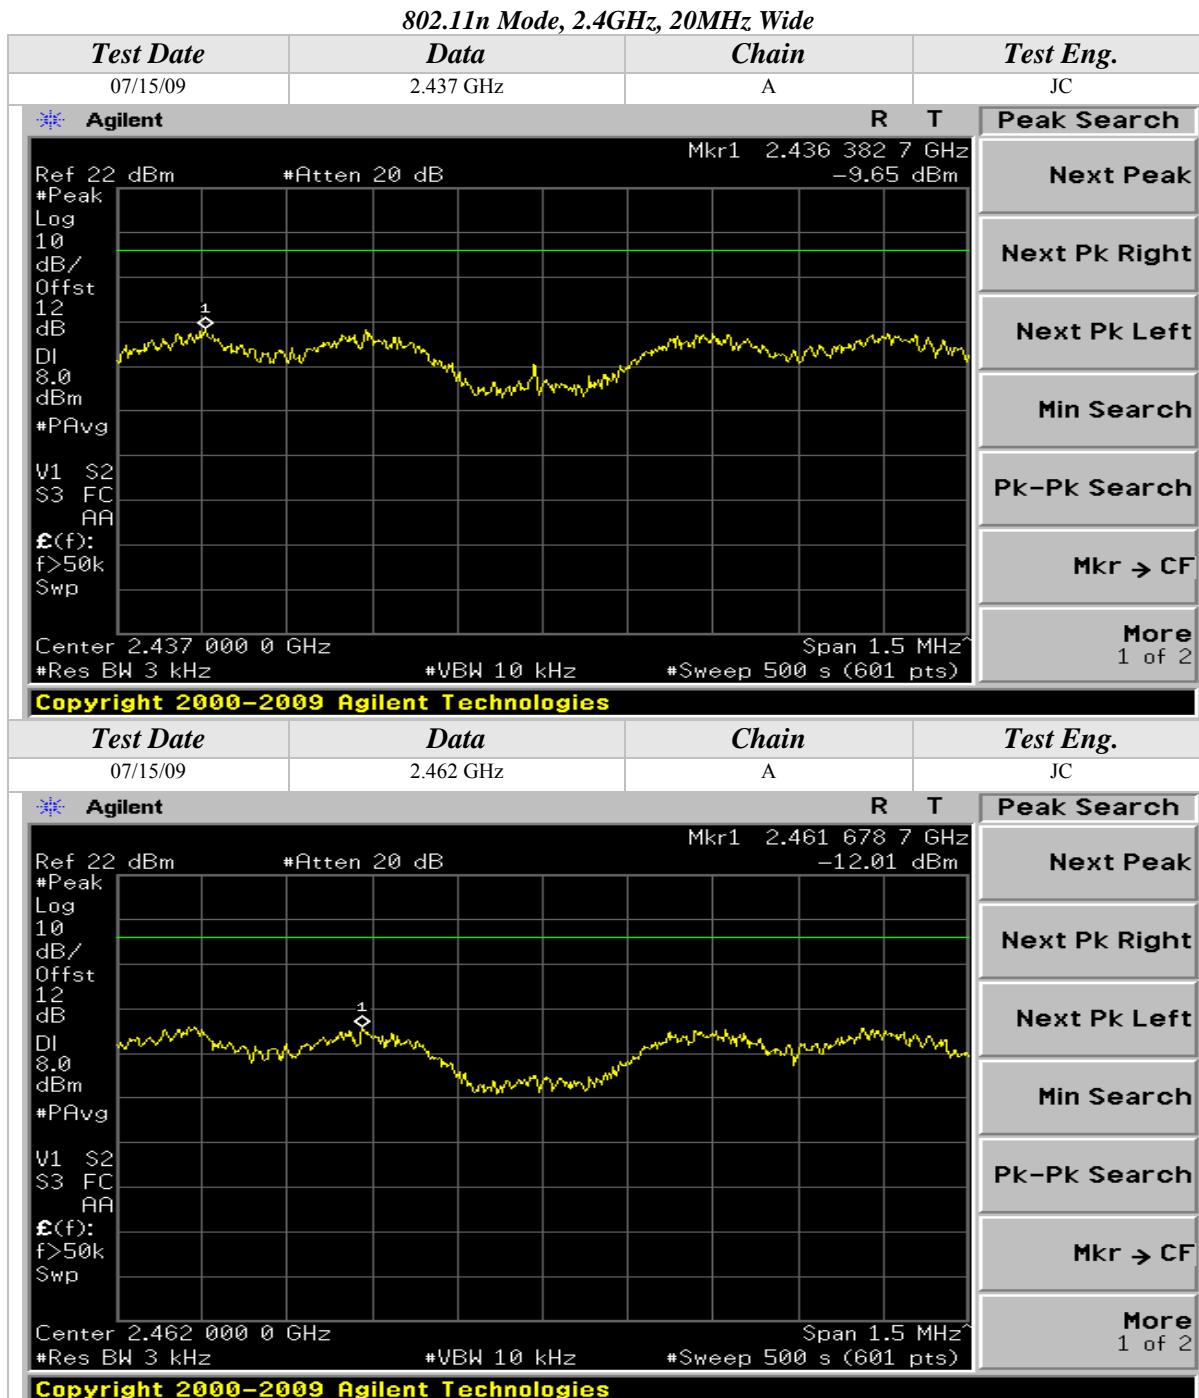


## Peak Power Spectral Density (Continued)

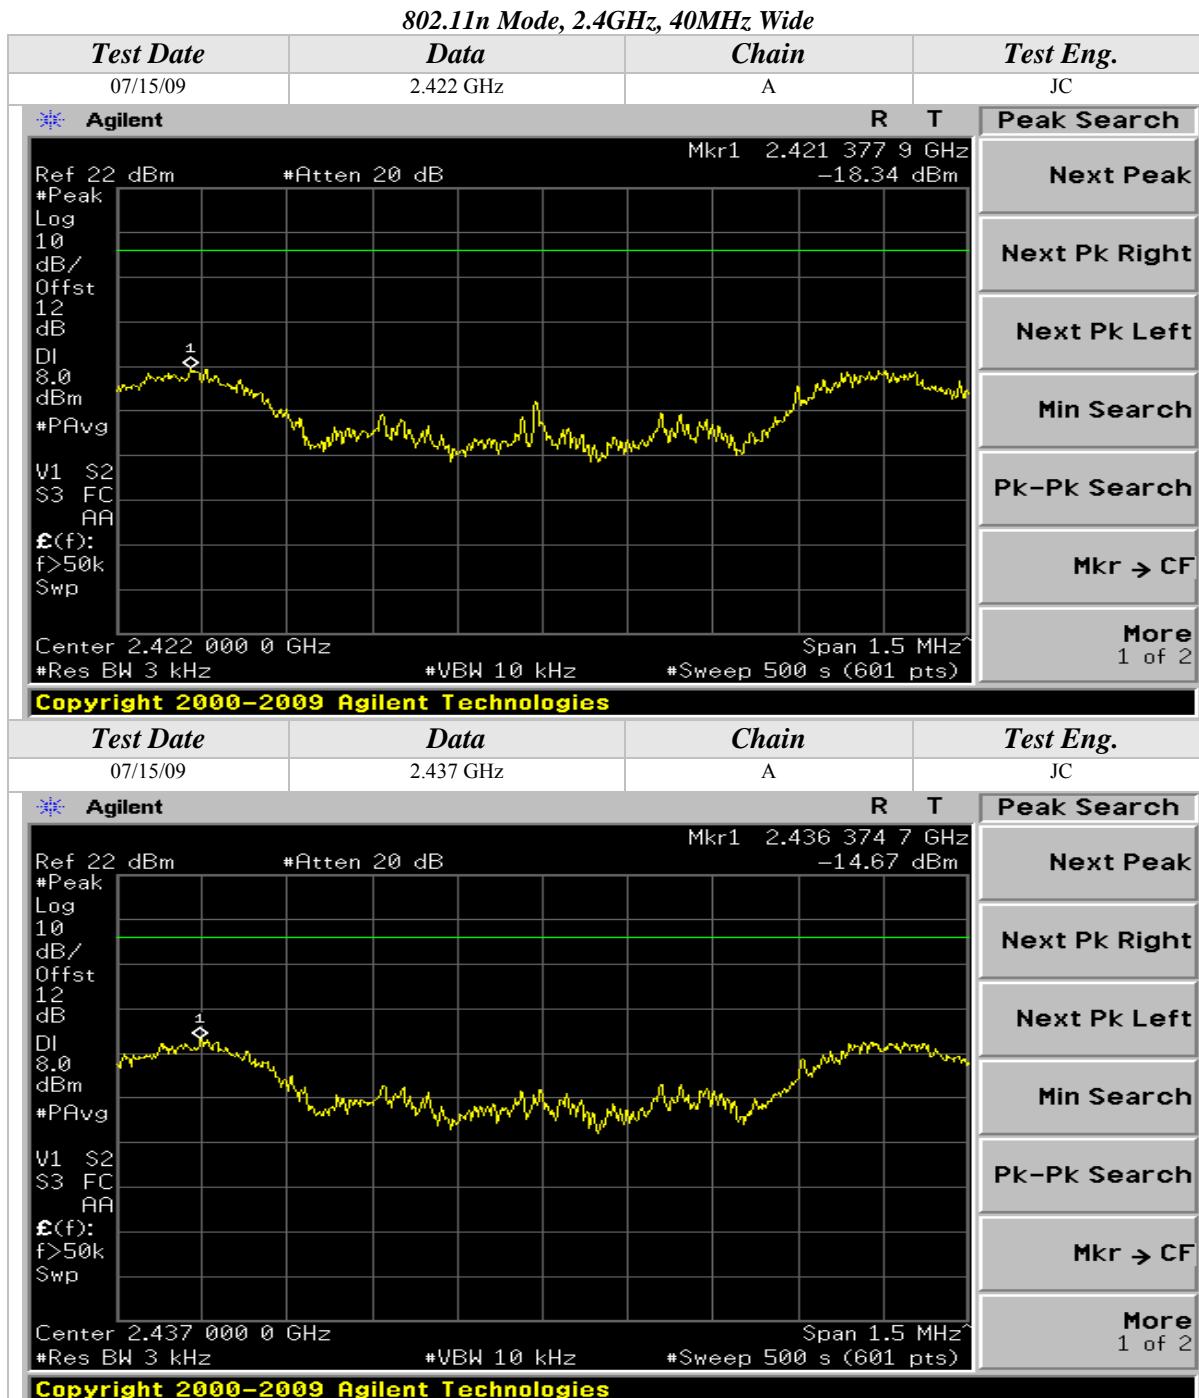


## Peak Power Spectral Density (Continued)

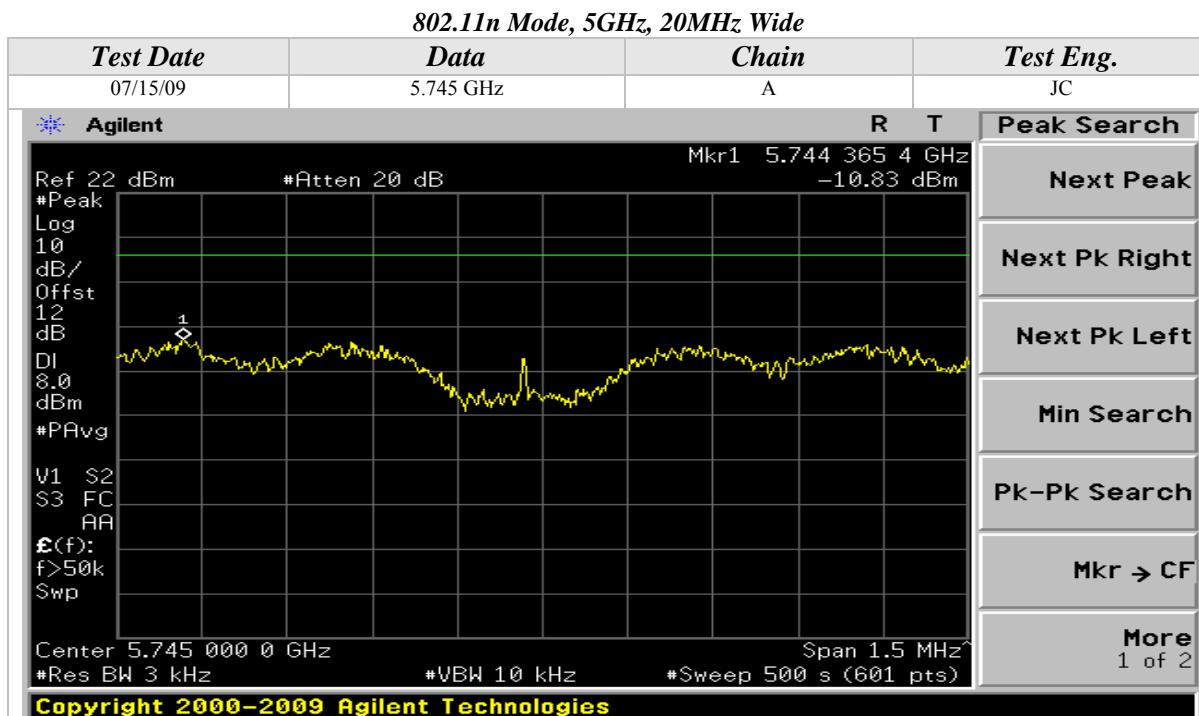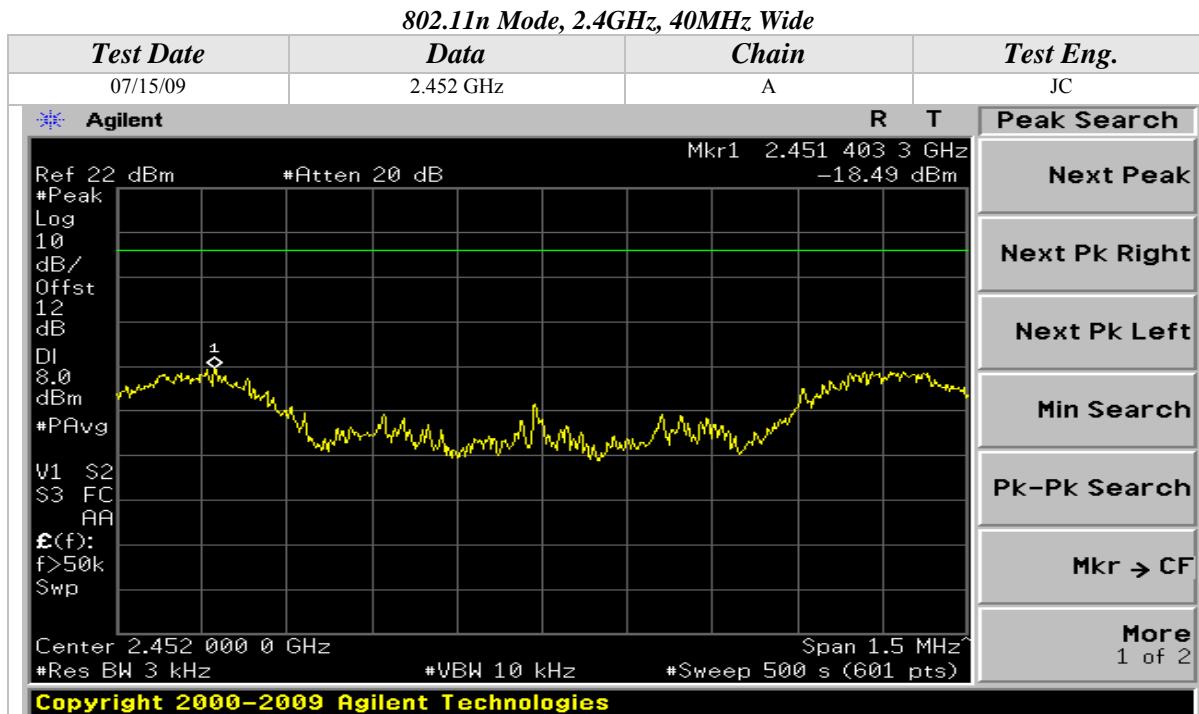


## Peak Power Spectral Density (Continued)

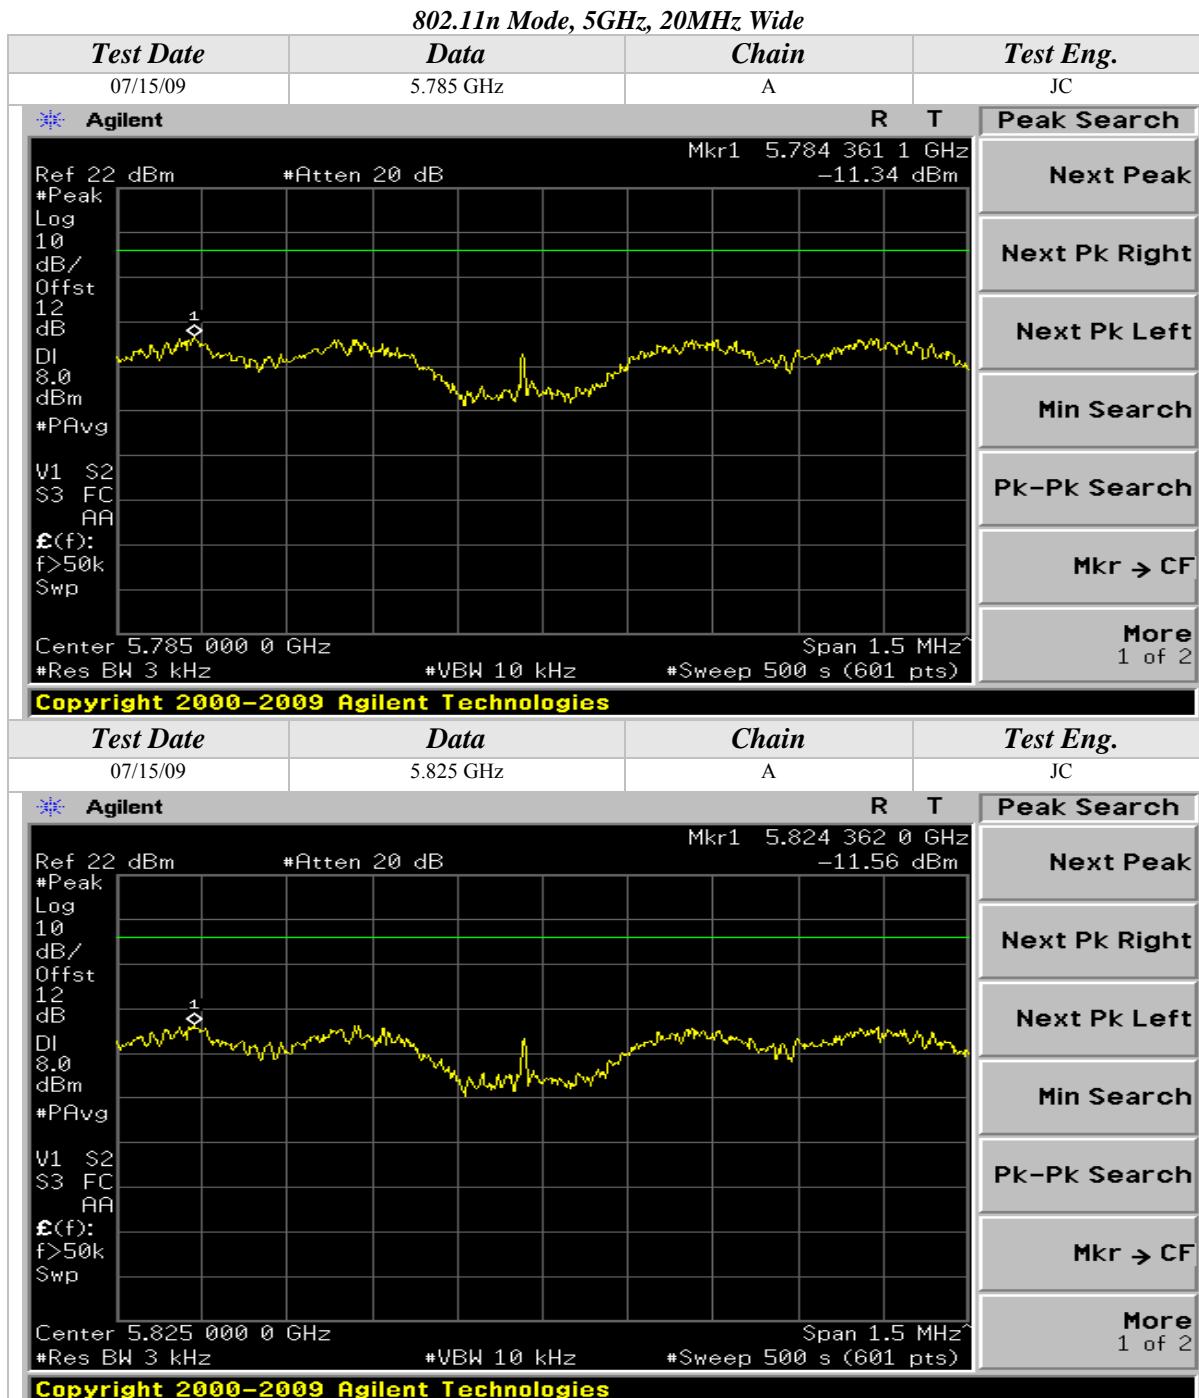



## Peak Power Spectral Density (Continued)

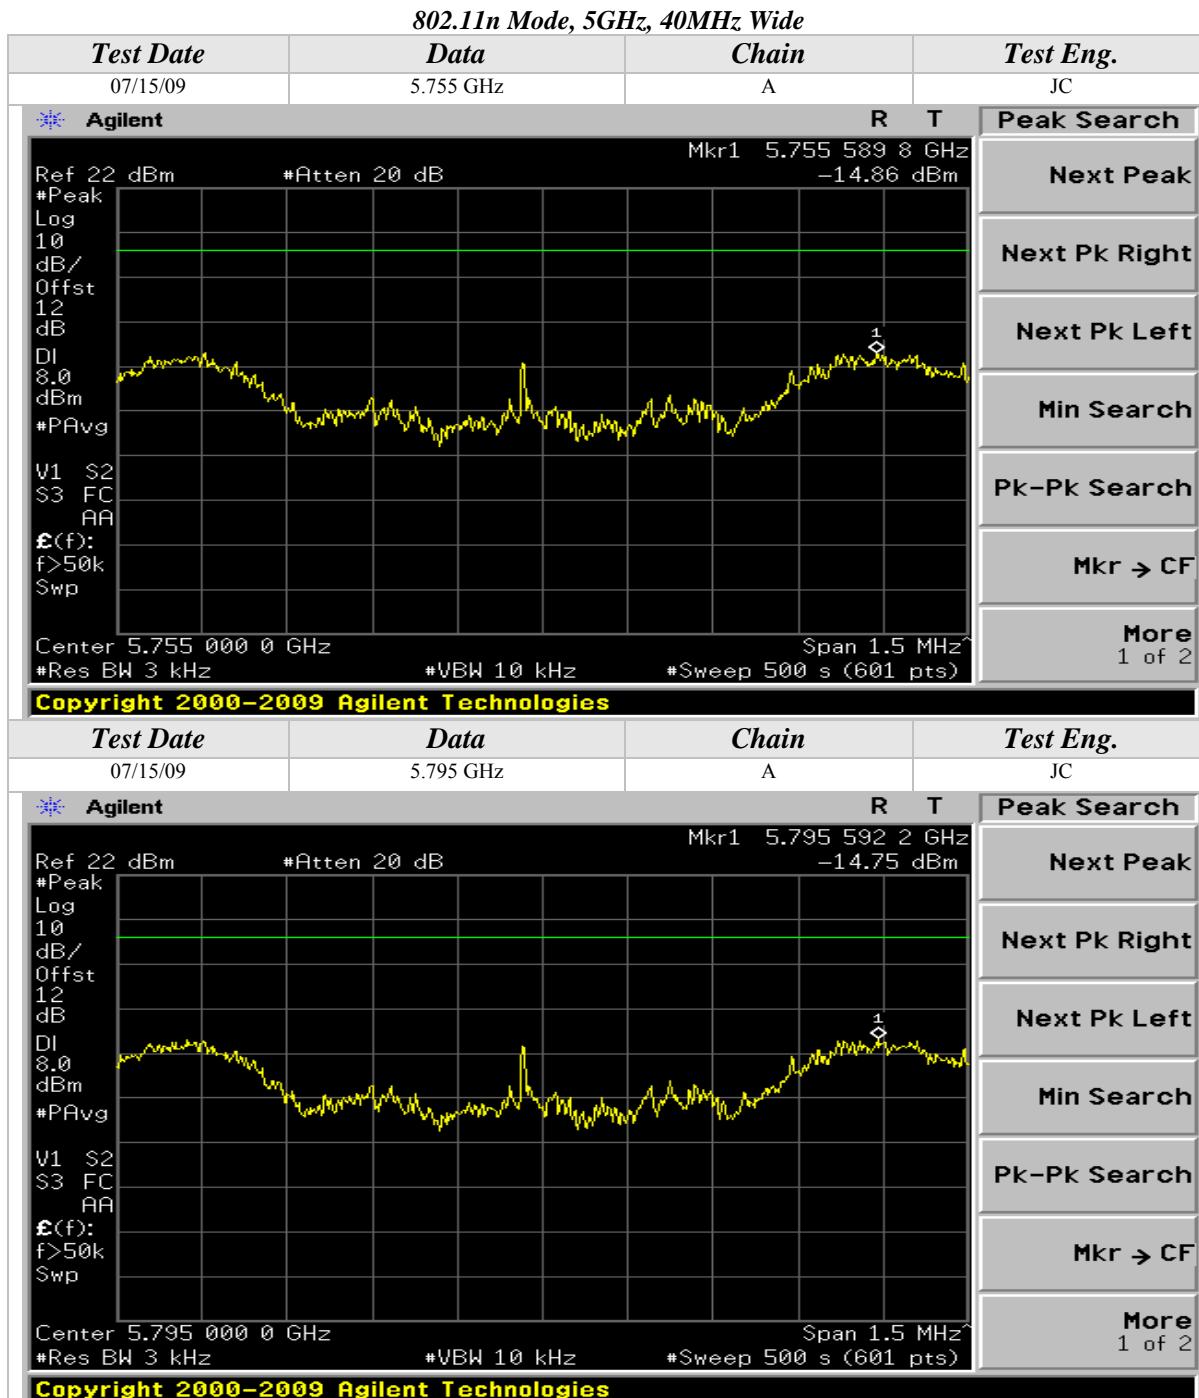

## Peak Power Spectral Density (Continued)


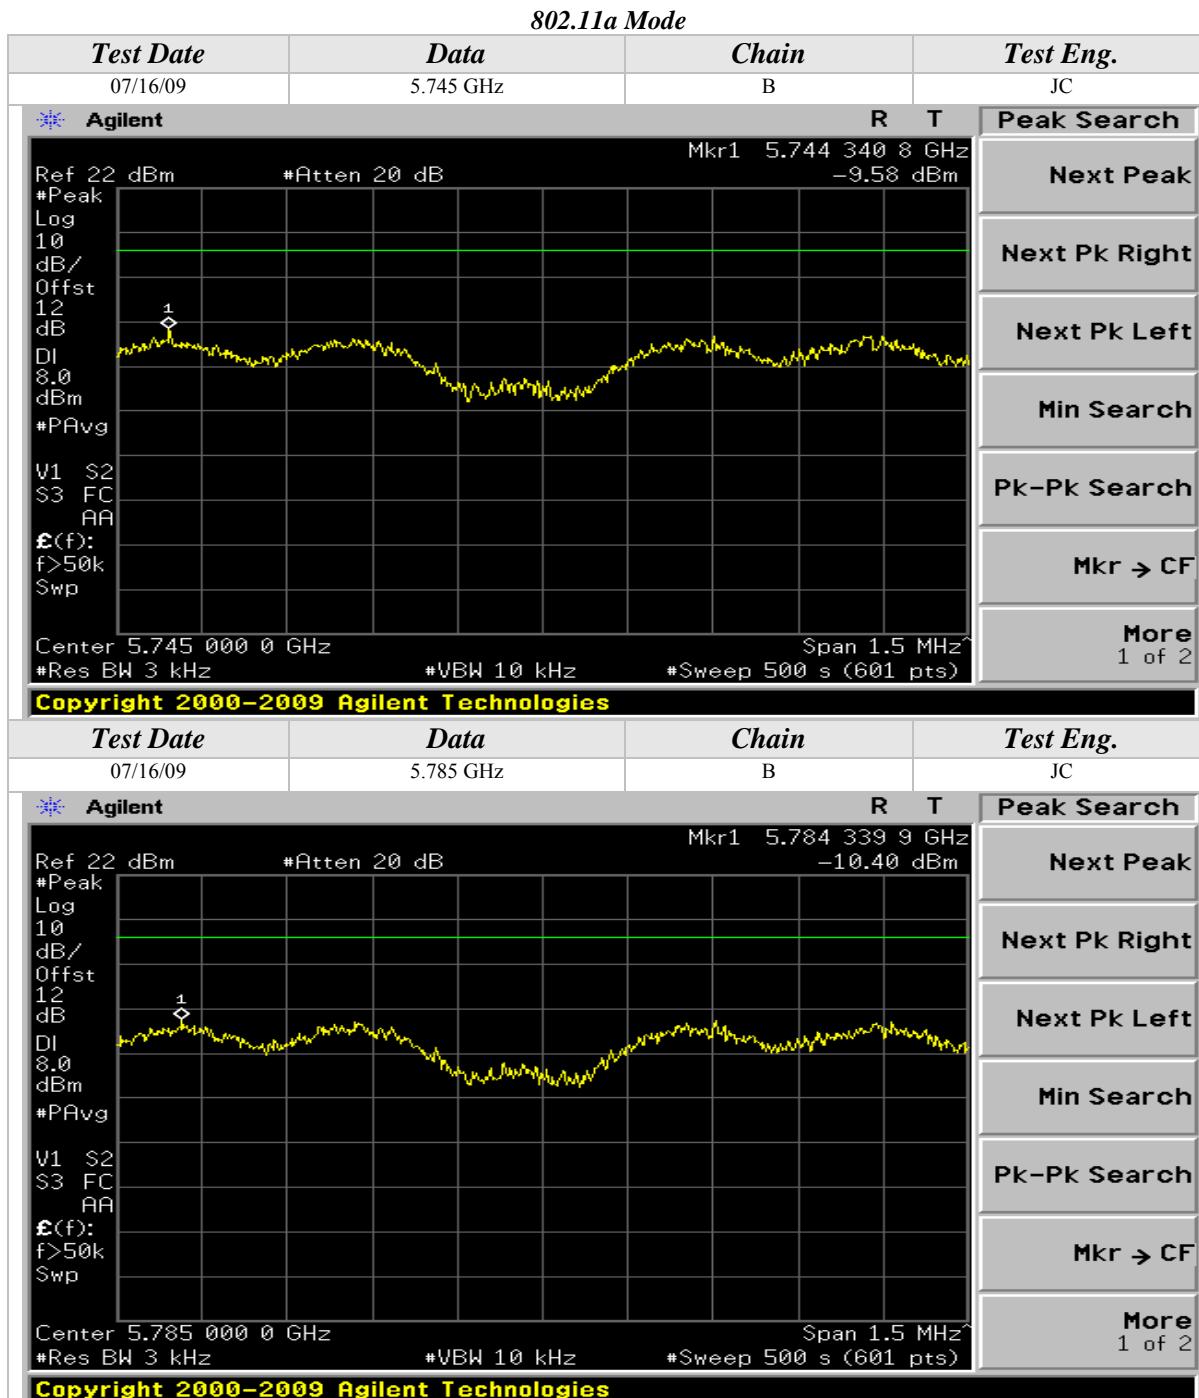


## Peak Power Spectral Density (Continued)

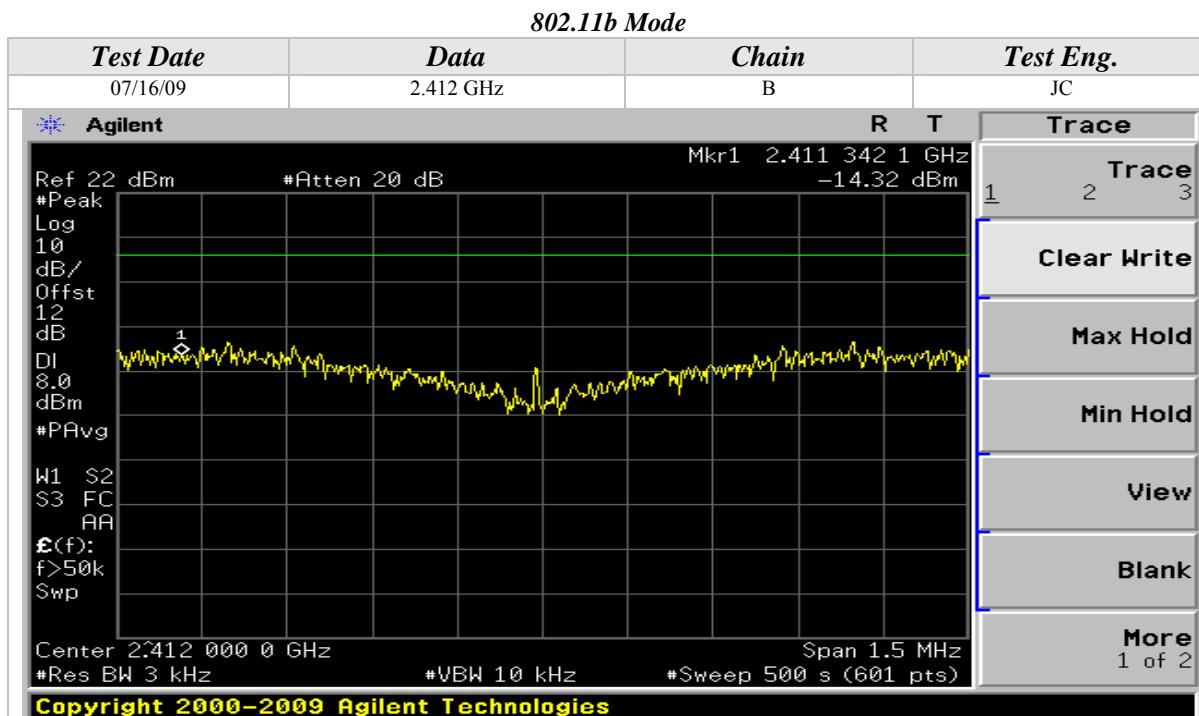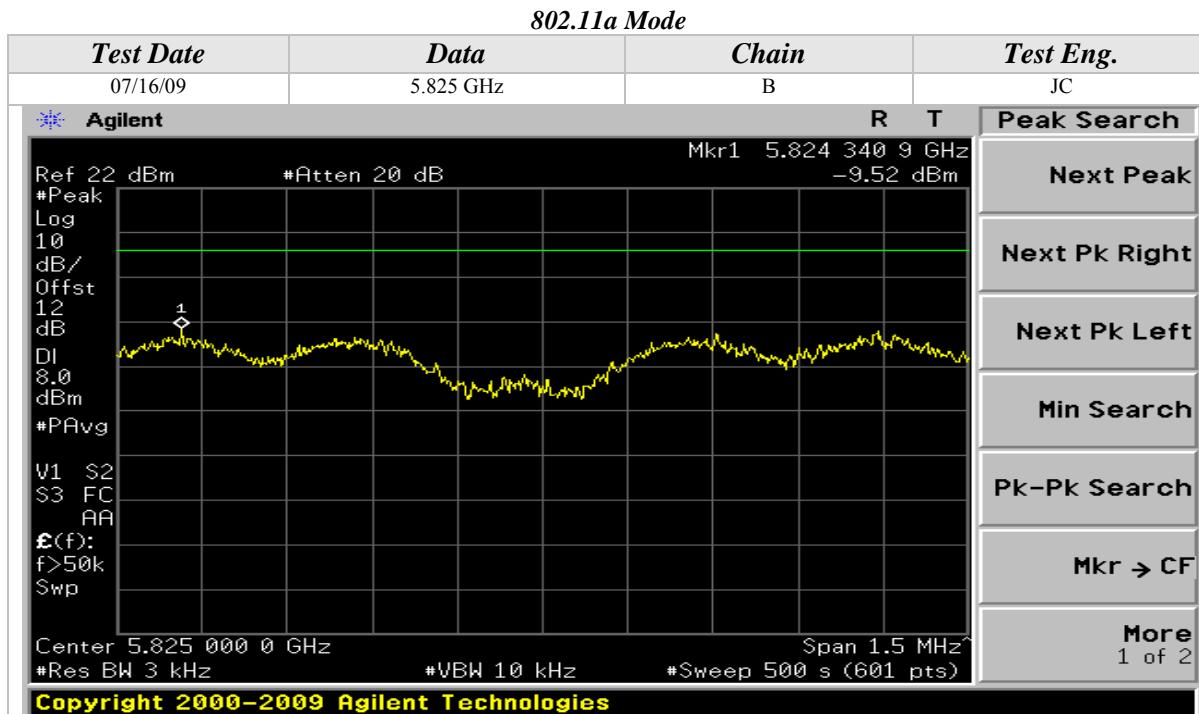


## Peak Power Spectral Density (Continued)

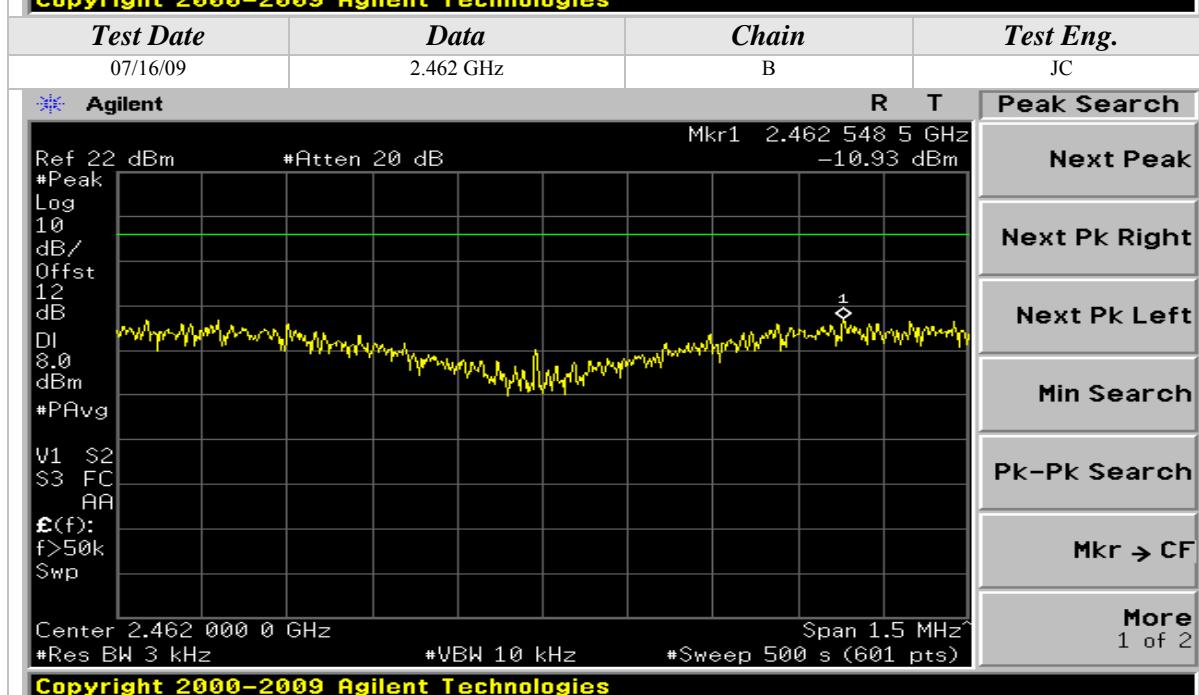
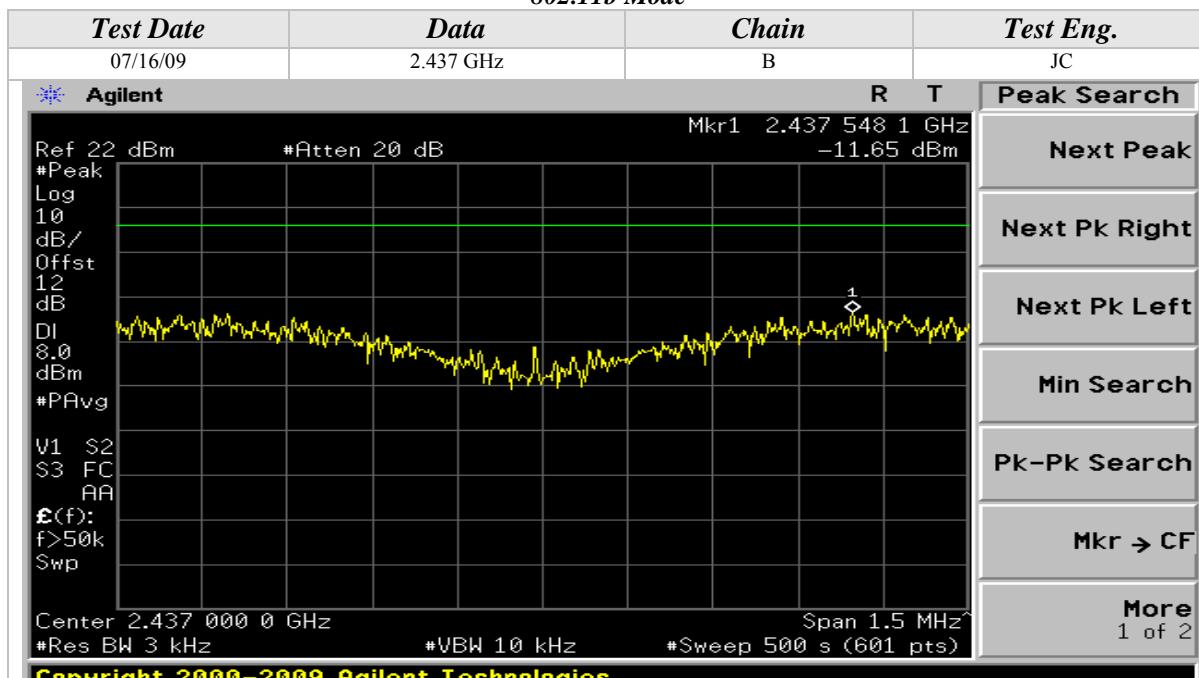
## 802.11b Mode




## Peak Power Spectral Density (Continued)

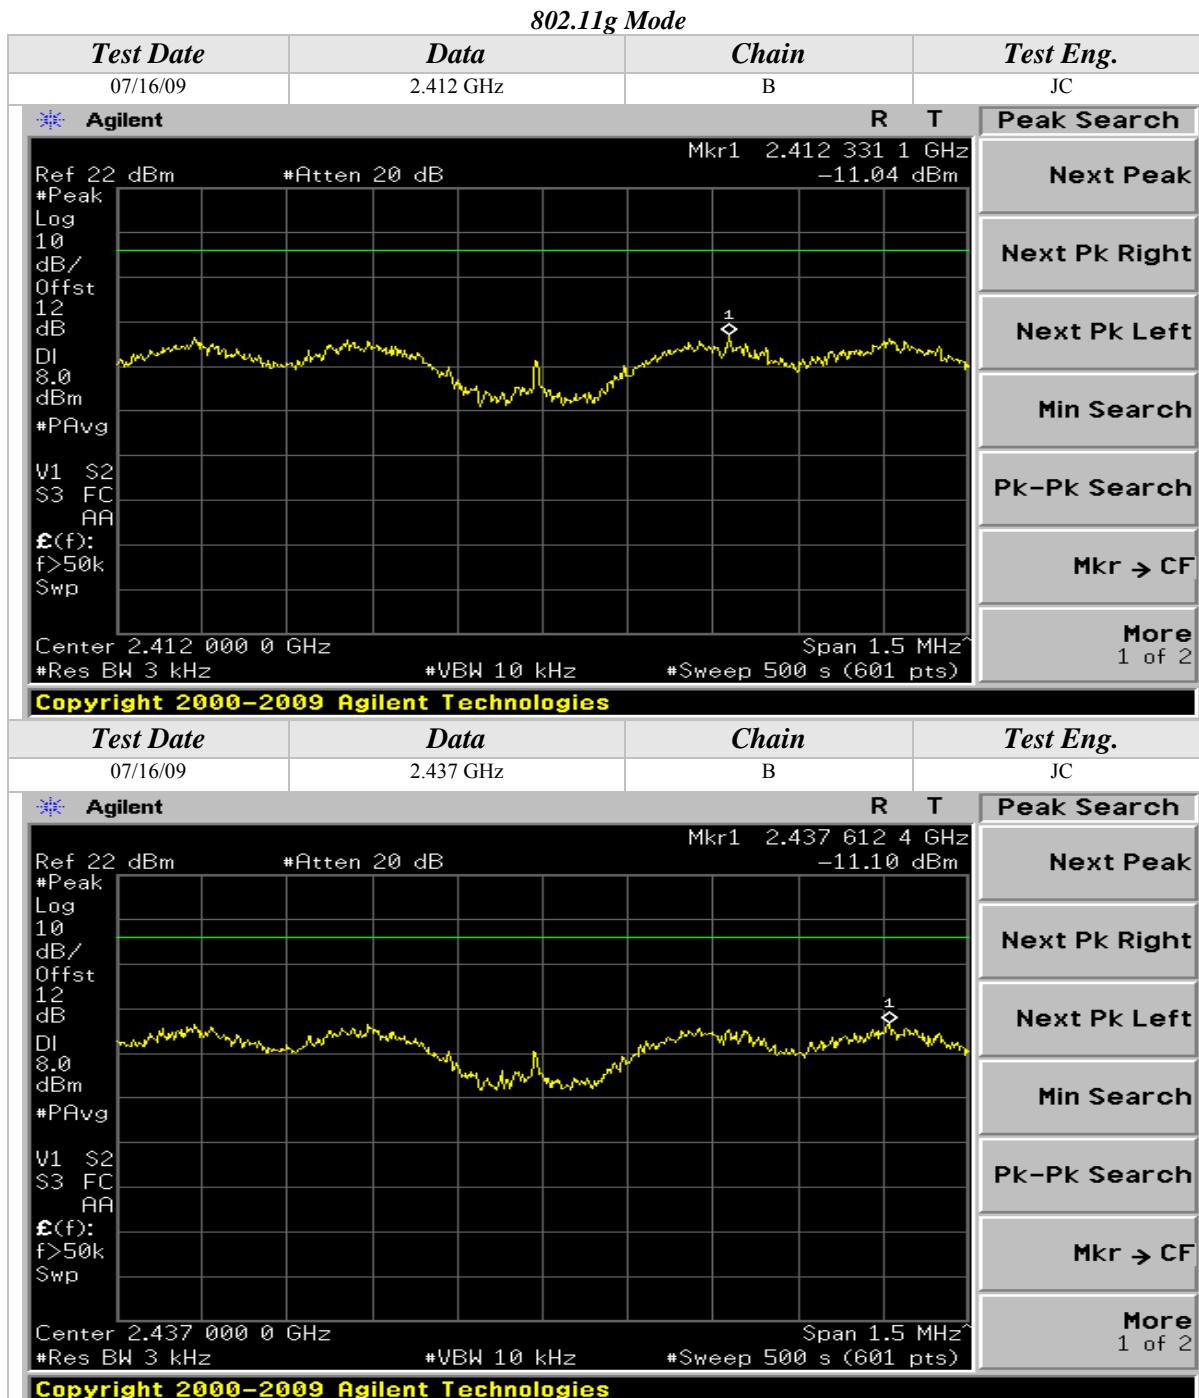


## Peak Power Spectral Density (Continued)

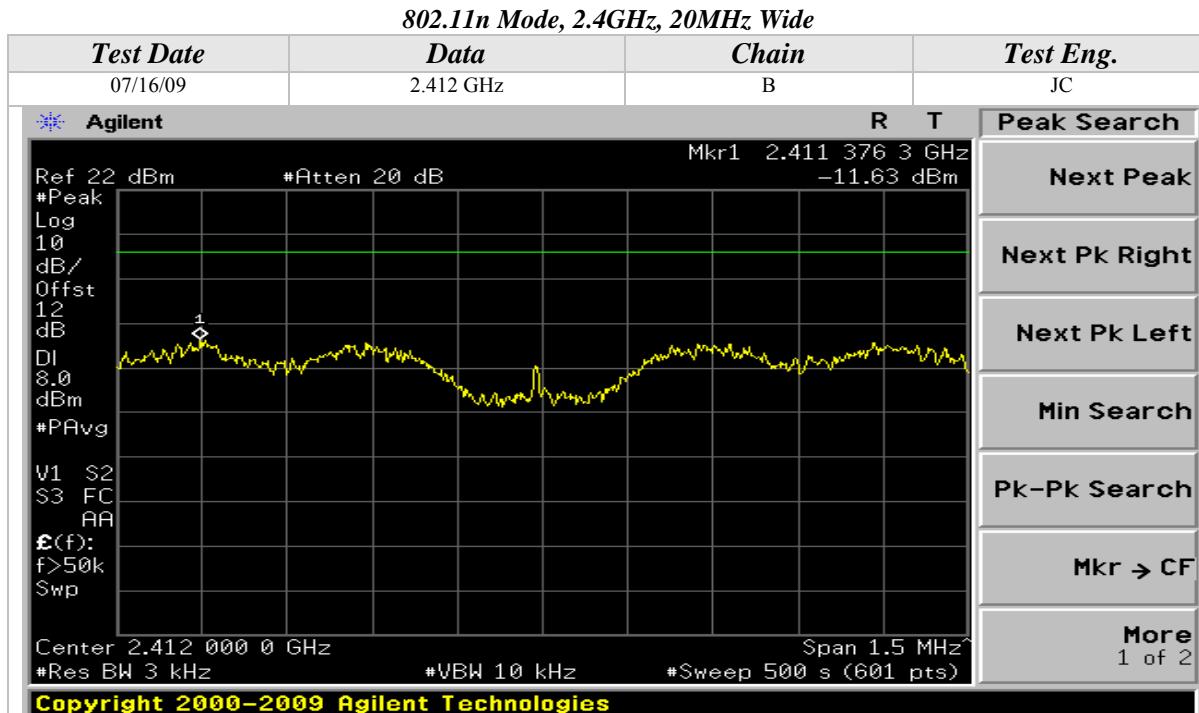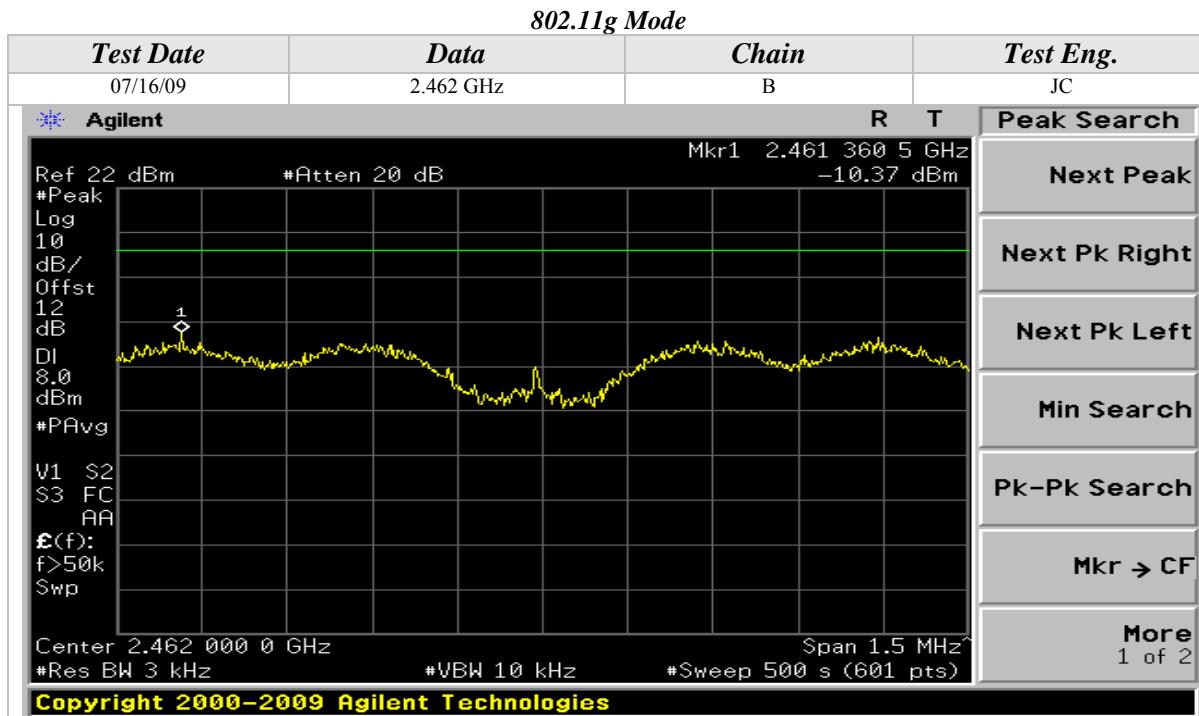



## Peak Power Spectral Density (Continued)

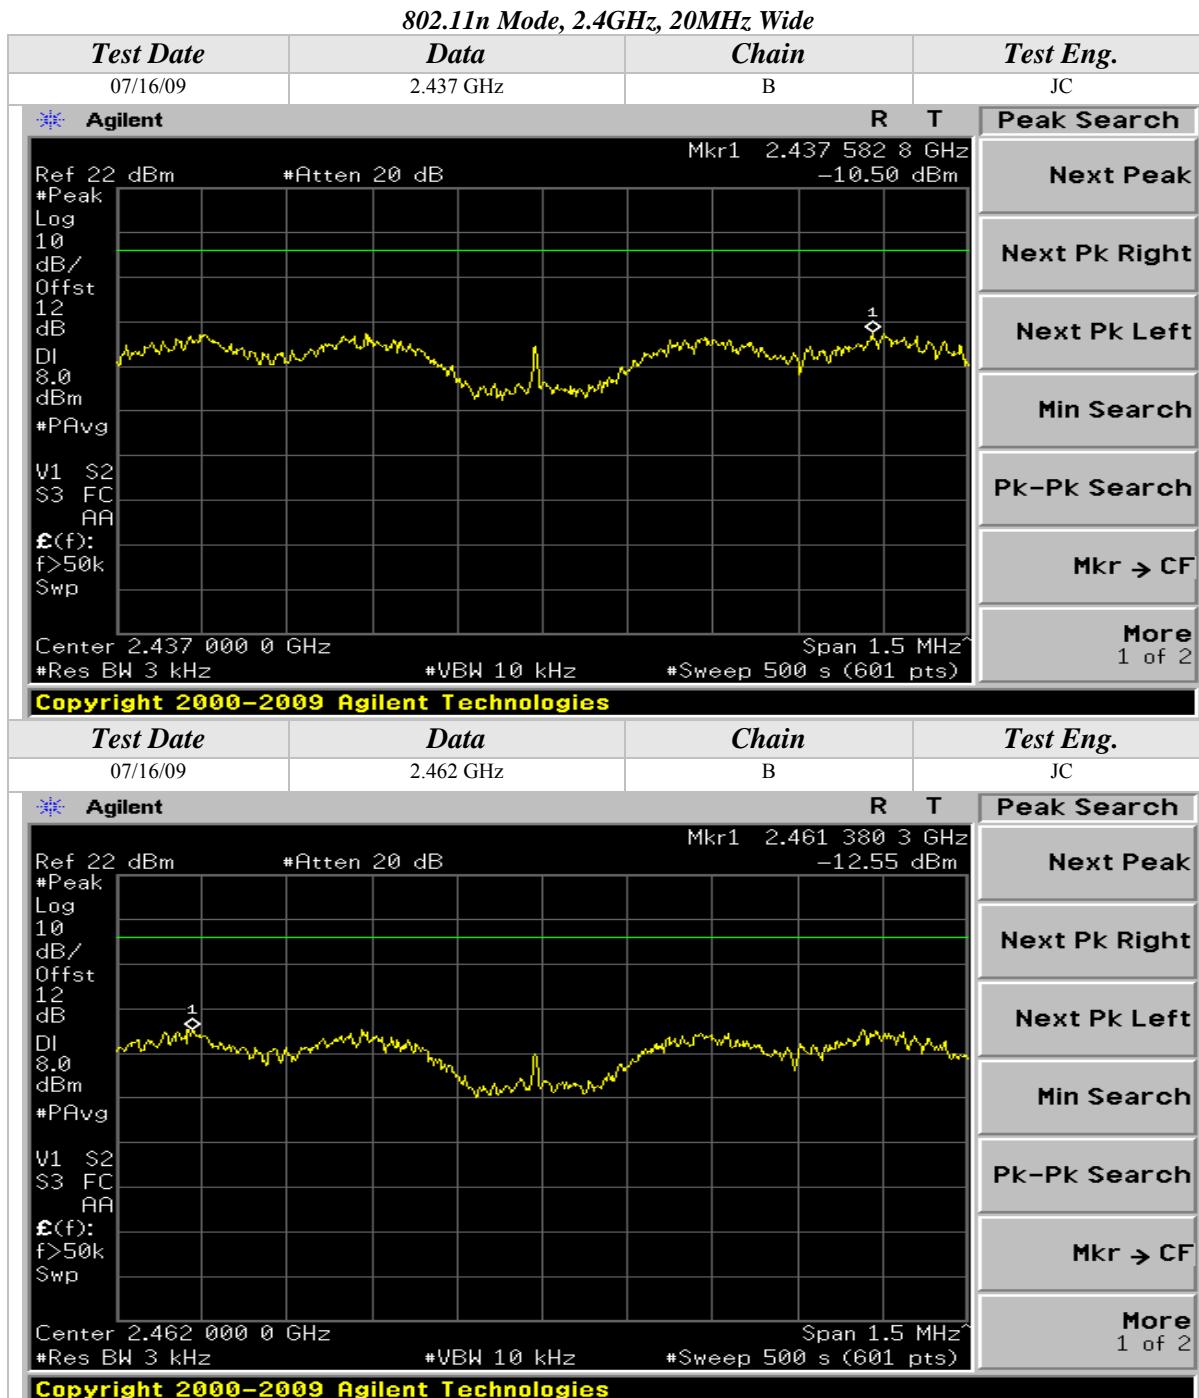


## Peak Power Spectral Density (Continued)

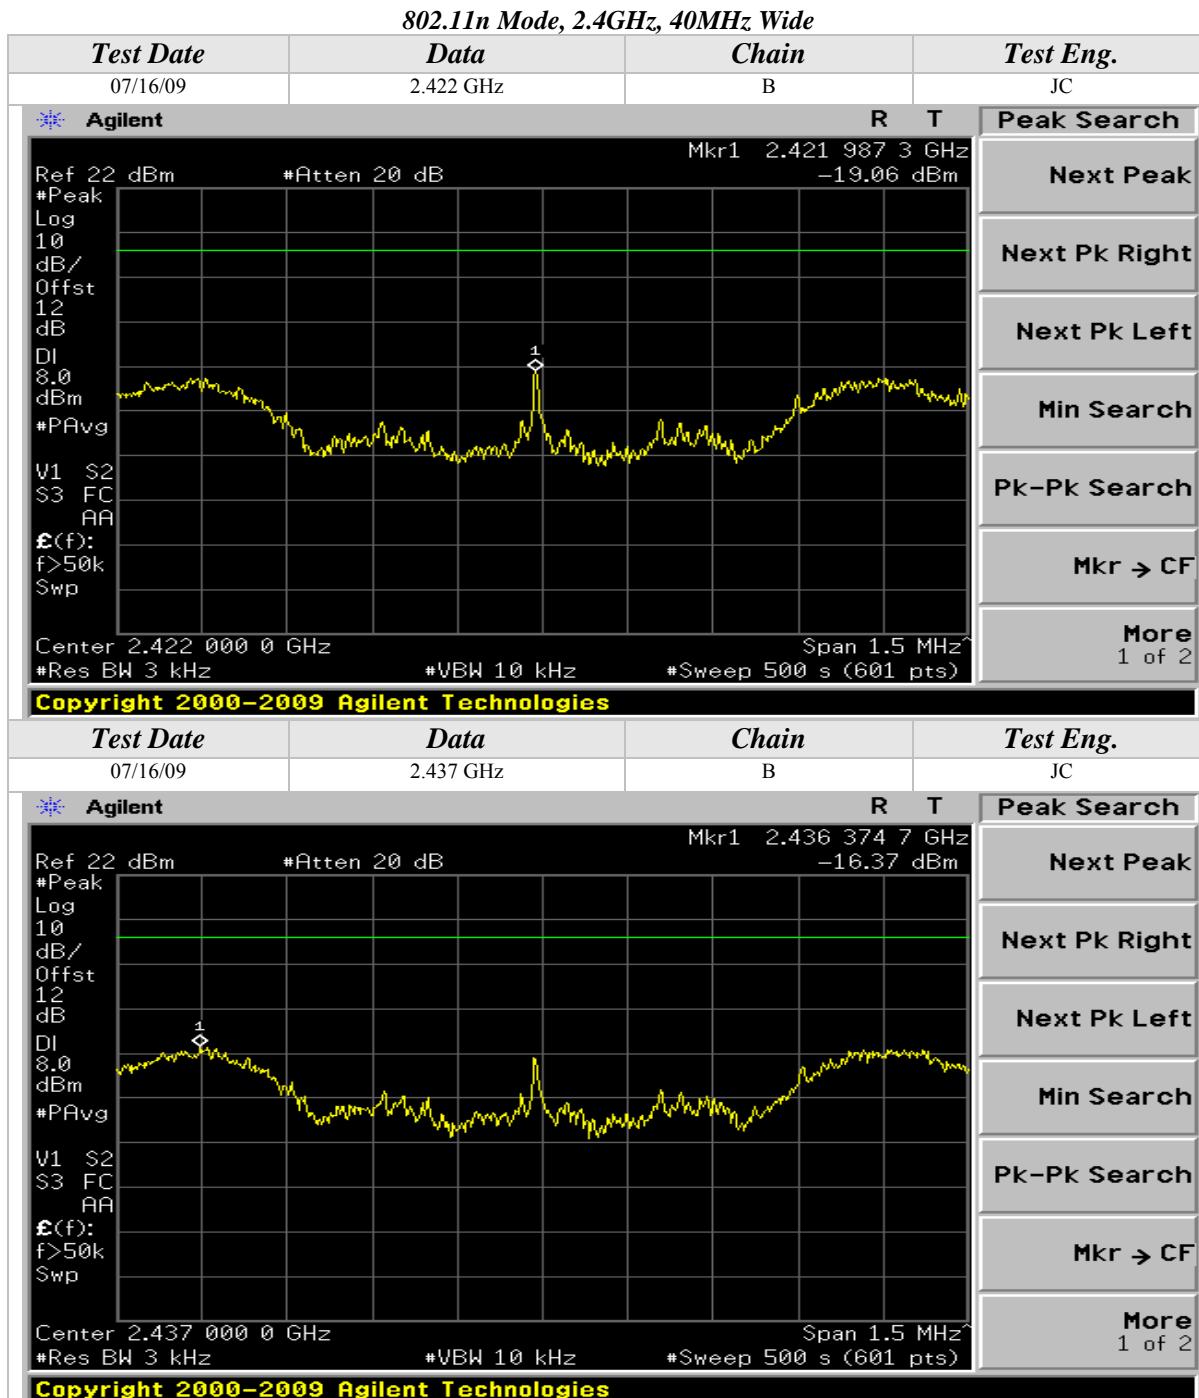


## Peak Power Spectral Density (Continued)

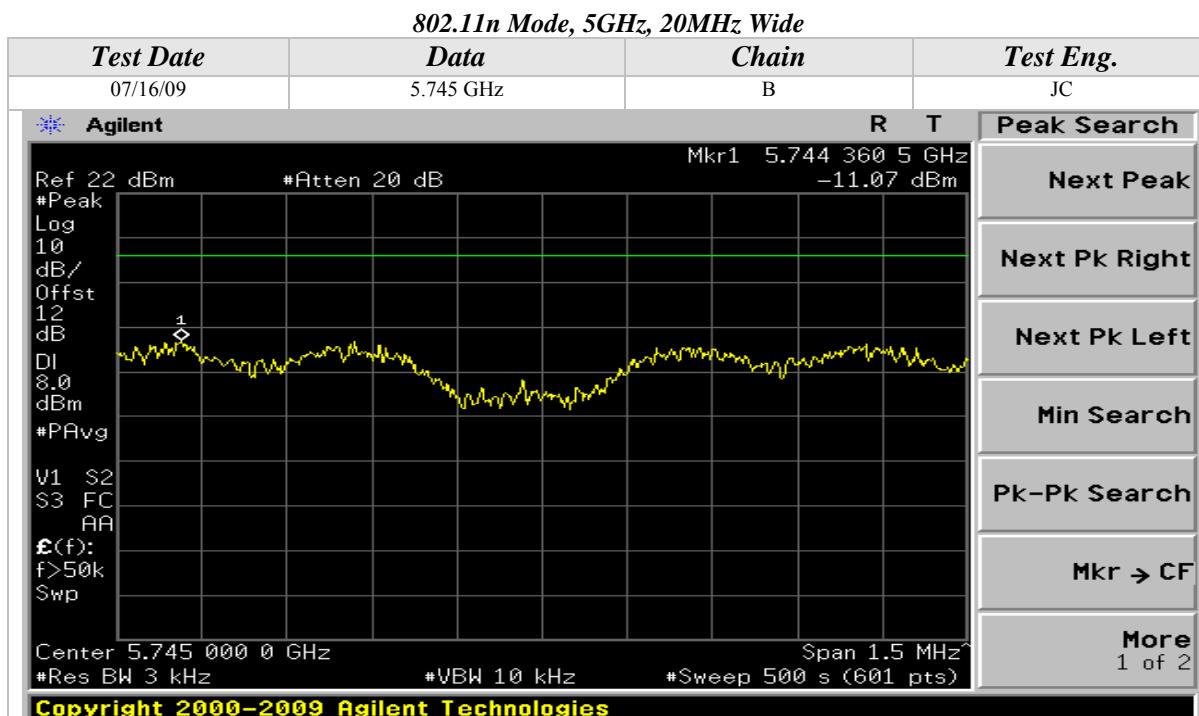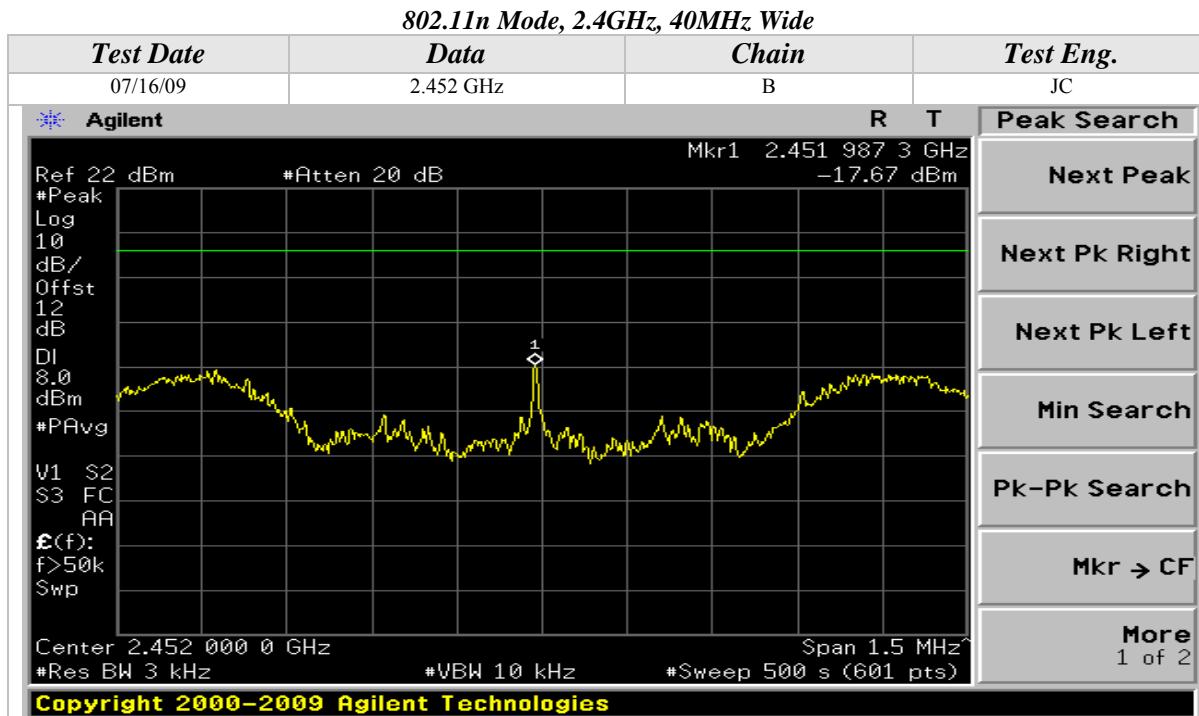

## Peak Power Spectral Density (Continued)

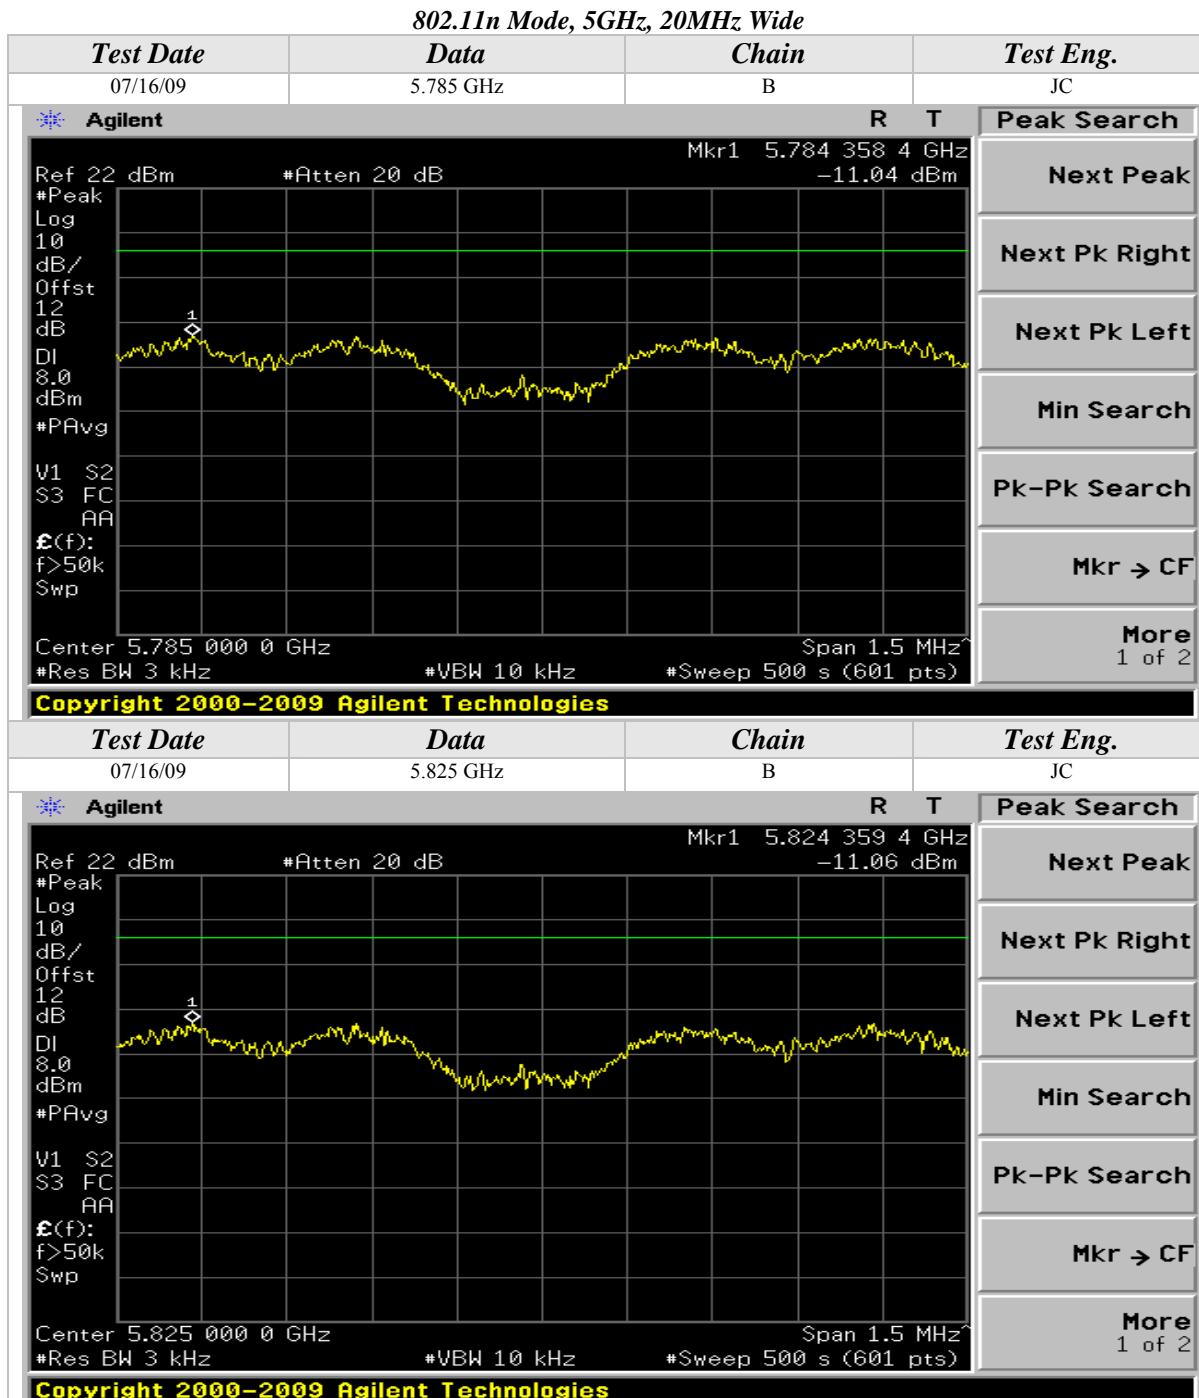

## Peak Power Spectral Density (Continued)

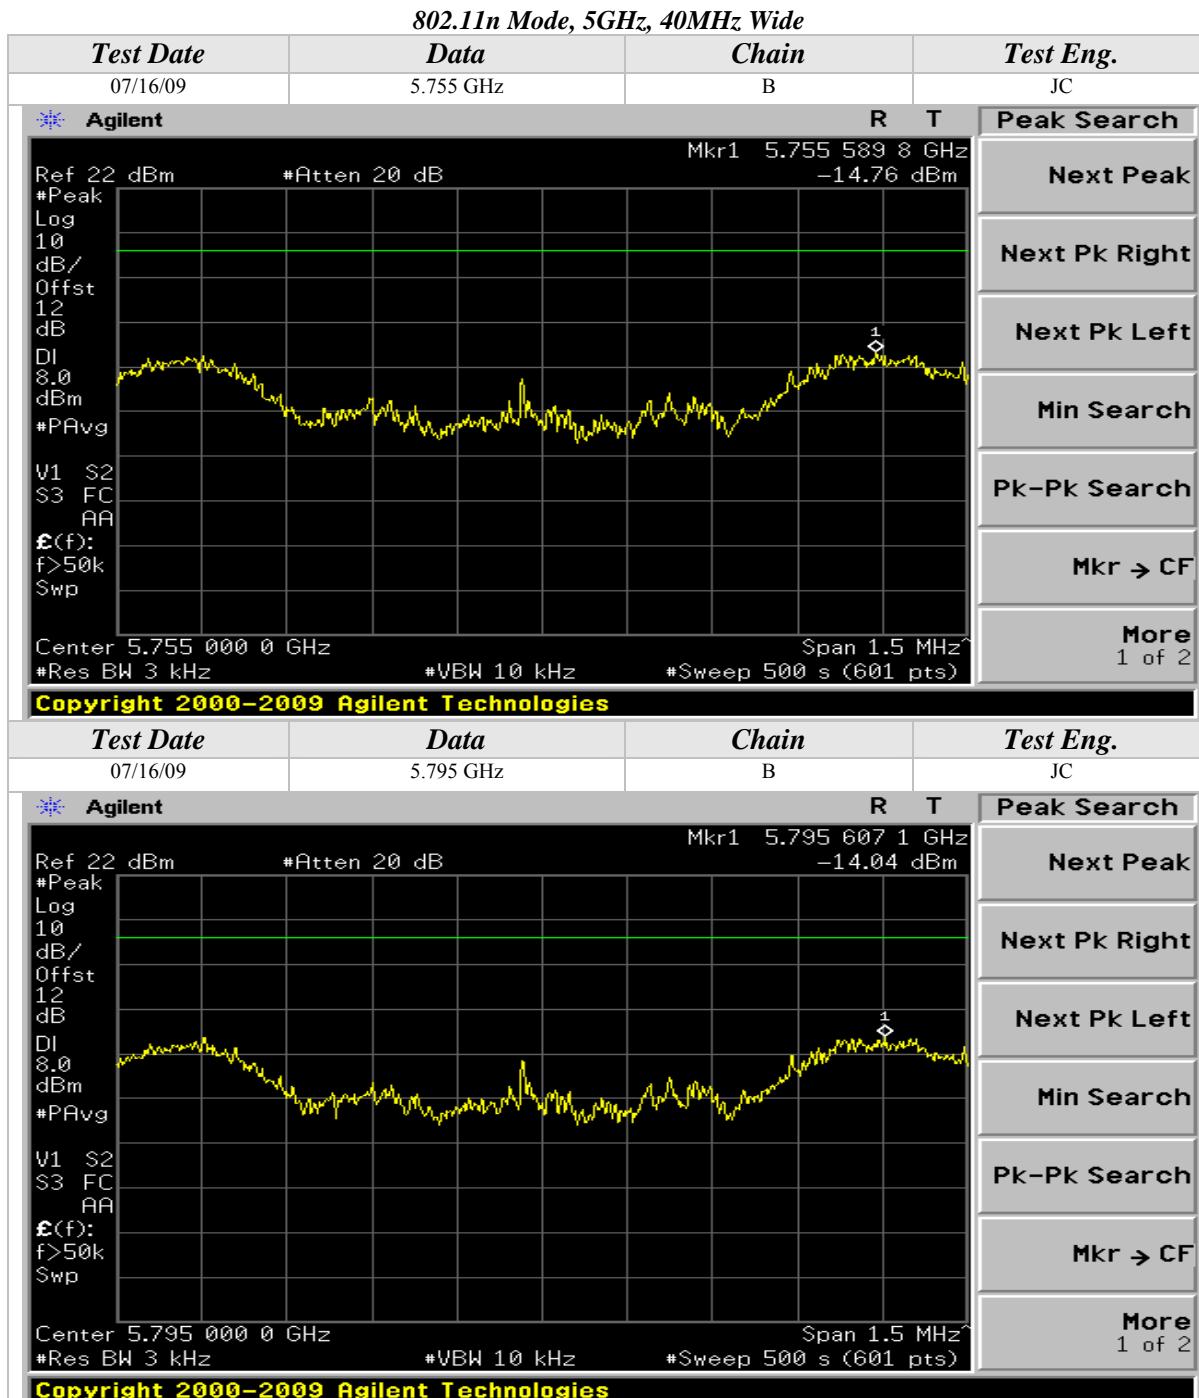





## CONDUCTED OUT OF BAND EMISSIONS

<b>CLIENT:</b>	Intel Corporation	<b>DATE:</b>	07/31/09
<b>EUT:</b>	Intel WiFi Link 6300	<b>PROJECT NUMBER:</b>	INTEL-090601
<b>MODEL NUMBER:</b>	622ANHMW	<b>TEST ENGINEER:</b>	JC
<b>SERIAL NUMBER:</b>	0015005A3C7C	<b>SITE #:</b>	2
<b>CONFIGURATION:</b>	Tested installed in an extender board connected to the host laptop's mini PCI slot	<b>TEMPERATURE:</b>	26 deg. C
		<b>HUMIDITY:</b>	34% RH
		<b>TIME:</b>	9:30 AM

<b>Description:</b>	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.
<b>Results:</b>	See Data Sheet
<b>Note:</b>	Conducted Emissions Measurements were performed on the EUT with power supply set at the following voltage and frequency. <ul style="list-style-type: none"><li>• 120VAC / 60 Hz.</li></ul>

## Conducted Out Of Band Emissions (Continued)
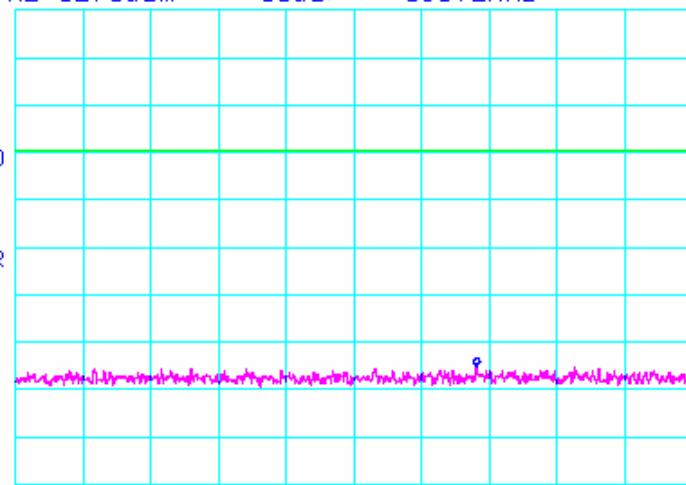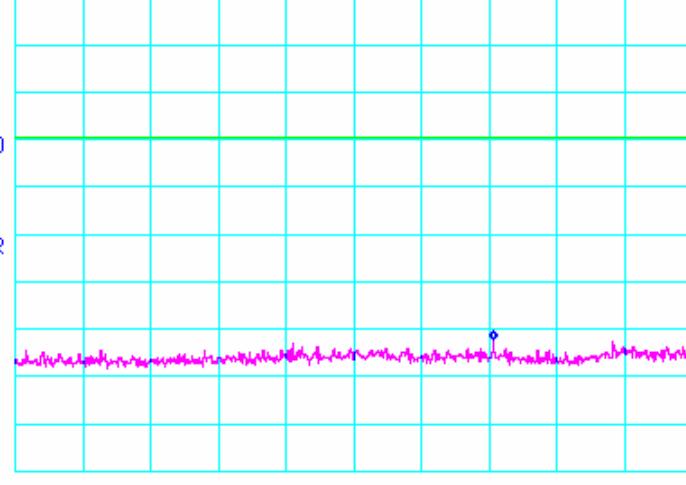
## 802.11a Mode

Test Date	Data	Chain	Test Eng.
05/02/08	5.745 GHz	A	JC
*ATTEN 10dB RL 12.0dBm	10dB/	MKR -63.17dBm 691.2MHz	
			
START 30.0MHz *RBW 100kHz	*VBW 300kHz	STOP 1.0000GHz SWP 540ms	
Test Date	Data	Chain	Test Eng.
05/02/08	5.745 GHz	A	JC
*ATTEN 10dB RL 12.0dBm	10dB/	MKR -60.33dBm 3.827GHz	
			
START 1.0000GHz *RBW 100kHz	*VBW 300kHz	STOP 5.0000GHz SWP 2.20sec	

## Conducted Out Of Band Emissions (Continued)

### ***802.11a Mode***

Test Date	Data	Chain	Test Eng.
05/02/08	5.745 GHz	A	JC

\*ATTEN 10dB  
RL 12.0dBm  
10dB/  
MKR 2.33dBm  
5.742GHz

Graph showing a sharp peak at 5.742 GHz and a noisy baseline. The y-axis has labels D and R. The x-axis shows frequency from 5.000 GHz to 10.000 GHz.

START 5.000GHz STOP 10.000GHz  
\*RBW 100kHz \*VBW 300kHz SWP 2.80sec

Test Date	Data	Chain	Test Eng.
05/02/08	5.745 GHz	A	JC

\*ATTEN 10dB  
RL 12.0 dBm

MKR -56.83dBm  
10dB/  
13.22GHz

START 10.00GHz  
STOP 20.00GHz  
\*RBW 100kHz  
\*UVBW 300kHz  
SWP 5.50sec

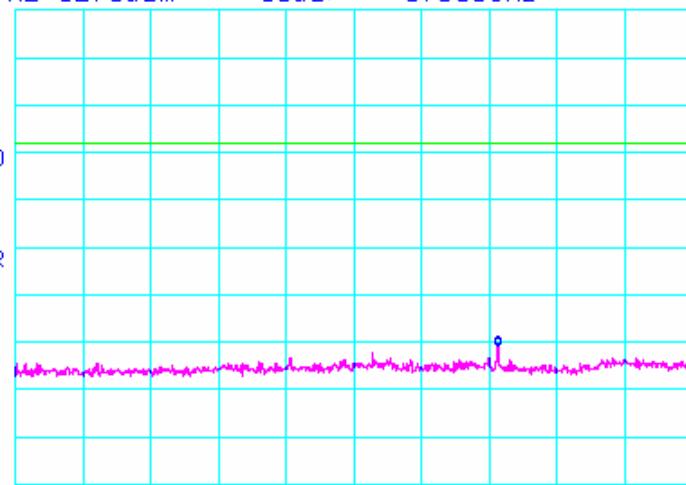
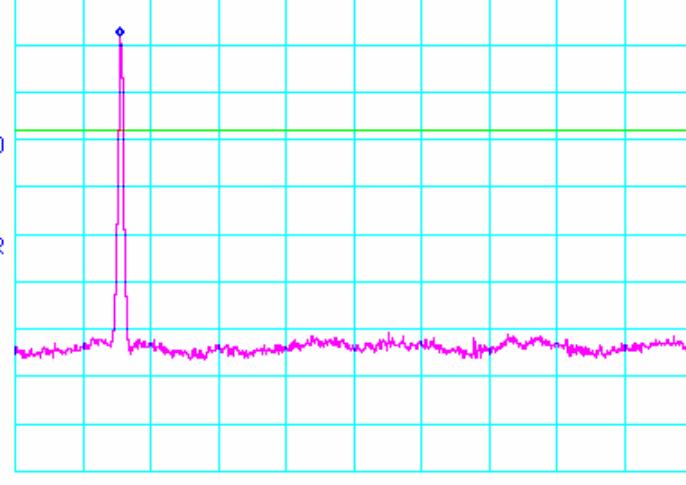
## Conducted Out Of Band Emissions (Continued)

## 802.11a Mode

Test Date	Data	Chain	Test Eng.
05/02/08	5.745 GHz	A	JC
*ATTEN 10dB RL 12.0dBm	10dB/	MKR -51.00dBm 37.23GHz	
START 20.00GHz *RBW 100kHz	STOP 40.00GHz *VBW 300kHz	SWP 11.0sec	
Test Date	Data	Chain	Test Eng.
05/02/08	5.785 GHz	A	JC
*ATTEN 10dB RL 12.0dBm	10dB/	MKR -62.00dBm 563.5MHz	
START 30.0MHz *RBW 100kHz	STOP 1.0000GHz *VBW 300kHz	SWP 540ms	



## Conducted Out Of Band Emissions (Continued)

## 802.11a Mode

Test Date	Data	Chain	Test Eng.
05/02/08	5.785 GHz	A	JC
*ATTEN 10dB RL 12.0dBm	10dB/ MKR -58.83dBm 3.853GHz		
			
START 1.000GHz *RBW 100kHz	STOP 5.000GHz *VBW 300kHz	SWP 2.20sec	
Test Date	Data	Chain	Test Eng.
05/02/08	5.785 GHz	A	JC
*ATTEN 10dB RL 12.0dBm	10dB/ MKR 3.67dBm 5.775GHz		
			
START 5.000GHz *RBW 100kHz	STOP 10.000GHz *VBW 300kHz	SWP 2.80sec	

## Conducted Out Of Band Emissions (Continued)
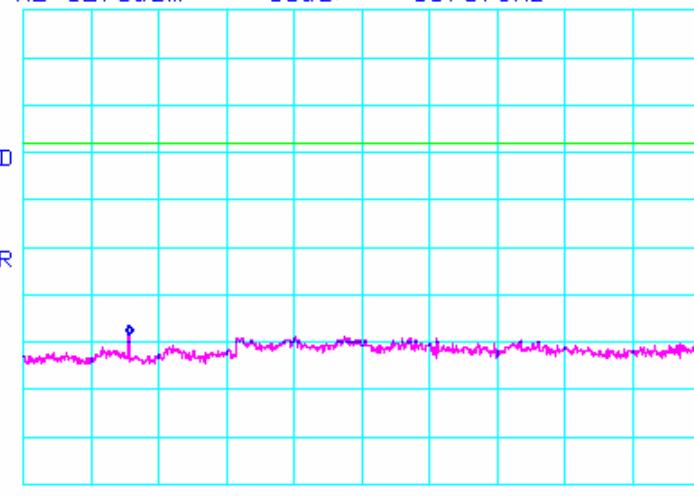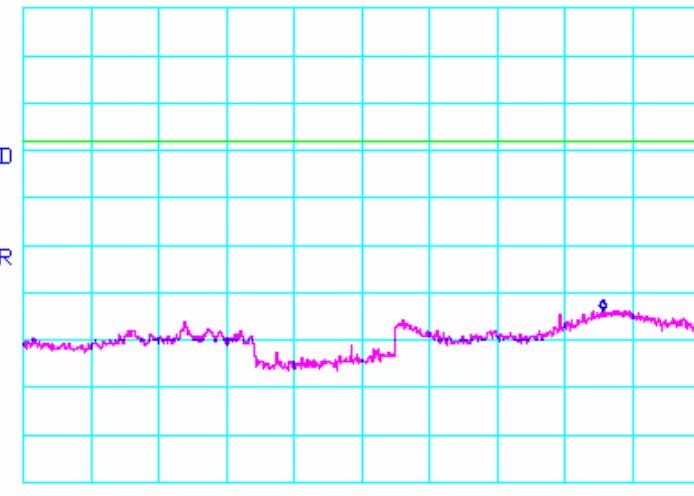
## 802.11a Mode

Test Date	Data	Chain	Test Eng.
05/02/08	5.785 GHz	A	JC
*ATTEN 10dB RL 12.0dBm		MKR -56.50dBm 11.57GHz	
			
START 10.00GHz *RBW 100kHz		STOP 20.00GHz *VUBW 300kHz    SWP 5.50sec	
*ATTEN 10dB RL 12.0dBm		MKR -51.67dBm 37.13GHz	
			
START 20.00GHz *RBW 100kHz		STOP 40.00GHz *VUBW 300kHz    SWP 11.0sec	



## Conducted Out Of Band Emissions (Continued)
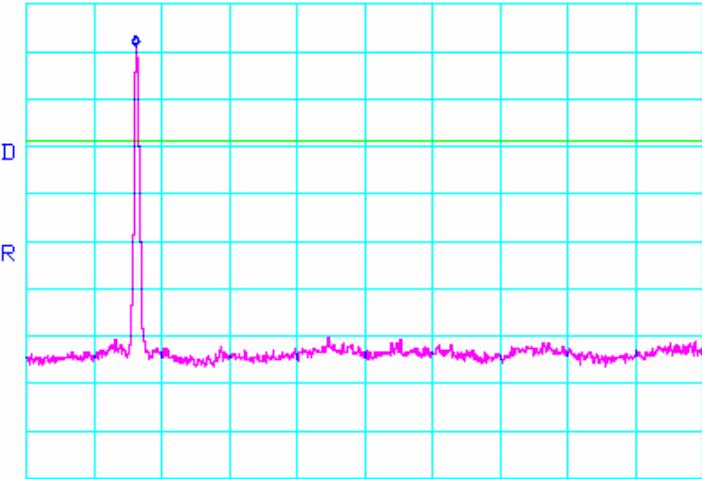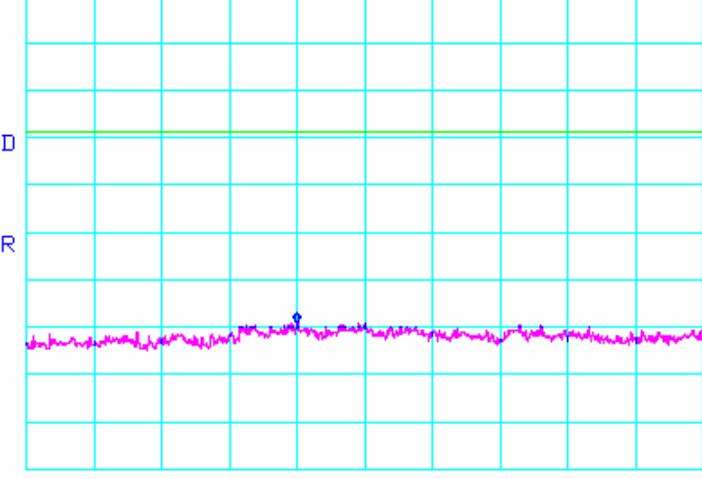
## 802.11a Mode


Test Date	Data	Chain	Test Eng.
05/02/08	5.825 GHz	A	JC
*ATTEN 10dB RL 12.0dBm		MKR -62.50dBm 120.5MHz	
START 30.0MHz *RBW 100kHz		STOP 1.0000GHz *VUBW 300kHz	
SWP 540ms			
Test Date	Data	Chain	Test Eng.
05/02/08	5.825 GHz	A	JC
*ATTEN 10dB RL 12.0dBm		MKR -59.33dBm 3.880GHz	
START 1.0000GHz *RBW 100kHz		STOP 5.0000GHz *VUBW 300kHz	
SWP 2.20sec			

## Conducted Out Of Band Emissions (Continued)

## 802.11a Mode



Test Date	Data	Chain	Test Eng.
05/02/08	5.825 GHz	A	JC
*ATTEN 10dB RL 12.0dBm		MKR 3.17 dBm 5.808GHz	
			
START 5.000GHz *RBW 100kHz		STOP 10.000GHz *VBW 300kHz	
SWP 2.80sec			
Test Date	Data	Chain	Test Eng.
05/02/08	5.825 GHz	A	JC
*ATTEN 10dB RL 12.0dBm		MKR -57.00 dBm 14.00GHz	
			
START 10.00GHz *RBW 100kHz		STOP 20.00GHz *VBW 300kHz	
SWP 5.50sec			

## Conducted Out Of Band Emissions (Continued)

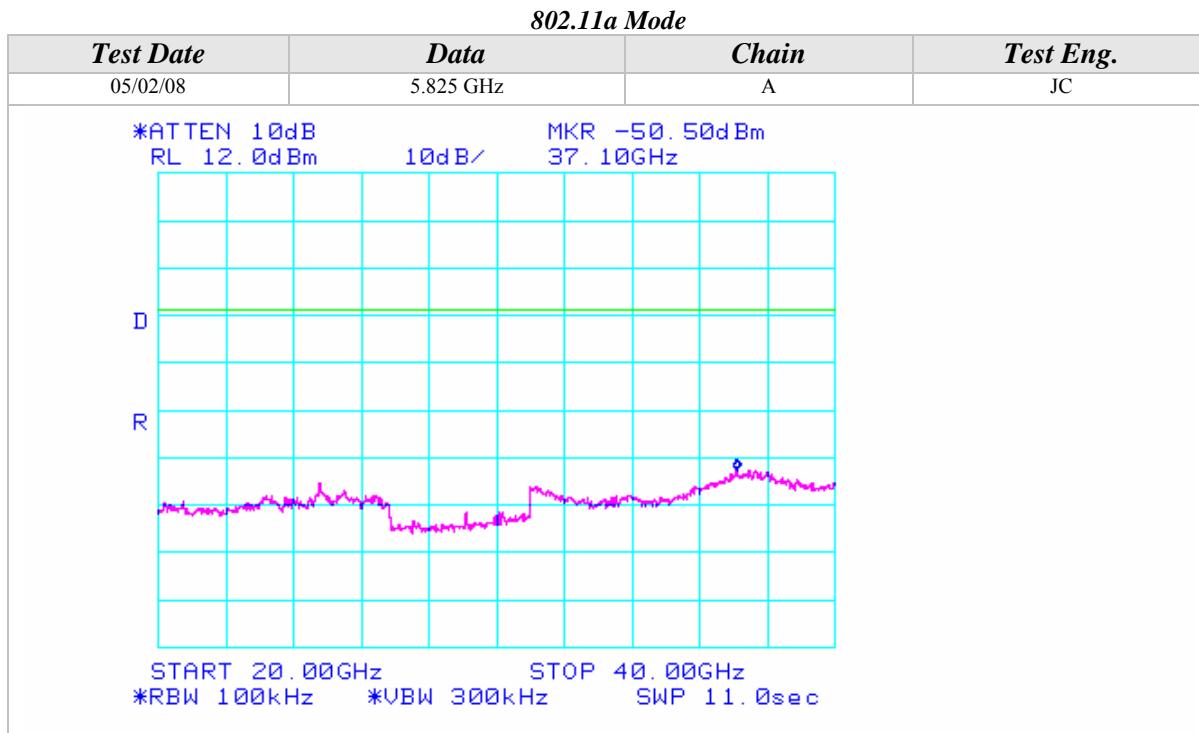


## Conducted Out Of Band Emissions (Continued)
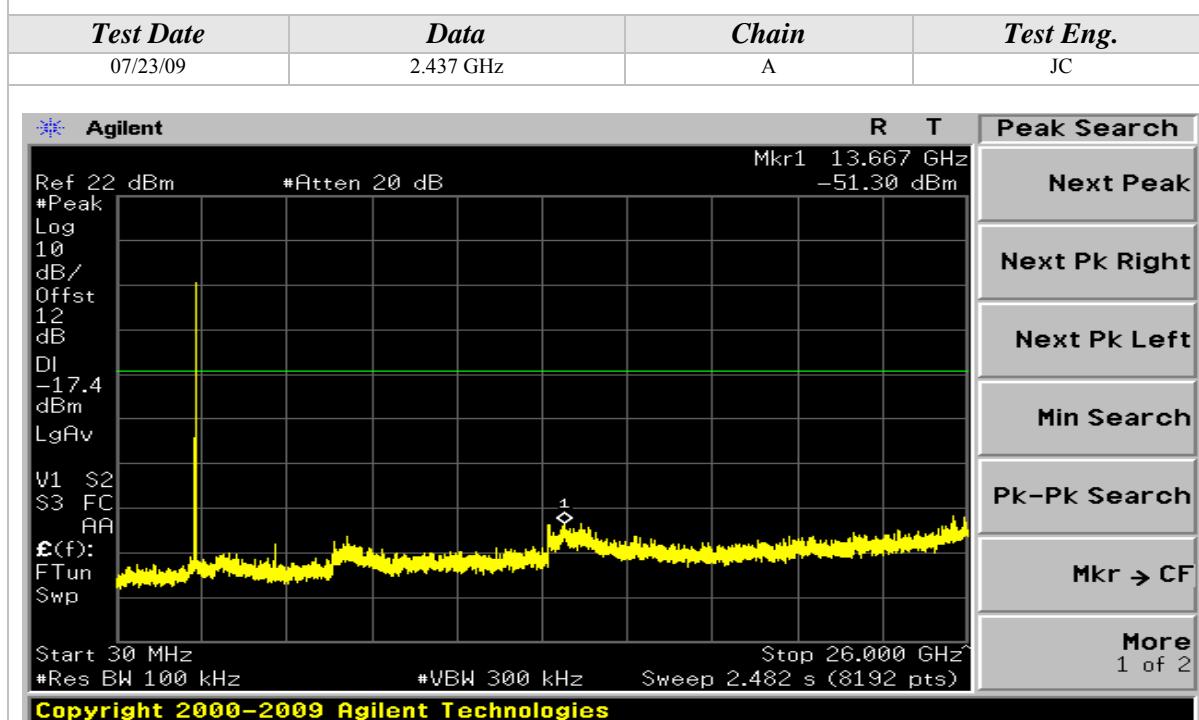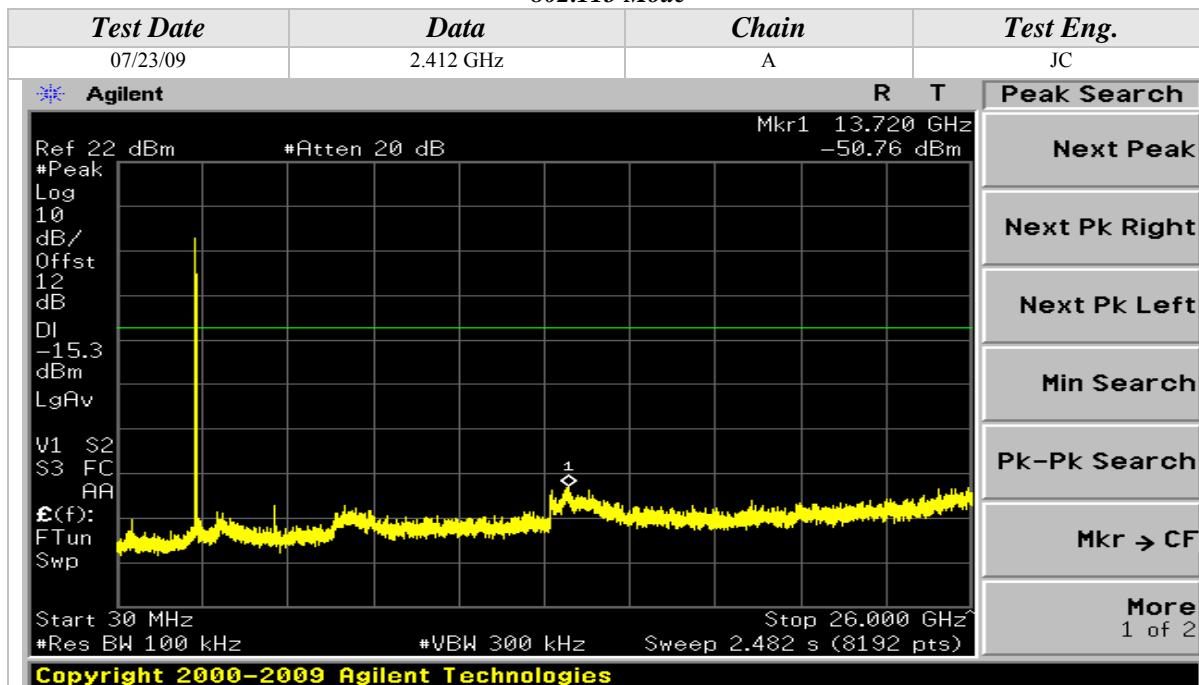
## 802.11b Mode




## Conducted Out Of Band Emissions (Continued)


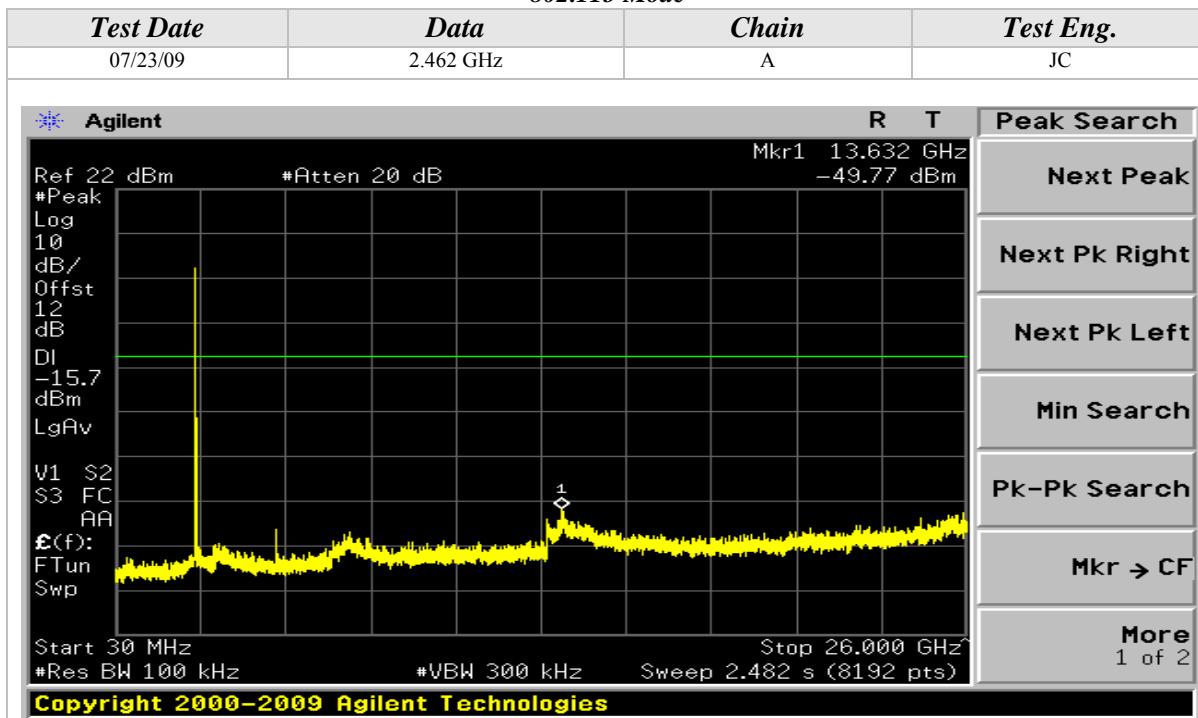
## 802.11b Mode




## 802.11g Mode

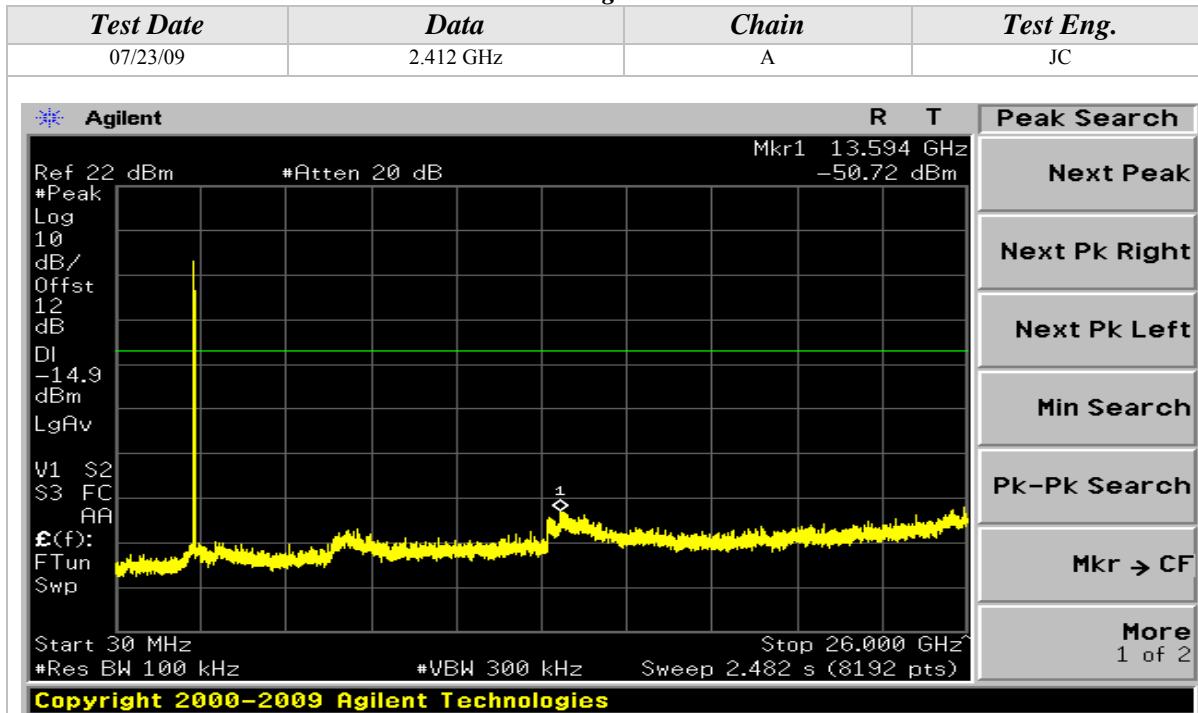



## Conducted Out Of Band Emissions (Continued)

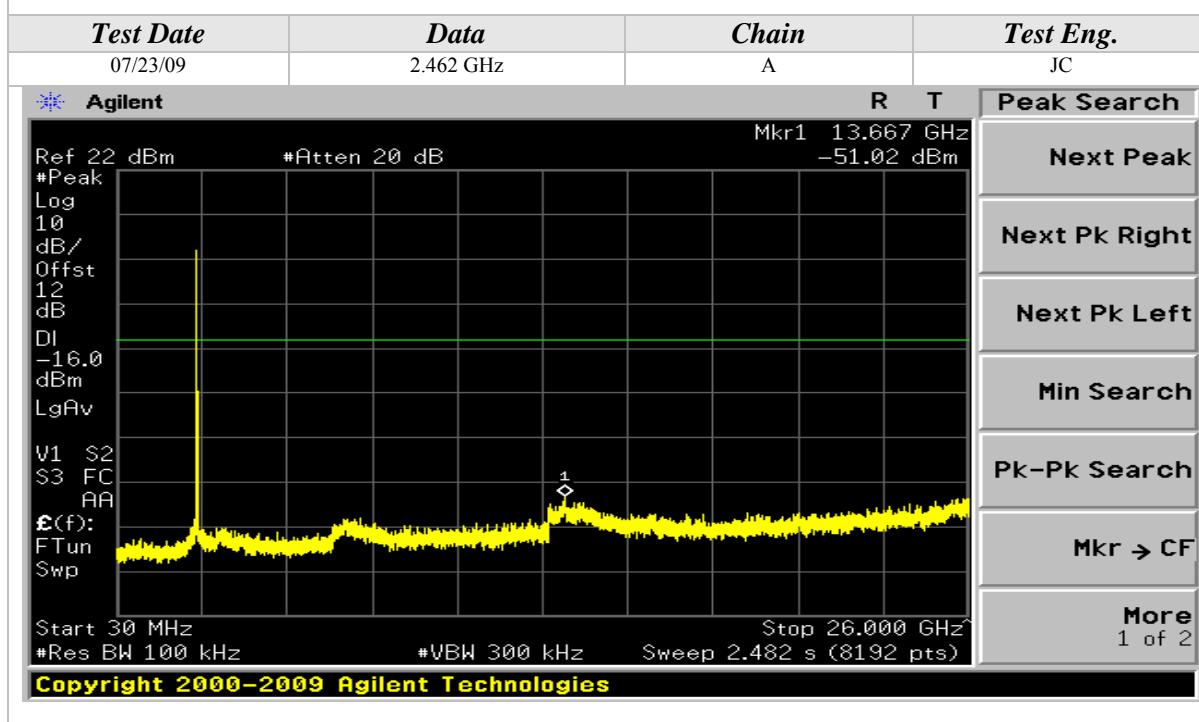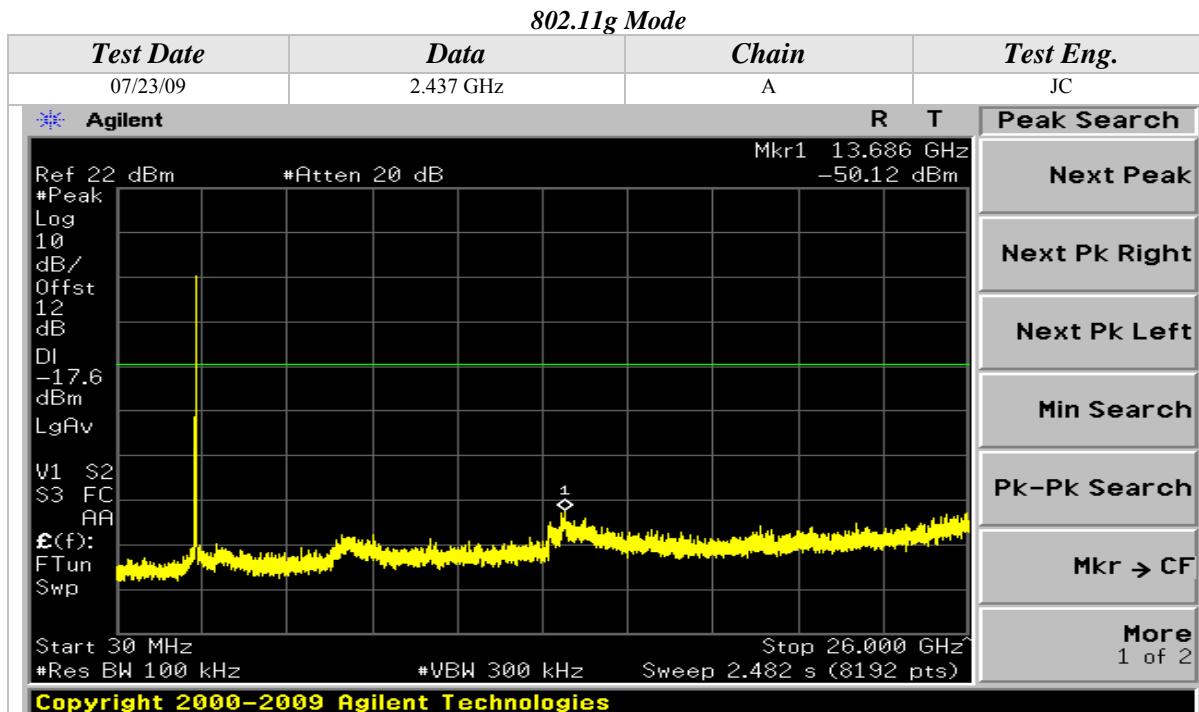


## Conducted Out Of Band Emissions (Continued)

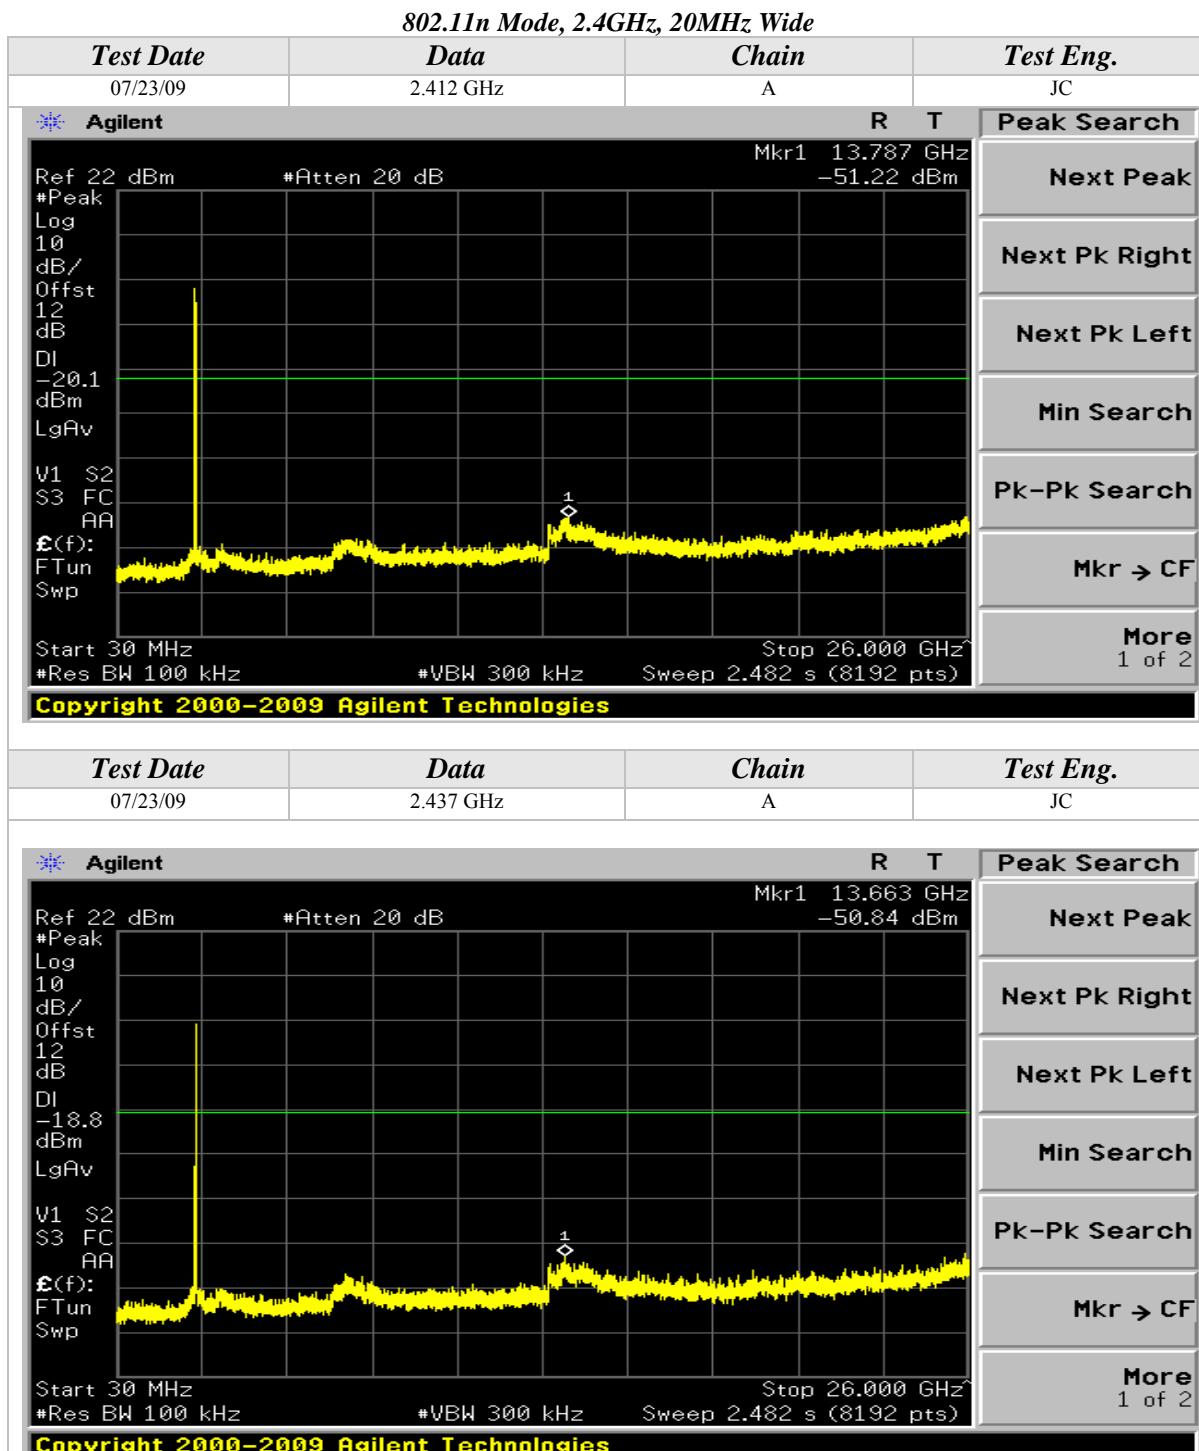



## Conducted Out Of Band Emissions (Continued)

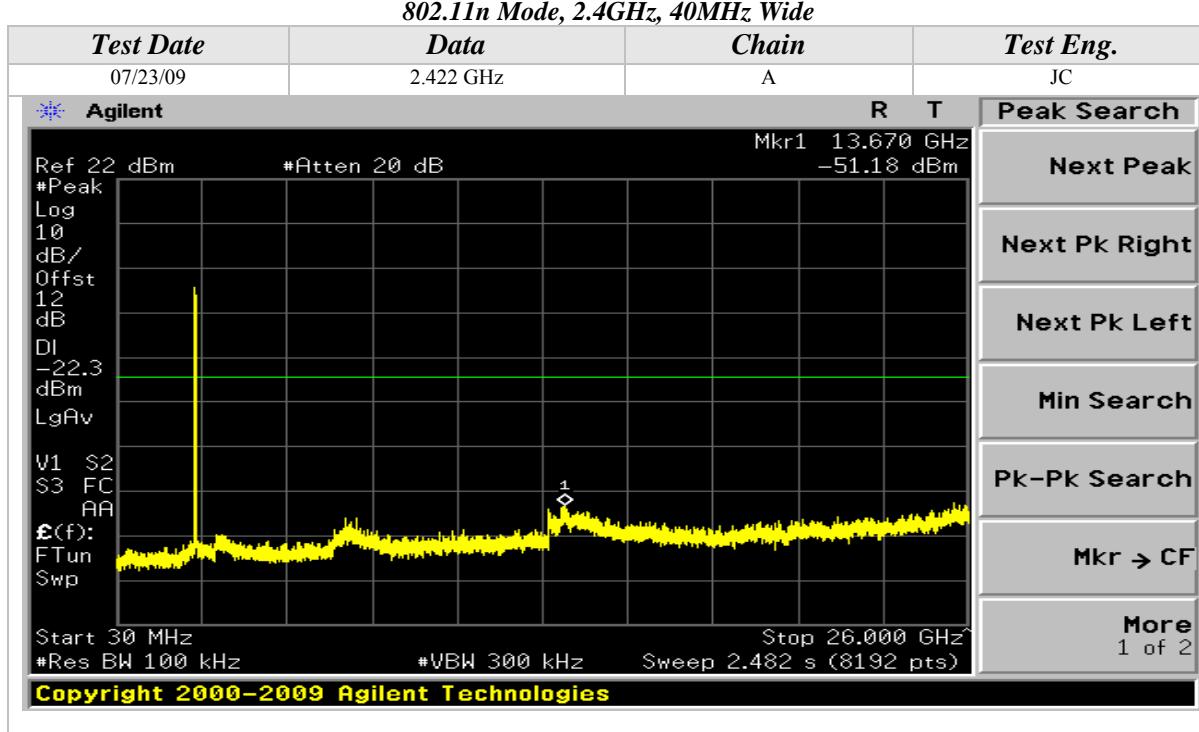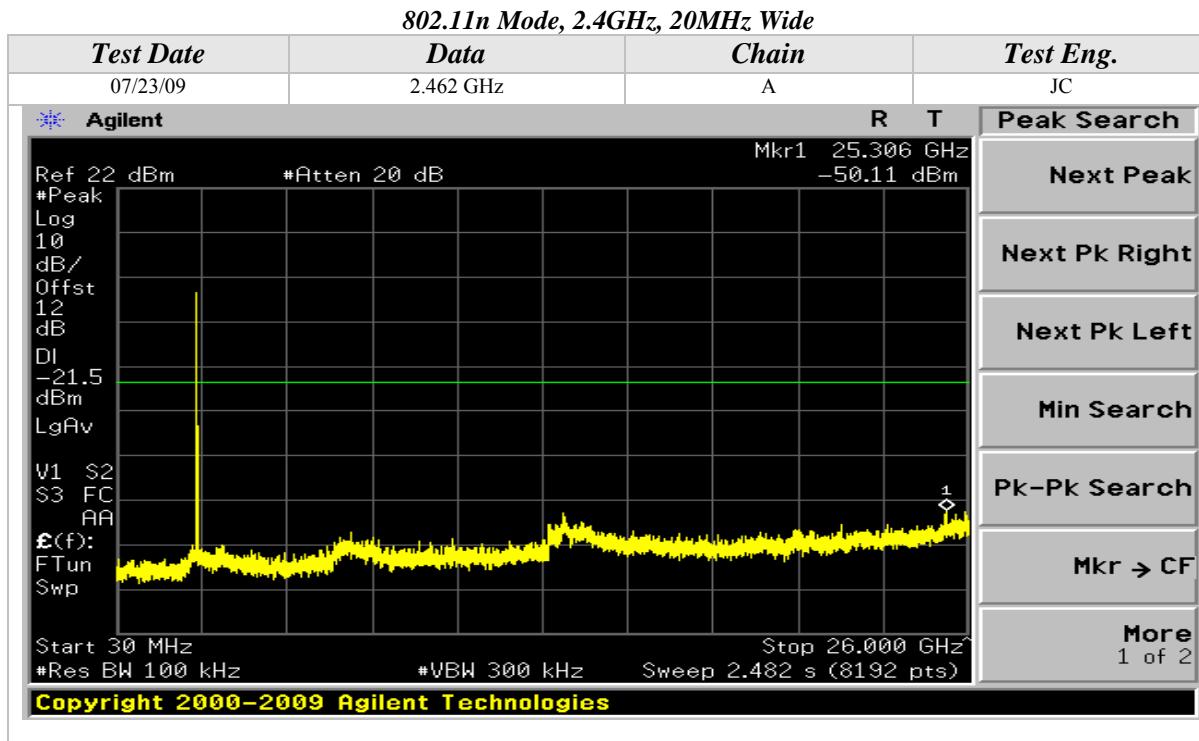



## Conducted Out Of Band Emissions (Continued)

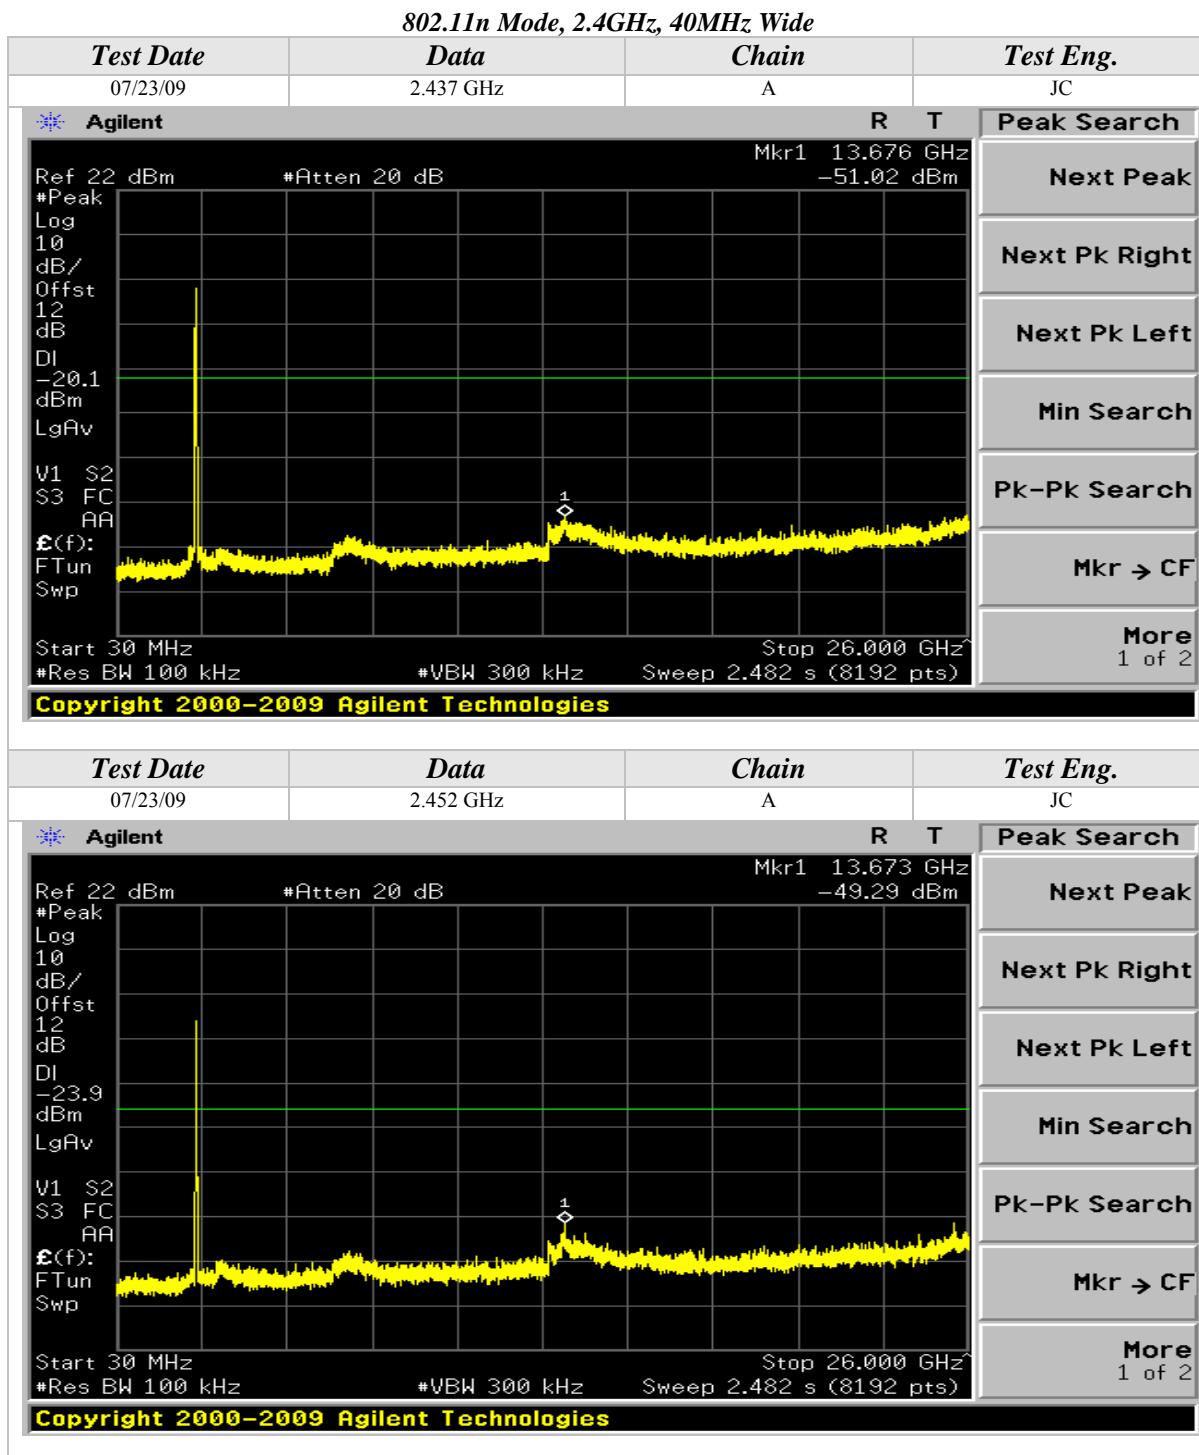



## Conducted Out Of Band Emissions (Continued)
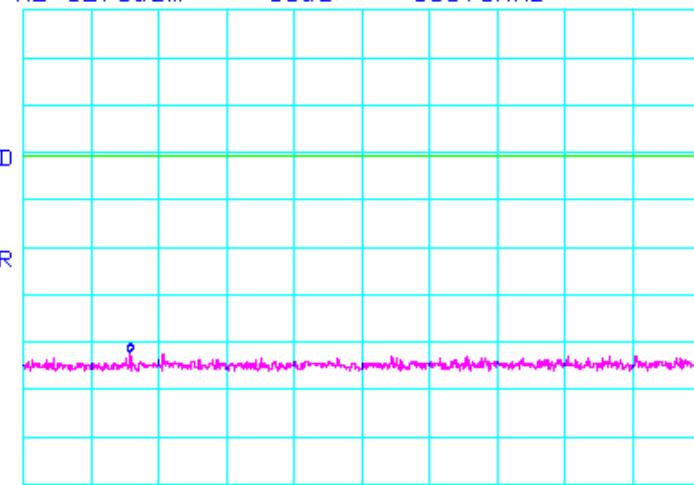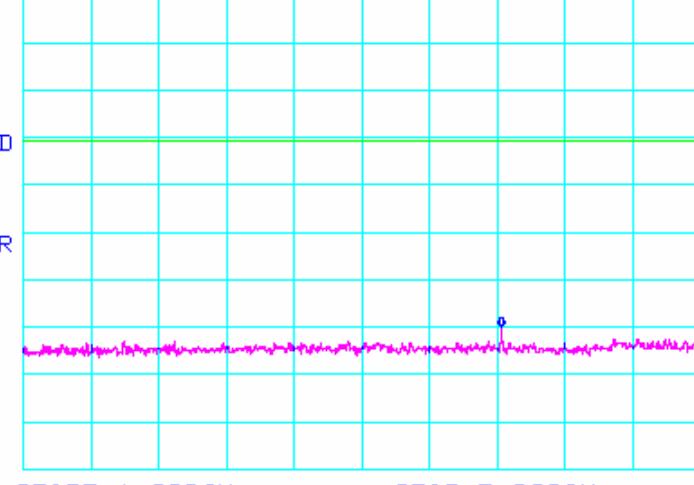
<i>802.11n Mode, 5GHz, 20MHz Wide</i>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.745 GHz	A	JC
<b>*ATTEN 10dB RL 12.0dBm 10dB/</b>			
<b>MKR -60.17dBm 183.6MHz</b>			
			
START 30.0MHz STOP 1.0000GHz *RBW 100kHz *VBW 300kHz SWP 540ms			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.745 GHz	A	JC
<b>*ATTEN 10dB RL 12.0dBm 10dB/</b>			
<b>MKR -58.00dBm 3.827GHz</b>			
			
START 1.000GHz STOP 5.000GHz *RBW 100kHz *VBW 300kHz SWP 2.20sec			



## Conducted Out Of Band Emissions (Continued)
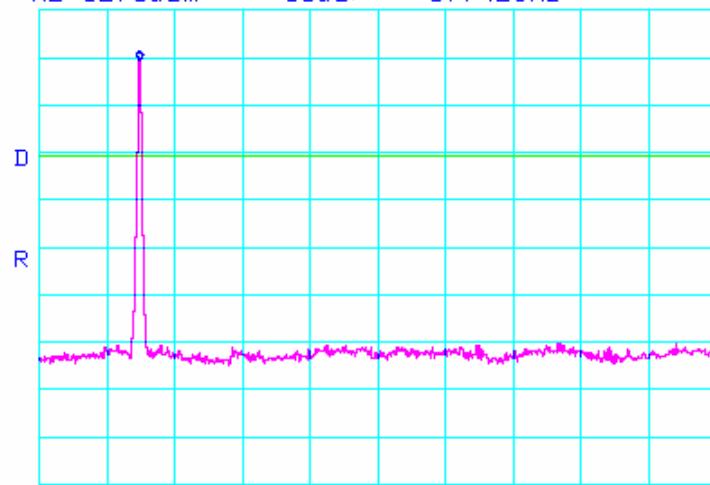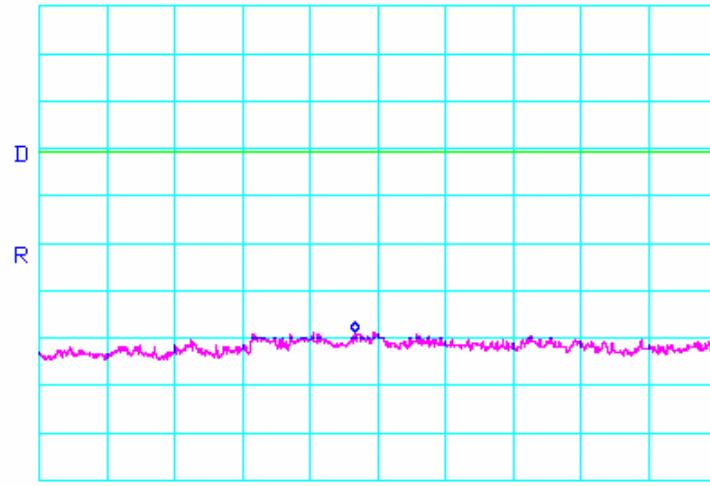
<i>802.11n Mode, 5GHz, 20MHz Wide</i>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.745 GHz	A	JC
<b>*ATTEN 10dB RL 12.0dBm</b>			
<b>MKR 1.50dBm 5.742GHz</b>			
			
<b>START 5.000GHz STOP 10.000GHz</b> <b>*RBW 100kHz *VBW 300kHz SWP 2.80sec</b>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.745 GHz	A	JC
<b>*ATTEN 10dB RL 12.0dBm</b>			
<b>MKR -56.67dBm 14.67GHz</b>			
			
<b>START 10.00GHz STOP 20.00GHz</b> <b>*RBW 100kHz *VBW 300kHz SWP 5.50sec</b>			


## Conducted Out Of Band Emissions (Continued)

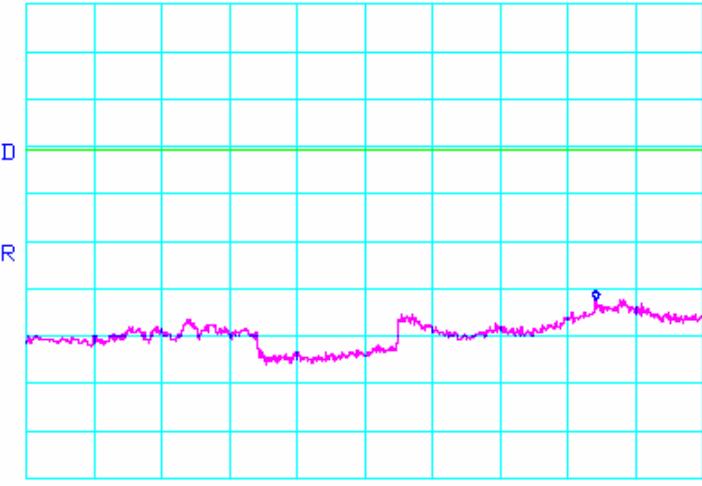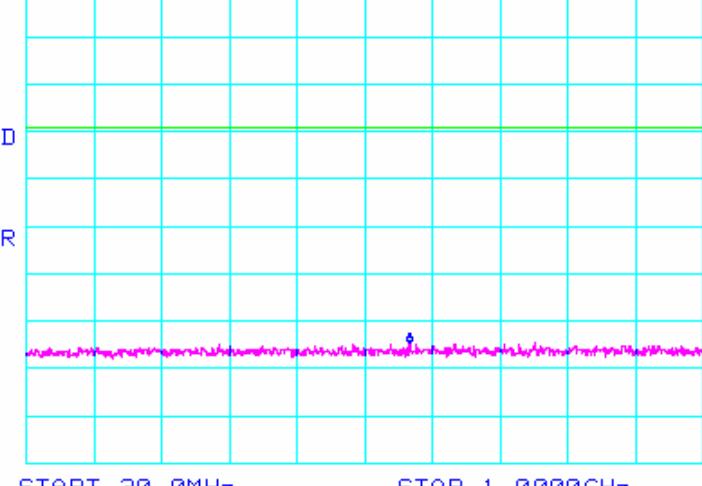802.11n Mode, 5GHz, 20MHz Wide			
Test Date	Data	Chain	Test Eng.
05/02/08	5.745 GHz	A	JC
*ATTEN 10dB RL 12.0dBm 10dB/  MKR -50.33dBm 36.83GHz			
START 20.00GHz *RBW 100kHz *VBW 300kHz SWP 11.0sec			
Test Date	Data	Chain	Test Eng.
05/02/08	5.785 GHz	A	JC
*ATTEN 10dB RL 12.0dBm 10dB/  MKR -62.67dBm 579.7MHz			
START 30.0MHz *RBW 100kHz *VBW 300kHz SWP 540ms			



## Conducted Out Of Band Emissions (Continued)

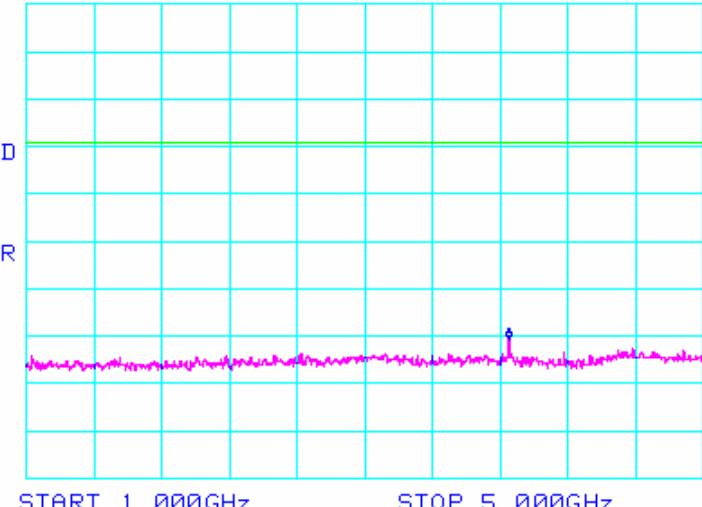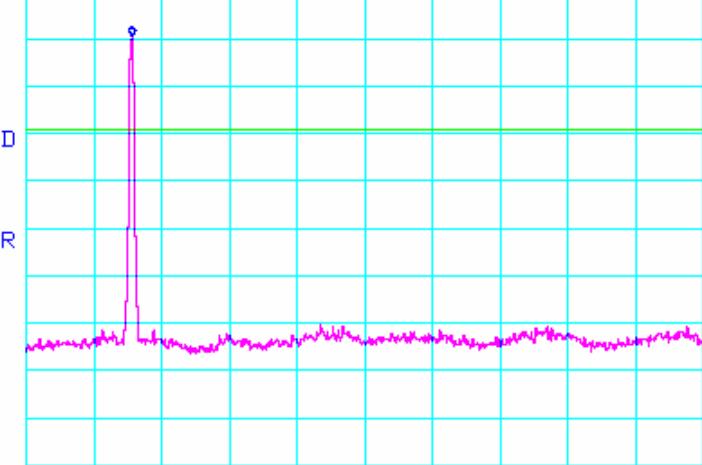802.11n Mode, 5GHz, 20MHz Wide			
Test Date	Data	Chain	Test Eng.
05/02/08	5.785 GHz	A	JC
*ATTEN 10dB RL 12.0dBm 10dB/  START 1.000GHz STOP 5.000GHz *RBW 100kHz *VUBW 300kHz SWP 2.20sec			
Test Date	Data	Chain	Test Eng.
05/02/08	5.785 GHz	A	JC
*ATTEN 10dB RL 12.0dBm 10dB/  START 5.000GHz STOP 10.000GHz *RBW 100kHz *VUBW 300kHz SWP 2.80sec			



## Conducted Out Of Band Emissions (Continued)

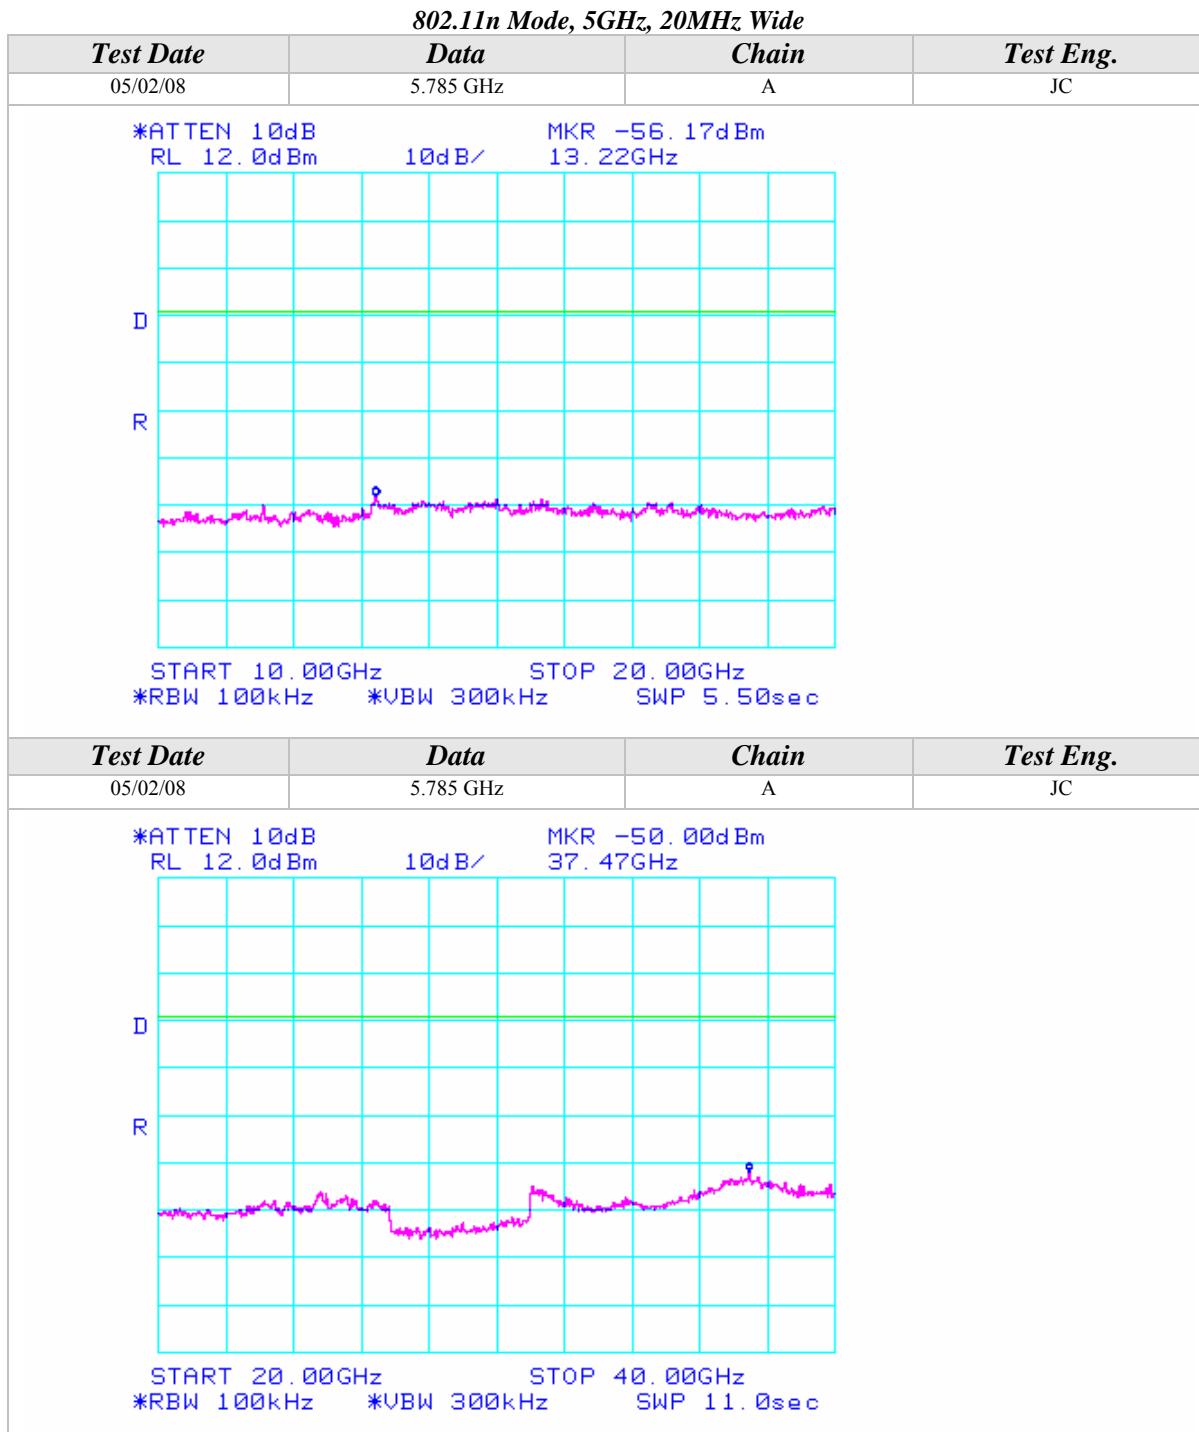


## Conducted Out Of Band Emissions (Continued)
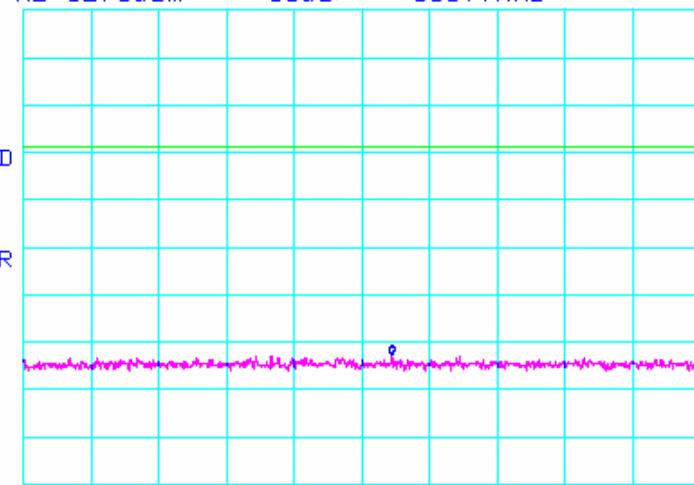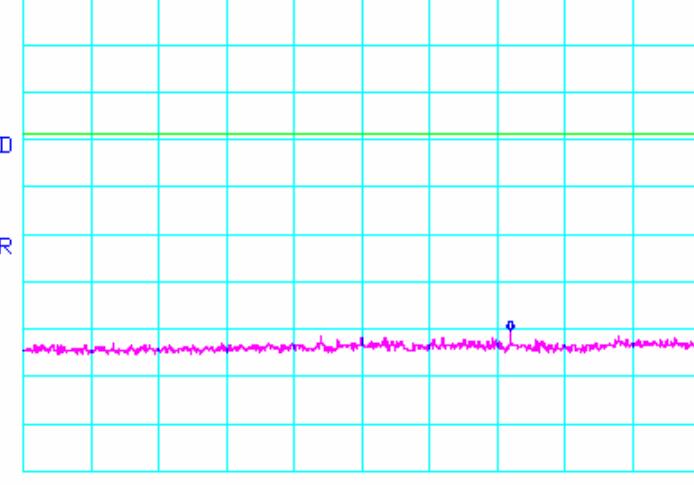
<i>802.11n Mode, 5GHz, 20MHz Wide</i>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.825 GHz	A	JC
<i>*ATTEN 10dB RL 12.0dBm 10dB/</i>			
<i>MKR -60.67dBm 558.7MHz</i>			
			
<i>START 30.0MHz *RBW 100kHz STOP 1.0000GHz *VBW 300kHz SWP 540ms</i>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.825 GHz	A	JC
<i>*ATTEN 10dB RL 12.0dBm 10dB/</i>			
<i>MKR -58.33dBm 3.880GHz</i>			
			
<i>START 1.0000GHz *RBW 100kHz STOP 5.0000GHz *VBW 300kHz SWP 2.20sec</i>			



## Conducted Out Of Band Emissions (Continued)
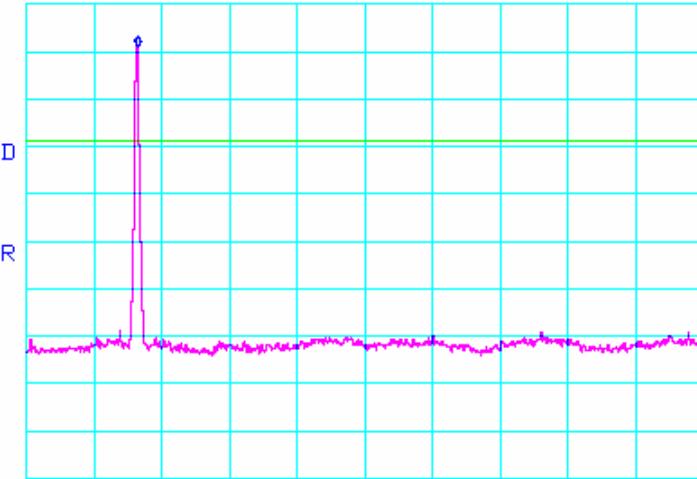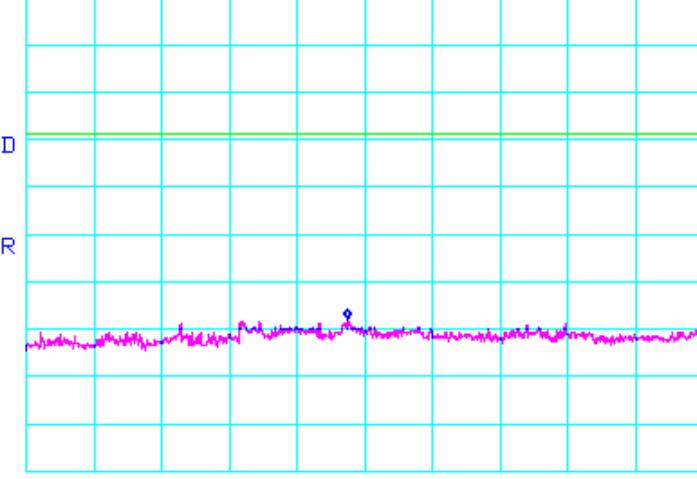
<i>802.11n Mode, 5GHz, 20MHz Wide</i>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.825 GHz	A	JC
<b>*ATTEN 10dB</b> <b>RL 12.0 dBm</b> <b>10dB/</b> <b>MKR 3.17 dBm</b> <b>5.825GHz</b>			
			
START 5.000GHz      STOP 10.000GHz *RBW 100kHz      *VBW 300kHz      SWP 2.80sec			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.825 GHz	A	JC
<b>*ATTEN 10dB</b> <b>RL 12.0 dBm</b> <b>10dB/</b> <b>MKR -55.83 dBm</b> <b>14.75GHz</b>			
			
START 10.00GHz      STOP 20.00GHz *RBW 100kHz      *VBW 300kHz      SWP 5.50sec			


## Conducted Out Of Band Emissions (Continued)

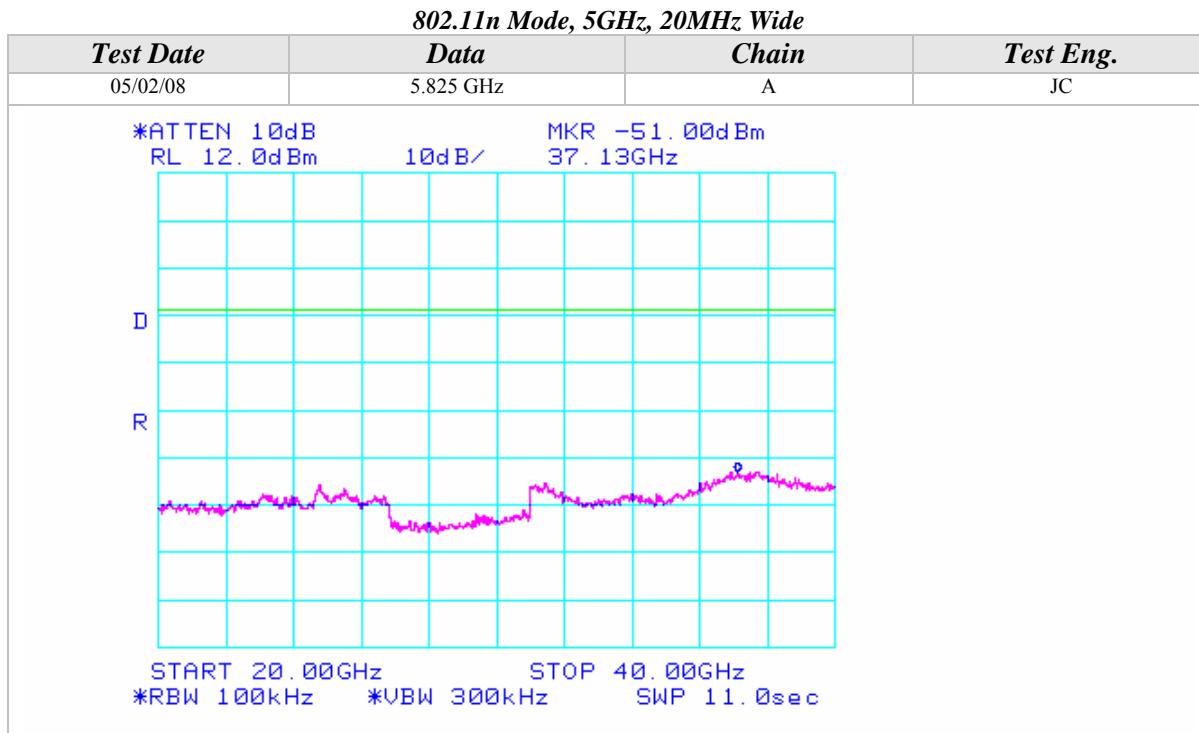



## Conducted Out Of Band Emissions (Continued)

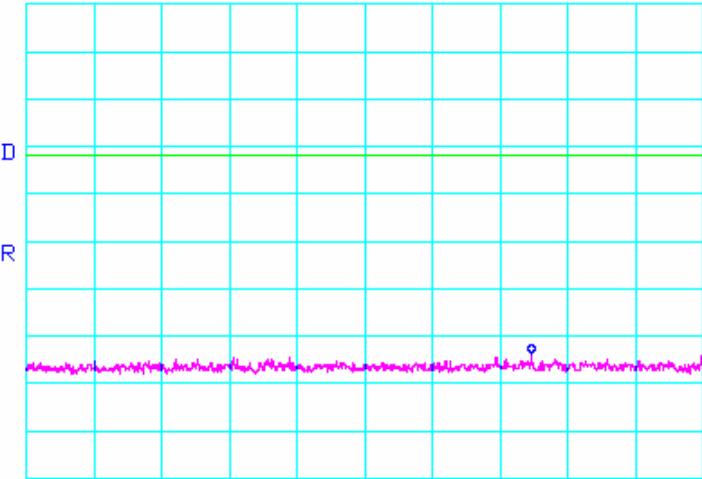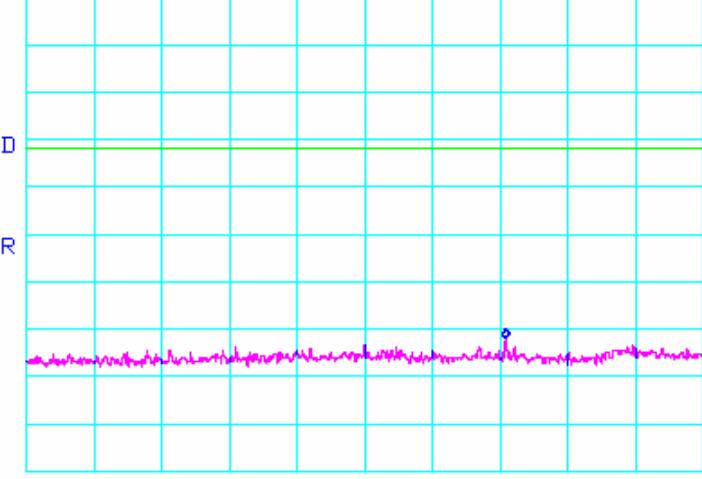802.11n Mode, 5GHz, 40MHz Wide			
Test Date	Data	Chain	Test Eng.
05/02/08	5.755 GHz	A	JC
*ATTEN 10dB RL 12.0dBm 10dB/ 			
MKR -61.67dBm 754.3MHz			
START 30.0MHz *RBW 100kHz STOP 1.0000GHz *VBW 300kHz SWP 540ms			
Test Date	Data	Chain	Test Eng.
05/02/08	5.755 GHz	A	JC
*ATTEN 10dB RL 12.0dBm 10dB/ 			
MKR -60.00dBm 3.833GHz			
START 1.0000GHz *RBW 100kHz STOP 5.0000GHz *VBW 300kHz SWP 2.20sec			



## Conducted Out Of Band Emissions (Continued)

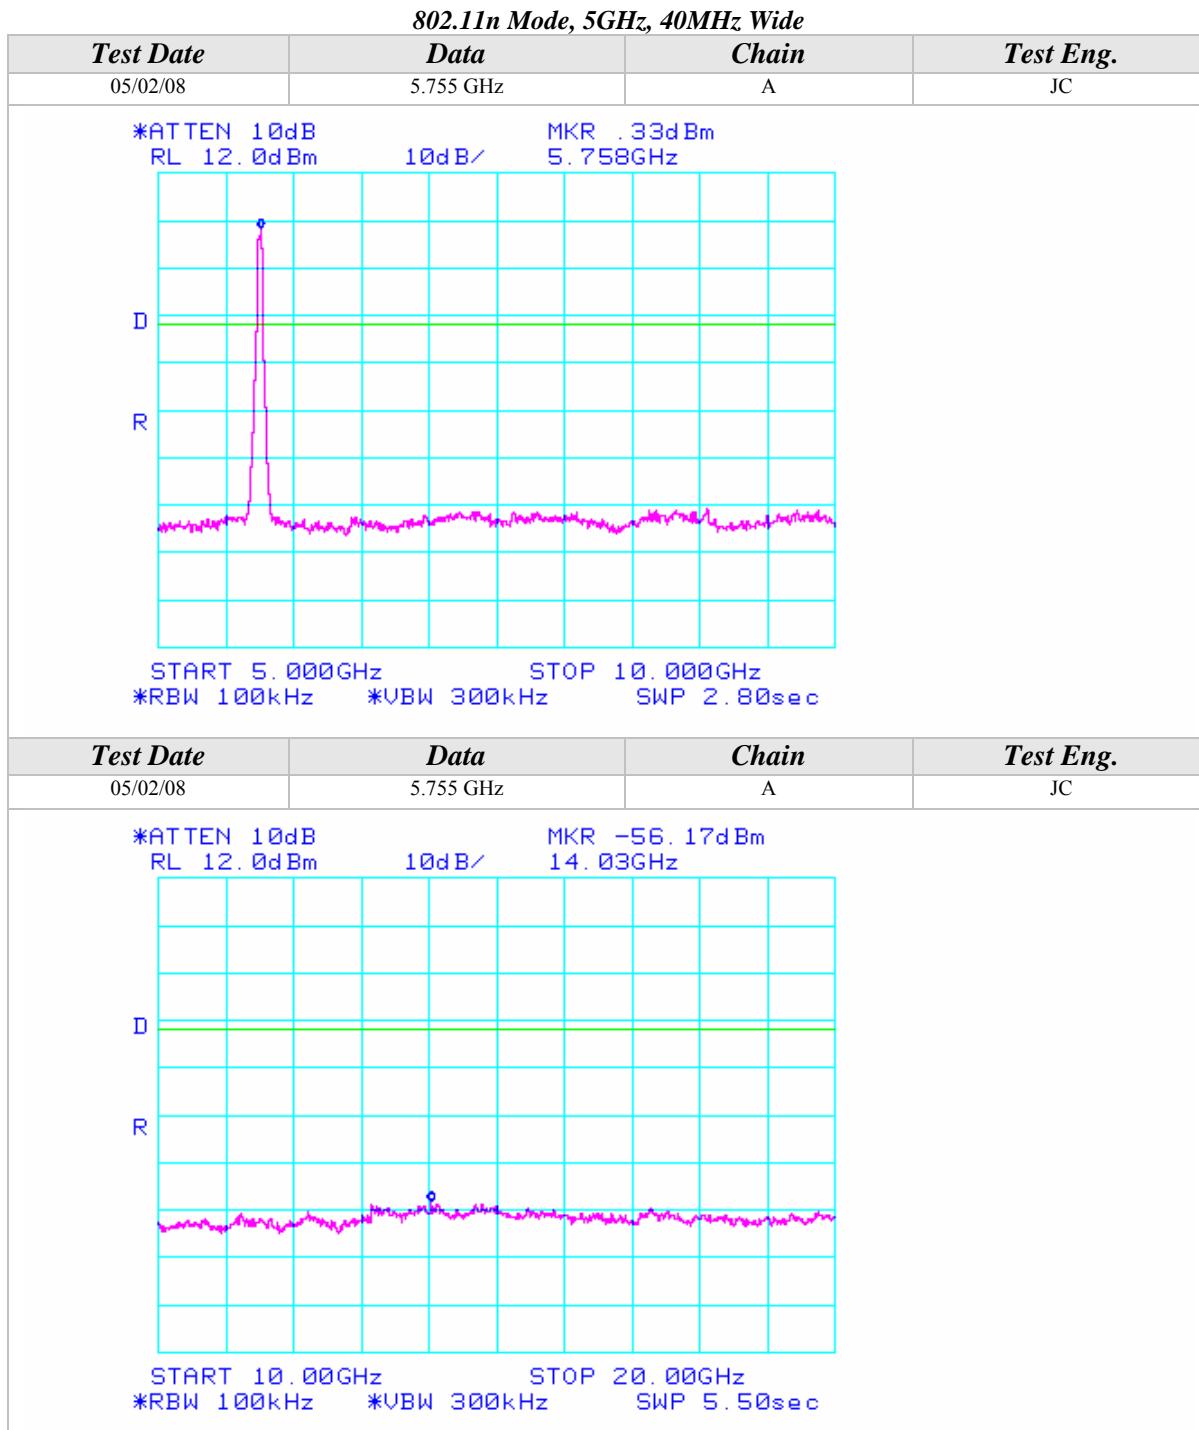



## Conducted Out Of Band Emissions (Continued)

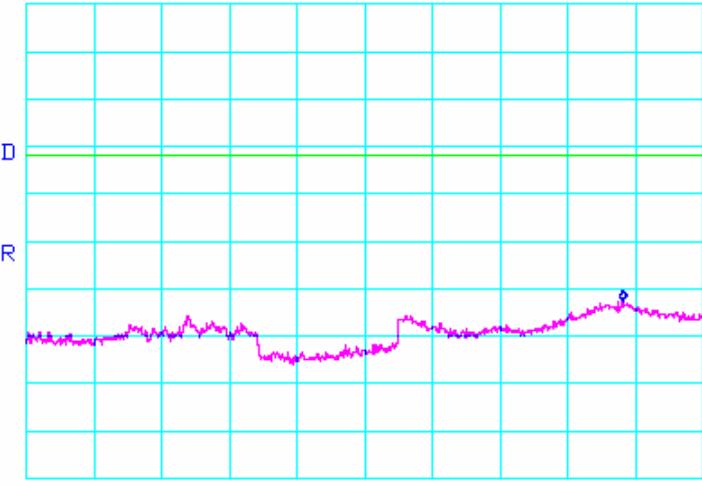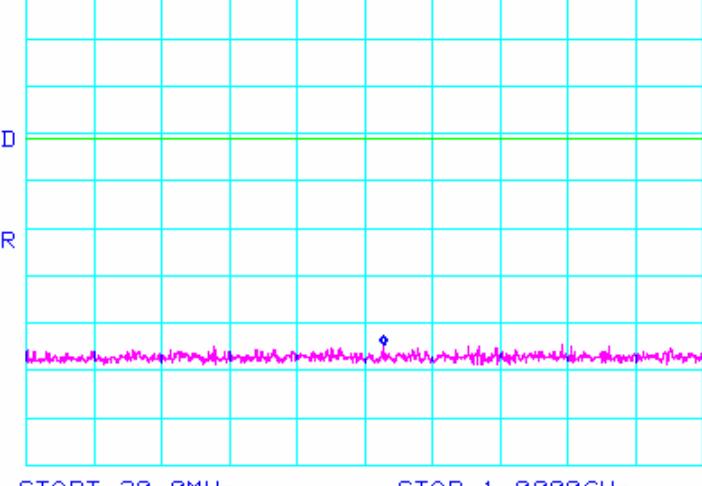802.11n Mode, 5GHz, 40MHz Wide			
Test Date	Data	Chain	Test Eng.
05/02/08	5.755 GHz	A	JC
*ATTEN 10dB RL 12.0dBm 10dB/  MKR -50.50dBm 37.63GHz			
START 20.00GHz *RBW 100kHz *VBW 300kHz SWP 11.0sec			
Test Date	Data	Chain	Test Eng.
05/02/08	5.795 GHz	A	JC
*ATTEN 10dB RL 12.0dBm 10dB/  MKR -62.67dBm 542.5MHz			
START 30.0MHz *RBW 100kHz *VBW 300kHz SWP 540ms			

## Conducted Out Of Band Emissions (Continued)

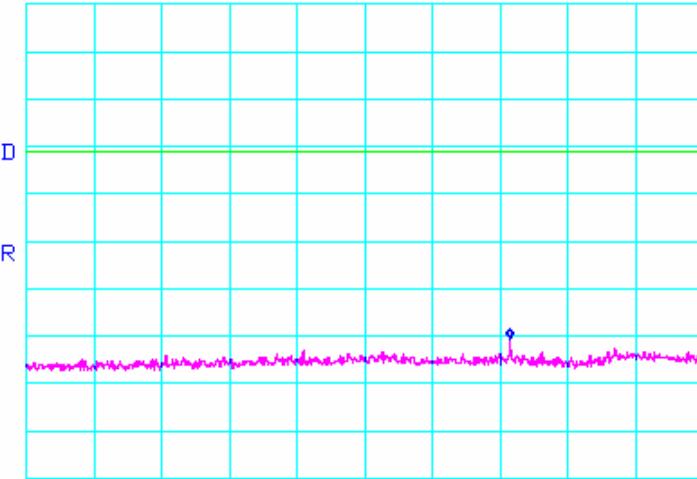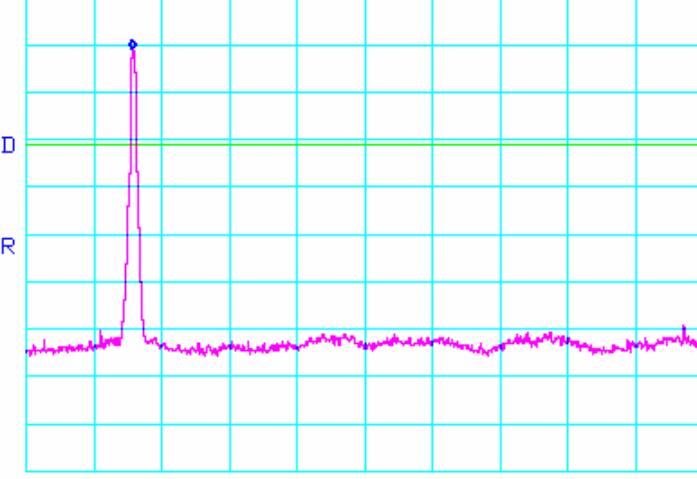802.11n Mode, 5GHz, 40MHz Wide			
Test Date	Data	Chain	Test Eng.
05/02/08	5.795 GHz	A	JC
*ATTEN 10dB RL 12.0d Bm      MKR -58.50dBm 10dB/ 3.860GHz			
			
START 1.000GHz      STOP 5.000GHz *RBW 100kHz      *VUBW 300kHz      SWP 2.20sec			
Test Date	Data	Chain	Test Eng.
05/02/08	5.795 GHz	A	JC
*ATTEN 10dB RL 12.0d Bm      MKR 1.00dBm 10dB/ 5.783GHz			
			
START 5.000GHz      STOP 10.000GHz *RBW 100kHz      *VUBW 300kHz      SWP 2.80sec			

## Conducted Out Of Band Emissions (Continued)
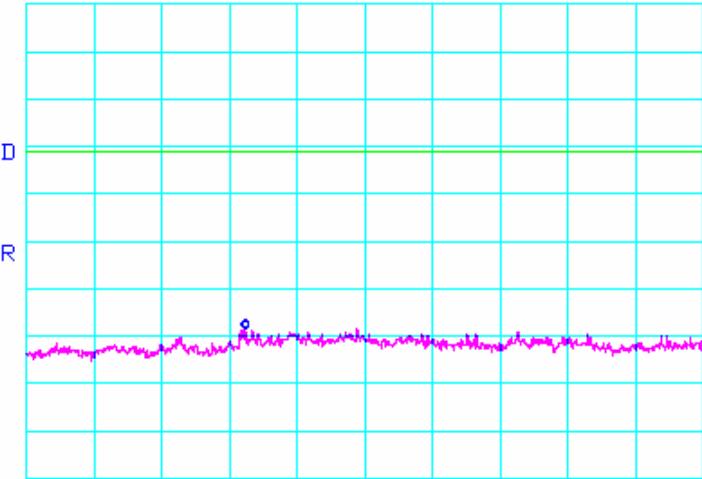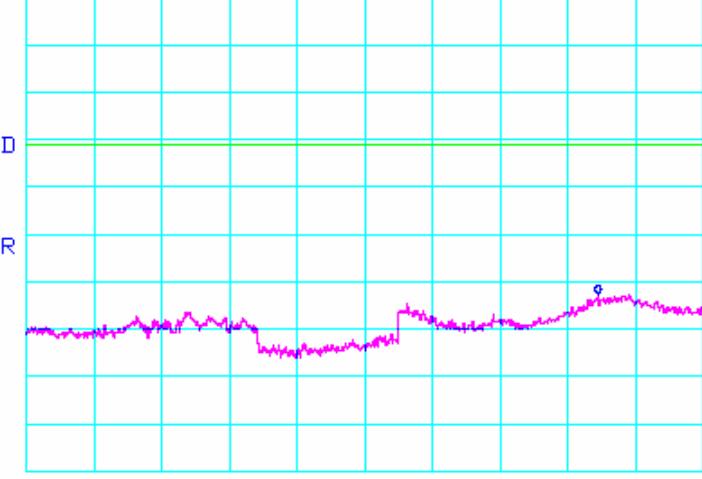
<i>802.11n Mode, 5GHz, 40MHz Wide</i>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.795 GHz	A	JC
<i>*ATTEN 10dB RL 12.0dBm 10dB/ MKR -56.50dBm 13.23GHz</i>			
			
<i>START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec</i>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.795 GHz	A	JC
<i>*ATTEN 10dB RL 12.0dBm 10dB/ MKR -50.67dBm 36.90GHz</i>			
			
<i>START 20.00GHz STOP 40.00GHz *RBW 100kHz *VBW 300kHz SWP 11.0sec</i>			

## Conducted Out Of Band Emissions (Continued)

## 802.11a Mode

Test Date	Data	Chain	Test Eng.
05/02/08	5.745 GHz	B	JC
*ATTEN 10dB RL 12.0dBm	10dB/	MKR -62.50dBm 102.8MHz	
START 30.0MHz *RBW 100kHz	STOP 1.0000GHz *VBW 300kHz	SWP 540ms	
Test Date	Data	Chain	Test Eng.
05/02/08	5.745 GHz	B	JC
*ATTEN 10dB RL 12.0dBm	10dB/	MKR -57.00dBm 3.827GHz	
START 1.0000GHz *RBW 100kHz	STOP 5.0000GHz *VBW 300kHz	SWP 2.20sec	

## Conducted Out Of Band Emissions (Continued)

## 802.11a Mode

Test Date	Data	Chain	Test Eng.
05/02/08	5.745 GHz	B	JC
*ATTEN 10dB RL 12.0dBm 10dB/ 			
START 5.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 2.80sec			
Test Date	Data	Chain	Test Eng.
05/02/08	5.745 GHz	B	JC
*ATTEN 10dB RL 12.0dBm 10dB/ 			
START 10.00GHz STOP 20.00GHz *RBW 100kHz *VBW 300kHz SWP 5.50sec			

## Conducted Out Of Band Emissions (Continued)

## 802.11a Mode

Test Date	Data	Chain	Test Eng.
05/02/08	5.745 GHz	B	JC
	<b>*ATTEN 10dB</b> <b>RL 12.0dBm</b> <b>10dB/</b> <b>MKR -50.17dBm</b> <b>37.53GHz</b>		
	<b>START 20.00GHz</b> <b>*RBW 100kHz</b> <b>*VBW 300kHz</b> <b>STOP 40.00GHz</b> <b>SWP 11.0sec</b>		
Test Date	Data	Chain	Test Eng.
05/02/08	5.785 GHz	B	JC
	<b>*ATTEN 10dB</b> <b>RL 12.0dBm</b> <b>10dB/</b> <b>MKR -61.33dBm</b> <b>767.2MHz</b>		
	<b>START 30.0MHz</b> <b>*RBW 100kHz</b> <b>*VBW 300kHz</b> <b>STOP 1.0000GHz</b> <b>SWP 540ms</b>		

## Conducted Out Of Band Emissions (Continued)

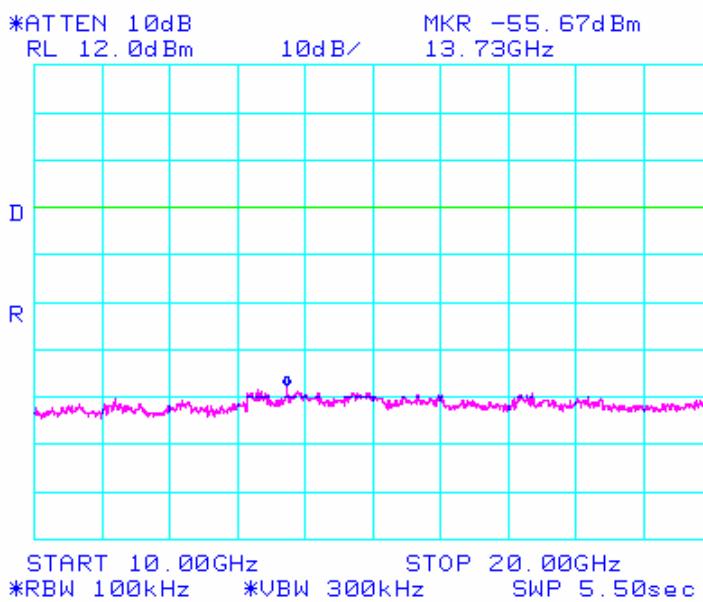
## 802.11a Mode

Test Date	Data	Chain	Test Eng.
05/02/08	5.785 GHz	B	JC
*ATTEN 10dB RL 12.0dBm		MKR -57.17dBm 3.853GHz	
START 1.000GHz *RBW 100kHz		STOP 5.000GHz *VUBW 300kHz	
SWP 2.20sec			
Test Date	Data	Chain	Test Eng.
05/02/08	5.785 GHz	B	JC
*ATTEN 10dB RL 12.0dBm		MKR 2.17dBm 5.775GHz	
START 5.000GHz *RBW 100kHz		STOP 10.000GHz *VUBW 300kHz	
SWP 2.80sec			


## Conducted Out Of Band Emissions (Continued)

### ***802.11a Mode***

<b>Test Date</b>	<b>Data</b>	<b>Chain</b>	<b>Test Eng.</b>
05/02/08	5.785 GHz	B	JC





<b><i>Test Date</i></b>	<b><i>Data</i></b>	<b><i>Chain</i></b>	<b><i>Test Eng.</i></b>
05/02/08	5.785 GHz	B	JC

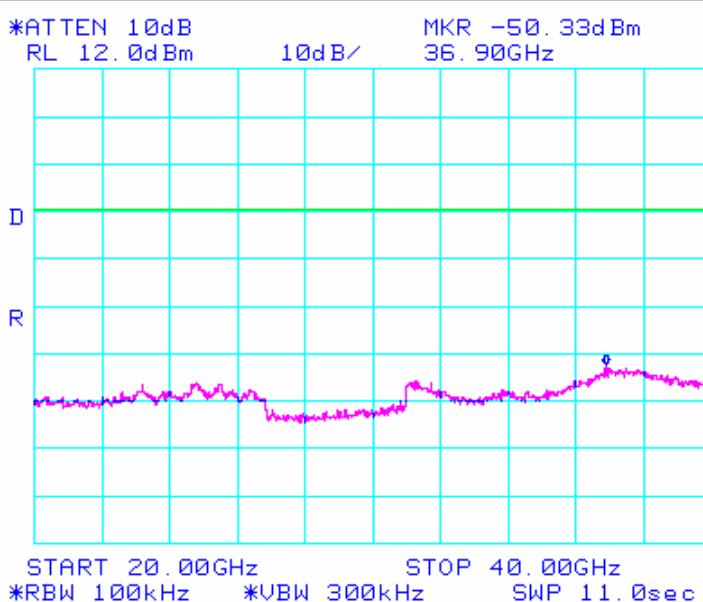

## Conducted Out Of Band Emissions (Continued)
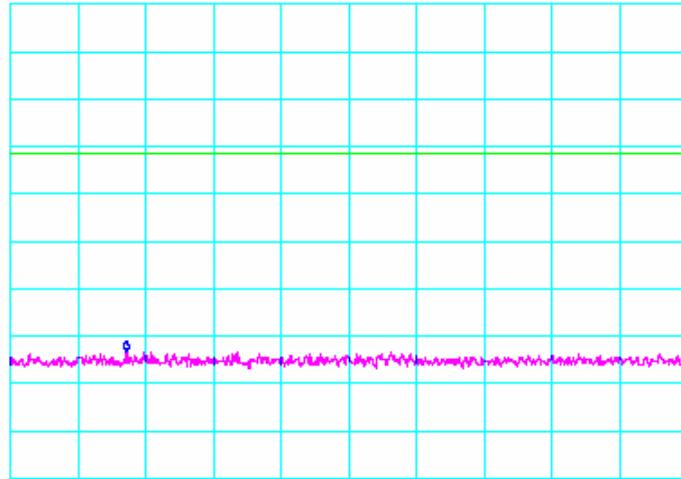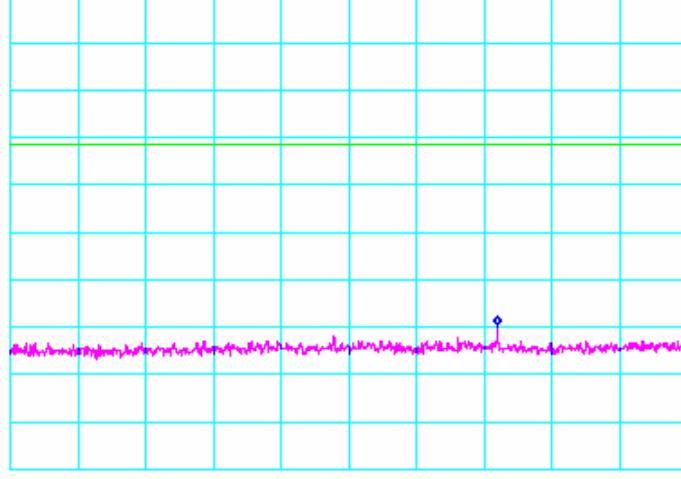
## 802.11a Mode


Test Date	Data	Chain	Test Eng.
05/02/08	5.825 GHz	B	JC
*ATTEN 10dB RL 12.0dBm	10dB/ MKR -61.17dBm 196.5MHz		
D			
R			
START 30.0MHz *RBW 100kHz	STOP 1.0000GHz *VBW 300kHz	SWP 540ms	
Test Date	Data	Chain	Test Eng.
05/02/08	5.825 GHz	B	JC
*ATTEN 10dB RL 12.0dBm	10dB/ MKR -57.67dBm 3.880GHz		
D			
R			
START 1.000GHz *RBW 100kHz	STOP 5.000GHz *VBW 300kHz	SWP 2.20sec	

## Conducted Out Of Band Emissions (Continued)
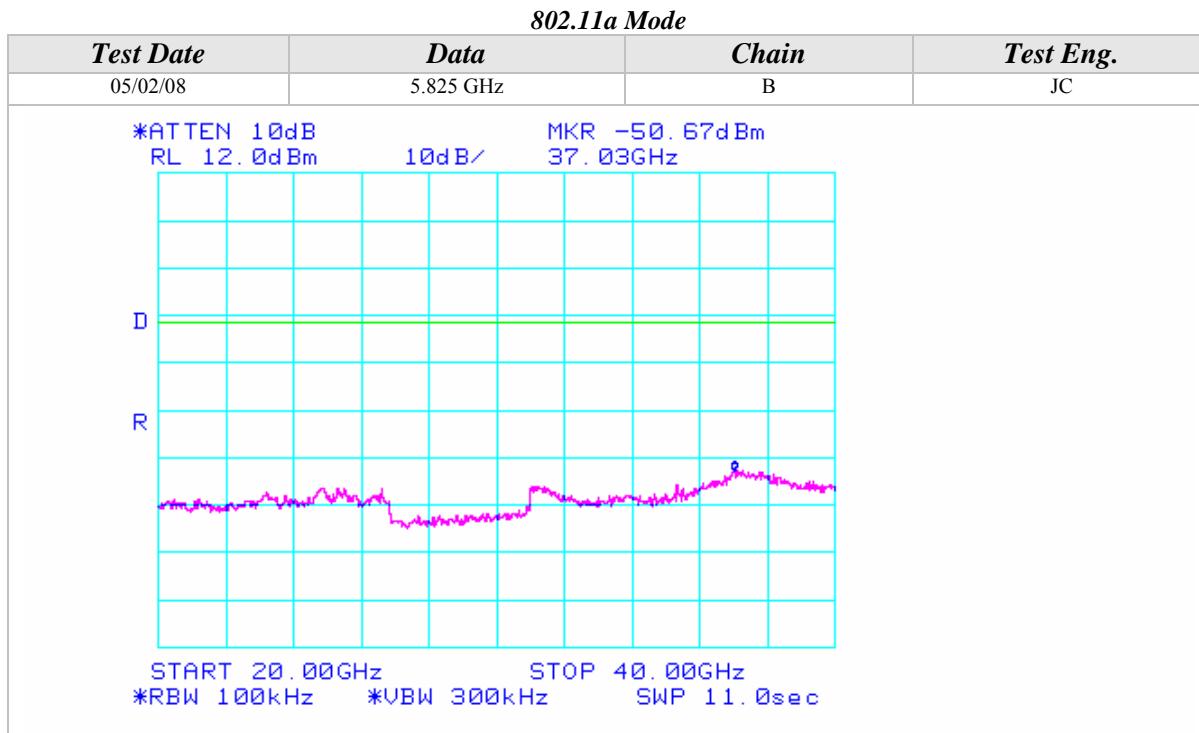
## 802.11a Mode



Test Date	Data	Chain	Test Eng.
05/02/08	5.825 GHz	B	JC
*ATTEN 10dB RL 12.0dBm		MKR .50dBm 5.817GHz	
START 5.000GHz *RBW 100kHz		STOP 10.000GHz *VBW 300kHz	
SWP 2.80sec			
Test Date	Data	Chain	Test Eng.
05/02/08	5.825 GHz	B	JC
*ATTEN 10dB RL 12.0dBm		MKR -56.33dBm 13.95GHz	
START 10.00GHz *RBW 100kHz		STOP 20.00GHz *VBW 300kHz	
SWP 5.50sec			

## Conducted Out Of Band Emissions (Continued)





## Conducted Out Of Band Emissions (Continued)
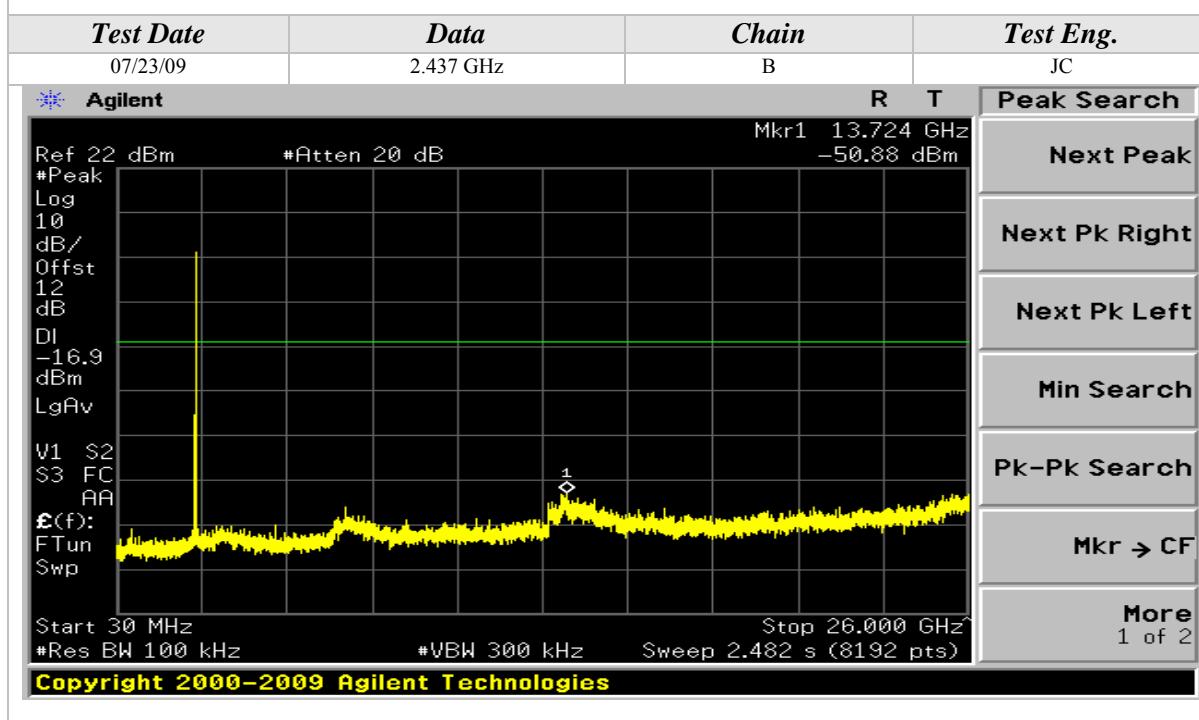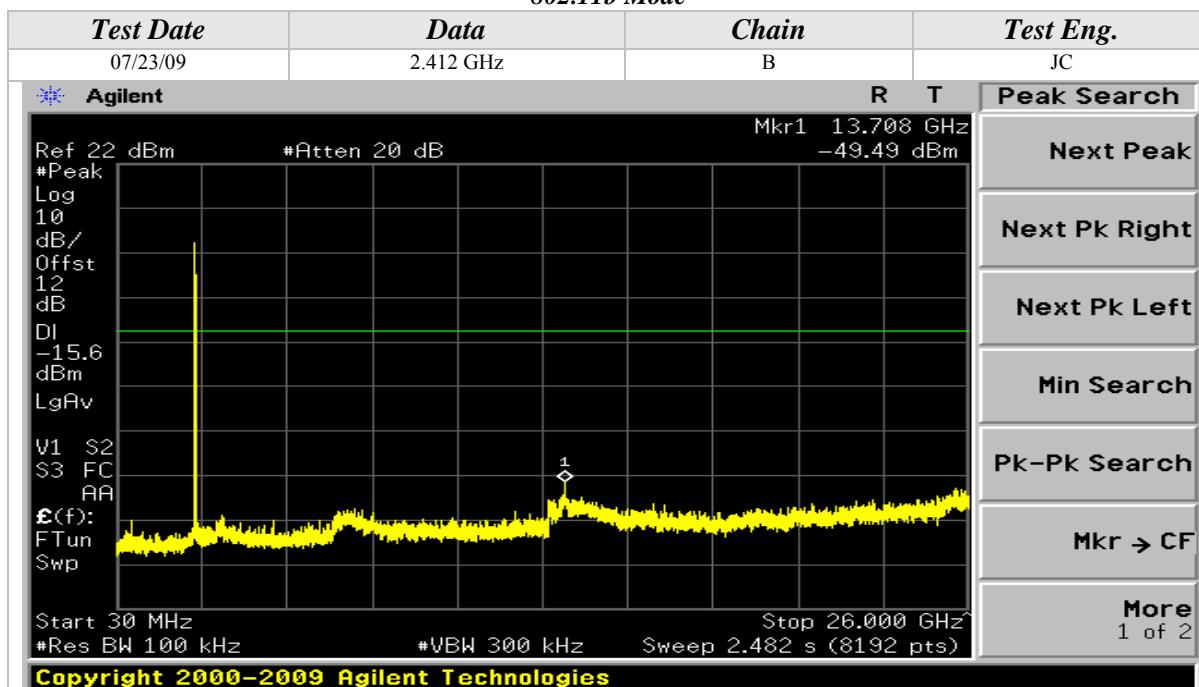
## 802.11b Mode





## Conducted Out Of Band Emissions (Continued)

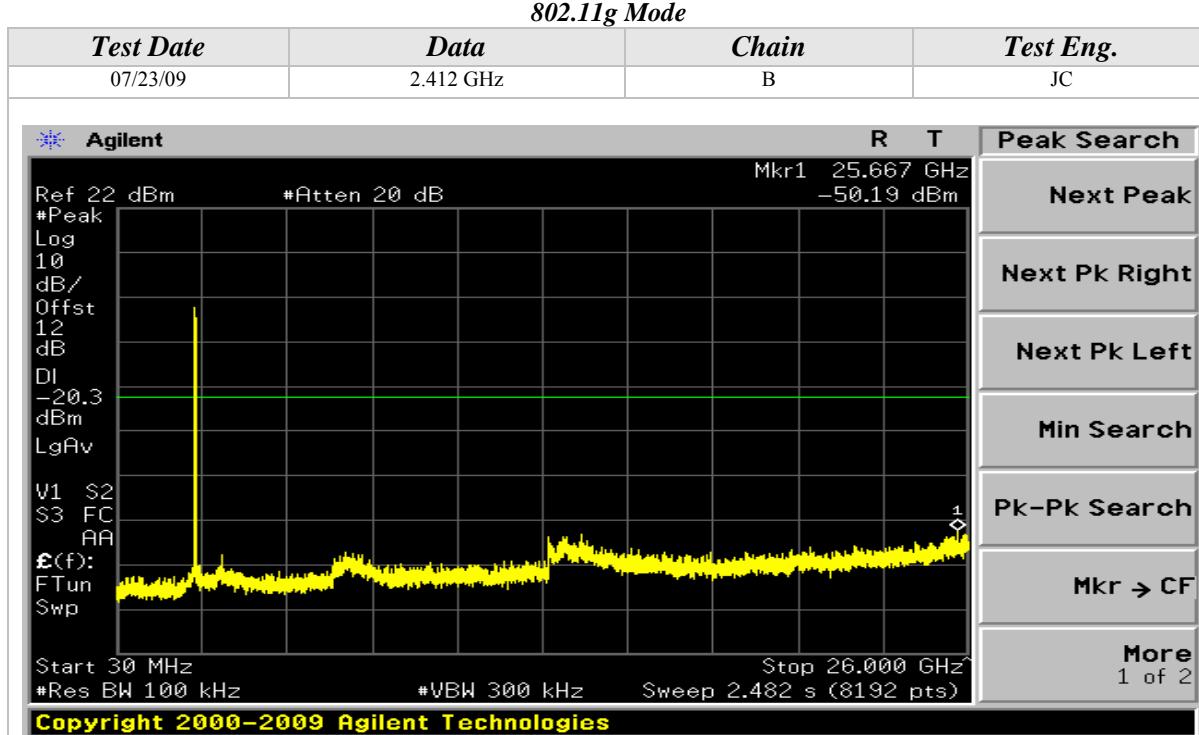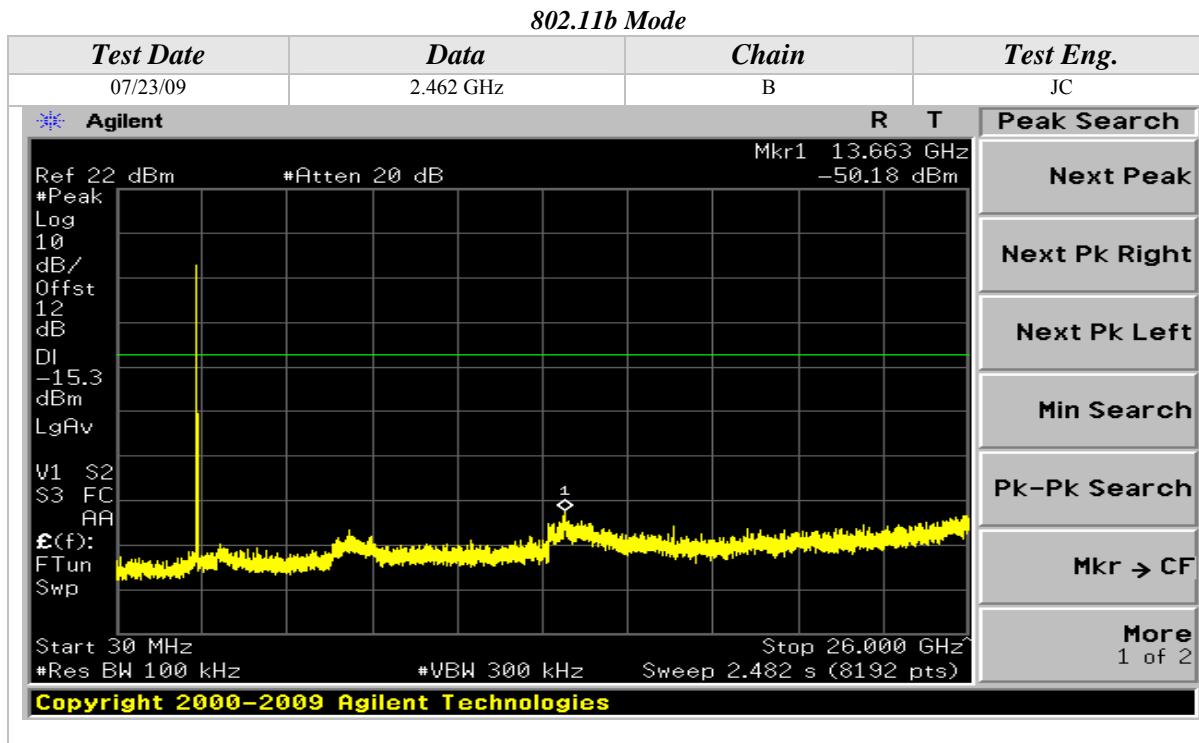


## Conducted Out Of Band Emissions (Continued)

## 802.11g Mode

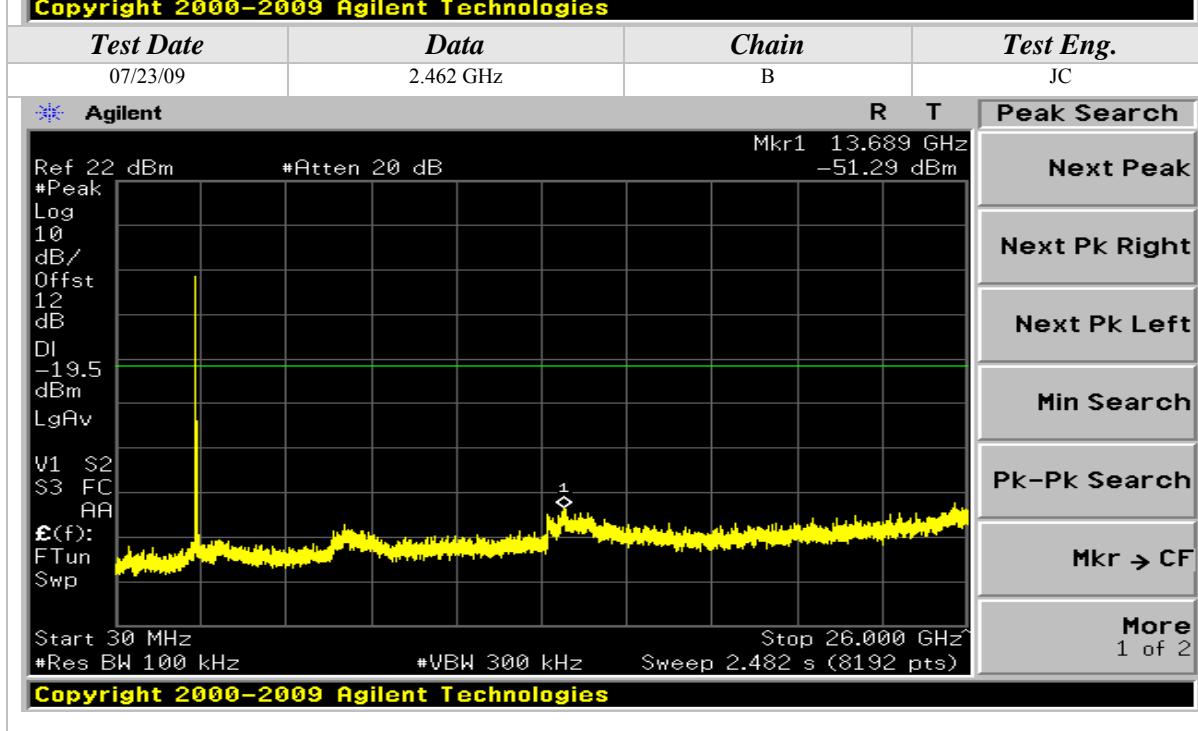
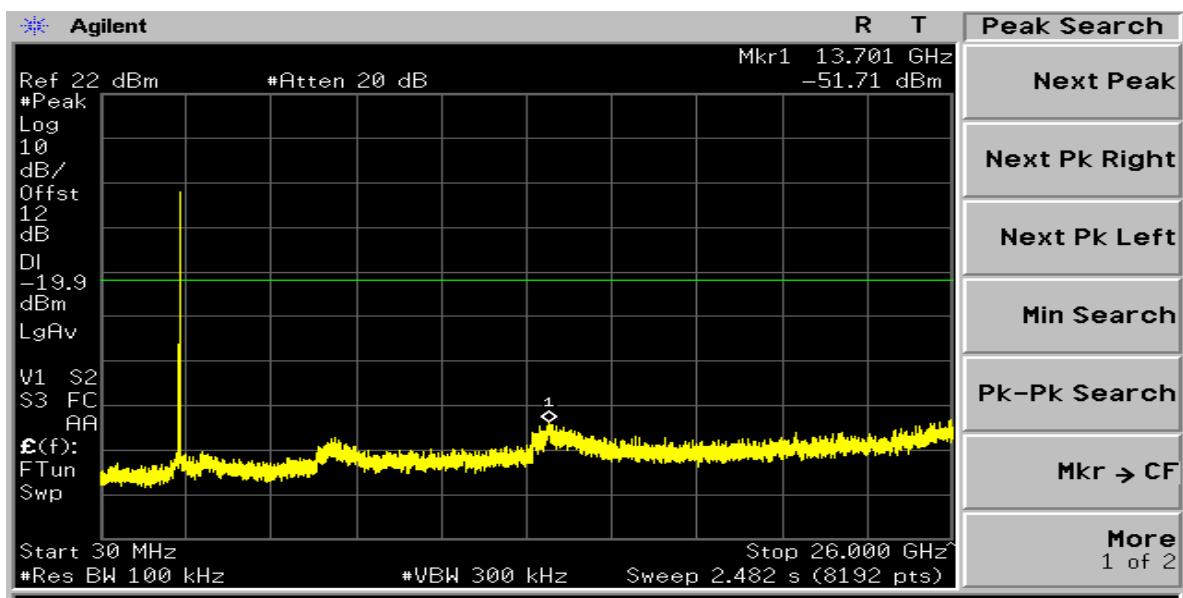
Test Date	Data	Chain	Test Eng.
07/23/09	2.437 GHz	B	JC





## Conducted Out Of Band Emissions (Continued)

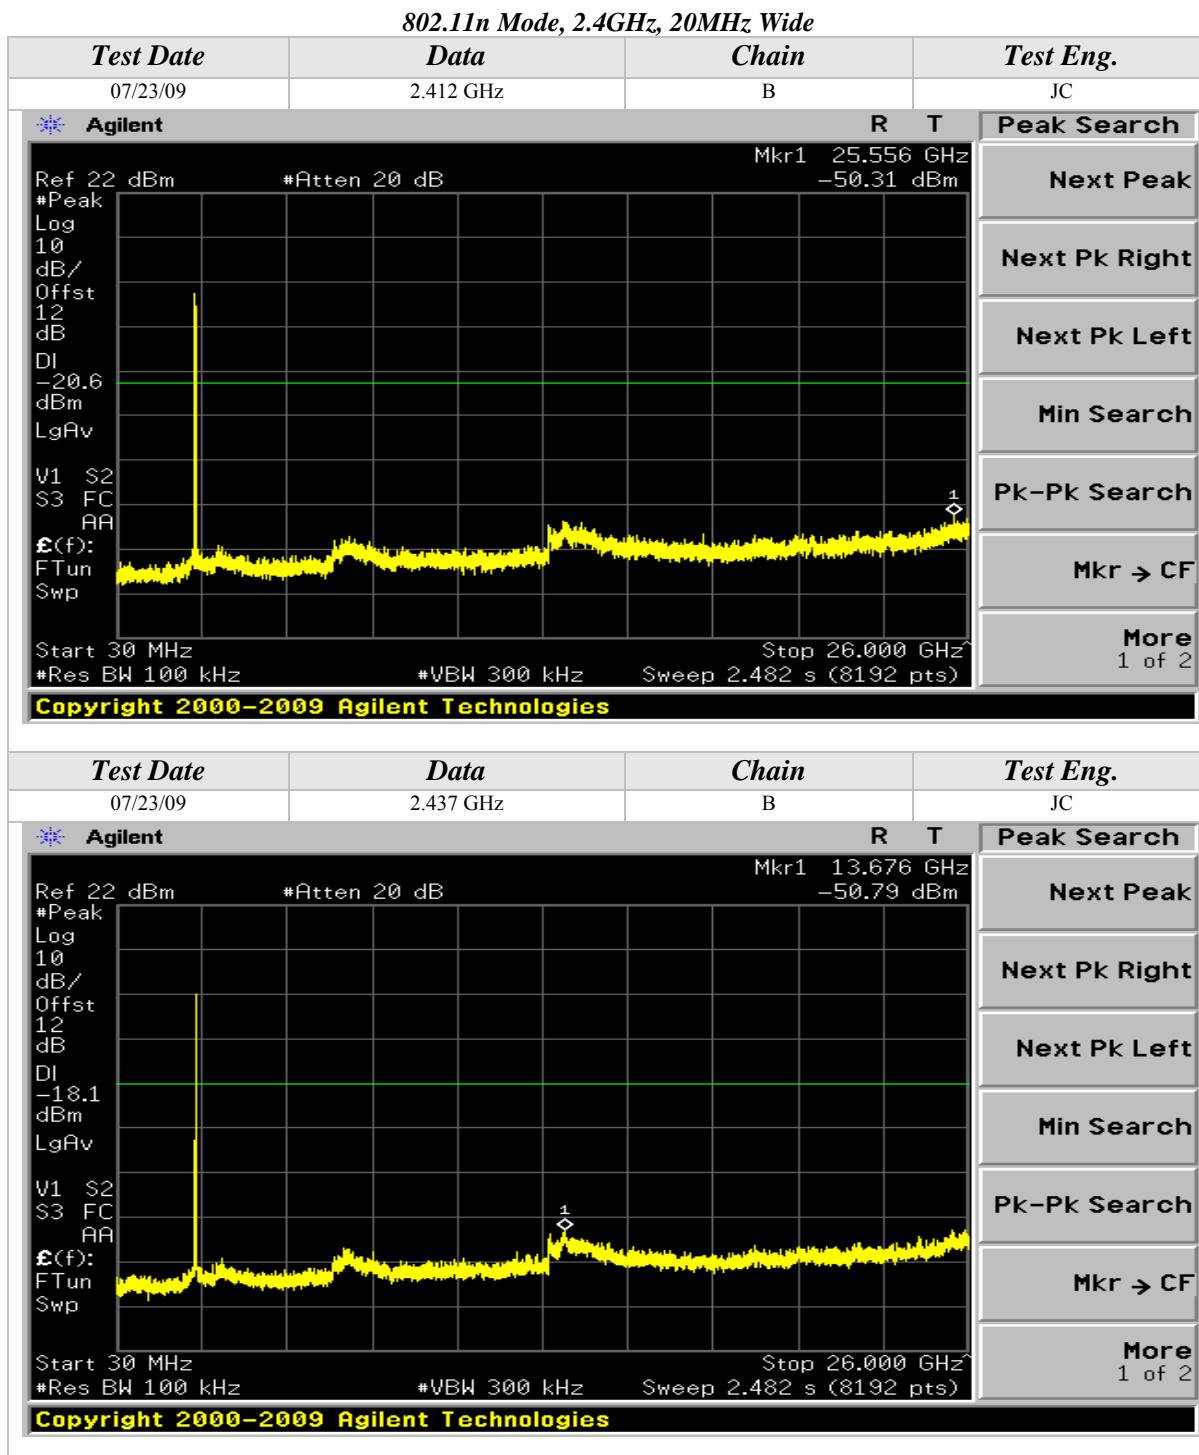



## Conducted Out Of Band Emissions (Continued)

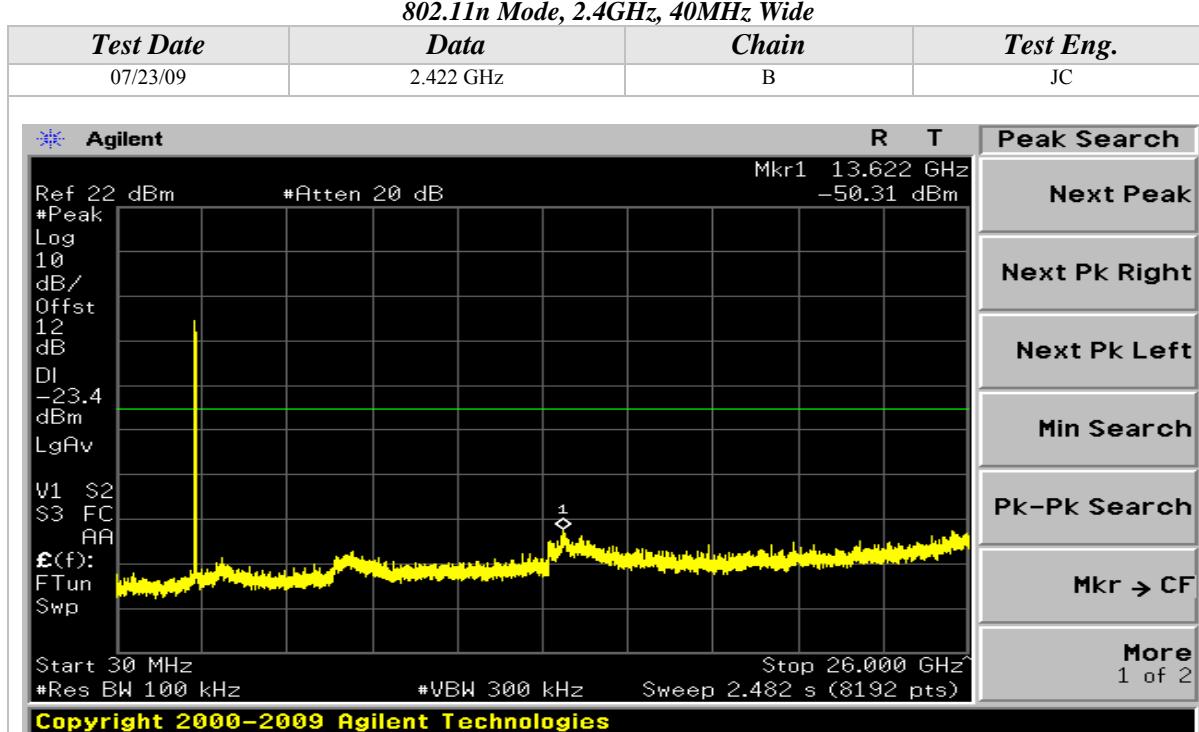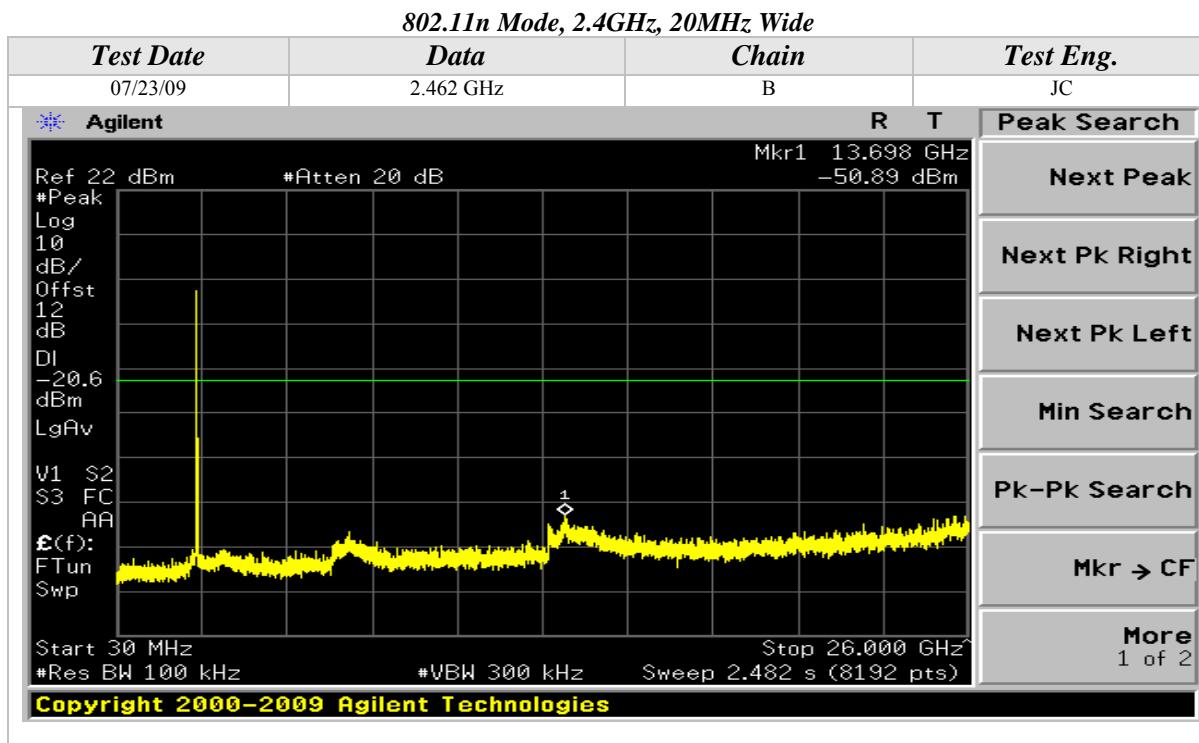



## Conducted Out Of Band Emissions (Continued)

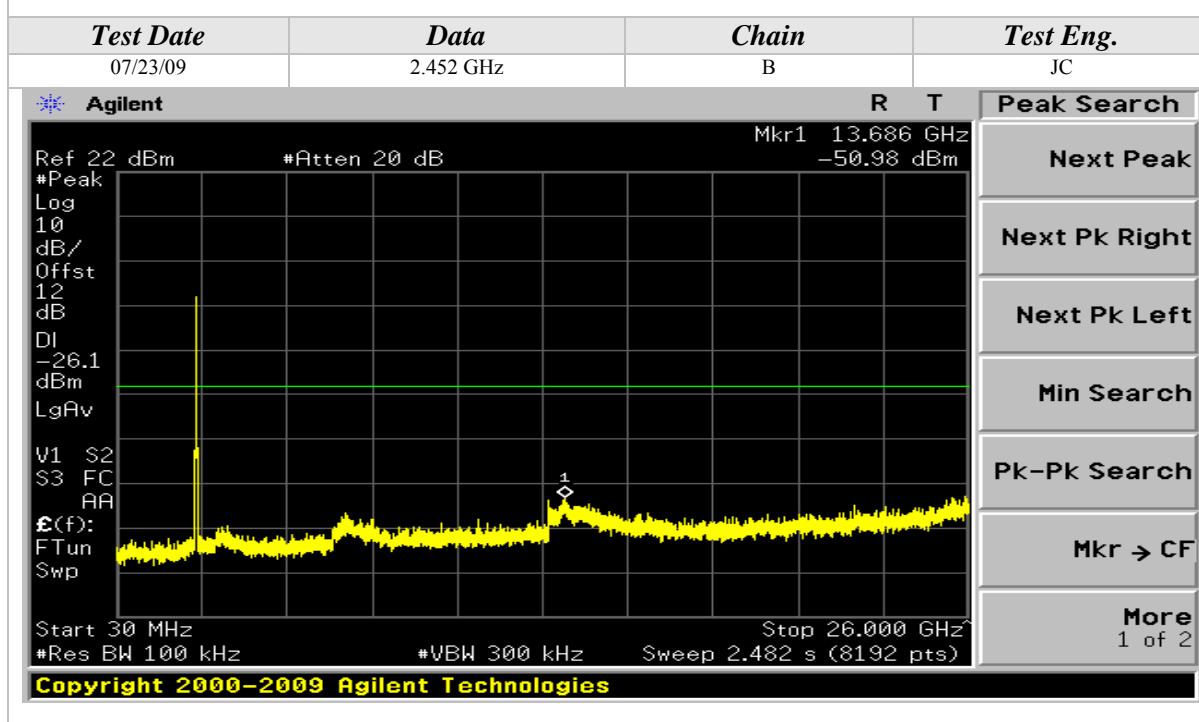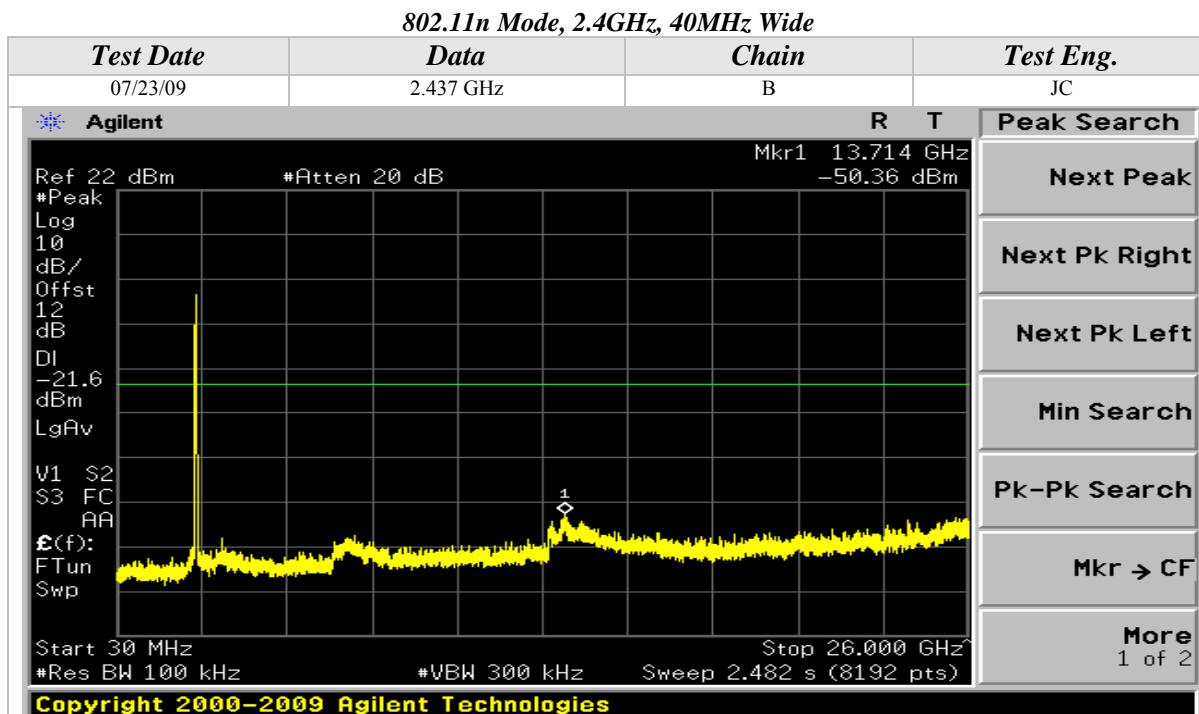



## Conducted Out Of Band Emissions (Continued)
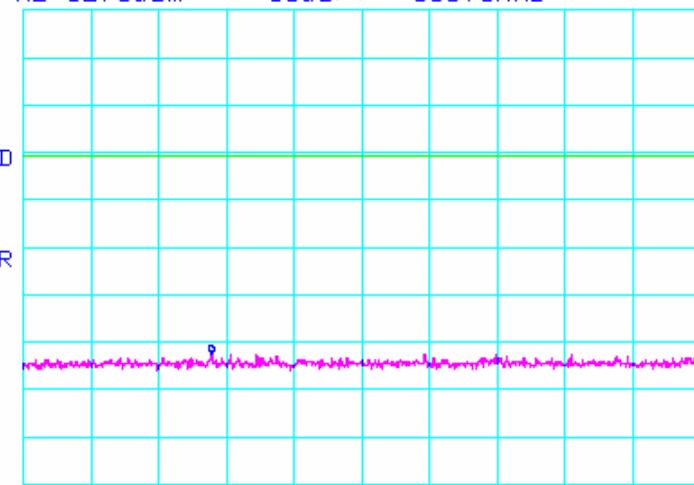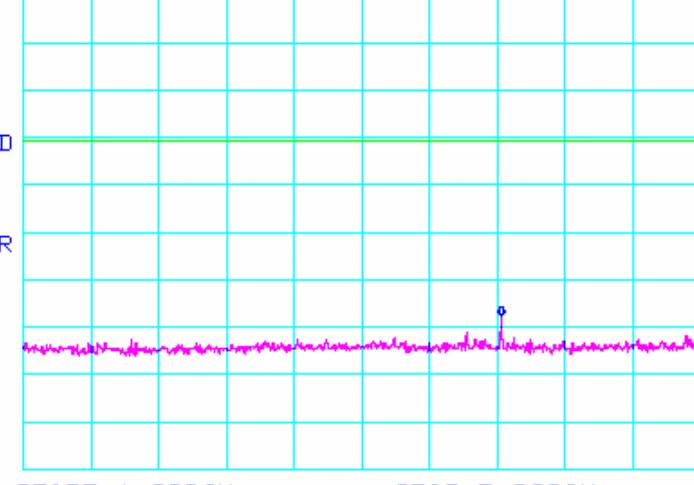
<i>802.11n Mode, 5GHz, 20MHz Wide</i>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.745 GHz	B	JC
<i>*ATTEN 10dB RL 12.0dBm 10dB/</i>			
<i>MKR -60.50dBm 300.0MHz</i>			
			
<i>START 30.0MHz STOP 1.0000GHz *RBW 100kHz *VBW 300kHz SWP 540ms</i>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.745 GHz	B	JC
<i>*ATTEN 10dB RL 12.0dBm 10dB/</i>			
<i>MKR -55.67dBm 3.827GHz</i>			
			
<i>START 1.000GHz STOP 5.000GHz *RBW 100kHz *VBW 300kHz SWP 2.20sec</i>			



## Conducted Out Of Band Emissions (Continued)
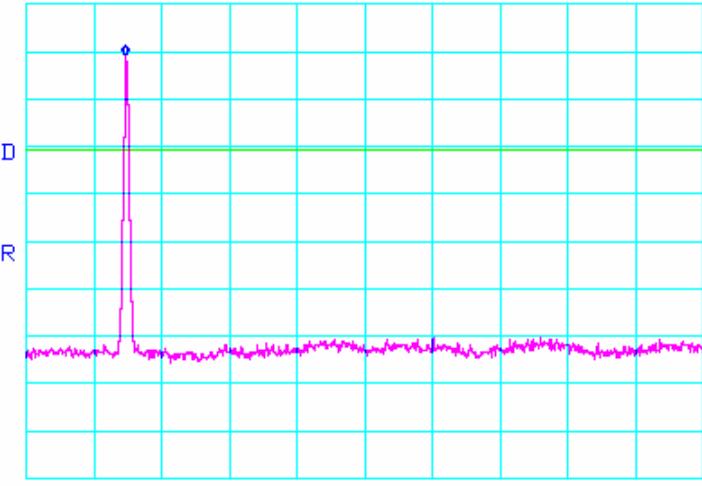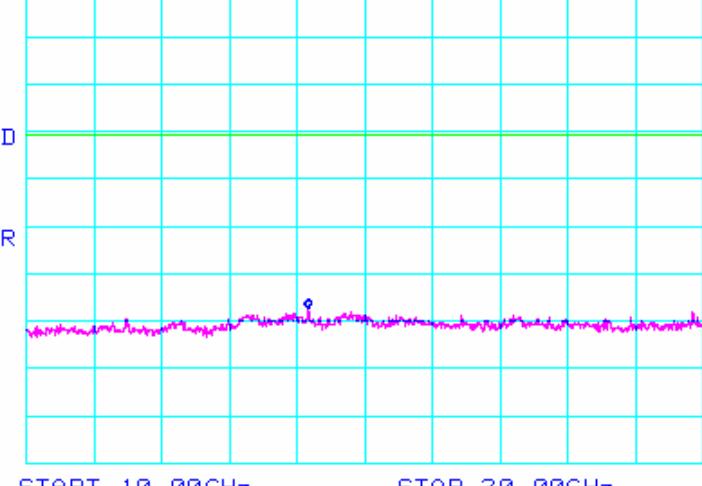
<i>802.11n Mode, 5GHz, 20MHz Wide</i>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.745 GHz	B	JC
<b>*ATTEN 10dB RL 12.0dBm</b>			
<b>MKR 1.33dBm 5.733GHz</b>			
			
<b>10dB/100kHz</b>			
<b>START 5.000GHz STOP 10.000GHz</b>			
<b>*RBW 100kHz *VBW 300kHz SWP 2.80sec</b>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.745 GHz	B	JC
<b>*ATTEN 10dB RL 12.0dBm</b>			
<b>MKR -55.33dBm 14.17GHz</b>			
			
<b>10dB/100kHz</b>			
<b>START 10.000GHz STOP 20.000GHz</b>			
<b>*RBW 100kHz *VBW 300kHz SWP 5.50sec</b>			



## Conducted Out Of Band Emissions (Continued)
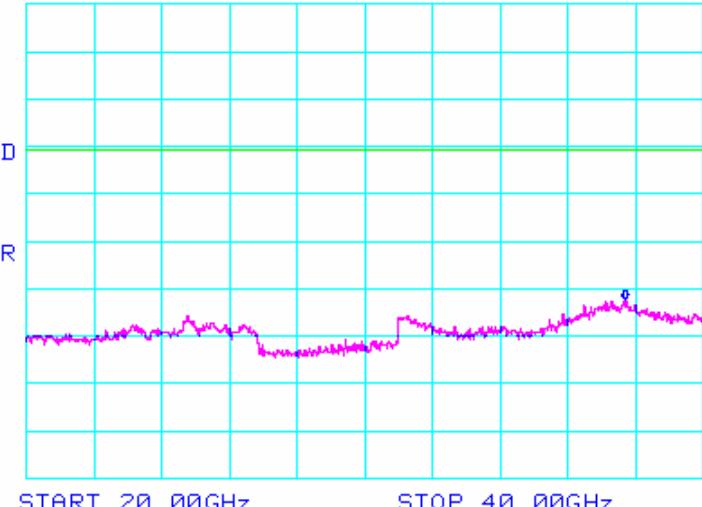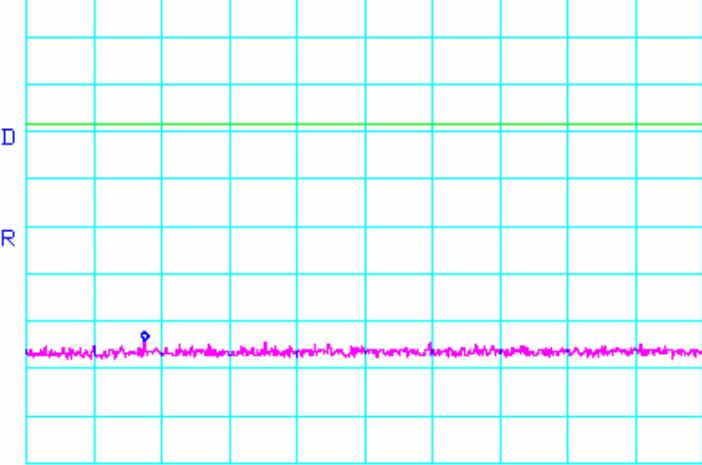
<i>802.11n Mode, 5GHz, 20MHz Wide</i>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.745 GHz	B	JC
<i>*ATTEN 10dB RL 12.0dBm 10dB/</i>			
<i>MKR -50.33dBm 37.70GHz</i>			
			
<i>START 20.00GHz *RBW 100kHz *VUBW 300kHz SWP 11.0sec</i>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.785 GHz	B	JC
<i>*ATTEN 10dB RL 12.0dBm 10dB/</i>			
<i>MKR -62.17dBm 199.8MHz</i>			
			
<i>START 30.0MHz *RBW 100kHz *VUBW 300kHz SWP 540ms</i>			



## Conducted Out Of Band Emissions (Continued)

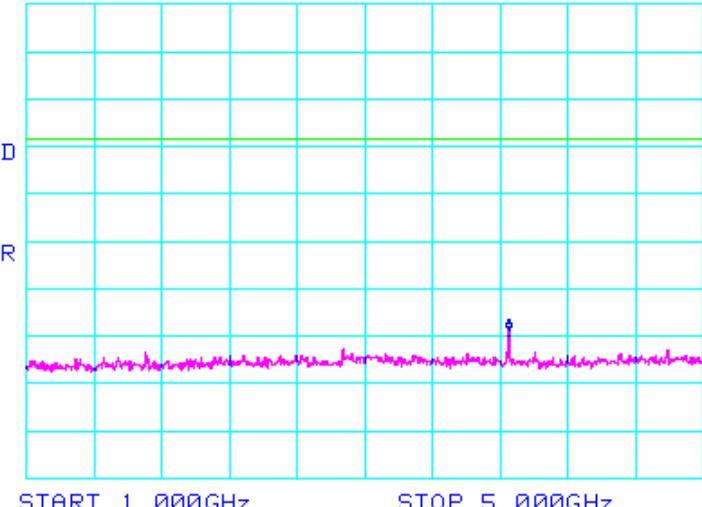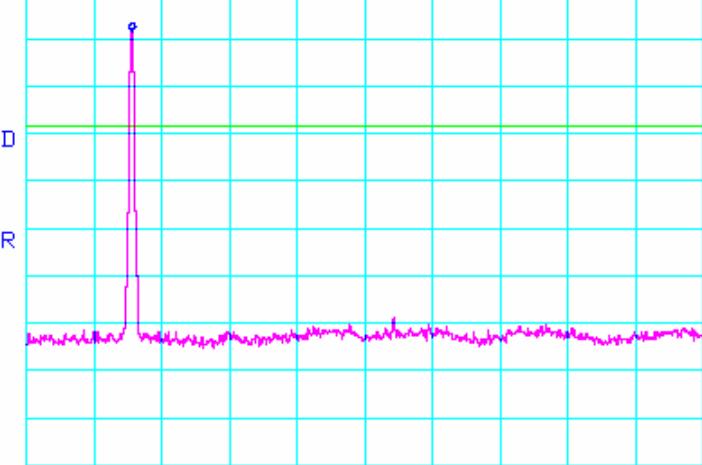802.11n Mode, 5GHz, 20MHz Wide			
Test Date	Data	Chain	Test Eng.
05/02/08	5.785 GHz	B	JC
*ATTEN 10dB RL 12.0dBm 10dB/  START 1.000GHz STOP 5.000GHz *RBW 100kHz *VUBW 300kHz SWP 2.20sec			
Test Date	Data	Chain	Test Eng.
05/02/08	5.785 GHz	B	JC
*ATTEN 10dB RL 12.0dBm 10dB/  START 5.000GHz STOP 10.000GHz *RBW 100kHz *VUBW 300kHz SWP 2.80sec			



## Conducted Out Of Band Emissions (Continued)
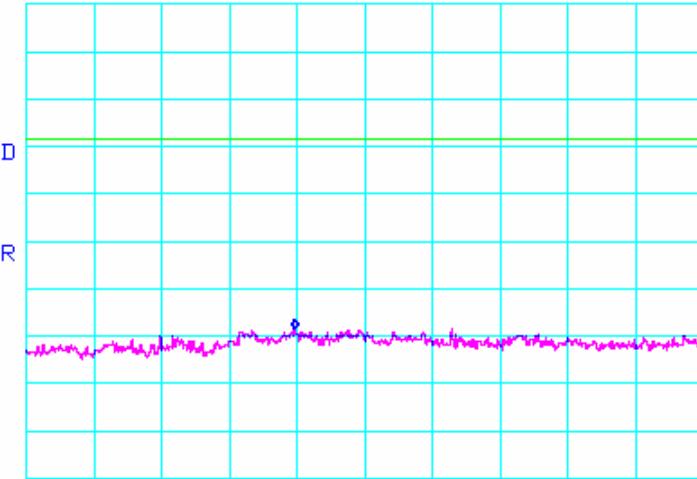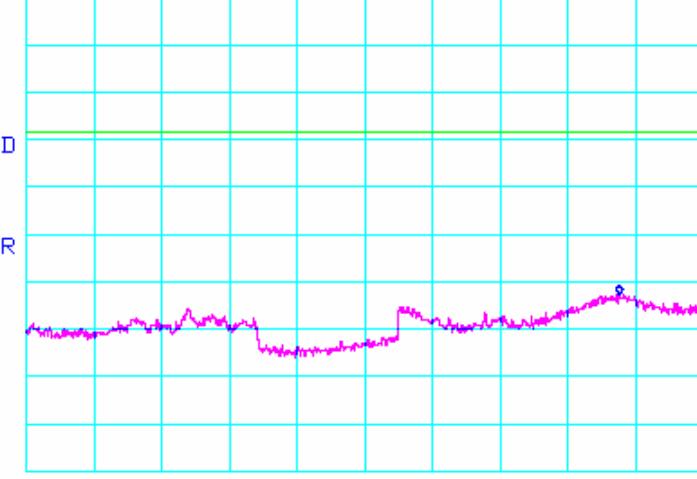
<i>802.11n Mode, 5GHz, 20MHz Wide</i>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.785 GHz	B	JC
<i>*ATTEN 10dB RL 12.0dBm 10dB/</i>			
<i>MKR -56.50dBm 13.97GHz</i>			
 D			
R			
START 10.00GHz *RBW 100kHz *VBW 300kHz			
STOP 20.00GHz SWP 5.50sec			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.785 GHz	B	JC
<i>*ATTEN 10dB RL 12.0dBm 10dB/</i>			
<i>MKR -50.67dBm 37.53GHz</i>			
 D			
R			
START 20.00GHz *RBW 100kHz *VBW 300kHz			
STOP 40.00GHz SWP 11.0sec			


## Conducted Out Of Band Emissions (Continued)
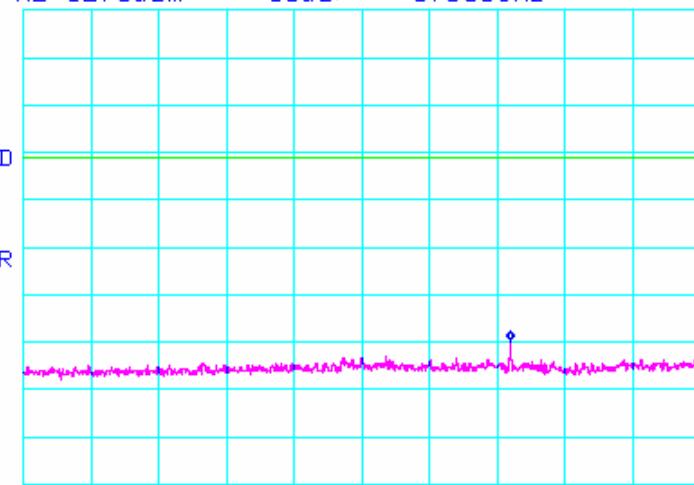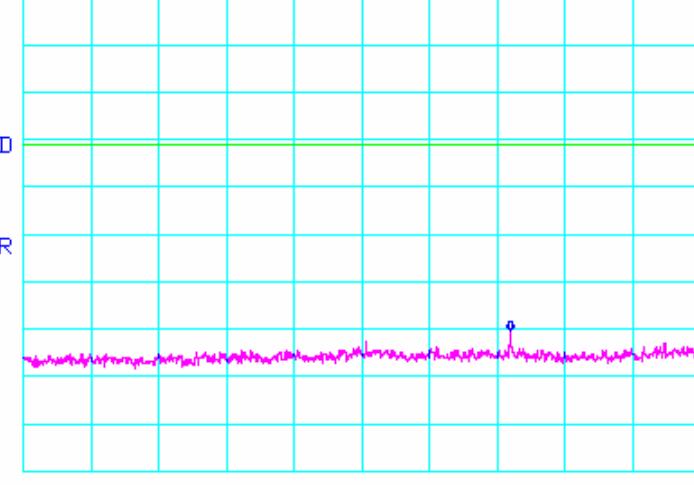
<i>802.11n Mode, 5GHz, 20MHz Wide</i>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.825 GHz	B	JC
<b>*ATTEN 10dB RL 12.0dBm 10dB/</b>			
			
START 1.000GHz STOP 5.000GHz *RBW 100kHz *VBW 300kHz SWP 2.20sec			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.825 GHz	B	JC
<b>*ATTEN 10dB RL 12.0dBm 10dB/</b>			
			
START 1.000GHz STOP 5.000GHz *RBW 100kHz *VBW 300kHz SWP 2.20sec			



## Conducted Out Of Band Emissions (Continued)
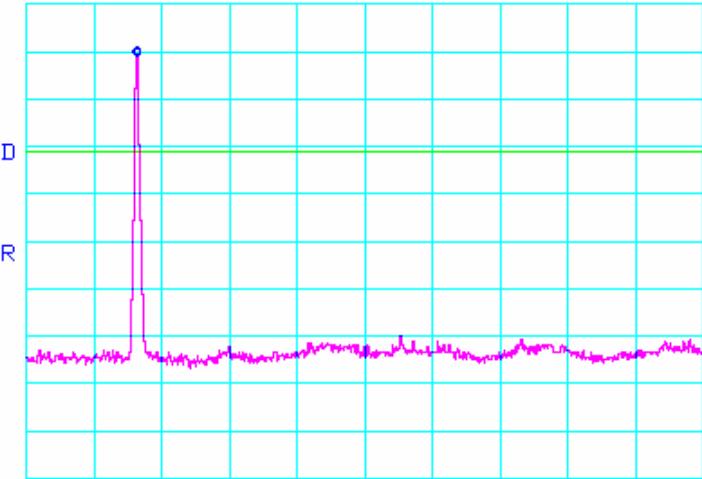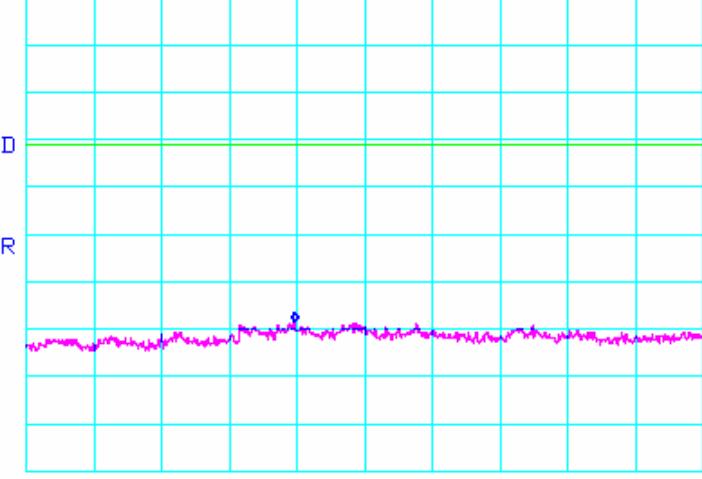
<i>802.11n Mode, 5GHz, 20MHz Wide</i>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.825 GHz	B	JC
<b>*ATTEN 10dB</b> <b>RL 12.0 dBm</b> <b>10dB/</b> <b>MKR 1.00 dBm</b> <b>5.817GHz</b>			
 <p>D</p> <p>R</p> <p>START 5.000GHz STOP 10.000GHz    *RBW 100kHz *VBW 300kHz SWP 2.80sec</p>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.825 GHz	B	JC
<b>*ATTEN 10dB</b> <b>RL 12.0 dBm</b> <b>10dB/</b> <b>MKR -56.50 dBm</b> <b>13.97GHz</b>			
 <p>D</p> <p>R</p> <p>START 10.00GHz STOP 20.00GHz    *RBW 100kHz *VBW 300kHz SWP 5.50sec</p>			


## Conducted Out Of Band Emissions (Continued)

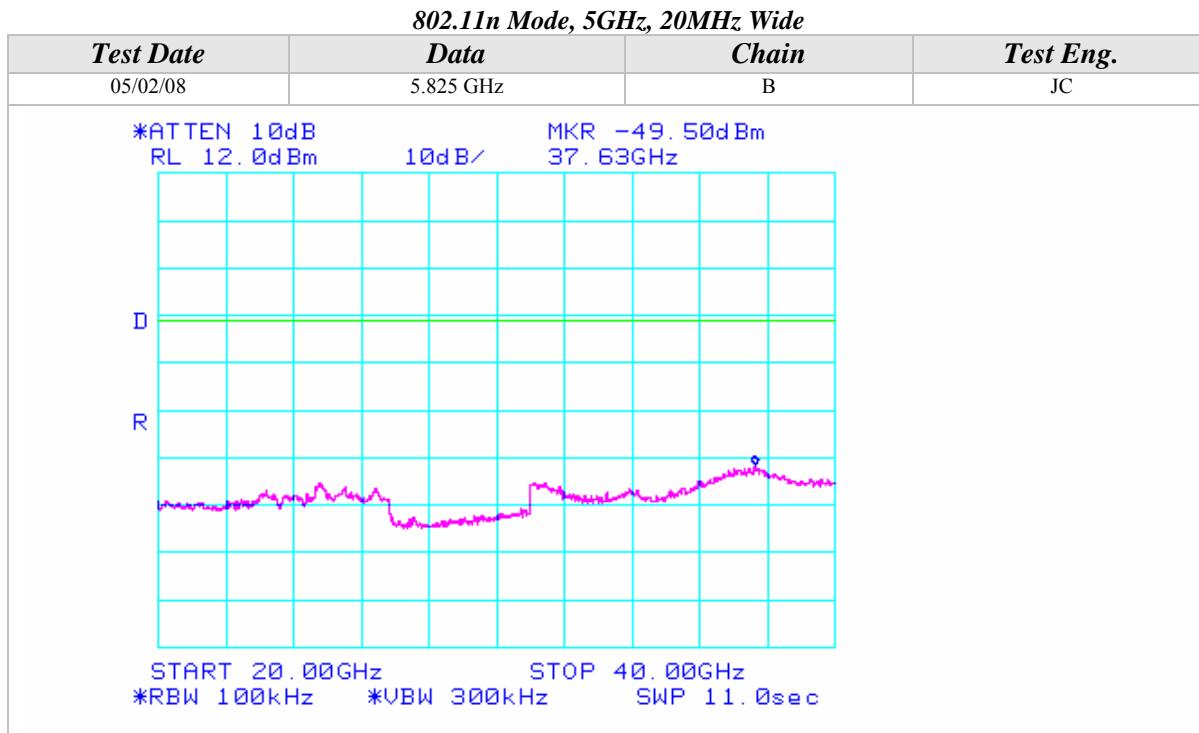



## Conducted Out Of Band Emissions (Continued)

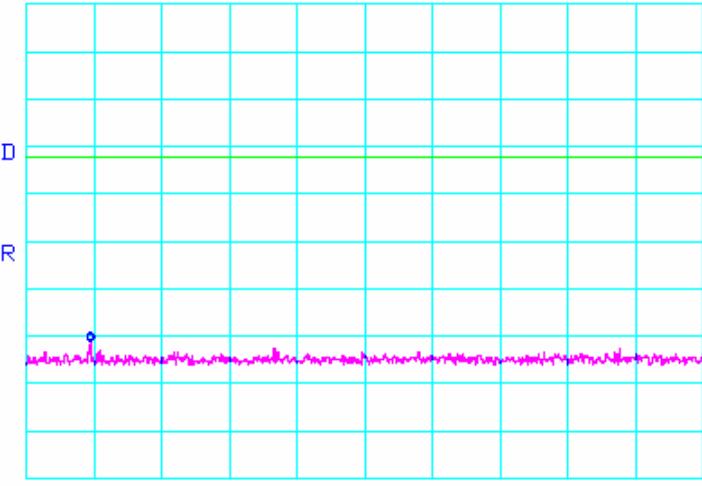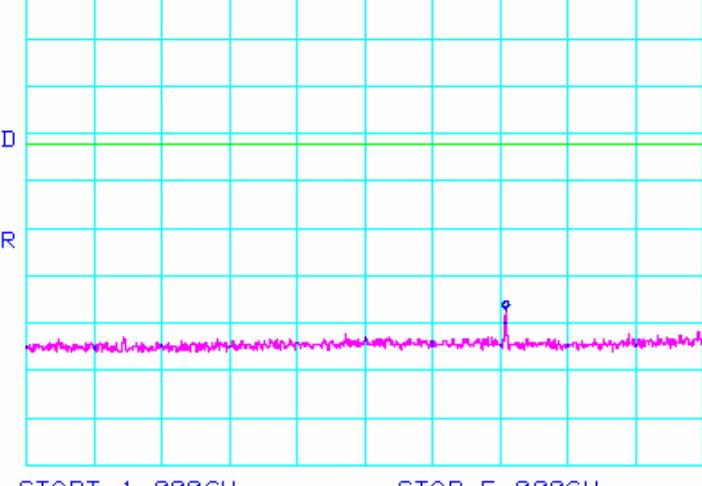802.11n Mode, 5GHz, 40MHz Wide			
Test Date	Data	Chain	Test Eng.
05/02/08	5.755 GHz	B	JC
*ATTEN 10dB RL 12.0dBm 10dB/ 			
MKR -59.17dBm 122.2MHz			
Test Date	Data	Chain	Test Eng.
05/02/08	5.755 GHz	B	JC
*ATTEN 10dB RL 12.0dBm 10dB/ 			
MKR -55.17dBm 3.833GHz			
START 30.0MHz STOP 1.0000GHz *RBW 100kHz *VBW 300kHz SWP 540ms			
START 1.0000GHz STOP 5.0000GHz *RBW 100kHz *VBW 300kHz SWP 2.20sec			



## Conducted Out Of Band Emissions (Continued)

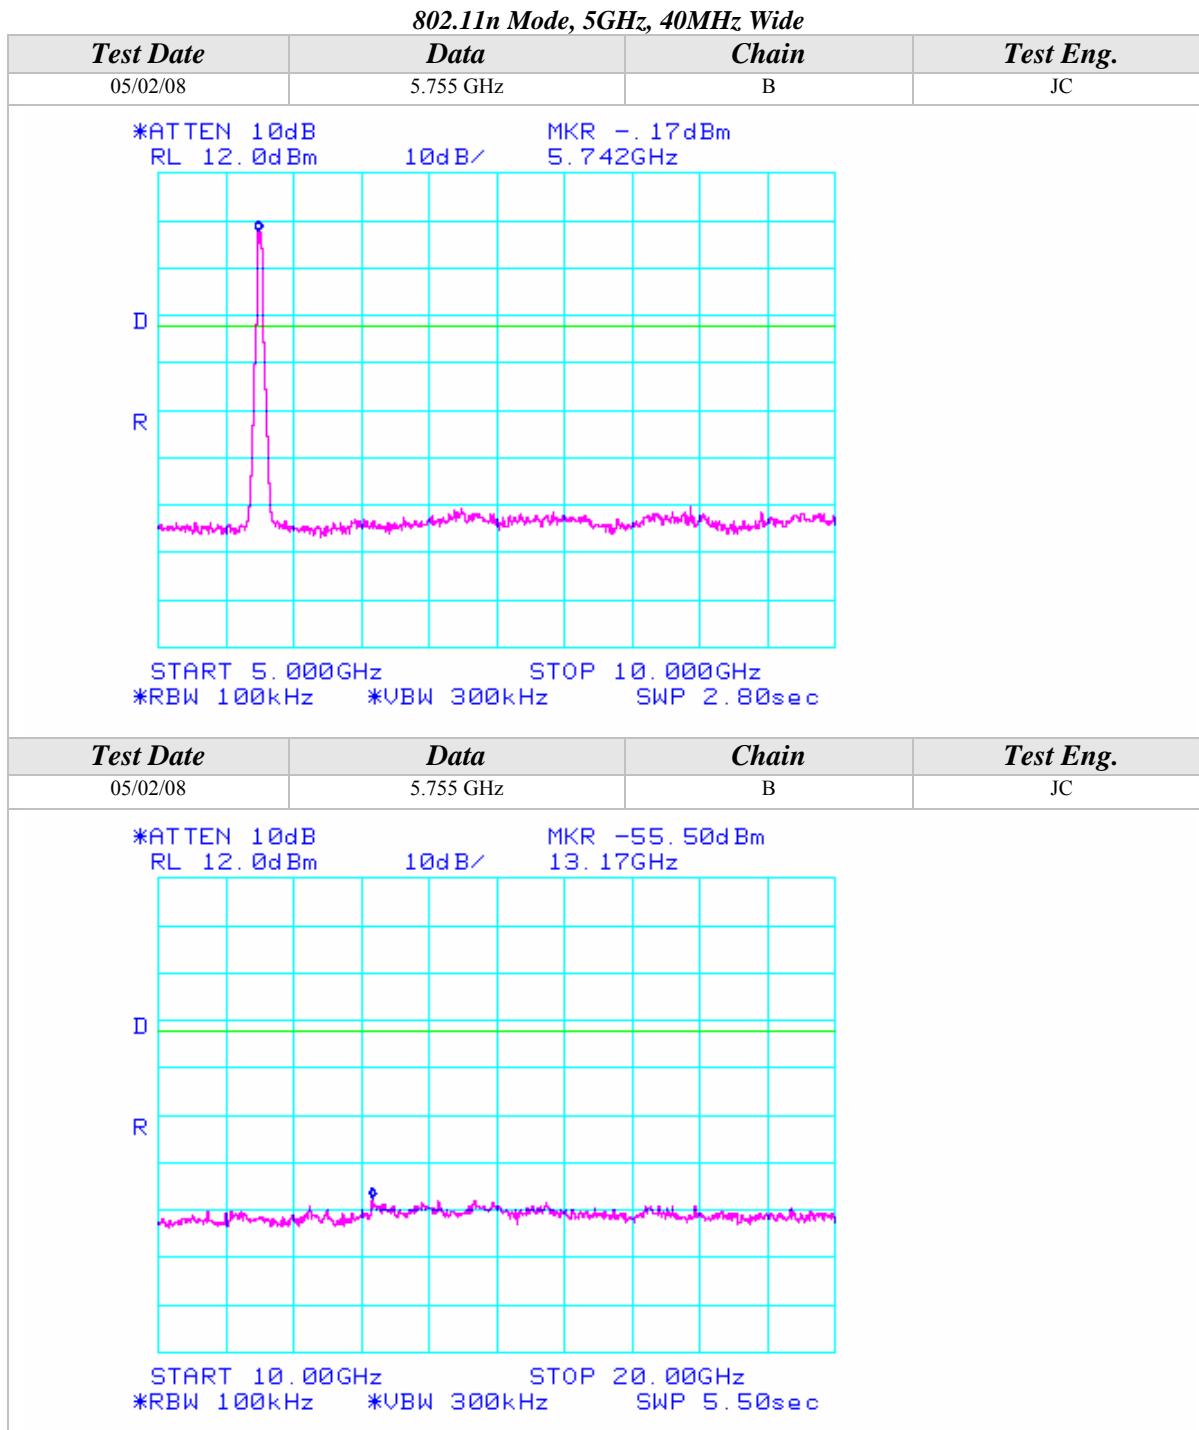


## Conducted Out Of Band Emissions (Continued)
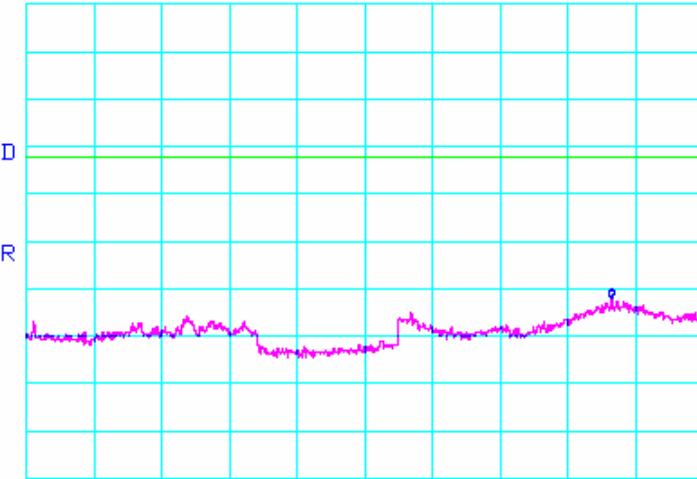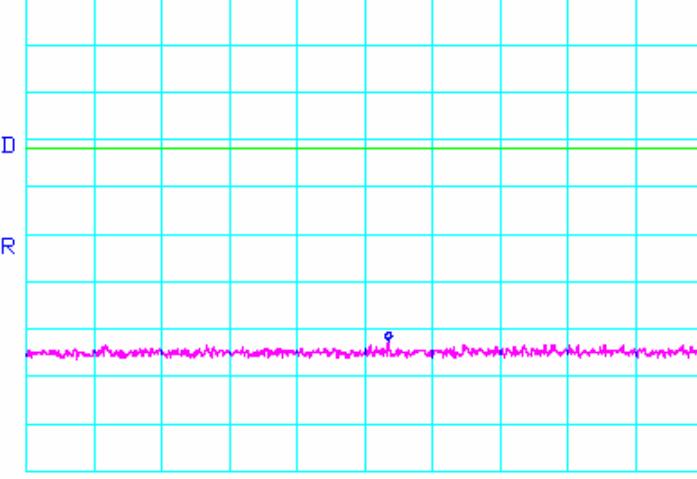
<i>802.11n Mode, 5GHz, 40MHz Wide</i>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.755 GHz	B	JC
<b>*ATTEN 10dB RL 12.0dBm 10dB/</b>			
<b>MKR -50.00dBm 37.30GHz</b>			
 START 20.00GHz STOP 40.00GHz *RBW 100kHz *VBW 300kHz SWP 11.0sec			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.795 GHz	B	JC
<b>*ATTEN 10dB RL 12.0dBm 10dB/</b>			
<b>MKR -60.50dBm 549.0MHz</b>			
 START 30.0MHz STOP 1.0000GHz *RBW 100kHz *VBW 300kHz SWP 540ms			

## Conducted Out Of Band Emissions (Continued)
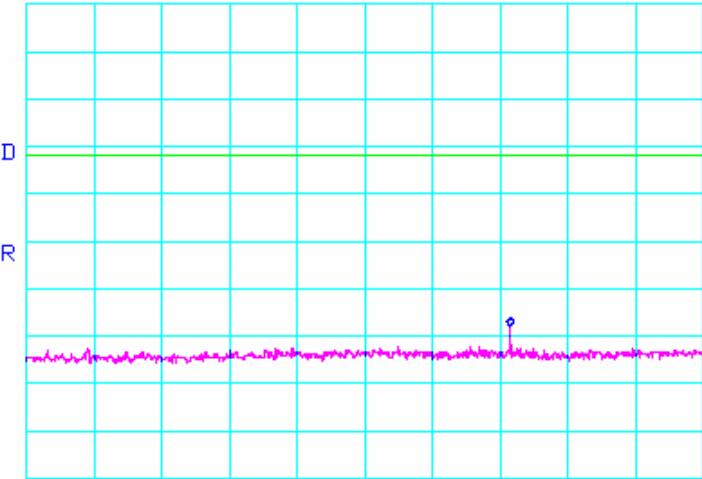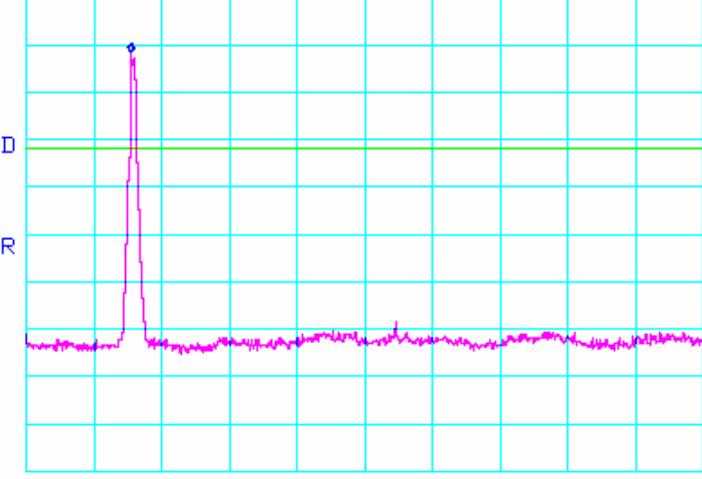
<i>802.11n Mode, 5GHz, 40MHz Wide</i>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.795 GHz	B	JC
<i>*ATTEN 10dB RL 12.0dBm 10dB/</i>			
<i>MKR -56.00dBm 3.860GHz</i>			
			
<i>START 1.000GHz STOP 5.000GHz *RBW 100kHz *VBW 300kHz SWP 2.20sec</i>			
<i>Test Date</i>	<i>Data</i>	<i>Chain</i>	<i>Test Eng.</i>
05/02/08	5.795 GHz	B	JC
<i>*ATTEN 10dB RL 12.0dBm 10dB/</i>			
<i>MKR .33dBm 5.775GHz</i>			
			
<i>START 5.000GHz STOP 10.000GHz *RBW 100kHz *VBW 300kHz SWP 2.80sec</i>			

## Conducted Out Of Band Emissions (Continued)

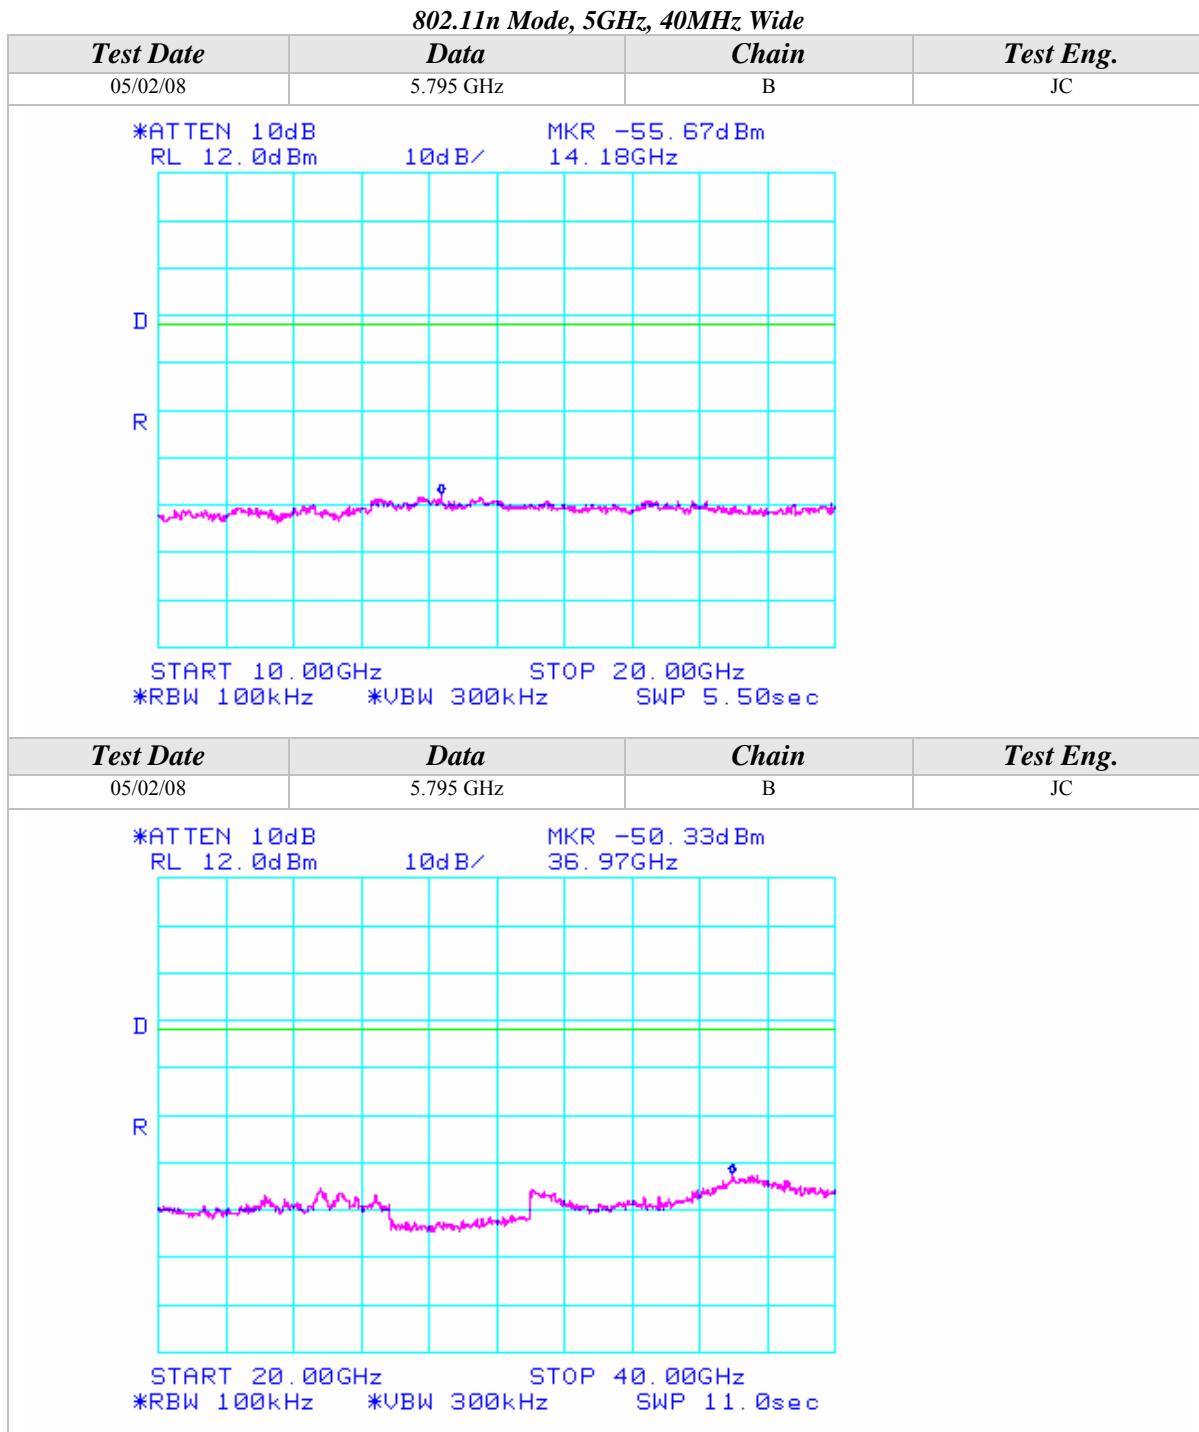



## APPENDIX B

### ***MODIFICATIONS AND RECOMMENDATIONS***

<b>1.0</b>	NONE