
Appendix C – Highest Test Plots

Test Date : 2024-04-15 | Ambient Temp : 22.8 °C | Tissue Temp : 21.3 °C

Test Mode**1_WCDMA Band II_RMC12.2K_Rear Face_0mm_Ch9262_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 2	WCDMA, 10011 - CAC	1852.400, 9262	8.64	1.41	42.3

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.758	0.811
psSAR-10g [W/kg]	0.375	0.387
Power Drift [dB]		0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		46.2
Dist 3dB Peak [mm]		8.2

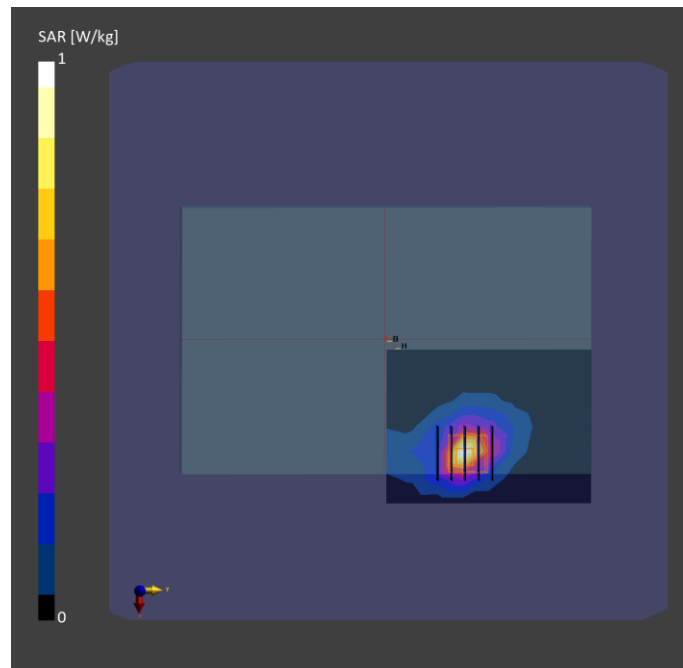

Test Date : 2024-04-15 | Ambient Temp : 22.8 °C | Tissue Temp : 21.3 °C

Test Mode**2_WCDMA Band IV_RMC12.2K_Rear Face_0mm_Ch1312_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 4	WCDMA, 10011 - CAC	1712.400, 1312	8.96	1.34	42.5

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.910	0.941
psSAR-10g [W/kg]	0.468	0.452
Power Drift [dB]		0.08
TSL Correction	Positive only	Positive only
M2 / M1 [%]		45.8
Dist 3dB Peak [mm]		8.7

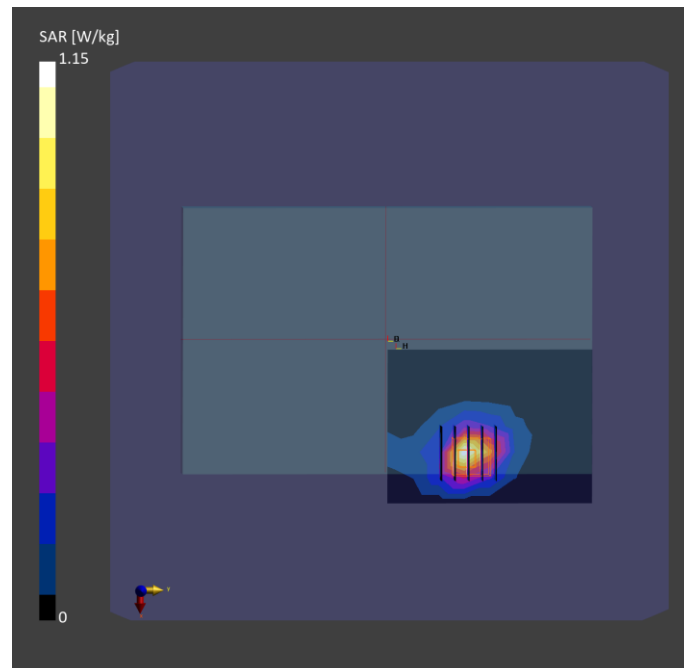

Test Date : 2024-04-15 | Ambient Temp : 22.8 °C | Tissue Temp : 21.3 °C

Test Mode**3_WCDMA Band V_RMC12.2K_Rear Face_0mm_Ch4132_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 5	WCDMA, 10011 - CAC	826.400, 4132	10.38	0.928	44.1

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.559	0.685
psSAR-10g [W/kg]	0.313	0.333
Power Drift [dB]		0.06
TSL Correction	Positive only	Positive only
M2 / M1 [%]		47.7
Dist 3dB Peak [mm]		8.2

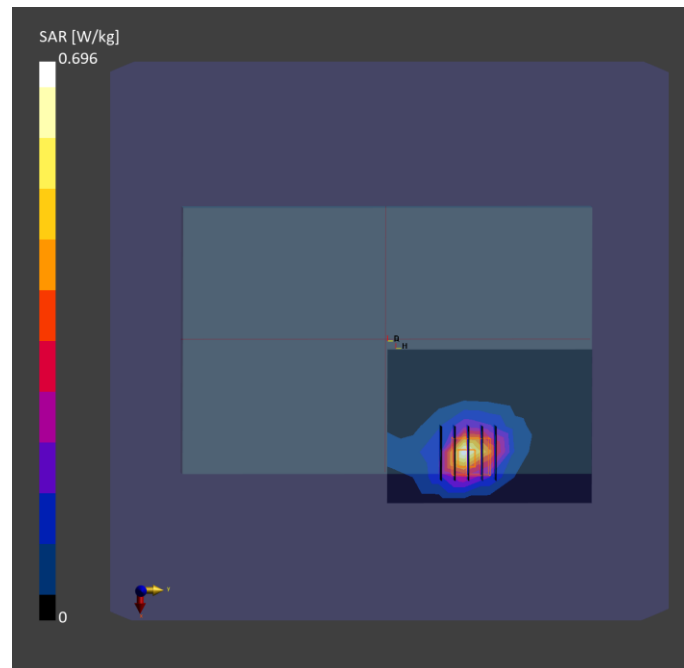

Test Date : 2024-04-15 | Ambient Temp : 22.8 °C | Tissue Temp : 21.3 °C

Test Mode**4_LTE Band 2_QPSK20M_Rear Face_0mm_Ch18900_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 2	LTE-FDD, 10169 - CAF	1880.000, 18900	8.64	1.43	42.2

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.751	0.833
psSAR-10g [W/kg]	0.390	0.398
Power Drift [dB]		-0.07
TSL Correction	Positive only	Positive only
M2 / M1 [%]		44.3
Dist 3dB Peak [mm]		8.7

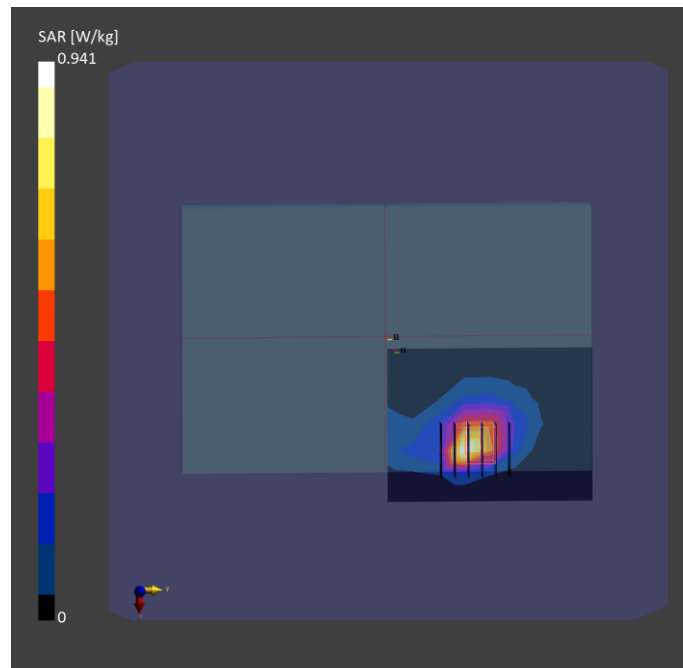

Test Date : 2024-04-15 | Ambient Temp : 22.8 °C | Tissue Temp : 21.3 °C

Test Mode**5_LTE Band 4_QPSK20M_Rear Face_0mm_Ch20300_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 4	LTE-FDD, 10169 - CAF	1745.000, 20300	8.96	1.36	42.5

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.904	0.921
psSAR-10g [W/kg]	0.472	0.443
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		45.7
Dist 3dB Peak [mm]		8.7

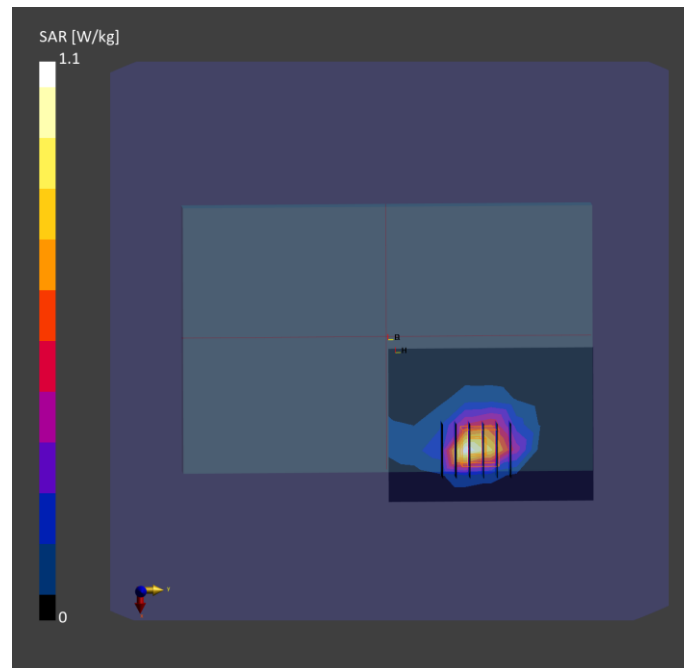

Test Date : 2024-04-15 | Ambient Temp : 22.8 °C | Tissue Temp : 21.3 °C

Test Mode**6_LTE Band 5_QPSK10M_Rear Face_0mm_Ch20525_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 5	LTE-FDD, 10175 - CAH	836.500, 20525	10.38	0.932	44.1

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.529	0.666
psSAR-10g [W/kg]	0.361	0.406
Power Drift [dB]		-0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		48.6
Dist 3dB Peak [mm]		11.6

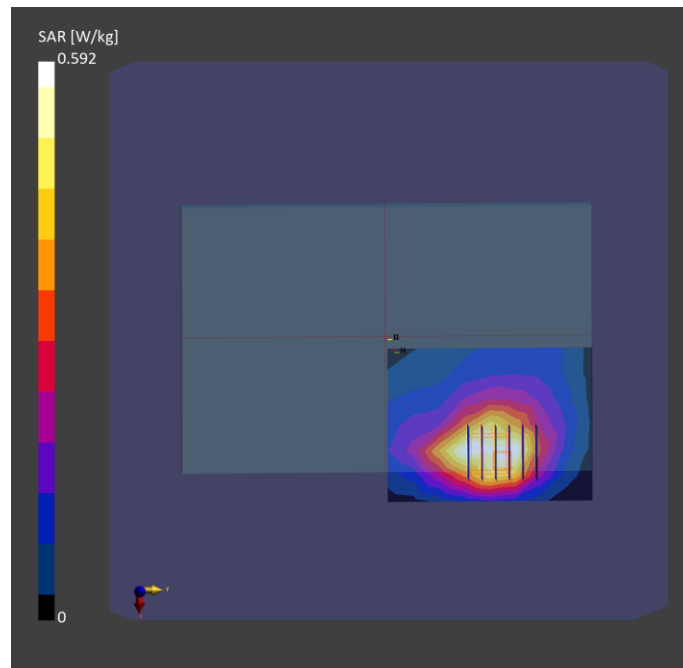

Test Date : 2024-04-15 | Ambient Temp : 22.8 °C | Tissue Temp : 21.3 °C

Test Mode**7_LTE Band 7_QPSK20M_Rear Face_0mm_Ch21100_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 7	LTE-FDD, 10169 - CAF	2535.000, 21100	8.04	1.89	41.4

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.651	0.591
psSAR-10g [W/kg]	0.310	0.260
Power Drift [dB]		0.05
TSL Correction	Positive only	Positive only
M2 / M1 [%]		38.2
Dist 3dB Peak [mm]		8.1

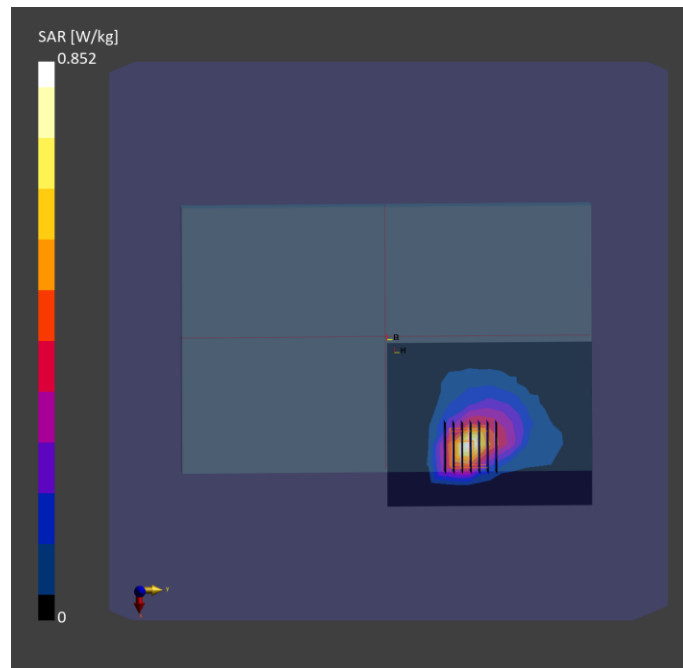

Test Date : 2024-04-15 | Ambient Temp : 22.8 °C | Tissue Temp : 21.3 °C

Test Mode**8_LTE Band 12_QPSK10M_Rear Face_0mm_Ch23130_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 12	LTE-FDD, 10175 - CAH	711.000, 23130	10.63	0.888	44.4

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.474	0.468
psSAR-10g [W/kg]	0.316	0.285
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		53.7
Dist 3dB Peak [mm]		12.8

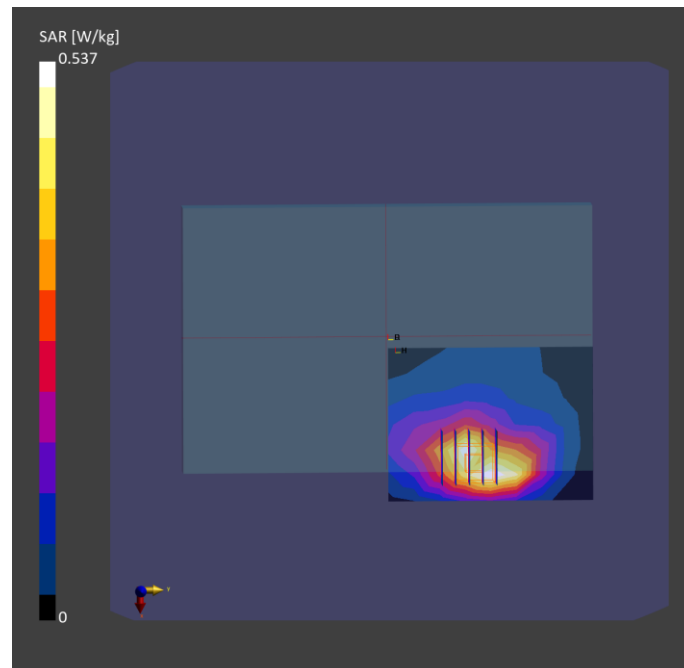

Test Date : 2024-04-15 | Ambient Temp : 22.8 °C | Tissue Temp : 21.3 °C

Test Mode**9_LTE Band 13_QPSK10M_Rear Face_0mm_Ch23230_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 13	LTE-FDD, 10175 - CAH	782.000, 23230	10.63	0.914	44.2

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.485	0.531
psSAR-10g [W/kg]	0.329	0.322
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		50.4
Dist 3dB Peak [mm]		9.6

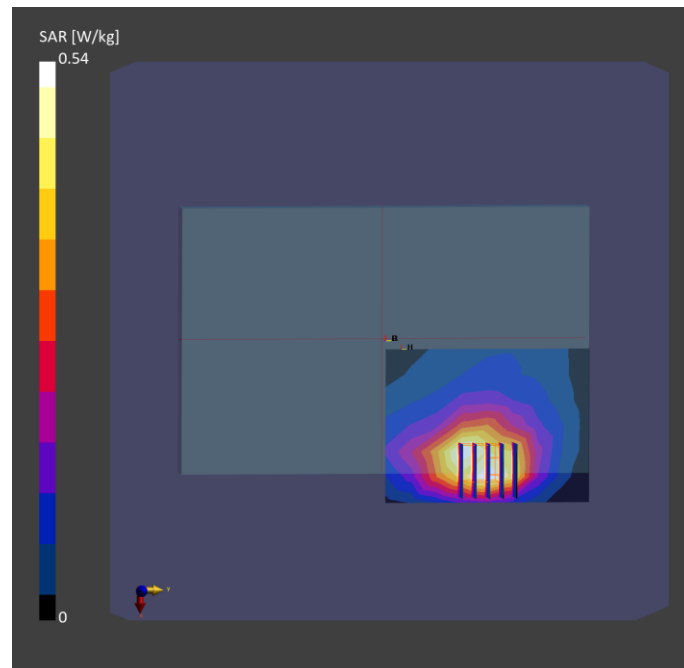

Test Date : 2024-04-15 | Ambient Temp : 22.8 °C | Tissue Temp : 21.3 °C

Test Mode**10_LTE Band 14_QPSK10M_Rear Face_0mm_Ch23330_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 14	LTE-FDD, 10175 - CAH	793.000, 23330	10.63	0.917	44.2

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.384	0.423
psSAR-10g [W/kg]	0.262	0.259
Power Drift [dB]		0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		47.1
Dist 3dB Peak [mm]		11.2

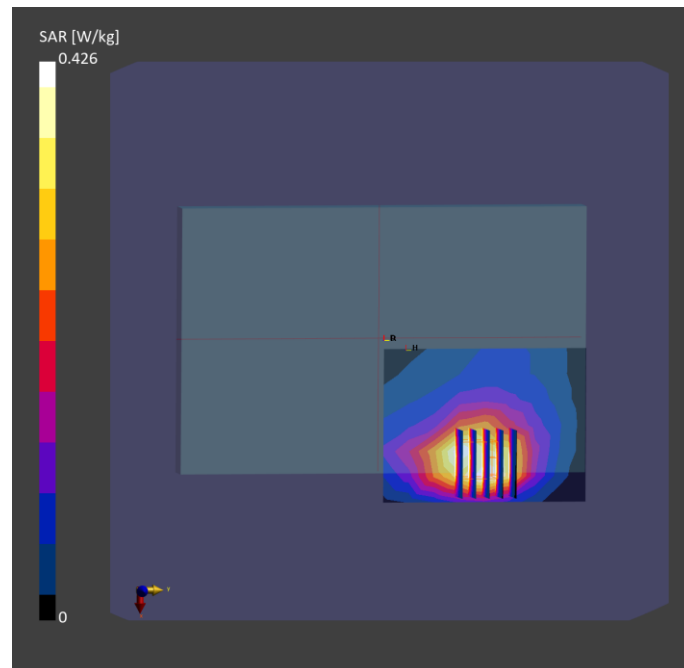

Test Date : 2024-04-15 | Ambient Temp : 22.8 °C | Tissue Temp : 21.3 °C

Test Mode**11_LTE Band 17_QPSK10M_Rear Face_0mm_Ch23790_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 17	LTE-FDD, 10175 - CAH	710.000, 23790	10.63	0.888	44.4

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.518	0.571
psSAR-10g [W/kg]	0.346	0.340
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		53.2
Dist 3dB Peak [mm]		11.7

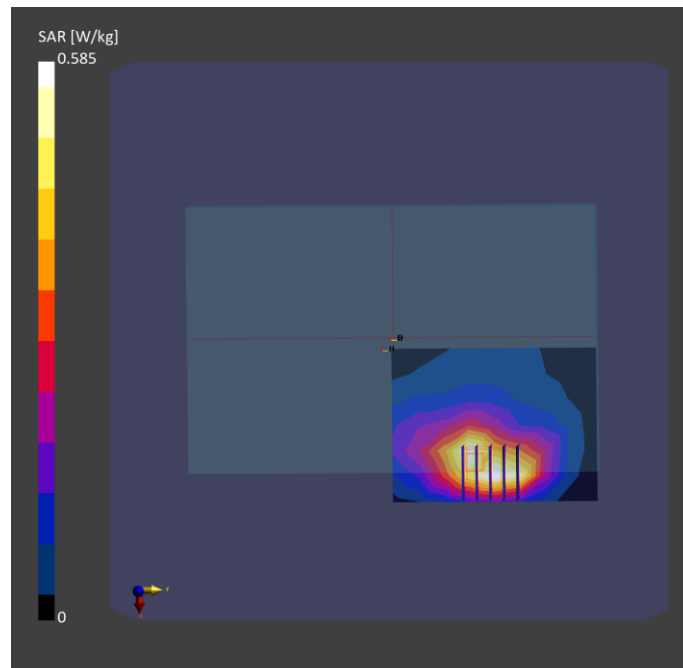

Test Date : 2024-04-15 | Ambient Temp : 22.8 °C | Tissue Temp : 21.3 °C

Test Mode**12_LTE Band 25_QPSK20M_Rear Face_0mm_Ch26590_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 25	LTE-FDD, 10169 - CAF	1905.000, 26590	8.64	1.44	42.2

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.910	0.933
psSAR-10g [W/kg]	0.444	0.448
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		44.8
Dist 3dB Peak [mm]		8.1

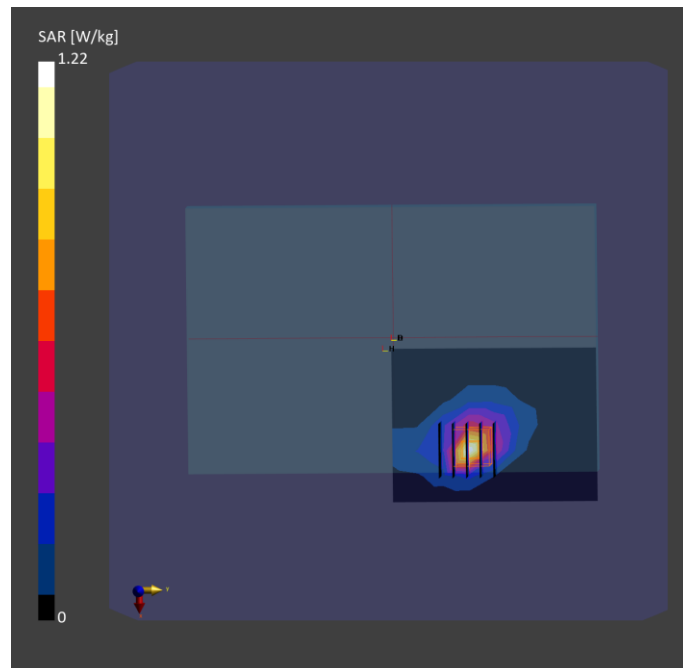

Test Date : 2024-04-15 | Ambient Temp : 22.5 °C | Tissue Temp : 21.3 °C

Test Mode**13_LTE Band 26_QPSK15M_Rear Face_0mm_Ch26865_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 26	LTE-FDD, 10181 - CAF	831.500, 26865	10.38	0.930	44.1

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.455	0.564
psSAR-10g [W/kg]	0.314	0.337
Power Drift [dB]		0.03
TSL Correction	Positive only	Positive only
M2 / M1 [%]		41.1
Dist 3dB Peak [mm]		11.2

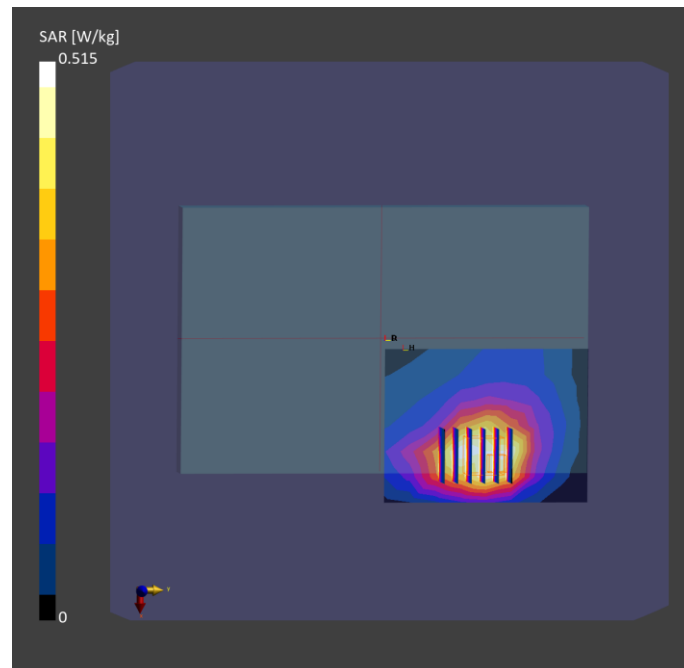

Test Date : 2024-04-12 | Ambient Temp : 22.5 °C | Tissue Temp : 21.5 °C

Test Mode**14_LTE Band 38_QPSK20M_Rear Face_0mm_Ch37850_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 38	LTE-TDD, 10172 - CAH	2580.000, 37850	8.04	1.89	40.7

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.750	0.854
psSAR-10g [W/kg]	0.365	0.415
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		47.7
Dist 3dB Peak [mm]		9.5

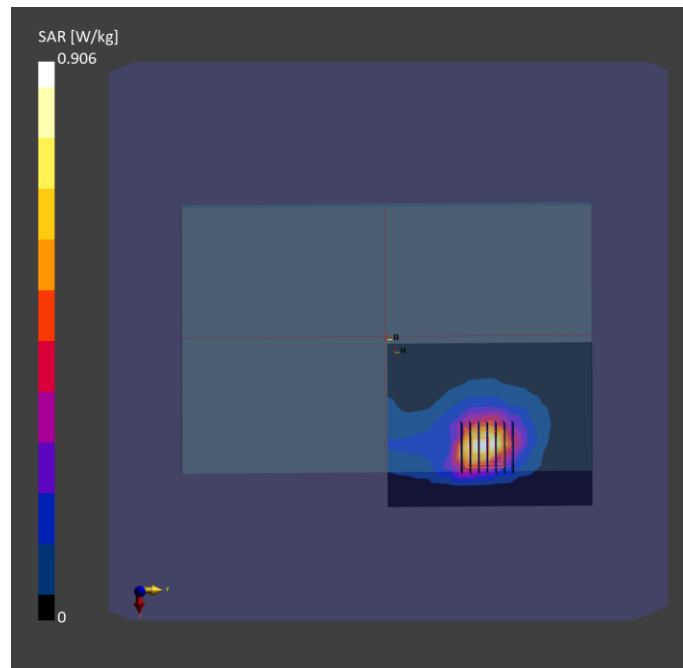

Test Date : 2024-04-12 | Ambient Temp : 22.5 °C | Tissue Temp : 21.5 °C

Test Mode**15_LTE Band 41_QPSK20M_Rear Face_0mm_Ch40185_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 41	LTE-TDD, 10172 - CAH	2549.500, 40185	8.04	1.88	40.8

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.278	0.326
psSAR-10g [W/kg]	0.130	0.150
Power Drift [dB]		0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		38.0
Dist 3dB Peak [mm]		9.3

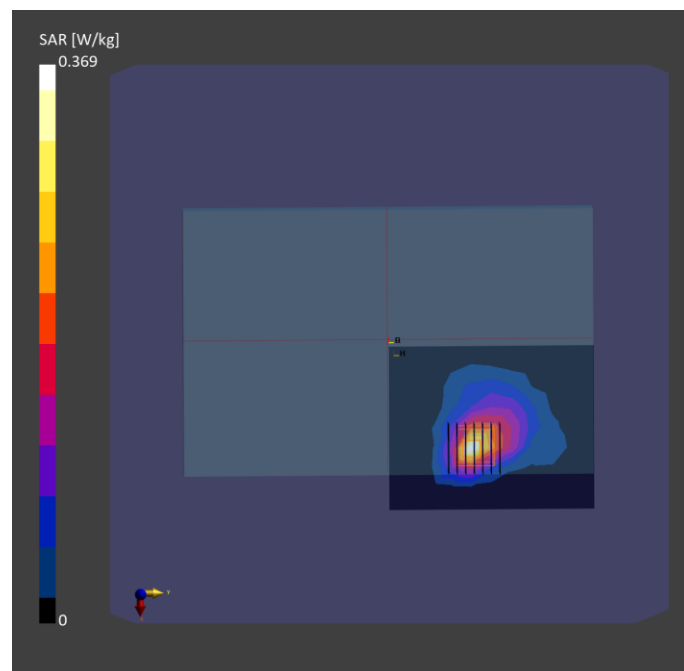

Test Date : 2024-04-12 | Ambient Temp : 22.5 °C | Tissue Temp : 21.5 °C

Test Mode**16_LTE Band 42_QPSK20M_Rear Face_0mm_Ch43490_1RB_Offset0_Ant MIMO 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 42	LTE-TDD, 10172 - CAH	3590.000, 43490	6.87	2.88	39.4

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2023-06-05	DAE4 Sn1743 / 2023-08-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	192.0 x 72.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.180	0.253
psSAR-10g [W/kg]	0.069	0.095
Power Drift [dB]		-0.08
TSL Correction	Positive only	Positive only
M2 / M1 [%]		61.6
Dist 3dB Peak [mm]		6.0

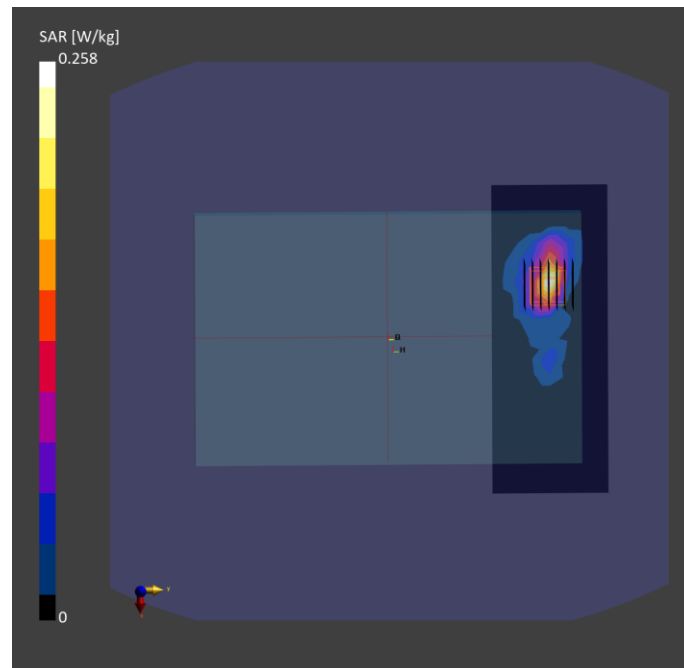

Test Date : 2024-04-12 | Ambient Temp : 22.5 °C | Tissue Temp : 21.5 °C

Test Mode**17_LTE Band 43_QPSK20M_Rear Face_0mm_Ch44340_1RB_Offset0_Ant MIMO 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 43	LTE-TDD, 10172 - CAH	3675.000, 44340	6.8	2.96	39.3

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2023-06-05	DAE4 Sn1743 / 2023-08-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 72.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.616	0.676
psSAR-10g [W/kg]	0.214	0.235
Power Drift [dB]		0.05
TSL Correction	Positive only	Positive only
M2 / M1 [%]		60.6
Dist 3dB Peak [mm]		5.4

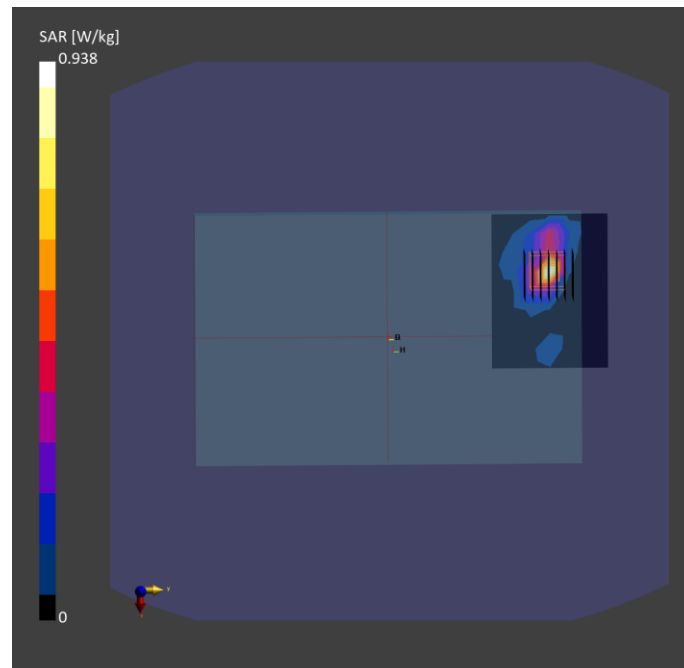

Test Date : 2024-04-12 | Ambient Temp : 22.5 °C | Tissue Temp : 21.5 °C

Test Mode**18_LTE Band 48_QPSK20M_Rear Face_0mm_Ch56207_1RB_Offset0_Ant MIMO 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 48	LTE-TDD, 10172 - CAH	3646.700, 56207	6.8	2.93	39.4

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2023-06-05	DAE4 Sn1743 / 2023-08-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	192.0 x 72.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.288	0.392
psSAR-10g [W/kg]	0.118	0.130
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		59.5
Dist 3dB Peak [mm]		5.9

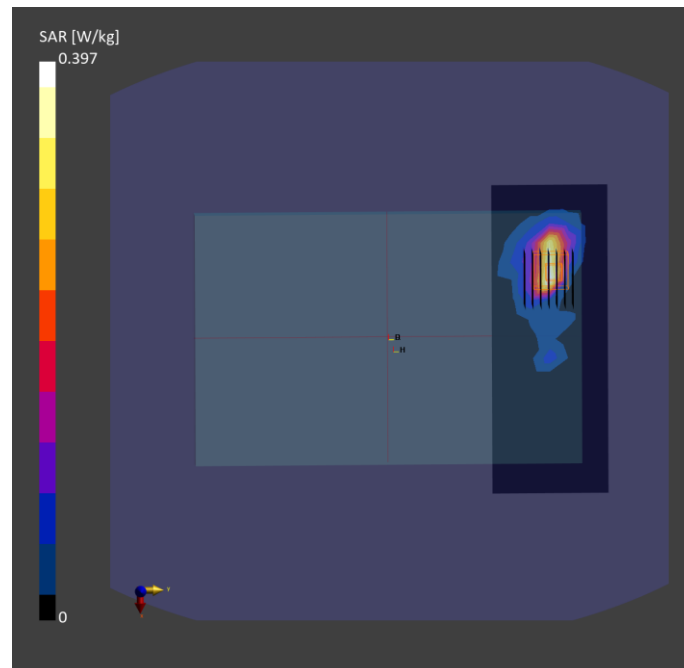

Test Date : 2024-04-12 | Ambient Temp : 22.5 °C | Tissue Temp : 21.5 °C

Test Mode**19_LTE Band 66_QPSK20M_Rear Face_0mm_Ch132322_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 66	LTE-FDD, 10169 - CAF	1745.000, 132322	8.03	1.36	41.8

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2023-06-05	DAE4 Sn1743 / 2023-08-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.967	0.942
psSAR-10g [W/kg]	0.492	0.450
Power Drift [dB]		-0.09
TSL Correction	Positive only	Positive only
M2 / M1 [%]		44.7
Dist 3dB Peak [mm]		8.0

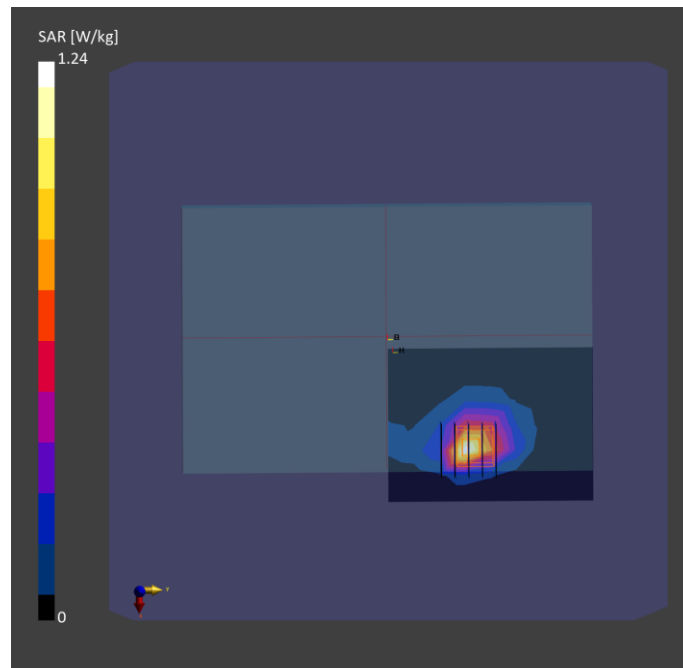

Test Date : 2024-04-12 | Ambient Temp : 22.5 °C | Tissue Temp : 21.5 °C

Test Mode**20_LTE Band 71_QPSK20M_Rear Face_0mm_Ch133322_1RB_Offset0_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band 71	LTE-FDD, 10169 - CAF	683.000, 133322	9.22	0.899	43.6

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2023-06-05	DAE4 Sn1743 / 2023-08-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.648	0.736
psSAR-10g [W/kg]	0.430	0.440
Power Drift [dB]		-0.14
TSL Correction	Positive only	Positive only
M2 / M1 [%]		55.0
Dist 3dB Peak [mm]		11.4

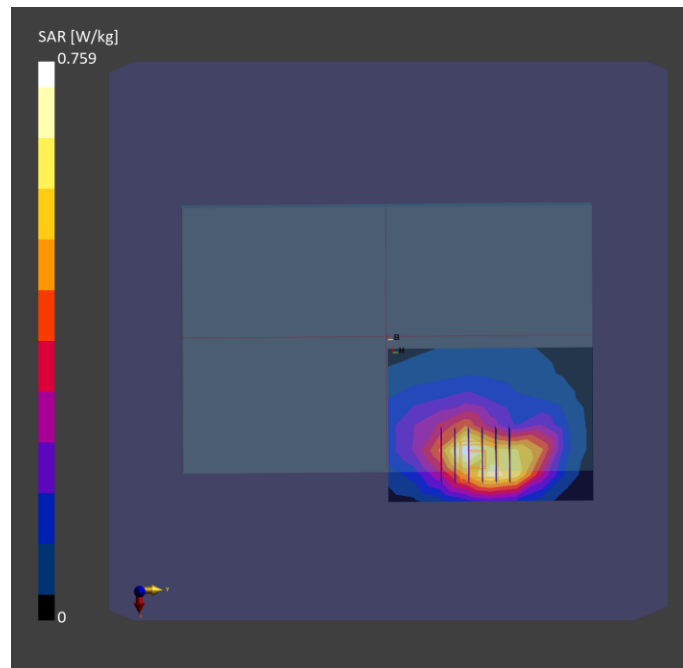

Test Date : 2024-04-12 | Ambient Temp : 22.5 °C | Tissue Temp : 21.5 °C

Test Mode**21_NR Band n2_DFT-s QPSK20M_Rear Face_0mm_Ch372000_1RB_Offset1_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n2	5G NR FR1 FDD, 10931 - AAC	1860.000, 372000	8.64	1.42	41.6

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.811	0.911
psSAR-10g [W/kg]	0.423	0.434
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		44.5
Dist 3dB Peak [mm]		8.0

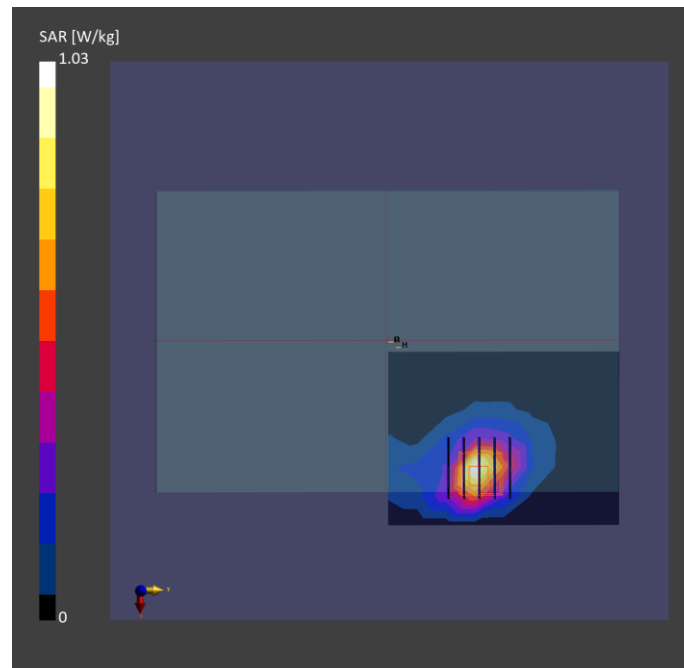

Test Date : 2024-04-12 | Ambient Temp : 22.5 °C | Tissue Temp : 21.5 °C

Test Mode**22_NR Band 5_DFT-s QPSK20M_Rear Face_0mm_Ch167300_1RB_Offset1_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n5	5G NR FR1 FDD, 10931 - AAC	836.500, 167300	10.38	0.951	43.1

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.659	0.641
psSAR-10g [W/kg]	0.443	0.406
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		46.5
Dist 3dB Peak [mm]		14.5

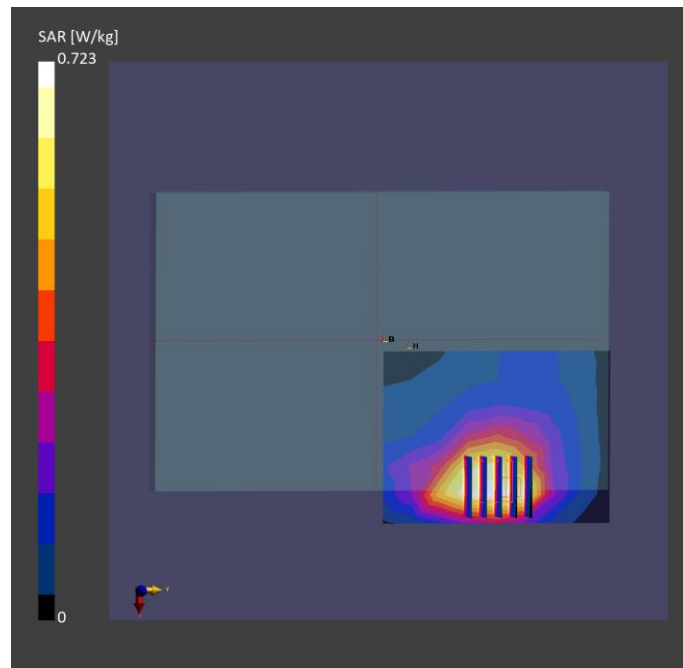

Test Date : 2024-04-12 | Ambient Temp : 22.5 °C | Tissue Temp : 21.5 °C

Test Mode**23_NR Band 7_DFT-s QPSK20M_Rear Face_0mm_Ch507000_1RB_Offset1_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n7	5G NR FR1 FDD, 10931 - AAC	2535.000, 507000	8.04	1.86	40.7

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 120.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.714	0.776
psSAR-10g [W/kg]	0.351	0.347
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		38.8
Dist 3dB Peak [mm]		9.3

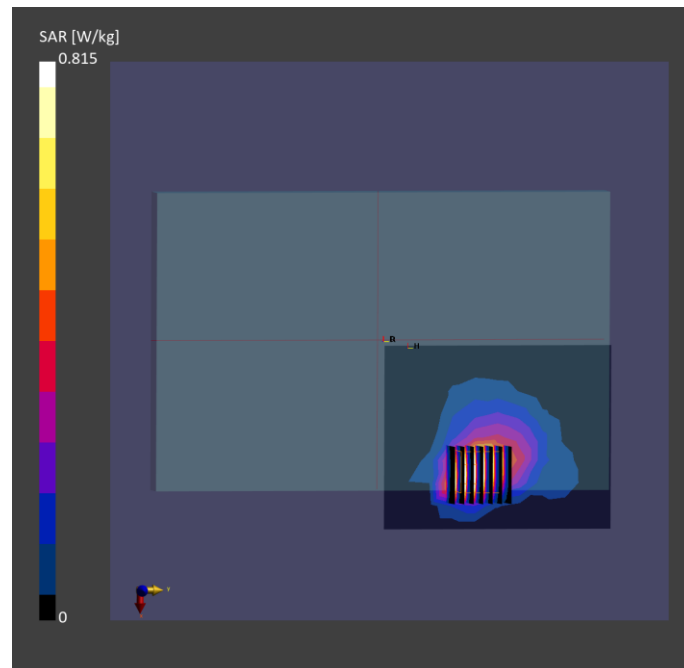

Test Date : 2024-04-12 | Ambient Temp : 22.5 °C | Tissue Temp : 21.5 °C

Test Mode**24_NR Band n25_DFT-s QPSK20M_Rear Face_0mm_Ch376500_1RB_Offset1_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n25	5G NR FR1 FDD, 10931 - AAC	1882.500, 376500	8.64	1.43	41.5

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.764	0.857
psSAR-10g [W/kg]	0.396	0.409
Power Drift [dB]		0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		44.4
Dist 3dB Peak [mm]		8.0

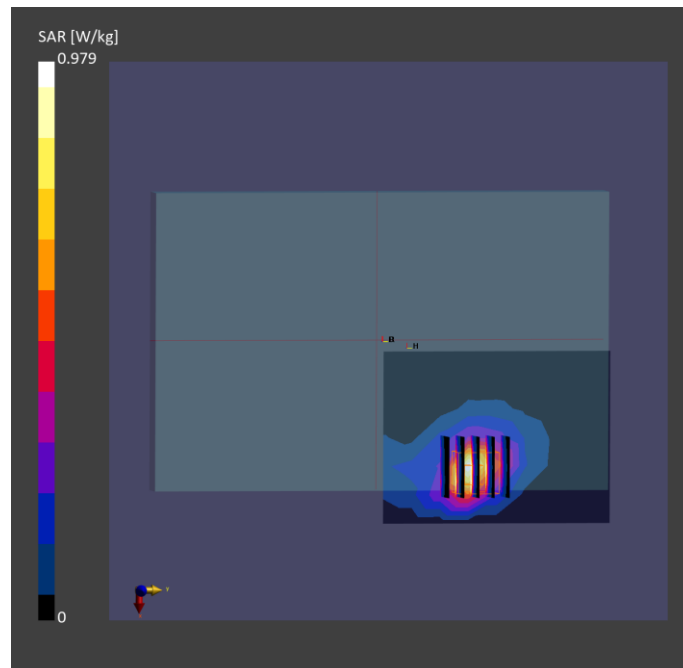

Test Date : 2024-04-12 | Ambient Temp : 22.5 °C | Tissue Temp : 21.5 °C

Test Mode**25_NR Band n30_DFT-s QPSK10M_Rear Face_0mm_Ch462000_1RB_Offset1_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n30	5G NR FR1 FDD, 10929 - AAD	2310.000, 462000	7.32	1.70	41.0

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2023-06-05	DAE4 Sn1743 / 2023-08-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.708	0.712
psSAR-10g [W/kg]	0.339	0.330
Power Drift [dB]		-0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		42.7
Dist 3dB Peak [mm]		9.4

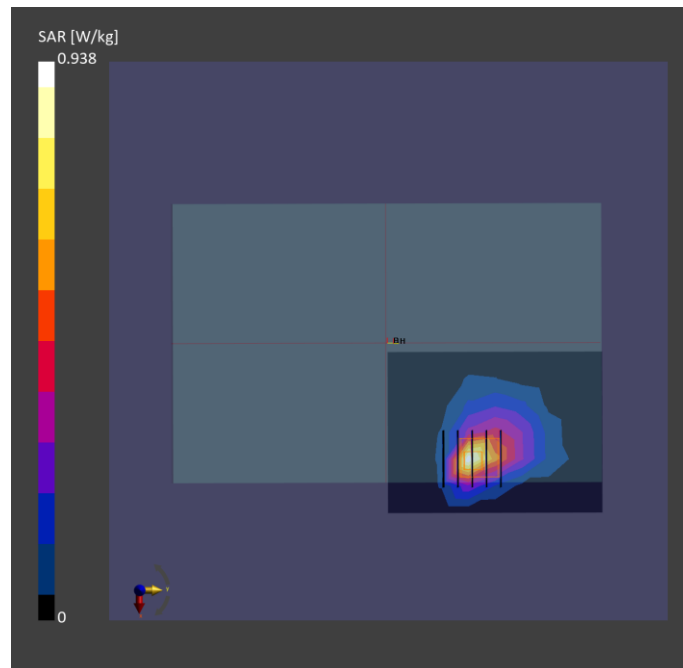

Test Date : 2024-04-12 | Ambient Temp : 22.5 °C | Tissue Temp : 21.5 °C

Test Mode**26_NR Band n38_DFT-s QPSK20M_Rear Face_0mm_Ch519000_1RB_Offset1_Ant Aux****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n38	5G NR FR1 TDD, 10900 - AAC	2595.000, 519000	8.04	1.90	40.7

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 72.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.116	0.140
psSAR-10g [W/kg]	0.051	0.054
Power Drift [dB]		0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		42.7
Dist 3dB Peak [mm]		7.1

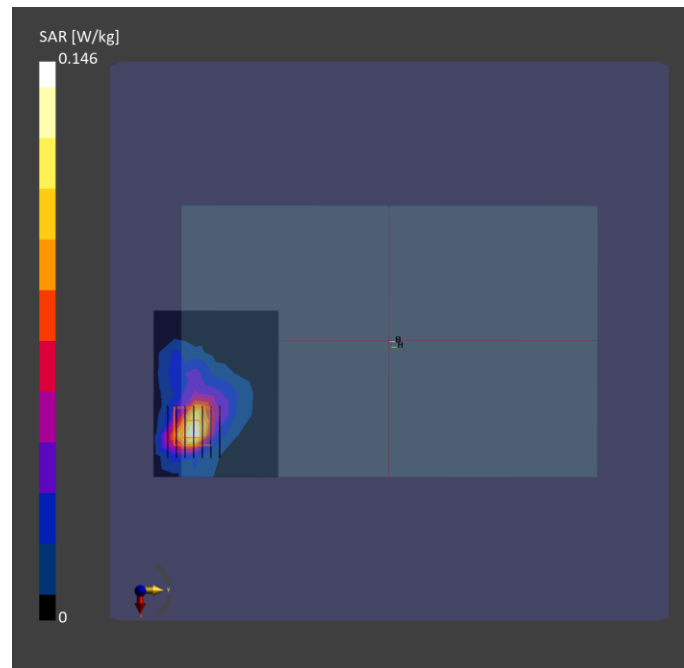

Test Date : 2024-04-12 | Ambient Temp : 22.5 °C | Tissue Temp : 21.5 °C

Test Mode**27_NR Band n41_DFT-s QPSK100M_Rear Face_0mm_Ch518598_1RB_Offset1_Ant Aux****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n41	5G NR FR1 TDD, 10866 - AAF	2592.990, 518598	8.04	1.90	40.7

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 72.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.297	0.360
psSAR-10g [W/kg]	0.135	0.144
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		44.6
Dist 3dB Peak [mm]		7.7

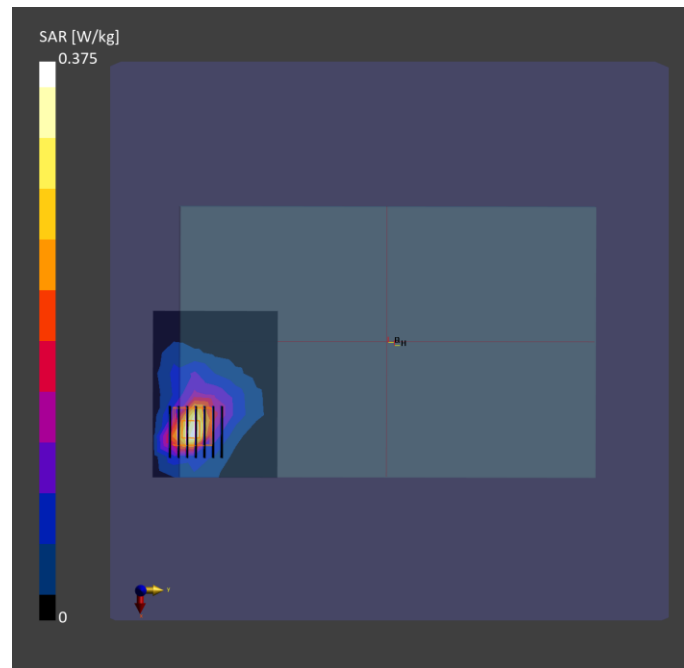

Test Date : 2024-04-12 | Ambient Temp : 22.5 °C | Tissue Temp : 21.5 °C

Test Mode**28_NR Band n48_DFT-s QPSK40M_Rear Face_0mm_Ch642888_1RB_Offset1_Ant MIMO 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n48	5G NR FR1 TDD, 10903 - AAD	3643.320, 642888	6.87	2.93	39.4

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2023-06-05	DAE4 Sn1743 / 2023-08-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	168.0 x 72.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.812	0.918
psSAR-10g [W/kg]	0.299	0.312
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		60.1
Dist 3dB Peak [mm]		6.0

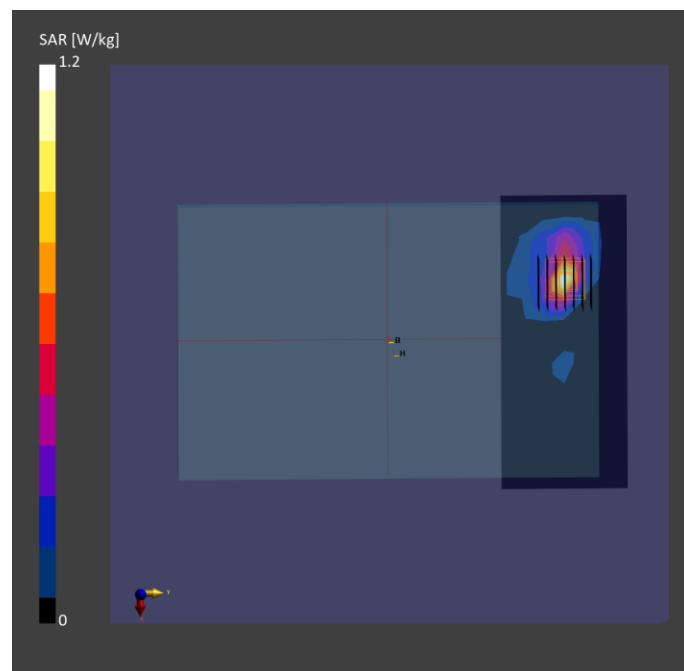

Test Date : 2024-04-12 | Ambient Temp : 22.5 °C | Tissue Temp : 21.5 °C

Test Mode**29_NR Band n66_DFT-s QPSK20M_Rear Face_0mm_Ch344000_1RB_Offset1_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n66	5G NR FR1 FDD, 10931 - AAC	1720.000, 344000	8.03	1.34	41.8

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2023-06-05	DAE4 Sn1743 / 2023-08-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.844	0.939
psSAR-10g [W/kg]	0.456	0.475
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		48.9
Dist 3dB Peak [mm]		9.1

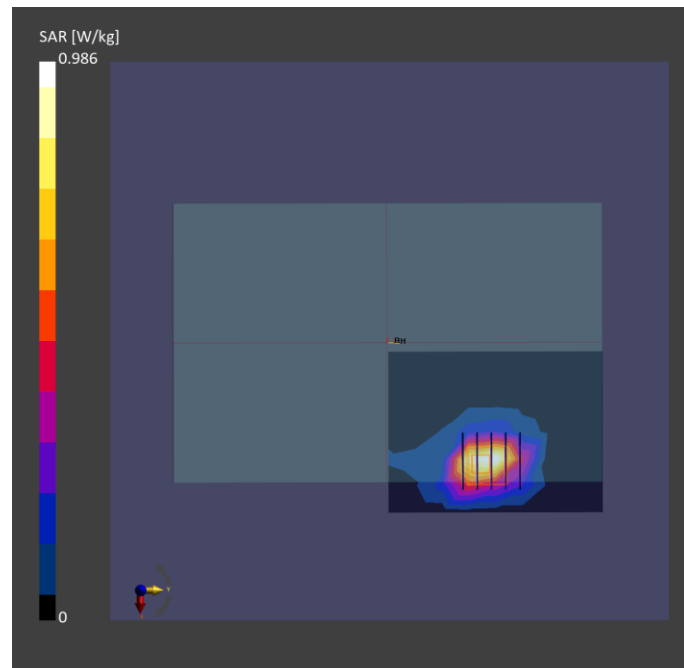

Test Date : 2024-04-12 | Ambient Temp : 22.5 °C | Tissue Temp : 21.5 °C

Test Mode**30_NR Band 71_DFT-s QPSK20M_Rear Face_0mm_Ch136100_1RB_Offset1_Ant Main****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n71	5G NR FR1 FDD, 10931 - AAC	680.500, 136100	9.22	0.899	43.6

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2023-06-05	DAE4 Sn1743 / 2023-08-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	90.0 x 120.0	32.0 x 32.0 x 30.0
Grid Steps [mm]	15.0 x 15.0	8.0 x 8.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.631	0.664
psSAR-10g [W/kg]	0.415	0.398
Power Drift [dB]		0.09
TSL Correction	Positive only	Positive only
M2 / M1 [%]		58.9
Dist 3dB Peak [mm]		12.5

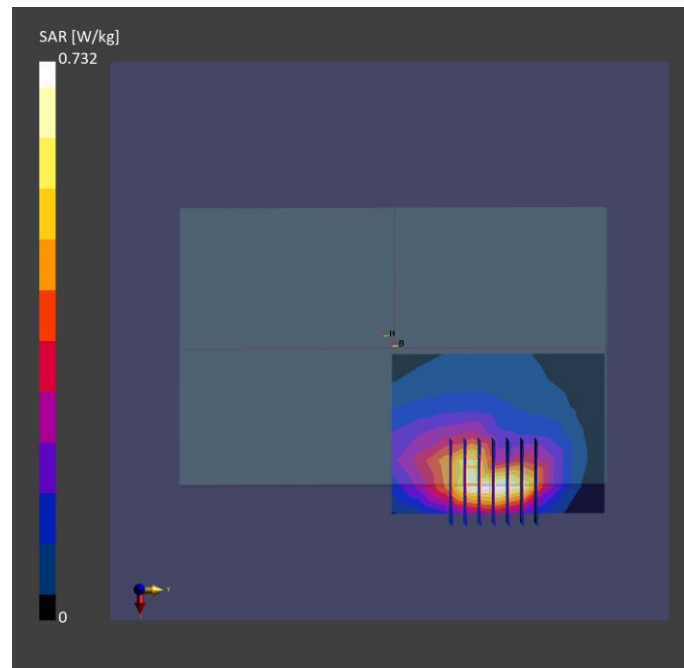

Test Date : 2024-04-12 | Ambient Temp : 22.5 °C | Tissue Temp : 21.5 °C

Test Mode**31_NR Band n77_DFT-s QPSK100M_Rear Face_0mm_Ch650000_1RB_Offset1_Ant MIMO 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n77	5G NR FR1 TDD, 10866 - AAF	3750.000, 650000	6.68	2.65	39.8

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2023-06-05	DAE4 Sn1743 / 2023-08-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	192.0 x 72.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.763	0.859
psSAR-10g [W/kg]	0.288	0.292
Power Drift [dB]		0.03
TSL Correction	Positive only	Positive only
M2 / M1 [%]		60.3
Dist 3dB Peak [mm]		6.0

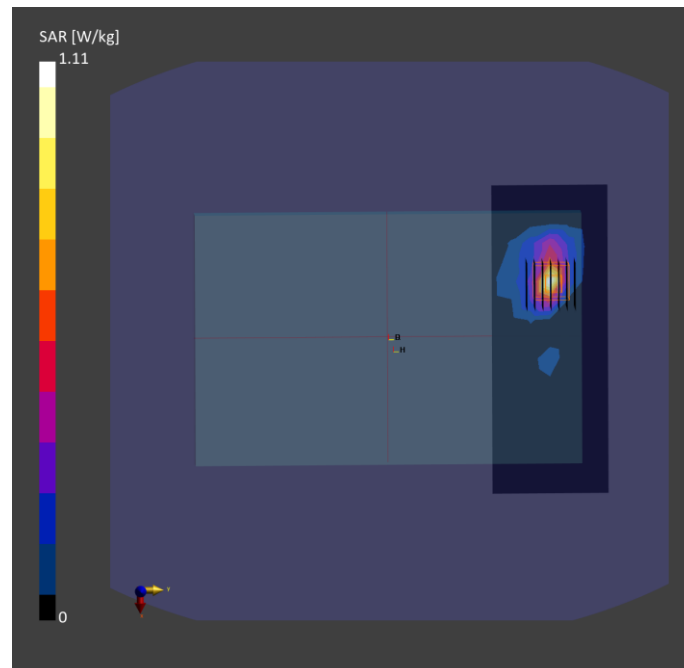

Test Date : 2024-04-12 | Ambient Temp : 22.5 °C | Tissue Temp : 21.5 °C

Test Mode**33_NR Band n78_DFT-s QPSK100M_Rear Face_0mm_Ch650000_1RB_Offset1_Ant MIMO 1****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	Band n78	5G NR FR1 TDD, 10866 - AAF	3750.000, 650000	6.68	3.02	39.2

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7737 / 2023-06-05	DAE4 Sn1743 / 2023-08-17

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	192.0 x 72.0	30.0 x 30.0 x 28.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 2.5
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.898	0.911
psSAR-10g [W/kg]	0.324	0.306
Power Drift [dB]		0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		58.7
Dist 3dB Peak [mm]		5.1

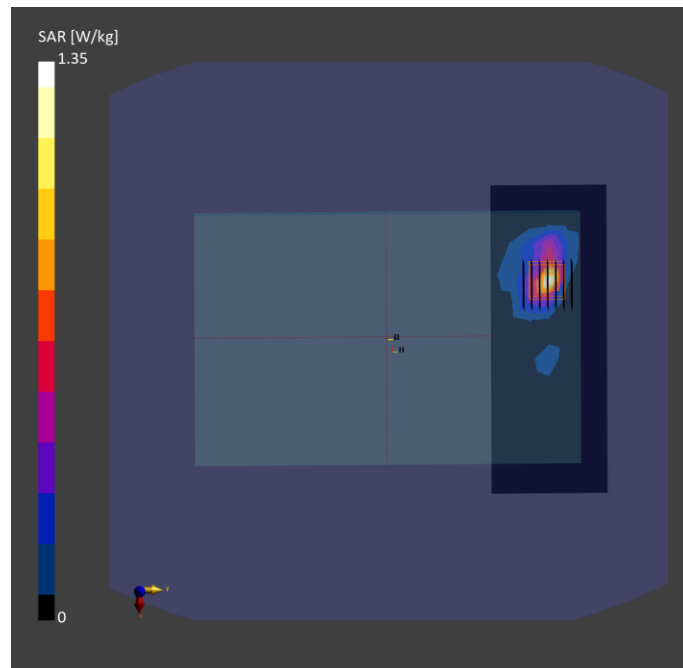

Test Date : 2024-04-15 | Ambient Temp : 22.8 °C | Tissue Temp : 21.3 °C

Test Mode**41_WLAN 2.4G_802.11n HT40_Rear Face_0mm_Ch3_Ant 1+2****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A007	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	WLAN 2.4GHz	WLAN, 10599 - AAC	2422.000, 3	8.2	1.80	41.6

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	192.0 x 72.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.709	0.796
psSAR-10g [W/kg]	0.287	0.297
Power Drift [dB]		-0.02
TSL Correction	Positive only	Positive only
M2 / M1 [%]		39.0
Dist 3dB Peak [mm]		6.0

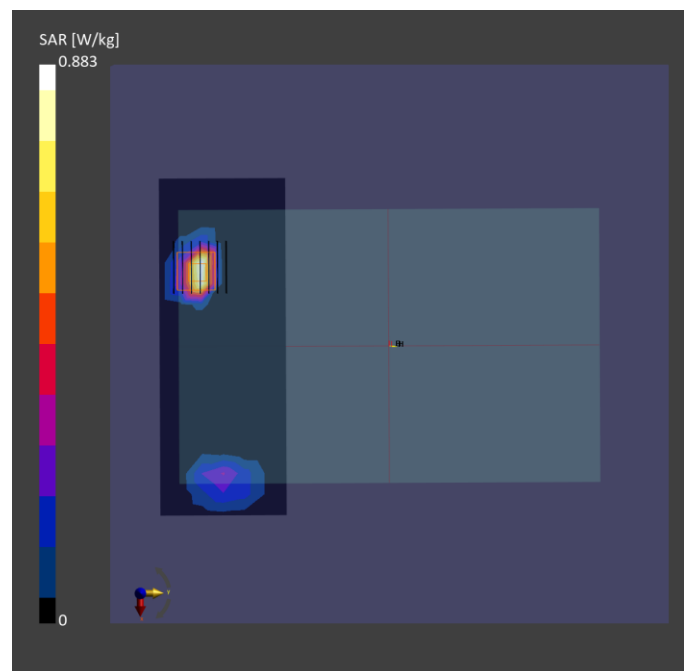

Test Date : 2024-04-15 | Ambient Temp : 22.8 °C | Tissue Temp : 21.3 °C

Test Mode**42_WLAN5.3G_802.11ac VHT160_Rear Face_0mm_Ch50_Ant 2****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	WLAN 5GHz	WLAN, 10554 - AAD	5250.000, 50	5.91	4.49	35.6

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.976	0.954
psSAR-10g [W/kg]	0.309	0.291
Power Drift [dB]		-0.04
TSL Correction	Positive only	Positive only
M2 / M1 [%]		62.6
Dist 3dB Peak [mm]		5.1

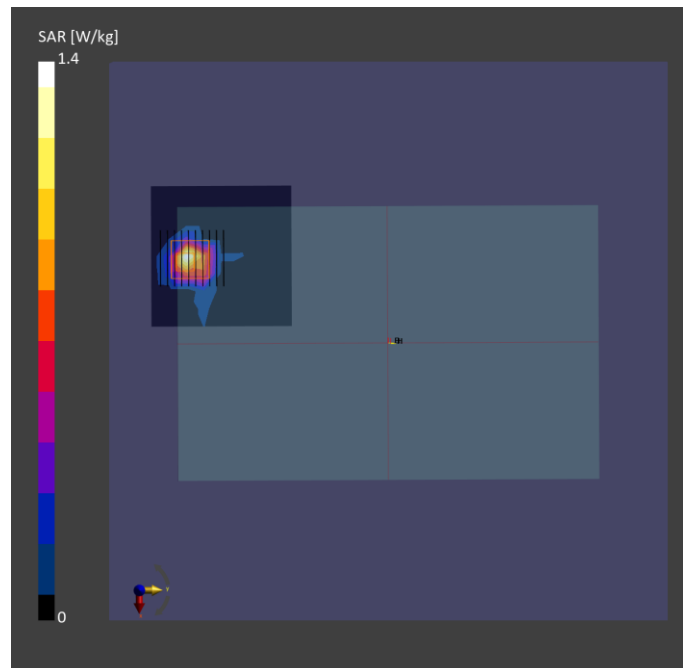

Test Date : 2024-04-15 | Ambient Temp : 22.8 °C | Tissue Temp : 21.3 °C

Test Mode**43_WLAN5.6G_802.11ac VHT160_Rear Face_0mm_Ch114_Ant 1+2****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	WLAN 5GHz	WLAN, 10554 - AAD	5570.000, 114	5.25	4.83	35.1

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	180.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.863	1.05
psSAR-10g [W/kg]	0.315	0.364
Power Drift [dB]		0.03
TSL Correction	Positive only	Positive only
M2 / M1 [%]		60.4
Dist 3dB Peak [mm]		4.4

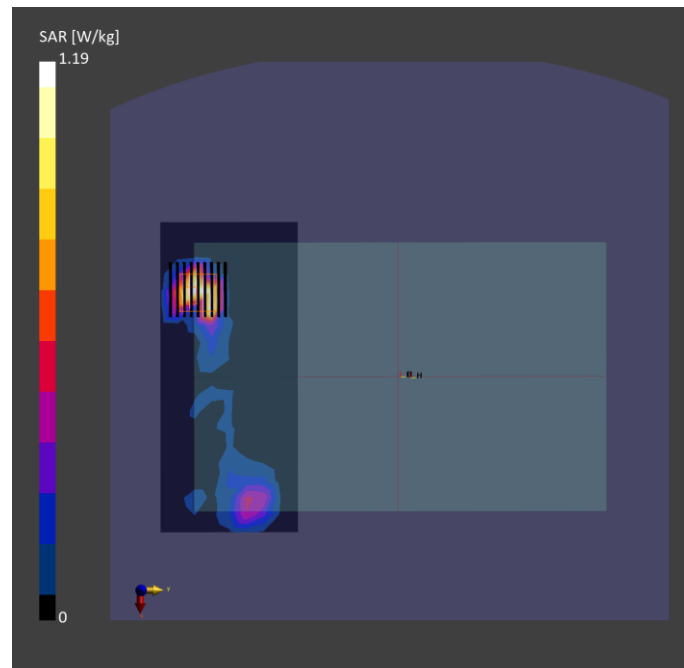

Test Date : 2024-04-15 | Ambient Temp : 22.8 °C | Tissue Temp : 21.3 °C

Test Mode**45_WLAN5.8G_802.11ac VHT160_Rear Face_0mm_Ch155_Ant 2****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A008	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	WLAN 5GHz	WLAN, 10544 - AAC	5775.000, 155	5.28	5.07	34.7

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2179	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	80.0 x 80.0	24.0 x 24.0 x 22.0
Grid Steps [mm]	10.0 x 10.0	4.0 x 4.0 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.866	0.883
psSAR-10g [W/kg]	0.282	0.288
Power Drift [dB]		-0.01
TSL Correction	Positive only	Positive only
M2 / M1 [%]		59.8
Dist 3dB Peak [mm]		4.6

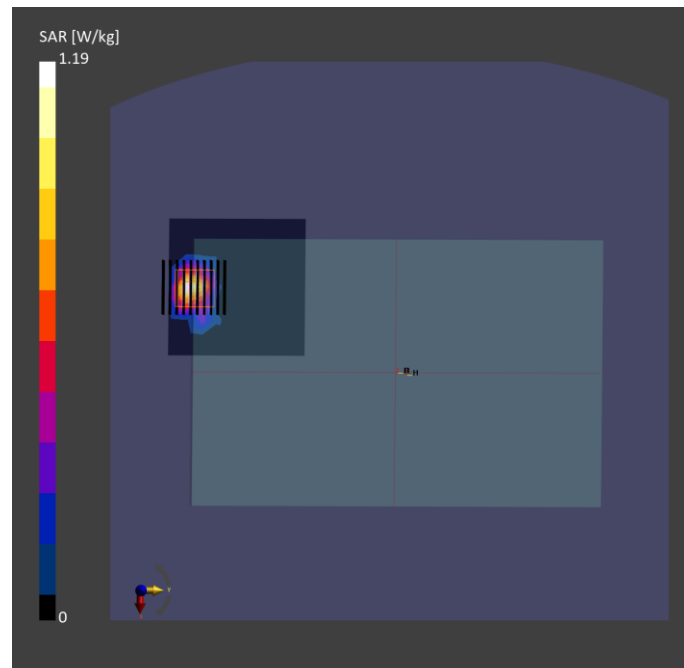

Test Date : 2024-04-15 | Ambient Temp : 22.8 °C | Tissue Temp : 21.3 °C

Test Mode**46_Bluetooth_8-DPSK_Rear Face_0mm_Ch39_Ant 2****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A007	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	ISM 2.4 GHz Band	Bluetooth, 10032 - CAA	2441.000, 39	8.2	1.81	41.5

Hardware Setup


Phantom	Tissue Simulating Liquid	Probe Calibration Date	DAE Calibration Date
ELI V8.0 (20deg probe tilt) - 2176	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	96.0 x 96.0	30.0 x 30.0 x 30.0
Grid Steps [mm]	12.0 x 12.0	5.0 x 5.0 x 5.0
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.254	0.229
psSAR-10g [W/kg]	0.10	0.078
Power Drift [dB]		0.05
TSL Correction	Positive only	Positive only
M2 / M1 [%]		40.4
Dist 3dB Peak [mm]		6.0

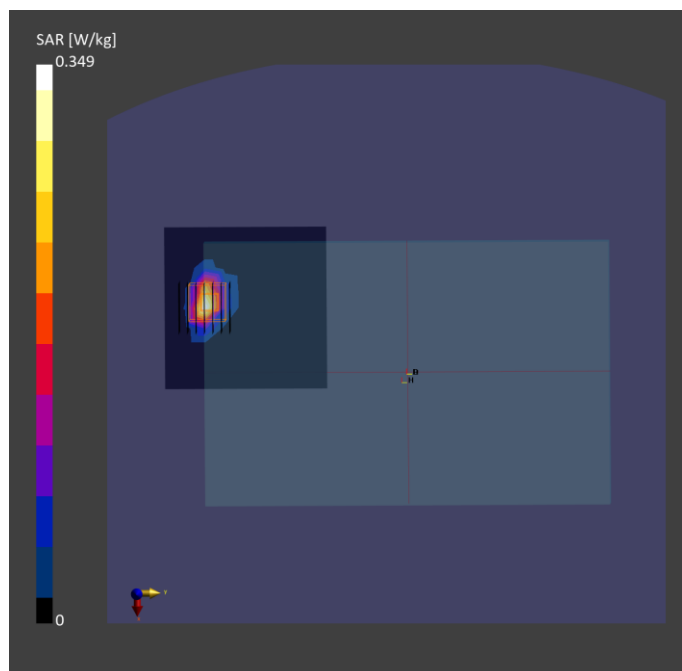

Test Date : 2024-04-15 | Ambient Temp : 22.8 °C | Tissue Temp : 21.3 °C

Test Mode**47_UNII-5_802.11ax HE160_Rear Face_0mm_Ch15_Ant 2****Device Under Test Properties**

Manufacturer or Brand	Model No. or Code Name	Sample No. or IMEI	DUT Type
Getac	ZX80	A007	Tablet

Exposure Conditions

Phantom Section	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor	TSL Conductivity [S/m]	TSL Permittivity
Flat	U-NII-5	WLAN, 10755 - AAC	6025.000, 15	5.4	5.34	34.4

Hardware Setup

Phantom	Tissue Simulating Liquid	Probe / Calibration Date	DAE / Calibration Date
ELI V8.0 (20deg probe tilt) - 2176	HBBL-600-10000	EX3DV4 - SN7650 / 2023-05-22	DAE4 Sn1741 / 2023-08-23

Scan Setup

	Area Scan	Zoom Scan
Grid Extents [mm]	85.0 x 85.0	23.8 x 23.8 x 22.0
Grid Steps [mm]	8.5 x 8.5	3.4 x 3.4 x 1.4
Sensor Surface [mm]	3.0	1.4
Graded Grid	N/A	Yes
Grading Ratio	N/A	1.4

Measurement Results

	Area Scan	Zoom Scan
psSAR-1g [W/kg]	0.867	0.939
psSAR-10g [W/kg]	0.271	0.309
psAPD (1.0 cm ² , sq) [W/m ²]		9.49
psAPD (4.0 cm ² , sq) [W/m ²]		7.19
Power Drift [dB]		-0.07
TSL Correction	Positive only	Positive only
M2 / M1 [%]		56.9
Dist 3dB Peak [mm]		4.9

