

Specification Sheet		Charge		Confirm		Approval																																																																																																																																																									
Object	Monopole Cable Antenna	/		/		/																																																																																																																																																									
Customer	Polymap	REV.	IR	Page	1 of 4																																																																																																																																																										
Model name	KBI-CO-24	Date		Dec 2, 2003																																																																																																																																																											
System	Bluetooth Scale	Written by		Jin Myung Kim																																																																																																																																																											
<table border="1"> <tr> <td colspan="2">Electrical Specification</td> <td colspan="6"></td> </tr> <tr> <td colspan="2">Frequency Range</td> <td colspan="6">2.4 ~ 2.4835 (GHz)</td> </tr> <tr> <td colspan="2">Band Width</td> <td colspan="6">83.5 (MHz)</td> </tr> <tr> <td colspan="2">V.S.W.R</td> <td colspan="6">less than 2 : 1</td> </tr> <tr> <td colspan="2">Gain</td> <td colspan="6">Peak 3 dBi</td> </tr> <tr> <td colspan="2">Input Impedance</td> <td colspan="6">50 ()</td> </tr> <tr> <td colspan="2">Polarization</td> <td colspan="6">Linear</td> </tr> <tr> <td colspan="8"> <table border="1"> <tr> <td colspan="2">Mechanical Specification</td> <td colspan="6"></td> </tr> <tr> <td colspan="2">Antenna Size</td> <td colspan="6">54.5 × 8 × 1 mm (L×W×t)</td> </tr> <tr> <td colspan="2">Weight</td> <td colspan="6">3 (g)</td> </tr> <tr> <td colspan="2">Radiator Material</td> <td colspan="6">FR-4</td> </tr> <tr> <td colspan="2">Cable Ass'y</td> <td colspan="6">IPEX Coaxial Cable Ass'y</td> </tr> <tr> <td colspan="2">Cable Length</td> <td colspan="6">380mm 5mm</td> </tr> <tr> <td colspan="2">Cable Diameter</td> <td colspan="6">1.03 mm</td> </tr> <tr> <td colspan="2">Operation Temperature</td> <td colspan="6">-20 ~ 90 (C)</td> </tr> <tr> <td colspan="2">Operation Humidity</td> <td colspan="6">0 ~ 90 (%)</td> </tr> <tr> <td>Option</td> <td colspan="7"></td> </tr> <tr> <td>Others</td> <td colspan="7"></td> </tr> </table> </td> </tr> </table>								Electrical Specification								Frequency Range		2.4 ~ 2.4835 (GHz)						Band Width		83.5 (MHz)						V.S.W.R		less than 2 : 1						Gain		Peak 3 dBi						Input Impedance		50 ()						Polarization		Linear						<table border="1"> <tr> <td colspan="2">Mechanical Specification</td> <td colspan="6"></td> </tr> <tr> <td colspan="2">Antenna Size</td> <td colspan="6">54.5 × 8 × 1 mm (L×W×t)</td> </tr> <tr> <td colspan="2">Weight</td> <td colspan="6">3 (g)</td> </tr> <tr> <td colspan="2">Radiator Material</td> <td colspan="6">FR-4</td> </tr> <tr> <td colspan="2">Cable Ass'y</td> <td colspan="6">IPEX Coaxial Cable Ass'y</td> </tr> <tr> <td colspan="2">Cable Length</td> <td colspan="6">380mm 5mm</td> </tr> <tr> <td colspan="2">Cable Diameter</td> <td colspan="6">1.03 mm</td> </tr> <tr> <td colspan="2">Operation Temperature</td> <td colspan="6">-20 ~ 90 (C)</td> </tr> <tr> <td colspan="2">Operation Humidity</td> <td colspan="6">0 ~ 90 (%)</td> </tr> <tr> <td>Option</td> <td colspan="7"></td> </tr> <tr> <td>Others</td> <td colspan="7"></td> </tr> </table>								Mechanical Specification								Antenna Size		54.5 × 8 × 1 mm (L×W×t)						Weight		3 (g)						Radiator Material		FR-4						Cable Ass'y		IPEX Coaxial Cable Ass'y						Cable Length		380mm 5mm						Cable Diameter		1.03 mm						Operation Temperature		-20 ~ 90 (C)						Operation Humidity		0 ~ 90 (%)						Option								Others							
Electrical Specification																																																																																																																																																															
Frequency Range		2.4 ~ 2.4835 (GHz)																																																																																																																																																													
Band Width		83.5 (MHz)																																																																																																																																																													
V.S.W.R		less than 2 : 1																																																																																																																																																													
Gain		Peak 3 dBi																																																																																																																																																													
Input Impedance		50 ()																																																																																																																																																													
Polarization		Linear																																																																																																																																																													
<table border="1"> <tr> <td colspan="2">Mechanical Specification</td> <td colspan="6"></td> </tr> <tr> <td colspan="2">Antenna Size</td> <td colspan="6">54.5 × 8 × 1 mm (L×W×t)</td> </tr> <tr> <td colspan="2">Weight</td> <td colspan="6">3 (g)</td> </tr> <tr> <td colspan="2">Radiator Material</td> <td colspan="6">FR-4</td> </tr> <tr> <td colspan="2">Cable Ass'y</td> <td colspan="6">IPEX Coaxial Cable Ass'y</td> </tr> <tr> <td colspan="2">Cable Length</td> <td colspan="6">380mm 5mm</td> </tr> <tr> <td colspan="2">Cable Diameter</td> <td colspan="6">1.03 mm</td> </tr> <tr> <td colspan="2">Operation Temperature</td> <td colspan="6">-20 ~ 90 (C)</td> </tr> <tr> <td colspan="2">Operation Humidity</td> <td colspan="6">0 ~ 90 (%)</td> </tr> <tr> <td>Option</td> <td colspan="7"></td> </tr> <tr> <td>Others</td> <td colspan="7"></td> </tr> </table>								Mechanical Specification								Antenna Size		54.5 × 8 × 1 mm (L×W×t)						Weight		3 (g)						Radiator Material		FR-4						Cable Ass'y		IPEX Coaxial Cable Ass'y						Cable Length		380mm 5mm						Cable Diameter		1.03 mm						Operation Temperature		-20 ~ 90 (C)						Operation Humidity		0 ~ 90 (%)						Option								Others																																																																							
Mechanical Specification																																																																																																																																																															
Antenna Size		54.5 × 8 × 1 mm (L×W×t)																																																																																																																																																													
Weight		3 (g)																																																																																																																																																													
Radiator Material		FR-4																																																																																																																																																													
Cable Ass'y		IPEX Coaxial Cable Ass'y																																																																																																																																																													
Cable Length		380mm 5mm																																																																																																																																																													
Cable Diameter		1.03 mm																																																																																																																																																													
Operation Temperature		-20 ~ 90 (C)																																																																																																																																																													
Operation Humidity		0 ~ 90 (%)																																																																																																																																																													
Option																																																																																																																																																															
Others																																																																																																																																																															

KRD01-00A05-01IR

KOSAN I & T Co., Ltd.

Fig 1. RETURN LOSS

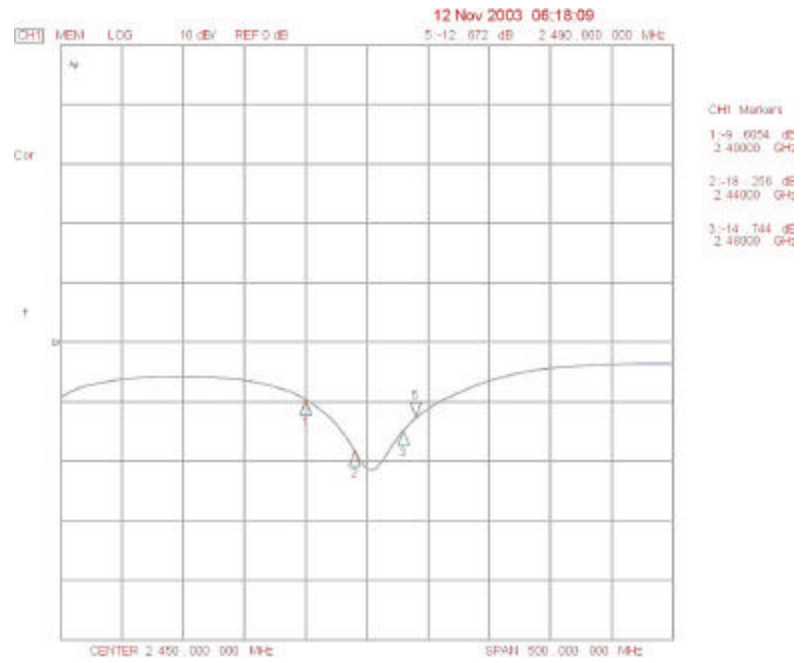


Fig 2. VSWR


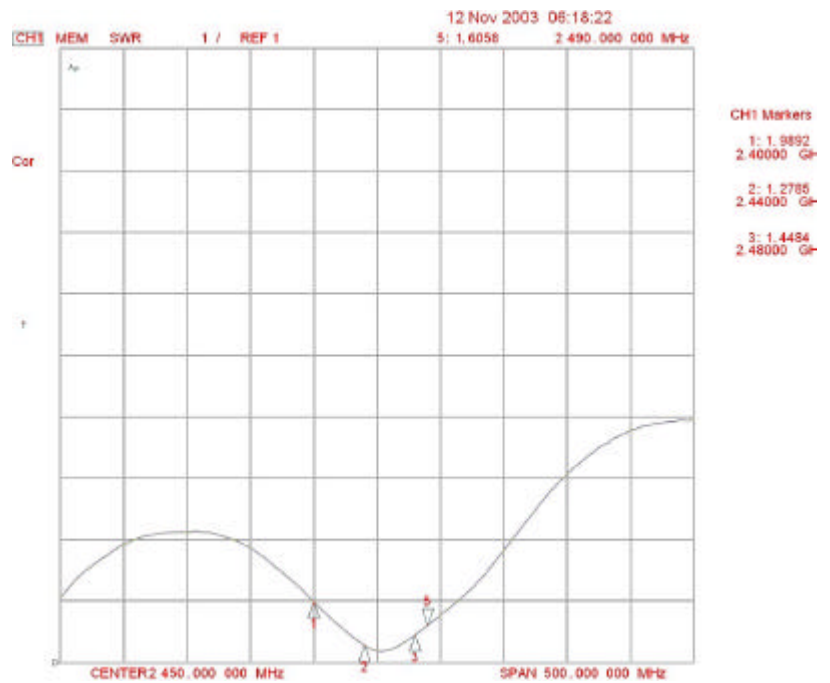


Fig 4. RADIATION PATTERN

ELEVATION PATTERN



AZIMUTH PATTERN

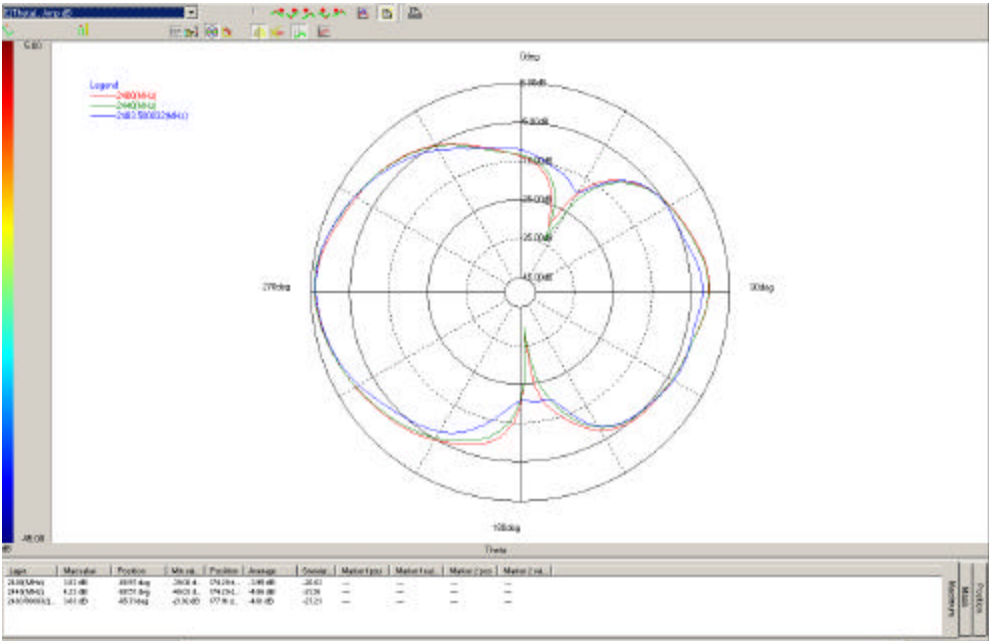