



**FCC CFR47 PART 15 SUBPART C
CERTIFICATION
TEST REPORT**

FOR

BLUETOOTH REMOTE

MODEL NUMBER: PWR-07-03

FCC ID: QYPPWR0703

REPORT NUMBER: 05U3432-1

ISSUE DATE: MAY 17, 2005

Prepared for
POLYMAP WIRELESS
310 S. WILLIAMS BLVD., STE. 346
TUSCON, AZ 85711
U.S.A.

Prepared by
COMPLIANCE ENGINEERING SERVICES, INC.
d.b.a.
COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888

NVLAP[®]
LAB CODE:200065-0

Revision History

Rev.	Revisions	Revised By
------	-----------	------------

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY.....	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	5
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	5
5. EQUIPMENT UNDER TEST.....	6
5.1. <i>DESCRIPTION OF EUT</i>	6
5.2. <i>MAXIMUM OUTPUT POWER</i>	6
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS.....</i>	6
5.4. <i>SOFTWARE AND FIRMWARE</i>	6
5.5. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	6
5.6. <i>DESCRIPTION OF TEST SETUP</i>	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. LIMITS AND RESULTS	11
7.1. <i>ANTENNA PORT CHANNEL TESTS</i>	11
7.1.1. 20 dB BANDWIDTH	11
7.1.2. HOPPING FREQUENCY SEPARATION.....	15
7.1.3. NUMBER OF HOPPING CHANNELS	17
7.1.4. AVERAGE TIME OF OCCUPANCY	21
7.1.5. PEAK OUTPUT POWER	24
7.1.6. MAXIMUM PERMISSIBLE EXPOSURE.....	28
7.1.7. AVERAGE POWER.....	31
7.1.8. PEAK POWER SPECTRAL DENSITY	32
7.1.9. CONDUCTED SPURIOUS EMISSIONS.....	36
7.2. <i>RADIATED EMISSIONS.....</i>	45
7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS	45
7.2.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ	48
7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz.....	57
8. SETUP PHOTOS	61

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: POLYMAP WIRELESS
310 S. WILLIAMS BLVD., SUITE 346
TUSCON, AZ 85711
U.S.A.

EUT DESCRIPTION: BLUETOOTH REMOTE

MODEL: PWR-07-03

SERIAL NUMBER: 00043E68B87E

DATE TESTED: MAY 10 –MAY 11, 2005

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:



YAN ZHENG
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

Tested By:



DAVID GARCIA
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a Bluetooth remote transceiver, designed to be used as an accessory to a LifeScan OneTouch Ultra glucose meter.

The radio module is manufactured by Polymap Wireless.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

2400 to 2483.5 MHz Authorized Band

Frequency Range (MHz)	Output Power (dBm)	Output Power (mW)
2402 - 2480	-0.20	0.95

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an monopole cable antenna, with a maximum gain of 3 dBi.

5.4. SOFTWARE AND FIRMWARE

The test utility software used during testing was Zerial rev. 5.2.

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. The highest measured output power was at 2402 MHz.

The X, Y, and Z position of EUT have been investigated. The Y position is the worst-case.

Thus all emissions tests were made in the Y position.

5.6. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop PC	HP	ze4400	CNF3370PWY	DoC
Hardwire Board	Polymap	Hardwire Rev B	N/A	N/A
AC/DC Adapter	HP	PPP0145	565C50AU4P6707	N/A


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	Input	1	12 pin	Ribbon	15cm	
2	Antenna	1	SMT	Antenna	3cm	
3	RS-232	1	DB9	Shielded	1.5m	
4	DC	1	DC	Unshielded	1.8m	
5	AC	1	IEC	Unshielded	1.5m	

TEST SETUP

The EUT is connected to the Hardwire Rev B board with a flat ribbon cable. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

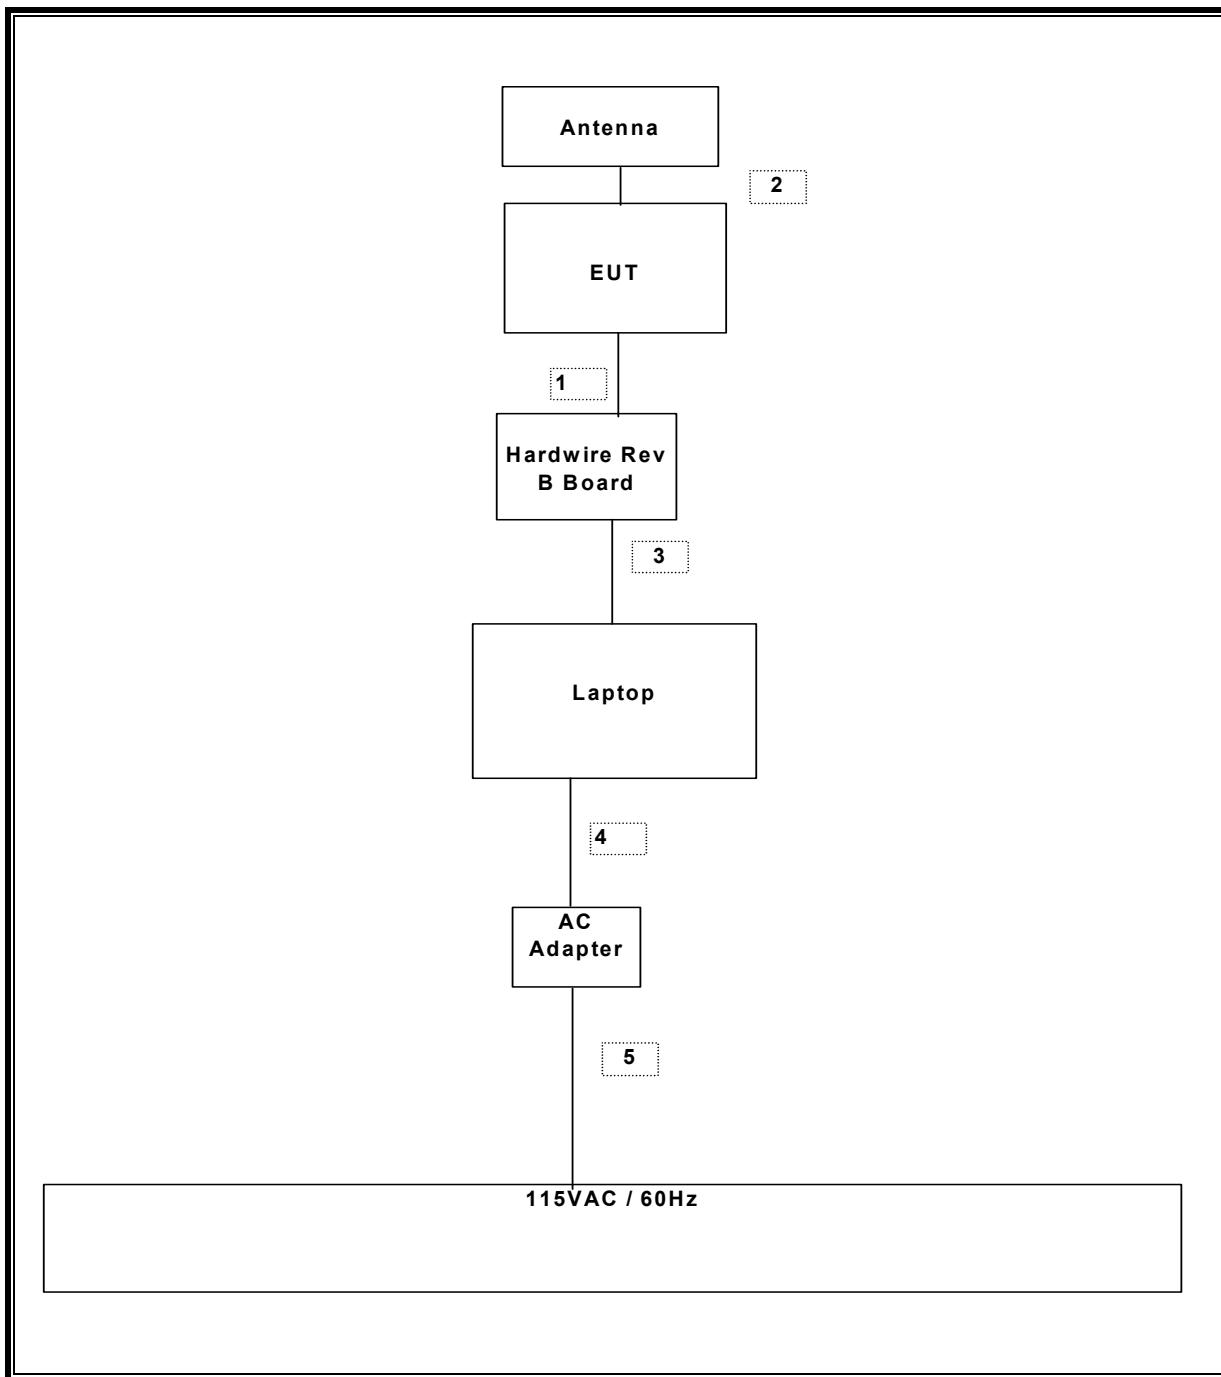

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
Spectrum Analyzer 3 Hz ~ 44 GHz	Agilent	E4446A	US42070220	1/1/2006
Power Meter	R & S	NRVD	DE 12893	10/21/05
Power Sensor, 18GHz, 300 mW	R&S	NVR-Z51	DE 13014	10/20/05
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	6717	6/12/05
Preamplifier, 1 ~ 26 GHz	Miteq	NSP2600-SP	924341	12/23/05
4.0 GHz High Pass Filter	Micro Tronics	HPM13351	2706	CNR

7. LIMITS AND RESULTS

7.1. ANTENNA PORT CHANNEL TESTS

7.1.1. 20 dB BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 1% to 3% of the 20 dB bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled.


RESULTS


No non-compliance noted:

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)
Low	2402	942
Middle	2441	892
High	2480	942

20 dB BANDWIDTH

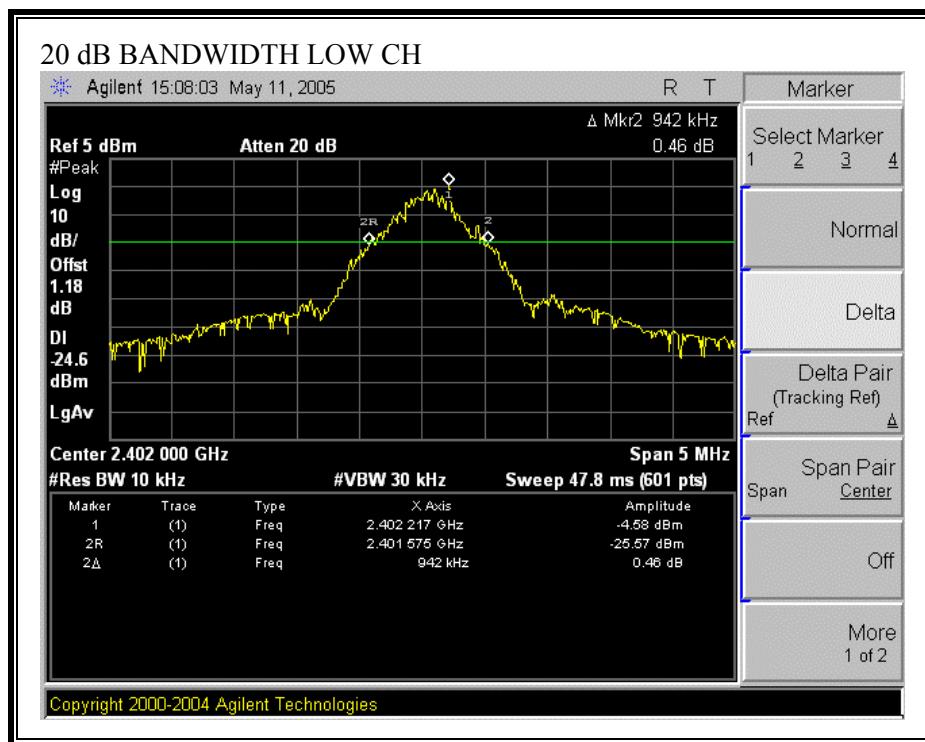

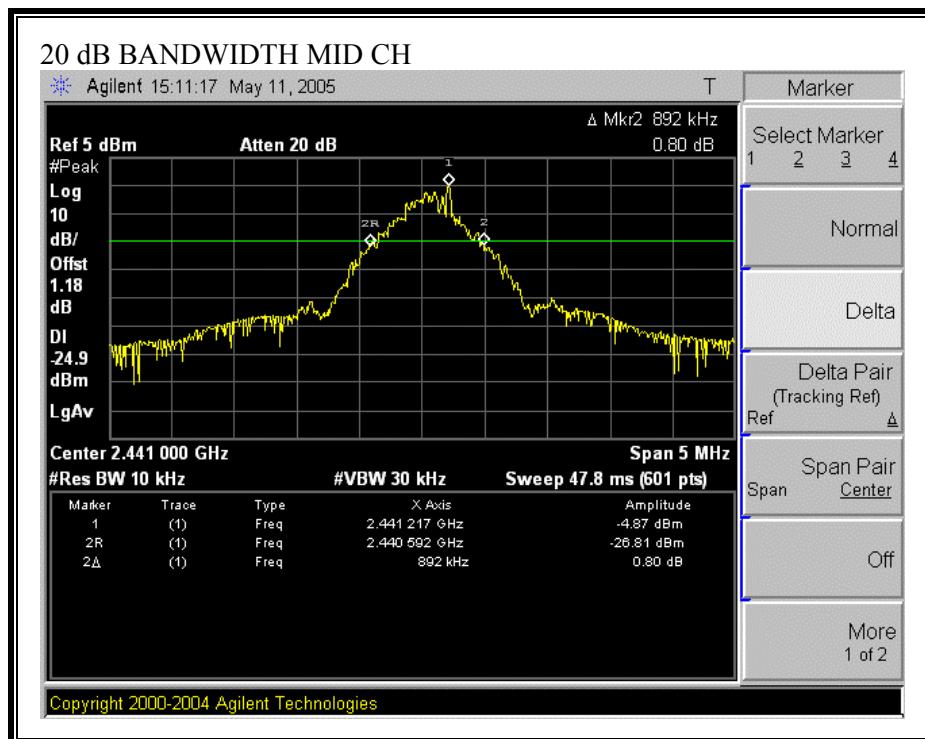

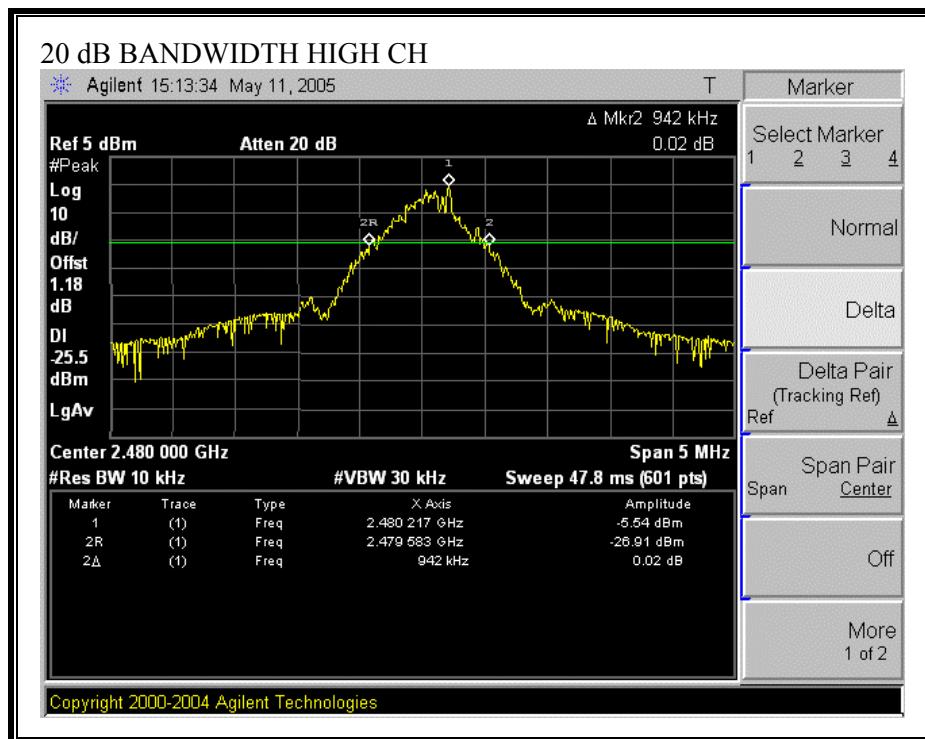

7.1.2. HOPPING FREQUENCY SEPARATION

LIMIT

§15.247 (a) (1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hoping channel, whichever is greater.


TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

RESULTS

No non-compliance noted:

HOPPING FREQUENCY SEPARATION

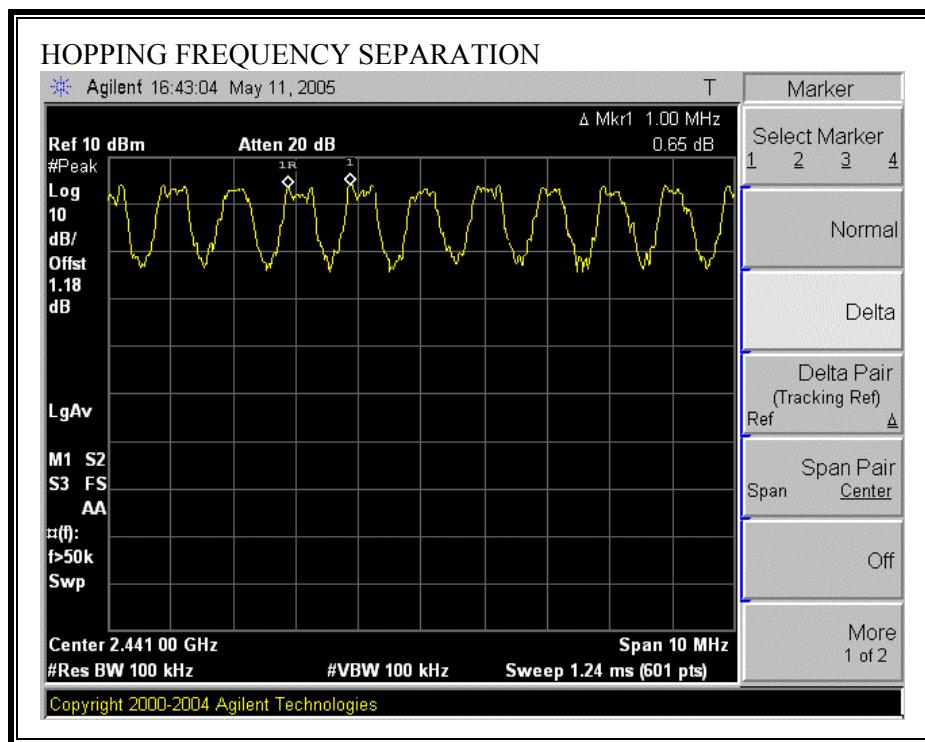

7.1.3. NUMBER OF HOPPING CHANNELS

LIMIT

§15.247 (a) (1) (iii) Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to 1 % of the span. The analyzer is set to Max Hold.


RESULTS


No non-compliance noted:

79 Channels observed.

NUMBER OF HOPPING CHANNELS

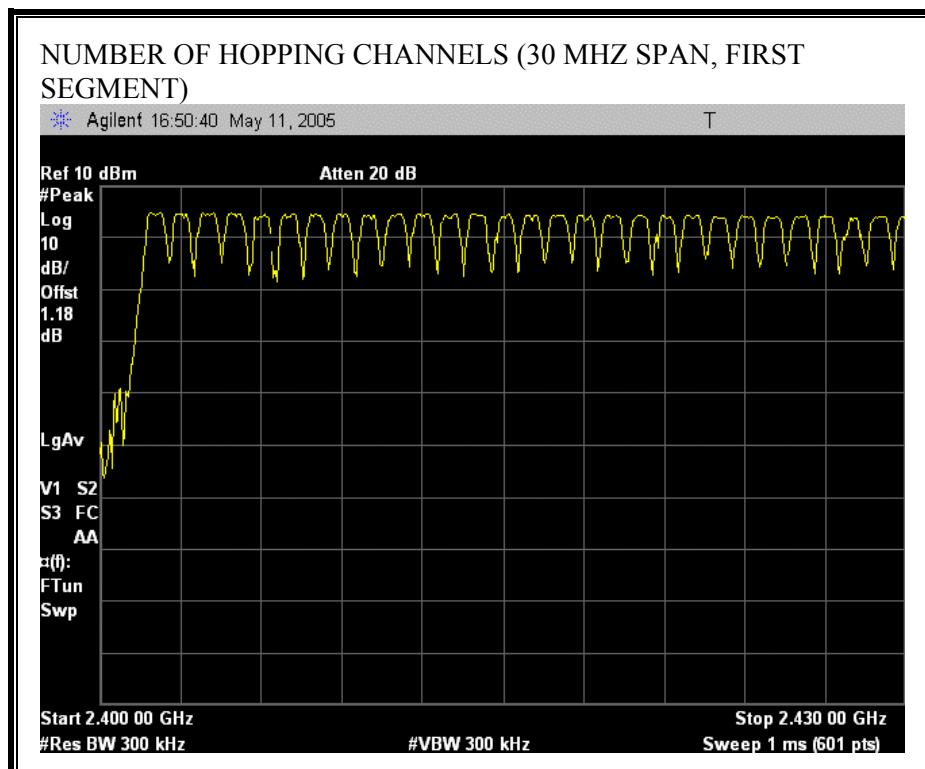

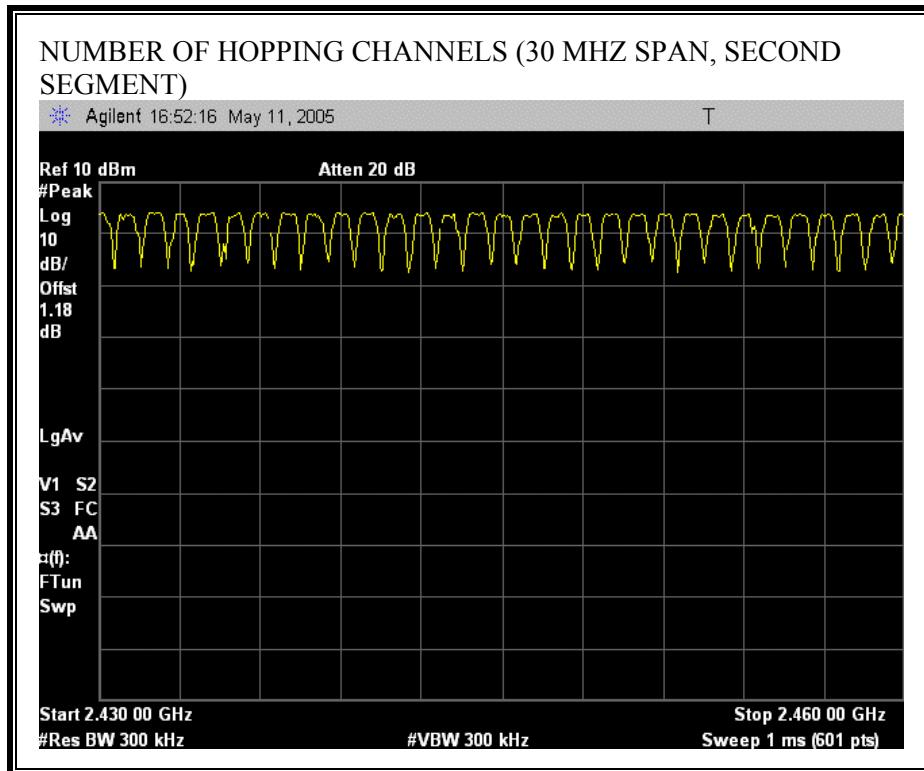

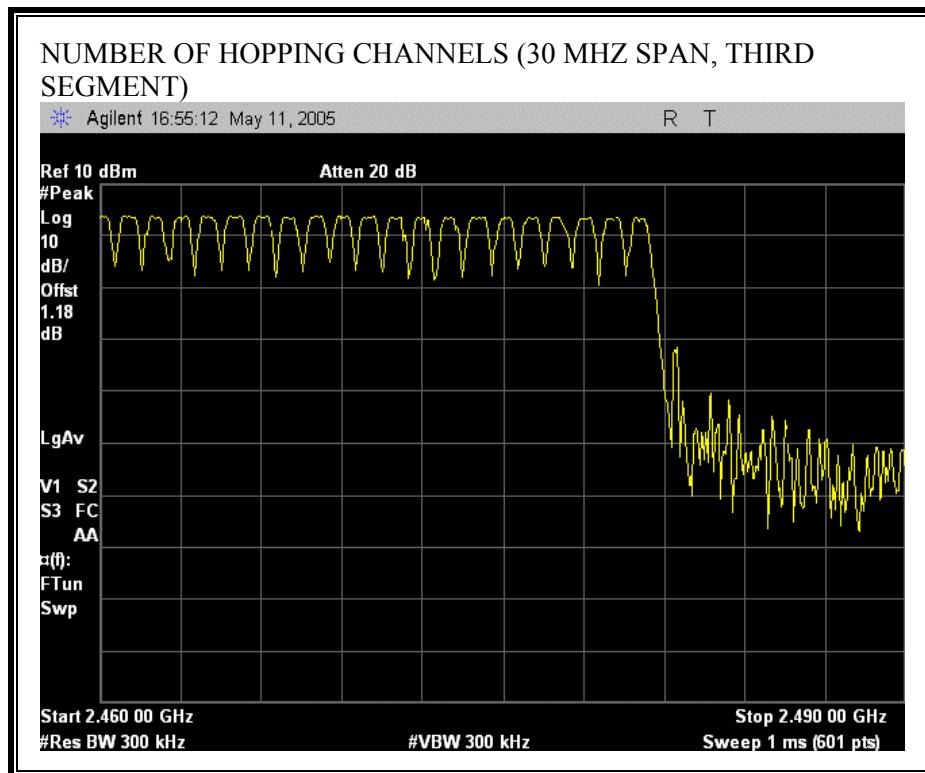

7.1.4. AVERAGE TIME OF OCCUPANCY

LIMIT

§15.247 (a) (1) (iii) Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels * 0.4 s) is equal to $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$.


RESULTS

No non-compliance noted:

PULSE WIDTH

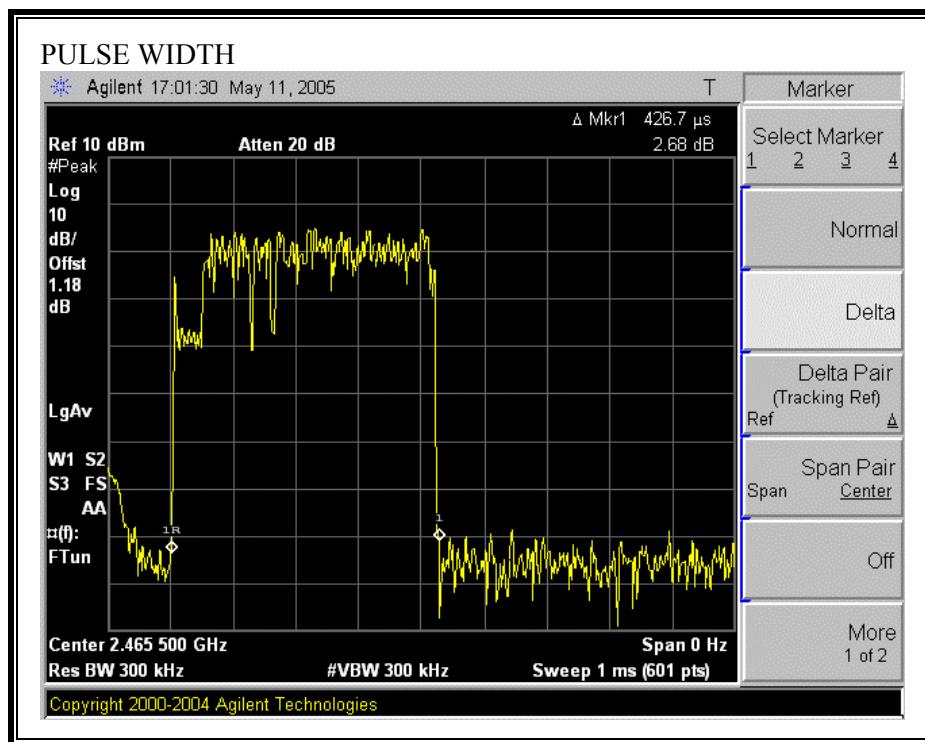

NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD

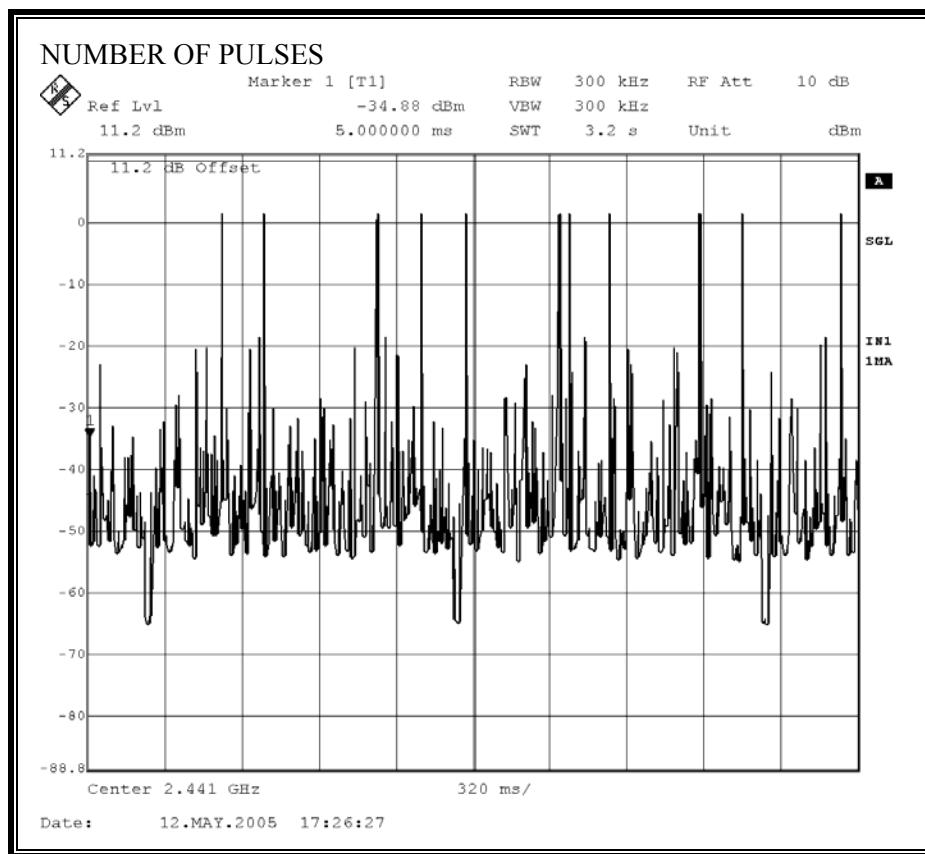

7.1.5. PEAK OUTPUT POWER

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum antenna gain is 3 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer and the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.


RESULTS


No non-compliance noted:

Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-0.20	30	-30.20
Middle	2441	-1.16	30	-31.16
High	2480	-1.64	30	-31.64

OUTPUT POWER

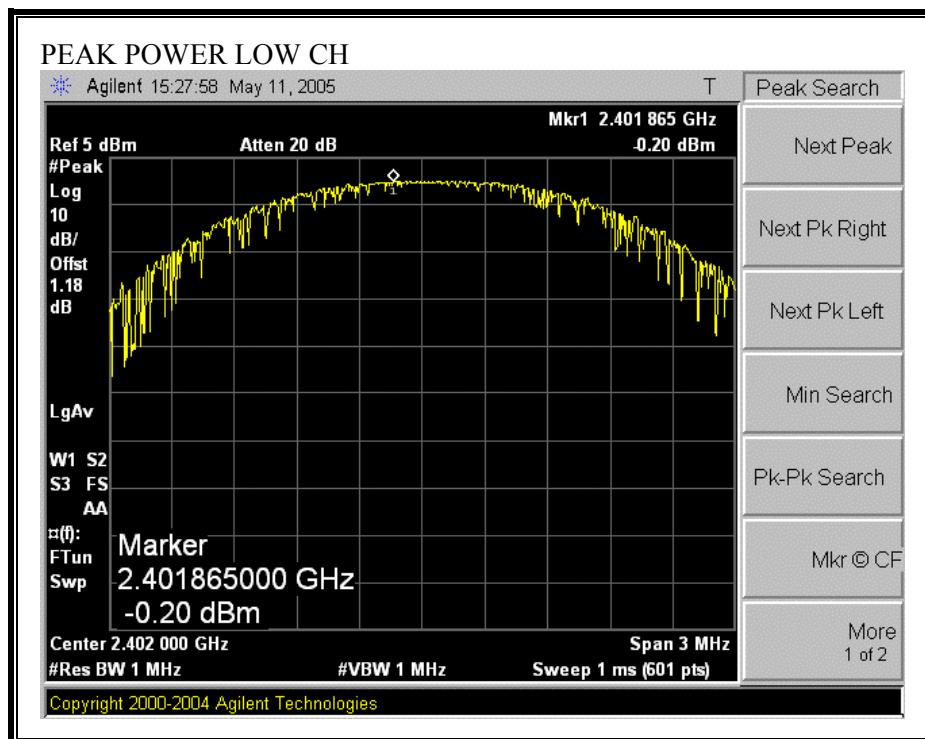

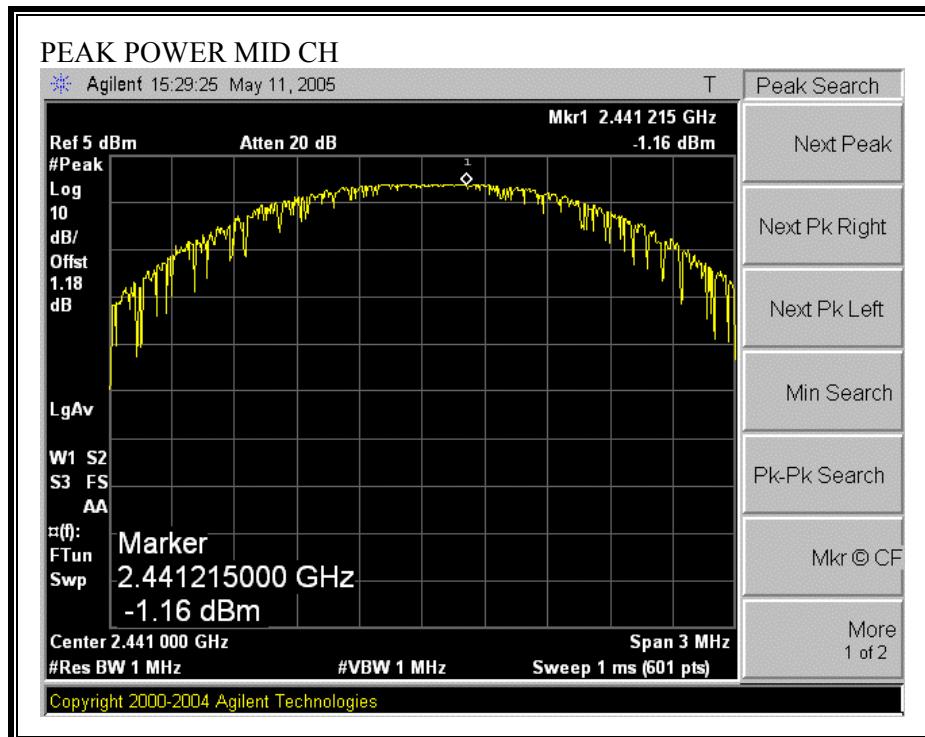

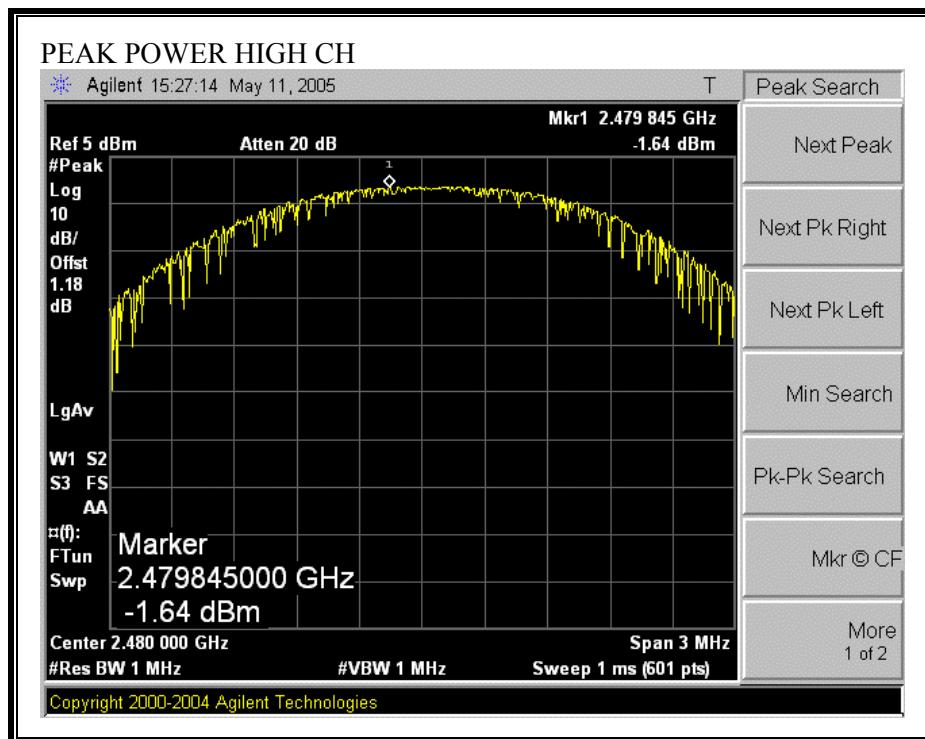

7.1.6. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P (\text{mW}) = P (\text{W}) / 1000 \text{ and}$$

$$d (\text{cm}) = 100 * d (\text{m})$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P (\text{mW}) = 10^{(P (\text{dBm}) / 10)} \text{ and}$$

$$G (\text{numeric}) = 10^{(G (\text{dBi}) / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S} \quad \text{Equation (1)}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Equation (1) and the measured peak power is used to calculate the MPE distance.

LIMITS

From §1.1310 Table 1 (B), S = 1.0 mW/cm²

RESULTS

No non-compliance noted:

Power Density Limit (mW/cm²)	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
1.0	-0.20	3.00	0.39

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

7.1.7. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 1.18 was entered as an offset in the power meter to allow for direct reading of power.

Channel	Frequency (MHz)	Average Power (dBm)
Low	2402	-1.05
Middle	2441	-2.26
High	2480	-3.20

7.1.8. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

§15.247 (f) The digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.


RESULTS


No non-compliance noted:

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-10.48	8	-18.48
Middle	2441	-11.43	8	-19.43
High	2480	-11.98	8	-19.98

PEAK POWER SPECTRAL DENSITY

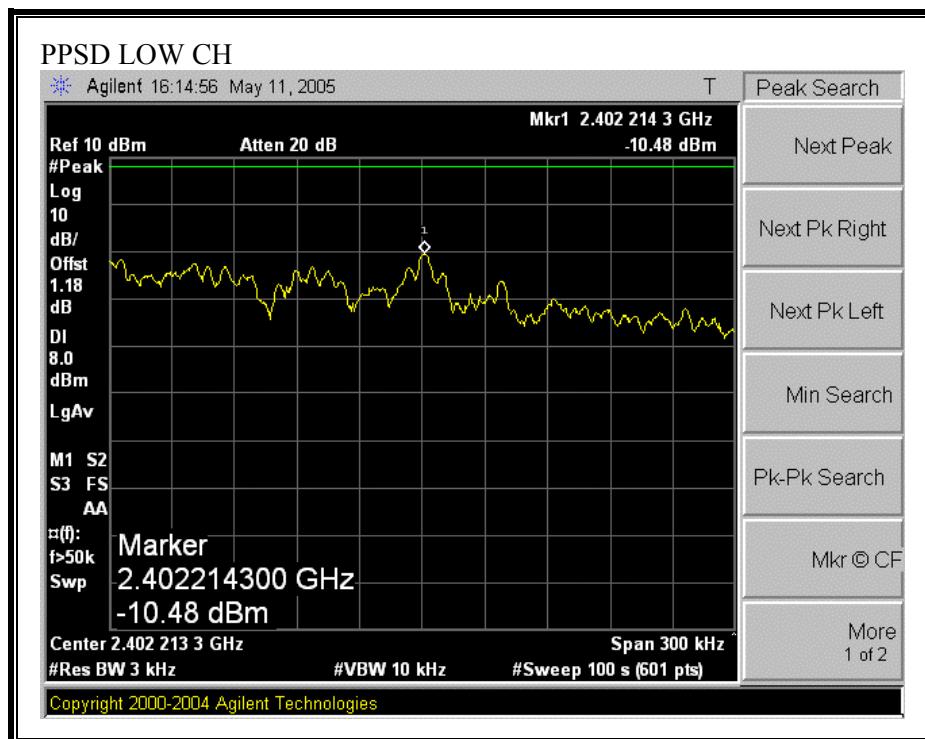

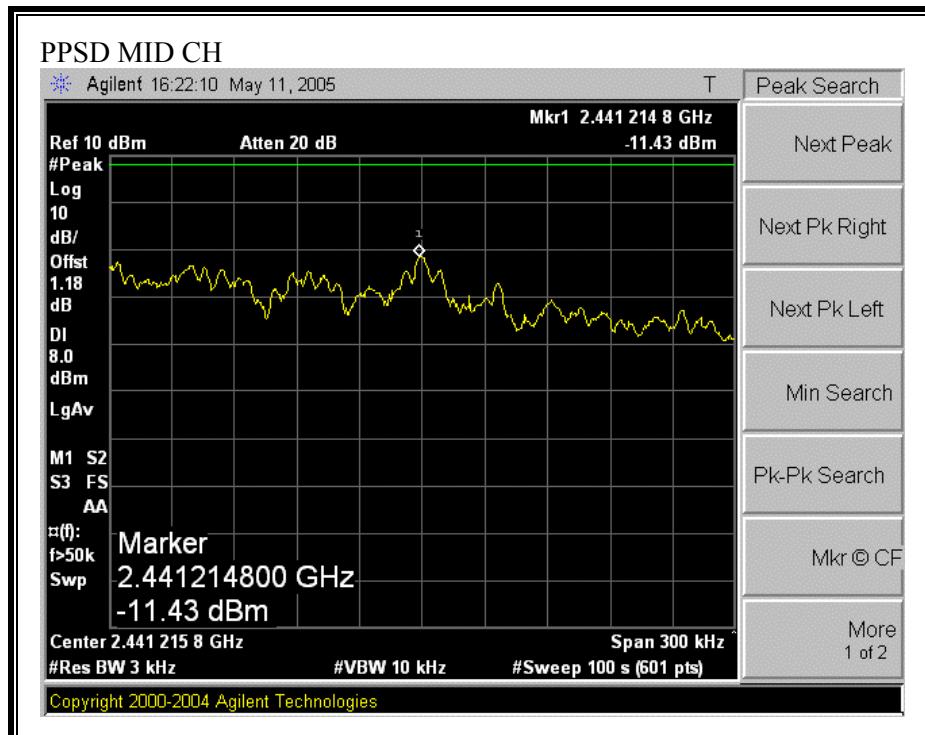

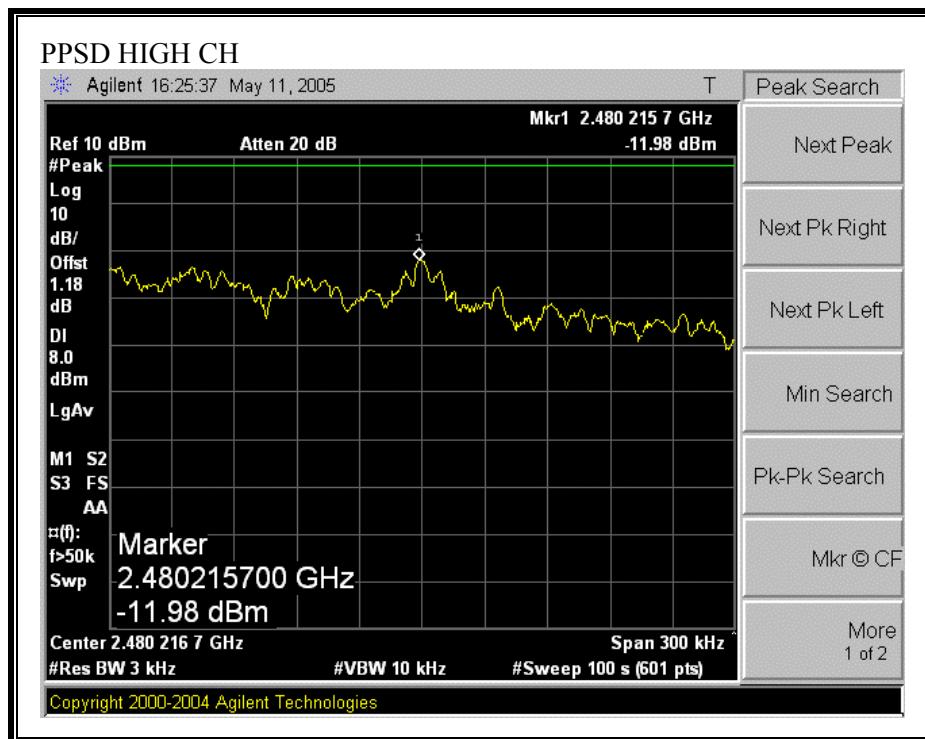

7.1.9. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS


No non-compliance noted:


SPURIOUS EMISSIONS, LOW CHANNEL

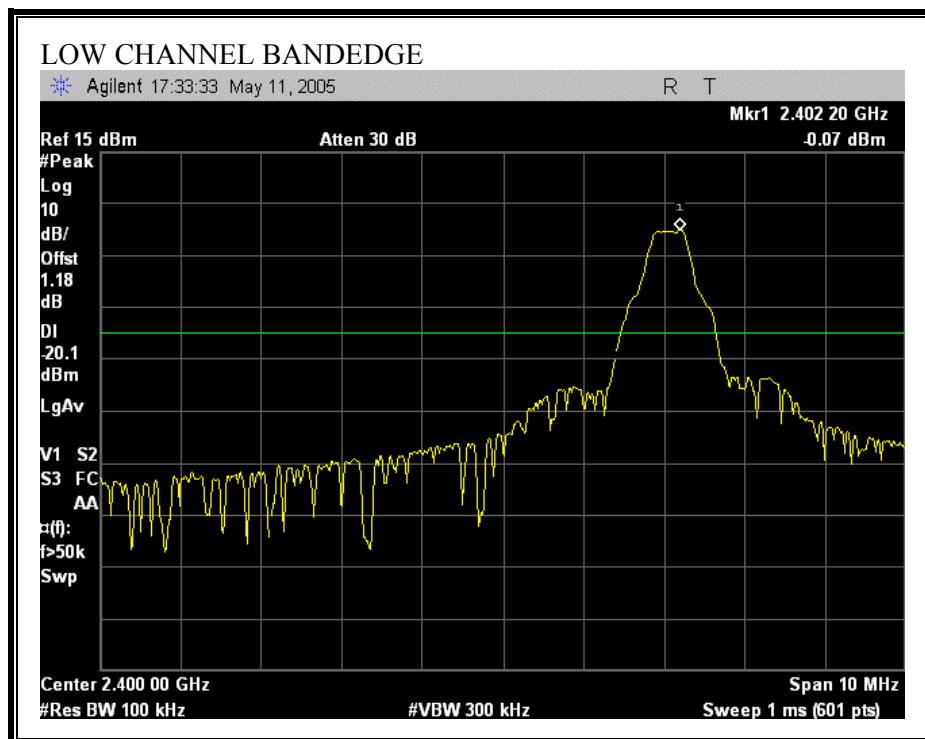

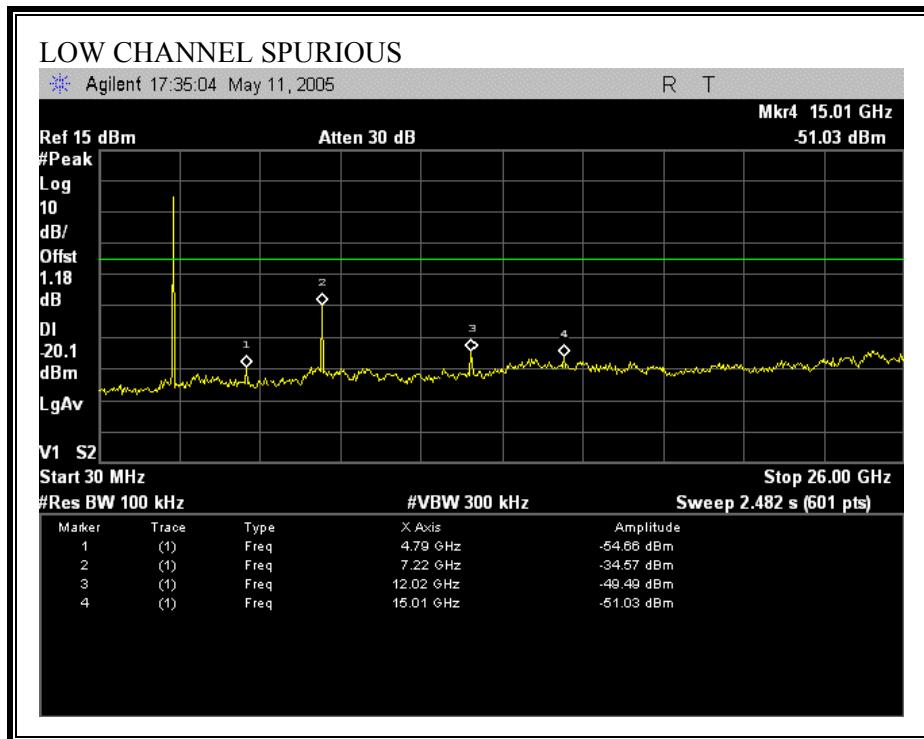



SPURIOUS EMISSIONS, MID CHANNEL

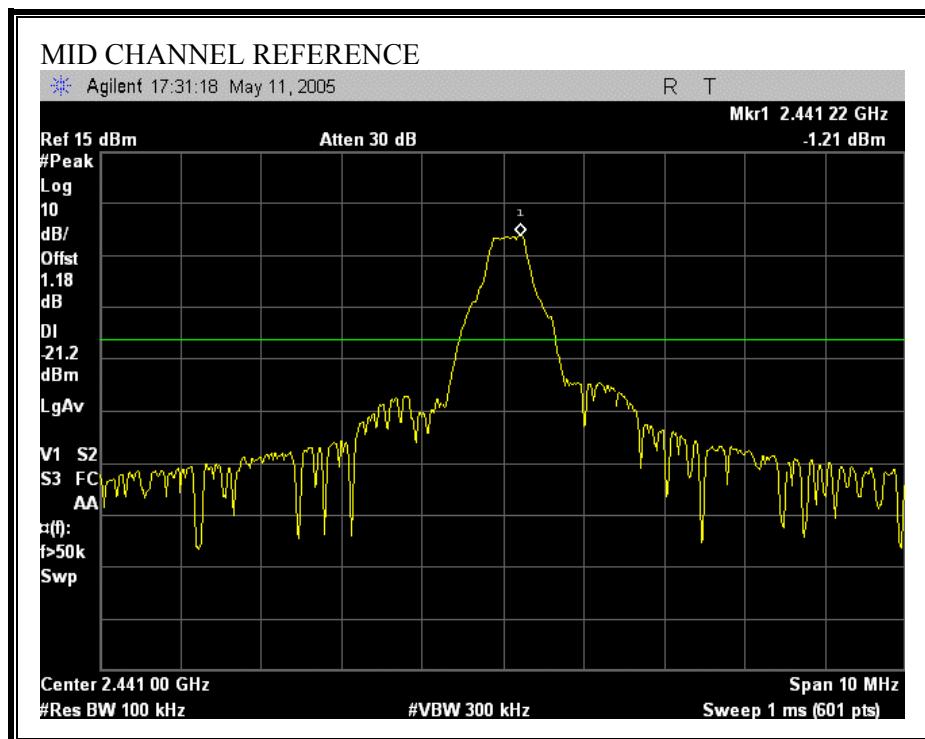

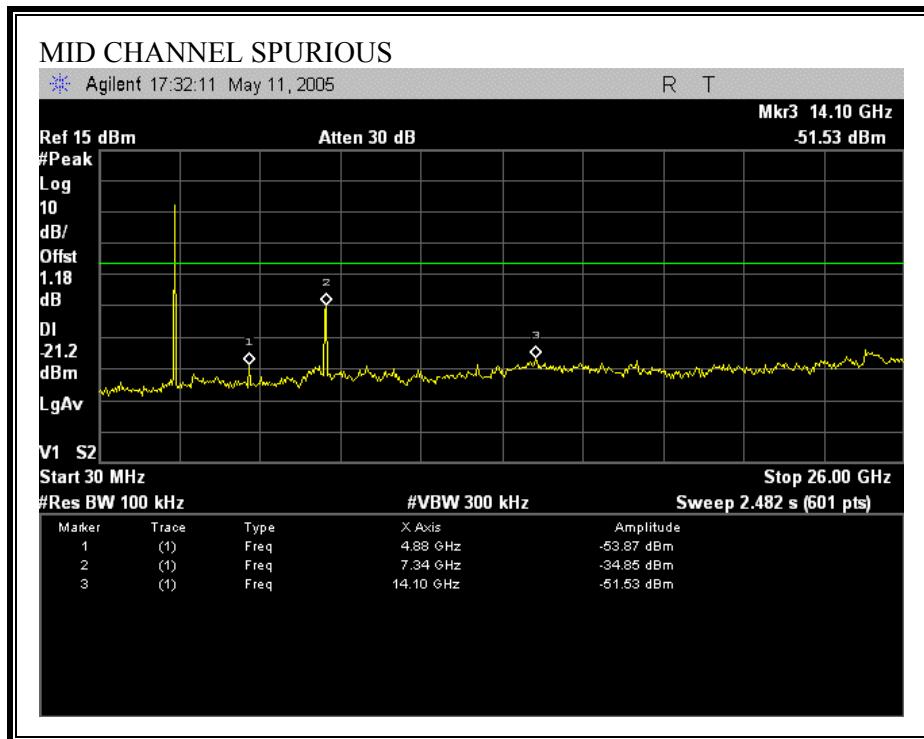



SPURIOUS EMISSIONS, HIGH CHANNEL

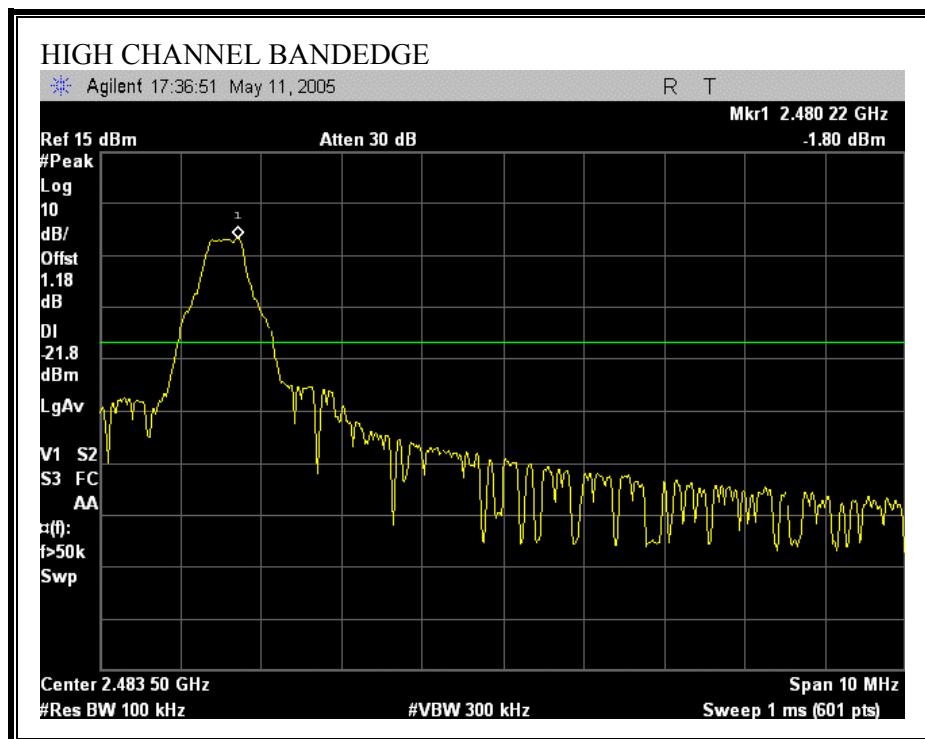

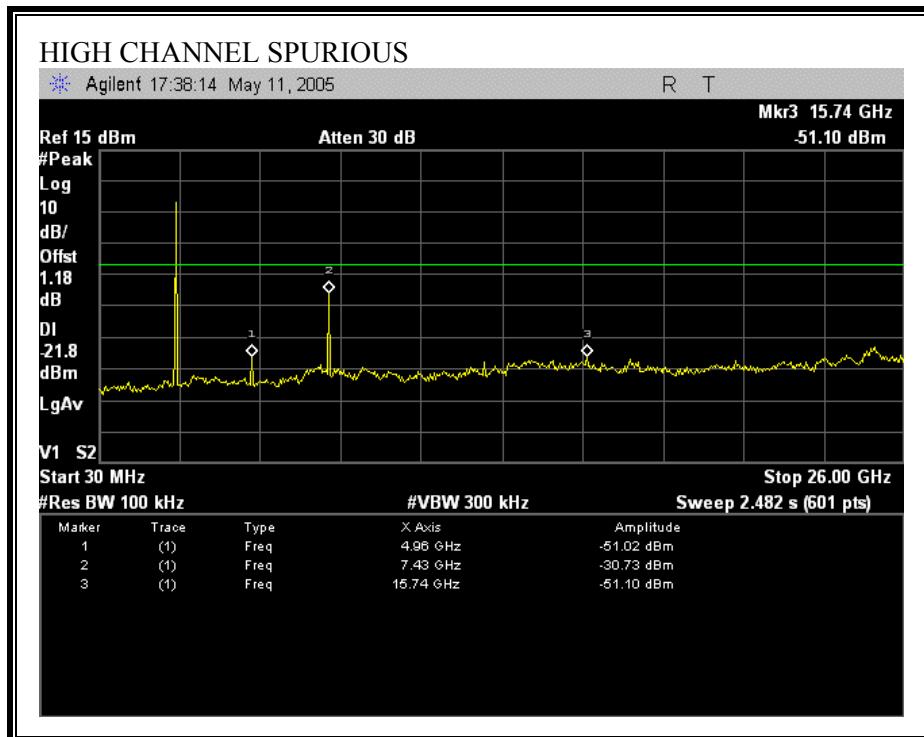

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

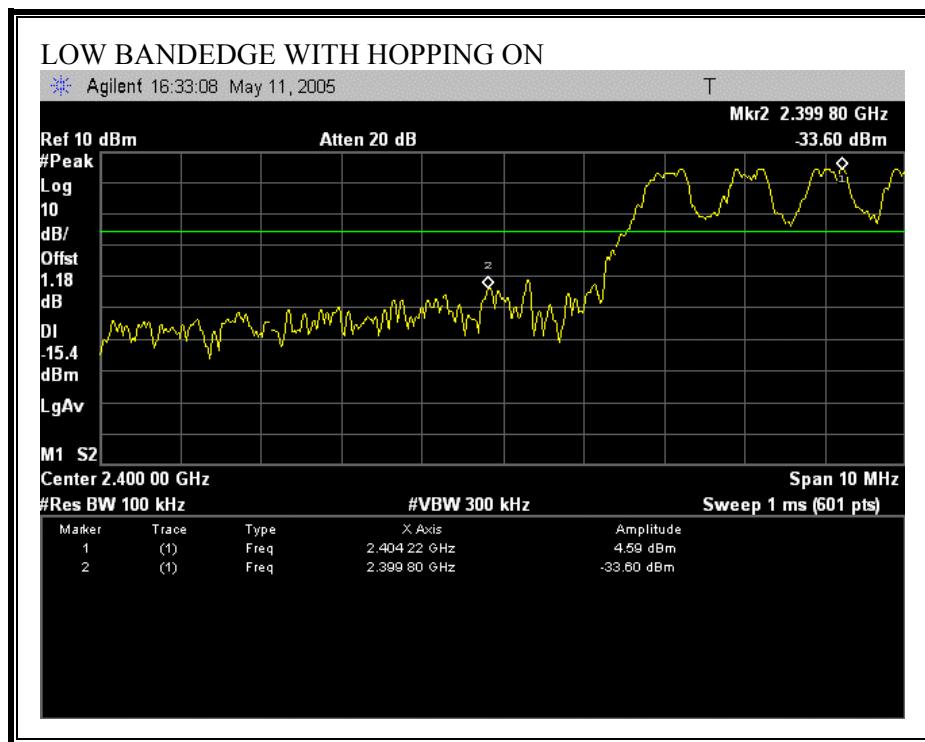

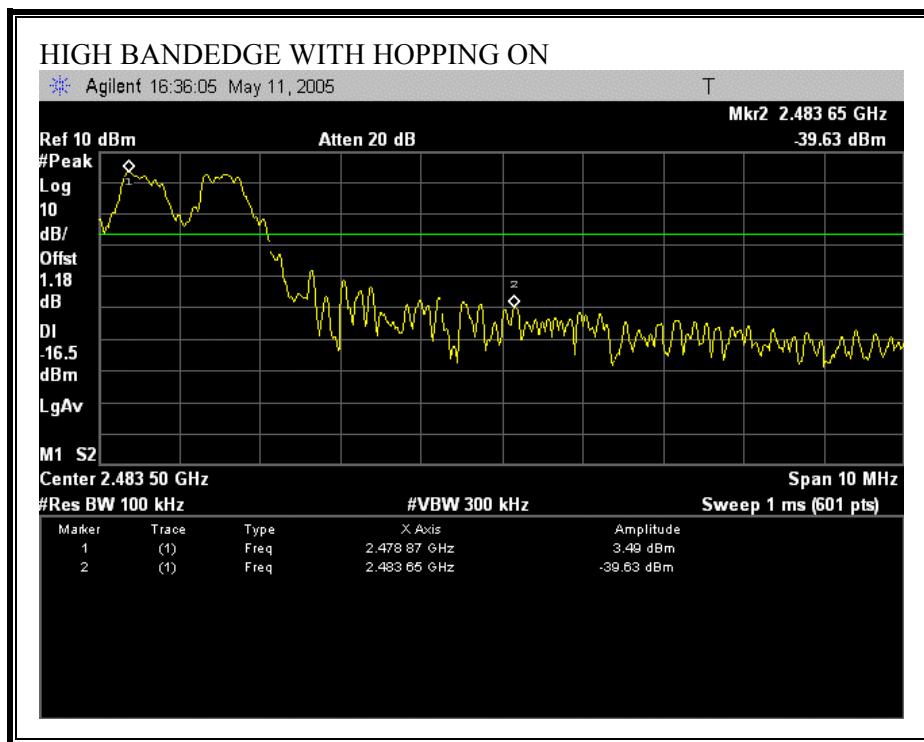

7.2. RADIATED EMISSIONS

7.2.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


7.2.2. TRANSMITTER RADIATED EMISSIONS ABOVE 1 GHZ


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

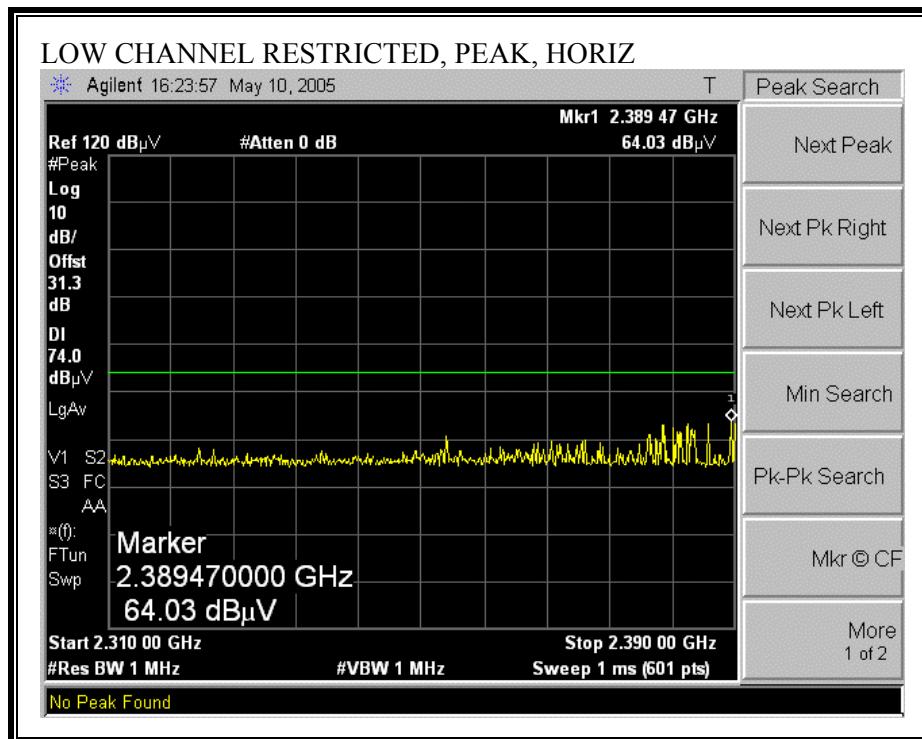

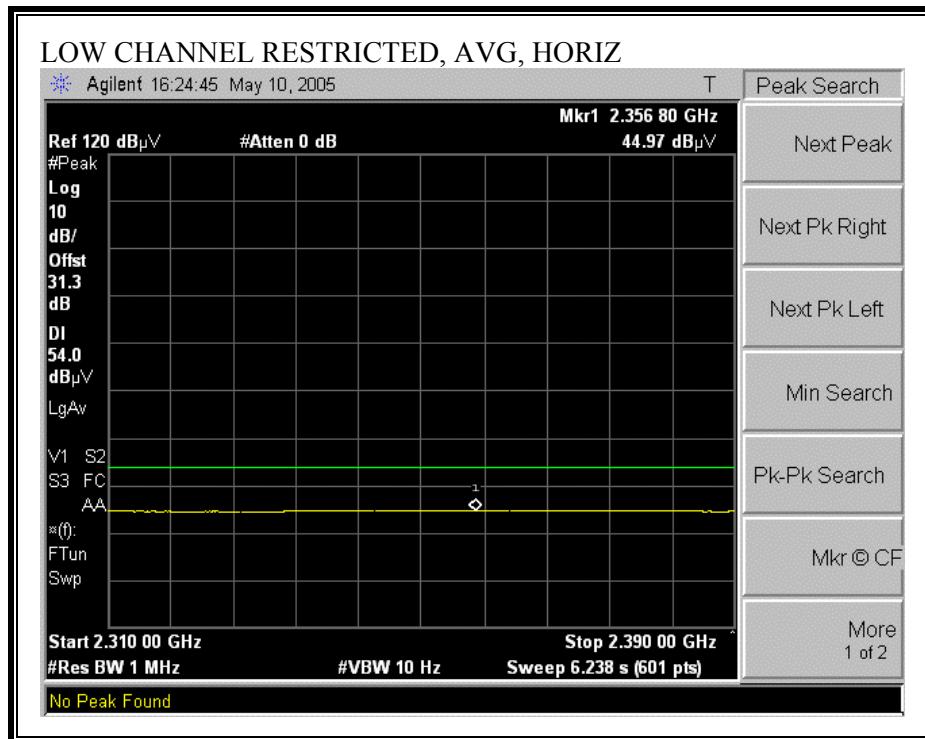



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

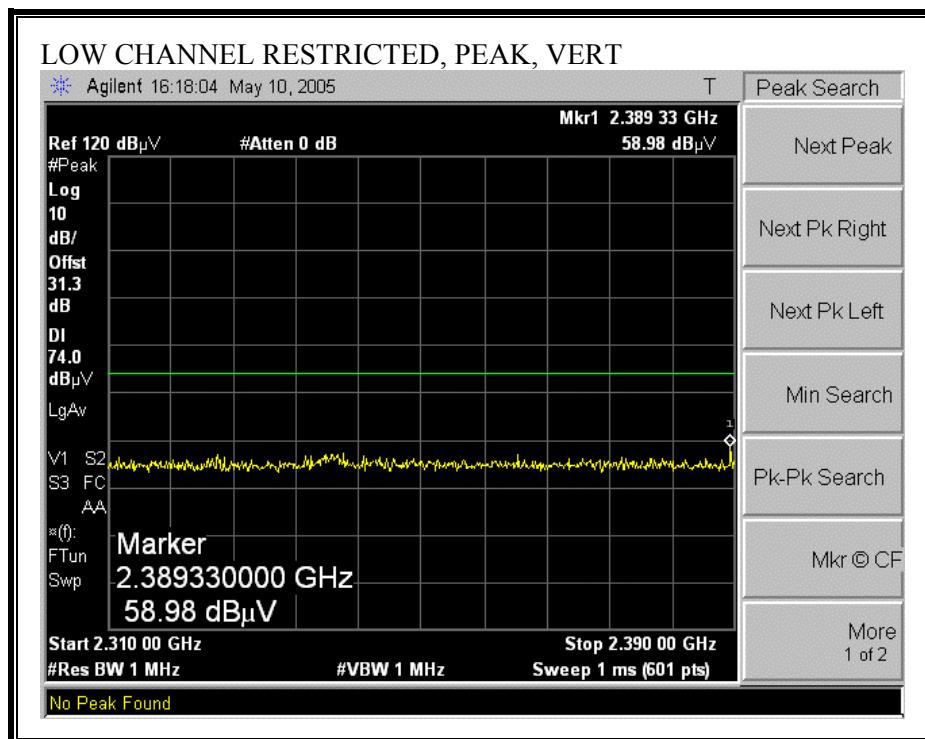

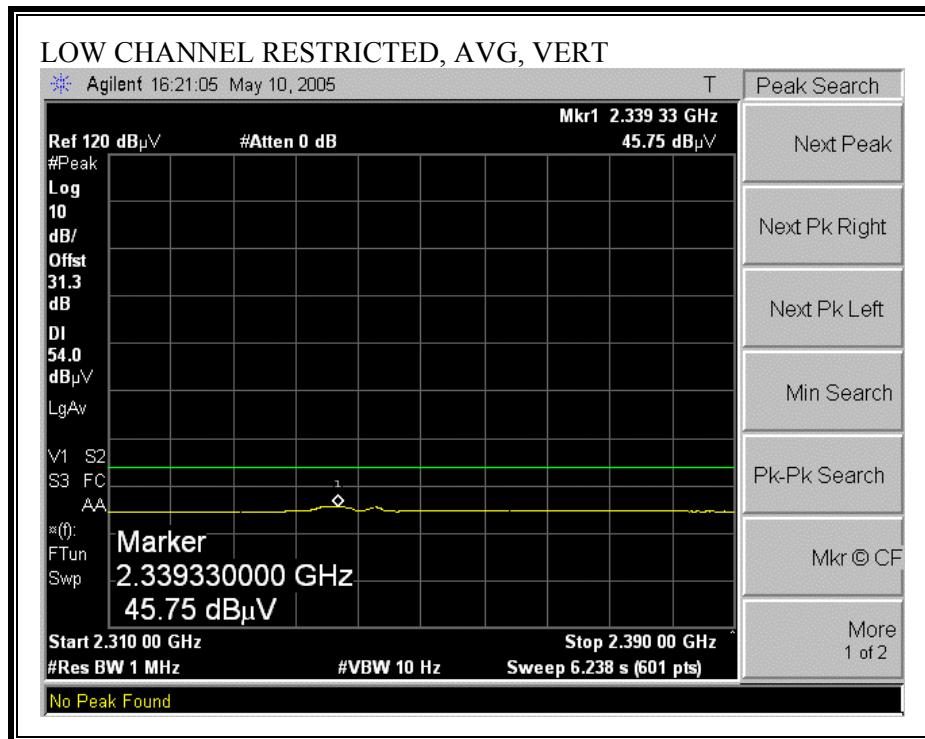



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

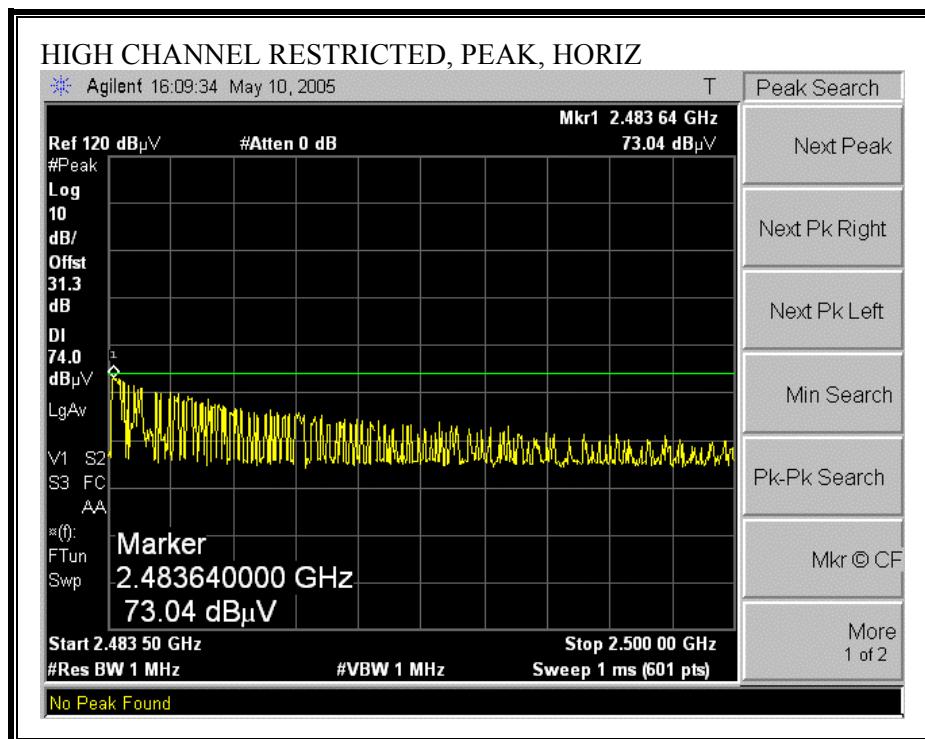

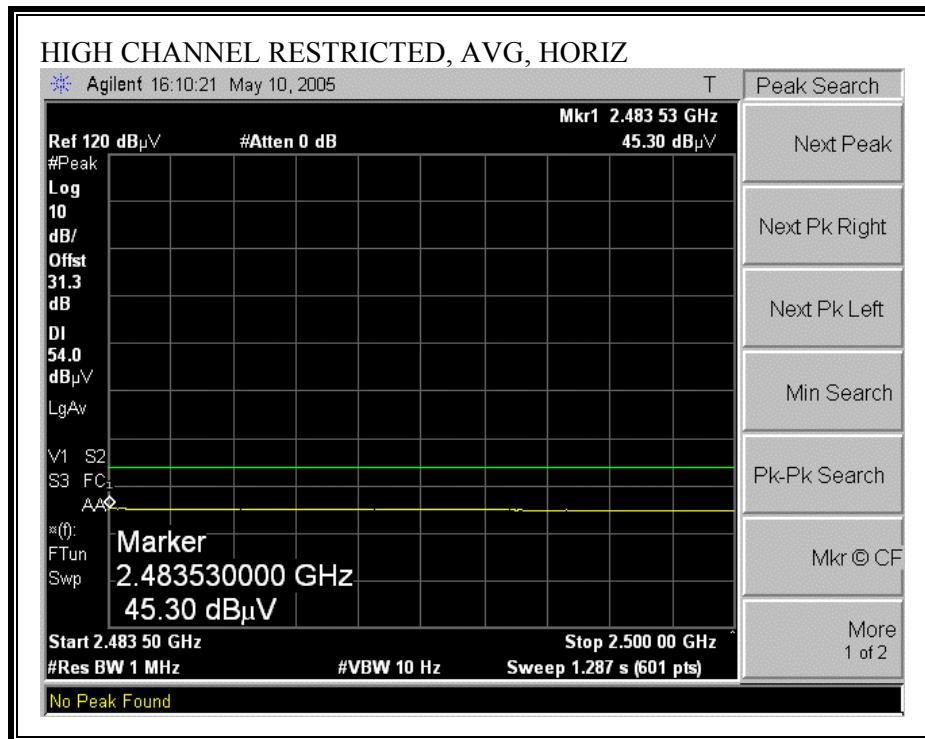

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

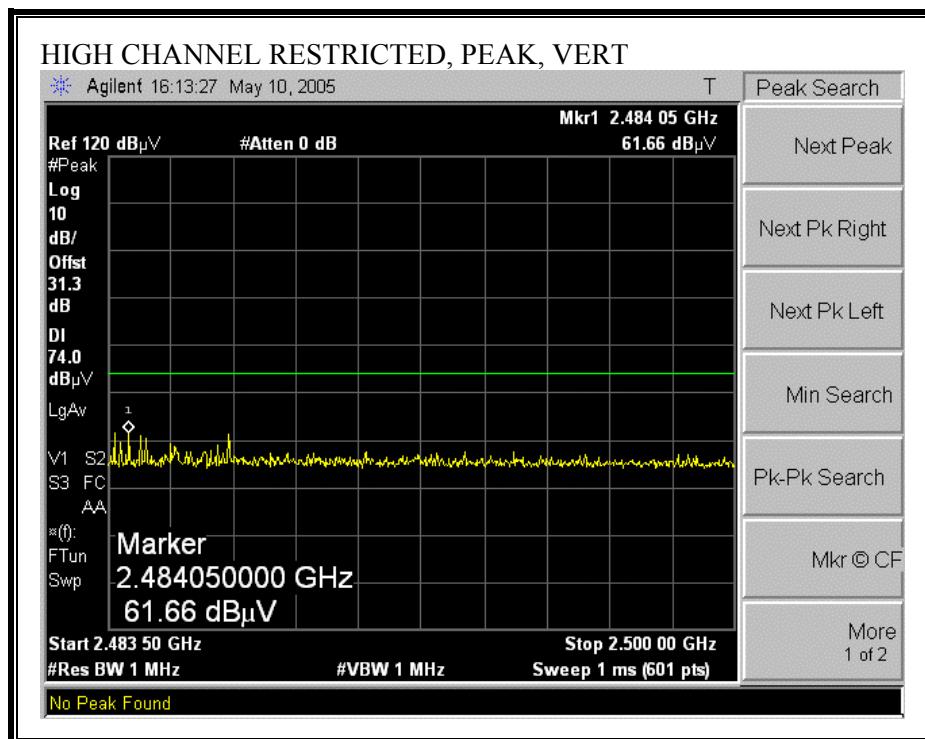

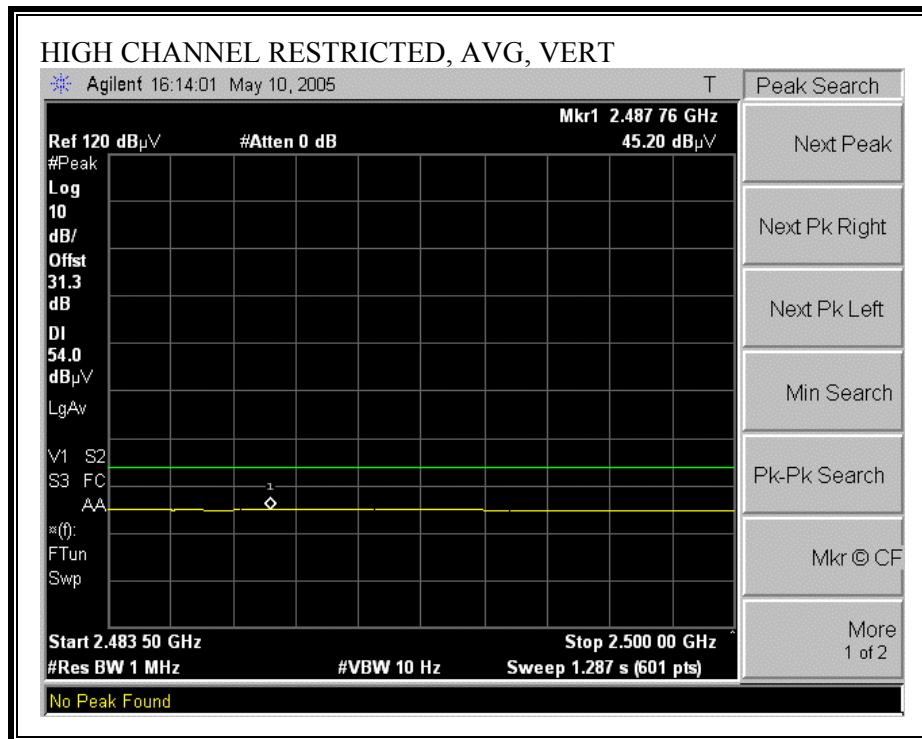

HARMONICS AND SPURIOUS EMISSIONS

05/11/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																																												
<p>Test Engr: David Garcia Project #: 05U3432-1 Company: Polymap EUT Descrip.: Bluetooth Remote Module EUT M/N: PWR-07-03 Test Target: FCC 15.247 Mode Oper: Transmitting Average Power Meter: Low = xx dBm, Mid = xx dBm, High = xx dBm</p> <p>Test Equipment:</p> <table border="1"> <tr> <td>EMCO Horn 1-18GHz</td> <td>Pre-amplifier 1-26GHz</td> <td>Pre-amplifier 26-40GHz</td> <td colspan="3">Horn > 18GHz</td> </tr> <tr> <td>T73; S/N: 6717 @1m</td> <td>T86 Miteq924341</td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td colspan="6">Hi Frequency Cables</td> </tr> <tr> <td>2 foot cable</td> <td>3 foot cable</td> <td>4 foot cable</td> <td>12 foot cable</td> <td>HPF</td> <td>Reject Filter</td> </tr> <tr> <td>2_David</td> <td></td> <td>4_David</td> <td>12_Yan</td> <td>HPF_4.0GHz</td> <td></td> </tr> </table> <p>Peak Measurements RBW=VBW=1MHz</p> <p>Average Measurements RBW=1MHz ; VBW=10Hz</p>															EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz			T73; S/N: 6717 @1m	T86 Miteq924341					Hi Frequency Cables						2 foot cable	3 foot cable	4 foot cable	12 foot cable	HPF	Reject Filter	2_David		4_David	12_Yan	HPF_4.0GHz	
EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz																																									
T73; S/N: 6717 @1m	T86 Miteq924341																																											
Hi Frequency Cables																																												
2 foot cable	3 foot cable	4 foot cable	12 foot cable	HPF	Reject Filter																																							
2_David		4_David	12_Yan	HPF_4.0GHz																																								
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																													
2402 Channel, Setting @ 39																																												
4.804	3.0	56.6	45.4	33.7	5.5	-44.0	0.0	0.6	52.4	41.2	74	54	-21.6	-12.8	V																													
12.010	3.0	51.0	36.0	38.5	9.5	-43.0	0.0	0.9	56.9	41.9	74	54	-17.1	-12.1	V																													
4.804	3.0	58.6	42.8	33.7	5.5	-44.0	0.0	0.6	54.4	38.6	74	54	-19.6	-15.4	H																													
12.010	3.0	53.3	38.5	38.5	9.5	-43.0	0.0	0.9	59.2	44.4	74	54	-14.8	-9.6	H																													
2441 Channel, Setting @ 39																																												
4.882	3.0	53.5	38.9	33.8	5.5	-44.1	0.0	0.6	49.3	34.7	74	54	-24.7	-19.3	V																													
7.323	3.0	62.5	44.9	35.5	6.8	-44.7	0.0	0.6	60.7	43.1	74	54	-13.3	-10.9	V																													
12.205	3.0	50.0	36.3	38.5	9.5	-43.1	0.0	0.9	55.9	42.2	74	54	-18.1	-11.8	V																													
4.882	3.0	56.6	42.3	33.8	5.5	-44.1	0.0	0.6	52.5	38.1	74	54	-21.5	-15.9	H																													
7.323	3.0	66.0	45.6	35.5	6.8	-44.7	0.0	0.6	64.2	43.8	74	54	-9.8	-10.2	H																													
12.205	3.0	50.4	36.2	38.5	9.5	-43.1	0.0	0.9	56.3	42.1	74	54	-17.7	-11.9	H																													
2480 Channel, Setting @ 39																																												
4.960	3.0	57.1	49.8	33.9	5.6	-44.2	0.0	0.6	53.0	45.7	74	54	-21.0	-8.3	H																													
7.440	3.0	62.3	54.0	35.7	6.8	-44.6	0.0	0.6	60.8	52.5	74	54	-13.2	-1.5	H																													
12.400	3.0	50.4	38.5	38.5	9.6	-43.2	0.0	0.9	56.2	44.3	74	54	-17.8	-9.7	H																													
4.960	3.0	48.6	40.2	33.9	5.6	-44.2	0.0	0.6	44.5	36.1	74	54	-29.5	-17.9	V																													
7.440	3.0	57.9	49.9	35.7	6.8	-44.6	0.0	0.6	56.4	48.4	74	54	-17.6	-5.6	V																													
12.400	3.0	46.9	34.5	38.5	9.6	-43.2	0.0	0.9	52.7	40.3	74	54	-21.3	-13.7	V																													
No further emissions were detected above the noise floor of the receiver.																																												
f	Measurement Frequency			Amp	Preamp Gain					Avg Lim	Average Field Strength Limit																																	
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit																																	
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit																																	
AF	Antenna Factor			Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit																																	
CL	Cable Loss			HPF																																								

7.2.3. WORST-CASE RADIATED EMISSIONS BELOW 1 GHz


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 8 File#: 05U3432.EMI Date: 05-13-2005 Time: 18:29:58

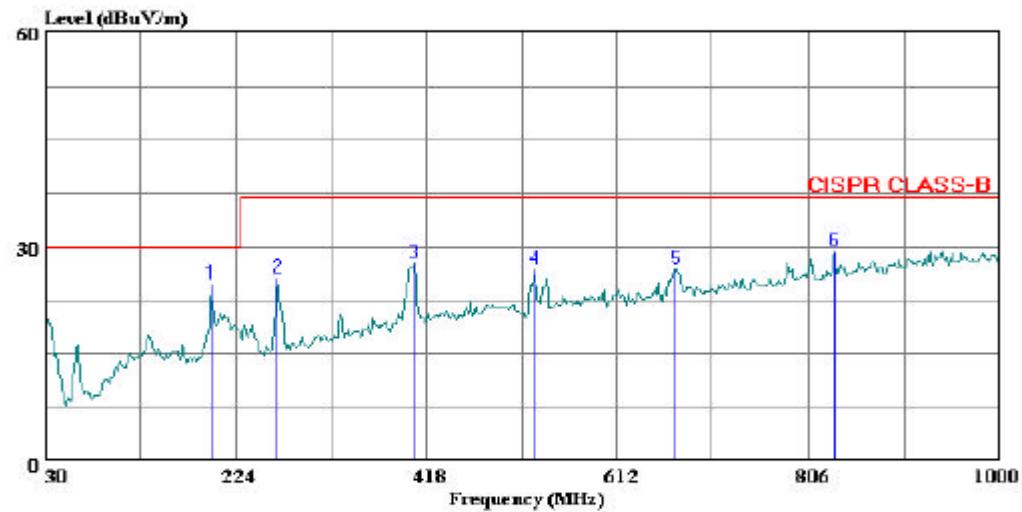

(Audix ATC)
Trace: 7

Ref Trace:

Condition: CISPR CLASS-B HORIZONTAL
Test Operator: : David Garcia
Project #: : 05U3432-1
Company: : Polymap Wireless
EUT: : Bluetooth remote module
Model No. : PWR-07-03
Configuration: : EUT, Hardwire adapter, laptop
Target of Test : FCC CLASS B (CISPR B Limits)
Mode of Operation: TX worst case (low channel)

HORIZONTAL DATA

Freq	Read		Level	Limit	Over	Remark
	Level	Factor				
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1	198.780	10.42	14.37	24.79	30.00	-5.21 Peak
2	266.680	11.08	14.45	25.53	37.00	-11.47 Peak
3	405.390	9.46	18.18	27.64	37.00	-9.36 Peak
4	528.580	6.12	20.63	26.75	37.00	-10.25 Peak
5	672.140	4.19	22.68	26.87	37.00	-10.13 Peak
6	832.190	4.40	24.95	29.35	37.00	-7.65 Peak


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 6 File#: 05U3432.EMI Date: 05-13-2005 Time: 18:25:34

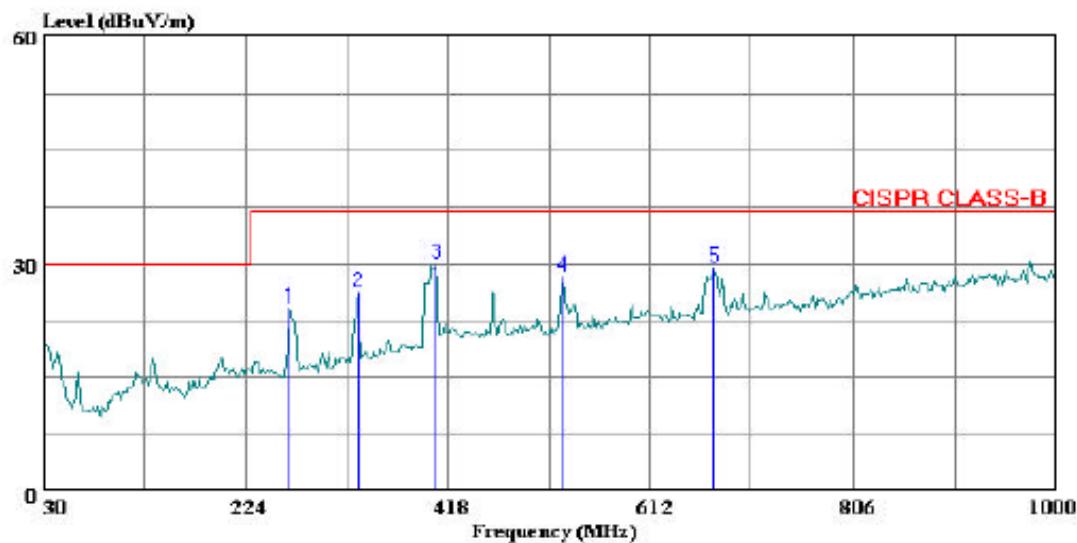

Trace: 5

Ref Trace:


Condition: CISPR CLASS-B VERTICAL
Test Operator: : David Garcia
Project #: : 05U3432-1
Company: : Polymap Wireless
EUT: : Bluetooth remote module
Model No. : PWR-07-03
Configuration: : EUT, Hardwire adapter, laptop
Target of Test : FCC CLASS B (CISPR B LIMITS)
Mode of Operation: TX worst case (low channel0

VERTICAL DATA


		Read		Limit	Over	
Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1	266.680	9.72	14.45	24.17	37.00	-12.83 Peak
2	332.640	9.77	16.47	26.24	37.00	-10.76 Peak
3	407.330	11.69	18.21	29.90	37.00	-7.10 Peak
4	528.580	7.65	20.63	28.28	37.00	-8.72 Peak
5	674.080	6.76	22.71	29.47	37.00	-7.53 Peak

8. SETUP PHOTOS

ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

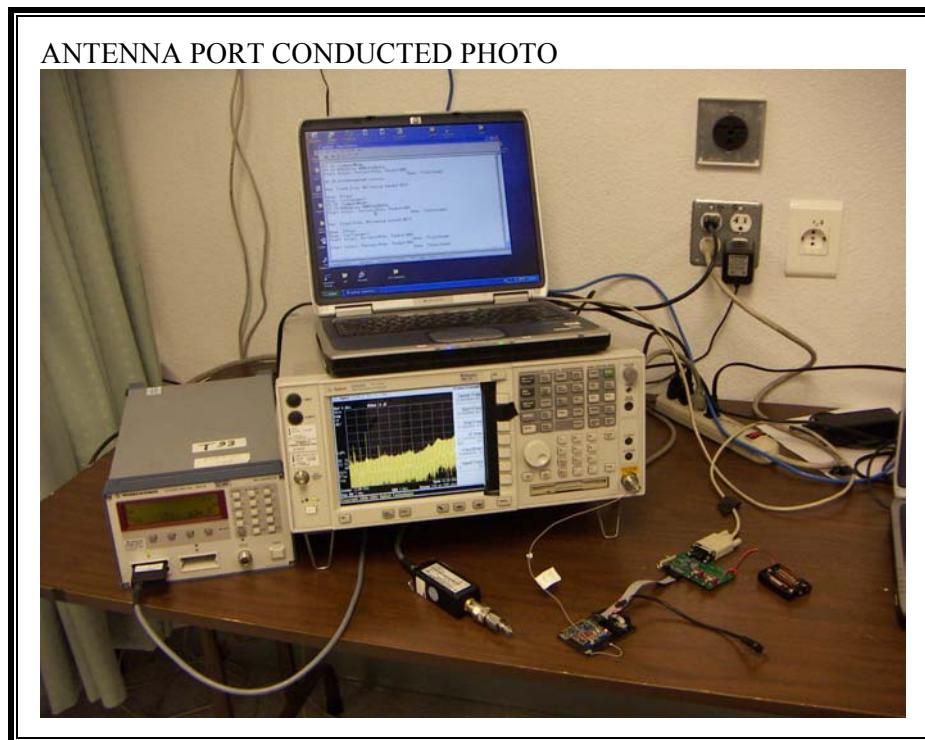


RADIATED RF MEASUREMENT SETUP FOR PORTABLE CONFIGURATION

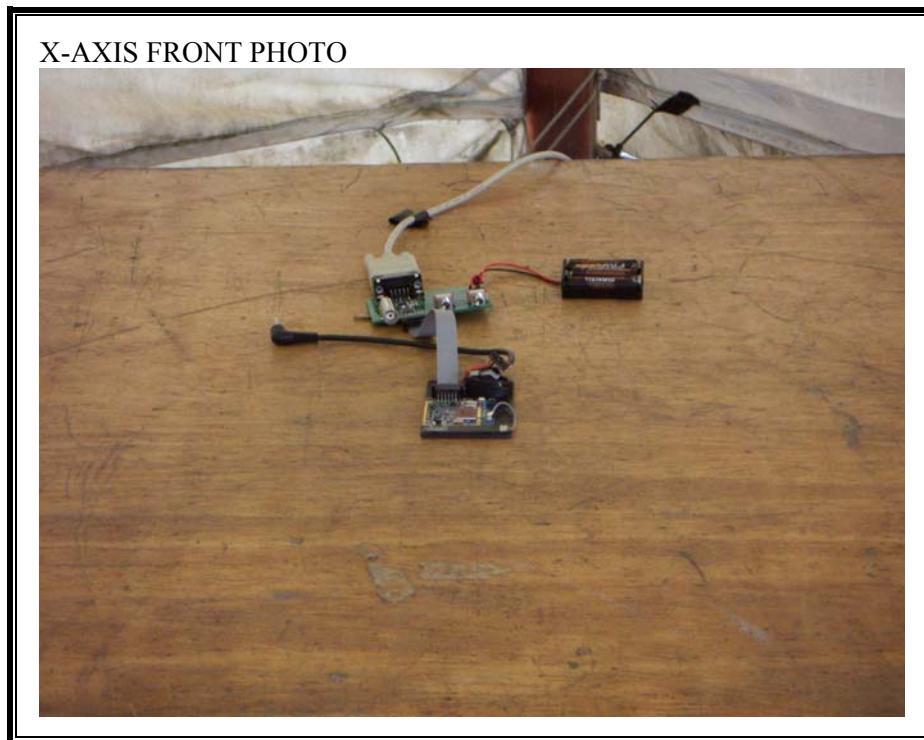


X-AXIS BACK PHOTO




Y-AXIS FRONT PHOTO

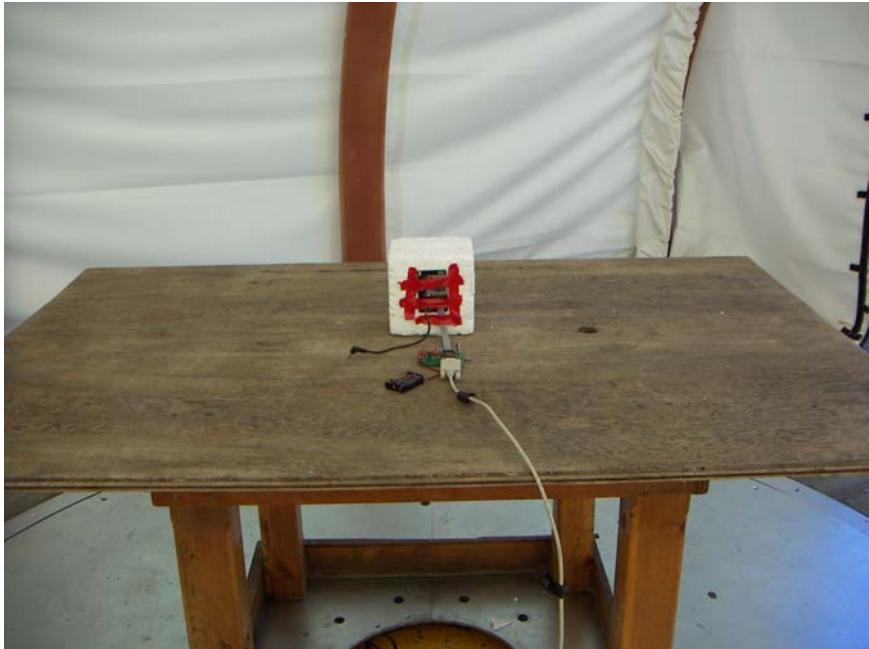


Y-AXIS BACK PHOTO

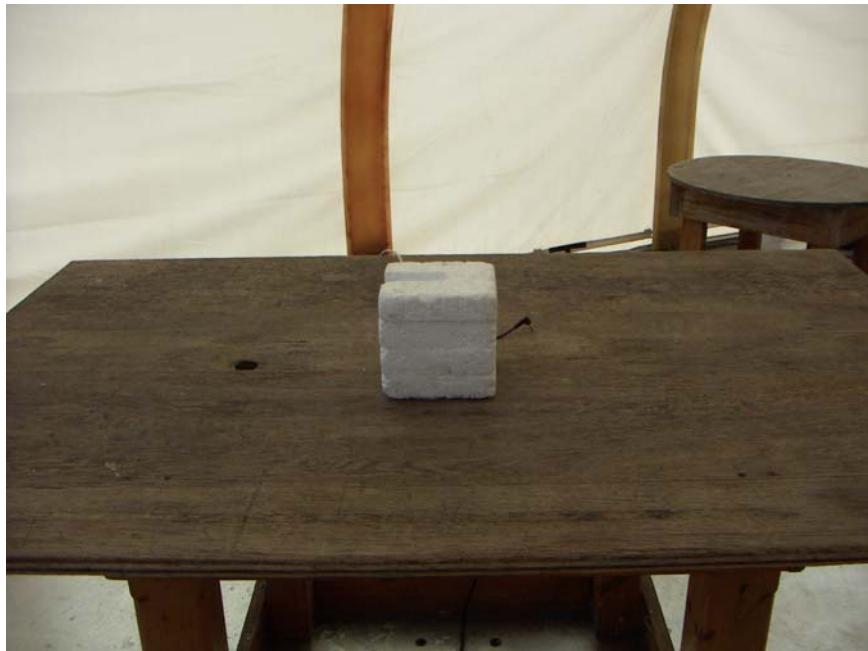

Z-AXIS FRONT PHOTO

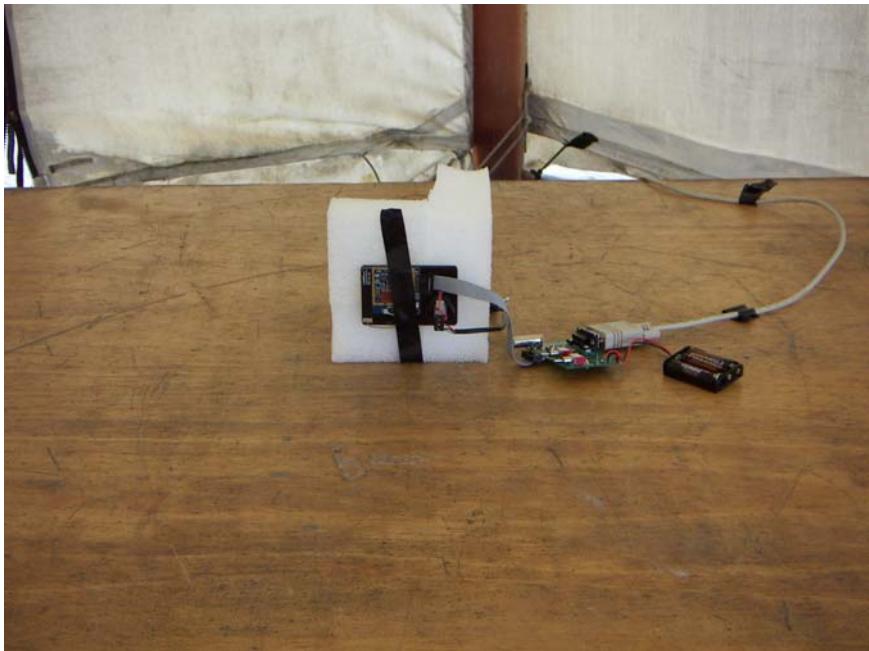

Z-AXIS BACK PHOTO

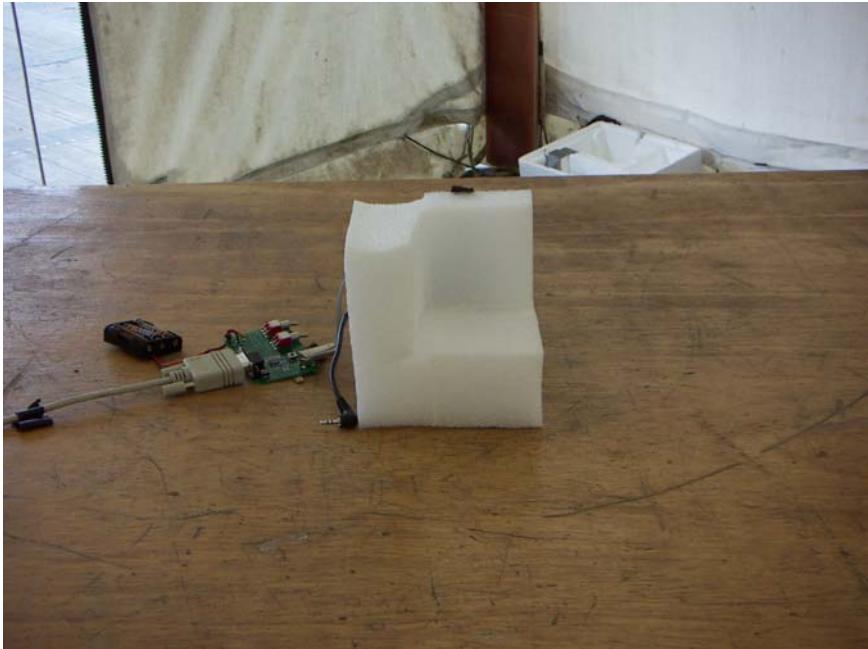

END OF REPORT