



**BUREAU
VERITAS**

Test Report No.: RF120929N002



Test Lab
Cert 2951.01

TEST REPORT

Applicant:	Chenzhou Hualu Digital Technology Co., Ltd
Address:	Export-processing Zone, Bailutang Town, Suxian District, Chenzhou, Hunan, China

Manufacturer or Supplier	Chenzhou Hualu Digital Technology Co., Ltd
Address	Export-processing Zone, Bailutang Town, Suxian District, Chenzhou, Hunan, China
Product	WiFi Share
Brand Name	hualu
Model	WD1201
Additional Model & Model Difference	N/A
Date of tests	Sep. 30 ~ Dec. 19, 2012

the tests have been carried out according to the requirements of the following standard:

☒ **FCC Part 15, Subpart C (Section 15.247)**

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Kent liu Specialist / EMC Department	Approved by Sam Tung Manager / EMC Department
	 Date: Dec. 21, 2012

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 SUMMARY OF TEST RESULTS.....	5
2 MEASUREMENT UNCERTAINTY	5
3 GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT.....	6
3.2 DESCRIPTION OF TEST MODES	7
3.2.1. CONFIGURATION OF SYSTEM UNDER TEST	8
3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	8
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.4 DESCRIPTION OF SUPPORT UNITS	11
4 TEST TYPES AND RESULTS.....	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	12
4.1.2 TEST INSTRUMENTS.....	12
4.1.3 TEST PROCEDURES	13
4.1.4 DEVIATION FROM TEST STANDARD	13
4.1.5 TEST SETUP	14
4.1.6 EUT OPERATING CONDITIONS	14
4.1.7 TEST RESULTS	15
4.2 RADIATED EMISSION MEASUREMENT.....	17
4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	17
4.2.2 TEST INSTRUMENTS.....	18
4.2.3 TEST PROCEDURES	18
4.2.4 DEVIATION FROM TEST STANDARD	18
4.2.5 TEST SETUP	18
4.2.6 EUT OPERATING CONDITIONS	18
4.2.7 TEST RESULTS	18
4.3 6dB BANDWIDTH MEASUREMENT.....	18
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	18
4.3.2 TEST INSTRUMENTS.....	18
4.3.3 TEST PROCEDURE.....	18
4.3.4 DEVIATION FROM TEST STANDARD	18
4.3.5 TEST SETUP	18



4.3.6	EUT OPERATING CONDITIONS	18
4.3.7	TEST RESULTS	18
4.4	CONDUCTED OUTPUT POWER	18
4.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	18
4.4.2	TEST SETUP	18
4.4.3	TEST INSTRUMENTS.....	18
4.4.4	TEST PROCEDURES	18
4.4.5	DEVIATION FROM TEST STANDARD	18
4.4.6	EUT OPERATING CONDITIONS	18
4.4.7	TEST RESULTS	18
4.5	POWER SPECTRAL DENSITY MEASUREMENT	18
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	18
4.5.2	TEST SETUP	18
4.5.3	TEST INSTRUMENTS.....	18
4.5.4	TEST PROCEDURE.....	18
4.5.5	DEVIATION FROM TEST STANDARD	18
4.5.6	EUT OPERATING CONDITION	18
4.5.7	TEST RESULTS	18
4.6	OUT OF BAND EMISSION MEASUREMENT	18
4.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	18
4.6.2	TEST SETUP	18
4.6.3	TEST INSTRUMENTS.....	18
4.6.4	TEST PROCEDURE.....	18
4.6.5	DEVIATION FROM TEST STANDARD	18
4.6.6	EUT OPERATING CONDITION	18
4.6.7	TEST RESULTS	18
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	18
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	18



Test Report No.: RF120929N002

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120929N002	Original release	Dec. 21, 2012



1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -8.31dB at 0.18075MHz.
15.205 15.209	Restricted bands of operation & Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -1dB at 4904MHz-802.11n
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.247(d)	Out of Band Emission Measurement	PASS	Meet the requirement of limit.

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.94dB
Radiated emissions	30MHz ~ 1GMHz	3.64dB
	1GHz ~ 18GHz	2.2dB
	18GHz ~ 40GHz	1.94dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	WiFi Share
MODEL NO.	WD1201
FCC ID	QZ2WD1201121206
NOMINAL VOLTAGE	DC 3.7V from battery or DC 5V from PC
MODULATION TECHNOLOGY	DSSS, OFDM
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11n(HT40)
PEAK POWER	19.24dBm (Maximum)
ANTENNA TYPE	PCB antenna with 2dBi gain
I/O PORTS	RJ45 port, USB port, SD port, TF port
CABLE SUPPLIED	N/A

NOTE:

1. The EUT provides one transmitter and one receiver.

MODULATION MODE	TX FUNCTION
802.11b	1TX
802.11g	1TX
802.11n (HT20)	1TX
802.11n (HT40)	1TX

2. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n(HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		



3.2.1. CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

3.2.2. TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report.

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE $\geq$ 1G	RE<1G	PLC	APCM	
A	-	√	NOTE	-	Battery mode with WIFI function
B	√	√	√	√	USB Charging mode with WIFI function

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

NOTE: No need to concern of Conducted Emission due to the EUT is powered by battery.

RADIATED EMISSION TEST (ABOVE 1GHz):

☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
B	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0	X
B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0	X
B	802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5	X
B	802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5	X

**RADIATED EMISSION TEST (BELOW 1GHz):**

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
B	802.11b	1 to 11	6	DSSS	DBPSK	1.0	X

POWER LINE CONDUCTED EMISSION TEST:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
B	802.11b	1 to 11	6	DSSS	DBPSK	1.0

BANDEDGE MEASUREMENT:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
B	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
B	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
B	802.11n HT20	1 to 11	1, 11	OFDM	BPSK	6.5
B	802.11n HT40	3 to 9	3, 9	OFDM	BPSK	13.5

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
B	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
B	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
B	802.11n HT20	1 to 11	1,6, 11	OFDM	BPSK	6.5
B	802.11n HT40	3 to 9	3,6, 9	OFDM	BPSK	13.5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE≥1G	26deg. C, 45%RH	DC 5V	Venless Long
RE<1G	25deg. C, 45%RH	DC 5V	Venless Long
PLC	23deg. C, 68%RH	DC 5V	Venless Long
APCM	25deg. C, 60%RH	DC 5V	Venless Long



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

558074 D01 DTS Meas Guidance

662911 D01 Multiple Transmitter Output

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Doc). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	DELL	5P2PM2X	12400120329	N/A
2	SD card	Kingston	K00125	KT02628	N/A
3	TF card	maxell	MX-MSDC4-4GB	944903803891	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	Signal Line: Shielded, Detachable 1.8m
2	AC Line: Shielded, Detachable 1.5m, DC Line: Shielded, Undetachable 1.8m. USB Line: Unshielded, Detachable 1.0m



4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:** 1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU 26	100005	May 15,12	May 14,13
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	May 15,12	May 14,13
Pulse Limiter	Rohde&Schwarz	ESH3-Z2	100168	May 15,12	May 14,13
Impedance Stabilization Network	TESEQ	ISN T800	27957	Oct.10,12	Oct.09,13
Test software	ADT	ADT_Conc _V7.3.7	N/A	N/A	N/A

- NOTE:** 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA and NIM/CHINA
2. The test was performed in Shielding Room 553.



4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.


NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.



4.1.5 TEST SETUP

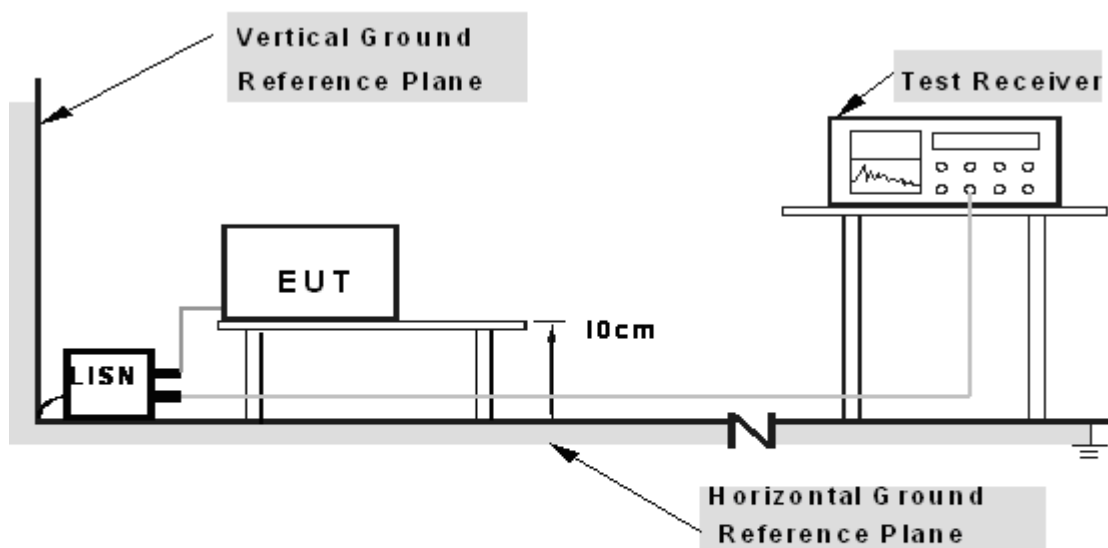

**Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80
from other units and other metal planes**

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.




4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA: 802.11b-CH6

PHASE	Line	6dB BANDWIDTH	9kHz
-------	------	---------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18075	10.54	43.13	28.03	53.67	38.57	64.45	54.45	-10.78	-15.88
2	0.24025	10.43	35.12	20.09	45.55	30.52	62.09	52.09	-16.53	-21.56
3	0.29858	10.4	27.92	13.86	38.32	24.26	60.28	50.28	-21.96	-26.02
4	3.45395	9.95	24.49	18.95	34.44	28.9	56	46	-21.56	-17.1
5	20.29432	10.3	31.13	23.61	41.43	33.91	60	50	-18.57	-16.09
6	25.04497	10.53	28.04	21.44	38.57	31.97	60	50	-21.43	-18.03

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

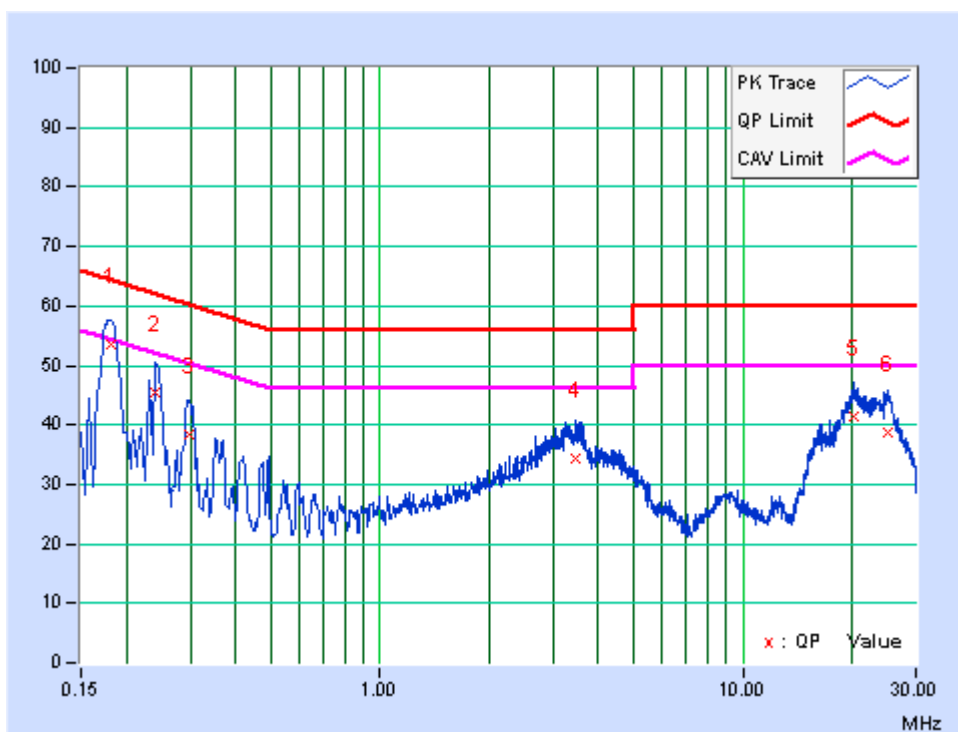




PHASE	Neutral	6dB BANDWIDTH	9kHz
--------------	---------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.18075	10.51	45.63	30.42	56.14	40.93	64.45	54.45	-8.31	-13.52
2	0.24384	10.38	37.69	21.39	48.07	31.77	61.96	51.96	-13.9	-20.2
3	0.29858	10.4	30.33	15.33	40.73	25.73	60.28	50.28	-19.56	-24.56
4	3.45395	9.64	26	19.76	35.64	29.4	56	46	-20.36	-16.6
5	20.29432	10.21	30.14	22.57	40.35	32.78	60	50	-19.65	-17.22
6	25.04497	10.53	29.08	21.7	39.61	32.23	60	50	-20.39	-17.77

- REMARKS:** 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

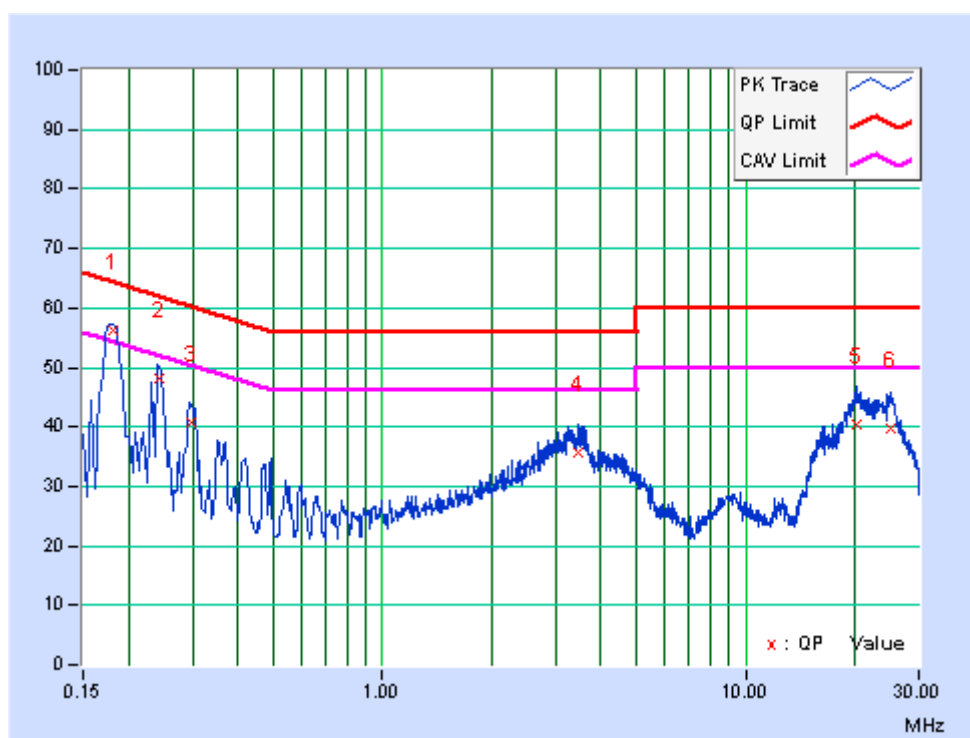



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Spectrum Analyzer ROHDE & SCHWARZ	E4446A	MY46180622	May 02, 12	May 01, 13
Test Receiver ROHDE & SCHWARZ	ESVD	847398/004	May 15,12	May 14,13
Bilog Antenna TESEQ	CBL 6111D	27089	Jul. 16,12	Jul. 15,13
Horn Antenna EMCO	3117	00062558	Oct.18,12	Oct.17,13
10m Semi-anechoic Chamber ETS-LINDGREN	21.4m*12.1m*8.8m	NSEMC006	Mar 24,12	Mar 23,13
RF Cable IMRO	IMRO-400	10m Cable 1#10m	May 16,12	May 15,13
RF Cable IMRO	IMRO-400	10m Cable 2#3m	May 16,12	May 15,13
Signal Amplifier EMCI	EMC330	980095	Nov. 2,12	Nov.1,13
Signal Amplifier HP	8449B	3008A00409	May 31,12	May 30,13
RF Cable DRAKA	M06/25-RG102	10m Cable 2#	May 16,12	May 15,13
Test software ADT	ADT_Radiated_V7.6.15	N/A	N/A	N/A

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA and NIM/CHINA.
 2. The test was performed in Chamber 10m.
 3. The horn antenna are used only for the measurement of emission frequency above 1GHz if tested.



4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation



4.2.5 TEST SETUP

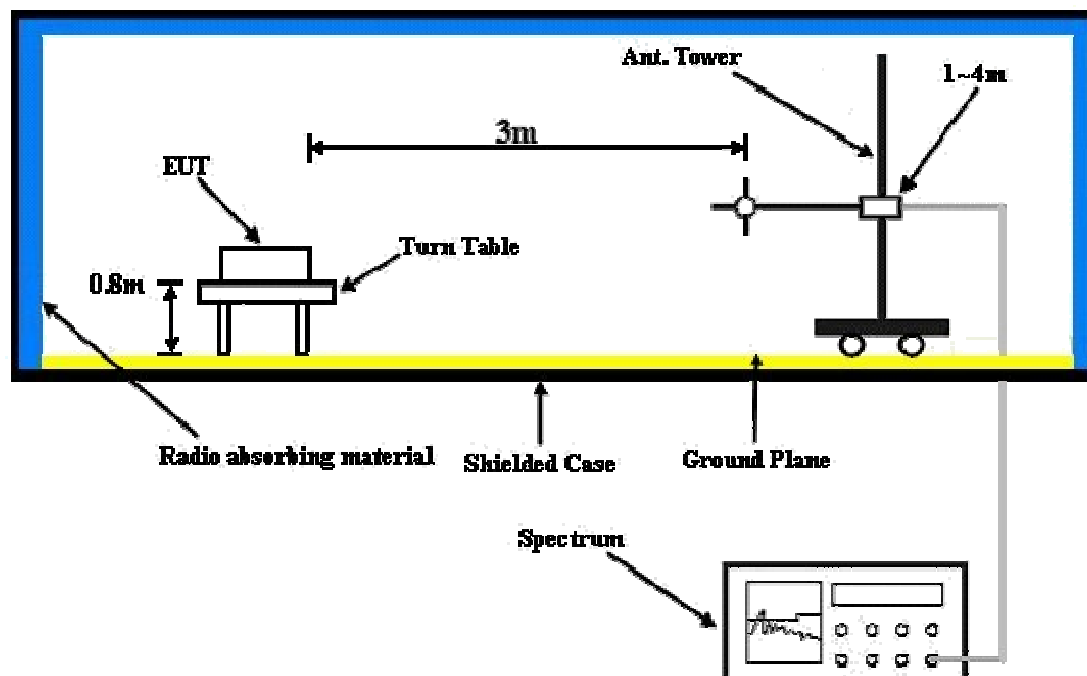

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

- Set the EUT under full load condition and placed them on a testing table.
- Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- The necessary accessories enable the EUT in full functions.



4.2.7 TEST RESULTS


BELOW 1GHz WORST-CASE DATA: 802.11b- CH6

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	97.90	32.9 QP	43.5	-10.6	1.24 H	279	22.08	10.83
2	143.17	31.2 QP	43.5	-12.3	1.58 H	259	18.60	12.61
3	185.20	28.9 QP	43.5	-14.6	1.12 H	171	18.74	10.14
4	432.55	27.9 QP	46.0	-18.1	1.83 H	241	9.11	18.75
5	775.28	38.4 QP	46.0	-7.6	1.36 H	222	13.06	25.38
6	788.22	38.9 QP	46.0	-7.1	1.97 H	202	13.55	25.38

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

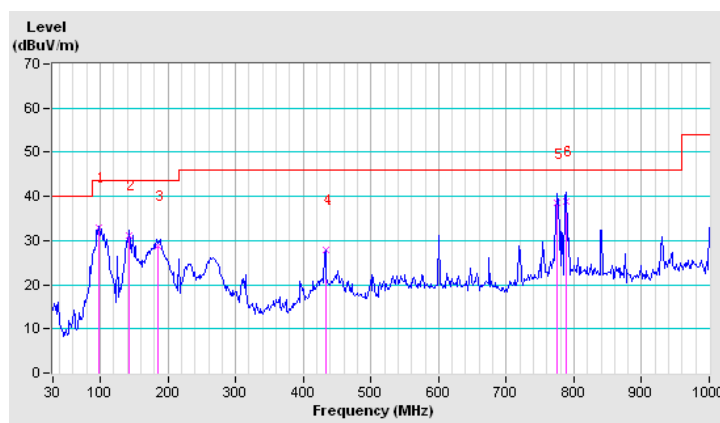




CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	185.20	32.5 QP	43.5	-11.0	1.00 V	0	22.32	10.14
2	264.42	29.9 QP	46.0	-16.2	1.00 V	0	14.77	15.08
3	576.43	36.5 QP	46.0	-9.5	1.00 V	11	14.12	22.38
4	600.68	36.1 QP	46.0	-9.9	1.00 V	37	13.44	22.63
5	775.28	42.0 QP	46.0	-4.0	1.00 V	0	16.62	25.38
6	788.22	41.2 QP	46.0	-4.9	1.00 V	0	15.77	25.38

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.

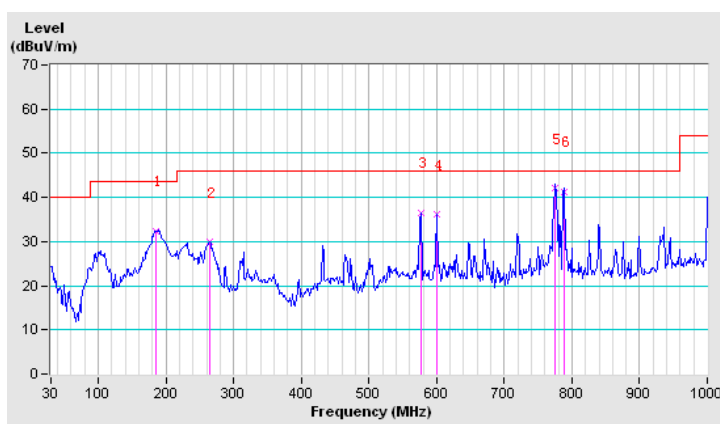



ABOVE 1GHz DATA

802.11b

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	60.0 PK	74.0	-14.0	1.00 H	8	23.59	36.41
2	2390.00	47.4 AV	54.0	-6.6	1.00 H	8	10.99	36.41
3	*2412.00	111.9 PK	-	-	1.00 H	80	75.29	36.61
4	*2412.00	107.6 AV	-	-	1.00 H	80	70.99	36.61
5	4824.00	58.8 PK	74.0	-15.2	1.00 H	240	9.55	49.25
6	4824.00	49.8 AV	54.0	-4.2	1.00 H	240	0.55	49.25
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.2 PK	74.0	-16.8	1.00 V	299	20.79	36.41
2	2390.00	44.1 AV	54.0	-9.9	1.00 V	299	7.69	36.41
3	*2412.00	102.3 PK	-	-	1.00 V	299	65.69	36.61
4	*2412.00	98.6 AV	-	-	1.00 V	299	61.99	36.61
5	4824.00	61.5 PK	74.0	-12.5	1.00 V	184	12.25	49.25
6	4824.00	52.7 AV	54.0	-1.3	1.00 V	184	3.45	49.25

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	112.1 PK	-	-	1.02 H	10	75.27	36.83
2	*2437.00	107.6 AV	-	-	1.02 H	10	70.77	36.83
3	4874.00	58.6 PK	74.0	-15.4	1.00 H	92	9.36	49.24
4	4874.00	49.6 AV	54.0	-4.4	1.00 H	92	0.36	49.24
5	7311.00	58.3 PK	74.0	-15.7	1.00 H	180	11.70	46.60
6	7311.00	44.7 AV	54.0	-9.3	1.00 H	180	-1.90	46.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.9 PK	-	-	1.02 V	286	66.07	36.83
2	*2437.00	99.0 AV	-	-	1.02 V	286	62.17	36.83
3	4874.00	61.9 PK	74.0	-12.1	1.00 V	120	12.66	49.24
4	4874.00	51.3 AV	54.0	-2.7	1.00 V	120	2.06	49.24
5	7311.00	57.5 PK	74.0	-16.5	1.00 V	360	10.90	46.60
6	7311.00	44.8 AV	54.0	-9.2	1.00 V	360	-1.80	46.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	111.7 PK	-	-	1.00 H	23	74.65	37.05
2	*2462.00	107.4 AV	-	-	1.00 H	23	70.35	37.05
3	2483.50	70.7 PK	74.0	-3.3	1.00 H	240	33.46	37.24
4	2483.50	51.6 AV	54.0	-2.4	1.00 H	240	14.36	37.24
5	4924.00	59.0 PK	74.0	-15.0	1.03 H	320	9.78	49.22
6	4924.00	50.0 AV	54.0	-4.0	1.00 H	360	0.78	49.22
7	7386.00	58.4 PK	74.0	-15.6	1.02 H	183	11.74	46.66
8	7386.00	45.1 AV	54.0	-8.9	1.02 H	183	-1.56	46.66
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.6 PK	-	-	1.00 V	270	66.55	37.05
2	*2462.00	99.4 AV	-	-	1.00 V	270	62.35	37.05
3	2483.50	58.3 PK	74.0	-15.7	1.05 V	352	21.06	37.24
4	2483.50	45.3 AV	54.0	-8.7	1.05 V	352	8.06	37.24
5	4924.00	56.6 PK	74.0	-17.4	1.00 V	360	7.38	49.22
6	4924.00	48.2 AV	54.0	-5.8	1.00 V	360	-1.02	49.22
7	7386.00	58.3 PK	74.0	-15.7	1.05 V	350	11.64	46.66
8	7386.00	45.3 AV	54.0	-8.7	1.05 V	350	-1.36	46.66

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.0 PK	74.0	-3.0	1.00 H	210	34.59	36.41
2	2390.00	49.0 AV	54.0	-5.0	1.00 H	210	12.59	36.41
3	*2412.00	106.7 PK	-	-	1.00 H	39	70.09	36.61
4	*2412.00	98.1 AV	-	-	1.00 H	39	61.49	36.61
5	4824.00	60.2 PK	74.0	-13.8	1.00 H	320	10.95	49.25
6	4824.00	50.1 AV	54.0	-3.9	1.00 H	320	0.85	49.25
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	63.1 PK	74.0	-10.9	1.00 V	290	26.69	36.41
2	2390.00	44.8 AV	54.0	-9.2	1.00 V	290	8.39	36.41
3	*2412.00	100.0 PK	-	-	1.00 V	295	63.39	36.61
4	*2412.00	90.6 AV	-	-	1.00 V	295	53.99	36.61
5	4824.00	60.2 PK	74.0	-13.8	1.00 V	160	10.95	49.25
6	4824.00	52.3 AV	54.0	-1.7	1.00 V	160	3.05	49.25

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.6 PK	-	-	1.05 H	230	68.77	36.83
2	*2437.00	97.7 AV	-	-	1.05 H	230	60.87	36.83
3	4874.00	61.3 PK	74.0	-12.7	1.06 H	150	12.06	49.24
4	4874.00	51.4 AV	54.0	-2.6	1.06 H	150	2.16	49.24
5	7311.00	57.7 PK	74.0	-16.3	1.10 H	320	11.10	46.60
6	7311.00	46.3 AV	54.0	-7.7	1.10 H	320	-0.30	46.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.3 PK	-	-	1.00 V	260	64.47	36.83
2	*2437.00	91.2 AV	-	-	1.00 V	260	54.37	36.83
3	4874.00	61.4 PK	74.0	-12.6	1.05 V	24	12.16	49.24
4	4874.00	52.7 AV	54.0	-1.3	1.05 V	24	3.46	49.24
5	7311.00	57.6 PK	74.0	-16.4	1.04 V	230	11.00	46.60
6	7311.00	47.6 AV	54.0	-6.4	1.04 V	230	1.00	46.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.2 PK	-	-	1.02 H	230	67.15	37.05
2	*2462.00	98.2 AV	-	-	1.02 H	230	61.15	37.05
3	2483.50	71.3 PK	74.0	-2.7	1.00 H	20	34.06	37.24
4	2483.50	51.8 AV	54.0	-2.2	1.00 H	20	14.56	37.24
5	4924.00	60.3 PK	74.0	-13.7	1.10 H	220	11.08	49.22
6	4924.00	50.8 AV	54.0	-3.2	1.10 H	220	1.58	49.22
7	7386.00	59.8 PK	74.0	-14.2	1.08 H	210	13.14	46.66
8	7386.00	48.9 AV	54.0	-5.1	1.08 H	210	2.24	46.66
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	99.8 PK	-	-	1.05 V	245	62.75	37.05
2	*2462.00	91.7 AV	-	-	1.05 V	245	54.65	37.05
3	2483.50	58.1 PK	74.0	-15.9	1.21 V	330	20.86	37.24
4	2483.50	45.6 AV	54.0	-8.4	1.21 V	330	8.36	37.24
5	4924.00	60.4 PK	74.0	-13.6	1.04 V	326	11.18	49.22
6	4924.00	52.0 AV	54.0	-2.0	1.04 V	326	2.78	49.22
7	7386.00	57.1 PK	74.0	-16.9	1.19 V	340	10.44	46.66
8	7386.00	44.9 AV	54.0	-9.1	1.19 V	340	-1.76	46.66

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



BUREAU VERITAS Test Report No.: RF120929N002

802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.6 PK	74.0	-5.4	1.00 H	240	32.19	36.41
2	2390.00	51.5 AV	54.0	-2.5	1.00 H	240	15.09	36.41
3	*2412.00	102.9 PK	-	-	1.07 H	315	66.29	36.61
4	*2412.00	95.2 AV	-	-	1.07 H	315	58.59	36.61
5	4824.00	60.2 PK	74.0	-13.8	1.00 H	290	10.95	49.25
6	4824.00	51.0 AV	54.0	-3.0	1.00 H	290	1.75	49.25
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.9 PK	74.0	-16.1	1.04 V	260	21.49	36.41
2	2390.00	45.2 AV	54.0	-8.8	1.04 V	260	8.79	36.41
3	*2412.00	95.4 PK	-	-	1.00 V	124	58.79	36.61
4	*2412.00	86.8 AV	-	-	1.00 V	124	50.19	36.61
5	4824.00	60.6 PK	74.0	-13.4	1.04 V	214	11.35	49.25
6	4824.00	52.7 AV	54.0	-1.3	1.04 V	214	3.45	49.25

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.9 PK	-	-	1.06 H	245	65.07	36.83
2	*2437.00	94.2 AV	-	-	1.06 H	245	57.37	36.83
3	4874.00	58.9 PK	74.0	-15.1	1.00 H	230	9.66	49.24
4	4874.00	49.7 AV	54.0	-4.3	1.00 H	230	0.46	49.24
5	7311.00	60.0 PK	74.0	-14.0	1.04 H	140	13.40	46.60
6	7311.00	46.5 AV	54.0	-7.5	1.04 H	140	-0.10	46.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	95.6 PK	-	-	1.00 V	150	58.77	36.83
2	*2437.00	87.5 AV	-	-	1.00 V	150	50.67	36.83
3	4874.00	59.9 PK	74.0	-14.1	2.20 V	320	10.66	49.24
4	4874.00	52.5 AV	54.0	-1.5	2.20 V	320	3.26	49.24
5	7311.00	57.9 PK	74.0	-16.1	1.05 V	340	11.30	46.60
6	7311.00	44.6 AV	54.0	-9.4	1.05 V	340	-2.00	46.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.0 PK	-	-	1.06 H	310	65.95	37.05
2	*2462.00	95.4 AV	-	-	1.06 H	310	58.35	37.05
3	2483.50	70.9 PK	74.0	-3.1	1.01 H	210	33.66	37.24
4	2483.50	51.6 AV	54.0	-2.4	1.01 H	210	14.36	37.24
5	4924.00	59.5 PK	74.0	-14.5	1.00 H	310	10.28	49.22
6	4924.00	50.7 AV	54.0	-3.3	1.00 H	310	1.48	49.22
7	7386.00	59.4 PK	74.0	-14.6	1.00 H	360	12.74	46.66
8	7386.00	45.8 AV	54.0	-8.2	1.00 H	360	-0.86	46.66
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	94.5 PK	-	-	1.00 V	110	57.45	37.05
2	*2462.00	86.3 AV	-	-	1.00 V	110	49.25	37.05
3	2483.50	57.7 PK	74.0	-16.3	1.24 V	360	20.46	37.24
4	2483.50	45.2 AV	54.0	-8.8	1.24 V	360	7.96	37.24
5	4924.00	60.6 PK	74.0	-13.4	1.00 V	210	11.38	49.22
6	4924.00	52.7 AV	54.0	-1.3	1.00 V	210	3.48	49.22
7	7386.00	59.0 PK	74.0	-15.0	1.00 V	320	12.34	46.66
8	7386.00	45.6 AV	54.0	-8.4	1.00 V	320	-1.06	46.66

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



BUREAU VERITAS Test Report No.: RF120929N002

802.11n (40MHz)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	68.3 PK	74.0	-5.7	1.00 H	230	31.89	36.41
2	2390.00	51.1 AV	54.0	-2.9	1.00 H	230	14.69	36.41
3	*2422.00	103.0 PK	-	-	1.05 H	320	66.30	36.70
4	*2422.00	95.1 AV	-	-	1.05 H	320	58.40	36.70
5	4844.00	58.8 PK	74.0	-15.2	1.00 H	360	9.56	49.24
6	4844.00	49.9 AV	54.0	-4.1	1.00 H	360	0.66	49.24
7	7266.00	59.2 PK	74.0	-14.8	1.04 H	125	12.63	46.57
8	7266.00	45.6 AV	54.0	-8.4	1.04 H	125	-0.97	46.57
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.9 PK	74.0	-16.1	1.06 V	54	21.49	36.41
2	2390.00	45.6 AV	54.0	-8.4	1.06 V	54	9.19	36.41
3	*2422.00	94.7 PK	-	-	1.00 V	120	58.00	36.70
4	*2422.00	86.4 AV	-	-	1.00 V	120	49.70	36.70
5	4844.00	60.6 PK	74.0	-13.4	1.00 V	220	11.36	49.24
6	4844.00	52.5 AV	54.0	-1.5	1.00 V	220	3.26	49.24
7	7266.00	58.7 PK	74.0	-15.3	1.04 V	340	12.13	46.57
8	7266.00	45.2 AV	54.0	-8.8	1.04 V	340	-1.37	46.57

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.6 PK	-	-	1.12 H	298	65.77	36.83
2	*2437.00	94.7 AV	-	-	1.12 H	298	57.87	36.83
3	4874.00	59.6 PK	74.0	-14.4	1.00 H	330	10.36	49.24
4	4874.00	50.2 AV	54.0	-3.8	1.00 H	330	0.96	49.24
5	7311.00	59.8 PK	74.0	-14.2	1.00 H	210	13.20	46.60
6	7311.00	46.4 AV	54.0	-7.6	1.00 H	210	-0.20	46.60
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	95.3 PK	-	-	1.00 V	110	58.47	36.83
2	*2437.00	87.2 AV	-	-	1.00 V	110	50.37	36.83
3	4874.00	60.1 PK	74.0	-13.9	1.00 V	220	10.86	49.24
4	4874.00	42.6 AV	54.0	-11.4	1.00 V	220	-6.64	49.24
5	7311.00	58.6 PK	74.0	-15.4	1.02 V	330	12.00	46.60
6	7311.00	45.0 AV	54.0	-9.0	1.02 V	330	-1.60	46.60

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	102.5 PK	-	-	1.10 H	306	65.54	36.96
2	*2452.00	95.0 AV	-	-	1.10 H	306	58.04	36.96
3	2483.50	70.8 PK	74.0	-3.2	1.00 H	145	33.56	37.24
4	2483.50	51.8 AV	54.0	-2.2	1.00 H	145	14.56	37.24
5	4904.00	59.6 PK	74.0	-14.4	1.00 H	320	10.37	49.23
6	4904.00	50.4 AV	54.0	-3.6	1.00 H	320	1.17	49.23
7	7356.00	59.4 PK	74.0	-14.6	1.03 H	360	12.77	46.63
8	7356.00	45.9 AV	54.0	-8.1	1.03 H	360	-0.73	46.63
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	95.2 PK	-	-	1.00 V	112	58.24	36.96
2	*2452.00	86.8 AV	-	-	1.00 V	112	49.84	36.96
3	2483.50	57.9 PK	74.0	-16.1	1.20 V	360	20.66	37.24
4	2483.50	45.6 AV	54.0	-8.4	1.20 V	360	8.36	37.24
5	4904.00	60.8 PK	74.0	-13.2	1.01 V	210	11.57	49.23
6	4904.00	53.0 AV	54.0	-1.0	1.01 V	210	3.77	49.23
7	7356.00	58.7 PK	74.0	-15.3	1.03 V	320	12.07	46.63
8	7356.00	45.2 AV	54.0	-8.8	1.03 V	320	-1.43	46.63

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Spectrum Analyzer Agilent	E7405A	MY45118807	May 15,12	May 14,13

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA and NIM/CHINA

2. The test was performed in Dongguan RF Chamber.

4.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100KHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.



4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	10.18	0.5	PASS
6	2437	10.18	0.5	PASS
11	2462	10.19	0.5	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.43	0.5	PASS
6	2437	16.45	0.5	PASS
11	2462	16.45	0.5	PASS

**802.11n (20MHz)**

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.69	0.5	PASS
6	2437	17.68	0.5	PASS
11	2462	17.67	0.5	PASS

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
3	2422	36.06	0.5	PASS
6	2437	35.95	0.5	PASS
9	2452	35.97	0.5	PASS




4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

4.4.2 TEST SETUP

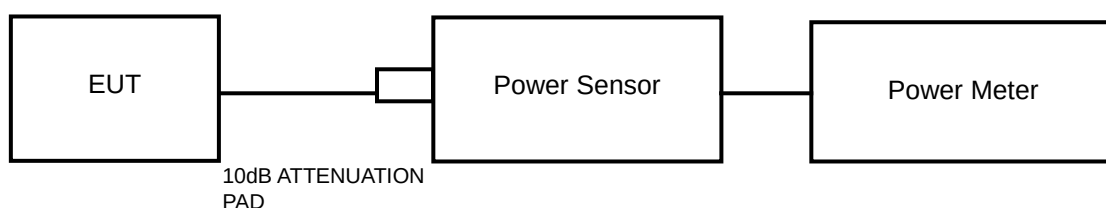

4.4.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Power Meter Anritsu	ML2495A	1139001	Nov. 04,12	Nov. 03,13

4.4.4 TEST PROCEDURES

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

Same as item 4.3.6.



4.4.7 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	15.57	30	PASS
6	2437	16.39	30	PASS
11	2462	17.64	30	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	16.34	30	PASS
6	2437	18.64	30	PASS
11	2462	19.24	30	PASS

802.11n (20MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	POWER LIMIT (dBm)	PASS/FAIL
1	2412	17.37	30	PASS
6	2437	18.84	30	PASS
11	2462	19.15	30	PASS

802.11n (40MHz)

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	POWER LIMIT (dBm)	PASS/FAIL
3	2422	16.17	30	PASS
6	2437	16.65	30	PASS
9	2452	16.66	30	PASS




4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

4.5.2 TEST SETUP



4.5.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

1. Set the RBW = 3 kHz, VBW = 10 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum amplitude level.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

Same as item 4.3.6



4.5.7 TEST RESULTS

802.11b

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-12.80	8	PASS
6	2437	-12.13	8	PASS
11	2462	-11.75	8	PASS

802.11g

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-20.00	8	PASS
6	2437	-19.47	8	PASS
11	2462	-18.99	8	PASS

802.11n (20MHz)

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-21.46	8	PASS
6	2437	-20.83	8	PASS
11	2462	-20.30	8	PASS

802.11n (40MHz)

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
3	2422	-25.27	8	PASS
6	2437	-25.34	8	PASS
9	2452	-25.38	8	PASS




4.6 OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP

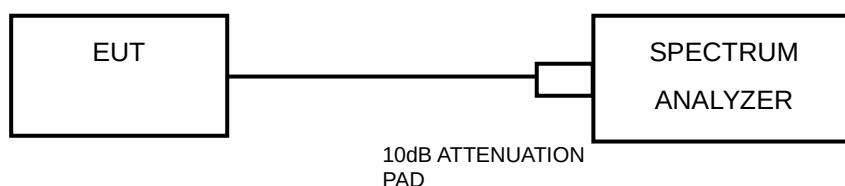

4.6.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW $\geq$ 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW $\geq$ 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.

4.6.6 EUT OPERATING CONDITION

Same as item 4.3.6




BUREAU
VERITAS

Test Report No.: RF120929N002


4.6.7 TEST RESULTS

802.11b


CH 1

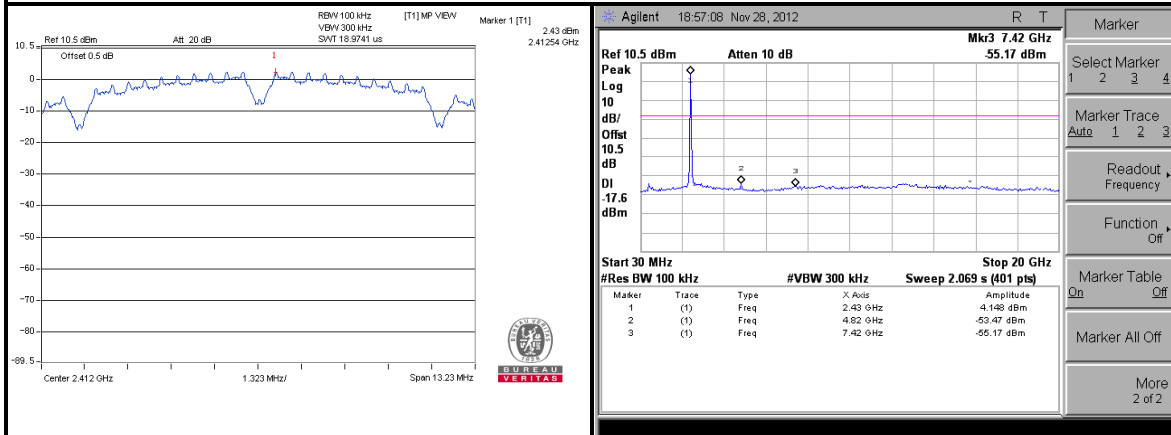

CH 6

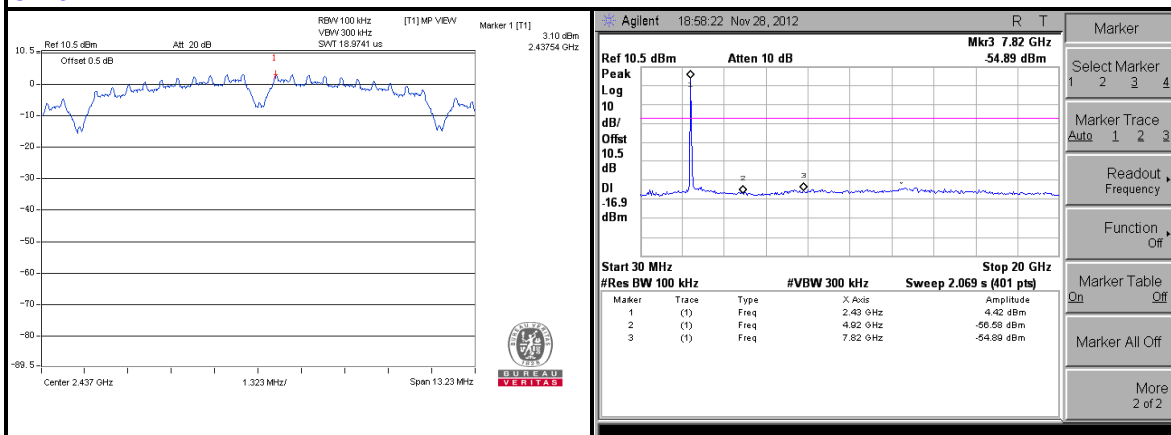

CH 11

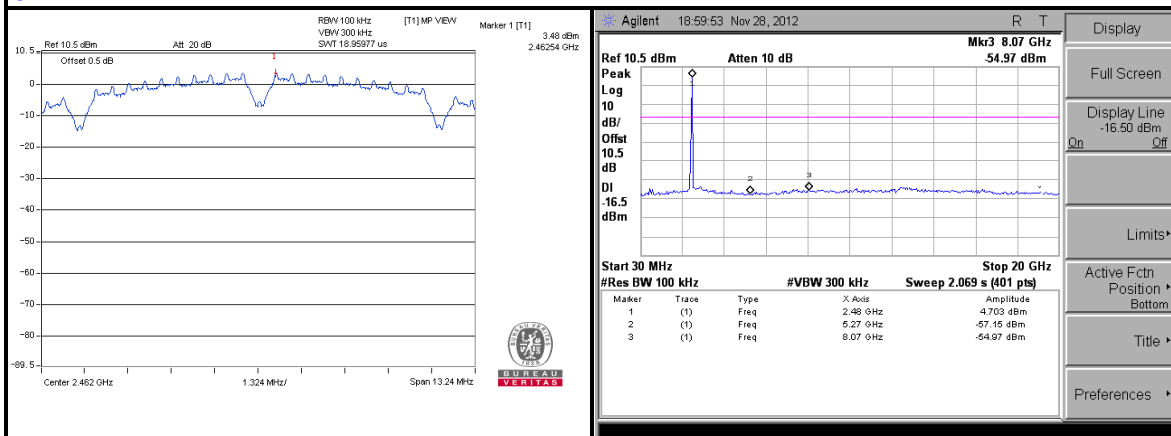





BUREAU
VERITAS



Test Report No.: RF120929N002

802.11g



CH 1

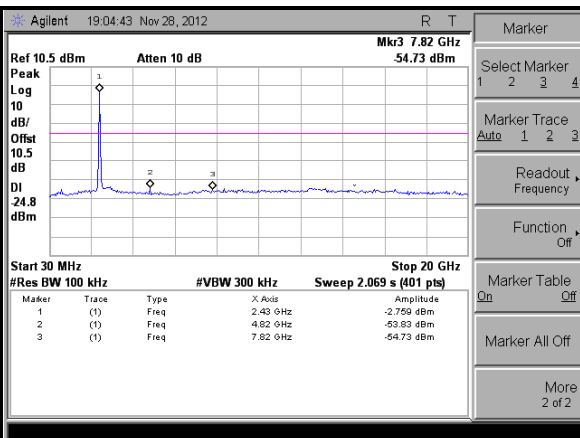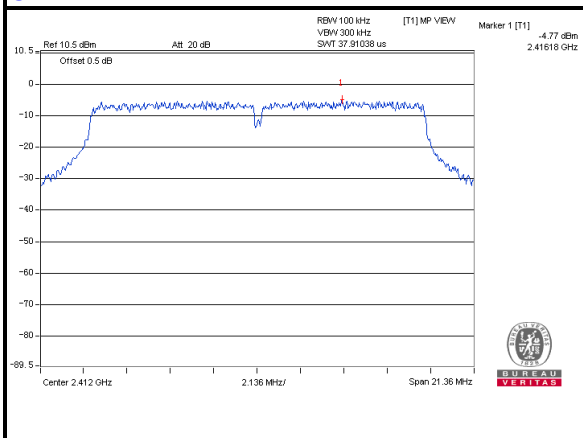

CH 6

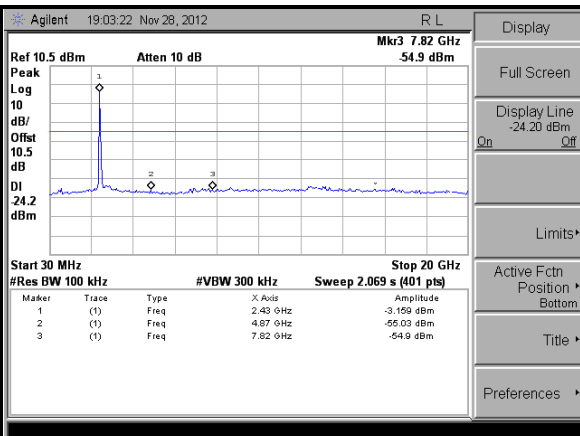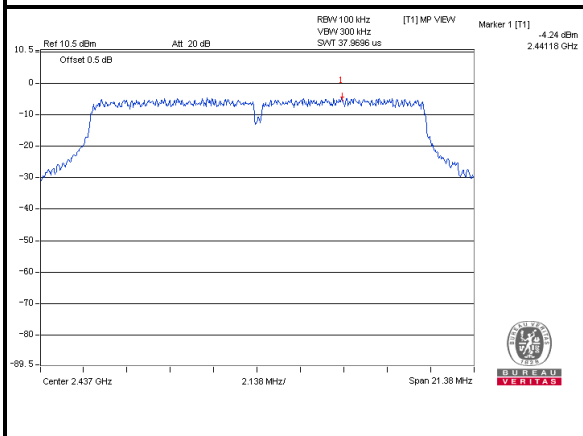

CH 11

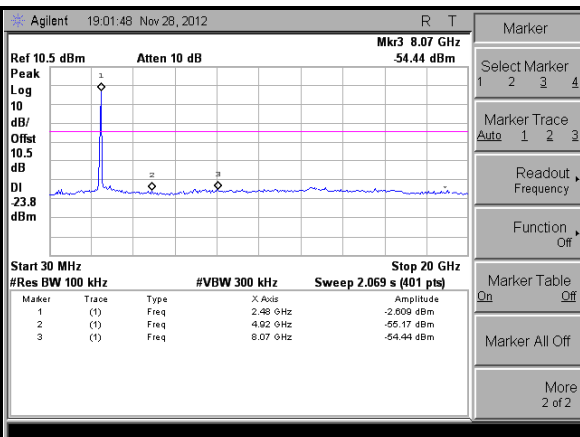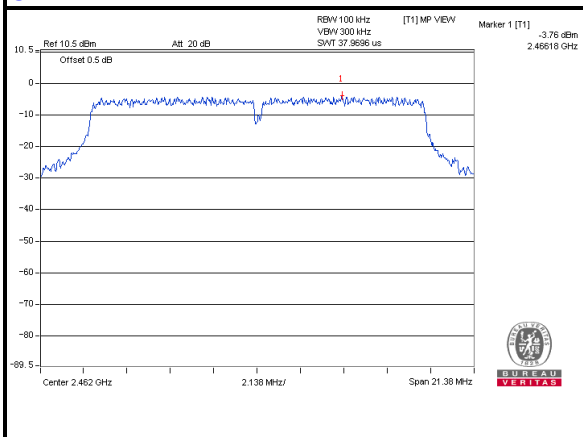




BUREAU
VERITAS

Test Report No.: RF120929N002

802.11n (20MHz)

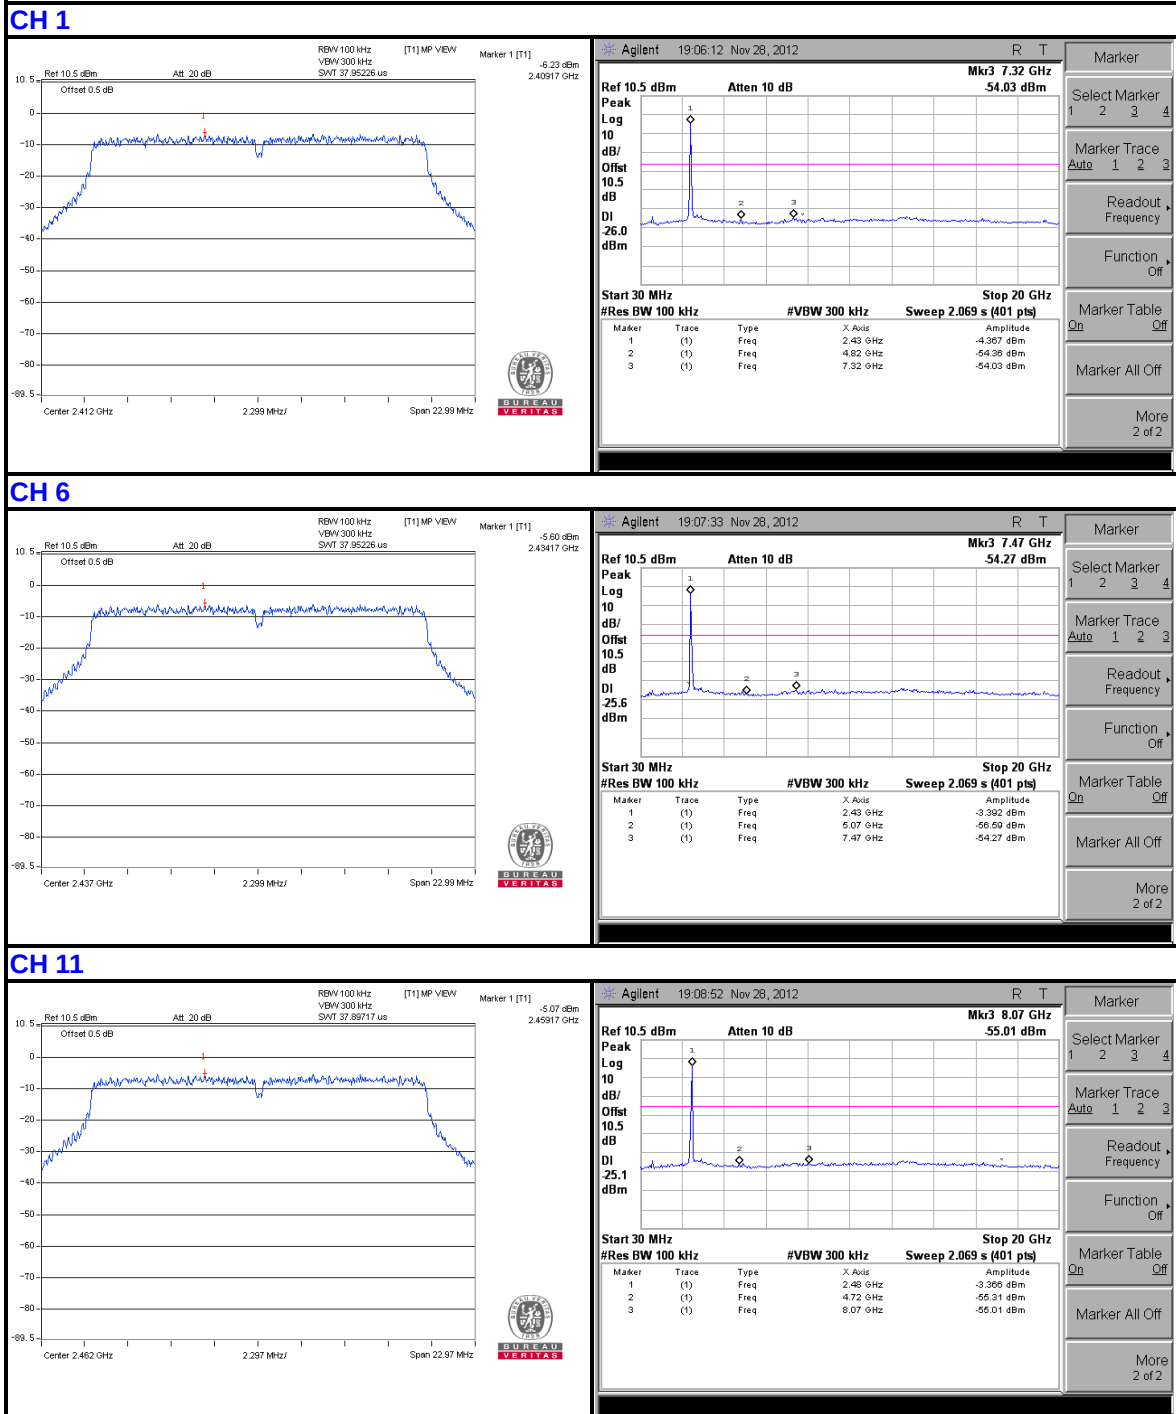





BUREAU
VERITAS



Test Report No.: RF120929N002

802.11n (40MHz)



CH 3

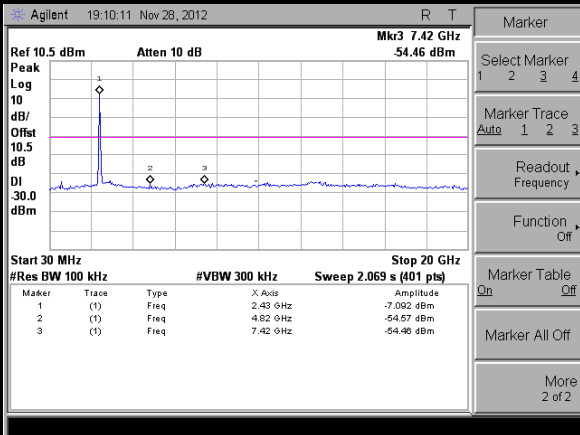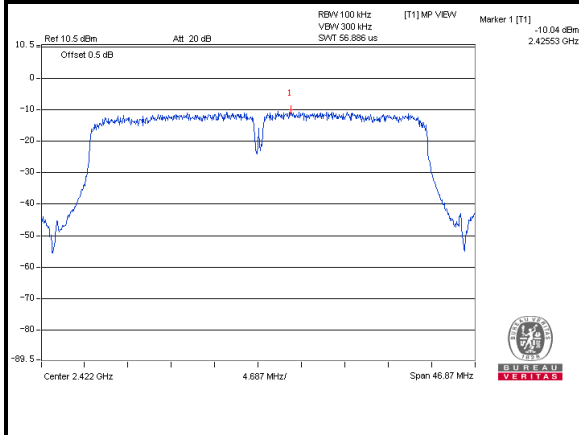

CH 6

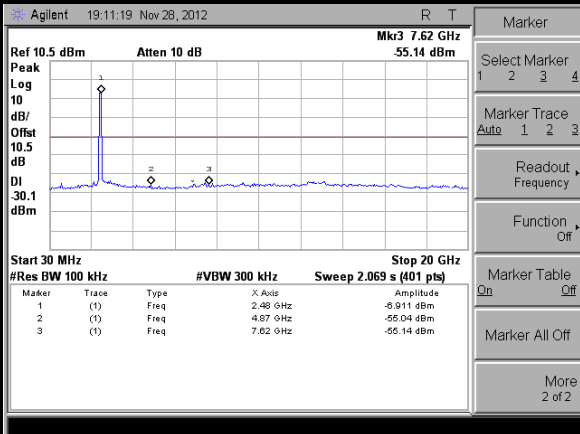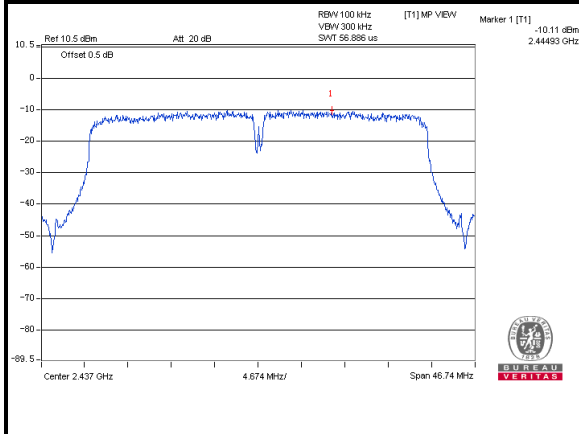

CH 9

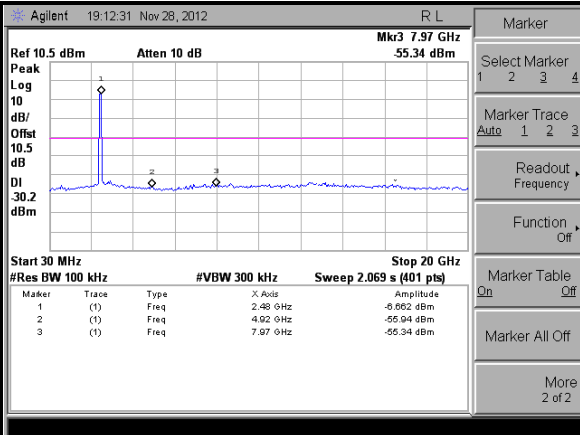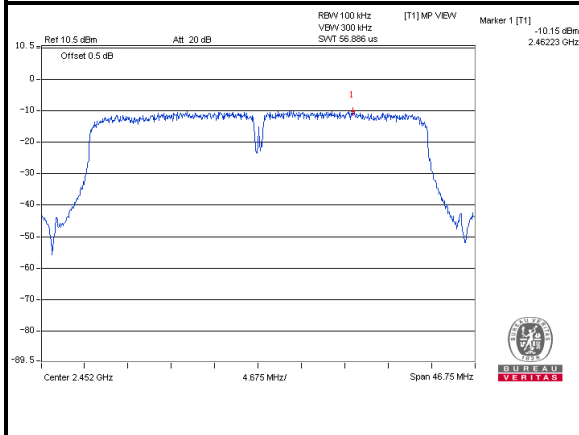



Test Report No.: RF120929N002

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---