

Electromagnetic Compatibility Test Report

Prepared in accordance with

FCC Part 15C, RSS-210 Issue 7

On

Gas Meter

EA2G

**Elster Solutions, LLC
208 South Rogers Lane
Raleigh, NC 27610**

Prepared by:

TUV Rheinland of North America, Inc.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Report No.:
31052582.001 Revision A
Page 2 of 41

Client:	Elster Solutions, LLC 208 South Rogers Lane Raleigh, NC 27610	John Holt 919-250-5557 / 919-250-5486 john.holt@us.elster.com
Identification:	Gas Meter	Serial No.: Production Sample
Test item:	EA2G	Date tested: 08 September 2010
Testing location:	TUV Rheinland of North America 762 Park Avenue Youngsville, NC 27596-9470 U.S.A.	
Test specification:	Emissions: FCC Part 15, Subpart C, RSS-210 Issue 7: FCC Part 15.207(a) and RSS-210 FCC Parts 15.205, 15.209, 15.215(c), RSS-210 FCC Part 15.247(a)(1)(i) and RSS-210 A1.1.3, FCC Part 15.247 and RSS-210 Annex 8, FCC Part 15.247(a)(1)(i), RSS-210, Section A8.1 and Section A1.1.3, FCC Part 15.247(a)(1) and RSS-210 A8.1(c), FCC Part 15.247(b)(2) and RSS-210 A8.4(1), FCC Part 15.247(g) and RSS-210 A8.1, FCC Part 15.247(h) and RSS-210 A8.1, FCC Parts 15.109(a) and ICES-003 and FCC Part 15.107(a) and ICES-003	
Test Result	The above product was found to be Compliant to the above test standard(s)	
tested by: Mark Ryan	reviewed by: Bob Richards	
 <u>24 Sep 2010</u> <i>Signature</i>	<u>24 Sep 2010</u> <i>Signature</i>	
Other Aspects:	None	
Abbreviations: OK, Pass, Compliant, Complies = passed Fail, Not Compliant, Does Not Comply = failed N/A = not applicable		
 90552 and 100881	 NVLAP Lab Code (200094-0)	Industry Canada IC-2932H

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

TABLE OF CONTENTS

1 GENERAL INFORMATION	4
1.1 SCOPE	4
1.2 PURPOSE	4
1.3 SUMMARY OF TEST RESULTS	5
2 LABORATORY INFORMATION	6
2.1 ACCREDITATIONS AND ENDORSEMENTS	6
2.2 MEASUREMENT UNCERTAINTY EMISSIONS	7
2.3 CALIBRATION TRACEABILITY	7
2.4 MEASUREMENT EQUIPMENT USED	8
3 PRODUCT INFORMATION	9
3.1 PRODUCT DESCRIPTION	9
3.2 EQUIPMENT MODIFICATIONS	9
4 SPURIOUS EMISSIONS	10
4.1 SPURIOUS EMISSIONS OUTSIDE THE BAND	10
4.1 CONDUCTED EMISSIONS IN TRANSMIT MODE	17
4.2 FREQUENCY HOPPING SPREAD SPECTRUM (FHSS) SYSTEMS FCC PART 15.247(G)	18
4.3 INCORPORATION OF INTELLIGENCE WITHIN A FHSS SYSTEM FCC PART 15.247(H)	18
5 ANTENNA PORT CONDUCTED EMISSIONS	19
5.1 CHANNEL SEPARATION	19
5.2 PSEUDORANDOM HOPPING ALGORITHM	21
5.3 OCCUPIED BANDWIDTH	26
5.4 99% POWER BANDWIDTH	29
5.5 BAND EDGE	31
5.6 PEAK OUTPUT POWER	34
6 EMISSIONS IN RECEIVE MODE	36
6.1 RADIATED EMISSIONS	36
6.2 CONDUCTED EMISSIONS	41

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

1 General Information

1.1 Scope

This report is intended to document the status of conformance with the requirements of the FCC Part 15C, RSS-210 Issue 7 based on the results of testing performed on 08 September 2010 on the Gas Meter, Model No. EA2G, manufactured by Elster Solutions, LLC. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT (Equipment Under Test) in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

1.3 Summary of Test Results

Applicant	Elster Solutions, LLC 208 South Rogers Lane Raleigh, NC 27610	Tel	919-250-5557	Contact	John Holt
		Fax	919-250-5486	e-mail	john.holt@us.elster.com
Description	Gas Meter	Model Number	EA2G		
Serial Number	Production Sample	Test Voltage/Freq.	3.6V DC Battery		
Test Date Completed:	08 September 2010	Test Engineer	Mark Ryan		
Standards	Description	Severity Level or Limit		Worst-Case	Test Result
FCC Part 15, Subpart C Standard	Radio Frequency Devices-Subpart C: Intentional Radiators	See called out basic standards below		See Below	Complies
RSS-210 Issue 7 Standard	Low-Power Licence-exempt Radiocommunication Devices Category I Equipment	See called out basic standards below		See Below	Complies
FCC Parts 15.205, 15.209, 15.215(c), RSS-210	Radiated Emissions EUT in Transmit Mode	Below limit of sections 15.205, 15.209(a) and 15.215(c)		68.01 dB μ V	Complies
FCC Part 15.207(a) and RSS-210	Conducted Emissions on Mains EUT in Transmit Mode	EUT is Battery opered only.		NA	Not Applicable
FCC Part 15.247 and RSS-210 Annex 8	Operation within the band 902-928 MHz	See called out basic standards below		--	Complies
FCC Part 15.247(a)(1)(i), RSS-210, Section A8.1	Channel Seperation	minimum 25kHz or 20dB Channel Band Width (which ever is greater)		400 kHz	Complies
FCC Part 15.247(a)(1) and RSS-210 A8.1(c)	Pseudorandom Hoppong Algorithm	25 hopping channels when the BW \geq 250kHz		See operation description	Complies
FCC Part 15.247(a)(1)(i) and RSS-210 A1.1.3	Occupied Bandwidth	20dB \leq 500 kHz 99% BW \leq 500 kHz		324.65 kHz 322.65 kHz	Complies
FCC Part 15.247(d) and RSS-210 A8.5	Band Edge	Ensure 20dB bandwidth is Contained within the Frequency Band		>20dB BW is contained	Complies
FCC Part 15.247(b)(2) and RSS-210 A8.4(1)	Transmitter Output Power	Shall not exceed 0.25 Watts		0.217 W	Complies
FCC Part 15.247(g) and RSS-210 A8.1	Frequency Hopping Spread Spectrum (FHSS) Systems	Description of Hopping System		See operation description	Complies
FCC Part 15.247(h) and RSS-210 A8.1	Incorporation of Intelligence within a FHSS System	Not Applicable: EUT does not incorporate hopping intelligence		NA	Not Applicable
FCC Parts 15.109(a) and ICES-003	Radiated Emissions while EUT in Receive Mode	Below limit of section 15.109(a) Class B		40.7 dB μ V	Complies
FCC Part 15.107(a) and ICES-003	Conducted Emissions EUT in Receive Mode	EUT is Battery opered only.		NA	Not Applicable

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

2 Laboratory Information

2.1 *Accreditations and Endorsements*

2.1.1 US Federal Communications Commission

TUV Rheinland of North America located at 762 Park Avenue, Youngsville, NC 27596-9470 is accredited by the commission for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (Registration No 90552 and 100881). The laboratory scope of accreditation includes: Title 47 CFR Part 15, and 18. The accreditation is updated every 3 years.

2.1.2 NIST / NVLAP

Program, which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Standard 17025:2005 (Lab code: 200094-0). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

2.1.3 Industry Canada

Registration No.: IC-2932H The OATS has been accepted by Industry Canada to perform testing to 3 and to 10m, based on the test procedures described in ANSI C63.4-2003 and C63.10-2009.

2.1.4 Japan – VCCI

The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland at the 762 Park Ave. Youngsville, N.C 27596 address has been assessed and approved in accordance with the Regulations for Voluntary Control Measures. (Registration No. R-1174, R-1679, C-1790 and C-1791).

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

2.1.5 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dB μ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m}}{20}}$$

Sample radiated emissions calculation @ 30 MHz

Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dB μ V/m)

$$25 \text{ dB}\mu\text{V/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dB}\mu\text{V/m}$$

2.2 Measurement Uncertainty Emissions

	U_{lab}	U_{cisp}
Radiated Disturbance @ 10m		
30 MHz – 1,000 MHz	3.3 dB	5.2 dB
Conducted Disturbance @ Mains Terminals		
150 kHz – 30 MHz	1.18 dB	3.6 dB
Disturbance Power		
30 MHz – 300 MHz	3.88 dB	4.5 dB

2.3 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2005. Equipment calibration records are kept on file at the test facility.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Report No.:
31052582.001 Revision A
Page 8 of 41
2.4 Measurement Equipment Used

Equipment	Manufacturer	Model #	Serial/Inst #	Last Cal dd/mm/yy	Next Cal dd/mm/yy
Radiated and Conducted RF Emissions (5 Meter Chamber)					
Amplifier, preamp	Agilent Technologies	8449B	3008A01480	24-Feb-10	24-Feb-11
Antenna Horn 1-18GHz	EMCO	3115	2236	12-Mar-09	12-Mar-11
Receiver, EMI	Rohde & Schwarz	ESIB40	100043	11-Jul-10	11-Jul-11
Spectrum Analyzer	Agilent Tec.	E7405A	US39440157	04-Dec-09	04-Dec-10
Cable, Coax	MicroCaox	MKR300C-0-0-1200-500500	002	07-Sept-10	07-Sept-11
Cable, Coax	Andrew	FSJ1-50A	003	14-Dec-09	14-Dec-10
Cable, Coax	Andrew	FSJ1-50A	030	14-Dec-09	14-Dec-10
1.5 GHz High Pass Filter	Bonn Electronik	BHF 1500	025155	16-Feb-10	16-Feb-11
General Laboratory Equipment					
Meter, Multi	Fluke	179	90580752	01-Dec-10	01-Dec-11
Meter, Temp/Humid/Barom	Fisher	02-400	01	28-Dec-09	28-Dec-10

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

3 Product Information

3.1 Product Description

The equipment under test is the Energy Axis Gas Meter Transponder 2 (model EA2G) printed circuit board assembly for which Limited Modular Approval is being sought. The EA2G is typically installed on one of several varieties of host gas meter of which there are three primary types; the AMCO, Rockwell and Sprague meters. Initially, the EUT will be tested as installed in a plastic housing to fit the AMCO gas meter. Moving the EA2G to the Rockwell or Sprague meters is expected to be a Class I permissive change since the housings are plastic and no changes to the EUT circuit board will be needed. These other embodiments will not be tested now due to the availability of housings.

A second consideration is that the devices are potted and cannot be reprogrammed afterward. This issue is mitigated by pre-configuring four units for constant transmit at each of four test frequencies required for Subpart C emissions tests. A fifth unit is pre-configured for constant receive, used for Subpart B emissions testing. Remaining tests such as signal bandwidth, band edge power, output power and channel time of occupancy are measured via coax cable attached to an RF test connector and can be done on an un-potted unit that can be reconfigured as needed.

A third consideration is that the devices are battery powered with a very low duty cycle. It is unfeasible to use the device's internal battery for the continuous operation required in FCC testing because it would prematurely drain the device's 3.6 volt Lithium Thionyl Chloride battery. To circumvent this problem, a 6 volt lantern battery with a 3.6 volt linear regulator is supplied to power the EUTs. This battery/regulator is capable of powering the EUT in a continuous transmit test mode for over 72 hours. The test units will automatically enter into their pre-configured test modes when the 3.6 volt supply is connected.

EUT	Model Name	Elster Style Number
#40 – AMCO housing, preconfigured for constant transmit, modulated, at CH 1 = 902.8 MHz.	EA2G (EA2G-I)	EG211000
#39 – AMCO housing, preconfigured for constant transmit, modulated, at CH 34 = 916.0 MHz.	EA2G (EA2G-I)	EG211000
#37 – AMCO housing, preconfigured for constant transmit, modulated, at CH 48 = 921.6 MHz.	EA2G (EA2G-I)	EG211000
#42 – AMCO housing, preconfigured for constant transmit, modulated, at CH 63 = 927.6 MHz.	EA2G (EA2G-I)	EG211000
#10 – AMCO housing, preconfigured for constant receive for Subpart B testing.	EA2G (EA2G-I)	EG211000
#44 – AMCO housing, configurable for conducted Subpart C testing.	EA2G (EA2G-I)	EG211000

Table 1: EUT Designation

3.2 Equipment Modifications

No modifications were needed to bring product into compliance.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

4 Spurious Emissions

4.1 Spurious Emissions Outside the band

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power, based on either RF conducted or radiated measurements. Conducted antenna port measurements are provided in Section 5.1 of this report to show that the EUT meets these requirements at the band edges.

4.1.1 Over View of Test

Results	Complies (as tested per this report)				Date	7 September 2010			
Standard	FCC Parts 15.205, 15.209, 15.215 and RSS-210								
Product Model	EA2G			Serial#	Production Sample				
Test Set-up	Tested in a 5m Semi Anechoic chamber, placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane on a turn-table. See test plans for details								
EUT Powered By	3.6V DC Battery	Temp	75° F	Humidity	43%	Pressure	1020 mbar		
Perf. Criteria	(Below Limit)		Perf. Verification	Readings Under Limit					
Mod. to EUT	None		Test Performed By	Mark Ryan					

4.1.2 Test Procedure

Testing was performed in accordance with 47 CFR Part 15, ANSI C63.10:2009, RSS-GEN Issue 2. These test methods are listed under the laboratory's NVLAP Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

4.1.3 Deviations

There were no deviations from the test methodology listed in the test plan for the radiated emission test.

4.1.4 Final Test

All final radiated spurious emissions measurements were below (in compliance) the limits.

The worst -case emissions are shown below. All other emissions are on file at TUV Rheinland.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

4.1.4.1 Emissions Outside the Frequency Band

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power, based on either RF conducted or radiated measurements. Conducted antenna port measurements are provided below to show that the EUT meets these requirements at the band edges.

Three orientations of the EUT investigated for highest emissions:

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	QP FIM Value (dB μ V)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dB μ V/m)	Orientation
CH 63:									
927.60	H	1.5	323	94.53	0.00	3.45	22.80	120.78	1
927.60	V	1.1	197	87.12	0.00	3.45	22.60	113.18	1
927.60	H	2	110	89.52	0.00	3.45	22.80	115.77	2
927.60	V	1.4	0	92.11	0.00	3.45	22.60	118.17	2
927.60	H	1.5	175	88.76	0.00	3.45	22.80	115.01	3
927.60	V	1.3	34	89.53	0.00	3.45	22.60	115.59	3

NOTE: Orientation 1 of CH 63 provided the highest harmonic emissions.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.


Report No.:

31052582.001 Revision A

Page 12 of 41

Radiated Emissions – 30 MHz to 1000 MHz

Horizontal Ch 63

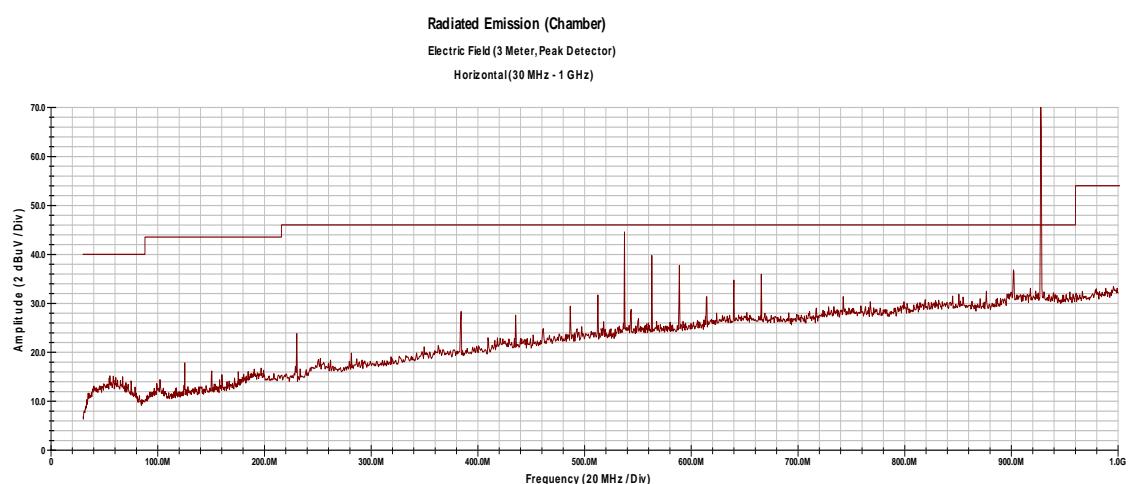

07:55:37 PM, Tuesday, September 07, 2010

Emission Freq (MHz)	ANT Polar	ANT Pos (m)	Table Pos (deg)	FIM Value (dBµV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBµV/m)	Spec Limit (dBµV/m)	Spec Margin (dB)
537.35	H	2	0	21.98	0.00	2.55	18.09	42.62	46.00	-3.38
563.11	H	1	0	18.91	0.00	2.61	18.40	39.92	46.00	-6.08
588.86	H	1.8	0	17.53	0.00	2.68	18.50	38.71	46.00	-7.29
665.65	H	1.5	0	16.22	0.00	2.85	20.20	39.27	46.00	-6.73
901.83	H	1.5	338	11.97	0.00	3.37	22.50	37.84	46.00	-8.16
927.60	H	1.5	323	78.89	0.00	3.45	22.80	105.14	NA	NA
927.60	H	1.5	323	94.53	0.00	3.45	22.80	120.78	NA	NA
927.60	H	1.5	323	89.20	0.00	3.45	22.80	115.45	NA	NA


Notes: The Plot was taken with a notch filter tuned at the fundamental frequency
 Except for the fundamental frequency, a notch filter was used for all measurements Using the QP detector.

The Fundamental frequency was measured without the notch filter and used the **Pk**, **QP** and **Av** detectors.
 These values are used as the reference level (-20dBc) for the harmonic measurements, not in a restricted band.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Radiated Emissions – 30 MHz to 1000 MHz

Vertical Ch 63

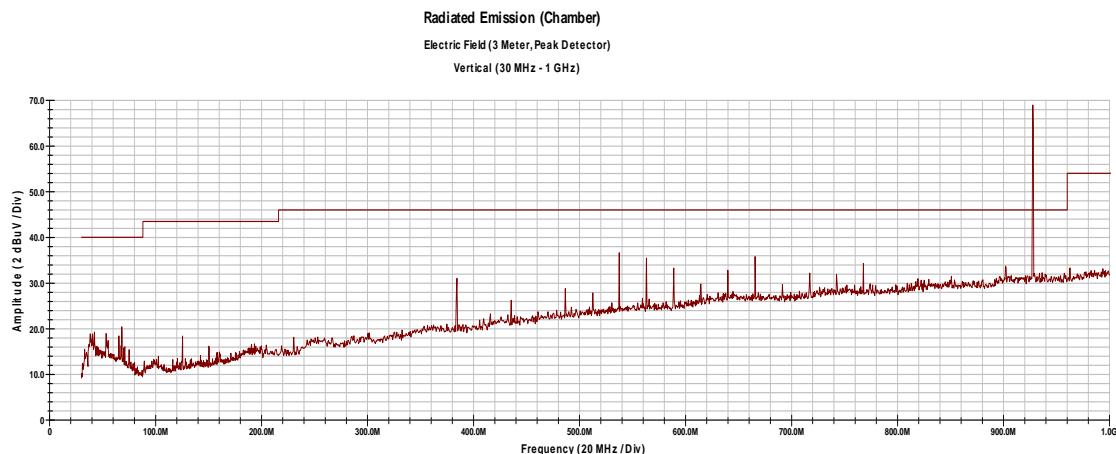

07:58:13 PM, Tuesday, September 07, 2010

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBµV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBµV/m)	Spec Limit (dBµV/m)	Spec Margin (dB)
384.32	V	1.1	315	13.25	0.00	2.13	14.89	30.27	46.00	-15.73
537.35	V	1.4	258	16.39	0.00	2.55	18.50	37.44	46.00	-8.56
563.11	V	1.1	257	14.03	0.00	2.61	18.40	35.04	46.00	-10.96
665.65	V	1	147	12.47	0.00	2.85	19.91	35.23	46.00	-10.77
767.70	V	1	0	1.36	0.00	3.08	20.86	25.31	46.00	-20.69
901.83	V	1.1	190	6.21	0.00	3.37	22.17	31.76	46.00	-14.24
927.60	V	1.1	189	87.13	0.00	3.45	22.60	113.19	NA	NA
927.60	V	1.1	189	86.31	0.00	3.45	22.60	112.37	NA	NA
927.60	V	1.1	189	61.95	0.00	3.45	22.60	88.01	NA	NA

Notes: The Plot was taken with a notch filter tuned at the fundamental frequency
 Except for the fundamental frequency, a notch filter was used for all measurements Using the QP detector.


The Fundamental frequency was measured without the notch filter and used the **Pk**, **QP** and **Av** detectors.
 These values are used as the reference level (-20dBc) for the harmonic measurements, not in a restricted band.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Report No.:

31052582.001 Revision A

Page 14 of 41

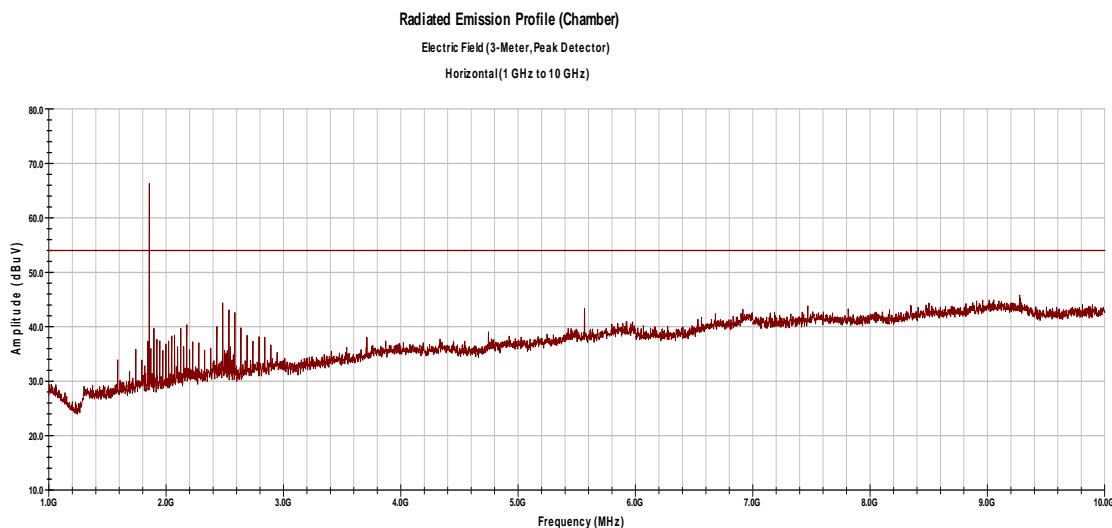Radiated Emissions – 1 GHz to 10 GHz
Horizontal CH 63


09:35:42 PM, Tuesday, September 07, 2010

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dB μ V)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dB μ V/m)	Spec Limit (dB μ V/m)	Spec Margin (dB)
1855.20	H	1.2	297	66.85	35.70	6.48	27.49	65.11	68.01	-2.90
5565.60	H	1	70	30.00	35.21	12.02	34.25	41.06	68.01	-26.95
6493.20	H	1	0	23.42	35.29	13.80	34.77	36.70	68.01	-31.31
9276.00	H	1.1	277	21.34	35.86	15.59	37.37	38.44	68.01	-29.57
1855.20	H	1.2	297	68.68	35.70	6.48	27.49	66.94	93.19	-26.25
5565.60	H	1	70	39.58	35.21	12.02	34.25	50.64	93.19	-42.55
6493.20	H	1	0	36.28	35.29	13.80	34.77	49.56	93.19	-43.63
9276.00	H	1.1	277	34.32	35.86	15.59	37.37	51.42	93.19	-41.77

Notes: Notes: CH 63 – 927.6 MHz High Pass Filter used

Emissions shown in Green are using the Average Detector and shown in Blue are using the Peak Detector

Highlighted emission is worst case

 Emissions not in the Restricted Bands are shown, the limit is -20dBc (88.01dB μ V – 20dB = 68.01).

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.


Report No.:

31052582.001 Revision A

Page 15 of 41

Radiated Emissions – Internal Antenna

Vertical CH 63

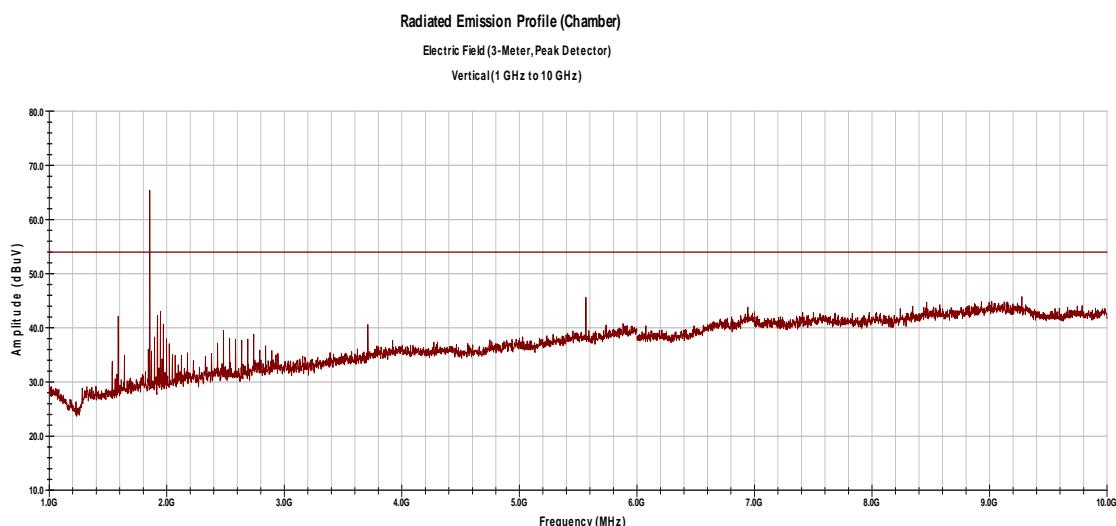

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dB μ V)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dB μ V/m)	Spec Limit (dB μ V/m)	Spec Margin (dB)
1855.20	V	1.4	63	66.81	35.70	6.48	27.34	64.93	68.01	-3.08
5565.60	V	1.1	293	29.61	35.21	12.02	34.30	40.72	68.01	-27.29
6493.20	V	1	0	23.66	35.29	13.80	34.74	36.91	68.01	-31.1
9276.00	V	1.1	185	22.24	35.86	15.59	37.49	39.46	68.01	-28.55
1855.20	V	1.4	63	67.55	35.70	6.48	27.34	65.67	93.19	-27.52
5565.60	V	1.1	293	40.20	35.21	12.02	34.30	51.31	93.19	-41.88
6493.20	V	1	0	36.84	35.29	13.80	34.74	50.09	93.19	-43.10
9276.00	V	1.1	185	35.39	35.86	15.59	37.49	52.61	93.19	-40.58

Notes: CH 63 – 927.6 MHz High Pass Filter used

Emissions shown in Green are using the Average Detector and shown in Blue are using the Peak Detector

Highlighted emission is worst case

 Emissions not in the Restricted Bands are shown, the limit is -20dBc (88.01dB μ V – 20dB = 68.01).

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Report No.:

31052582.001 Revision A

Page 16 of 41

Radiated Emissions in Restricted Bands

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dB μ V)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dB μ V/m)	Spec Limit (dB μ V/m)	Spec Margin (dB)
CH 63: PK										
2782.80	H	1.5	91	38.10	35.55	8.03	29.13	39.71	74.00	-34.29
3710.40	H	1	138	39.10	35.34	9.46	32.39	45.60	74.00	-28.40
4638.00	H	1	0	35.51	35.52	10.84	32.59	43.42	74.00	-30.58
7420.80	H	1.3	246	35.39	35.47	15.16	36.90	51.99	74.00	-22.01
8348.40	H	1	26	34.32	35.62	15.37	37.32	51.39	74.00	-22.61
CH 63: AV										
2782.80	H	1.5	91	24.63	35.55	8.03	29.13	26.24	54.00	-27.76
3710.40	H	1	138	27.13	35.34	9.46	32.39	33.63	54.00	-20.37
4638.00	H	1	0	22.33	35.52	10.84	32.59	30.24	54.00	-23.76
7420.80	H	1.3	246	22.01	35.47	15.16	36.90	38.61	54.00	-15.39
8348.40	H	1	26	21.62	35.62	15.37	37.32	38.69	54.00	-15.31
CH 63: PK										
2782.80	V	1.3	140	37.99	35.55	8.03	29.33	39.80	74.00	-34.20
3710.40	V	1	62	39.95	35.34	9.46	32.46	46.53	74.00	-27.47
4638.00	V	1	0	22.20	35.52	10.84	32.75	30.27	74.00	-41.73
7420.80	V	1	0	35.14	35.47	15.16	36.95	51.78	74.00	-22.22
8348.40	V	1.1	240	34.59	35.62	15.37	37.34	51.67	74.00	-22.33
CH 63: AV										
2782.80	V	1.3	140	24.26	35.55	8.03	29.33	26.07	54.00	-27.93
3710.40	V	1	62	28.26	35.34	9.46	32.46	34.84	54.00	-19.16
4638.00	V	1	0	35.27	35.52	10.84	32.75	43.34	54.00	-10.66
7420.80	V	1	0	21.41	35.47	15.16	36.95	38.05	54.00	-15.95
8348.40	V	1.1	240	21.65	35.62	15.37	37.34	38.73	54.00	-15.27

Notes: CH 63 – 927.6 MHz

High Pass Filter used

 Emissions shown in **Green** are using the Average Detector and shown in **Blue** are using the Peak Detector
 Emissions inside the Restricted Bands are shown.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

4.1 Conducted Emissions in Transmit mode

This test measures the electromagnetic levels of spurious signals generated by the EUT on the AC power line that may affect the performance of other nearby electronic equipment.

4.1.1 Test Procedure

Conducted and FCC emissions tests were performed using the procedures of ANSI C63.10-2009 including methods for signal maximizations and EUT configuration. The photos included with the report show the EUT in its maximized configuration.

The frequency range from 150 kHz – 30 MHz was investigated for conducted emissions.

Conducted Emissions measurements were performed in the shielded room using procedures specified in the test plan and standard.

4.1.2 Deviations

The EUT is battery operated and has no means to connect to AC Mains.

4.1.3 Final Test

The EUT is battery operated only; therefore this test is not applicable.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

4.2 Frequency Hopping Spread Spectrum (FHSS) Systems FCC Part 15.247(g)

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

In constant transmit mode, the EA2G Meter sends a packet nominally every 97.3 ms with a delay of 8 to 16 ms between packets. Each packet is sent on the next channel determined by the pseudo-random hop table. When presented with a continuous data stream, the EUT adheres to the 0.4 second dwell time for each 10 second window requirement. The EUT always distributes its transmissions across all 25 channels, and does not re-use a channel again until a transmission has occurred on each of the other 24 channels.

4.3 Incorporation of Intelligence within a FHSS System FCC Part 15.247(h)

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

The EUT does not incorporate intelligence relating to the hopping pattern as described above. Rather, the EUT always distributes its transmissions across the same 25 channels. A channel is not re-used until a transmission has occurred on each of the other 24 channels.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

5 Antenna Port Conducted Emissions

Testing was performed in accordance with 47 CFR Part 15, ANSI C63.10:2009, RSP-100 Issue 9. These test methods are listed under the laboratory's NVLAP Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

5.1 Channel Separation

5.1.1 Test Over View

Results	Complies (as tested per this report)				Date	8 September 2010			
Standard	FCC Part 15.247(a)(1)(i), RSS 210 A8.1								
Product Model	EA2G			Serial#	Production Sample				
Test Set-up	Direct Measurement from antenna port								
EUT Powered By	3.6V DC Battery	Temp	75° F	Humidity	43%	Pressure	1012 mbar		
Perf. Criteria	(Below Limit)		Perf. Verification	Readings Under Limit					
Mod. to EUT	None		Test Performed By	Mark Ryan					

5.1.2 Test Procedure

Frequency hopping Systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Maximum allowed 20dB Bandwidth = 500 kHz

Min. Channel Separation = 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater

The channel separation is greater than the measured maximum 20 dB bandwidth. Therefore the EUT is compliant with this section.

5.1.3 Deviations

There were no deviations from the test methodology listed in the test plan for this test.

5.1.4 Final Test

The EUT met the performance criteria requirement as specified in the test plan of this report and in the standards.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Report No.:

31052582.001 Revision A

Page 20 of 41

5.1.5 Final Data

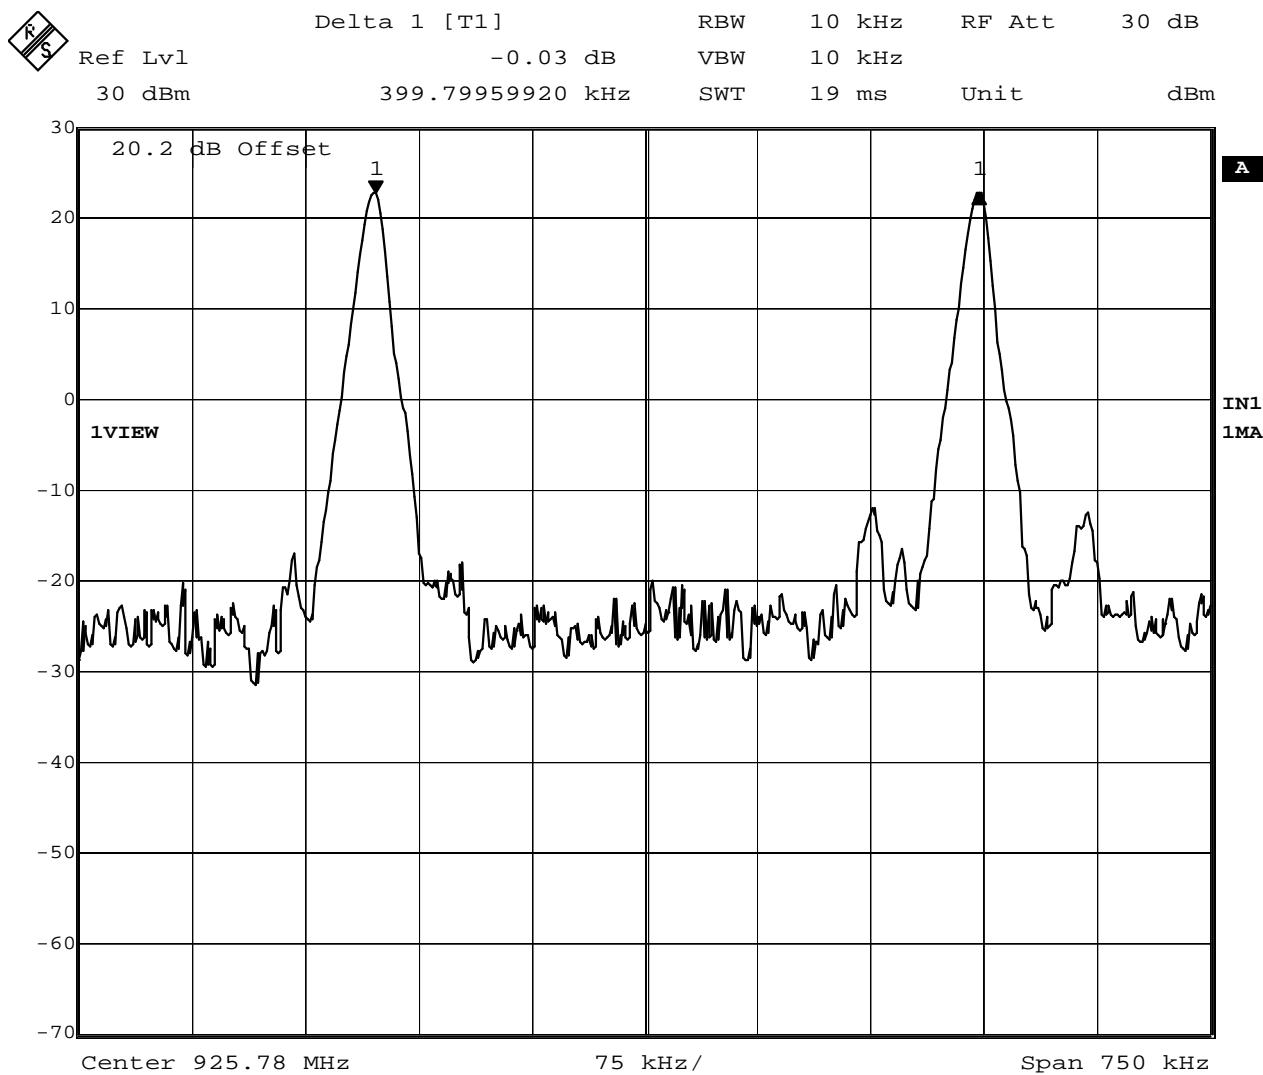


Figure 1: Channel Separation = 400 kHz

Spectrum Analyzer Parameters:

RBW=10kHz

Span=750kHz

VBW= 10kHz

LOG dB/div.= 10dB

Sweep = Auto

Detector = sample detector, max hold

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

5.2 Pseudorandom Hopping Algorithm

5.2.1 Test Over View

Results	Complies (as tested per this report)			Date	8 September 2010					
Standard	FCC Part 15.247(a)(1)(i) and RSS-210, A8.1									
Product Model	EA2G		Serial#	Production Sample						
Test Set-up	Direct Measurement from antenna port									
EUT Powered By	3.6V DC Battery	Temp	75° F	Humidity	43%	Pressure	1012 mbar			
Perf. Criteria	(Below Limit)		Perf. Verification	Readings Under Limit						
Mod. to EUT	None		Test Performed By	Mark Ryan						

5.2.2 Test Procedure

The channel bandwidth for this system is greater than 250 kHz. Therefore the system must use at least 25 channels that are selected at the system hopping rate, from a pseudo-randomly ordered list of hopping frequencies. Each frequency must be used equally on average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their transmitters and shall shift frequencies in synchronization with the transmitted signals.

In constant transmit mode, the EUT would send a packet every 97.3 ms with a delay of 8 to 16 ms between packets. Each packet is sent on the next channel determined by the pseudo-random hop sequence, as defined in the operation description document.

5.2.3 Deviations


There were no deviations from the test methodology listed in the test plan for this test.

5.2.4 Final Test

The EUT met the performance criteria requirement as specified in the test plan of this report and in the standards.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

5.2.5 Final Data

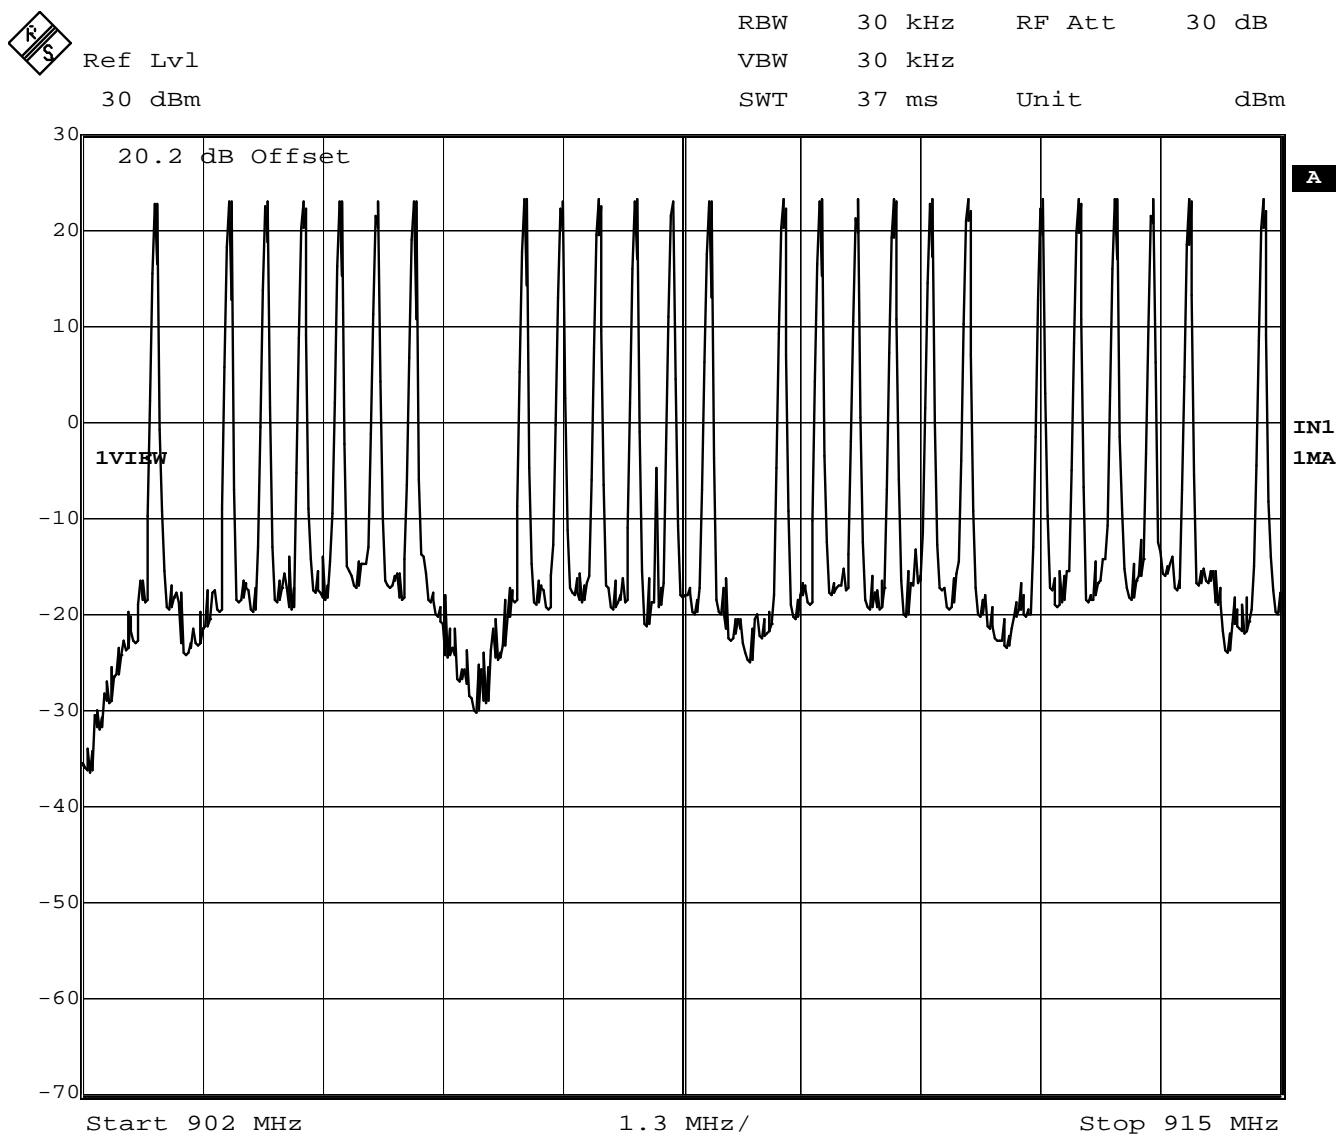

Date: 8.SEP.2010 20:46:09


Figure 2: Plot of hopping Channels - 902-915 MHz (Low Band)

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Report No.:

31052582.001 Revision A

Page 23 of 41

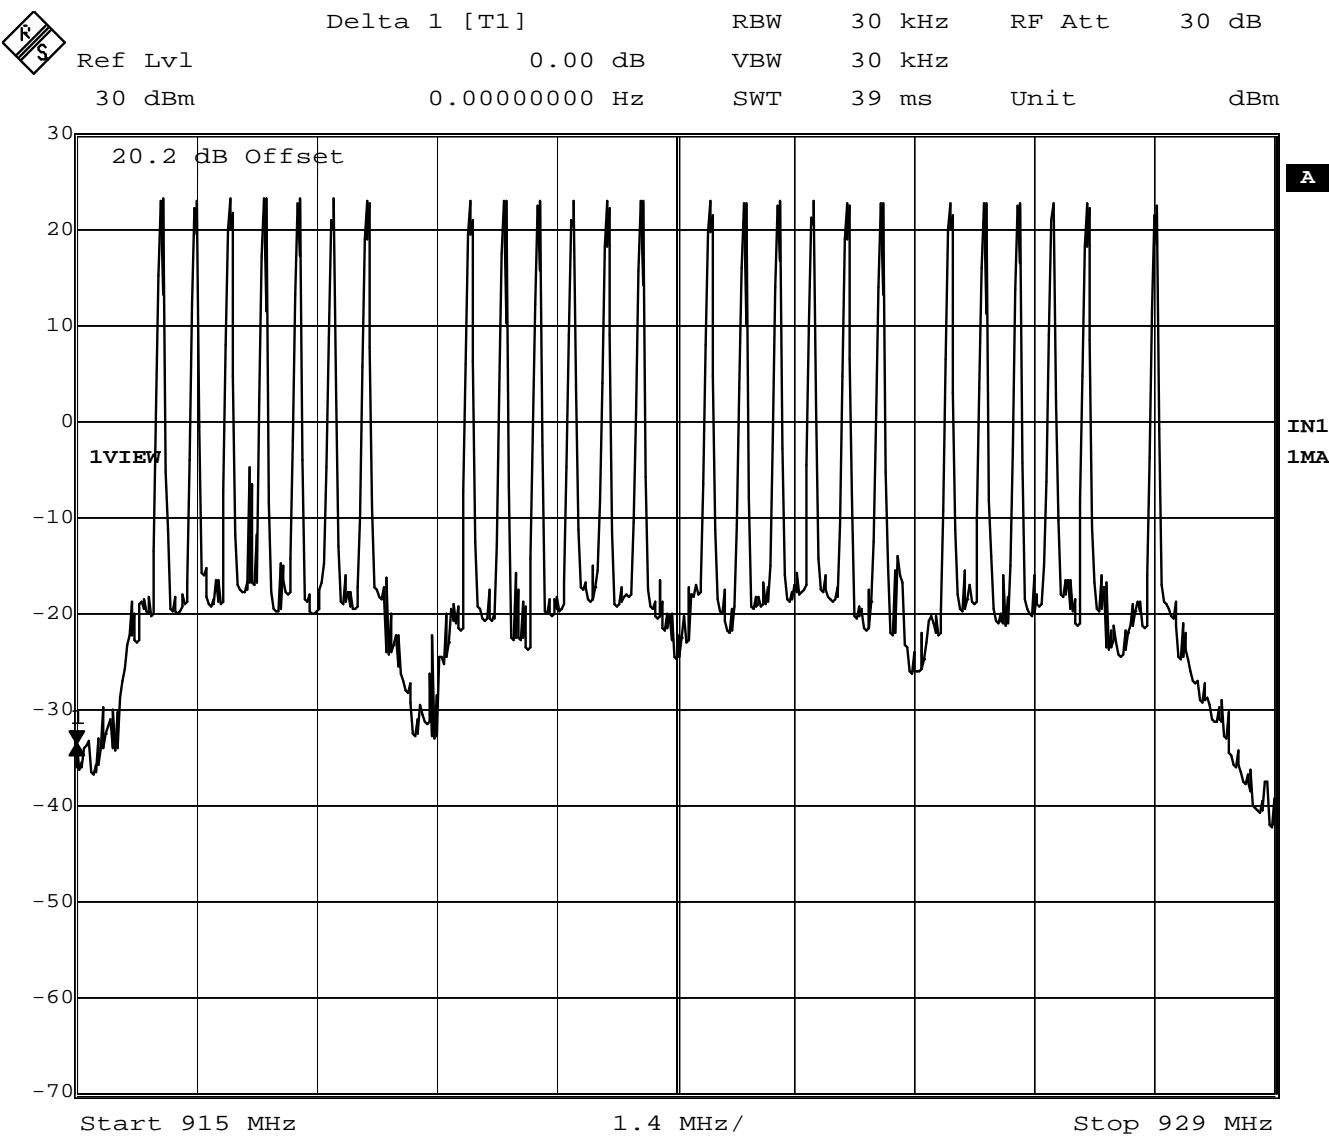

Date: 8.SEP.2010 21:07:10

Figure 3: Plot of hopping Channels - 915-928 MHz (Upper Band)

Spectrum Analyzer Parameters:

RBW=30kHz

Span=14MHz

VBW= 30kHz

LOG dB/div.=

Sweep = Auto

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or

Report No.:

31052582.001 Revision A

Page 24 of 41


Time of Occupancy FCC Part 15.247(a)(1)(i)

Frequency Band (MHz)	20 dB Bandwidth	Number of Hopping Channels	Average Time of Occupancy
902.4-927.6	=>250 kHz	25	=<0.4 sec. In 10 sec.

There were 2 hops at 81.48 milliseconds per hop for any 10 sec. Period. Time of occupancy equals number of hops multiplied by the duration of one hop.

Time of Occupancy limit = 0.400 seconds in any 10 second period.

Calculated Time of Occupancy = 0.0814 seconds x 2 = 0.163 seconds in any 10 second period

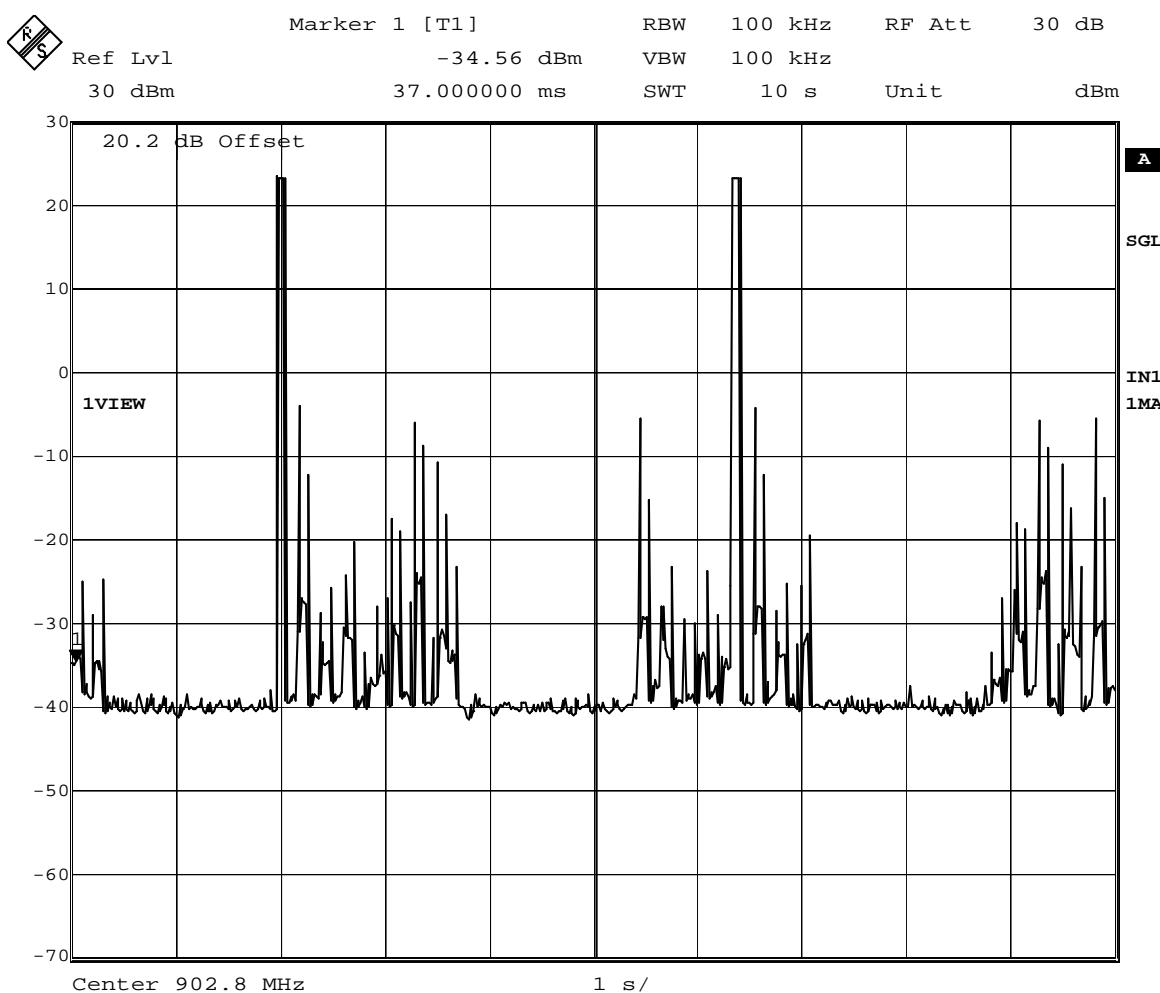


Date: 8.SEP.2010 20:54:06

Figure 4: 10 second sweep of 902.8 MHz

Note: The on-channel traces are the two highest peaks.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

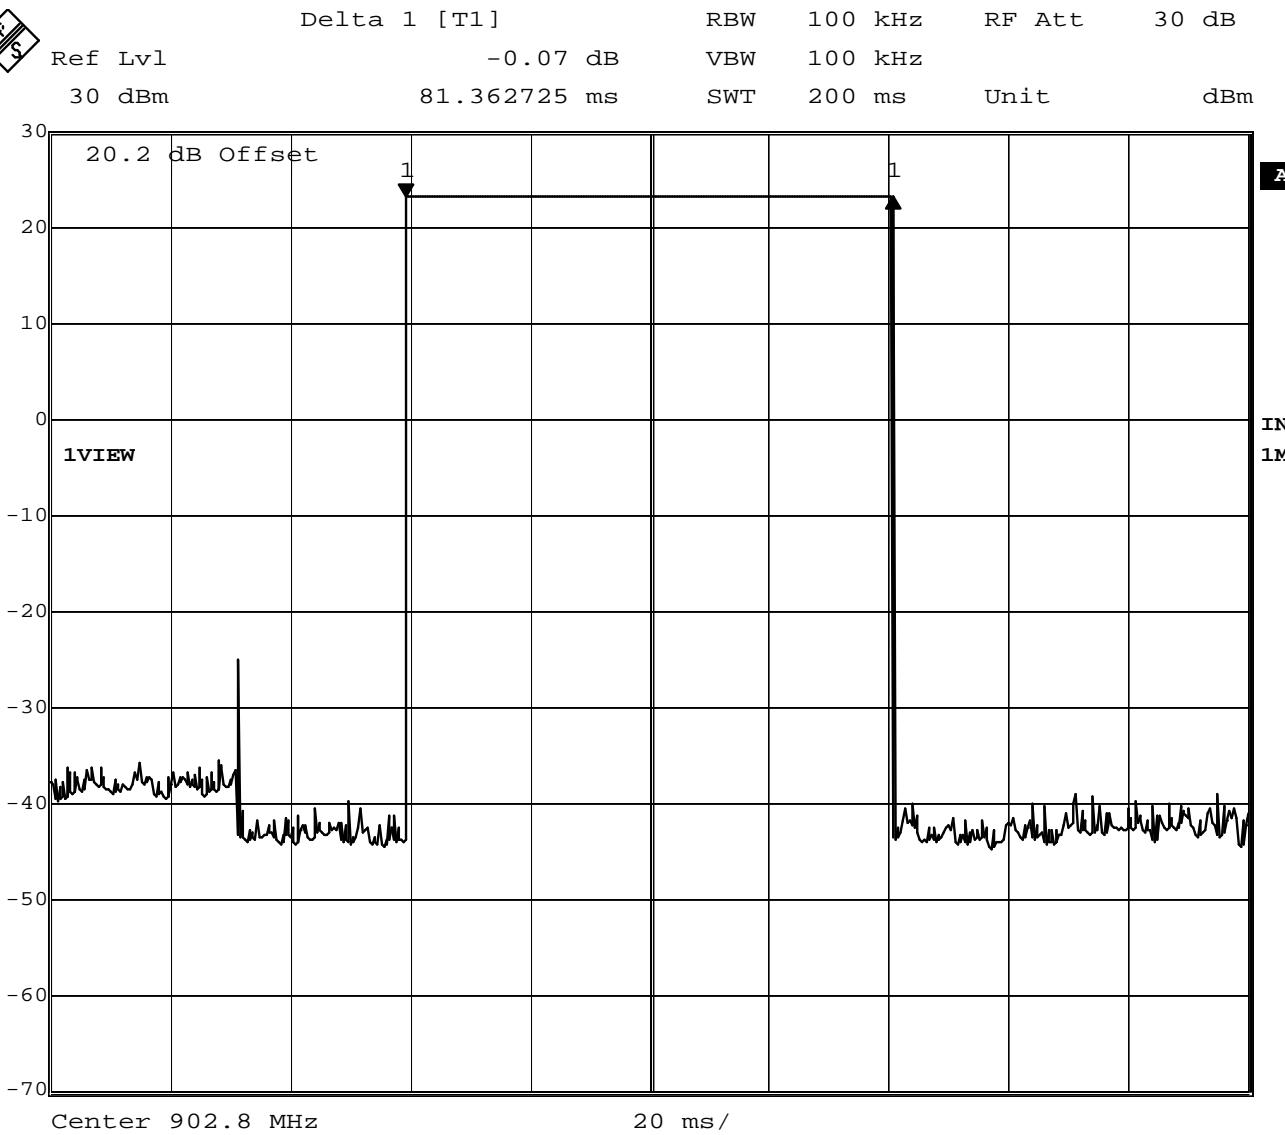Report No.:
31052582.001 Revision A
Page 25 of 41


Date: 8.SEP.2010 21:00:07

Figure 5: Measurement of 1 hop at 902.8 MHz

Time on Frequency = 81.4 ms

Spectrum Analyzer Parameters:

RBW=100kHz

Span=zero

VBW= 100kHz

LOG dB/div.= 10dB

Sweep = 200 ms

Detector = sample detector, max hold

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

5.3 Occupied Bandwidth

The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

5.3.1 Test Over View

Results	Complies (as tested per this report)				Date	8 September 2010			
Standard	FCC Part 15.247(a)(1)(i)								
Product Model	EA2G			Serial#	Production Sample				
Test Set-up	Direct Measurement from antenna port								
EUT Powered By	3.6V DC Battery	Temp	75° F	Humidity	43%	Pressure	1012 mbar		
Perf. Criteria	(Below Limit)		Perf. Verification	Readings Under Limit					
Mod. to EUT	None		Test Performed By	Mark Ryan					

5.3.2 Test Procedure

Frequency hopping Systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Maximum allowed 20dB Bandwidth = 500 kHz

Channel Separation = 25 kHz Min. or the 20 dB bandwidth of the hopping channel, whichever is greater

The channel separation is greater than the measured maximum 20 dB bandwidth. Therefore the EUT is compliant with this section.

5.3.3 Deviations

There were no deviations from the test methodology listed in the test plan for this test.

5.3.4 Final Test

The EUT met the performance criteria requirement as specified in the test plan of this report and in the standards.


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Report No.:

31052582.001 Revision A

Page 27 of 41

5.3.5 Final Data

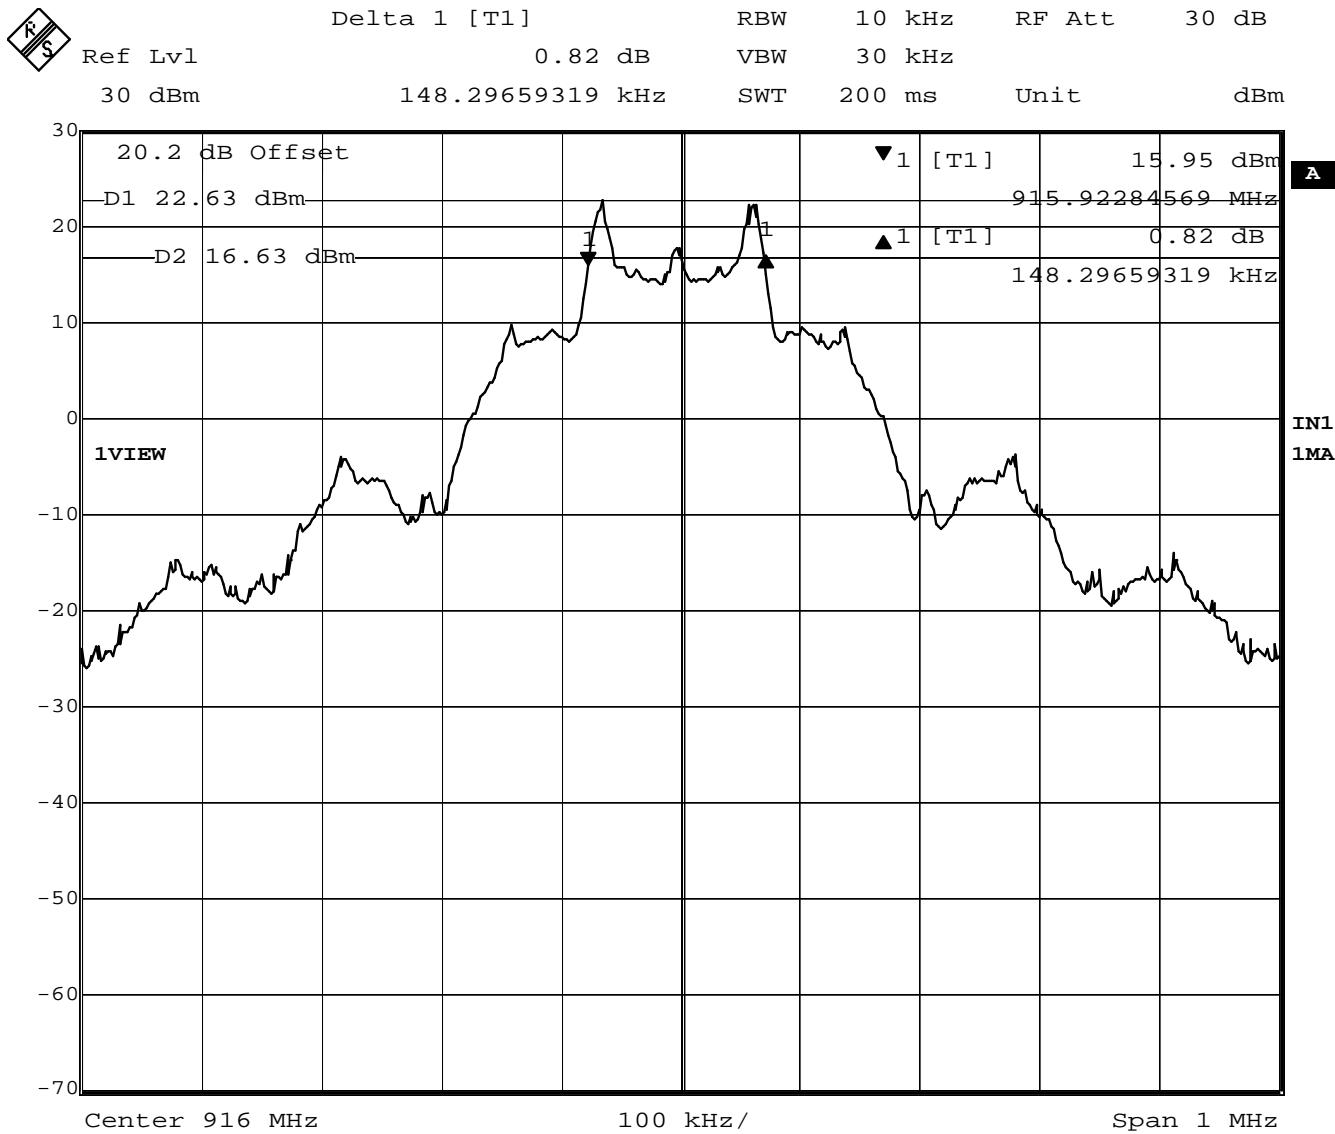

Date: 8.SEP.2010 19:49:09

Figure 6: 6 dB Occupied Bandwidth


Note: The above plot is the worst case.

***BW = 148.3 KHZ**

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Report No.:
31052582.001 Revision A

Page 28 of 41

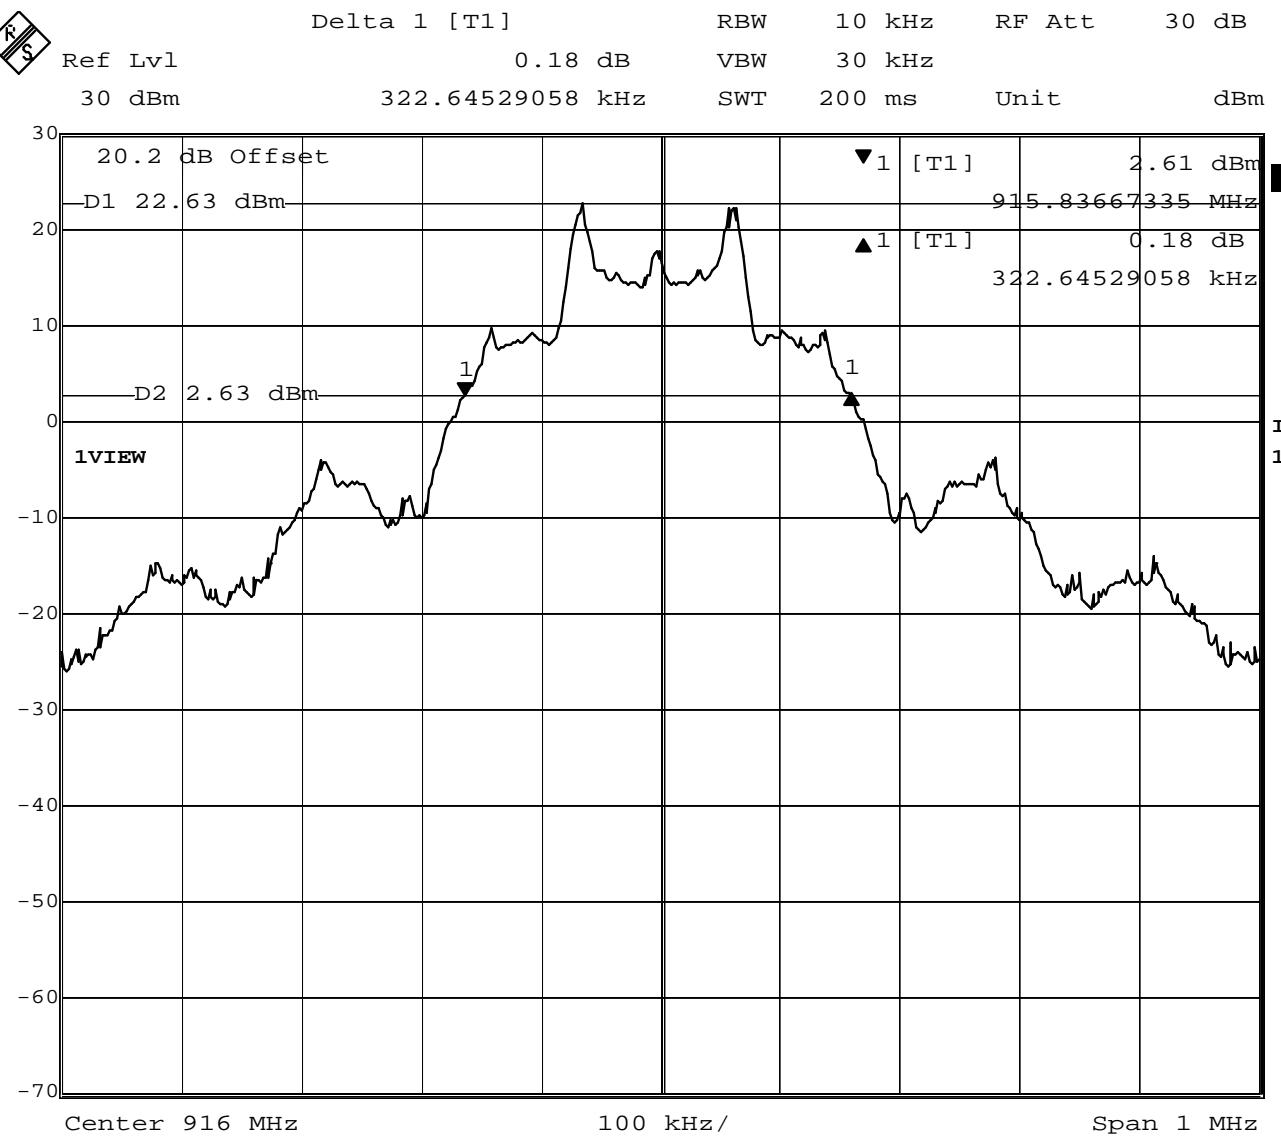

Date: 8.SEP.2010 19:50:22

Figure 7: 20 dB Occupied Bandwidth

Note: The above plot is the worst case.

***BW = 324.65 KHZ**

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

5.4 99% Power Bandwidth

For the purpose of Section A1.1, the 99% bandwidth shall be no wider than .25% of the center frequency for devices operating between 70-900MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency.

5.4.1 Test Over View

Results	Complies (as tested per this report)			Date	8 September 2010		
Standard	RSS-210 Section A1.1.3						
Product Model	EA2G			Serial#	Production Sample		
Test Set-up	Direct Measurement from antenna port						
EUT Powered By	3.6V DC Battery	Temp	75° F	Humidity	43%	Pressure	1012 mbar
Perf. Criteria	(Below Limit)		Perf. Verification	Readings Under Limit			
Mod. to EUT	None		Test Performed By	Mark Ryan			

5.4.2 Test Procedure

Using the procedures of RSS-GEN section 4.6.1, the 10 kHz resolution bandwidth is 1% of the 1 MHz span. The Video bandwidth is 3 times that of the resolution bandwidth.

The limit of the bandwidth would be 0.5% of 916 MHz is 4.58 MHz. The measured 99% bandwidth is 322.65 kHz.

5.4.3 Deviations

There were no deviations from the test methodology listed in the test plan for this test.

5.4.4 Final Test

The EUT met the performance criteria requirement as specified in the test plan of this report and in the standards.


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Report No.:

31052582.001 Revision A

Page 30 of 41

5.4.5 Final Data

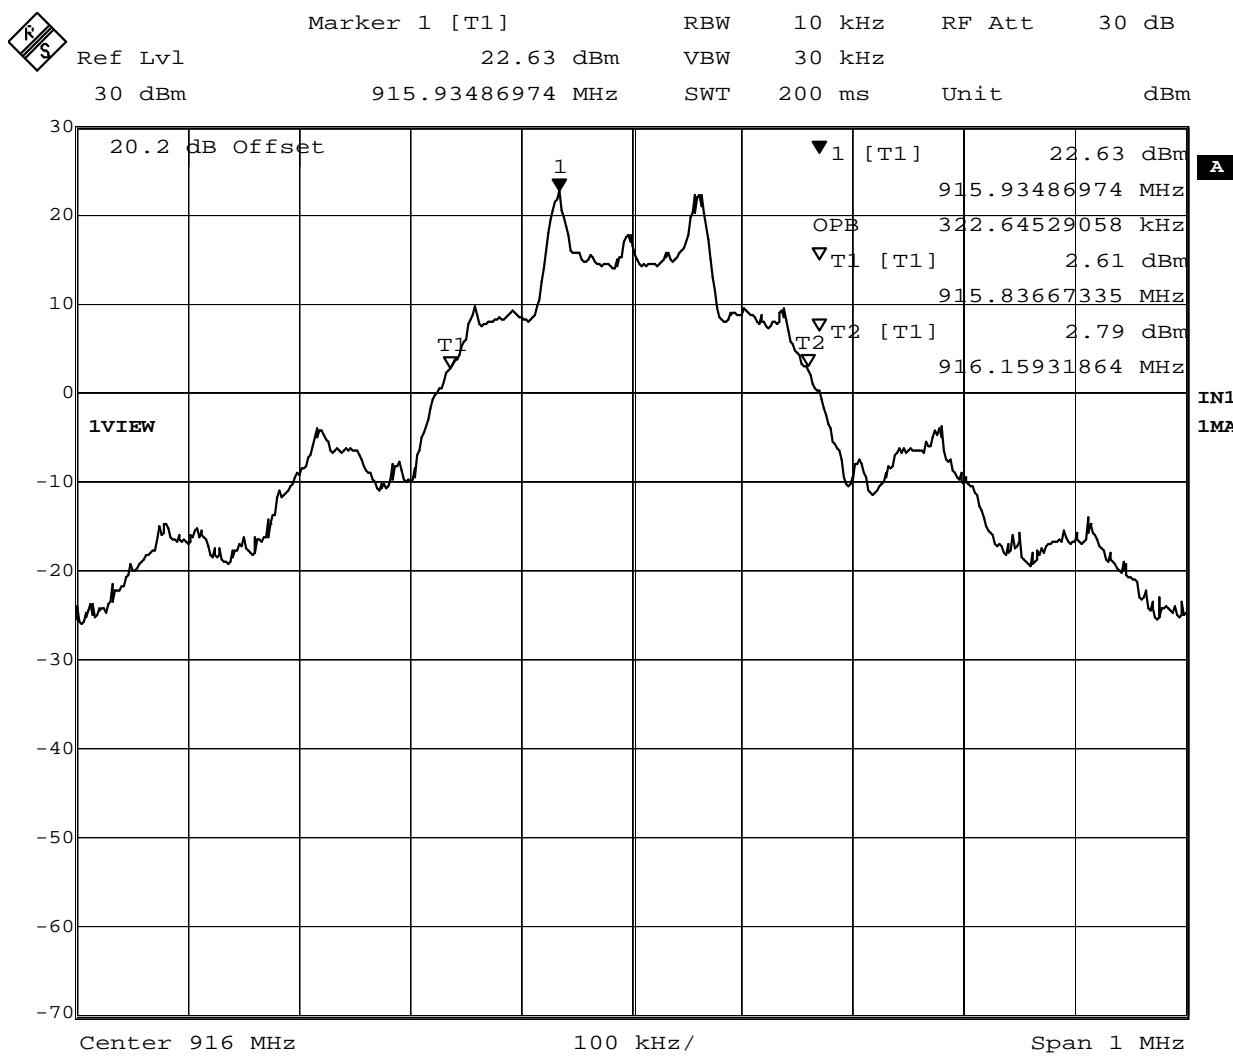

Date: 8.SEP.2010 19:50:57

Figure 8 – 99% Power Bandwidth = 322.6 kHz

Spectrum Analyzer Parameters:

RBW=10kHz

Span=1MHz

VBW= 30kHz

LOG dB/div.= 10dB

Sweep = Auto

Detector = sample detector, max hold

The EUT is compliant to the requirements of RSS-210 A1.1.3

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

5.5 Band Edge

5.5.1 Test Over View

Results	Complies (as tested per this report)				Date	8 September 2010	
Standard	FCC Part 15.247(d), RSS 210 A8.1(c)						
Product Model	EA2G			Serial#	Production Sample		
Test Set-up	Direct Measurement from antenna port						
EUT Powered By	3.6V DC Battery	Temp	75° F	Humidity	43%	Pressure	1012 mbar
Perf. Criteria	(Below Limit)		Perf. Verification		Readings Under Limit		
Mod. to EUT	None		Test Performed By		Mark Ryan		

5.5.2 Test Procedure

Intentional radiators operating under the alternative provisions to the general emission limits must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

5.5.3 Deviations

There were no deviations from the test methodology listed in the test plan for this test.


5.5.4 Final Test

The EUT met the performance criteria requirement as specified in the test plan of this report and in the standards.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Report No.:
31052582.001 Revision A

Page 32 of 41

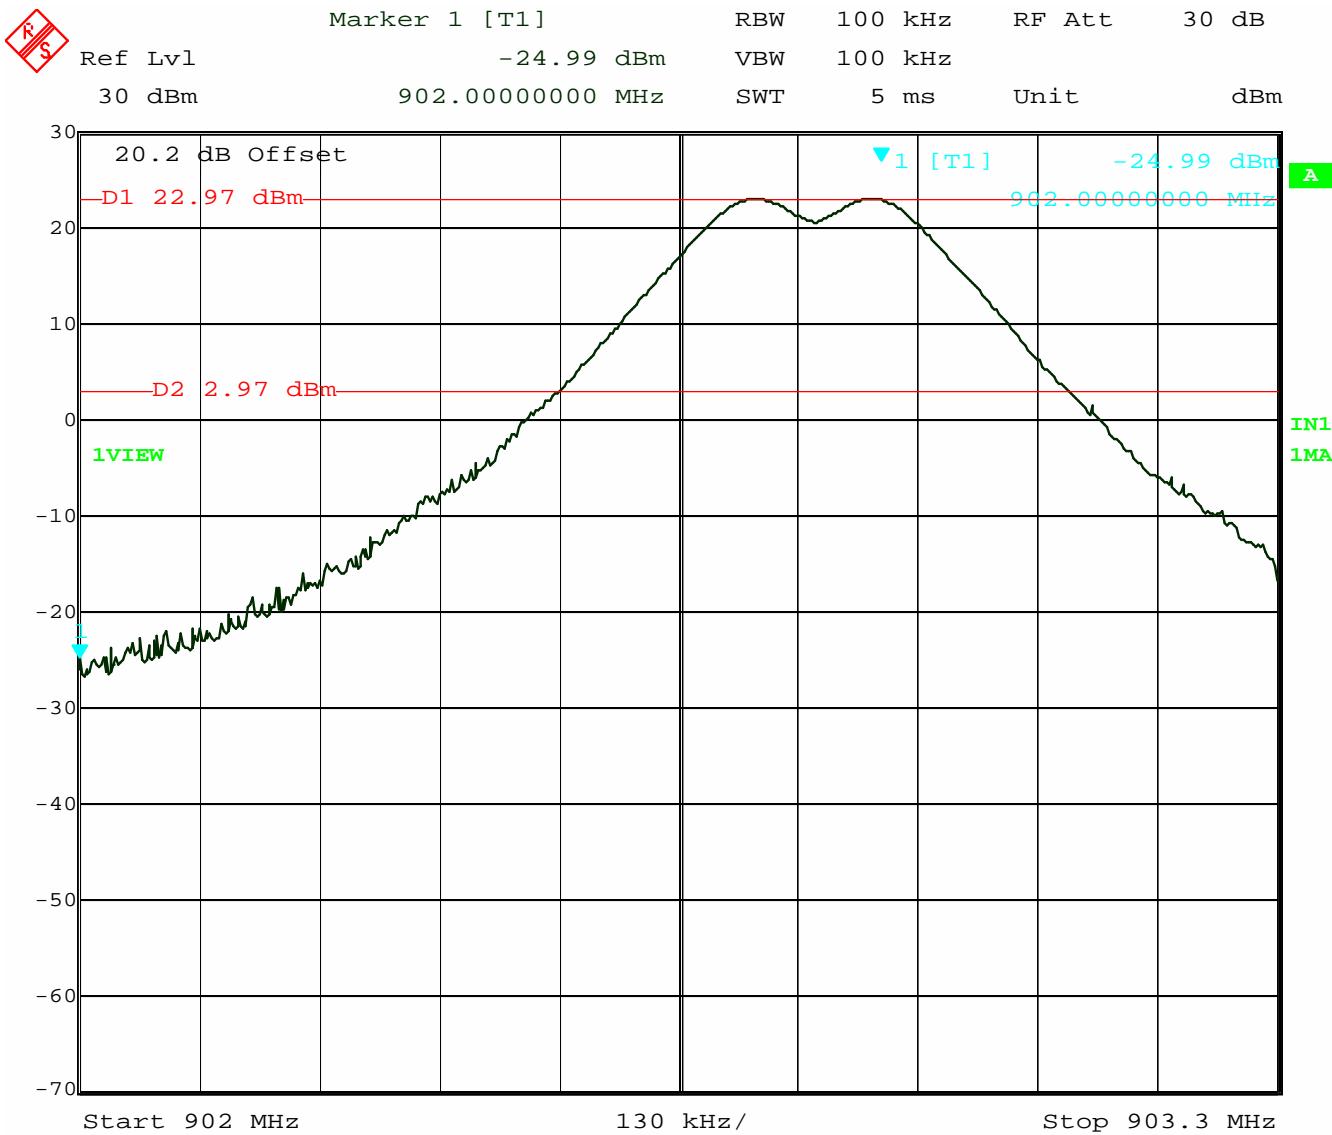

Date: 8.SEP.2010 19:25:30

Figure 9: Lower Band Edge Measurement

Note: Band Edge is at 902 MHz


Channel Frequency is 902.8 MHz, The 20dB down point is at 902.52 MHz. The EUT is compliant with the rules.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Report No.:

31052582.001 Revision A

Page 33 of 41

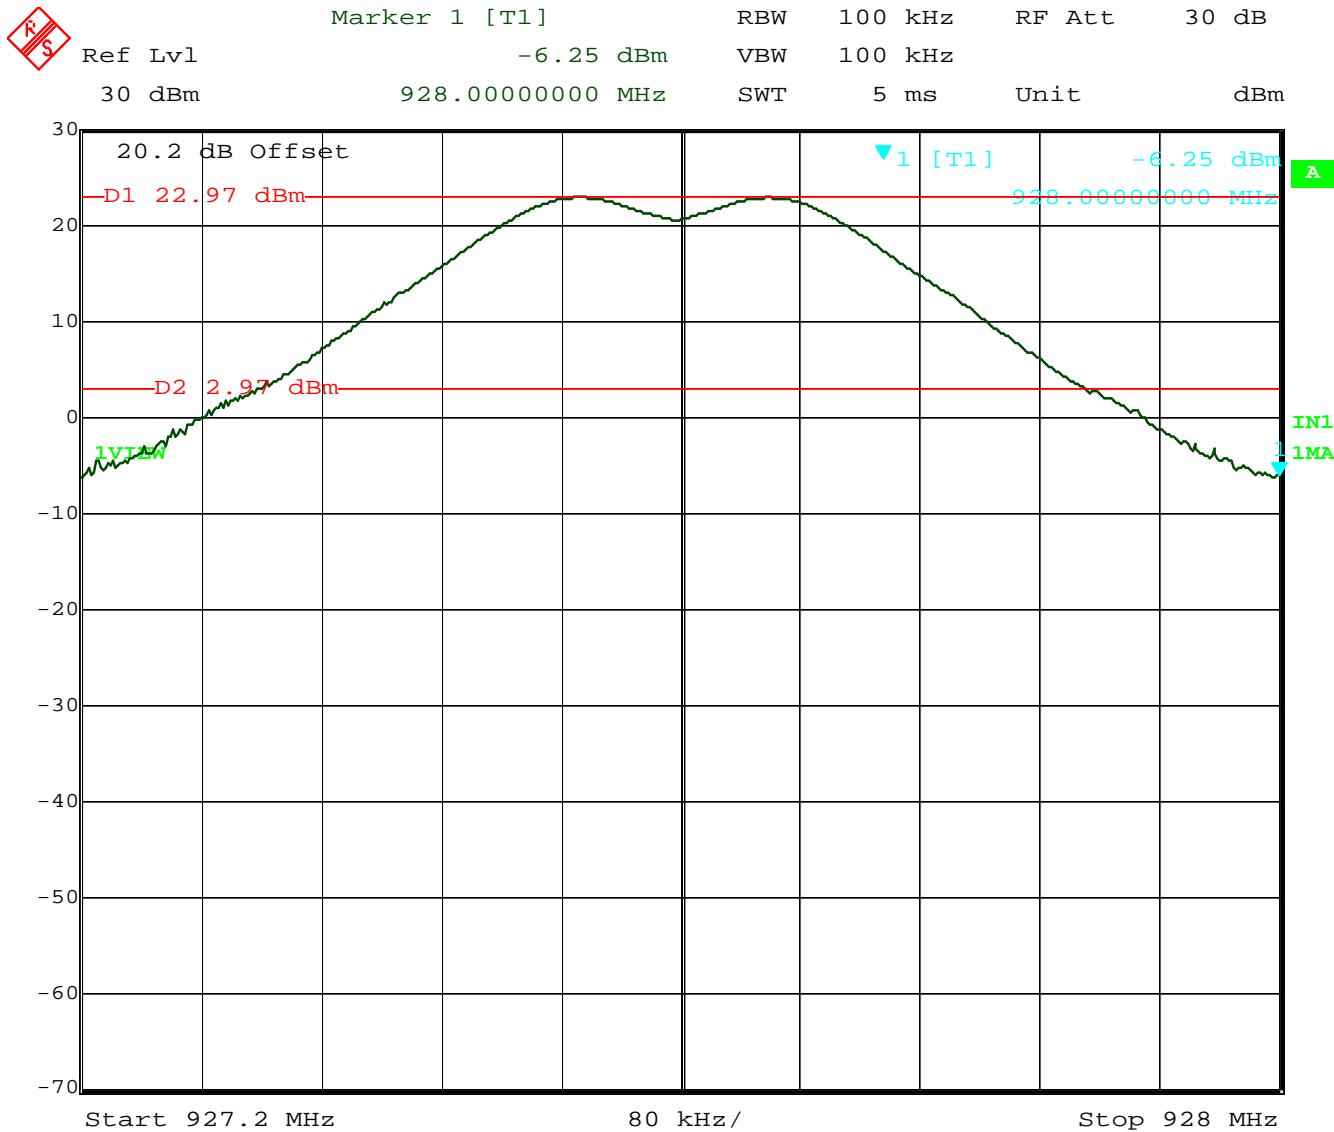

Date: 8.SEP.2010 19:28:28

Figure 10: Upper Band Edge Measurement

Note: Band edge is at 928 MHz

Channel 63 Frequency is 927.6 MHz. The EUT is compliant with the rules.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

5.6 Peak Output Power

The maximum peak output power of the intentional radiator shall not exceed 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels. (Conducted Measurement)


5.6.1 Test Over View

Results	Complies (as tested per this report)			Date	8 September 2010		
Standard	FCC Part 15.247(b)(2) and RSS-210 A8.4(1)						
Product Model	EA2G			Serial#	Production Sample		
Test Set-up	Direct Measurement from antenna port						
EUT Powered By	3.6V DC Battery	Temp	75° F	Humidity	43%	Pressure	1012 mbar
Perf. Criteria	(Below Limit)		Perf. Verification	Readings Under Limit			
Mod. to EUT	None		Test Performed By	Mark Ryan			

5.6.2 Test Procedure

The peak output power was measured at CH01, CH34, CH48, and at CH63. The measurements were made using a direct connection between the RF output of the EUT and the spectrum analyzer. The cable loss and the attenuator was measured and added in the reference level offset in the spectrum analyzer. The spectrum analyzer's resolution bandwidth was greater than the 20dB bandwidth of the modulated carrier and the video bandwidth was equal to the resolution bandwidth.

Test Setup:

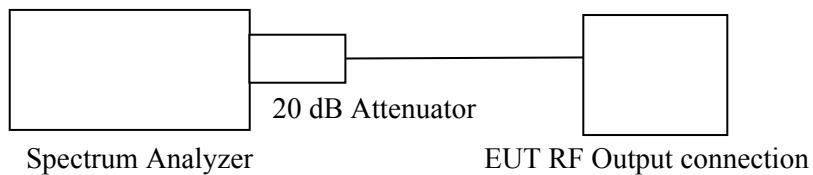

5.6.3 Deviations

There were no deviations from the test methodology listed in the test plan for this test.

5.6.4 Final Test

The EUT met the performance criteria requirement as specified in the test plan of this report and in the standards.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

5.6.5 Final Data - Peak Power Output

CH01: 902.8 MHz = 0.2008 Watts = 130.02 dB μ V

CH34: 916.0 MHz = 0.2178 Watts = 130.37 dB μ V – highest output.

CH48: 921.6 MHz = 0.2041 Watts = 130.08 dB μ V

CH63: 927.6 MHz = 0.1891 Watts = 129.76 dB μ V

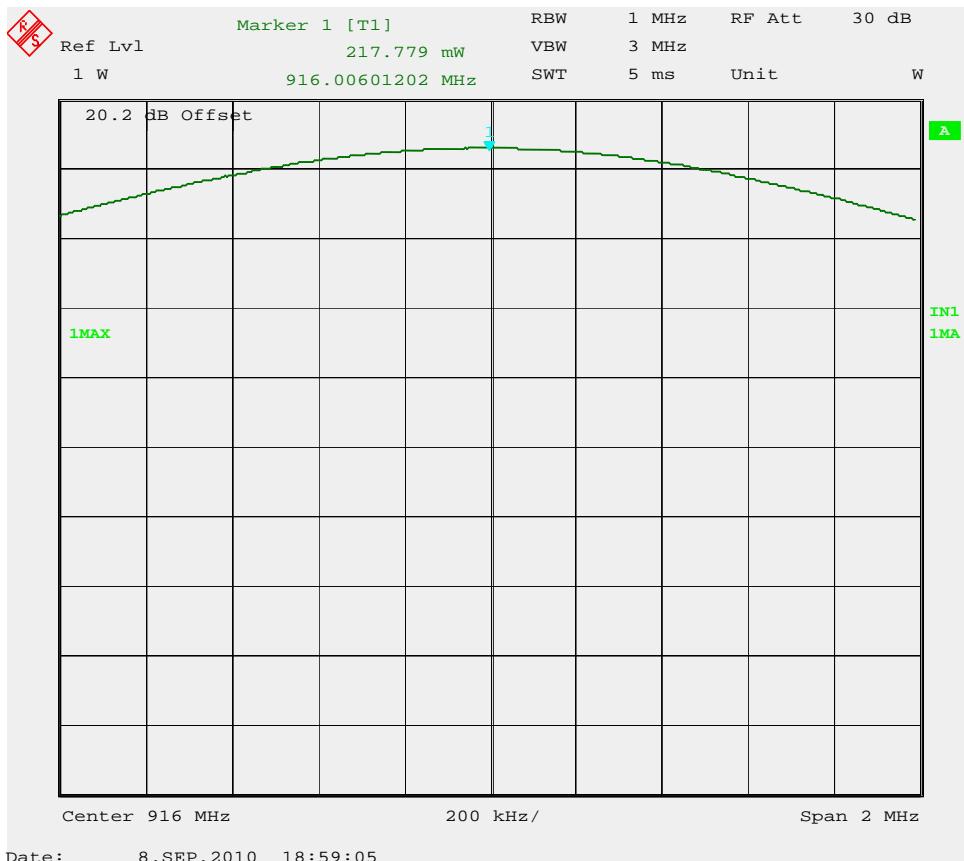


Figure 11: CH 34 (916.0 MHz) Peak Output Power - Worst Case Shown.

Plots of other channels are on file at TUV Rheinland.

Antenna Gain

The antenna gain data was supplied separately with the following results provided:

Results; Internal Antenna

Freq. (MHz)	Peak (dBi)	Gain (Numeric)
902.0 – 928.0	0.63	1.16

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

6 Emissions in Receive Mode.

6.1 Radiated Emissions

This test measures the electromagnetic levels of spurious signals generated by the EUT that radiated from the EUT and may affect the performance of other nearby electronic equipment.

6.1.1 Over View of Test

Results	Complies (as tested per this report)				Date	8 September 2010						
Standard	FCC Parts 15.109(a) and ICES-003											
Product Model	EA2G			Serial#	Production Sample							
Configuration	See test plan for details											
Test Set-up	Tested in a 5m Semi Anechoic chamber, placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane on a turn-table. See test plans for details											
EUT Powered By	3.6V DC Battery	Temp	75° F	Humidity	43%	Pressure	1012 mbar					
Frequency Range	30 MHz to 5 GHz @ 3m											
Perf. Criteria	(Below Limit)		Perf. Verification	Readings Under Limit								
Mod. to EUT	None		Test Performed By	Mark Ryan								

6.1.2 Test Procedure

Radiated and FCC emissions tests were performed using the procedures of ANSI C63.4:2003 including methods for signal maximizations and EUT configuration. The photos included with the report show the EUT in its maximized configuration.

The frequency range from 30 MHz to 5 GHz was investigated for radiated emissions.

Radiated emission testing was performed at a distance of 3 meters in a 5 meter semi-anechoic chamber.

6.1.3 Deviations

There were no deviations from the test methodology listed in the test plan for the radiated emission test.


6.1.4 Final Test

All final radiated emissions measurements were below (in compliance) the limits.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

6.1.5 Final Graphs and Tabulated Data

Radiated Emissions – External Antenna Horizontal

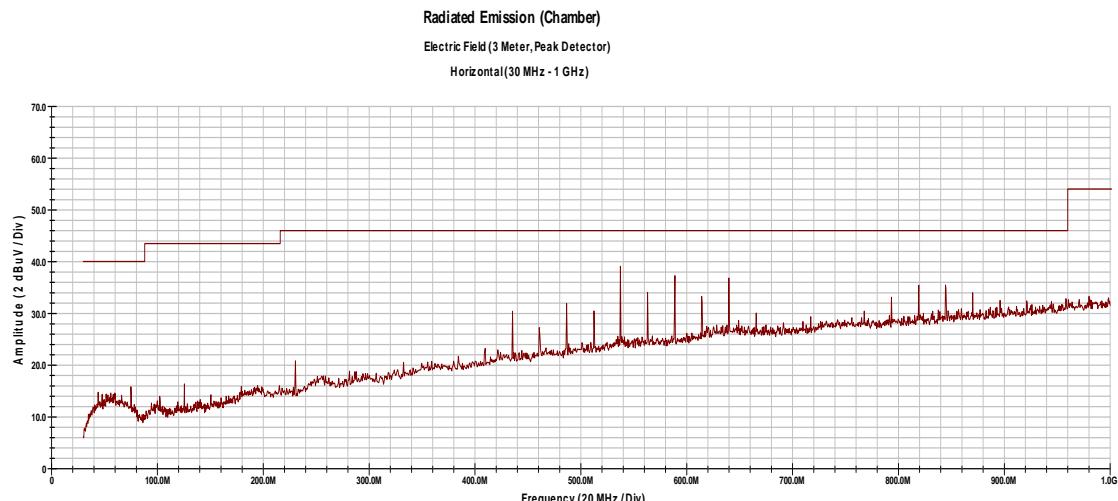

11:02:10 PM, Wednesday, September 08, 2010


Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	QP FIM Value (dB μ V)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dB μ V/m)	Spec Limit (dB μ V/m)	Spec Margin (dB)
230.40	H	1	62	7.93	0.00	1.73	10.72	20.39	46.00	-25.61
537.60	H	1	0	18.15	0.00	2.69	18.10	38.94	46.00	-7.06
588.80	H	1	0	16.39	0.00	2.81	18.50	37.70	46.00	-8.30
640.00	H	1.6	5	17.66	0.00	2.94	20.10	40.70	46.00	-5.30
844.80	H	1.6	4	9.04	0.00	3.39	21.90	34.33	46.00	-11.67

Notes: The low emissions below 200 MHz are anomalies of the receiver.

Highlighted emission is worst case

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Radiated Emissions – External Antenna

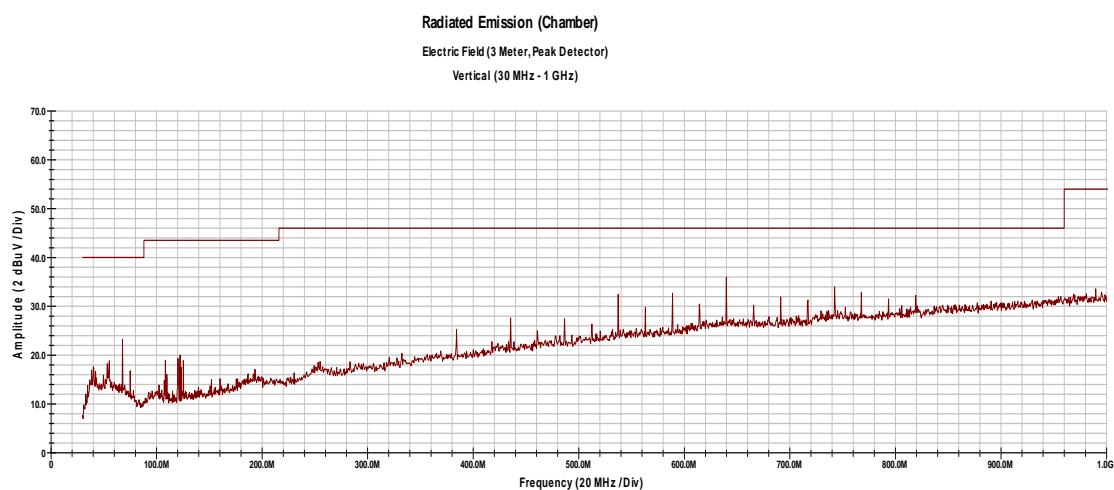

11:04:46 PM, Wednesday, September 08, 2010


Notes: The low emissions below 200 MHz are anomalies of the receiver.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Report No.:

31052582.001 Revision A

Page 39 of 41

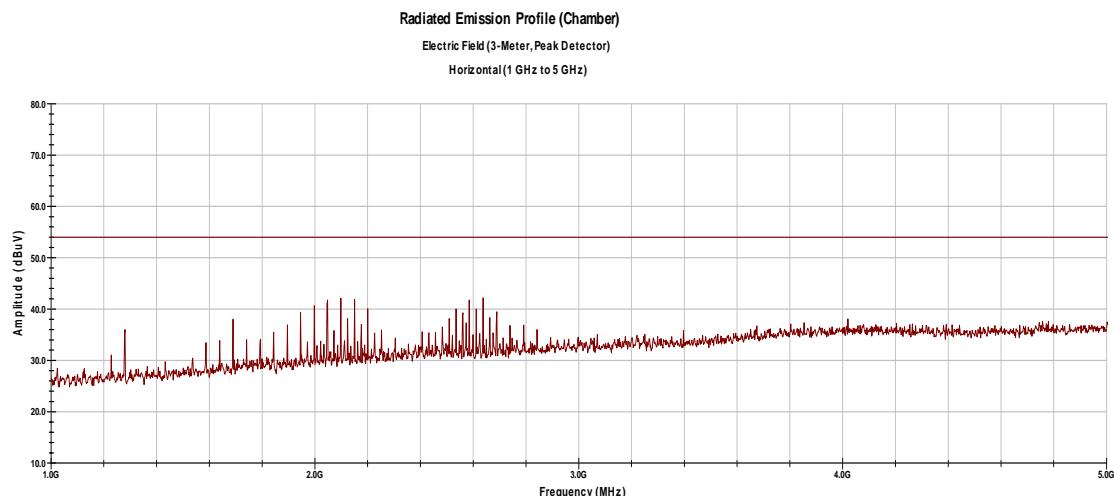Radiated Emissions – External Antenna
Horizontal


09:48:53 PM, Wednesday, September 08, 2010

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dB μ V)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dB μ V/m)	Spec Limit (dB μ V/m)	Spec Margin (dB)
1280.00	H	1	292	47.73	36.17	5.31	25.25	42.11	74.00	-31.89
1280.00	H	1	292	39.71	36.17	5.31	25.25	34.09	54.00	-19.91
2099.20	H	1	46	47.26	35.47	6.93	27.69	46.40	74.00	-27.60
2099.20	H	1	46	41.50	35.47	6.93	27.69	40.64	54.00	-13.36
2636.80	H	1	289	44.98	35.58	7.84	29.11	46.35	74.00	-27.65
2636.80	H	1	289	39.35	35.58	7.84	29.11	40.72	54.00	-13.28

 Notes: Emissions shown in **Blue** are using the Peak Detector and **Green** are using the Average Detector

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.


Report No.:

31052582.001 Revision A

Page 40 of 41

Radiated Emissions – External Antenna

Vertical

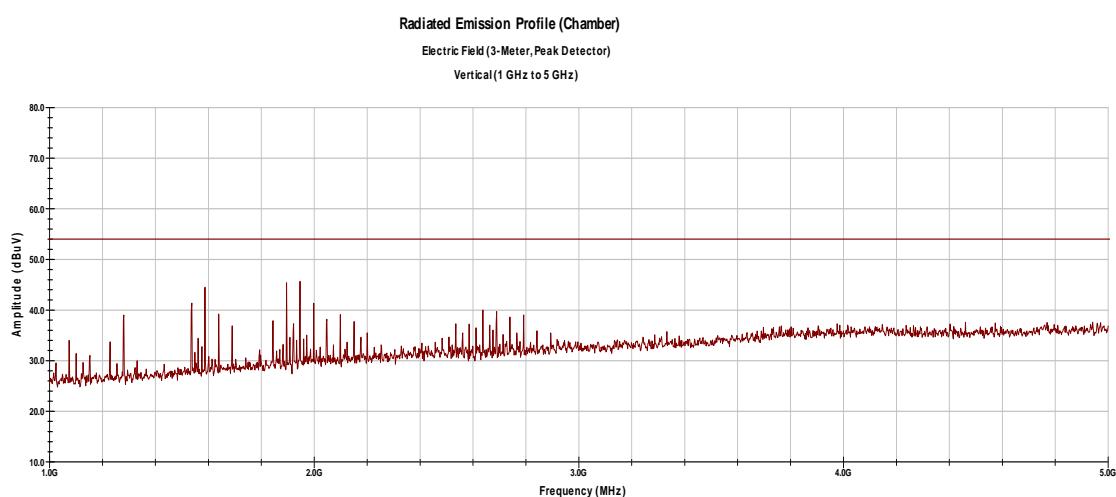

09:51:17 PM, Wednesday, September 08, 2010

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dB μ V)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dB μ V/m)	Spec Limit (dB μ V/m)	Spec Margin (dB)
1280.00	V	1.4	329	49.13	36.17	5.31	25.17	43.43	74.00	-30.57
1280.00	V	1.4	329	44.03	36.17	5.31	25.17	38.33	54.00	-15.67
1587.20	V	1	0	50.23	35.85	5.98	25.88	46.25	74.00	-27.75
1587.20	V	1	0	46.82	35.85	5.98	25.88	42.84	54.00	-11.16
1945.60	V	1	313	49.54	35.60	6.65	27.50	48.10	74.00	-25.90
1945.60	V	1	313	45.92	35.60	6.65	27.50	44.48	54.00	-9.52
2637.00	V	1	62	43.81	35.58	7.84	29.21	45.28	74.00	-28.72
2637.00	V	1	62	36.57	35.58	7.84	29.21	38.04	54.00	-15.96

 Notes: Emissions shown in **Blue** are using the Peak Detector and **Green** are using the Average Detector

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

6.2 Conducted Emissions

This test measures the electromagnet levels of spurious signals generated by the EUT on the AC power line that may affect the performance of other near by electronic equipment.

6.2.1 Over View of Test

Results	Complies (as tested per this report)				Date				
Standard	FCC Part 15.107(a) and ICES-003								
Product Model	EA2G		Serial#	Production Sample					
Configuration	See test plan for details								
Test Set-up	Tested in shielded room. EUT placed on table, see test plans for details								
EUT Powered By	3.6V DC Battery	Temp		Humidity		Pressure			
Frequency Range	150 kHz to 30 MHz								
Perf. Criteria	(Below Limit)	Perf. Verification	Readings Under Limit for L1 & Neutral						
Mod. to EUT	None	Test Performed By	Mark Ryan						

6.2.2 Test Procedure

Conducted and FCC emissions tests were performed using the procedures of ANSI C63.4:2003 including methods for signal maximizations and EUT configuration. The photos included with the report show the EUT in its maximized configuration.

The frequency range from 150 kHz to 30 MHz was investigated for conducted emissions.

Conducted Emissions measurements were performed in the shielded room using procedures specified in the test plan and standard.

6.2.1 Deviations

The EUT is battery operated and has no means to connect to AC Mains.

6.2.2 Final Test

The EUT is battery operated only; therefore this test is not applicable.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.