

Emissions Test Report

EUT Name: Energy Axis Rex2 Form 12S Meter

EUT Model: RX2EA, RX2EAI

FCC ID: QZC-RX2EA, QZC-RX2EAI

IC: 4557A-RX2EA

CLASS 2 PERMISSIVE CHANGE

FCC Title 47, Part 15, Subpart C, RSS-210 Issue 7

Prepared for:

John Holt
Elster Electricity, LLC
208 South Rogers Lane
Raleigh, NC 27610
Tel: 919 212-4700
Fax: 919 212-5108

Prepared by:

TUV Rheinland
762 Park Avenue
Youngsville, NC 27596
Tel: (919) 554-0901
Fax: (919) 556-2043
<http://www.tuv.com/>

Report/Issue Date: 12 December, 2008

Report Number: 30863608.001 C2PC

Statement of Compliance

Manufacturer: Elster Electricity, LLC
208 South Rogers Lane
Raleigh, NC 27610
919 212-4700

Requester / Applicant: John Holt

Name of Equipment: Energy Axis Rex2 Form 12S Meter

Operation Frequency Range: 902.4 MHz to 927.6 MHz

Type of Equipment: Intentional Radiator

Application of Regulations: FCC Title 47, Part 15, Subpart C, RSS-210 Issue 7

Test Dates: 10 December, 2008 to 10 December, 2008

Guidance Documents:

Emissions: FCC 47 CFR Part 15C, RSS-210 Issue 7

Test Methods:

Emissions: ANSI C63.4:2003, RSS-GEN

The electromagnetic compatibility test and documented data described in this report has been performed and recorded by TUV Rheinland, in accordance with the standards and procedures listed herein. As the responsible authorized agent of the EMC laboratory, I hereby declare that a sample of one, of the equipment described above, has been shown to be compliant with the EMC requirements of the stated regulations and standards based on these results. If any special accessories and/or modifications were required for compliance, they are listed in the Executive Summary of this report.

This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government. This report contains data that are not covered by NVLAP accreditation. This report shall not be reproduced except in full, without the written authorization of the laboratory.

16 December

2008

Date

NVLAP Signatory



200094-0



90552 and
100881

Industry Canada

IC3755

Table of Contents

1	EXECUTIVE SUMMARY.....	4
1.1	SCOPE	4
1.2	PURPOSE.....	4
1.3	SUMMARY OF TEST RESULTS.....	4
1.4	SPECIAL ACCESSORIES.....	5
1.5	EQUIPMENT MODIFICATIONS	5
2	LABORATORY INFORMATION	5
2.1	ACCREDITATIONS & ENDORSEMENTS	5
2.2	TEST FACILITIES.....	6
2.3	MEASUREMENT UNCERTAINTY.....	7
2.4	CALIBRATION TRACEABILITY	7
2.5	PRODUCT INFORMATION	8
2.6	PRODUCT DESCRIPTION	8
2.7	CONFIGURATION	9
3	SPURIOUS EMISSIONS	9
3.1	SPURIOUS EMISSIONS FCC PART 15.247(C)	9
4	TEST EQUIPMENT USE LIST	20
4.1	TEST EQUIPMENT USE LIST	20

1 Executive Summary

1.1 Scope

This report is intended to document the status of conformance with the requirements of the FCC Title 47, Part 15, Subpart C, RSS-210 Issue 7 based on the results of testing performed on *10 December, 2008* through *10 December, 2008* on the *Energy Axis Rex2 Form 12S Meter* Model No. *RX2EA, RX2EAI* manufactured by Elster Electricity, LLC. Refer to Test plan for details on the modification. The modification will have no effect on any of the Time of Occupancy, Occupied Bandwidth, or Peak Output Power. The only possible effect would be the spurious emissions. This test report is the measurement of those emissions. The test set up was identical as was used in the previous test report. Since the emissions of the harmonics (not in restricted bands) has margins of typically -40 dBc (verified by the frequency scan), the focus of emissions will be those in the restricted bands.

1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report.

1.3 Summary of Test Results

Table 1 - Summary of Test Results

Test	Test Method(s)	Test Parameters	Result
Spurious Emissions (in Restricted Bands)	FCC Part 15.247(C) RSS-210, Annex 8, Section A8.5	Table FCC Parts 15.205 & 15.209	compliant

1.4 Special Accessories

No special accessories were necessary in order to achieve compliance.

1.5 Equipment Modifications

No modifications were found to be necessary in order to achieve compliance.

2 Laboratory Information

2.1 Accreditations & Endorsements

2.1.1 US Federal Communications Commission

TUV Rheinland at the 762 Park Ave. Youngsville, N.C 27596 address is accredited by the commission for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (Registration No 90552 and 100881). The laboratory scope of accreditation includes: Title 47 CFR Part 15, 18, and 90. The accreditation is updated every 3 years.

2.1.2 NIST / NVLAP

TUV Rheinland is accredited by the National Voluntary Laboratory Accreditation Program, which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Guide 25 and ISO 9002 (Lab code 200094-0). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

2.1.3 Canada – Industry Canada

Registration No. IC3755

2.1.4 Japan - VCCI

The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland at the 762 Park Ave. Youngsville, N.C 27596 address has been assessed and approved in accordance with the Regulations for Voluntary Control Measures. (Registration No. R-1174 and C-1236).

2.1.5 Acceptance By Mutual Recognition Arrangement

The United States has an established agreement with specific countries under the Asia Pacific Laboratory Accreditation Corporation (APLAC) Mutual Recognition Arrangement. Under this agreement, all TUV Rheinland at the 762 Park Ave. Youngsville, N.C 27596 address test results and test reports within the scope of the laboratory NIST / NVLAP accreditation will be accepted by each member country.

2.2 Test Facilities

All of the test facilities are located at 762 Park Ave., Youngsville, North Carolina 27596, USA.

2.2.1 Emission Test Facility

The Open Area Test Site and AC Line Conducted measurement facility used to collect the radiated and conducted data has been constructed in accordance with ANSI C63.7:1992. The site has been measured in accordance with and verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4:2005, at a test distance of 3 and 10 meters. This site has been described in reports dated May 12, 1997, submitted to the FCC, and accepted by letter dated June 25, 1997 (31040/SIT 1300F2). The site is listed with the FCC and accredited by NVLAP (code 200094-0). The 5m semi-anechoic chamber used to collect the radiated data has been verified to comply with the theoretical normalized site attenuation requirements of ANSI C63.4:2005, at a test distance of 3 meters. A report detailing this site can be obtained from TUV Rheinland.

2.2.2 Immunity Test Facility

ESD, EFT, Surge, PQF: These tests are performed in an environmentally controlled room with a 3.7m x 3.7m x 3.175mm thick aluminum floor connected to PE ground. For ESD testing, tabletop equipment is placed on an insulated mat with a surface resistivity of 10^9 Ohms/square on a 1.6m x 0.8m x 0.8m high non-conductive table with a 3.175mm aluminum top (Horizontal Coupling Plane). The HCP is connected to the main ground plane via a low impedance ground strap through two 470 k Ω resistors. The Vertical Coupling Plane consists of an aluminum plate 50cm x 50cm x 3.175mm thick. The VCP is connected to the main ground plane via a low impedance ground strap through two 470 k Ω resistors. For each of the other tests, the HCP is removed.

RF Field Immunity testing is performed in a 7.3m x 3.7m x 3.2m anechoic chamber.

RF Conducted and Magnetic Field Immunity testing is performed on a 4.9m x 3.7m x 3.175mm thick aluminum ground plane which is connected to one end of the anechoic chamber.

All test areas allow a minimum distance of 1 meter from the EUT to walls or conducting objects.

2.3 Measurement Uncertainty

Two types of measurement uncertainty are expressed in this report, per *ISO Guide To The Expression Of Uncertainty In Measurement*, 1st addition, 1995.

The Combined Standard Uncertainty is the standard uncertainty of the result of a measurement when that result is obtained from the values of a number of other quantities, equal to the positive square root of a sum of terms, the terms being the variances or co-variances of these other quantities weighted according to how the measurement result varies with changes in these quantities. The term standard uncertainty is the result of a measurement expressed as a standard deviation.

The Expanded Uncertainty defines an interval about the result of a measurement that may be expected to encompass a large fraction of the distribution of values that could reasonably be attributed to the measurand. The fraction may be viewed as the coverage probability or level of confidence of the interval.

The test system for conducted emissions is defined as the LISN, spectrum analyzer, coaxial cables, and pads. The test system for radiated emissions is defined as the antenna, spectrum analyzer, pre-amplifier, coaxial cables, and pads. The conducted test system has a combined standard uncertainty of ± 1.2 dB. The radiated test system has a combined standard uncertainty of ± 1.6 dB. The expanded uncertainty at a level of 95% confidence is obtained by multiplying the combined standard uncertainty by a coverage factor of 2. Compliance criteria are not based on measurement uncertainty.

2.4 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Guide 25.

2.5 Product Information



Figure 1: Photo of 12S meter in a 12S electrical socket

2.6 Product Description

The EUT is a watt-hour meter with an integrated 900 MHz band, frequency hopping radio. A block diagram and schematic showing the major sections of the electronic assembly have been included in a separate test plan document for submission.

A more detailed description of the EUT can be found in the Manufacturer' test plan.

The EUT submitted for testing was Not Serialized.

2.7 Configuration

Each meter type was installed in turn in a meter socket appropriate for measuring electricity consumption. Preliminary testing was performed on each of the three meter types to determine the configuration that produced maximum radiation. The following meter types were tested:

Meter Form	Test Voltage
Rex2 meter, Form 12S	120Vac
Rex2 meter, Form 12S, with service disconnect switch (SDS) installed.	120Vac

All units have an internal microwave slot antenna printed on the main PCB. There are no other antenna options to be tested. The printed circuit board assembly is connected to line voltage (120 or 240V ac) and to the output of a current transformer. There are no other cables or wires connected to the Single-phase meter. For the service disconnect meter, there is a disconnect option board that connects to the main board via the 10-pin header J5.

The final configuration was selected to produce worse case radiation and place the EUT in the most susceptible state. The Rex2 meter with the internal service disconnect switch was determined to have the worst case emissions and was therefore used for all final testing displayed in this report.

3 Spurious Emissions

3.1 Spurious Emissions FCC Part 15.247(c)

3.1.1 Test Methodology

3.1.1.1 Preliminary Test

A test program that controls instrumentation and data logging was used to automate the preliminary RF emission test procedure. The frequency range of interest was divided into sub-ranges to yield a frequency resolution of approximately 300 kHz and provide a reading at each frequency for each 6° of turntable rotation. For each frequency sub-range the turntable was rotated 360° while peak emission data was recorded and plotted over the frequency range of interest in horizontal and vertical antenna polarization's.

Preliminary emission profile testing was performed inside the anechoic chamber. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the floor. The EUT was positioned as shown in the setup photographs. The receiving antenna was placed at a distance of 3m at a fixed height of 1m. Measurement equipment was located outside of the chamber. A video camera was placed inside the chamber to view the EUT.

3.1.1.2 Final Test

For each frequency measured, the peak emission was maximized by manipulating the receiving antenna from 1 to 4 meters above the ground plane and placing it at the position that produced the maximum signal strength reading. The turntable was then rotated through 360° while observing the peak signal and placing the EUT at the position that produced maximum radiation.

Final testing was performed on an NSA compliant test site. The EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane. The placement of EUT and cables were the same as for preliminary testing and is shown in the setup photographs.

3.1.1.3 Deviations

There were no deviations from this test methodology.

3.1.2 Test Results

As originally tested, the EUT was found to be compliant to the requirements of the test standard(s).

3.1.2.1 Restricted band measurements

Radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see 15.205(c)). In addition, where an average detector is used for determining compliance with the limits in 15.209(a), there is a corresponding peak limit 20 dB above the specified average limit according to 15.35(b)

Measurements demonstrating compliance with these parts are provided in the tables below.

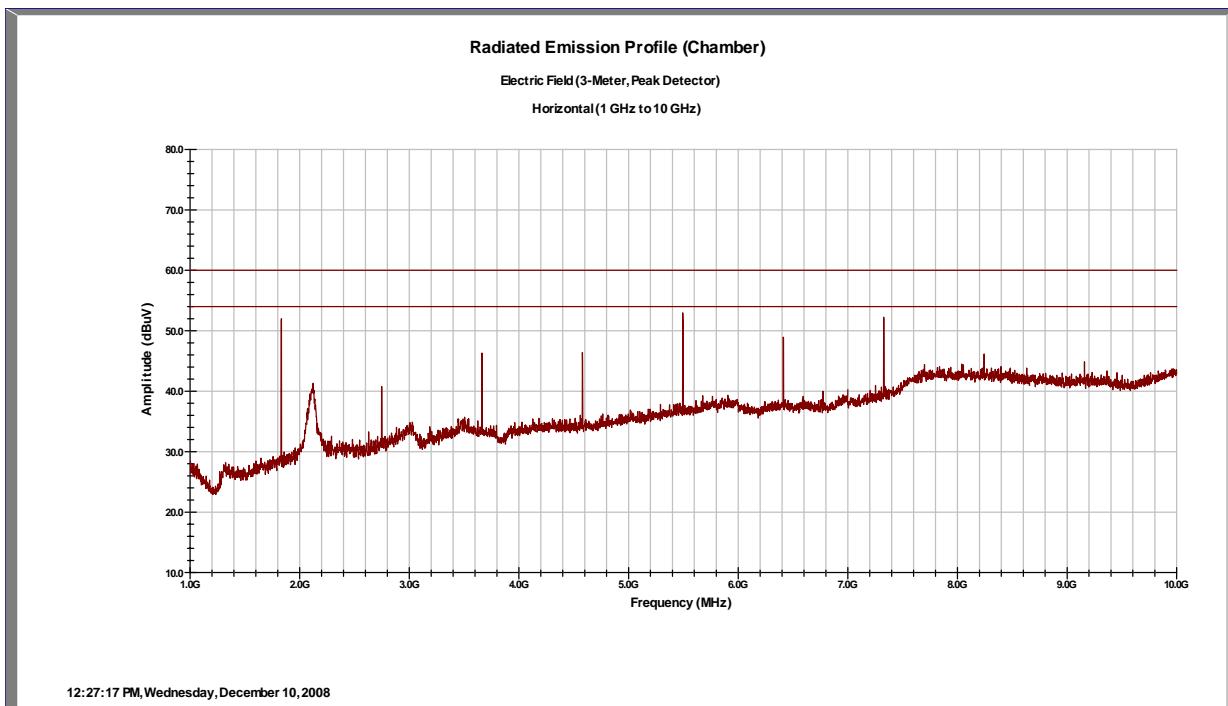


Figure 2: Plot of Radiated Harmonics and spurs 1-10GHz Horizontal

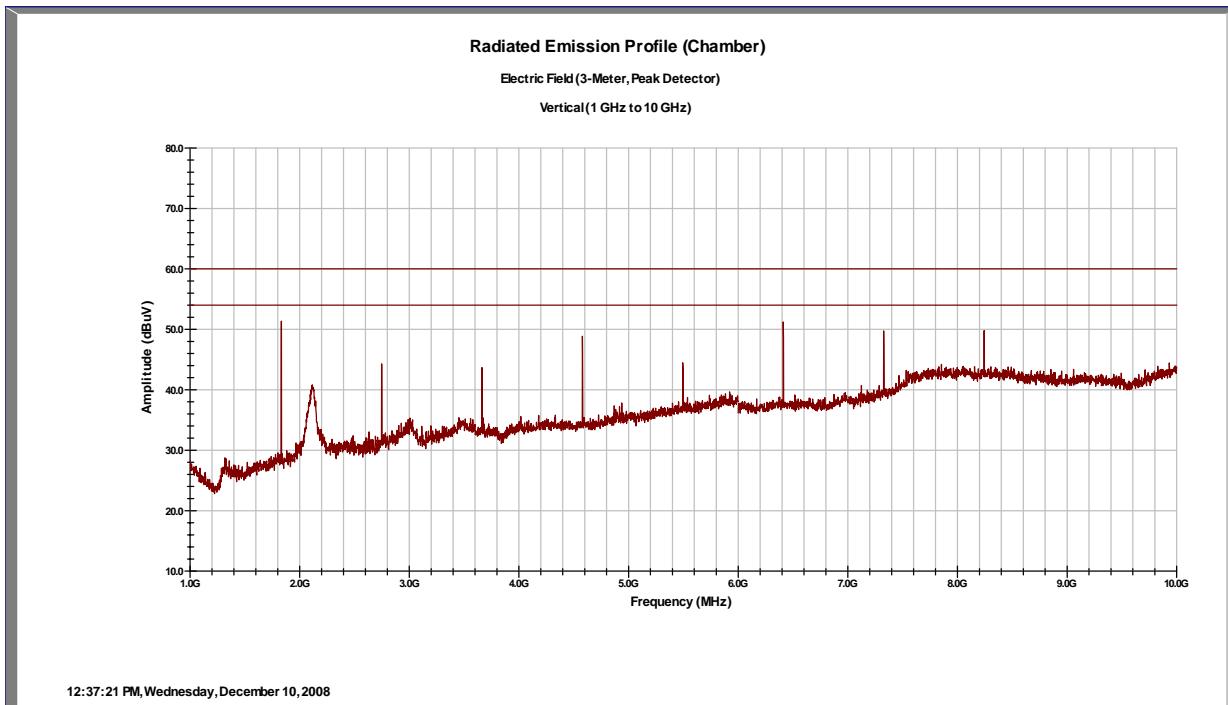


Figure 3: Plot of Radiated Harmonics and spurs 1-10GHz Vertical

SOP 1 Radiated Emissions							Tracking # 30863608.001 Page 1 of 6 C2PC				
EUT Name	Energy Axis Rex2 Form 12S Meter					Date	10 December, 2008				
EUT Model	RX2EA, RX2EAI					Temp / Hum in	73.4 deg F / 37% rh				
EUT Serial	Not Serialized					Temp / Hum out	N/A				
Standard	FCC 47 CFR Part 15C, RSS-210 Issue 7					Line AC / Freq.	120 VAC				
Deg/sweep	6					RBW / VBW	1 MHz/1MHz				
Dist/Ant Used	3 meters / 3115					Performed by	Mark Ryan				
Configuration	REX2 Meter with internal service disconnect switch, Channel 1, 902.8 MHz										
Emission Freq (MHz)	ANT Polar (H)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)	
Peak											
2708.40	H	1.84	20	46.03	36.01	7.81	29.68	47.52	74.00	-26.48	
3611.20	H	1.37	3	44.05	35.74	9.42	31.82	49.55	74.00	-24.45	
4514.00	H	1.71	338	42.52	35.83	10.51	32.43	49.64	74.00	-24.36	
5414.40	H	1.27	19	46.03	35.15	11.28	34.16	56.33	74.00	-17.67	
8125.20	H	1.23	32	36.73	35.46	15.81	37.28	54.35	74.00	-19.65	
9028.00	H	1.33	355	36.08	35.94	15.50	37.61	53.24	74.00	-20.76	
Average											
2708.40	H	1.84	20	37.42	36.01	7.81	29.68	38.91	54.00	-15.09	
3611.20	H	1.37	3	34.99	35.74	9.42	31.82	40.49	54.00	-13.51	
4514.00	H	1.71	338	32.72	35.83	10.51	32.43	39.84	54.00	-14.16	
5414.40	H	1.22	13	37.71	35.15	11.28	34.16	48.01	54.00	-5.99	
8125.20	H	1.23	32	24.14	35.46	15.81	37.28	41.76	54.00	-12.24	
9028.00	H	1.33	355	23.71	35.94	15.50	37.61	40.87	54.00	-13.13	
Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor \pm Uncertainty											
Combined Standard Uncertainty $u_c(y) = \pm 1.6$ dB Expanded Uncertainty $U = ku_c(y)$ $k = 2$ for 95% confidence											
Notes: RBW/VBW = 1MHz/1MHz For frequencies between 1GHz and 10 GHz											
Note: Peak measurements were made to document compliance with 15.247(c) and compliance with 15.35b. In addition, average measurements were made to document compliance with 15.205(b) for spurious emissions falling in the restricted bands.											

SOP 1 Radiated Emissions							Tracking # 30863608.001 Page 2 of 6 C2PC					
EUT Name	Energy Axis Rex2 Form 12S Meter					Date	10 December, 2008					
EUT Model	RX2EA, RX2EAI					Temp / Hum in	73.4 deg F / 37% rh					
EUT Serial	07 672 721					Temp / Hum out	N/A					
Standard	FCC 47 CFR Part 15C, RSS-210 Issue 7					Line AC / Freq.	120 VAC					
Deg/sweep	6					RBW / VBW	1 MHz/1MHz					
Dist/Ant Used	3 meters / 3115					Performed by	Mark Ryan					
Configuration	REX2 Meter with internal service disconnect switch, Channel 1, 902.8 MHz											
Emission Freq (MHz)	ANT Polar (V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)		
Peak												
2708.40	V	1.03	25	47.55	36.01	7.81	29.21	48.57	74.00	-25.43		
3611.20	V	1.00	321	43.02	35.74	9.42	31.61	48.31	74.00	-25.69		
4514.00	V	1.08	69	40.59	35.83	10.51	32.63	47.90	74.00	-26.10		
5414.40	V	1.01	5	41.87	35.15	11.28	34.33	52.33	74.00	-21.67		
8125.20	V	1.03	345	39.37	35.46	15.81	37.23	56.94	74.00	-17.06		
9028.00	V	1.35	23	36.08	35.94	15.50	37.81	53.44	74.00	-20.56		
Average												
2708.40	V	1.03	25	39.88	36.01	7.81	29.21	40.90	54.00	-13.10		
3611.20	V	1.00	321	33.89	35.74	9.42	31.61	39.18	54.00	-14.82		
4514.00	V	1.08	69	29.78	35.83	10.51	32.63	37.09	54.00	-16.91		
5414.40	V	1.01	5	32.08	35.15	11.28	34.33	42.54	54.00	-11.46		
8125.20	V	1.03	345	28.36	35.46	15.81	37.23	45.93	54.00	-8.07		
9028.00	V	1.35	23	23.22	35.94	15.50	37.81	40.58	54.00	-13.42		
Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor \pm Uncertainty												
Combined Standard Uncertainty $U_c(y) = \pm 1.6$ dB Expanded Uncertainty $U = ku_c(y)$ $k = 2$ for 95% confidence												
Notes: RBW/VBW = 1MHz/1MHz For frequencies between 1GHz and 10 GHz												
Note: Peak measurements were made to document compliance with 15.247(c) and compliance with 15.35b. In addition, average measurements were made to document compliance with 15.205(b) for spurious emissions falling in the restricted bands.												

SOP 1 Radiated Emissions							Tracking # 30863608.001 Page 3 of 6				
EUT Name	Energy Axis Rex2 Form 12S Meter			Date	10 December, 2008						
EUT Model	RX2EA, RX2EAI			Temp / Hum in	72.5 deg F / 44% rh						
EUT Serial	Not Serialized			Temp / Hum out	N/A						
Standard	FCC 47 CFR Part 15C, RSS-210 Issue 7			Line AC / Freq.	120 VAC						
Deg/sweep	6			RBW / VBW	1 MHz/1MHz						
Dist/Ant Used	3 meters / 3115			Performed by	Mark Ryan						
Configuration	REX2 Meter with internal service disconnect switch, Channel 34, 916.00 MHz										
Emission Freq (MHz)	ANT Polar (H)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)	
Peak											
2748.00	H	1.83	19	45.02	35.93	7.94	29.79	46.82	74.00	-27.18	
3664.00	H	1.20	359	45.15	35.60	9.25	31.93	50.72	74.00	-23.28	
4580.00	H	1.29	10	43.41	35.94	10.93	32.58	50.97	74.00	-23.03	
7328.00	H	1.25	312	44.05	36.11	14.35	36.42	58.71	74.00	-15.29	
8244.00	H	1.55	324	37.12	35.57	15.76	37.35	54.66	74.00	-19.34	
9160.00	H	1.26	357	33.95	36.04	15.43	37.63	50.97	74.00	-23.03	
Average											
2748.00	H	1.83	19	36.31	35.93	7.94	29.79	38.11	54.00	-15.89	
3664.00	H	1.20	359	36.29	35.60	9.25	31.93	41.86	54.00	-12.14	
4580.00	H	1.29	10	33.87	35.94	10.93	32.58	41.43	54.00	-12.57	
7328.00	H	1.25	312	35.42	36.11	14.35	36.42	50.08	54.00	-3.92	
8244.00	H	1.55	324	25.23	35.57	15.76	37.35	42.77	54.00	-11.23	
9160.00	H	1.26	357	20.83	36.04	15.43	37.63	37.85	54.00	-16.15	
Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor ± Uncertainty											
Combined Standard Uncertainty $U_c(y) = \pm 1.6\text{dB}$ Expanded Uncertainty $U = ku_c(y)$ $k = 2$ for 95% confidence											
Notes: RBW/VBW = 1MHz/1MHz For frequencies between 1GHz and 10 GHz											
Note: Peak measurements were made to document compliance with 15.247(c) and compliance with 15.35b. In addition, average measurements were made to document compliance with 15.205(b) for spurious emissions falling in the restricted bands.											

SOP 1 Radiated Emissions							Tracking # 30863608.001 Page 4 of 6 C2PC					
EUT Name	Energy Axis Rex2 Form 12S Meter					Date	10 December, 2008					
EUT Model	RX2EA, RX2EAI					Temp / Hum in	72.5 deg F / 44% rh					
EUT Serial	Not Serialized					Temp / Hum out	N/A					
Standard	FCC 47 CFR Part 15C, RSS-210 Issue 7					Line AC / Freq.	120 VAC					
Deg/sweep	6					RBW / VBW	1 MHz/1MHz					
Dist/Ant Used	3 meters / 3115					Performed by	Mark Ryan					
Configuration	REX2 Meter with internal service disconnect switch, Channel 34, 916.00 MHz											
Emission Freq (MHz)	ANT Polar (V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)		
Peak												
2748.00	V	1.73	66	46.15	35.93	7.94	29.34	47.50	74.00	-26.50		
3664.00	V	1.66	2	44.88	35.60	9.25	31.76	50.28	74.00	-23.72		
4580.00	V	1.01	22	43.67	35.94	10.93	32.74	51.40	74.00	-22.60		
7328.00	V	1.38	339	41.34	36.11	14.35	36.42	56.00	74.00	-18.00		
8244.00	V	1.37	25	38.26	35.57	15.76	37.34	55.80	74.00	-18.20		
9160.00	V	1.25	10	35.01	36.04	15.43	37.83	52.23	74.00	-21.77		
Average												
2748.00	V	1.73	66	37.85	35.93	7.94	29.34	39.20	54.00	-14.80		
3664.00	V	1.66	2	35.49	35.60	9.25	31.76	40.89	54.00	-13.11		
4580.00	V	1.01	22	34.33	35.94	10.93	32.74	42.06	54.00	-11.94		
7328.00	V	1.38	339	31.83	36.11	14.35	36.42	46.49	54.00	-7.51		
8244.00	V	1.37	25	27.00	35.57	15.76	37.34	44.54	54.00	-9.46		
9160.00	V	1.25	10	20.83	36.04	15.43	37.83	38.05	54.00	-15.95		
Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor \pm Uncertainty												
Combined Standard Uncertainty $U_c(y) = \pm 1.6$ dB Expanded Uncertainty $U = ku_c(y)$ $k = 2$ for 95% confidence												
Notes: RBW/VBW = 1MHz/1MHz For frequencies between 1GHz and 10 GHz												
Note: Peak measurements were made to document compliance with 15.247(c) and compliance with 15.35b. In addition, average measurements were made to document compliance with 15.205(b) for spurious emissions falling in the restricted bands.												

SOP 1 Radiated Emissions							Tracking #	30863608.001 Page 5 of 6		
EUT Name	Energy Axis Rex2 Form 12S Meter				Date	10 December, 2008				
EUT Model	RX2EA, RX2EAI				Temp / Hum in	72.5 deg F / 44% rh				
EUT Serial	Not Serialized				Temp / Hum out	N/A				
Standard	FCC 47 CFR Part 15C, RSS-210 Issue 7				Line AC / Freq.	120 VAC				
Deg/sweep	6				RBW / VBW	1 MHz/1MHz				
Dist/Ant Used	3 meters / 3115				Performed by	Mark Ryan				
Configuration	REX2 Meter with internal service disconnect switch, Channel 48, 921.60 MHz									
Emission Freq (MHz)	ANT Polar (H)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)
Peak										
2764.80	H	1.79	23	44.88	35.95	7.99	29.84	46.76	74.00	-27.24
3686.40	H	1.16	328	46.53	35.54	9.18	31.97	52.15	74.00	-21.85
4608.00	H	1.41	7	45.90	35.98	10.94	32.64	53.49	74.00	-20.51
7372.80	H	1.22	319	43.02	36.05	14.42	36.52	57.91	74.00	-16.09
8294.40	H	1.13	86	40.10	35.59	15.73	37.38	57.62	74.00	-16.38
9216.00	H	1.08	73	37.88	36.12	15.41	37.64	54.81	74.00	-19.19
Average										
2764.80	H	1.79	23	35.30	35.95	7.99	29.84	37.18	54.00	-16.82
3686.40	H	1.16	328	37.90	35.54	9.18	31.97	43.52	54.00	-10.48
4608.00	H	1.41	7	37.82	35.98	10.94	32.64	45.41	54.00	-8.59
7372.80	H	1.22	319	33.35	36.05	14.42	36.52	48.24	54.00	-5.76
8294.40	H	1.13	86	29.51	35.59	15.73	37.38	47.03	54.00	-6.97
9216.00	H	1.08	73	26.06	36.12	15.41	37.64	42.99	54.00	-11.01
Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor \pm Uncertainty										
Combined Standard Uncertainty $U_c(y) = \pm 1.6$ dB Expanded Uncertainty $U = ku_c(y)$ $k = 2$ for 95% confidence										
Notes: RBW/VBW = 1MHz/1MHz For frequencies between 1GHz and 10 GHz										
Note: Peak measurements were made to document compliance with 15.247(c) and compliance with 15.35b. In addition, average measurements were made to document compliance with 15.205(b) for spurious emissions falling in the restricted bands.										

SOP 1 Radiated Emissions							Tracking # 30863608.001 Page 6 of 6 C2PC					
EUT Name	Energy Axis Rex2 Form 12S Meter					Date	10 December, 2008					
EUT Model	RX2EA, RX2EAI					Temp / Hum in	72.5 deg F / 44% rh					
EUT Serial	Not Serialized					Temp / Hum out	N/A					
Standard	FCC 47 CFR Part 15C, RSS-210 Issue 7					Line AC / Freq.	120 VAC					
Deg/sweep	6					RBW / VBW	1 MHz/1MHz					
Dist/Ant Used	3 meters / 3115					Performed by	Mark Ryan					
Configuration	REX2 Meter with internal service disconnect switch, Channel 48, 921.60 MHz											
Emission Freq (MHz)	ANT Polar (V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)		
Peak												
2764.80	V	1.06	26	46.15	35.95	7.99	29.40	47.59	74.00	-26.41		
3686.40	V	1.62	0	42.90	35.54	9.18	31.82	48.37	74.00	-25.63		
4608.00	V	1.09	349	44.47	35.98	10.94	32.79	52.22	74.00	-21.78		
7372.80	V	1.19	247	39.61	36.05	14.42	36.54	54.53	74.00	-19.47		
8294.40	V	1.15	33	39.49	35.59	15.73	37.39	57.02	74.00	-16.98		
9216.00	V	1.29	35	35.80	36.12	15.41	37.84	52.93	74.00	-21.07		
Average												
2764.80	V	1.06	26	37.83	35.95	7.99	29.40	39.27	54.00	-14.73		
3686.40	V	1.62	0	33.21	35.54	9.18	31.82	38.68	54.00	-15.32		
4608.00	V	1.09	349	35.92	35.98	10.94	32.79	43.67	54.00	-10.33		
7372.80	V	1.19	247	29.52	36.05	14.42	36.54	44.44	54.00	-9.56		
8294.40	V	1.15	33	28.55	35.59	15.73	37.39	46.08	54.00	-7.92		
9216.00	V	1.29	35	23.72	36.12	15.41	37.84	40.85	54.00	-13.15		
Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor \pm Uncertainty												
Combined Standard Uncertainty $U_c(y) = \pm 1.6$ dB Expanded Uncertainty $U = ku_c(y)$ $k = 2$ for 95% confidence												
Notes: RBW/VBW = 1MHz/1MHz For frequencies between 1GHz and 10 GHz												
Note: Peak measurements were made to document compliance with 15.247(c) and compliance with 15.35b. In addition, average measurements were made to document compliance with 15.205(b) for spurious emissions falling in the restricted bands.												

SOP 1 Radiated Emissions							Tracking # 30863608.001 Page 7 of 6 C2PC					
EUT Name	Energy Axis Rex2 Form 12S Meter					Date	10 December, 2008					
EUT Model	RX2EA, RX2EAI					Temp / Hum in	72.5 deg F / 44% rh					
EUT Serial	07 672 721					Temp / Hum out	N/A					
Standard	FCC 47 CFR Part 15C, RSS-210 Issue 7					Line AC / Freq.	120 VAC					
Deg/sweep	12					RBW / VBW	1 MHz/1MHz					
Dist/Ant Used	3 meters / 3115					Performed by	Mark Ryan					
Configuration	REX2 Meter with internal service disconnect switch, Channel 63, 927.6 MHz											
Emission Freq (MHz)	ANT Polar (H)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)		
Peak												
2782.80	H	1.03	242	43.92	35.98	8.05	29.89	45.89	74.00	-28.11		
3710.40	H	1.02	328	46.66	35.51	9.03	32.02	52.21	74.00	-21.79		
4638.00	H	1.44	13	45.65	36.01	10.76	32.70	53.11	74.00	-20.89		
7420.80	H	1.18	320	42.39	35.94	14.56	36.63	57.64	74.00	-16.36		
8348.40	H	1.41	8	37.88	35.61	15.72	37.41	55.40	74.00	-18.6		
Average												
2782.80	H	1.03	242	33.66	35.98	8.05	29.89	35.63	54.00	-18.37		
3710.40	H	1.02	328	38.87	35.51	9.03	32.02	44.42	54.00	-9.58		
4638.00	H	1.27	8	37.79	36.01	10.76	32.70	45.25	54.00	-8.75		
7420.80	H	1.18	320	33.26	35.94	14.56	36.63	48.51	54.00	-5.49		
8348.40	H	1.41	8	25.93	35.61	15.72	37.41	43.45	54.00	-10.55		
Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor \pm Uncertainty												
Combined Standard Uncertainty $u_c(y) = \pm 1.6$ dB Expanded Uncertainty $U = ku_c(y)$ $k = 2$ for 95% confidence												
Notes: RBW/VBW = 1MHz/1MHz For frequencies between 1GHz and 10 GHz												
Note: Peak measurements were made to document compliance with 15.247(c) and compliance with 15.35b. In addition, average measurements were made to document compliance with 15.205(b) for spurious emissions falling in the restricted bands.												

SOP 1 Radiated Emissions							Tracking #	30863608.001 Page 8 of 6		
EUT Name	Energy Axis Rex2 Form 12S Meter				Date	10 December, 2008				
EUT Model	RX2EA, RX2EAI				Temp / Hum in	72.5 deg F / 44% rh				
EUT Serial	Not Serialized				Temp / Hum out	N/A				
Standard	FCC 47 CFR Part 15C, RSS-210 Issue 7				Line AC / Freq.	120 VAC				
Deg/sweep	12				RBW / VBW	1 MHz/1MHz				
Dist/Ant Used	3 meters / 3115				Performed by	Mark Ryan				
Configuration	REX2 Meter with internal service disconnect switch, Channel 63, 927.6 MHz									
Emission Freq (MHz)	ANT Polar (V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)
Peak										
2782.80	V	1.05	16	45.02	35.98	8.05	29.46	46.56	74.00	-27.44
3710.40	V	1.05	326	43.41	35.51	9.03	31.89	48.83	74.00	-25.17
4638.00	V	1.11	350	44.20	36.01	10.76	32.85	51.80	74.00	-22.20
7420.80	V	1.21	10	42.01	35.94	14.56	36.68	57.31	74.00	-16.69
8348.40	V	1.71	17	38.13	35.61	15.72	37.45	55.69	74.00	-18.31
Average										
2782.80	V	1.05	16	35.31	35.98	8.05	29.46	36.85	54.00	-17.15
3710.40	V	1.05	326	33.82	35.51	9.03	31.89	39.24	54.00	-14.76
4638.00	V	1.11	350	35.50	36.01	10.76	32.85	43.10	54.00	-10.90
7420.80	V	1.21	10	32.96	35.94	14.56	36.68	48.26	54.00	-5.74
8348.40	V	1.71	17	26.71	35.61	15.72	37.45	44.27	54.00	-9.73
Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor \pm Uncertainty										
Combined Standard Uncertainty $U_c(y) = \pm 1.6\text{dB}$ Expanded Uncertainty $U = ku_c(y)$ $k = 2$ for 95% confidence										
Notes: RBW/VBW = 1MHz/1MHz For frequencies between 1GHz and 10 GHz										
Note: Peak measurements were made to document compliance with 15.247(c) and compliance with 15.35b. In addition, average measurements were made to document compliance with 15.205(b) for spurious emissions falling in the restricted bands.										

4 Test Equipment Use List

4.1 Test Equipment use list

Equipment	Manufacturer	Model #	Serial/Inst #	Last Cal dd/mm/yy	Next Cal dd/mm/yy
SOP 1 - Radiated Emissions (5 Meter Chamber)					
Amplifier, preamp	Agilent Technologies	8449B	3008A01480	30-Jan-08	30-Jan-09
Antenna Horn 1-18GHz	EMCO	3115	5770	16-Jun-08	16-Jun-10
Ant. BiconiLog	Chase	CBL6140A	1108	13-Jun-08	13-Jun-10
Receiver, EMI ¹	Rohde & Schwarz	ESIB40	100043	9-Jun-08	9-Jun-09
Cable, Coax	Andrew	FSJ1-50A	003	25-Jan-08	25-Jan-09
Cable, Coax	Andrew	FSJ1-50A	030	30-Jan-08	30-Jan-09
Cable, Coax	Andrew	FSJ1-50A	045	30-Jan-08	30-Jan-09

- Calibration of equipment past due for re-calibration will be performed expeditiously. If any equipment is found to be out of tolerance at that time, affected customers will be notified accordingly.

1) This equipment was also used for antenna port conducted measurements.