

# Electromagnetic Compatibility Test Report

*Prepared in accordance with*

**FCC Part 15C, RSS-210 Issue 7**

On

## **Rex2 Family of Power Meters**

**RX2EA4**

**Elster Solutions, LLC  
208 South Rogers Lane  
Raleigh, NC 27610**

Prepared by:

**TUV Rheinland of North America, Inc.**

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Report No.:**
**30953899.001**
**Page 2 of 47**

<b>Client:</b>		Elster Solutions, LLC 208 South Rogers Lane Raleigh, NC 27610	John Holt 919-250-5557 / 919-250-5486 john.holt@us.elster.com
<b>Identification:</b>	Rex2 Family of Power Meters	<b>Serial No.:</b>	1056
<b>Test item:</b>	RX2EA4	<b>Date tested:</b>	02 February 2010
<b>Testing location:</b>	TUV Rheinland of North America 762 Park Avenue Youngsville, NC 27596-9470 U.S.A.		Tel: (919) 554-3668 Fax: (919) 554-3542
<b>Test specification:</b>	<b>Emissions:</b> FCC Part 15, Subpart C, RSS-210 Issue 7: FCC Part 15.207(a) and RSS-210 FCC Parts 15.205, 15.209, 15.215(c), RSS-210 FCC Part 15.247(a)(1)(i) and RSS-210 A1.3, FCC Part 15.247 and RSS-210 Annex 8, FCC Part 15.247(a)(1)(i) and RSS-210, Section A8.1 and Section A1.1.3, FCC Part 15.247(a)(1) and RSS-210 A8.1(c), FCC Part 15.247(b)(2) and RSS-210 A8.4(1), FCC Part 15.247(g) and RSS-210 A8.1, FCC Part 15.247(h) and RSS-210 A8.1, FCC Parts 15.109(a) and ICES-003 and FCC Part 15.107(a) and ICES-003		
<b>Test Result</b>	<b>The above product was found to be Compliant to the above test standard(s)</b>		
<b>tested by:</b> Michael Moranha	<b>reviewed by:</b> Robert Richards		
8 February 2010	8 February 2010		
<i>Signature</i>	<i>Signature</i>		
<b>Other Aspects:</b>	<b>None</b>		
Abbreviations:	OK, Pass, Compliant, Complies = passed Fail, Not Compliant, Does Not Comply = failed N/A = not applicable		
<b>FC</b>  90552 and 100881	<b>NVLAP</b>  NVLAP Lab Code (200094-0)	<b>Industry Canada</b>  IC-2932H	

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## TABLE OF CONTENTS

<b>1 GENERAL INFORMATION .....</b>	<b>4</b>
1.1 SCOPE .....	4
1.2 PURPOSE .....	4
1.3 SUMMARY OF TEST RESULTS .....	5
<b>2 LABORATORY INFORMATION .....</b>	<b>6</b>
2.1 ACCREDITATIONS AND ENDORSEMENTS .....	6
2.2 MEASUREMENT UNCERTAINTY EMISSIONS .....	7
2.3 CALIBRATION TRACEABILITY .....	7
2.4 MEASUREMENT EQUIPMENT USED .....	8
<b>3 PRODUCT INFORMATION .....</b>	<b>9</b>
3.1 PRODUCT DESCRIPTION .....	9
3.2 EQUIPMENT MODIFICATIONS .....	9
<b>4 SPURIOUS EMISSIONS .....</b>	<b>10</b>
4.1 SPURIOUS EMISSIONS OUTSIDE THE BAND .....	10
4.1 CONDUCTED EMISSIONS IN TRANSMIT MODE .....	16
4.2 FREQUENCY HOPPING SPREAD SPECTRUM (FHSS) SYSTEMS FCC PART 15.247(G) .....	19
4.3 INCORPORATION OF INTELLIGENCE WITHIN A FHSS SYSTEM FCC PART 15.247(H) .....	19
<b>5 ANTENNA PORT CONDUCTED EMISSIONS .....</b>	<b>20</b>
5.1 BAND EDGE .....	20
5.2 CHANNEL SEPARATION .....	23
5.3 PSEUDORANDOM HOPPING ALGORITHM .....	25
5.4 OCCUPIED BANDWIDTH .....	30
5.5 99% POWER BANDWIDTH .....	32
5.6 PEAK OUTPUT POWER .....	34
<b>6 EMISSIONS IN RECEIVE MODE .....</b>	<b>40</b>
6.1 RADIATED EMISSIONS .....	40
6.2 CONDUCTED EMISSIONS .....	45

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## 1 General Information

### 1.1 Scope

This report is intended to document the status of conformance with the requirements of the FCC Part 15C, RSS-210 Issue 7 based on the results of testing performed on 02 February 2010 on the Rex2 Family of Power Meters, Model No. RX2EA4, manufactured by Elster Solutions, LLC. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

### 1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT (Equipment Under Test) in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**1.3 Summary of Test Results**

<b>Applicant</b>	Elster Solutions, LLC 208 South Rogers Lane Raleigh, NC 27610	<b>Tel</b>	919-250-5557	<b>Contact</b>	John Holt
		<b>Fax</b>	919-250-5486	<b>e-mail</b>	john.holt@us.elster.com
<b>Description</b>	Rex2 Family of Power Meters	<b>Model Number</b>	RX2EA4		
<b>Serial Number</b>	1056	<b>Test Voltage/Freq.</b>	120VAC / 60Hz		
<b>Test Date Completed:</b>	02 February 2010	<b>Test Engineer</b>	Michael Moranha		
Standards	Description	Severity Level or Limit		Criteria	Test Result
FCC Part 15, Subpart C Standard	Radio Frequency Devices-Subpart C: Intentional Radiators	See called out basic standards below		See Below	Complies
RSS-210 Issue 7 Standard	Low-Power Licence-exempt Radiocommunication Devices Category I Equipment	See called out basic standards below		See Below	Complies
FCC Parts 15.205, 15.209, 15.215(c), RSS-210	Radiated Emissions EUT in Transmit Mode	Below limit of sections 15.205, 15.209(a) and 15.215(c)		Below Limit	Complies
FCC Part 15.207(a) and RSS-210	Conducted Emissions on Mains EUT in Transmit Mode	Below limit of section 15.207(a)		Below Limit	Complies
FCC Part 15.247 and RSS-210 Annex 8	Operation within the band 902-928 MHz	See called out basic standards below		Below Limit	Complies
FCC Part 15.247(a)(1)(i) and RSS-210 A1.3	Occupied Bandwidth	Contained within the Frequency Band 20dB $\leq$ 500 kHz 99% BW $\leq$ 500 kHz		Below Limit	Complies
FCC Part 15.247(a)(1)(i) and RSS-210, Section A8.1	Channel Separation	15,848 $\mu$ V/m at 30m 84 dB $\mu$ V/m at 30m		Below Limit	Complies
FCC Part 15.247(a)(1) and RSS-210 A8.1(c)	Pseudorandom Hopping Algorithm	25 hopping channels when the BW $\geq$ 250kHz		Below Limit	Complies
FCC Part 15.247(b)(2) and RSS-210 A8.4(1)	Transmitter Output Power	Shall not exceed 0.25 Watts		Below Limit	Complies
FCC Part 15.247(g) and RSS-210 A8.1	Frequency Hopping Spread Spectrum (FHSS) Systems	Description of Hopping System		Below Limit	Complies
FCC Part 15.247(h) and RSS-210 A8.1	Incorporation of Intelligence within a FHSS System	Not Applicable: EUT does not incorporate hopping intelligence		NA	Complies
FCC Parts 15.109(a) and ICES-003	Radiated Emissions while EUT in Receive Mode	Below limit of section 15.109(a) Class B		Below Limit	Complies
FCC Part 15.107(a) and ICES-003	Conducted Emissions EUT in Receive Mode	Below limit of section 15.107(a) Class B		Below Limit	Complies

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## 2 Laboratory Information

### 2.1 *Accreditations and Endorsements*

#### 2.1.1 US Federal Communications Commission

TUV Rheinland of North America located at 762 Park Avenue, Youngsville, NC 27596-9470 is accredited by the commission for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (Registration No 90552 and 100881). The laboratory scope of accreditation includes: Title 47 CFR Part 15, and 18. The accreditation is updated every 3 years.

#### 2.1.2 NIST / NVLAP

Program, which is administered under the auspices of the National Institute of Standards and Technology. The laboratory has been assessed and accredited in accordance with ISO Standard 17025:2005 (Lab code: 200094-0). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

#### 2.1.3 Industry Canada

Registration No.: IC-2932H The OATS has been accepted by Industry Canada to perform testing to 3 and to 10m, based on the test procedures described in ANSI C63.4-2009.

#### 2.1.4 Japan – VCCI

The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland at the 762 Park Ave. Youngsville, N.C 27596 address has been assessed and approved in accordance with the Regulations for Voluntary Control Measures. (Registration No. R-1174, R-1679, C-1790 and C-1791).

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

### 2.1.5 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dB $\mu$ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m}}{20}}$$

#### Sample radiated emissions calculation @ 30 MHz

**Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dBuV/m)**

$$25 \text{ dBuV/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dBuV/m}$$

## 2.2 Measurement Uncertainty Emissions

	$U_{\text{lab}}$	$U_{\text{cisp}}$
<b>Radiated Disturbance @ 10m</b>		
30 MHz – 1,000 MHz	3.3 dB	5.2 dB
<b>Conducted Disturbance @ Mains Terminals</b>		
150 kHz – 30 MHz	1.18 dB	3.6 dB
<b>Disturbance Power</b>		
30 MHz – 300 MHz	3.88 dB	4.5 dB

## 2.3 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2005. Equipment calibration records are kept on file at the test facility.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Report No.:**
**30953899.001**
**Page 8 of 47**

## 2.4 Measurement Equipment Used

Equipment	Manufacturer	Model #	Serial/Inst #	Last Cal dd/mm/yy	Next Cal dd/mm/yy
Radiated and Conducted RF Emissions (5 Meter Chamber)					
Amplifier, preamp	Agilent Technologies	8449B	3008A01480	23-Jan-09	23-Jan-10
Antenna Horn 1-18GHz	EMCO	3115	5770	16-Jun-08	16-Jun-10
Receiver, EMI	Rohde & Schwarz	ESIB40	100043	29-Jun-09	29-Jun-10
Spectrum Analyzer	Agilent Tec.	E7405A	US39440157	04-Dec-09	04-Dec-10
Cable, Coax	Andrew	FSJ1-50A	003	14-Dec-09	14-Dec-10
Cable, Coax	Andrew	FSJ1-50A	030	14-Dec-09	14-Dec-10
Cable, Coax	Andrew	FSJ1-50A	045	14-Dec-09	14-Dec-10
Cable, Coax	Andrew	FSJ1-50A	049	14-Dec-09	14-Dec-10
1.5 GHz High Pass Filter	Bonn Electronik	BHF 1500	025155	26-Jan-09	26-Jan-10
Conducted Emissions (AC/DC and Signal I/O)					
LISN 15-18 (NSLK 8126)	Schwarzbeck Mess-Electronik	NSLK 8126	003885	02-Feb-09	02-Feb-10
Transient Limiter	Schaffner	CFL-9206	1649	09-Dec-09	09-Dec-10
Transient Limiter	Schaffner	CFL-9206	1630	10-Dec-09	10-Dec-10
Receiver, EMI	Rohde & Schwarz	ESH3	860905/005	24-Aug-09	24-Aug-10
Spectrum Analyzer	Agilent Tec.	E7405A	US39440157	04-Dec-09	04-Dec-10
Spectrum Analyzer	Agilent Tec.	E7405A	US39440161	26-May-09	26-May-10
Cable, Coax	Pasternack	RG-223	051	09-Dec-09	09-Dec-10
General Laboratory Equipment					
Meter, Temp/Humid/Barom	Fisher	02-400	01	28-Dec-09	28-Dec-10
Meter, Temp/Humidity	Dickson Company	TH550	6215304	19-Mar-09	19-Mar-11
Attenuator	Pasternack	PE7015-20	NA	22-Jan-09	22-Jan-10

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## 3 Product Information

### 3.1 Product Description

The Equipment Under Test is a Form 12S Rex2 meter, containing the model RX2EA4 (and RX2EA4-I) transceiver, for which Limited Modular Approval is being sought. The 12S meter is typically installed one of two ways; with its built-in integral antenna or with one of several approved external antennas. The information provided in the following table lists two representative sample configurations. Note, the “?” characters in the model/style numbers designate “don’t care” values and those fields can be multiple values to indicate specific single phase forms or to indicate specific customer options. These options do not change the electronic module and are considered equivalent styles. The following meters will be tested and the worst-case meter will be used to file the FCC report.

Table 1 – EUT Designation

EUT	Model Name	Elster Style Number
#1056 – Form 12S Rex2 meter with internal antenna	RX2EA4	ZF5?2??????
#1056 – Form 12S Rex2 meter with external antenna	RX2EA4	ZF5?6??????

Note that a single device is being submitted for testing. It can be reconfigured from *internal antenna* to *external antenna* with a simple jumper change and use of a second meter base that contains an antenna isolation board.

### 3.2 Equipment Modifications

No modifications were needed to bring product into compliance.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## 4 Spurious Emissions

### 4.1 Spurious Emissions Outside the band

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power, based on either RF conducted or radiated measurements. Conducted antenna port measurements are provided below to show that the EUT meets these requirements at the band edges.

#### 4.1.1 Over View of Test

<b>Results</b>	<b>Complies</b> (as tested per this report)			<b>Date</b>	18, 19 January 2010		
<b>Standard</b>	FCC Parts 15.205, 15.209, 15.215 and RSS-210						
<b>Product Model</b>	RX2EA4			<b>Serial#</b>	1056		
<b>Test Set-up</b>	Tested in a 5m Semi Anechoic chamber, placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane on a turn-table. See test plans for details						
<b>EUT Powered By</b>	120VAC / 60Hz	<b>Temp</b>	74 °F	<b>Humidity</b>	36%	<b>Pressure</b>	1000 mbar
<b>Perf. Criteria</b>	(Below Limit)		<b>Perf. Verification</b>	Readings Under Limit			
<b>Mod. to EUT</b>	None		<b>Test Performed By</b>	Michael Moranha			

#### 4.1.2 Test Procedure

Testing was performed in accordance with 47 CFR Part 15, ANSI C63.10:2009, RSS-GEN Issue 2. These test methods are listed under the laboratory's NVLAP Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

#### 4.1.3 Deviations

There were no deviations from the test methodology listed in the test plan for the radiated emission test.

#### 4.1.4 Final Test

All final radiated spurious emissions measurements were below (in compliance) the limits.


The worst –case emissions are shown below. All other emissions are on file at TUV Rheinland.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

#### 4.1.4.1 Emissions Outside the Frequency Band

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of desired power, based on either RF conducted or radiated measurements. Conducted antenna port measurements are provided below to show that the EUT meets these requirements at the band edges.

##### Radiated Emissions – Internal Antenna Horizontal Ch 63

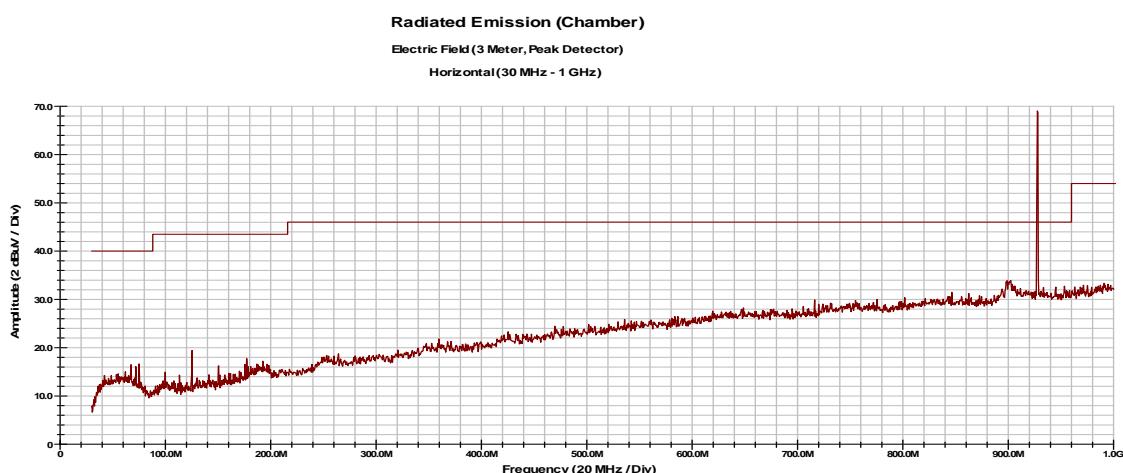

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)
901.88	H	1.2	94	7.24	0.00	3.35	22.50	33.09	46.00	-12.91
927.60	H	1.4	0.	86.58	0.00	3.43	22.80	112.81	N/A	N/A
927.60	H	1.4	0.	91.91	0.00	3.43	22.80	118.14	N/A	N/A
927.60	H	1.4	0.	92.82	0.00	3.43	22.80	119.05	N/A	N/A

Notes: The Plot was taken with a notch filter tuned at the fundamental frequency  
 Except for the fundamental frequency, a notch filter was used for all measurements Using the QP detector.


The Fundamental frequency was measured without the notch filter and used the **Pk**, **QP** and **Av** detectors.  
 These values are used as the reference level (-20dBc) for the harmonic measurements, not in a restricted band.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Report No.:

30953899.001

Page 12 of 47

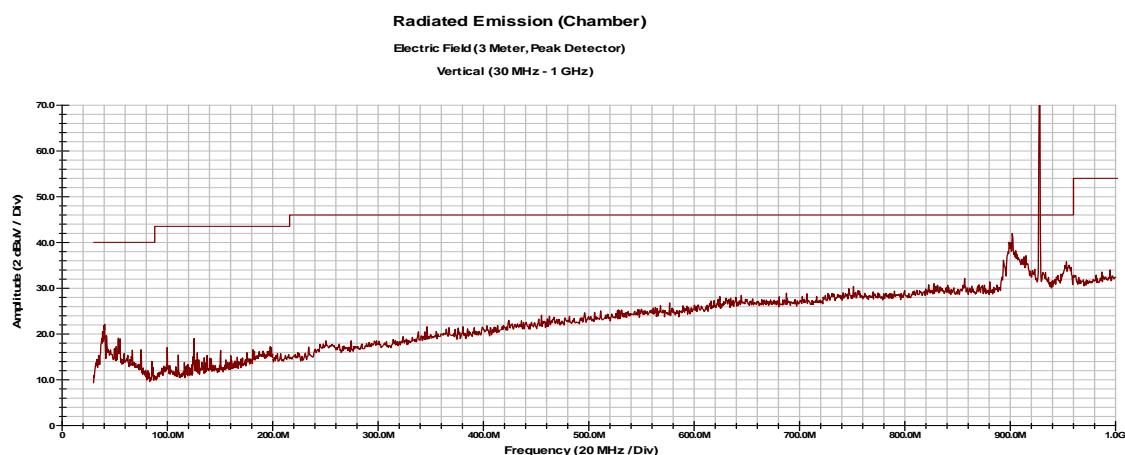**Radiated Emissions – Internal Antenna**  
**Vertical Ch 63**


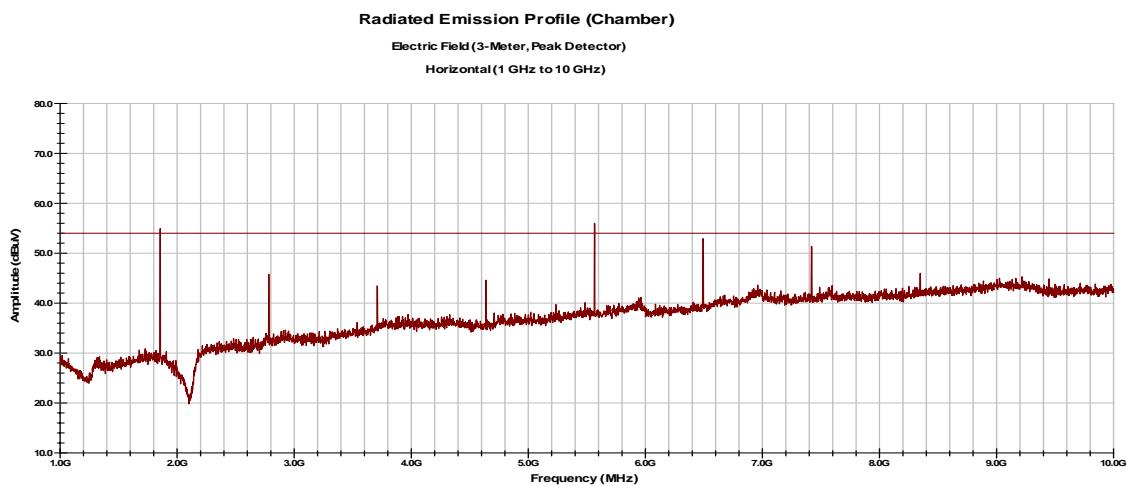
10:13:42 AM, Tuesday, January 19, 2010

Emission Freq (MHz)	ANT Polar	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)
901.92	V	1.1	328	12.06	0.00	3.35	22.18	37.59	46.00	-8.41
927.60	V	1.2	0	88.73	0.00	3.43	22.60	114.76	N/A	N/A
927.60	V	1.2	0	94.58	0.00	3.43	22.60	120.61	N/A	N/A
927.60	V	1.2	0	94.79	0.00	3.43	22.60	120.82	N/A	N/A

Notes: The Plot was taken with a notch filter tuned at the fundamental frequency  
 Except for the fundamental frequency, a notch filter was used for all measurements Using the QP detector.

The Fundamental frequency was measured without the notch filter and used the **Pk**, **QP** and **Av** detectors.  
 These values are used as the reference level (-20dBc) for the harmonic measurements, not in a restricted band.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Report No.:**
**30953899.001**
**Page 13 of 47**
**Radiated Emissions – Internal Antenna**  
**Horizontal CH 63**


04:27:16 PM, Monday, January 18, 2010

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	ANT Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)
1855.20	H	1.3	331	57.80	35.70	6.41	27.09	55.59	92.81	-37.22
5565.60	H	1.3	305	38.52	35.21	11.85	33.97	49.13	92.81	-43.68
6493.20	H	1.1	271	35.92	35.29	13.56	34.20	48.40	92.81	-44.41
9276.00	H	1	0	21.12	35.86	15.63	37.68	38.56	92.81	-54.25
1855.20	H	1.3	331	62.89	35.70	6.41	27.09	60.68	112.81	-52.13
5565.60	H	1.3	305	46.70	35.21	11.85	33.97	57.31	112.81	-55.50
6493.20	H	1.1	271	44.93	35.29	13.56	34.20	57.41	112.81	-55.40
9276.00	H	1	0	34.26	35.86	15.63	37.68	51.70	112.81	-61.11

Notes: Notes: CH 63 – 927.6 MHz High Pass Filter used

 Emissions shown in shown in **Blue** are using the Peak Detector and **Green** are using the Average Detector

Emissions outside the Restricted Bands are shown.


Emissions Inside the Restricted Bands are shown below

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Report No.:

30953899.001

Page 14 of 47

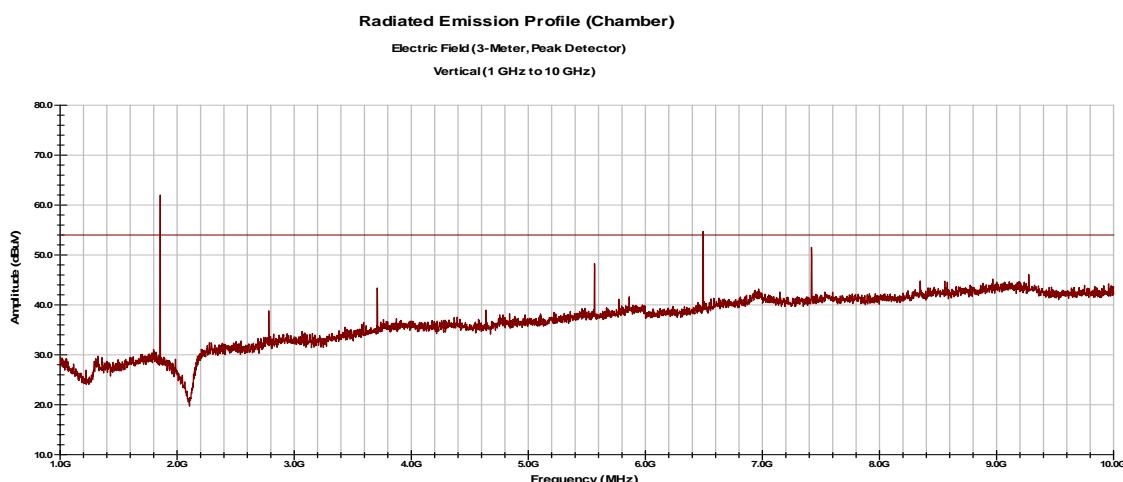**Radiated Emissions – Internal Antenna**  
**Vertical CH 63**


04:32:42 PM, Monday, January 18, 2010

Emission Freq (MHz)	ANT Polar	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)
1855.20	V	1	48	60.24	35.70	6.41	27.13	58.08	94.76	-36.68
5565.60	V	1	307	33.58	35.21	11.85	34.03	44.26	94.76	-50.50
6493.20	V	1	331	35.70	35.29	13.56	34.29	48.27	94.76	-46.49
9276	V	1	0	21.12	35.86	15.63	37.68	38.56	94.76	-56.20
1855.20	V	1	48	35.48	35.70	6.41	27.13	33.32	114.76	-81.44
5565.60	V	1	307	42.96	35.21	11.85	34.03	53.64	114.76	-61.12
6493.20	V	1	331	45.06	35.29	13.56	34.29	57.63	114.76	-57.13
9276	V	1	0	34.26	35.86	15.63	37.68	51.70	114.76	-63.06

Notes: CH 63 – 927.6 MHz High Pass Filter used

 Emissions shown in **Blue** are using the Peak Detector and **Green** are using the Average Detector  
 Emissions outside the Restricted Bands are shown.

Emissions Inside the Restricted Bands are shown below

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Report No.:**
**30953899.001**
*Page 15 of 47*
**Radiated Emissions in Restricted Bands**
**Rex 2 – Internal Antenna**

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)
CH 63: PK										
2782.80	H	1.1	19	45.57	35.55	8.03	28.72	46.77	74.00	-27.23
3710.40	H	1.2	323	42.44	35.34	9.39	32.21	48.70	74.00	-25.30
4638.00	H	1	332	40.49	35.52	10.74	32.31	48.02	74.00	-25.98
7420.80	H	1.2	309	40.99	35.47	15.02	36.66	57.20	74.00	-16.80
8348.40	H	1.2	26	36.10	35.62	15.35	37.10	52.92	74.00	-21.08
CH 63: AV										
2782.80	H	1.1	19	36.80	35.55	8.03	28.72	38.00	54.00	-16.00
3710.40	H	1.2	323	33.11	35.34	9.39	32.21	39.37	54.00	-14.63
4638.00	H	1	332	30.14	35.52	10.74	32.31	37.67	54.00	-16.33
7420.80	H	1.2	309	30.94	35.47	15.02	36.66	47.15	54.00	-6.85
8348.40	H	1.2	26	22.02	35.62	15.35	37.10	38.84	54.00	-15.16
CH 63: PK										
2782.80	V	1	349	42.57	35.55	8.03	28.98	44.04	74.00	-29.96
3710.40	V	1.6	19	41.77	35.34	9.39	32.23	48.06	74.00	-25.94
4638.00	V	1	79	36.87	35.52	10.74	32.51	44.60	74.00	-29.40
7420.80	V	1.6	308	41.77	35.47	15.02	36.68	58.00	74.00	-16.00
8348.40	V	1.2	15	36.77	35.62	15.35	37.05	53.54	74.00	-20.46
CH 63: AV										
2782.80	V	1	349	30.45	35.55	8.03	28.98	31.92	54.00	-22.08
3710.40	V	1.6	19	31.57	35.34	9.39	32.23	37.86	54.00	-16.14
4638.00	V	1	79	26.59	35.52	10.74	32.51	34.32	54.00	-19.68
7420.80	V	1.6	308	31.82	35.47	15.02	36.68	48.05	54.00	-5.95
8348.40	V	1.2	15	22.13	35.62	15.35	37.05	38.90	54.00	-15.10

Notes: CH 63 – 927.6 MHz

High Pass Filter used

Highlighted emission is worst case

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## 4.1 Conducted Emissions in Transmit mode

This test measures the electromagnetic levels of spurious signals generated by the EUT on the AC power line that may affect the performance of other nearby electronic equipment.

### 4.1.1 Over View of Test

<b>Results</b>	<b>Complies</b> (as tested per this report)			<b>Date</b>	22 January 2010			
<b>Standard</b>	FCC Part 15.207(a) and RSS-210							
<b>Product Model</b>	RX2EA4		<b>Serial#</b>	1056				
<b>Test Set-up</b>	Tested in shielded room. EUT placed on table, see test plans for details							
<b>EUT Powered By</b>	120VAC / 60 Hz	<b>Temp</b>	73° F	<b>Humidity</b>	25%	<b>Pressure</b>		
<b>Frequency Range</b>	150 kHz – 30 MHz							
<b>Perf. Criteria</b>	(Below Limit)	<b>Perf. Verification</b>		Readings Under Limit for L1 & Neutral				
<b>Mod. to EUT</b>	None	<b>Test Performed By</b>		Michael Moranha				

### 4.1.2 Test Procedure

Conducted and FCC emissions tests were performed using the procedures of ANSI C63.4 including methods for signal maximizations and EUT configuration. The photos included with the report show the EUT in its maximized configuration.

The frequency range from 150 kHz – 30 MHz was investigated for conducted emissions.

Conducted Emissions measurements were performed in the shielded room using procedures specified in the test plan and standard.

### 4.1.3 Deviations

There were no deviations from the test methodology listed in the test plan for the conducted emission test.

### 4.1.4 Final Test

All final conducted emissions measurements were below (in compliance) the limits.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.


Report No.:

30953899.001

Page 17 of 47

#### 4.1.5 Final Graphs and Tabulated Data

##### Conducted Emissions @ 120V/60Hz Line 1

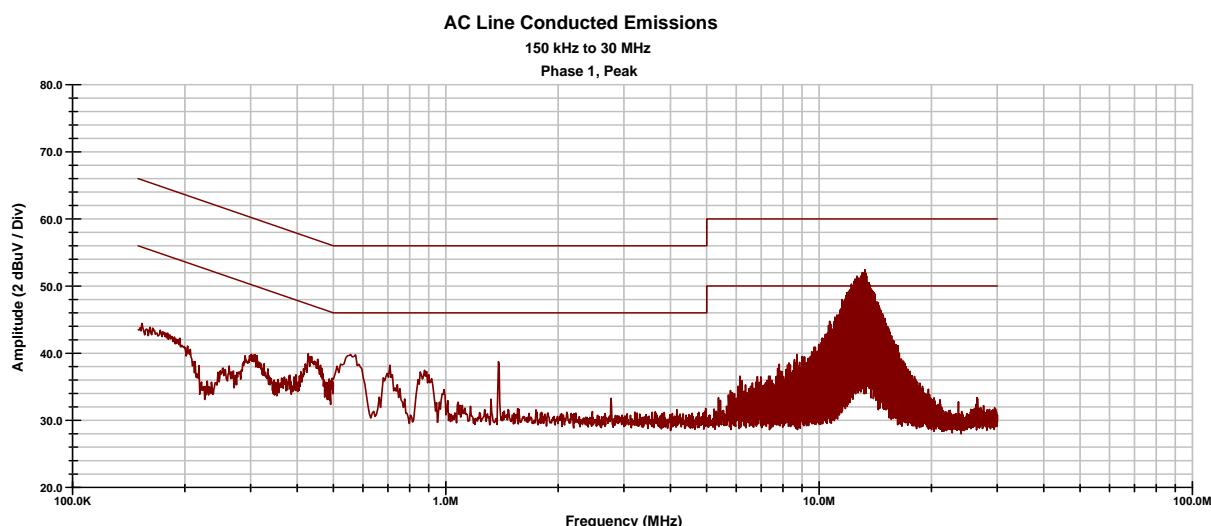

Freq (MHz)	ID (1,2,3,N)	Quasi (dBuV)	Ave (dBuV)	Loss (dB)	T Limiter (dB)	Limit (dBuV)	Limit (dBuV)	Margin (dB)	Margin (dB)
0.15	1	28.11	12.06	0.02	9.98	66.00	56.00	-27.89	-33.94
0.54	1	23.25	10.13	0.04	10.06	56.00	46.00	-22.65	-25.77
0.87	1	19.46	9.13	0.05	10.10	56.00	46.00	-26.39	-26.72
1.38	1	27.51	26.33	0.07	10.10	56.00	46.00	-18.32	-9.50
2.76	1	20.24	17.41	0.11	10.20	56.00	46.00	-25.46	-18.29
12.85	1	39.67	35.92	0.25	10.59	60.00	50.00	-9.49	-3.24


Notes:

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Report No.:

30953899.001

Page 18 of 47

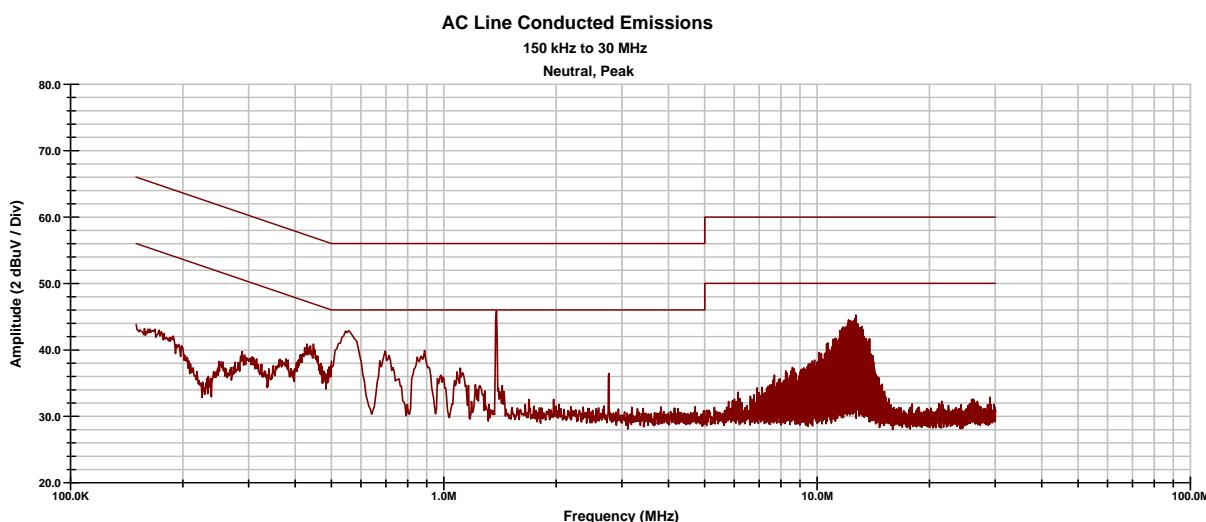 Conducted Emissions @ 120V/60Hz  
 Neutral


Freq (MHz)	ID (1,2,3,N)	Quasi (dBuV)	Ave (dBuV)	Loss (dB)	T Limiter (dB)	Limit (dBuV)	Limit (dBuV)	Margin (dB)	Margin (dB)
0.15	N	27.35	11.97	0.02	9.97	66.00	56.00	-28.66	-34.04
0.56	N	26.75	10.83	0.04	10.06	56.00	46.00	-19.15	-25.07
0.86	N	22.59	9.83	0.05	10.12	56.00	46.00	-23.24	-26.00
1.38	N	35.57	33.31	0.07	10.12	56.00	46.00	-10.24	-2.50
2.79	N	21.78	22.28	0.11	10.22	56.00	46.00	-23.89	-13.39
12.85	N	32.28	30.58	0.24	10.53	60.00	50.00	-16.94	-8.64

Notes:

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

#### **4.2 Frequency Hopping Spread Spectrum (FHSS) Systems FCC Part 15.247(g)**

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

In constant transmit mode, the Rex2 Meter sends a packet nominally every 97.3 ms with a delay of 8 to 16 ms between packets. Each packet is sent on the next channel determined by the pseudo-random hop table. When presented with a continuous data stream, the EUT adheres to the 0.4 second dwell time for each 10 second window requirement. The EUT always distributes its transmissions across all 25 channels, and does not re-use a channel again until a transmission has occurred on each of the other 24 channels.

#### **4.3 Incorporation of Intelligence within a FHSS System FCC Part 15.247(h)**

The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

The EUT does not incorporate intelligence relating to the hopping pattern as described above. Rather, the EUT always distributes its transmissions across the same 25 channels. A channel is not re-used until a transmission has occurred on each of the other 24 channels.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## 5 Antenna Port Conducted Emissions

Testing was performed in accordance with 47 CFR Part 15, ANSI C63.10:2009, RSP-100 Issue 9. These test methods are listed under the laboratory's NVLAP Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

### 5.1 Band Edge

#### 5.1.1 Test Over View

<b>Results</b>	<b>Complies</b> (as tested per this report)				<b>Date</b>	22 January 2010			
<b>Standard</b>	FCC Part 15.247(a)(1)(i), RSS 210 A8.1								
<b>Product Model</b>	RX2EA4			<b>Serial#</b>	1056				
<b>Test Set-up</b>	Direct Measurement from antenna port								
<b>EUT Powered By</b>	120VAC / 60Hz	<b>Temp</b>	74° F	<b>Humidity</b>	32%	<b>Pressure</b>	1010mbar		
<b>Perf. Criteria</b>	(Below Limit)		<b>Perf. Verification</b>	Readings Under Limit					
<b>Mod. to EUT</b>	None		<b>Test Performed By</b>	Michael Moranha					

#### 5.1.2 Test Procedure

Intentional radiators operating under the alternative provisions to the general emission limits must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

#### 5.1.3 Deviations

There were no deviations from the test methodology listed in the test plan for the Radiated Immunity test.

#### 5.1.4 Final Test


The EUT met the performance criteria requirement as specified in the test plan of this report and in the standards.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Report No.:

30953899.001

Page 21 of 47

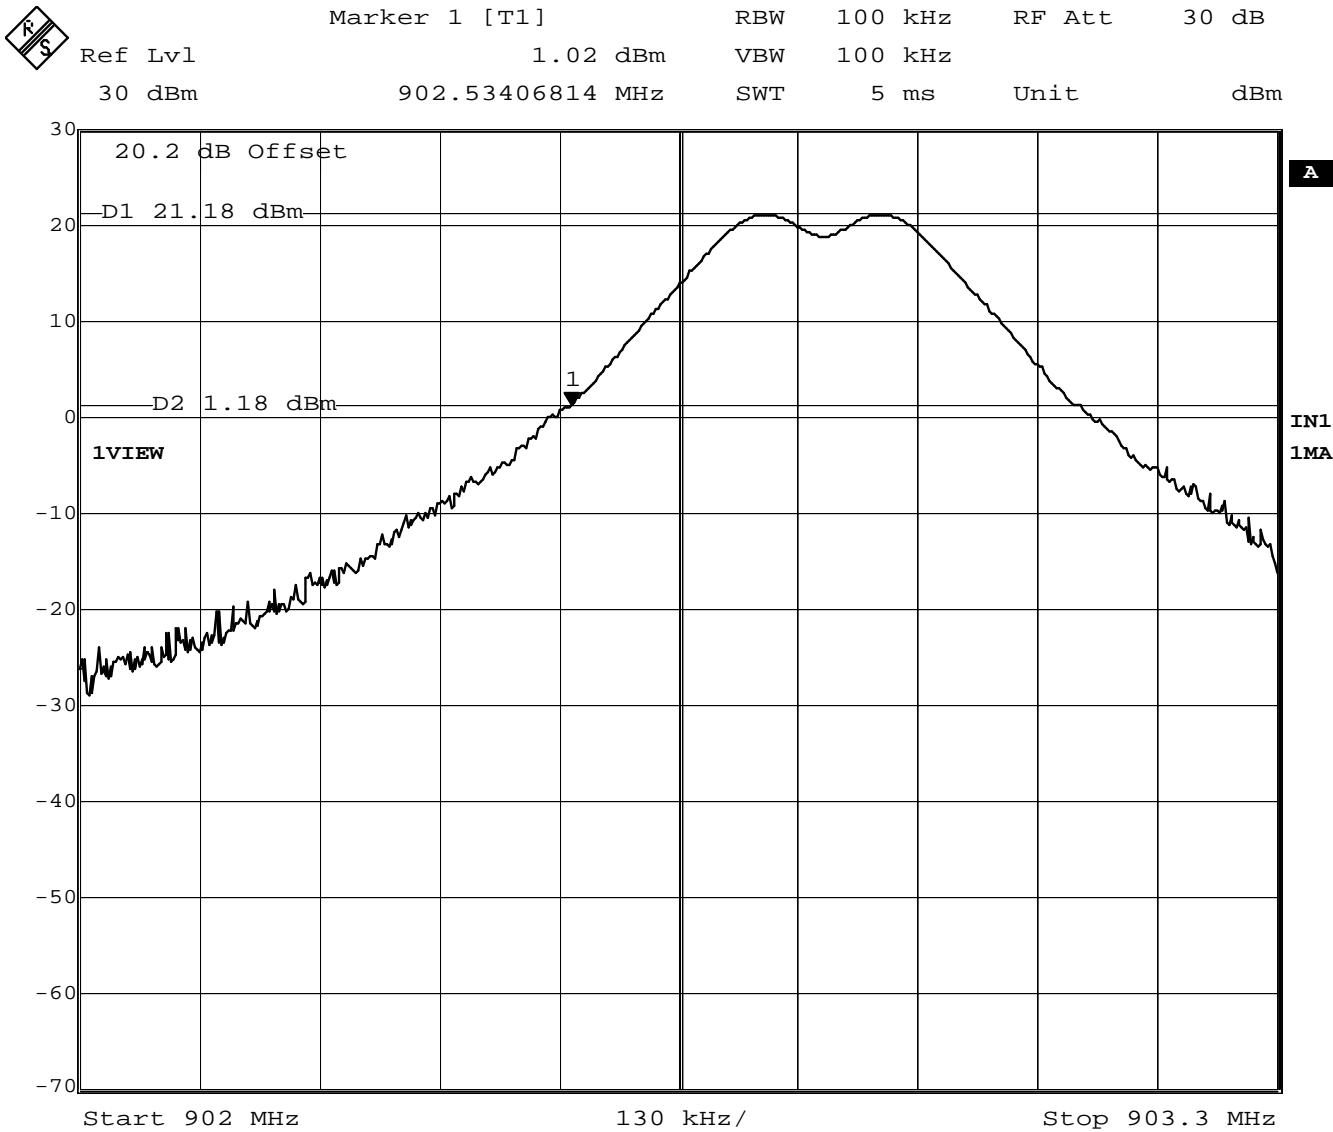

Date: 22.JAN.2010 15:10:49

Figure 1: Lower Band Edge Measurement

Note: Band Edge is at 902 MHz


Channel Frequency is 902.8 MHz, The 20dB down point is at 902.42 MHz. The EUT is compliant with the rules.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Report No.:

30953899.001

Page 22 of 47

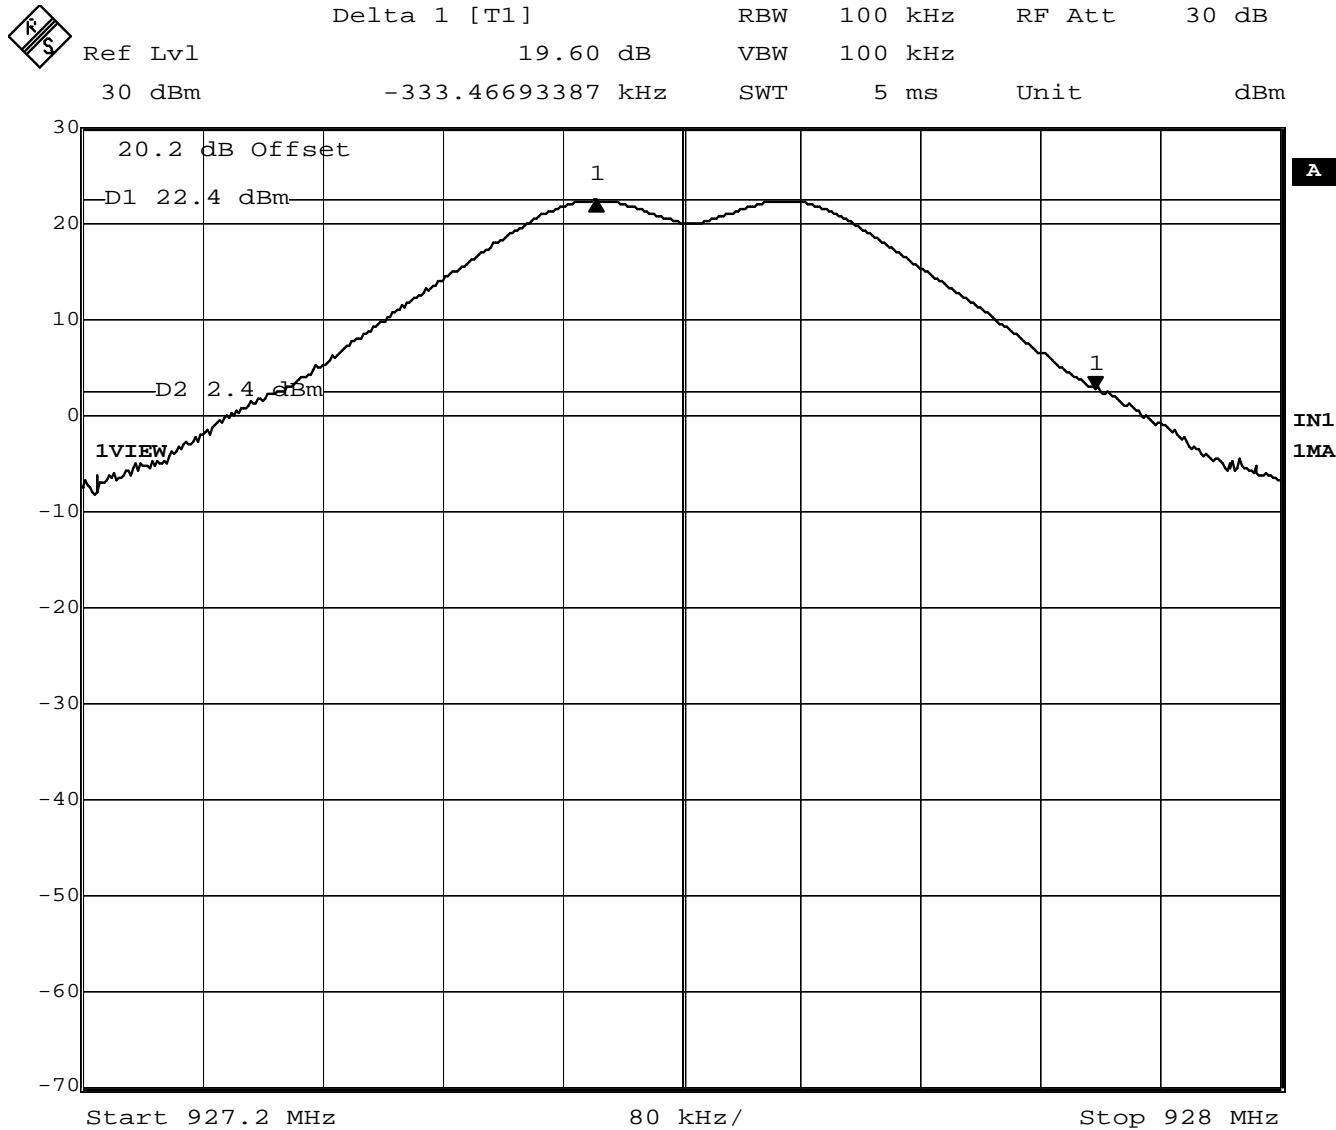

Date: 22.JAN.2010 15:08:58

Figure 2: Upper Band Edge Measurement

Note: Band edge is at 928 MHz

Channel 63 Frequency is 927.6 MHz. The EUT is compliant with the rules.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## 5.2 *Channel Separation*

### 5.2.1 Test Over View

<b>Results</b>	<b>Complies</b> (as tested per this report)			<b>Date</b>	22 January 2010		
<b>Standard</b>	FCC Part 15.247(a)(1)(i), RSS 210 A8.1						
<b>Product Model</b>	<a href="#">RX2EA4</a>			<b>Serial#</b>	<a href="#">1056</a>		
<b>Test Set-up</b>	Direct Measurement from antenna port						
<b>EUT Powered By</b>	<a href="#">120VAC / 60Hz</a>	<b>Temp</b>	74° F	<b>Humidity</b>	32%	<b>Pressure</b>	1010mbar
<b>Perf. Criteria</b>	(Below Limit)		<b>Perf. Verification</b>	Readings Under Limit			
<b>Mod. to EUT</b>	None		<b>Test Performed By</b>	Michael Moranha			

### 5.2.2 Test Procedure

Frequency hopping Systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Maximum allowed 20dB Bandwidth = 500 kHz

Channel Separation = 25 kHz Min. or the 20 dB bandwidth of the hopping channel, whichever is greater

The channel separation is greater than the measured maximum 20 dB bandwidth. Therefore the EUT is compliant with this section.

### 5.2.3 Deviations

There were no deviations from the test methodology listed in the test plan for the Radiated Immunity test.

### 5.2.4 Final Test

The EUT met the performance criteria requirement as specified in the test plan of this report and in the standards.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Report No.:

30953899.001

Page 24 of 47

### 5.2.5 Final Data

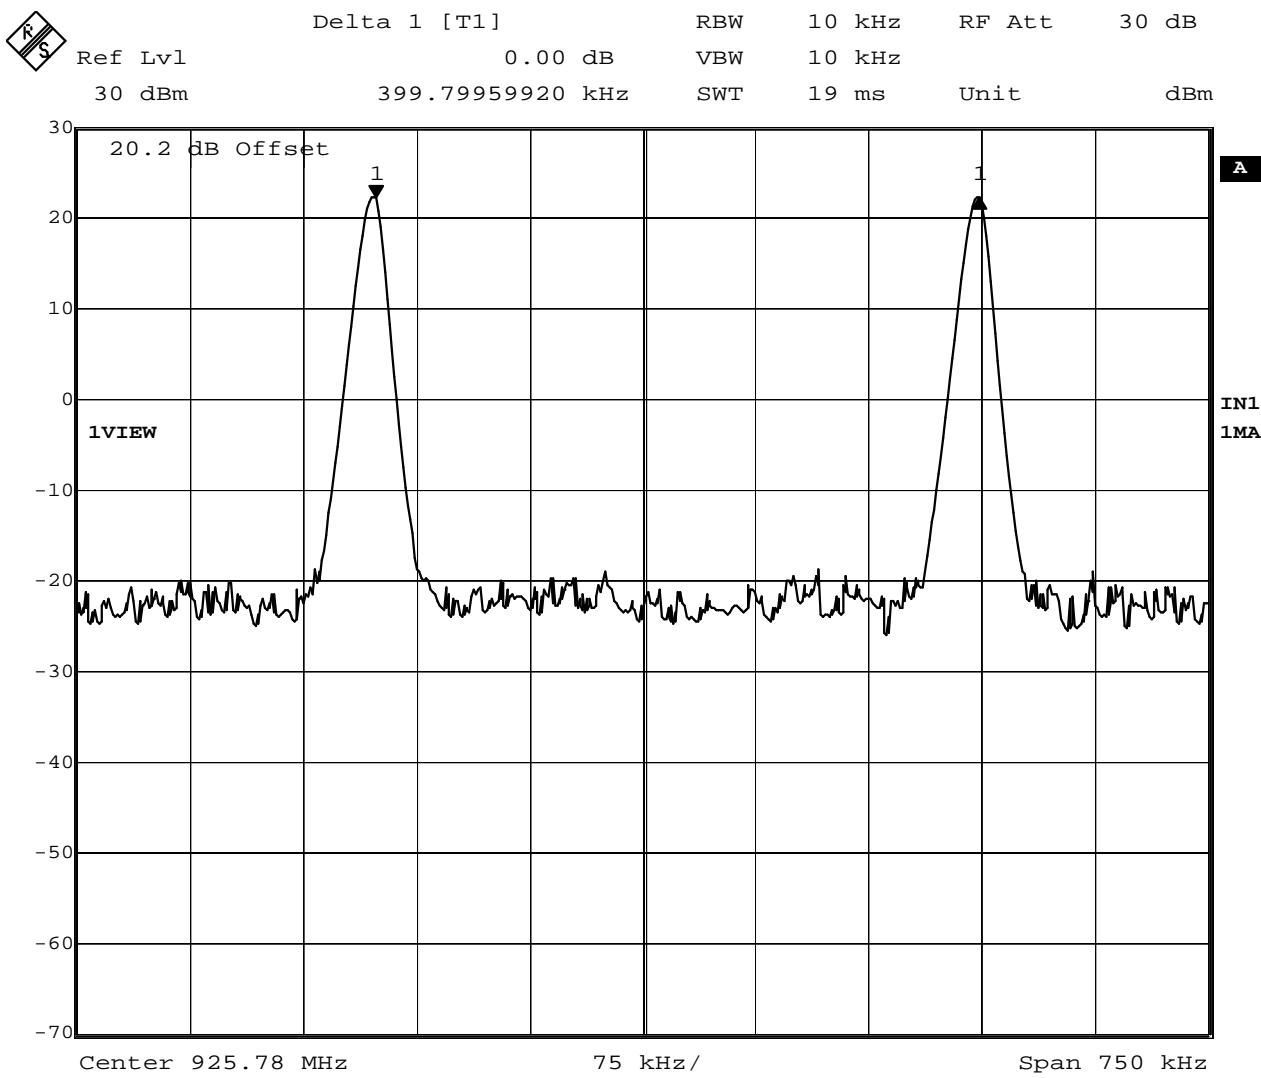


Figure 3: Channel Separation = 400 kHz

Spectrum Analyzer Parameters:

RBW=10kHz

Span=750kHz

VBW= 10kHz

LOG dB/div.= 10dB

Sweep = Auto

Detector = sample detector, max hold

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

### 5.3 Pseudorandom Hopping Algorithm

#### 5.3.1 Test Over View

<b>Results</b>	<b>Complies</b> (as tested per this report)			<b>Date</b>	22 January 2010		
<b>Standard</b>	FCC Part 15.247(a)(1)(i) and RSS-210, A8.1						
<b>Product Model</b>	RX2EA4			<b>Serial#</b>	1056		
<b>Test Set-up</b>	Direct Measurement from antenna port						
<b>EUT Powered By</b>	120VAC / 60Hz	<b>Temp</b>	74° F	<b>Humidity</b>	32%	<b>Pressure</b>	1010mbar
<b>Perf. Criteria</b>	(Below Limit)		<b>Perf. Verification</b>	Readings Under Limit			
<b>Mod. to EUT</b>	None		<b>Test Performed By</b>	Michael Moranha			

#### 5.3.2 Test Procedure

The channel bandwidth for this system is greater than 250 kHz. Therefore the system must use at least 25 channels that are selected at the system hopping rate, from a pseudo-randomly ordered list of hopping frequencies. Each frequency must be used equally on average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their transmitters and shall shift frequencies in synchronization with the transmitted signals.

In constant transmit mode, the Rex2 Meter would send a packet every 97.3 ms with a delay of 8 to 16 ms between packets. Each packet is sent on the next channel determined by the pseudo-random hop sequence given in the operation description

#### 5.3.3 Deviations


There were no deviations from the test methodology listed in the test plan for the Radiated Immunity test.

#### 5.3.4 Final Test

The EUT met the performance criteria requirement as specified in the test plan of this report and in the standards.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

### 5.3.5 Final Data

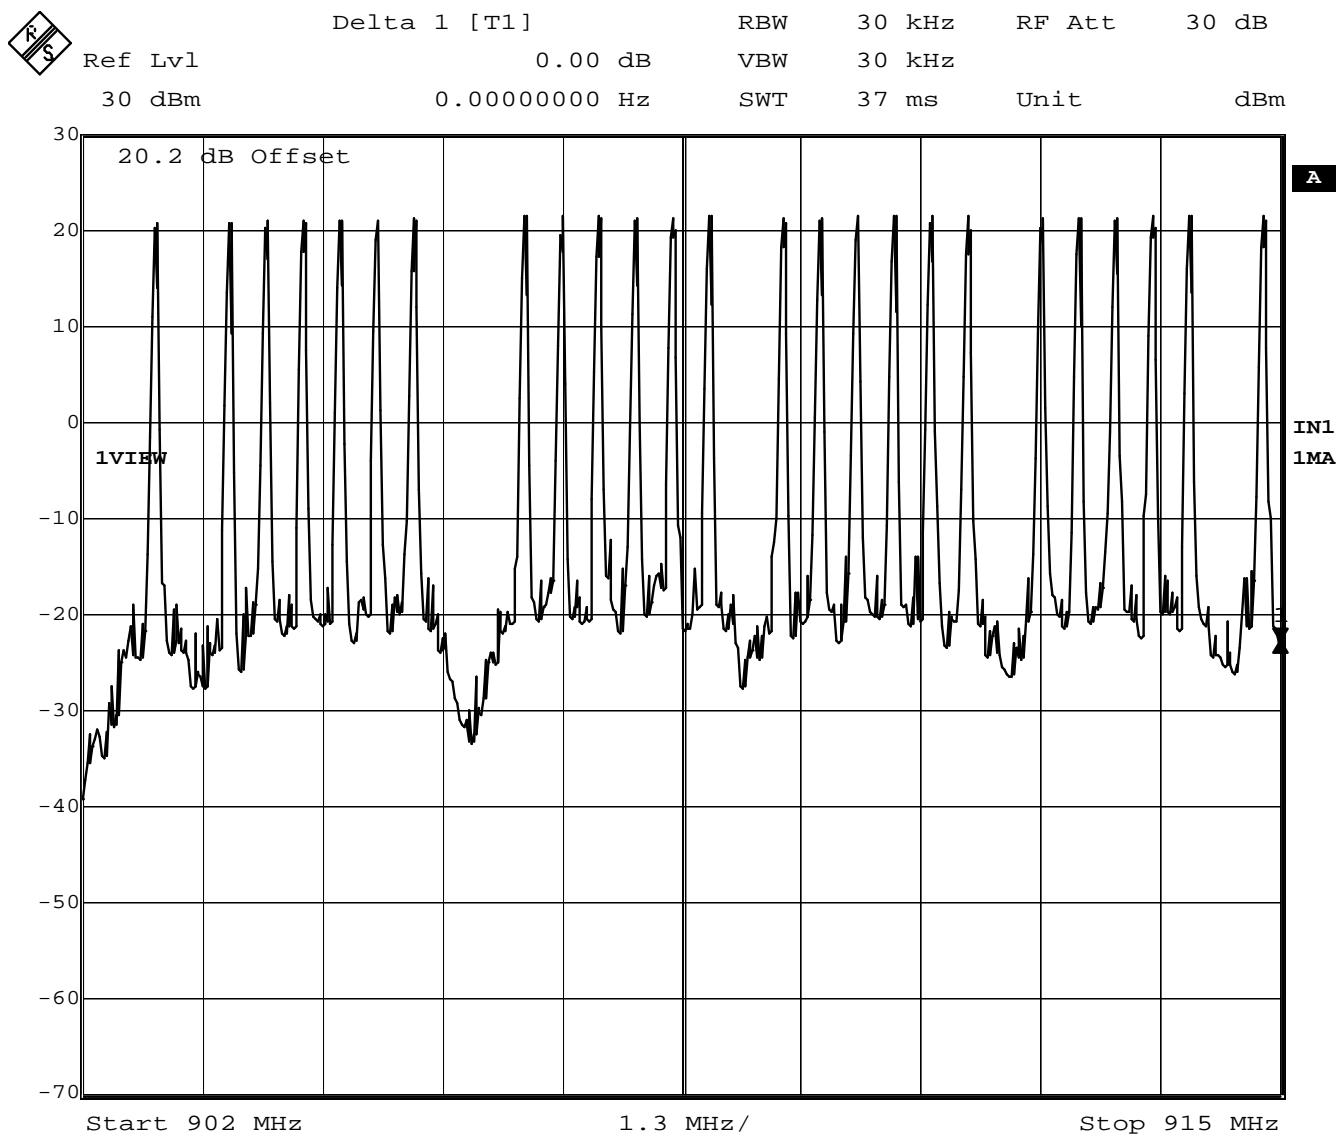

Date: 22.JAN.2010 15:17:34


Figure 4: Plot of hopping Channels - 902-915 MHz (Low Band)

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Report No.:**

**30953899.001**

Page 27 of 47

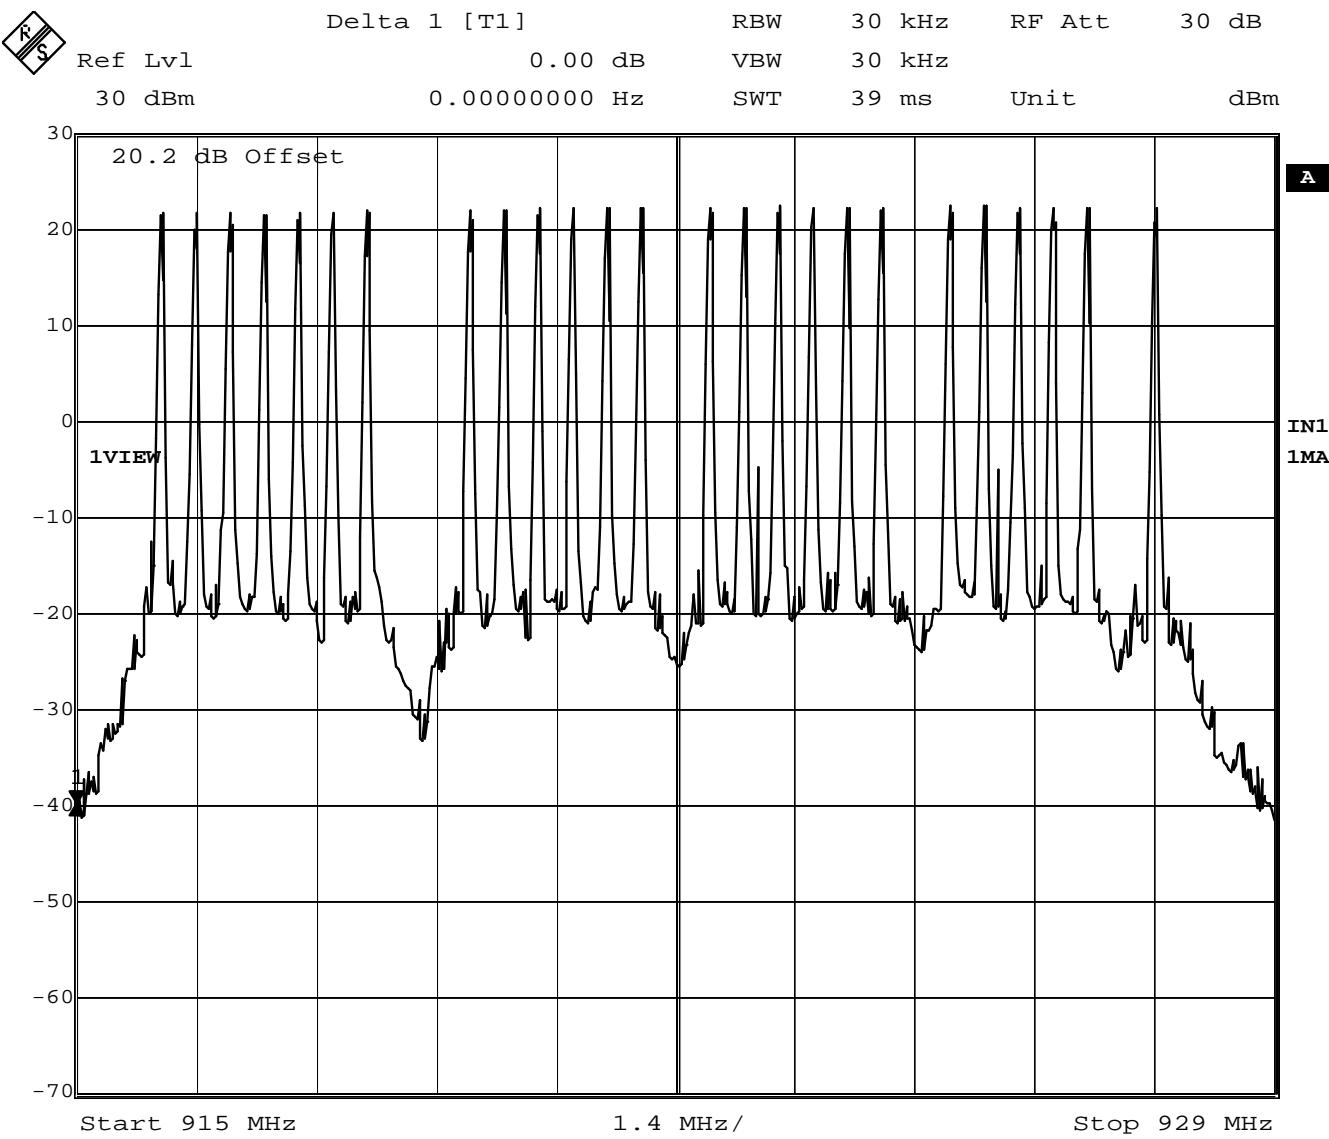

Date: 22.JAN.2010 15:19:35

Figure 5: Plot of hopping Channels - 915-928 MHz (Upper Band)

### Spectrum Analyzer Parameters:

RBW=30kHz

Span=14MHz

VBW= 30kHz

LOG dB/div.=

Sweep = Auto

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or

Report No.:

30953899.001

Page 28 of 47

## Time of Occupancy FCC Part 15.247(a)(1)(i)

Frequency Band (MHz)	20 dB Bandwidth	Number of Hopping Channels	Average Time of Occupancy
902.4-927.6	=>250 kHz	25	=<0.4 sec. In 10 sec.

There were 2 hops at 81.48 milliseconds per hop for any 10 sec. Period. Time of occupancy equals number of hops multiplied by the duration of one hop.

**Time of Occupancy limit** = 0.400 seconds in any 10 second period.

**Calculated Time of Occupancy** = 0.0815 seconds x 2 = 0.163 seconds in any 10 second period

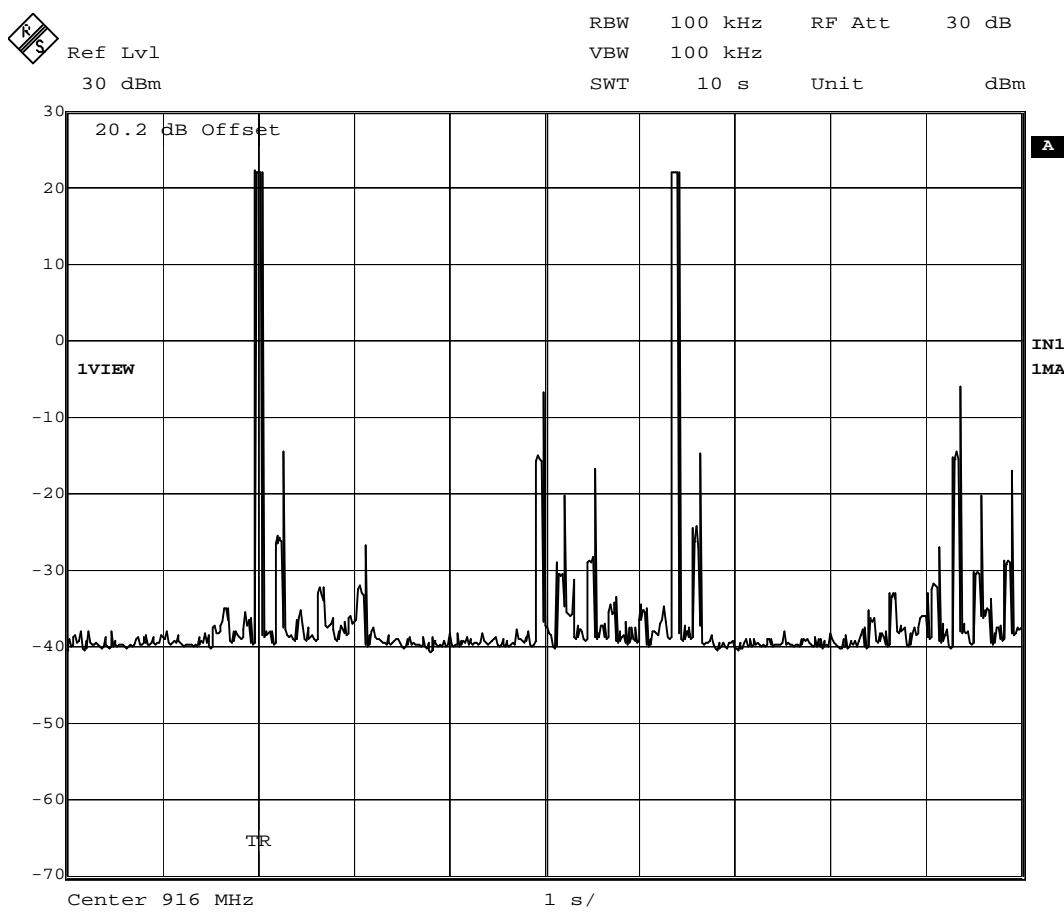
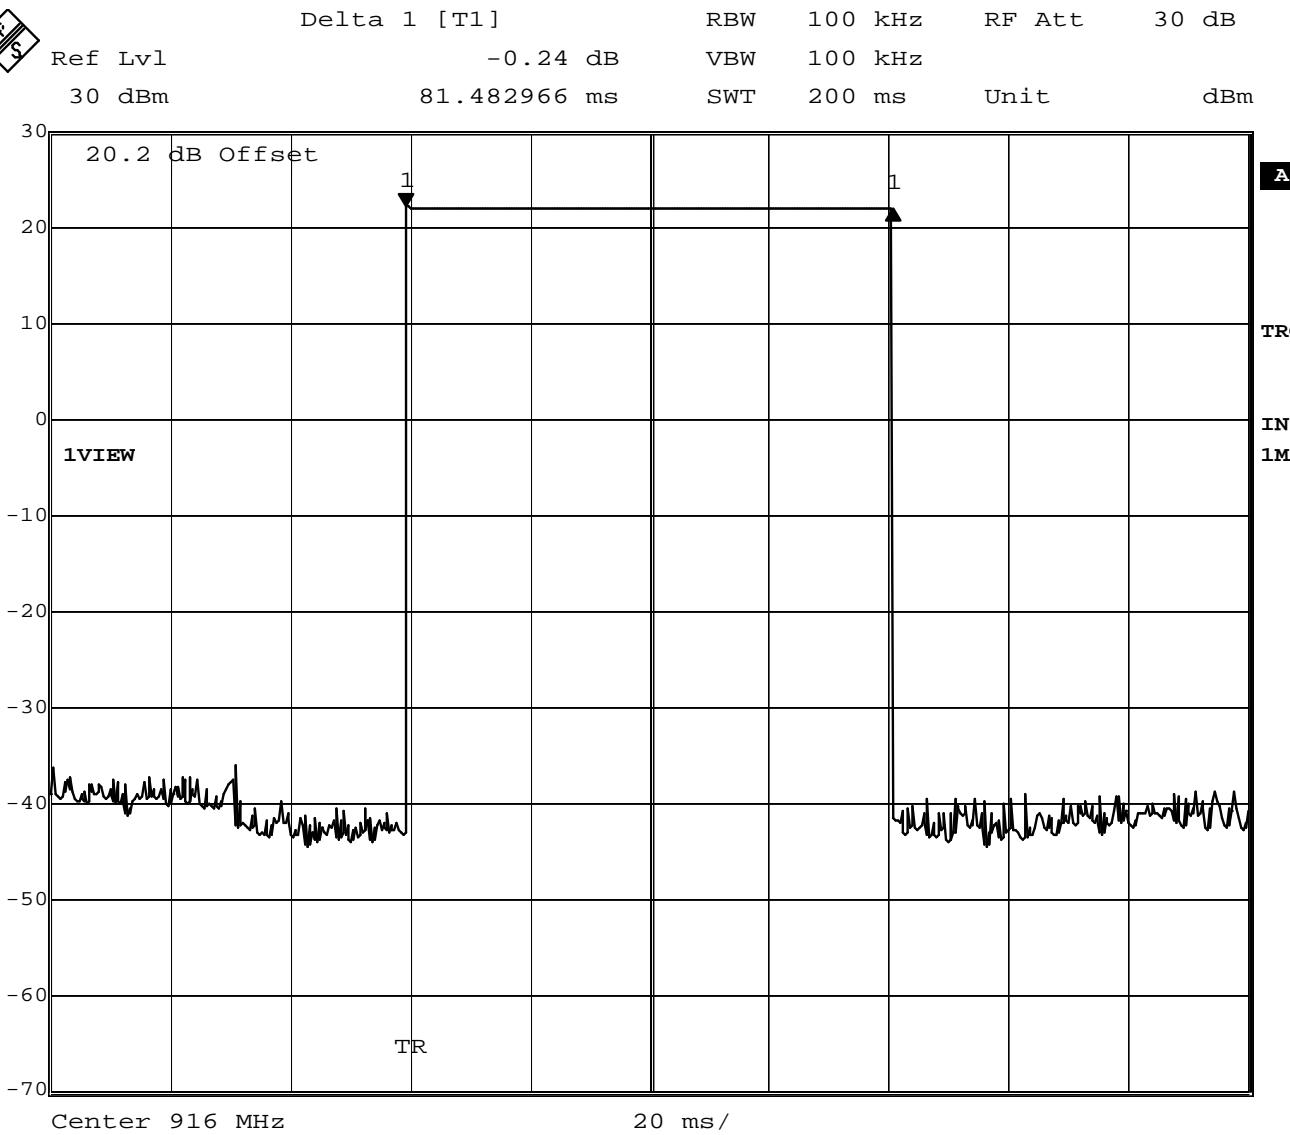


Figure 6: 10 second sweep of 902.8 MHz

Note: The on-channel traces are the two highest peaks.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Report No.:**
**30953899.001**
**Page 29 of 47**


Date: 22.JAN.2010 15:25:18

Figure 7: Measurement of 1 hop at 902.8 MHz

Time on Frequency = 81.48ms

Spectrum Analyzer Parameters:

RBW=100kHz

Span=zero

VBW= 100kHz

LOG dB/div.= 10dB

Sweep = 200 ms

Detector = sample detector, max hold

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## 5.4 Occupied Bandwidth

The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

### 5.4.1 Test Over View

<b>Results</b>	<b>Complies</b> (as tested per this report)				<b>Date</b>	22 January 2010			
<b>Standard</b>	FCC Part 15.247(a)(1)(i)								
<b>Product Model</b>	RX2EA4		<b>Serial#</b>	1056					
<b>Test Set-up</b>	Direct Measurement from antenna port								
<b>EUT Powered By</b>	120VAC / 60Hz	<b>Temp</b>	74° F	<b>Humidity</b>	32%	<b>Pressure</b>	1010mbar		
<b>Perf. Criteria</b>	(Below Limit)		<b>Perf. Verification</b>	Readings Under Limit					
<b>Mod. to EUT</b>	None		<b>Test Performed By</b>	Michael Moranha					

### 5.4.2 Test Procedure

Frequency hopping Systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Maximum allowed 20dB Bandwidth = 500 kHz

Channel Separation = 25 kHz Min. or the 20 dB bandwidth of the hopping channel, whichever is greater

The channel separation is greater than the measured maximum 20 dB bandwidth. Therefore the EUT is compliant with this section.

### 5.4.3 Deviations

There were no deviations from the test methodology listed in the test plan for the Radiated Immunity test.

### 5.4.4 Final Test

The EUT met the performance criteria requirement as specified in the test plan of this report and in the standards.


The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Report No.:

30953899.001

Page 31 of 47

### 5.4.5 Final Data

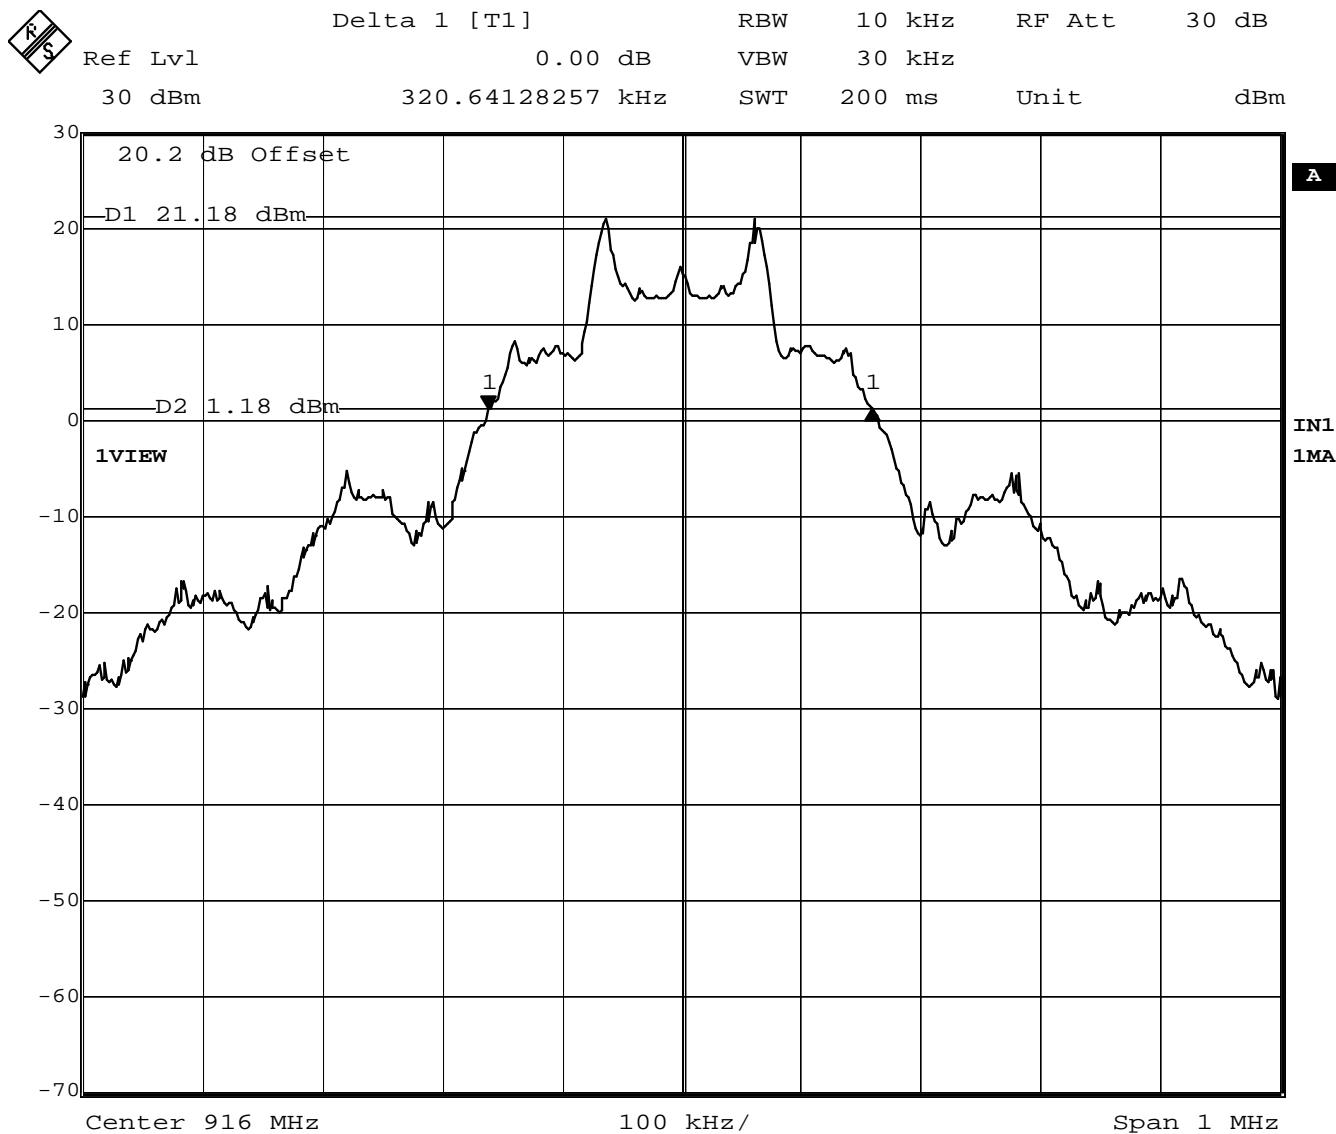

Date: 22.JAN.2010 15:30:07

Figure 8: Occupied Bandwidth

Note: The above plot is the worst case.

**\*BW = 320.6 KHZ**

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## 5.5 99% Power Bandwidth

For the purpose of Section A1.1, the 99% bandwidth shall be no wider than .25% of the center frequency for devices operating between 70-900MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency.

### 5.5.1 Test Over View

<b>Results</b>	<b>Complies</b> (as tested per this report)			<b>Date</b>	22 January 2010		
<b>Standard</b>	RSS-210 Section A1.1.3						
<b>Product Model</b>	RX2EA4			<b>Serial#</b>	1056		
<b>Test Set-up</b>	Direct Measurement from antenna port						
<b>EUT Powered By</b>	120VAC / 60Hz	<b>Temp</b>	74° F	<b>Humidity</b>	32%	<b>Pressure</b>	1010mbar
<b>Perf. Criteria</b>	(Below Limit)		<b>Perf. Verification</b>	Readings Under Limit			
<b>Mod. to EUT</b>	None		<b>Test Performed By</b>	Michael Moranha			

### 5.5.2 Test Procedure

Using the procedures of RSS-GEN section 4.6.1, the 1 kHz resolution bandwidth is 1% of the 1 MHz span. The Video bandwidth is 3 times that of the resolution bandwidth.

The limit of the bandwidth would be 0.25% of 902.8MHz is 1.08 MHz. The measured 99% bandwidth is 412.8 kHz.

### 5.5.3 Deviations

There were no deviations from the test methodology listed in the test plan for the Electrical Fast transients (EFT) Immunity test.

### 5.5.4 Final Test

The EUT met the performance criteria requirement as specified in the test plan of this report and in the standards.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

### 5.5.5 Final Data

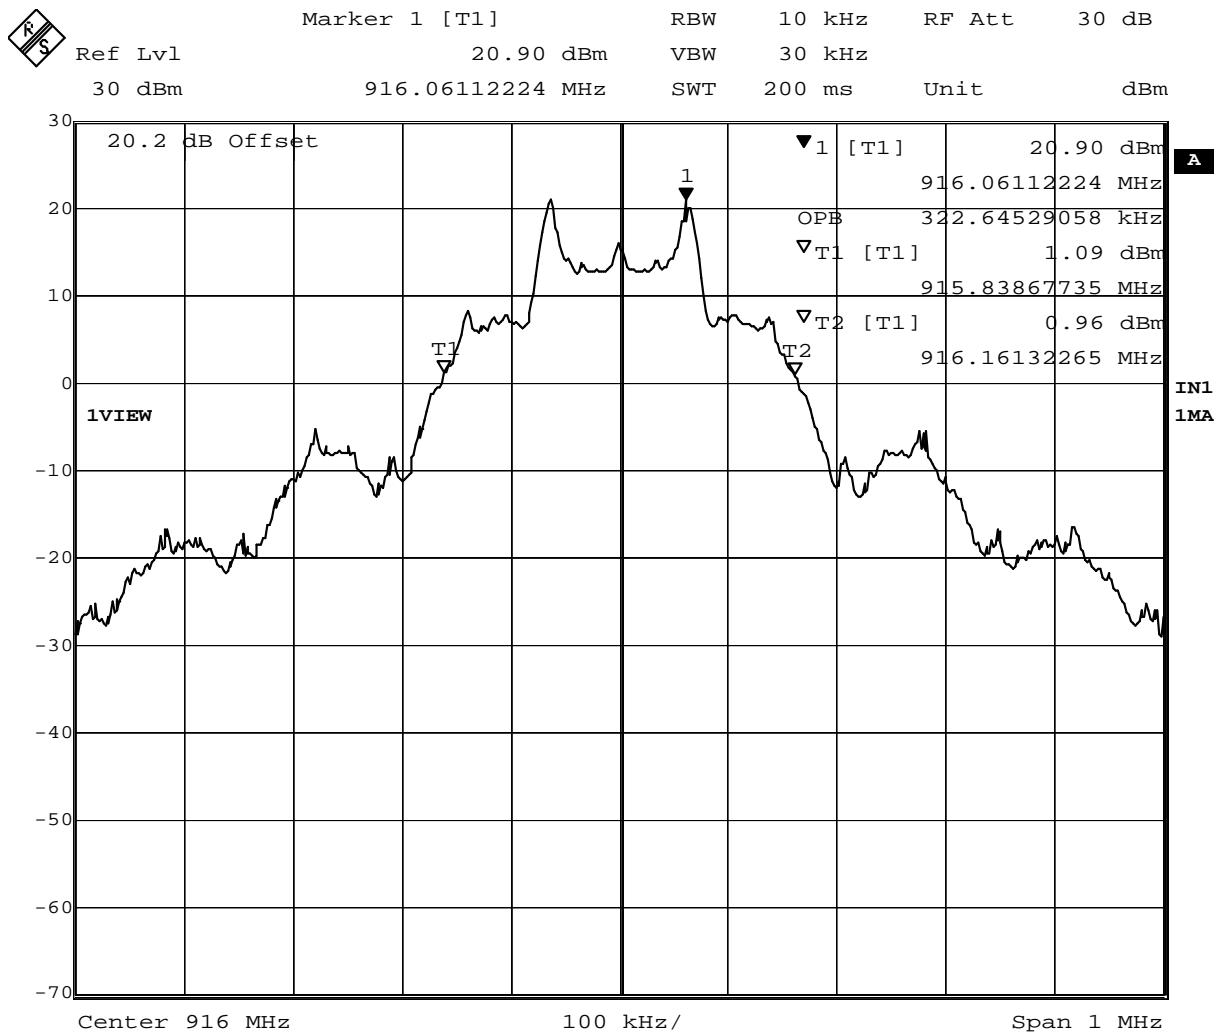


Figure 9 – 99% Power Bandwidth = 322.6 kHz

### Spectrum Analyzer Parameters:

Spectrum Freq.  
RBW=10kHz

RDW-T0K1L  
Span=1MHz

Span=1MHz  
VBW= 30kHz

VBW = 30kHz  
LOC dB/div = 10dB

LOG dB/div. =

Sweep = Auto  
Bottom

Detector = sample detector, max hold

The EUT is compliant to the requirements of RSS-210 A1.1.3

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

---

**Report No.:**
**30953899.001**
*Page 34 of 47*

## 5.6 Peak Output Power

The maximum peak output power of the intentional radiator shall not exceed 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels. (Conducted Measurement)


### 5.6.1 Test Over View

<b>Results</b>	<b>Complies</b> (as tested per this report)				<b>Date</b>	22 January 2010	
<b>Standard</b>	FCC Part 15.247(b)(2) and RSS-210 A8.4(1)						
<b>Product Model</b>	RX2EA4			<b>Serial#</b>	1056		
<b>Test Set-up</b>	Direct Measurement from antenna port						
<b>EUT Powered By</b>	120VAC / 60Hz	<b>Temp</b>	74° F	<b>Humidity</b>	32%	<b>Pressure</b>	1010mbar
<b>Perf. Criteria</b>	(Below Limit)		<b>Perf. Verification</b>	Readings Under Limit			
<b>Mod. to EUT</b>	None		<b>Test Performed By</b>	Michael Moranha			

### 5.6.2 Test Procedure

The peak output power was measured at CH01, CH34, CH48, and at CH63. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The cable loss and the attenuator was measured and added in the reference level offset in the spectrum analyzer. The spectrum analyzer's resolution bandwidth was greater than the 20dB bandwidth of the modulated carrier and the video bandwidth was equal to the resolution bandwidth.

Test Setup:

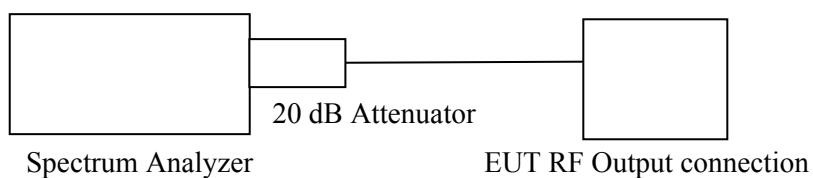

### 5.6.3 Deviations

There were no deviations from the test methodology listed in the test plan for the Surge Immunity test.

### 5.6.4 Final Test

The EUT met the performance criteria requirement as specified in the test plan of this report and in the standards.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Report No.:

30953899.001


Page 35 of 47

### 5.6.5 Final Data - Peak Power Output

 CH01: 902.8 MHz = 0.143 Watts = 128.54 dB $\mu$ V

 CH34: 916.0 MHz = 0.161 Watts = 129.06 dB $\mu$ V

 CH48: 921.6 MHz = 0.182 Watts = 129.59 dB $\mu$ V

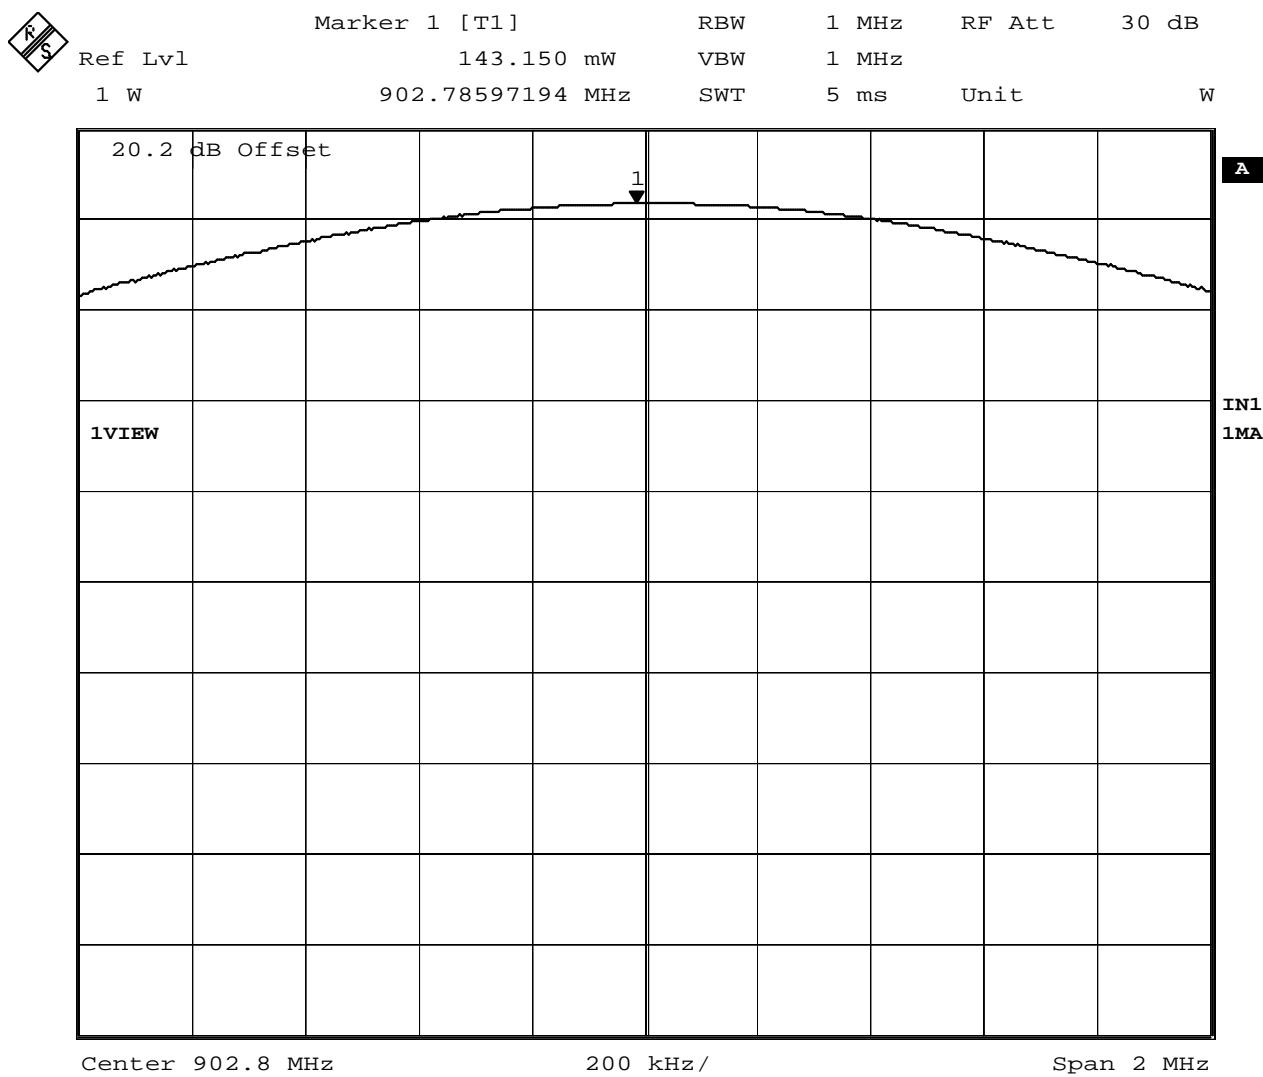 CH63: 927.6 MHz = 0.166 Watts = 129.19 dB $\mu$ V


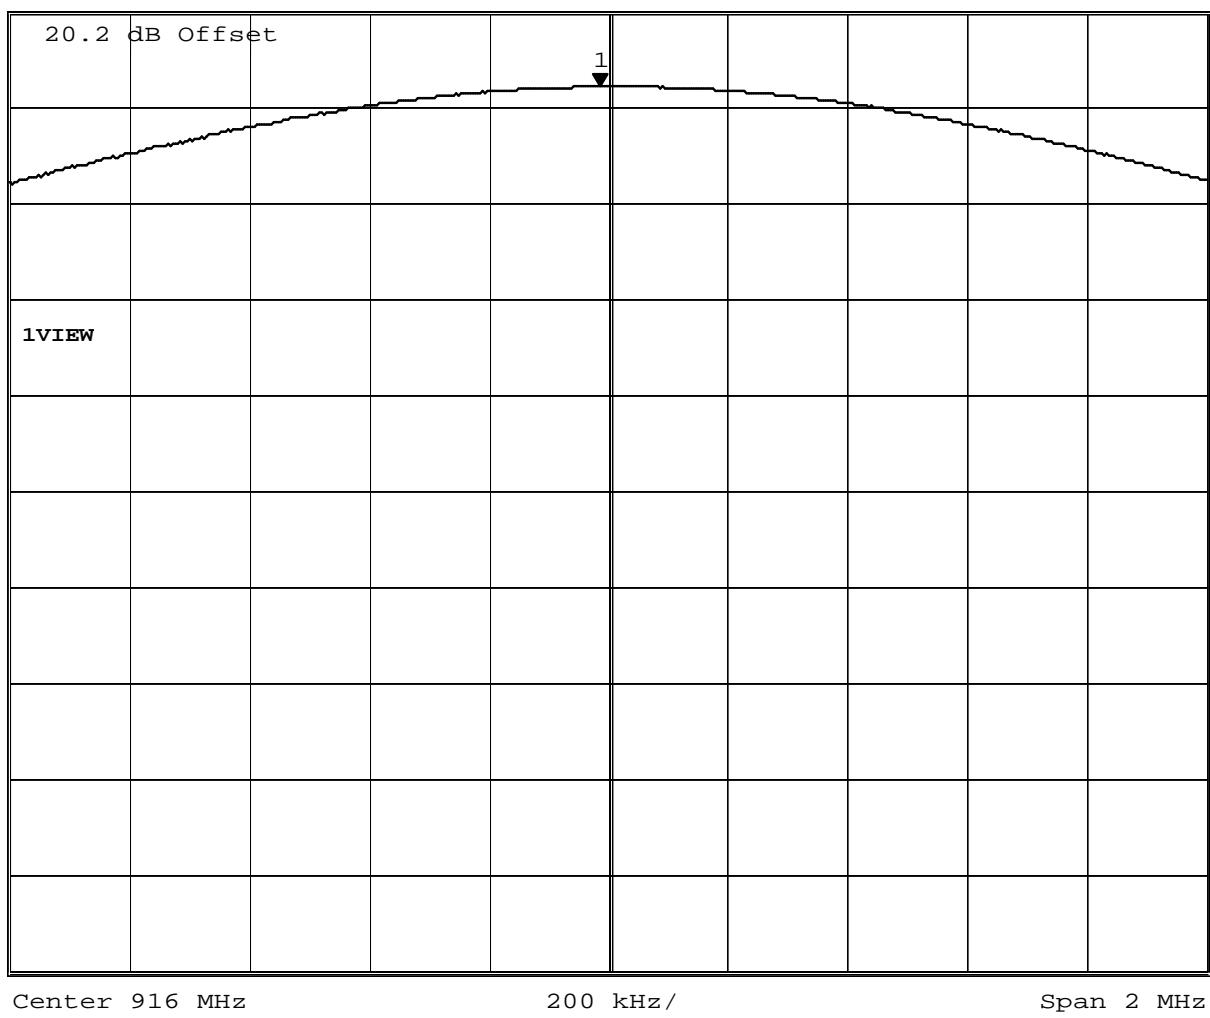
Date: 2.FEB.2010 16:17:55

Figure 10: CH 1 (902.8 MHz) Peak Output Power

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Report No.:**
**30953899.001**
*Page 36 of 47*

 Ref Lvl  
 1 W

 Marker 1 [T1] 161.231 mW  
 915.98597194 MHz  
 RBW 1 MHz  
 VBW 1 MHz  
 SWT 5 ms  
 RF Att Unit  
 30 dB W


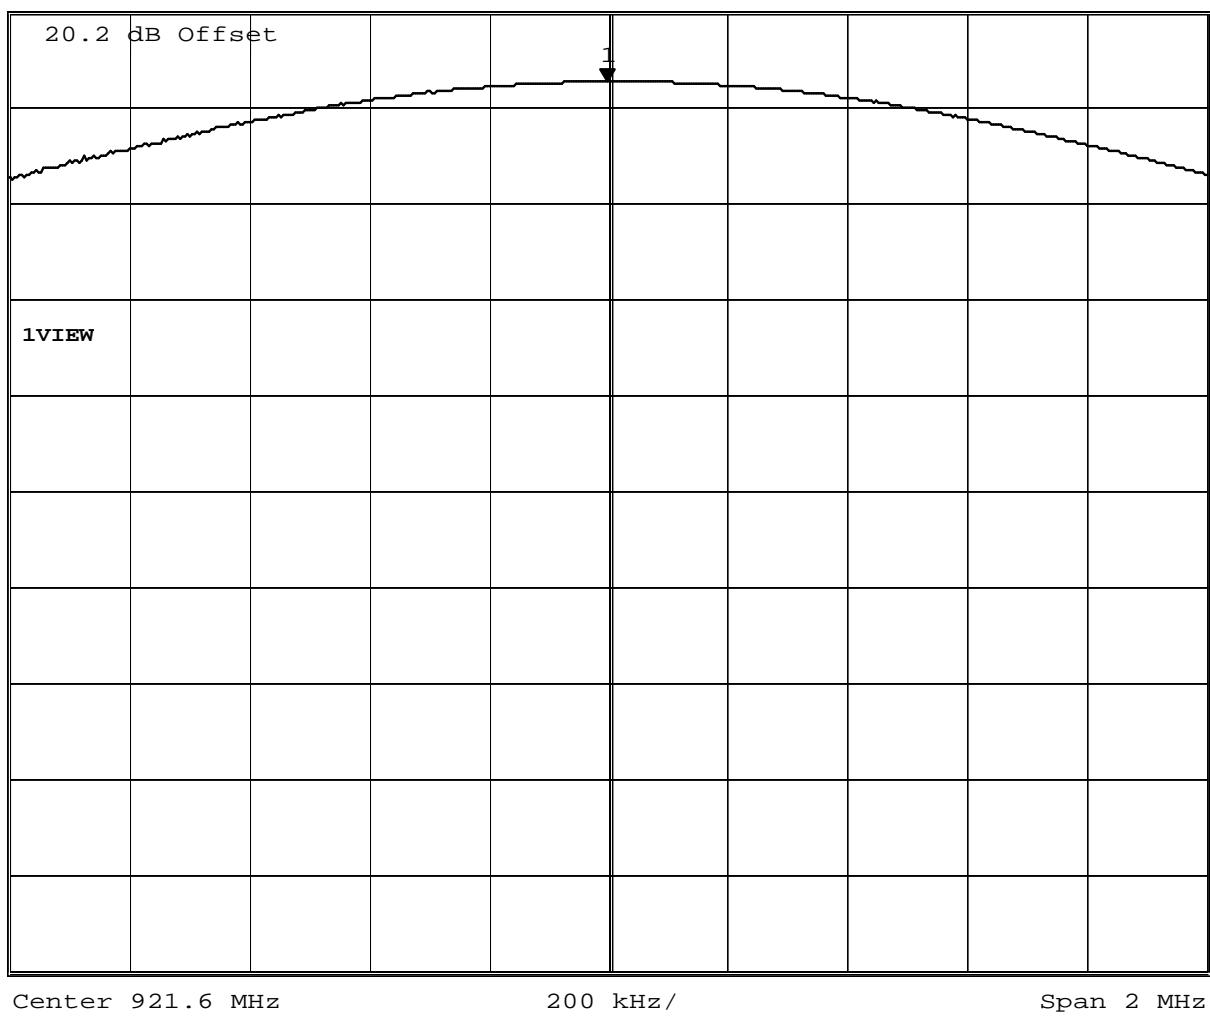
Date: 2.FEB.2010 16:16:42

Figure 11: CH 34 (916.0 MHz) Peak Output Power

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Report No.:**
**30953899.001**
*Page 37 of 47*

 Ref Lvl  
 1 W

 Marker 1 [T1] 181.937 mW 1 MHz RF Att 30 dB  
 921.59799599 MHz VBW 1 MHz  
 SWT 5 ms Unit W


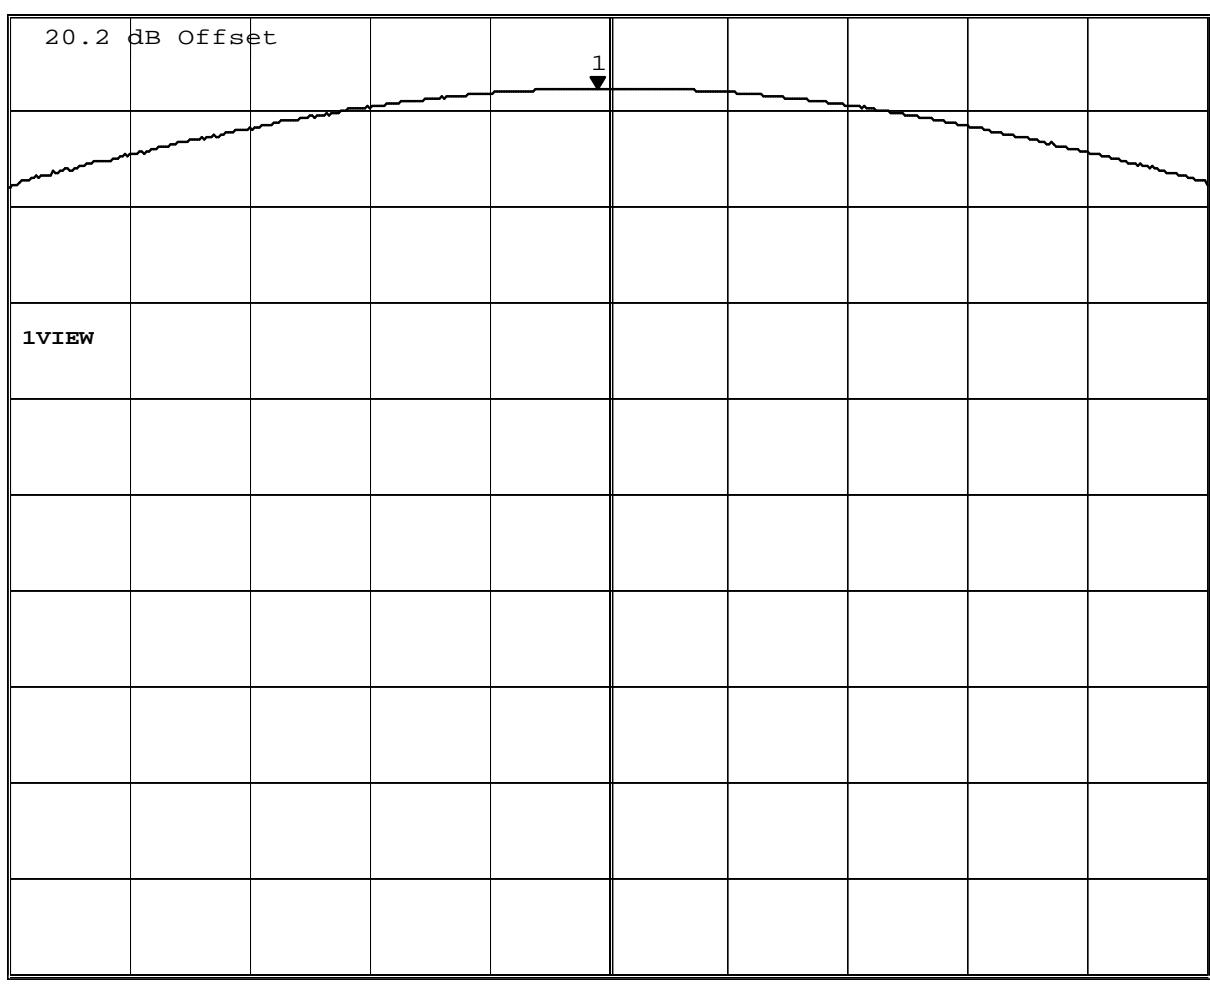
Date: 2.FEB.2010 16:15:42

Figure 12: CH 48 (921.6 MHz) Peak Output Power

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Report No.:**
**30953899.001**
*Page 38 of 47*


Marker 1 [T1]	RBW	1 MHz	RF Att	30 dB
Ref Lvl	VBW	1 MHz		
1 W	SWT	5 ms	Unit	W



Date: 2.FEB.2010 16:19:56

Figure 13: CH 63 (926.7 MHz) Peak Output Power

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## Antenna Gain

The antenna gain data was supplied separately with the following results provided:

### **Results**

#### **Internal Antenna**

Freq. (GHz)	Peak (dBi)
0.902 – 0.928	5.64

## External Antennas

Though the RX2EA4 module is normally supplied with an integral printed circuit antenna, it may be used with two different models of external antenna as shown in the table 5. The remote mount model offers a 3db gain option and the local mount model has the option for use with or without a metal ground plane mounting.

Approved External Antennas

Antenna	Mount	Gain
PCTEL(MAXRAD) MFB9150 Unity Gain Fiberglass Omnidirectional	Remote	2.15 dBi
PCTEL(MAXRAD) MFB9153 3dB Fiberglass Omnidirectional	Remote	5.15 dBi
Antenex TRA9023P(NP)* [white body] 3dB Gain Antenex TRAB9023P(NP)* [black body] 3dB Gain	Local	3.00 dBi

- Note the “NP” designation specifies the NGP variation that can be used without a metal ground plane. It is equivalent with respect to gain and pattern, to the “P” model that does require a metal ground plane.
- Refer to the Technical Description document for more details

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## 6 Emissions in Receive Mode.

### 6.1 Radiated Emissions

This test measures the electromagnetic levels of spurious signals generated by the EUT that radiated from the EUT and may affect the performance of other nearby electronic equipment.

#### 6.1.1 Over View of Test

<b>Results</b>	<b>Complies</b> (as tested per this report)				<b>Date</b>	21 January 2010			
<b>Standard</b>	FCC Parts 15.109(a) and ICES-003								
<b>Product Model</b>	RX2EA4				<b>Serial#</b>	1056			
<b>Configuration</b>	See test plan for details								
<b>Test Set-up</b>	Tested in a 5m Semi Anechoic chamber, placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane on a turn-table. See test plans for details								
<b>EUT Powered By</b>	120VAC / 60Hz	<b>Temp</b>	74° F	<b>Humidity</b>	32%	<b>Pressure</b>	1010mbar		
<b>Frequency Range</b>	30 MHz to 5 GHz @ 3m								
<b>Perf. Criteria</b>	(Below Limit)		<b>Perf. Verification</b>	Readings Under Limit					
<b>Mod. to EUT</b>	None		<b>Test Performed By</b>	Michael Moranha					

#### 6.1.2 Test Procedure

Radiated and FCC emissions tests were performed using the procedures of ANSI C63.4:2003 including methods for signal maximizations and EUT configuration. The photos included with the report show the EUT in its maximized configuration.

The frequency range from 30 MHz to 5 GHz was investigated for radiated emissions.

Radiated emission testing was performed at a distance of 3 meters in a 5 meter semi-anechoic chamber.

#### 6.1.3 Deviations

There were no deviations from the test methodology listed in the test plan for the radiated emission test.

#### 6.1.4 Final Test

All final radiated emissions measurements were below (in compliance) the limits.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Report No.:


30953899.001

Page 41 of 47

### 6.1.5 Final Graphs and Tabulated Data

#### Radiated Emissions – External Antenna

Horizontal

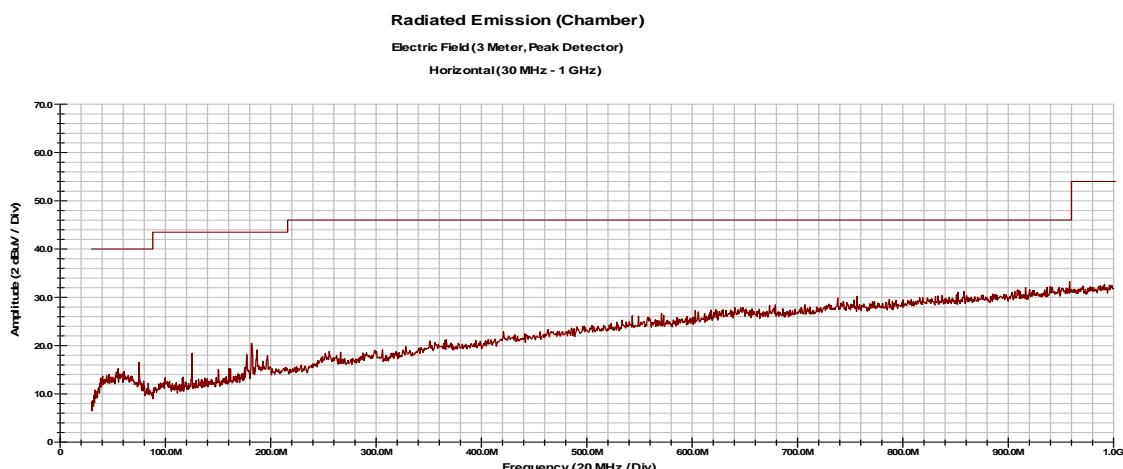

02:56:20 PM, Thursday, January 21, 2010


Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)

Notes: All emissions are either below the noise floor of the receiver, or more than 20dB below the limits

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## Radiated Emissions – External Antenna

## Vertical

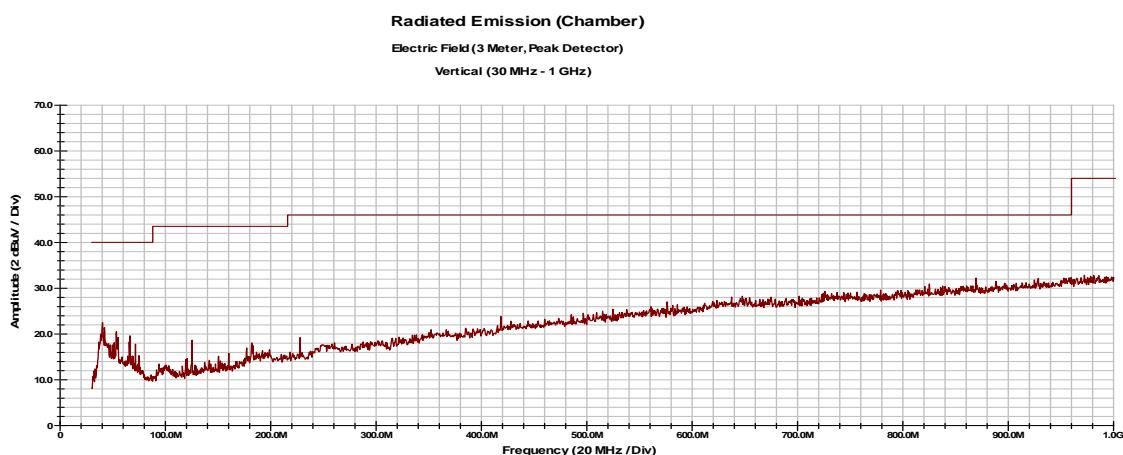

02:58:56 PM, Thursday, January 21, 2010


Notes: All emissions are either below the noise floor of the receiver, or more than 20dB below the limits

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Report No.:

30953899.001

Page 43 of 47

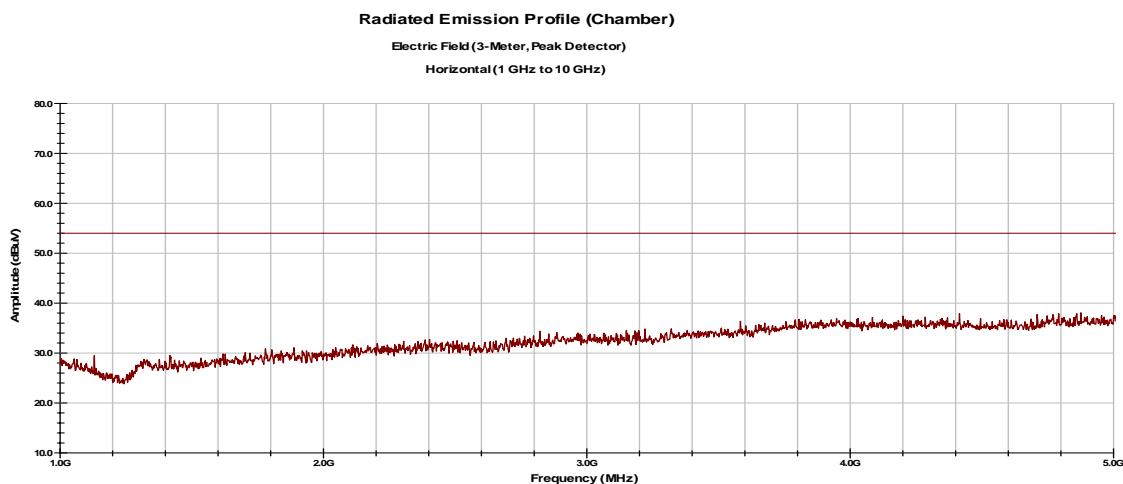**Radiated Emissions – External Antenna**  
**Horizontal**


02:41:33 PM, Thursday, January 21, 2010


Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)

Notes: All emissions are either below the noise floor of the receiver, or more than 20dB below the limits

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## Radiated Emissions – External Antenna

## Vertical

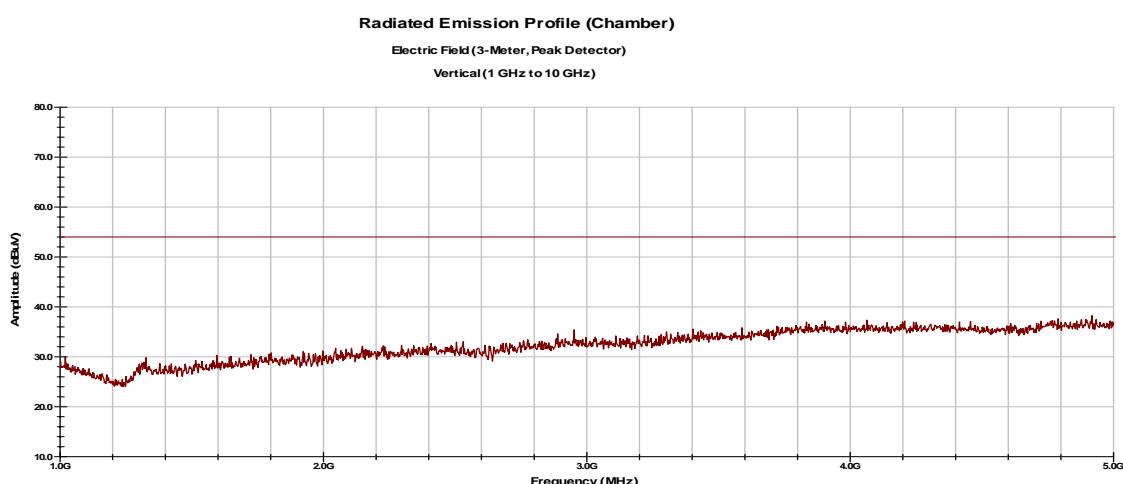

02:43:59 PM, Thursday, January 21, 2010

Notes: All emissions are either below the noise floor of the receiver, or more than 20dB below the limits

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

## 6.2 Conducted Emissions

This test measures the electromagnet levels of spurious signals generated by the EUT on the AC power line that may affect the performance of other near by electronic equipment.

### 6.2.1 Over View of Test

<b>Results</b>	<b>Complies</b> (as tested per this report)			<b>Date</b>	22 January 2010					
<b>Standard</b>	FCC Part 15.107(a) and ICES-003									
<b>Product Model</b>	RX2EA4			<b>Serial#</b>	1056					
<b>Configuration</b>	See test plan for details									
<b>Test Set-up</b>	Tested in shielded room. EUT placed on table, see test plans for details									
<b>EUT Powered By</b>	120VAC / 60Hz	<b>Temp</b>	74° F	<b>Humidity</b>	32%	<b>Pressure</b>	1010mbar			
<b>Frequency Range</b>	150 kHz to 30 MHz									
<b>Perf. Criteria</b>	(Below Limit )	<b>Perf. Verification</b>		Readings Under Limit for L1 & Neutral						
<b>Mod. to EUT</b>	None	<b>Test Performed By</b>		Michael Moranha						

### 6.2.2 Test Procedure

Conducted and FCC emissions tests were performed using the procedures of ANSI C63.4 including methods for signal maximizations and EUT configuration. The photos included with the report show the EUT in its maximized configuration.

The frequency range from 150 kHz to 30 MHz was investigated for conducted emissions.

Conducted Emissions measurements were performed in the shielded room using procedures specified in the test plan and standard.

### 6.2.3 Deviations

There were no deviations from the test methodology listed in the test plan for the conducted emission test.

### 6.2.4 Final Test

All final conducted emissions measurements were below (in compliance) the limits.

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.


Report No.:

30953899.001

Page 46 of 47

### 6.2.5 Final Graphs and Tabulated Data

#### Conducted Emissions @ 120V/60Hz Line 1

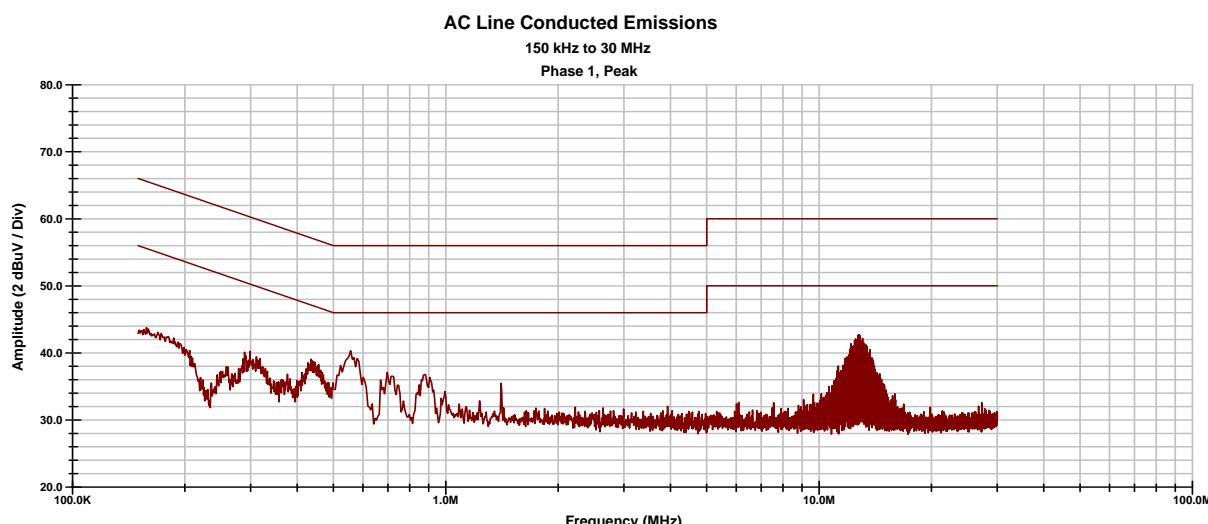

Freq (MHz)	ID (1,2,3,N)	Quasi (dBuV)	Ave (dBuV)	Loss (dB)	T Limiter (dB)	Limit (dBuV)	Limit (dBuV)	Margin (dB)	Margin (dB)
0.15	1	26.78	11.88	0.02	10.05	66.00	56.00	-29.15	-34.05
0.29	1	21.96	15.28	0.03	10.00	60.52	50.52	-28.53	-25.21
0.56	1	22.70	10.14	0.04	9.96	56.00	46.00	-23.30	-25.86
0.70	1	19.86	9.37	0.05	9.94	56.00	46.00	-26.15	-26.64
1.41	1	22.48	20.21	0.07	9.88	56.00	46.00	-23.57	-15.84
12.79	1	25.98	20.11	0.25	10.06	60.00	50.00	-23.72	-19.59


Notes:

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Report No.:

30953899.001

Page 47 of 47

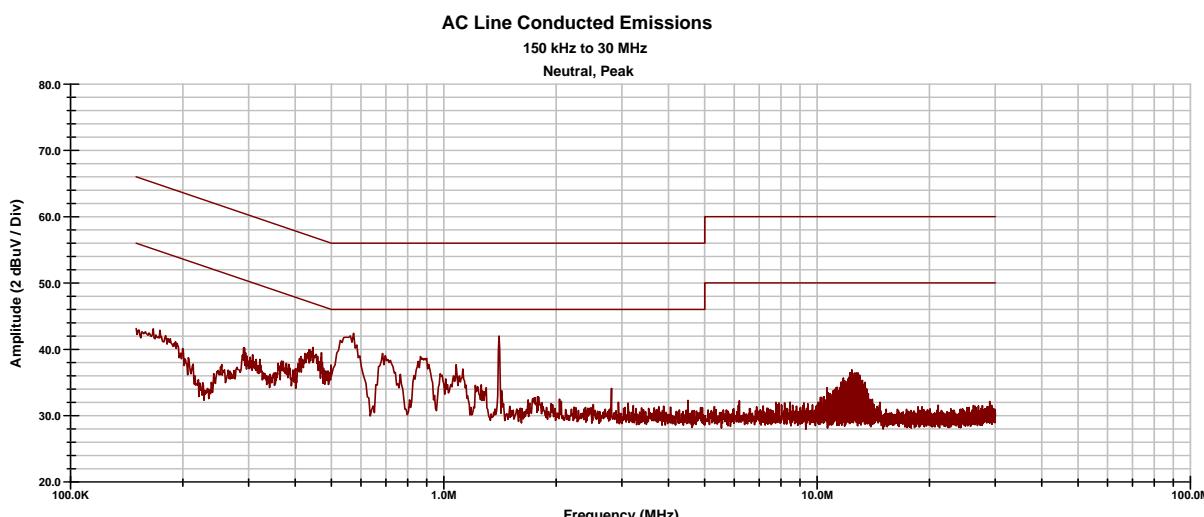 Conducted Emissions @ 120V/60Hz  
 Neutral


Freq (MHz)	ID (1,2,3,N)	Quasi (dBuV)	Ave (dBuV)	Loss (dB)	T Limiter (dB)	Limit (dBuV)	Limit (dBuV)	Margin (dB)	Margin (dB)
0.15	N	26.51	11.76	0.02	0.07	66.00	56.00	-39.40	-44.15
0.57	N	24.80	11.75	0.04	0.16	56.00	46.00	-31.00	-34.05
0.71	N	22.63	10.06	0.05	0.18	56.00	46.00	-33.14	-35.71
0.90	N	21.52	10.06	0.05	0.19	56.00	46.00	-34.24	-35.70
1.41	N	29.79	29.10	0.07	0.21	56.00	46.00	-25.93	-16.62
12.52	N	23.33	20.77	0.25	0.20	60.00	50.00	-36.22	-28.78

Notes:

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.