

Test of Juniper Networks WLA532 Wireless LAN
Access Point

To: FCC 47 CFR Part 15.247 & IC RSS-210

Test Report Serial No.: JNIP03-U1 Rev A



TEST REPORT

FROM



Test of Juniper Networks WLA532 Wireless LAN Access Point

to

To FCC 47 CFR Part 15.247 & IC RSS-210

Test Report Serial No.: JNIP03-U1 Rev A

Note: this report contains data with regard to the 2400 to 2483.5 MHz and 5725 to 5850 MHz operational modes of the Juniper Networks WLA532 Wireless Access Point.

This report supersedes: NONE

Applicant: Juniper Networks, Inc
1194 North Mathilda Avenue
Sunnyvale
California 94089, USA

Product Function: Wireless LAN Access Point

Copy No: pdf Issue Date: 26th September 2011

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.

440 Boulder Court, Suite 200

Pleasanton, CA 94566 USA

Phone: +1 (925) 462-0304

Fax: +1 (925) 462-0306

www.micomlabs.com



TEST CERTIFICATE #2381.01

MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 3 of 279

This page has been left intentionally blank

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 4 of 279

TABLE OF CONTENTS

ACCREDITATION, LISTINGS & RECOGNITION	5
TESTING ACCREDITATION	5
RECOGNITION	6
PRODUCT CERTIFICATION	7
1. TEST RESULT CERTIFICATE	9
2. REFERENCES AND MEASUREMENT UNCERTAINTY	10
2.1. Normative References	10
2.2. Test and Uncertainty Procedures	11
3. PRODUCT DETAILS AND TEST CONFIGURATIONS	12
3.1. Technical Details	12
3.2. Scope of Test Program	13
3.3. Equipment Model(s) and Serial Number(s)	15
3.4. Antenna Details	15
3.5. Cabling and I/O Ports	15
3.6. Test Configurations	16
3.7. Equipment Modifications	18
3.8. Deviations from the Test Standard	18
3.9. Subcontracted Testing or Third Party Data	18
4. TEST SUMMARY	19
5. TEST RESULTS	21
5.1. Device Characteristics	21
5.1.1. 6 dB and 99 % Bandwidth	21
5.1.2. Peak Output Power	90
5.1.3. Peak Power Spectral Density	101
5.1.4. Maximum Permissible Exposure	170
5.1.5. Conducted Spurious Emissions	171
5.1.6. Radiated Emissions	235
5.1.7. AC Wireline Conducted Emissions (150 kHz – 30 MHz)	274
6. PHOTOGRAPHS	276
6.1. Conducted Test Setup	276
6.2. Radiated Test Setup > 1 GHz	277
7. TEST EQUIPMENT DETAILS	278

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 5 of 279

ACCREDITATION, LISTINGS & RECOGNITION

TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



The American Association for Laboratory Accreditation

World Class Accreditation

Accredited Laboratory

A2LA has accredited

MICOM LABS

Pleasanton, CA

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General Requirements for the Competence of Testing and Calibration Laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).



Presented this 14th day of April 2010.

President & CEO
For the Accreditation Council
Certificate Number 2381.01
Valid to November 30, 2011

For the tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 6 of 279

RECOGNITION

MiCOM Labs, Inc has widely recognized Electrical testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA** countries. Our test reports are widely accepted for global type approvals.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	Listing #: 4143A-2
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	210
	VCCI	--	--	No. 2959
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

**APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

N/A – Not Applicable

**EU MRA – European Union Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the EU member countries.

**NB – Notified Body

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 7 of 279

PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard EN ISO/IEC Guide 65. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



The American Association for Laboratory Accreditation

Accredited Product Certification Body

A2LA has accredited

MICOM LABS

Pleasanton, CA

for technical competence as a

Product Certification Body

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC Guide 65:1996 *General requirements for bodies operating product certification systems*. This accreditation demonstrates technical competence for a defined scope and the operation of a quality management system for a Telecommunications Certification Body (TCB) meeting FCC (U.S.), and IC (Canada) requirements.



Presented this 24th day of June 2010.

President & CEO
For the Accreditation Council
Certificate Number 2381.02
Valid to November 30, 2011

For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation.

USA Telecommunication Certification Body (TCB) - TCB Identifier – US0159

Industry Canada Certification Body - CAB Identifier – US0159

European Notified Body - Notified Body Identifier - 2280

Japan – Recognized Certification Body (RCB) - RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 8 of 279

DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft		
Rev A	26 th September 2011	Initial release.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 9 of 279

1. TEST RESULT CERTIFICATE

Manufacturer:	Juniper Networks, Inc 1194 North Mathilda Avenue Sunnyvale California 94089, USA	Tested By:	MiCOM Labs, Inc. 440 Boulder Court Suite 200 Pleasanton California, 94566, USA
EUT:	802.11a/b/g/n Wireless LAN Access Point	Telephone:	+1 925 462 0304
Model:	WLA532-US	Fax:	+1 925 462 0306
S/N's:	JC0211322570, JC0211322566		
Test Date(s):	7th July to 14th September '11	Website:	www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC 47 CFR Part 15.247 & IC RSS-210	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.

Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.


Approved & Released for MiCOM Labs, Inc. by:



TEST CERTIFICATE #2381.01



Graeme Grieve
Quality Manager MiCOM Labs,



Gordon Hurst
President & CEO MiCOM Labs, Inc.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

2. REFERENCES AND MEASUREMENT UNCERTAINTY

2.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
i.	FCC 47 CFR Part 15, Subpart C	2010	Title 47: Telecommunication PART 15—RADIO FREQUENCY DEVICES Subpart C—Intentional Radiators
ii.	RSS-210 Annex 8	2010	Radio Standards Specification 210, Issue 8, Low-power Licence-exempt Radiocommunication Devices (All Frequency Bands): Category I Equipment
iii.	FCC OET KDB 662911	4 th April 2011	Emissions Testing of Transmitters with Multiple Outputs in the Same Band
iv.	DA 00-705	2000	FCC DA 00-705 "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems" released March 30, 2000
v.	RSS-GEN	2010	Radio Standards Specification-Gen, Issue 3, General Requirements and Information for the Certification of Radiocommunication Equipment
vi.	FCC 47 CFR Part 15, Subpart B	2010	47 CFR Part 15, SubPart B; Unintentional Radiators
vii.	ICES-003	2004	Spectrum Management and Telecommunications Policy Interference-Causing Equipment Standard Digital Apparatus; Issue 4
viii.	ANSI C63.4	2009	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ix.	CISPR 22/ EN 55022	2008 2006+A1:2007	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
x.	M 3003	Edition 1 Dec. 1997	Expression of Uncertainty and Confidence in Measurements
xi.	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
xii.	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
xiii.	A2LA	9th June 2010	Reference to A2LA Accreditation Status – A2LA Advertising Policy

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 11 of 279

2.2. Test and Uncertainty Procedures

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 12 of 279

3. PRODUCT DETAILS AND TEST CONFIGURATIONS

3.1. Technical Details

Details	Description
Purpose:	Test of the Juniper Networks WLA532 Wireless LAN Access Point to FCC Part 15.247 and Industry Canada RSS-210 regulations.
Applicant:	Juniper Networks, Inc 1194 North Mathilda Avenue Sunnyvale California 94089, USA
Manufacturer:	As applicant.
Laboratory performing the tests:	MiCOM Labs, Inc. 440 Boulder Court, Suite 200 Pleasanton, California 94566 USA
Test report reference number:	JNIP03-U1 Rev A
Date EUT received:	2nd July 2011
Standard(s) applied:	FCC 47 CFR Part 15.247 & IC RSS-210
Dates of test (from - to):	7th July to 14th September '11
No of Units Tested:	One
Type of Equipment:	802.11a/b/g/n Wireless Access Point, 3x3 Spatial Multiplexing MIMO configuration
Manufacturers Trade Name:	Wireless Access Point
Model(s):	WLA532
Location for use:	Indoor/Outdoor
Declared Frequency Range(s):	2400 - 2483.5 MHz; 5725 - 5850 MHz
Software Release	7.6.1.0
Type of Modulation:	Per 802.11 –CCK, BPSK, QPSK, DSSS, OFDM
Declared Nominal Average Output Power:	802.11b: +21 dBm 802.11g: Leg. +19dBm, HT-20 +19 dBm, HT-40 +18 dBm 802.11a: Leg. +19dBm, HT-20 +19 dBm, HT-40 +18 dBm
EUT Modes of Operation:	Legacy 802.11a/b/g, 802.11n HT-20, HT-40
Transmit/Receive Operation:	Time Division Duplex
System Beam Forming:	WLA532 has no capability for beam forming
Rated Input Voltage and Current:	POE 48 Vdc 0.625 A
Operating Temperature Range:	Declared range -20° to +55°C
ITU Emission Designator:	2400 – 2483.5 MHz 802.11b 15M5G1D 2400 – 2483.5 MHz 802.11g 16M8D1D 2400 – 2483.5 MHz 802.11n – HT-20 19M2D1D 2400 – 2483.5 MHz 802.11n – HT-40 36M6D1D 5725 – 5850 MHz 802.11a 17M1D1D 5725 – 5850 MHz 802.11n – HT-20 17M9D1D 5725 – 5850 MHz 802.11n – HT-40 36M4D1D
Equipment Dimensions:	6.0 (Diameter) x 2.5 (H) inches 15 (Diameter) x 6.35 (H) cm
Weight:	1 lb (0.454 Kg)
Primary function of equipment:	Wireless Access Point for transmitting data and voice.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 13 of 279

3.2. Scope of Test Program

Juniper Networks WLA532 Wireless Access Point

The scope of the test program was to test the Juniper Networks WLA532.11a/b/g/n Wireless Access Point, 3x3 Spatial Multiplexing MIMO configurations in the frequency ranges 2400 - 2483.5 MHz and 5725 – 5850 MHz for compliance against FCC 47 CFR Part 15.247 and Industry Canada RSS-210 specifications.

WLA532-US (for US distribution)

WLA532-WW, WLA532-XX (where –XX can be any alphanumeric, for world wide distribution)

FCC OET KDB Implementation

This test program implements the following FCC KDB – 662911 4/4/2011;

Emissions Testing of Transmitters with Multiple Outputs in the Same Band

The KDB document provides guidance for measurements of conducted output emissions of devices that employ a single transmitter with multiple outputs in the same band, with the outputs occupying the same or overlapping frequency ranges. It applies to EMC compliance measurements on devices that transmit on multiple antennas simultaneously in the same or overlapping frequency ranges through a coordinated process. Examples include, but are not limited to, devices employing beam forming or multiple-input and multiple-output (MIMO.) This guidance applies to both licensed and unlicensed devices wherever the FCC rules call for conducted output measurements. Guidance is provided for in-band, out-of-band and spurious emission measurements.

This guidance does not apply to the multiple transmitters included in a composite device, such as a device that combines an 802.11 modem with a cell phone in one enclosure with each driving its own antenna.

WLA532 802.11 a/b/g/n Wireless Access Point





Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 15 of 279

3.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	802.11a/b/g/n Wireless Access Point	Juniper Networks	WLA532	JC0211322570, JC0211322566
Support	Laptop PC	IBM	Thinkpad	None

3.4. Antenna Details

- Integral Single Band: Gain 2.4 GHz 2 dBi
- Integral Single Band: Gain 5 GHz 3 dBi

3.5. Cabling and I/O Ports

Number and type of I/O ports

1. 1 x 10/100/1000 Ethernet
2. dc Power In (48 Vdc POE)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 16 of 279

3.6. Test Configurations

Testing was performed to determine the highest power level versus bit rate. The variant with the highest power was used to exercise the product.

Operational Mode(s) (802.11a/b/g/n)	Variant	Data Rate with Highest Power	Frequencies (MHz)
b	Legacy	1 MBit/s	2,412 2,437 2,462
g	Legacy	6 MBit/s	
n	HT-20	6.5 (MCS 0)	
	HT-40	13.5 (MCS 0)	2,422 2,437 2,452
a	Legacy	6 MBit/s	5,745 5,785 5,825
n	HT-20	6.5 (MCS 0)	
	HT-40	13.5 (MCS 0)	5,755 5,795

Legacy – data rates for 802.11abg products

Results for the above configurations are provided in this report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 17 of 279

Antenna Test Configurations for Radiated Emissions

Results for the following configurations are provided in this report.

2,400 – 2483.5 MHz

5,725 – 5850 MHz

15.247	
802.11b	b SE 2412
	b SE 2437
	b SE 2462
	BE b 2390
	BE b 2483.5
802.11g	g SE 2412
	g SE 2437
	g SE 2462
	BE g 2390
	BE g 2483.5
802.11n HT-20	n HT-20 SE 2412
	n HT-20 SE 2437
	n HT-20 SE 2462
	BE n HT-20 2390
	BE n HT-20 2483.5
802.11n HT-40	n HT-40 SE 2422
	n HT-40 SE 2437
	n HT-40 SE 2452
	BE n HT-40 2390
	BE n HT-40 2483.5

15.247	
802.11a	a SE 5745
	a SE 5785
	a SE 5825
802.11n HT-20	n HT-20 SE 5745
	n HT-20 SE 5785
	n HT-20 SE 5825
802.11n HT-40	n HT-40 SE 5755
	n HT-40 SE 5785
	n HT-40 SE 5815

KEY;-

SE – Spurious Emission
BE – Band-Edge

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



3.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. Band-Edge Power Reduction

During radiated band-edge emission testing the output power was reduced in order to comply with the Restricted Band criteria. At 2.4 GHz restricted bands are 2,310 – 2,390 MHz and 2,483.5 – 2,500 MHz.

Section 5.1.2 Peak Output Power identifies the total conducted power levels measured per antenna port and sums the powers. The tables in Section 5.1.2 identify the equipment under test maximum power setting.

Note: the power setting for the mid channel is maximized at all times.

3.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

3.9. Subcontracted Testing or Third Party Data

1. NONE



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 19 of 279

4. TEST SUMMARY

List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 15.247** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.247(a)(2) A8.2(1) 4.4	6 dB and 99 % Bandwidths	≥500 kHz	Conducted	Complies	5.1.1
15.247(b)(3) 15.31(e) A8.4(4)	Peak Output Power Voltage Variation	Shall not exceed 1W Variation of supply voltage 85 % -115 %	Conducted	Complies	5.1.2
15.247(e) A8.2	Peak Power Spectral Density	Shall not be greater than +8 dBm in any 3 kHz band	Conducted	Complies	5.1.3
15.247(i) 5.5	Maximum Permissible Exposure	Exposure to radio frequency energy levels	Conducted	Complies	5.1.4
15.247(d) 15.205 / 15.209 A8.5 2.2 4.7	Spurious Emissions (30MHz - 26 GHz b/g and 30 MHz – 40 GHz a)	The radiated emission in any 100 kHz of out-band shall be at least 20 dB below the highest in-band spectral density	Conducted	Complies	5.1.5

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 20 of 279

List of Measurements (continued)

The following table represents the list of measurements required under the **FCC CFR47 Part 15.247**, **Industry Canada RSS-210**, and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.247(d) 15.205 / 15.209 A8.5 2.2 2.6 4.7	Radiated Emissions	Restricted Bands	Radiated	Complies	5.1.6
	Transmitter Radiated Spurious Emissions	Emissions above 1 GHz		Complies	5.1.6.1
	Radiated Band Edge	Band-edge results Peak Emissions		Complies	5.1.6.2.
	Receiver Radiated Spurious Emissions	Emissions above 1 GHz		Complies	5.1.6.3
Industry Canada only RSS-Gen §4.10, §6					
15.205 / 15.209 2.2	Radiated Spurious Emissions	Emissions <1 GHz (30M-1 GHz)	Radiated	Complies	5.1.6.4
15.207 7.2.2	AC Wireline Conducted Emissions 150 kHz–30 MHz	Conducted Emissions	Conducted	Complies	5.1.7

Note 1: Test results reported in this document relate only to the items tested

Note 2: The required tests demonstrated compliance as per client declaration of test configuration, monitoring methodology and associated pass/fail criteria

Note 3: Section 3.7 Equipment Modifications highlights the equipment modifications that were required to bring the product into compliance with the above test matrix

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5. TEST RESULTS

5.1. Device Characteristics

5.1.1. 6 dB and 99 % Bandwidth

FCC, Part 15 Subpart C §15.247(a)(2)


Industry Canada RSS-210 §A8.2

Industry Canada RSS-Gen §4.4

Test Procedure

The bandwidth at 6 dB and 99 % is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

Test Measurement Set up

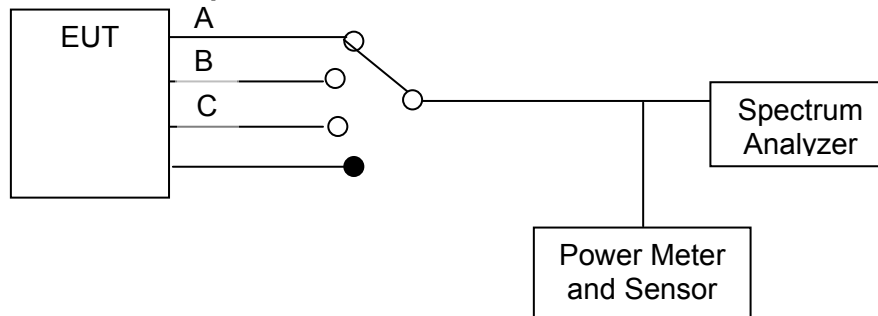

Measurement set up for 6 dB and 99 % bandwidth test

Measurement Results for 6 dB & 99% Bandwidth

Ambient conditions.

Temperature: 17 to 23 °C

Relative humidity: 31 to 57 %

Pressure: 999 to 1012 mbar

Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier

Power: Default, Maximum Power

Test s/w: ART



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 22 of 279

Measurement Results for 6 dB Operational Bandwidth(s) Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

TABLE OF RESULTS – 802.11b Legacy

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11b	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	2 dBi
Applied Voltage:	48.00 Vdc		
Notes 1:			
Notes 2:			

6 dB Bandwidth

6 dB Bandwidth							
Test Frequency	6 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz						
MHz	a	b	c	d	kHz	MHz	MHz
2412.000	10.180000	10.180000	10.180000	--	500	0.5	-9.680000
2437.000	10.180000	10.180000	10.180000	--			-9.680000
2462.000	10.180000	10.180000	10.180000	--			-9.680000

99% Bandwidth

99 % Bandwidth							
Test Frequency	MHz						
	MHz	a	b	c	d		
2412.000	14.749000	14.349000	14.509000	--			
2437.000	14.589000	14.830000	14.910000	--			
2462.000	14.669000	14.990000	14.990000	--			

Measurement uncertainty:	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 23 of 279

PORT A 2,412 MHz 802.11b Legacy 6 dB and 99% Bandwidth



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 24 of 279

PORT B 2,412 MHz 802.11b Legacy 6 dB and 99% Bandwidth




This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 25 of 279

PORT C 2,412 MHz 802.11b Legacy 6 dB and 99% Bandwidth

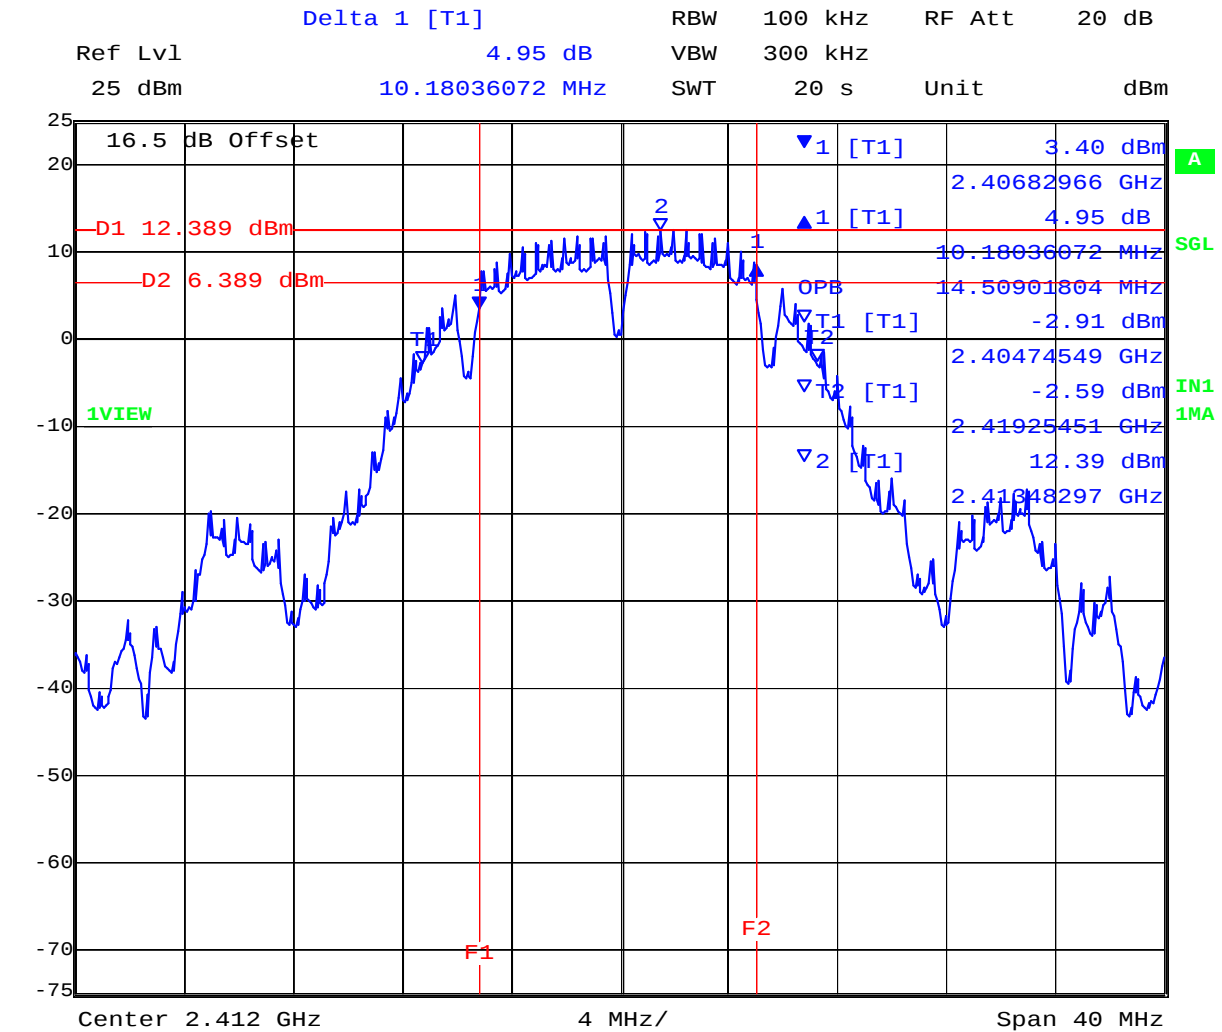


Date: 12.AUG.2011 15:50:48

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 26 of 279

PORT A 2,437 MHz 802.11b Legacy 6 dB and 99% Bandwidth

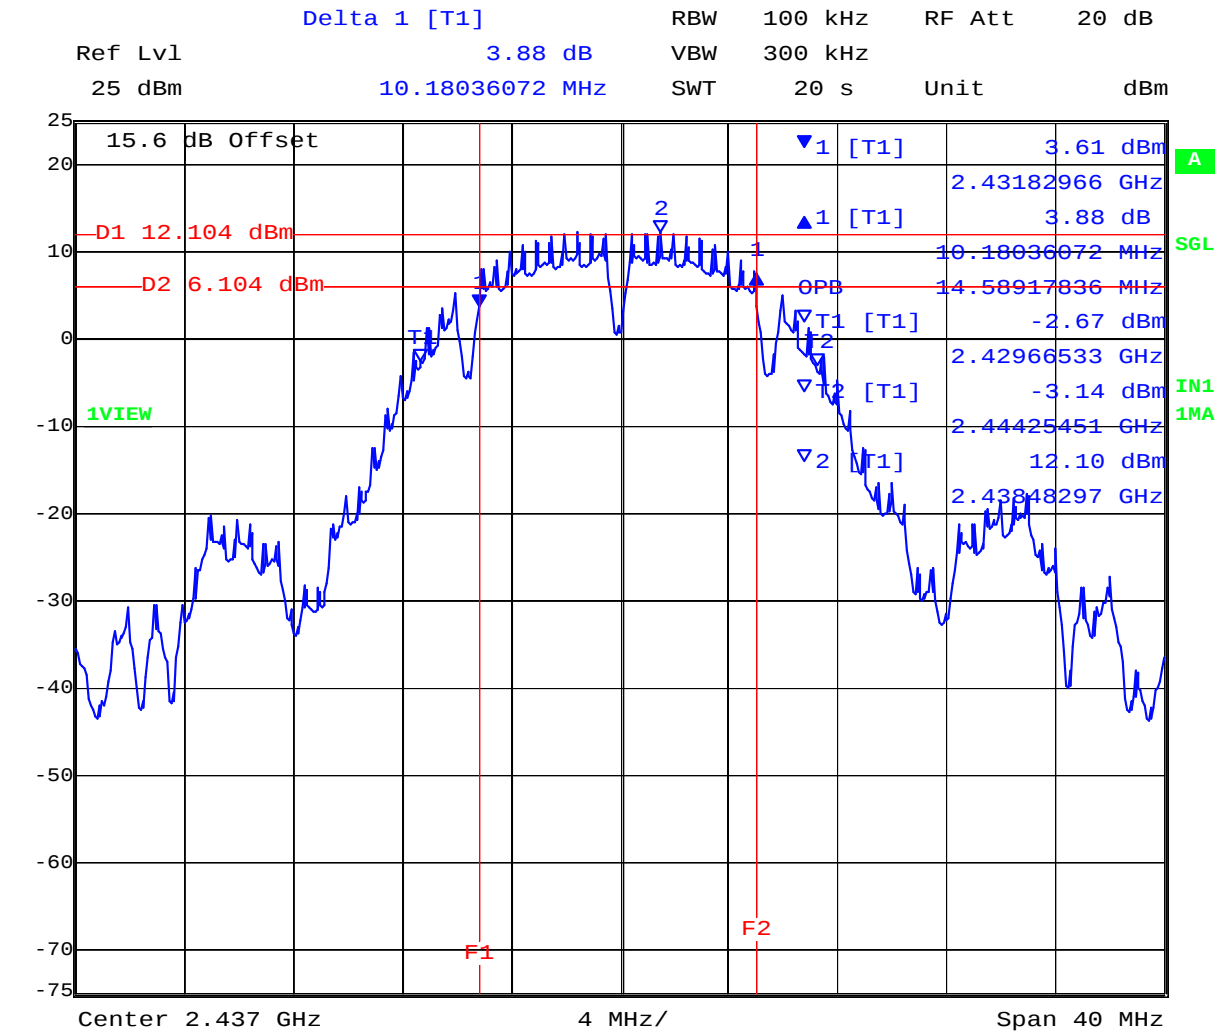

Date: 12.AUG.2011 16:21:47

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 27 of 279

PORT B 2,437 MHz 802.11b Legacy 6 dB and 99% Bandwidth




Date: 12.AUG.2011 16:22:50

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 28 of 279

PORT C 2,437 MHz 802.11b Legacy 6 dB and 99% Bandwidth

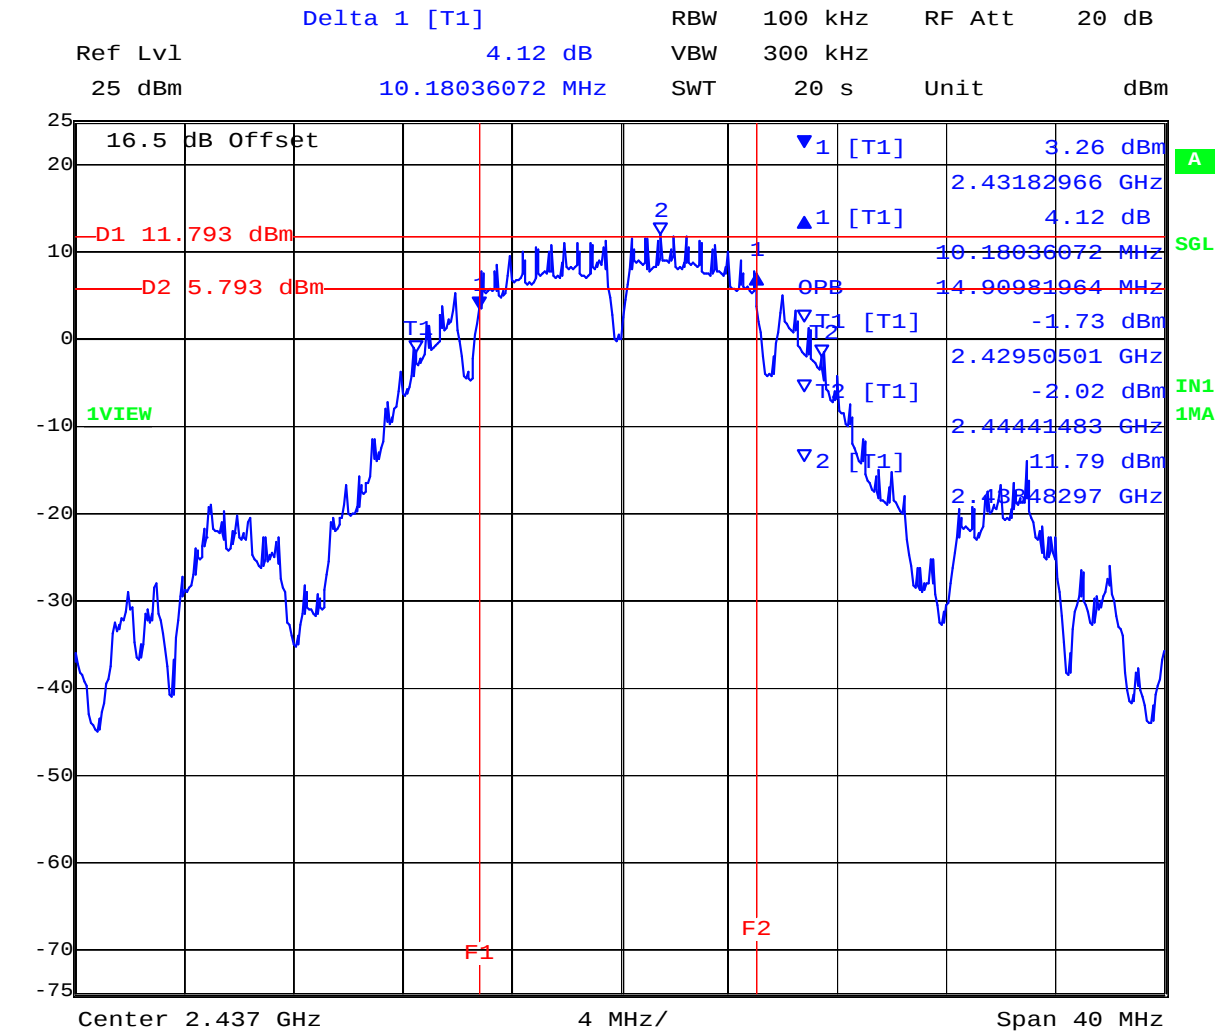


Date: 12.AUG.2011 16:23:54

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 29 of 279


PORT A 2,462 MHz 802.11b Legacy 6 dB and 99% Bandwidth

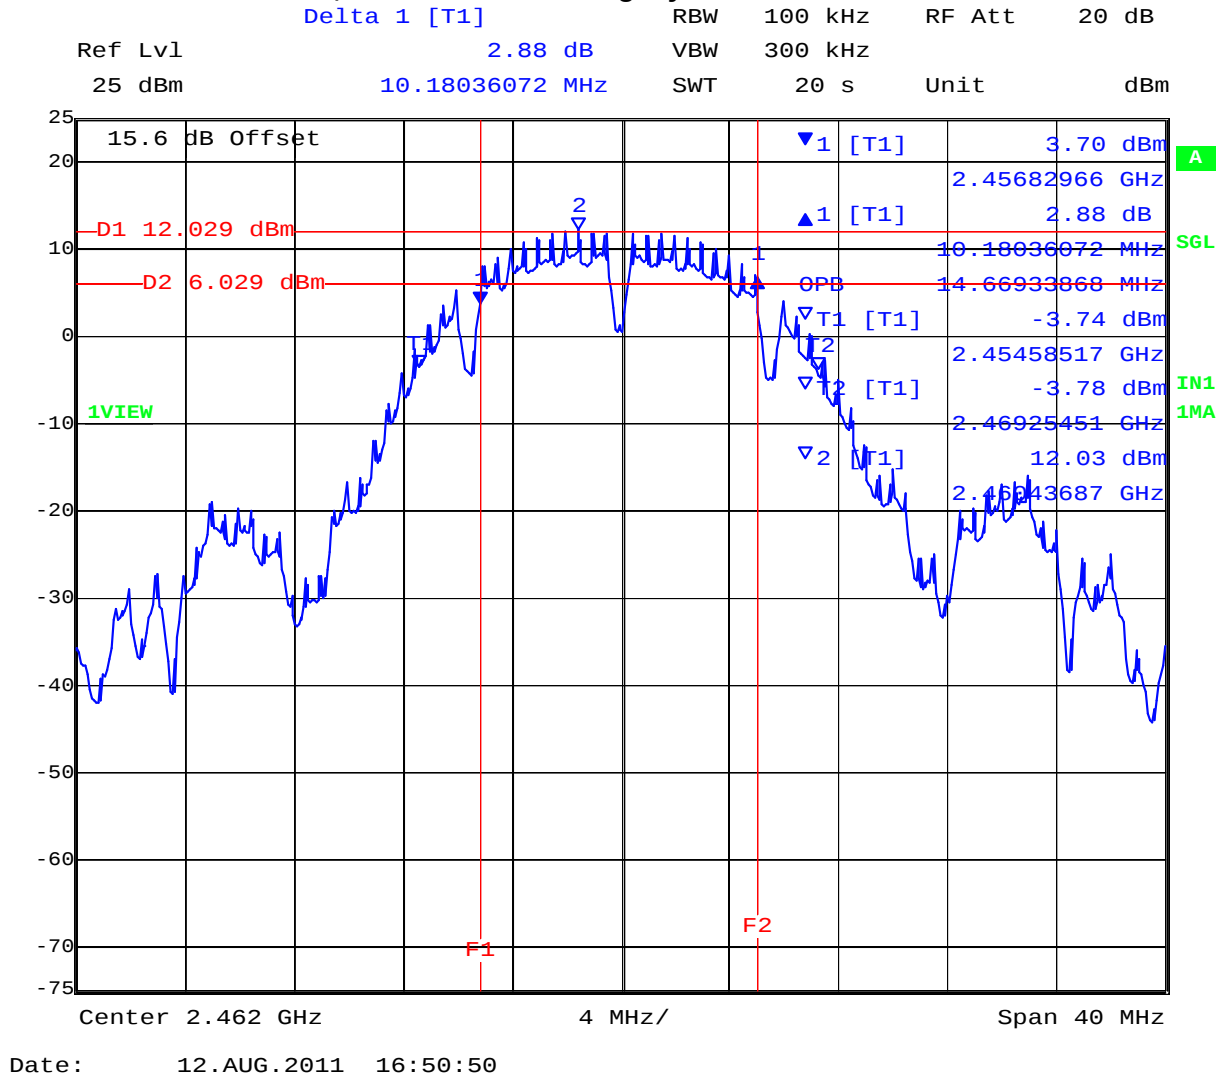

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 30 of 279

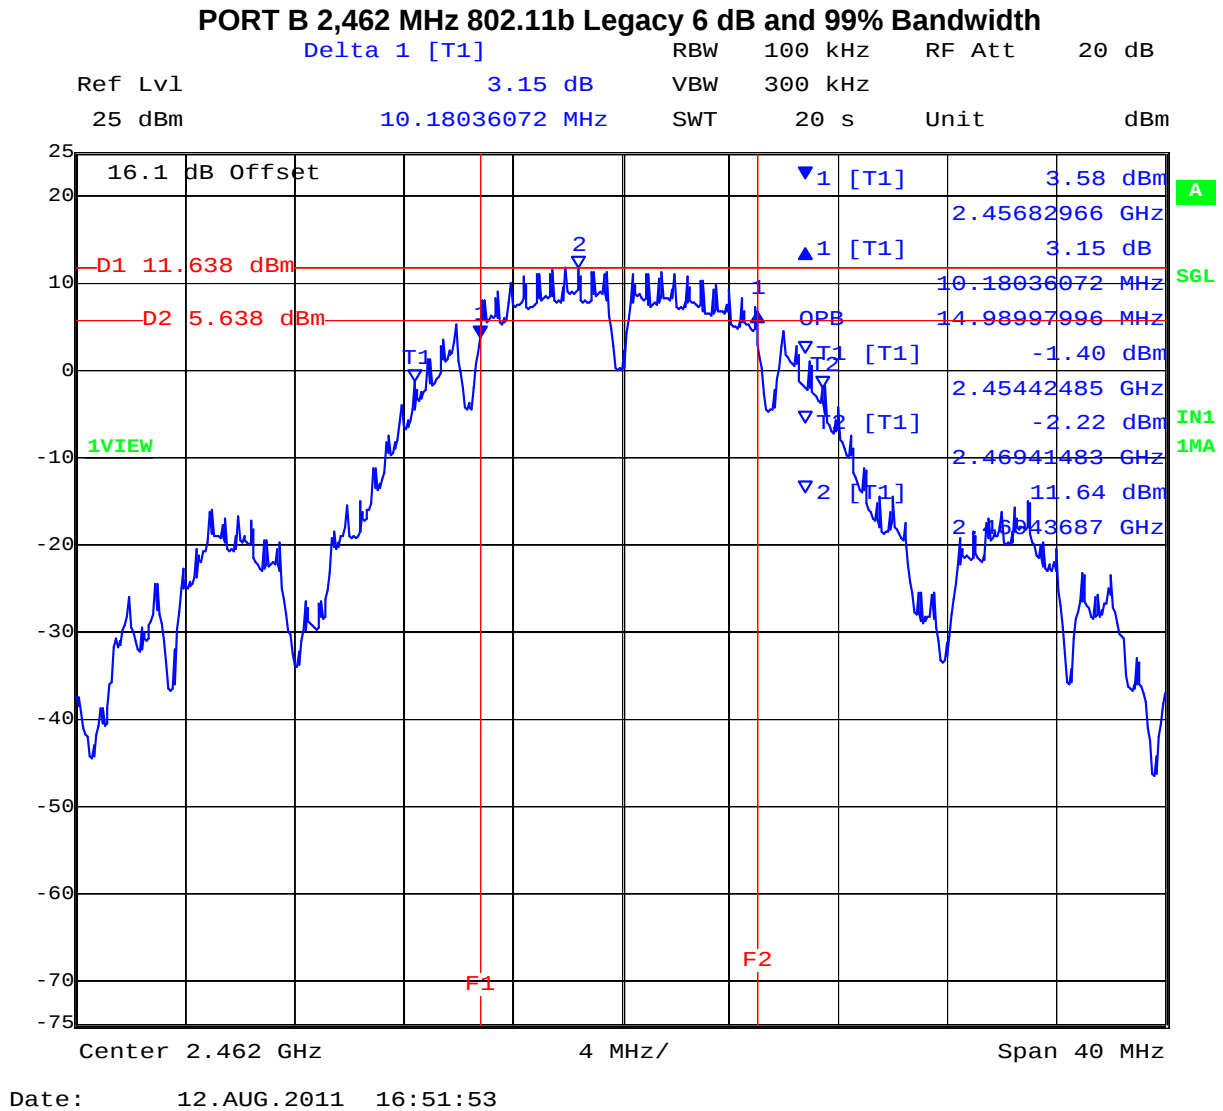

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 31 of 279

PORT C 2,462 MHz 802.11b Legacy 6 dB and 99% Bandwidth



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 32 of 279

TABLE OF RESULTS – 802.11g Legacy

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11g	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	2 dBi
Applied Voltage:	48.00 Vdc		
Notes 1:			
Notes 2:			

6 dB Bandwidth

Test Frequency	6 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz						
MHz	a	b	c	d	kHz	MHz	MHz
2412.000	16.433000	16.433000	16.433000	--	500	0.5	-15.933000
2437.000	16.433000	16.433000	16.433000	--			-15.933000
2462.000	16.433000	16.433000	16.433000	--			-15.933000

99% Bandwidth

Test Frequency	99 % Bandwidth						
	MHz						
MHz	a	b	c	d			
2412.000	22.285000	22.285000	21.242000	--			
2437.000	22.044000	23.487000	22.605000	--			
2462.000	24.208000	25.251000	25.491000	--			


Measurement uncertainty:	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 33 of 279

PORT A 2,412 MHz 802.11g Legacy 6 dB and 99% Bandwidth

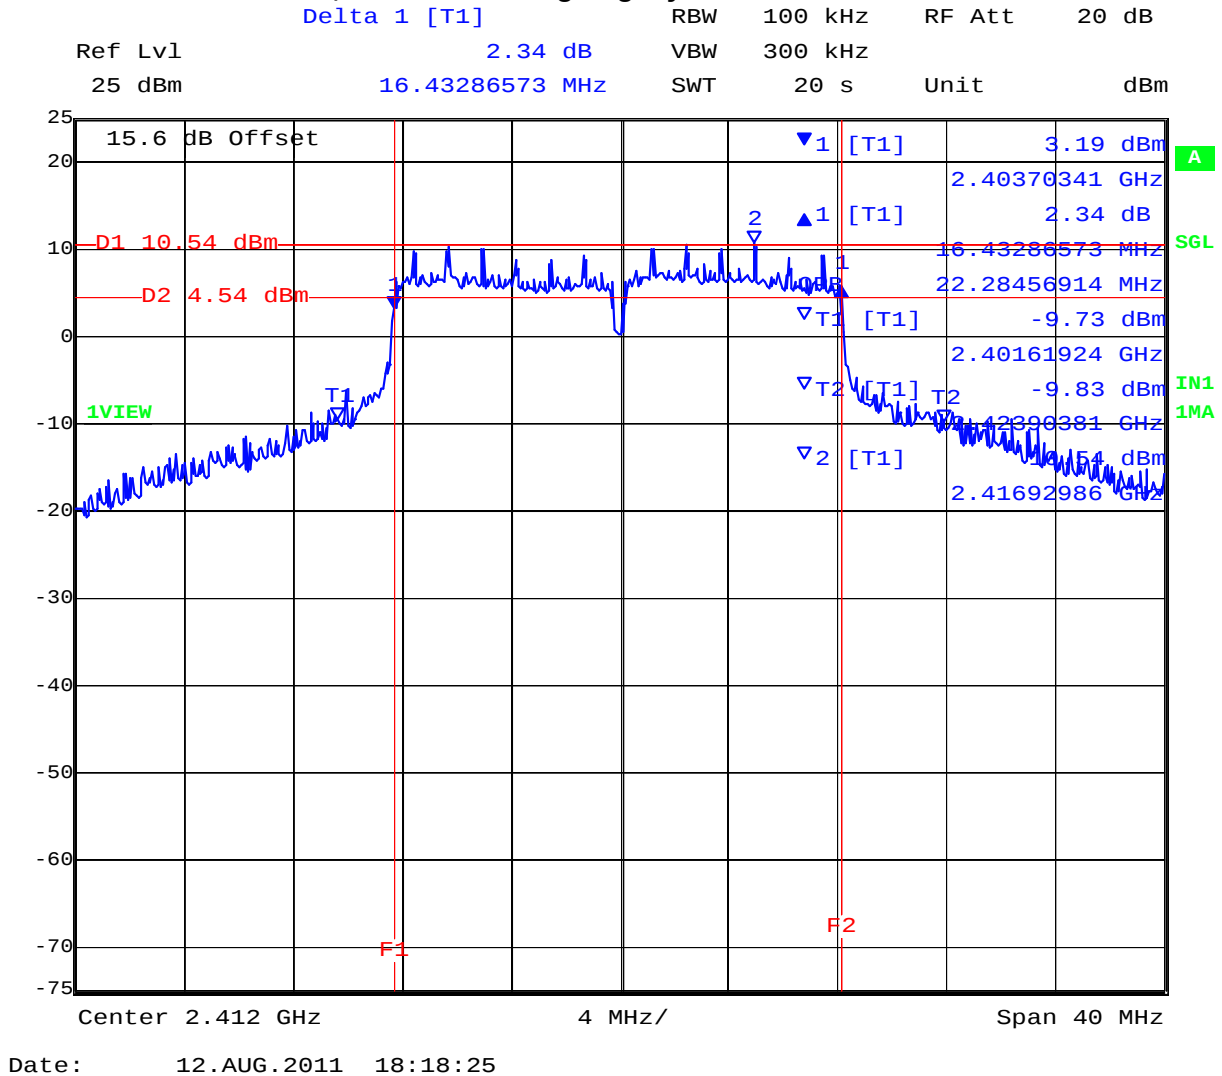


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 34 of 279

PORT B 2,412 MHz 802.11g Legacy 6 dB and 99% Bandwidth

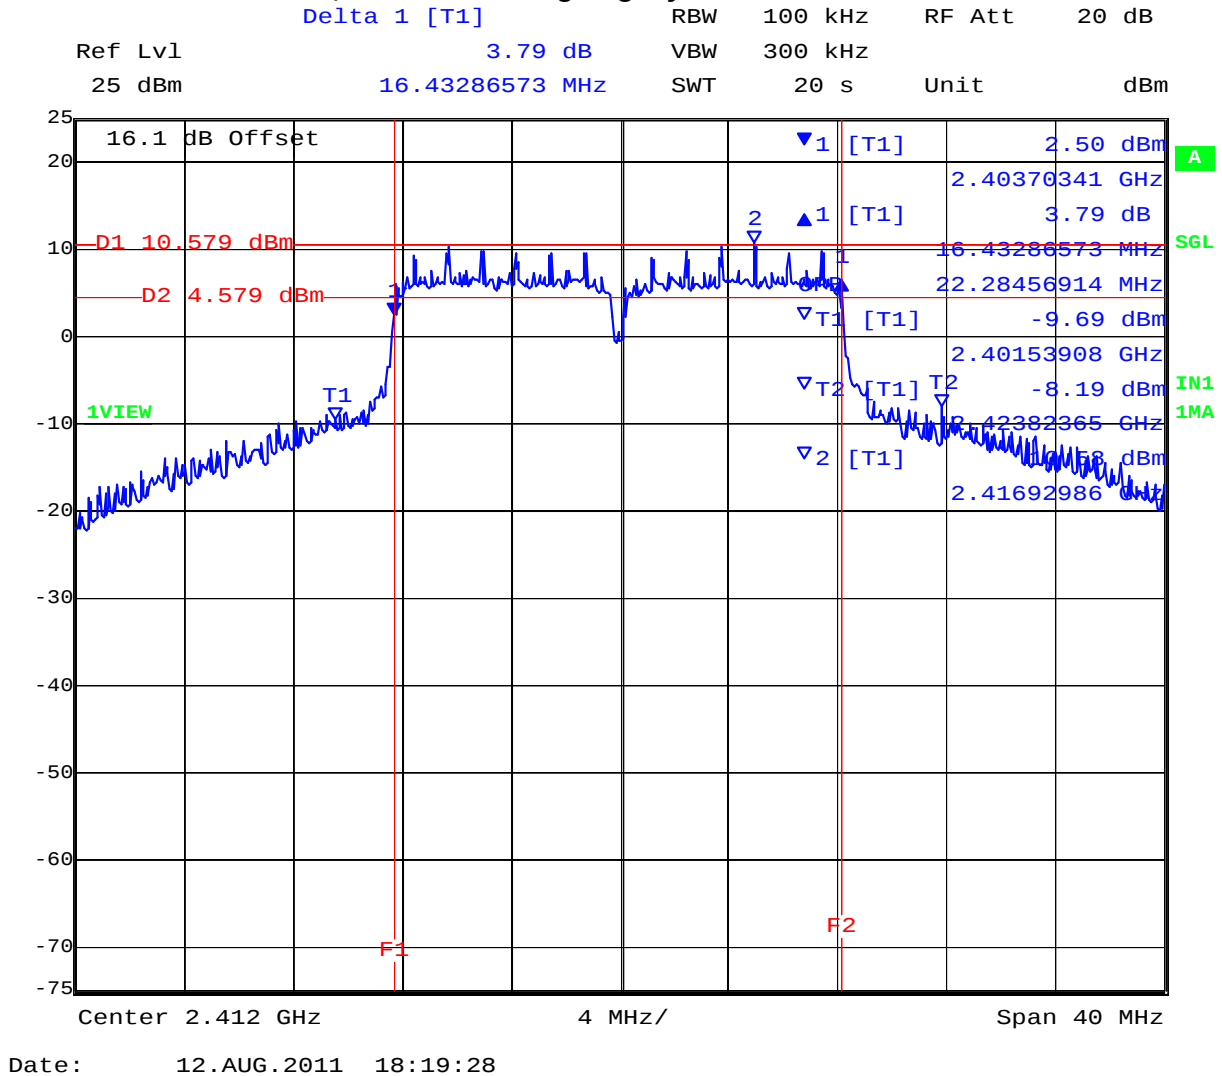


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 35 of 279

PORT C 2,412 MHz 802.11g Legacy 6 dB and 99% Bandwidth

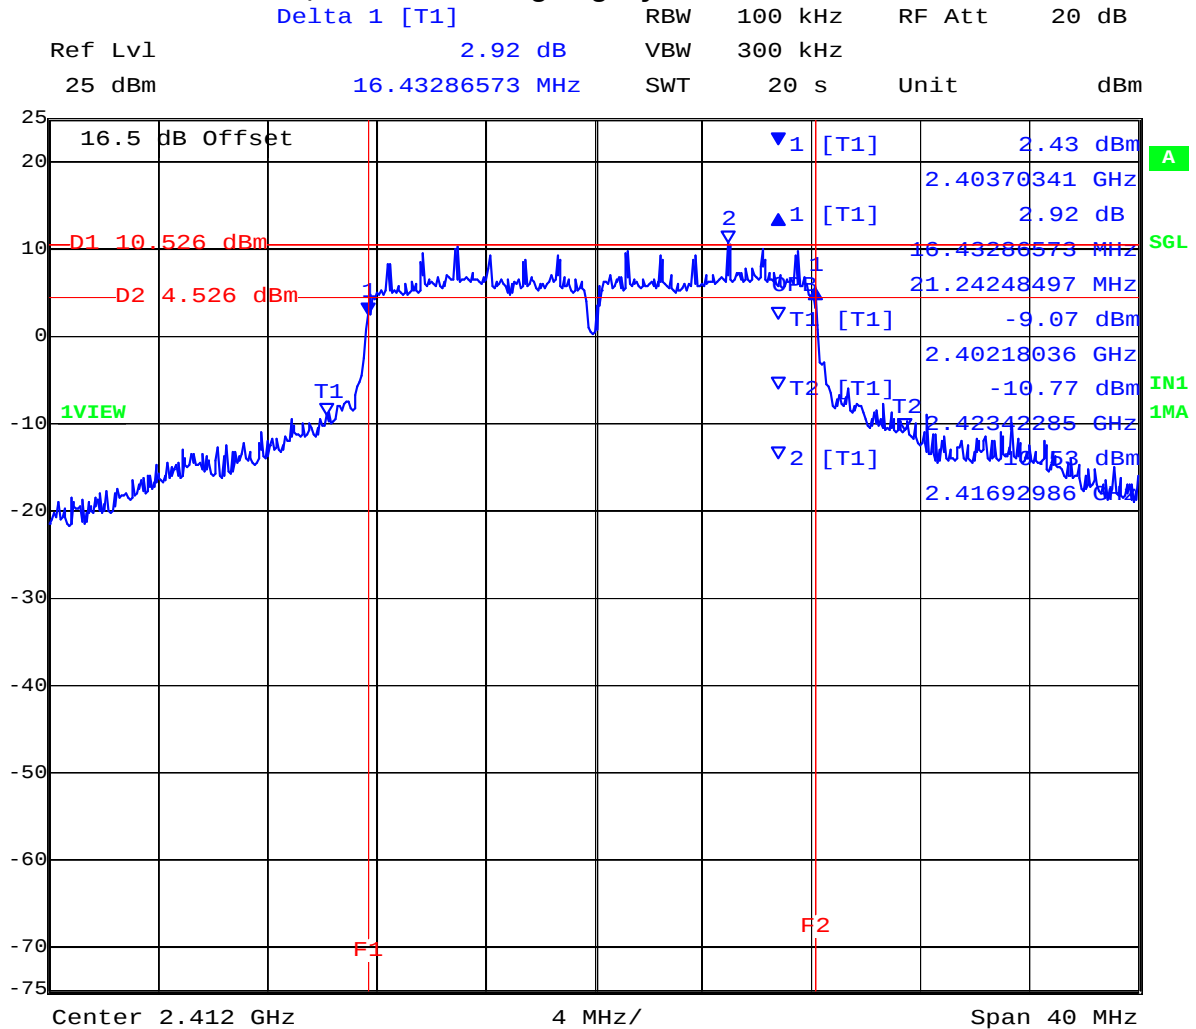


Date: 12.AUG.2011 18:20:31

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 36 of 279

PORT A 2,437 MHz 802.11g Legacy 6 dB and 99% Bandwidth

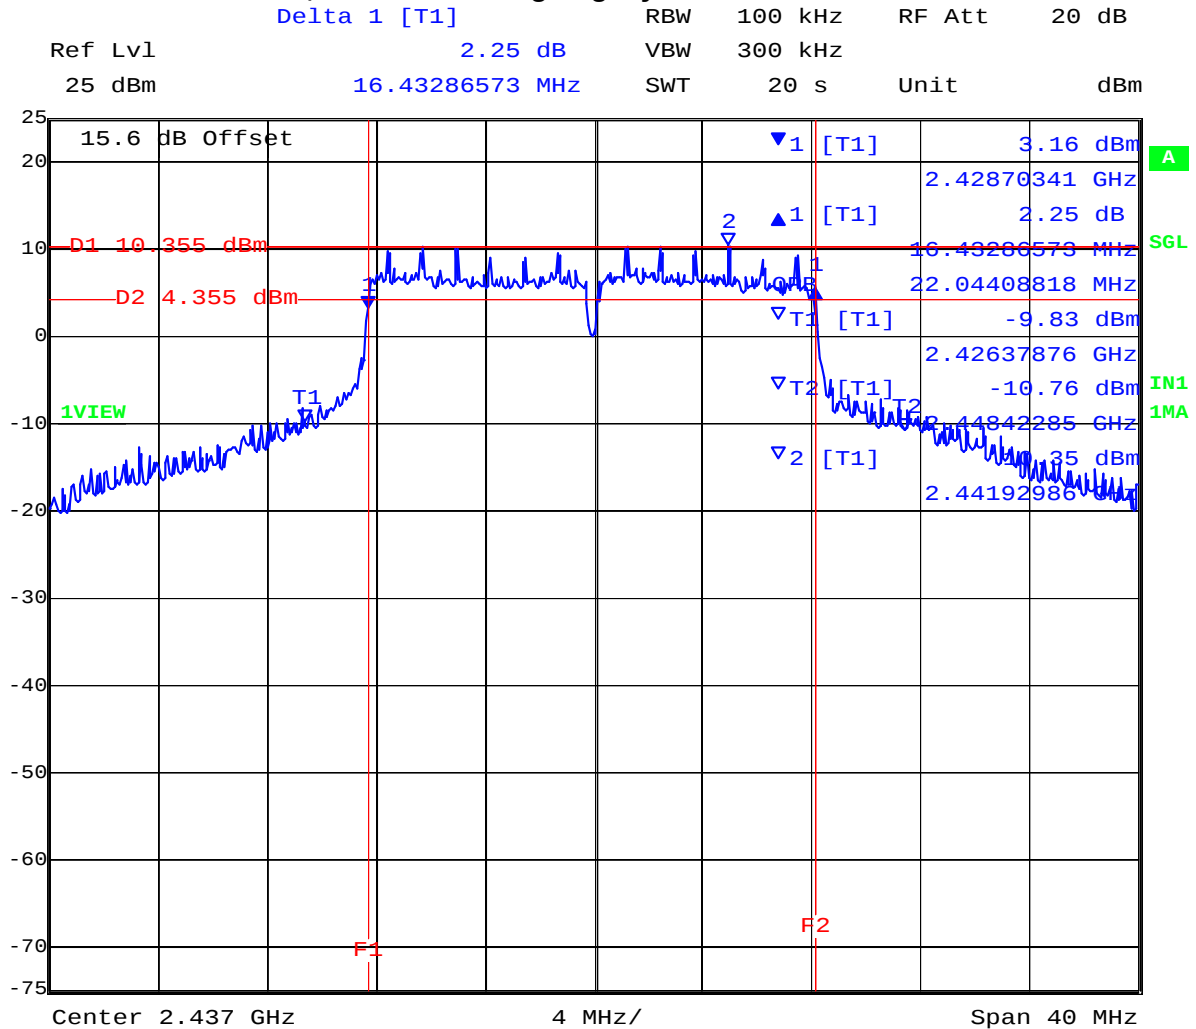


Date: 12.AUG.2011 18:51:14

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 37 of 279

PORT B 2,437 MHz 802.11g Legacy 6 dB and 99% Bandwidth

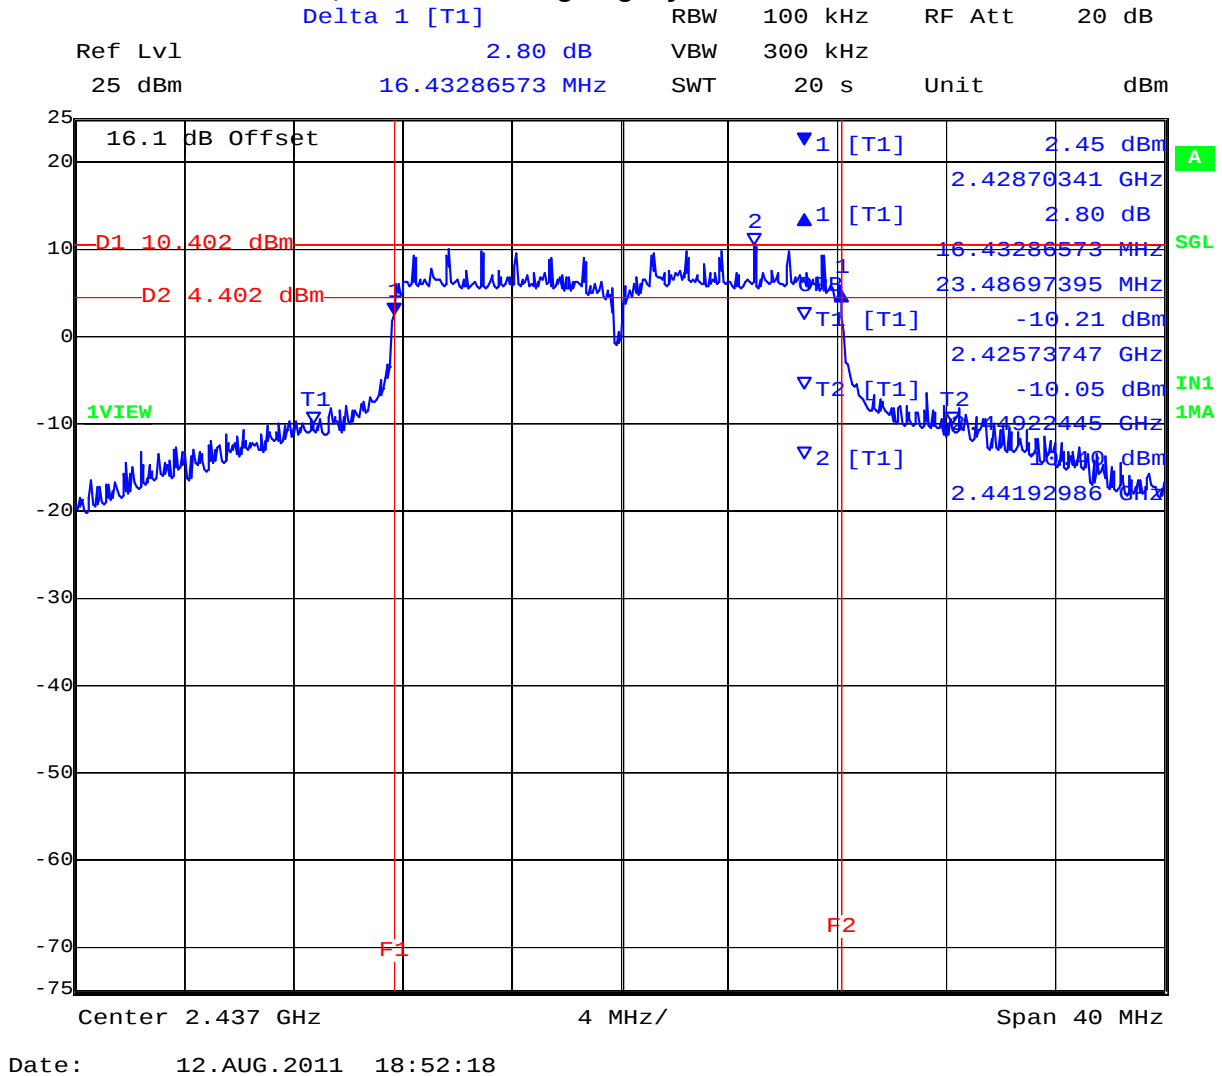


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 38 of 279

PORT C 2,412 MHz 802.11g Legacy 6 dB and 99% Bandwidth

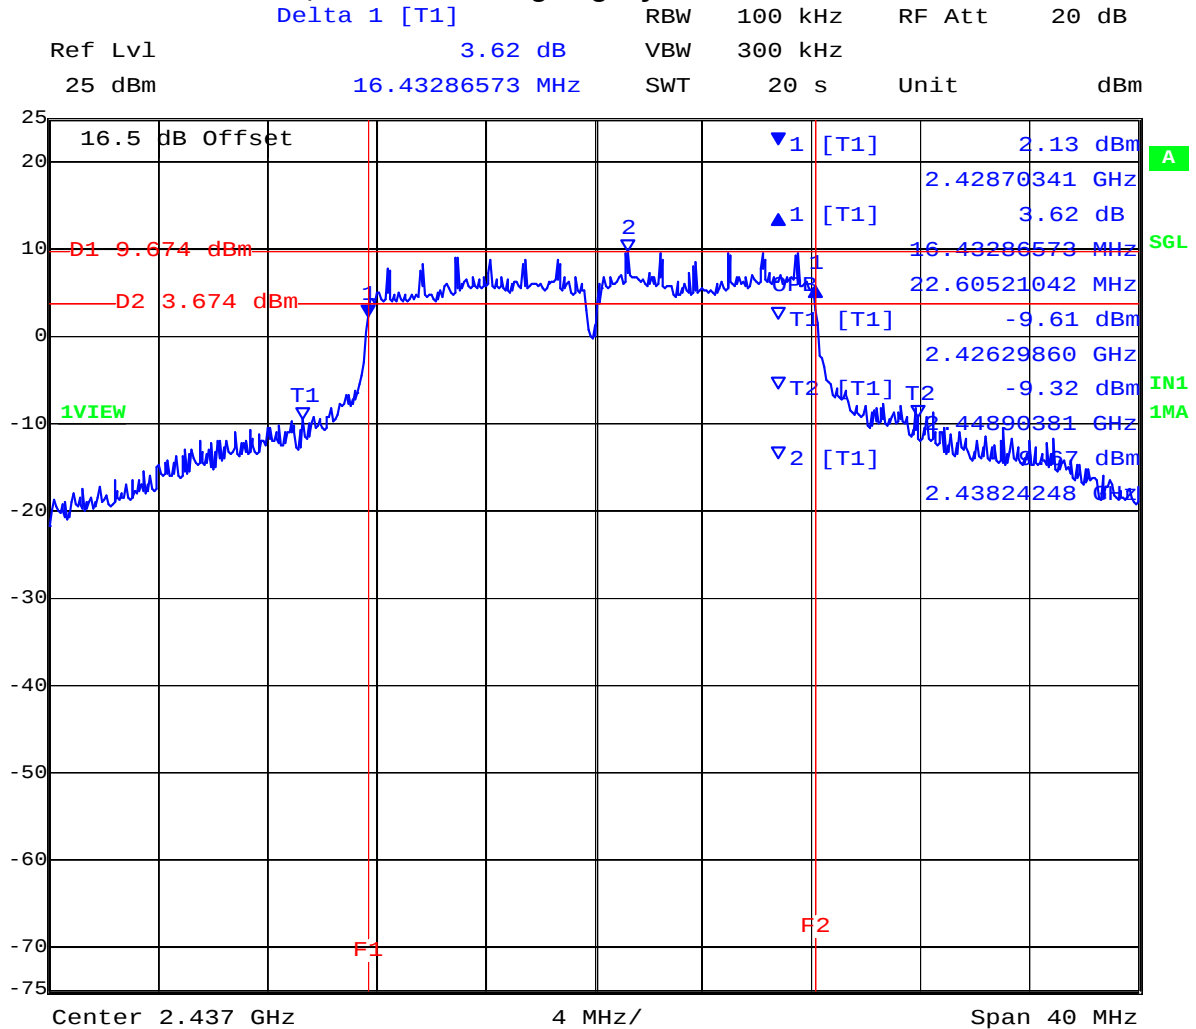


Date: 12.AUG.2011 18:53:21

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 39 of 279

PORT A 2,462 MHz 802.11g Legacy 6 dB and 99% Bandwidth

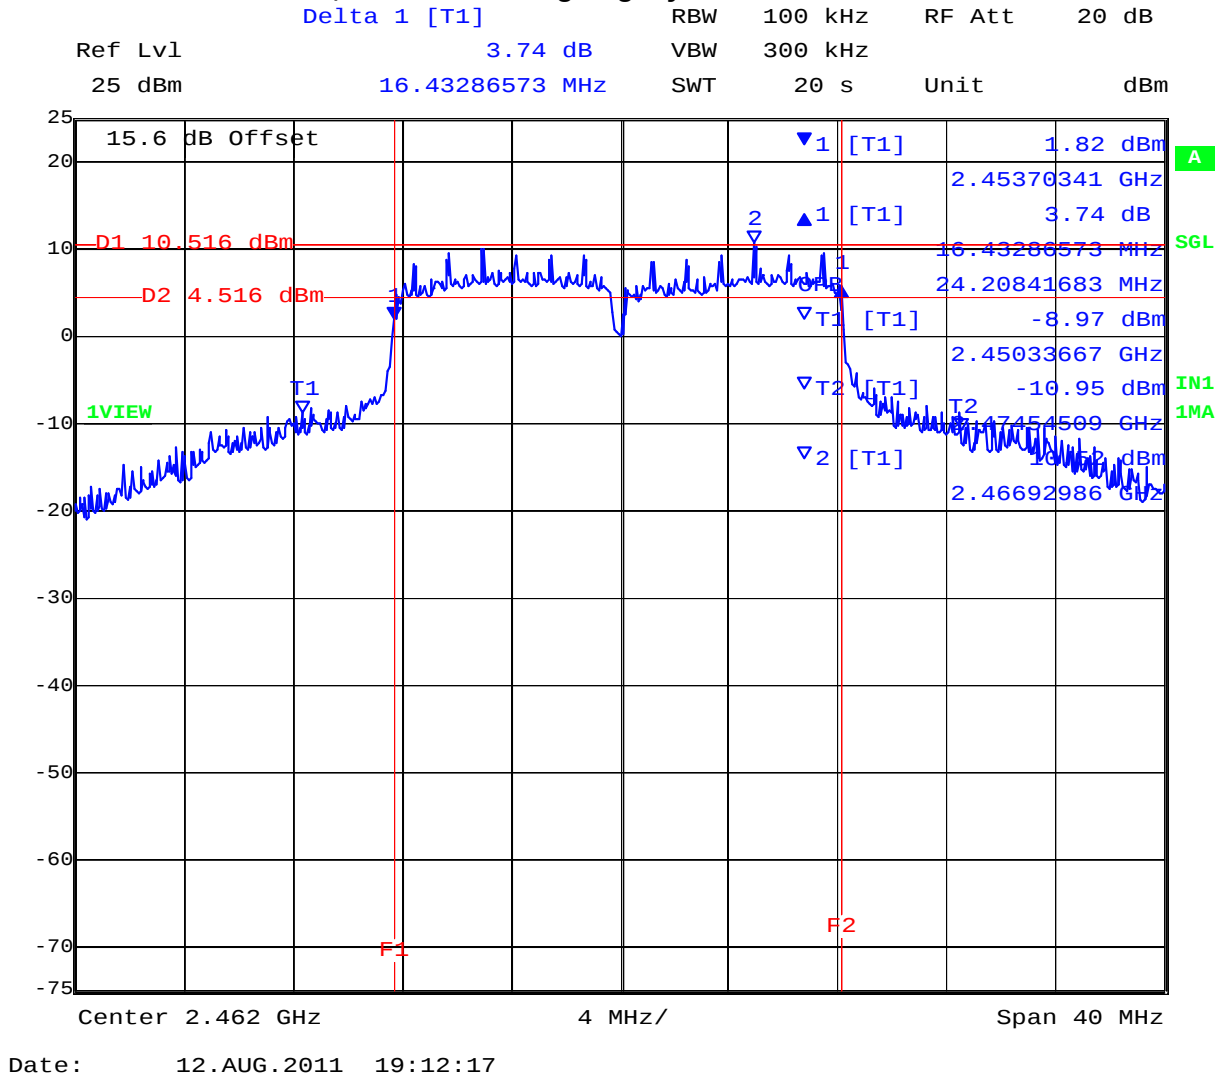


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 40 of 279

PORT B 2,462 MHz 802.11g Legacy 6 dB and 99% Bandwidth

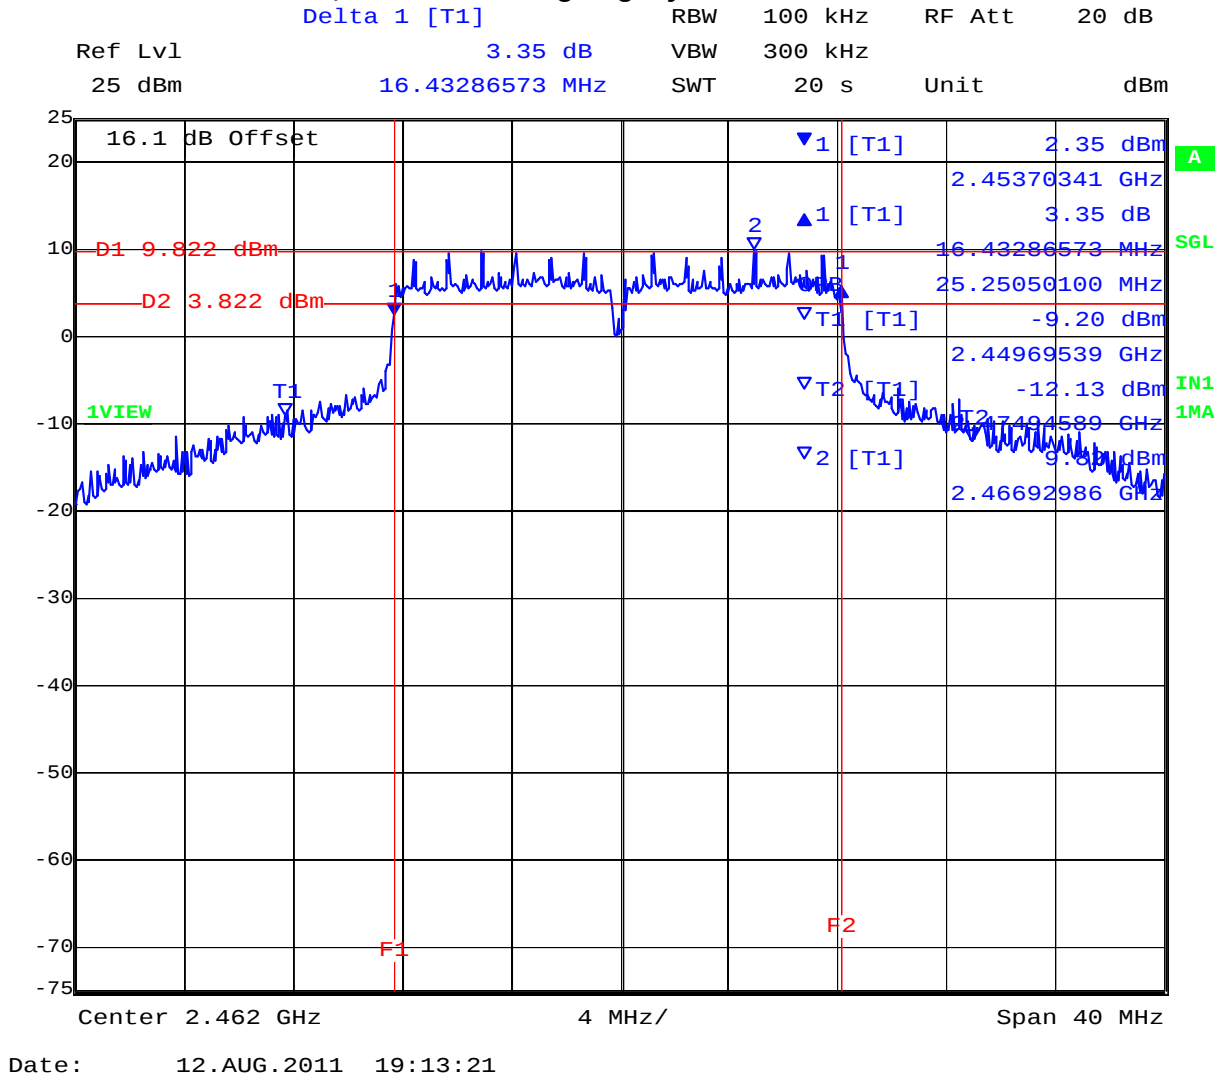


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 41 of 279

PORT C 2,462 MHz 802.11g Legacy 6 dB and 99% Bandwidth

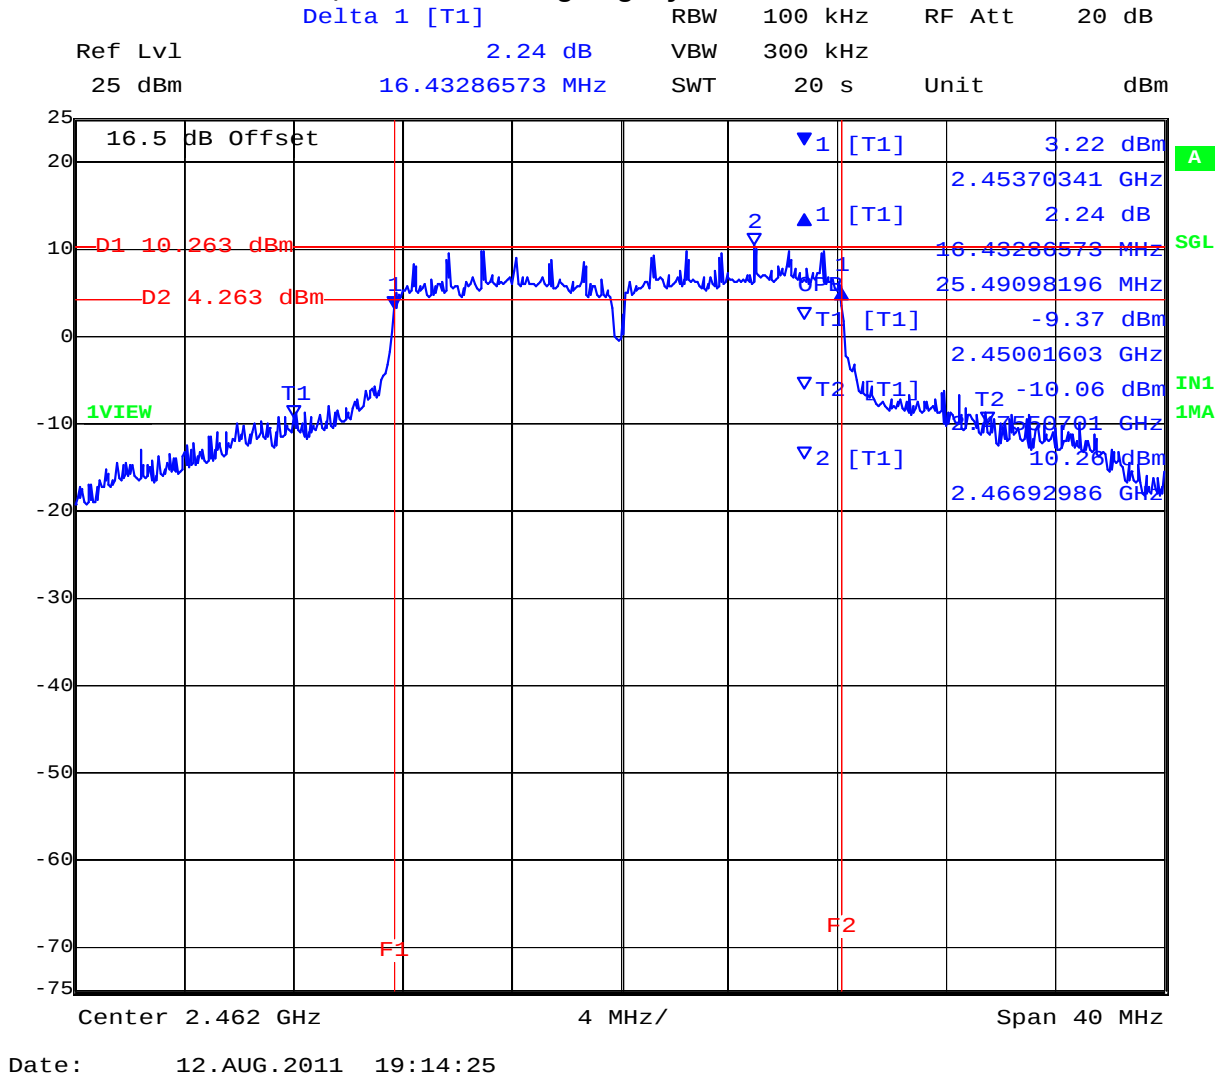

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 42 of 279

TABLE OF RESULTS – 802.11n HT-20 Legacy

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	2 dBi
Applied Voltage:	48.00 Vdc		
Notes 1:			
Notes 2:			

6 dB Bandwidth

6 dB Bandwidth							
Test Frequency	6 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz						
MHz	a	b	c	d	kHz	MHz	MHz
2412.000	17.635000	17.635000	17.635000	--	500	0.5	-17.135000
2437.000	17.395000	17.555000	17.635000	--			-16.895000
2462.000	17.635000	17.635000	17.635000	--			-17.135000

99% Bandwidth

99 % Bandwidth							
Test Frequency	MHz						
	MHz	a	b	c	d		
2412.000	21.643000	22.044000	21.643000	--			
2437.000	23.006000	24.930000	24.128000	--			
2462.000	24.689000	25.972000	26.293000	--			


Measurement uncertainty:	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 43 of 279

PORT A 2,412 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth

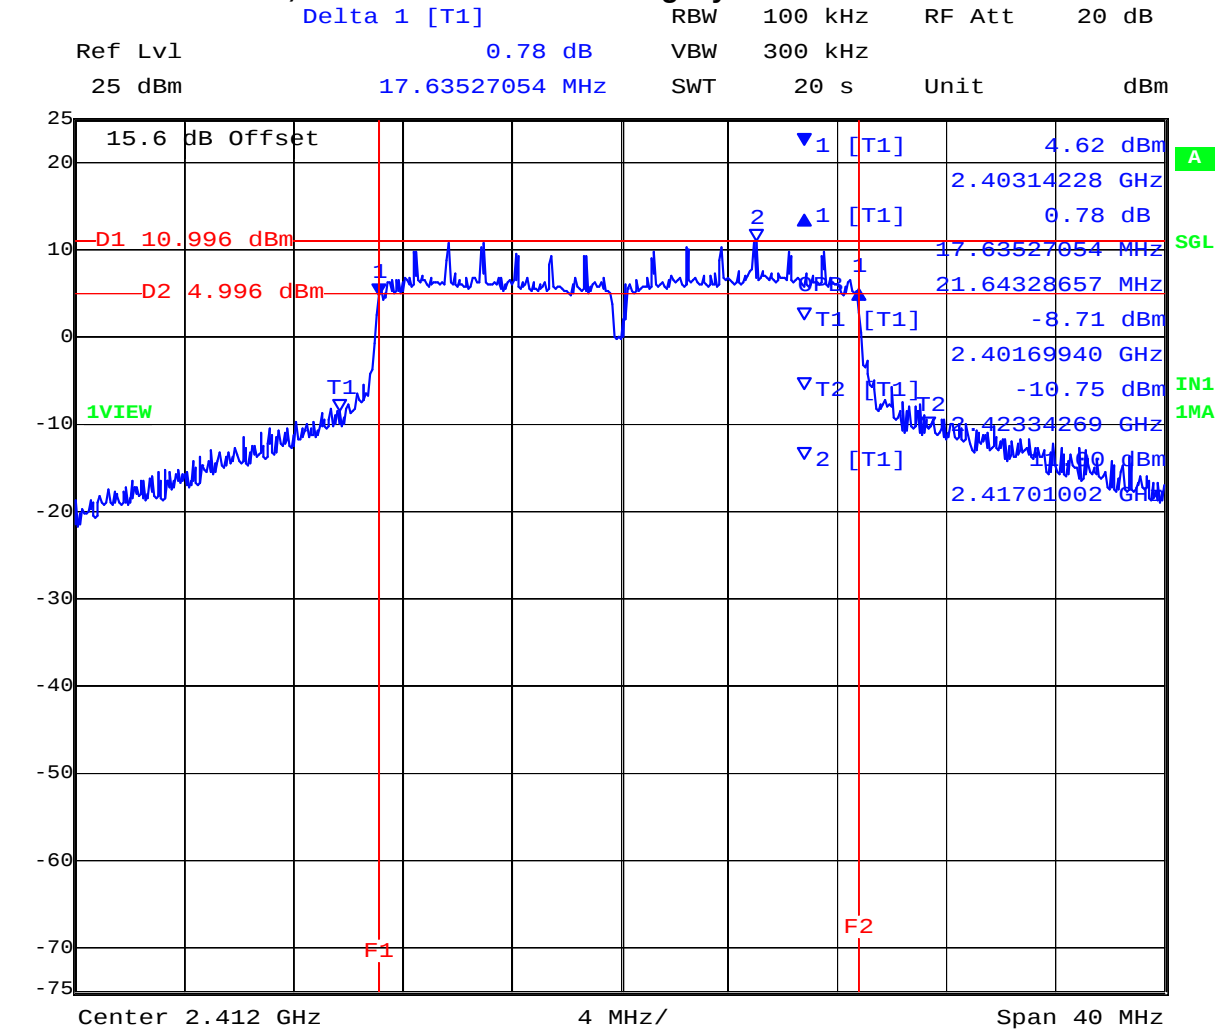


Date: 14.AUG.2011 15:16:25

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 44 of 279

PORT B 2,412 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth

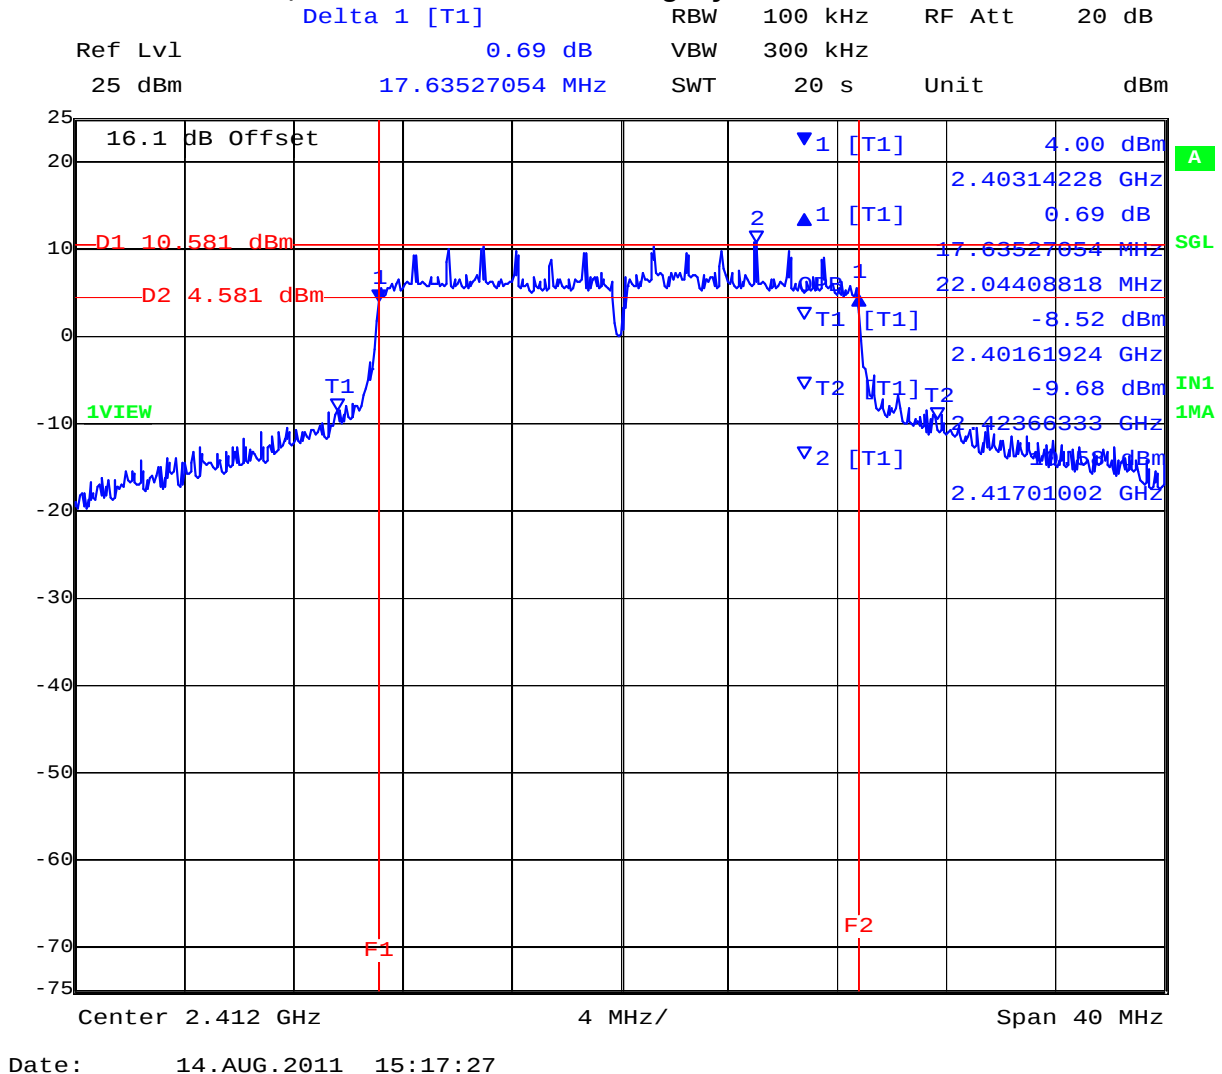


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 45 of 279

PORT C 2,412 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth

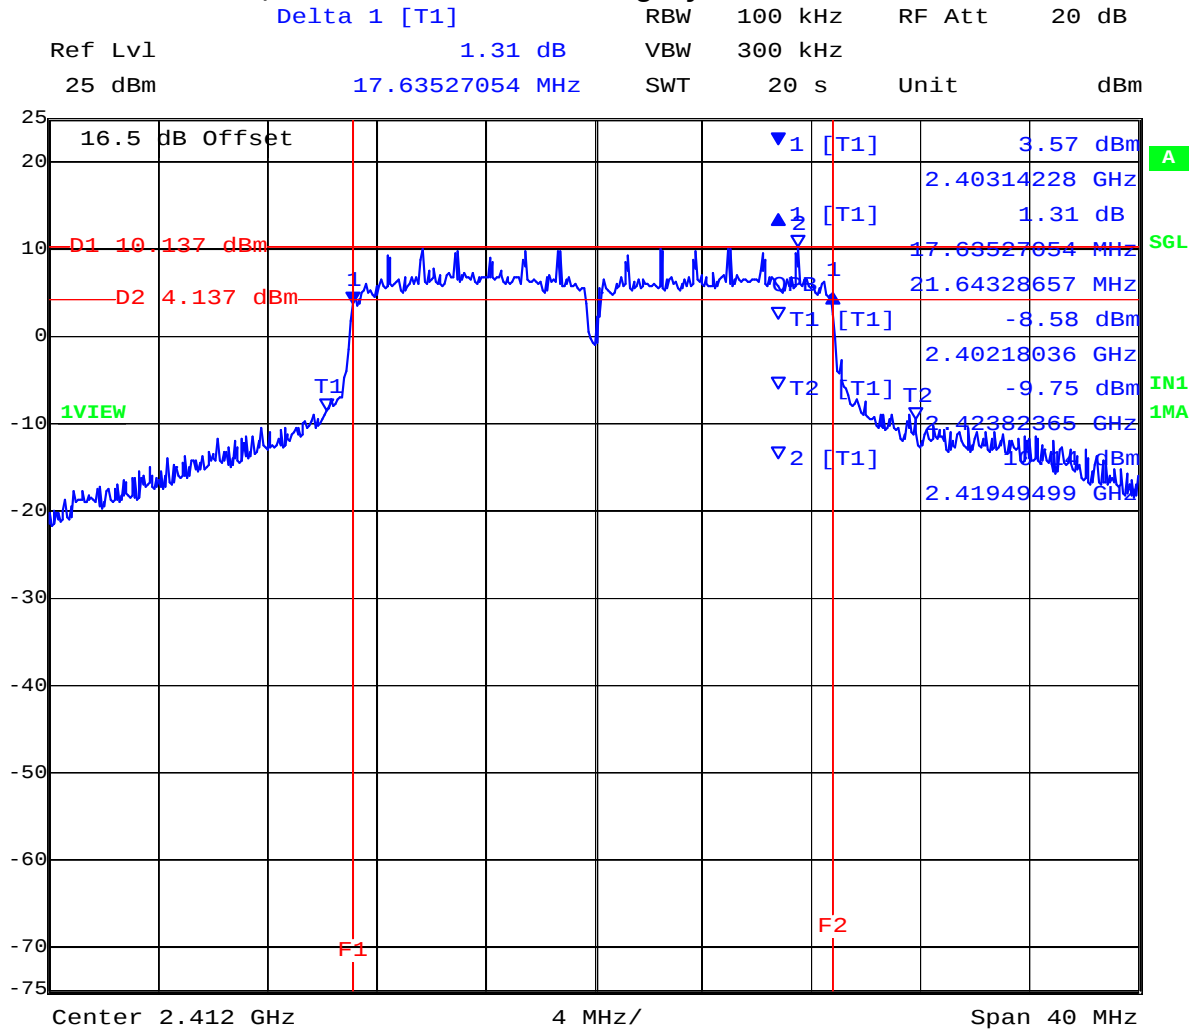


Date: 14.AUG.2011 15:18:30

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 46 of 279

PORT A 2,437 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth

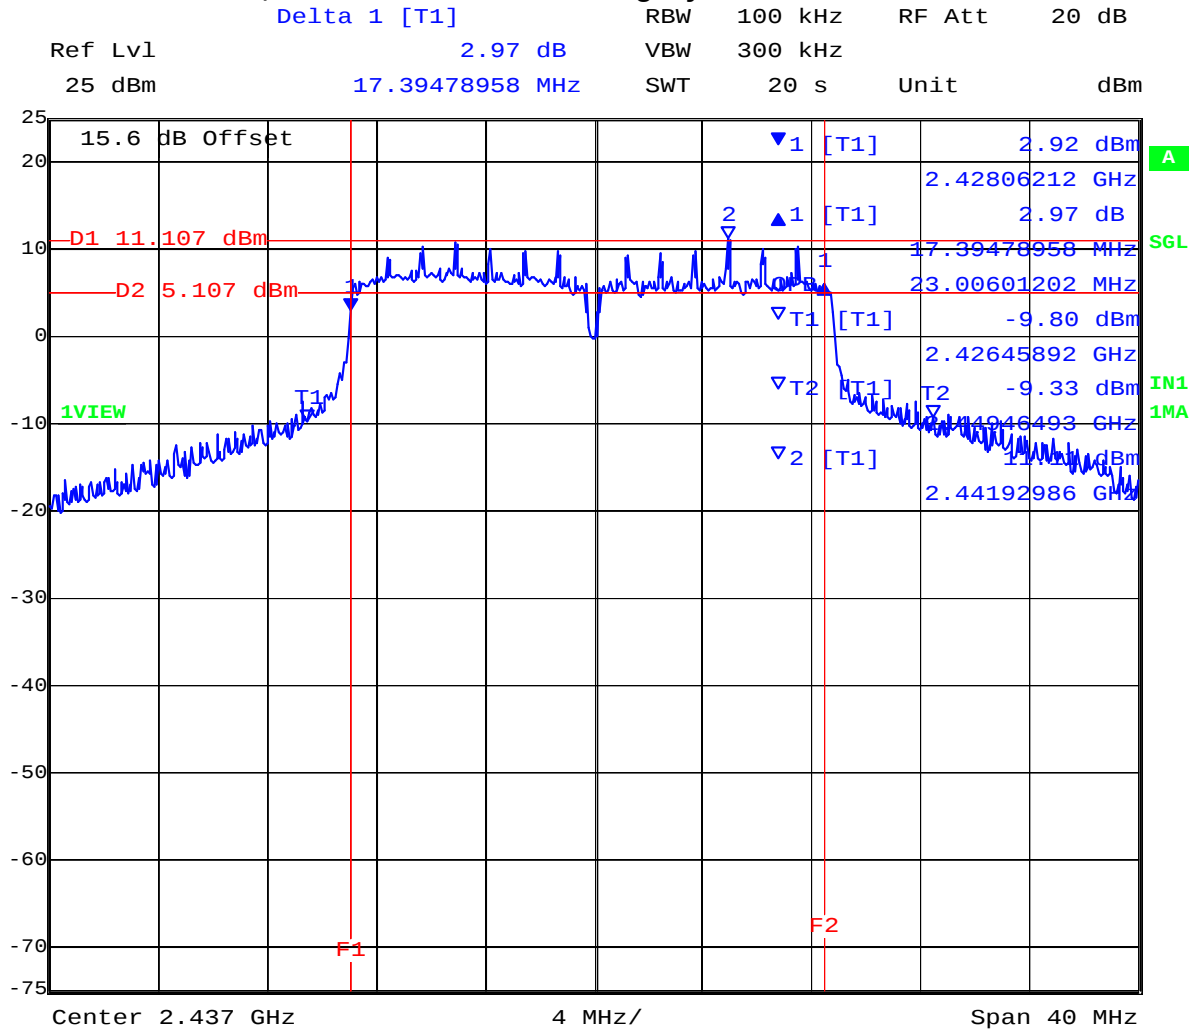


Date: 14.AUG.2011 15:49:12

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 47 of 279

PORT B 2,437 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth

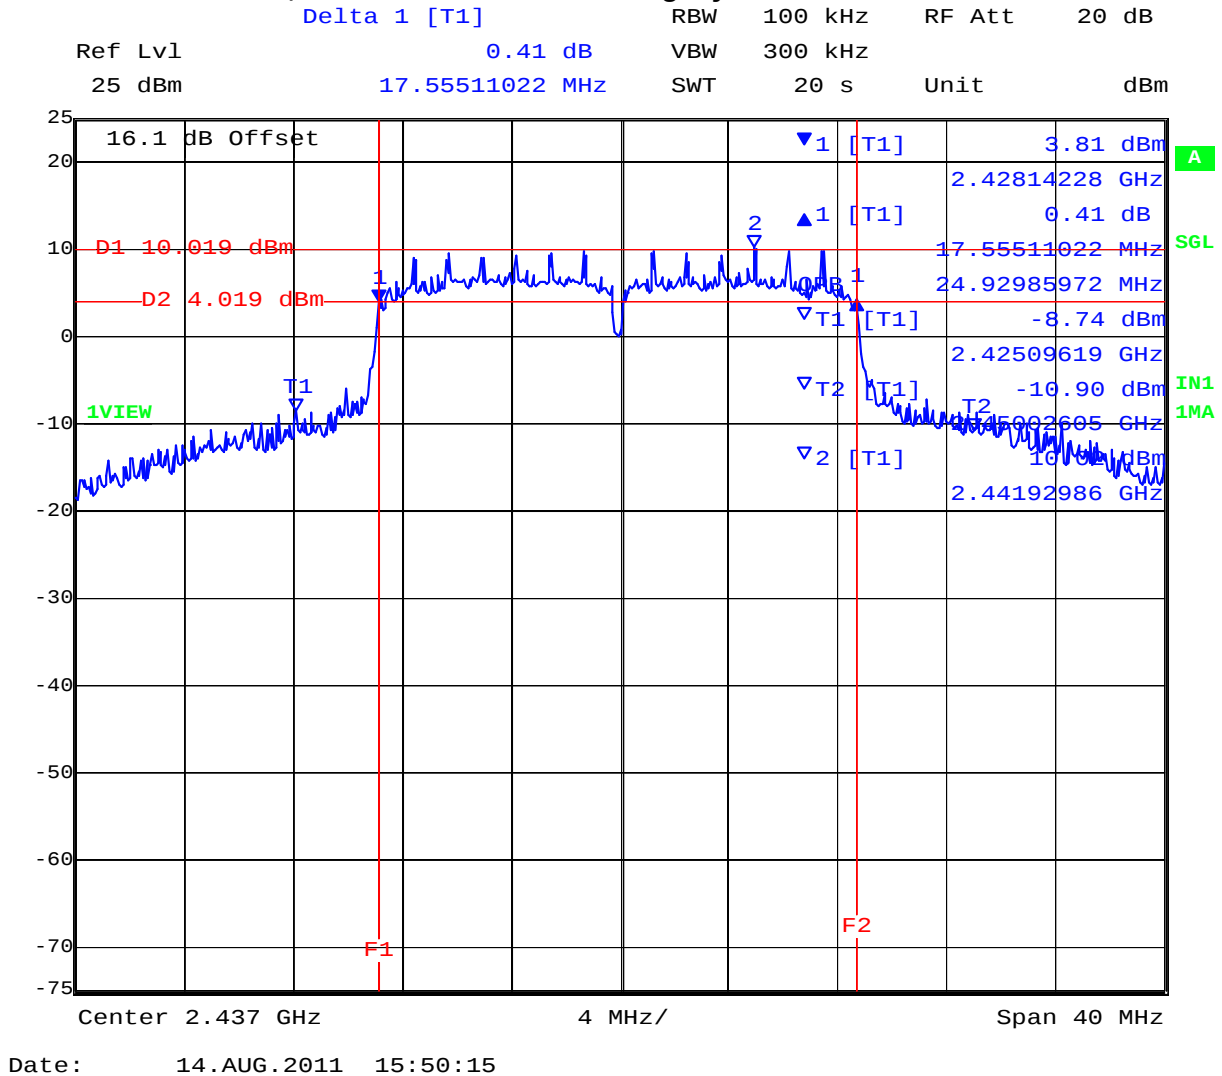


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 48 of 279

PORT C 2,437 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth

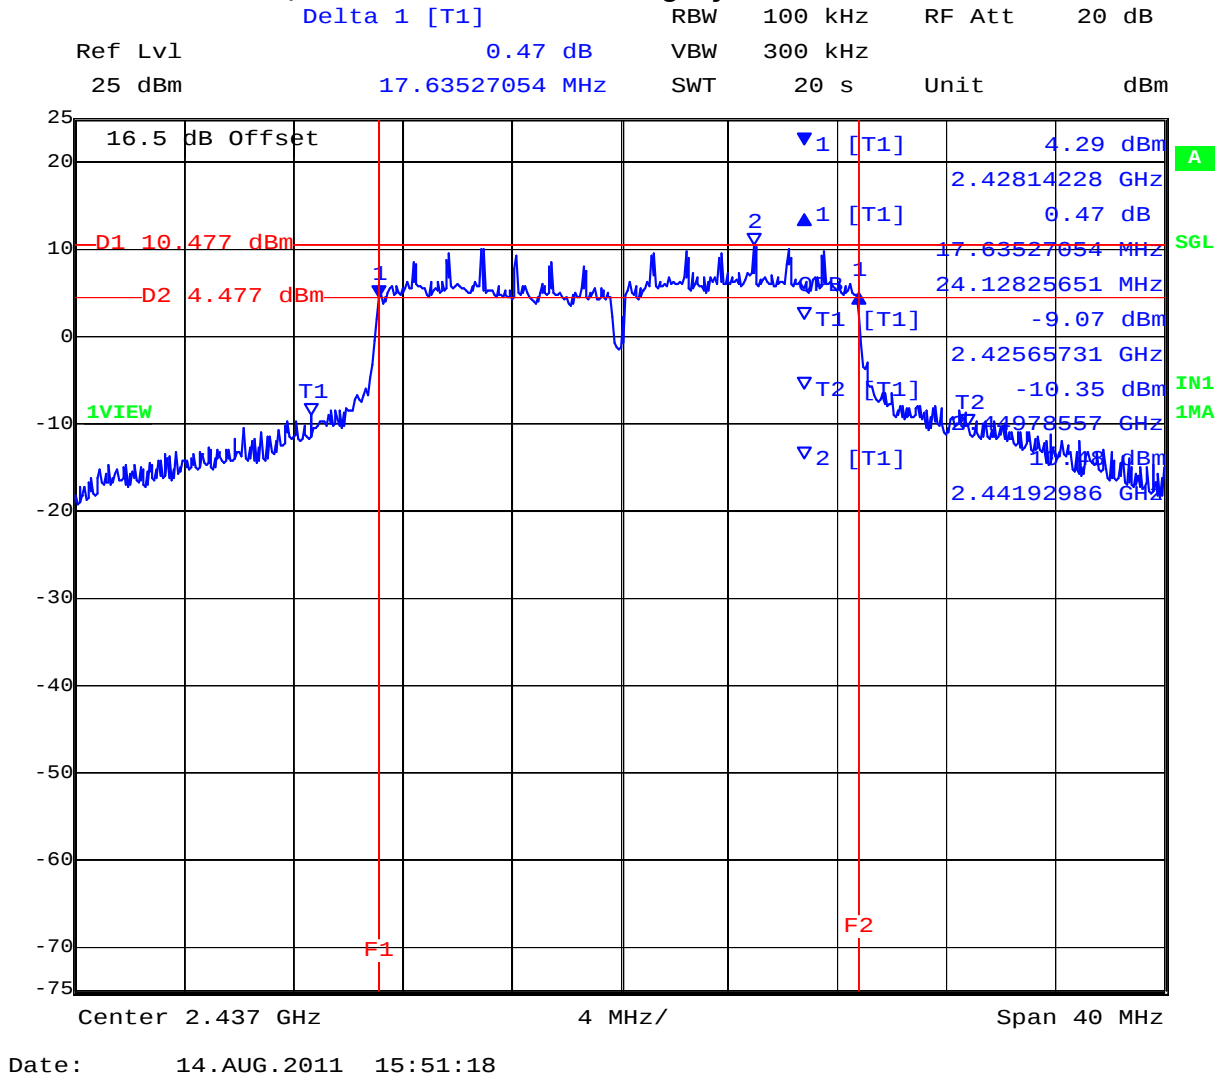


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 49 of 279

PORT A 2,462 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth

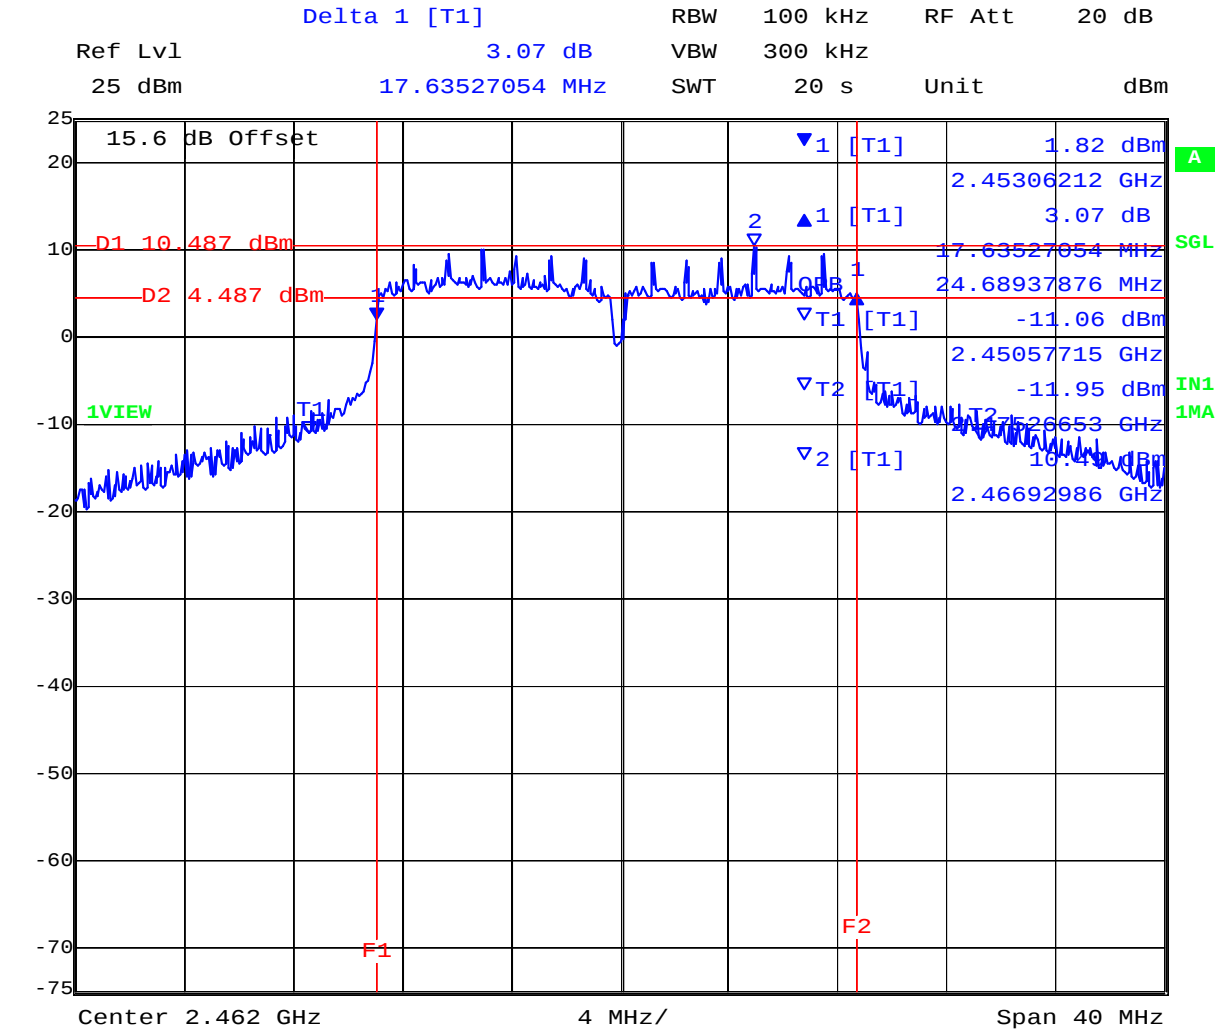


Date: 14.AUG.2011 16:21:23

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 50 of 279

PORT B 2,462 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth

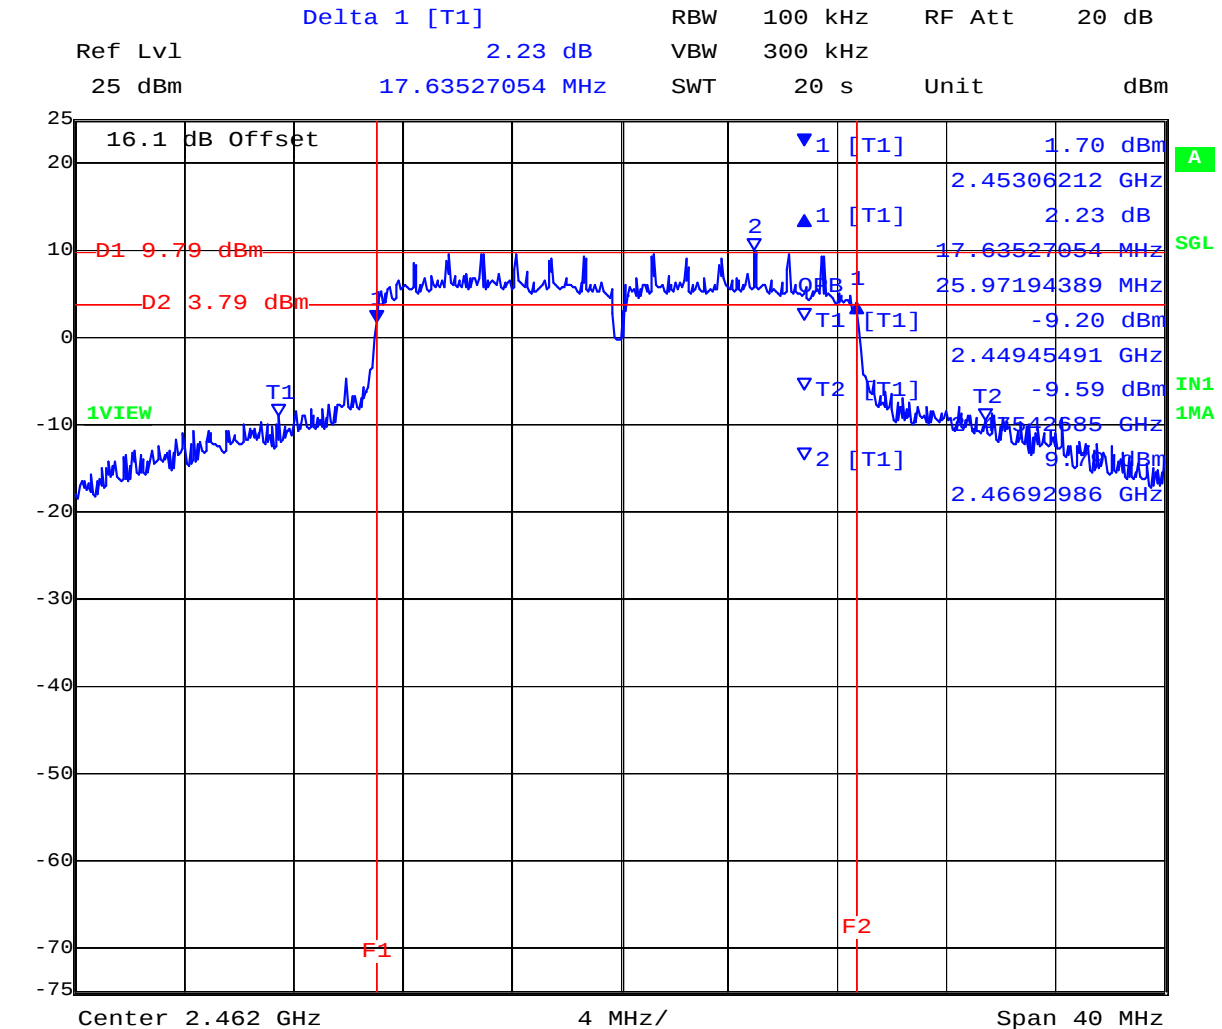


Date: 14.AUG.2011 16:22:26

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 51 of 279

PORT C 2,462 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth

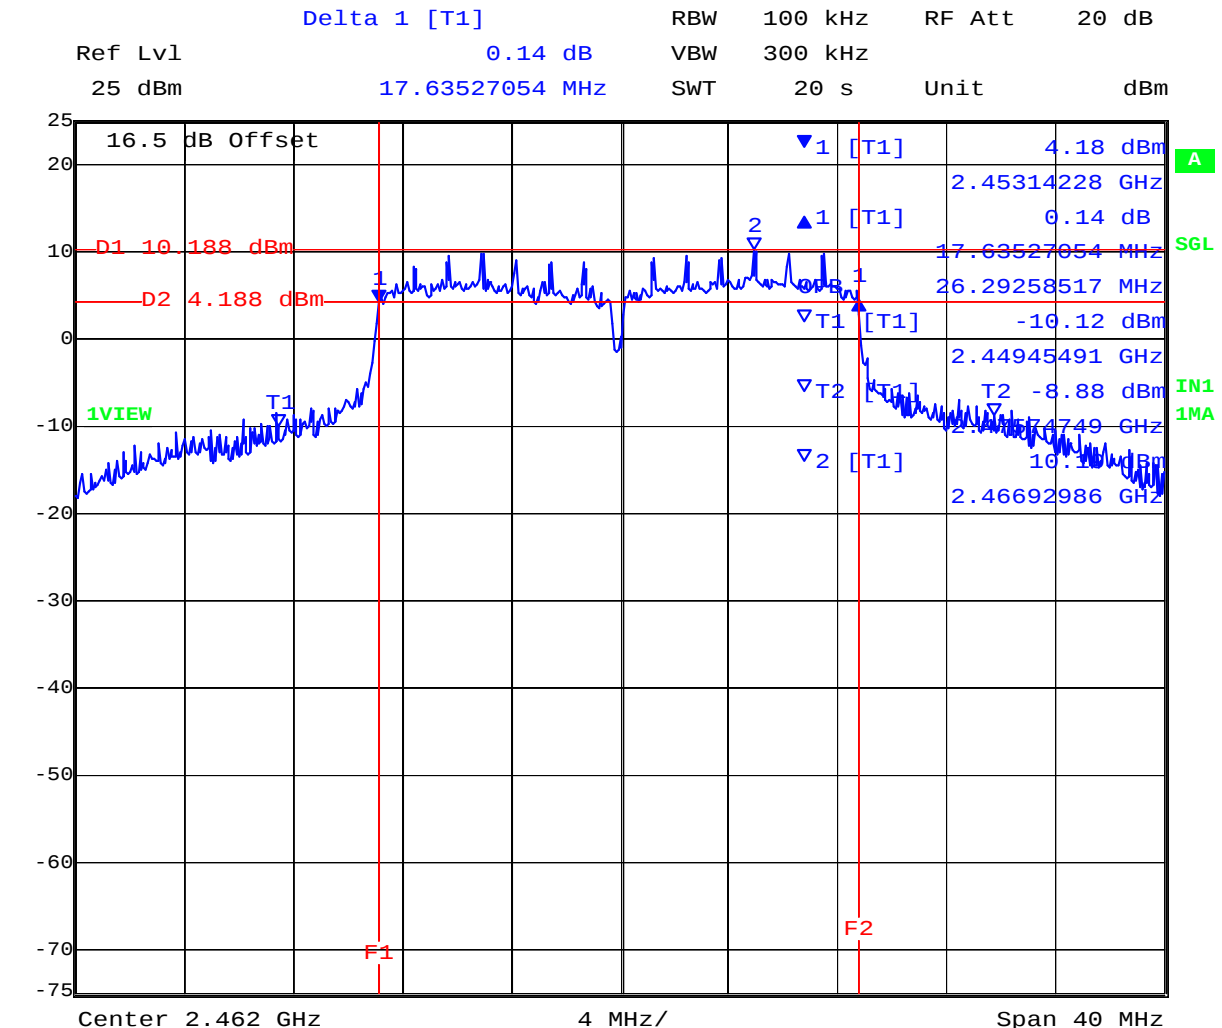

Date: 14.AUG.2011 16:23:30

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 52 of 279

TABLE OF RESULTS – 802.11n HT-40 Legacy

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	2 dBi
Applied Voltage:	48.00 Vdc		
Notes 1:			
Notes 2:			

6 dB Bandwidth

Test Frequency	6 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz						
MHz	a	b	c	d	kHz	MHz	MHz
2422	36.553000	36.553000	36.553000	--	500	0.5	-36.053000
2437	36.553000	36.553000	36.232000	--			-35.732000
2452	36.713000	36.553000	36.553000	--			-36.053000

99% Bandwidth

Test Frequency	99 % Bandwidth						
	MHz						
MHz	a	b	c	d			
2422	37.194000	37.836000	39.760000	--			
2437	39.118000	40.080000	42.645000	--			
2452	41.683000	41.363000	46.333000	--			


Measurement uncertainty:	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 53 of 279

PORT A 2,422 MHz 802.11n HT-40 Legacy 6 dB and 99% Bandwidth

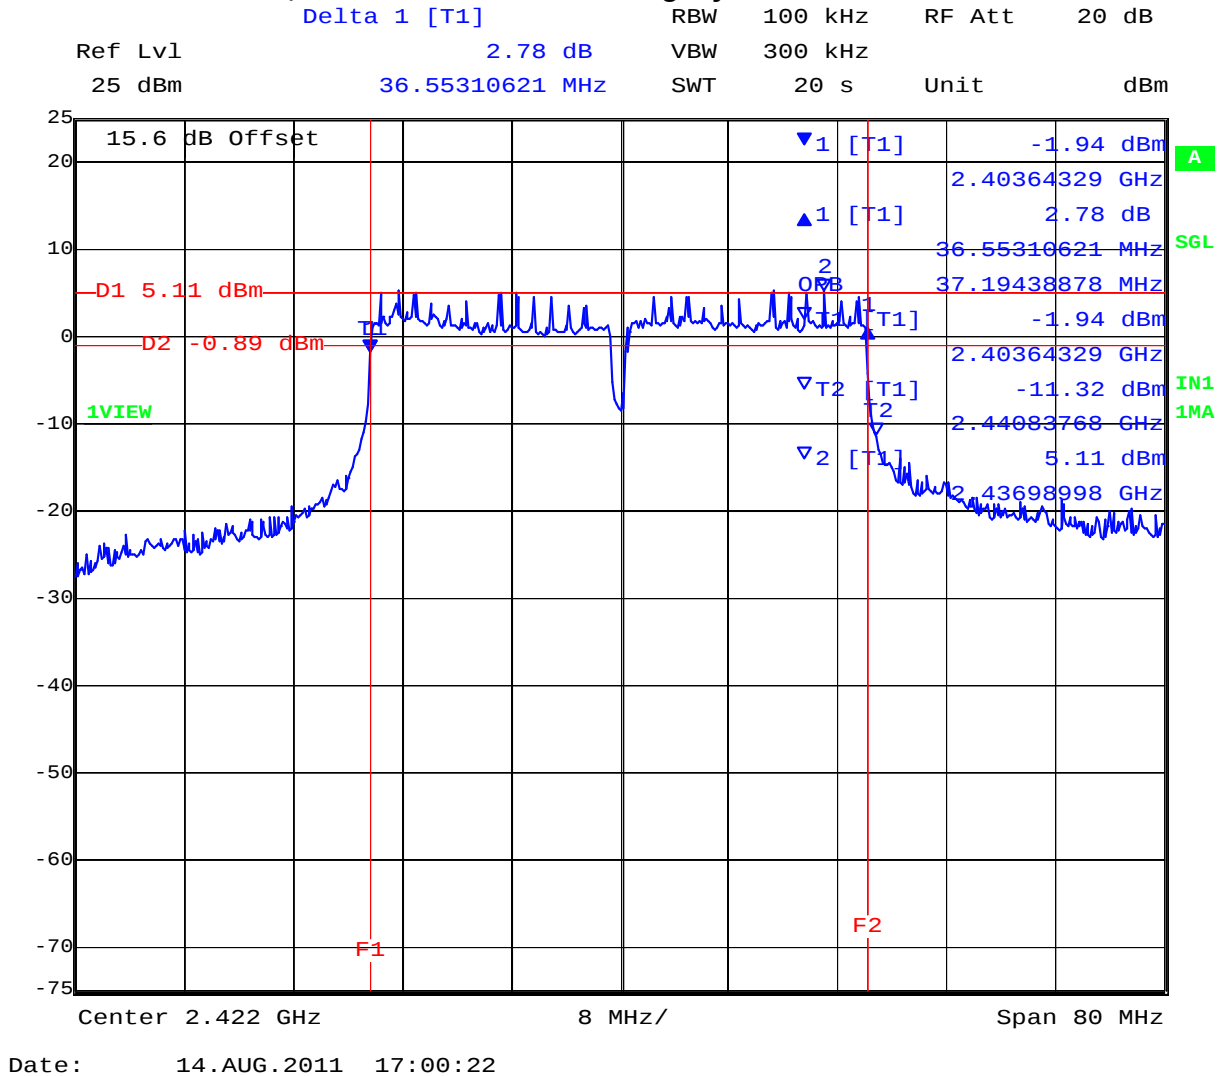


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 54 of 279

PORT B 2,422 MHz 802.11n HT-40 Legacy 6 dB and 99% Bandwidth

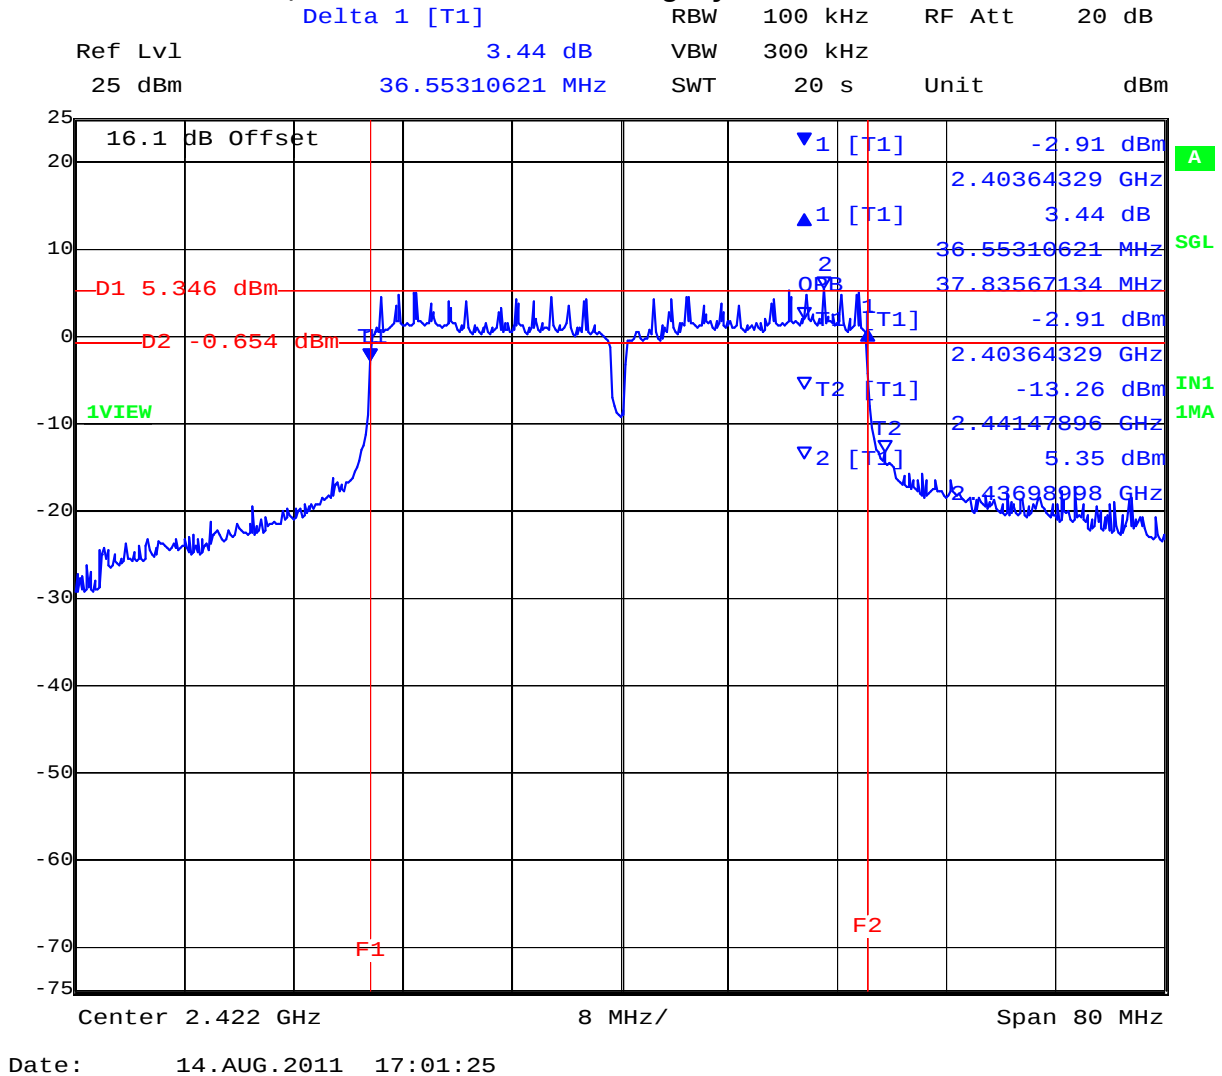


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 55 of 279

PORT C 2,422 MHz 802.11n HT-40 Legacy 6 dB and 99% Bandwidth

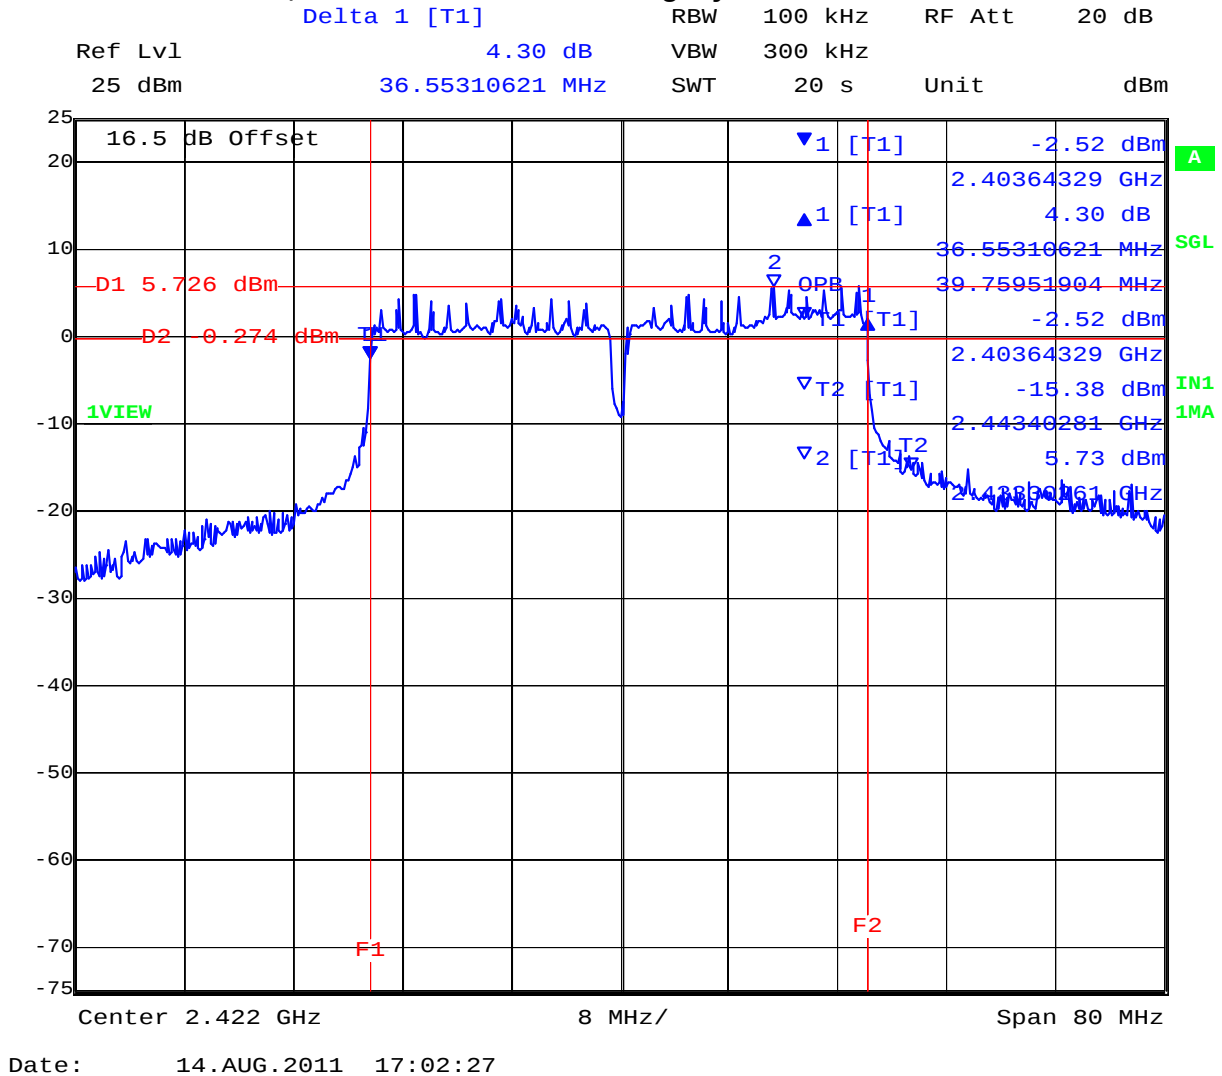


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 56 of 279

PORT A 2,437 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth

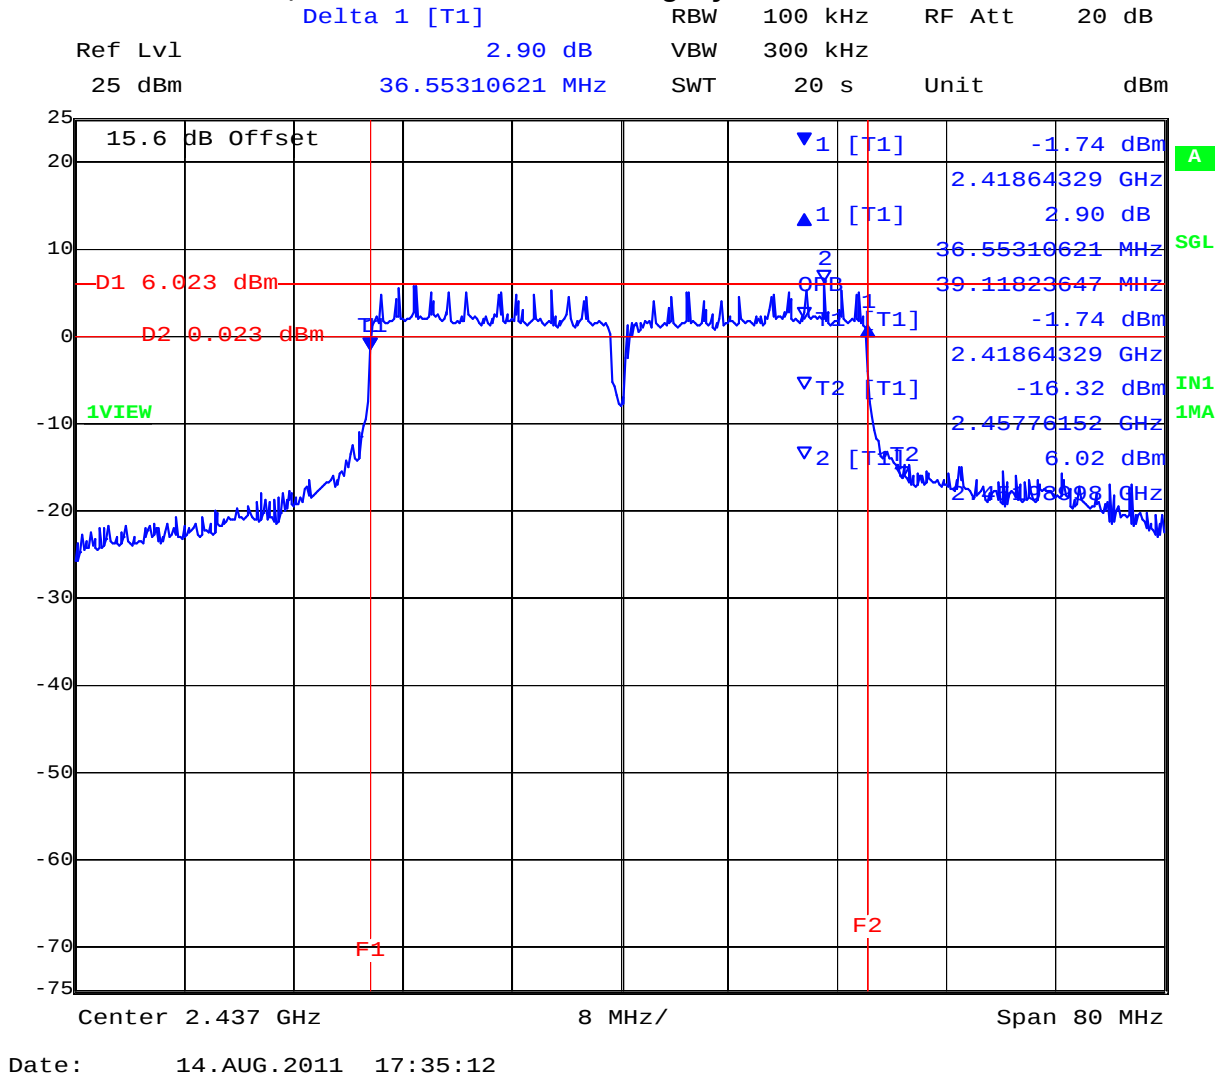


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 57 of 279

PORT B 2,437 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth

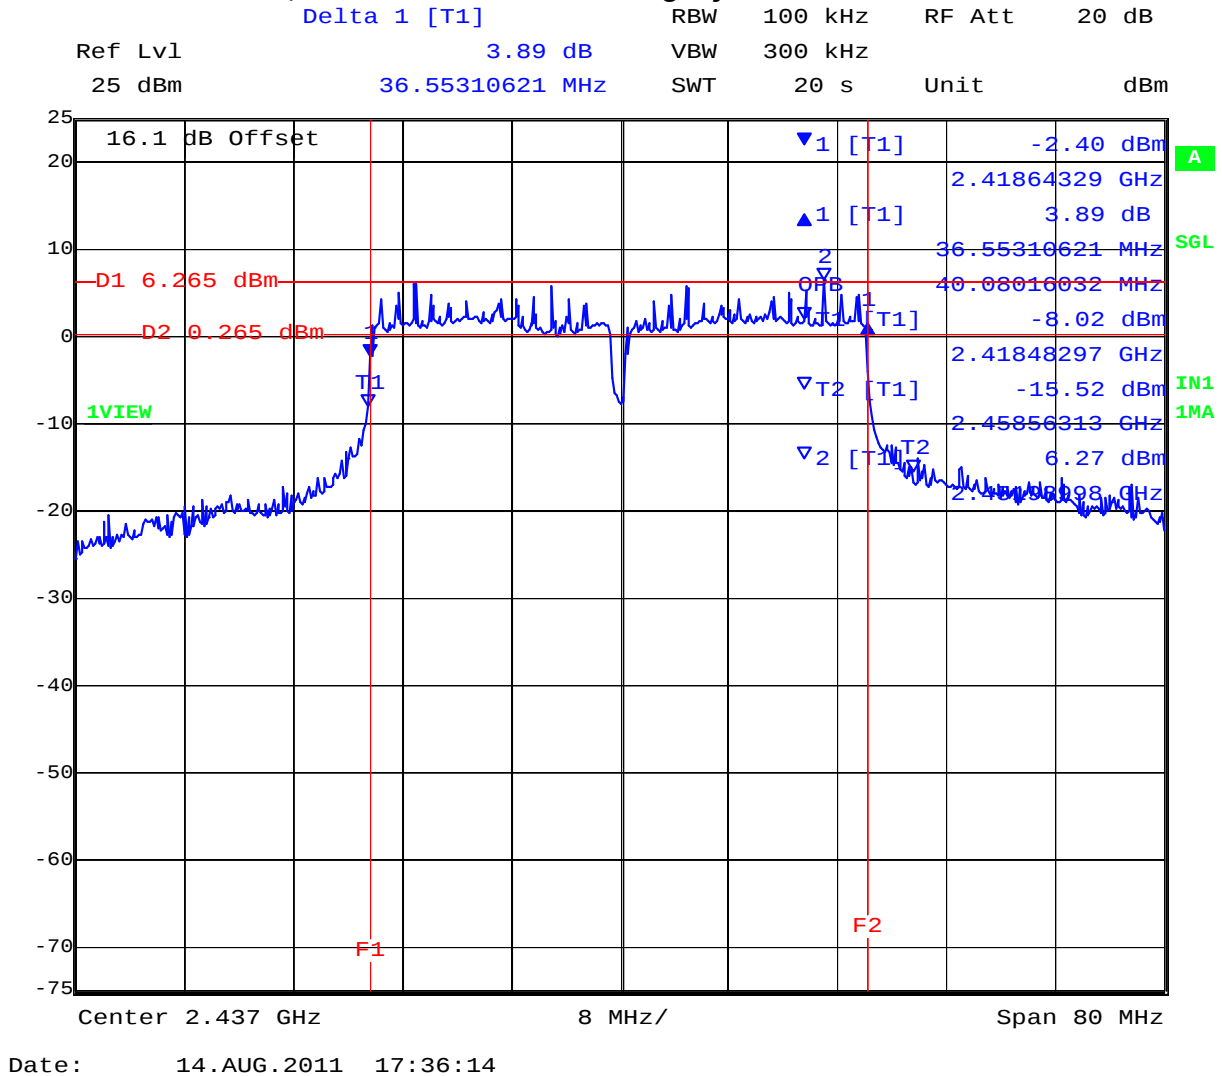


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 58 of 279

PORT C 2,437 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth

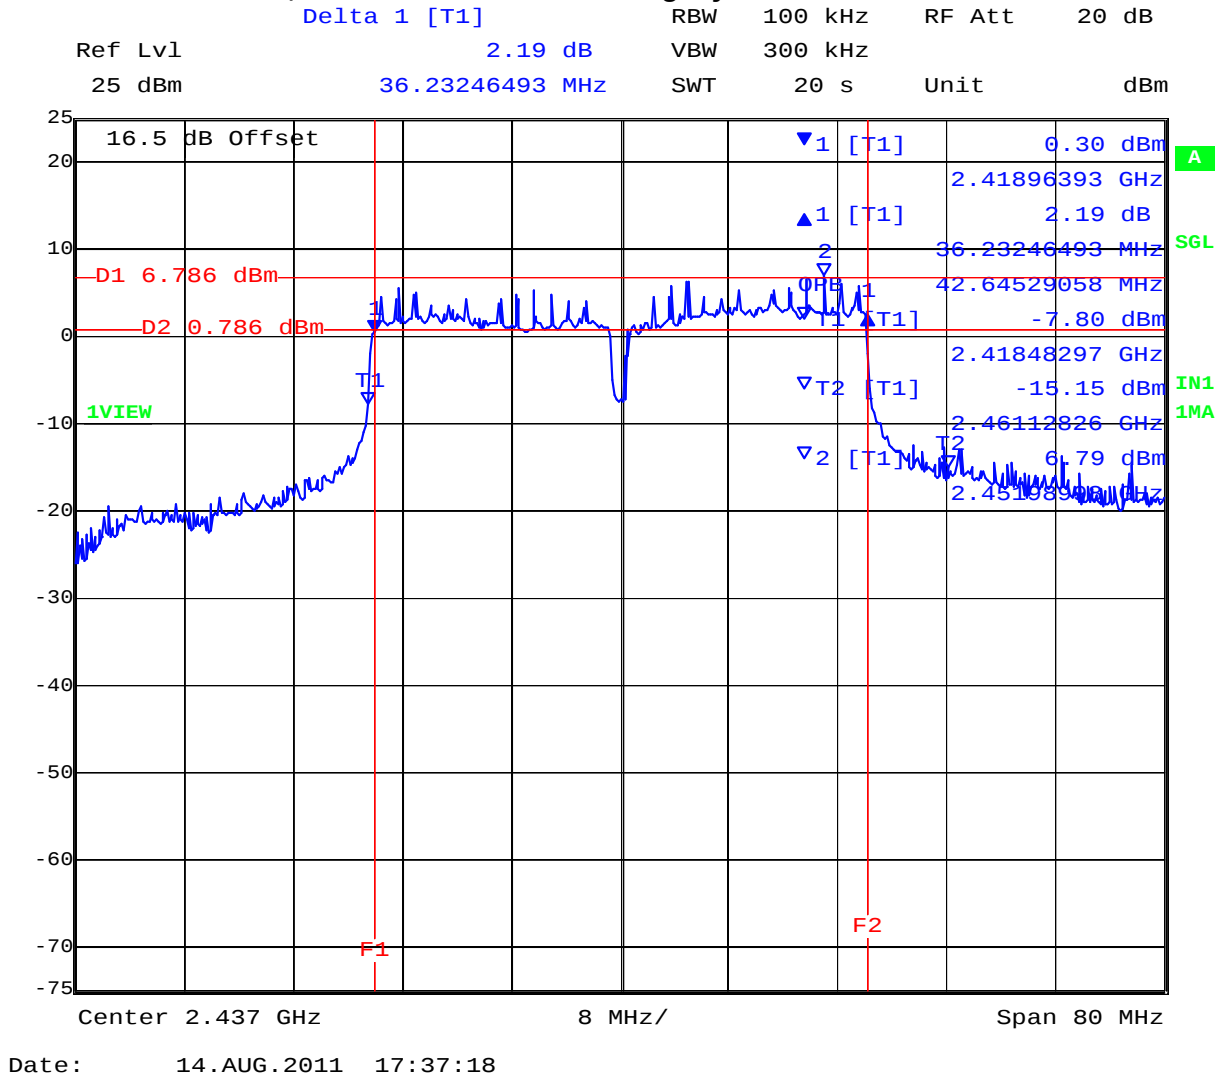


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 59 of 279

PORT A 2,452 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth

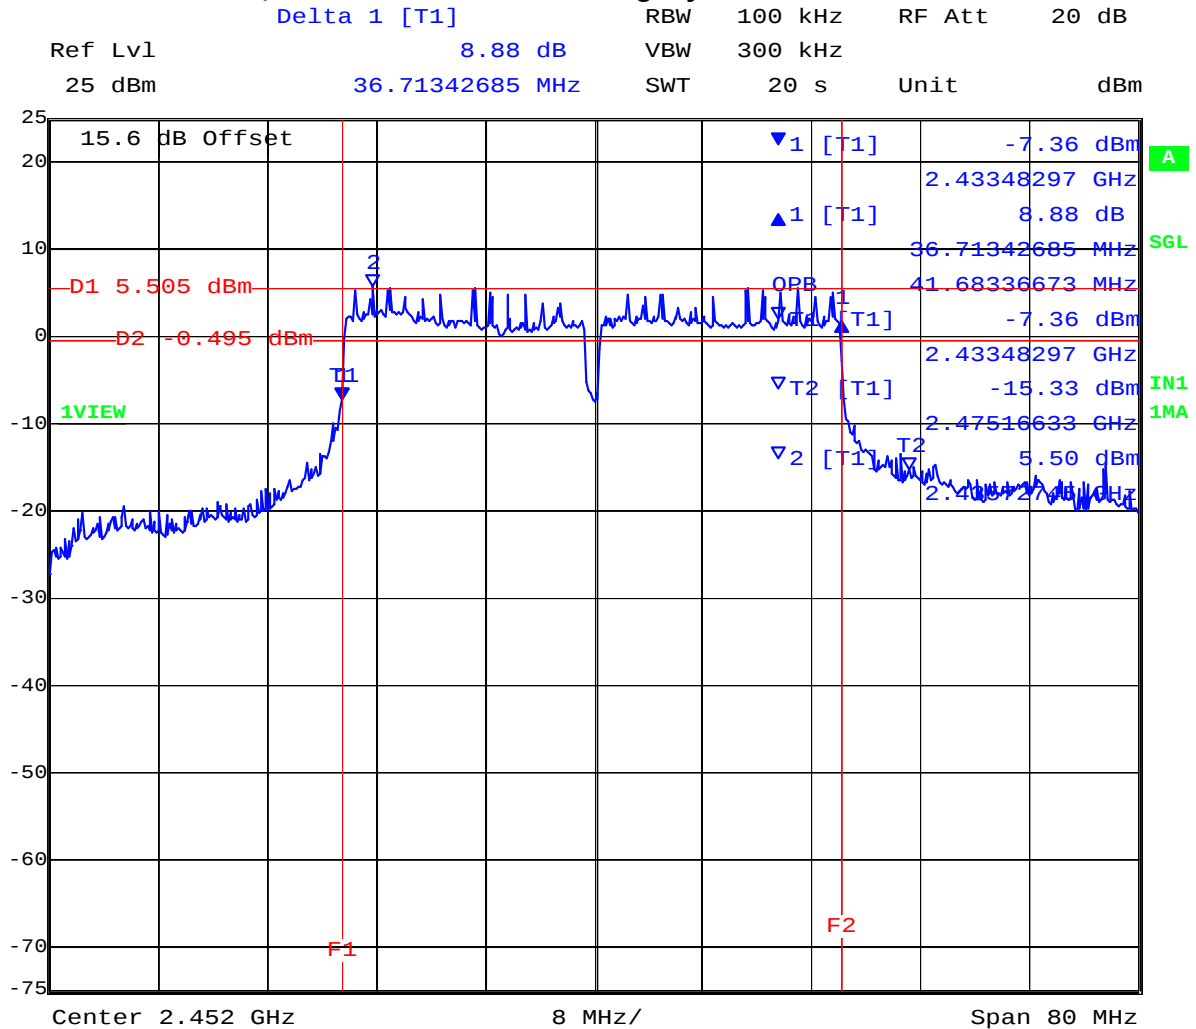


Date: 14.AUG.2011 18:04:05

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 60 of 279

PORT B 2,452 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth

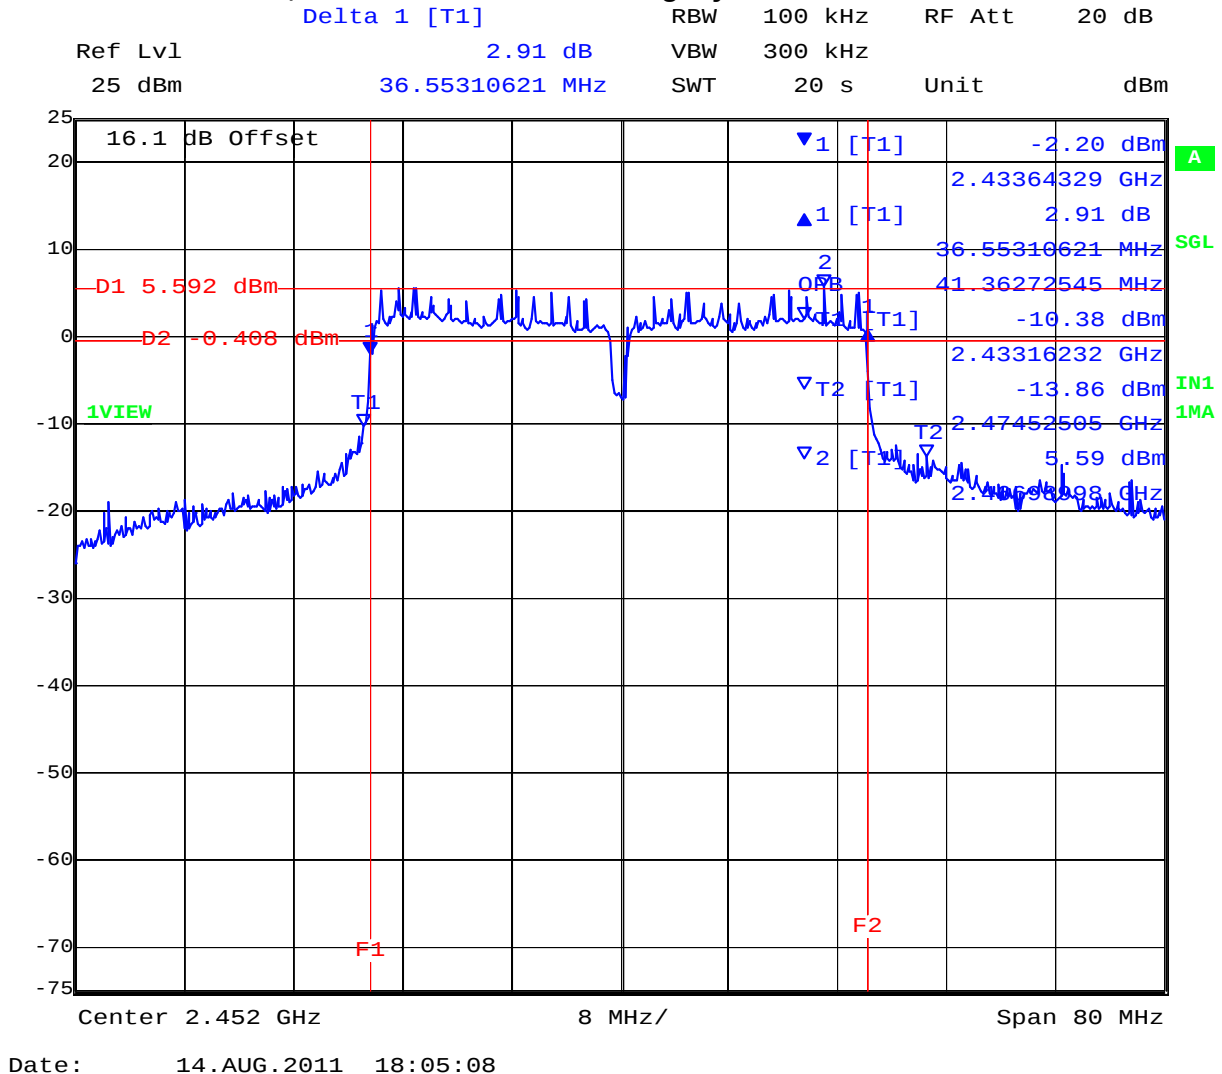

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 2,452 MHz 802.11n HT-20 Legacy 6 dB and 99% Bandwidth

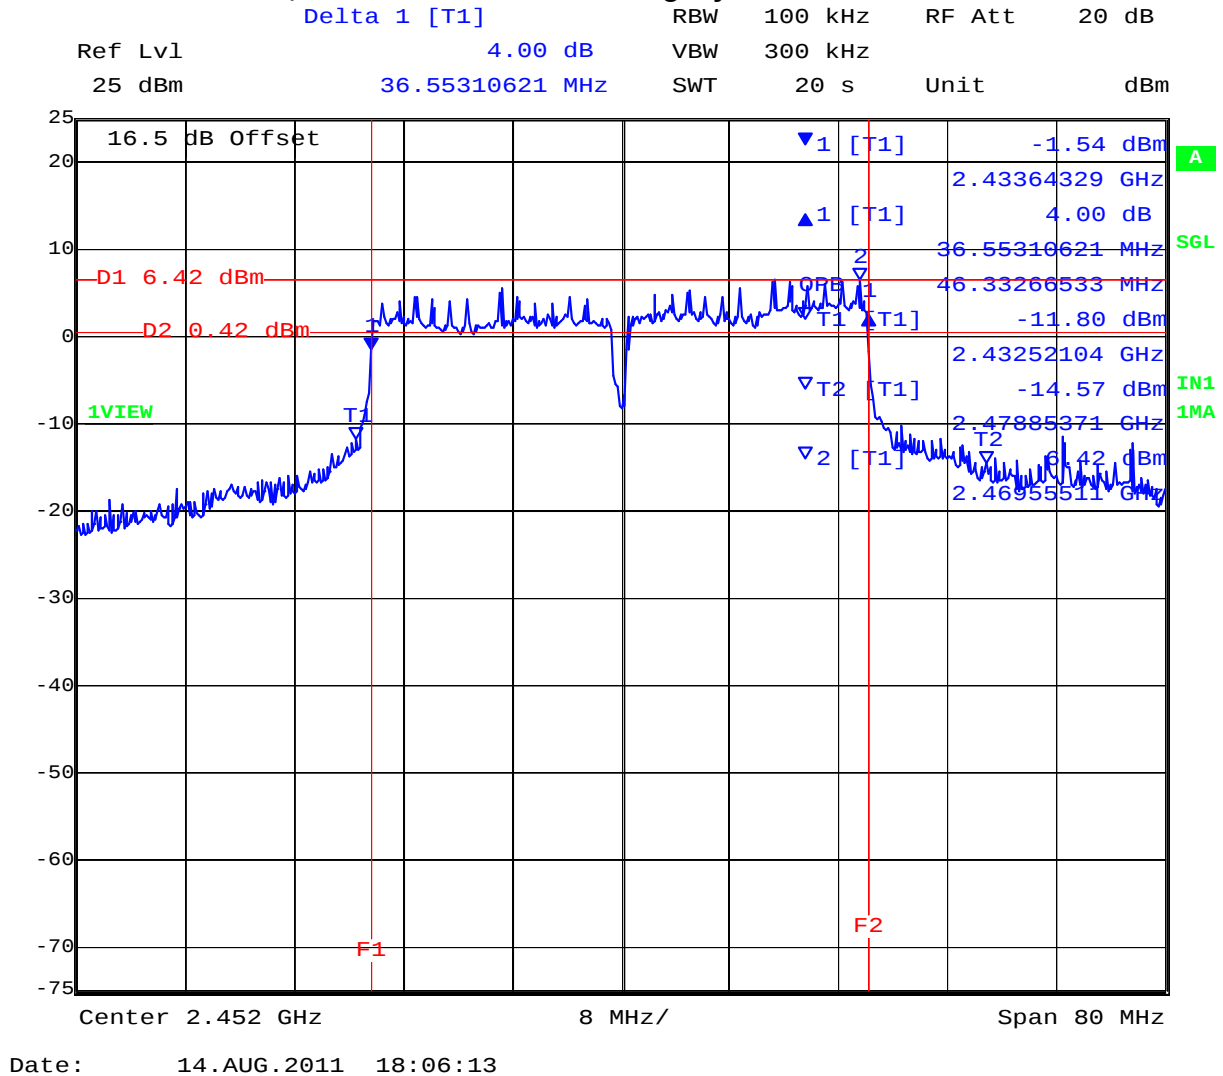



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 62 of 279

TABLE OF RESULTS – 802.11a - Legacy

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11a	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.00 Vdc		
Notes 1:			
Notes 2:			

6 dB Bandwidth

6 dB Bandwidth							
Test Frequency	6 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz						
MHz	a	b	c	d	kHz	MHz	MHz
5745	16.433000	16.433000	16.192000	--	500	0.5	-15.692000
5875	16.513000	16.433000	16.112000	--			-15.612000
5825	16.433000	16.032000	15.792000	--			-15.292000

99% Bandwidth

99 % Bandwidth							
Test Frequency							
	MHz						
MHz	a	b	c	d			
5745	16.834000	16.673000	16.673000	--			
5875	16.754000	16.593000	16.673000	--			
5825	16.834000	16.593000	16.673000	--			


Measurement uncertainty:	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 63 of 279

PORT A 5,745 MHz 802.11a Legacy 6 dB and 99% Bandwidth

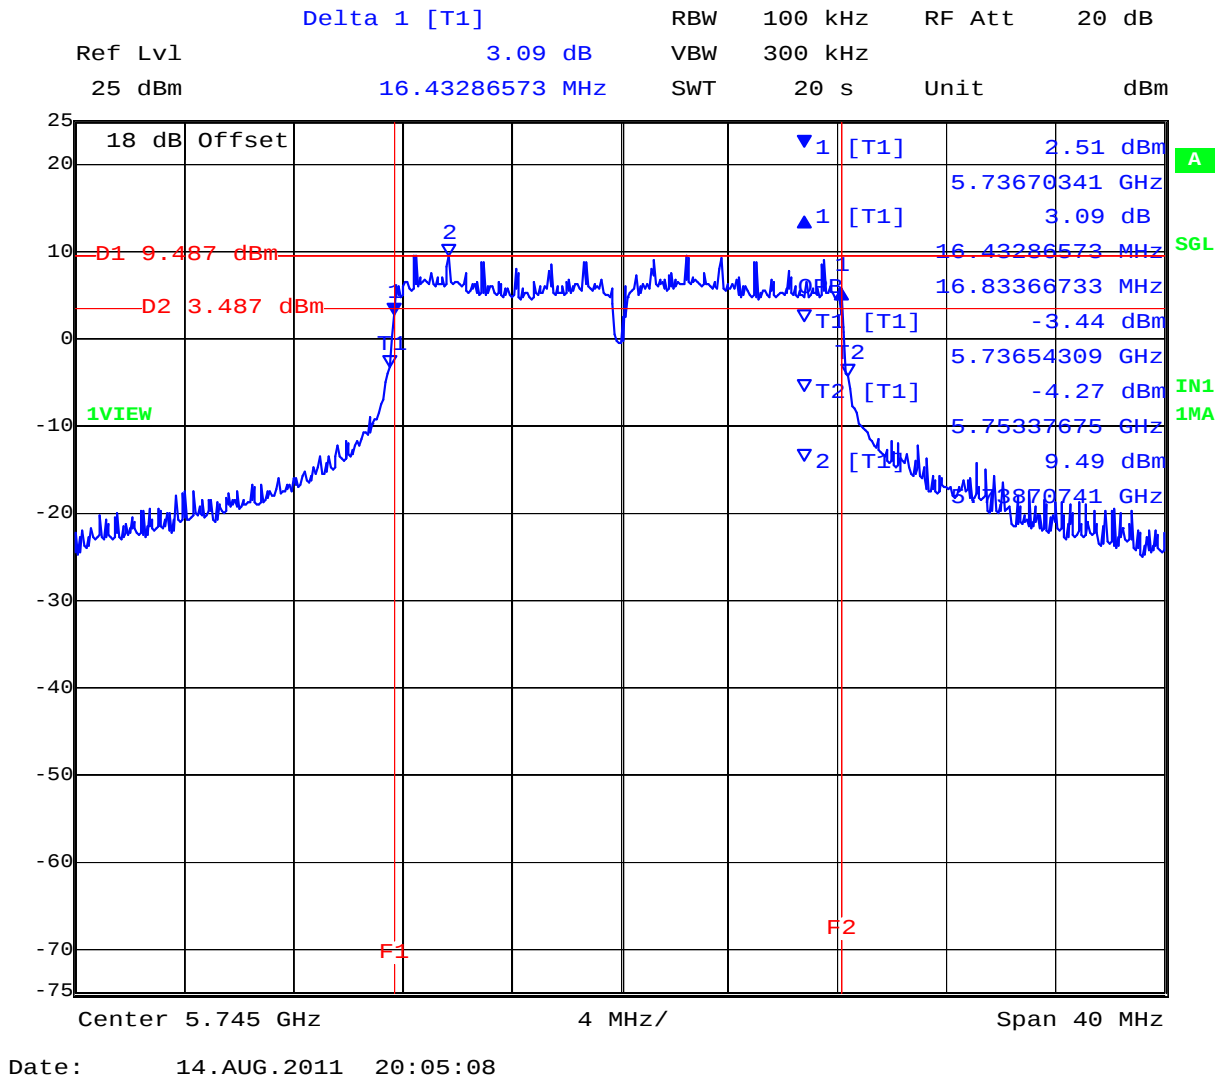


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 64 of 279

PORT B 5,745 MHz 802.11a Legacy 6 dB and 99% Bandwidth

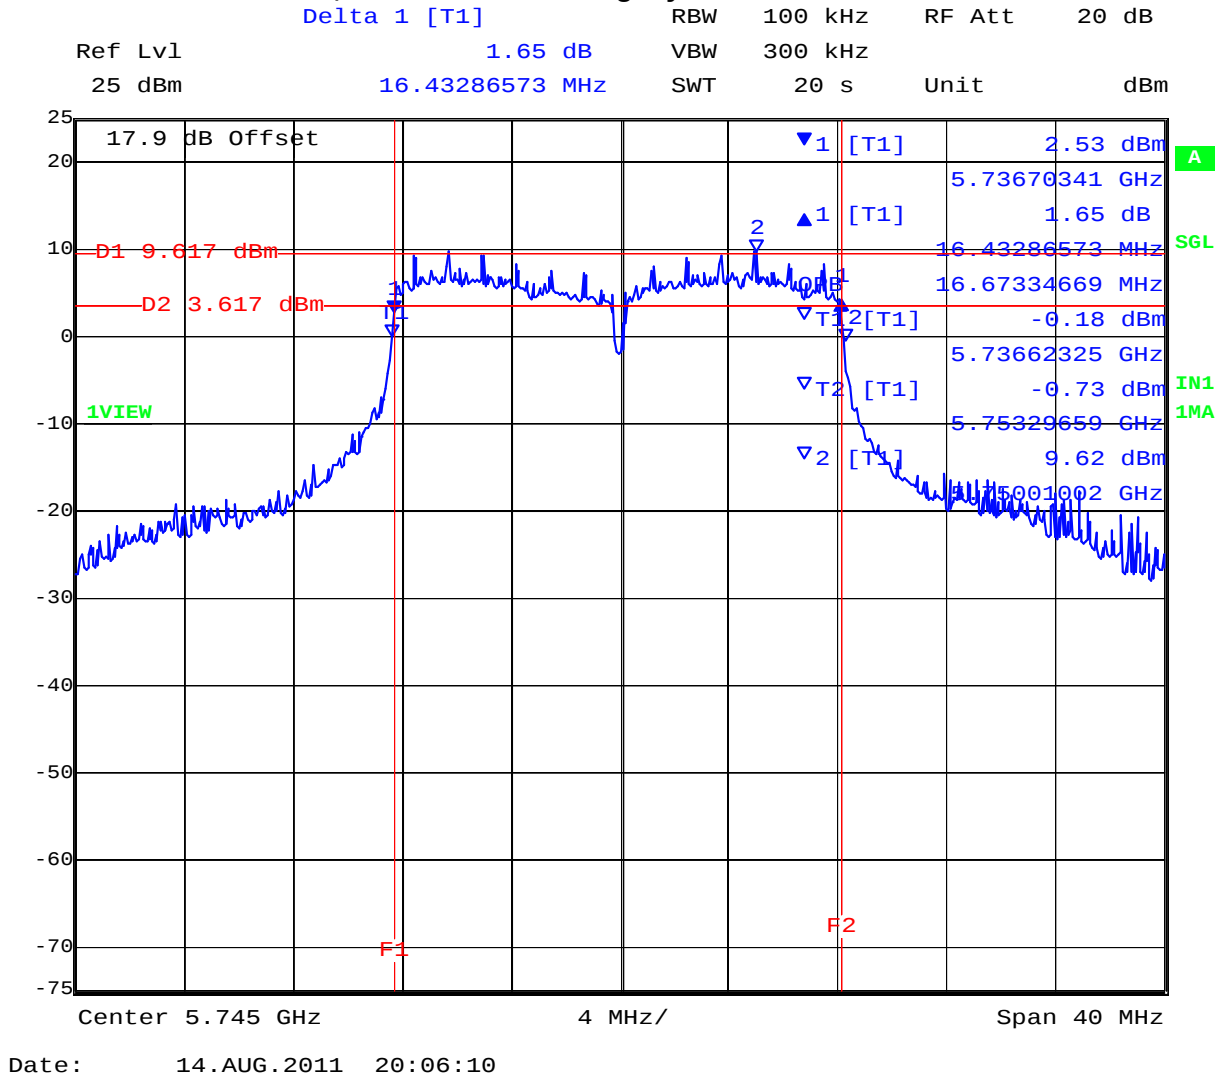


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 65 of 279

PORT C 5,745 MHz 802.11a Legacy 6 dB and 99% Bandwidth

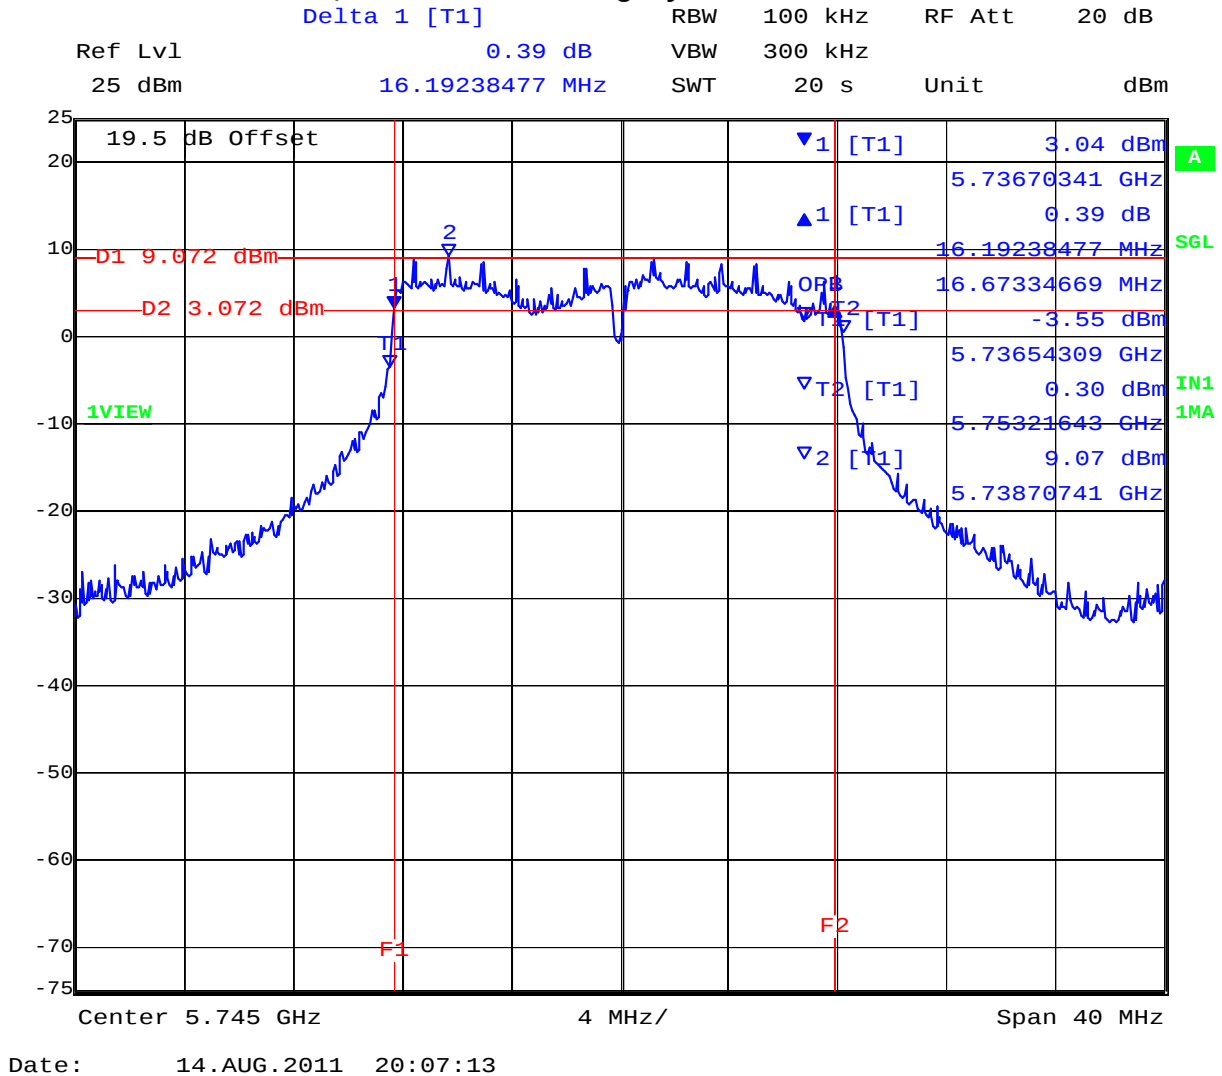


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 66 of 279

PORT A 5,785 MHz 802.11a Legacy 6 dB and 99% Bandwidth

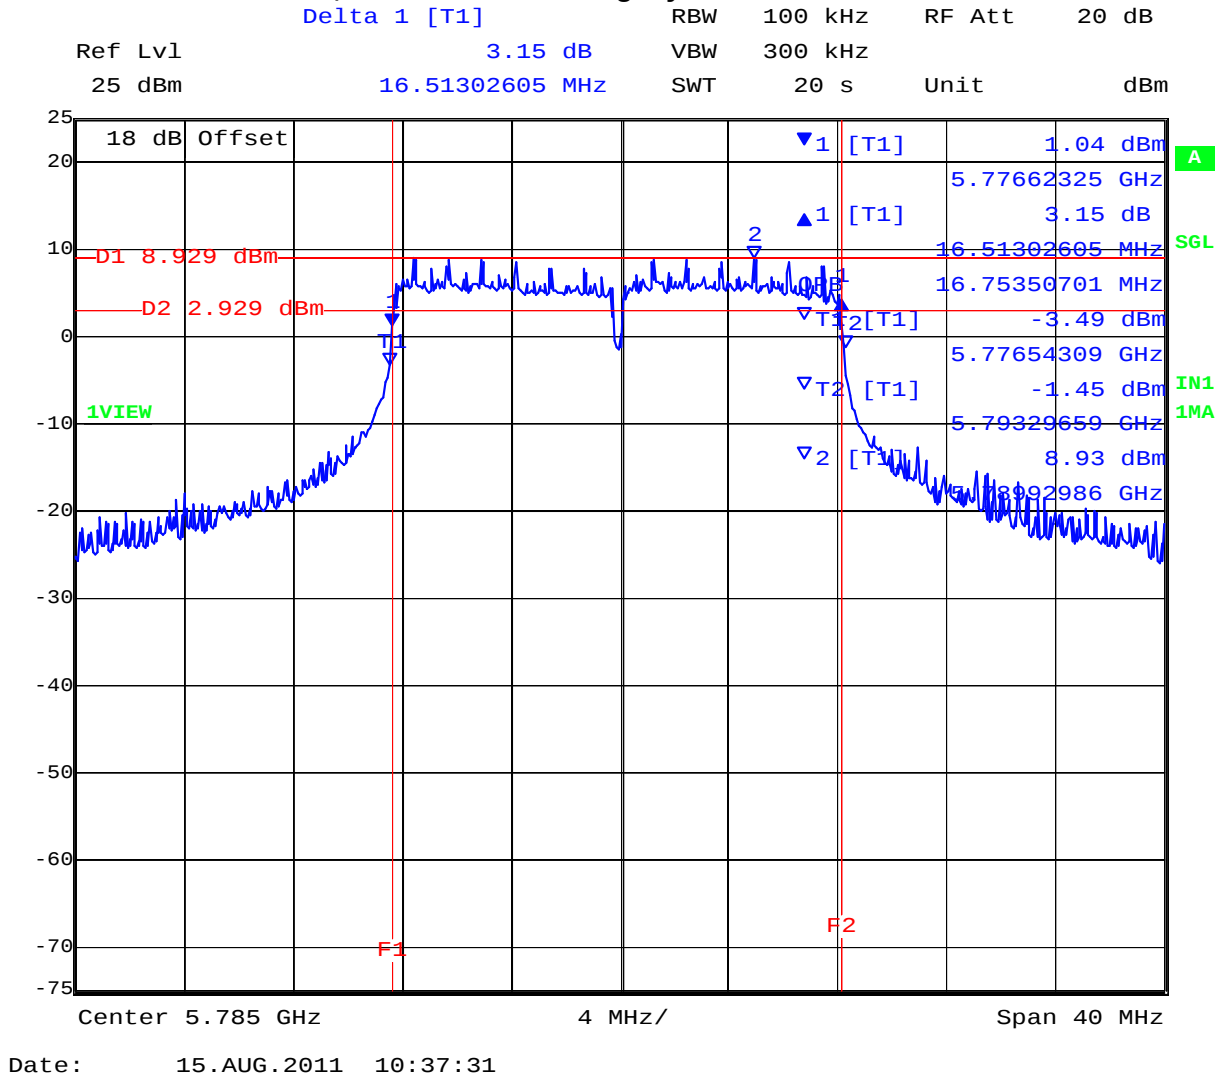


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 67 of 279

PORT B 5,785 MHz 802.11a Legacy 6 dB and 99% Bandwidth

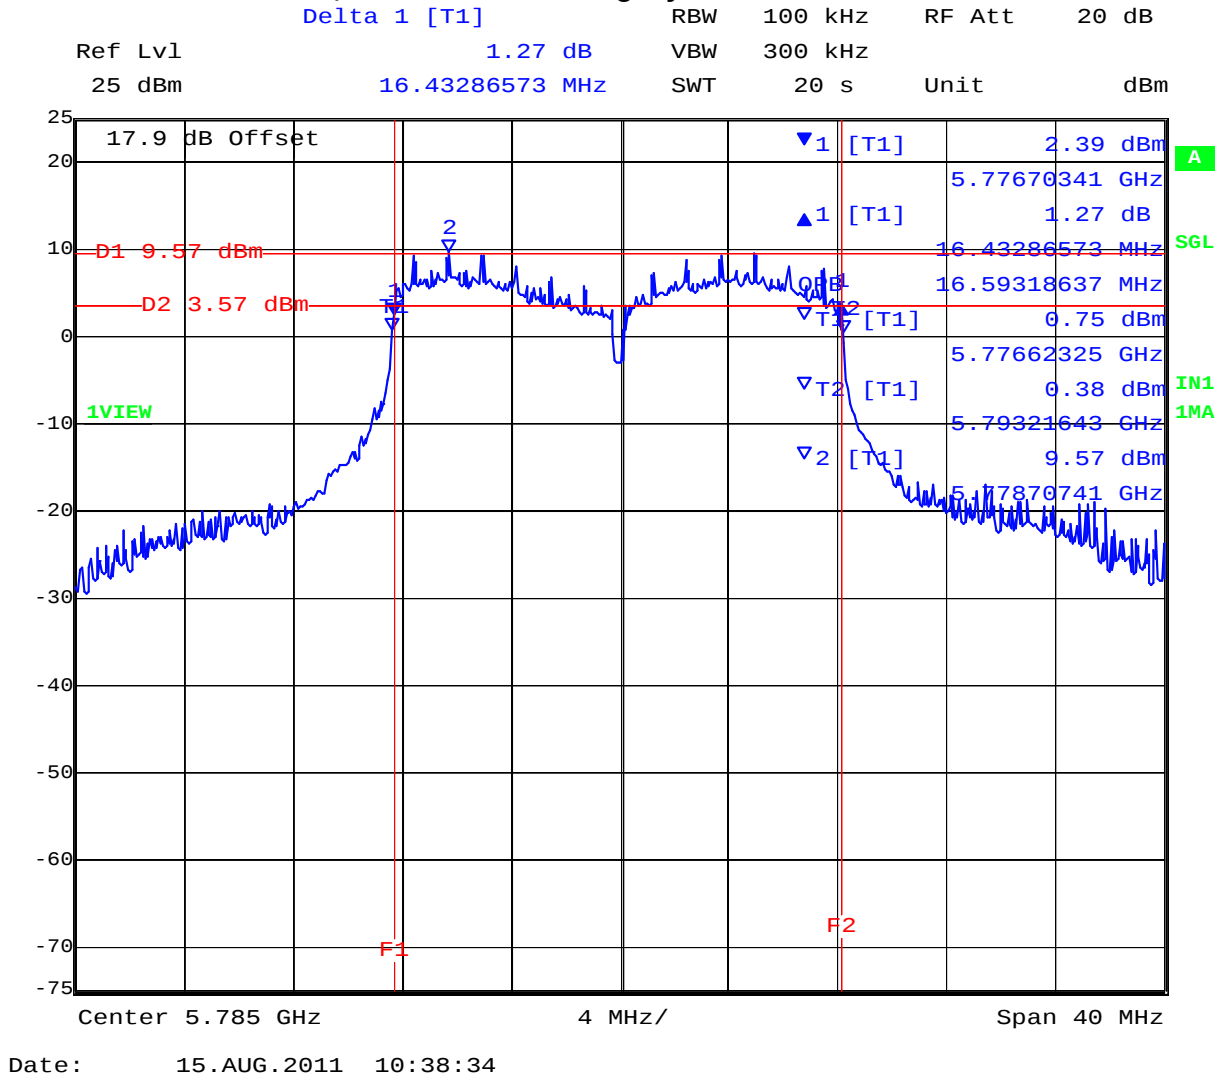


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 68 of 279

PORT C 5,785 MHz 802.11a Legacy 6 dB and 99% Bandwidth

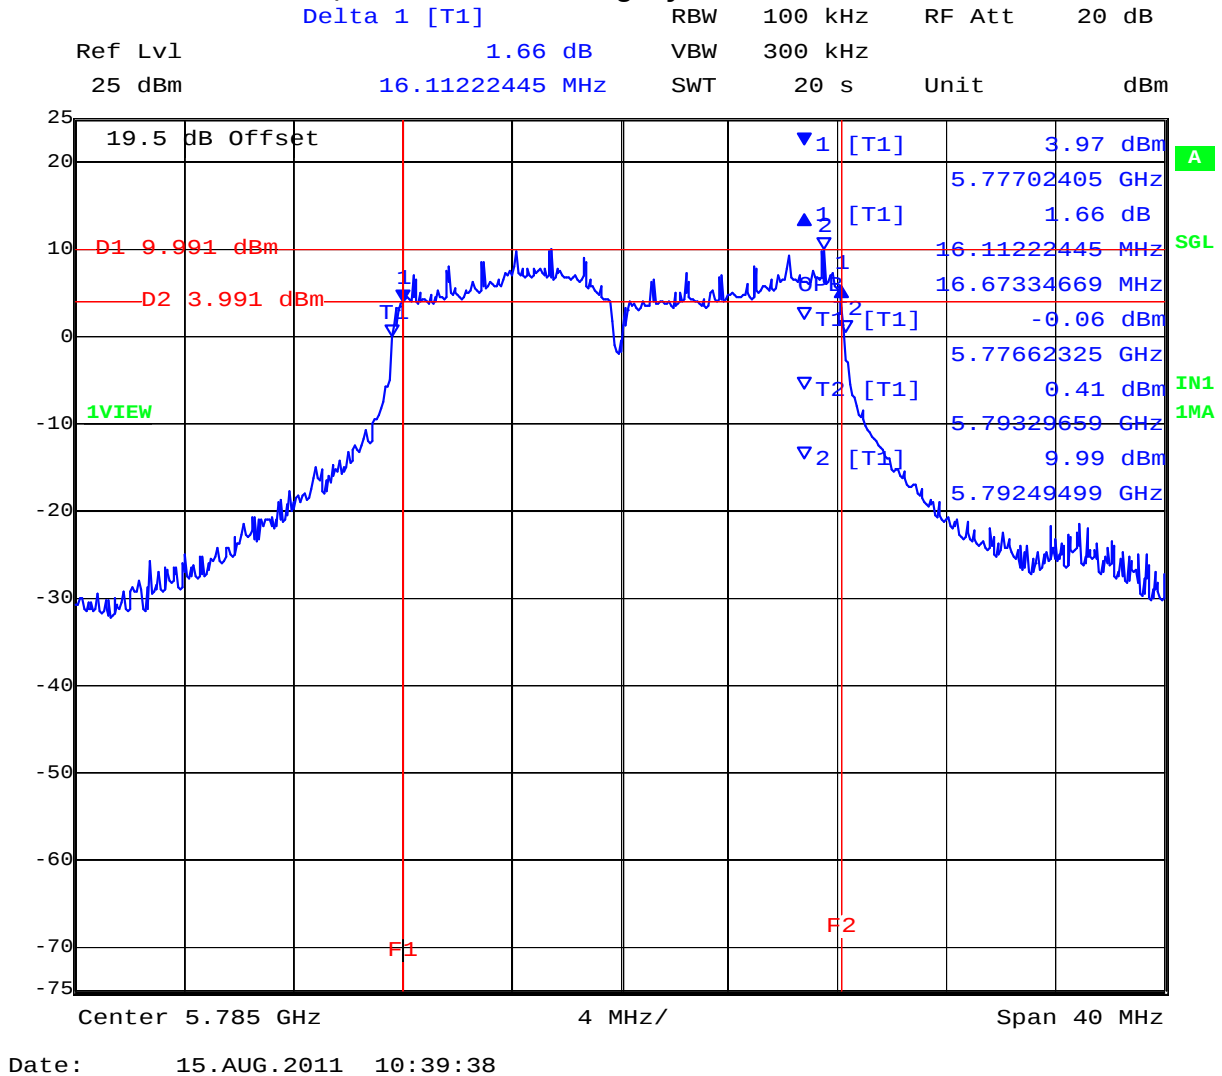


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 69 of 279

PORT A 5,825 MHz 802.11a Legacy 6 dB and 99% Bandwidth

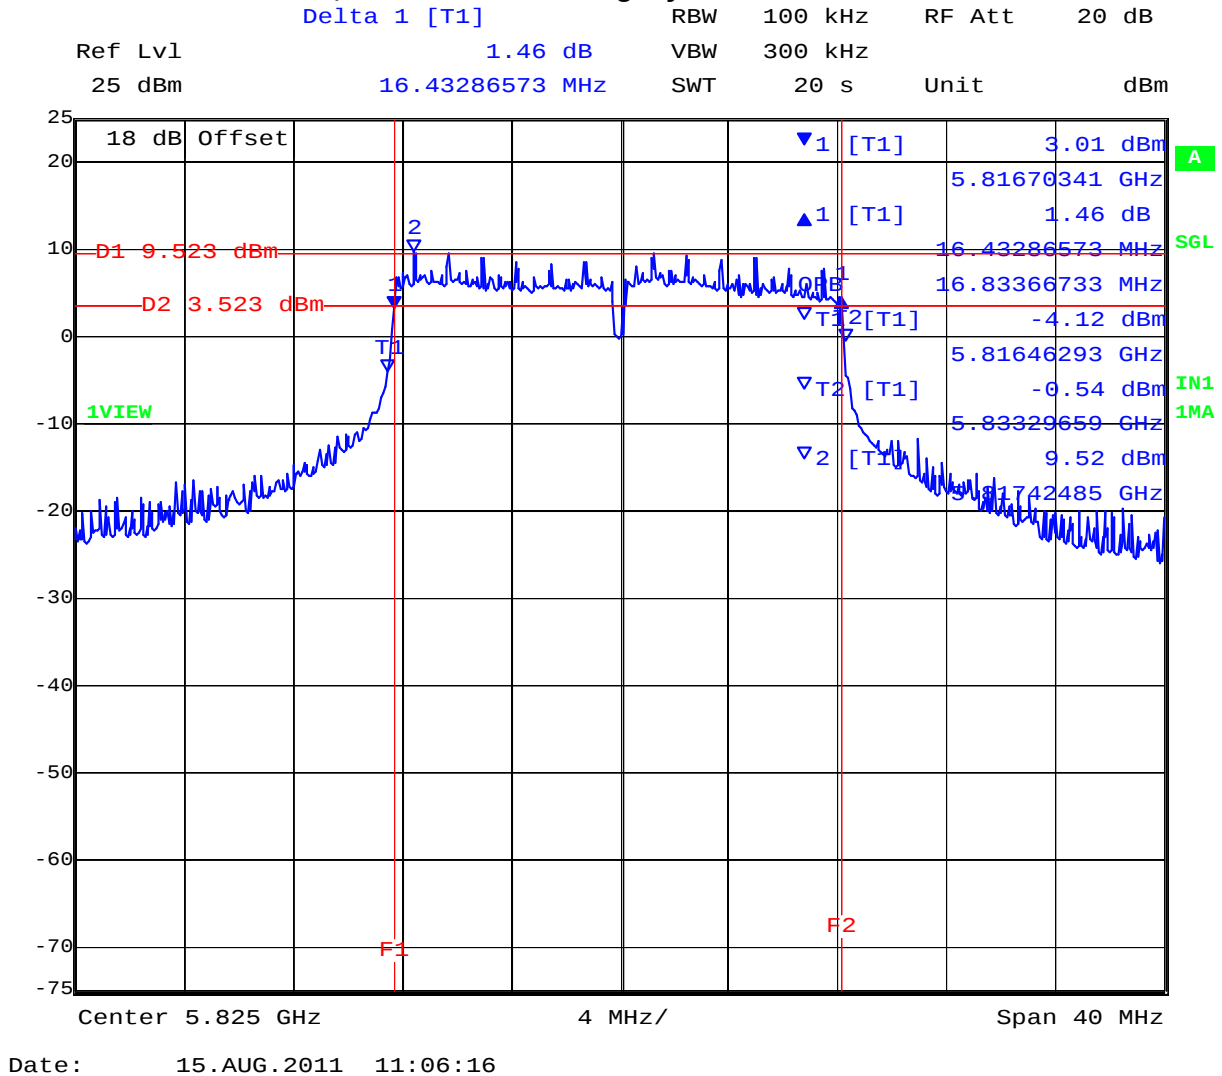


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 70 of 279

PORT B 5,825 MHz 802.11a Legacy 6 dB and 99% Bandwidth

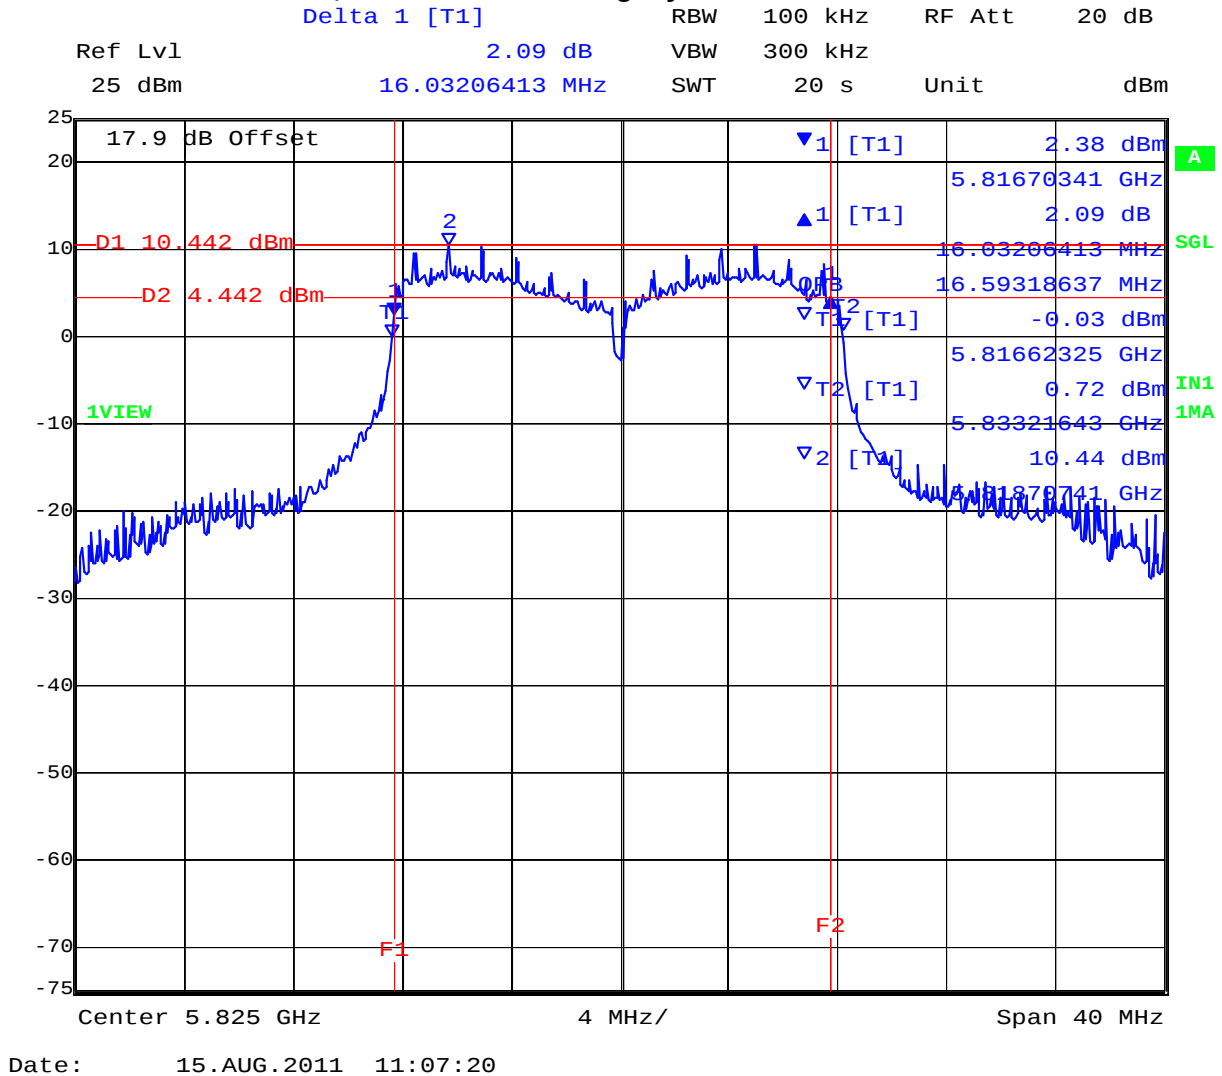


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 71 of 279

PORT C 5,825 MHz 802.11a Legacy 6 dB and 99% Bandwidth

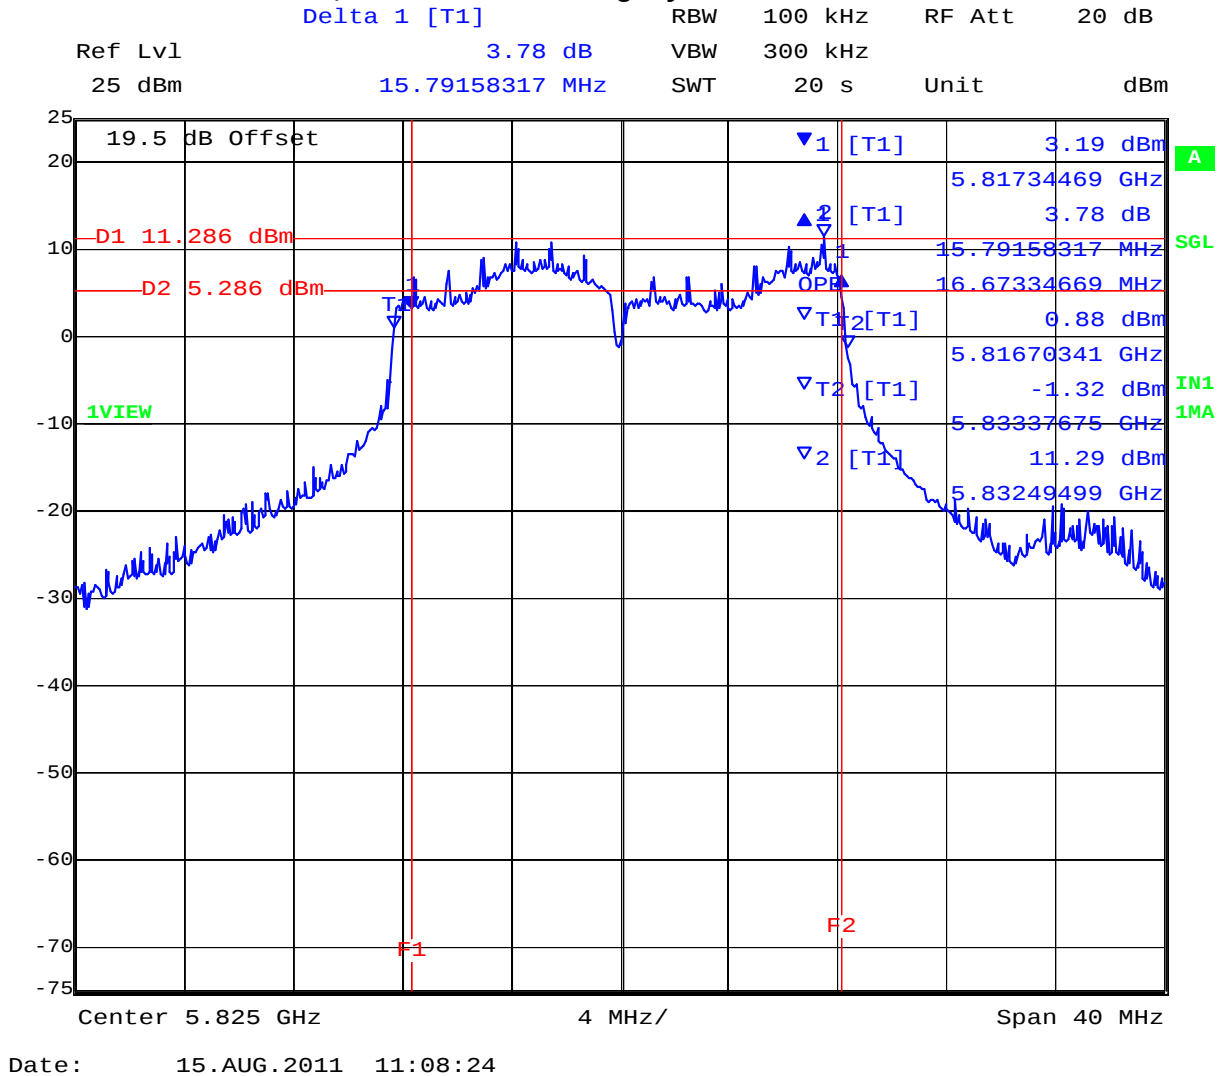

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 72 of 279

TABLE OF RESULTS – 802.11n HT-20

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.00 Vdc		
Notes 1:			
Notes 2:			

6 dB Bandwidth

Test Frequency	6 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz						
MHz	a	b	c	d	kHz	MHz	MHz
5745.000	17.635000	17.635000	17.395000	--	500	0.5	-16.895000
5785.000	17.635000	17.395000	17.395000	--			-16.895000
5825.000	17.635000	17.635000	16.673000	--			-16.173000

99% Bandwidth

99 % Bandwidth							
Test Frequency	MHz						
	MHz	a	b	c	d		
5745.000	25.731000	21.403000	20.441000	--			
5785.000	28.617000	24.689000	19.719000	--			
5825.000	27.976000	23.166000	18.918000	--			


Measurement uncertainty:	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 73 of 279

PORT A 5,745 MHz 802.11n HT-20 6 dB and 99% Bandwidth

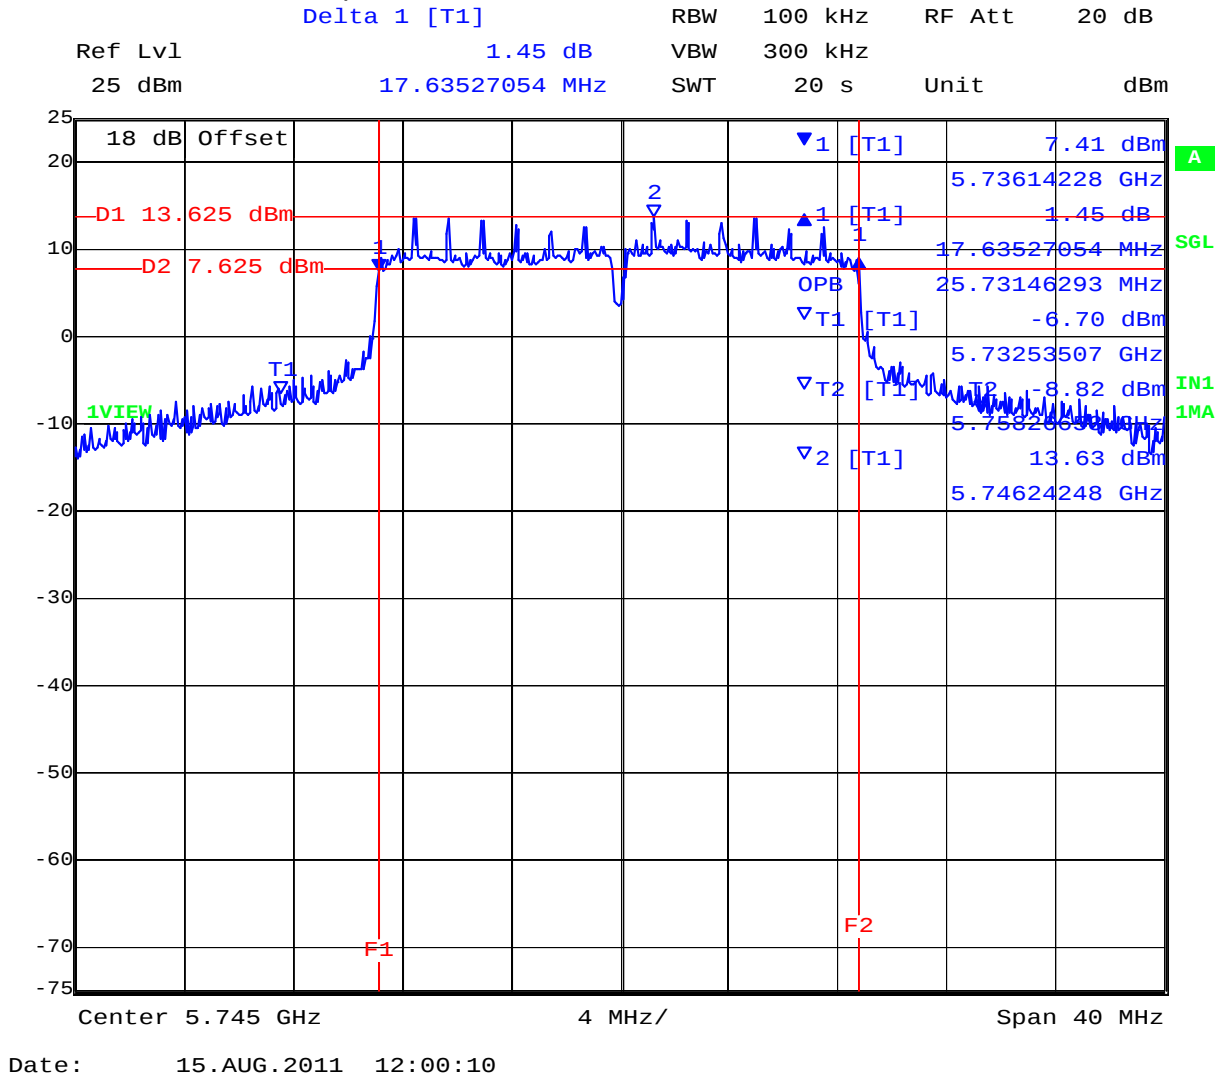


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 74 of 279

PORT B 5,745 MHz 802.11n HT-20 6 dB and 99% Bandwidth

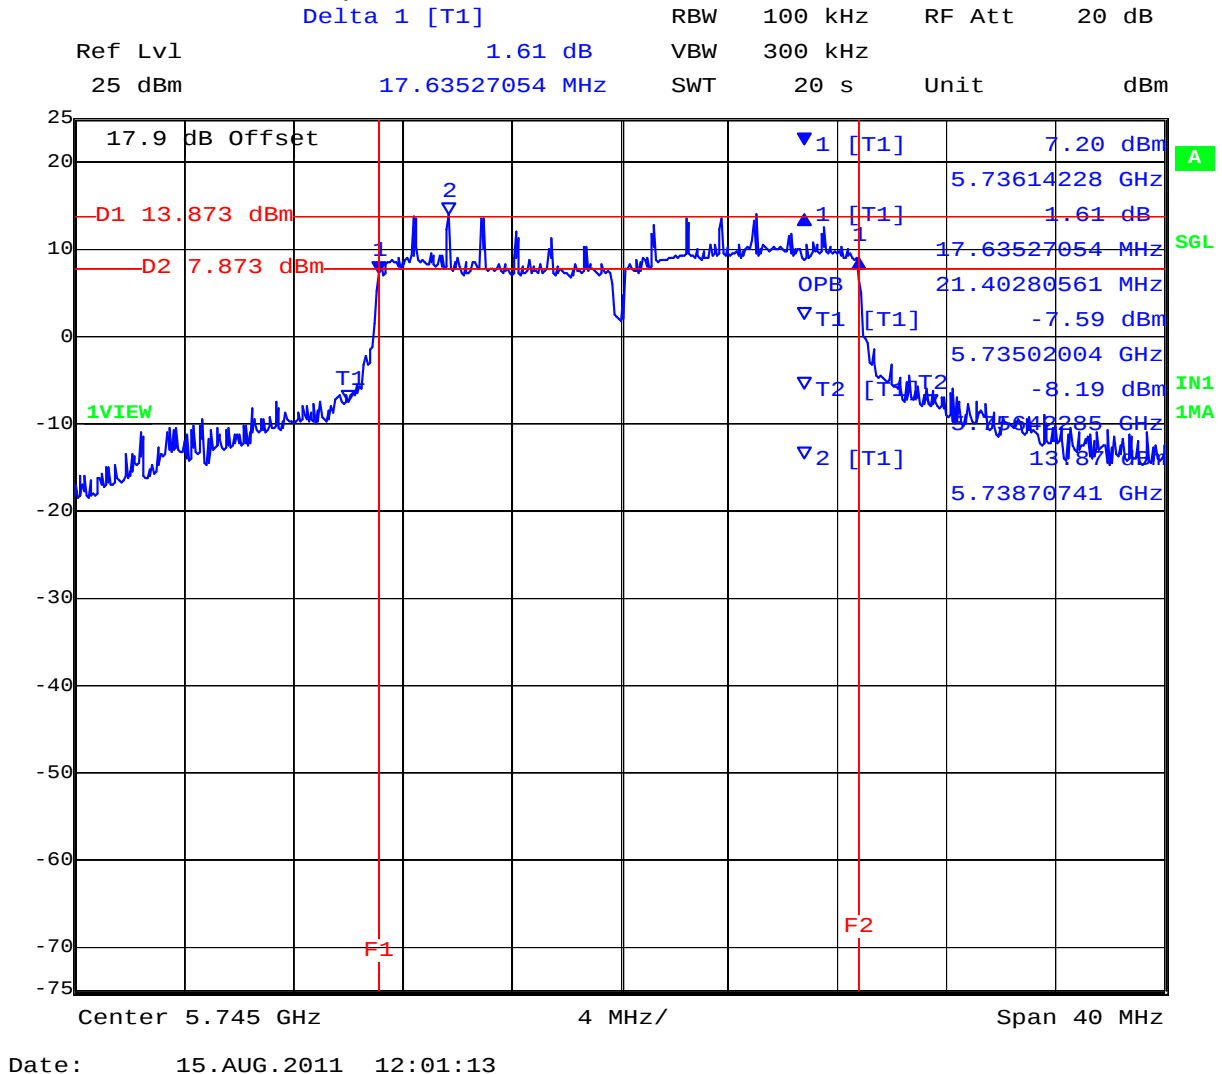


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 75 of 279

PORT C 5,745 MHz 802.11n HT-20 6 dB and 99% Bandwidth

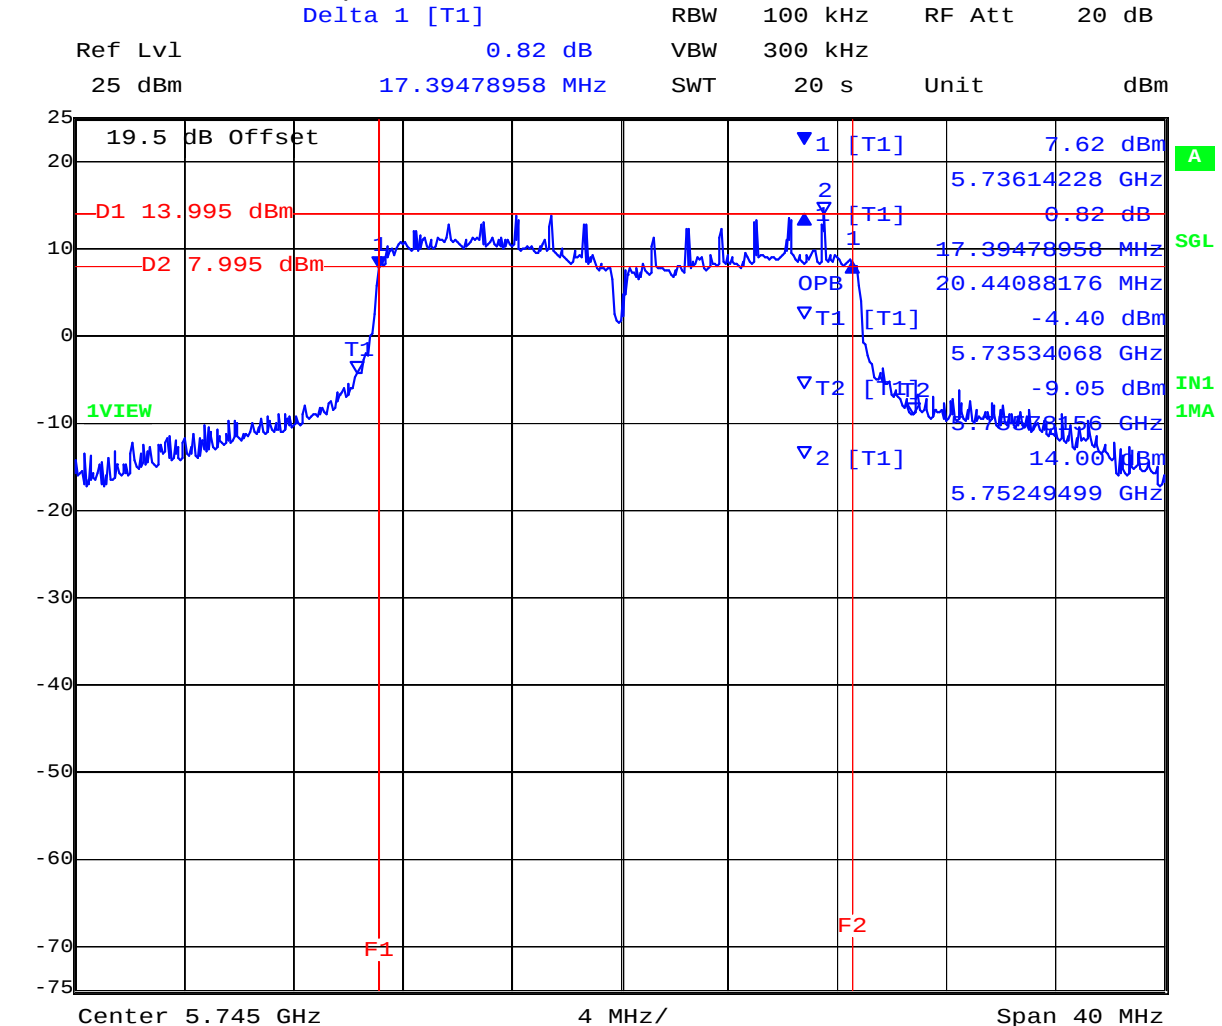


Date: 15.AUG.2011 12:02:16

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 76 of 279

PORT A 5,785 MHz 802.11n HT-20 6 dB and 99% Bandwidth

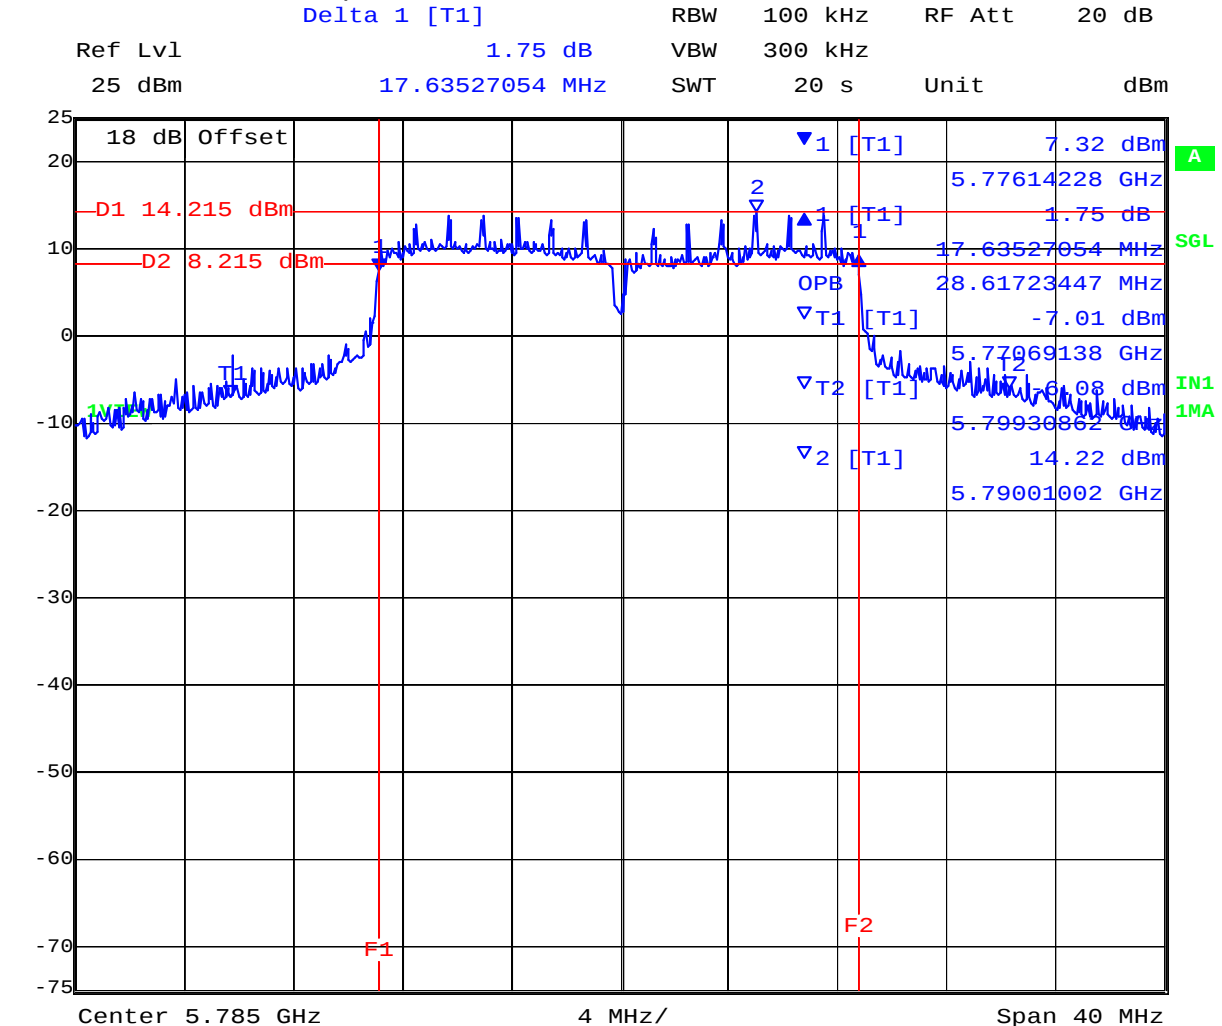


Date: 15.AUG.2011 12:37:02

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 77 of 279

PORT B 5,785 MHz 802.11n HT-20 6 dB and 99% Bandwidth

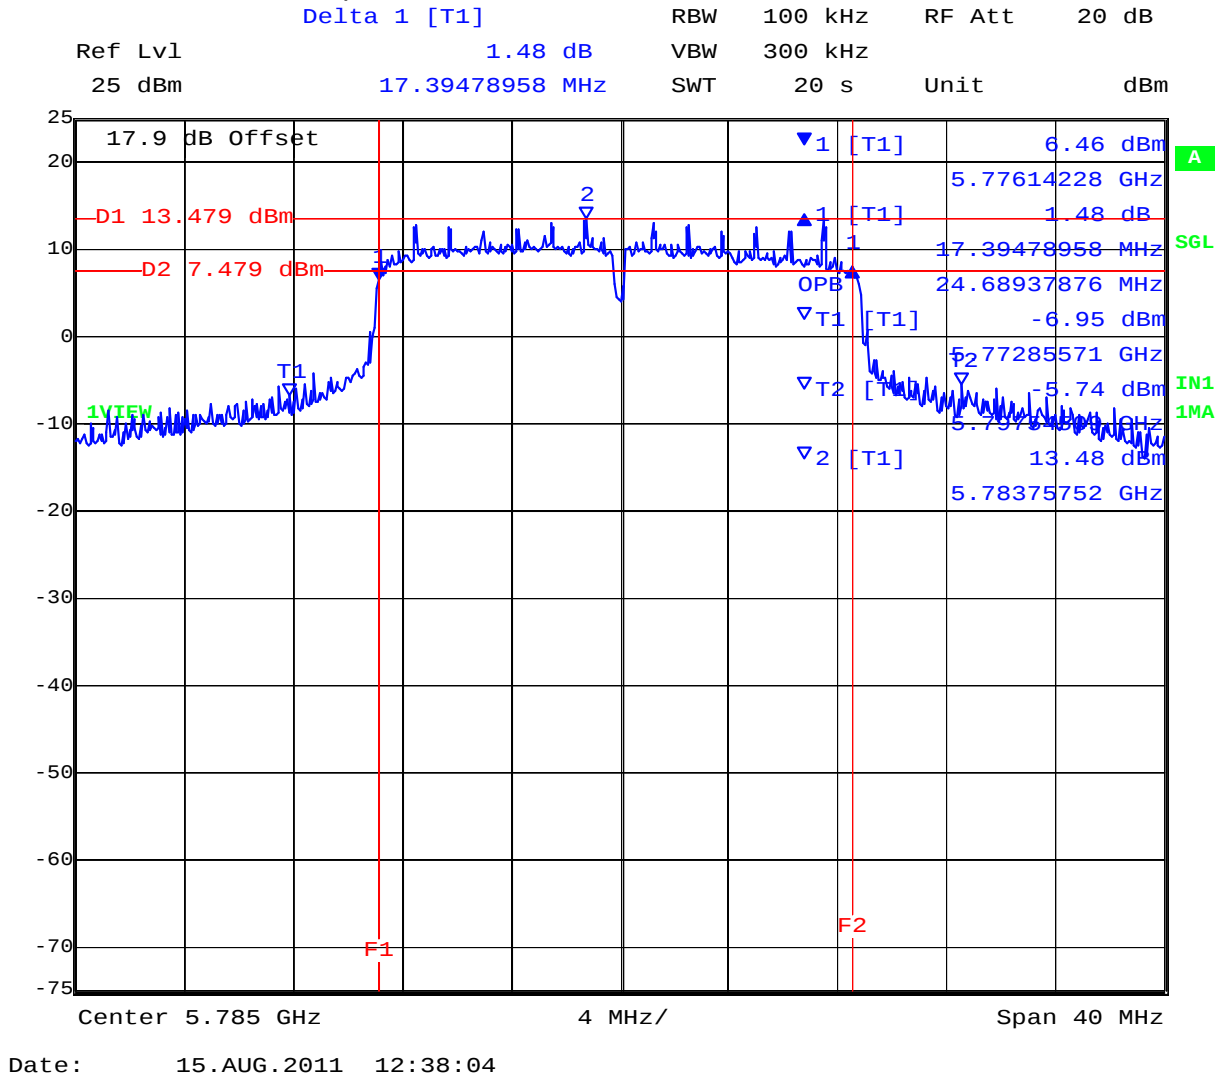


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 78 of 279

PORT C 5,785 MHz 802.11n HT-20 6 dB and 99% Bandwidth

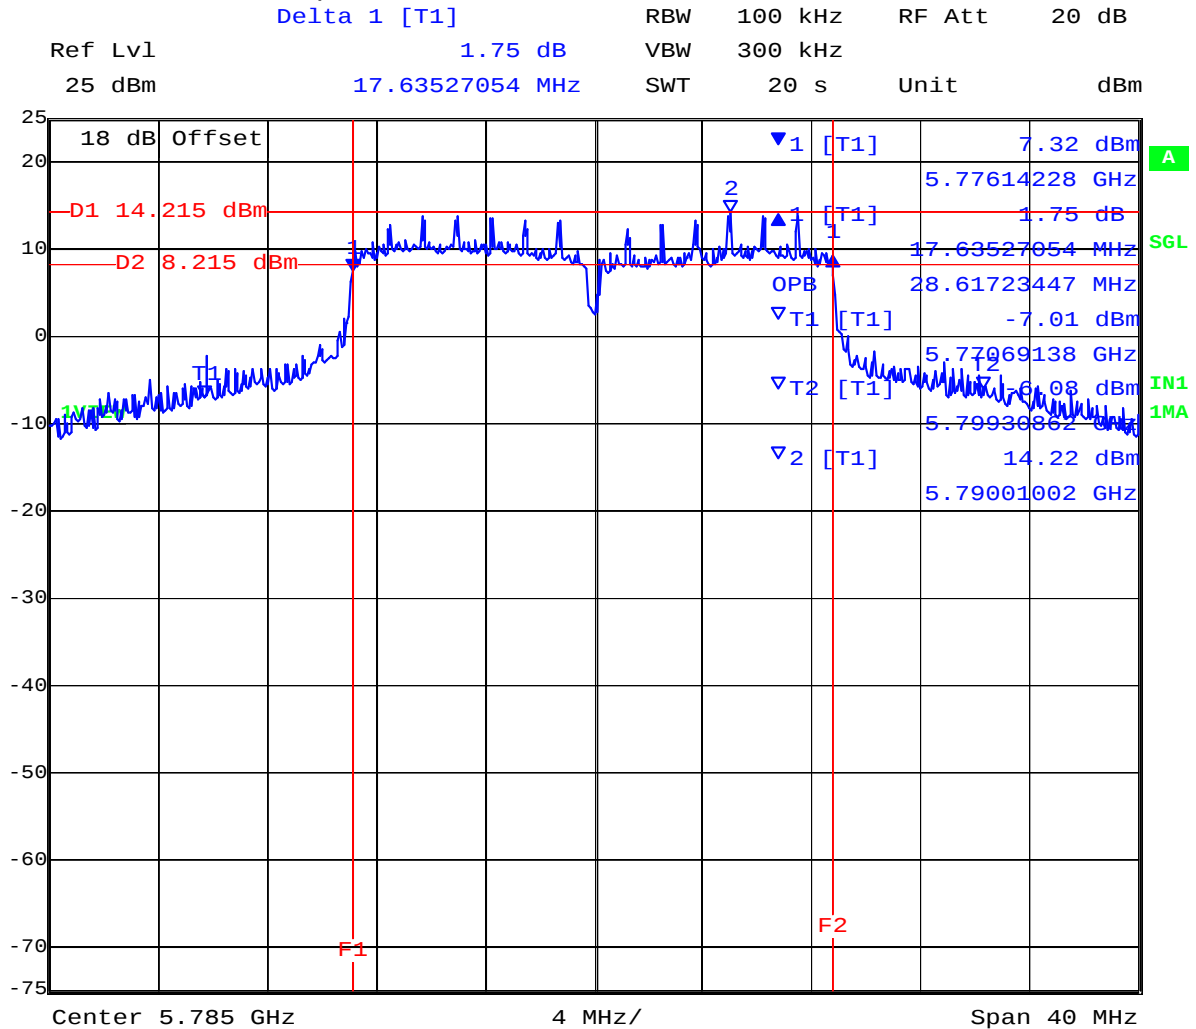


Date: 15.AUG.2011 12:37:02

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 79 of 279

PORT A 5,825 MHz 802.11n HT-20 6 dB and 99% Bandwidth

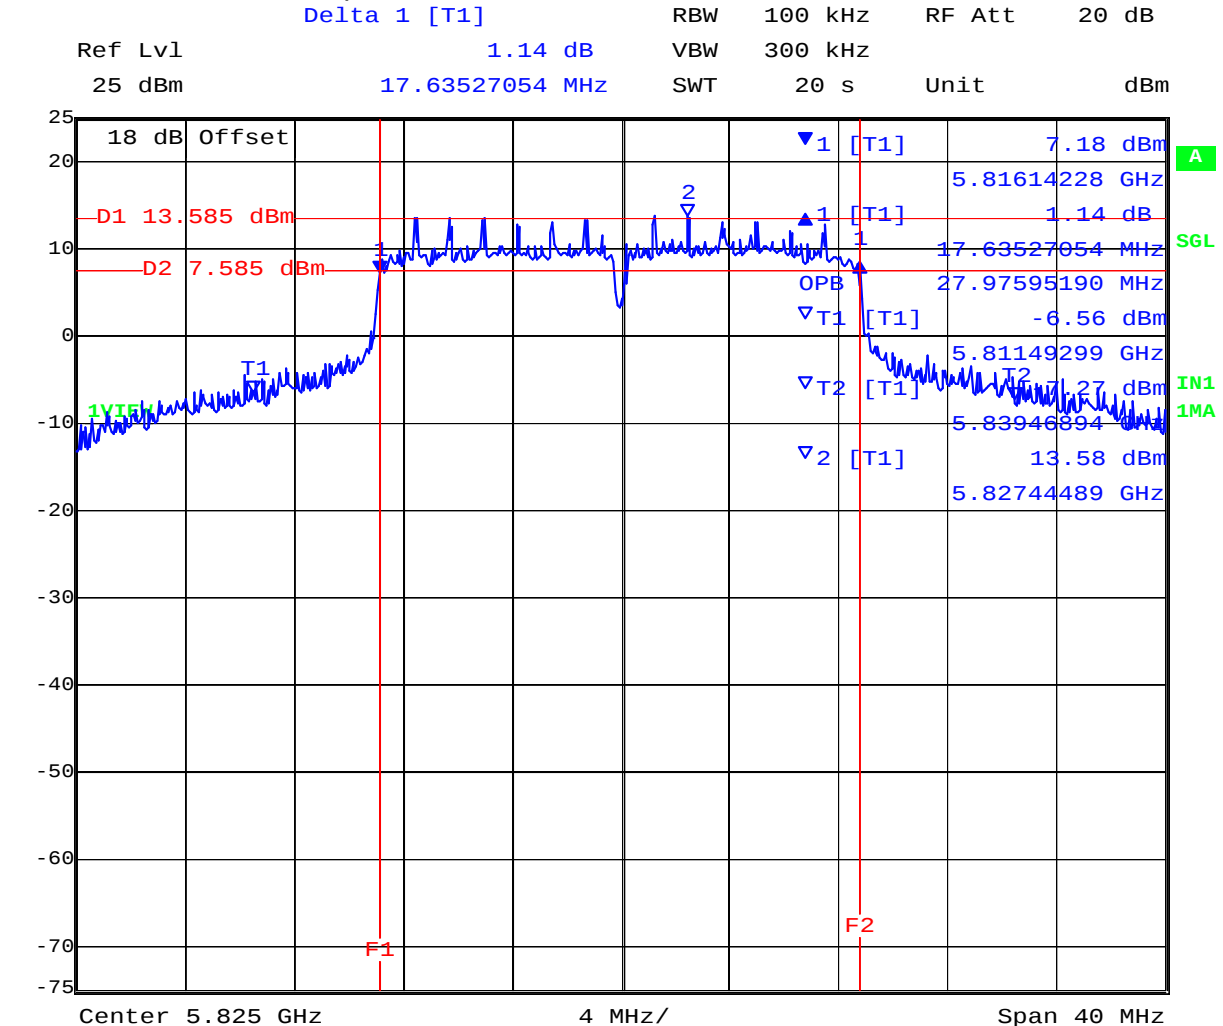


Date: 15.AUG.2011 13:01:28

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 80 of 279

PORT B 5,825 MHz 802.11n HT-20 6 dB and 99% Bandwidth

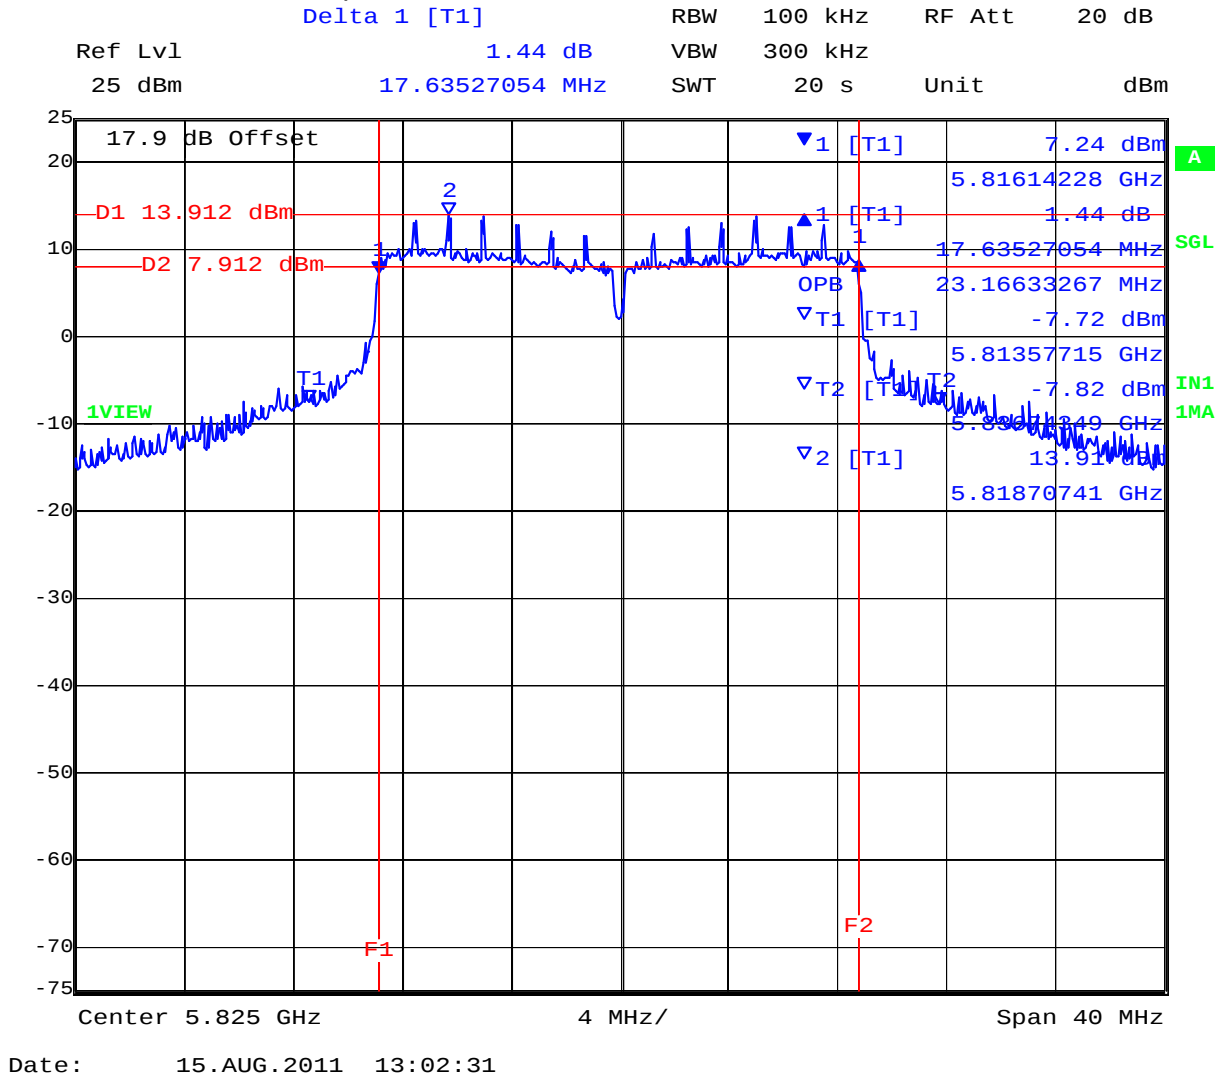


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 81 of 279

PORT C 5,825 MHz 802.11n HT-20 6 dB and 99% Bandwidth

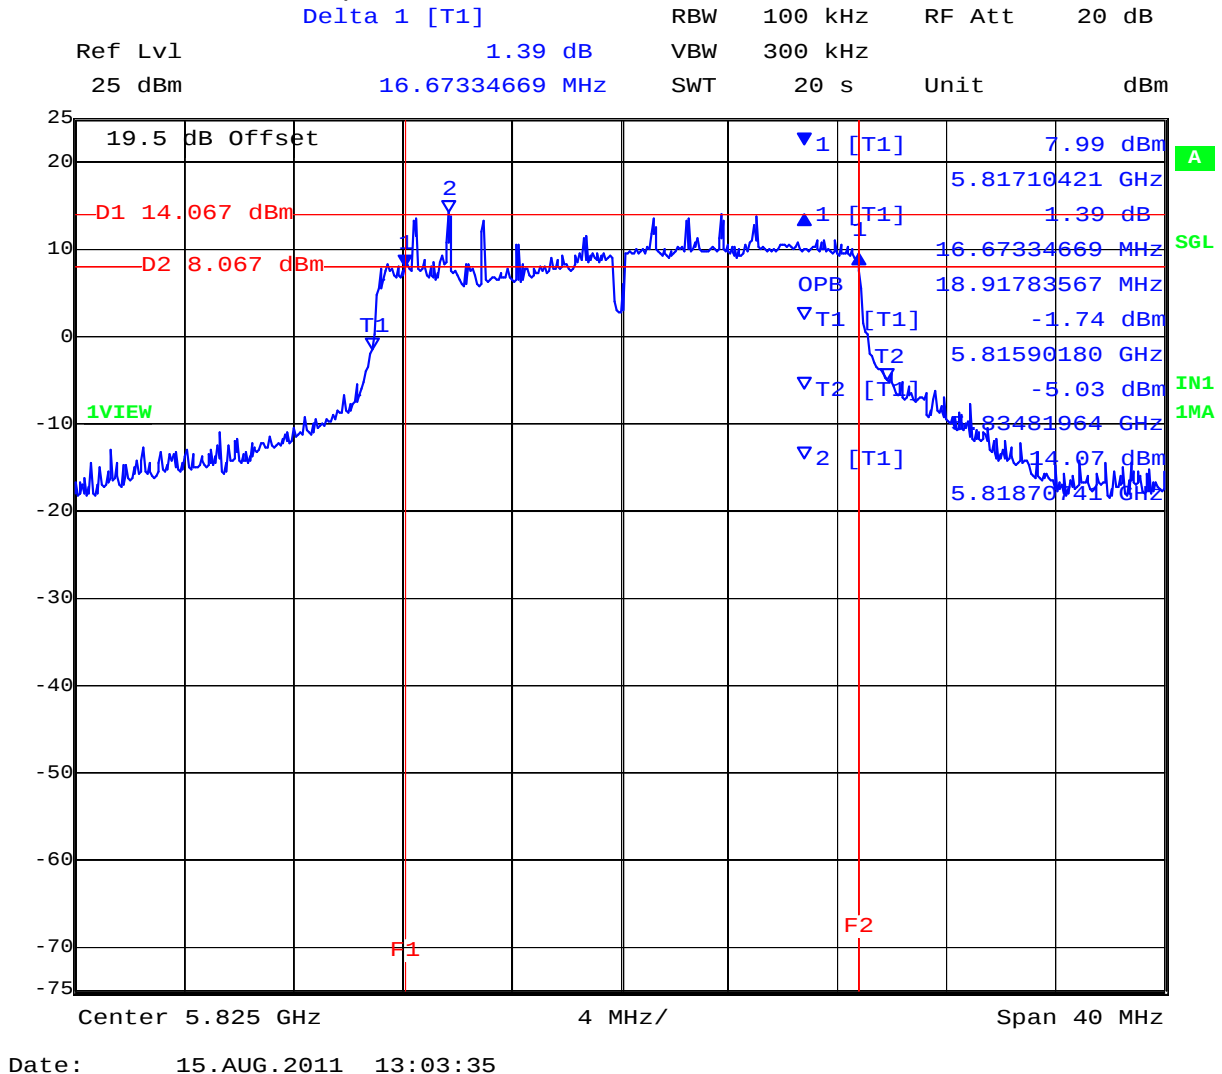

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 82 of 279

TABLE OF RESULTS – 802.11n - HT-40

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.00 Vdc		
Notes 1:			
Notes 2:			

6 dB Bandwidth

6 dB Bandwidth							
Test Frequency	6 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz						
MHz	a	b	c	d	kHz	MHz	MHz
5755	36.553000	36.553000	35.591000	--	500	0.5	-35.091000
5795	36.553000	35.912000	35.752000	--			-35.252000

99% Bandwidth

99 % Bandwidth							
Test Frequency	MHz						
MHz	a	b	c	d			
5755	50.020000	41.523000	36.874000	--			
5795	57.395000	51.944000	42.164000	--			


Measurement uncertainty:	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 83 of 279

PORTA 5,755 MHz 802.11n HT-40 6 dB and 99% Bandwidth

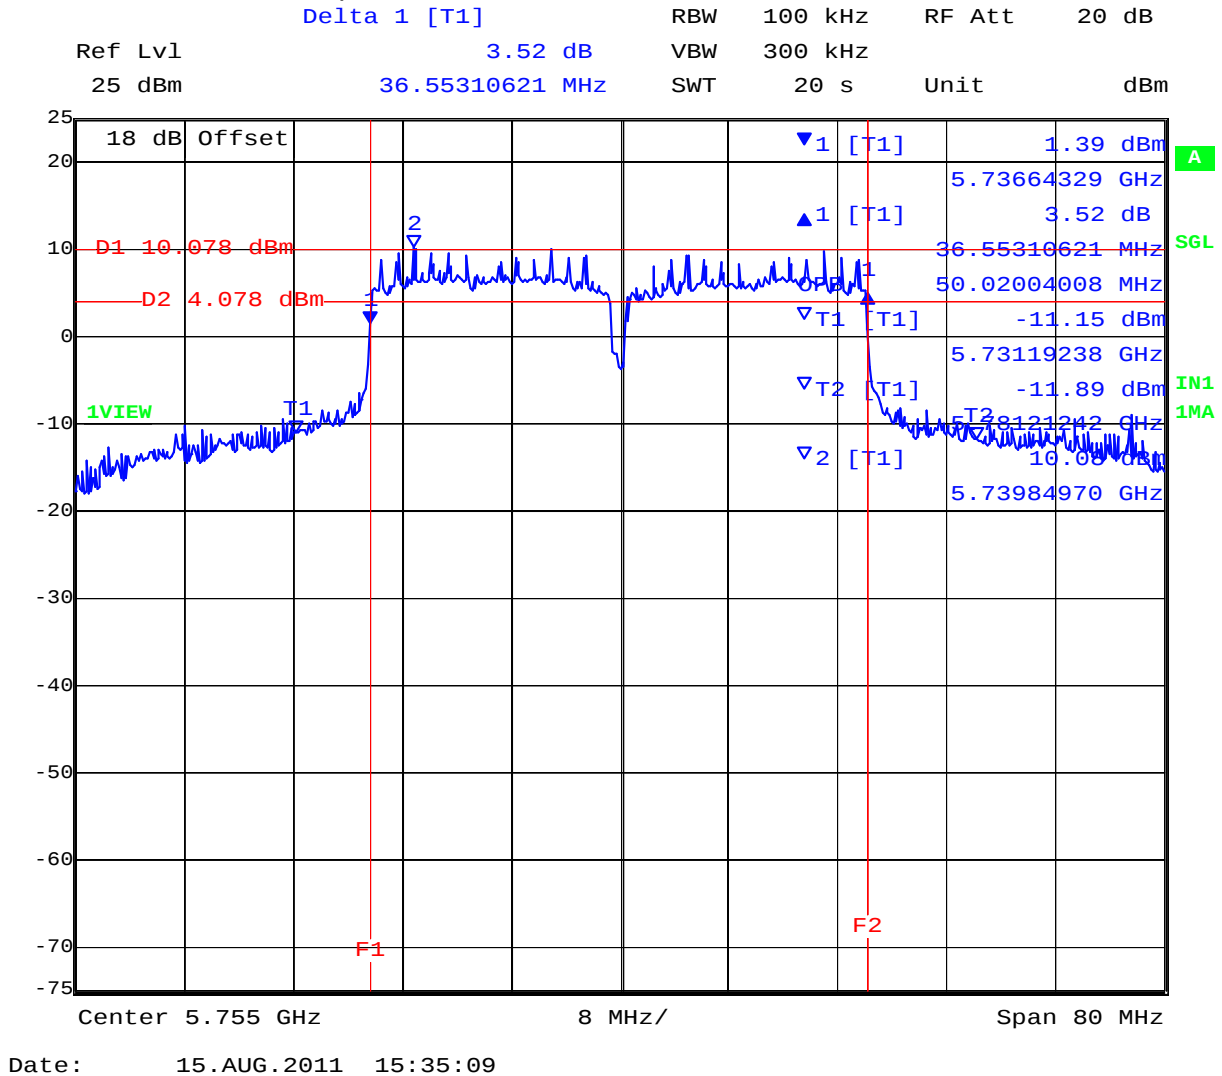


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 84 of 279

PORTB 5,755 MHz 802.11n HT-40 6 dB and 99% Bandwidth

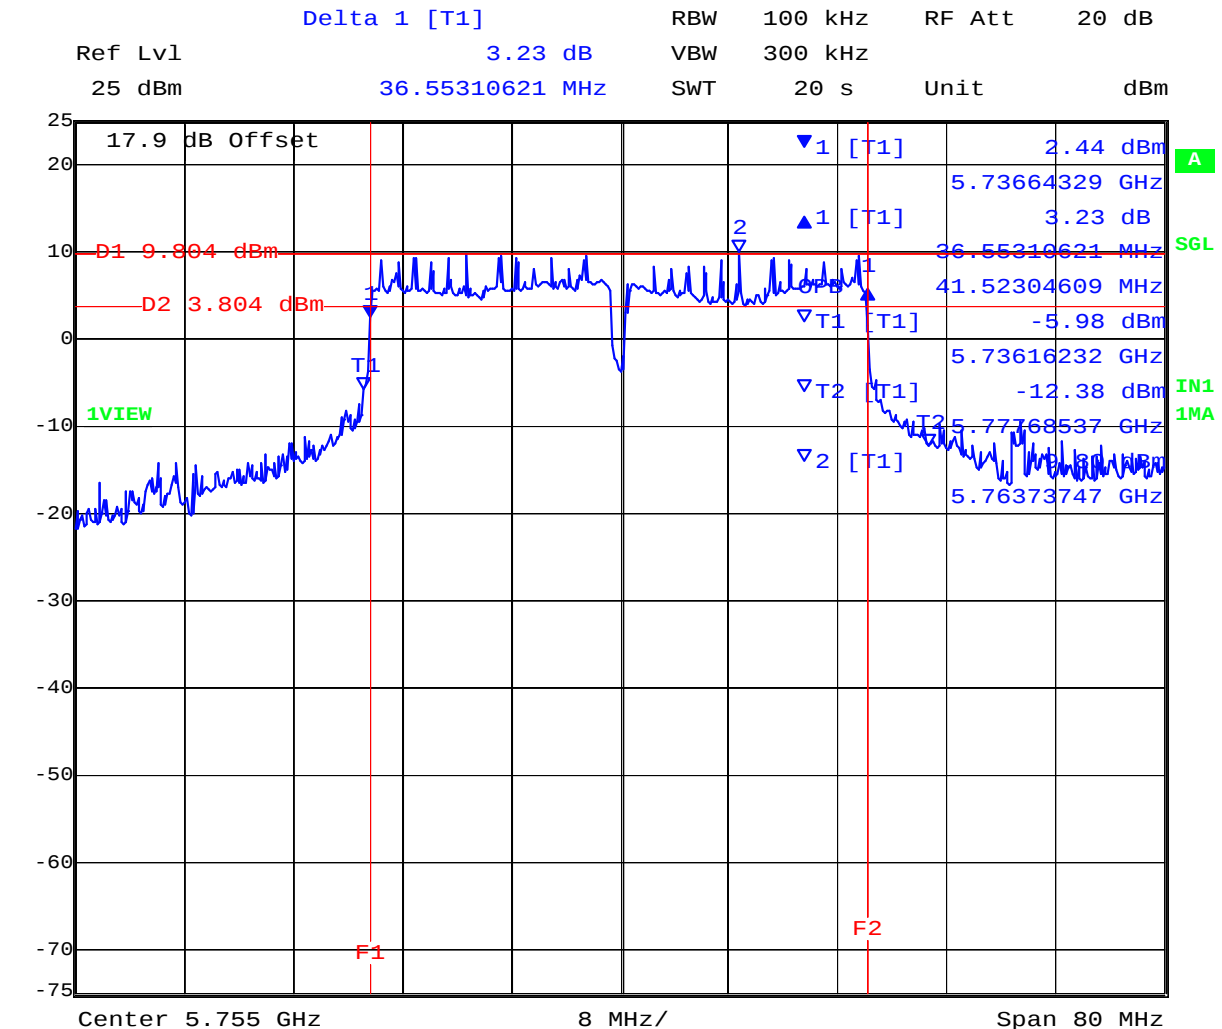


Date: 15.AUG.2011 15:36:12

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 85 of 279

PORT C 5,755 MHz 802.11n HT-40 6 dB and 99% Bandwidth

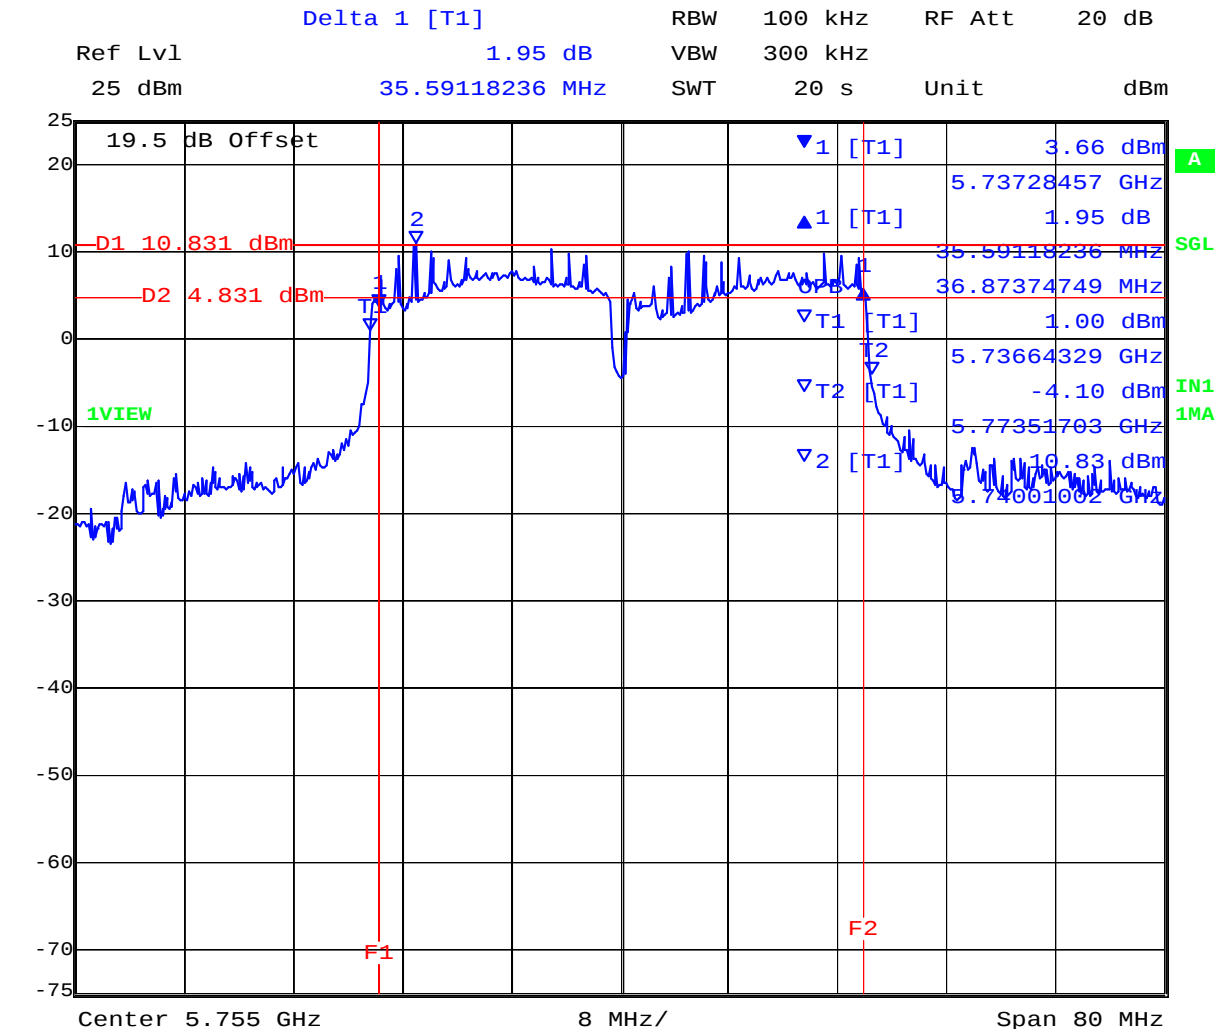


Date: 15.AUG.2011 15:37:16

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 86 of 279

PORT A 5,795 MHz 802.11n HT-40 6 dB and 99% Bandwidth

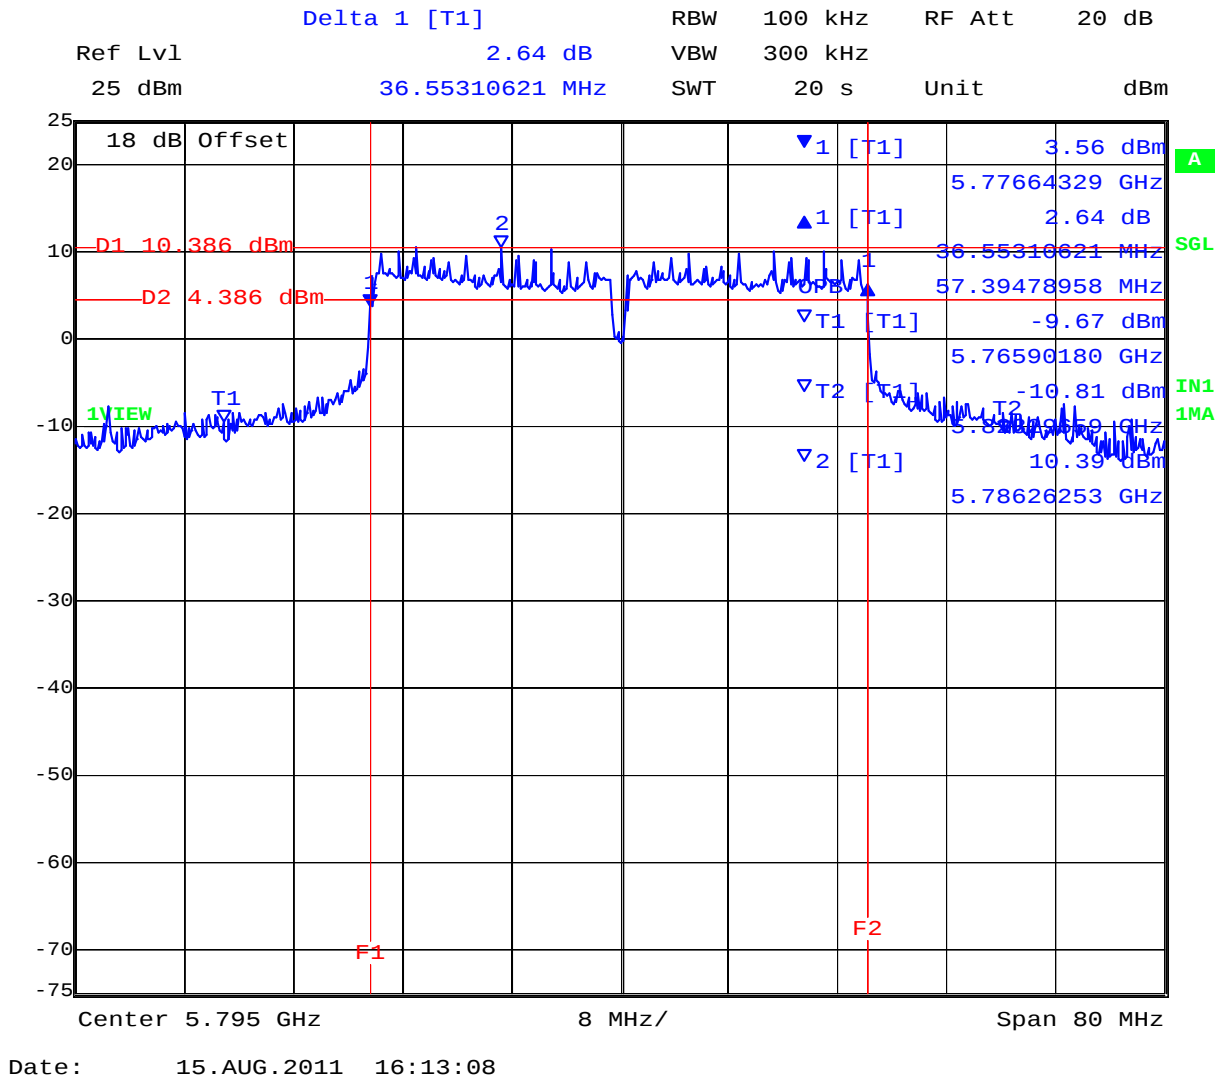


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 87 of 279

PORT B 5,795 MHz 802.11n HT-40 6 dB and 99% Bandwidth

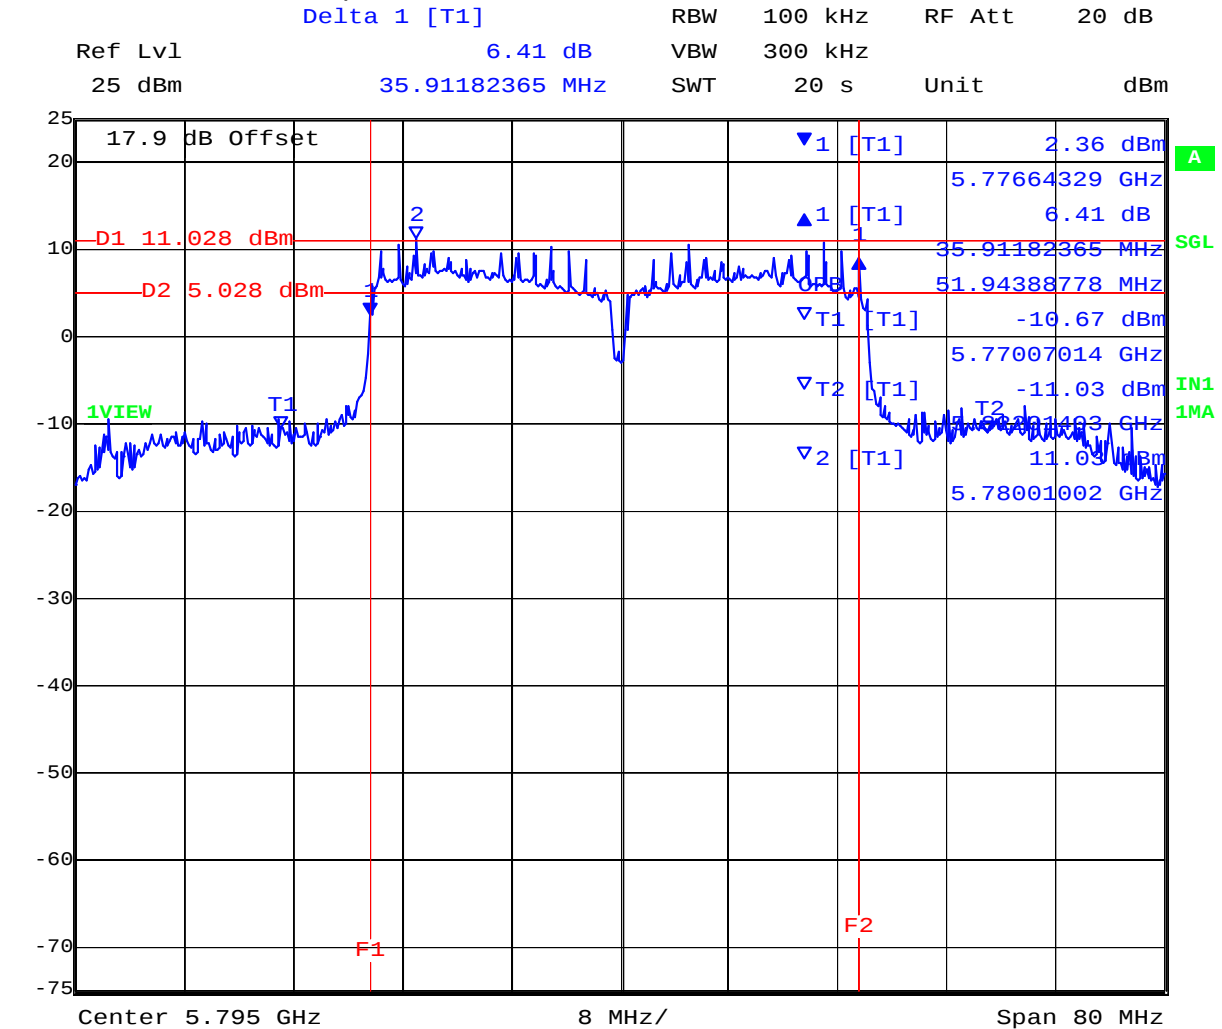


Date: 15.AUG.2011 16:14:11

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 88 of 279

PORT C 5,795 MHz 802.11n HT-40 6 dB and 99% Bandwidth

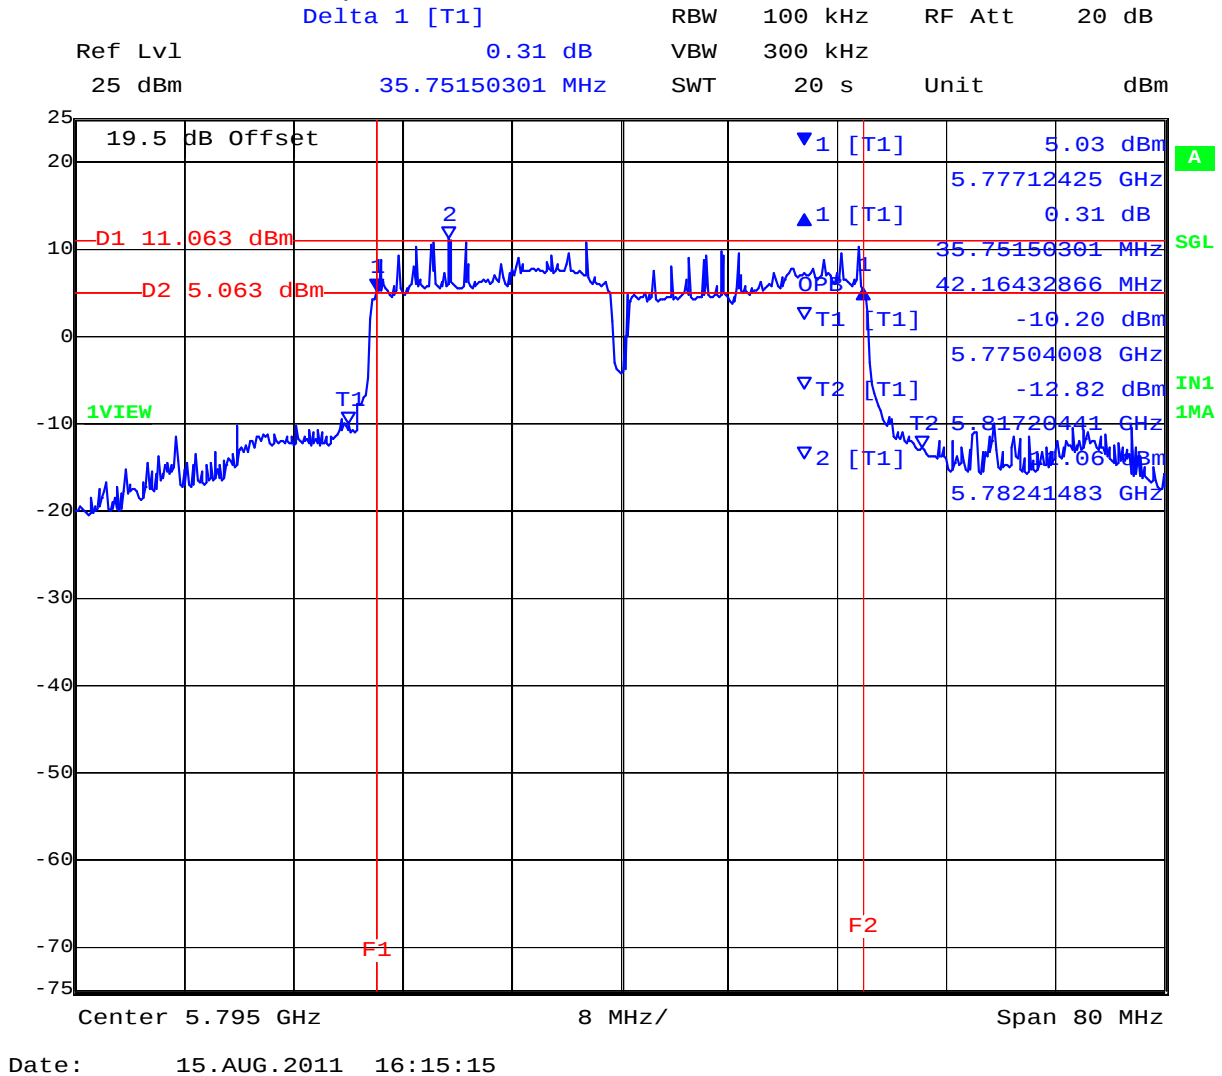

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 89 of 279

Specification

Limits

§15.247 (a)(2) & RSS-210 §A8.2(1)

The minimum 6 dB bandwidth shall be at least 500 kHz.

§ IC RSS-Gen 4.4.1 Occupied Bandwidth When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

§ IC RSS-Gen 4.4.2 6 dB Bandwidth Where indicated, the 6 dB bandwidth is measured at the points when the spectral density of the signal is 6 dB down from the in-band spectral density of the modulated signal, with the transmitter modulated by a representative signal.

Laboratory Measurement Uncertainty for Spectrum Measurement

Measurement uncertainty	±2.81 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Spectrum Mask'	0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.2. Peak Output Power


FCC, Part 15 Subpart C §15.247(b)(3), §15.31(e)

Industry Canada RSS-210 §A8.4(4)

Test Procedure

The transmitter terminal of EUT was connected to the input of the spectrum analyzer set to measure peak power. The resolution filter bandwidth was set to 6 dB, peak detector selected and the analyzer built-in power function was used to measure peak power over the 99 % bandwidth.

Test Measurement Set up

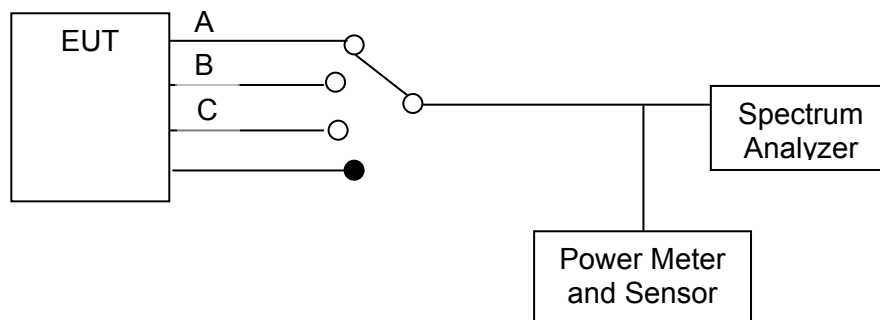

Measurement set up for Transmitter Peak Output Power

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier

Power: Maximum Default Power

Calculated Power = A + G + 10 log (1/x) dBm

A = Total Power [$10 \log_{10} (10^{a/10} + 10^{b/10})$], G = Antenna Gain,
x = Duty Cycle

NOTE: KDB 662911 was implemented for In-band power measurements. The measure and sum technique was implemented in all cases.



15.247 (c) Operation with directional antenna gains greater than 6 dBi.
If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

MIMO Operation

2.4 GHz MIMO (Non-Legacy Operation)

Antenna	Gain	Max. Allowable Conducted Peak Power (dBm)		Maximum EIRP
(dB)	(dBi)	Non-Beam Forming	Beam Forming	(dBm)
Integral	2.0	+30.0	N/A	+36.0

5.8 GHz MIMO Operation (Non-Legacy Operation)

Antenna	Gain	Max. Allowable Conducted Peak Power (dBm)		Maximum EIRP
(dB)	(dBi)	Non-Beam Forming	Beam Forming	(dBm)
Integral	5.0	+30.0	N/A	+36.0

Non-MIMO Operation

2.4 GHz Non-MIMO Operation (Legacy)

Antenna	Gain dBi	Antenna Gain Increase V's No. Antenna Ports		Total Gain	Max. Allowable Conducted Peak Power	Maximum EIRP
(dB)		Ports	dB	dBi	(dBm)	(dBm)
Integral	3.0	3	4.77	7.77	+28.23	+36.0

5.8 GHz Non-MIMO Operation (Legacy)

Antenna	Gain dBi	Antenna Gain Increase V's No. Antenna Ports		Total Gain	Max. Allowable Conducted Peak Power	Maximum EIRP
(dB)		Ports	dB	dBi	(dBm)	(dBm)
Integral	5.0	3	4.77	9.77	+26.23	+36.0



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 92 of 279

TABLE OF RESULTS – 802.11b – Legacy

Test Conditions:	15.247 (b)	Rel. Humidity (%):	35	to	42
Variant:	802.11b	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A	dB	Antenna Gain:	2 dBi	
Applied Voltage:	48.00	Vdc			
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	Combined	Calculated	dBm	dB
2412	18.34	17.37	17.75	--	N/A	22.61	28.23	-5.62
2437	21.34	20.71	20.73	--	N/A	25.71	28.23	-2.52
2462	17.98	18.20	18.11	--	N/A	22.87	28.23	-5.36

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 93 of 279

TABLE OF RESULTS – 802.11g – Legacy

Test Conditions:	15.247 (b)		Rel. Humidity (%):	35	to	42
Variant:	802.11g		Ambient Temp. (°C):	19	to	22
TPC:	HIGH		Pressure (mBars):	998	to	1003
Modulation:	ON		Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A	dB	Antenna Gain:	2 dBi		
Applied Voltage:	48.00	Vdc				
Notes 1:						
Notes 2:						

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	Combined	Calculated	dBm	dB
2412	15.10	14.83	14.70	--	N/A	19.65	28.23	-8.58
2437	20.67	20.14	20.04	--	N/A	25.06	28.23	-3.17
2462	14.45	14.38	14.50	--	N/A	19.21	28.23	-9.02

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 94 of 279

TABLE OF RESULTS – 802.11n – HT-20

Test Conditions:	15.247 (b)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	2 dBi		
Applied Voltage:	48.00 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	Combined	Calculated	dBm	dB
2412	13.55	13.25	13.22	--	N/A	18.11	30.00	-11.89
2437	20.54	20.05	19.79	--	N/A	24.91	30.00	-5.09
2462	14.39	14.33	14.36	--	N/A	19.13	30.00	-10.87

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 95 of 279

TABLE OF RESULTS – 802.11n – HT-40

Test Conditions:	15.247 (b)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A	dB	Antenna Gain:	2 dBi	
Applied Voltage:	48.00	Vdc			
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	Combined	Calculated	dBm	dB
2422	12.77	12.44	12.70	--	N/A	17.41	30.00	-12.59
2437	19.27	18.87	19.34	--	N/A	23.94	30.00	-6.06
2452	12.90	12.68	13.18	--	N/A	17.70	30.00	-12.30

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 96 of 279

5.8 GHz Band

TABLE OF RESULTS – 802.11a – Legacy

Test Conditions:	15.247 (b)	Rel. Humidity (%):	35	to	42
Variant:	802.11a	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3		dBi
Applied Voltage:	48.00 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)							
5745	a	b	c	d	Combined	Calculated	dBm	dB
5745	20.12	19.68	19.22	--	N/A	24.46	26.23	-1.77
5785	20.28	19.71	19.68	--	N/A	24.67	26.23	-1.56
5825	20.16	19.96	19.52	--	N/A	24.66	26.23	-1.57

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 97 of 279

TABLE OF RESULTS – 802.11n – HT-20
Maximum Conducted Power

Test Conditions:	15.247 (b)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi		
Applied Voltage:	48.00 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	Combined	Calculated	dBm	dB
5745	23.59	23.32	23.17	--	N/A	28.13	30.00	-1.87
5785	23.90	23.69	23.64	--	N/A	28.52	30.00	-1.48
5825	23.65	23.44	23.39	--	N/A	28.27	30.00	-1.73

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 98 of 279

TABLE OF RESULTS – 802.11n – HT-40
Maximum Conducted Power

Test Conditions:	15.247 (b)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3		dBi
Applied Voltage:	48.00 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	Combined	Calculated	dBm	dB
5755	23.50	23.04	22.93	--	N/A	27.93	30.00	-2.07
5795	23.77	22.43	23.23	--	N/A	27.95	30.00	-2.05

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 99 of 279

Specification

Limits

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands: 1.0 watt.

15.247 (b) (4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

15.247 (c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

§15.31 (e) For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

§ RSS-210 A8.4(4) For systems employing digital modulation techniques operating in the 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz bands the maximum peak conducted power shall not exceed 1 watt.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 100 of 279

Laboratory Measurement Uncertainty for Power Measurements

Measurement uncertainty	± 1.33 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5.1.3. Peak Power Spectral Density

FCC, Part 15 Subpart C §15.247(e)
Industry Canada RSS-210 §A8.2

Test Procedure

The transmitter output was connected to a spectrum analyzer and the maximum level in a 3 kHz bandwidth was measured. A peak value was found over the full emission bandwidth and the frequency span reduced to obtain enhanced resolution. Sweep time $\geq$ span / 3 kHz with video averaging turned off. The Peak Power Spectral Density is the highest level found across the emission in a 3 kHz resolution bandwidth.

Test Measurement Set up

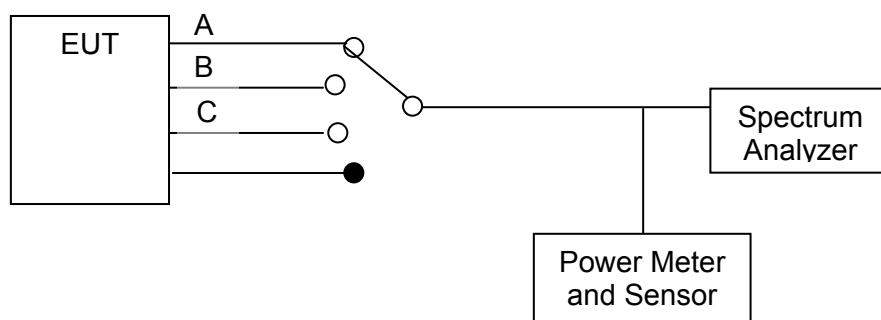

Measurement set up for Peak Power Spectral Density

Measurement Results for Peak Power Spectral Density

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier

Power: Maximum Default Power

NOTE: KDB 662911 was implemented for In-band power spectral density (PSD) measurements. Option (2) Measure and add 10 log (N) dB was implemented



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 102 of 279

Peak Power Spectral Density

TABLE OF RESULTS – 802.11b

Test Conditions:	15.247 (e)	Rel. Humidity (%):	35	to	42
Variant:	802.11b	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain	N/A dB	Antenna Gain:	2 dBi		
Applied Voltage:	48.00 Vdc	Antenna Ports (N):	3		
Notes 1:					
Notes 2:					

Test Frequency	Measured Power Density				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
2412.000	-1.50	-2.38	-2.40	--	4.77	3.28	8.00	-4.72
2437.000	-2.26	-2.53	-2.67	--	4.77	2.51	8.00	-5.49
2462.000	-2.43	-2.82	-3.11	--	4.77	2.34	8.00	-5.66


Measurement uncertainty:	± 1.33 dB
---------------------------------	-----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 103 of 279

PORT A 2,412 MHz 802.11b - Peak Power Spectral Density

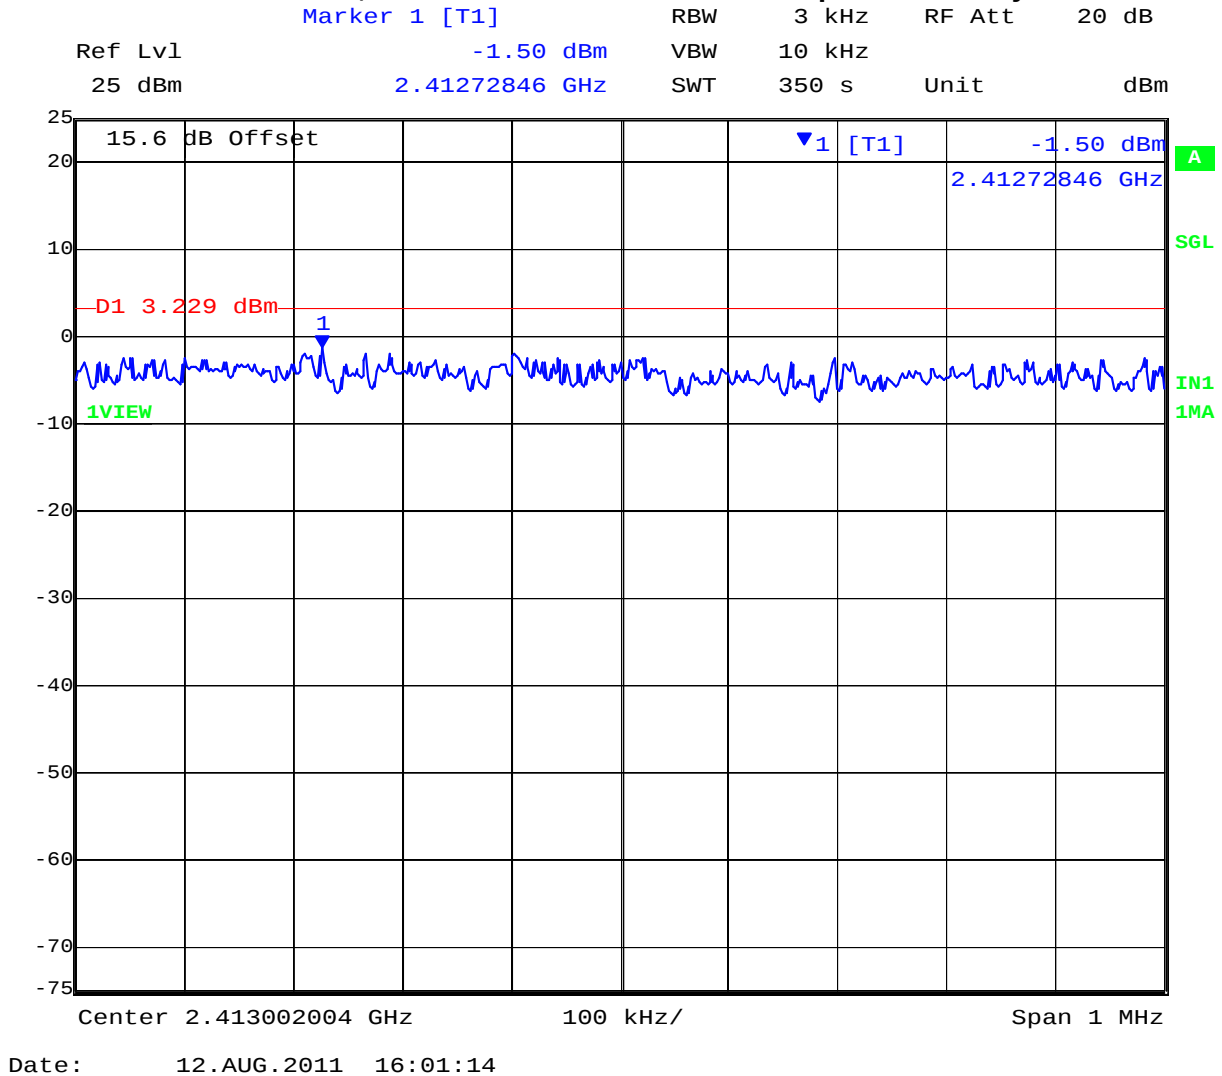


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 104 of 279

PORT B 2,412 MHz 802.11b - Peak Power Spectral Density

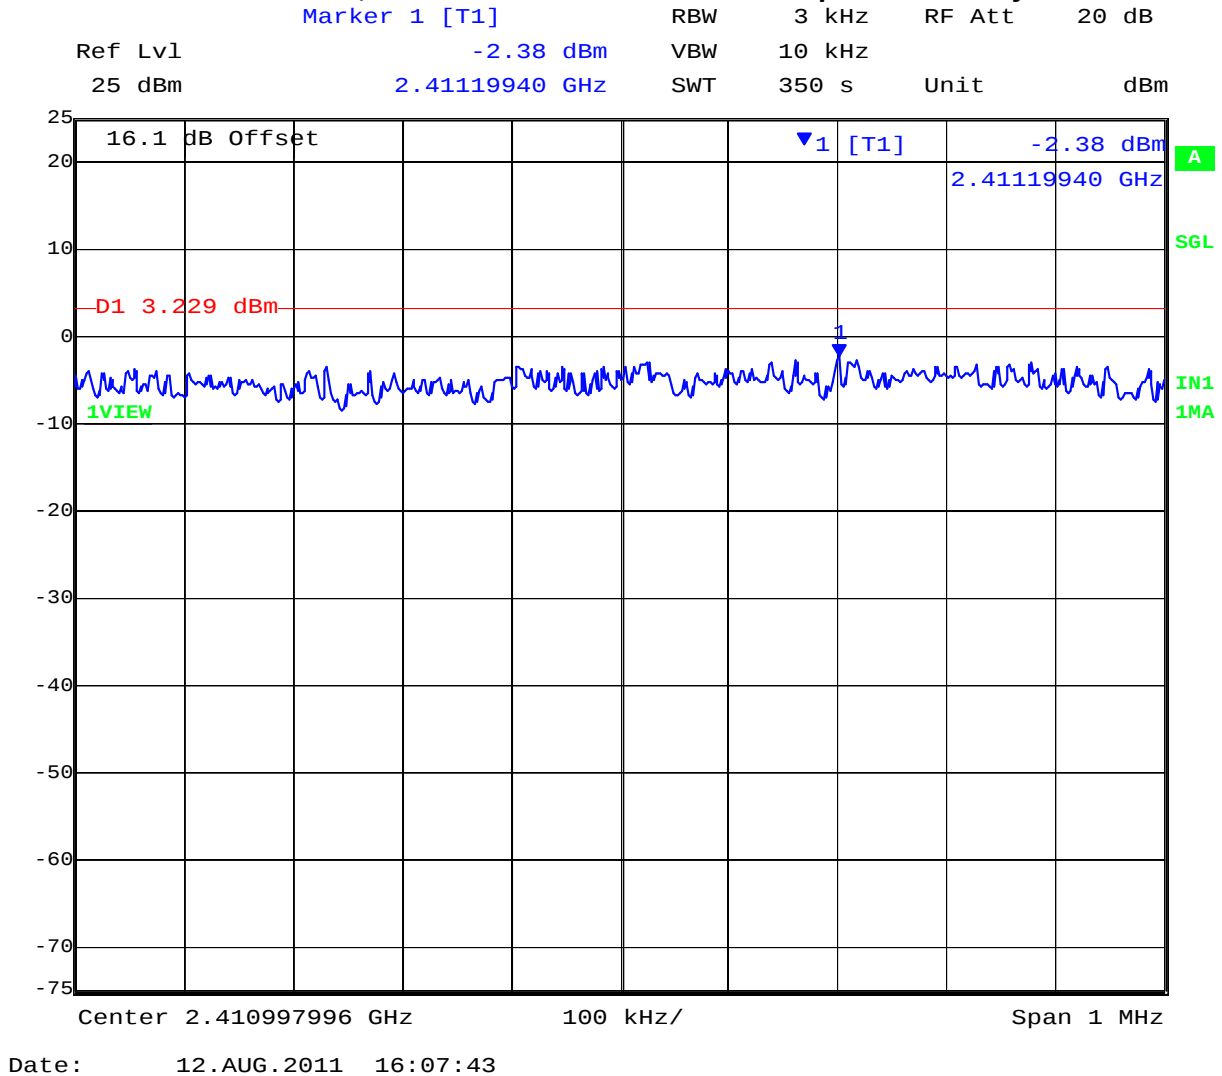


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 105 of 279

PORT C 2,412 MHz 802.11b - Peak Power Spectral Density

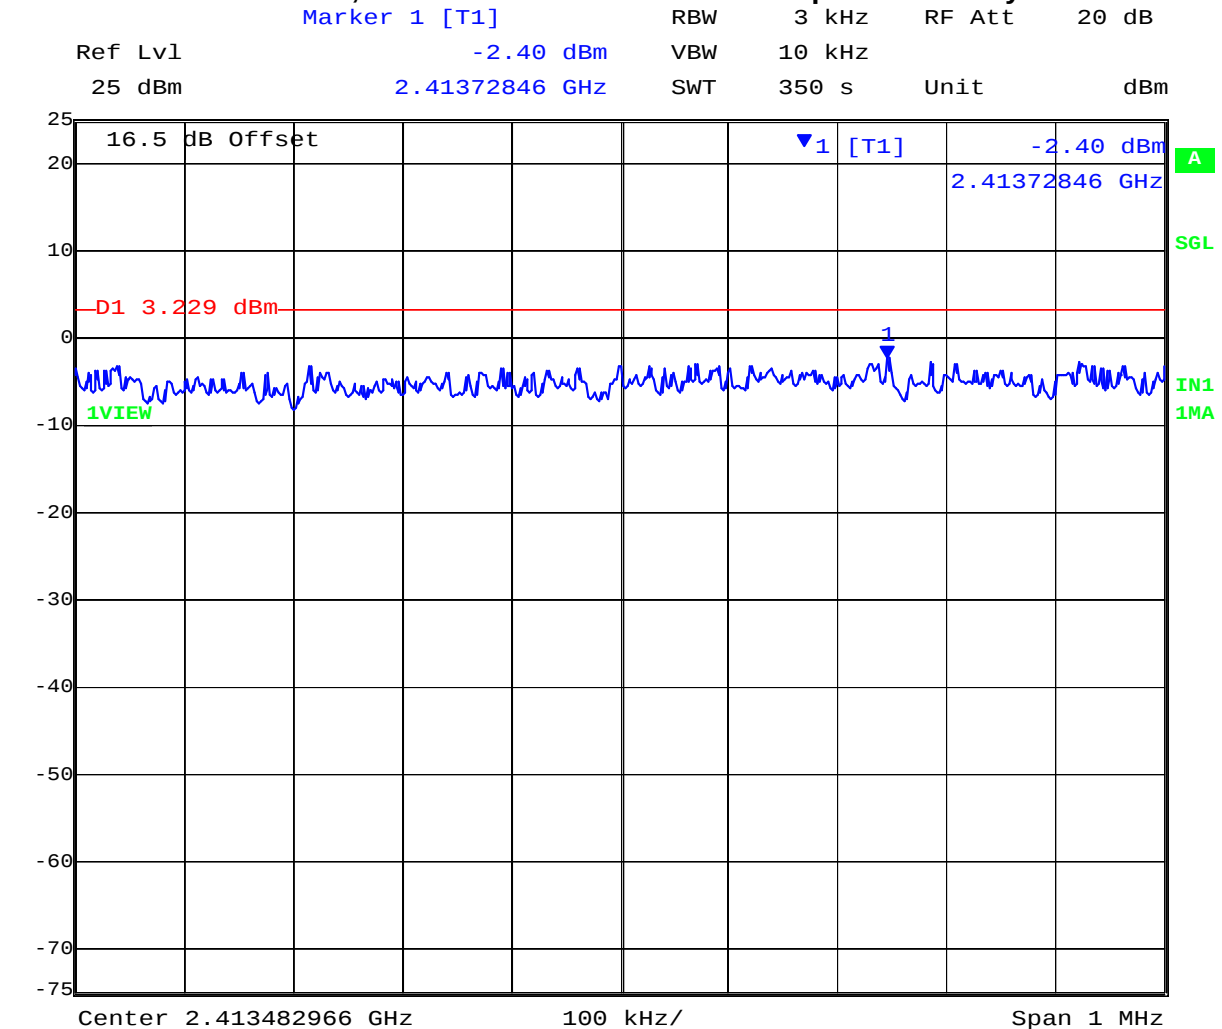


Date: 12.AUG.2011 16:14:12

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 106 of 279

PORT A 2,437 MHz 802.11b - Peak Power Spectral Density

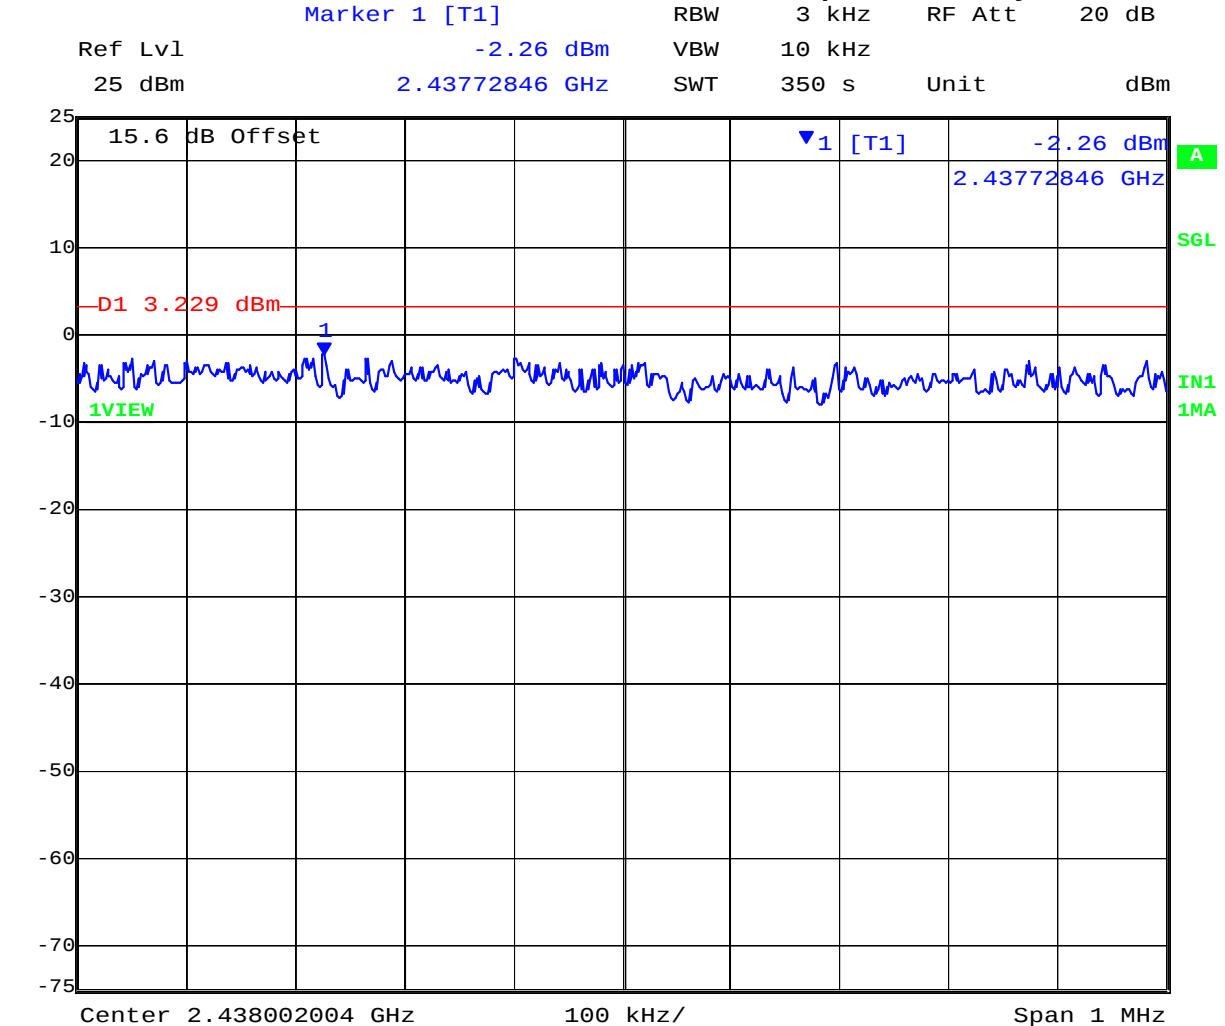


Date: 12.AUG.2011 16:30:28

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 107 of 279

PORT B 2,437 MHz 802.11b - Peak Power Spectral Density

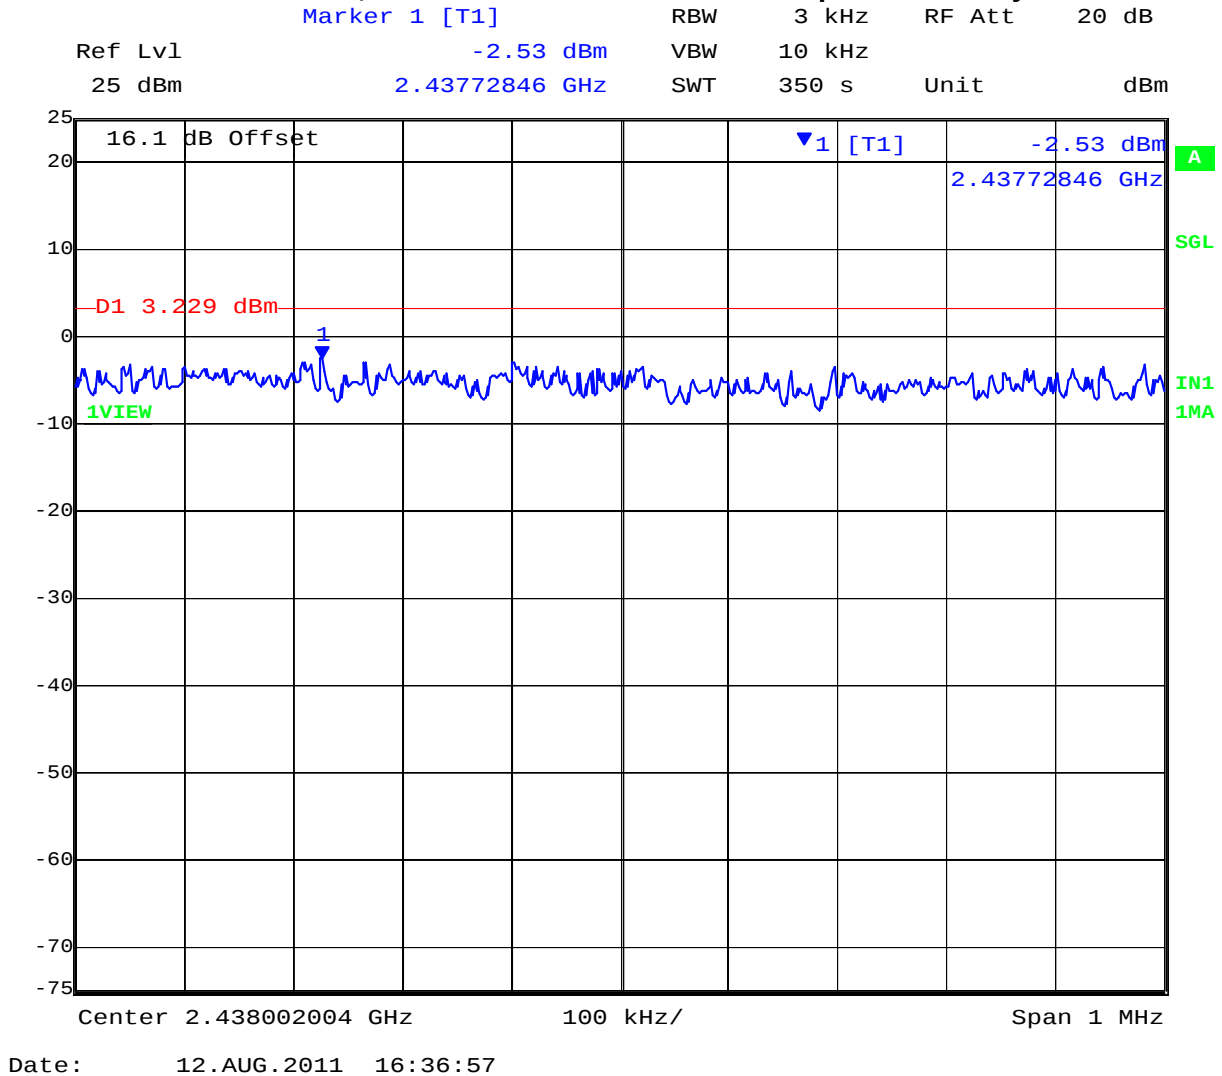


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 108 of 279

PORT C 2,437 MHz 802.11b - Peak Power Spectral Density

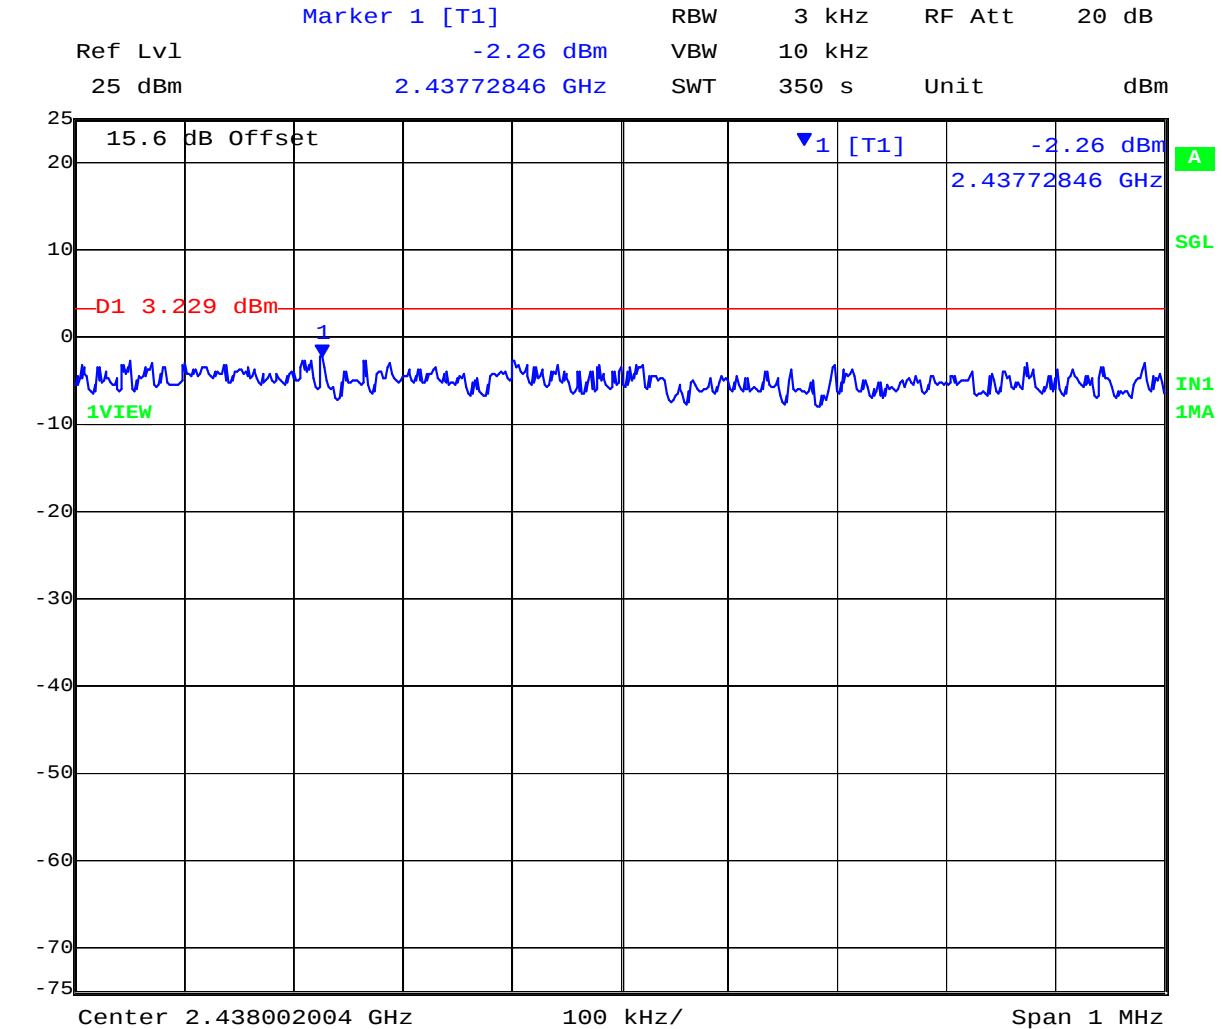


Date: 12.AUG.2011 16:30:28

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 109 of 279

PORT A 2,462 MHz 802.11b - Peak Power Spectral Density

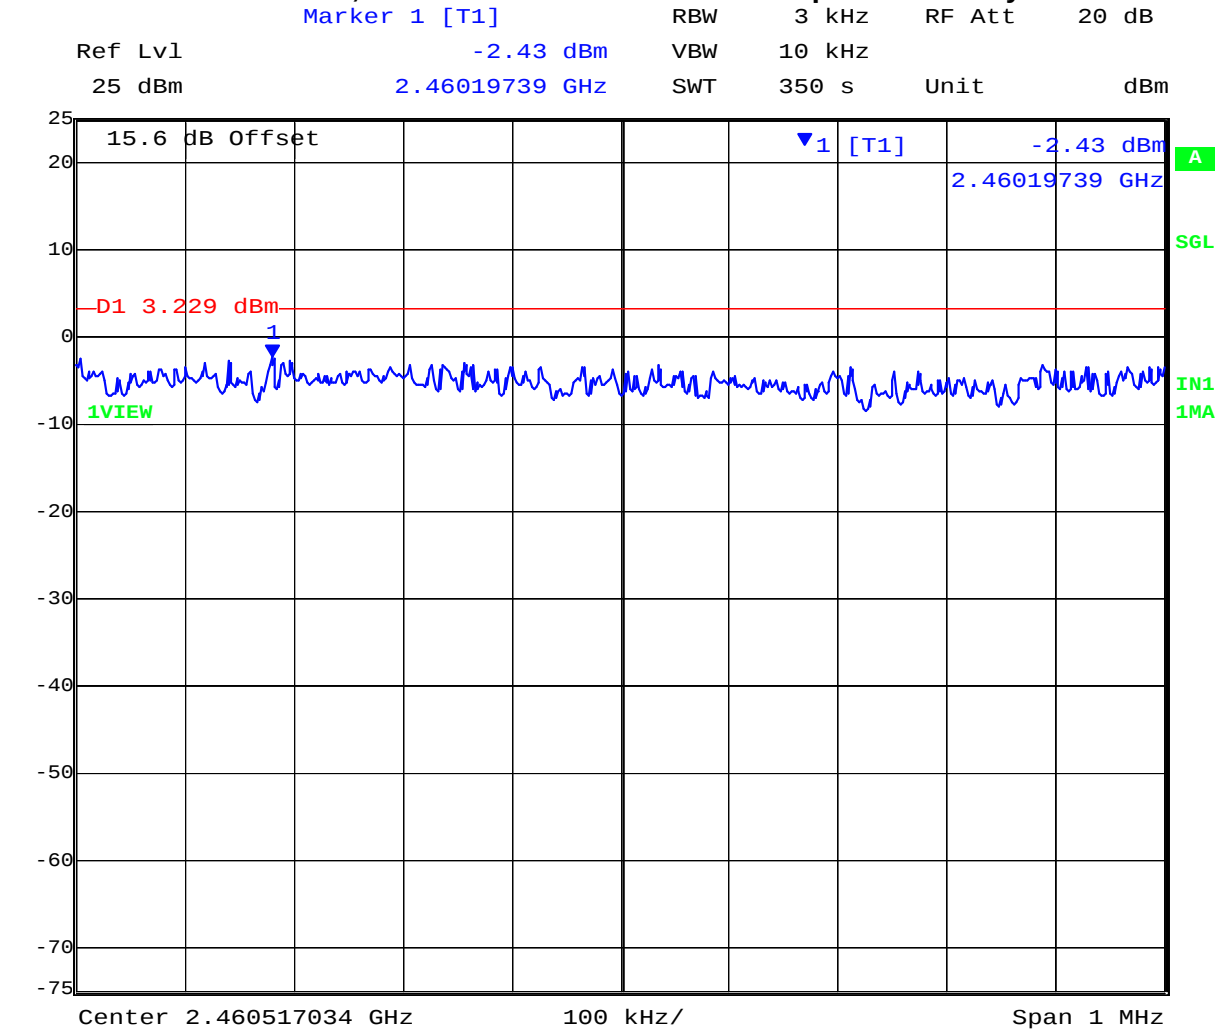


Date: 12.AUG.2011 17:03:33

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 110 of 279

PORT B 2,462 MHz 802.11b - Peak Power Spectral Density

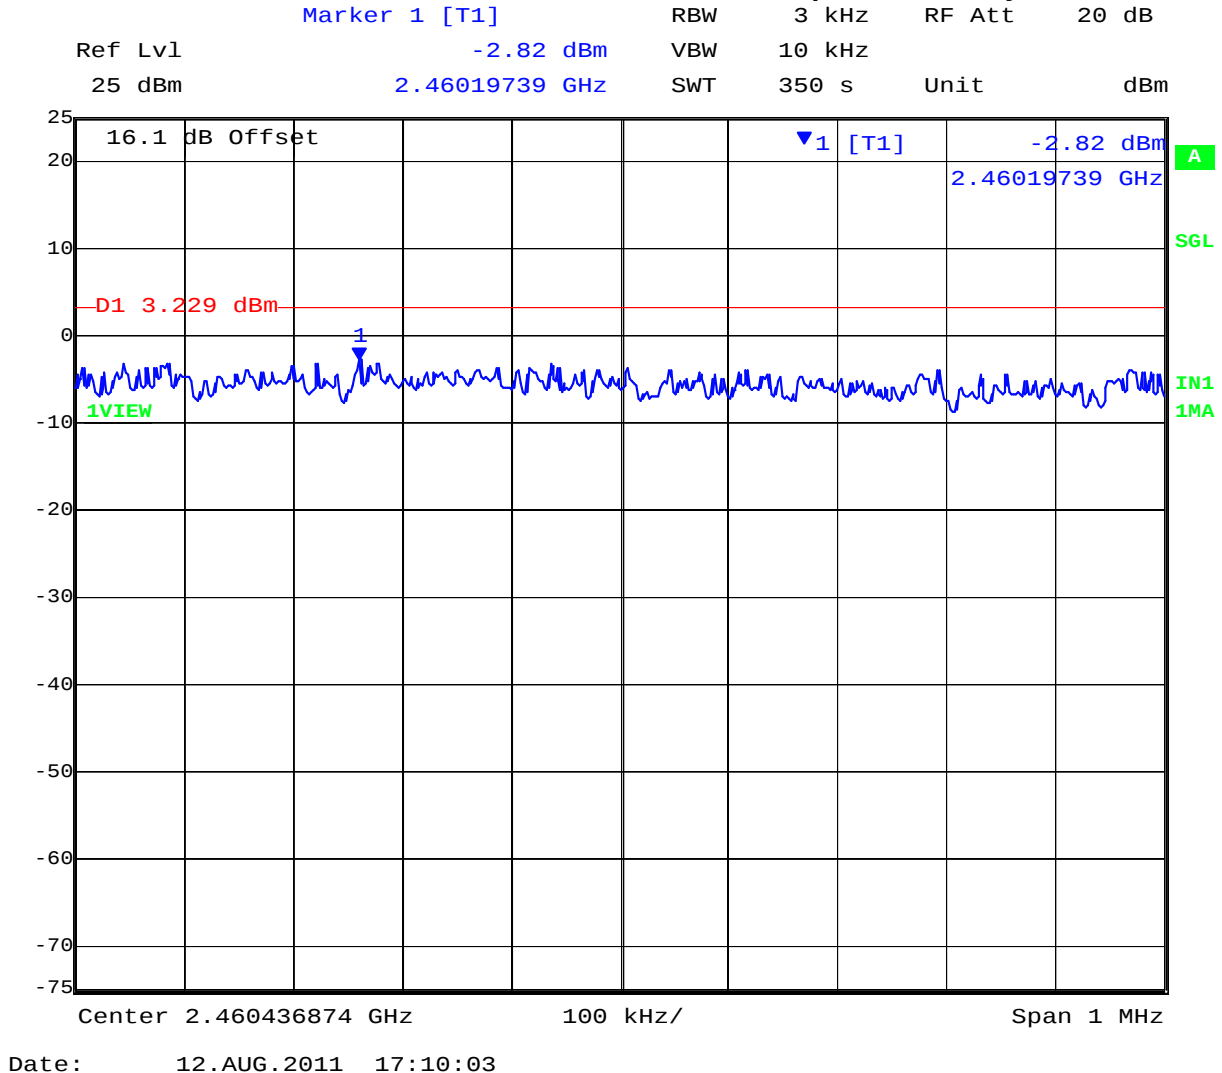


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 111 of 279

PORT C 2,462 MHz 802.11b - Peak Power Spectral Density

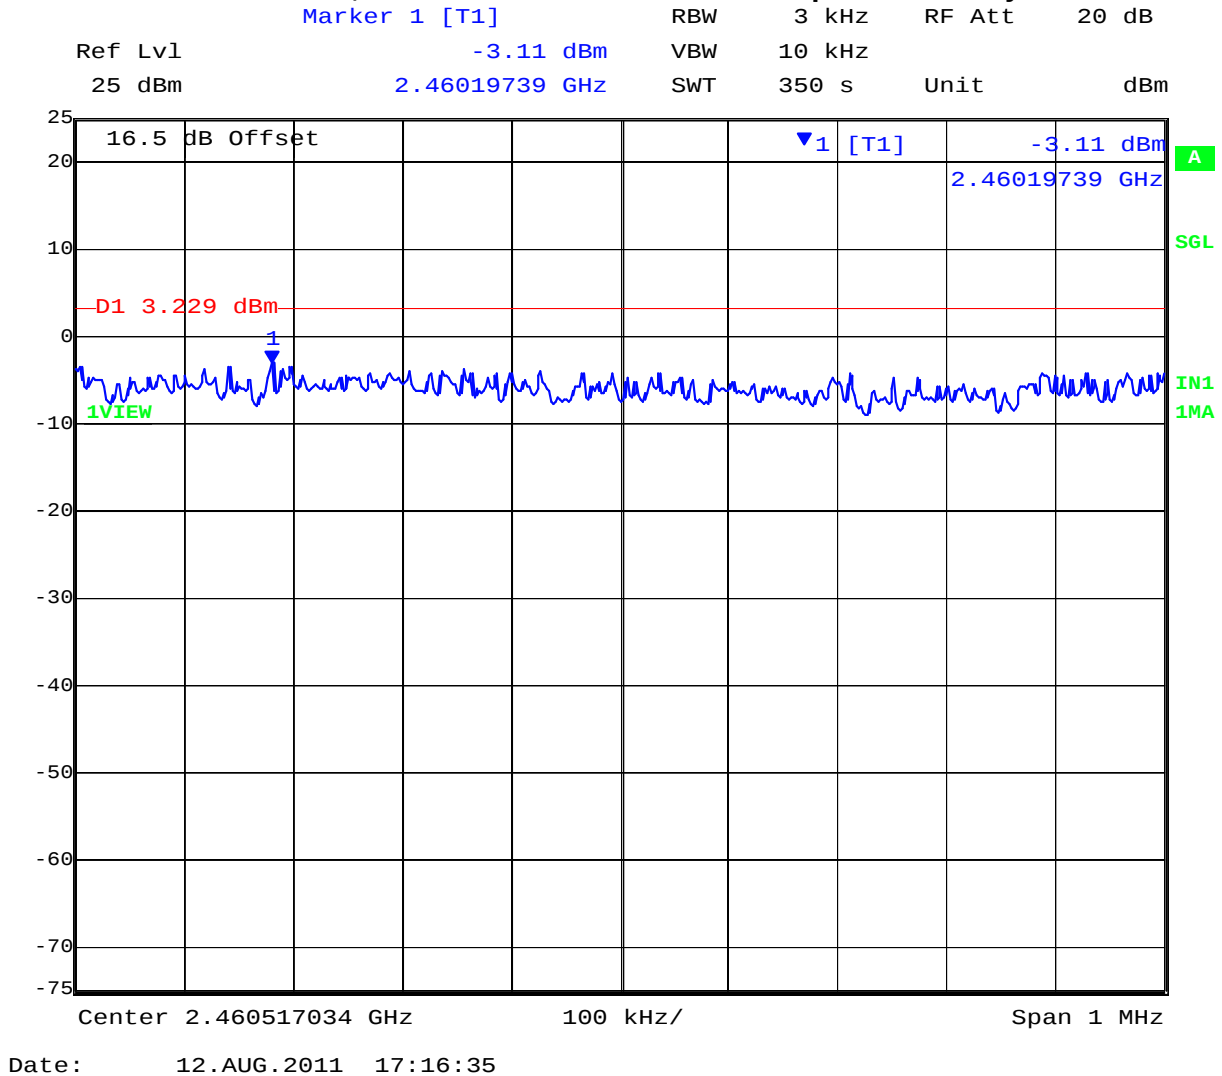

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 112 of 279

Peak Power Spectral Density

TABLE OF RESULTS – 802.11g Legacy

Test Conditions:	15.247 (e)	Rel. Humidity (%):	35	to	42
Variant:	802.11g	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain	N/A dB	Antenna Gain:	2 dBi		
Applied Voltage:	48.00 Vdc	Antenna Ports (N):	3		
Notes 1:					
Notes 2:					

Test Frequency	Measured Power Density				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
2412.000	-3.32	-3.30	-3.21	--	4.77	1.56	8.00	-6.44
2437.000	-3.55	-3.52	-3.04	--	4.77	1.73	8.00	-6.27
2462.000	-3.64	-4.11	-3.25	--	4.77	1.53	8.00	-6.47


Measurement uncertainty:	± 1.33 dB
---------------------------------	-----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 113 of 279

PORT A 2,412 MHz 802.11g Legacy - Peak Power Spectral Density

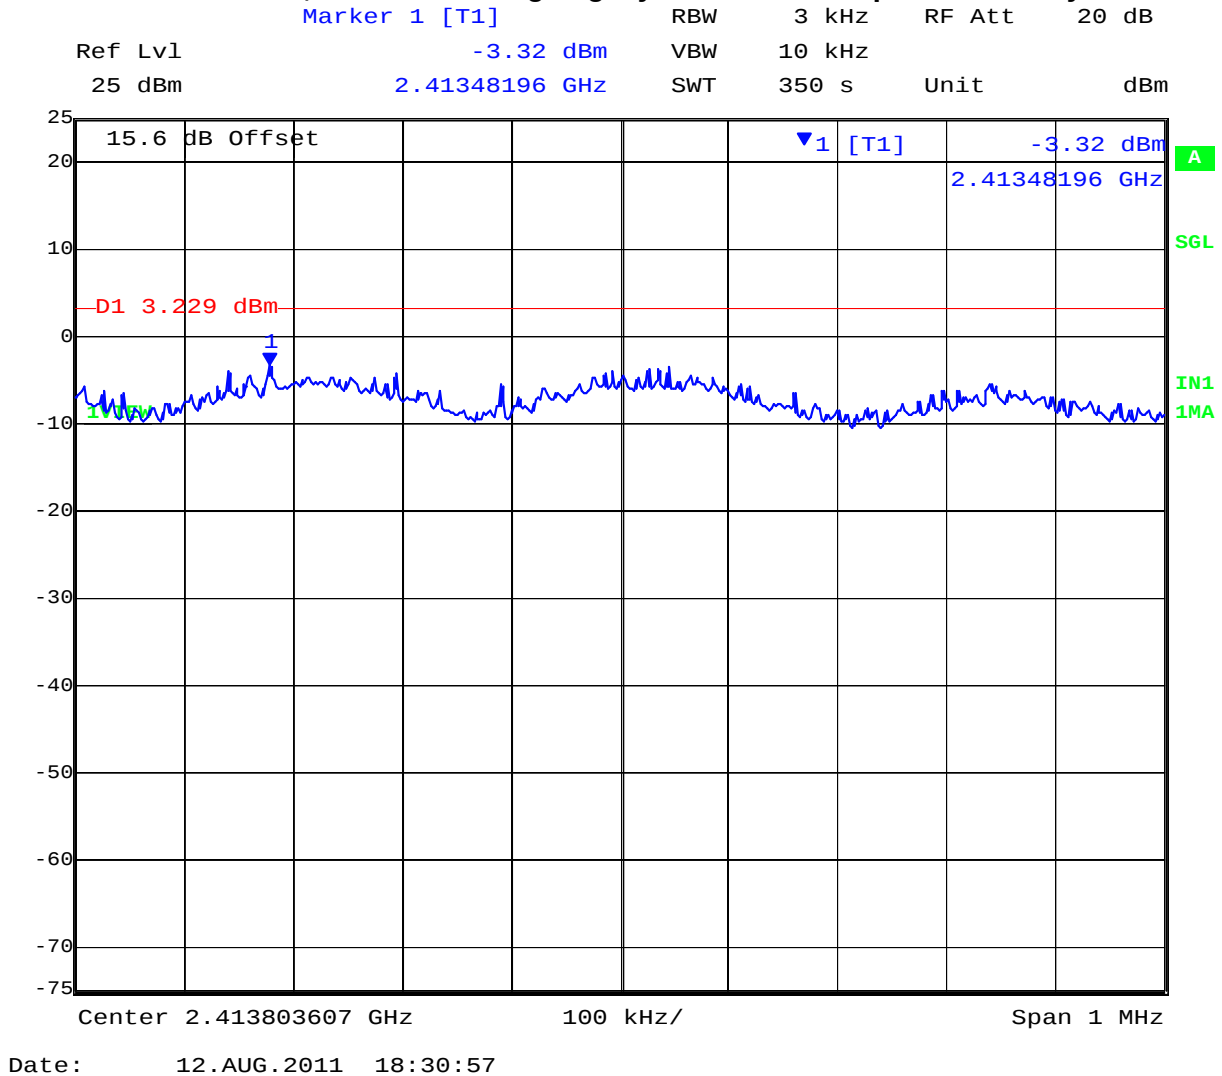


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 114 of 279

PORT B 2,412 MHz 802.11g Legacy - Peak Power Spectral Density

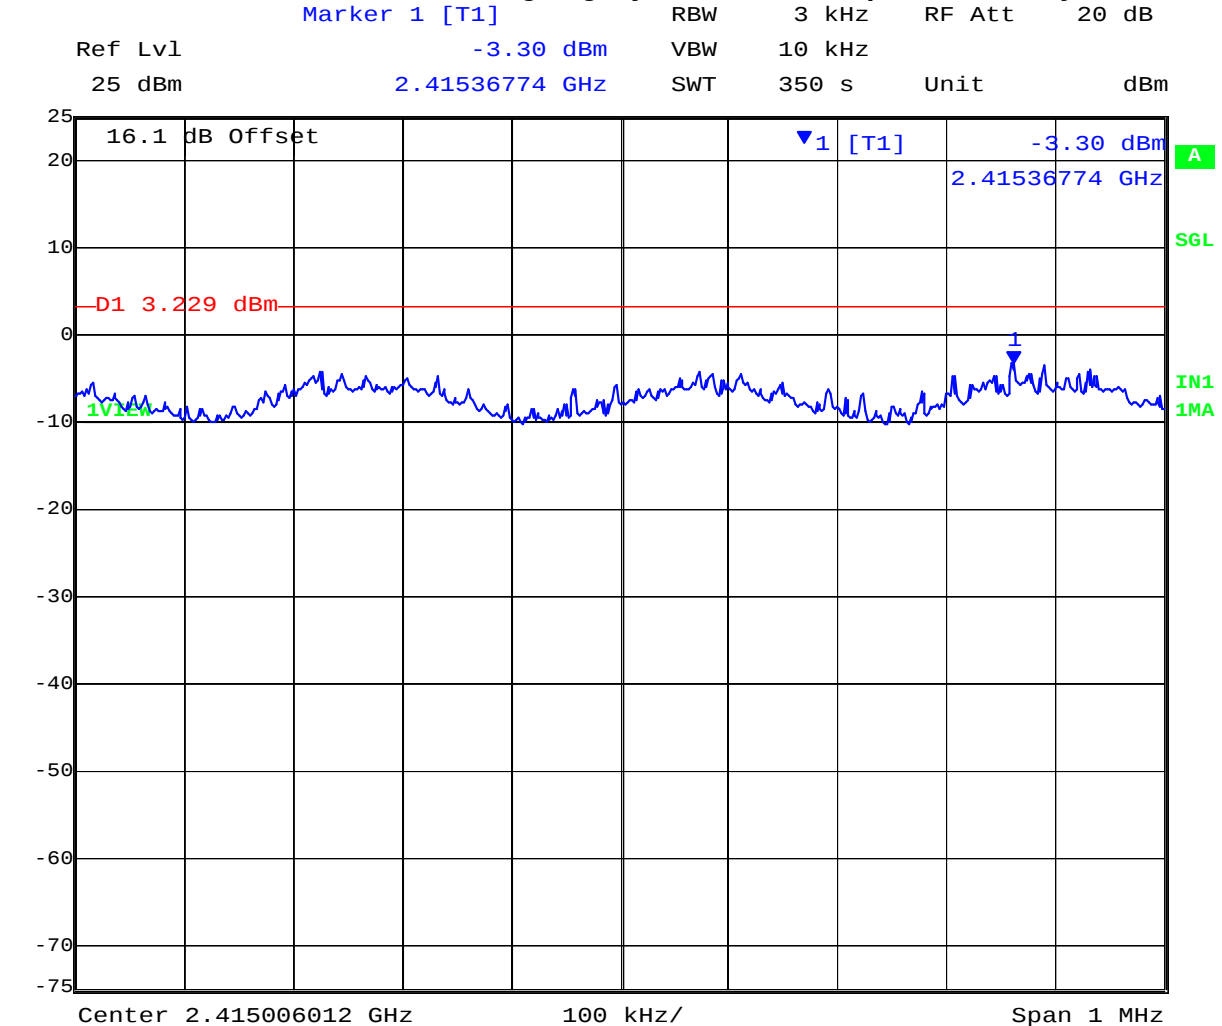


Date: 12.AUG.2011 18:37:25

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 115 of 279

PORT C 2,412 MHz 802.11g Legacy - Peak Power Spectral Density

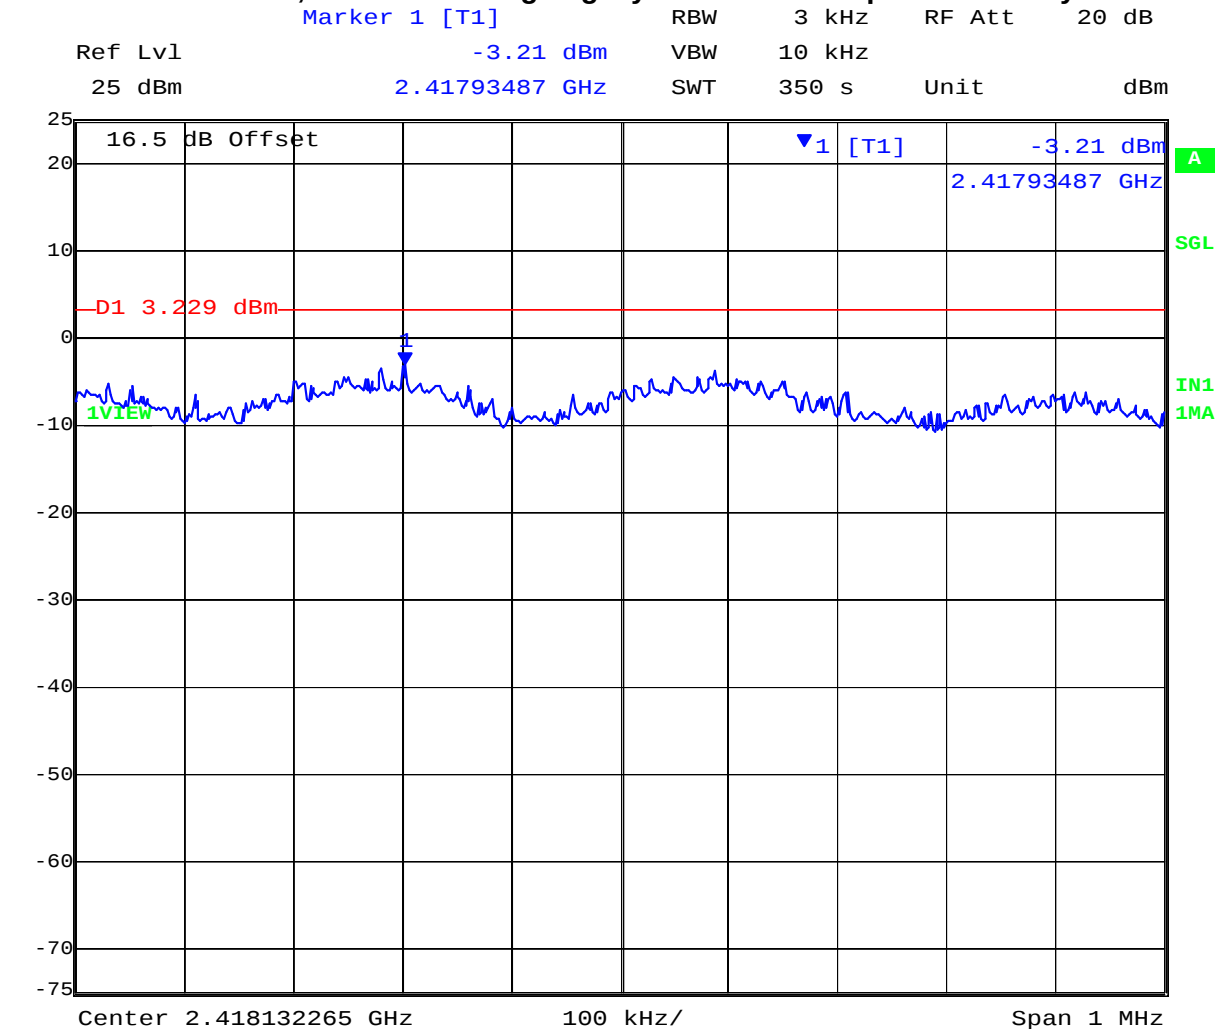


Date: 12.AUG.2011 18:43:56

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 116 of 279

PORT A 2,437 MHz 802.11g Legacy - Peak Power Spectral Density

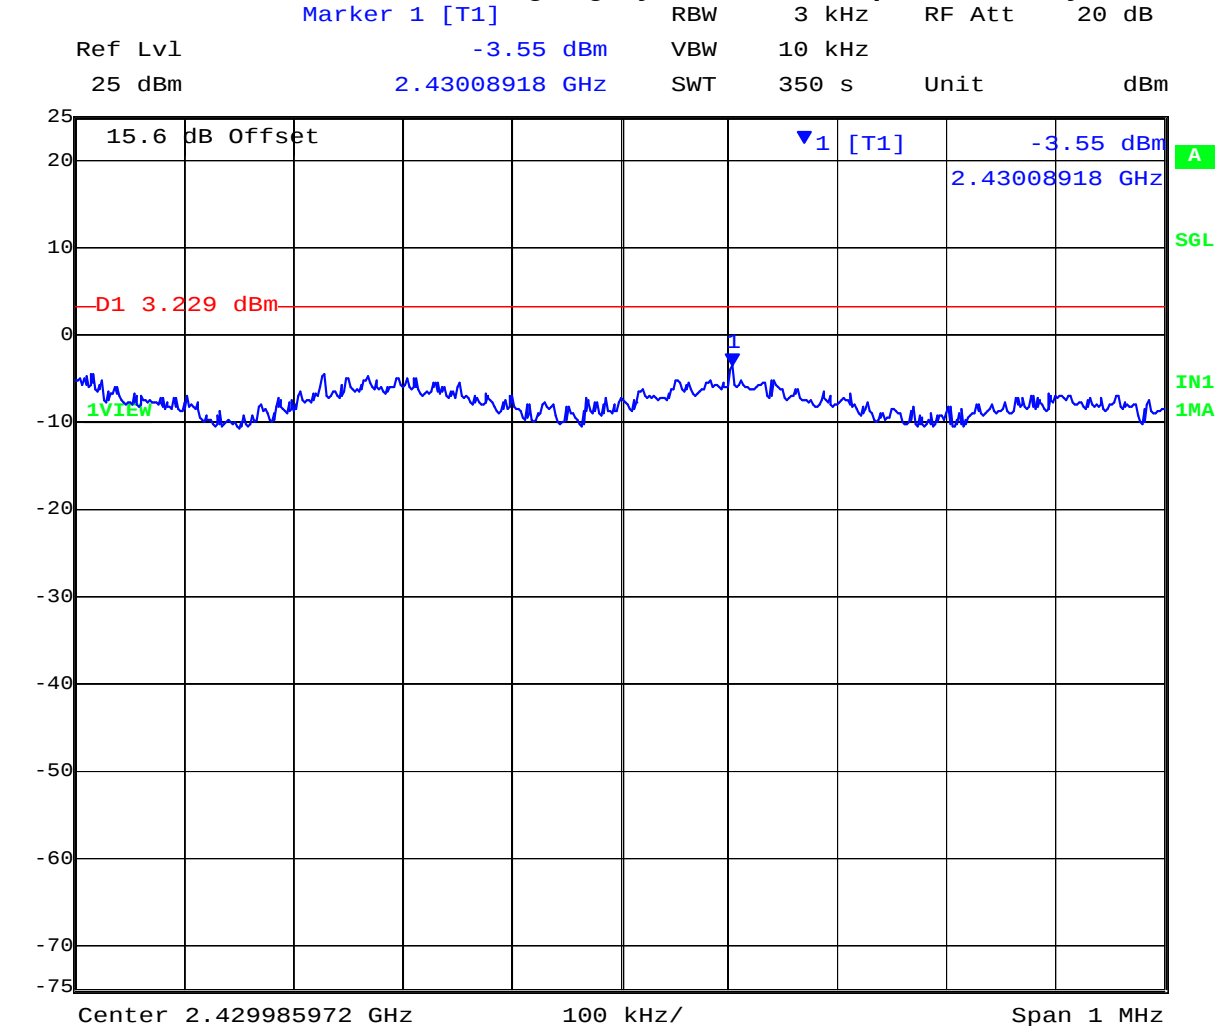


Date: 12.AUG.2011 19:52:26

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 117 of 279

PORT B 2,437 MHz 802.11g Legacy - Peak Power Spectral Density

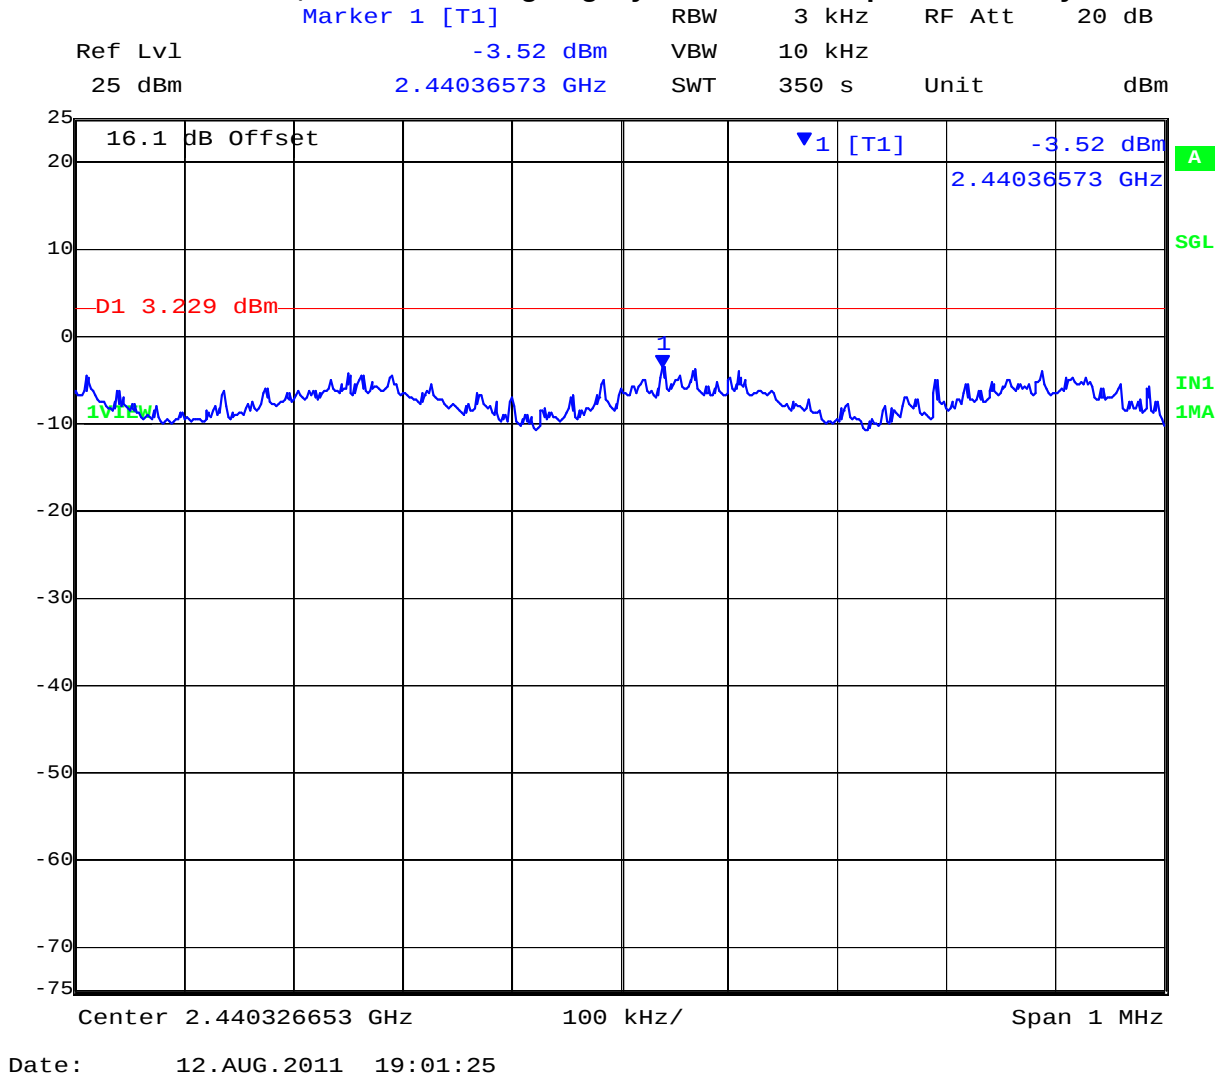

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

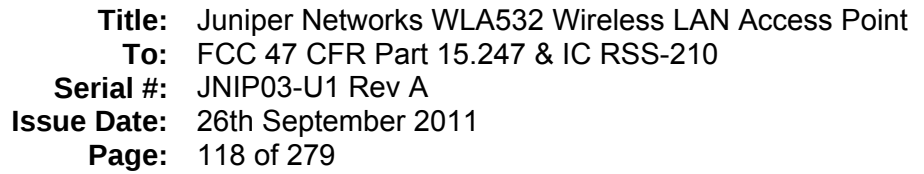


MiCOM Labs, 440 Boulder Court, Suite 200, Pleasanton, CA 94566 USA, Phone: 925.462.0304, Fax: 925.462.0306, www.micomlabs.com



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 119 of 279

PORT A 2,462 MHz 802.11g Legacy - Peak Power Spectral Density

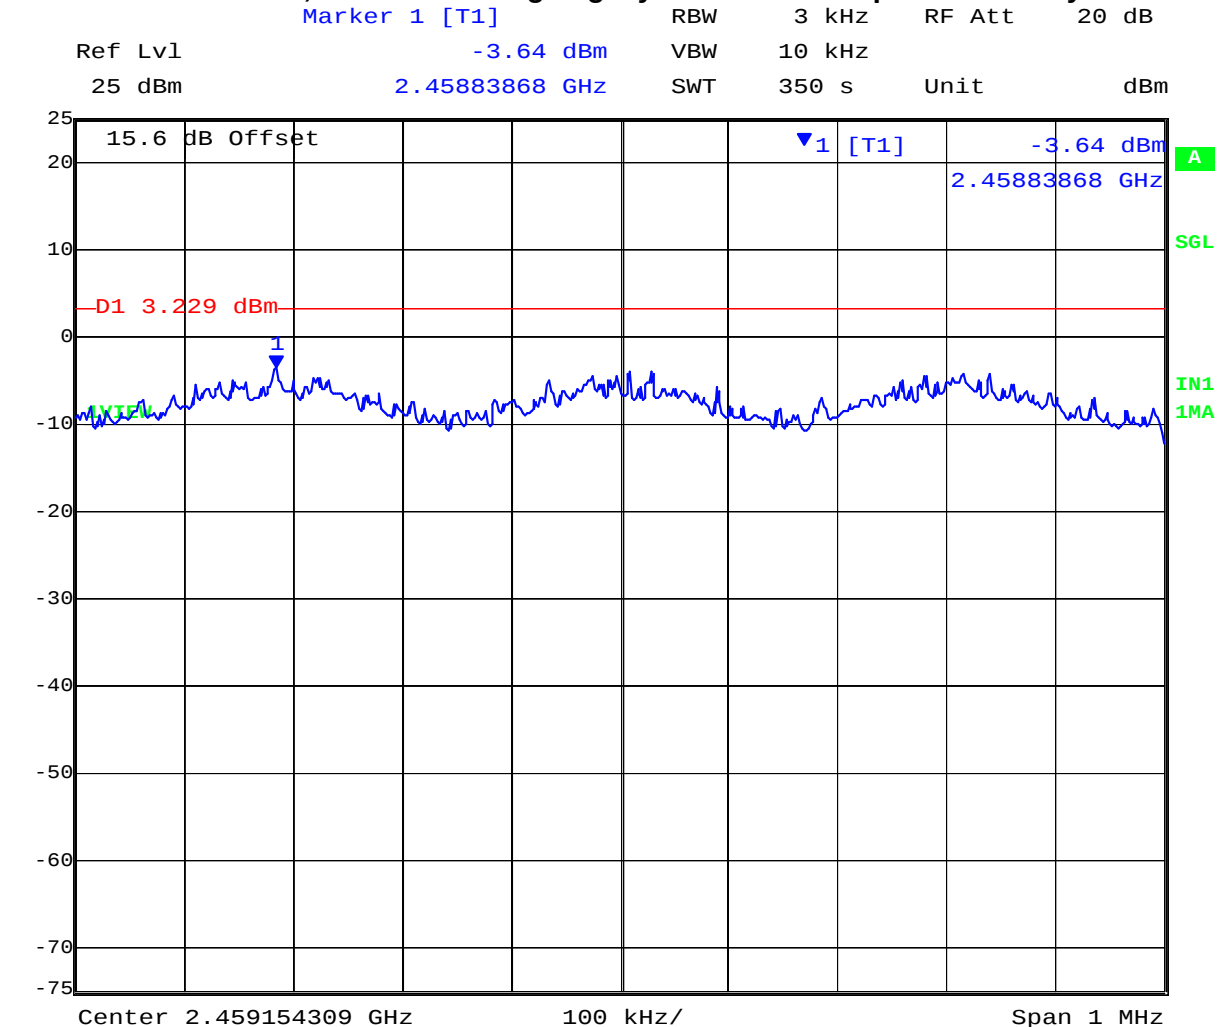


Date: 12.AUG.2011 19:25:03

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 120 of 279

PORT B 2,462 MHz 802.11g Legacy - Peak Power Spectral Density

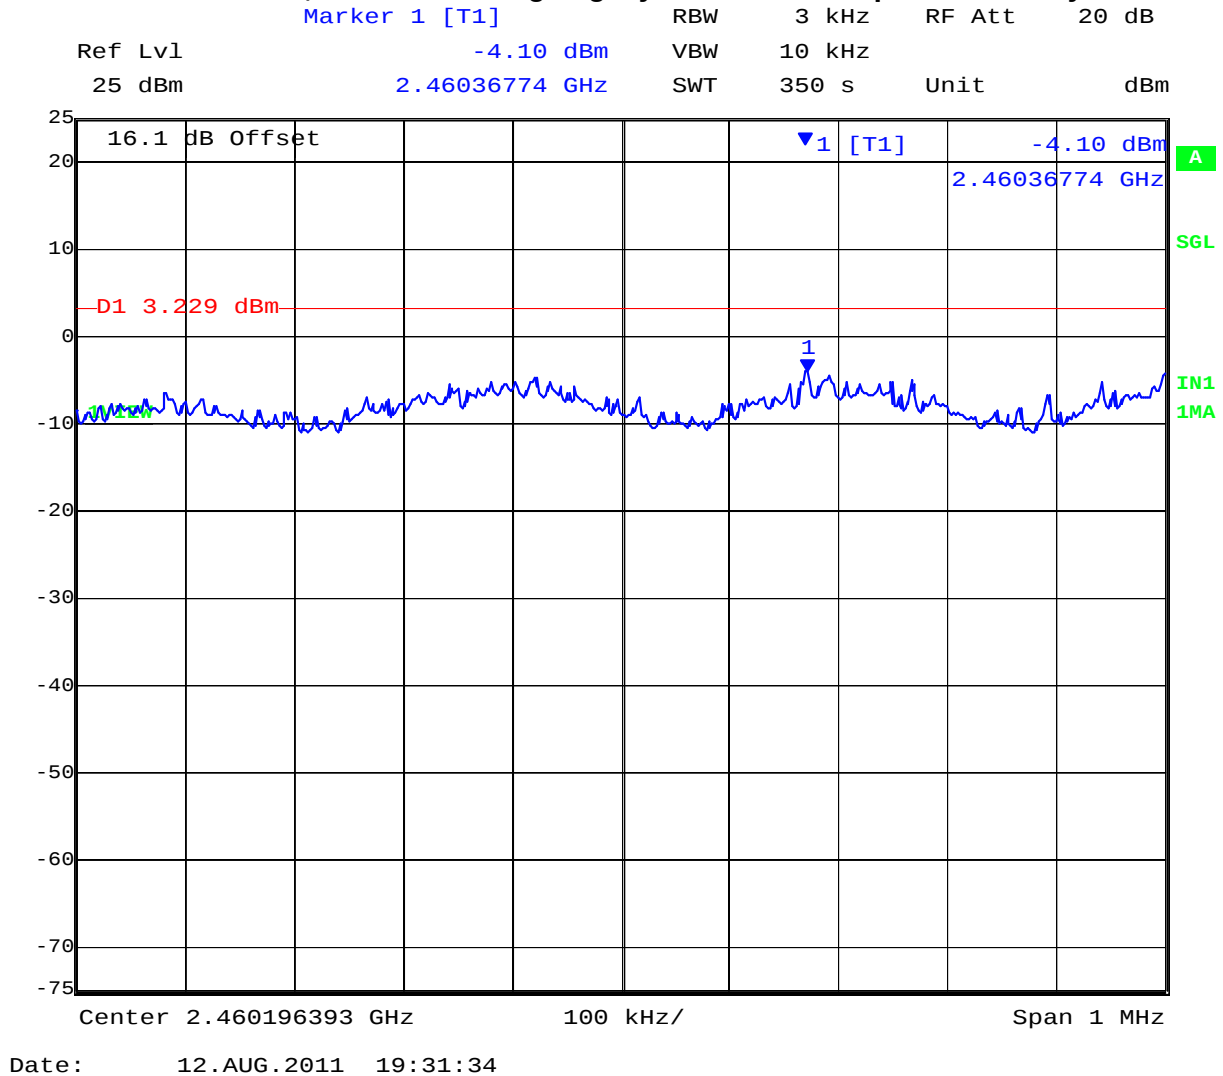


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 121 of 279

PORT C 2,462 MHz 802.11g Legacy - Peak Power Spectral Density

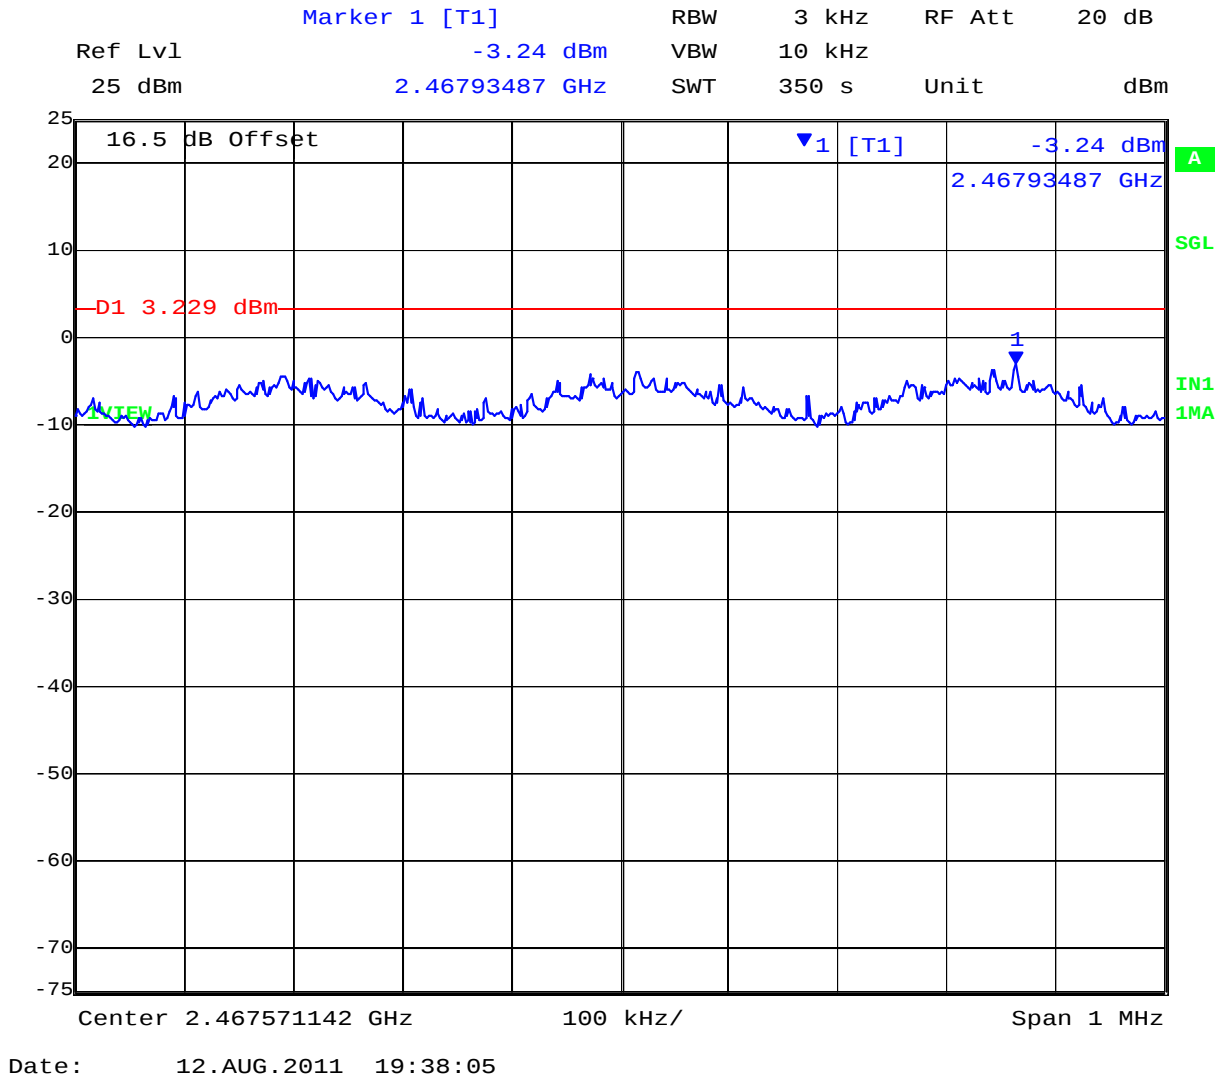

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 122 of 279

Peak Power Spectral Density

TABLE OF RESULTS – 802.11N HT-20

Test Conditions:	15.247 (e)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain	N/A dB	Antenna Gain:	2		dBi
Applied Voltage:	48.00 Vdc	Antenna Ports (N):	3		
Notes 1:					
Notes 2:					

Test Frequency	Measured Power Density				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
2412.000	-3.70	-5.13	-4.05	--	4.77	1.07	8.00	-6.93
2437.000	-2.52	-3.80	-3.99	--	4.77	2.25	8.00	-5.75
2462.000	-2.98	-4.40	-3.69	--	4.77	1.79	8.00	-6.21


Measurement uncertainty:	± 1.33 dB
---------------------------------	-----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 123 of 279

PORT A 2,412 MHz 802.11n HT-20 - Peak Power Spectral Density

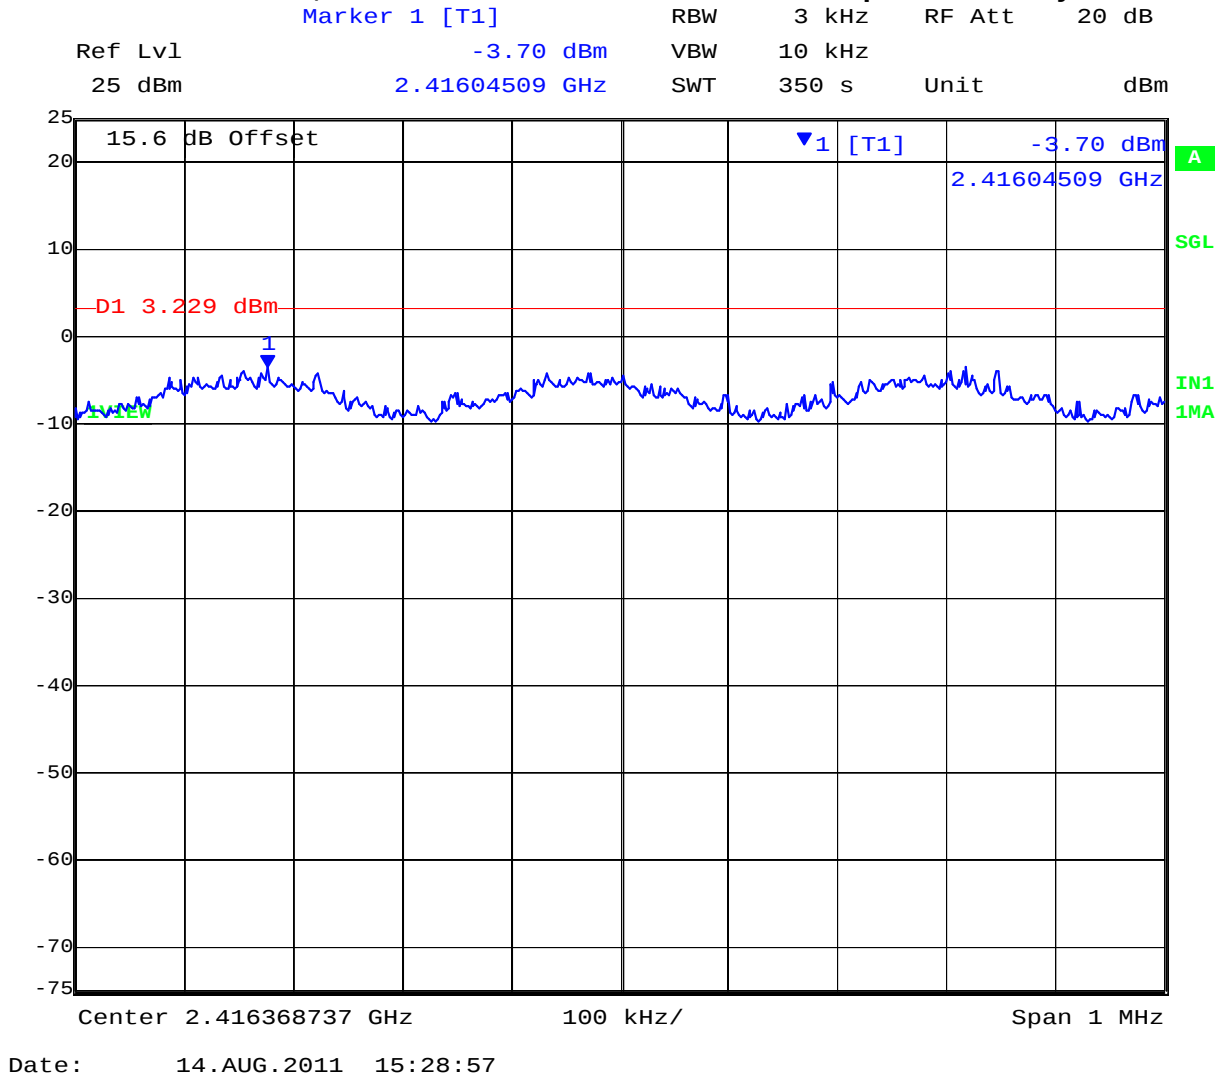


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 124 of 279

PORT B 2,412 MHz 802.11n HT-20 - Peak Power Spectral Density

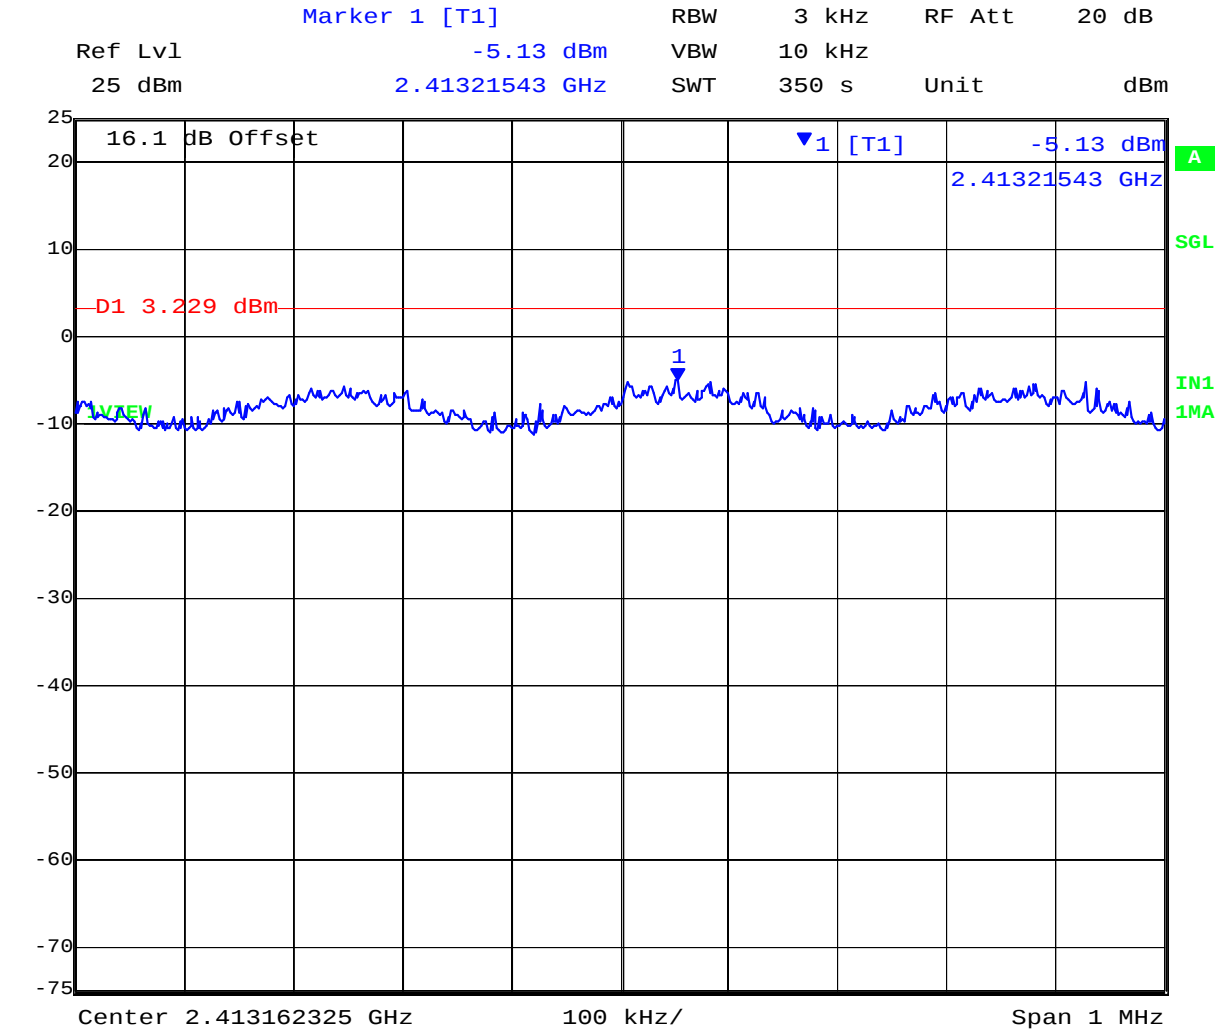


Date: 14.AUG.2011 15:35:26

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 125 of 279

PORT C 2,412 MHz 802.11n HT-20 - Peak Power Spectral Density

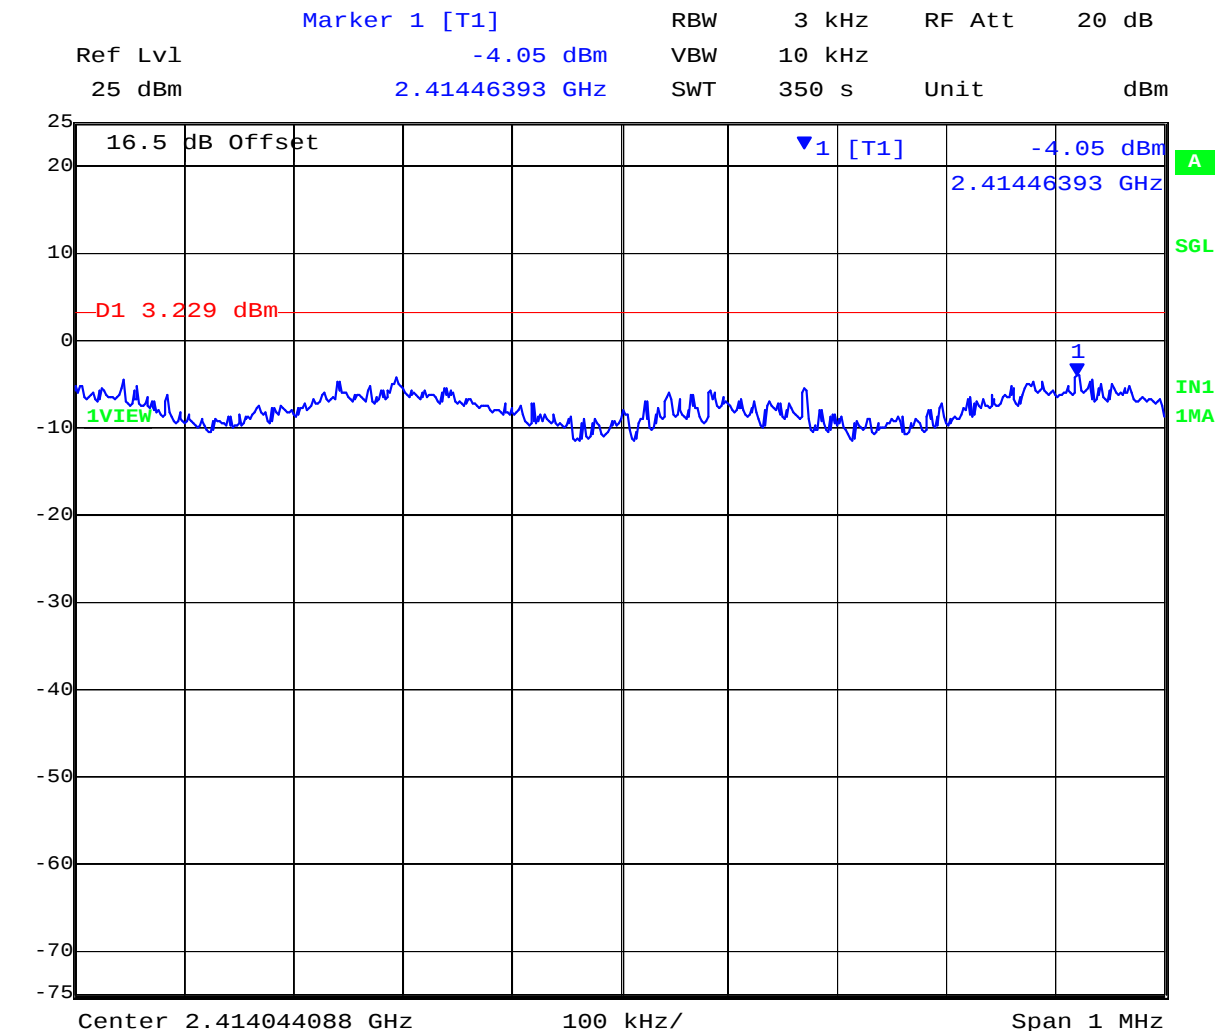


Date: 14.AUG.2011 15:41:56

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 126 of 279

PORT A 2,437 MHz 802.11n HT-20 - Peak Power Spectral Density

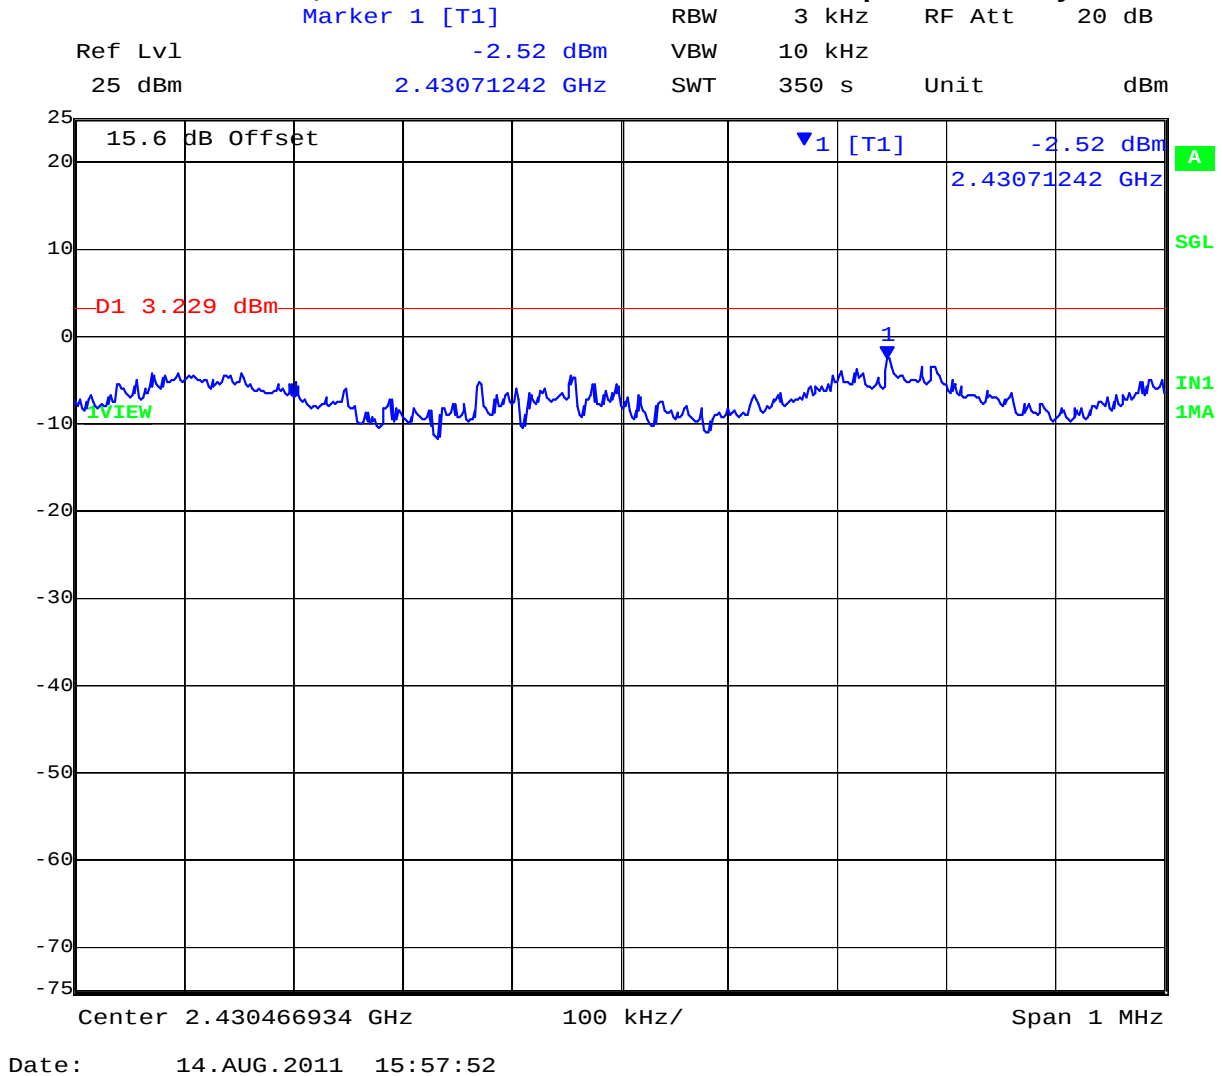


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 127 of 279

PORT B 2,437 MHz 802.11n HT-20 - Peak Power Spectral Density

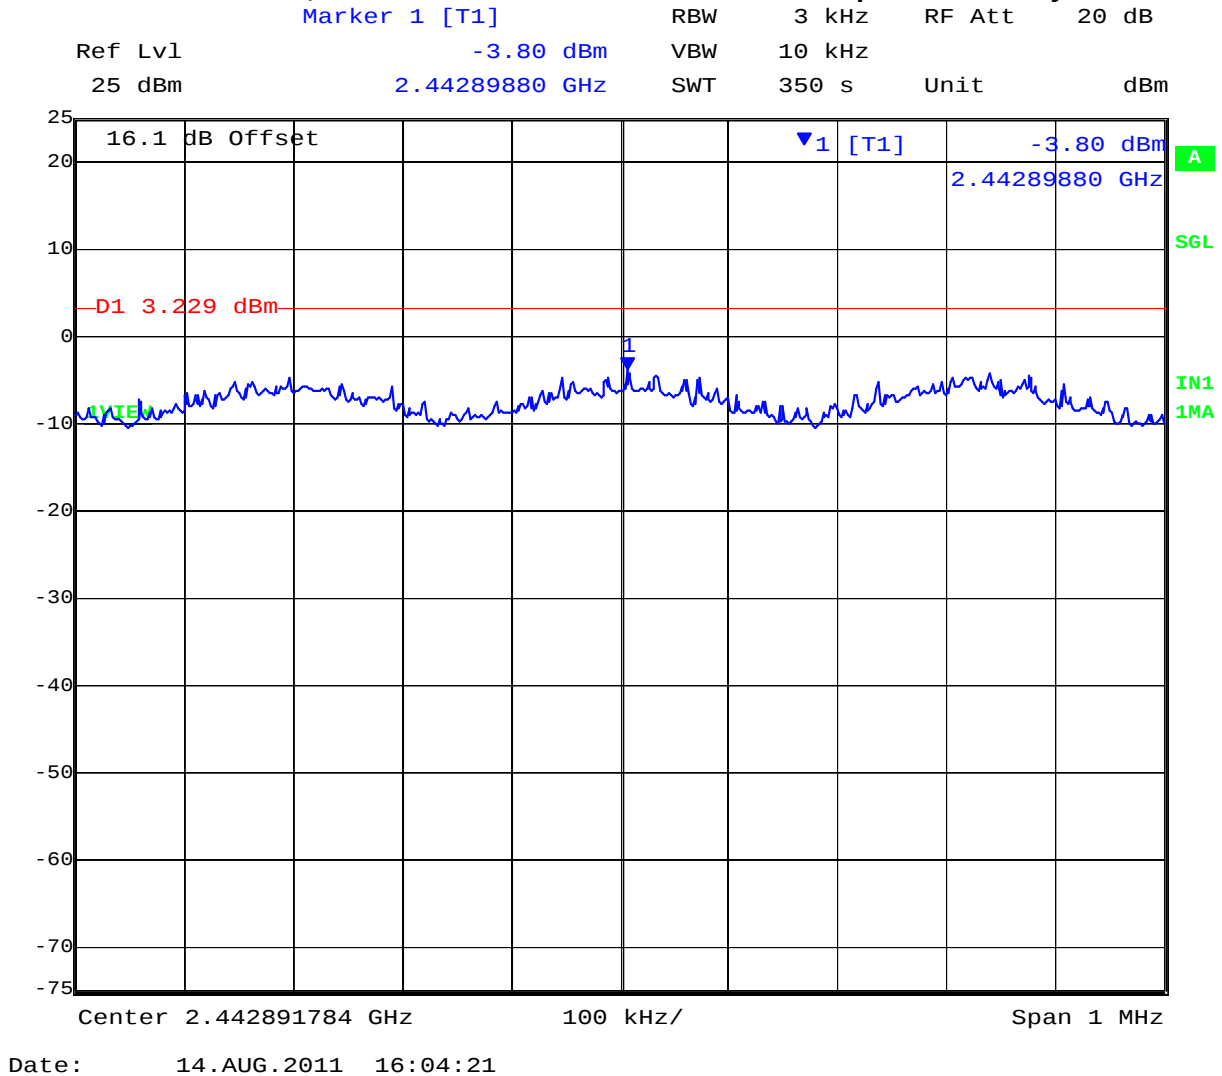


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 128 of 279

PORT C 2,437 MHz 802.11n HT-20 - Peak Power Spectral Density

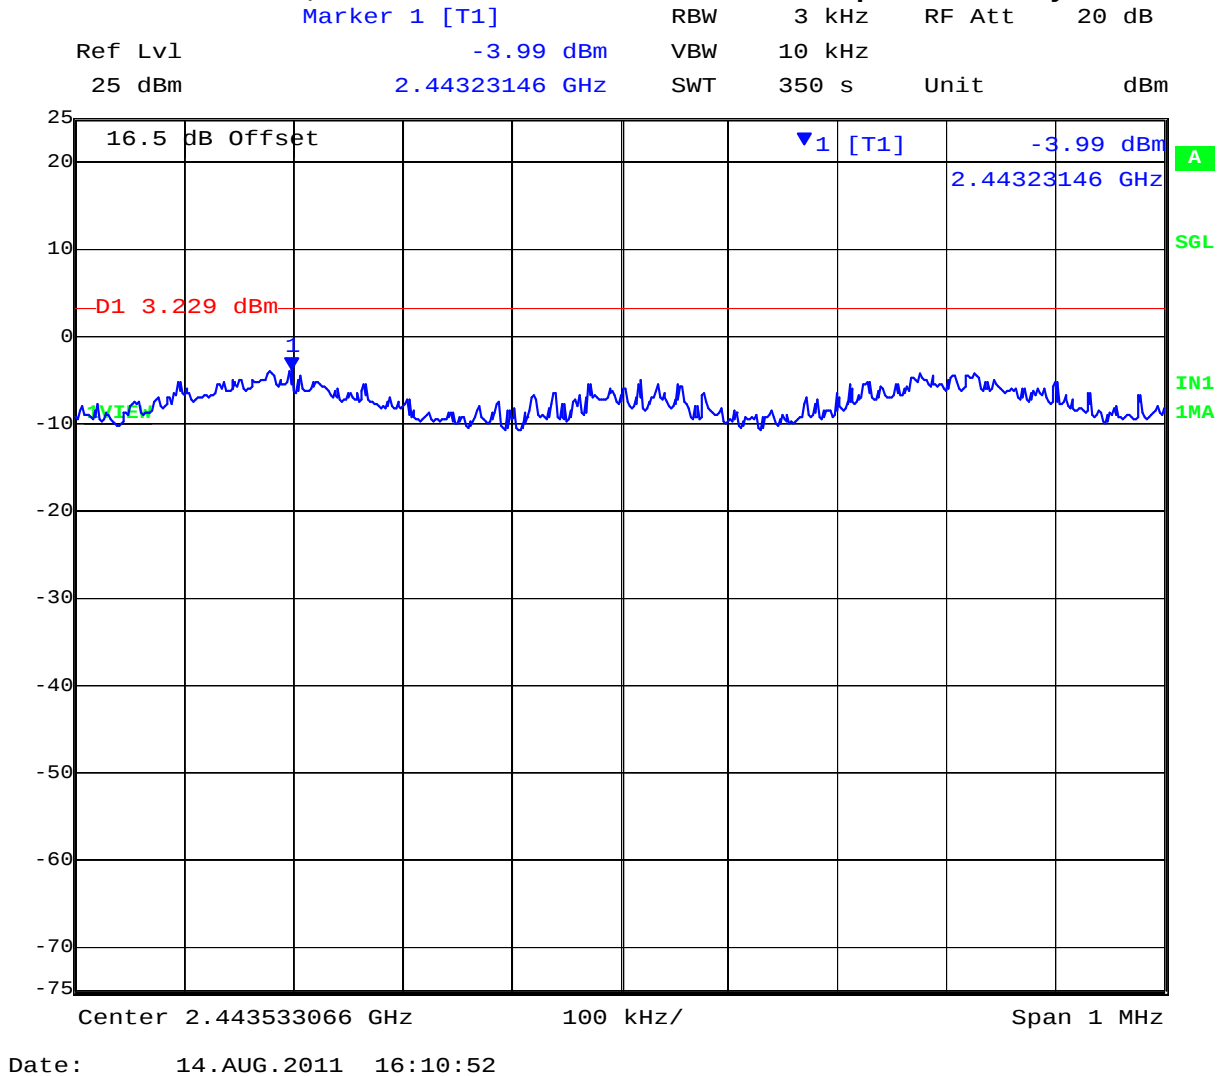


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 129 of 279

PORT A 2,462 MHz 802.11n HT-20 - Peak Power Spectral Density

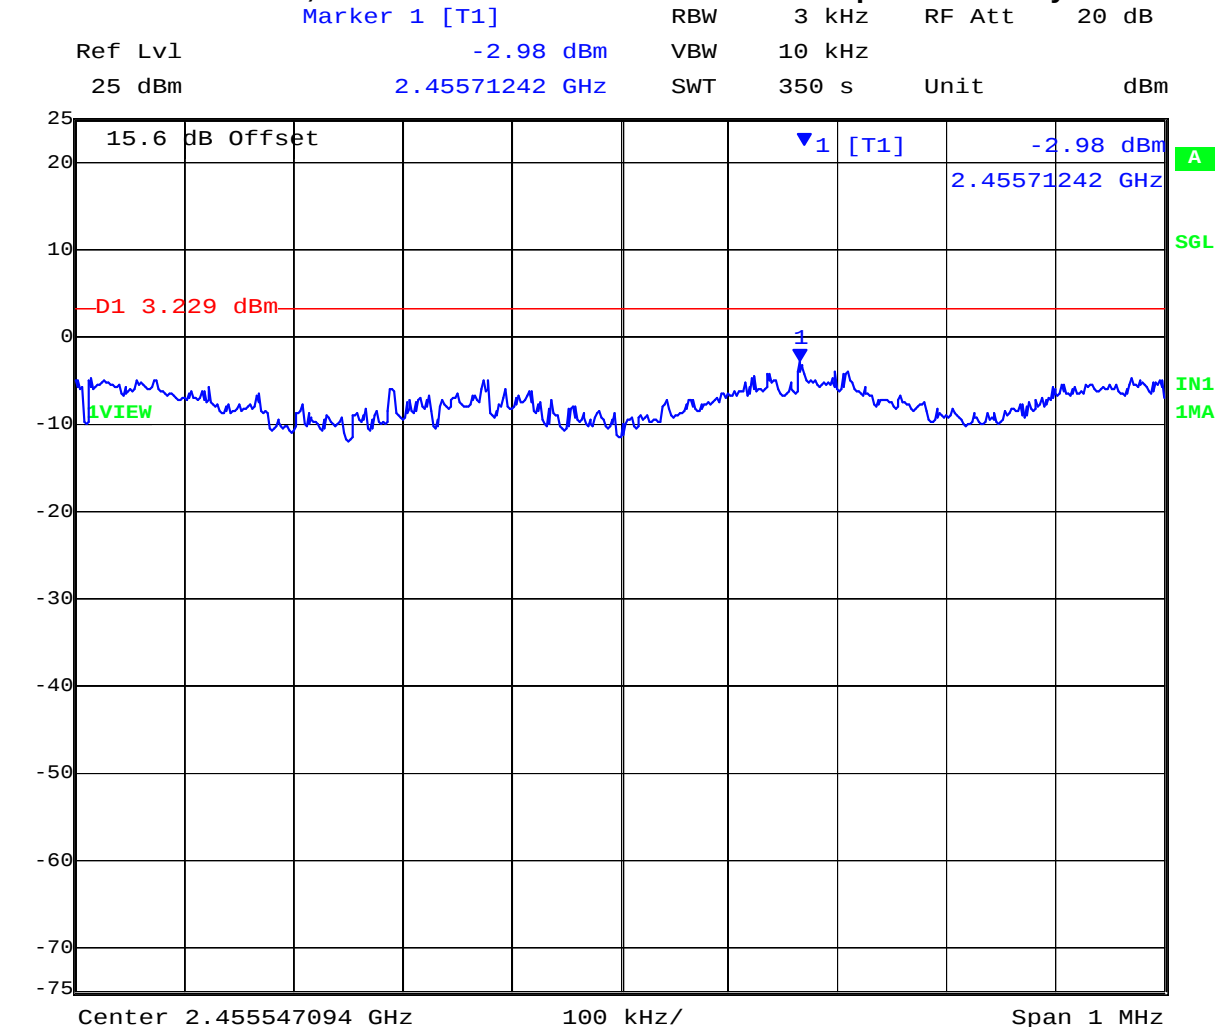


Date: 14.AUG.2011 16:34:06

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 130 of 279

PORT B 2,462 MHz 802.11n HT-20 - Peak Power Spectral Density

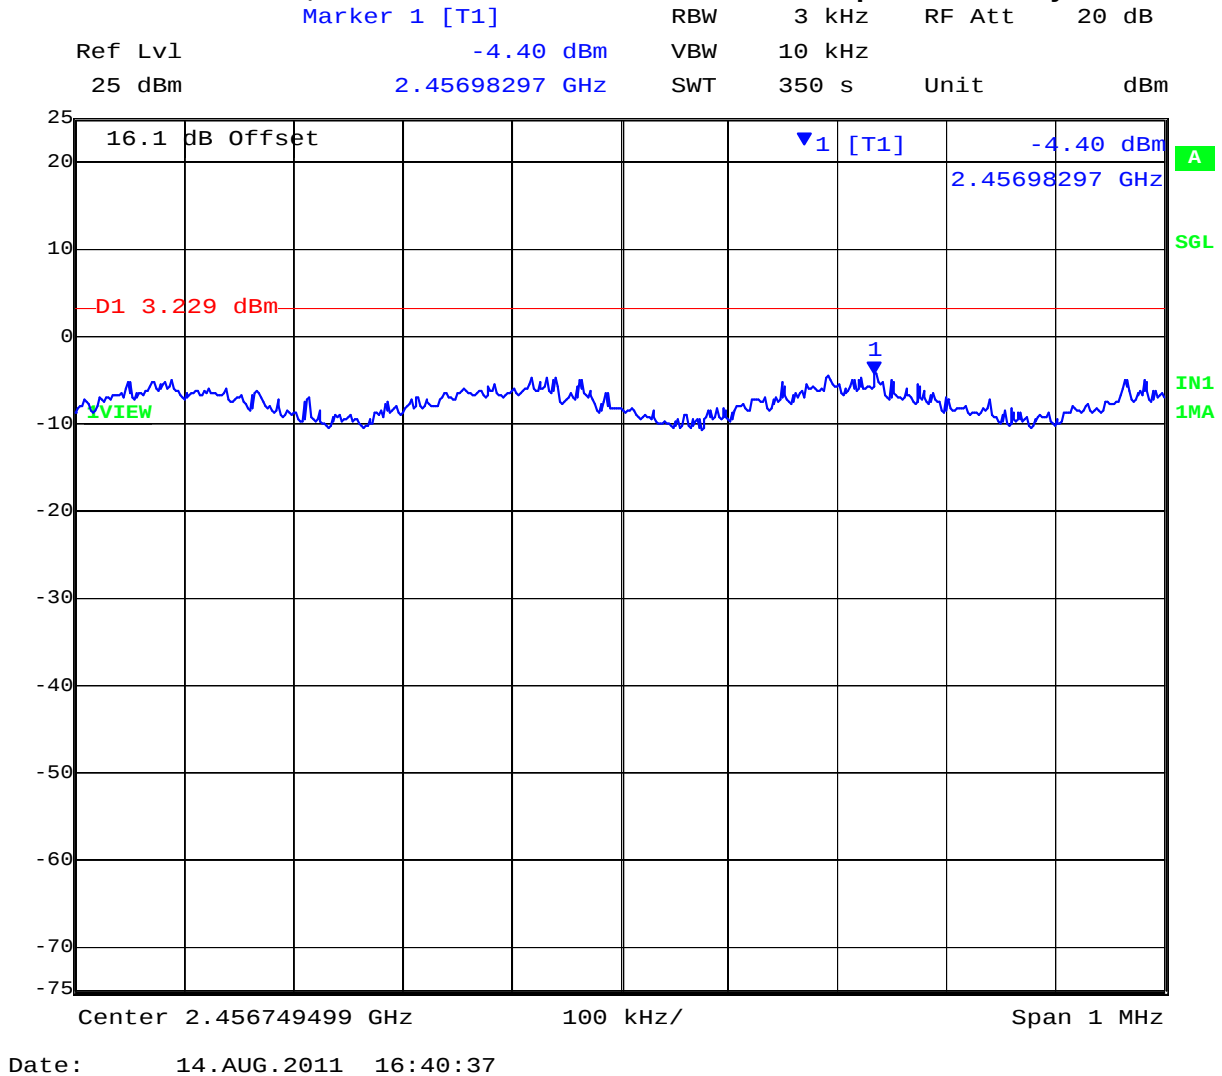


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 131 of 279

PORT C 2,462 MHz 802.11n HT-20 - Peak Power Spectral Density

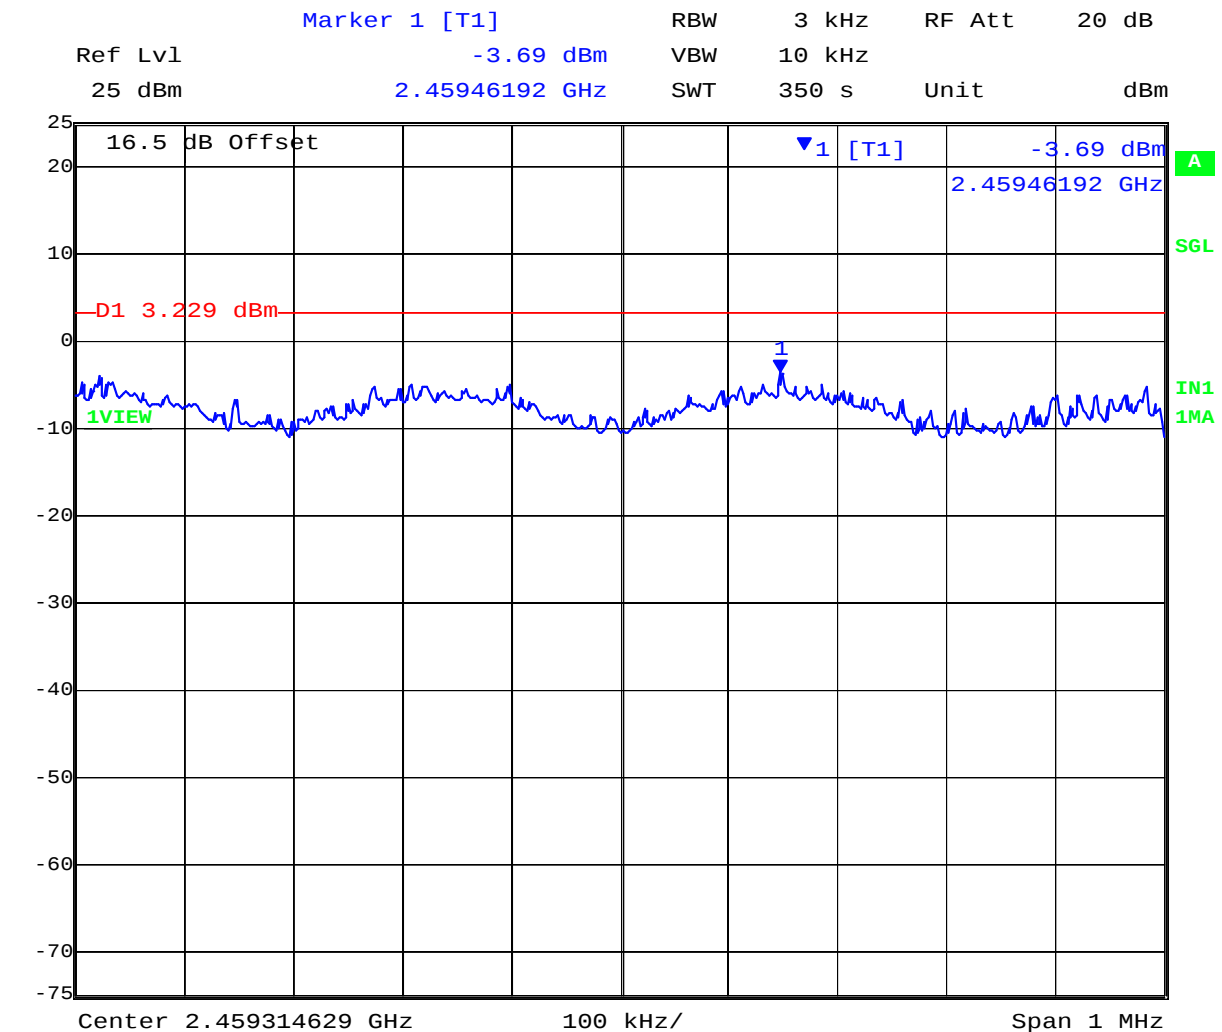

Date: 14.AUG.2011 16:47:07

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 132 of 279

Peak Power Spectral Density


TABLE OF RESULTS – 802.11N HT-40

Test Conditions:	15.247 (e)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain	N/A dB	Antenna Gain:	2		dBi
Applied Voltage:	48.00 Vdc	Antenna Ports (N):	3		
Notes 1:					
Notes 2:					

Test Frequency	Measured Power Density				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
2422	-8.45	-8.97	-6.96	--	4.77	-2.18	8.00	-10.18
2437	-7.91	-7.30	-6.56	--	4.77	-1.79	8.00	-9.79
2452	-8.16	-8.65	-5.84	--	4.77	-1.07	8.00	-9.07

Measurement uncertainty:	± 1.33 dB
---------------------------------	-----------


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

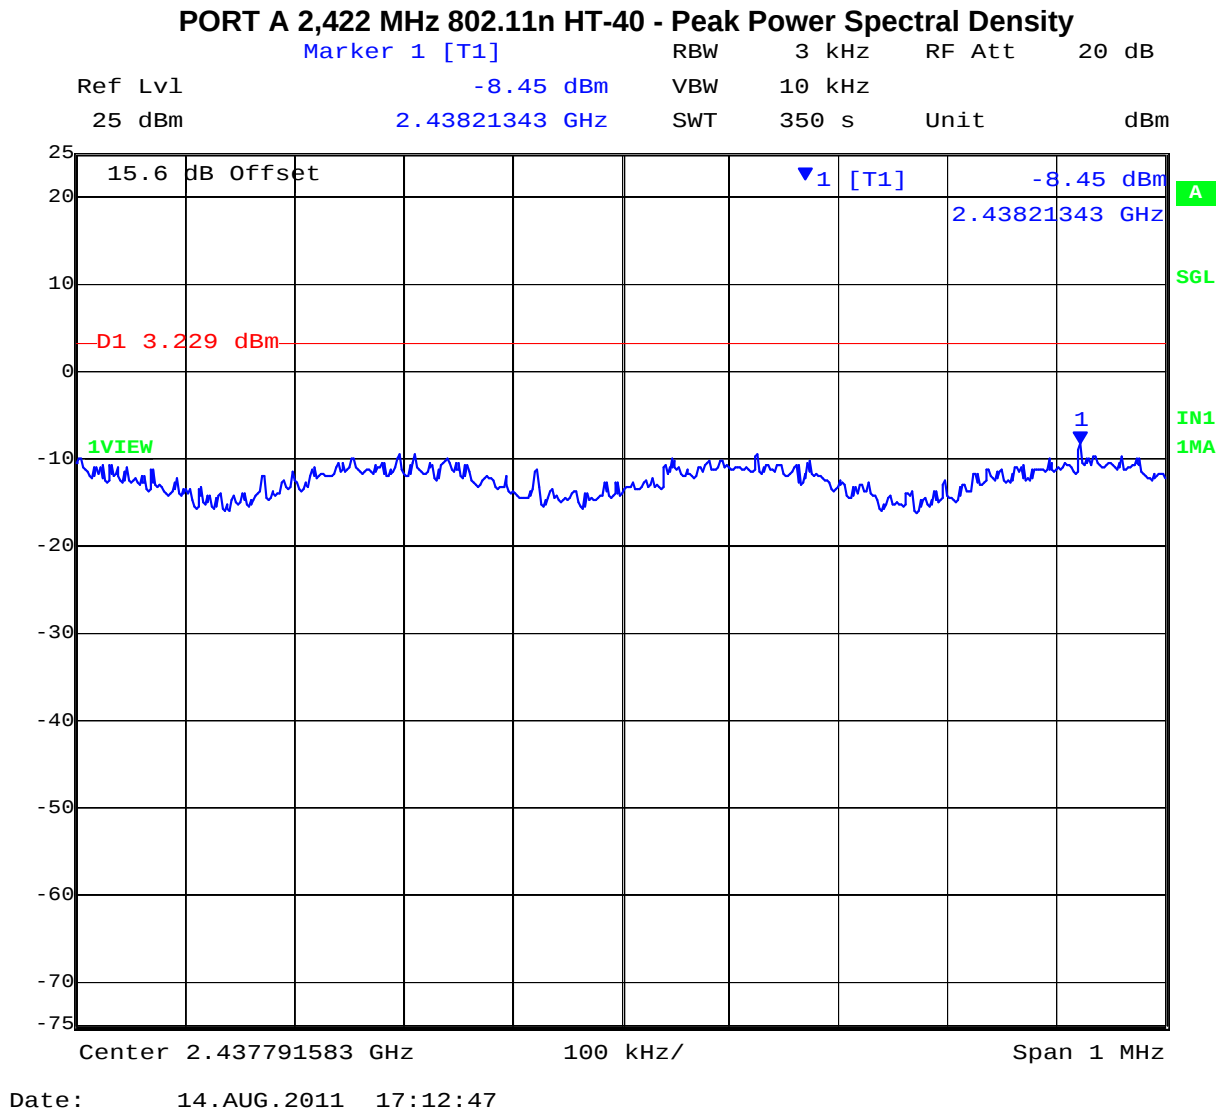



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 134 of 279

PORT B 2,422 MHz 802.11n HT-40 - Peak Power Spectral Density

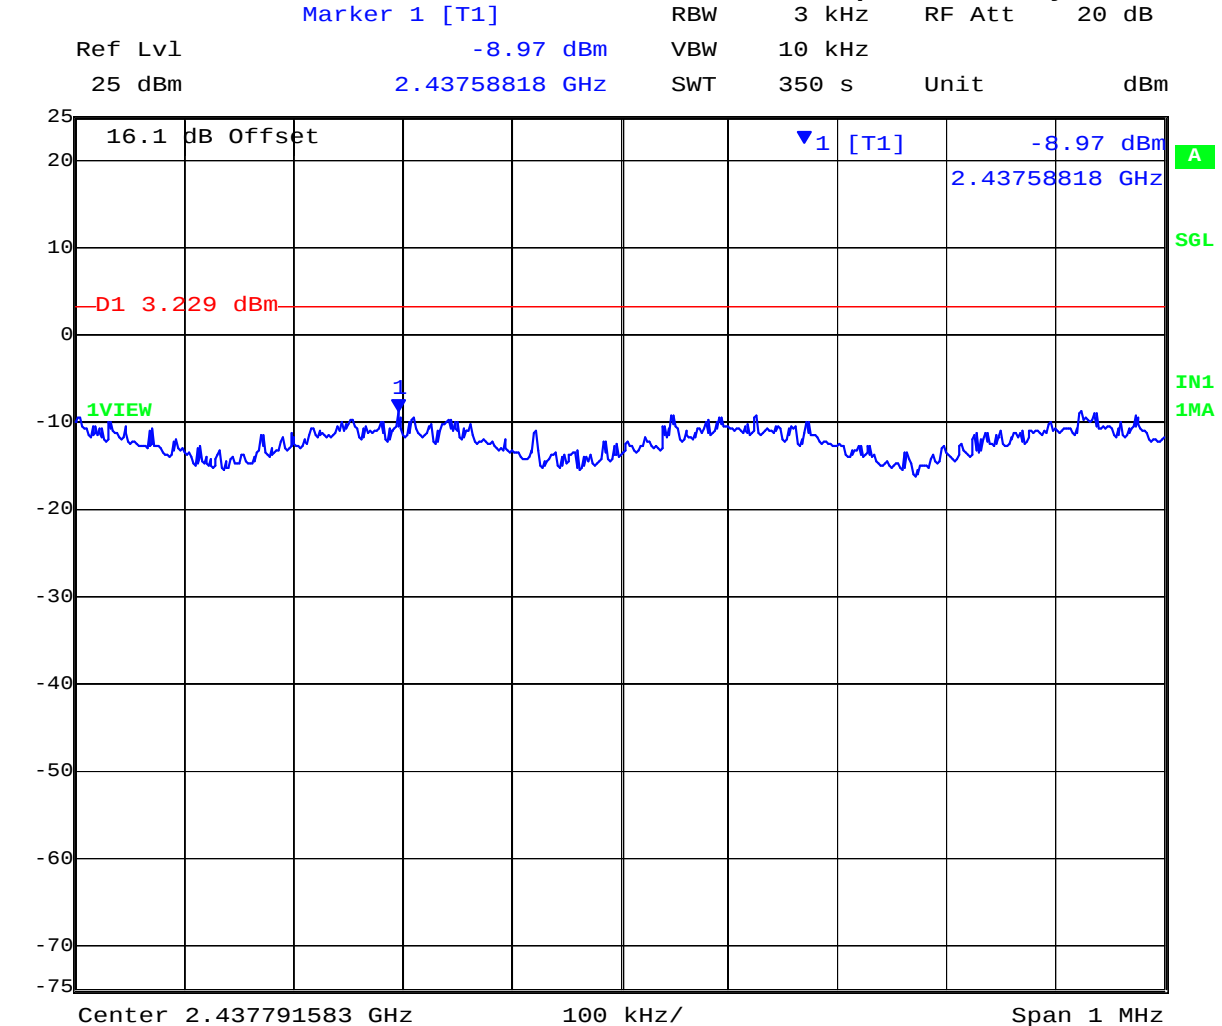


Date: 14.AUG.2011 17:19:16

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 135 of 279

PORT C 2,422 MHz 802.11n HT-40 - Peak Power Spectral Density

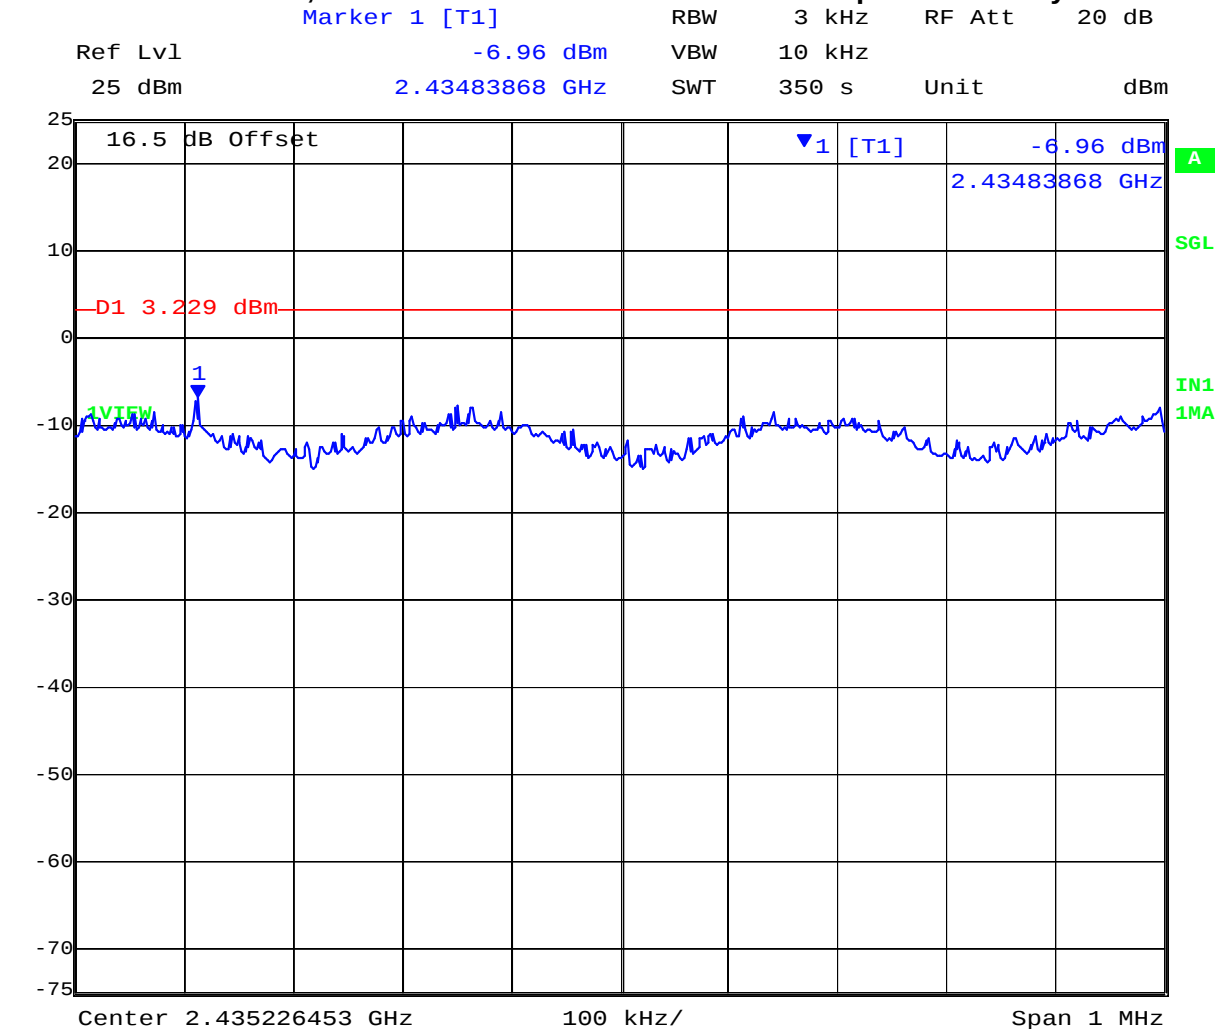


Date: 14.AUG.2011 17:25:45

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 136 of 279

PORT A 2,437 MHz 802.11n HT-40 - Peak Power Spectral Density

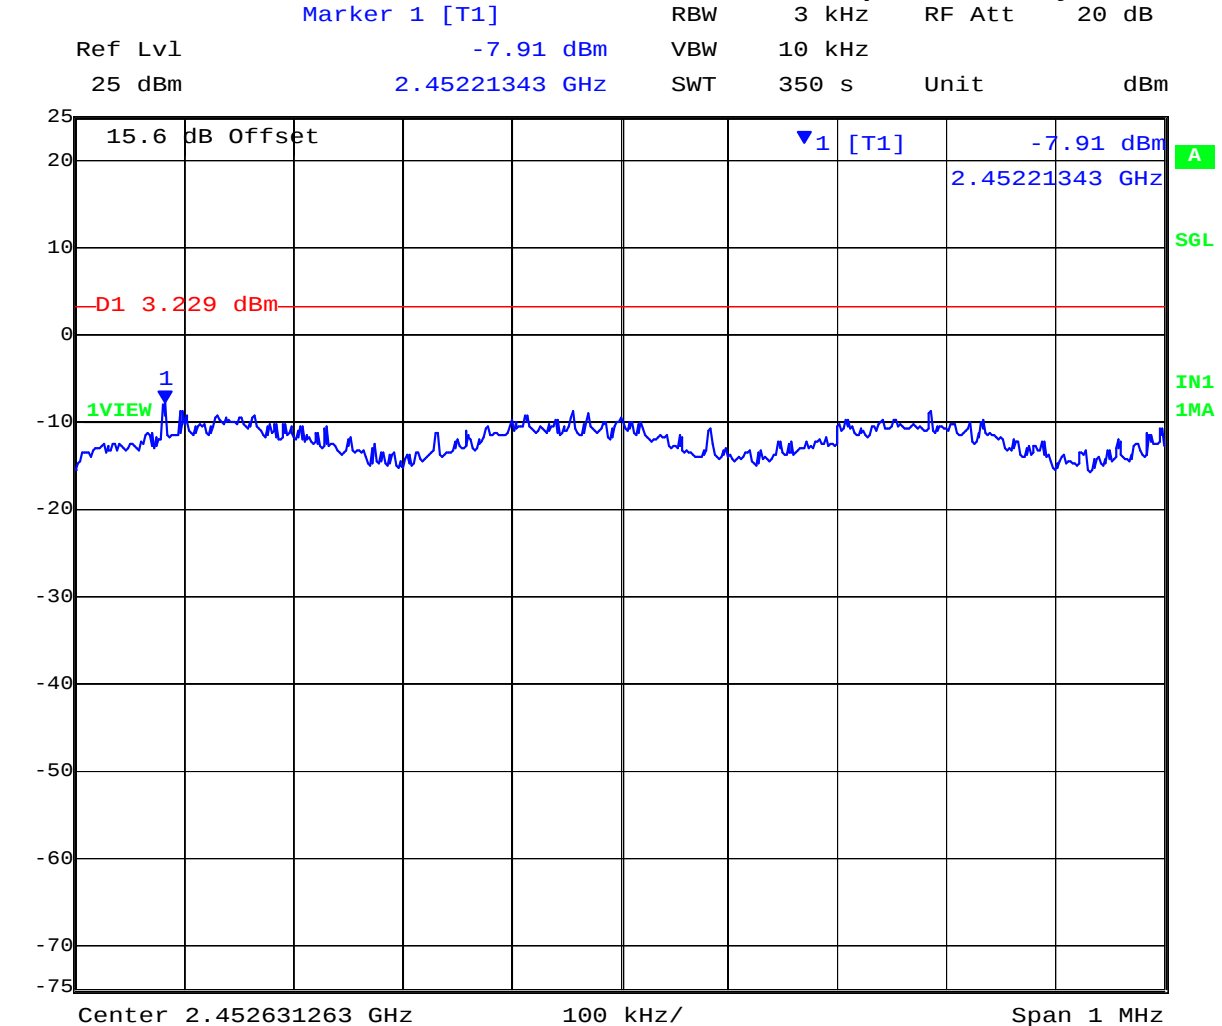


Date: 14.AUG.2011 17:43:52

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 137 of 279

PORT B 2,437 MHz 802.11n HT-40 - Peak Power Spectral Density

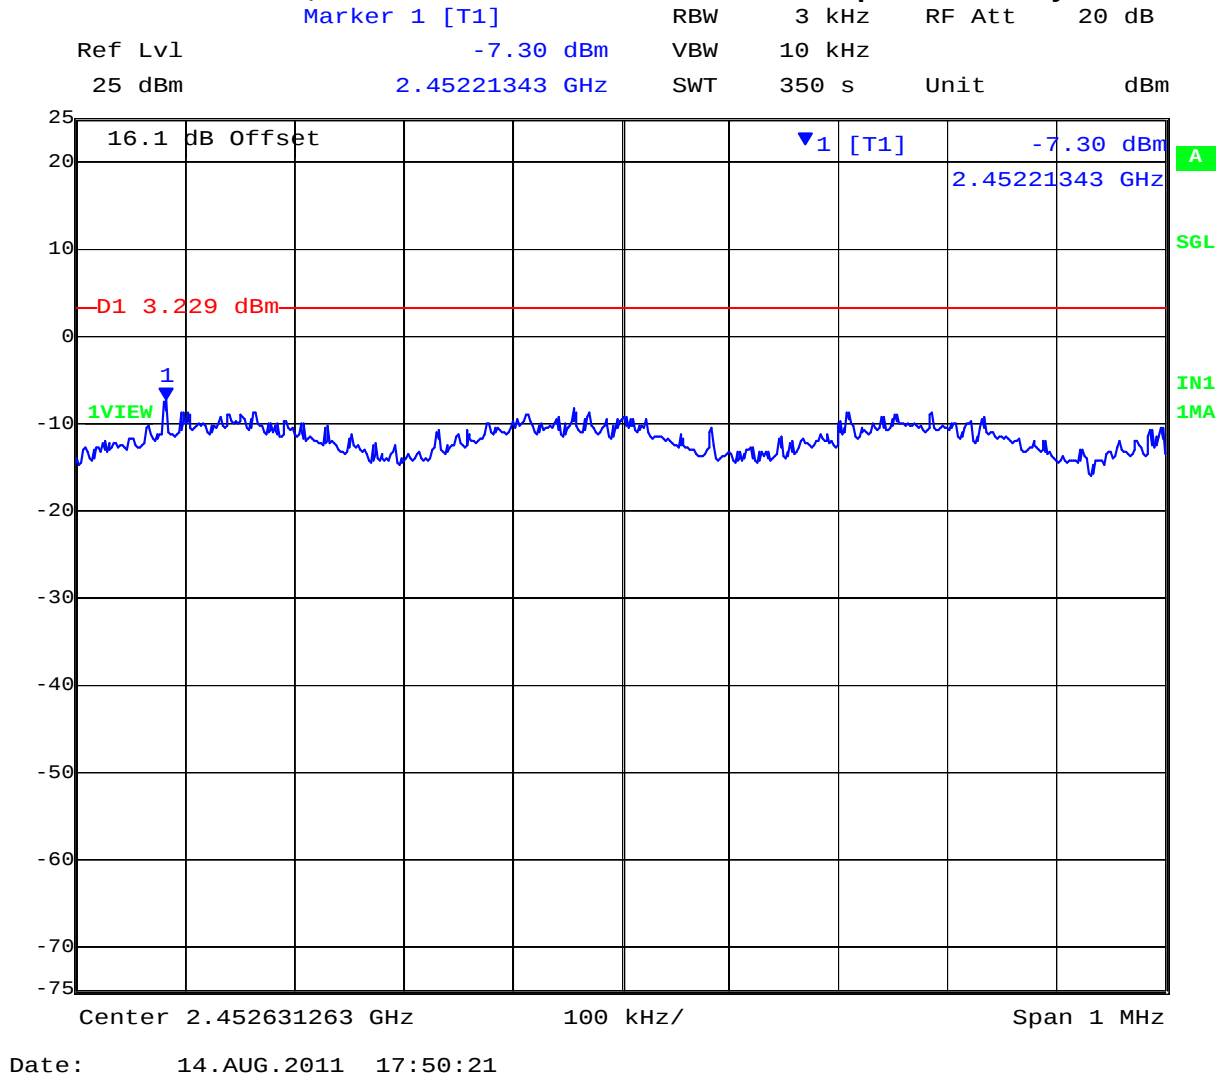


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 138 of 279

PORT C 2,437 MHz 802.11n HT-40 - Peak Power Spectral Density

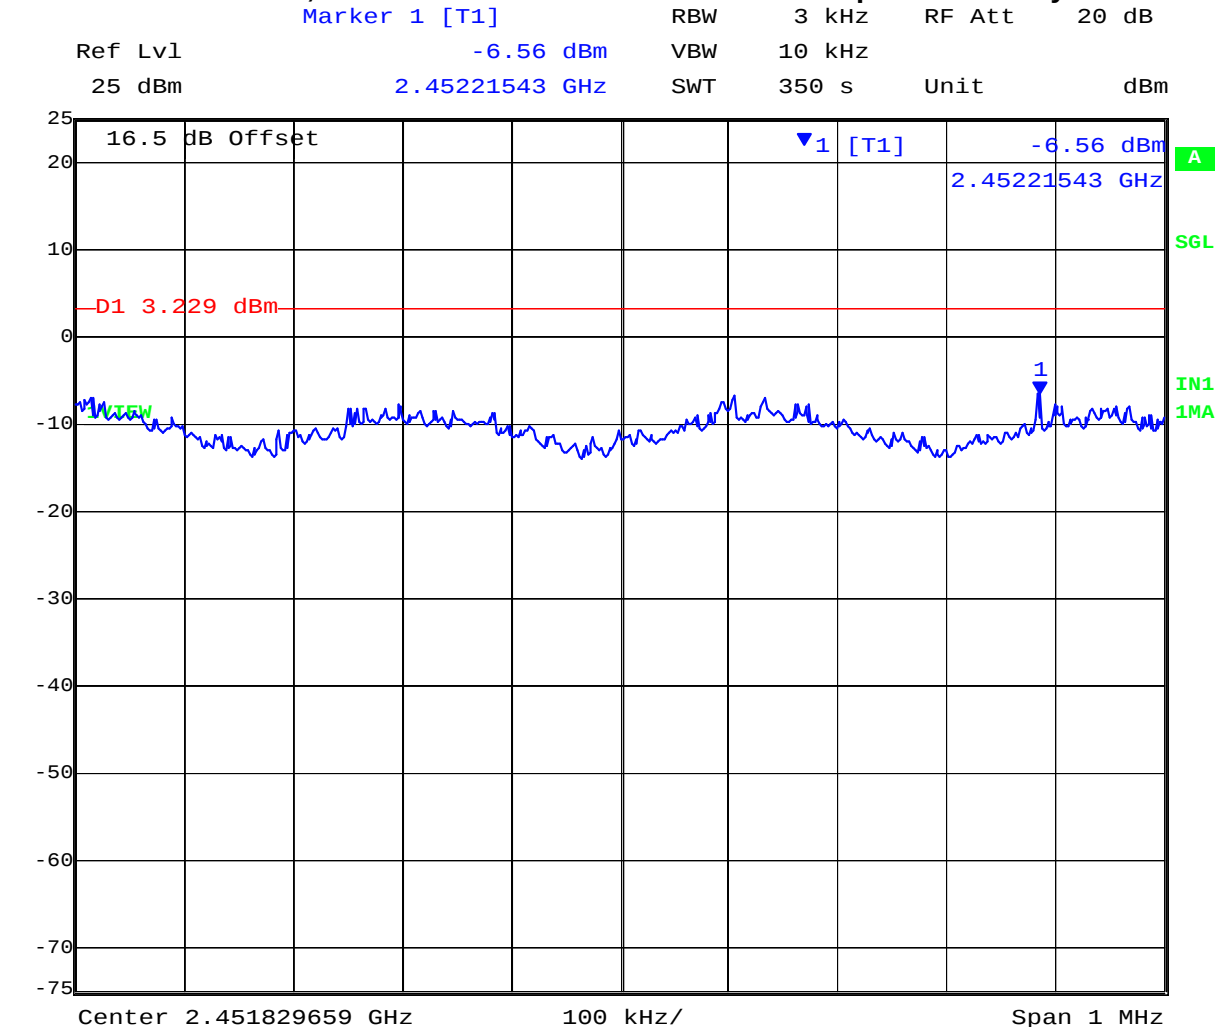


Date: 14.AUG.2011 17:56:51

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 139 of 279

PORT A 2,452 MHz 802.11n HT-40 - Peak Power Spectral Density

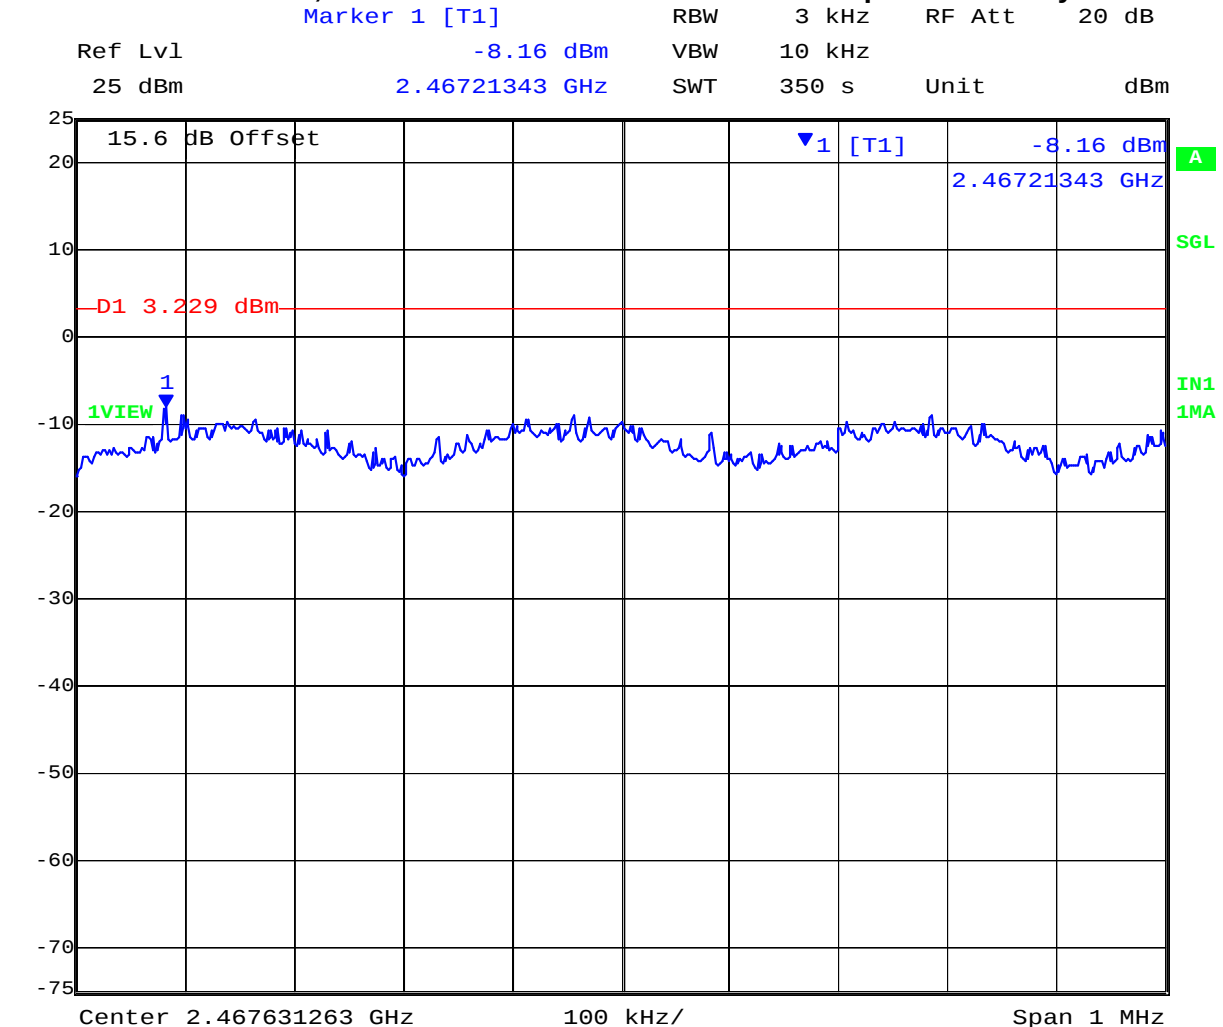


Date: 14.AUG.2011 18:16:40

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 140 of 279

PORT B 2,452 MHz 802.11n HT-40 - Peak Power Spectral Density

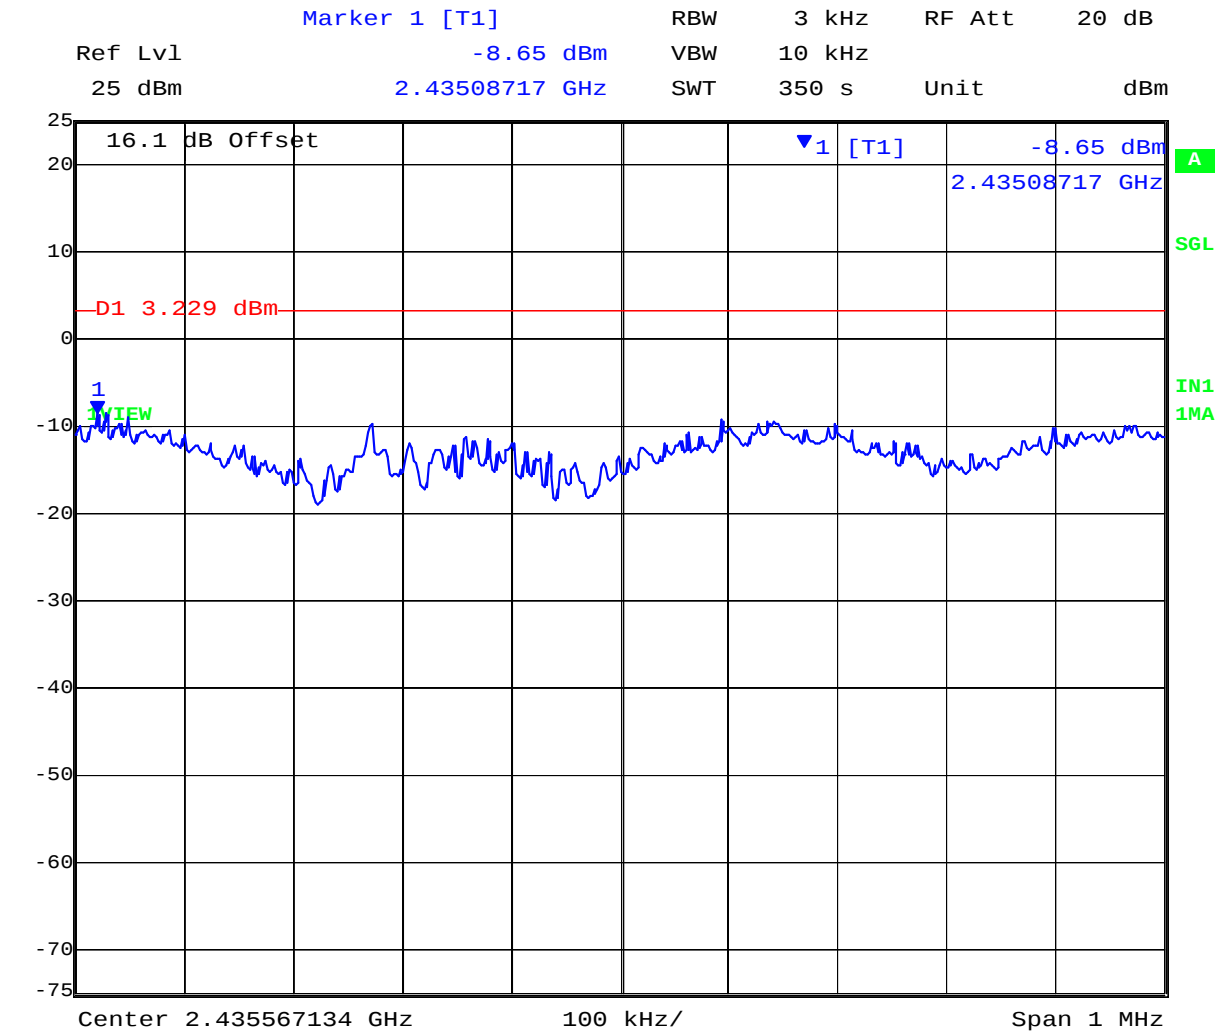


Date: 14.AUG.2011 18:23:12

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 141 of 279

PORT C 2,452 MHz 802.11n HT-40 - Peak Power Spectral Density

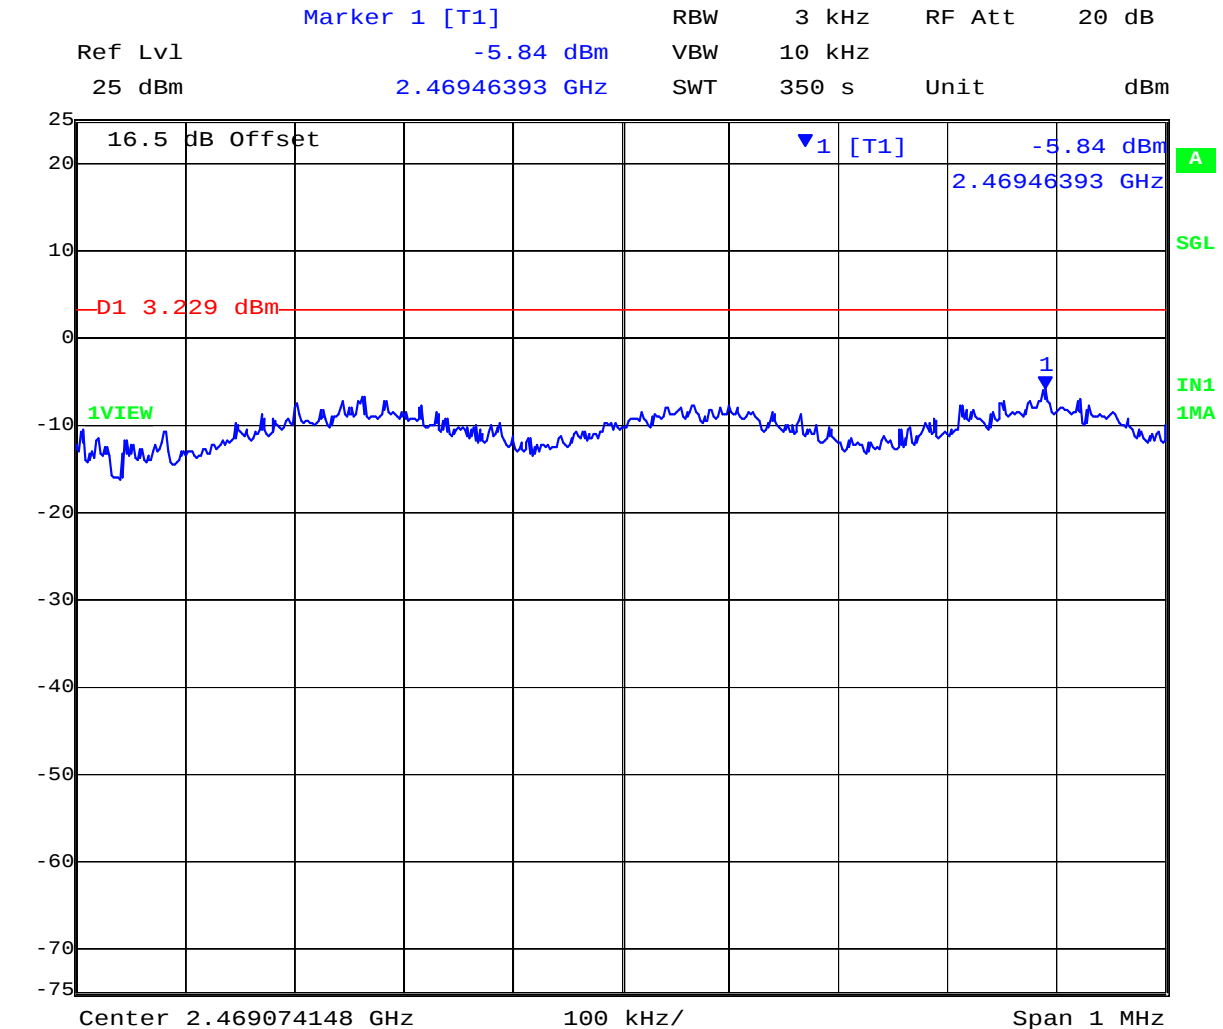

Date: 14.AUG.2011 18:29:43

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 142 of 279

TABLE OF RESULTS – 802.11a Legacy

Test Conditions:	15.247 (e)	Rel. Humidity (%):	35	to	42
Variant:	802.11a	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain	N/A dB	Antenna Gain:	3 dBi		
Applied Voltage:	48.00 Vdc	Antenna Ports (N):	3		
Notes 1:					
Notes 2:					

Test Frequency	Measured Power Density				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
5745	-3.19	-3.48	-4.69	--	4.77	1.58	8.00	-6.42
5785	-3.70	-3.58	-2.20	--	4.77	2.57	8.00	-5.43
5825	-3.26	-3.73	-3.63	--	4.77	1.51	8.00	-6.49


Measurement uncertainty:	± 1.33 dB
---------------------------------	-----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 143 of 279

PORT A 5,745 MHz 802.11a Legacy - Peak Power Spectral Density

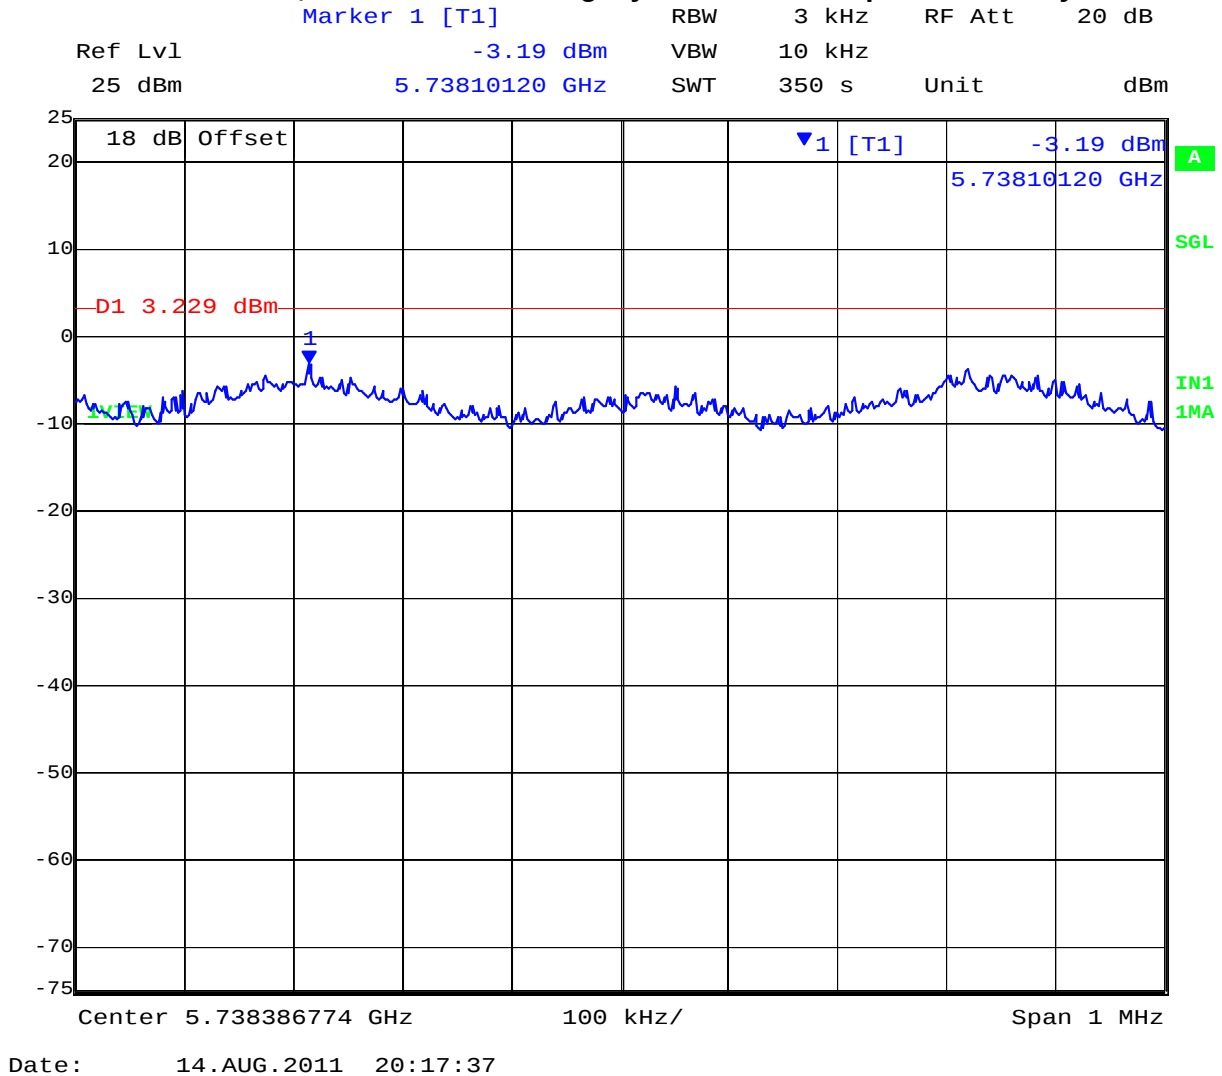


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 144 of 279

PORT B 5,745 MHz 802.11a Legacy - Peak Power Spectral Density

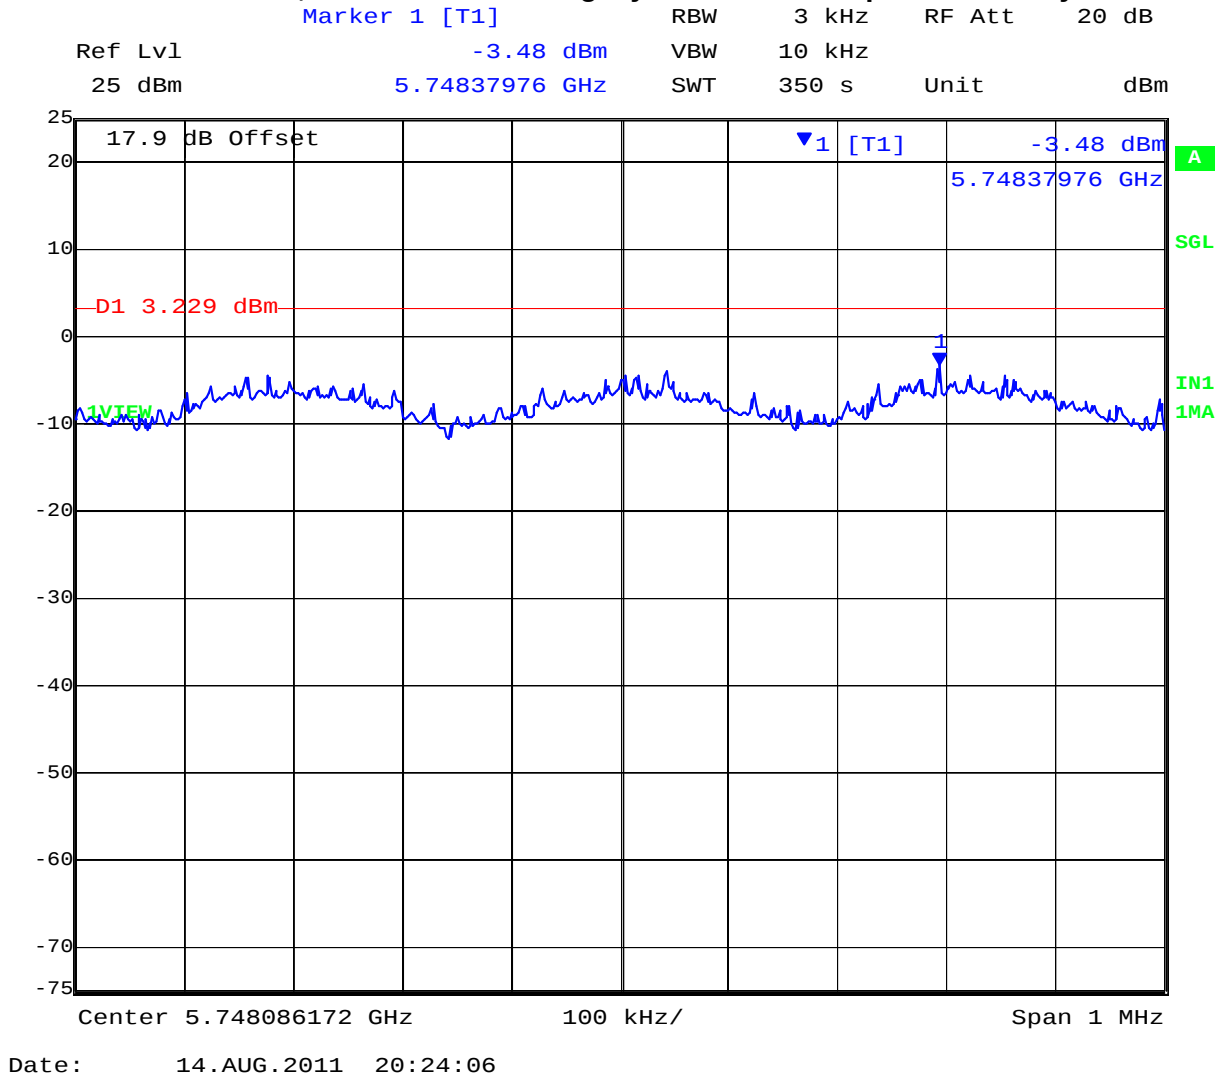

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


PORT C 5,745 MHz 802.11a Legacy - Peak Power Spectral Density

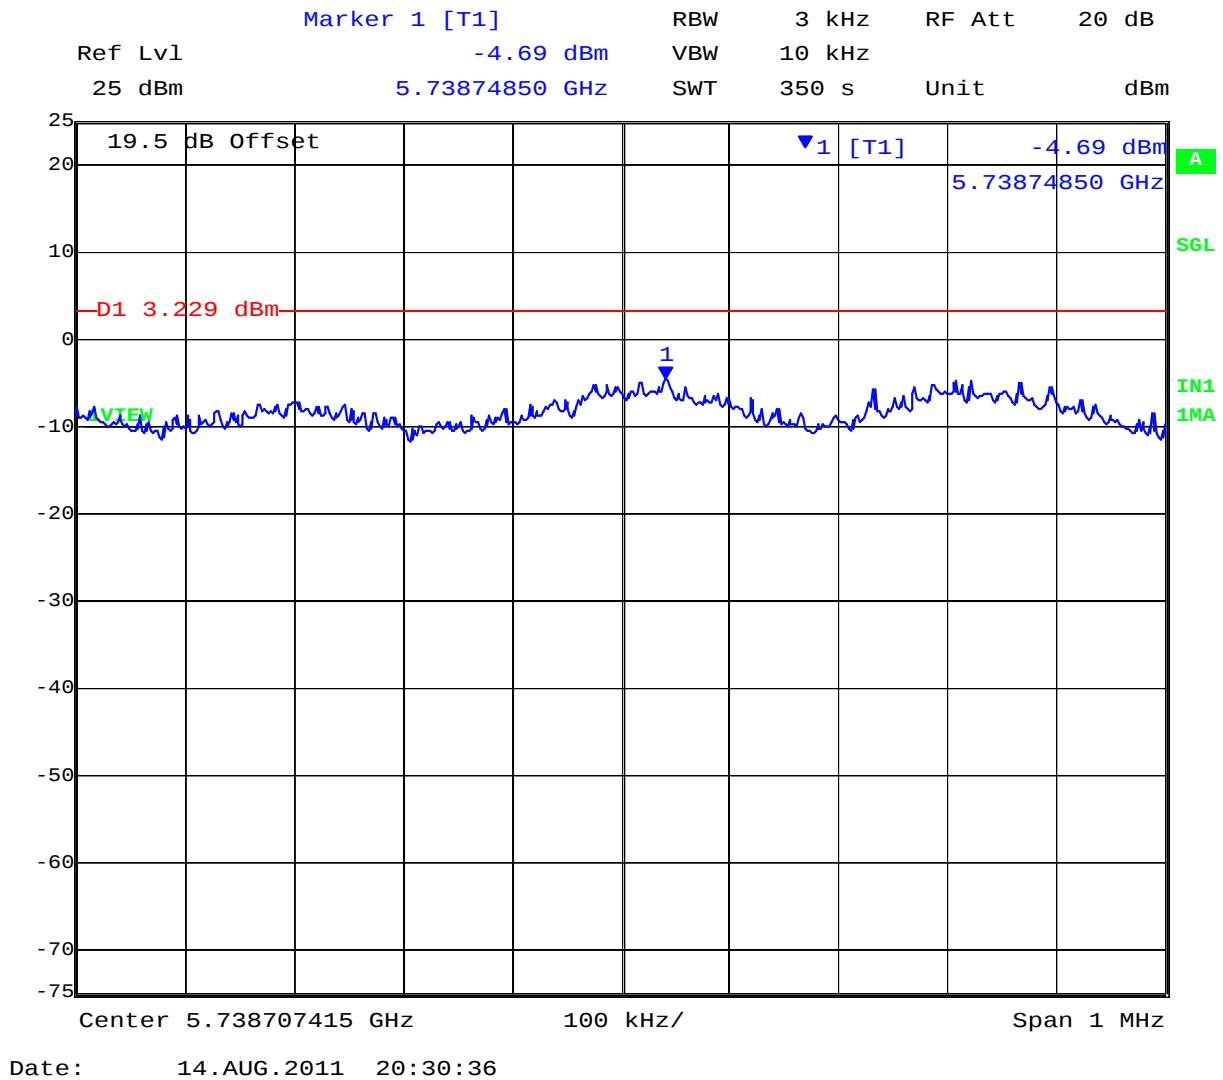



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 146 of 279

PORT A 5,785 MHz 802.11a Legacy - Peak Power Spectral Density

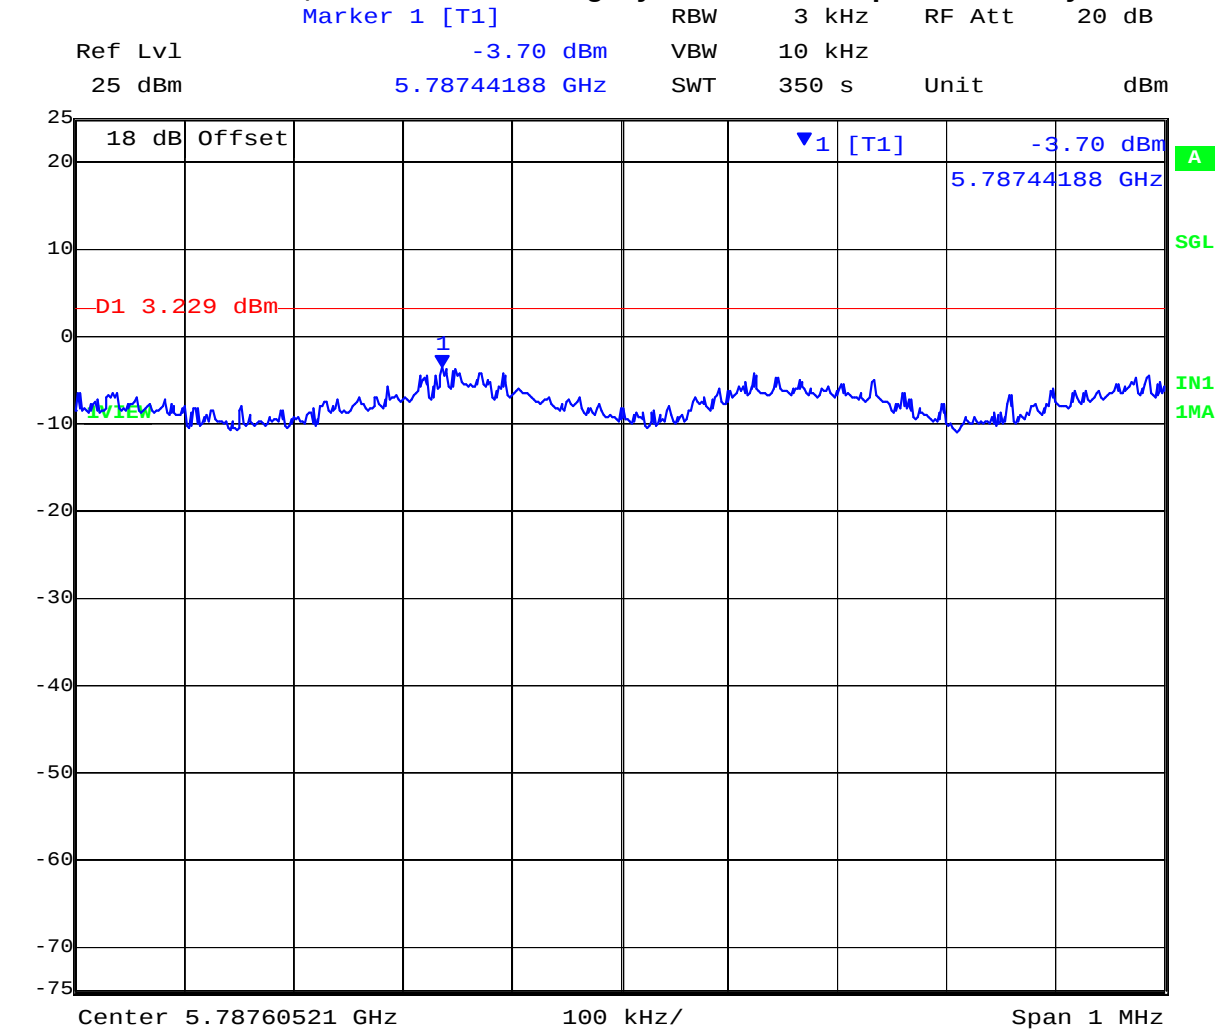


Date: 15.AUG.2011 10:46:12

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 147 of 279

PORT B 5,785 MHz 802.11a Legacy - Peak Power Spectral Density

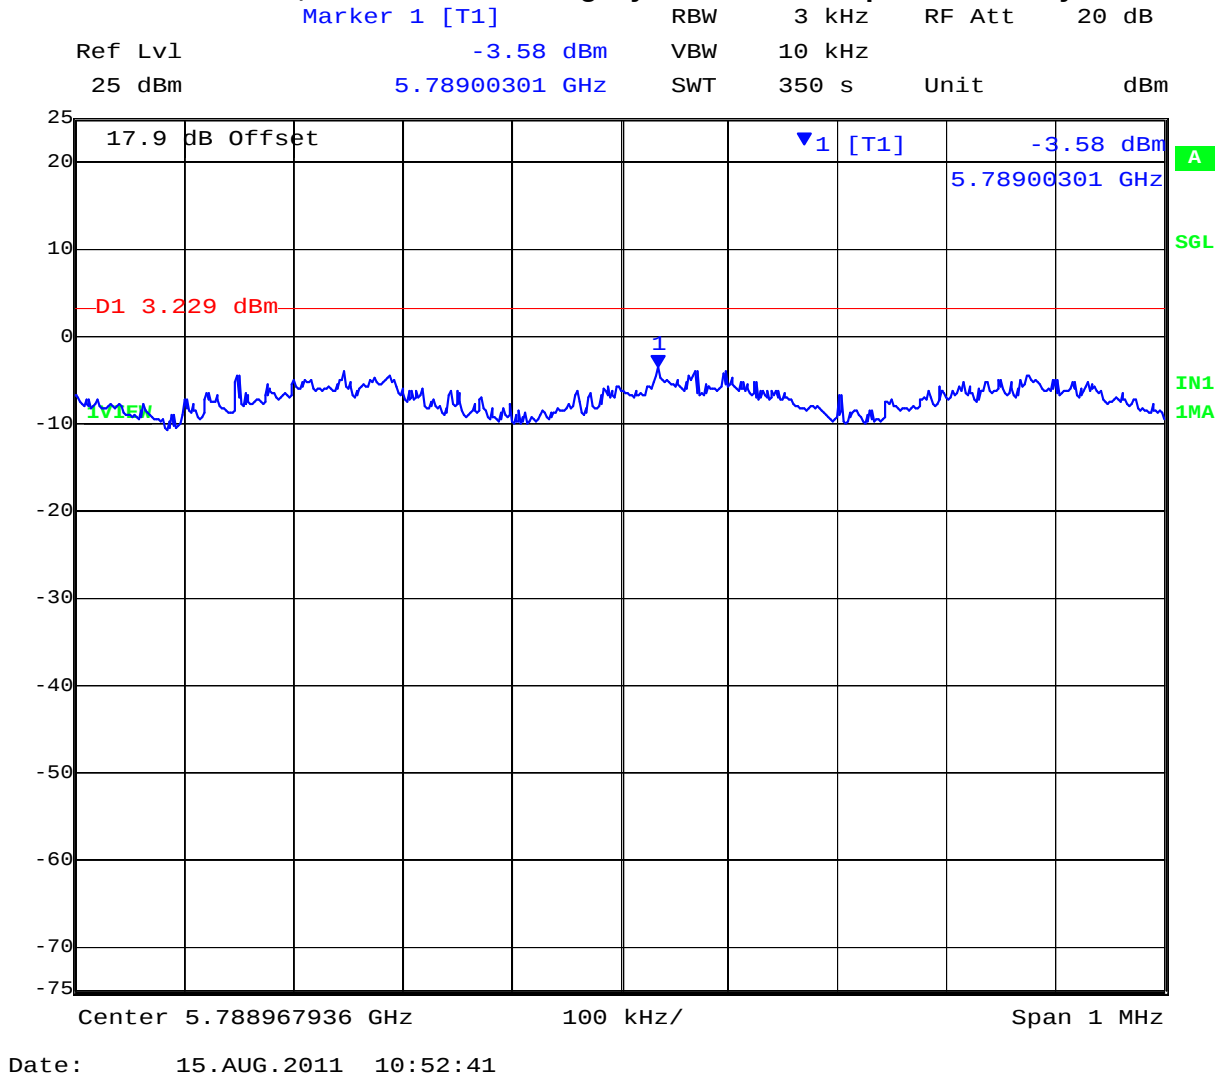


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 148 of 279

PORT C 5,785 MHz 802.11a Legacy - Peak Power Spectral Density

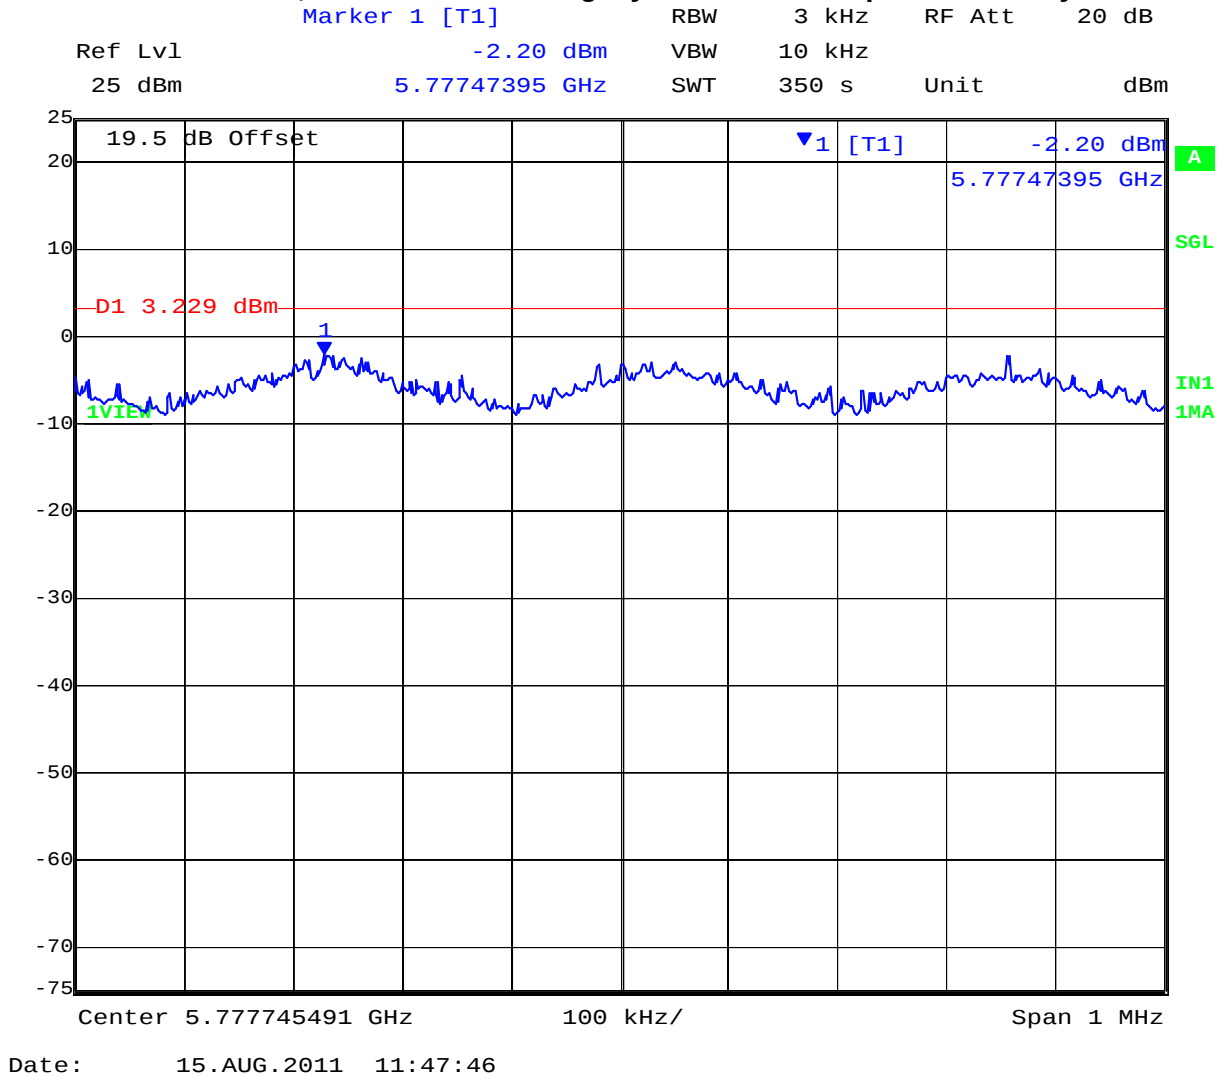


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 149 of 279

PORT A 5,825 MHz 802.11a Legacy - Peak Power Spectral Density

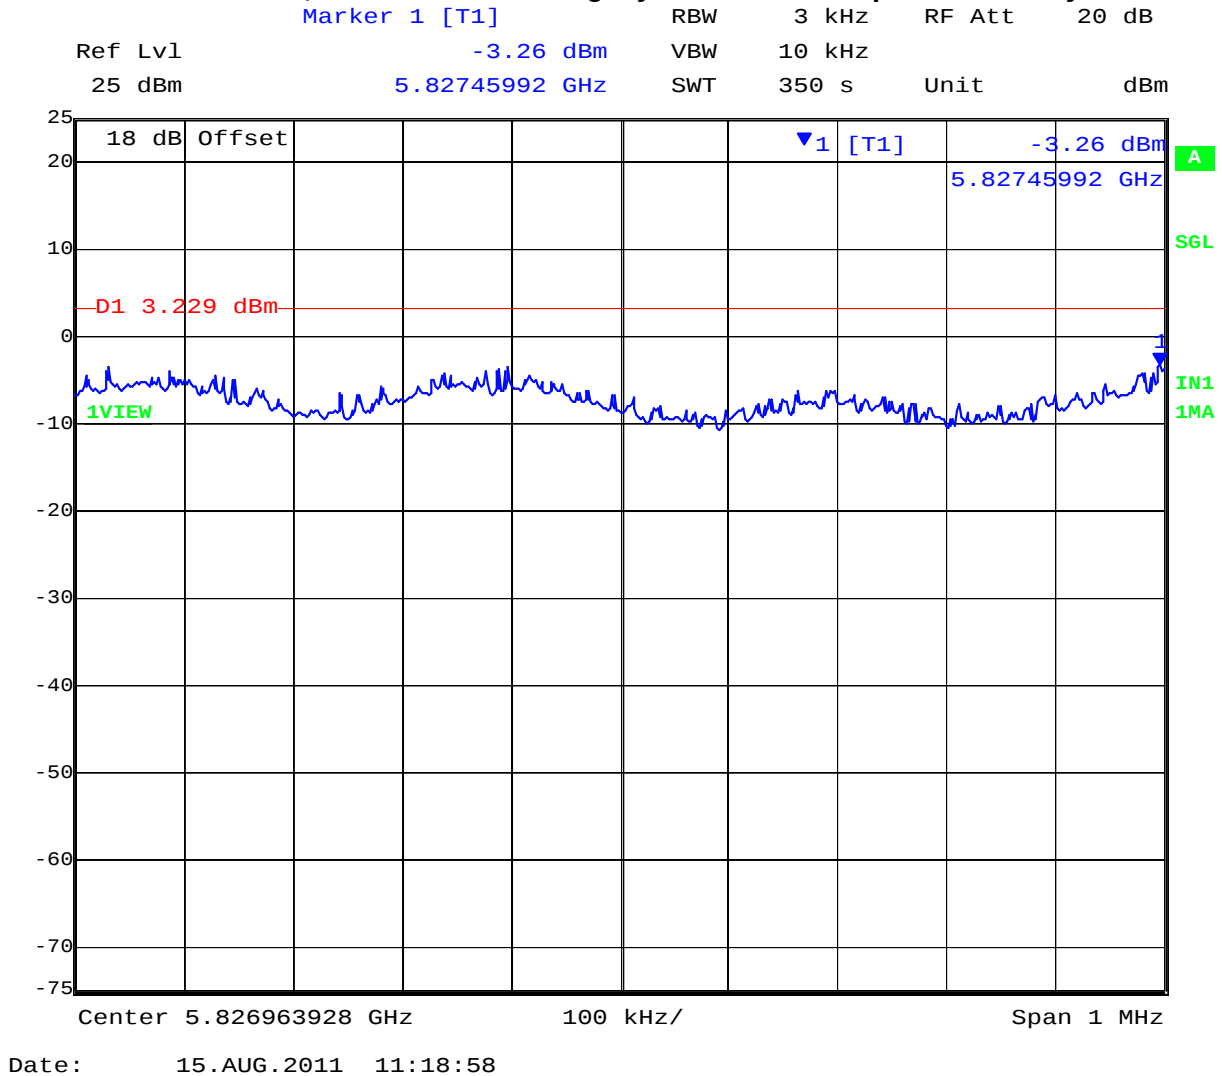


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 150 of 279

PORT B 5,825 MHz 802.11a Legacy - Peak Power Spectral Density

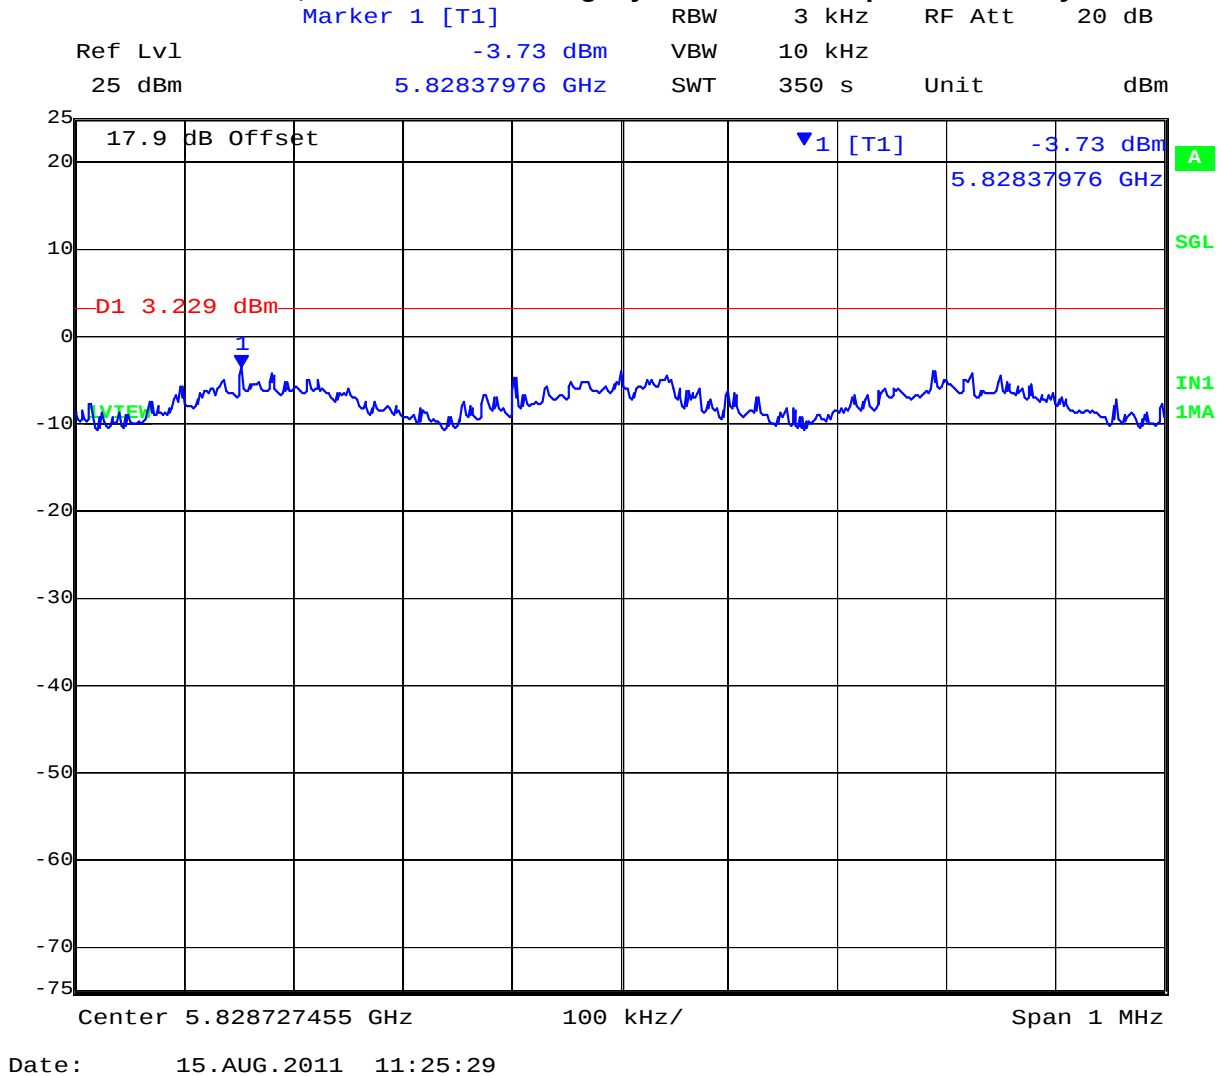


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 151 of 279

PORT C 5,825 MHz 802.11a Legacy - Peak Power Spectral Density

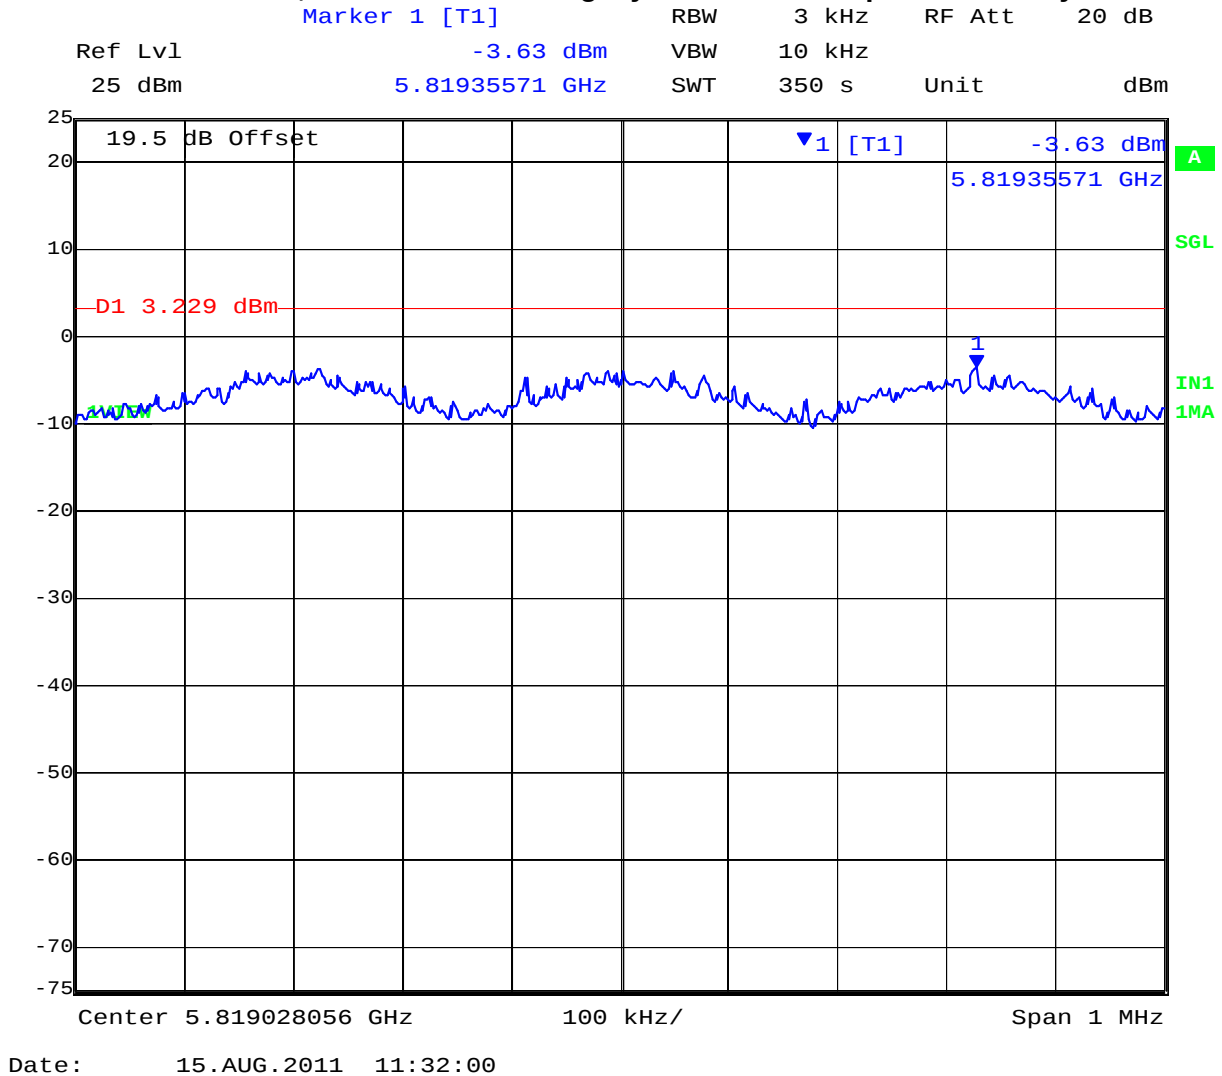

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 152 of 279

TABLE OF RESULTS – 802.11N HT-20

Test Conditions:	15.247 (e)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain	N/A	Antenna Gain:	3 dBi		
Applied Voltage:	48.00	Antenna Ports (N):	3		
Notes 1:					
Notes 2:					

Test Frequency	Measured Power Density				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
5745.000	0.41	0.48	-0.10	--	4.77	5.25	8.00	-2.75
5785.000	0.04	-0.29	-0.28	--	4.77	4.82	8.00	-3.18
5825.000	-0.06	0.16	0.52	--	4.77	5.29	8.00	-2.71


Measurement uncertainty:	± 1.33 dB
---------------------------------	---------------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 153 of 279

PORT A 5,745 MHz 802.11n HT-20 - Peak Power Spectral Density

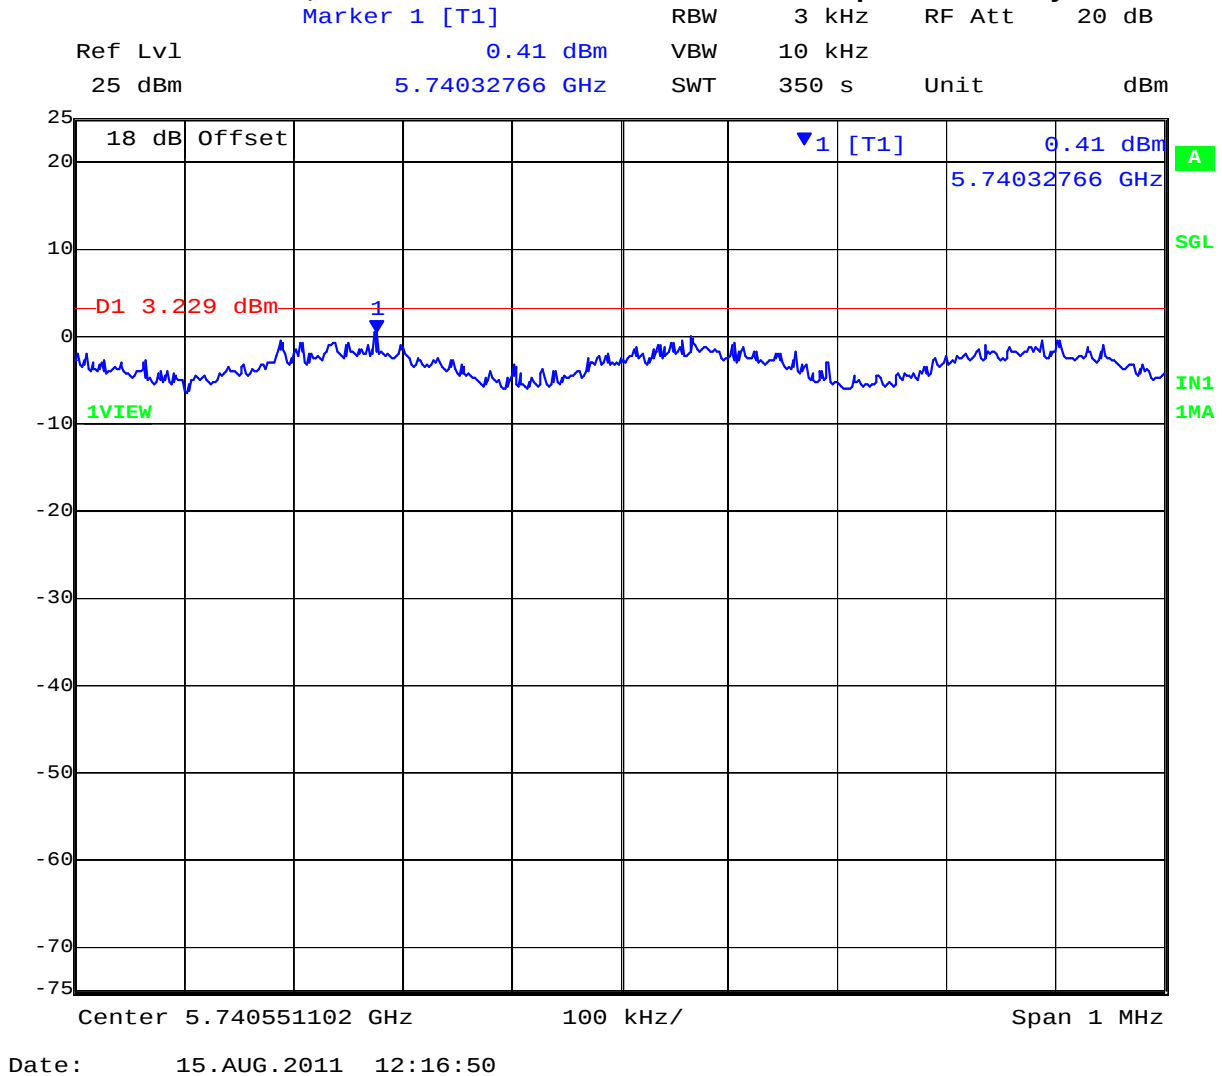


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 154 of 279

PORT B 5,745 MHz 802.11n HT-20 - Peak Power Spectral Density

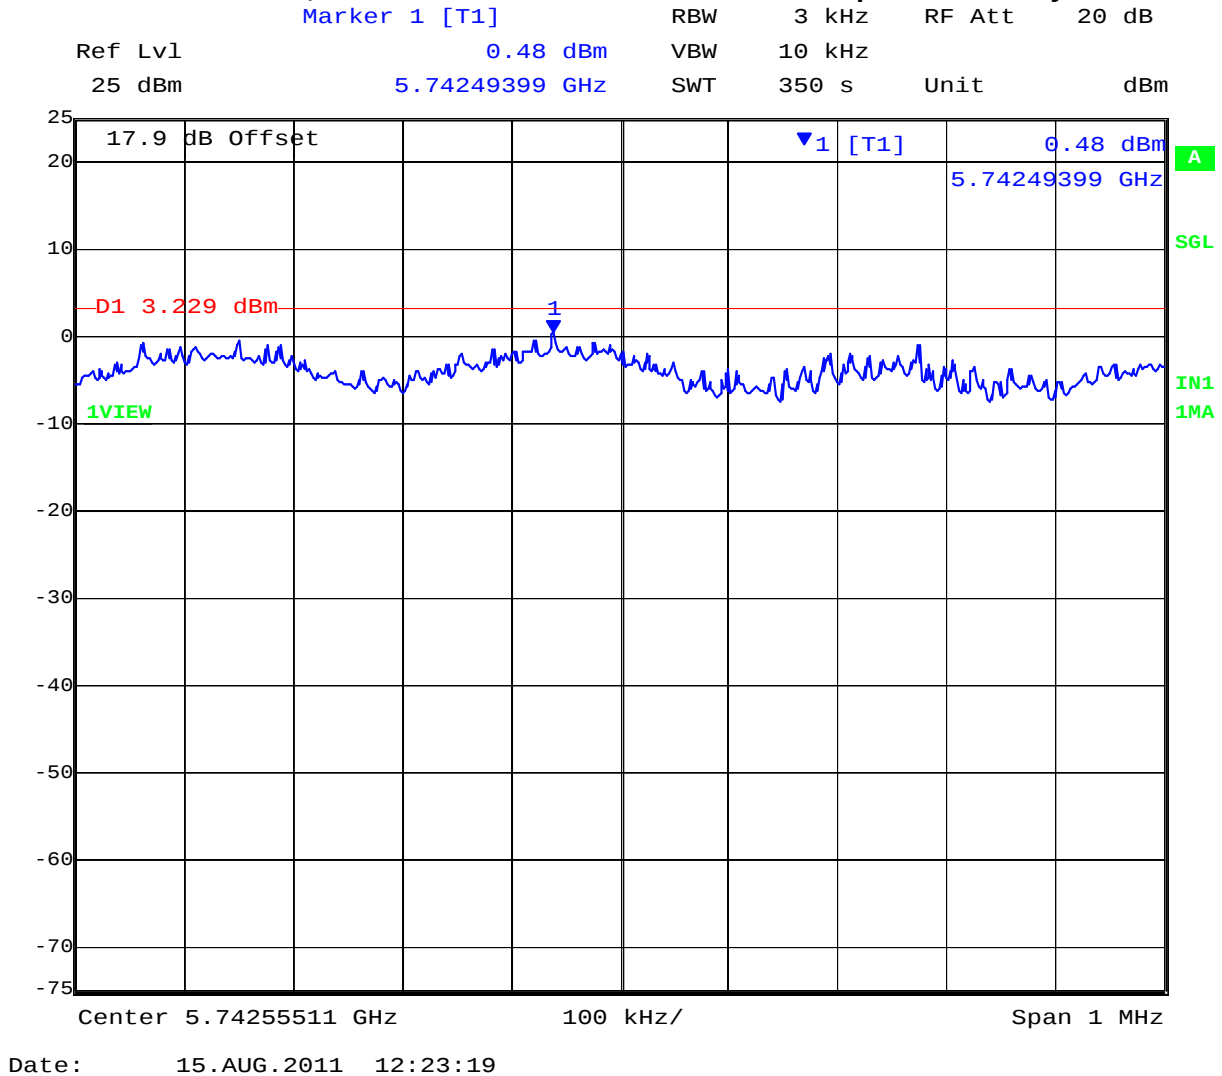


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 155 of 279

PORT C 5,745 MHz 802.11n HT-20 - Peak Power Spectral Density

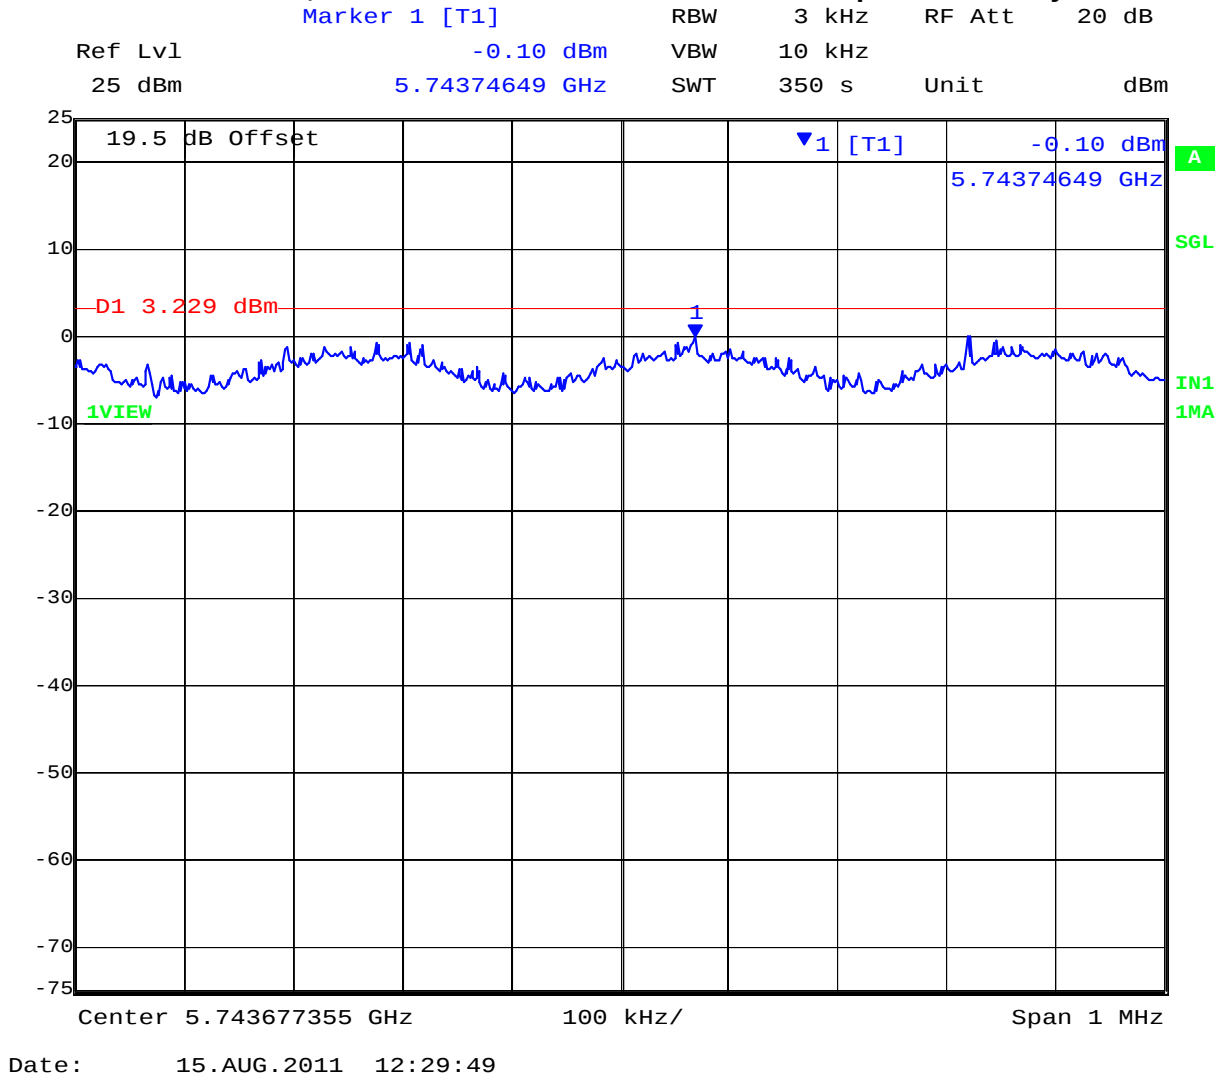


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 156 of 279

PORT A 5,785 MHz 802.11n HT-20 - Peak Power Spectral Density

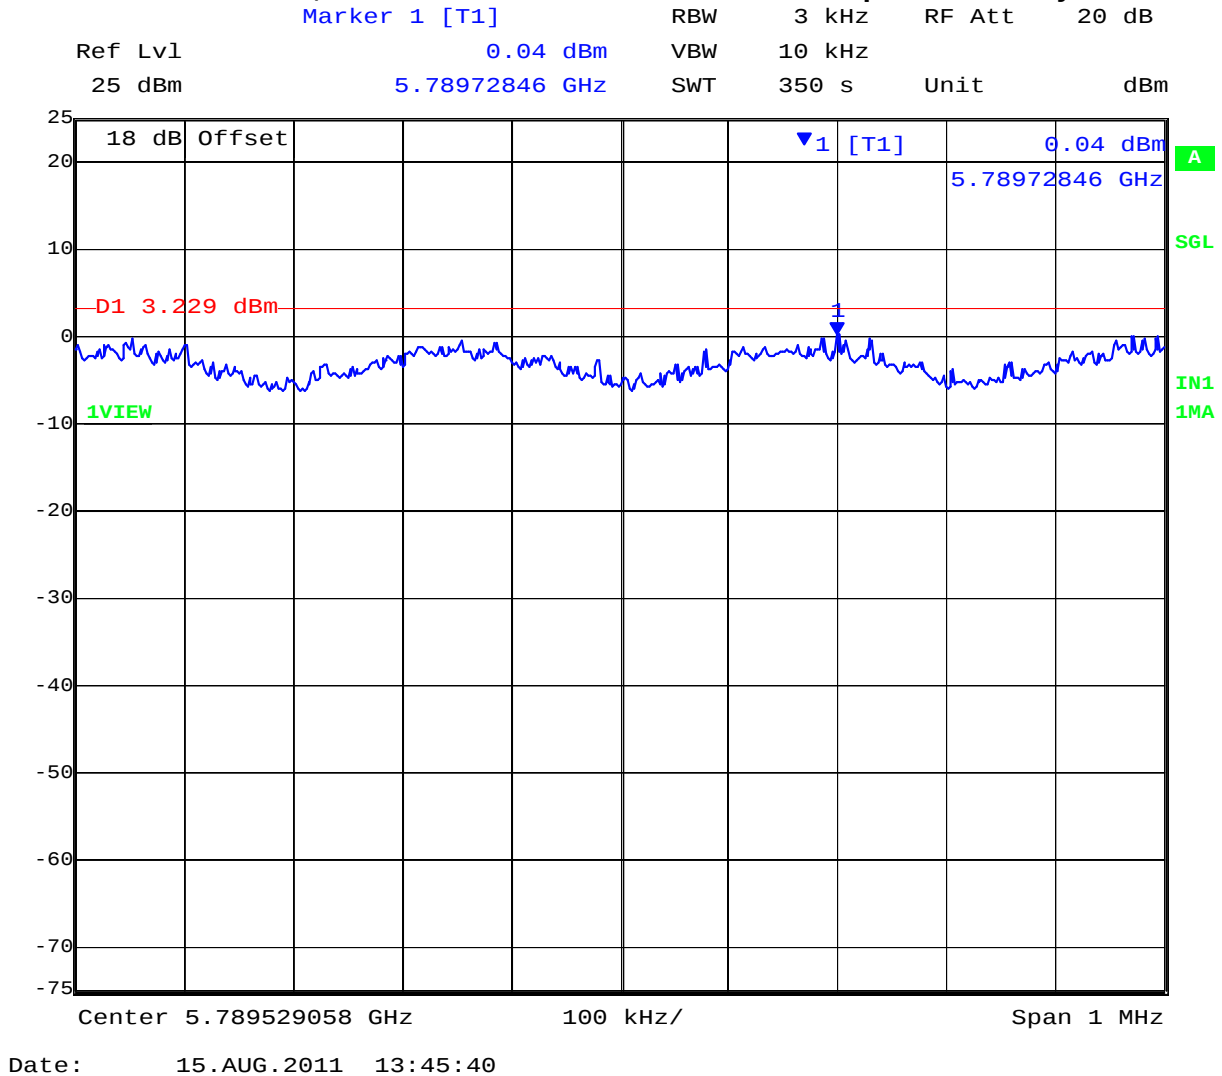


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 157 of 279

PORT B 5,785 MHz 802.11n HT-20 - Peak Power Spectral Density

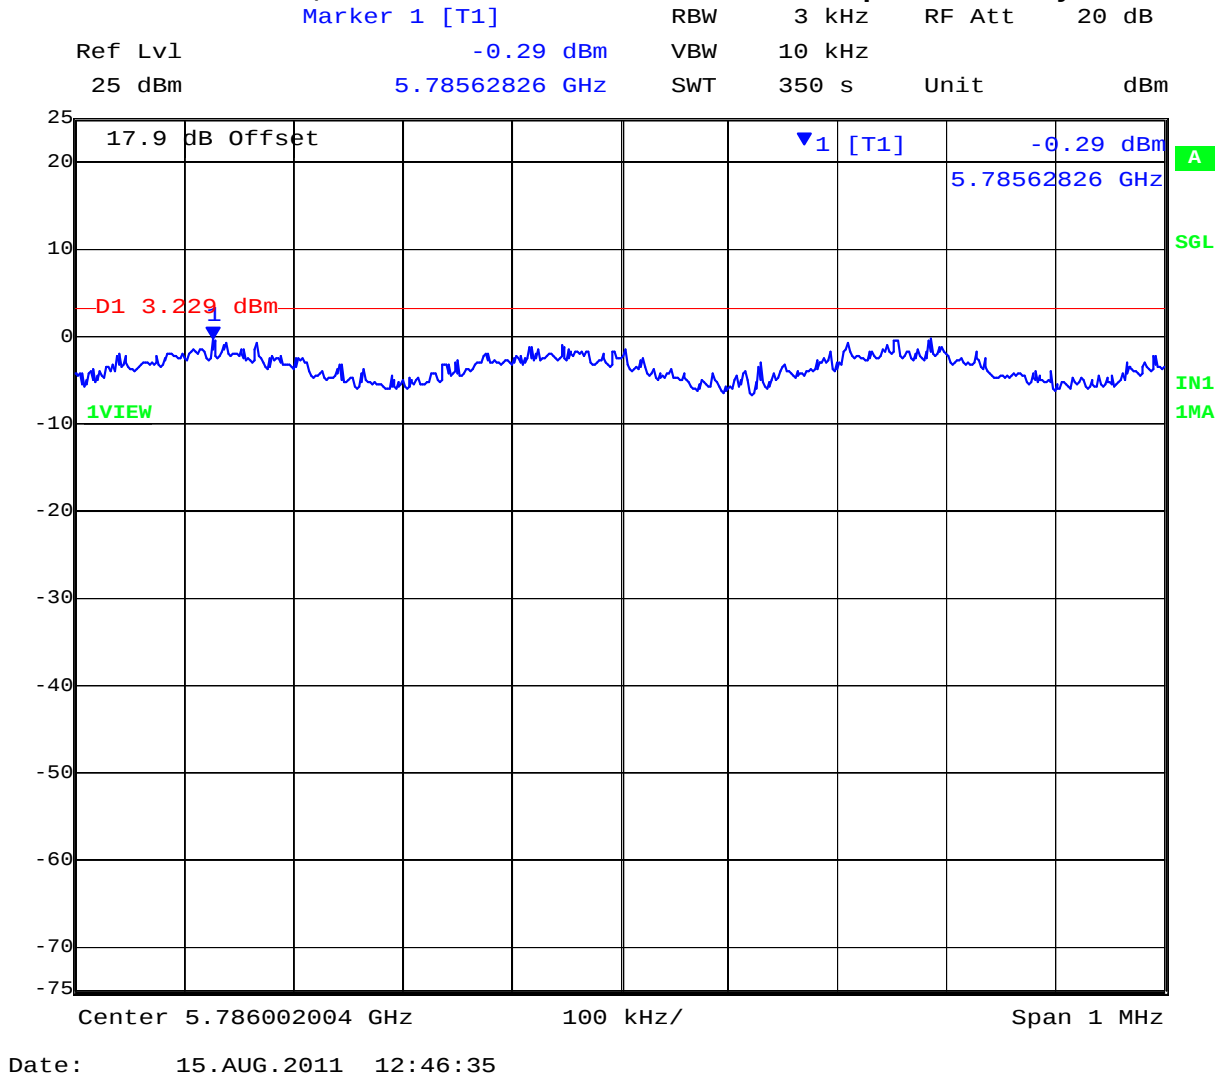


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 158 of 279

PORT C 5,785 MHz 802.11n HT-20 - Peak Power Spectral Density

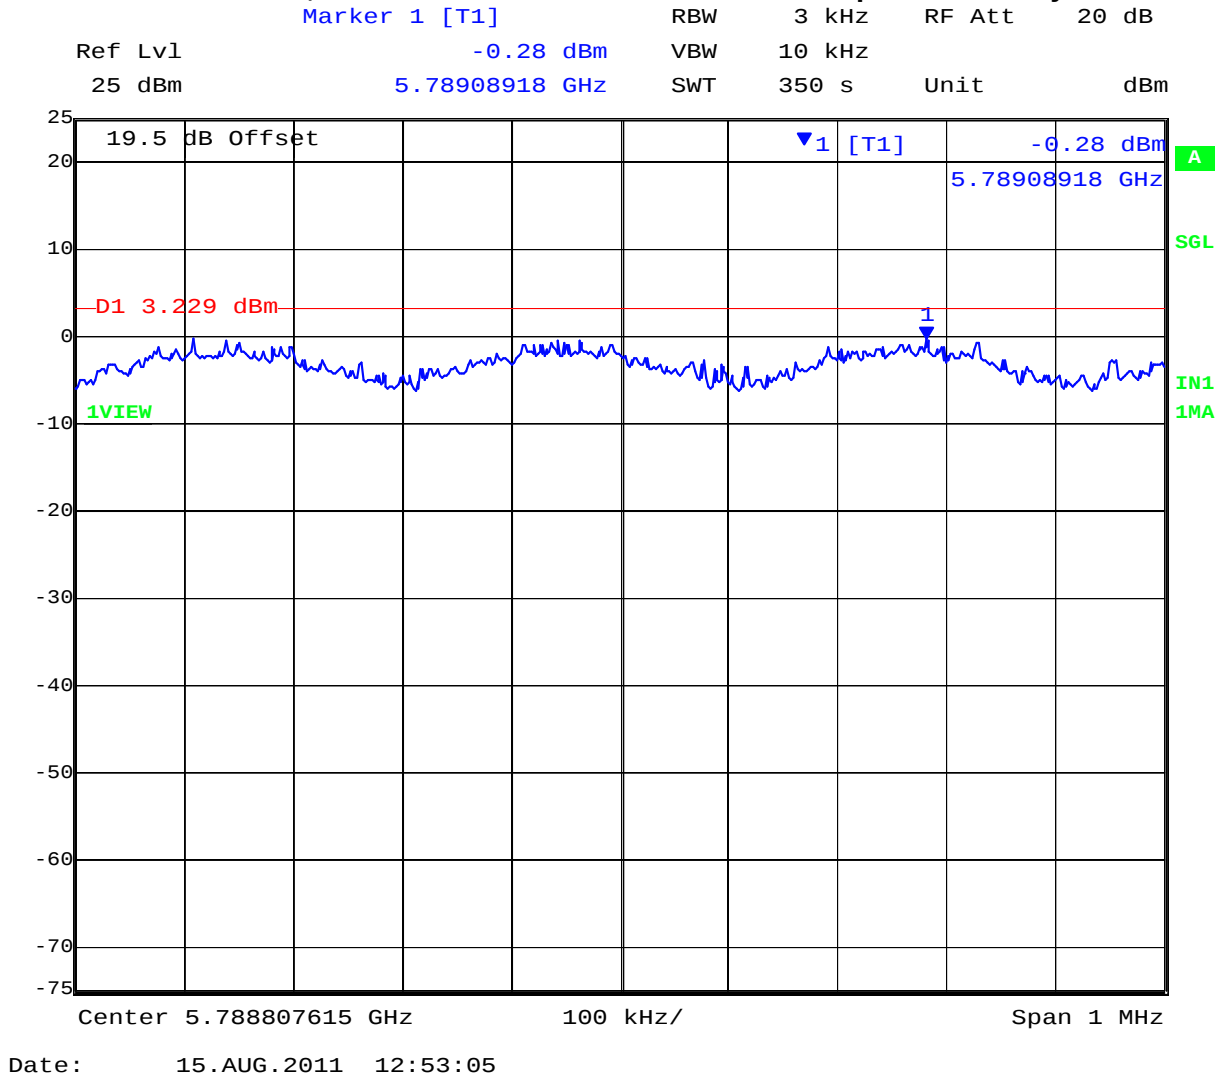


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 159 of 279

PORT A 5,825 MHz 802.11n HT-20 - Peak Power Spectral Density

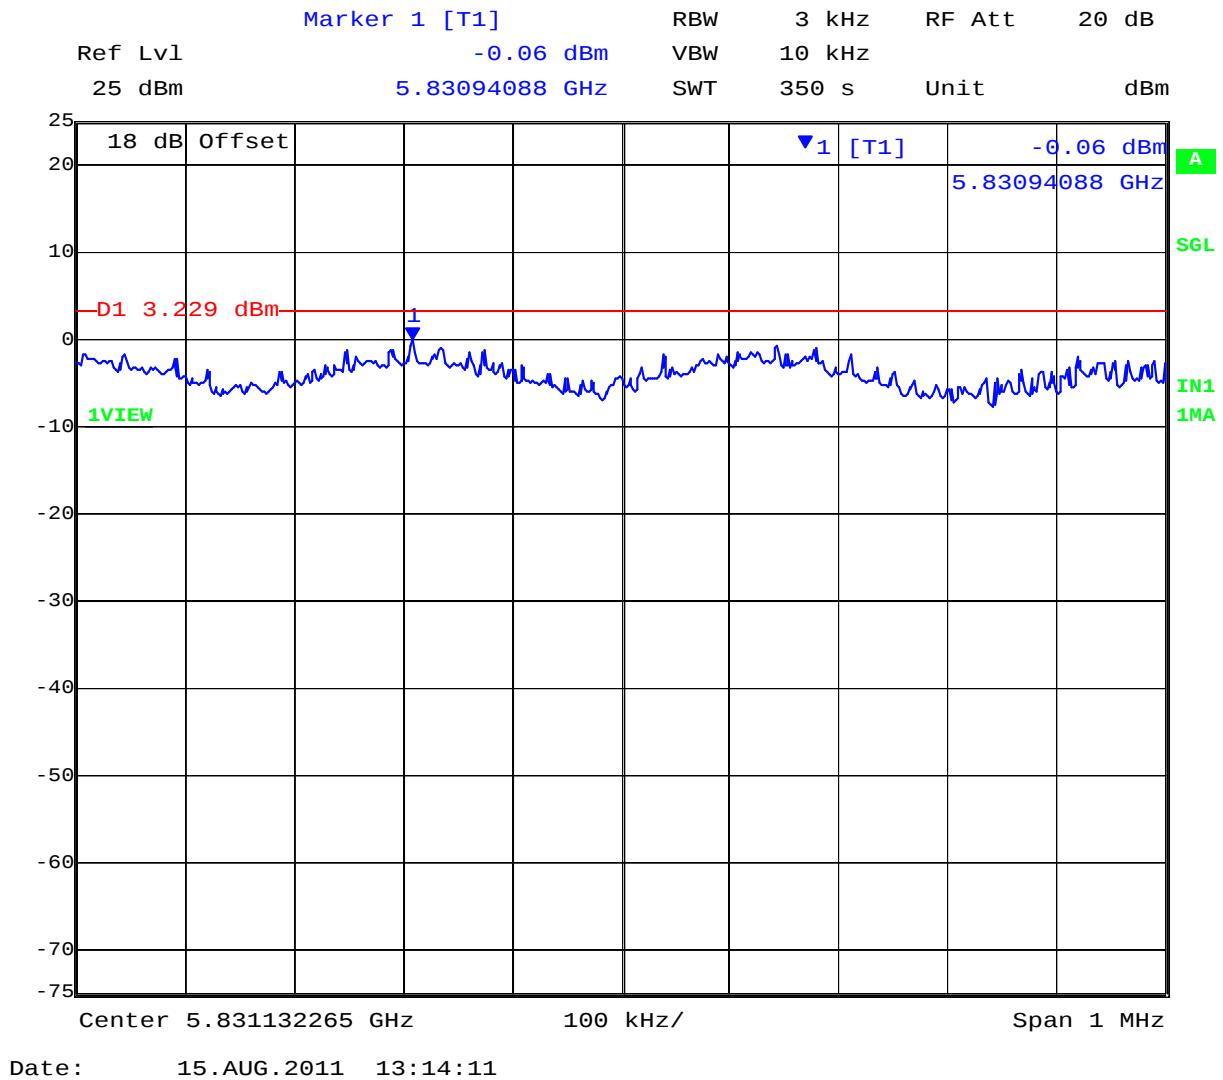


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 160 of 279

PORT B 5,825 MHz 802.11n HT-20 - Peak Power Spectral Density

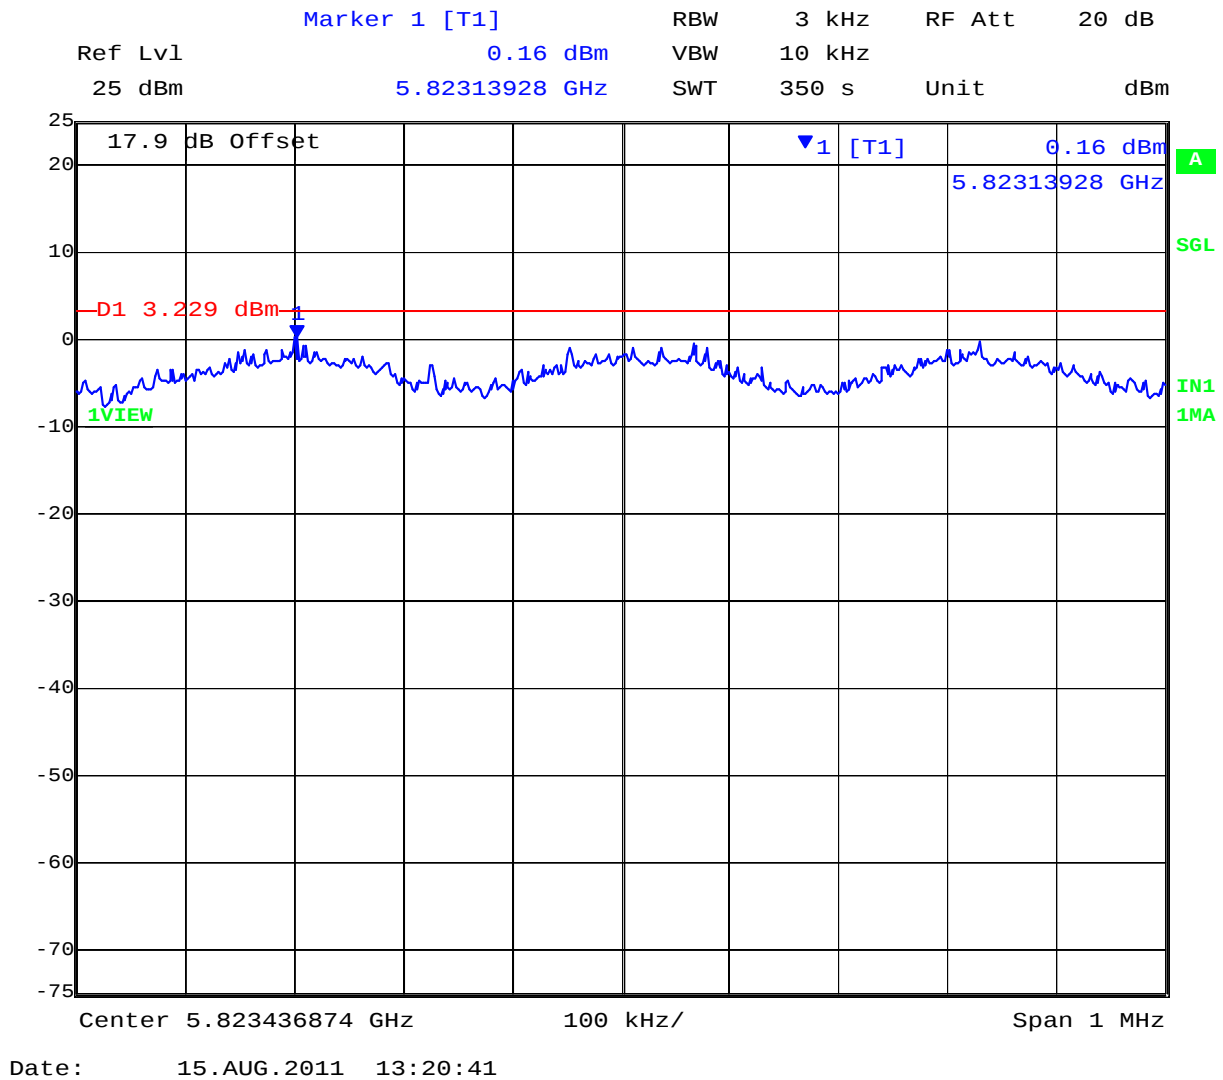


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 161 of 279

PORT C 5,825 MHz 802.11n HT-20 - Peak Power Spectral Density

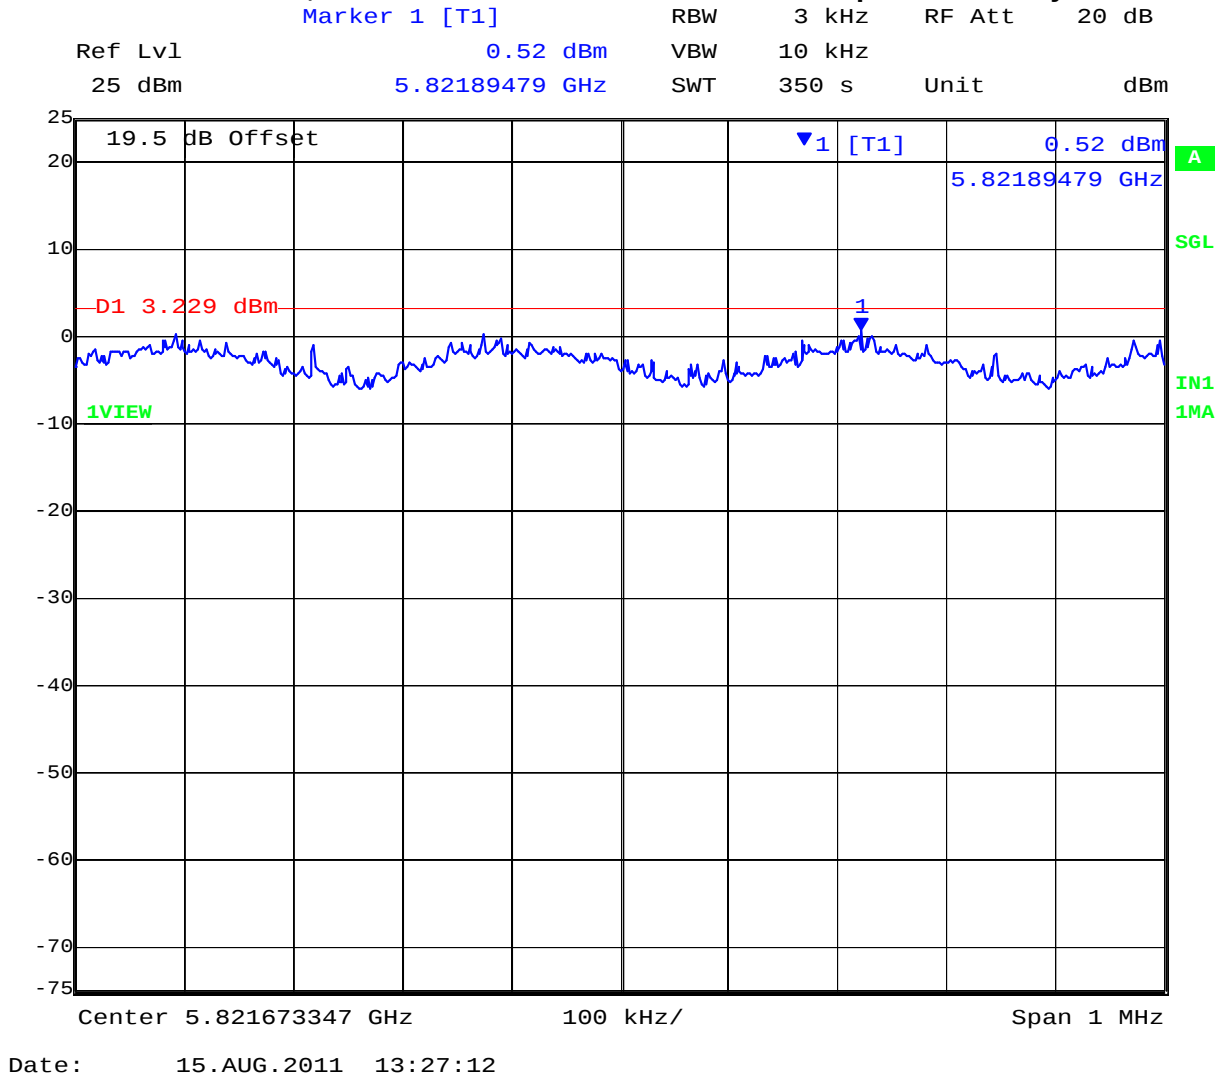

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 162 of 279

TABLE OF RESULTS – 802.11N HT-40

Test Conditions:	15.247 (e)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain	N/A	dB	Antenna Gain:	3 dBi	
Applied Voltage:	48.00	Vdc	Antenna Ports (N):	3	
Notes 1:					
Notes 2:					

Test Frequency	Measured Power Density				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
5755.000	-4.30	-3.93	-1.27	--	4.77	3.50	8.00	-4.50
5795.000	-3.38	-3.16	-0.83	--	4.77	3.94	8.00	-4.06


Measurement uncertainty:	± 1.33 dB
---------------------------------	---------------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 163 of 279

PORT A 5,755 MHz 802.11n HT-40 - Peak Power Spectral Density

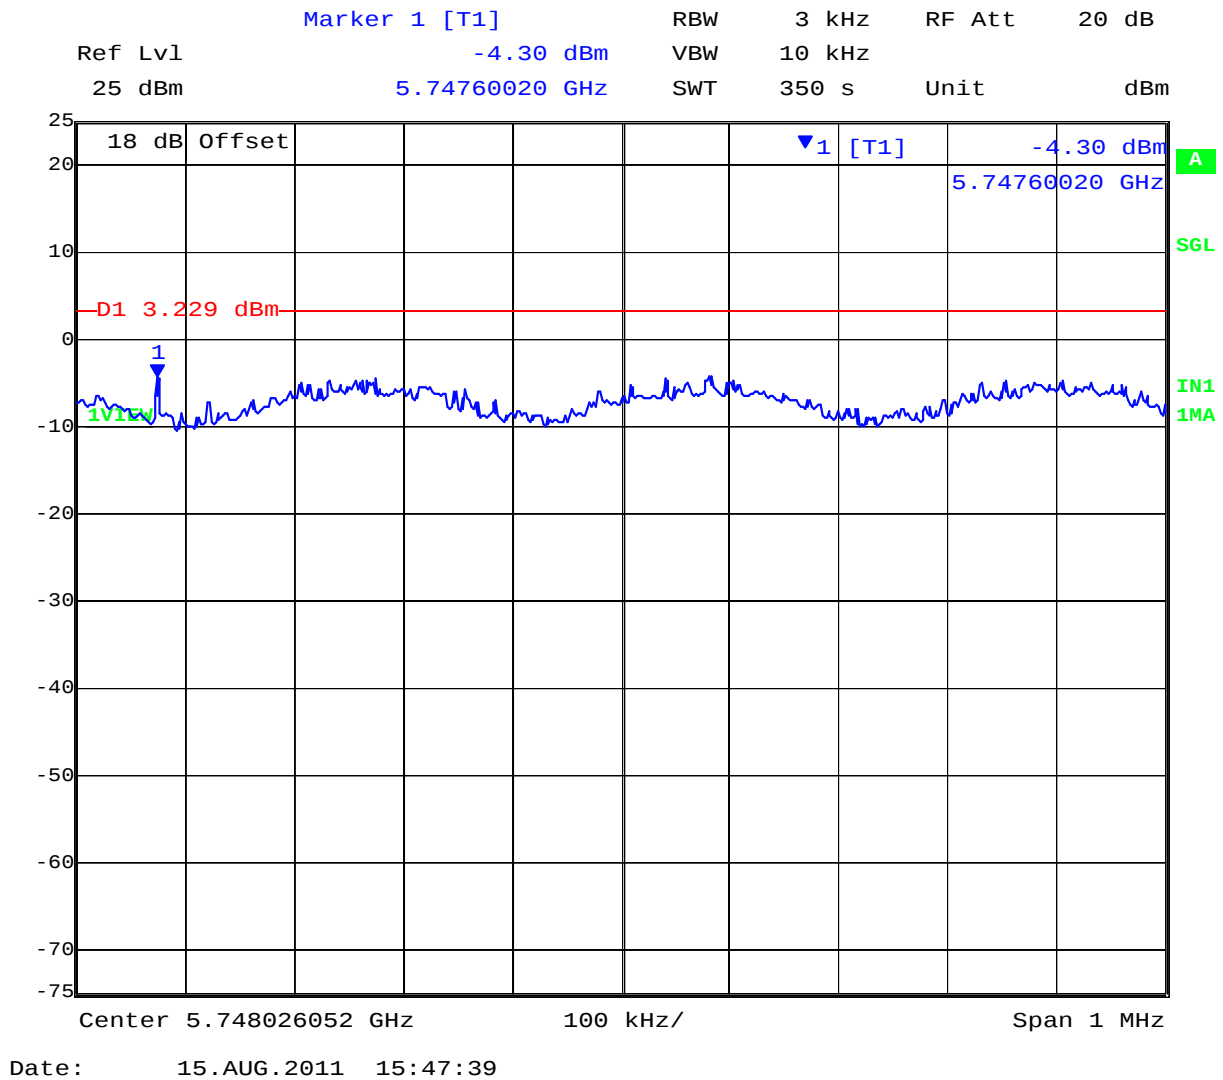


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 164 of 279

PORT B 5,755 MHz 802.11n HT-40 - Peak Power Spectral Density

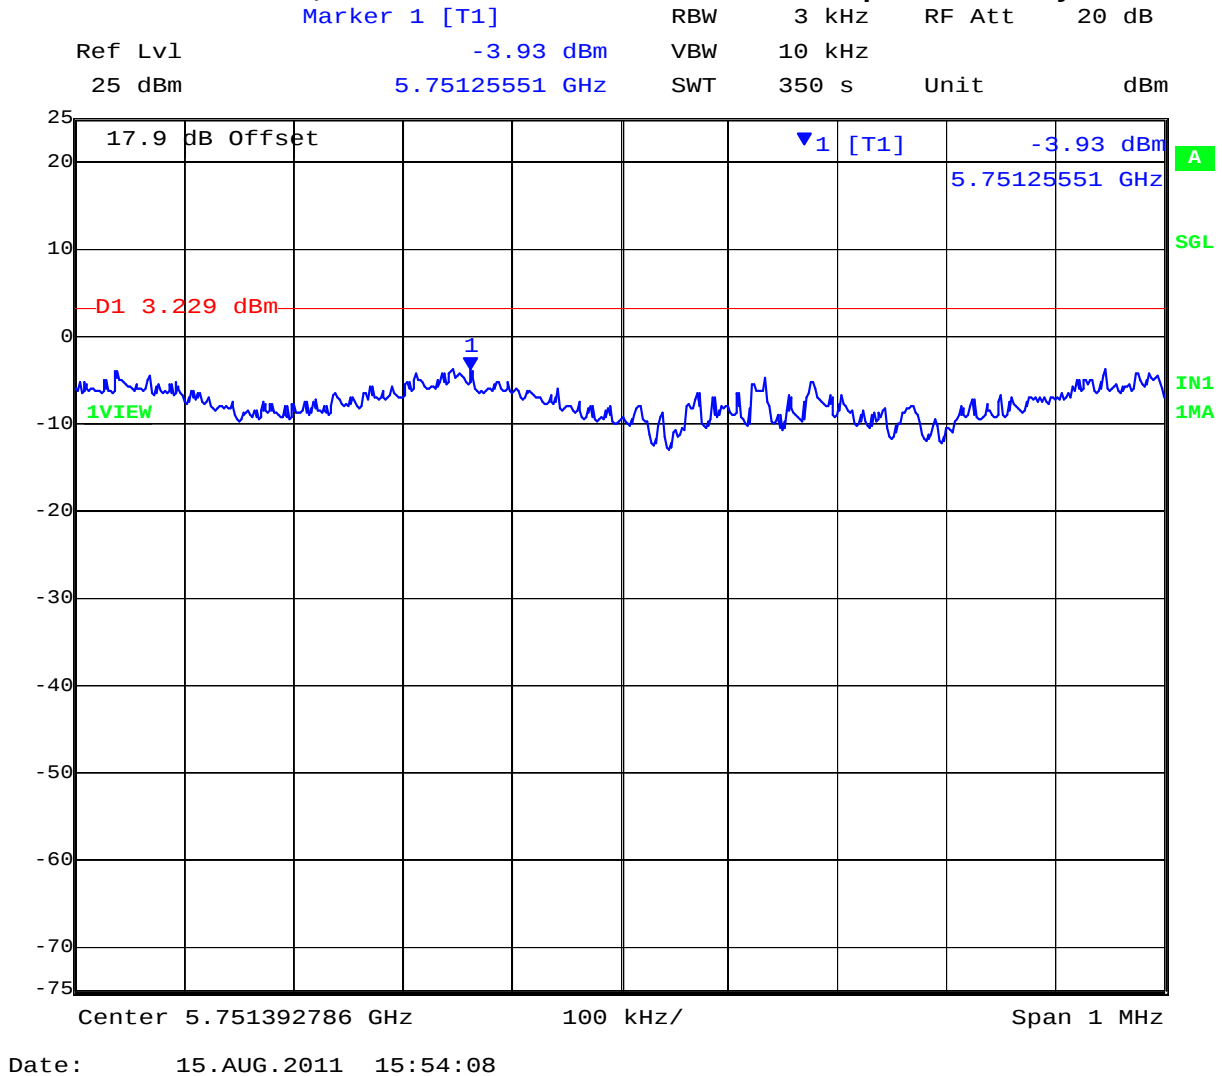


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 165 of 279

PORT C 5,755 MHz 802.11n HT-40 - Peak Power Spectral Density

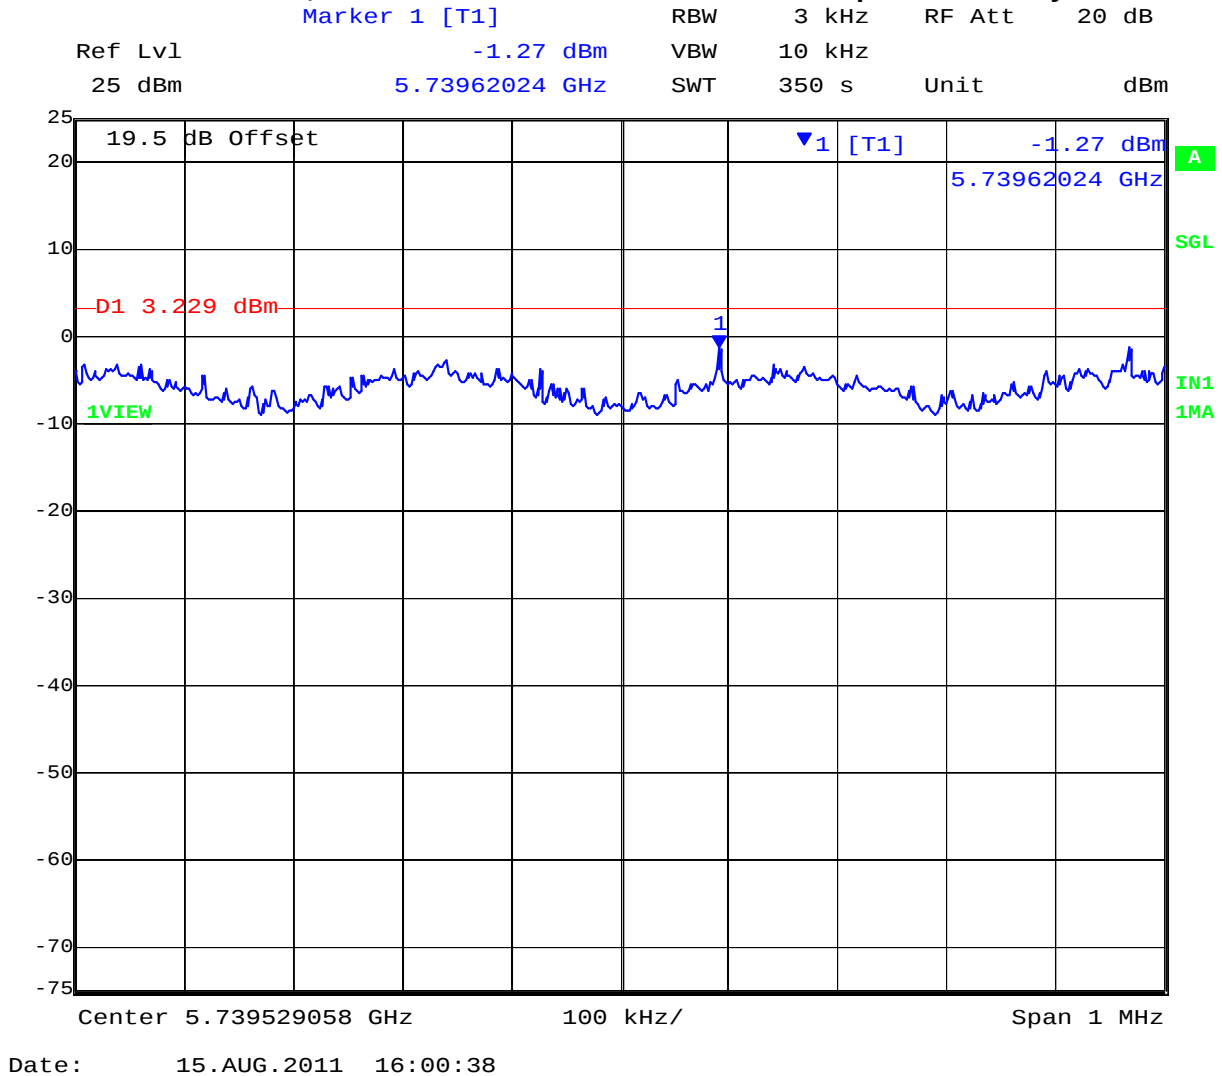


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 166 of 279

PORT A 5,795 MHz 802.11n HT-40 - Peak Power Spectral Density

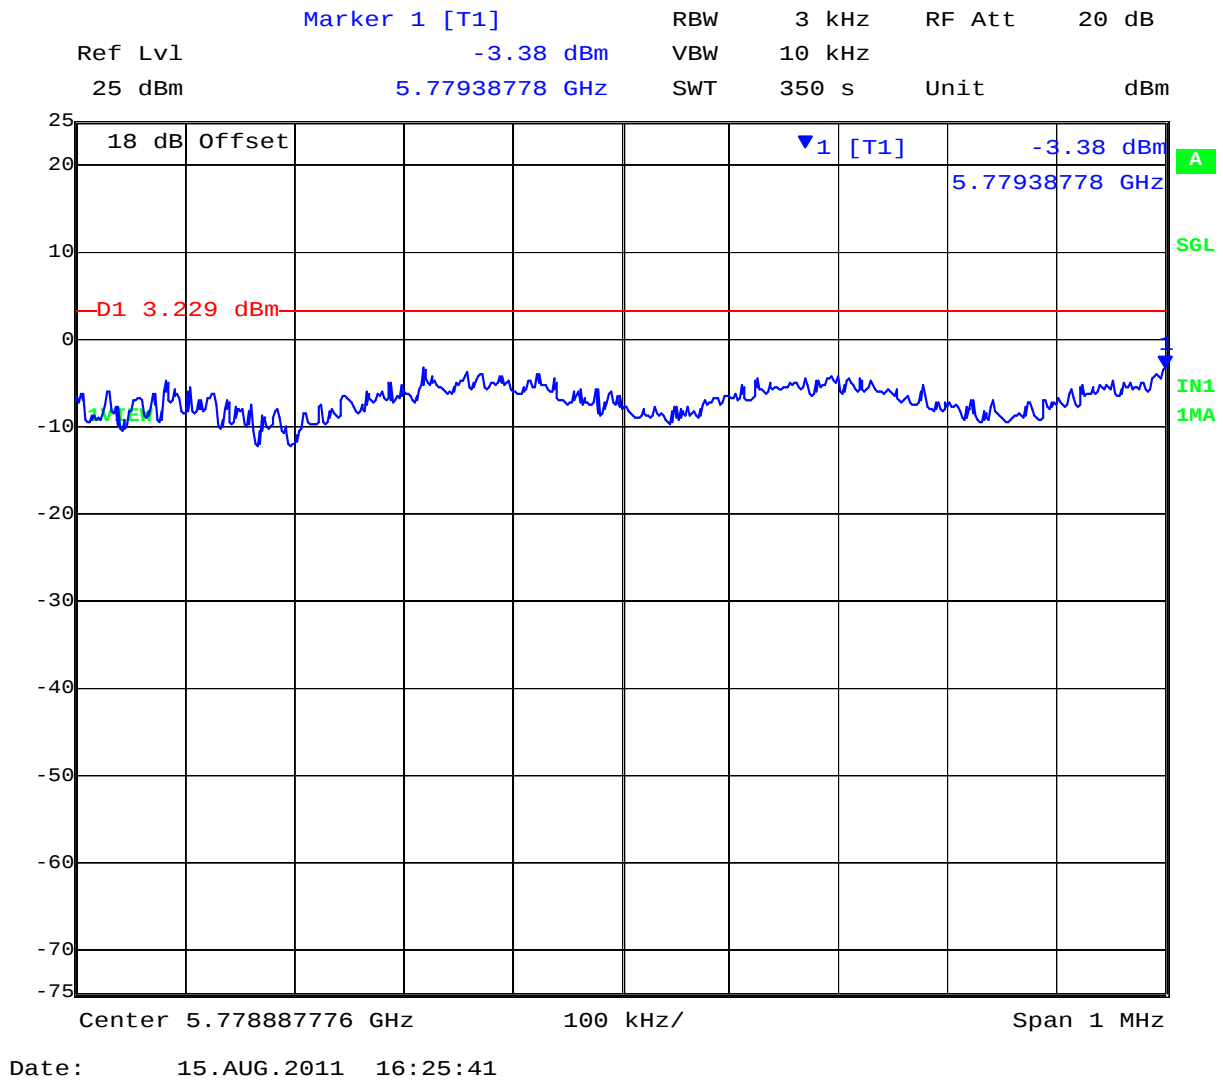

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 167 of 279

PORT B 5,795 MHz 802.11n HT-40 - Peak Power Spectral Density




This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 168 of 279

PORT C 5,795 MHz 802.11n HT-40 - Peak Power Spectral Density

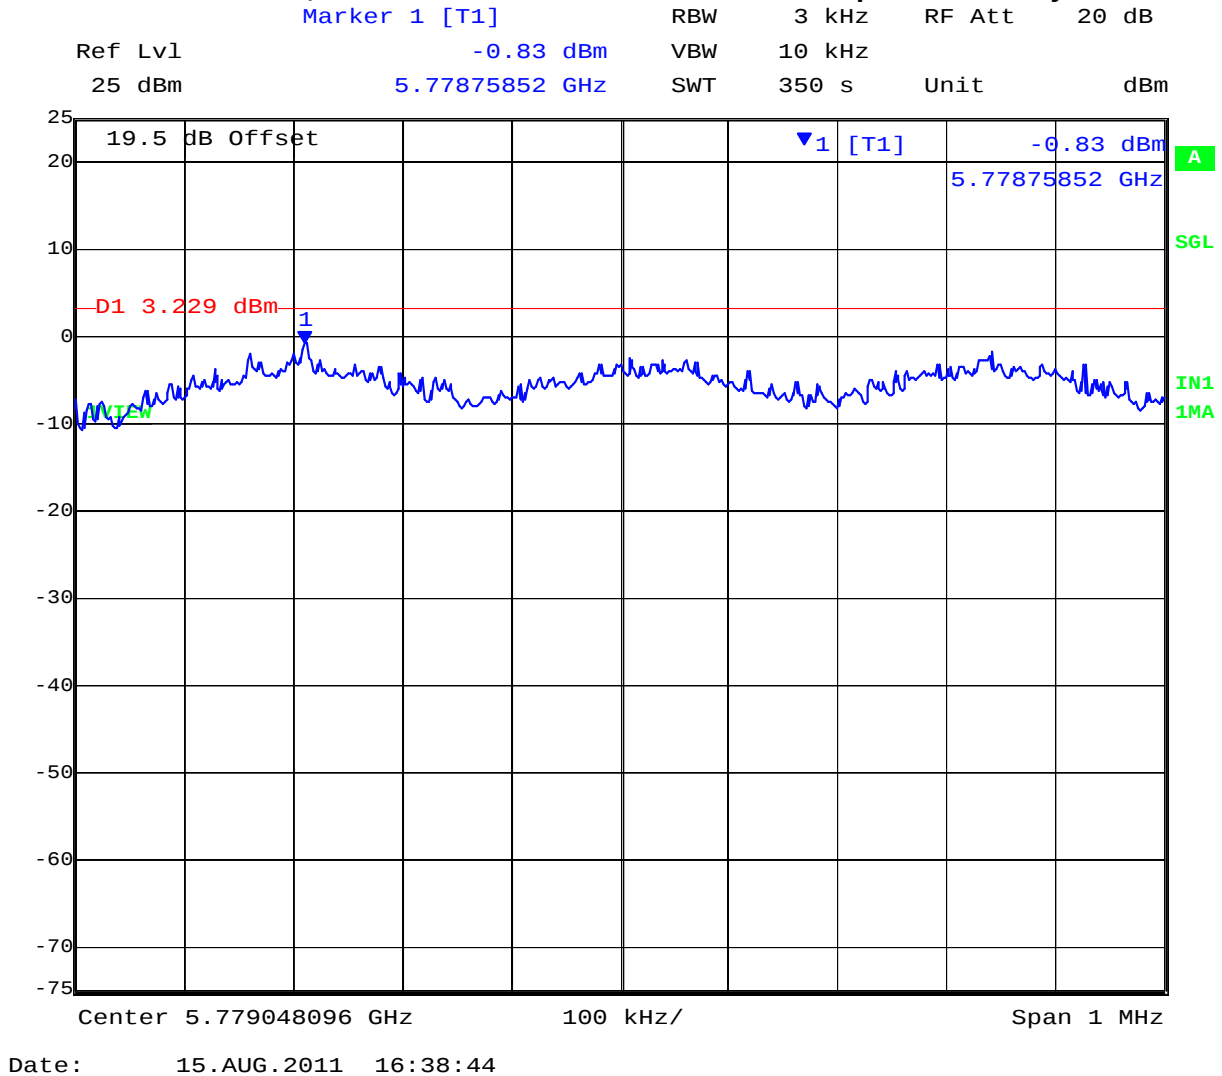

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 169 of 279

Specification

Peak Power Spectral Density Limits

§15.247(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission

RSS-210 §A8.2(2) The transmitter power spectral density (into the antenna) shall not be greater than +8 dBm in any 3 kHz band during any time interval of continuous transmission or over 1.0 second if the transmission exceeds 1.0 second duration.

Laboratory Measurement Uncertainty for Spectral Density

Measurement uncertainty	± 1.33 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 170 of 279

5.1.4. Maximum Permissible Exposure

FCC, Part 15 Subpart C §15.247(i)

Industry Canada RSS-Gen §5.5

Calculations for Maximum Permissible Exposure Levels

Power Density = P_d (mW/cm²) = $EIRP / (4\pi d^2)$

$EIRP = P * G$

P = Peak output power (mW)

G = Antenna numeric gain (numeric)

d = Separation distance (cm)

Numeric Gain = $10^{(G \text{ (dBi)} / 10)}$

The Juniper WLA532 has three transmitters operating in each band. The peak power in the table below is calculated by assuming a worst case scenario where all transmitters are operating simultaneously in the same channel.

Because the EUT belongs to the General Population/Uncontrolled Exposure the limit of power density is 1.0 mW/cm²

Freq. Band (GHz)	Antenna Gain (dBi)	Numeric Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Calculated Safe Distance @ 1mW/cm ² Limit(cm)	Minimum Separation Distance (cm)
2.4	2.0	1.58	+25.71	372.4	6.84	20.0*
5.8	3.0	2.00	+28.52	711.2	10.6	20.0*

***Note:** for mobile or fixed location transmitters the minimum separation distance is 20cm, even if calculations indicate the MPE distance to be less.

Specification

Maximum Permissible Exposure Limits

§15.247(i) Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency levels in excess of the Commission's guidelines.

FCC §1.1310 Limit = 1mW / cm² from 1.310 Table 1

RSS-Gen §5.5 Before equipment certification is granted, the applicable requirements of RSS-102 shall be met

Laboratory Measurement Uncertainty for Power Measurements

Measurement uncertainty

±1.33 dB

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.5. Conducted Spurious Emissions

FCC, Part 15 Subpart C §15.247(d); 15.205; 15.209


Industry Canada RSS-210 §A8.5, §2.2

Industry Canada RSS-Gen 4.7

Test Procedure

Conducted emissions were measured at a limit of 20 dB below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Emissions at the band edge were measured and recorded. Measurements were made while EUT was operating in transmit mode of operation at the appropriate center frequency.

Test Measurement Set up

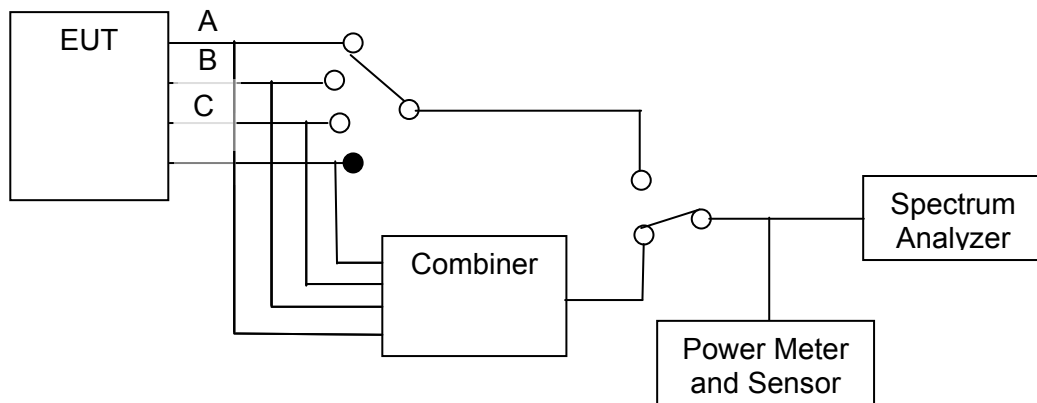

Band-edge measurement test configuration

Measurement Results of Conducted Spurious Emissions

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier

Power: Maximum Default Power

NOTE: KDB 662911 was implemented for Out-of-Band measurements. Where necessary Option (2) Measure and add 10 log (N) dB was implemented



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 172 of 279

Conducted Spurious Emission Results

Measurements were performed with the transmitter tuned to the channel closest to the band-edge being measured. All emissions were maximized during measurement. Limits which were derived from the band-edge measurements provided below are drawn on each plot.

TABLE OF RESULTS – 802.11b – Legacy

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35	to	42
Variant:	802.11b	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain	N/A dB	Antenna Gain:	N/A		dBi
Applied Voltage:	48.00 Vdc	Antenna Ports (N):			
Notes 1:					
Notes 2:					

Conducted Spurious Measurement

Test Freq.	Start Freq.	Stop Freq.	Port A		Port B		Port C		Port D	
MHz	MHz	MHz	SE dBm	Limit dBm	SE dBm	Limit dBm	SE dBm	Limit dBm	SE dBm	Limit dBm
2412.000	30.00	26000.00	-43.51	-7.81	-43.03	-8.09	-43.11	-8.96		
2437.000	30.00	26000.00	-43.45	-8.72	-43.86	-9.14	-42.84	-9.02		
2462.000	30.00	26000.00	-42.93	-9.72	-42.93	-9.19	-42.74	-10.26		

SE: Maximum spurious emission found

Band-edge Measurement

Test Freq.	Band-edge freq.	Port A		Port B		Port C		Port D	
MHz	MHz	BE dBm	Limit dBm	BE dBm	Limit dBm	BE dBm	Limit dBm	BE dBm	Limit dBm
2412.000	2400.00	-30.44	-8.11	-31.03	-7.76	-31.92	-7.99		
2462.000	2483.50	-32.60	-8.16	-34.74	-8.35	-34.46	-8.23		

BE: Maximum Band edge emission found

Measurement uncertainty:	±2.81 dB
---------------------------------	----------


Note: Limit is based on 20dB down from fundamental emissions

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 173 of 279

PORT A 802.11b - Conducted Spurious Emissions at the 2,400 MHz Band Edge

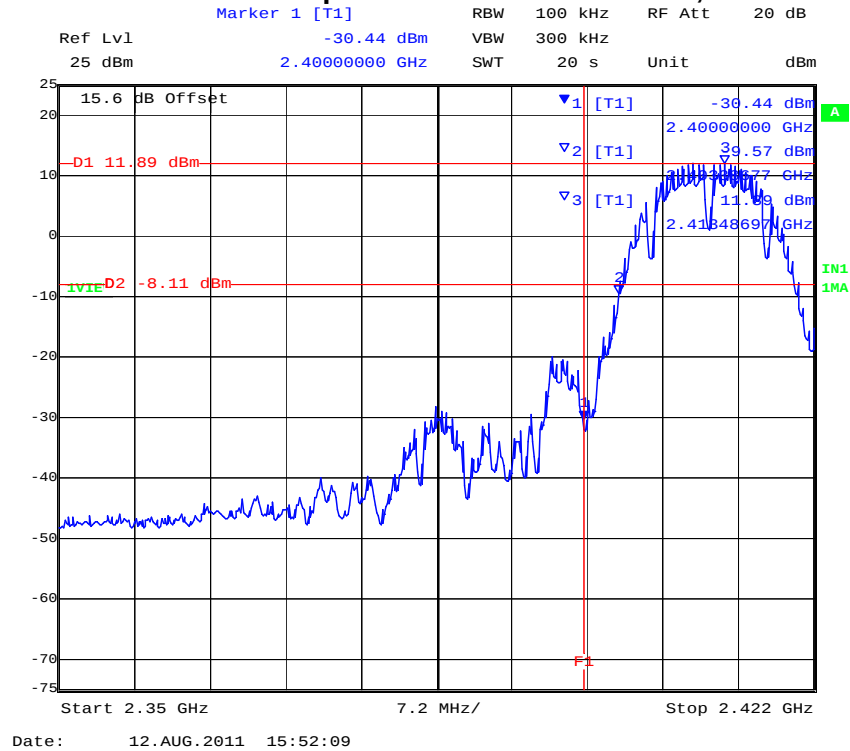

PORT B 802.11b - Conducted Spurious Emissions at the 2,400 MHz Band Edge

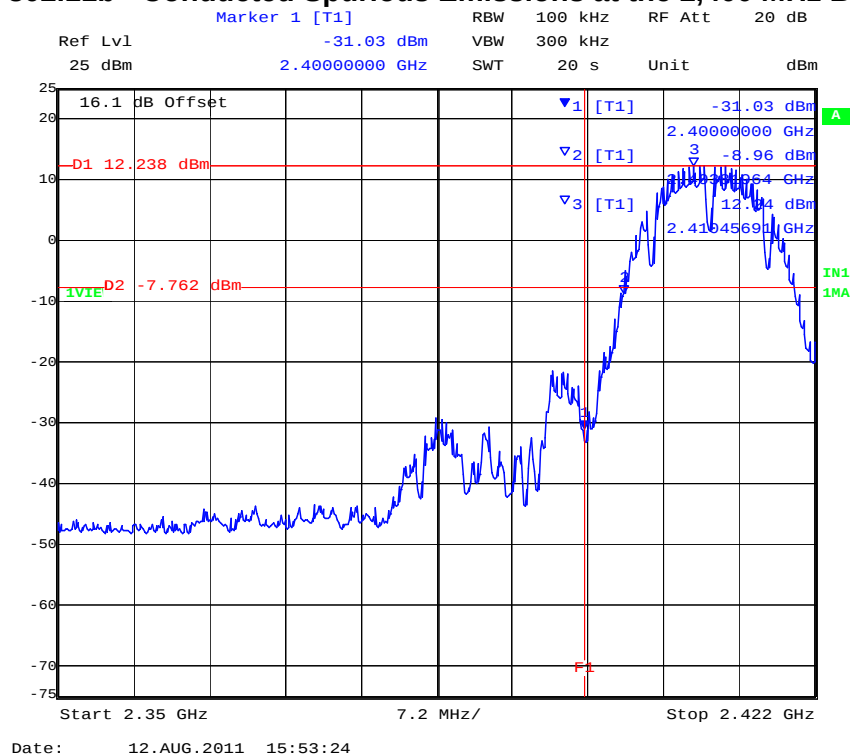


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 174 of 279

PORT C 802.11b - Conducted Spurious Emissions at the 2,400 MHz Band Edge

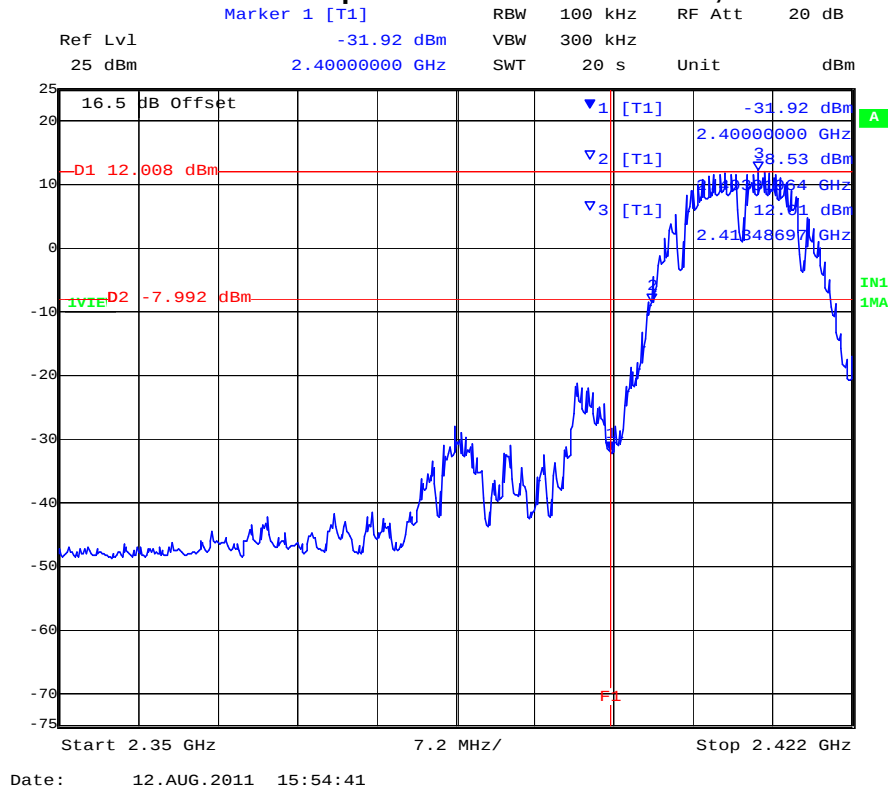


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 175 of 279

PORT A 802.11b - Conducted Spurious Emissions at the 2,483.5 MHz Band Edge

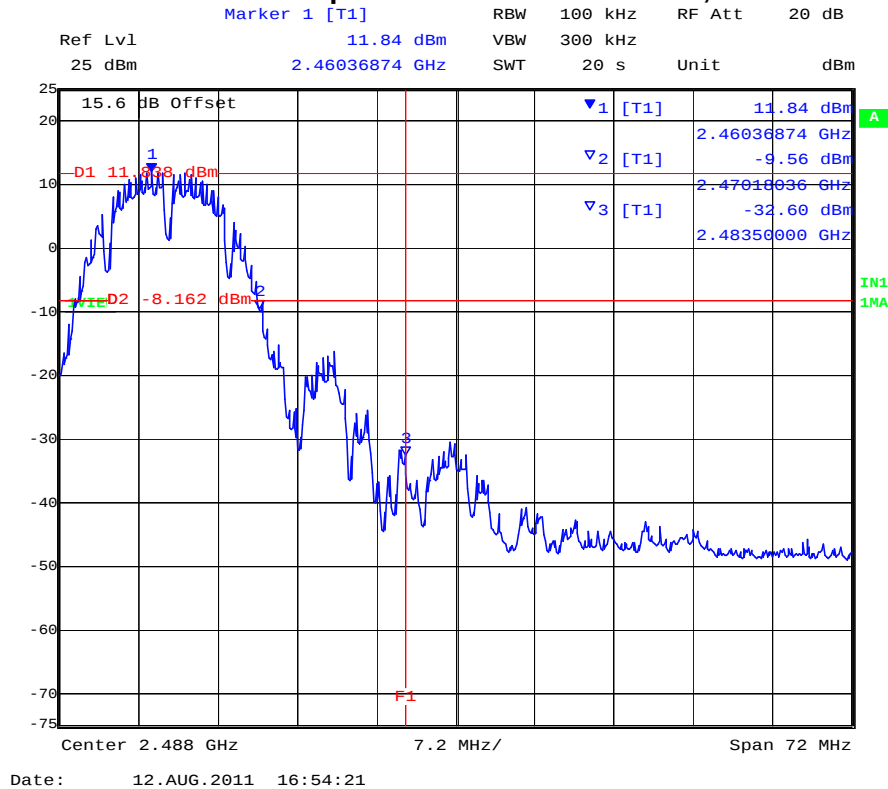

PORT B 802.11b - Conducted Spurious Emissions at the 2,483.5 MHz Band Edge

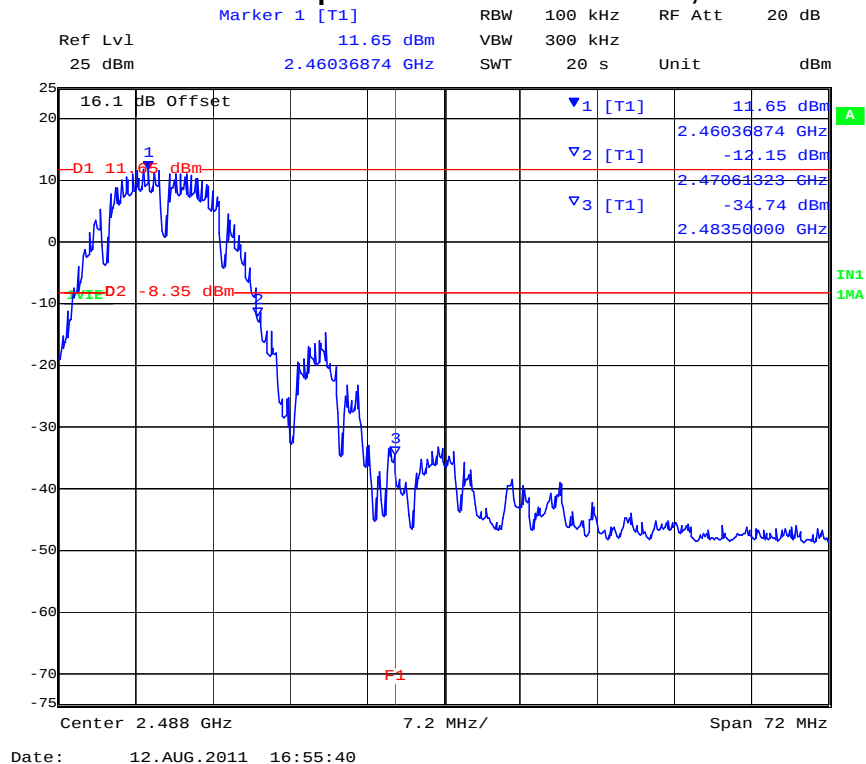


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 176 of 279

PORT C 802.11b - Conducted Spurious Emissions at the 2,483.5 MHz Band Edge

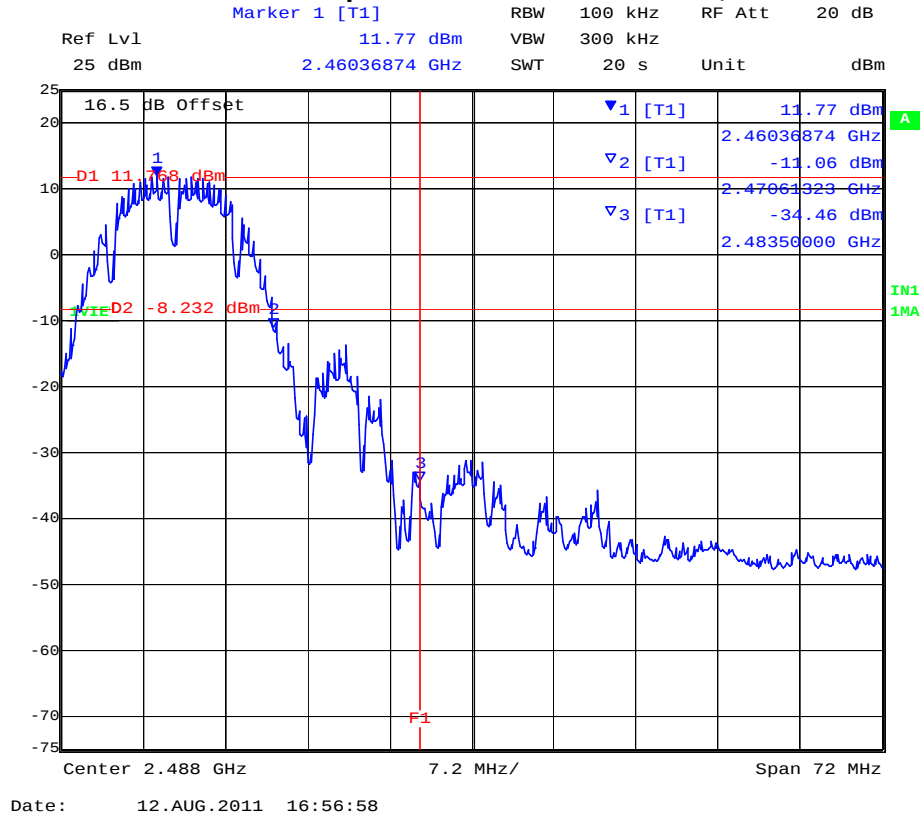


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 177 of 279

PORT A 802.11b-Legacy 2,412 MHz Conducted Spurious Emissions 0.30 to 26 GHz

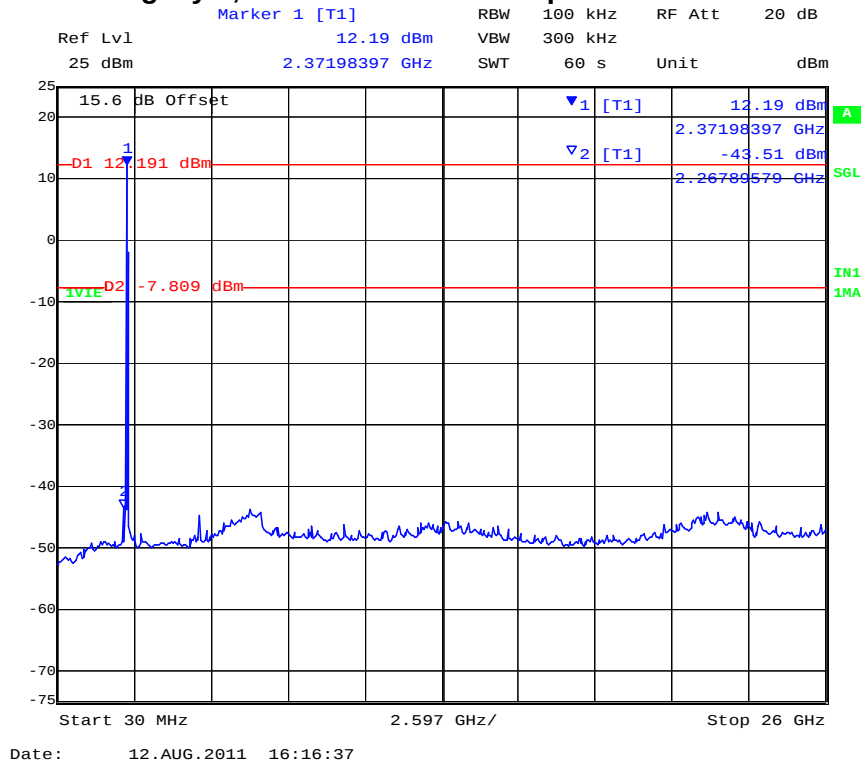

PORT B 802.11b-Legacy 2,412 MHz Conducted Spurious Emissions 0.30 to 26 GHz

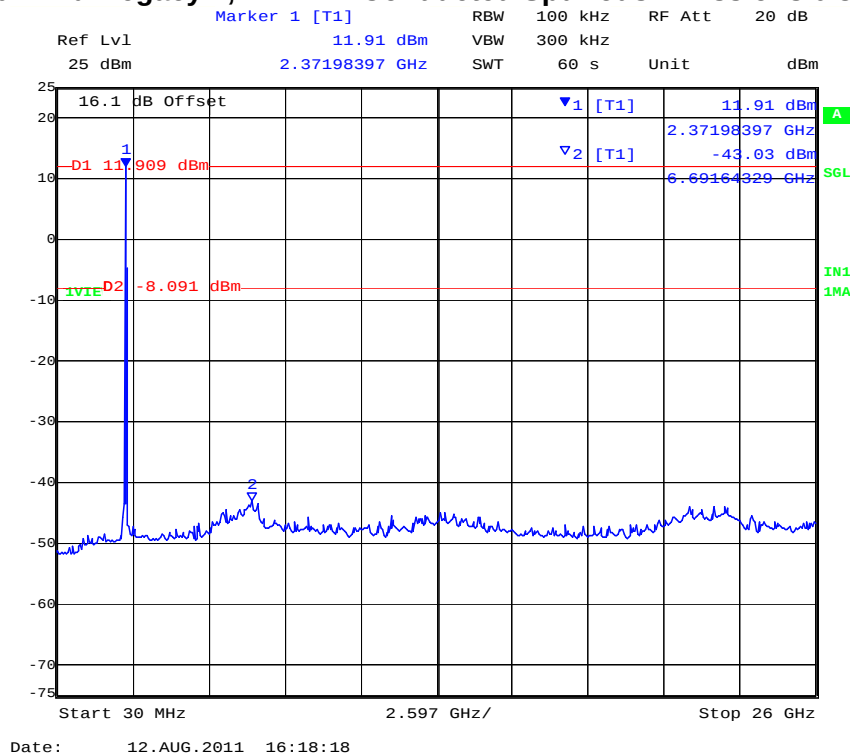


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 178 of 279

PORT C 802.11b–Legacy 2,412 MHz Conducted Spurious Emissions 0.30 to 26 GHz

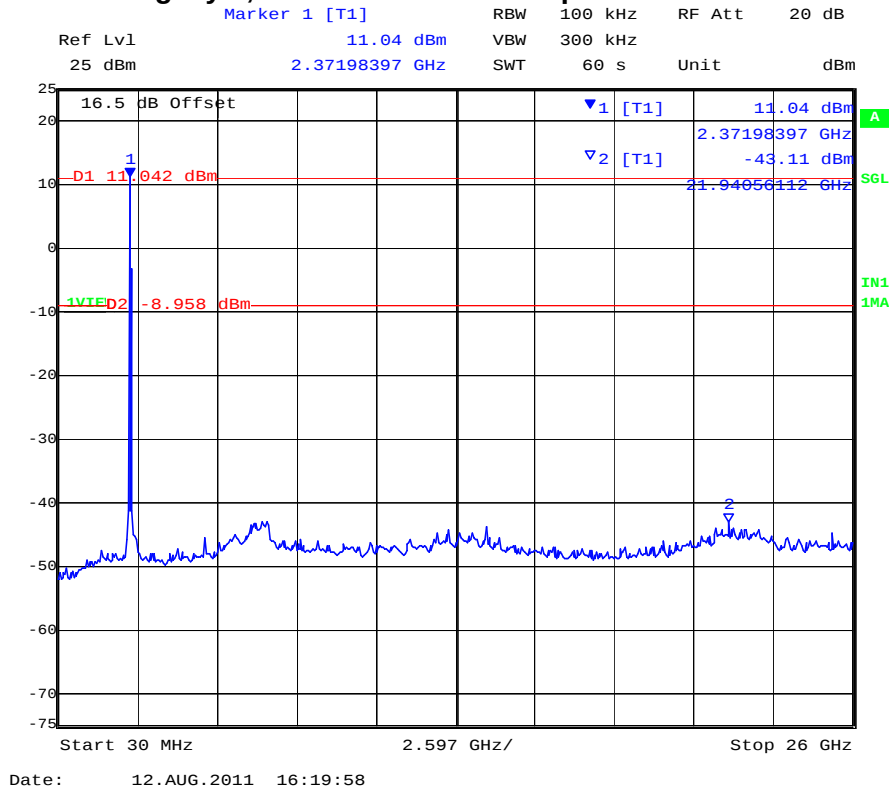

PORT A 802.11b–Legacy 2,437 MHz Conducted Spurious Emissions 0.30 to 26 GHz

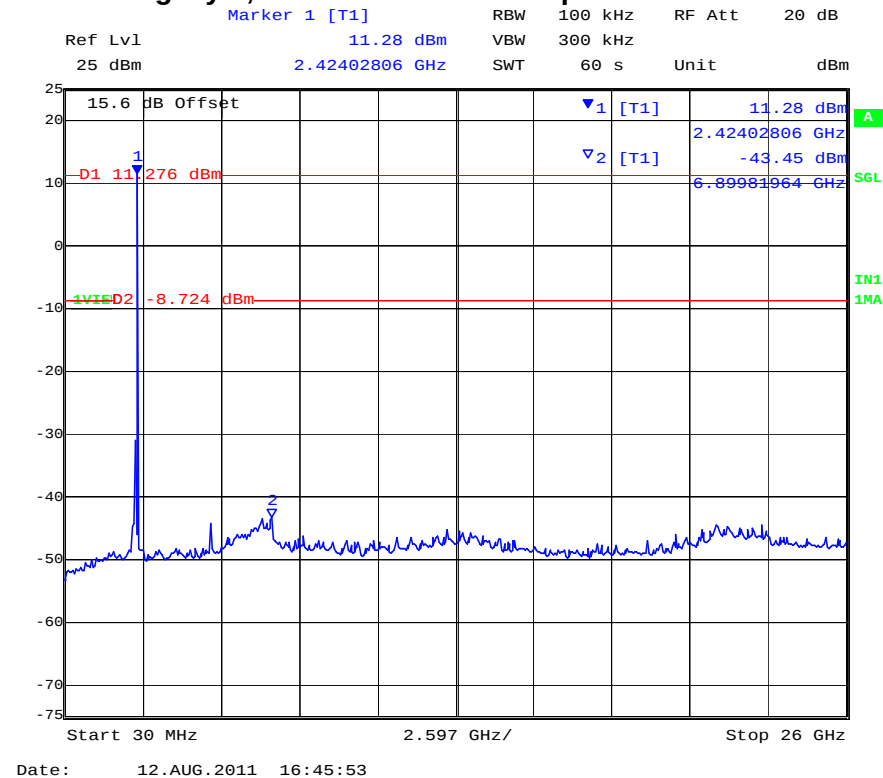


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 179 of 279

PORT B 802.11b-Legacy 2,437 MHz Conducted Spurious Emissions 0.30 to 26 GHz

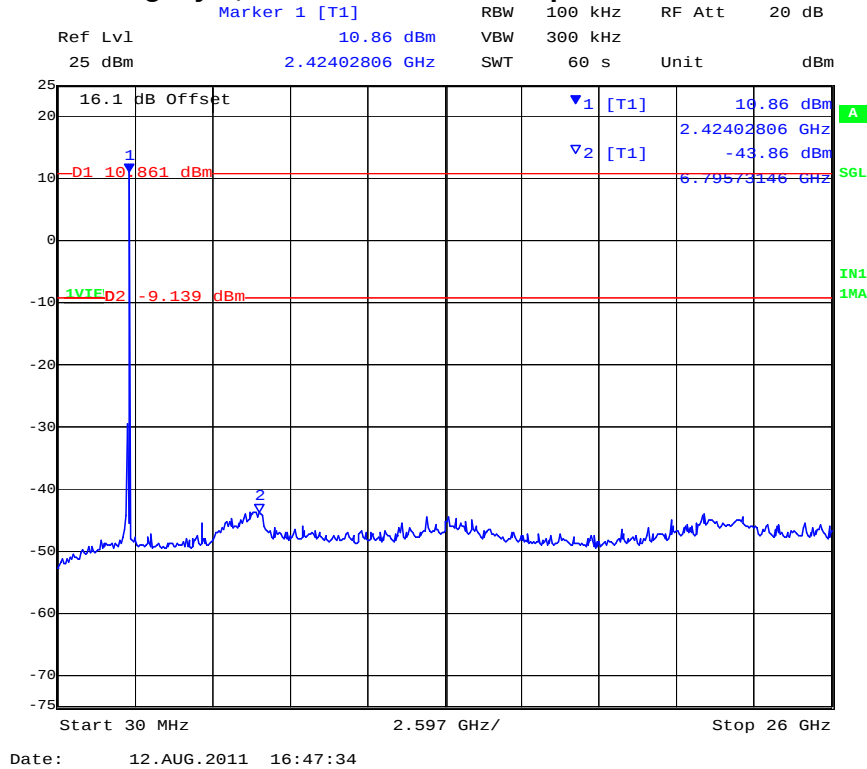

PORT C 802.11b-Legacy 2,437 MHz Conducted Spurious Emissions 0.30 to 26 GHz

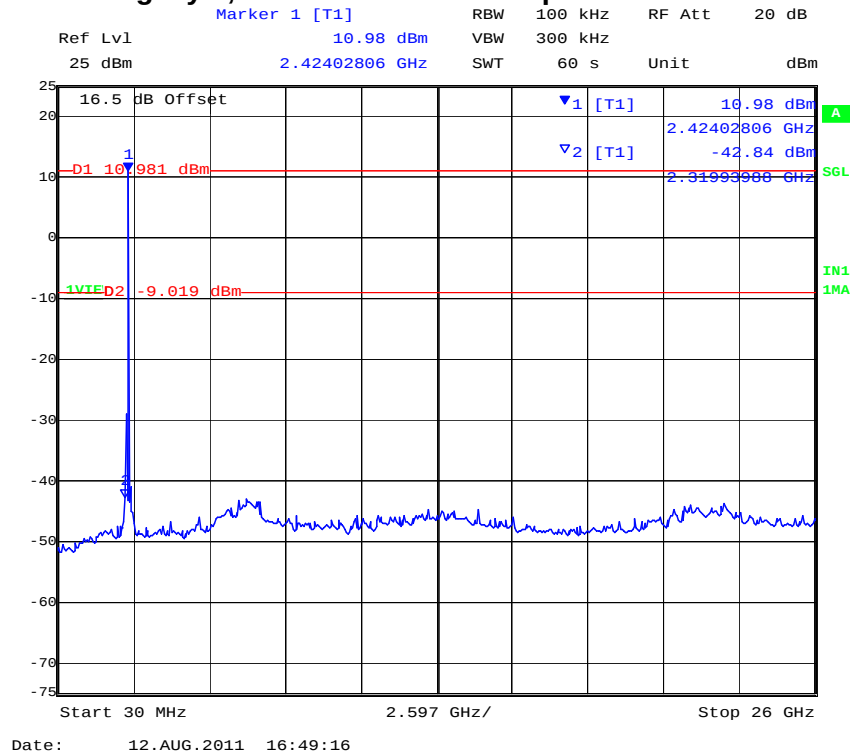


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 180 of 279

PORT A 802.11b-Legacy 2,462 MHz Conducted Spurious Emissions 0.30 to 26 GHz

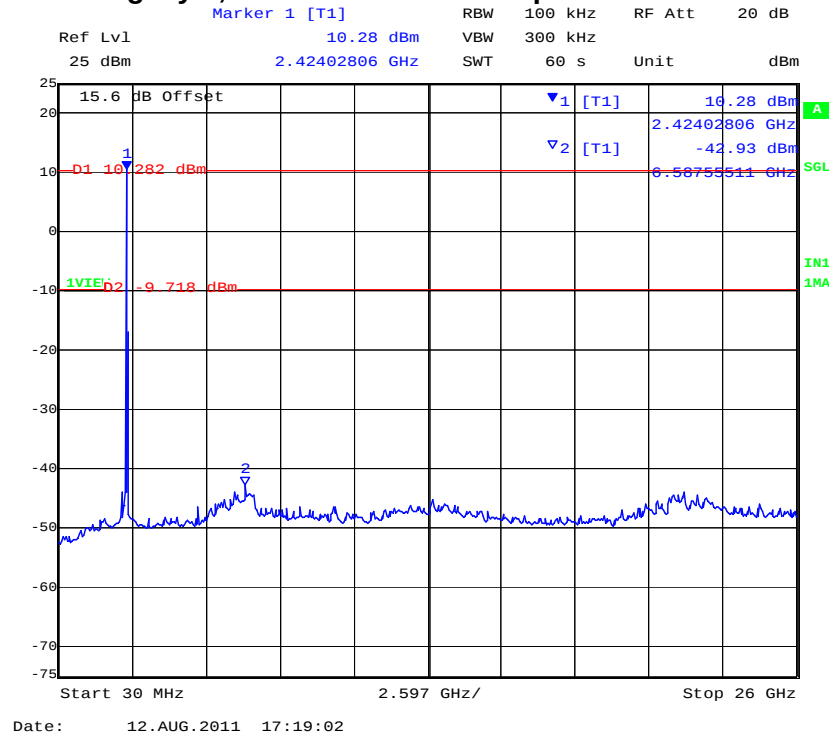

PORT B 802.11b-Legacy 2,462 MHz Conducted Spurious Emissions 0.30 to 26 GHz

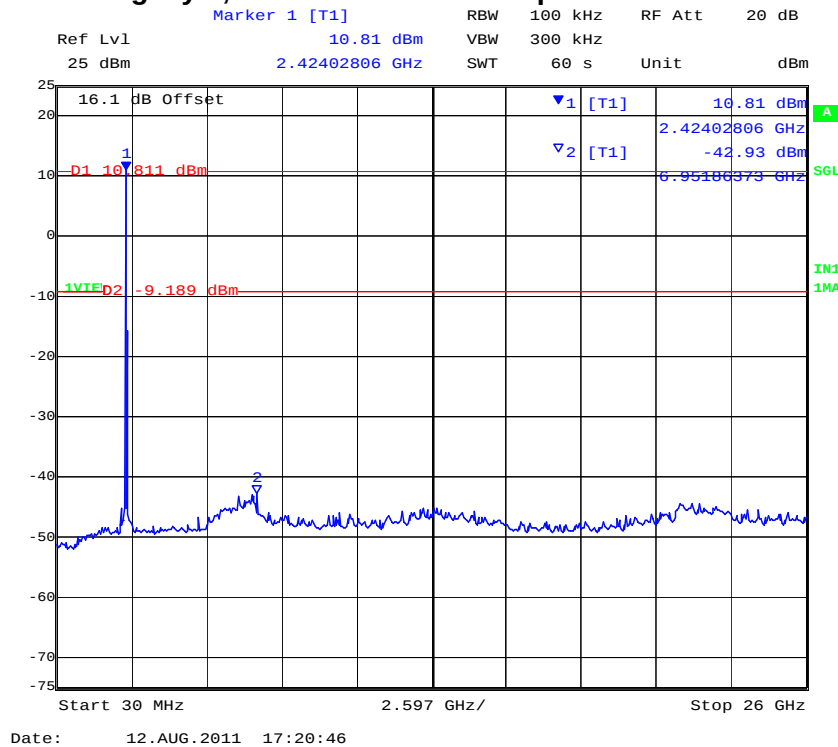


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 181 of 279

PORT C 802.11b-Legacy 2,462 MHz Conducted Spurious Emissions 0.30 to 26 GHz

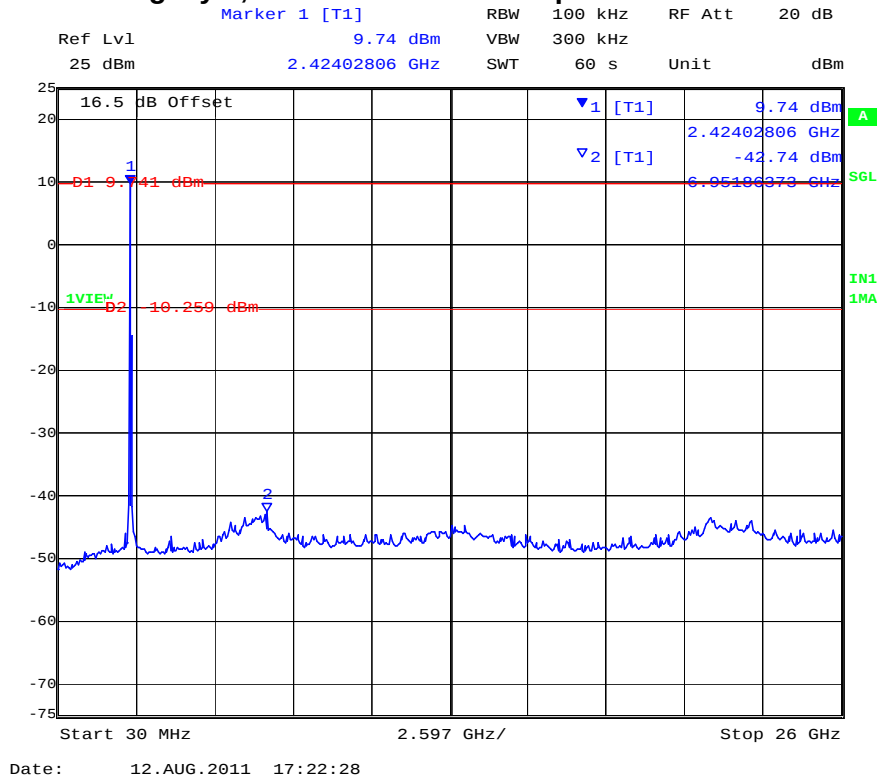

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 182 of 279

Conducted Spurious Emission Results

TABLE OF RESULTS – 802.11g Legacy

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35	to	42
Variant:	802.11g	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain	N/A dB	Antenna Gain:	N/A		dBi
Applied Voltage:	48.00 Vdc	Antenna Ports (N):			
Notes 1:					
Notes 2:					

Conducted Spurious Measurement

Test Freq.	Start Freq.	Stop Freq.	Port A		Port B		Port C		Port D	
MHz	MHz	MHz	SE dBm	Limit dBm	SE dBm	Limit dBm	SE dBm	Limit dBm	SE dBm	Limit dBm
2412.000	30.00	26000.00	-43.62	-10.00	-43.54	-11.43	-41.56	-9.94		
2437.000	30.00	26000.00	-43.87	-11.01	-42.81	-10.67	-41.87	-12.45		
2462.000	30.00	26000.00	-42.88	-11.70	-43.20	-14.00	-42.74	-13.69		

SE: Maximum spurious emission found

Band-edge Measurement

Test Freq.	Band-edge freq.	Port A		Port B		Port C		Port D	
MHz	MHz	BE dBm	Limit dBm	BE dBm	Limit dBm	BE dBm	Limit dBm	BE dBm	Limit dBm
2412.000	2400.00	-10.09	-9.16	-9.77	-9.49	-10.68	-9.51		
2462.000	2483.50	-20.25	-9.58	-18.20	-10.20	-19.19	-9.80		

BE: Maximum Band edge emission found

Measurement uncertainty:	±2.81 dB
---------------------------------	----------


Note: Limit is based on 20dB down from fundamental emissions

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 183 of 279

PORT A 802.11g Legacy - Conducted Spurious Emissions at the 2,400 MHz Band Edge

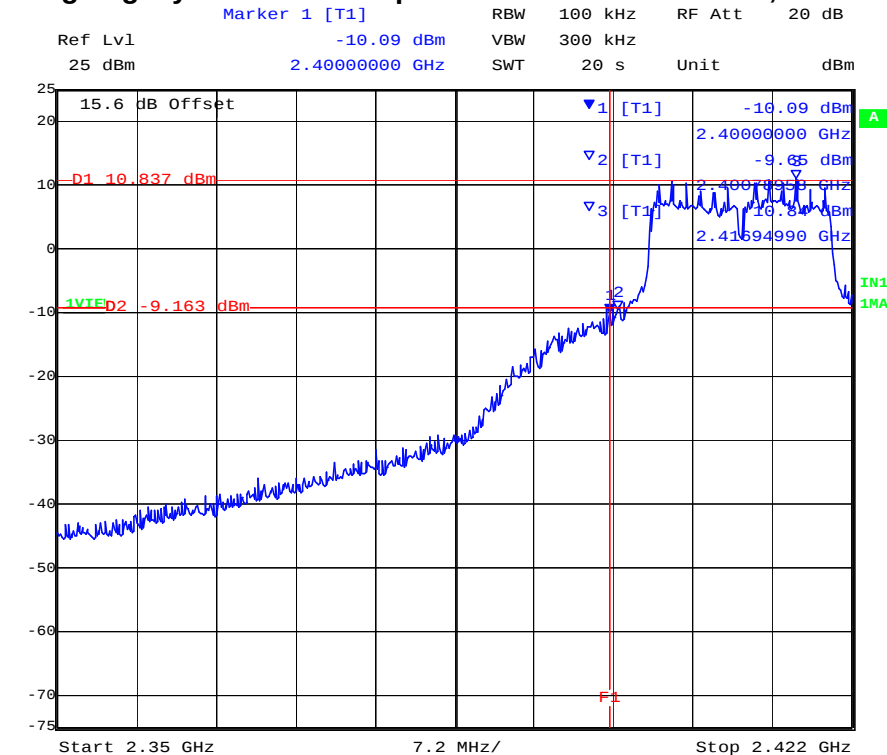

Date: 12.AUG.2011 18:21:51

PORT B 802.11g Legacy - Conducted Spurious Emissions at the 2,400 MHz Band Edge

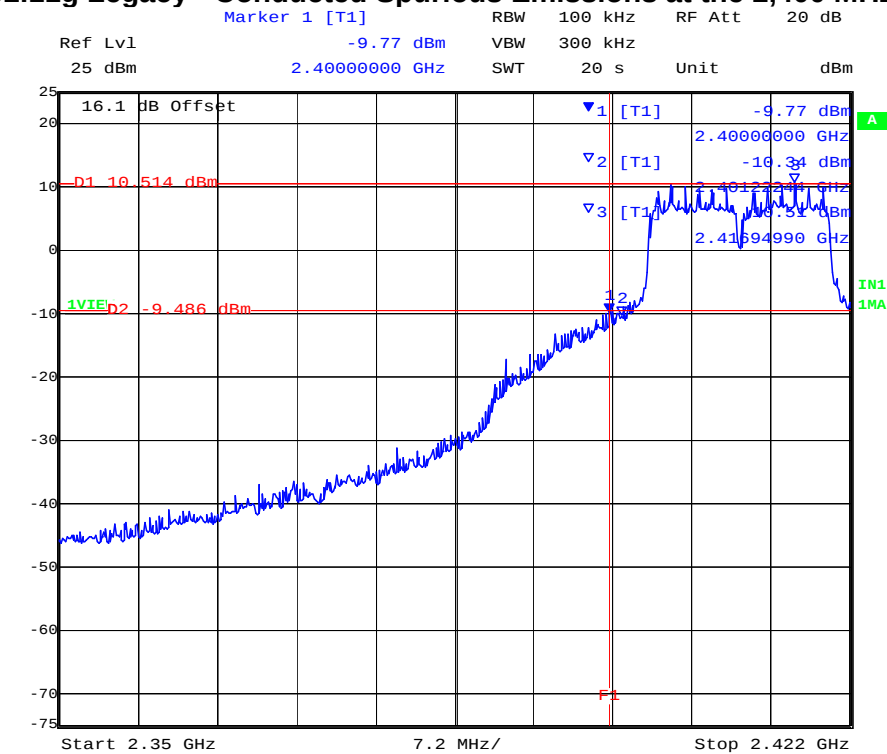


Date: 12.AUG.2011 18:23:08

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 184 of 279

PORT C 802.11g Legacy - Conducted Spurious Emissions at the 2,400 MHz Band Edge

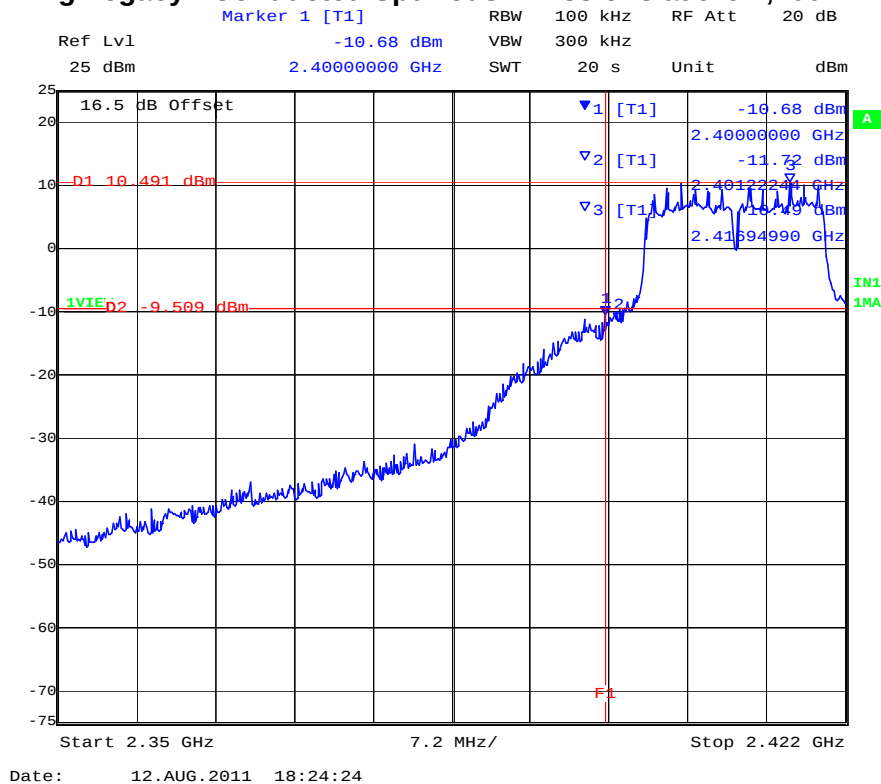

PORT A 802.11g - Conducted Spurious Emissions at the 2,483.5 MHz Band Edge

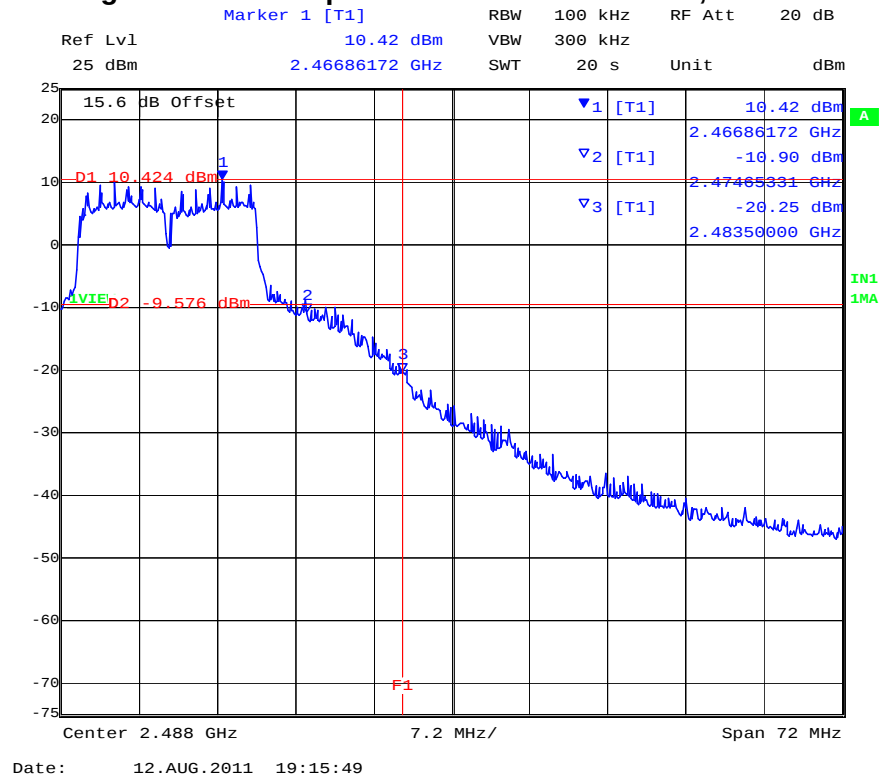


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 185 of 279

PORT B 802.11g - Conducted Spurious Emissions at the 2,483.5 MHz Band Edge

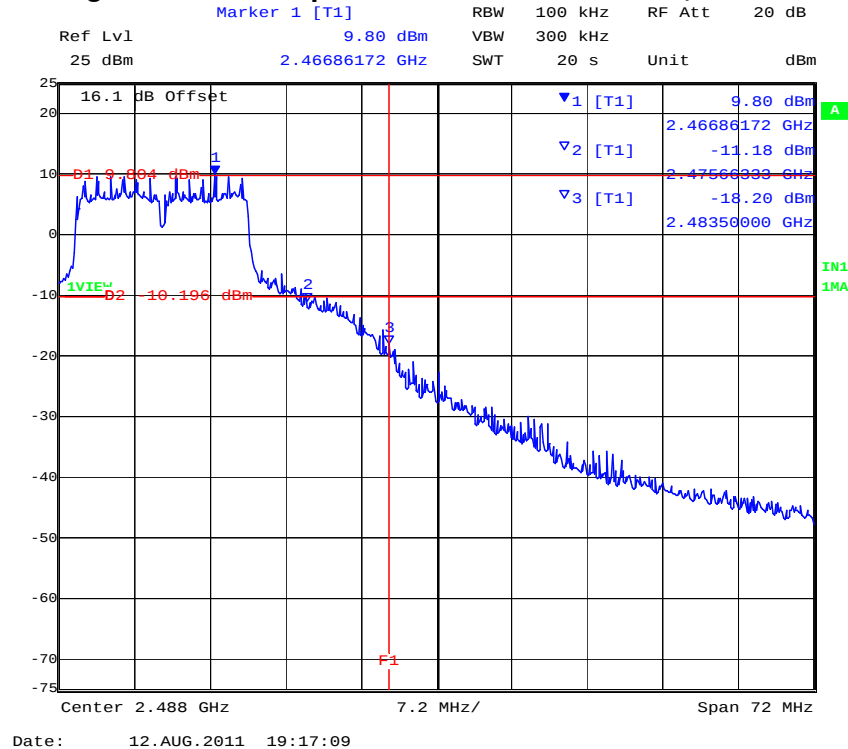

PORT C 802.11g - Conducted Spurious Emissions at the 2,483.5 MHz Band Edge

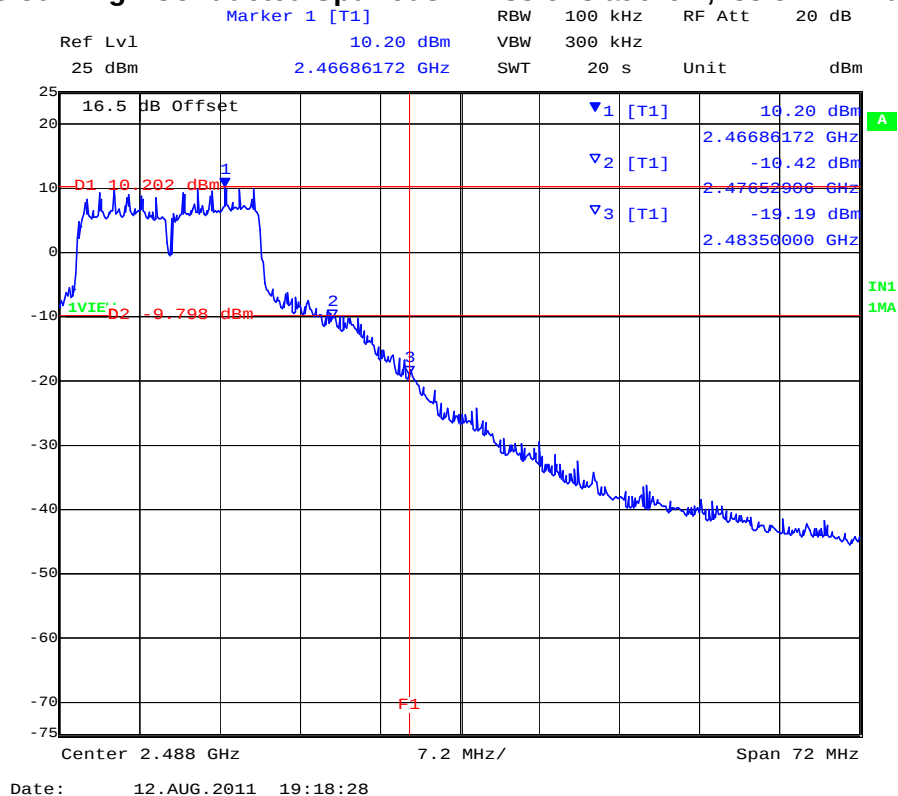


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 186 of 279

PORT A 802.11g – Legacy 2,412 MHz Conducted Spurious Emissions 0.03 – 26 GHz

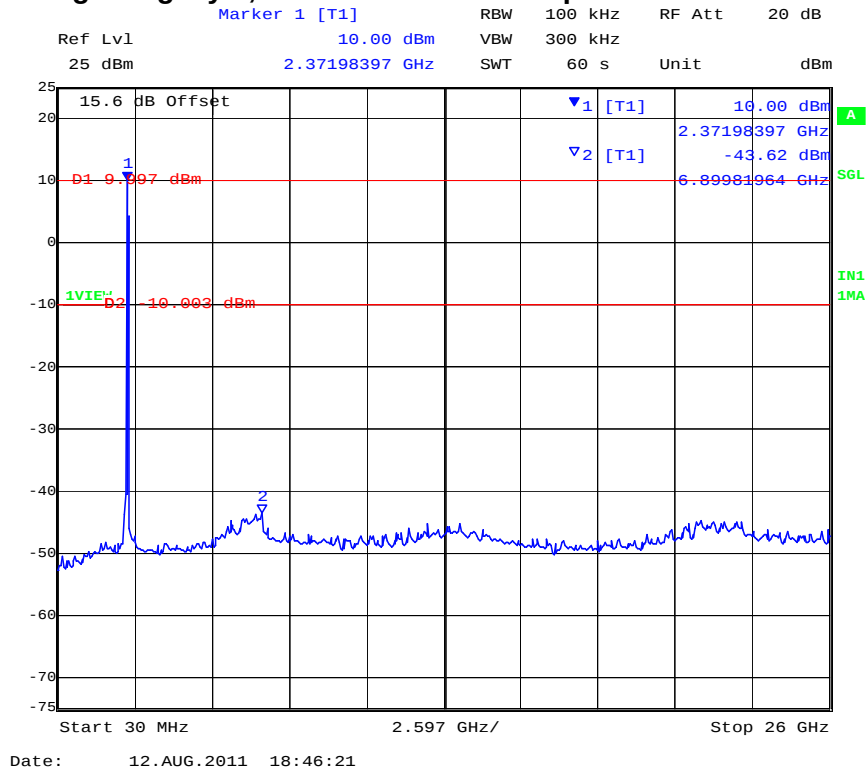

PORT B 802.11g – Legacy 2,412 MHz Conducted Spurious Emissions 0.03 – 26 GHz

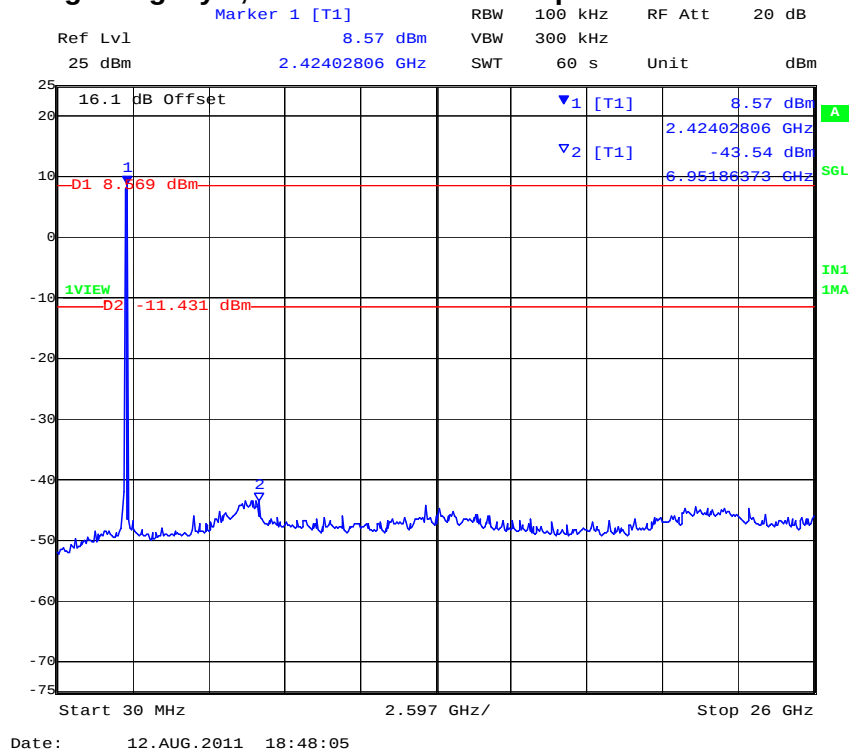


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 187 of 279

PORT C 802.11g – Legacy 2,412 MHz Conducted Spurious Emissions 0.03 – 26 GHz

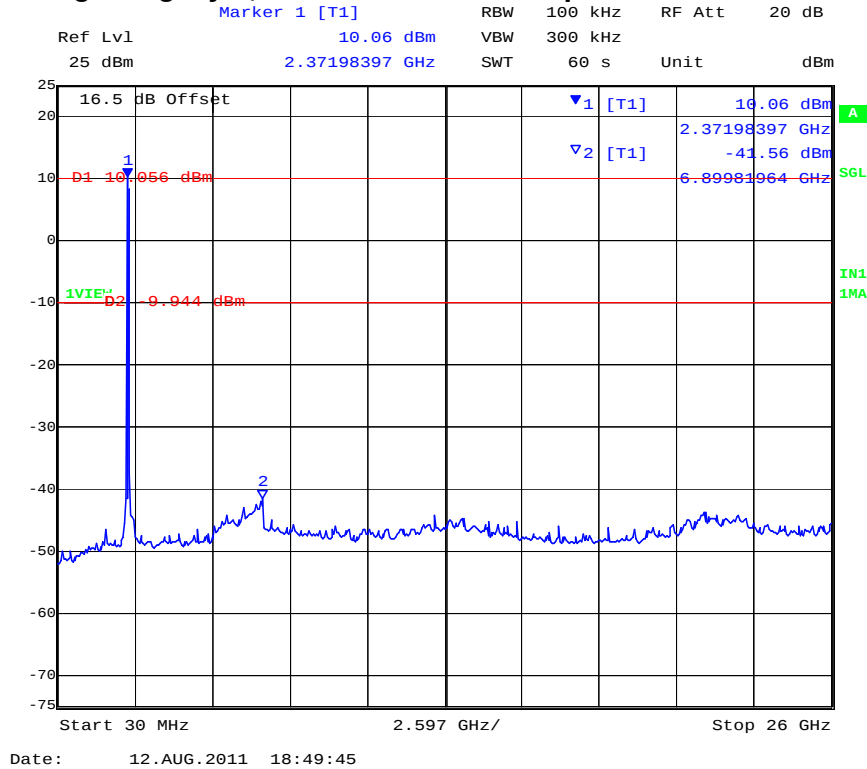

PORT A 802.11g–Legacy 2,437 MHz Conducted Spurious Emissions 0.03 – 26 GHz

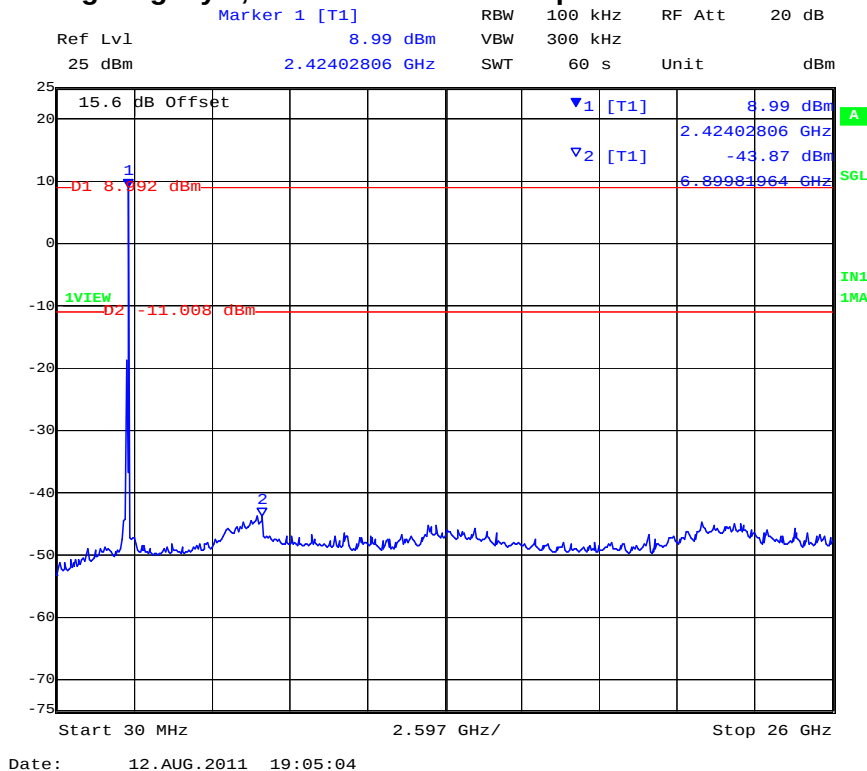


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 188 of 279

PORT B 802.11g-Legacy 2,437 MHz Conducted Spurious Emissions 0.03 – 26 GHz

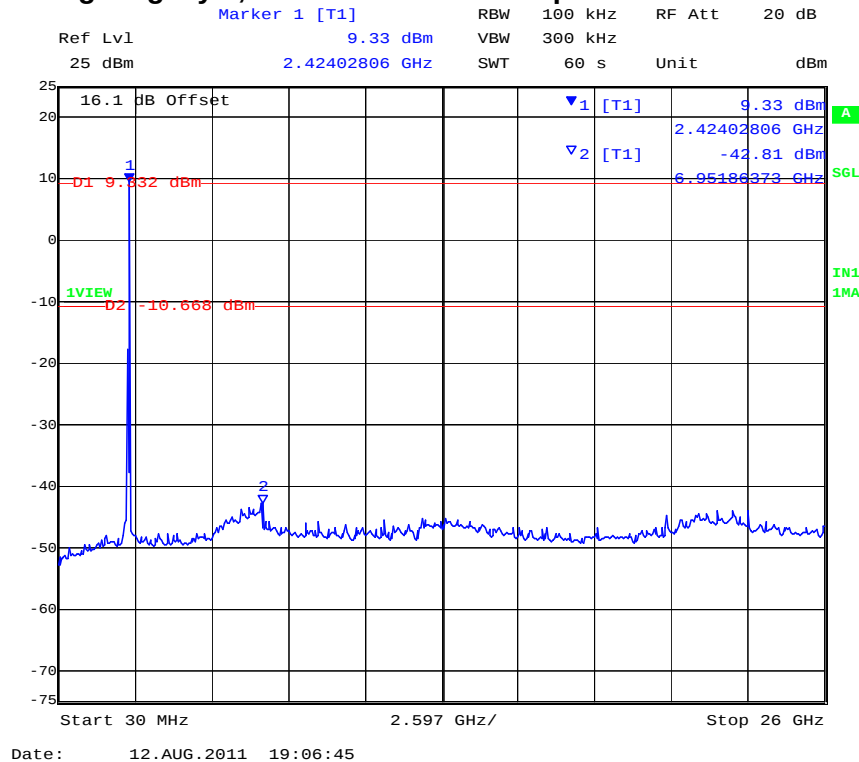

PORT C 802.11g-Legacy 2,437 MHz Conducted Spurious Emissions 0.03 – 26 GHz

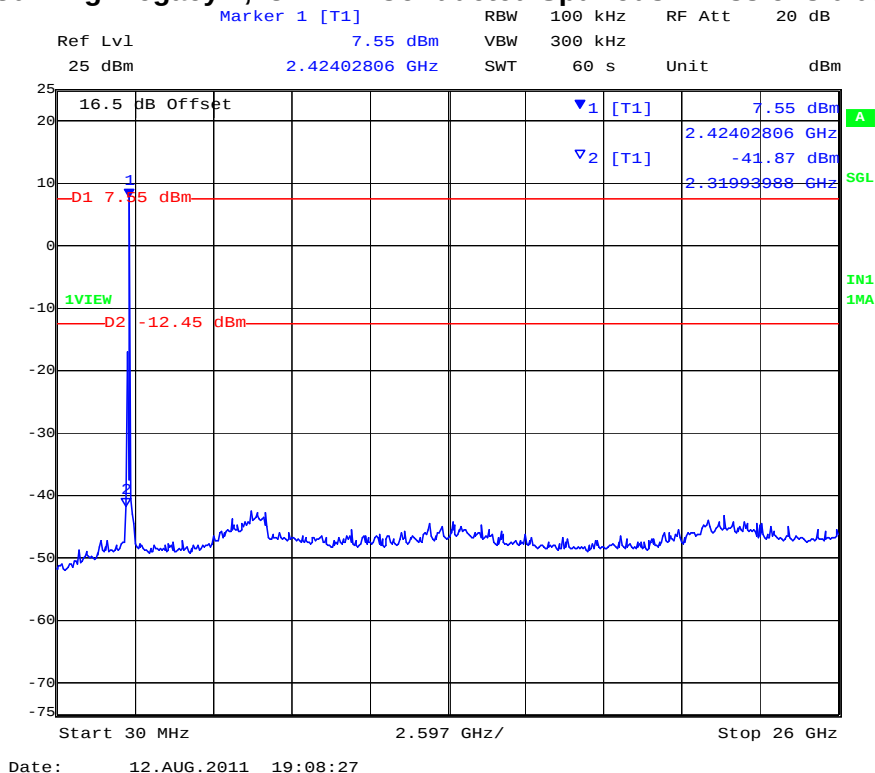


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 189 of 279

PORT A 802.11g – Legacy 2,462 MHz Conducted Spurious Emissions 0.03 – 26 GHz

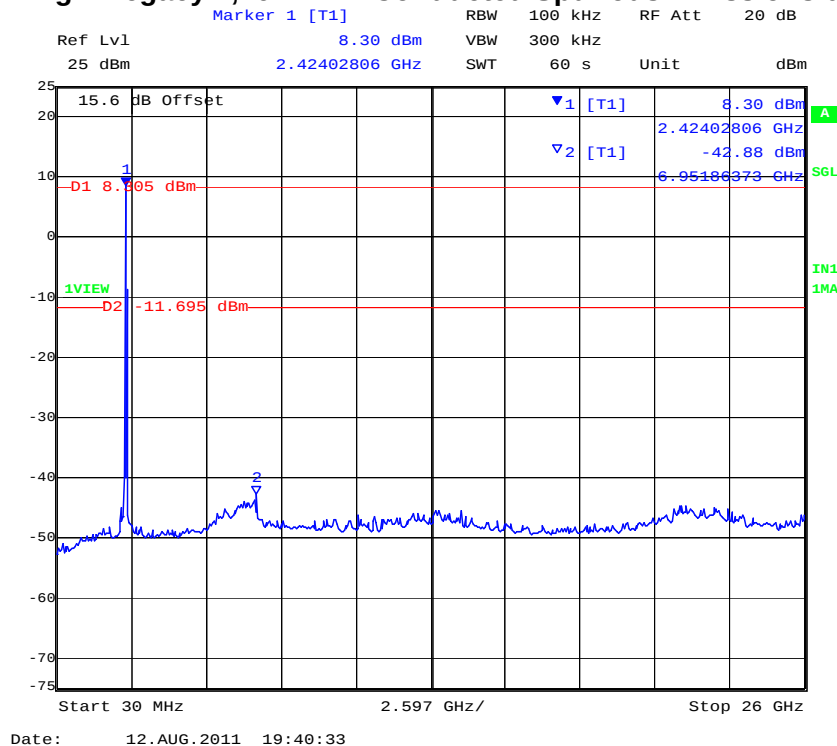

PORT B 802.11g – Legacy 2,462 MHz Conducted Spurious Emissions 0.03 – 26 GHz

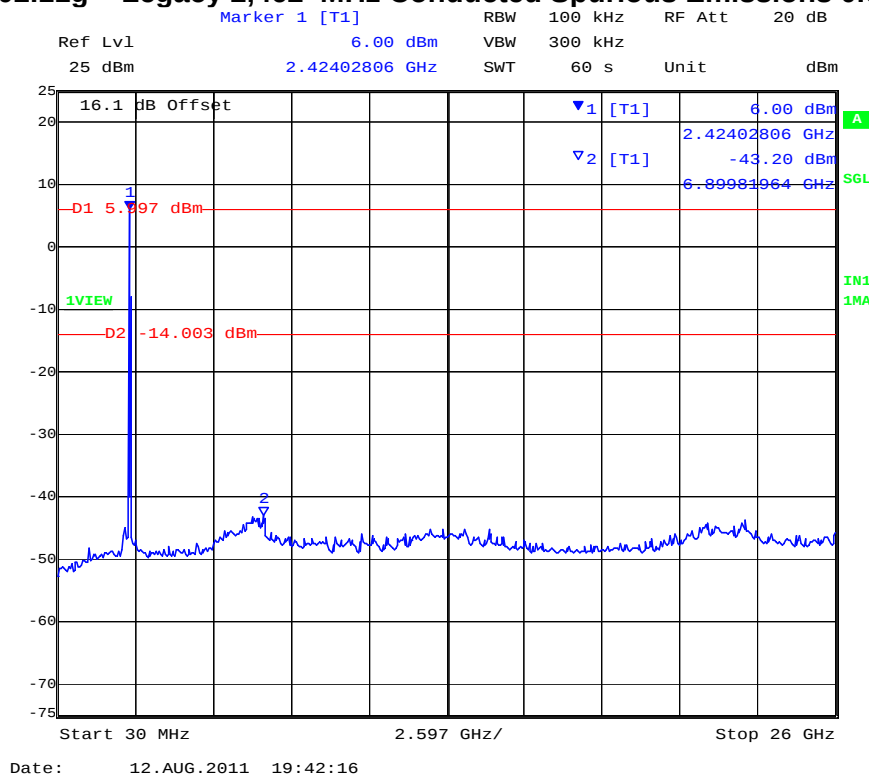


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 190 of 279

PORT C 802.11g – Legacy 2,462 MHz Conducted Spurious Emissions 0.03 – 26 GHz

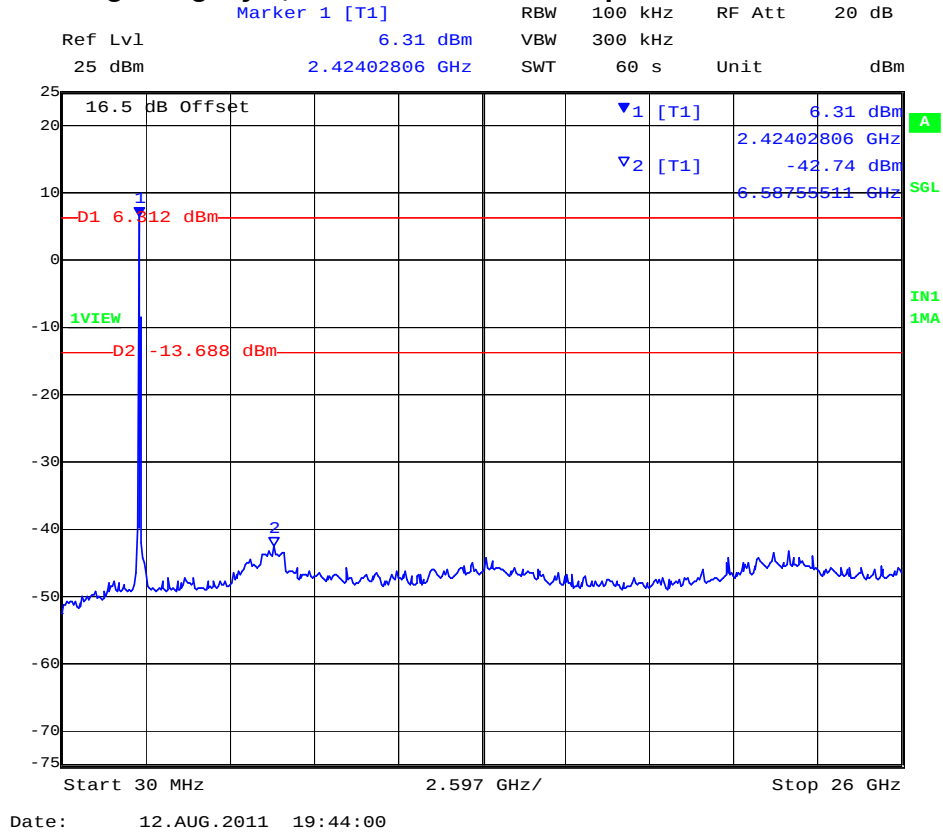

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 191 of 279

Conducted Spurious Emission Results

TABLE OF RESULTS – 802.11n HT-20

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain	N/A dB	Antenna Gain:	N/A	dBi	
Applied Voltage:	48.00 Vdc	Antenna Ports (N):			
Notes 1:					
Notes 2:					

Conducted Spurious Measurement

Test Freq.	Start Freq.	Stop Freq.	Port A		Port B		Port C		Port D	
MHz	MHz	MHz	SE dBm	Limit dBm	SE dBm	Limit dBm	SE dBm	Limit dBm	SE dBm	Limit dBm
2412.000	30.00	26000.00	-43.05	-9.51	-42.41	-10.80	-42.69	-9.78		
2437.000	30.00	26000.00	-43.57	-9.51	-42.95	-10.25	-42.72	-11.70		
2462.000	30.00	26000.00	-43.83	-11.24	-43.82	-11.39	-42.63	-10.77		

SE: Maximum spurious emission found

Band-edge Measurement

Test Freq.	Band-edge freq.	Port A		Port B		Port C		Port D	
MHz	MHz	BE dBm	Limit dBm	BE dBm	Limit dBm	BE dBm	Limit dBm	BE dBm	Limit dBm
2412.000	2400.00	-9.61	-8.74	-11.66	-9.49	-12.77	-10.10		
2462.000	2483.50	-17.59	-9.58	-17.57	-10.22	-17.65	-9.80		


BE: Maximum Band edge emission found

Measurement uncertainty:	±2.81 dB
---------------------------------	----------


Note: Limit is based on 20dB down from fundamental emissions

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 802.11n HT-20 Legacy - Conducted Band Edge Spurious 2,400 MHz

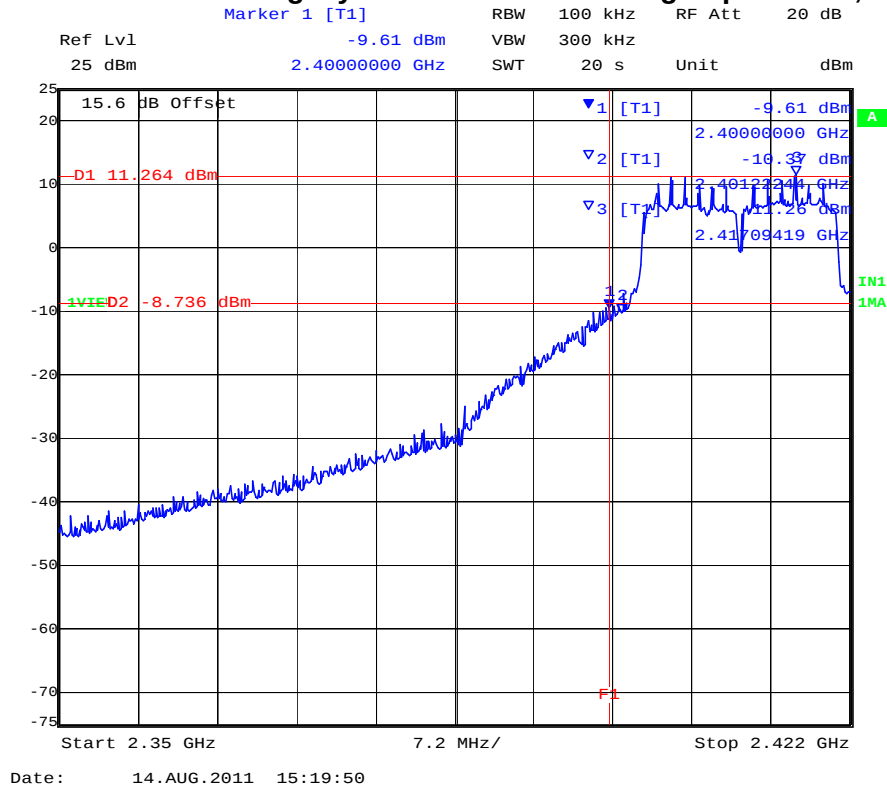

PORT B 802.11n HT-20 Legacy - Conducted Band Edge Spurious 2,400 MHz

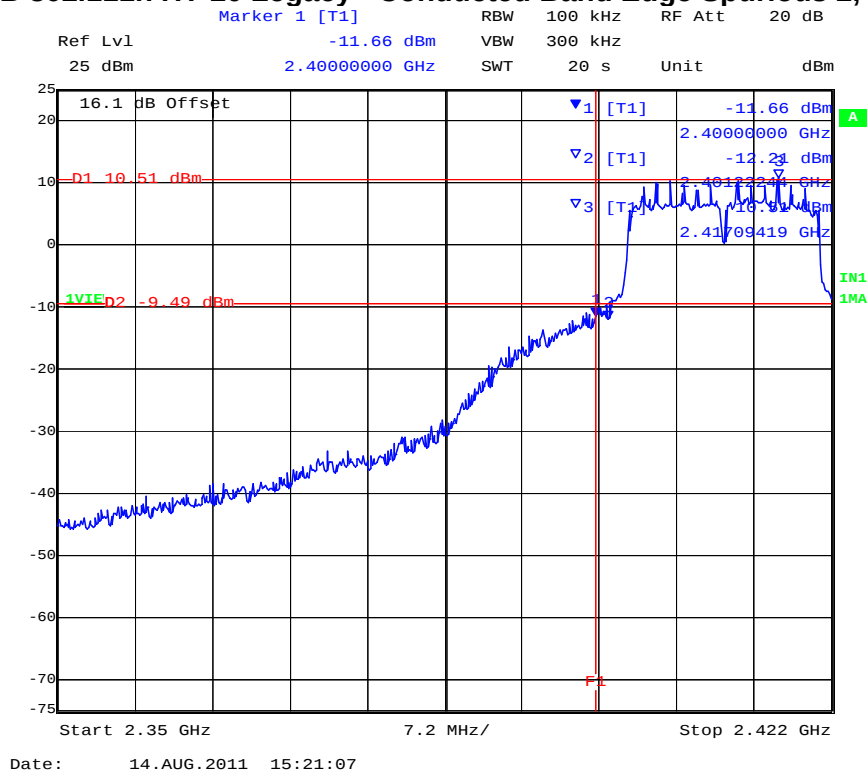


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 193 of 279

PORT C 802.11n HT-20 Legacy - Conducted Band Edge Spurious 2,400 MHz

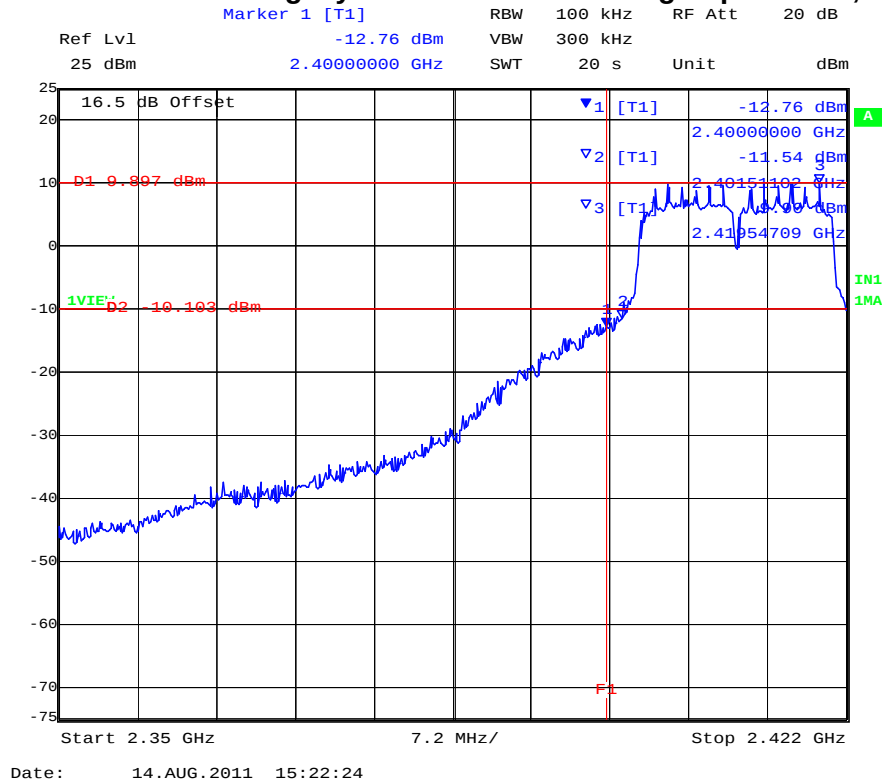


PORT A 802.11n HT-20 Conducted Spurious Emissions at 2,483.5 MHz Band Edge

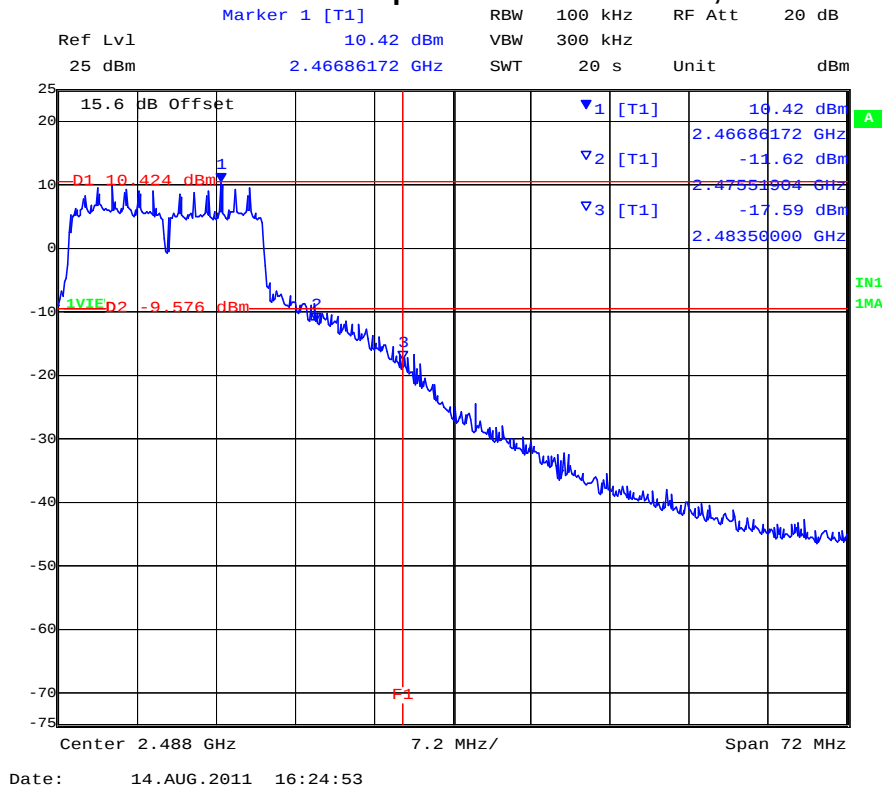


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT B 802.11n HT-20 Conducted Spurious Emissions at 2,483.5 MHz Band Edge

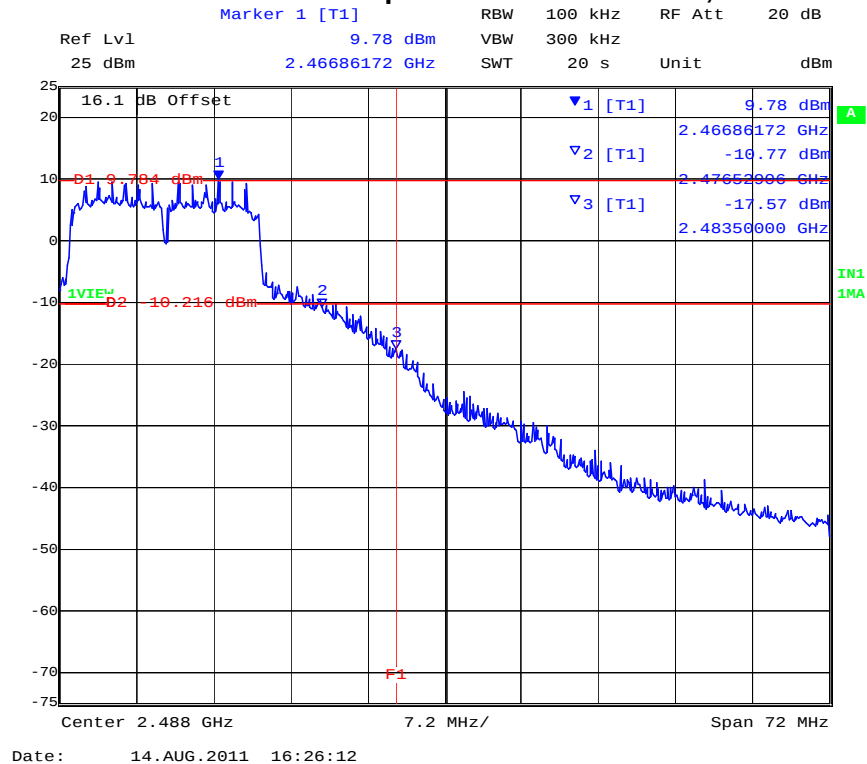

PORT C 802.11n HT-20 Conducted Spurious Emissions at 2,483.5 MHz Band Edge

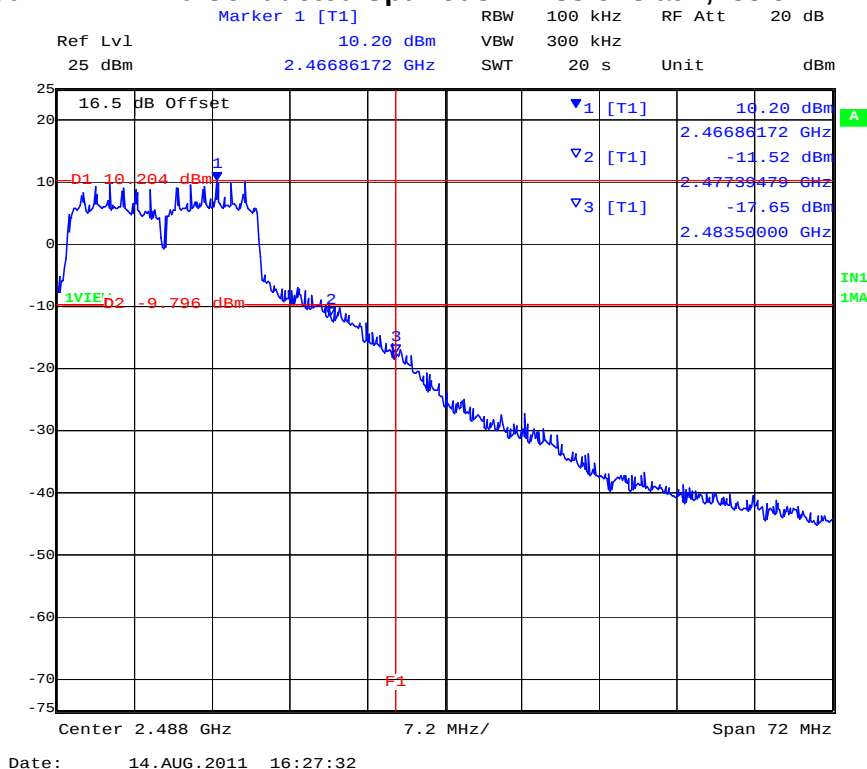


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 195 of 279

PORT A 802.11n HT-20 2,412 MHz Conducted Spurious Emissions 0.03 – 26 GHz

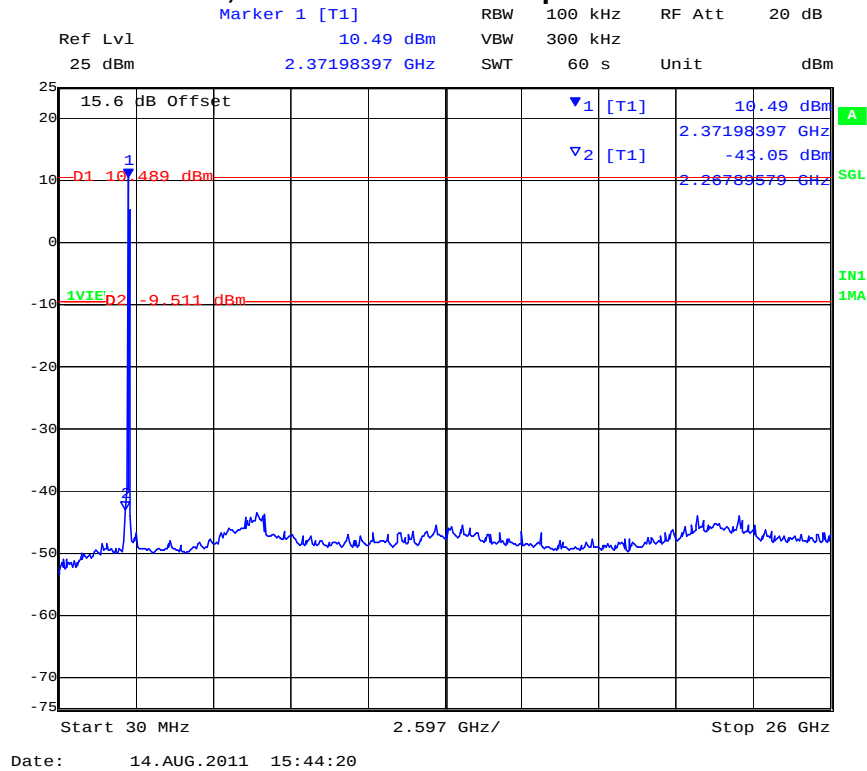

PORT B 802.11n HT-20 2,412 MHz Conducted Spurious Emissions 0.03 – 26 GHz

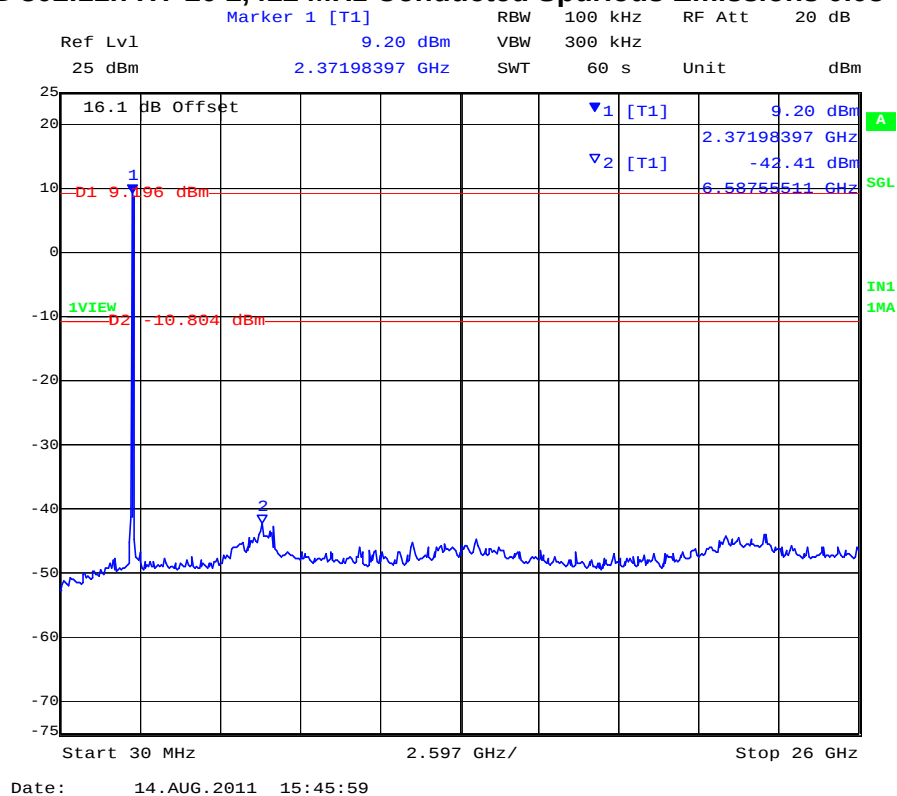


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 196 of 279

PORT C 802.11n HT-20 2,412 MHz Conducted Spurious Emissions 0.03 – 26 GHz

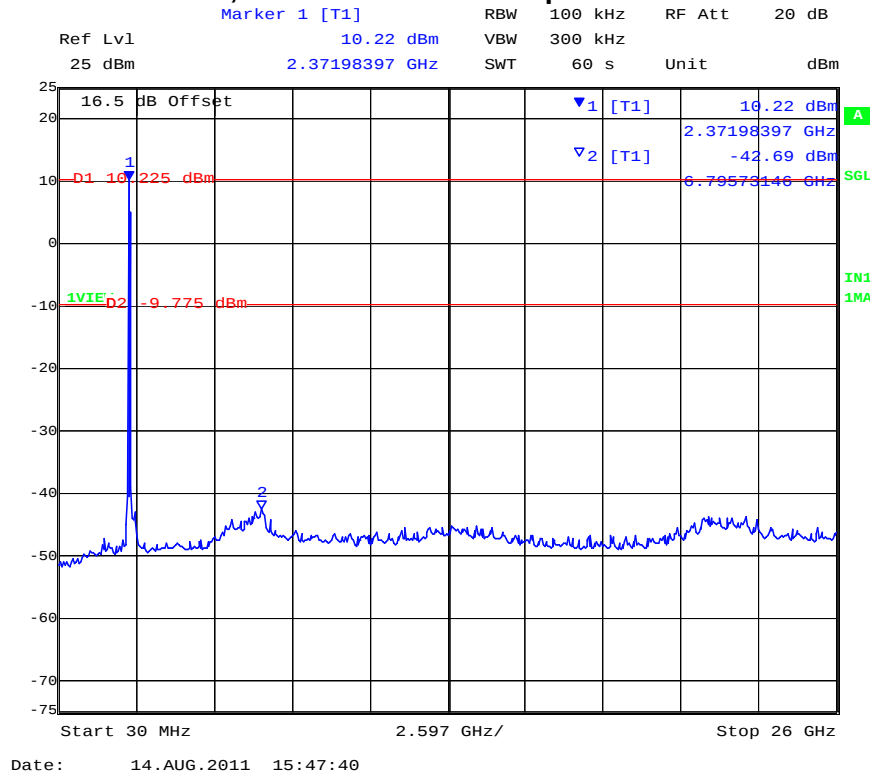

PORT A 802.11n HT-20 2,437 MHz Conducted Spurious Emissions 0.03 – 26 GHz

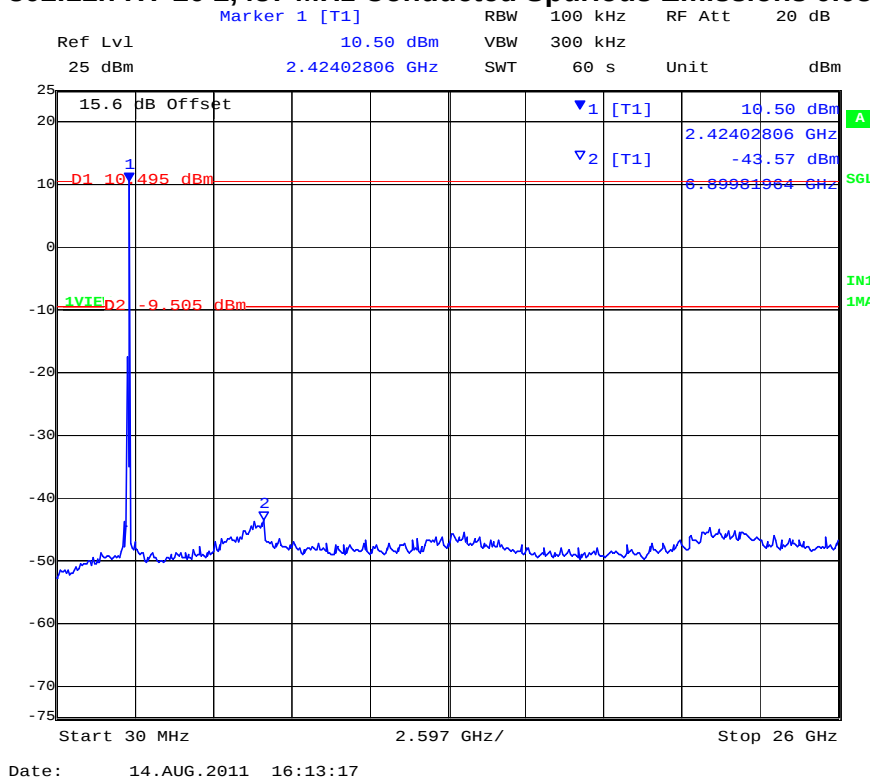


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 197 of 279

PORT B 802.11n HT-20 2,437 MHz Conducted Spurious Emissions 0.03 – 26 GHz

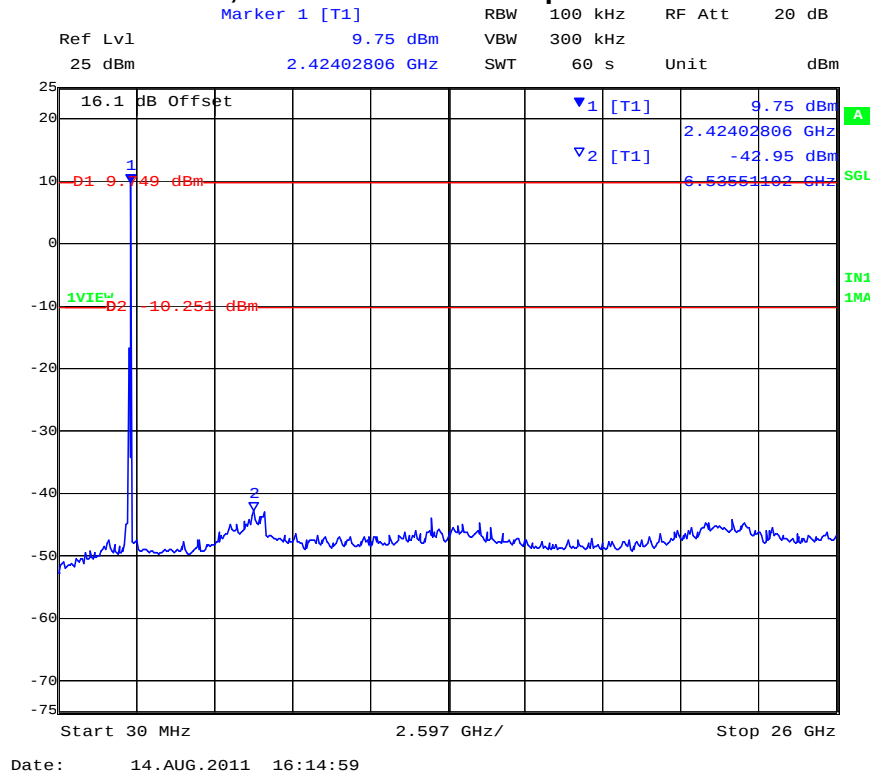

PORT C 802.11n HT-20 2,437 MHz Conducted Spurious Emissions 0.03 – 26 GHz

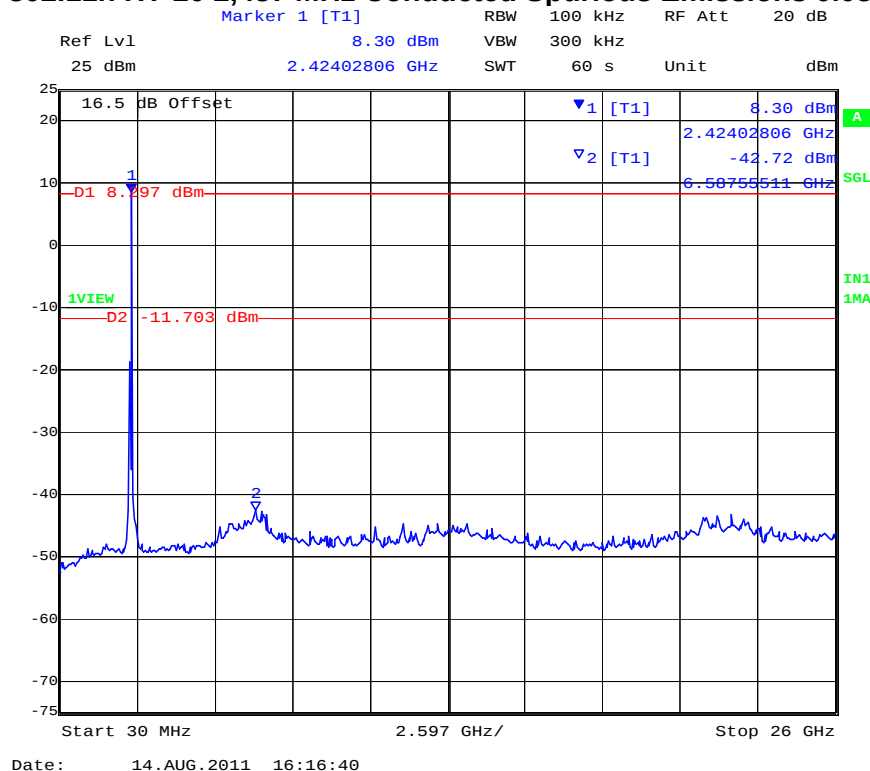


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 198 of 279

PORT A 802.11n HT-20 2,462 MHz Conducted Spurious Emissions 0.03 – 26 GHz

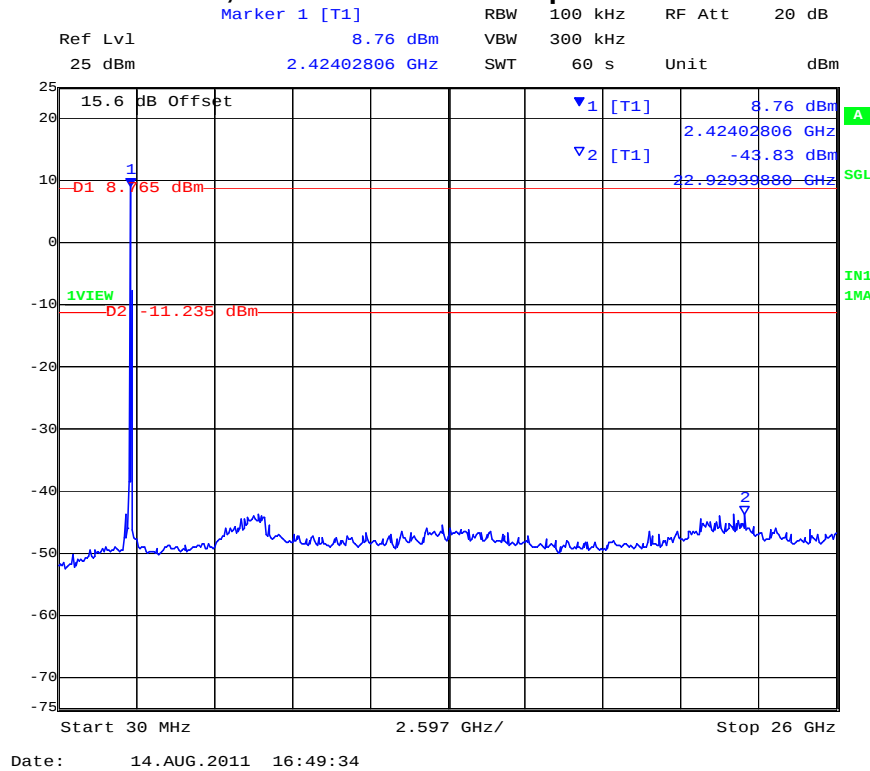

PORT B 802.11n HT-20 2,462 MHz Conducted Spurious Emissions 0.03 – 26 GHz

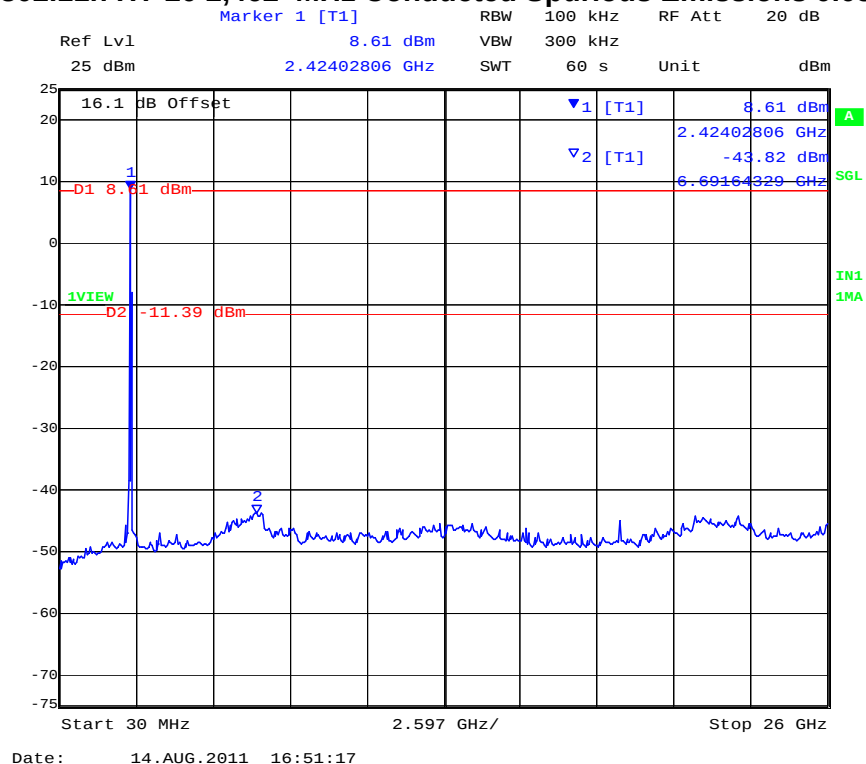


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 199 of 279

PORT C 802.11n HT-20 2,462 MHz Conducted Spurious Emissions 0.03 – 26 GHz

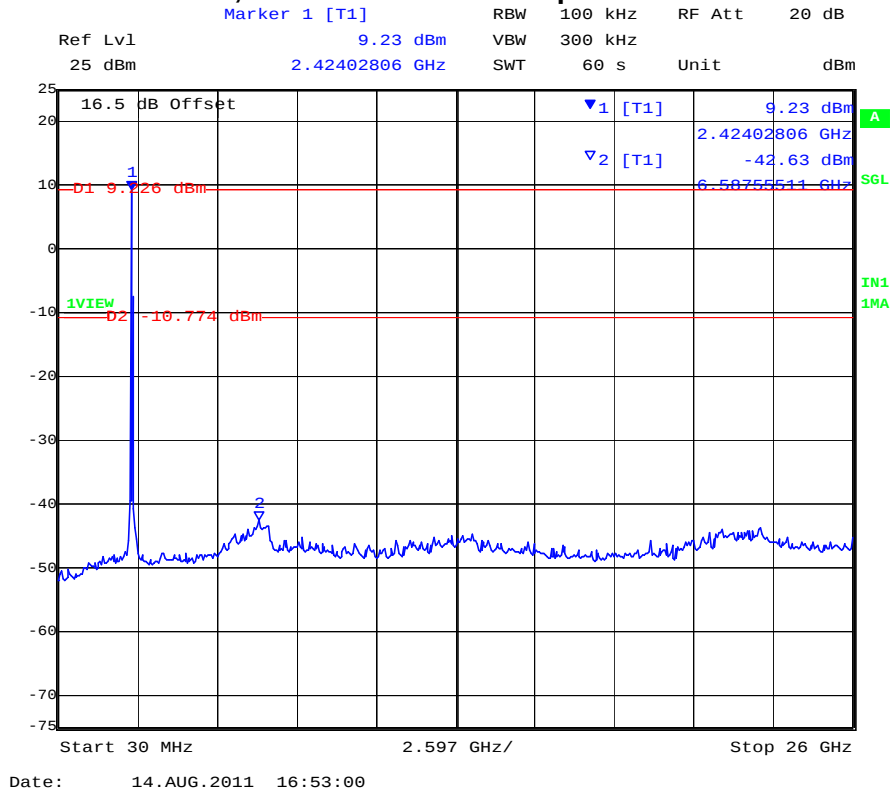

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 200 of 279

Conducted Spurious Emission Results

TABLE OF RESULTS – 802.11N HT-40

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain	N/A dB	Antenna Gain:	N/A		dBi
Applied Voltage:	48.00 Vdc	Antenna Ports (N):			
Notes 1:					
Notes 2:					

Conducted Spurious Measurement

Test Freq.	Start Freq.	Stop Freq.	Port A		Port B		Port C		Port D	
MHz	MHz	MHz	SE dBm	Limit dBm	SE dBm	Limit dBm	SE dBm	Limit dBm	SE dBm	Limit dBm
2422	30.00	26000.00	-42.72	-15.24	-43.36	-15.43	-43.61	-14.60		
2437	30.00	26000.00	-43.26	-14.64	-43.33	-15.65	-43.05	-14.58		
2452	30.00	26000.00	-43.43	-14.70	-42.77	-14.63	-42.76	-13.90		

SE: Maximum spurious emission found

Band-edge Measurement

Test Freq.	Band-edge freq.	Port A		Port B		Port C		Port D	
MHz	MHz	BE dBm	Limit dBm	BE dBm	Limit dBm	BE dBm	Limit dBm	BE dBm	Limit dBm
2422	2400.00	-19.55	-14.93	-19.50	-14.66	-18.03	-14.31		
2452	2483.50	-20.09	-15.45	-20.26	-15.17	-17.61	-14.13		


BE: Maximum Band edge emission found

Measurement uncertainty:	±2.81 dB
---------------------------------	----------


Note: Limit is based on 20dB down from fundamental emissions

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 802.11n HT-40 Conducted Band Edge Spurious 2,400 MHz

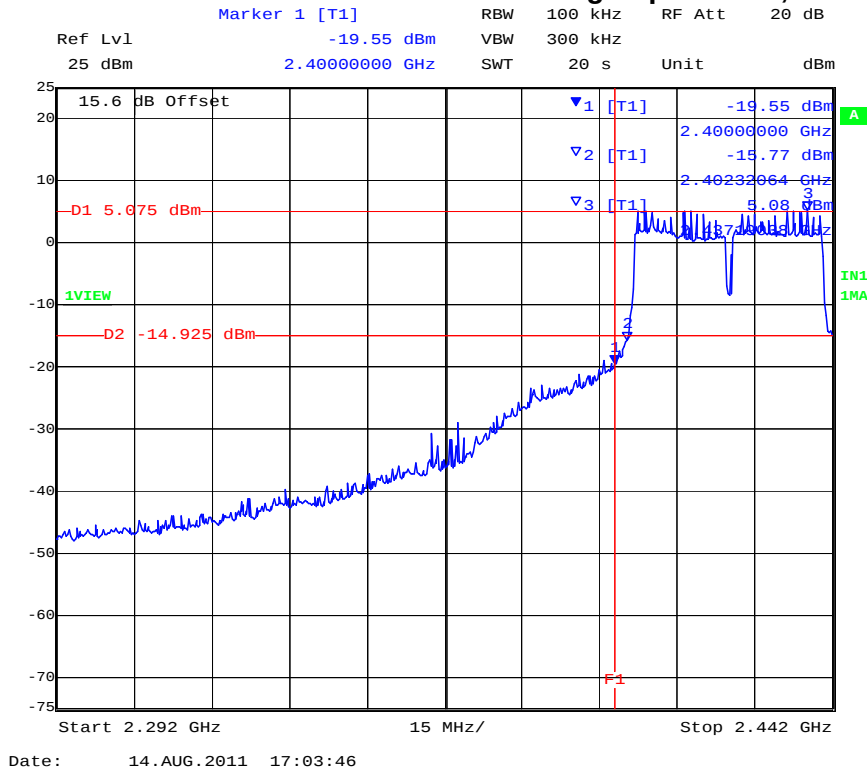

PORT B 802.11n HT-40 Conducted Band Edge Spurious 2,400 MHz

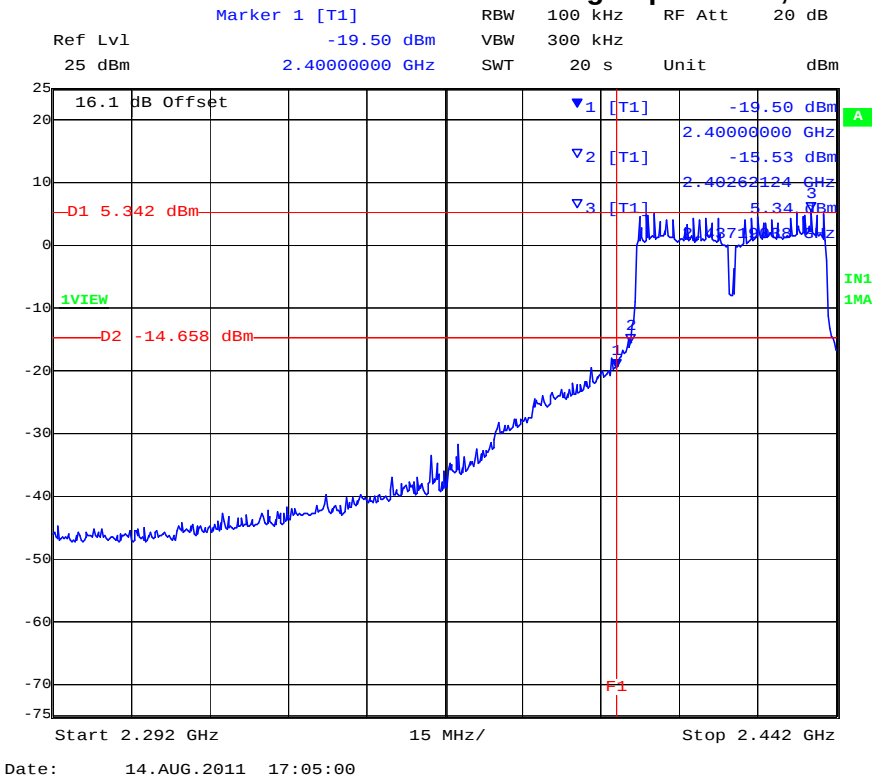


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 202 of 279

PORT C 802.11n HT-40 Conducted Band Edge Spurious 2,400 MHz

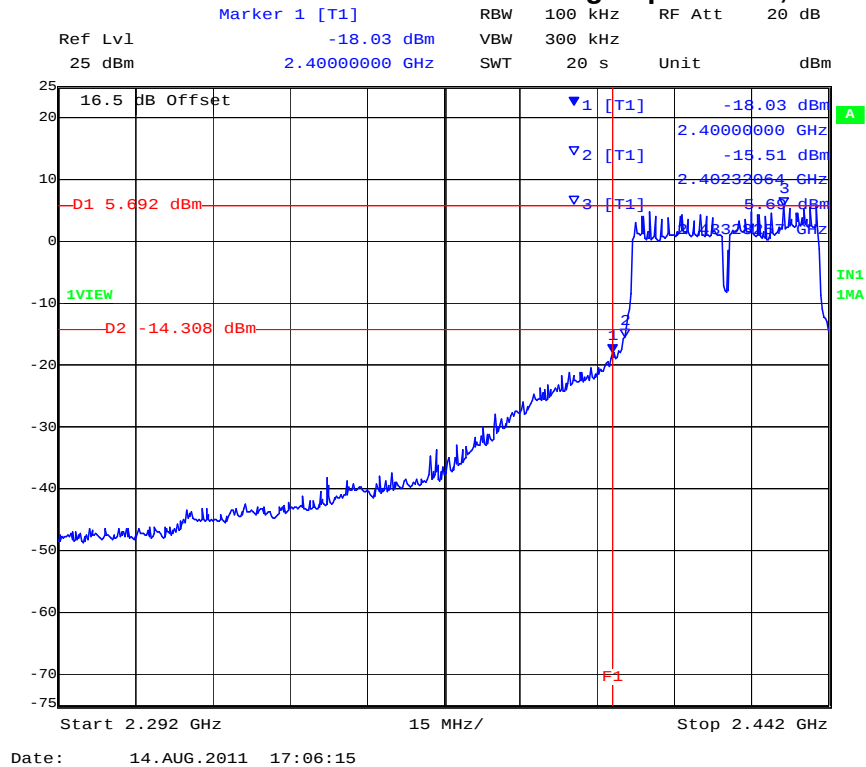

PORT A 802.11n HT-40 Conducted Spurious Emissions at 2,483.5 MHz Band Edge

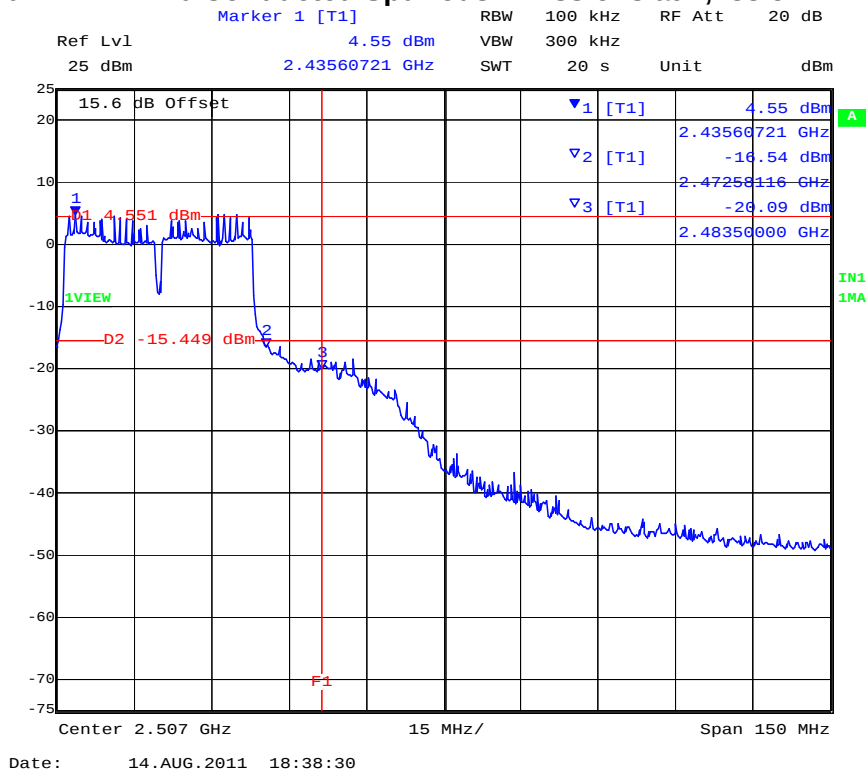


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 203 of 279

PORT B 802.11n HT-40 Conducted Spurious Emissions at 2,483.5 MHz Band Edge

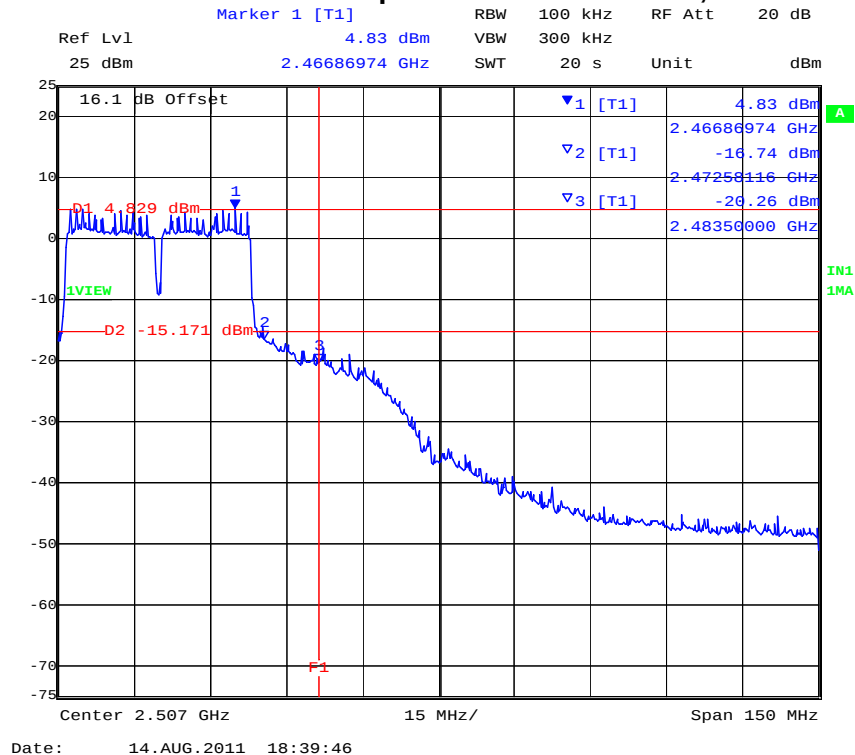

PORT C 802.11n HT-40 Conducted Spurious Emissions at 2,483.5 MHz Band Edge




This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 204 of 279

PORT A 802.11n – HT-40 2,422 MHz Conducted Spurious Emissions 0.03 – 26 GHz

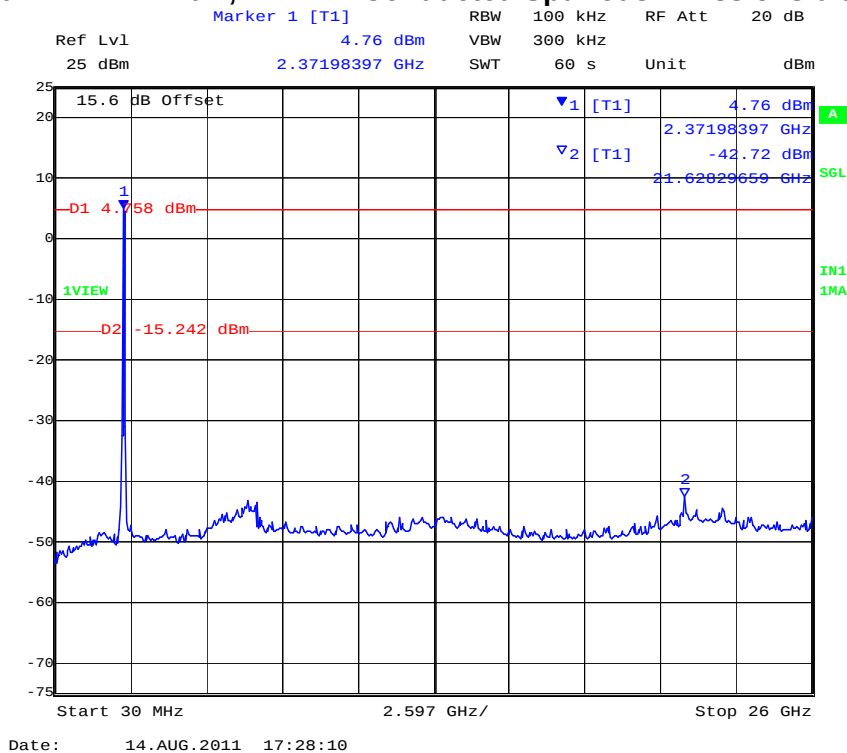

PORT B 802.11n – HT-40 2,422 MHz Conducted Spurious Emissions 0.03 – 26 GHz

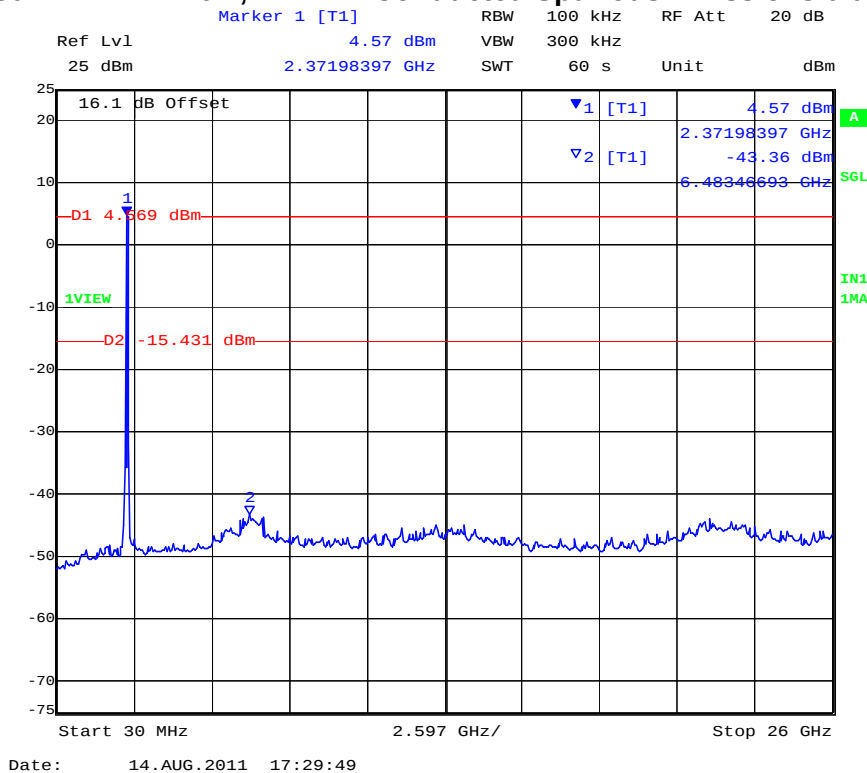


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 205 of 279

PORT C 802.11n – HT-40 2,422 MHz Conducted Spurious Emissions 0.03 – 26 GHz

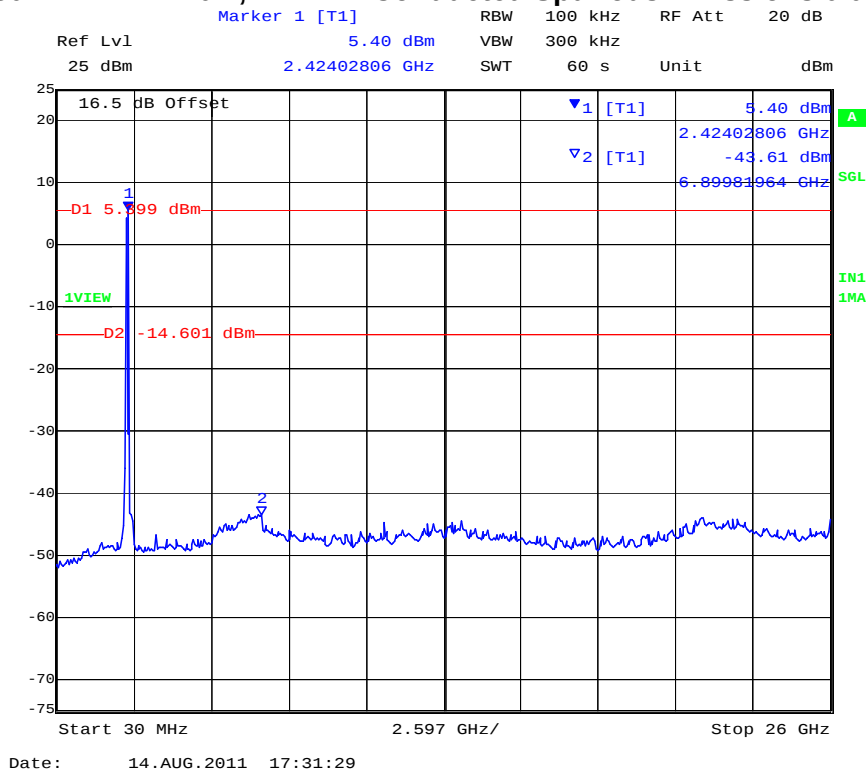

PORT A 802.11n HT-40 2,437 MHz Conducted Spurious Emissions 0.03 – 26 GHz

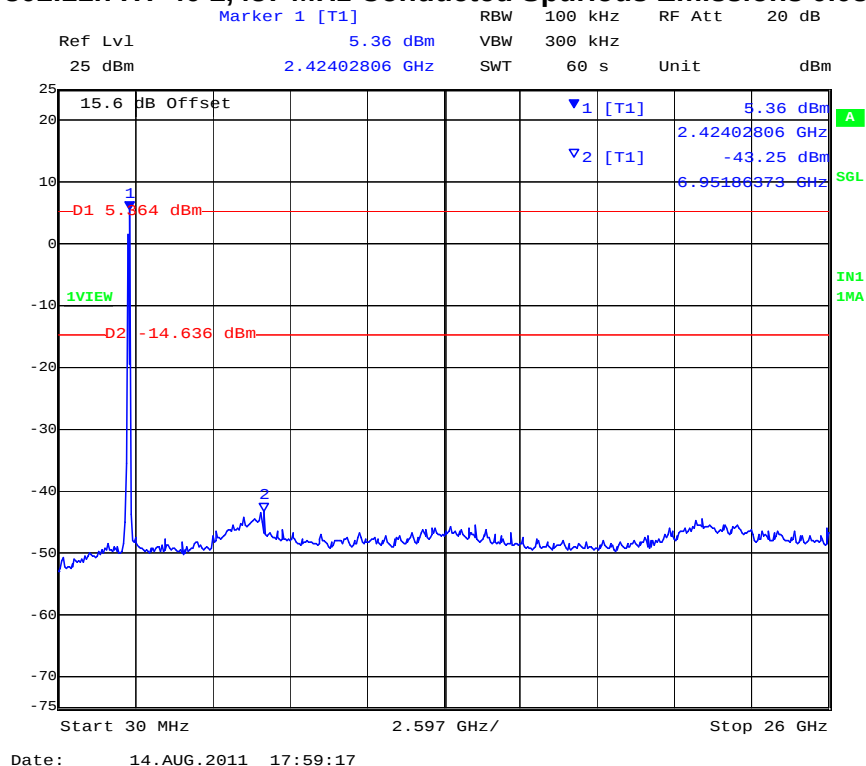


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 206 of 279

PORT B 802.11n HT-40 2,437 MHz Conducted Spurious Emissions 0.03 – 26 GHz

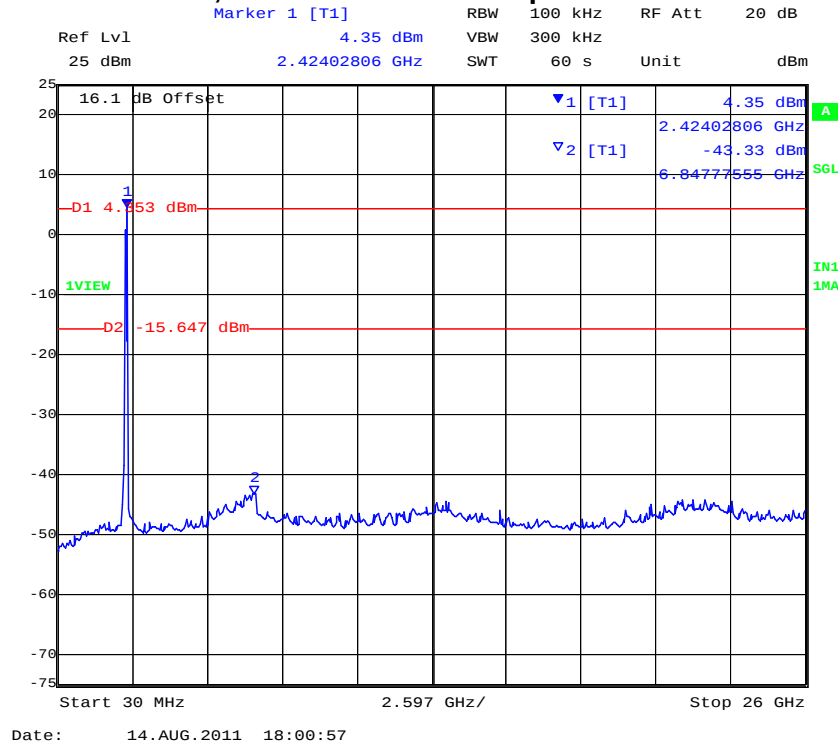

PORT C 802.11n HT-40 2,437 MHz Conducted Spurious Emissions 0.03 – 26 GHz

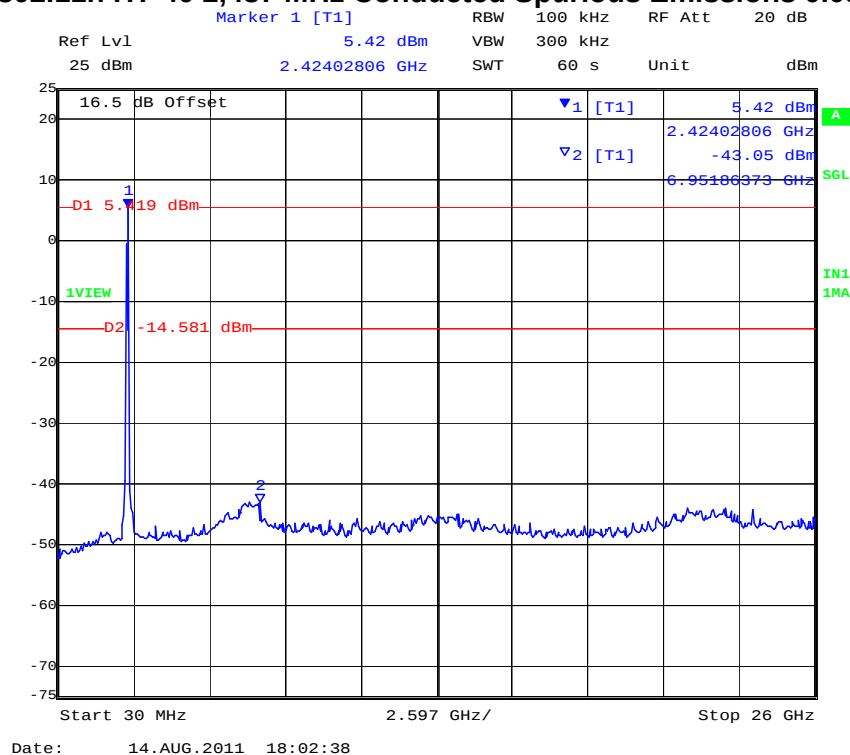


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 207 of 279

PORT A 802.11n HT-40 2,452 MHz Conducted Spurious Emissions 0.03 – 26 GHz

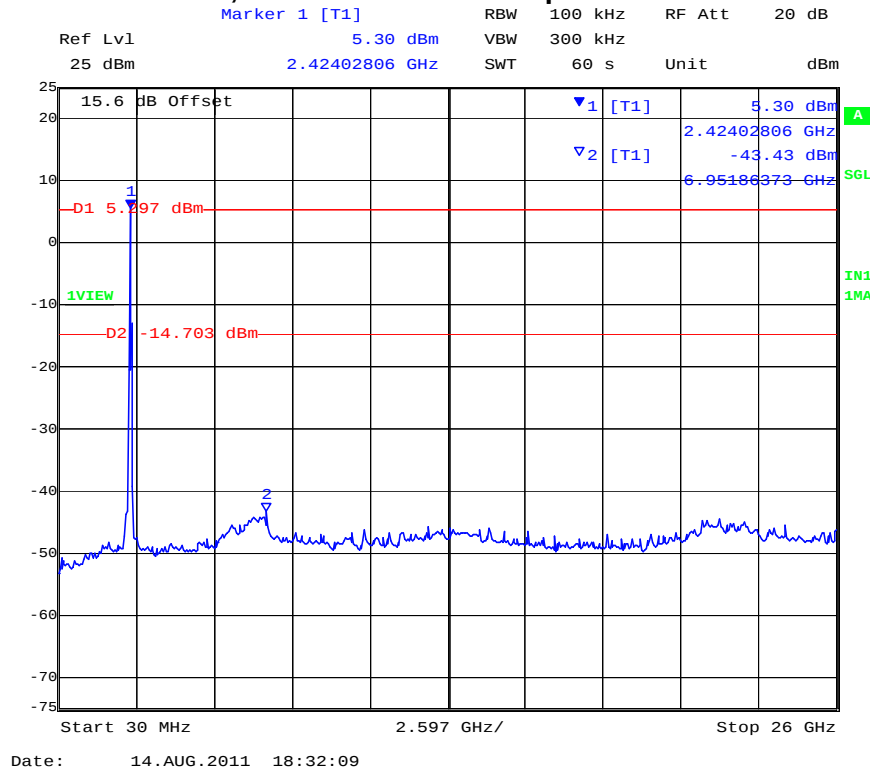

PORT B 802.11n HT-40 2,452 MHz Conducted Spurious Emissions 0.03 – 26 GHz

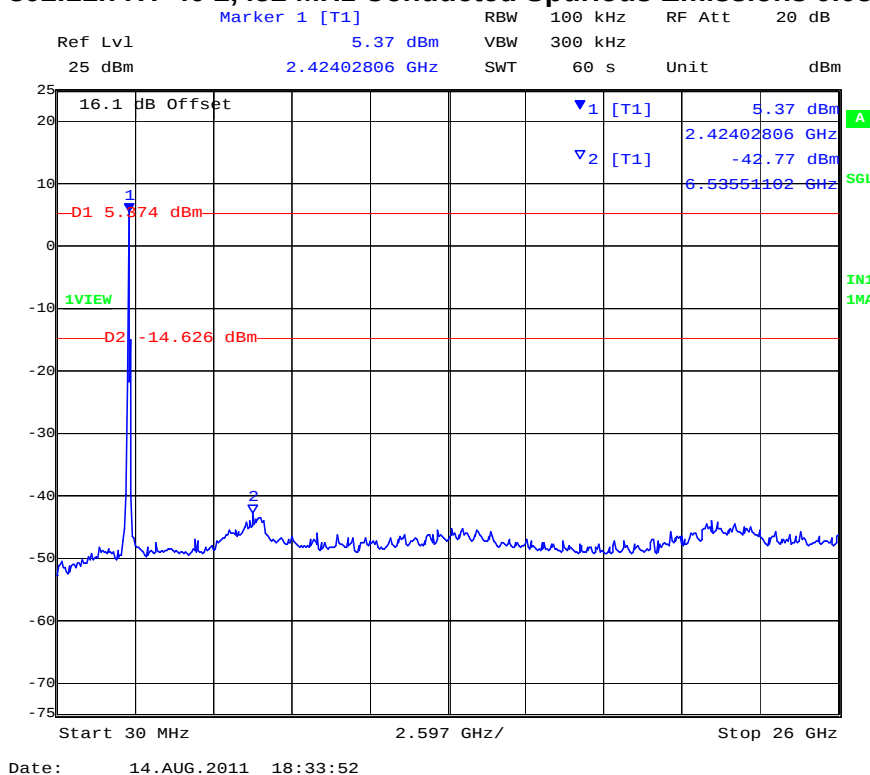


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 208 of 279

PORT A 802.11n HT-40 2,452 MHz Conducted Spurious Emissions 0.03 – 26 GHz

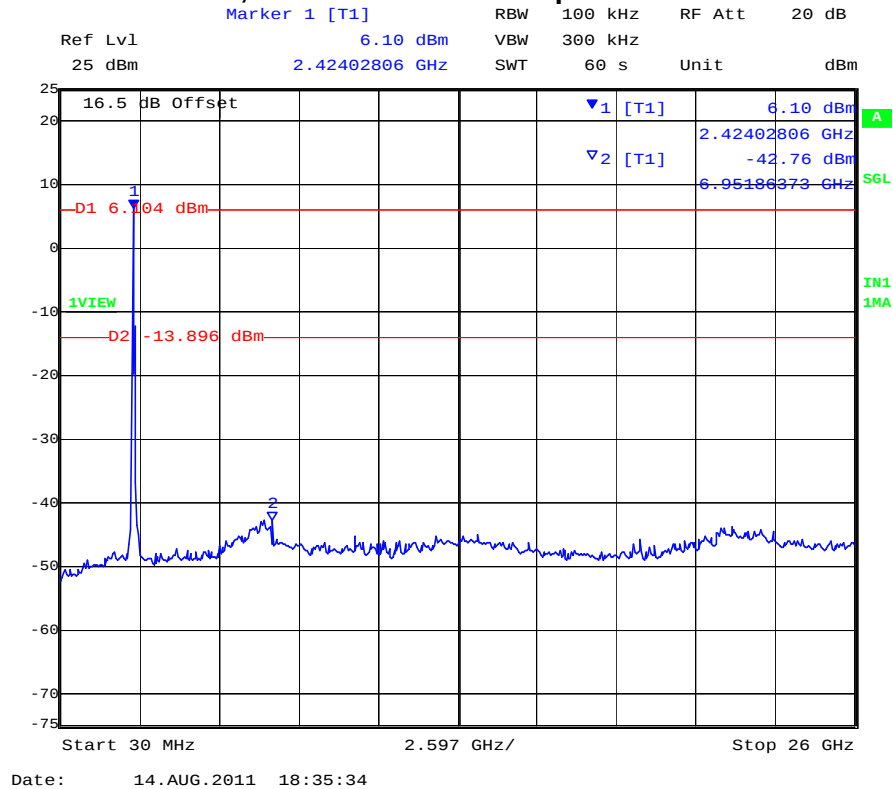

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 209 of 279

Conducted Spurious Emission Results

TABLE OF RESULTS – 802.11a Legacy

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35	to	42
Variant:	802.11a	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain	N/A dB	Antenna Gain:	N/A		
Applied Voltage:	48.00 Vdc	Antenna Ports (N):			
Notes 1:					
Notes 2:					

Conducted Spurious Measurement

Test Freq.	Start Freq.	Stop Freq.	Port A		Port B		Port C		Port D	
MHz	MHz	MHz	SE dBm	Limit dBm	SE dBm	Limit dBm	SE dBm	Limit dBm	SE dBm	Limit dBm
5745	30.00	26000.00	-41.00	-11.29	-39.89	-11.54	-39.57	-12.08		
5875	30.00	26000.00	-41.25	-12.96	-40.33	-12.58	-40.39	-11.48		
5825	30.00	26000.00	-41.33	-12.02	-38.42	-10.22	-40.39	-12.40		

SE: Maximum spurious emission found

Band-edge Measurement

Test Freq.	Band-edge freq.	Port A		Port B		Port C		Port D	
MHz	MHz	BE dBm	Limit dBm	BE dBm	Limit dBm	BE dBm	Limit dBm	BE dBm	Limit dBm
5745	5725.00	-22.95	-10.48	-25.56	-10.45	-30.65	-11.03		
5825	5850.00	-28.25	-10.38	-28.96	-9.77	-33.64	-8.94		

BE: Maximum Band edge emission found

Measurement uncertainty:	±2.81 dB
---------------------------------	----------


Note: Limit is based on 20dB down from fundamental emissions

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 210 of 279

PORT A 802.11a Legacy - Conducted Band Edge Spurious 5,725 MHz

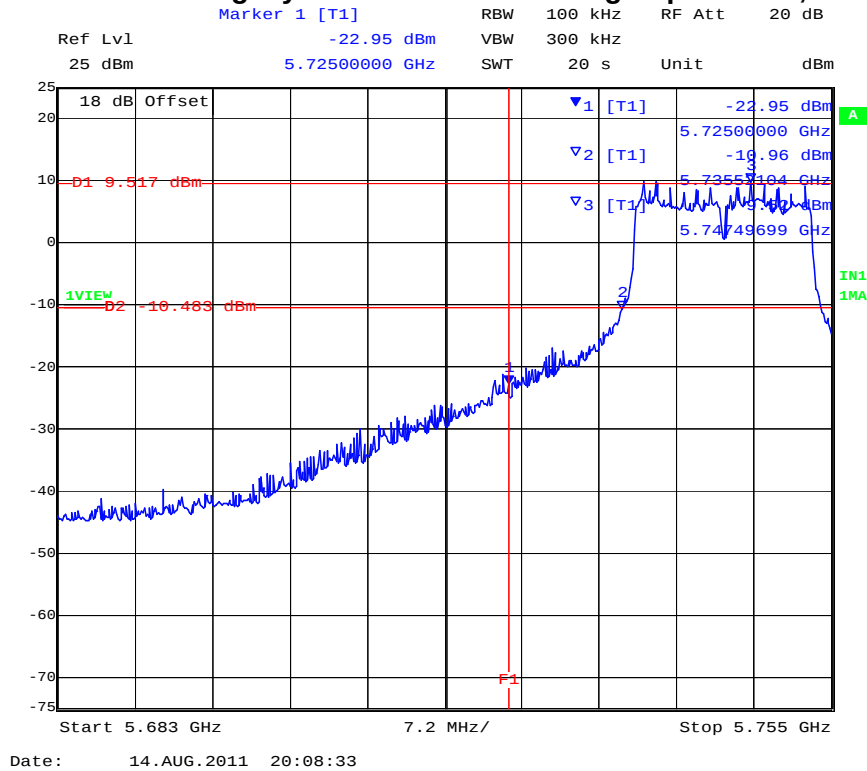

PORT B 802.11a Legacy - Conducted Band Edge Spurious 5,725 MHz

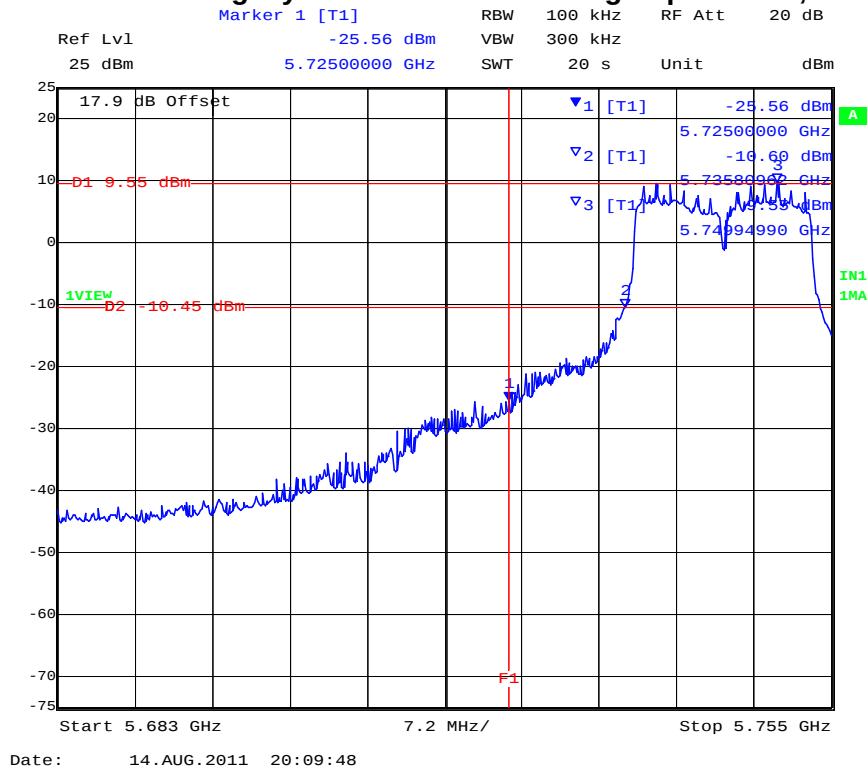


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 211 of 279

PORT C 802.11a Legacy - Conducted Band Edge Spurious 5,725 MHz

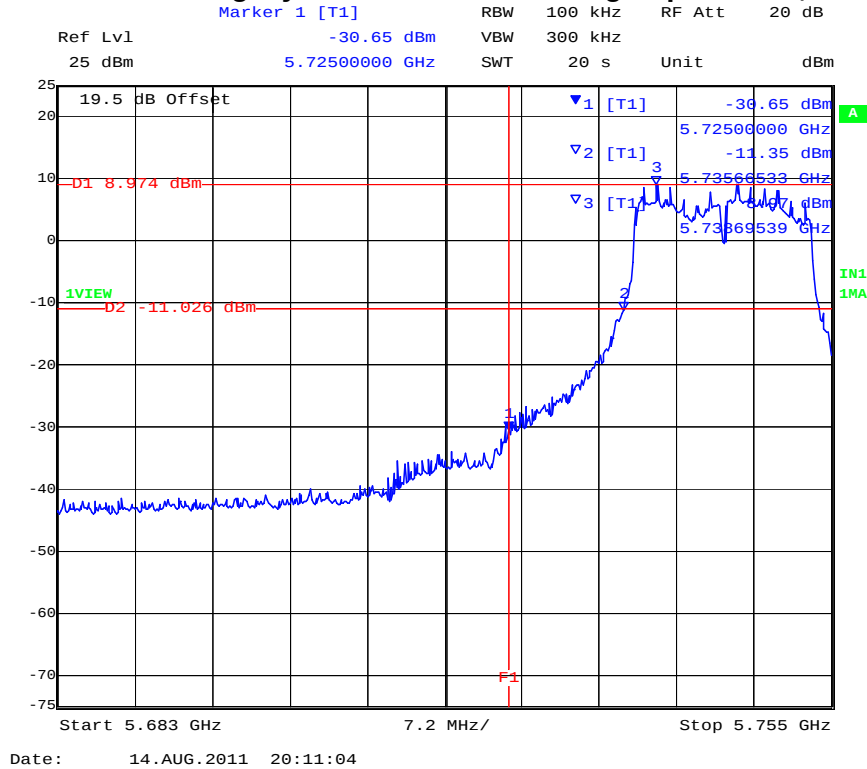

PORT A 802.11a Conducted Spurious Emissions at 5,850 MHz Band Edge

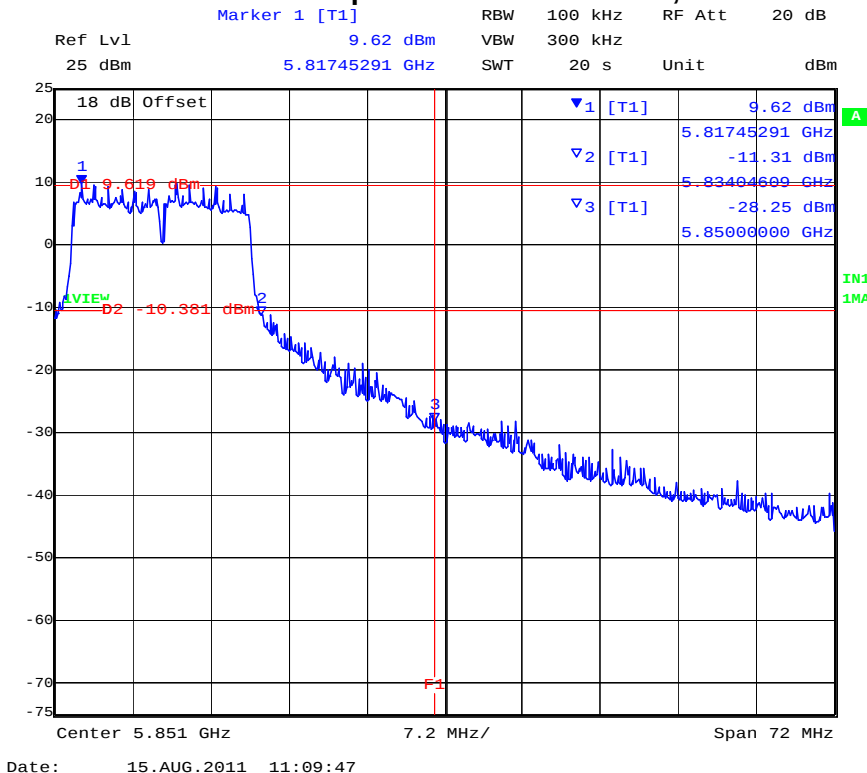


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 212 of 279

PORT B 802.11a Conducted Spurious Emissions at 5,850 MHz Band Edge

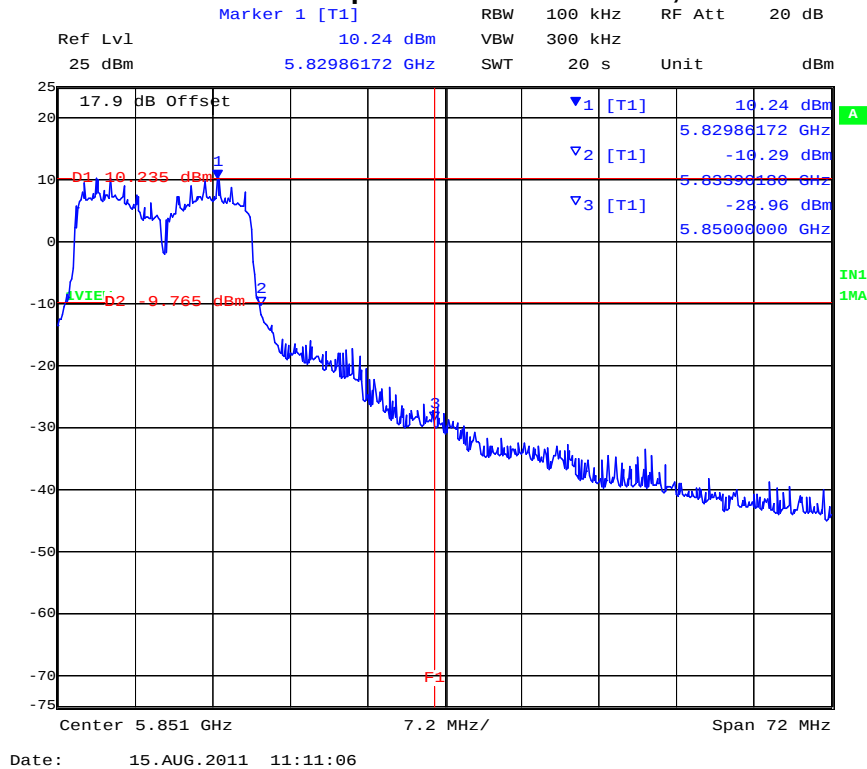

PORT C 802.11a Conducted Spurious Emissions at 5,850 MHz Band Edge

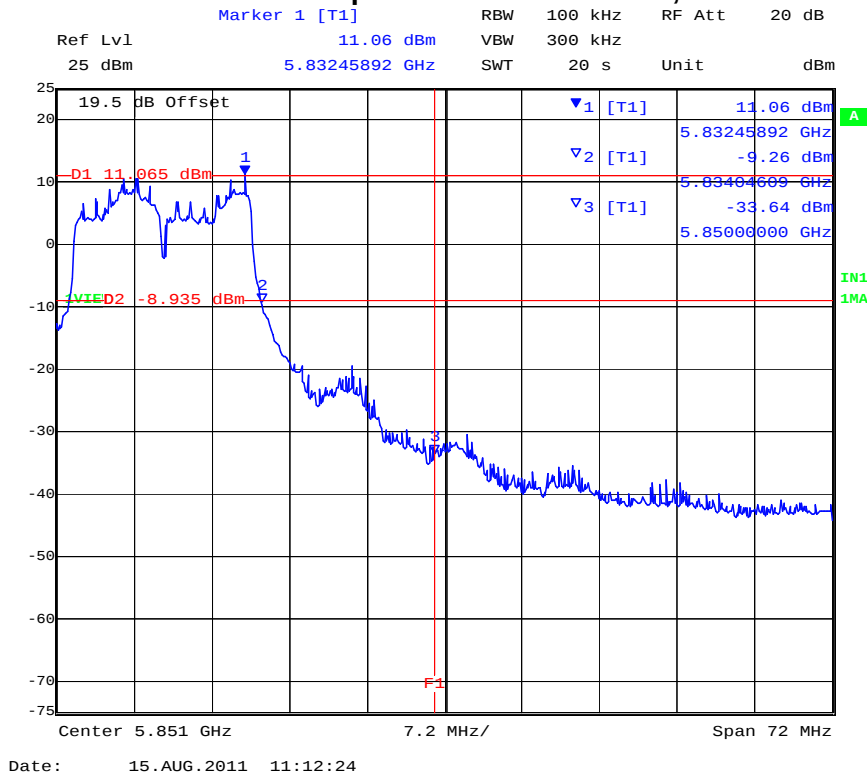


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 213 of 279

PORT A 802.11a – Legacy 5,745 MHz Conducted Spurious Emissions 0.03 – 40 GHz

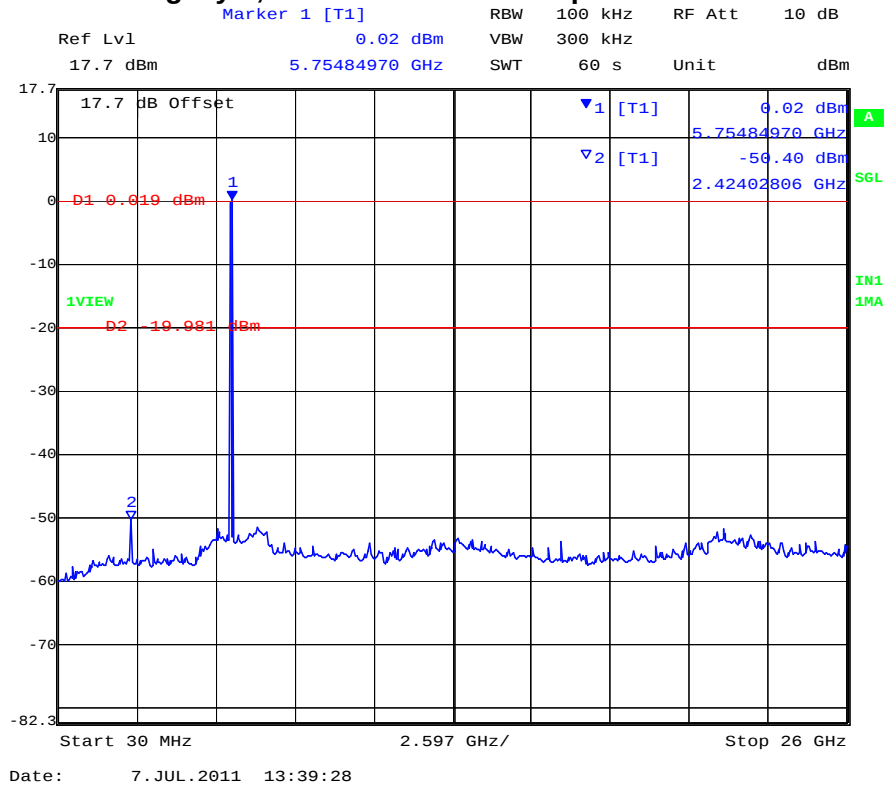

PORT B 802.11a – Legacy 5,745 MHz Conducted Spurious Emissions 0.03 – 40 GHz

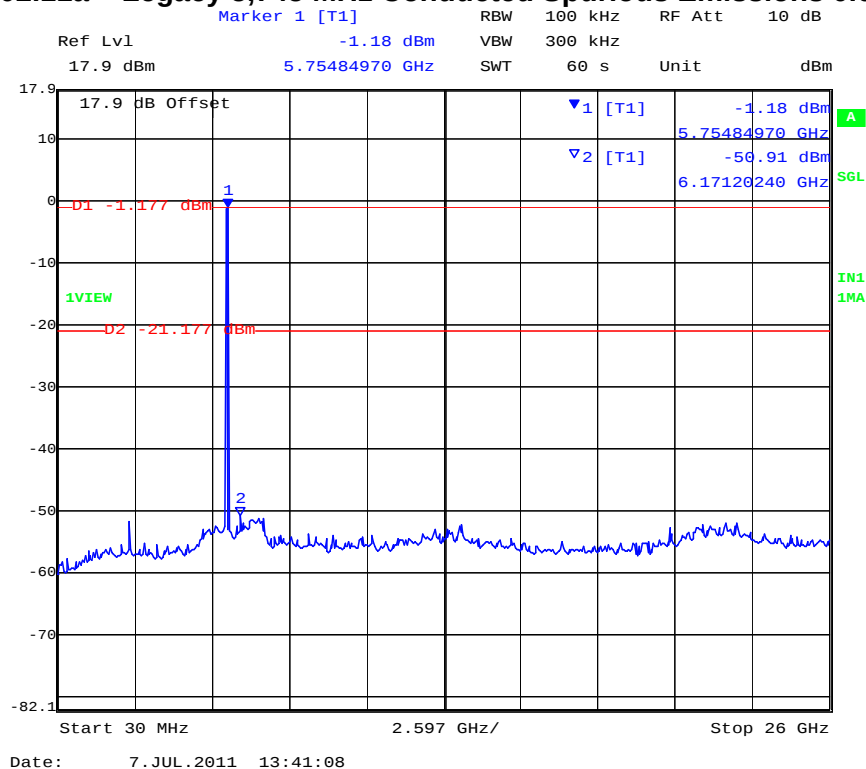


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 214 of 279

PORT C 802.11a – Legacy 5,745 MHz Conducted Spurious Emissions 0.03 – 40 GHz

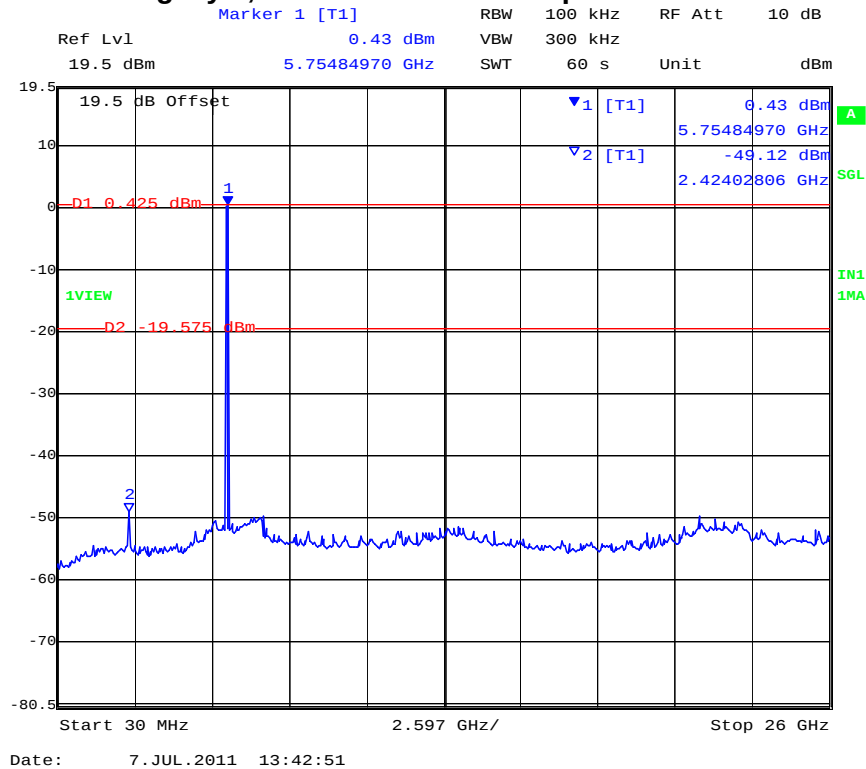

PORT A 802.11a – Legacy 5,785 MHz Conducted Spurious Emissions 0.03 – 40 GHz

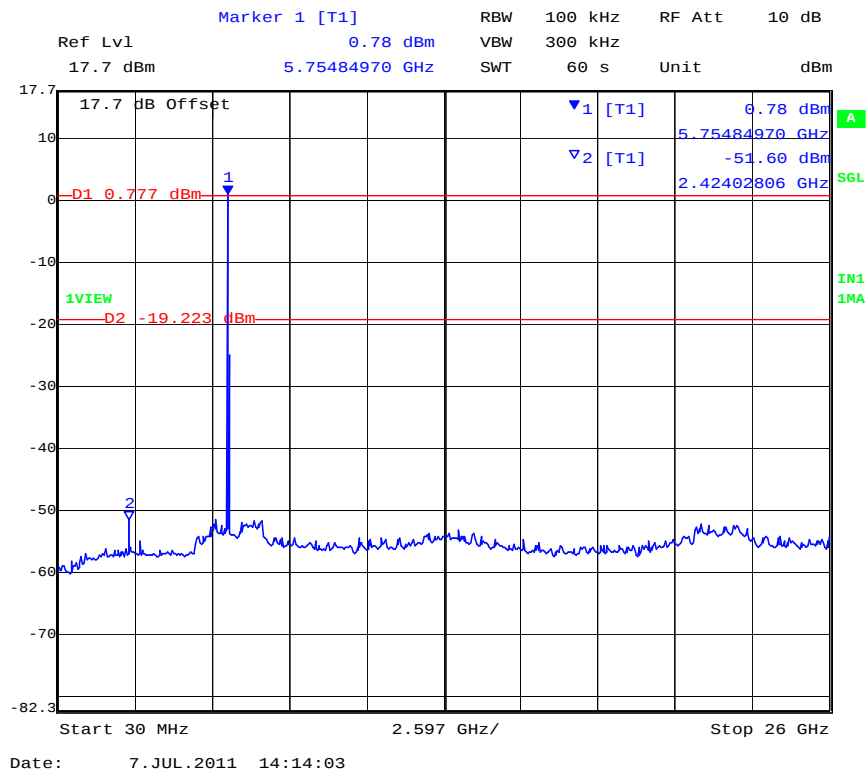


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 215 of 279


PORT B 802.11a – Legacy 5,785 MHz Conducted Spurious Emissions 0.03 – 40 GHz

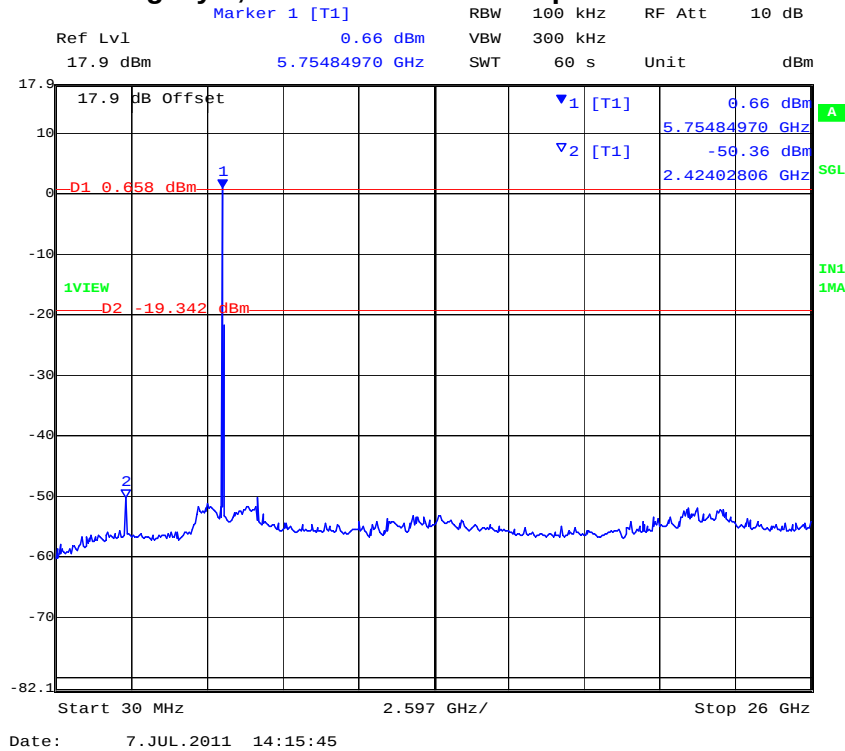

PORT C 802.11a – Legacy 5,785 MHz Conducted Spurious Emissions 0.03 – 40 GHz

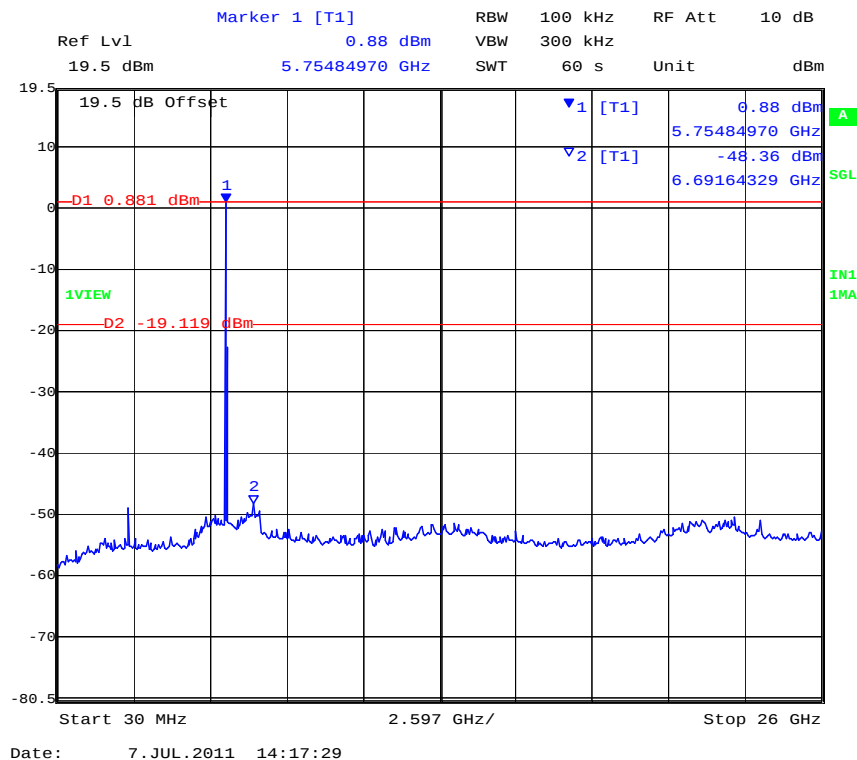

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

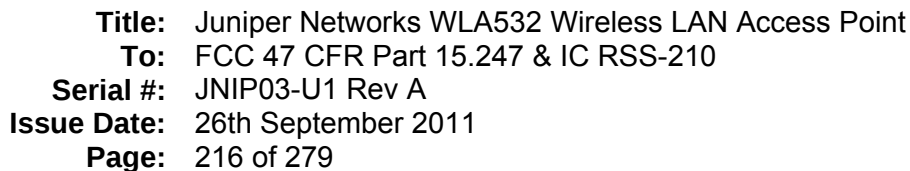

Ref Lvl 17.7 dBm

Marker 1 [T1] 1.25 dBm

5.80689379 GHz

RBW 100 kHz

VBW 300 kHz

SWT 60 s

Unit dBm

RF Att 10 dB

17.7 dB Offset

▼1 [T1] 1.25 dBm

▼2 [T1] -48.93 dBm

5.80689379 GHz

5.33849699 GHz

D1 1.247 dBm

D2 -18.753 dBm

1VIEW

Start 30 MHz

2.597 GHz/

Stop 26 GHz

Date: 7. JUL. 2011 14:54:17

Ref Lvl 17.9 dBm
 Marker 1 [T1] 1.42 dBm
 RBW 100 kHz
 VBW 300 kHz
 SWT 60 s
 Unit dBm


17.9 dB Offset
 17.9 dBm
 1.42 dBm
 5.80689379 GHz
 -48.98 dBm
 5.18236473 GHz
 1VIEW
 -18.579 dBm
 Start 30 MHz
 2.597 GHz/
 Stop 26 GHz
 Date: 7.JUL.2011 14:56:01

MiCOM Labs, 440 Boulder Court, Suite 200, Pleasanton, CA 94566 USA, Phone: 925.462.0304, Fax: 925.462.0306, www.micomlabs.com



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 217 of 279

PORT C 802.11a – Legacy 5,825 MHz Conducted Spurious Emissions 0.03 – 40 GHz

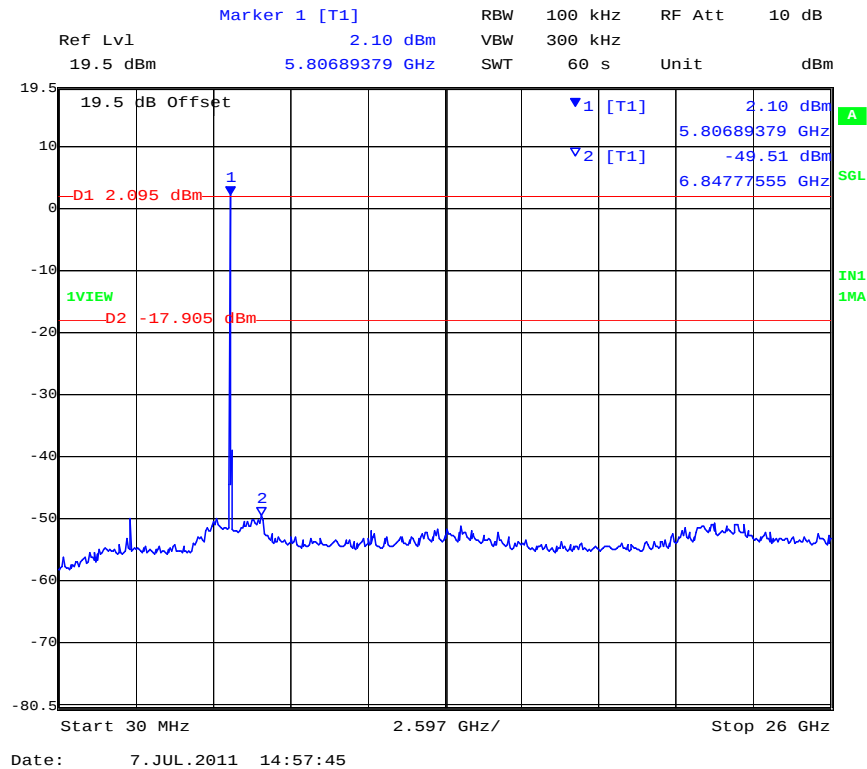

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 218 of 279

Conducted Spurious Emission Results

TABLE OF RESULTS – 802.11n HT-20

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain	N/A dB	Antenna Gain:	N/A		dBi
Applied Voltage:	48.00 Vdc	Antenna Ports (N):			
Notes 1:					
Notes 2:					

Conducted Spurious Measurement

Test Freq.	Start Freq.	Stop Freq.	Port A		Port B		Port C		Port D	
MHz	MHz	MHz	SE dBm	Limit dBm	SE dBm	Limit dBm	SE dBm	Limit dBm	SE dBm	Limit dBm
5745.000	30.00	26000.00	-41.06	-7.13	-36.09	-6.65	-40.57	-9.39		
5785.000	30.00	26000.00	-39.65	-6.86	-34.25	-6.93	-39.67	-6.05		
5825.000	30.00	26000.00	-40.05	-7.09	-35.75	-7.25	-39.13	-6.93		

SE: Maximum spurious emission found

Band-edge Measurement

Test Freq.	Band-edge freq.	Port A		Port B		Port C		Port D	
MHz	MHz	BE dBm	Limit dBm	BE dBm	Limit dBm	BE dBm	Limit dBm	BE dBm	Limit dBm
5745.000	5725.00	-8.70	-6.01	-14.83	-5.68	-14.35	-6.03		
5825.000	5850.00	-17.41	-6.28	-20.27	-6.00	-20.08	-5.67		

BE: Maximum Band edge emission found

Measurement uncertainty:	±2.81 dB
---------------------------------	----------


Note: Limit is based on 20dB down from fundamental emissions

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 219 of 279

PORT A 802.11n HT-20 Legacy - Conducted Band Edge Spurious 5,725 MHz

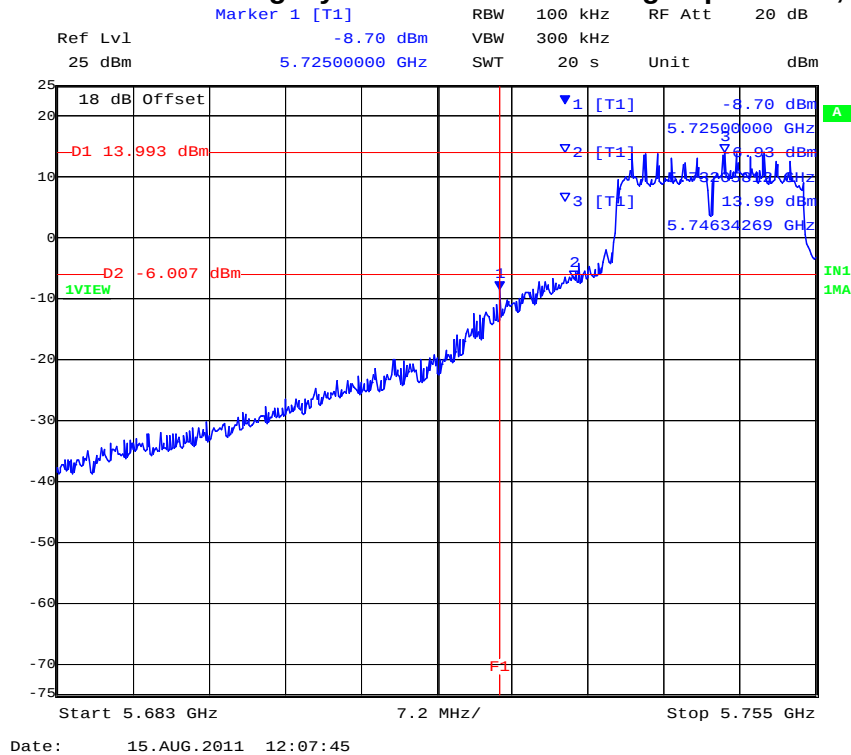

PORT B 802.11n HT-20 Legacy - Conducted Band Edge Spurious 5,725 MHz

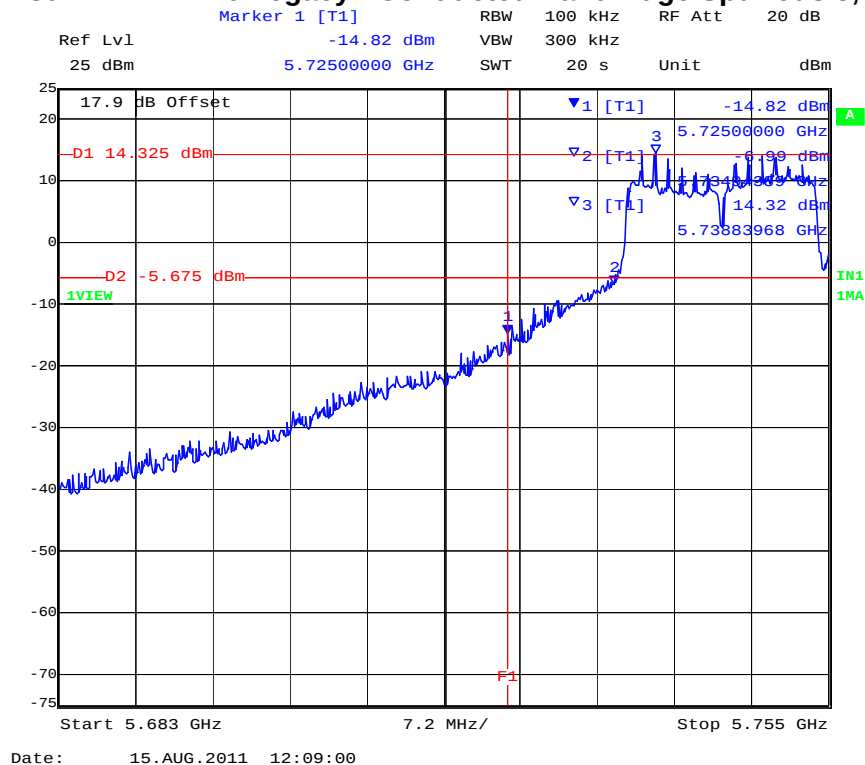


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 220 of 279


PORT C 802.11n HT-20 Legacy - Conducted Band Edge Spurious 5,725 MHz

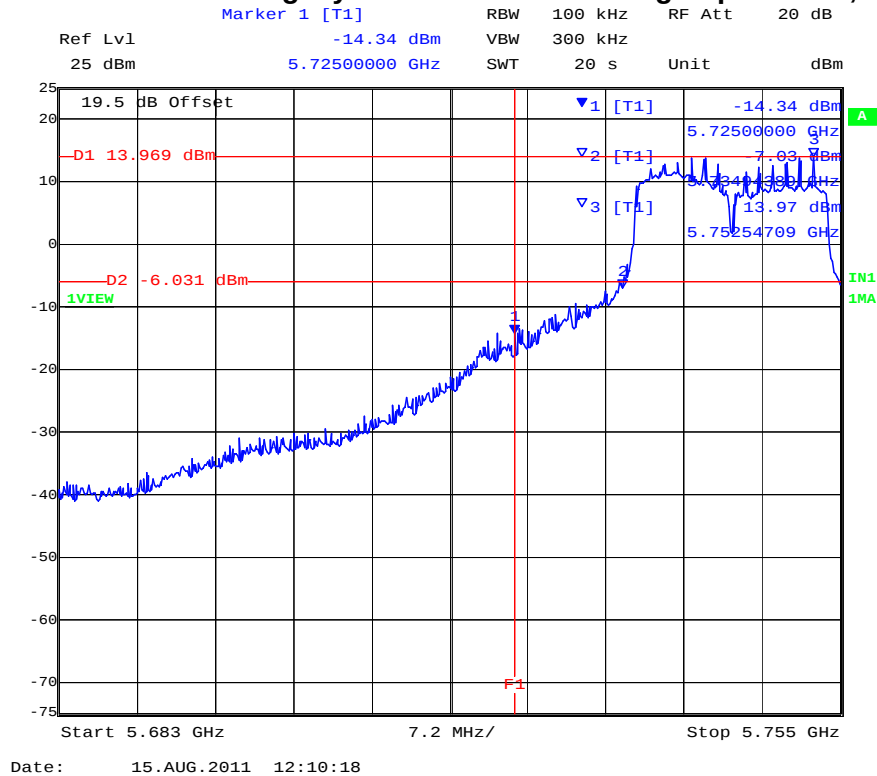

PORT A 802.11n HT-20 Conducted Spurious Emissions at 5,850 MHz Band Edge

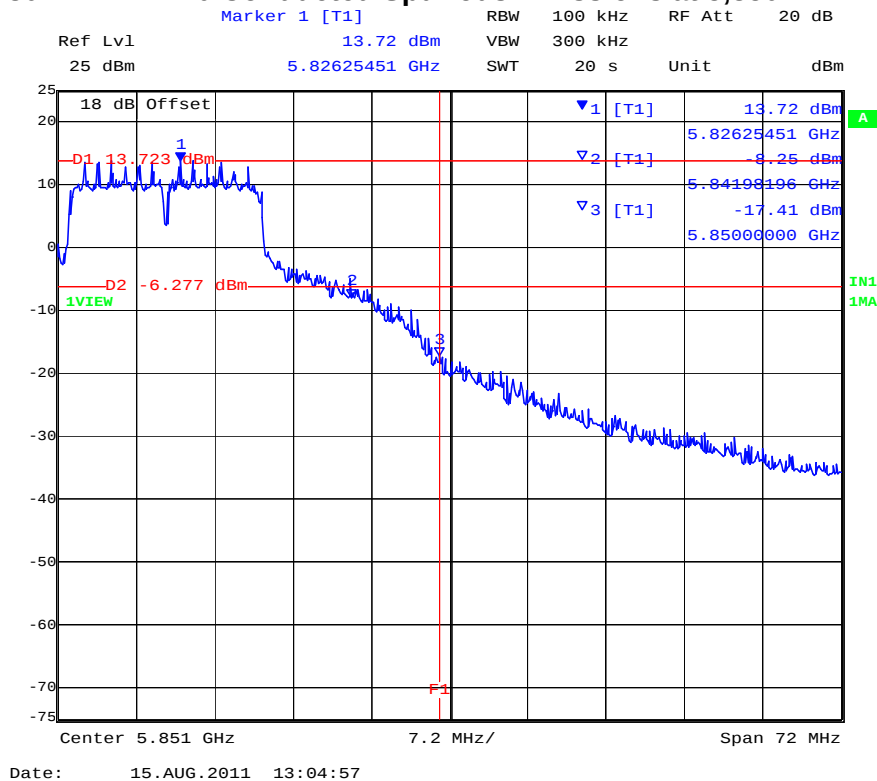

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

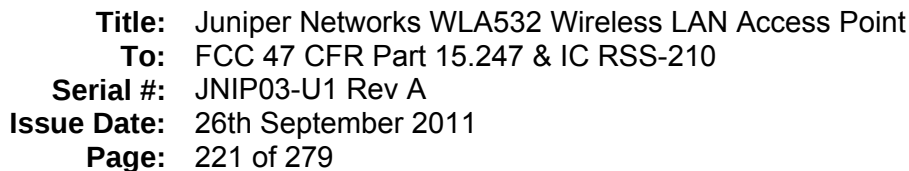
[illegible][illegible]

MiCOM Labs, 440 Boulder Court, Suite 200, Pleasanton, CA 94566 USA, Phone: 925.462.0304, Fax: 925.462.0306, www.micomlabs.com




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 222 of 279

PORT A 802.11n HT-20 5,745 MHz Conducted Spurious Emissions 0.03 – 26 GHz

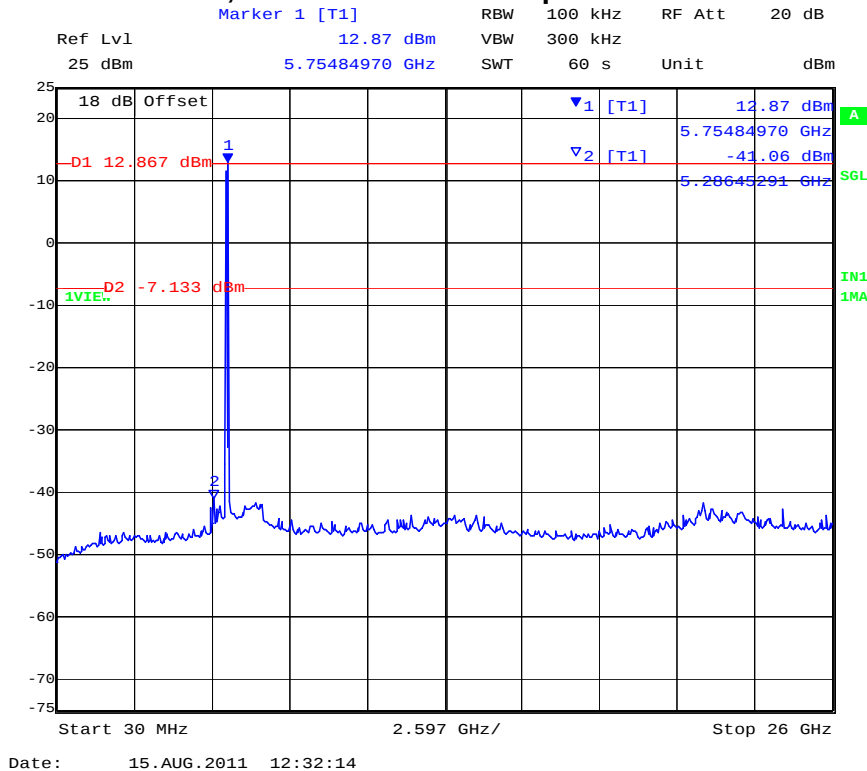

PORT B 802.11n HT-20 5,745 MHz Conducted Spurious Emissions 0.03 – 26 GHz

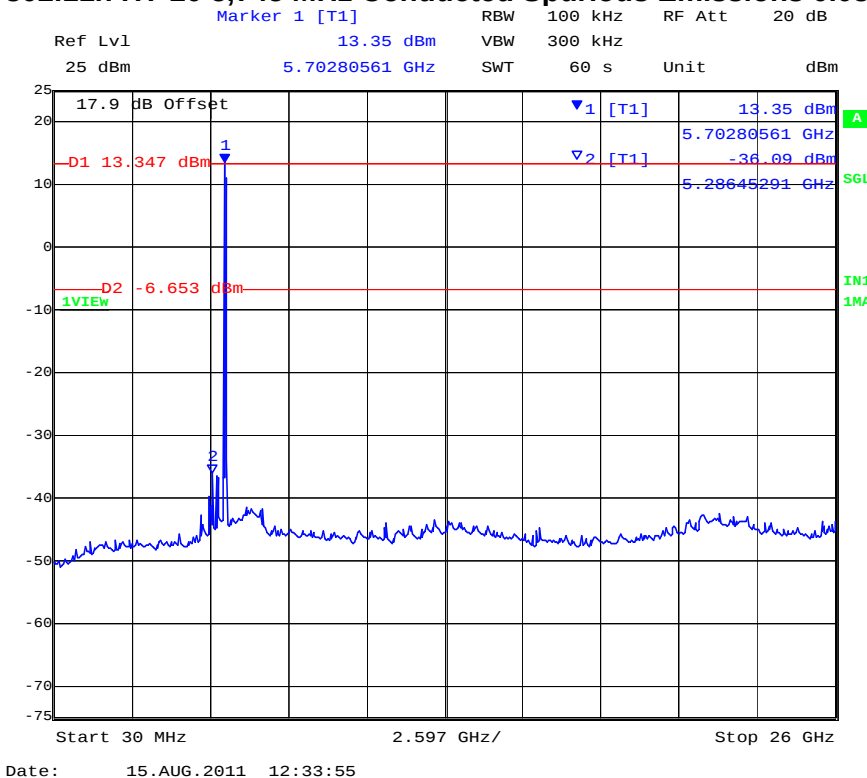


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 223 of 279

PORT C 802.11n HT-20 5,745 MHz Conducted Spurious Emissions 0.03 – 26 GHz

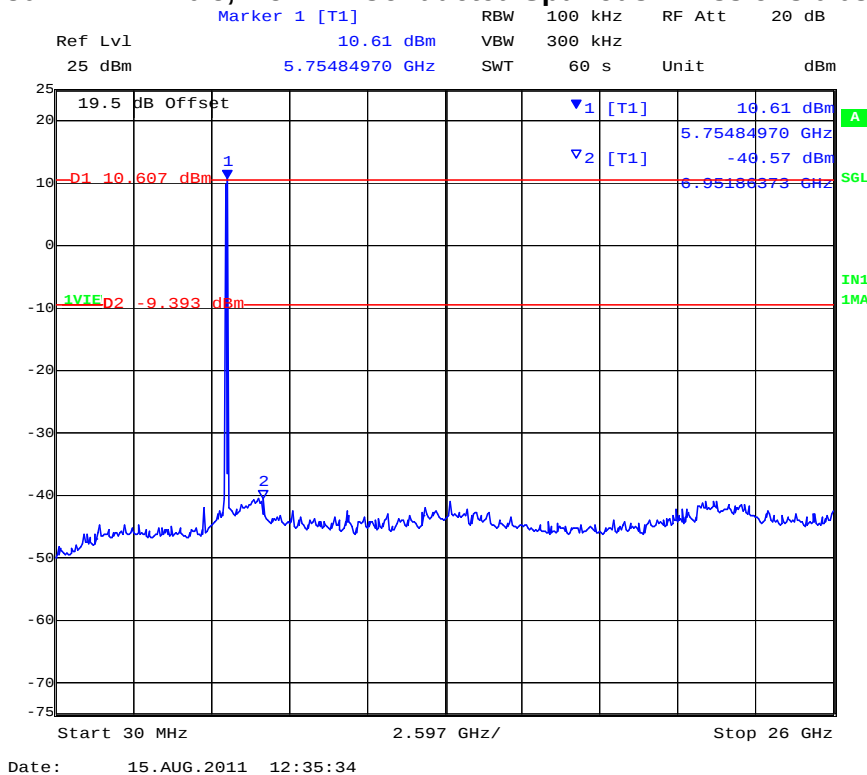

PORT A 802.11n HT-20 5,785 MHz Conducted Spurious Emissions 0.03 – 26 GHz

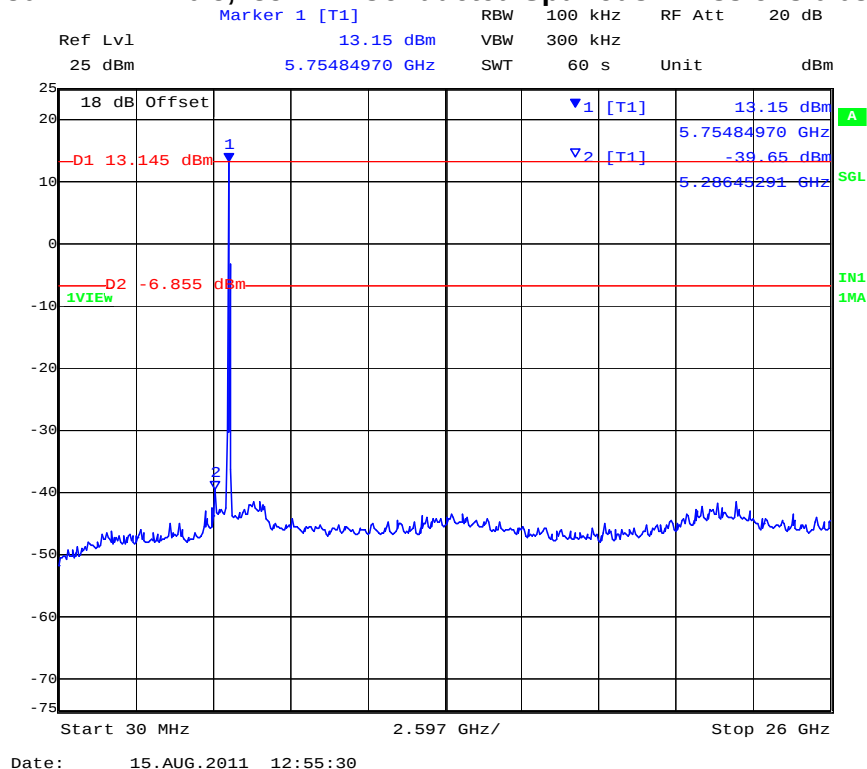


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 224 of 279

PORT B 802.11n HT-20 5,785 MHz Conducted Spurious Emissions 0.03 – 26 GHz

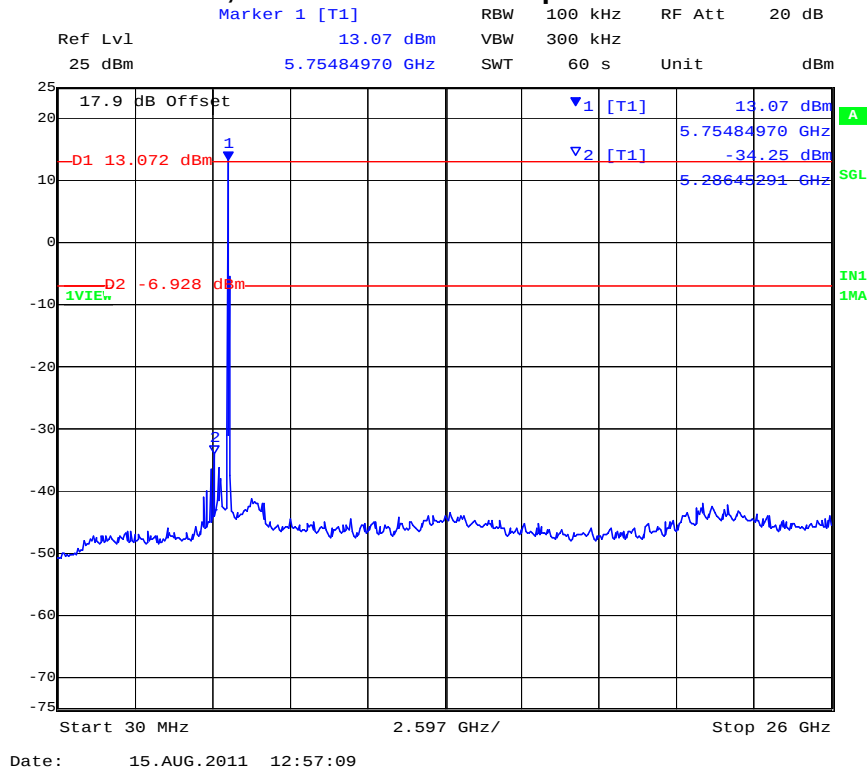


PORT C 802.11n HT-20 5,785 MHz Conducted Spurious Emissions 0.03 – 26 GHz

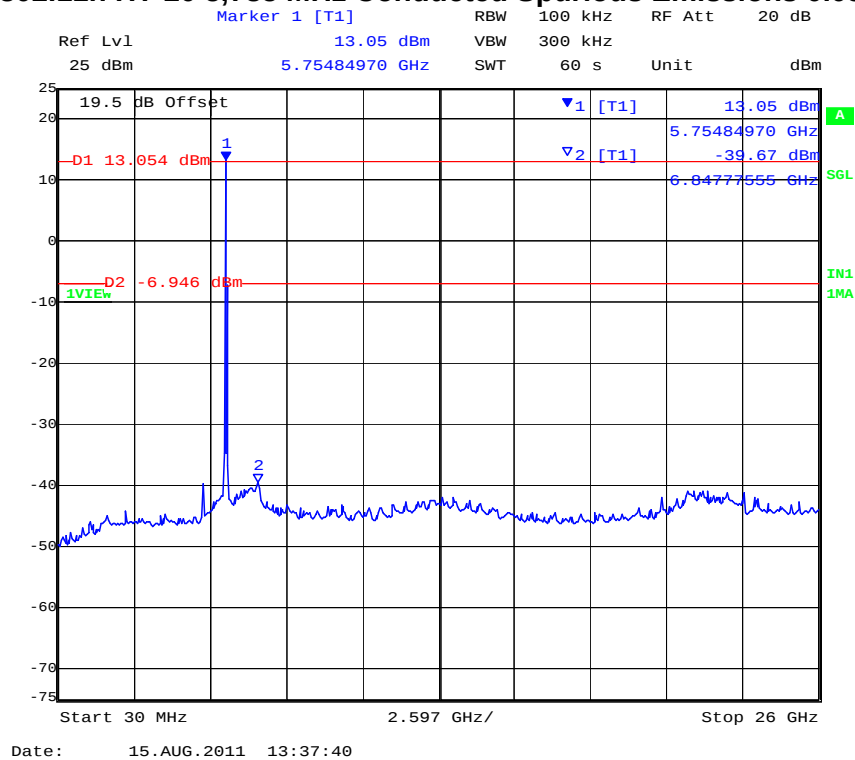


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 802.11n HT-20 5,825 MHz Conducted Spurious Emissions 0.03 – 26 GHz

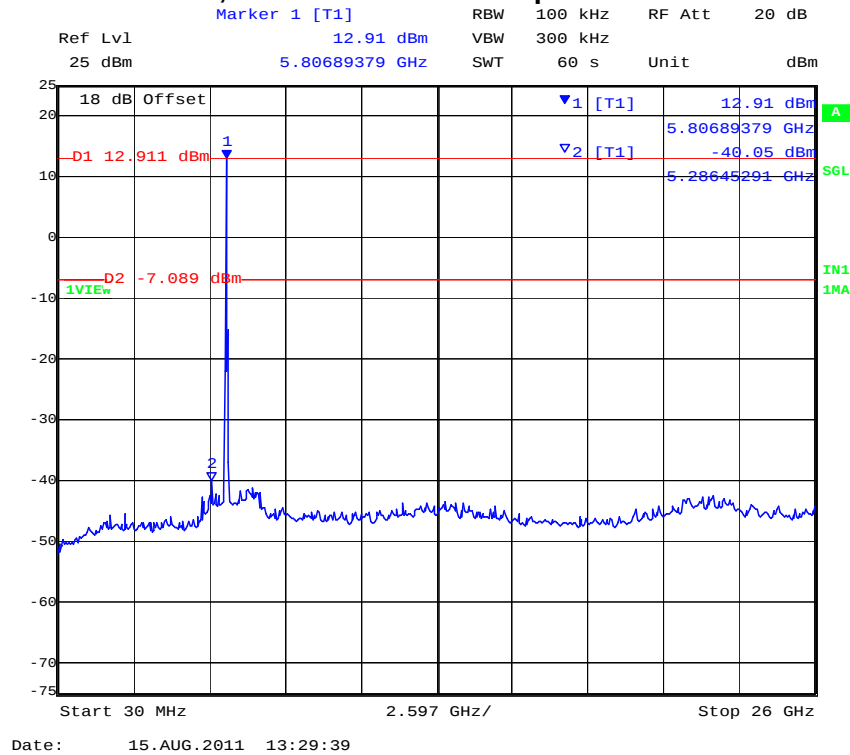

PORT B 802.11n HT-20 5,825 MHz Conducted Spurious Emissions 0.03 – 26 GHz

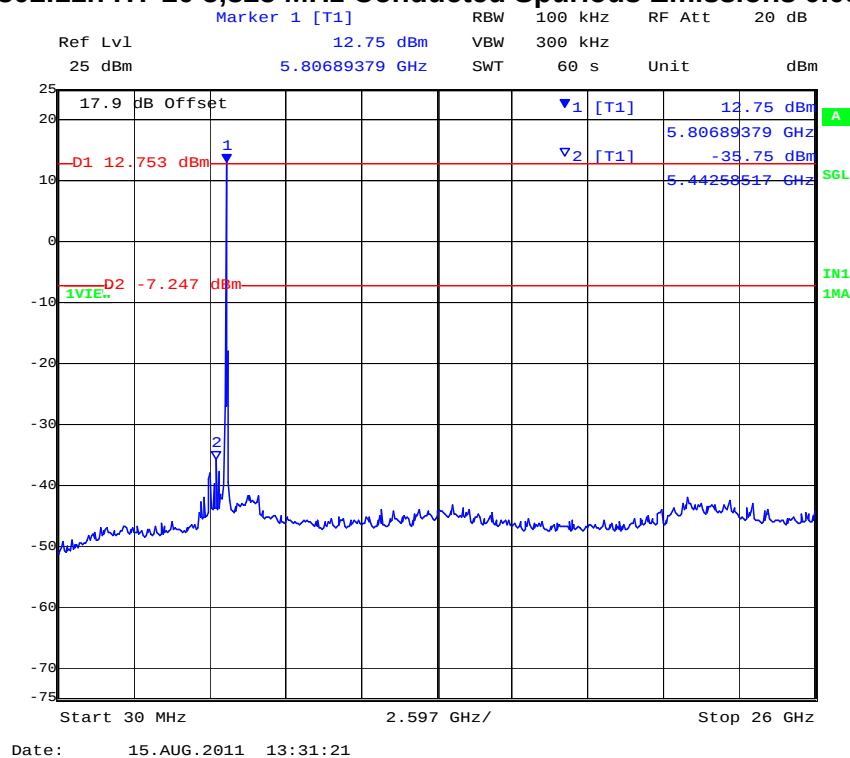


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 226 of 279

PORT C 802.11n HT-20 5,825 MHz Conducted Spurious Emissions 0.03 – 26 GHz

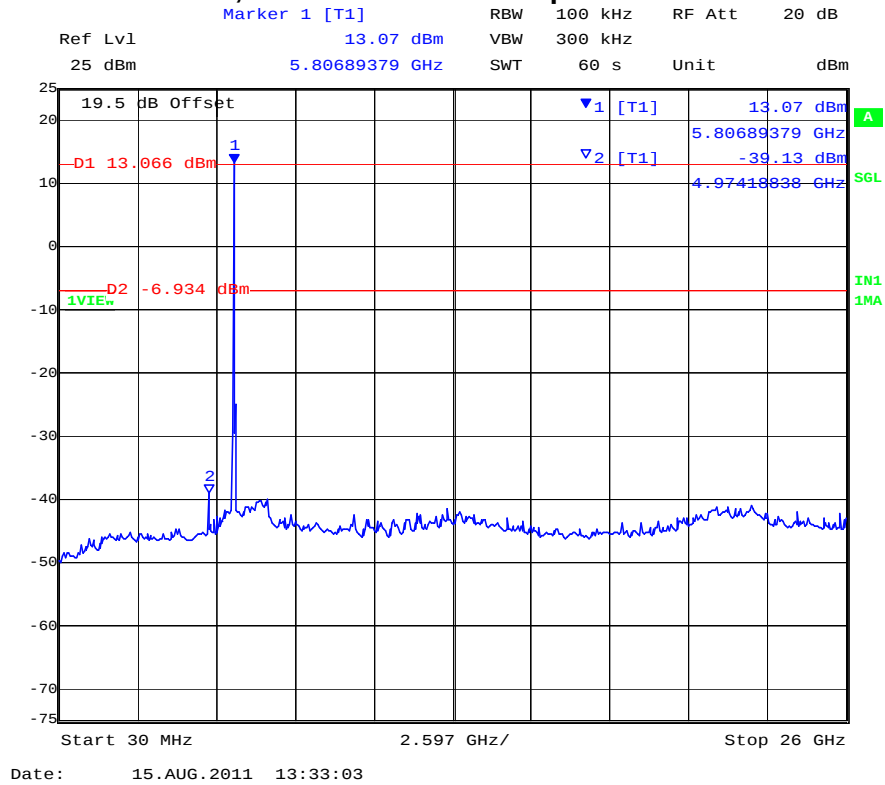

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 227 of 279

Conducted Spurious Emission Results

TABLE OF RESULTS – 802.11N HT-40

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain	N/A dB	Antenna Gain:	N/A		
Applied Voltage:	48.00 Vdc	Antenna Ports (N):			
Notes 1:					
Notes 2:					

Conducted Spurious Measurement

Test Freq.	Start Freq.	Stop Freq.	Port A		Port B		Port C		Port D	
MHz	MHz	MHz	SE dBm	Limit dBm	SE dBm	Limit dBm	SE dBm	Limit dBm	SE dBm	Limit dBm
5755.000	30.00	26000.00	-41.77	-10.49	-36.54	-9.91	-39.84	-10.57		
5795.000	30.00	26000.00	-41.07	-10.05	-35.57	-12.26	-39.75	-10.46		

Band-edge Measurement

Test Freq.	Band-edge freq.	Port A		Port B		Port C		Port D	
MHz	MHz	BE dBm	Limit dBm	BE dBm	Limit dBm	BE dBm	Limit dBm	BE dBm	Limit dBm
5755.000	5725.00	-10.13	-9.70	-17.66	-10.39	-15.83	-8.74		
5795.000	5850.00	-22.22	-9.58	-25.48	-9.01	-26.42	-8.93		

Measurement uncertainty:	±2.81 dB
---------------------------------	----------


Note: Limit is based on 20dB down from fundamental emissions

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 228 of 279

PORT A 802.11n HT-40 Legacy - Conducted Band Edge Spurious 5,725 MHz

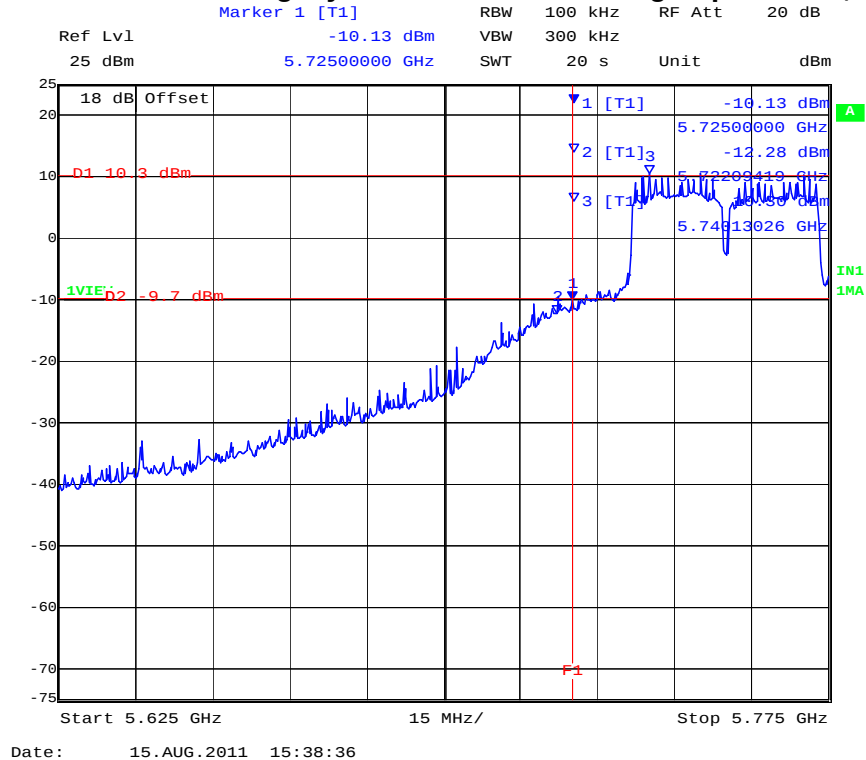

PORT B 802.11n HT-40 Legacy - Conducted Band Edge Spurious 5,725 MHz

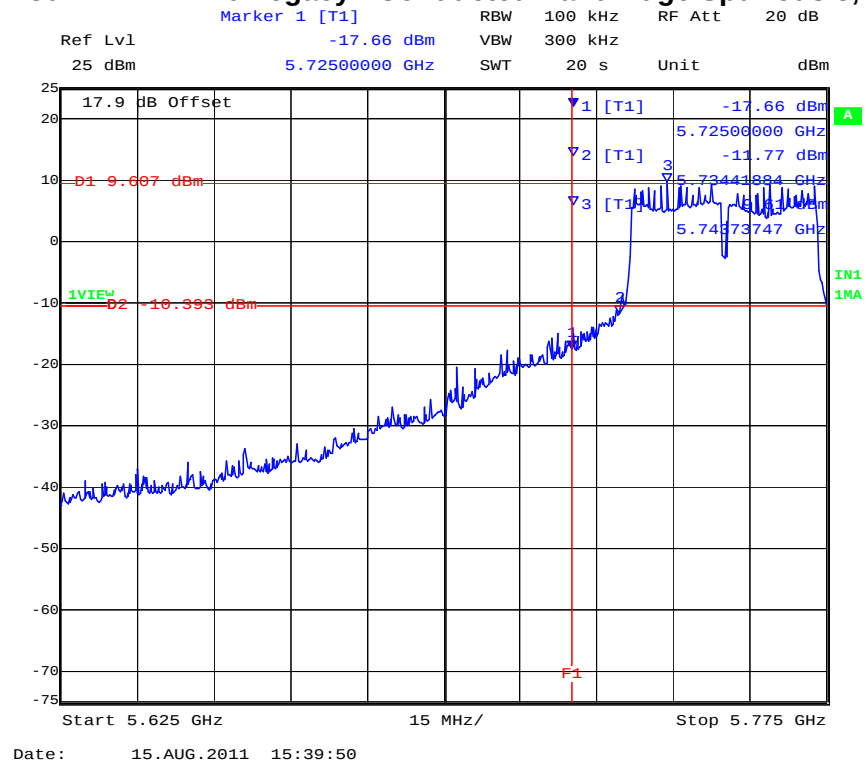


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 229 of 279

PORT C 802.11n HT-40 Legacy - Conducted Band Edge Spurious 5,725 MHz

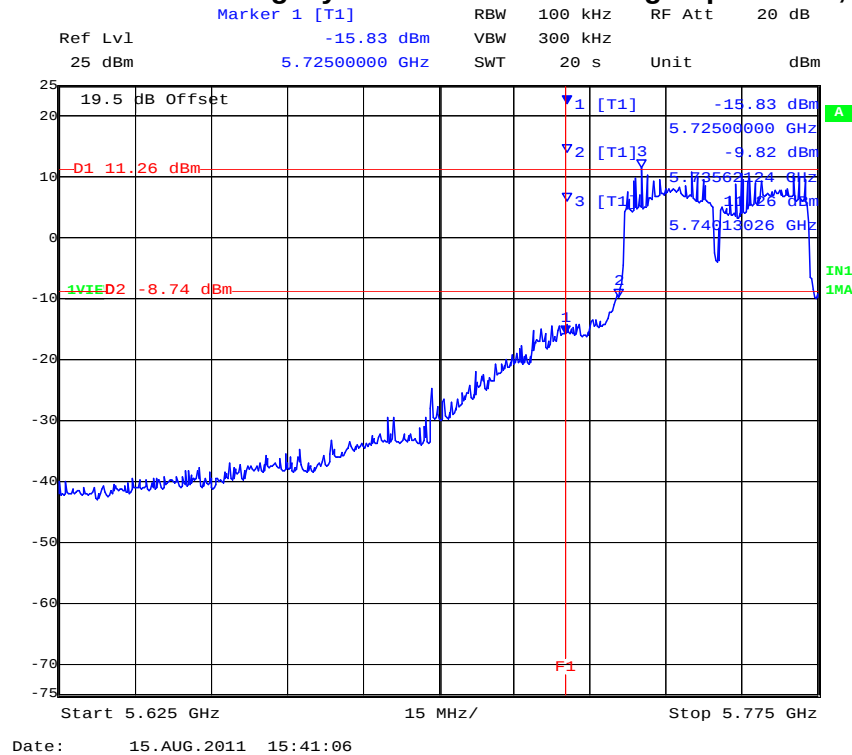

PORT A 802.11n HT-40 Conducted Spurious Emissions at 5,850 MHz Band Edge

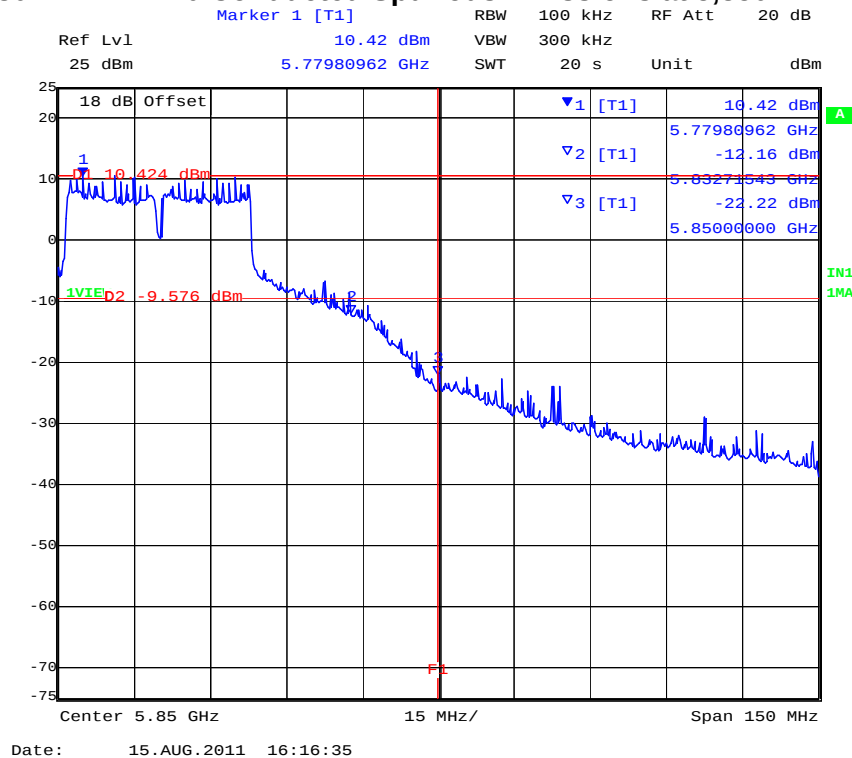


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 230 of 279

PORT B 802.11n HT-40 Conducted Spurious Emissions at 5,850 MHz Band Edge

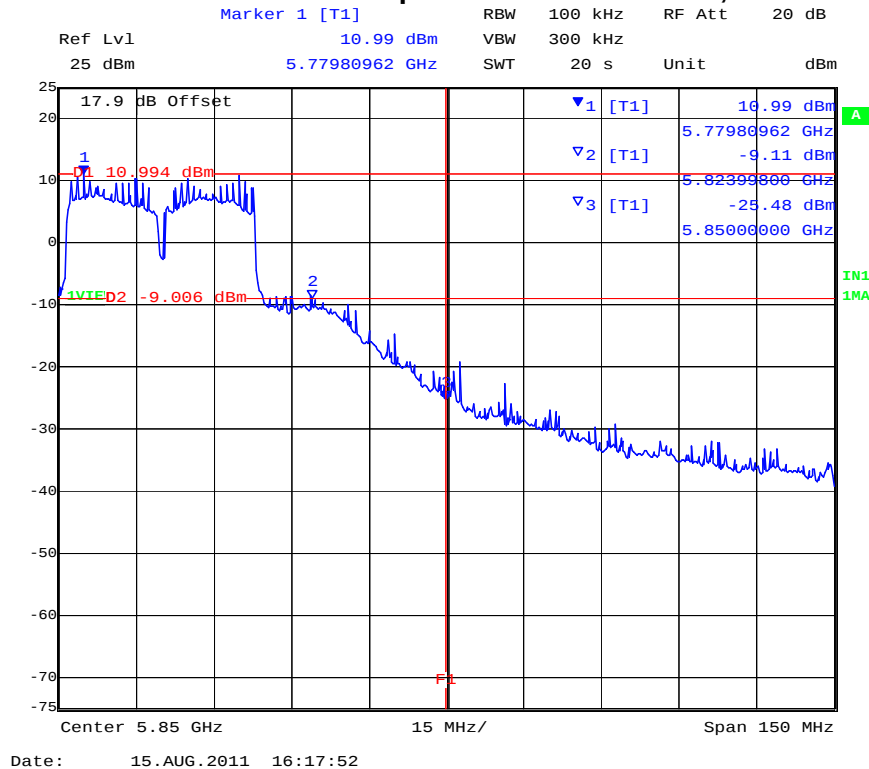

PORT C 802.11n HT-40 Conducted Spurious Emissions at 5,850 MHz Band Edge

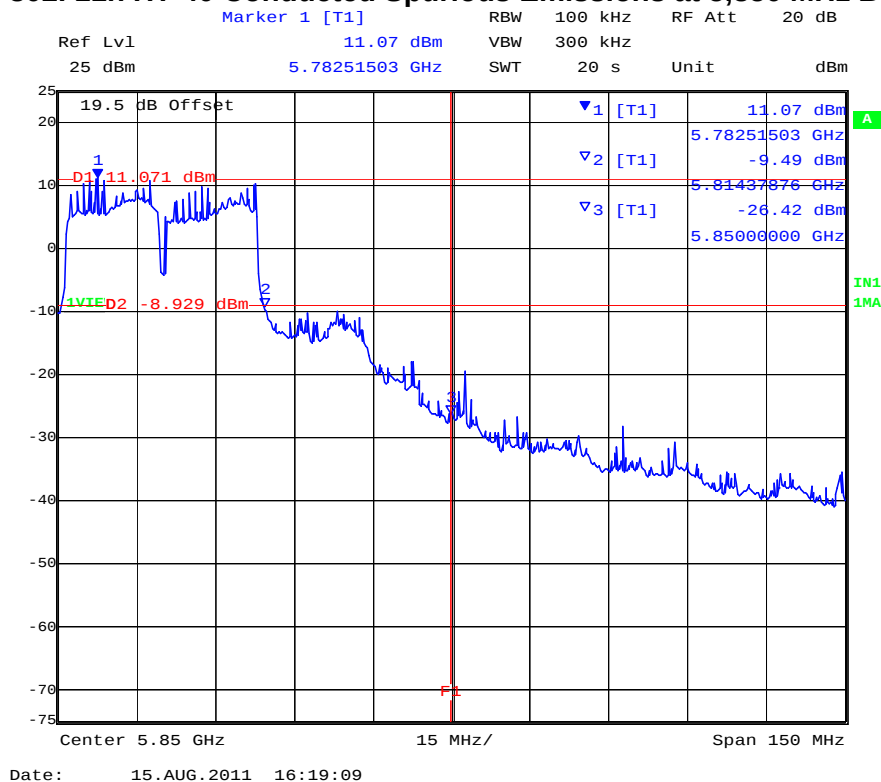


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 231 of 279

PORT A 802.11n HT-40 5,755 MHz Conducted Spurious Emissions 0.03 – 26 GHz

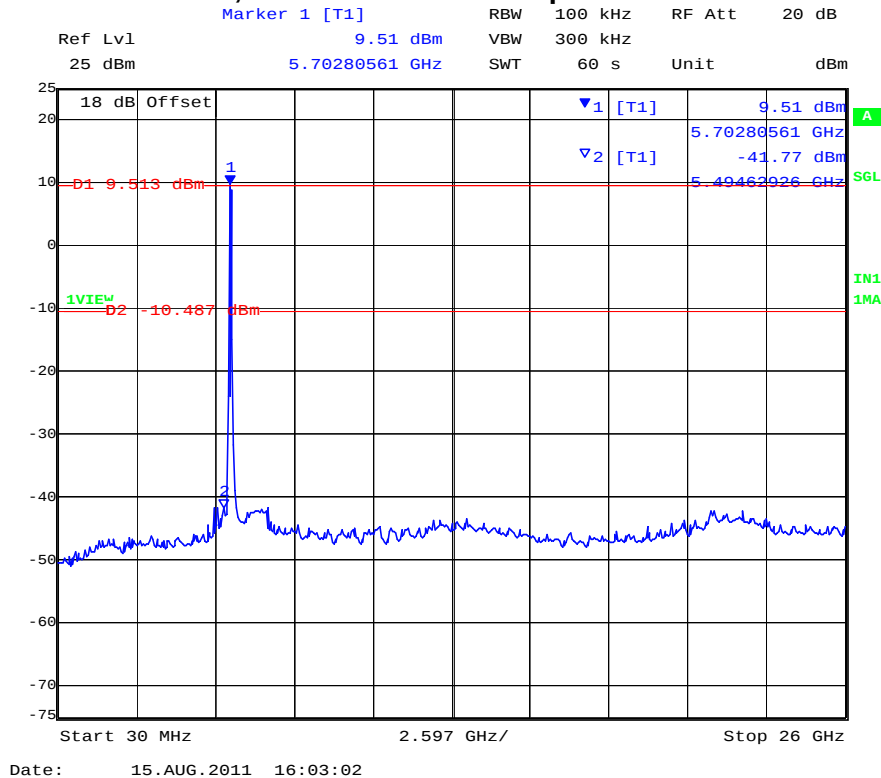

PORT B 802.11n HT-40 5,755 MHz Conducted Spurious Emissions 0.03 – 26 GHz

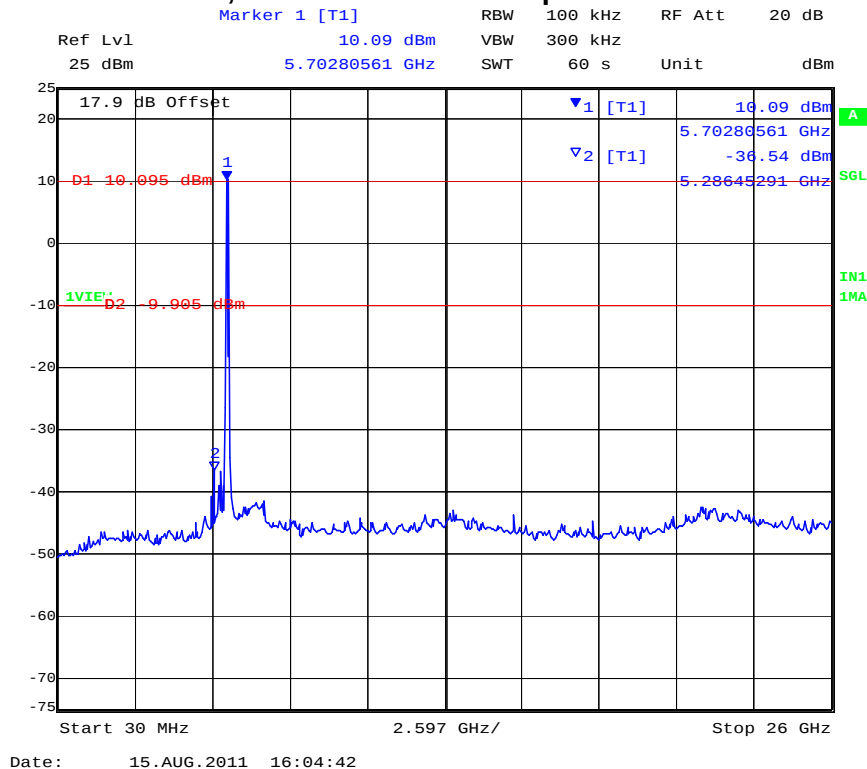


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 232 of 279

PORT C 802.11n HT-40 5,755 MHz Conducted Spurious Emissions 0.03 – 26 GHz

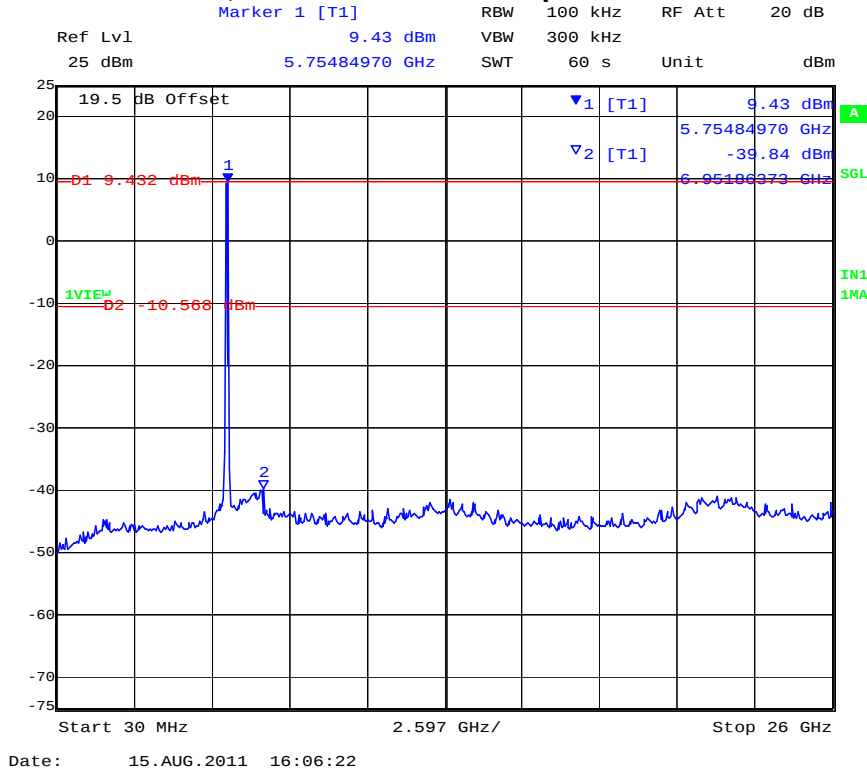


PORT A 802.11n HT-40 5,795 MHz Conducted Spurious Emissions 0.03 – 26 GHz

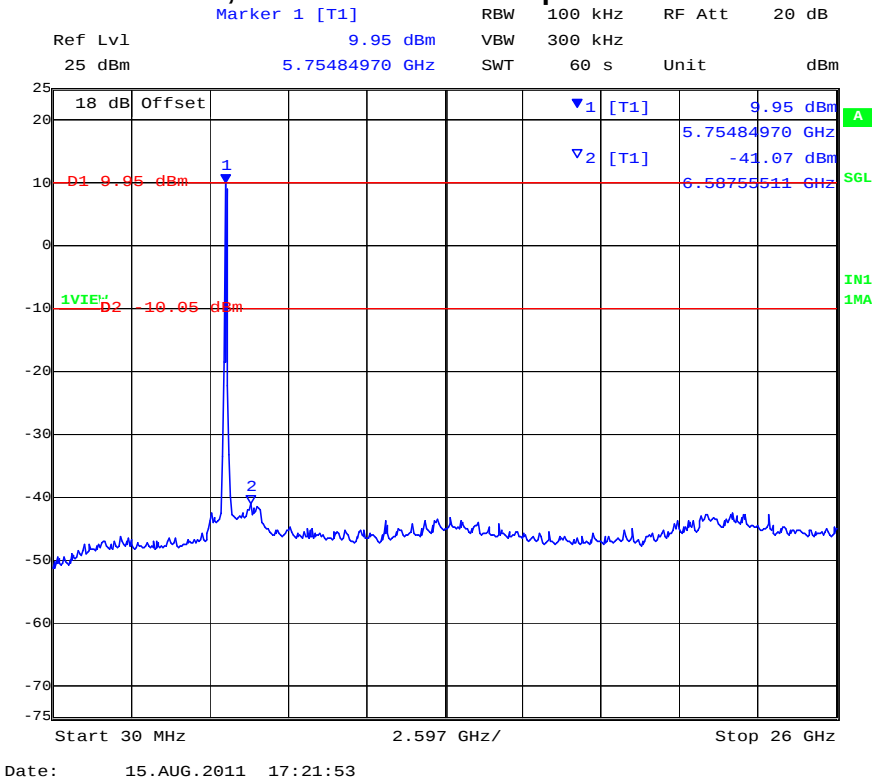


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT B 802.11n HT-40 5,795 MHz Conducted Spurious Emissions 0.03 – 26 GHz

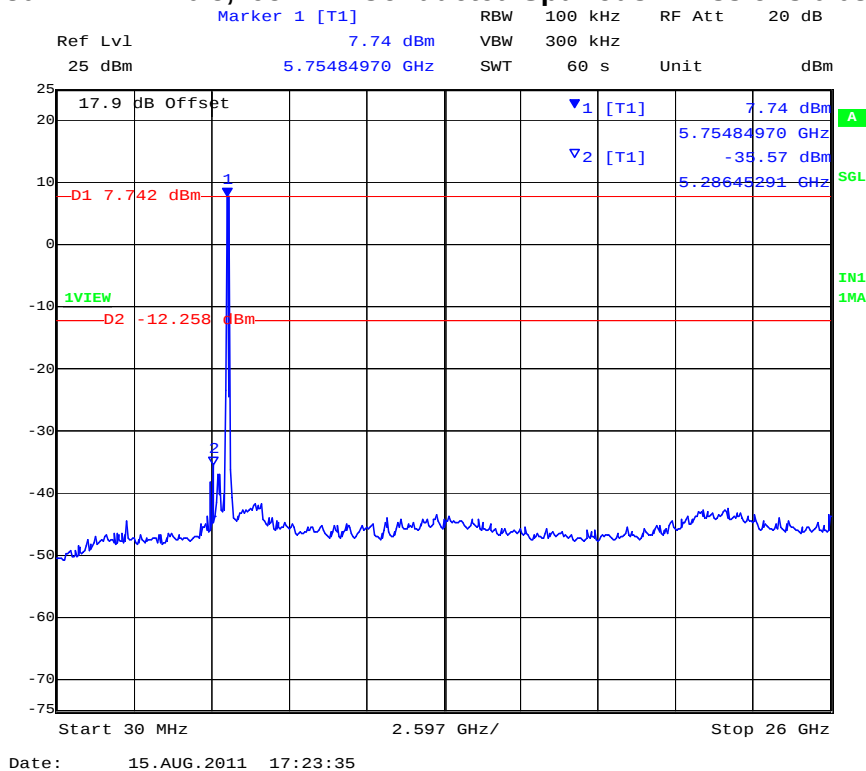

PORT C 802.11n HT-40 5,795 MHz Conducted Spurious Emissions 0.03 – 26 GHz

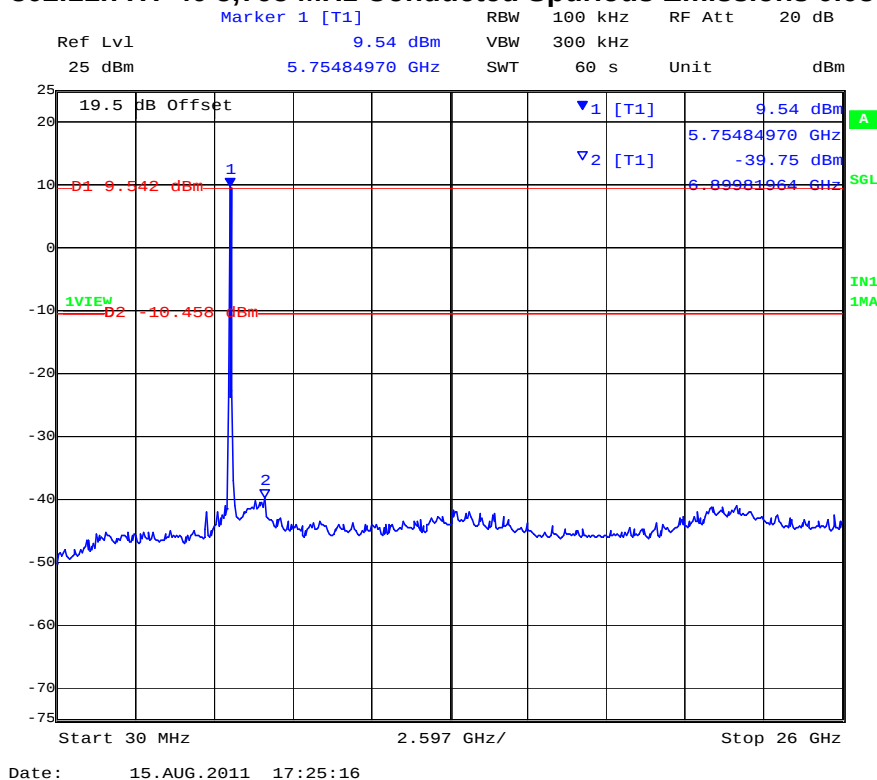

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 234 of 279

Specification

Limits Band-Edge

Lower Limit Band-edge	Upper Limit Band-edge	Limit below highest level of desired power
2,400 MHz	2,483.5 MHz	≥ 20 dB
5725 MHz	5850 MHz	

§15.247(d) and RSS-210 §A8.5 In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

§15.247(d)

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section §15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(a)).

RSS-210 §A8.5 If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

RSS-Gen §4.7

The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate of carrier frequency), or from 30 MHz , whichever is the lowest frequency, to the 5th harmonic of the highest frequency generated without exceeding 40 GHz.

Laboratory Measurement Uncertainty for Conducted Spurious Emissions

Measurement uncertainty	±2.37 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-05 'Measurement of Spurious Emissions'	0088, 0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 235 of 279

5.1.6. Radiated Emissions

Transmitter Radiated Spurious Emissions (above 1 GHz); Peak Field Strength Measurements; and Radiated Band Edge Measurements – Restricted Bands

FCC, Part 15 Subpart C §15.247(d) 15.205; 15.209

Industry Canada RSS-210 §A8.5, §2.2, §2.6

Industry Canada RSS-Gen §4.7

Test Procedure

Radiated emissions above 1 GHz are measured in the anechoic chamber at a 3-meter distance on every azimuth in both horizontal and vertical polarities. The emissions are recorded and maximized as a function of azimuth by rotation through 360° with a spectrum analyzer in peak hold mode. Depending on the frequency band spanned a notch filter and waveguide filter was used to remove the fundamental frequency. The highest emissions relative to the limit are listed for each frequency spanned.

All measurements on any frequency or frequencies over 1 MHz are based on the use of measurement instrumentation employing an average detector function. All measurements above 1 GHz were performed using a minimum resolution bandwidth of 1 MHz.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$FS = R + AF + CORR - FO$$

where: FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

For example:

Given receiver input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3 \text{ dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:


$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu V/m))}$$

$$40 \text{ dB}\mu\text{V/m} = 100 \mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250 \mu\text{V/m}$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Radiated Emission Measurement Setup – Above 1 GHz

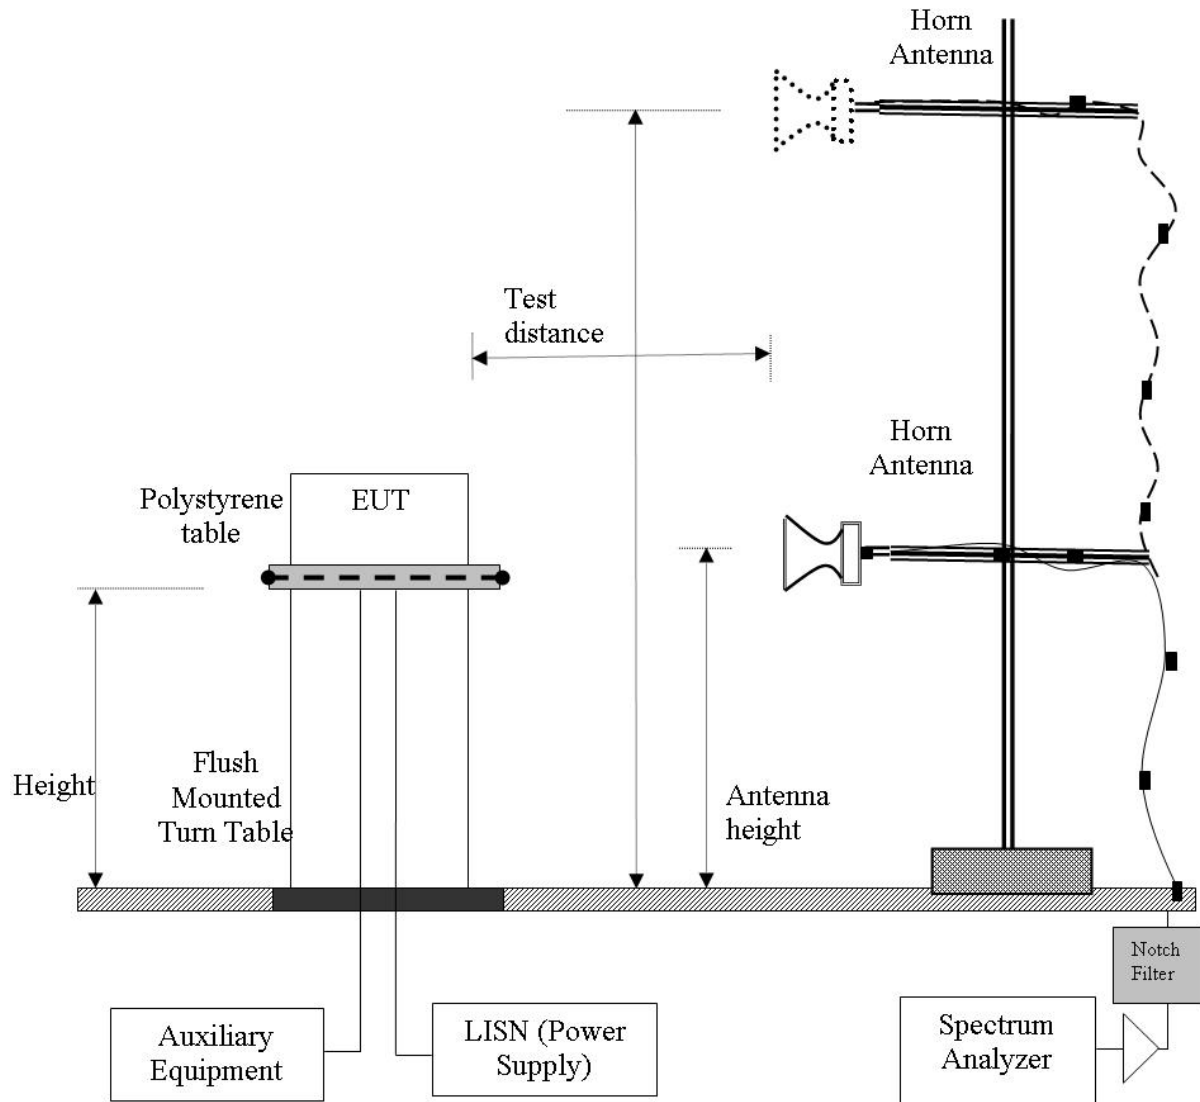


NOTE: KDB 662911 was implemented for Out-of-Band measurements. Where necessary Option (2) Measure and add $10 \log (N)$ dB was implemented



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 237 of 279

5.1.6.1. Integral Antenna

Test Freq.	2412 MHz	Engineer	GMH
Variant	802.11b; 1 Mbs	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	ART = 21.5	Press. (mBars)	1001
Antenna	Integral Gain 2 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

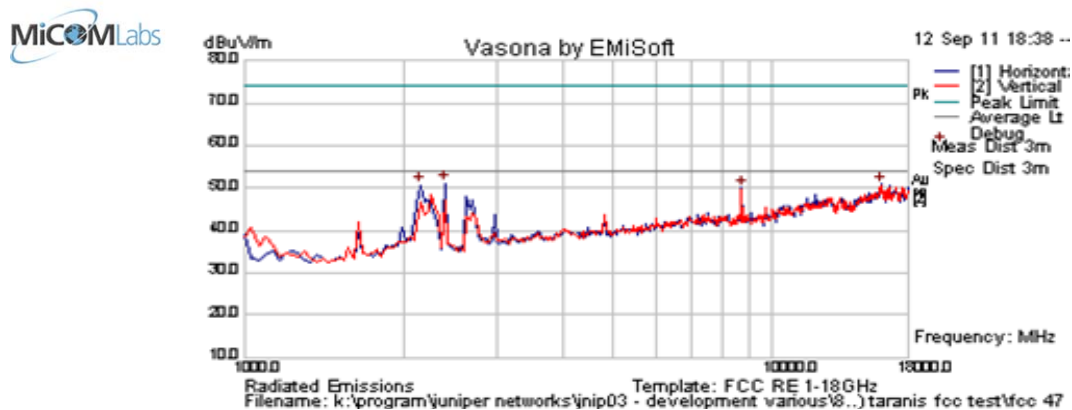

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2396.794	59.8	3.0	-11.6	51.2	Peak [Scan]	H						FUND
16058.116	41.6	9.0	0.4	50.9	Peak [Scan]	H	100	0	54.0	-3.1	Pass	NOISE
2158.317	59.4	2.8	-11.6	50.7	Peak [Scan]	H	100	0	54	-3.3	Pass	BE
8733.467	48.3	6.1	-4.5	49.9	Peak [Scan]	H	100	0	54	-4.1	Pass	NRB


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 238 of 279

Band Edge

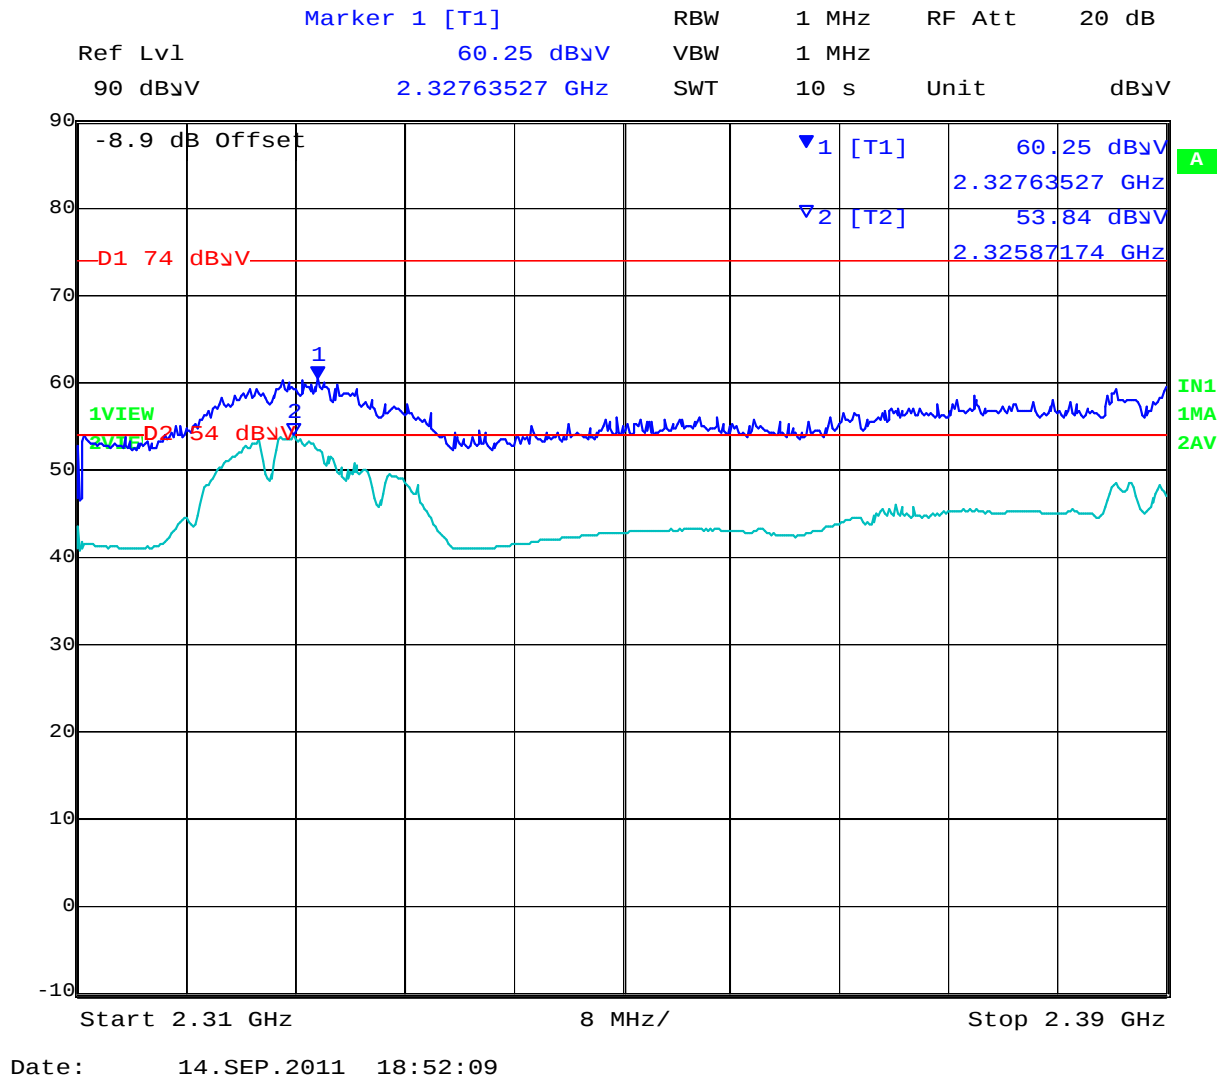


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 239 of 279

Test Freq.	2437 MHz	Engineer	GMH
Variant	802.11b; 1 Mbs	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	ART = 21.5	Press. (mBars)	1001
Antenna	Integral Gain 2 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

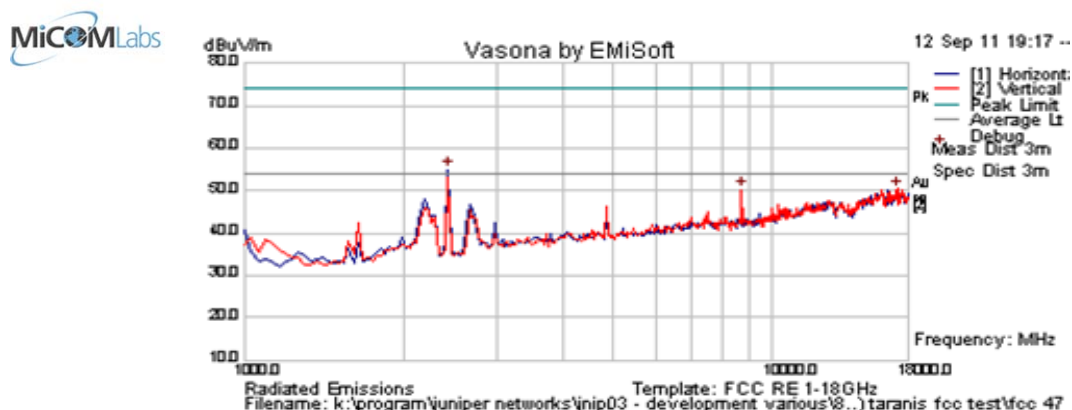

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2430.862	63.6	3.0	-11.6	55.0	Peak [Scan]	H						FUND
17182.365	41.0	8.6	0.8	50.4	Peak [Scan]	V	100	0	54.0	-3.7	Pass	NOISE
8733.467	48.7	6.1	-4.5	50.3	Peak [Scan]	V	100	0	54	-3.7	Pass	NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 240 of 279

Test Freq.	2462 MHz	Engineer	GMH
Variant	802.11b; 1 Mbs	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	ART = 21.5	Press. (mBars)	1001
Antenna	Integral Gain 2 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

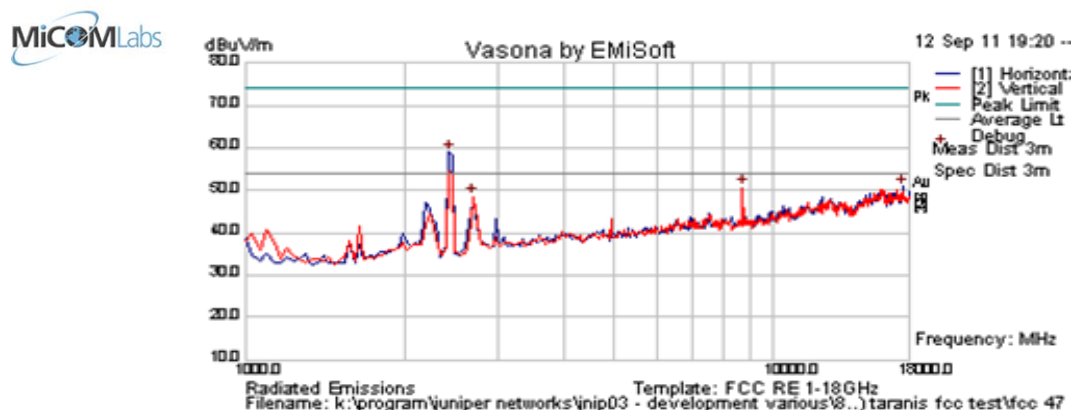

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2430.862	67.6	3.0	-11.6	59.0	Peak [Scan]	H						FUND
17488.978	40.9	8.8	1.2	50.9	Peak [Scan]	H	100	0	54.0	-3.1	Pass	Noise
8733.467	49.1	6.1	-4.5	50.7	Peak [Scan]	V	100	0	54	-3.3	Pass	NRB
2703.407	56.6	3.2	-11.2	48.5	Peak [Scan]	V	100	0	54	-5.5	Pass	BE
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 241 of 279

Band Edge

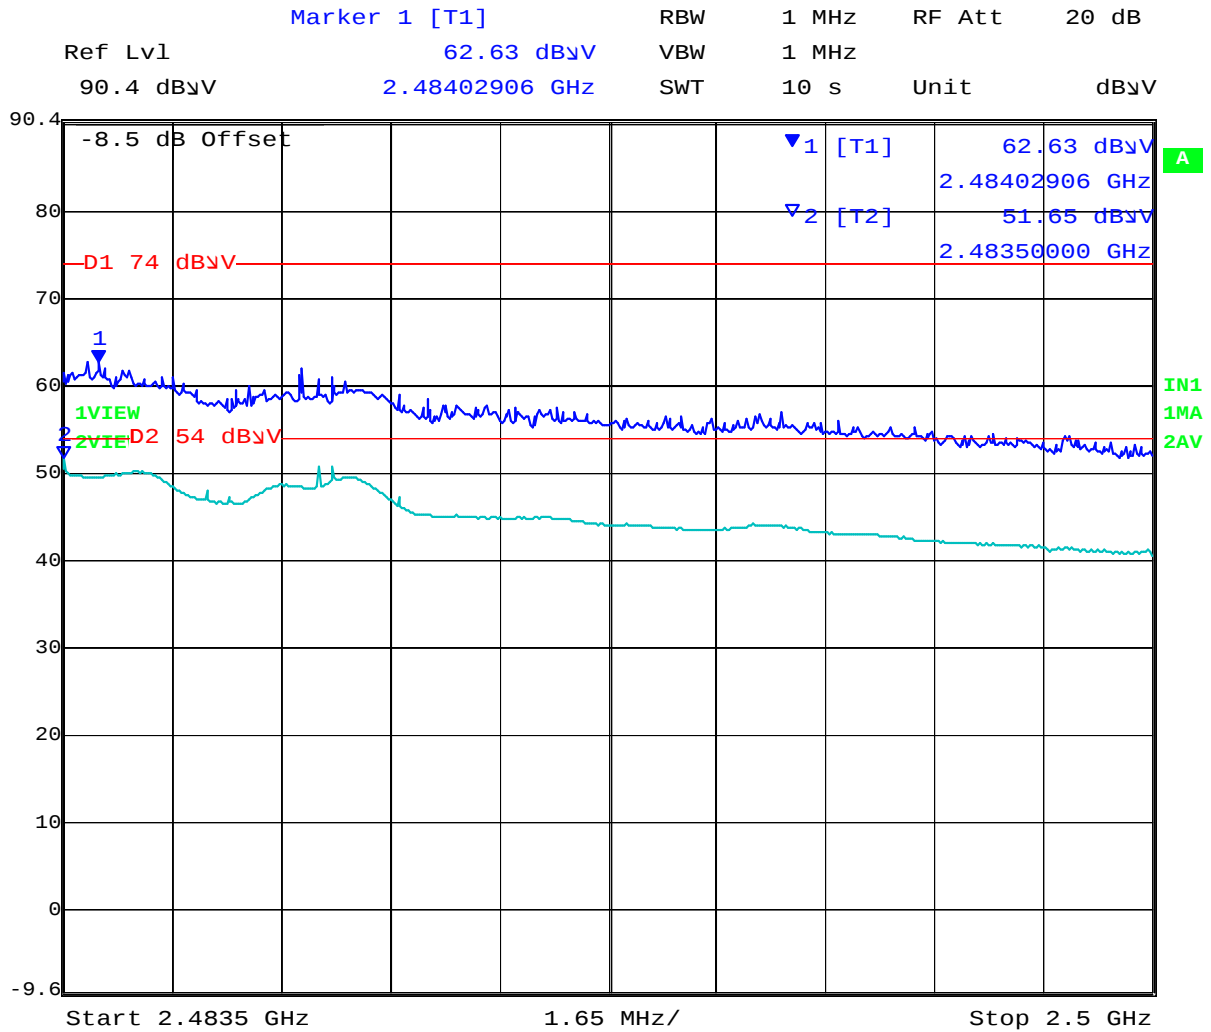


Date: 14.SEP.2011 19:36:49

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 242 of 279

Test Freq.	2412 MHz	Engineer	GMH
Variant	802.11g; 6 Mbs	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	ART = 21.0	Press. (mBars)	1001
Antenna	Integral Gain 2 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

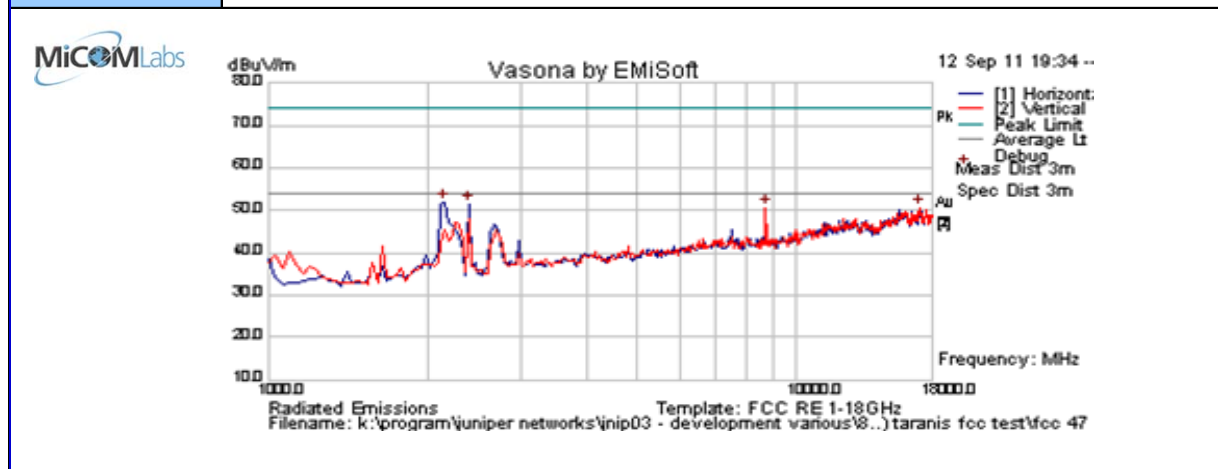

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2158.317	60.6	2.8	-11.6	51.9	Peak [Scan]	H						FUND
2396.793587	60.2	3.0	-11.6	51.5	Peak [Scan]	H	100	0	54.0	-2.5	Pass	BE
17046.092	41.9	8.5	0.4	50.7	Peak [Scan]	V	100	0	54	-3.3	Pass	Noise
8733.467	49.1	6.1	-4.5	50.7	Peak [Scan]	V	100	0	54	-3.4	Pass	NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 243 of 279

Band Edge

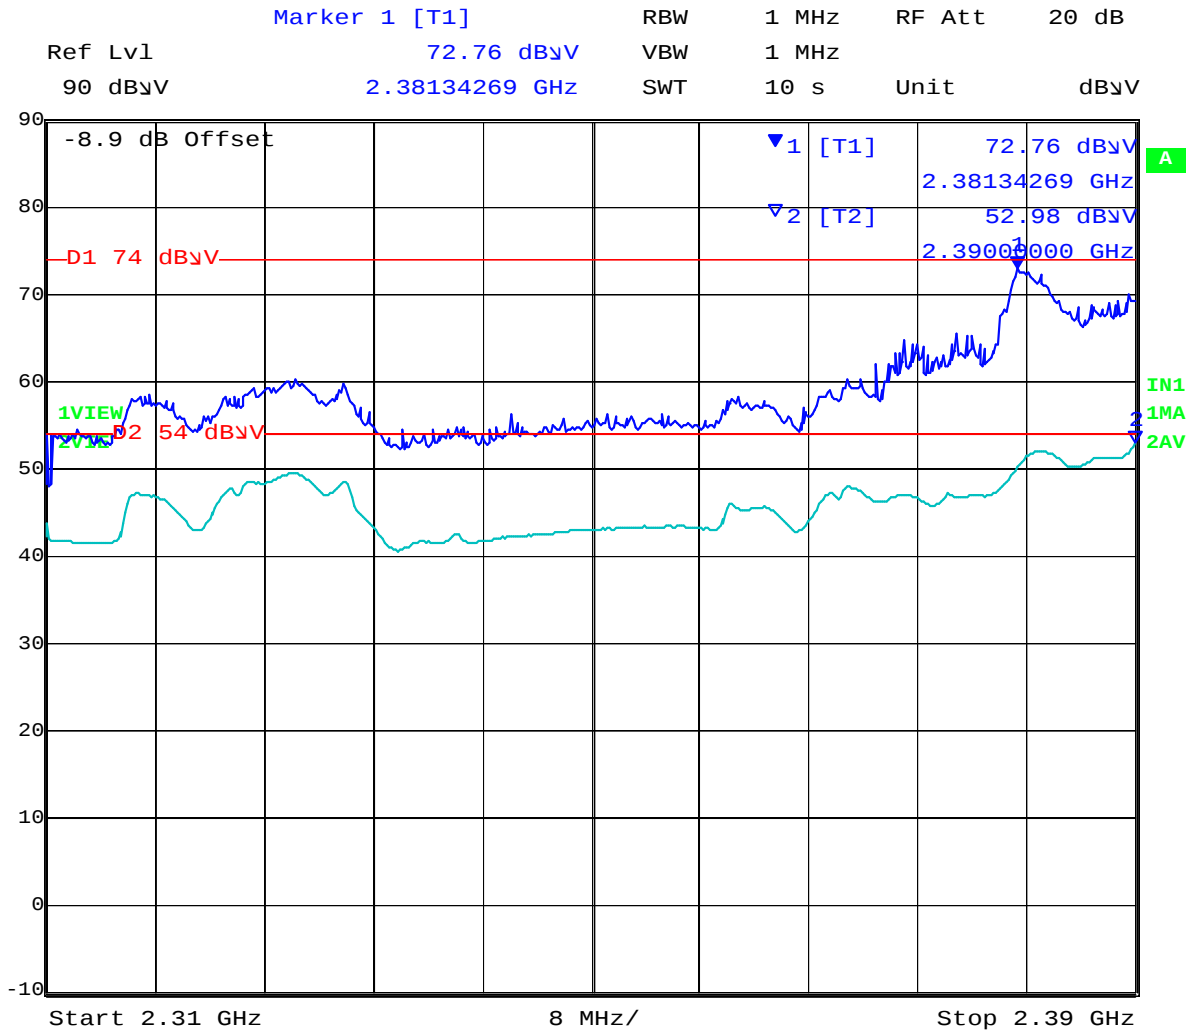


Date: 14.SEP.2011 18:55:25

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 244 of 279

Test Freq.	2437 MHz	Engineer	GMH
Variant	802.11g; 6 Mbs	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	ART = 21.0	Press. (mBars)	1001
Antenna	Integral Gain 2 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

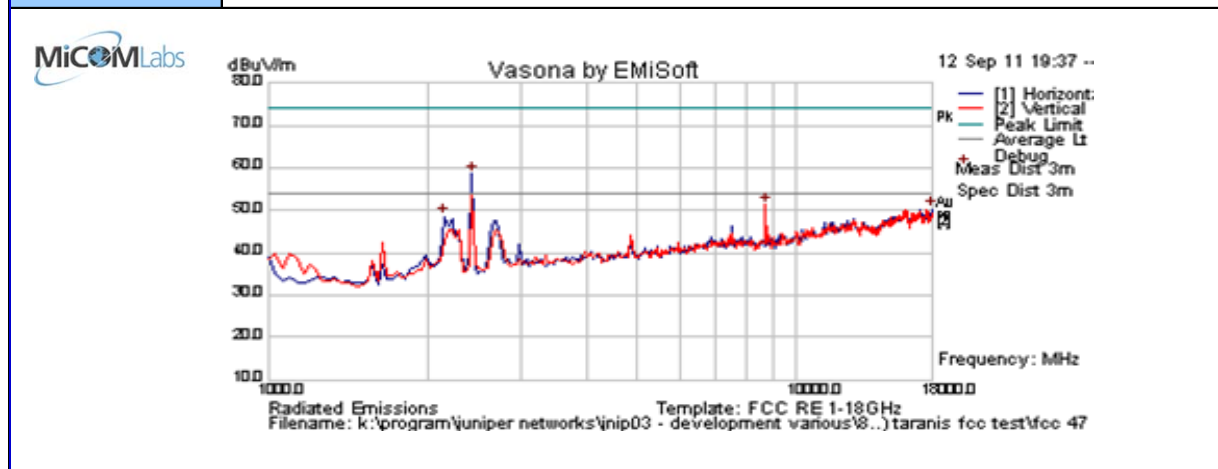

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2430.862	67.3	3.0	-11.6	58.7	Peak [Scan]	H						FUND
8733.466934	49.7	6.1	-4.5	51.3	Peak [Scan]	V	100	0	54.0	-2.8	Pass	NRB
18000.000	40.8	8.8	0.8	50.4	Peak [Scan]	H	100	0	54	-3.6	Pass	Noise
2158.317	57.3	2.8	-11.6	48.6	Peak [Scan]	H	100	0	54	-5.4	Pass	BE
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 245 of 279

Test Freq.	2462 MHz	Engineer	GMH
Variant	802.11g; 6 Mbs	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	ART = 21.0	Press. (mBars)	1001
Antenna	Integral Gain 2 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

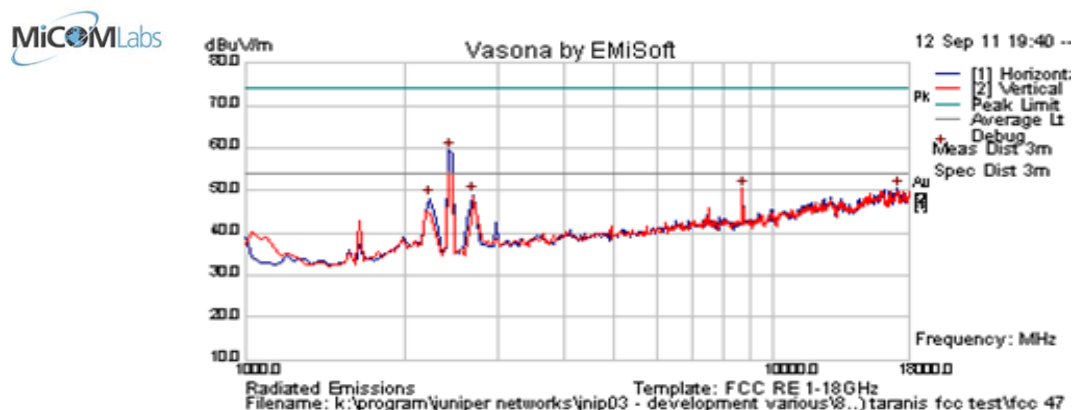

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2430.862	68.2	3.0	-11.6	59.6	Peak [Scan]	H						FUND
8733.466934	48.9	6.1	-4.5	50.4	Peak [Scan]	V	100	0	54.0	-3.6	Pass	NRB
17148.297	41.2	8.6	0.7	50.4	Peak [Scan]	H	100	0	54	-3.6	Pass	Noise
2703.407	57.1	3.2	-11.2	49.1	Peak [Scan]	H	100	0	54	-5.0	Pass	BE
2226.453	57.1	2.9	-11.8	48.1	Peak [Scan]	H	100	0	54	-5.9	Pass	BE
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 246 of 279

Band Edge

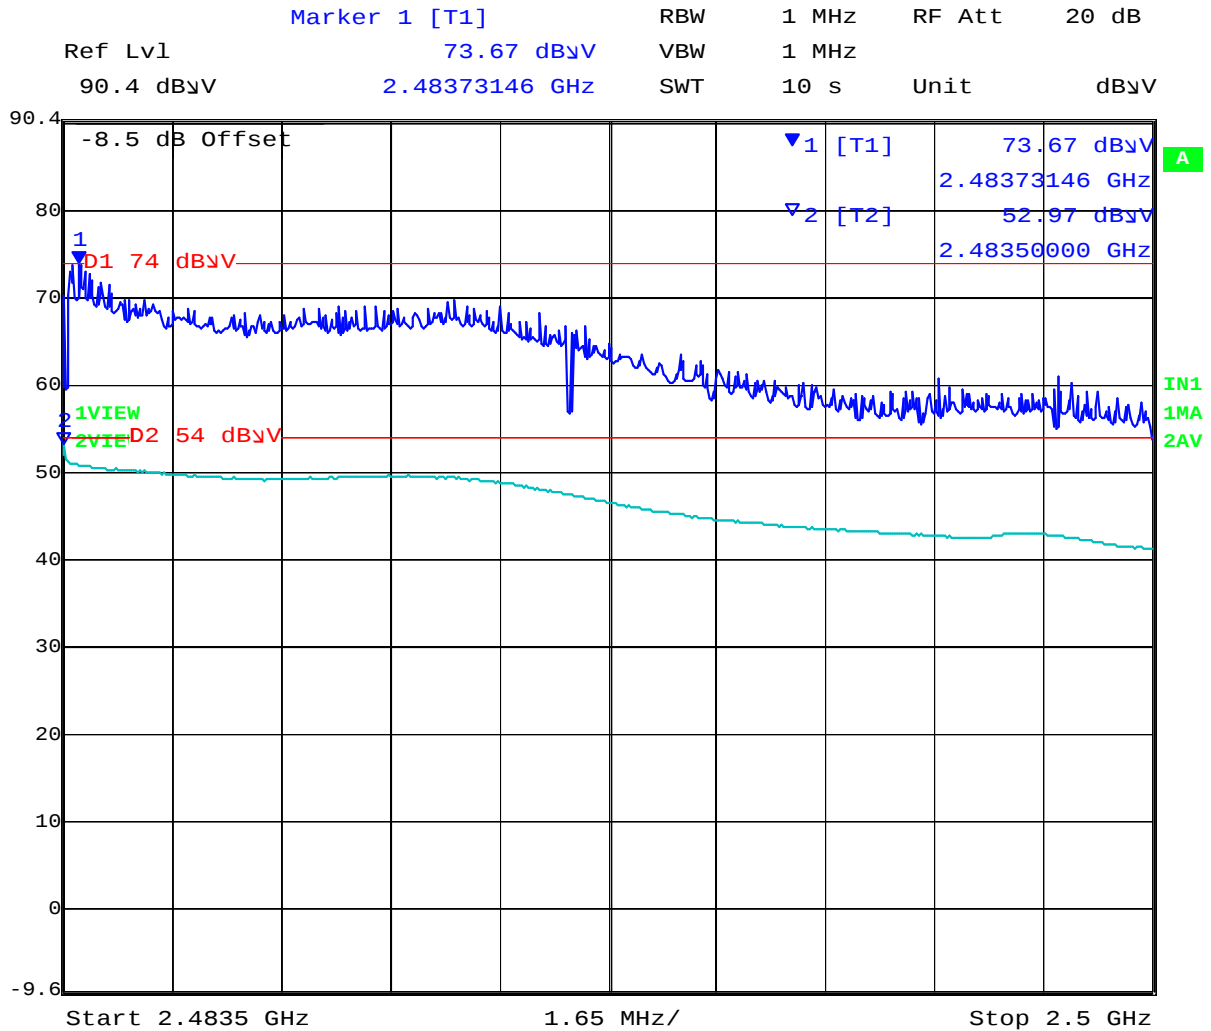


Date: 14.SEP.2011 19:39:06

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 247 of 279

Test Freq.	2412 MHz	Engineer	GMH
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	ART = 21.0	Press. (mBars)	1001
Antenna	Integral Gain 2 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

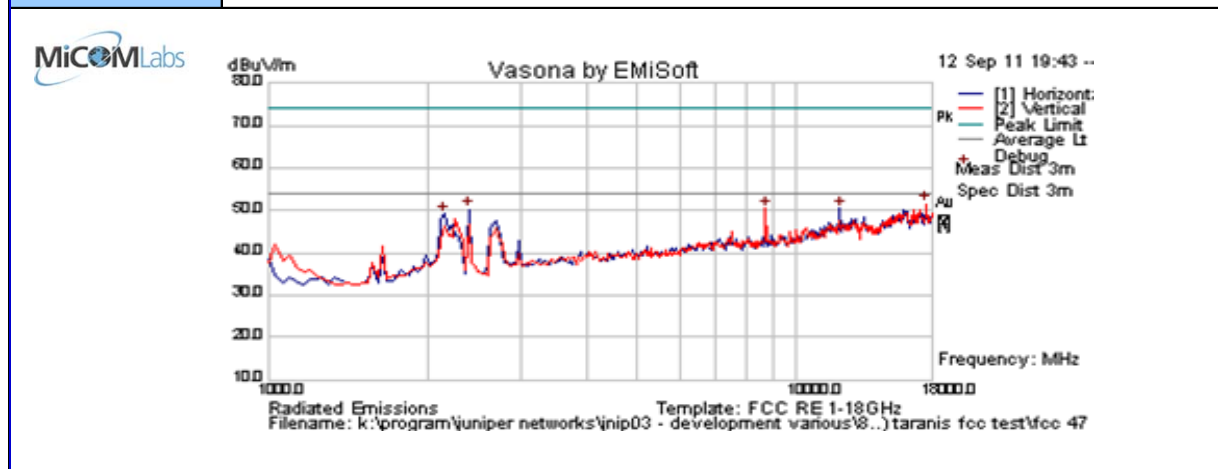

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
17591.182	41.8	8.8	0.9	51.5	Peak [Scan]	V	100	0	54.0	-2.5	Pass	Noise
12072.144	45.9	7.0	-2.3	50.5	Peak [Scan]	H	100	0	54.0	-3.5	Pass	
8733.467	48.9	6.1	-4.5	50.5	Peak [Scan]	V	100	0	54	-3.5	Pass	NRB
2396.794	58.9	3.0	-11.6	50.2	Peak [Scan]	H						FUND
2158.317	58.0	2.8	-11.6	49.3	Peak [Scan]	H	100	0	54	-4.7	Pass	BE
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 248 of 279

Band Edge

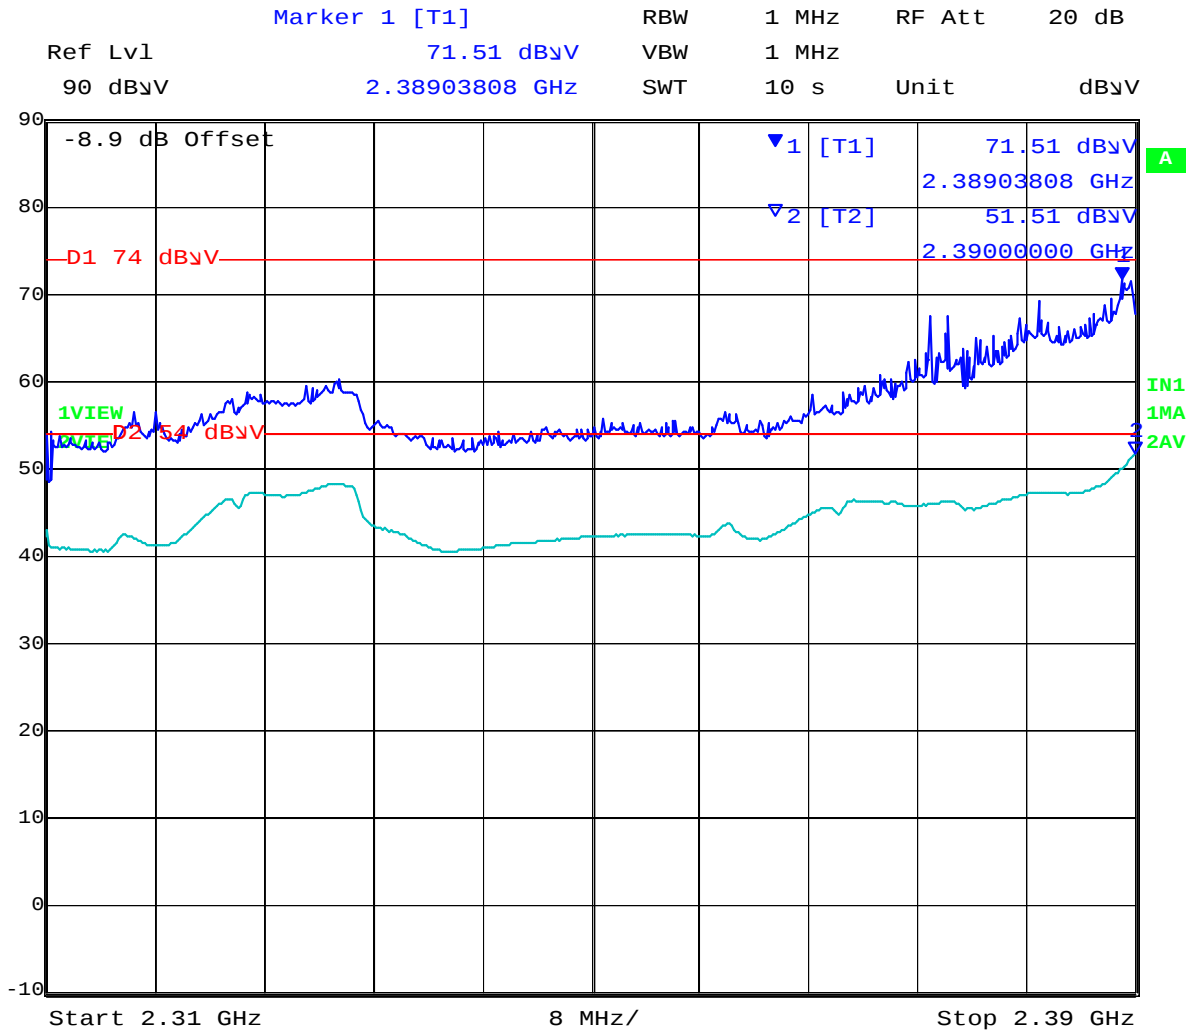


Date: 14.SEP.2011 19:03:36

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 249 of 279

Test Freq.	2437 MHz	Engineer	GMH
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	ART = 21.0	Press. (mBars)	1001
Antenna	Integral Gain 2 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

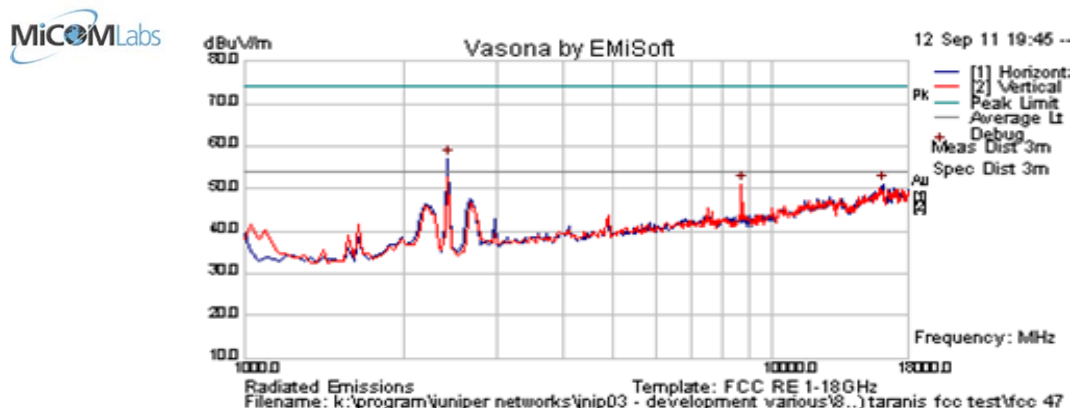

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2430.862	65.7	3.0	-11.6	57.1	Peak [Scan]	H						FUND
8733.466934	49.5	6.1	-4.5	51.1	Peak [Scan]	V	100	0	54.0	-2.9	Pass	NRB
16126.253	41.8	9.0	0.3	51.0	Peak [Scan]	H	100	0	54	-3.0	Pass	NOISE
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 250 of 279

Test Freq.	2462 MHz	Engineer	GMH
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	ART = 21.0	Press. (mBars)	1001
Antenna	Integral Gain 2 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

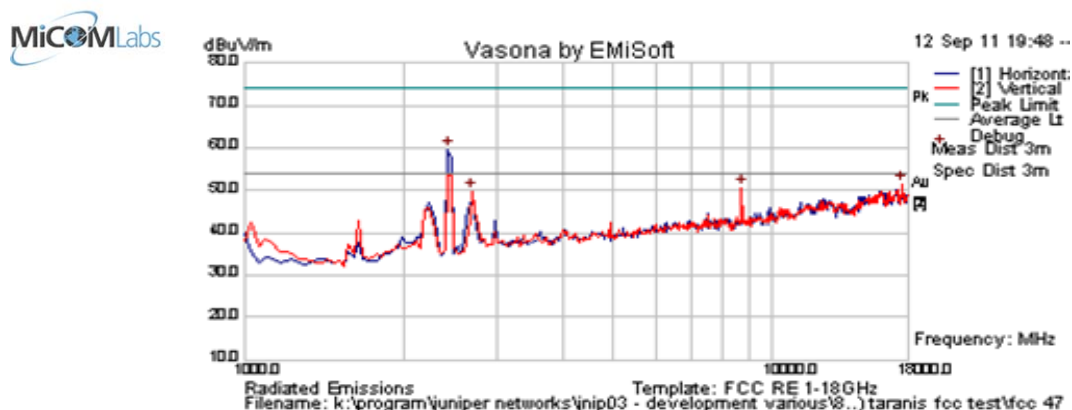

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2430.862	68.4	3.0	-11.6	59.8	Peak [Scan]	H						FUND
17523.046	41.6	8.8	1.1	51.5	Peak [Scan]	V	100	0	54.0	-2.5	Pass	NOISE
8733.467	49.1	6.1	-4.5	50.7	Peak [Scan]	V	100	0	54	-3.3	Pass	NRB
2703.407	57.8	3.2	-11.2	49.7	Peak [Scan]	V	100	0	54	-4.3	Pass	BE
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 251 of 279

Band Edge

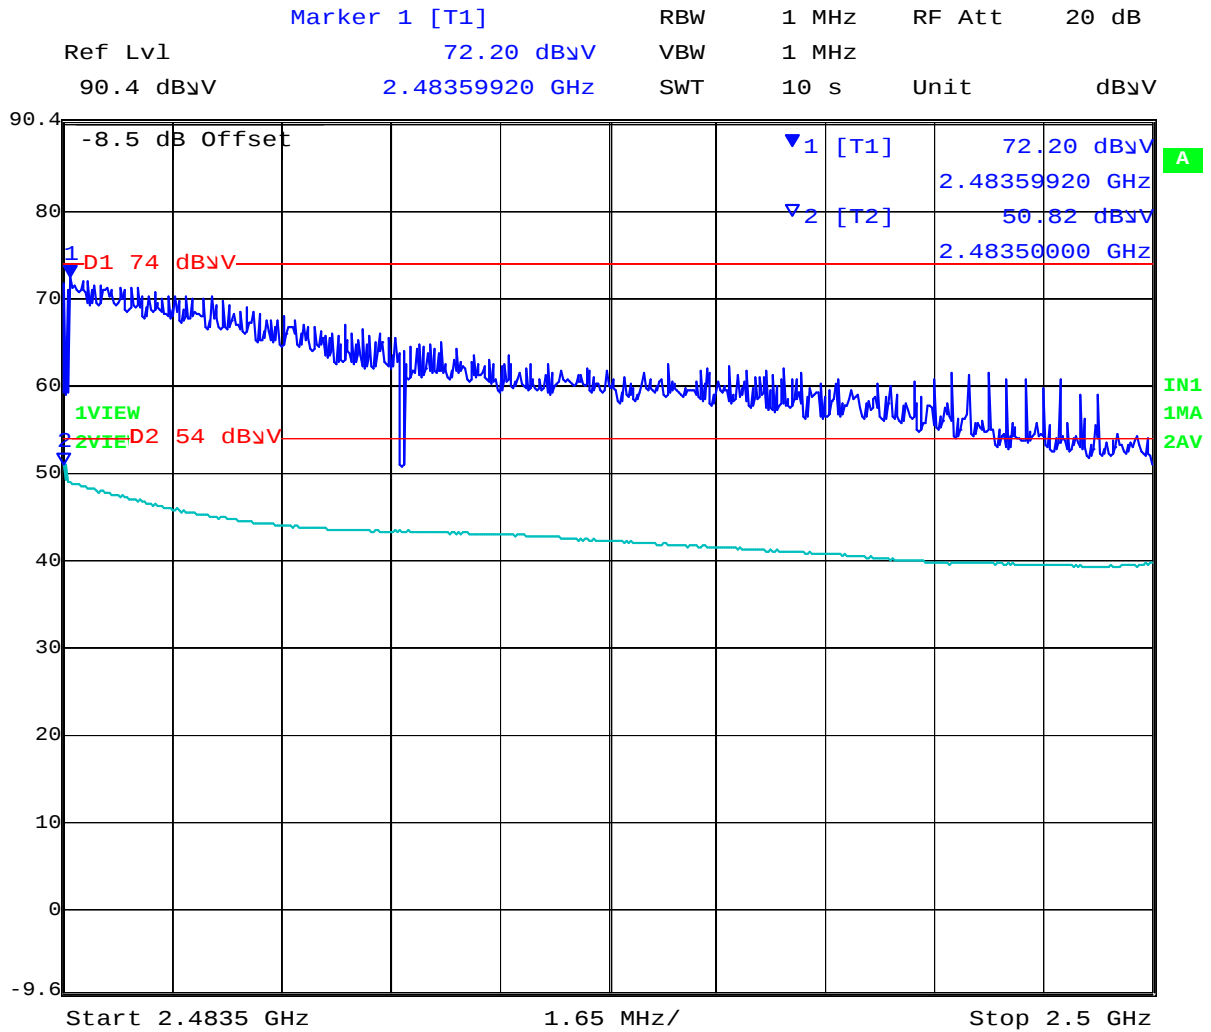


Date: 14.SEP.2011 19:40:56

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 252 of 279

Test Freq.	2422 MHz	Engineer	GMH
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	ART = 18.0	Press. (mBars)	1001
Antenna	Integral Gain 2 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

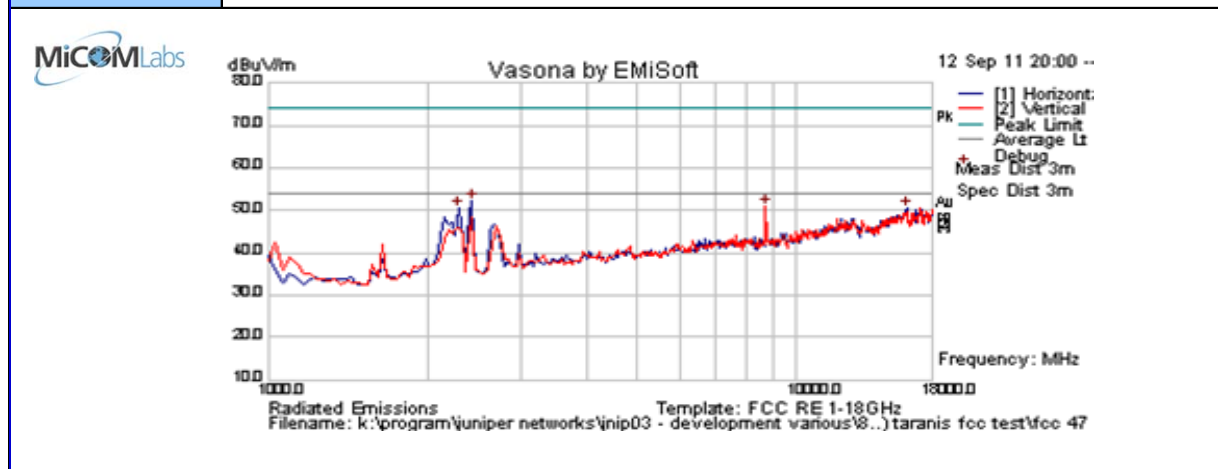

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2430.862	60.8	3.0	-11.6	52.2	Peak [Scan]	H						FUND
8733.466934	49.2	6.1	-4.5	50.8	Peak [Scan]	V	100	0	54.0	-3.2	Pass	NRB
2294.589	59.4	2.9	-11.8	50.5	Peak [Scan]	H	100	0	54	-3.5	Pass	BE
16126.253	41.2	9.0	0.3	50.5	Peak [Scan]	H	100	0	54	-3.5	Pass	NOISE
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 253 of 279

Band Edge

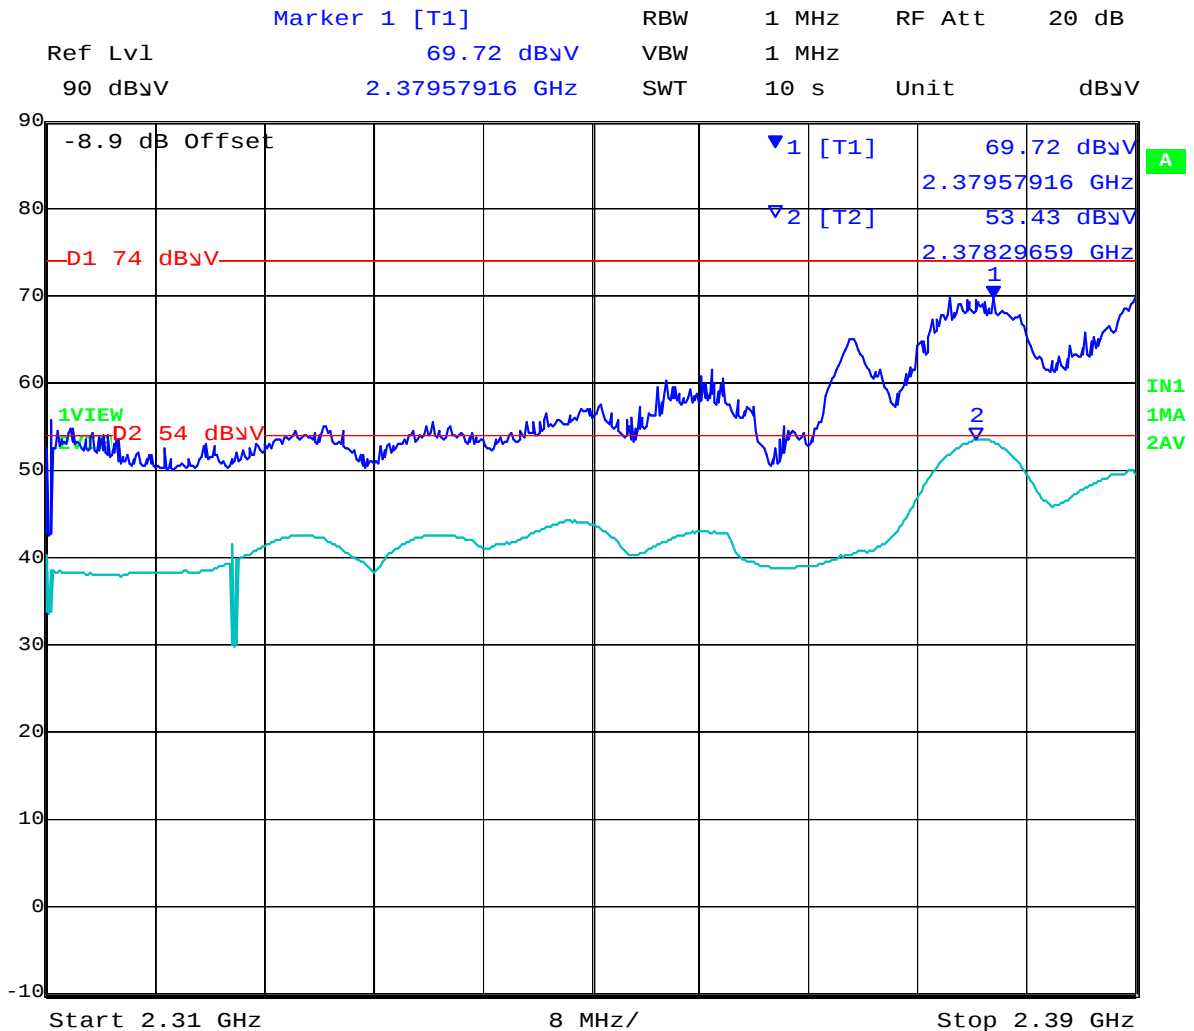


Date: 14.SEP.2011 19:05:18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 254 of 279

Test Freq.	2437 MHz	Engineer	GMH
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	ART = 18.0	Press. (mBars)	1001
Antenna	Integral Gain 2 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

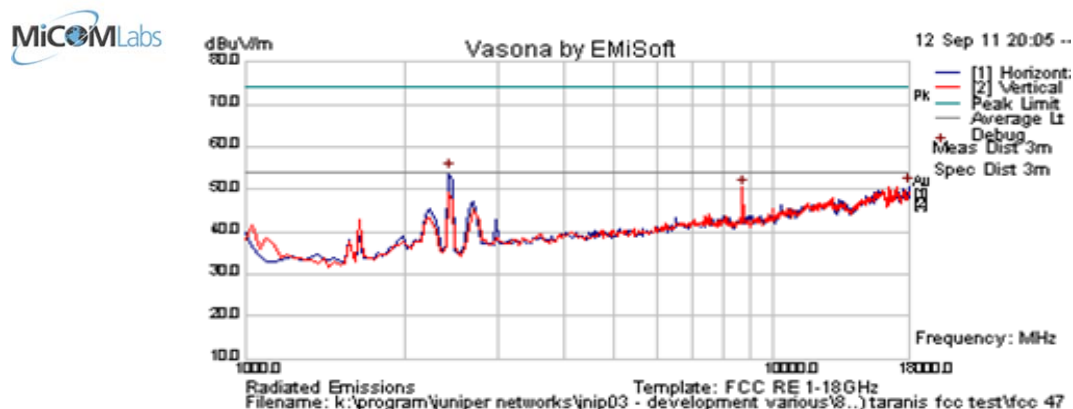

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2430.862	62.8	3.0	-11.6	54.2	Peak [Scan]	H						FUND
18000	41.3	8.8	0.8	50.9	Peak [Scan]	H	100	0	54.0	-3.1	Pass	NOISE
8733.467	49.0	6.1	-4.5	50.6	Peak [Scan]	V	100	0	54	-3.4	Pass	NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 255 of 279

Test Freq.	2452 MHz	Engineer	GMH
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	ART = 18.0	Press. (mBars)	1001
Antenna	Integral Gain 2 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

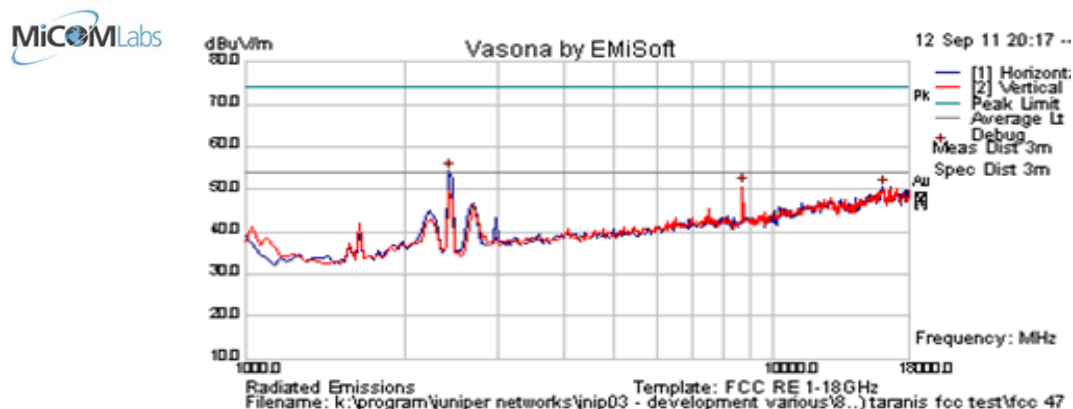

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2430.862	62.9	3.0	-11.6	54.3	Peak [Scan]	H						FUND
8733.466934	49.1	6.1	-4.5	50.7	Peak [Scan]	V	100	0	54.0	-3.3	Pass	NRB
16092.184	41.2	9.0	0.3	50.5	Peak [Scan]	H	100	0	54	-3.5	Pass	NOISE
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 256 of 279

Band Edge

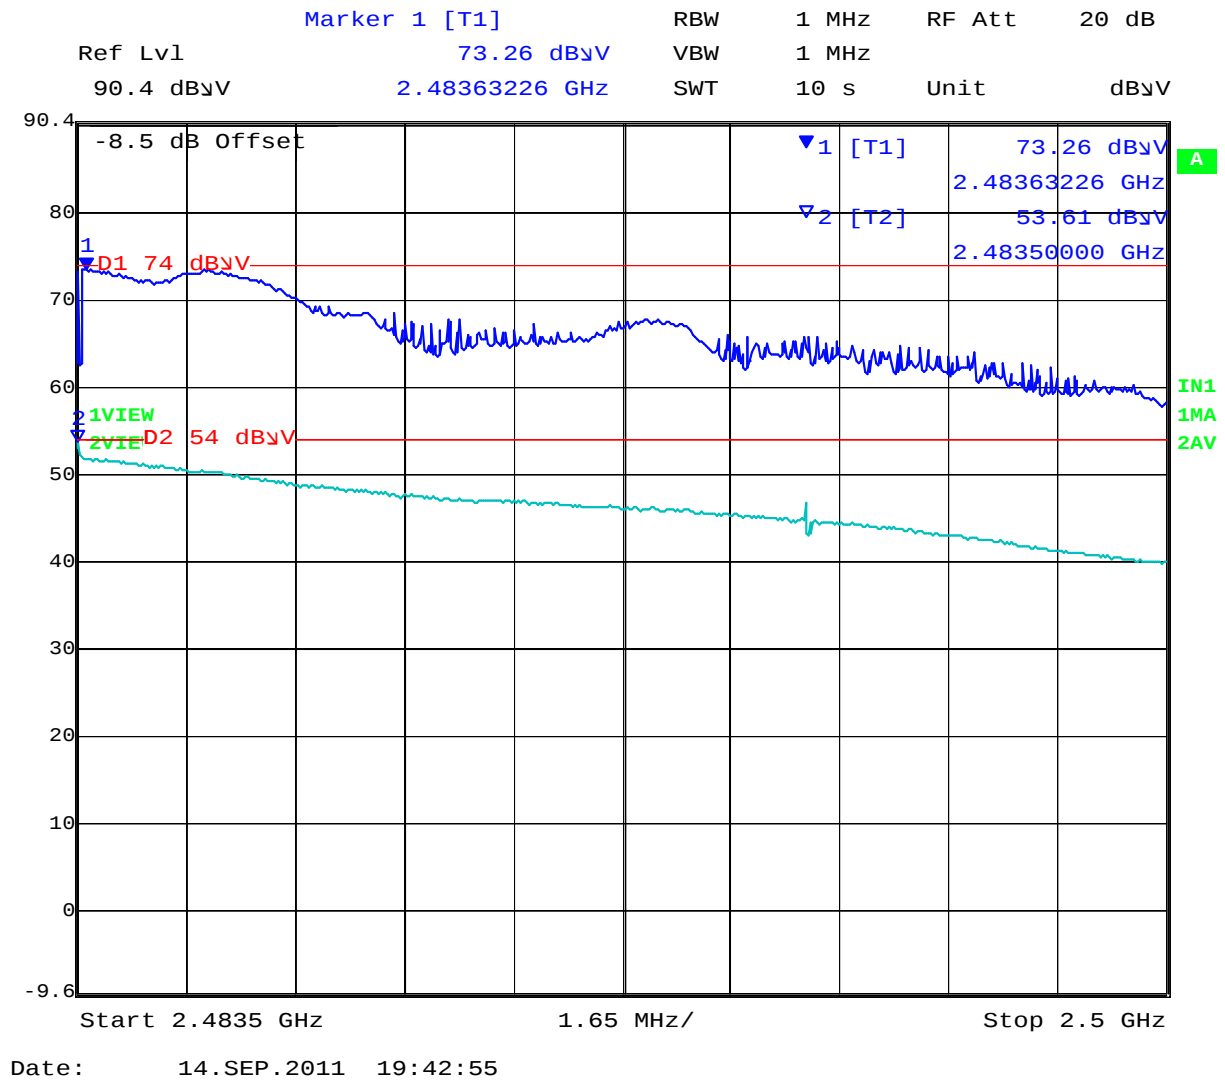


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 257 of 279

Test Freq.	5745 MHz	Engineer	GMH
Variant	802.11a; 6.5 Mbs	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	ART = 18.5	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

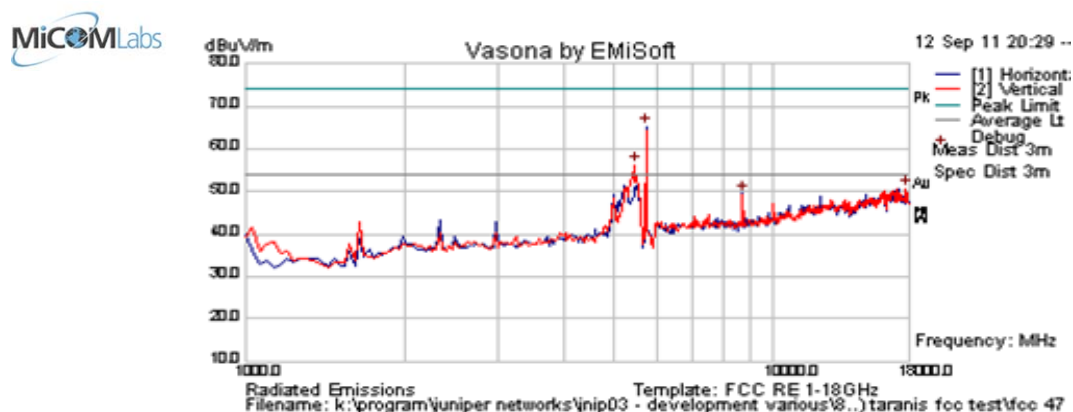

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5735.471	69.4	4.8	-8.9	65.2	Peak [Scan]	H						FUND
5462.925852	60.9	4.6	-9.2	56.3	Peak [Scan]	V					Pass	BE
17795.591	41.8	8.8	0.2	50.8	Peak [Scan]	V	100	0	54	-3.2	Pass	NOISE
8733.467	48.0	6.1	-4.5	49.6	Peak [Scan]	H	100	0	54	-4.4	Pass	NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 258 of 279

Test Freq.	5785 MHz	Engineer	GMH
Variant	802.11a; 6.5 Mbs	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	ART = 18.5	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

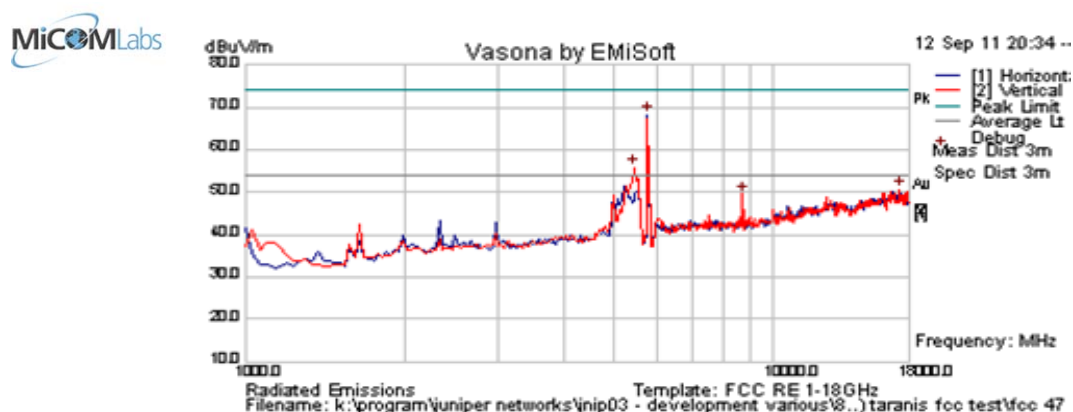

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5769.539	72.3	4.8	-8.9	68.2	Peak [Scan]	H						FUND
5428.857715	60.4	4.6	-9.3	55.8	Peak [Scan]	V					Pass	BE
17318.637	40.6	8.7	1.5	50.8	Peak [Scan]	V	100	0	54	-3.2	Pass	NOISE
8733.467	48.1	6.1	-4.5	49.7	Peak [Scan]	V	100	0	54	-4.3	Pass	NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 259 of 279

Test Freq.	5825 MHz	Engineer	GMH
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	ART = 23	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

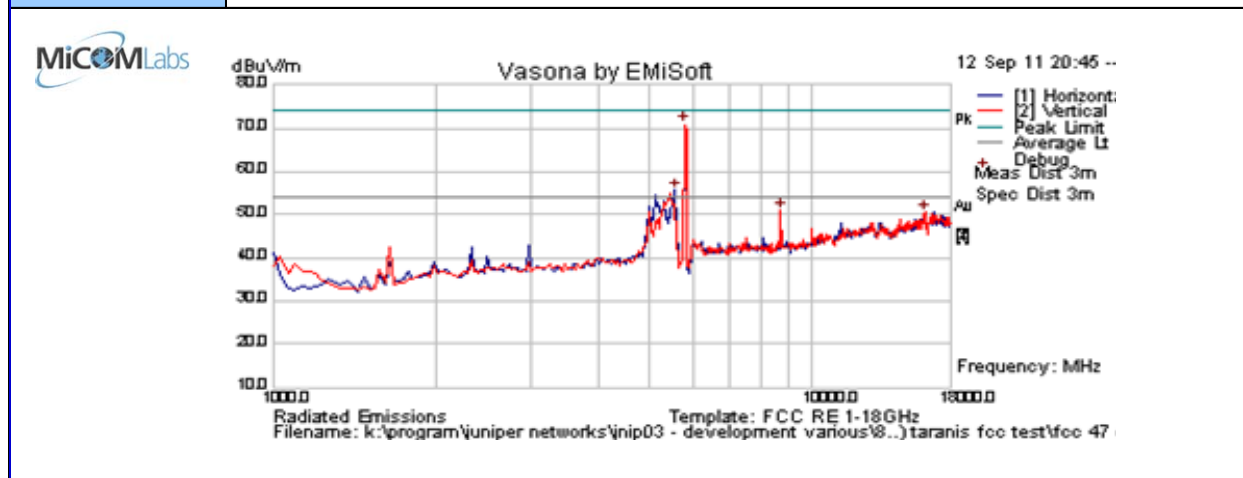

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5803.607	75.0	4.8	-8.9	70.9	Peak [Scan]	V						FUND
5565.130261	60.1	4.7	-9.1	55.7	Peak [Scan]	H					Pass	BE
8733.467	49.3	6.1	-4.5	50.9	Peak [Scan]	V	100	0	54	-3.1	Pass	NRB
16126.253	41.3	9.0	0.3	50.6	Peak [Scan]	V	100	0	54	-3.5	Pass	NOISE
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 260 of 279

Test Freq.	5745 MHz	Engineer	GMH
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	ART = 23	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

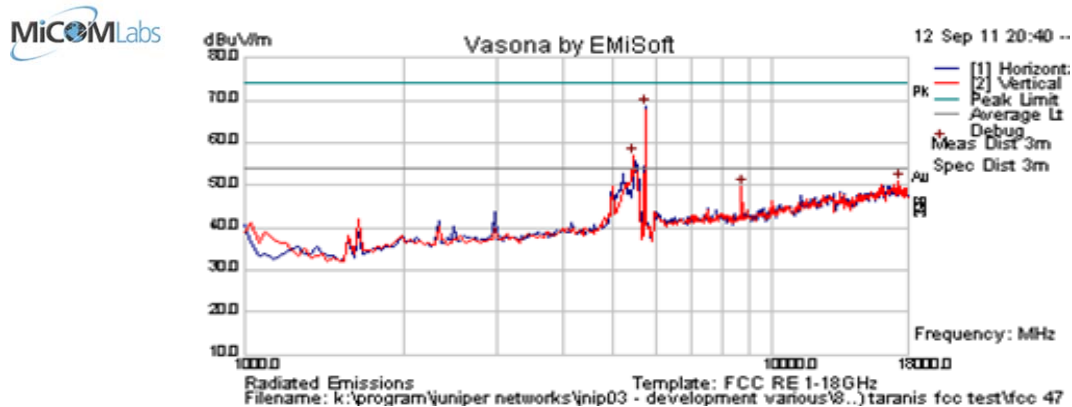

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5735.471	72.7	4.8	-8.9	68.5	Peak [Scan]	H						FUND
5428.857715	61.7	4.6	-9.3	57.0	Peak [Scan]	V					Pass	BE
17318.637	40.8	8.7	1.5	50.9	Peak [Scan]	V	100	0	54	-3.1	Pass	NOISE
8733.467	48.0	6.1	-4.5	49.6	Peak [Scan]	V	100	0	54	-4.4	Pass	NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 261 of 279

Test Freq.	5785 MHz	Engineer	GMH
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	ART = 23	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

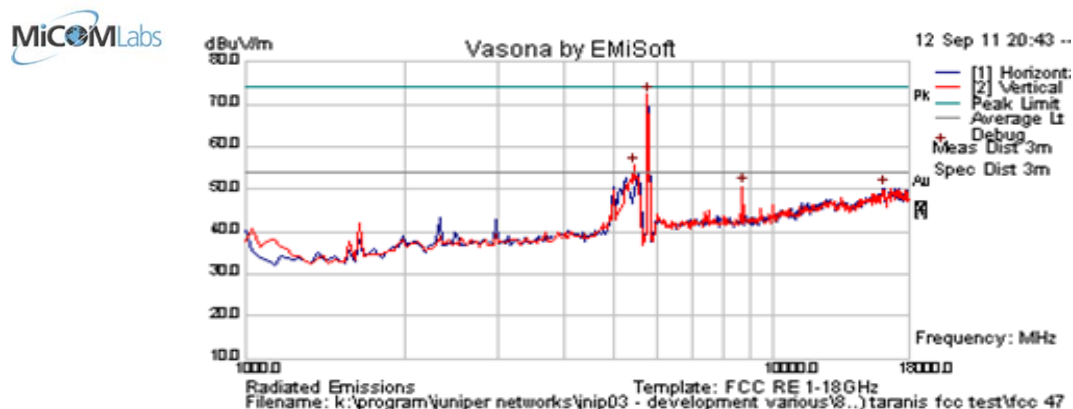

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5769.539	76.6	4.8	-8.9	72.5	Peak [Scan]	V						FUND
5428.857715	60.2	4.6	-9.3	55.5	Peak [Scan]	V					Pass	BE
8733.467	49.1	6.1	-4.5	50.6	Peak [Scan]	V	100	0	54	-3.4	Pass	NRB
16160.321	41.1	9.0	0.3	50.3	Peak [Scan]	H	100	0	54	-3.7	Pass	NOISE
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 262 of 279

Test Freq.	5825 MHz	Engineer	GMH
Variant	802.11n; HT-20; 6.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	ART = 23	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

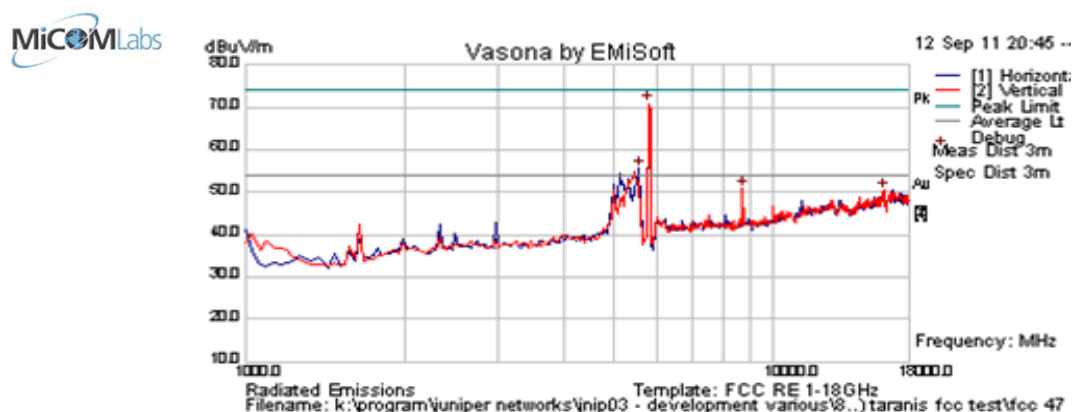

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5803.607	75.0	4.8	-8.9	70.9	Peak [Scan]	V						FUND
5565.130261	60.1	4.7	-9.1	55.7	Peak [Scan]	H					Pass	BE
8733.467	49.3	6.1	-4.5	50.9	Peak [Scan]	V	100	0	54	-3.1	Pass	NRB
16126.253	41.3	9.0	0.3	50.6	Peak [Scan]	V	100	0	54	-3.5	Pass	NOISE
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 263 of 279

Test Freq.	5755 MHz	Engineer	GMH
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	ART = 23	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

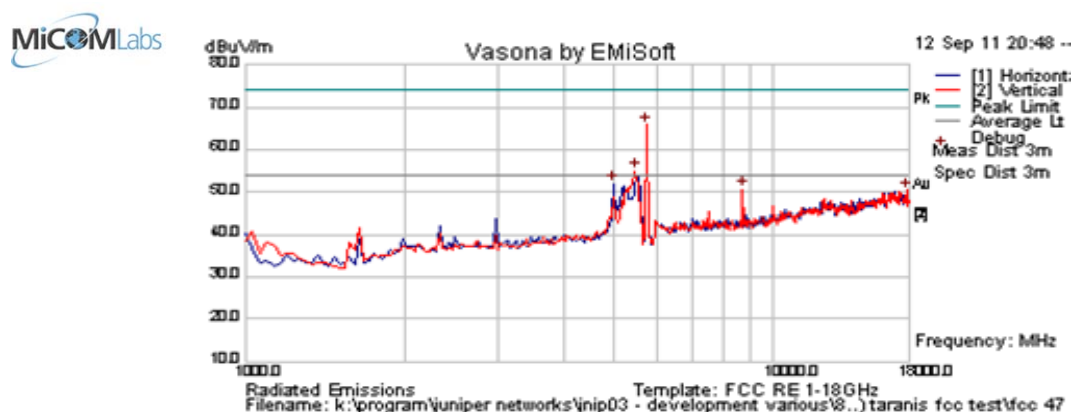

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5735.471	70.2	4.8	-8.9	66.0	Peak [Scan]	H						FUND
5462.925852	59.6	4.6	-9.2	55.0	Peak [Scan]	V					Pass	BE
4985.972	57.3	4.6	-9.9	52.0	Peak [Scan]	H	100	0	54	-2.0	Pass	BE
8733.467	49.0	6.1	-4.5	50.6	Peak [Scan]	V	100	0	54	-3.4	Pass	NRB
17829.659	41.5	8.8	0.3	50.5	Peak [Scan]	V	100	0	54	-3.5	Pass	NOISE
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 264 of 279

Test Freq.	5785 MHz	Engineer	GMH
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	ART = 23	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

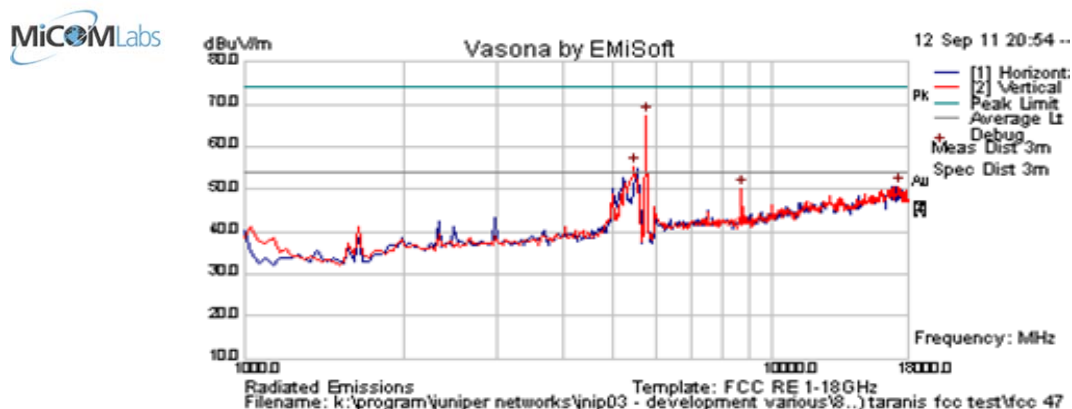

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5769.539	71.5	4.8	-8.9	67.3	Peak [Scan]	V						FUND
5462.925852	60.1	4.6	-9.2	55.5	Peak [Scan]	V					Pass	BE
17284.569	40.7	8.6	1.3	50.7	Peak [Scan]	V	100	0	54	-3.3	Pass	NOISE
8733.467	48.6	6.1	-4.5	50.2	Peak [Scan]	V	100	0	54	-3.8	Pass	NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 265 of 279

Test Freq.	5815 MHz	Engineer	GMH
Variant	802.11n; HT-40; 13.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum.(%)	31
Power Setting	ART = 23	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

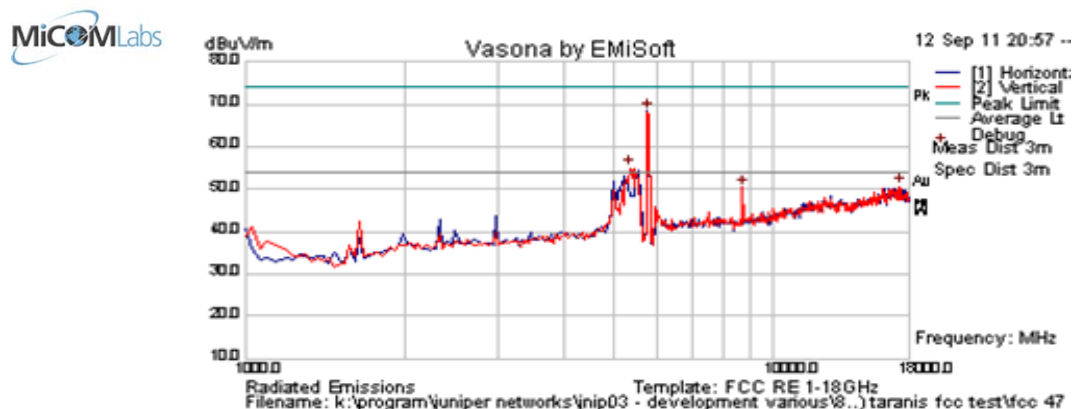

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5769.539	72.5	4.8	-8.9	68.4	Peak [Scan]	H						FUND
5360.721443	59.8	4.6	-9.4	55.1	Peak [Scan]	V					Pass	BE
17318.637	40.6	8.7	1.5	50.7	Peak [Scan]	V	100	0	54	-3.3	Pass	NOISE
8733.467	48.8	6.1	-4.5	50.4	Peak [Scan]	V	100	0	54	-3.7	Pass	NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission RB = Restricted Band (15.209 Limits); NRB = Non Restricted Band, Limit is 20dB below fundamental peak												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 266 of 279

Peak Emissions (2400 – 2483,5 Mz)

The peak emission level is present when the EUT is in the centre channel in the 2400 – 2483.4 MHz band in 11b mode.

Test Freq.	2437 MHz	Engineer	GMH
Variant	802.11b; 1 Mbs	Temp (°C)	29
Freq. Range	2400 - 2483.5 MHz	Rel. Hum.(%)	30
Power Setting	ART = 21.5	Press. (mBars)	996
Antenna	Integral Gain 2 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

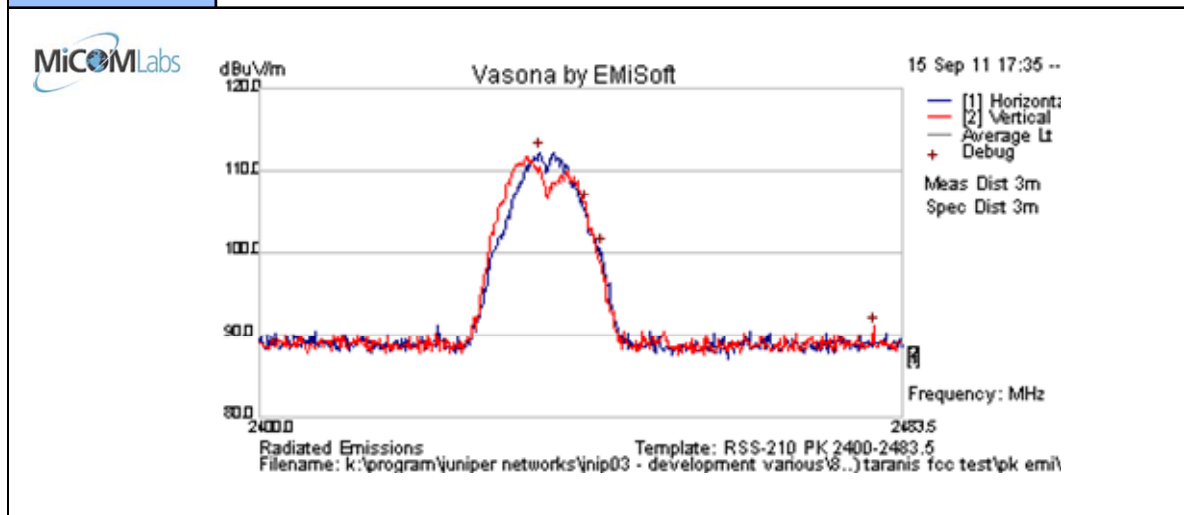

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
2436.144	67.1	13.0	32.2	112.3	Peak [Scan]	H						FUND
2442.001	60.8	13.0	32.3	106.1	Peak [Scan]	V						BE
2444.009	55.3	13.0	32.3	100.6	Peak [Scan]	H						BE
2479.819	45.8	13.0	32.3	91.1	Peak [Scan]	V						BE
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 267 of 279

Peak Emissions (5725 – 5850 MHz)

The peak emission level is present when the EUT is in the centre channel in the 5725 – 5850 MHz band in 11a mode.

Test Freq.	5785 MHz	Engineer	GMH
Variant	802.11a; 6 Mbs	Temp (°C)	29
Freq. Range	5725 - 5850 MHz	Rel. Hum.(%)	30
Power Setting	ART = 18.5	Press. (mBars)	996
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

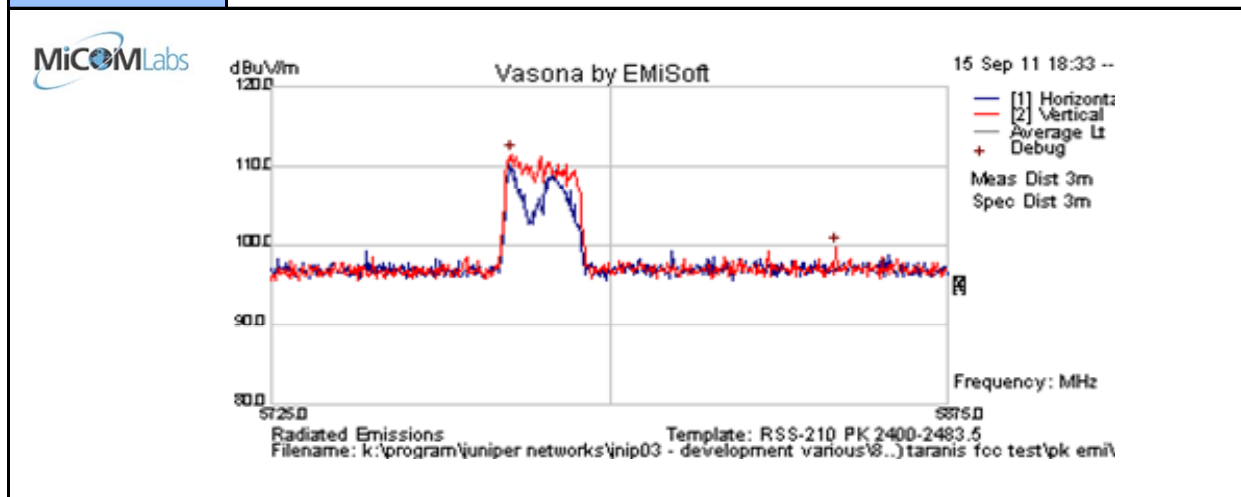

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5777.906	61.8	14.8	35.0	111.5	Peak [Scan]	V						FUND
5850.0501	50.0	14.8	35.0	99.8	Peak [Scan]	V						NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 268 of 279

Specification Limits

FCC §15.247(d) and RSS-210 §A8.5 In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

FCC §15.247(d)

If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section §15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(a)).

IC RSS-210 §A8.5 If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under section A8.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Tables 2 and 3 is not required. In addition, radiated emissions which fall in the restricted bands of Table 1 must also comply with the radiated emission limits specified in Tables 2 and 3.

IC RSS-Gen §4.7

The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate or carrier frequency), or from 30 MHz, whichever is the lowest frequency, to the 5th harmonic of the highest frequency generated without exceeding 40 GHz.

FCC §15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

FCC §15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

FCC §15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 269 of 279

§15.209 (a) Limit Matrix

Frequency(MHz)	Field Strength (μ V/m)	Field Strength (dB μ V/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 270 of 279

5.1.6.2. Radiated Spurious Emissions (30M-1 GHz)

FCC, Part 15 Subpart C §15.205/ §15.209
Industry Canada RSS-210 §2.2

Test Procedure

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

The EUT had two methods of powering on ac/dc converter and Power over Ethernet (POE). Both modes were tested for emissions below 1GHz.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength
R = Measured Receiver Input Amplitude
AF = Antenna Factor
CORR = Correction Factor = CL – AG + NFL
CL = Cable Loss
AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\text{dB}\mu\text{V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:


$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log (level (\mu\text{V/m}))}$$

$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


Radiated Emission Measurement Setup – Below 1 GHz

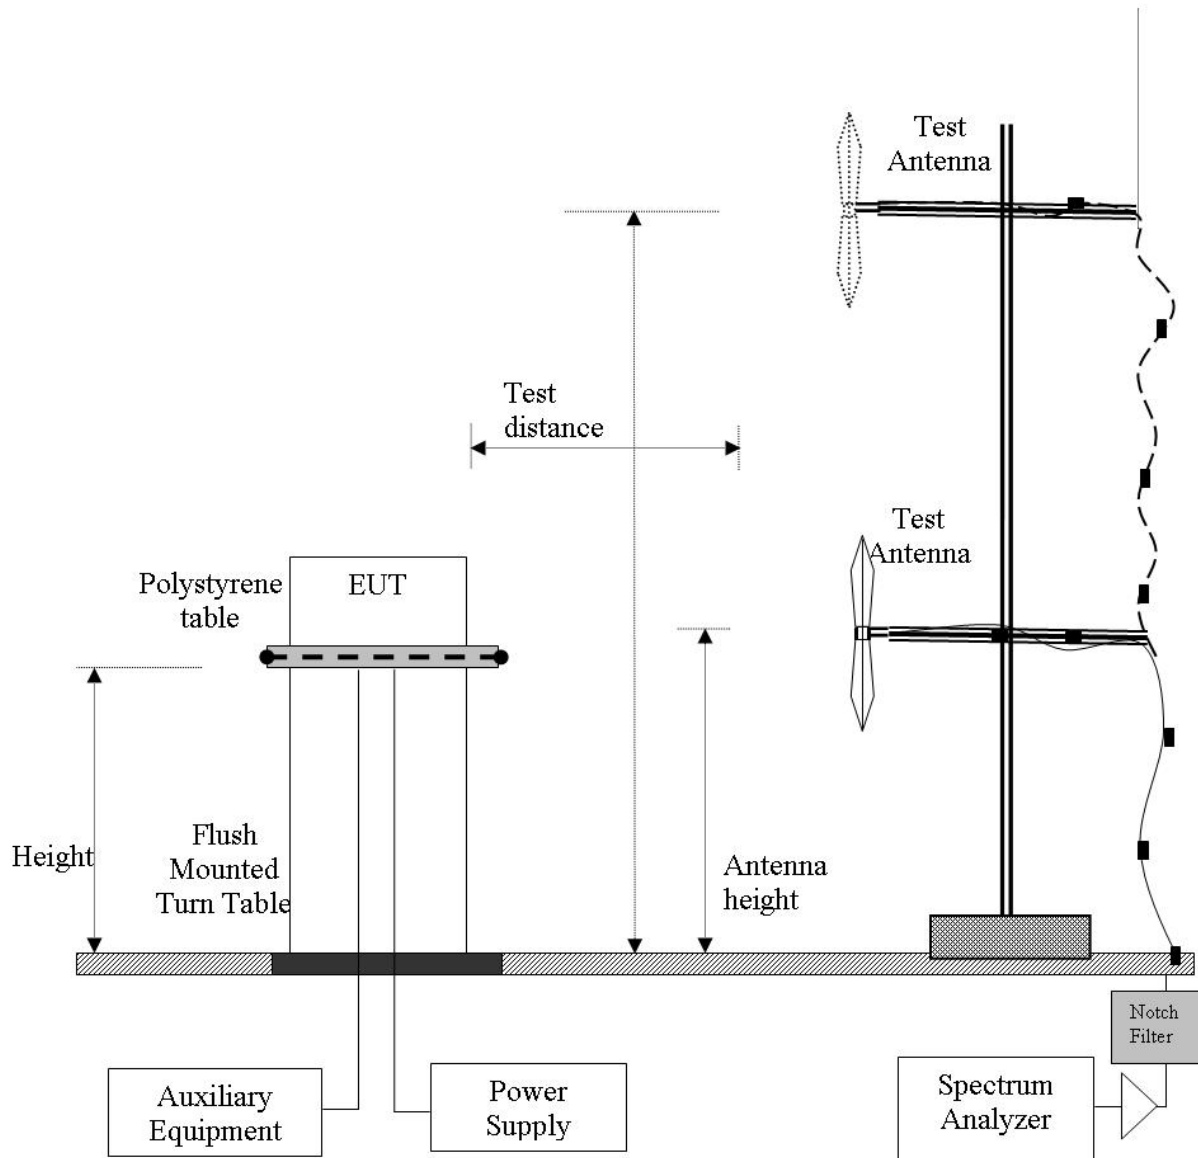



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 272 of 279

Test Freq.	2437 MHz	Engineer	GMH
Variant	Digital Emissions	Temp (°C)	29
Freq. Range	30 MHz - 1000 MHz	Rel. Hum.(%)	30
Power Setting	ART = 23	Press. (mBars)	996
Antenna	Integral Gain 2 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

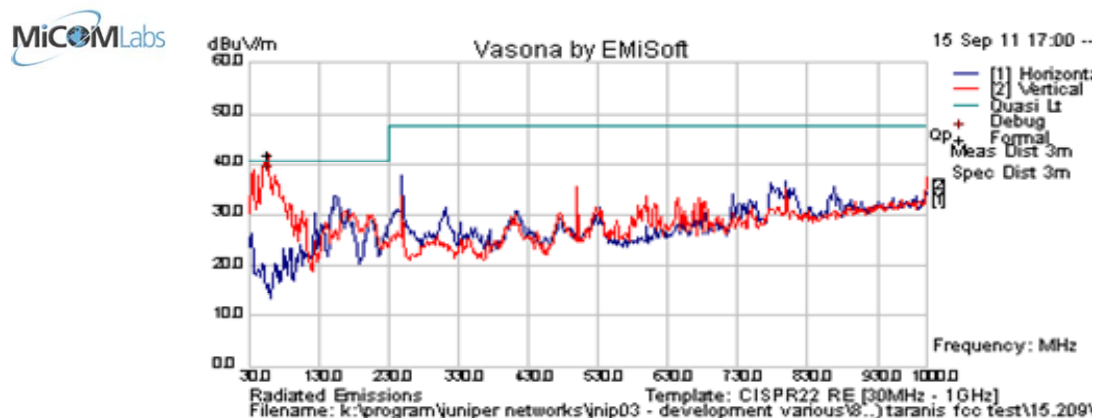

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
57.535	57.9	3.8	-23.7	38.0	Quasi Peak	V	98	86	40.5	-2.5	Pass	
Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 273 of 279

Specification

Limits

§15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

§15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

§15.209 (a) and RSS-Gen §2.2 Limit Matrix

Frequency(MHz)	Field Strength (μ V/m)	Field Strength (dB μ V/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 274 of 279


5.1.7. AC Wireline Conducted Emissions (150 kHz – 30 MHz)

FCC, Part 15 Subpart C §15.207
Industry Canada RSS-Gen §7.2.2

Test Procedure

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

Test Measurement Set up

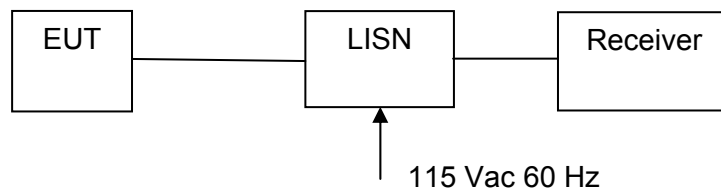

Measurement set up for AC Wireline Conducted Emissions Test

Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

Not required - EUT is POE only.



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 275 of 279

Specification

Limit

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu\Omega$ line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

RSS-Gen §7.2.2

The radio frequency voltage that is conducted back into the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table below. The tighter limit applies at the frequency range boundaries.

§15.207 (a) and **RSS-Gen §7.2.2** Limit Matrix

The lower limit applies at the boundary between frequency ranges

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

Laboratory Measurement Uncertainty for Conducted Emissions

Measurement uncertainty	± 2.64 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions'	0158, 0184, 0287, 0190, 0293, 0307


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6. PHOTOGRAPHS

6.1. Conducted Test Setup



6.2. Radiated Test Setup > 1 GHz

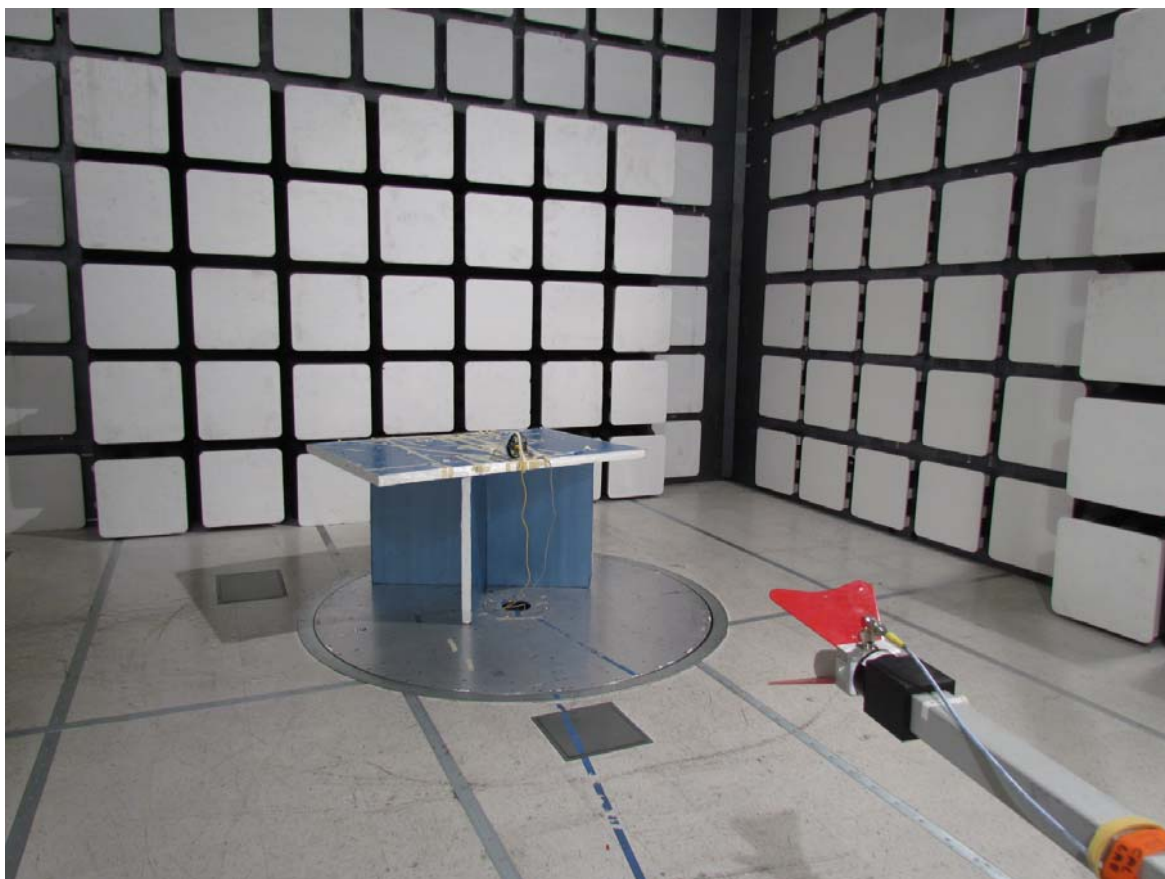



Title: Juniper Networks WLA532 Wireless LAN Access Point
To: FCC 47 CFR Part 15.247 & IC RSS-210
Serial #: JNIP03-U1 Rev A
Issue Date: 26th September 2011
Page: 278 of 279

7. TEST EQUIPMENT DETAILS

Asset #	Instrument	Manufacturer	Part #	Serial #
0088	Spectrum Analyzer	Hewlett Packard	8564E	3410A00141
0134	Amplifier	Com Power	PA 122	181910
0158	Barometer /Thermometer	Control Co.	4196	E2846
0287	EMI Receiver	Rhode & Schwartz	ESIB 40	100201
0252	SMA Cable	Megaphase	Sucoflex 104	None
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787- 3G03G0	209089-001
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181- 3G0300	209092-001
0313	Coupler	Hewlett Packard	86205A	3140A01285
0314	30dB N-Type Attenuator	ARRA	N9444-30	1623
0070	Power Meter	Hewlett Packard	437B	3125U11552
0116	Power Sensor	Hewlett Packard	8485A	3318A19694
0117	Power Sensor	Hewlett Packard	8487D	3318A00371
0184	Pulse Limiter	Rhode & Schwartz	ESH3Z2	357.8810.52
0190	LISN	Rhode & Schwartz	ESH3Z5	836679/006
0293	BNC Cable	Megaphase	1689 1GVT4	15F50B001
0301	5.6 GHz Notch Filter	Micro-Tronics	RBC50704	001
0302	5.25 GHz Notch Filter	Micro-Tronics	BRC50703	002
0303	5.8 GHz Notch Filter	Micro-Tronics	BRC50705	003
0304	2.4GHzHz Notch Filter	Micro-Tronics	--	001
0307	BNC Cable	Megaphase	1689 1GVT4	15F50B002
0335	1-18GHz Horn Antenna	ETS- Lindgren	3117	00066580
0337	Amplifier	MiCOM Labs	--	--
0338	Antenna	Sunol Sciences	JB-3	A052907

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



440 Boulder Court, Suite 200
Pleasanton, CA 94566, USA
Tel: 1.925.462.0304
Fax: 1.925.462.0306
www.micomlabs.com