

Test of Juniper Networks WLA532-US Wireless LAN
Access Point

To: FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: JNIP03-U3a Rev A



TEST REPORT
FROM
MiCOM Labs

Test of Juniper Networks WLA532-US Wireless LAN Access Point

to

To FCC 47 CFR Part 15.407 & IC RSS-210

Test Report Serial No.: JNIP03-U3a Rev A

Note: this report contains data with regard to the 5,150 to 5,350 MHz and 5470 to 5725 MHz bands for Juniper Networks, WLA532 Wireless Access Point. 2.4 and 5.8 GHz test data are reported in MiCOM Labs test report JNIP03-U1

This report supersedes None

Applicant: Juniper Networks, Inc
1194 North Mathilda Avenue
Sunnyvale
California 94089, USA

Product Function: Wireless Access Point

Copy No: pdf Issue Date: 15th February 2012

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
440 Boulder Court, Suite 200
Pleasanton, CA 94566 USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



TEST CERTIFICATE #2381.01

MiCOM Labs is an ISO 17025 Accredited Testing Laboratory



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 3 of 223

This page has been left intentionally blank

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

TABLE OF CONTENTS

ACCREDITATION, LISTINGS & RECOGNITION	5
TESTING ACCREDITATION	5
RECOGNITION.....	6
PRODUCT CERTIFICATION.....	7
1. TEST RESULT CERTIFICATE	9
2. REFERENCES AND MEASUREMENT UNCERTAINTY	10
2.1. Normative References	10
2.2. Test and Uncertainty Procedures	11
3. PRODUCT DETAILS AND TEST CONFIGURATIONS	12
3.1. Technical Details	12
3.2. Scope of Test Program.....	13
3.3. Equipment Model(s) and Serial Number(s)	15
3.4. Antenna Details	15
3.5. Cabling and I/O Ports	15
3.6. Test Configurations.....	16
3.7. Equipment Modifications.....	17
3.8. Deviations from the Test Standard	17
3.9. Subcontracted Testing or Third Party Data	17
4. TEST SUMMARY	18
5. TEST RESULTS	20
5.1. Device Characteristics	20
5.1.1. <i>26 dB and 99 % Bandwidth</i>	20
5.1.2. <i>Transmit Output Power</i>	75
5.1.3. <i>Peak Power Spectral Density</i>	87
5.1.4. <i>Peak Excursion Ratio</i>	124
5.1.5. <i>Frequency Stability</i>	179
5.1.6. <i>Maximum Permissible Exposure</i>	180
5.1.7. <i>Radiated Emissions</i>	181
5.1.8. <i>AC Wireline Conducted Emissions (150 kHz – 30 MHz)</i>	218
6. PHOTOGRAPHS.....	220
6.1. Conducted Test Setup	220
6.2. Radiated Test Setup > 1 GHz.....	221
7. TEST EQUIPMENT DETAILS.....	222

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 5 of 223

ACCREDITATION, LISTINGS & RECOGNITION

TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard EN ISO/IEC 17025. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



Accredited Laboratory

A2LA has accredited

MICOM LABS

Pleasanton, CA


for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 *General Requirements for the Competence of Testing and Calibration Laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Presented this 14th day of April 2010.




President & CEO
For the Accreditation Council
Certificate Number 2381.01
Valid to March 31, 2012
Revised January 20, 2012

For the tests or types of tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 6 of 223

RECOGNITION

MiCOM Labs, Inc has widely recognized Electrical testing capabilities. Our international recognition includes Conformity Assessment Body designation by APEC MRA** countries. Our test reports are widely accepted for global type approvals.

Country	Recognition Body	Status	Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	Listing #: 102167
Canada	Industry Canada (IC)	FCB	APEC MRA 2	Listing #: 4143A-2
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	APEC MRA 2	210
	VCCI	--	--	No. 2959
Europe	European Commission	NB	EU MRA	NB 2280
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)	CAB	APEC MRA 1	
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)	CAB	APEC MRA 1	
Singapore	Infocomm Development Authority (IDA)	CAB	APEC MRA 1	
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)	CAB	APEC MRA 1	
Vietnam	Ministry of Communication (MIC)	CAB	APEC MRA 1	

**APEC MRA – Asia Pacific Economic Community Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the APEC member countries.

Phase I - recognition for product testing

Phase II – recognition for both product testing and certification

N/A – Not Applicable

**EU MRA – European Union Mutual Recognition Agreement.

Is a recognition agreement under which test lab is accredited to regulatory standards of the EU member countries.

**NB – Notified Body

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 7 of 223

PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard EN ISO/IEC Guide 65. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



The American Association for Laboratory Accreditation

World Class Accreditation

Accredited Product Certification Body

A2LA has accredited

MICOM LABS

Pleasanton, CA

for technical competence as a

Product Certification Body

This product certification body is accredited in accordance with the recognized International Standard ISO/IEC Guide 65:1996 *General requirements for bodies operating product certification systems*. This accreditation demonstrates technical competence for a defined scope and the operation of a quality management system for a Telecommunications Certification Body (TCB) meeting FCC (U.S.), Japan (MIC), and IC (Canada) requirements.

Presented this 24th day of June 2010.


Pete Riley
President & CEO
For the Accreditation Council
Certificate Number 2381.02
Valid to March 31, 2012
Revised January 20, 2012

For the product certification schemes to which this accreditation applies, please refer to the organization's Product Certification Scope of Accreditation.

USA Telecommunication Certification Body (TCB) - TCB Identifier – US0159

Industry Canada Certification Body - CAB Identifier – US0159

European Notified Body - Notified Body Identifier - 2280

Japan – Recognized Certification Body (RCB) - RCB Identifier - 210

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 8 of 223

DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft		
Rev A	15 th February 2012	Initial release.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 9 of 223

1. TEST RESULT CERTIFICATE

Applicant:	Juniper Networks, Inc 1194 North Mathilda Avenue Sunnyvale California 94089, USA	Tested By:	MiCOM Labs, Inc. 440 Boulder Court Suite 200 Pleasanton California, 94566, USA
EUT:	802.11a/b/g/n Wireless LAN Access Point	Tel:	+1 925 462 0304
Model:	WLA532-US-US	Fax:	+1 925 462 0306
S/N:	JC0211322570, JC0211322566		
Test Date(s):	7th July to 14th September '11	Website:	www.micomlabs.com

STANDARD(S)	TEST RESULTS
FCC 47 CFR Part 15.407 & IC RSS-210	EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.


Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:



Graeme Grieve
Quality Manager MiCOM Labs,



Gordon Hurst
President & CEO MiCOM Labs, Inc.



TESTING CERTIFICATE #2381.01

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 10 of 223

2. REFERENCES AND MEASUREMENT UNCERTAINTY

2.1. Normative References

Ref.	Publication	Year	Title
(i)	FCC 47 CFR Part 15.407	2010	Code of Federal Regulations
(ii)	FCC 06-96	June 2006	Memorandum Opinion and Order
(iii)	FCC OET KDB 662911	4 th April 2011	Emissions Testing of Transmitters with Multiple Outputs in the Same Band
(iv)	Industry Canada RSS-210	2010	Low Power License-Exempt Radiocommunication Devices (All Frequency Bands): Category 1 Equipment
(v)	Industry Canada RSS-Gen	2010	General Requirements and Information for the Certification of Radiocommunication Equipment
(vi)	ANSI C63.4	2009	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
(vii)	CISPR 22/ EN 55022	2008 2006+A1:2007	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
(viii)	M 3003	Edition 1 Dec. 1997	Expression of Uncertainty and Confidence in Measurements
(ix)	LAB34	Edition 1 Aug 2002	The expression of uncertainty in EMC Testing
(x)	ETSI TR 100 028	2001	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
(xi)	A2LA	14 th September 2005	Reference to A2LA Accreditation Status – A2LA Advertising Policy
(xii)	FCC Public Notice – DA 02-2138	2002	Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 11 of 223

2.2. Test and Uncertainty Procedures

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 12 of 223

3. PRODUCT DETAILS AND TEST CONFIGURATIONS

3.1. Technical Details

Details	Description
Purpose:	Test of the Juniper Networks WLA532-US Wireless LAN Access Point in the frequency range 5,150 to 5,250 MHz to FCC Part 15.407 and Industry Canada RSS-210 regulations.
Applicant:	Juniper Networks, Inc 1194 North Mathilda Avenue Sunnyvale California 94089, USA
Manufacturer:	As applicant
Laboratory performing the tests:	MiCOM Labs, Inc. 440 Boulder Court, Suite 200 Pleasanton, California 94566 USA
Test report reference number:	JNIP03-U3a Rev A
Date EUT received:	2nd July 2011
Standard(s) applied:	FCC 47 CFR Part 15.407 & IC RSS-210
Dates of test (from - to):	7th July to 14th September '11
No of Units Tested:	1
Type of Equipment:	802.11a/b/g/n Wireless Access Point, 3x3 Spatial Multiplexing MIMO configuration
Applicants Trade Name:	Wireless Access Point
Model(s):	WLA532-US
Location for use:	Indoor/Outdoor
Declared Frequency Range(s):	5,250 to 5,350 and 5,470 to 5,725 MHz
Software Release	7.6.1.0
Type of Modulation:	Per 802.11 – OFDM
Declared Nominal Output Power: (Average Power)	802.11a: Legacy +19 dBm 802.11n: HT-20 +19 dBm 802.11n: HT-40 +18 dBm
EUT Modes of Operation:	Legacy 802.11a, 802.11n HT-20, HT-40
Transmit/Receive Operation:	Time Division Duplex
System Beam Forming:	WLA532 has no capability for beam forming
Rated Input Voltage and Current:	POE 48 Vdc 0.625 A
Operating Temperature Range:	Declared range -20° to +55°C
ITU Emission Designator:	802.11a 18M8D1D 802.11n HT-20 19M9D1D 802.11n HT-40 36M7D1D
Equipment Dimensions:	6.0 (Diameter) x 2.5 (H) inches 15 (Diameter) x 6.35 (H) cm
Weight:	1 lb (0.454 Kg)
Primary function of equipment:	Wireless Access Point for transmitting data and voice.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 13 of 223

3.2. Scope of Test Program

Juniper Networks WLA532 Access Point RF Testing

The scope of the test program was to test the Juniper Networks WLA532 802.11a/b/g/n Wireless Access Point, 3x3 Spatial Multiplexing MIMO configurations in the frequency range 5,150 to 5,250 MHz for compliance against FCC 47 CFR Part 15.407 and Industry Canada RSS-210 specifications.

WLA532-US (for US distribution)

WLA532-WW, WLA532-XX (where –XX can be any alphanumeric, for world wide distribution)

FCC OET KDB Implementation

This test program implements the following FCC KDB – 662911 4/4/2011;

Emissions Testing of Transmitters with Multiple Outputs in the Same Band

The KDB document provides guidance for measurements of conducted output emissions of devices that employ a single transmitter with multiple outputs in the same band, with the outputs occupying the same or overlapping frequency ranges. It applies to EMC compliance measurements on devices that transmit on multiple antennas simultaneously in the same or overlapping frequency ranges through a coordinated process. Examples include, but are not limited to, devices employing beam forming or multiple-input and multiple-output (MIMO.) This guidance applies to both licensed and unlicensed devices wherever the FCC rules call for conducted output measurements. Guidance is provided for in-band, out-of-band and spurious emission measurements.

This guidance does not apply to the multiple transmitters included in a composite device, such as a device that combines an 802.11 modem with a cell phone in one enclosure with each driving its own antenna.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

WLA532 802.11 a/b/g/n Wireless Access Point



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 15 of 223

3.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description (Including Brand Name)	Mfr	Model No.	Serial No.
EUT	802.11a/b/g/n Wireless Access Point	Juniper Networks	WLA532-US	JC0211322570, JC0211322566
Support	Laptop PC	IBM	Thinkpad	None

3.4. Antenna Details

- Integral Single Band: Gain 2.4 GHz 2 dBi
- Integral Single Band: Gain 5 GHz 3 dBi

3.5. Cabling and I/O Ports

Number and type of I/O ports

1. 1 x 10/100/1000 Ethernet
2. dc Power In (48 Vdc POE)

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 16 of 223

3.6. Test Configurations

Testing was performed to determine the highest power level versus bit rate. The variant with the highest power was used to exercise the product.

Matrix of test configurations

Operational Mode(s) (802.11)	Variant	Data Rates with Highest Power	Frequencies (MHz)
a,n	Legacy	6 MBit/s	5,260/5,300/5,320/ 5,500/5,580/5,700
	HT-20	6.5 MCS	
	HT-40	13.5 MCS	5,270, 5,230 5,510/5,550/5,670

Antenna Test Configurations for Radiated Emissions and Band-Edge

The following measurements were performed on all antenna configurations identified in Section 3.4 Antenna Details.

Spurious Emission and Band-Edge Test Strategy

Band 5,250 – 5,350

11a	11n HT-20	11n HT-40
SE 5180	SE 5180	SE 5190
SE 5200	SE 5200	
SE 5240	SE 5240	SE 5230
SE 5260	SE 5260	SE 5270
SE 5300	SE 5300	
SE 5320	SE 5320	SE 5310
BE 5350	BE 5350	BE 5350
Pk 5260	Pk 5260	Pk 5270
Pk 5300	Pk 5300	
Pk 5320	Pk 5320	Pk 5310

KEY:-

SE – Spurious Emissions

BE – Band-Edge

PK - Peak Emission

Band 5,470 – 5,725

11a	11n HT-20	11n HT-40
SE 5500	SE 5500	SE 5510
SE 5580	SE 5580	SE 5550
SE 5700	SE 5700	SE 5670
BE 5460	BE 5460	BE 5460
Pk 5500	Pk 5500	PK 5510
Pk 5580	Pk 5580	PK 5550
Pk 5700	Pk 5700	PK 5670

KEY:-

SE – Spurious Emissions

BE – Band-Edge

PK - Peak Emission

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 17 of 223

3.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. The Output Power was reduced to meet the conducted power and peak power spectral density limits.

3.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

3.9. Subcontracted Testing or Third Party Data

1. NONE

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 18 of 223

4. TEST SUMMARY

List of Measurements

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.407(a) A9.2(2) 4.4	26dB and 99% Emission BW	Emission bandwidth measurement	Conducted	Complies	5.1.1
15.407(a) A9.2(2) 4.6	Transmit Output Power	Power Measurement	Conducted	Complies	5.1.2
15.407(a) A9.2(2)	Peak Power Spectral Density	PPSD	Conducted	Complies	5.1.3
15.407(a)(6)	Peak Excursion Ratio	<13dB in any 1MHz bandwidth	Conducted	Complies	5.1.4
15.407(g) 15.31 2.1 4.5	Frequency Stability	Limits: contained within band of operation at all times.	Applicant declaration	Complies	5.1.5
15.407(f) 5.5	Radio Frequency Radiation Exposure	Exposure to radio frequency energy levels, Maximum Permissible Exposure (MPE)	Conducted	Complies	5.1.6

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 19 of 223

List of Measurements (continued)

The following table represents the list of measurements required under the **FCC CFR47 Part 15.407** and **Industry Canada RSS-210** and **Industry Canada RSS-Gen**.

Section(s)	Test Items	Description	Condition	Result	Test Report Section
15.407(b)(2) 15.205(a) 15.209(a) 2.2 2.6 A9.3(2) 4.7	Radiated Emissions		Radiated		5.1.7
	Transmitter Radiated Spurious Emissions	Emissions above 1 GHz		Complies	5.1.7.1
	Radiated Band Edge	Band edge results		Complies	5.1.7.1
Industry Canada only RSS-Gen §4.10, §6	Receiver Radiated Spurious Emissions	Emissions above 1 GHz		Complies	5.1.7.2
15.407(b)(6) 15.205(a) 15.209(a) 2.2	Radiated Emissions	Emissions <1 GHz (30M-1 GHz)		Complies	5.1.7.3
15.407(b)(6) 15.207 7.2.2	AC Wireline Conducted Emissions 150 kHz–30 MHz	Conducted Emissions	Conducted	Complies	5.1.8

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5. **TEST RESULTS**

5.1. Device Characteristics


5.1.1. 26 dB and 99 % Bandwidth

FCC, Part 15 Subpart C §15.407(a)
Industry Canada RSS-210 § A9.2(2)
Industry Canada RSS-Gen 4.4

Test Procedure

The bandwidth at 26 dB and 99 % is measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

Test Measurement Set up

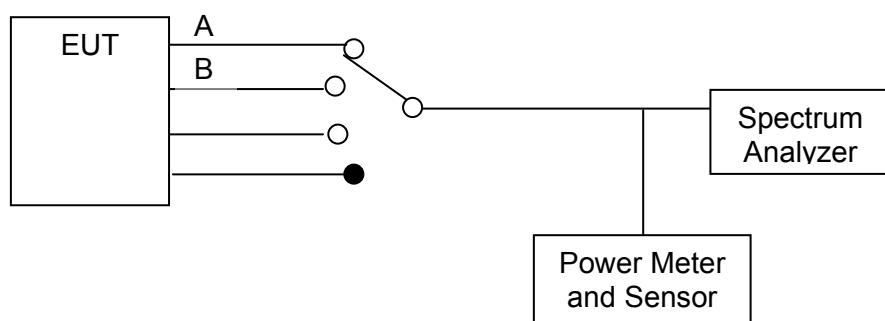

Measurement set up for 26 dB and 99 % bandwidth test

Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier

Power: Maximum Default Power

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 21 of 223

Measurement Results for 26 dB and 99 % Operational Bandwidth(s)

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

TABLE OF RESULTS – 802.11a Legacy 5150 – 5250 MHz

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11a	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (x):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.0 Vdc		
Notes 1:			
Notes 2:			

26 dB Bandwidth

Test Frequency	26 dB Bandwidth				Minimum 6dB Bandwidth Limit	Margin
	MHz					
MHz	a	b	c	d	kHz	MHz
5180	22.846000	22.946000	23.246000		500	0.5
5200	22.445000	22.946000	23.347000			
5240	23.547000	23.647000	23.848000			


99% Bandwidth

Test Frequency	99 % Bandwidth					
	MHz					
MHz	a	b	c	d		
5180	16.733000	16.733000	16.834000			
5200	16.733000	16.733000	16.834000			
5240	16.733000	16.834000	16.934000			


Measurement uncertainty:	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,180 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

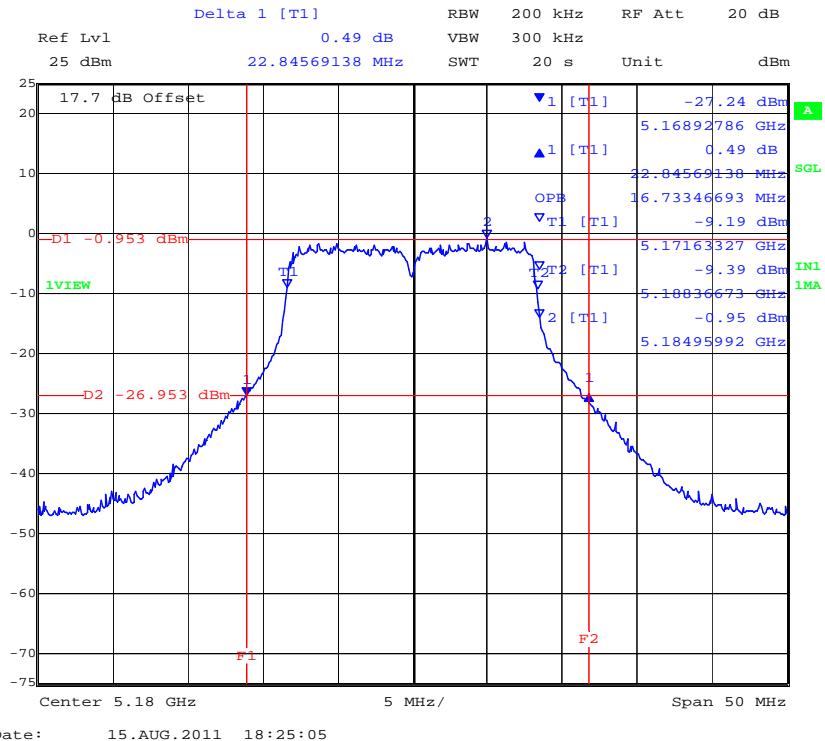


PORT B 5,180 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

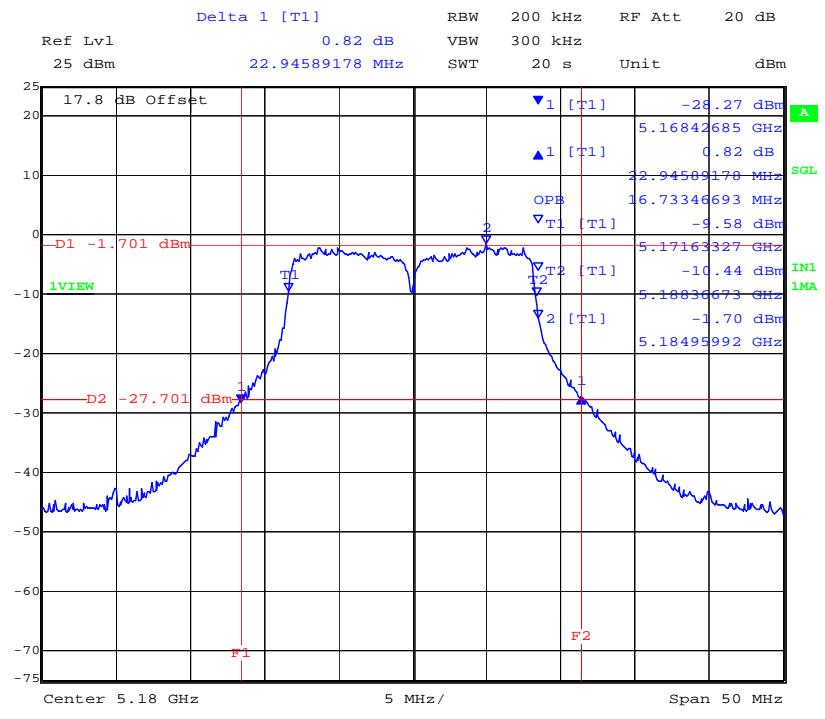

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


PORT C 5,180 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

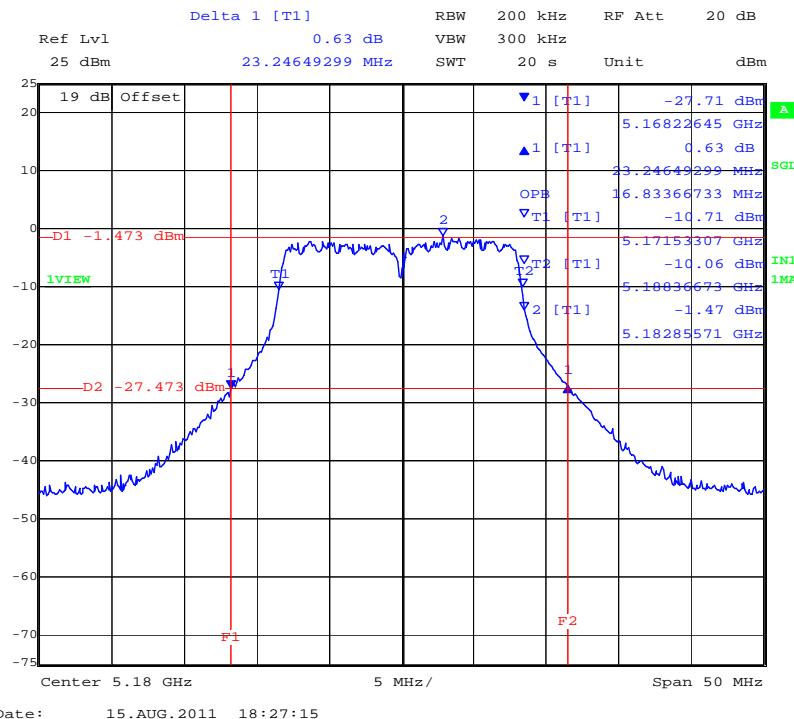


Date: 15.AUG.2011 18:27:15

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,200 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

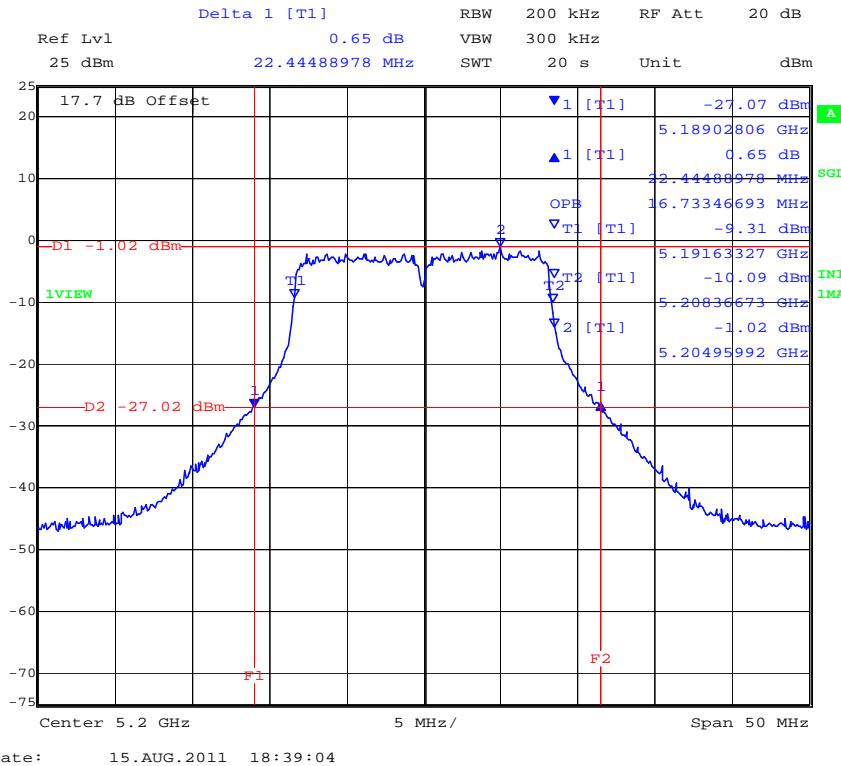


PORT B 5,200 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

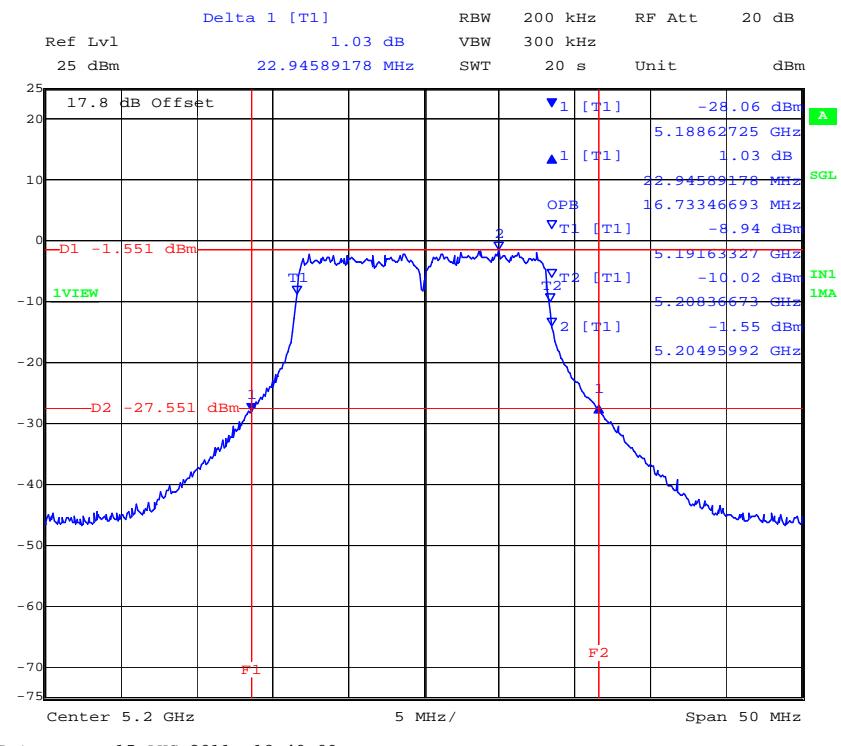


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,200 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

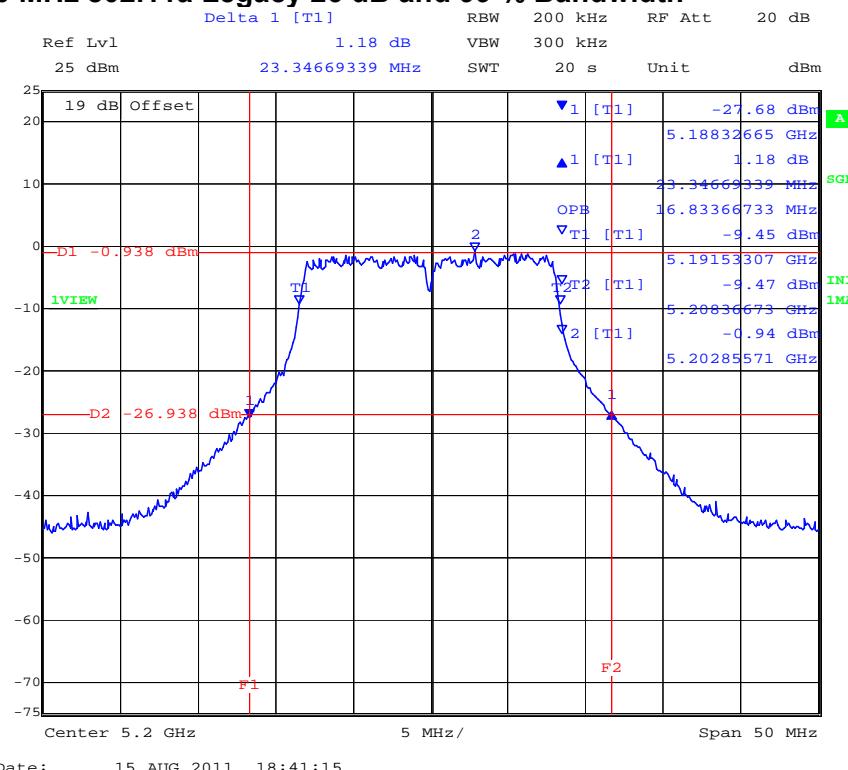


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,240 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

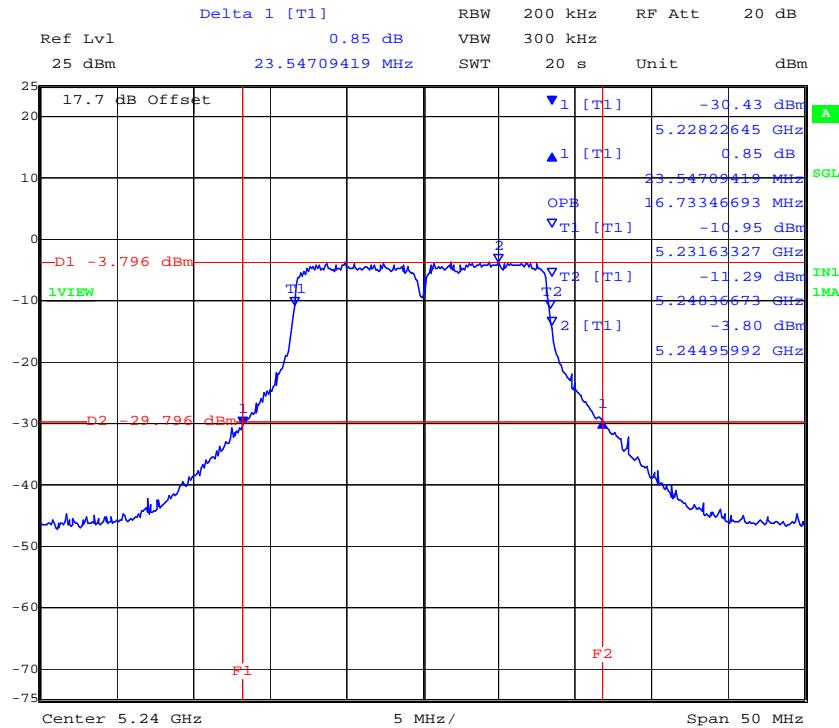

Date: 15.AUG.2011 18:56:41


PORT B 5,240 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

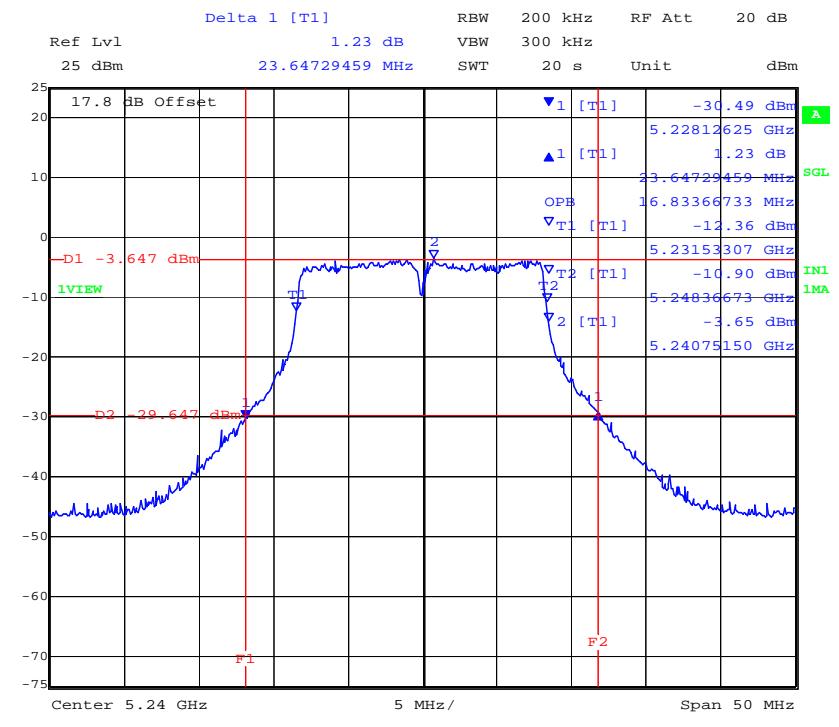

Date: 15.AUG.2011 18:57:46

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,240 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

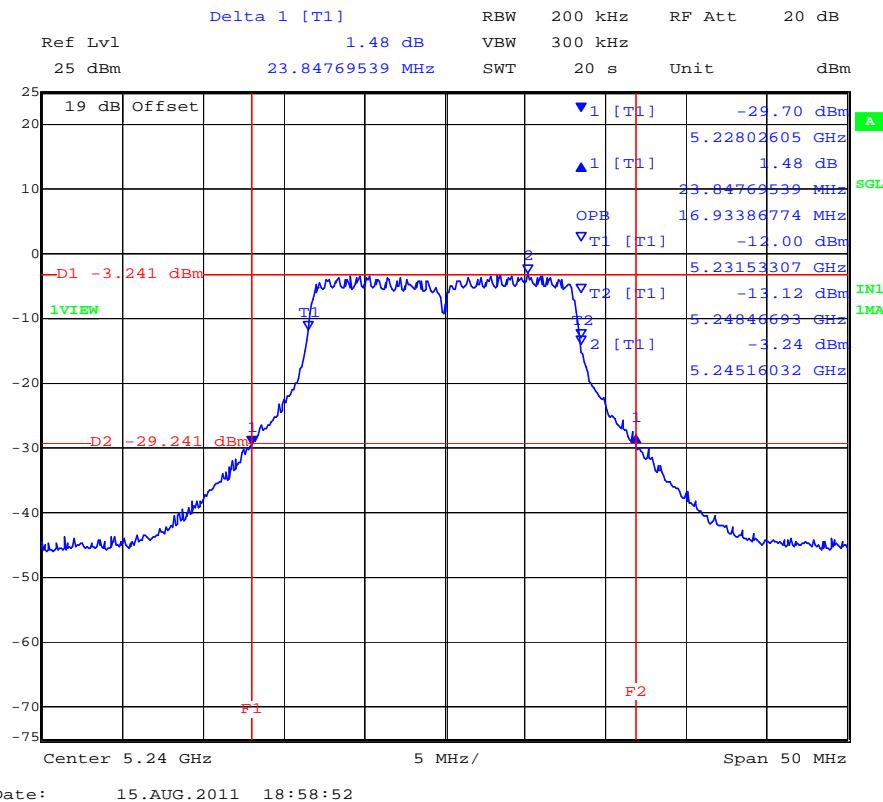

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 28 of 223

TABLE OF RESULTS – 802.11n HT-20 5150 – 5250 MHz

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (x):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.0 Vdc		
Notes 1:			
Notes 2:			

26 dB Bandwidth

Test Frequency	26 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz						
MHz	a	b	c	d	kHz	MHz	MHz
5180	33.267000	23.948000	24.549000		500	0.5	-23.448000
5200	23.547000	23.447000	24.248000				-22.947000
5240	23.347000	23.948000	24.549000				-22.847000


99% Bandwidth

Test Frequency	99 % Bandwidth						
	MHz						
MHz	a	b	c	d			
5180	18.036000	18.036000	18.036000				
5200	17.936000	17.836000	18.036000				
5240	17.936000	18.136000	17.936000				

Measurement uncertainty:	±2.81 dB
---------------------------------	----------


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,180 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

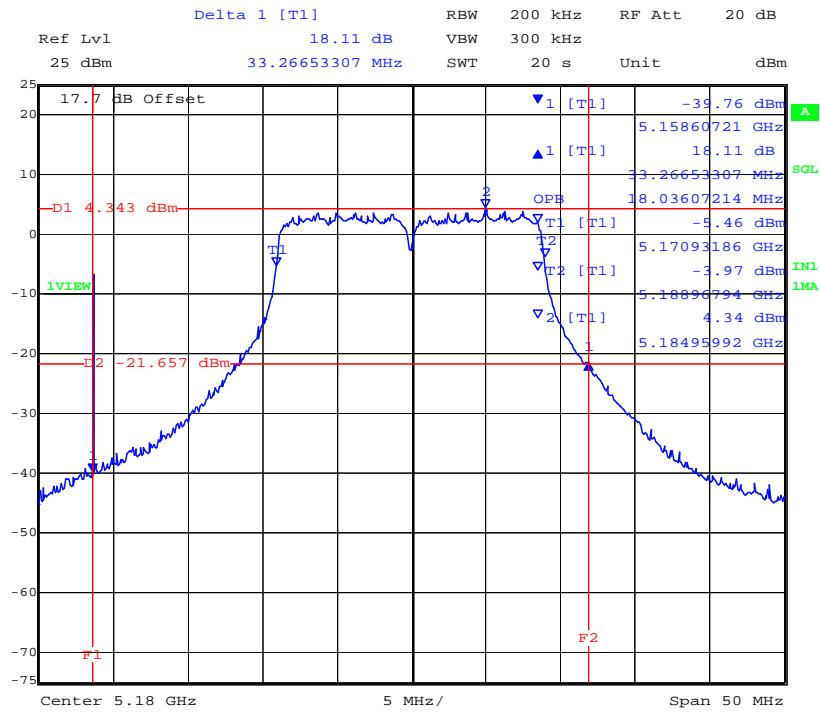

Date: 27.AUG.2011 11:03:55


PORT B 5,180 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

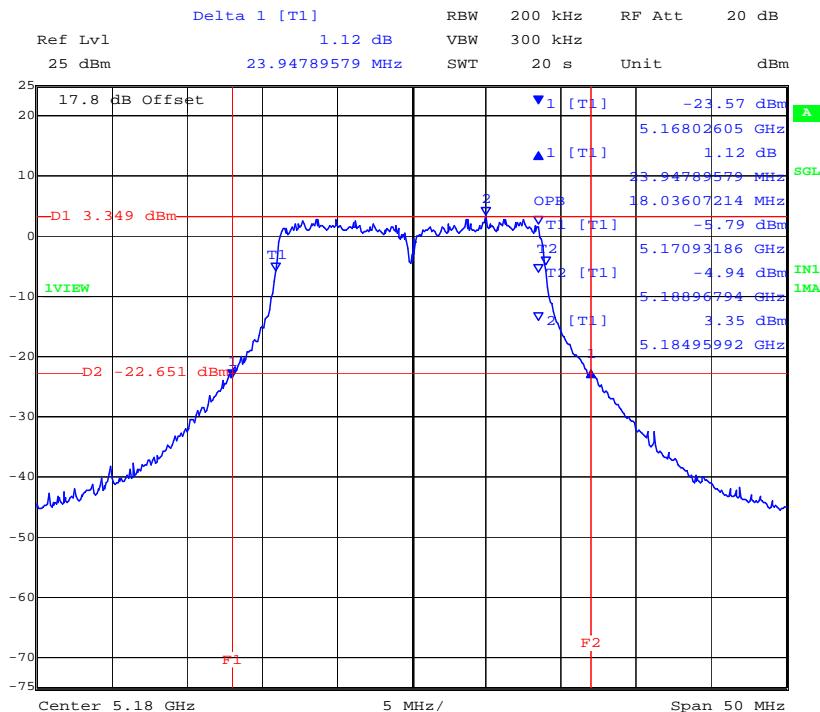

Date: 27.AUG.2011 11:05:00

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


PORT C 5,180 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

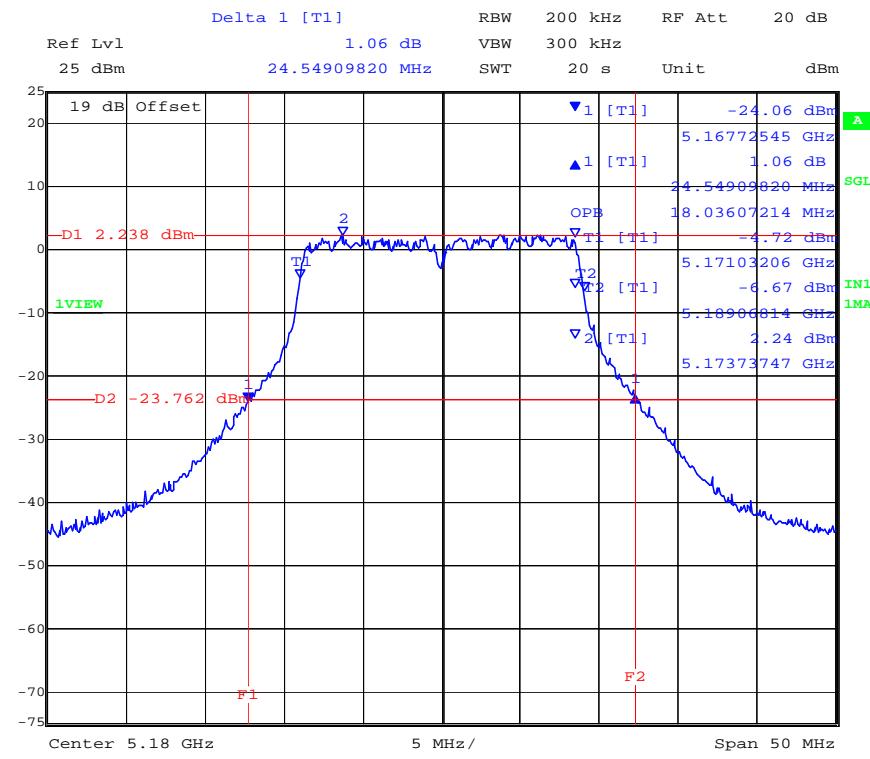

Date: 27.AUG.2011 11:06:05


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,200 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

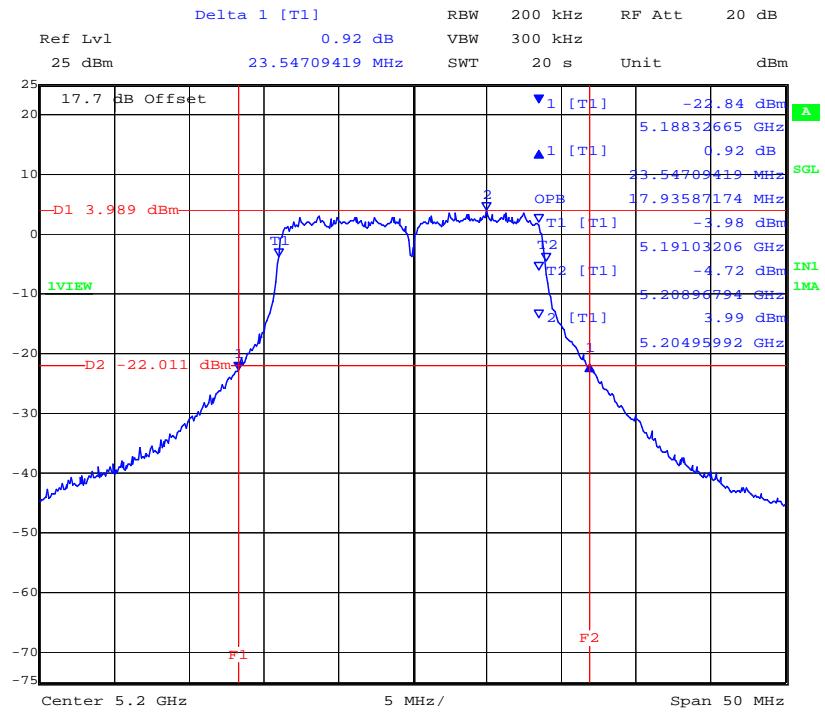

Date: 27.AUG.2011 11:14:23


PORT B 5,200 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

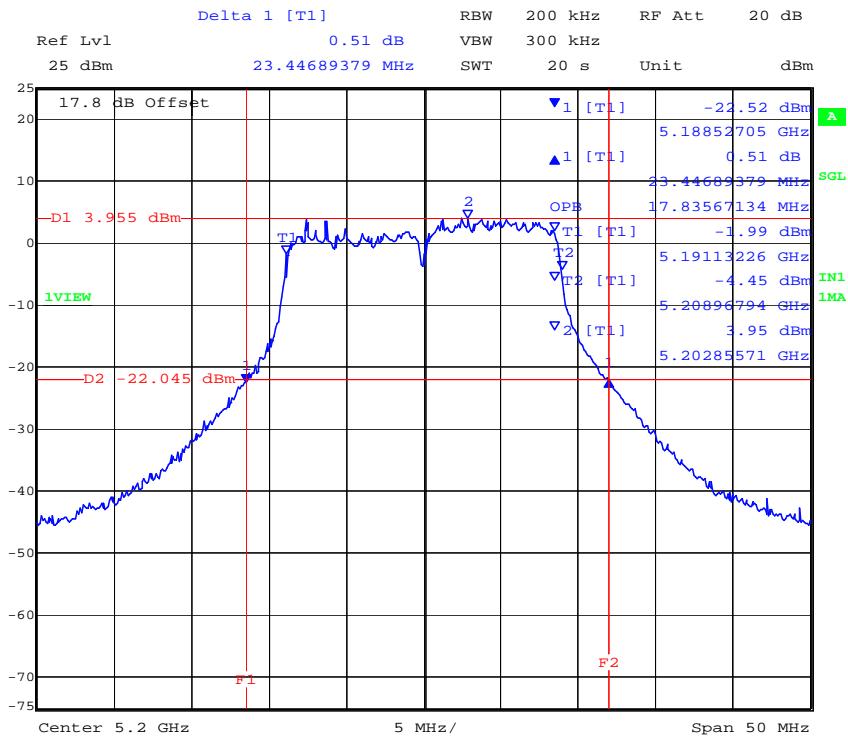

Date: 27.AUG.2011 11:15:28


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,200 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

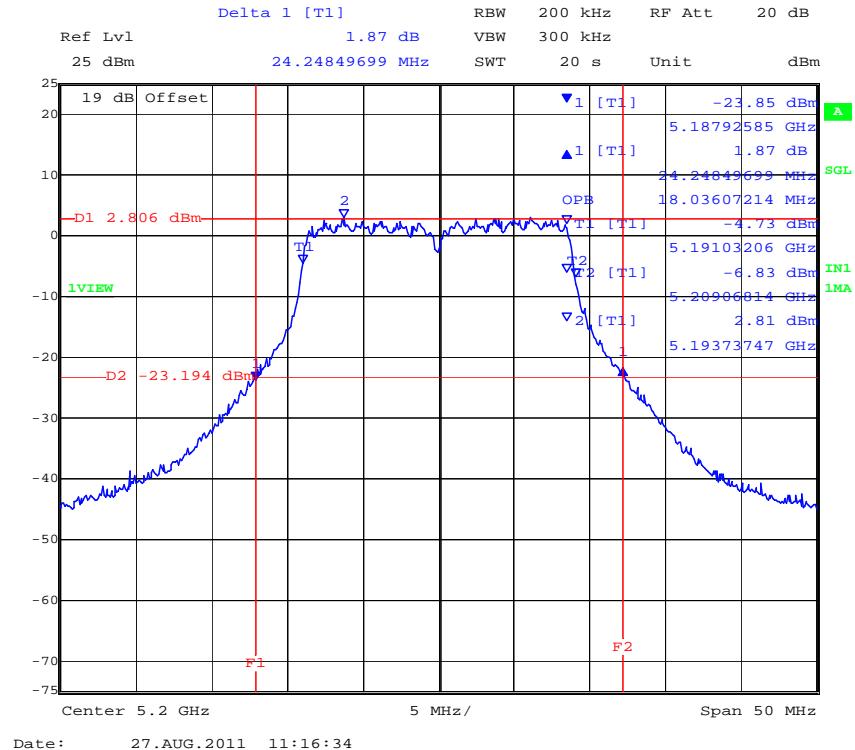


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,240 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

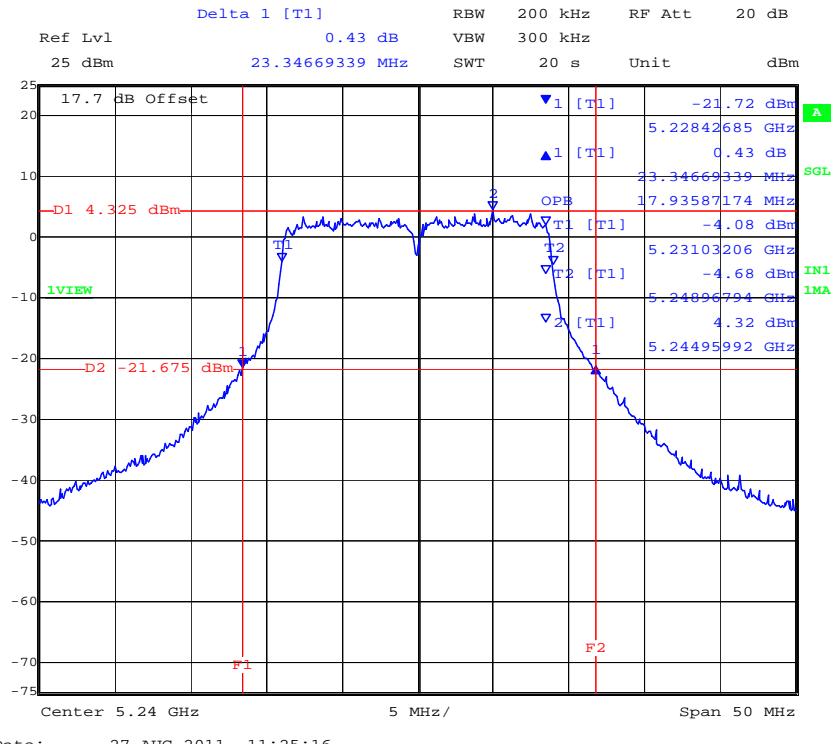

Date: 27.AUG.2011 11:25:16


PORT B 5,240 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

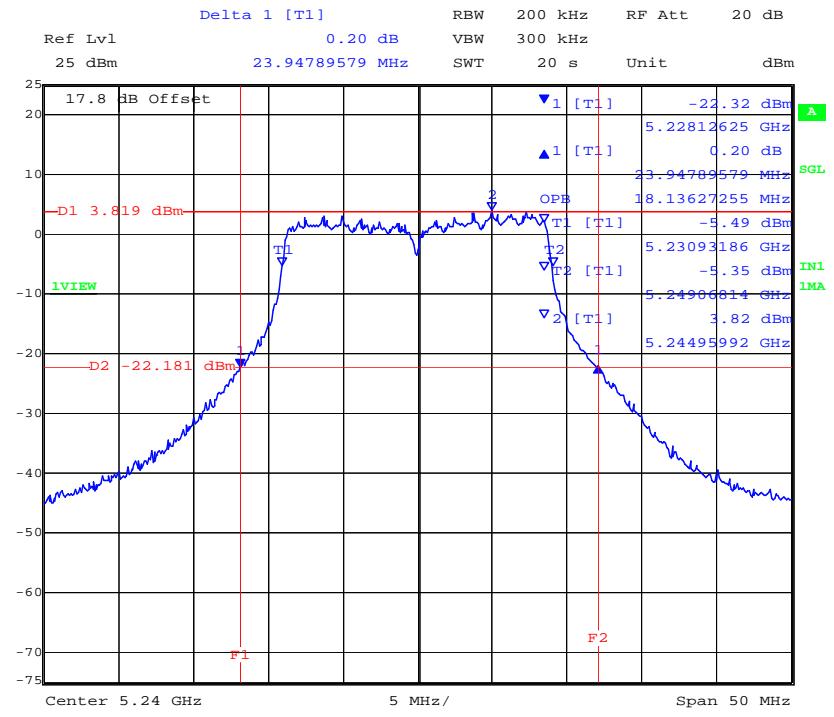

Date: 27.AUG.2011 11:26:22

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,240 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

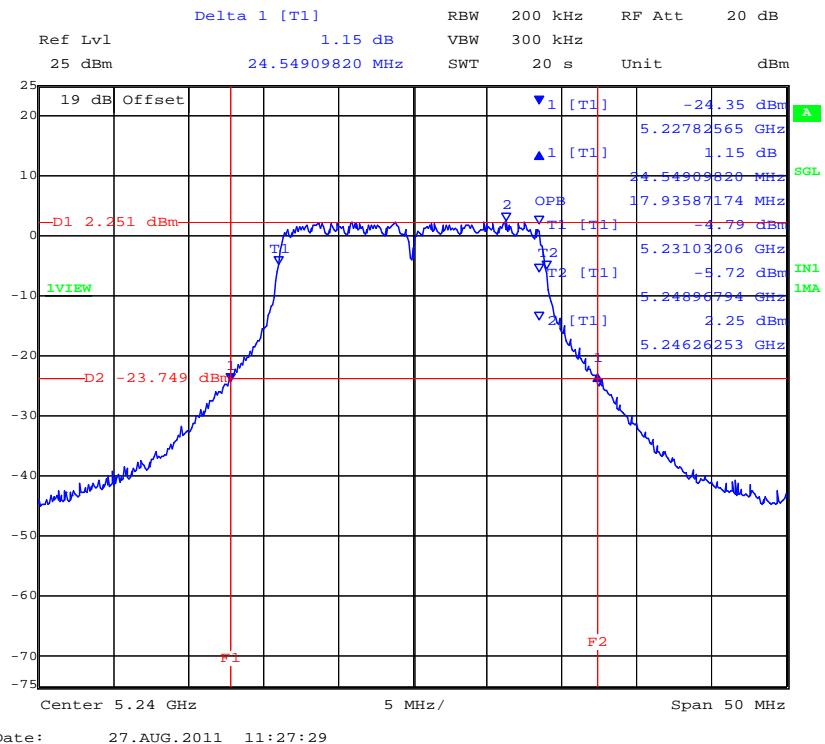

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 35 of 223

TABLE OF RESULTS – 802.11n HT-40 5150 – 5250 MHz

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (x):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.0 Vdc		
Notes 1:			
Notes 2:			

26 dB Bandwidth

Test Frequency	26 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz						
MHz	a	b	c	d	kHz	MHz	MHz
5190	44.689000	44.689000	47.094000		500	0.5	-44.189000
5230	44.489000	46.493000	46.092000				-43.989000


99% Bandwidth

Test Frequency	99 % Bandwidth						
	MHz						
MHz	a	b	c	d			
5190	36.473000	36.473000	36.473000				
5230	36.473000	36.473000	36.473000				


Measurement uncertainty:	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,190 MHz 802.11n HT-40 26 dB and 99 % Bandwidth

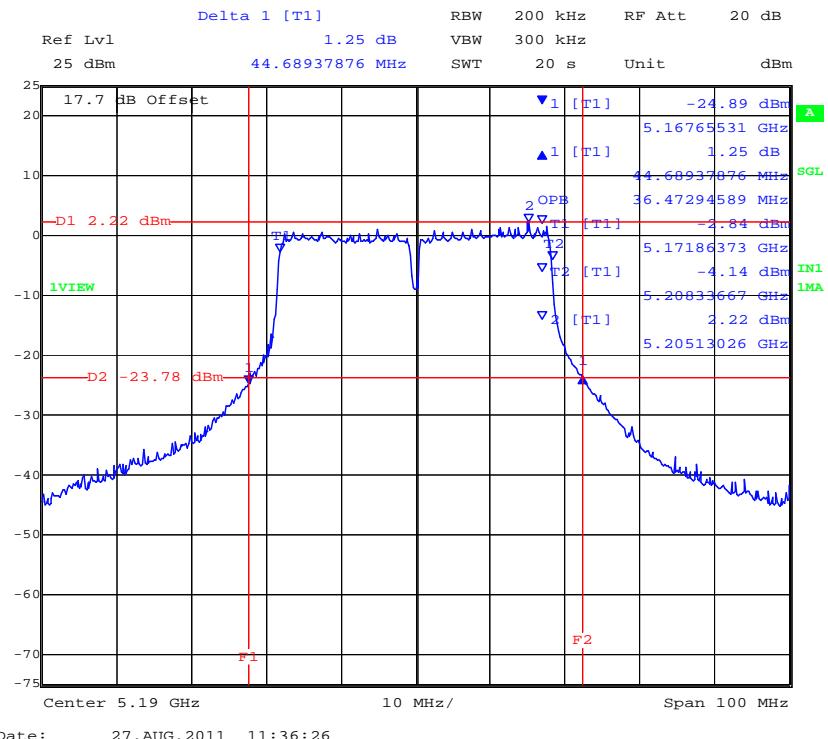


PORT B 5,190 MHz 802.11n HT-40 26 dB and 99 % Bandwidth

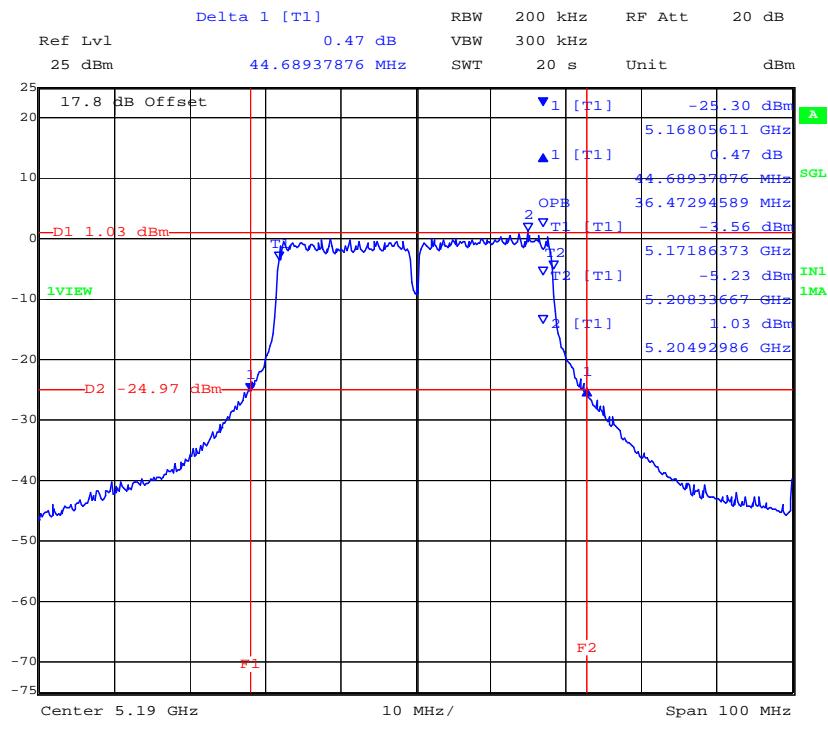

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


PORT C 5,190 MHz 802.11n HT-40 26 dB and 99 % Bandwidth

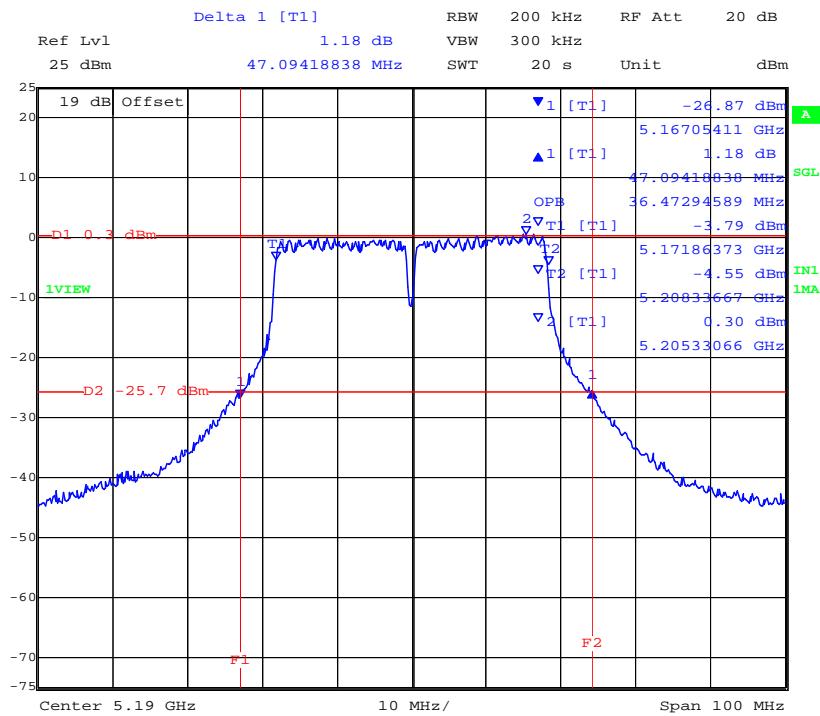


Date: 27.AUG.2011 11:38:37

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,230 MHz 802.11n HT-40 26 dB and 99 % Bandwidth

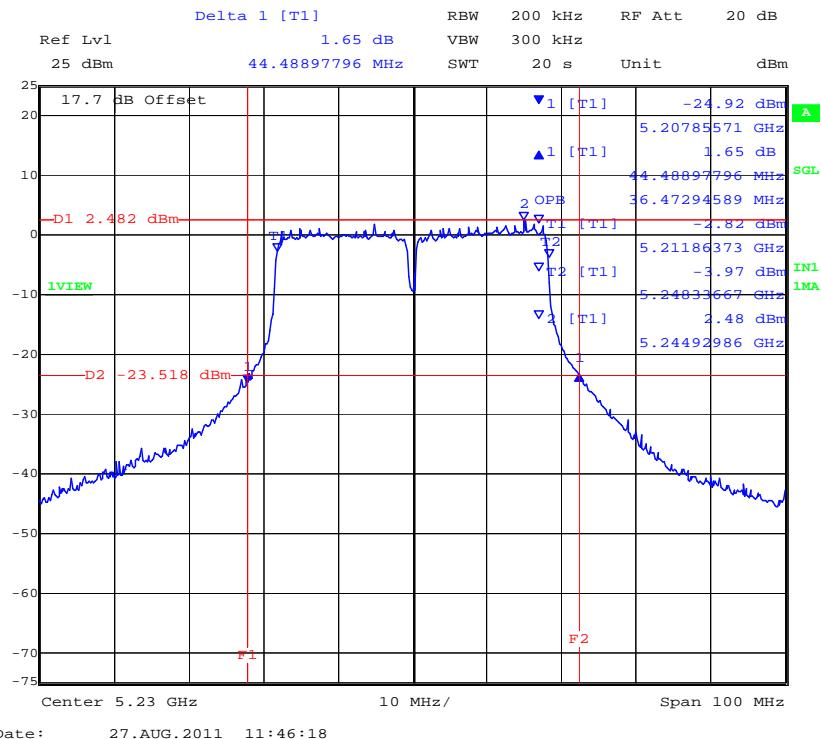


PORT B 5,230 MHz 802.11n HT-40 26 dB and 99 % Bandwidth

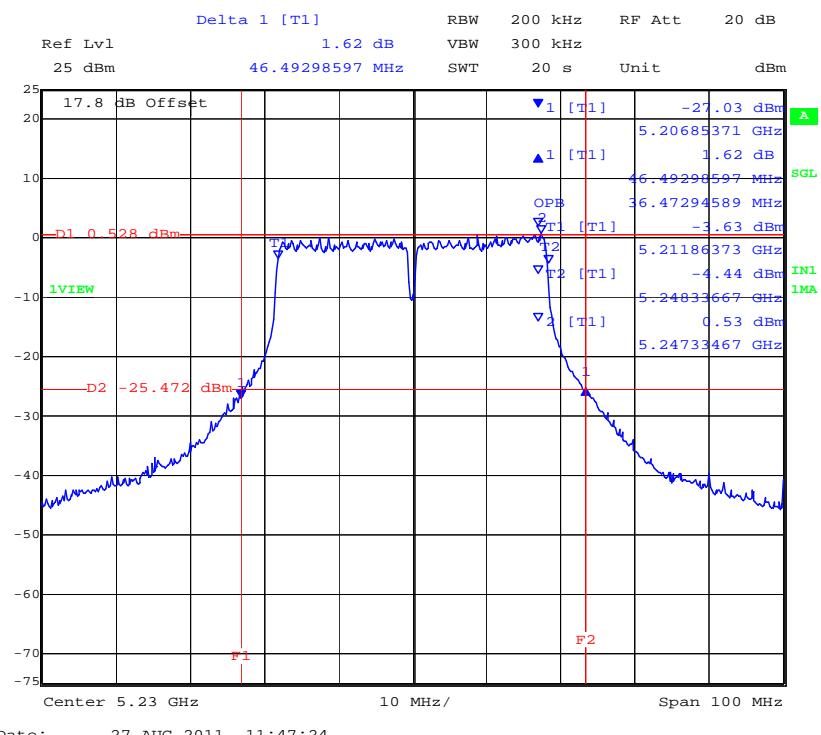

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,230 MHz 802.11n HT-40 26 dB and 99 % Bandwidth

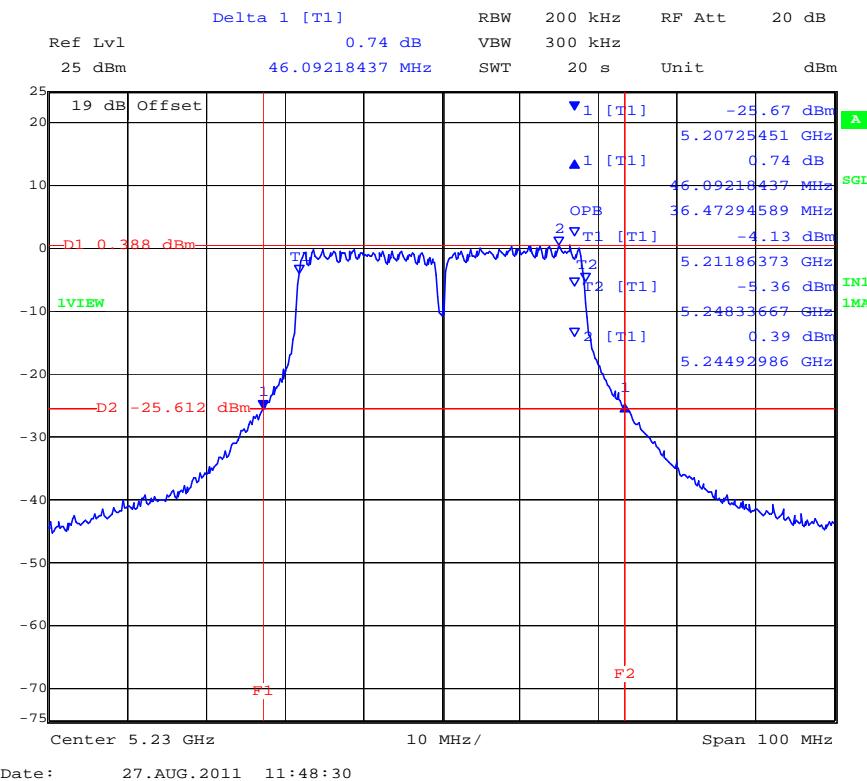

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 40 of 223

TABLE OF RESULTS – 802.11a Legacy 5250 – 5350 MHz

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11a	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (x):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.0 Vdc		
Notes 1:			
Notes 2:			

26 dB Bandwidth

Test Frequency	26 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz						
MHz	a	b	c	d	kHz	MHz	MHz
5260	22.545000	23.246000	23.848000		500	0.5	-22.045000
5300	22.545000	22.645000	23.647000				-22.045000
5320	22.846000	23.347000	23.447000				-22.346000


99% Bandwidth

Test Frequency	99 % Bandwidth						
	MHz						
MHz	a	b	c	d			
5260	16.733000	16.834000	16.834000				
5300	16.733000	16.834000	16.934000				
5320	16.733000	16.834000	16.834000				


Measurement uncertainty:	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,260 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

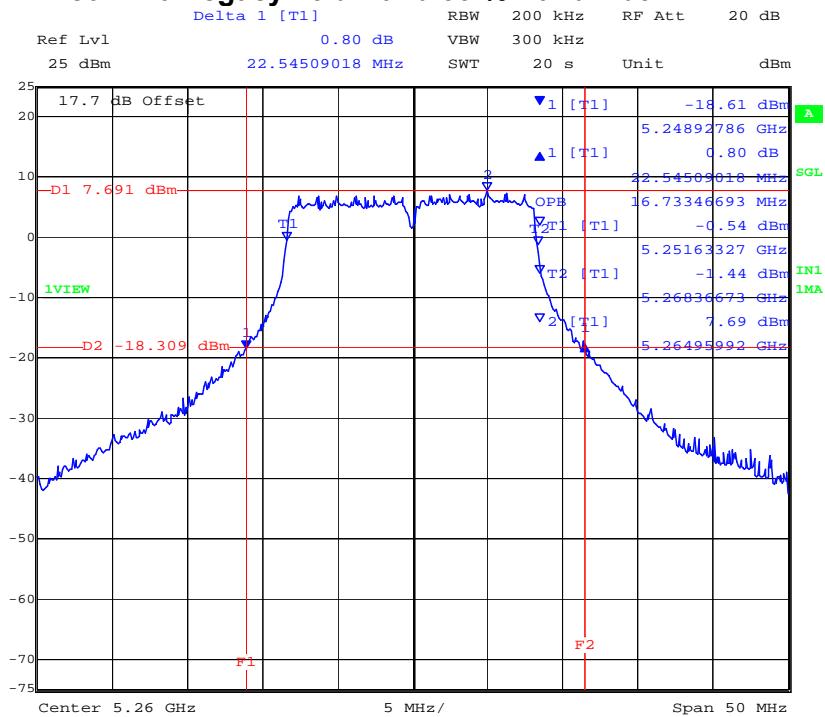


PORT B 5,260 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

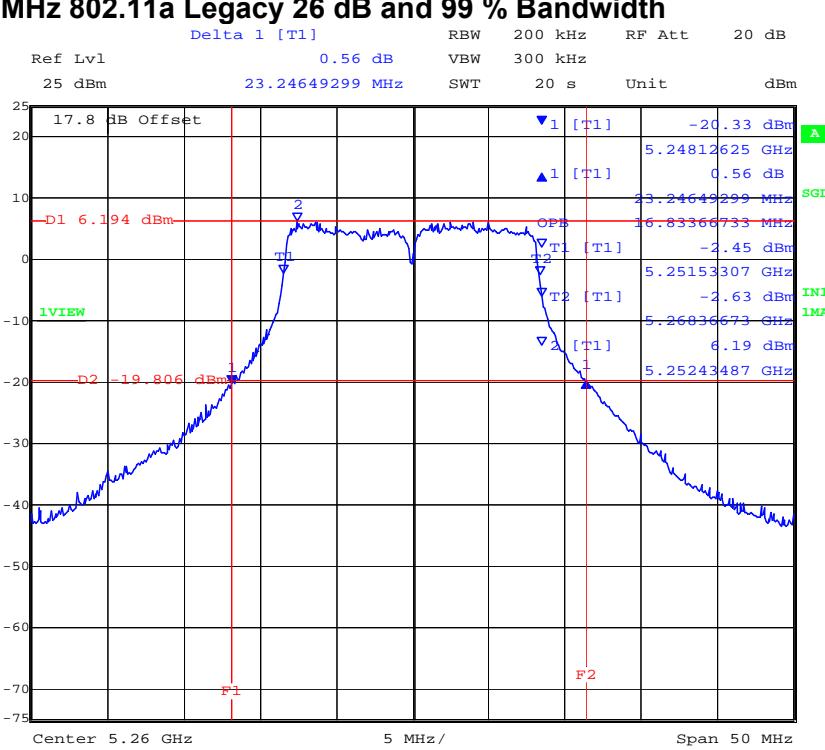


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,260 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

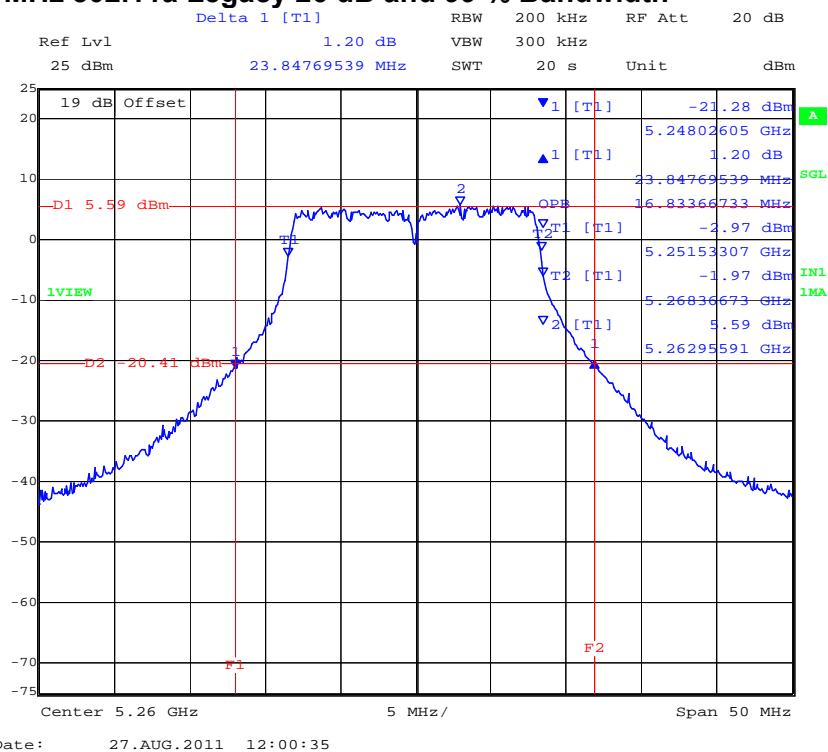


PORT A 5300 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

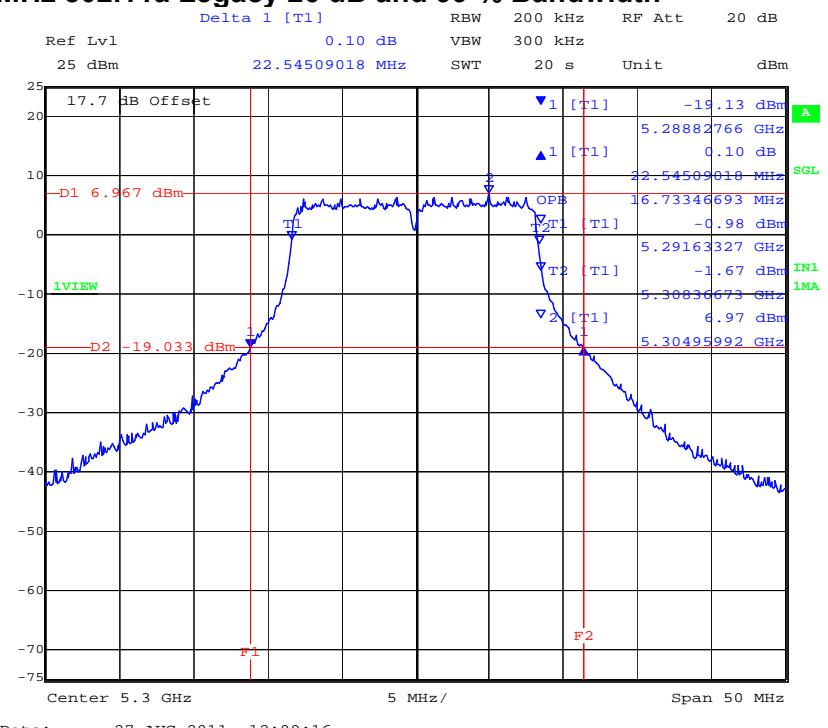


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT B 5,300 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

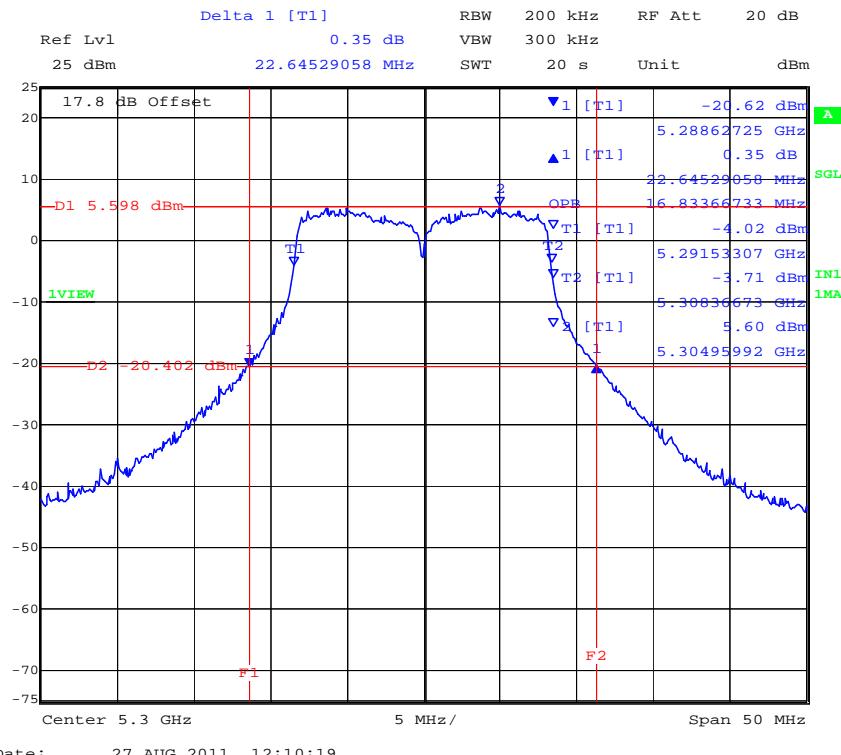


PORT C 5,300 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

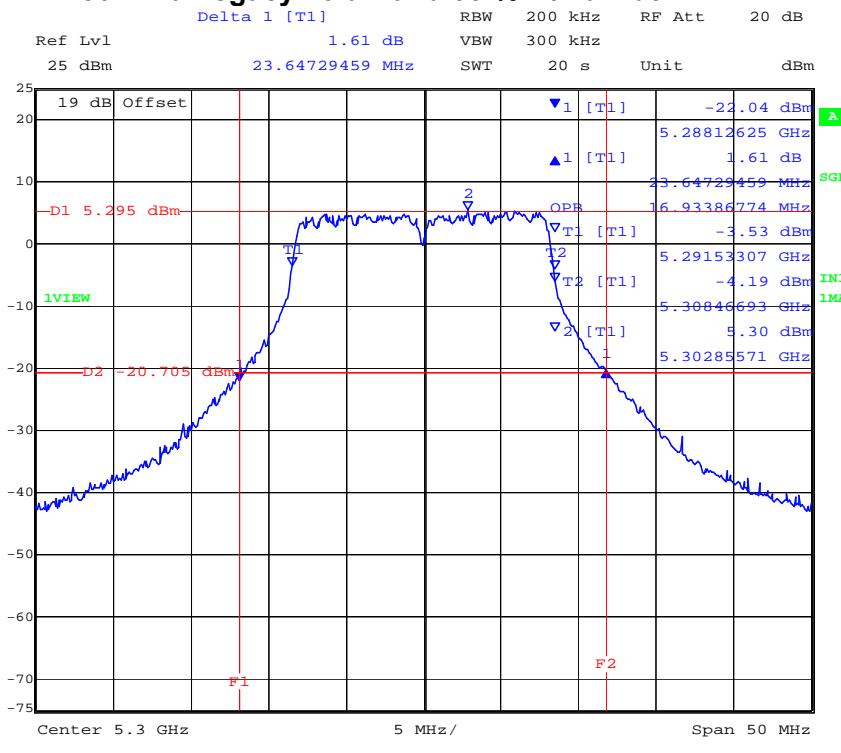


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,320 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

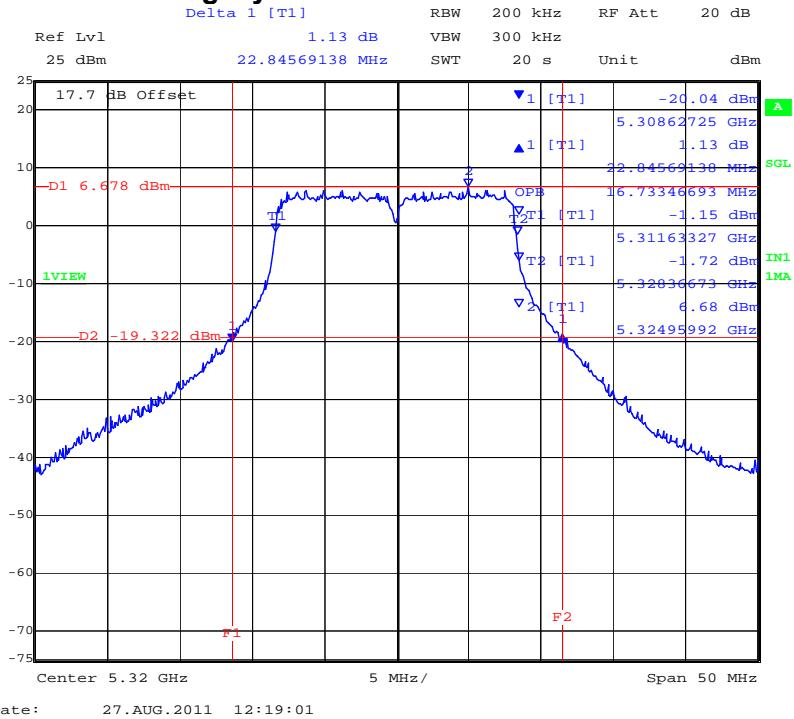


PORT B 5,320 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

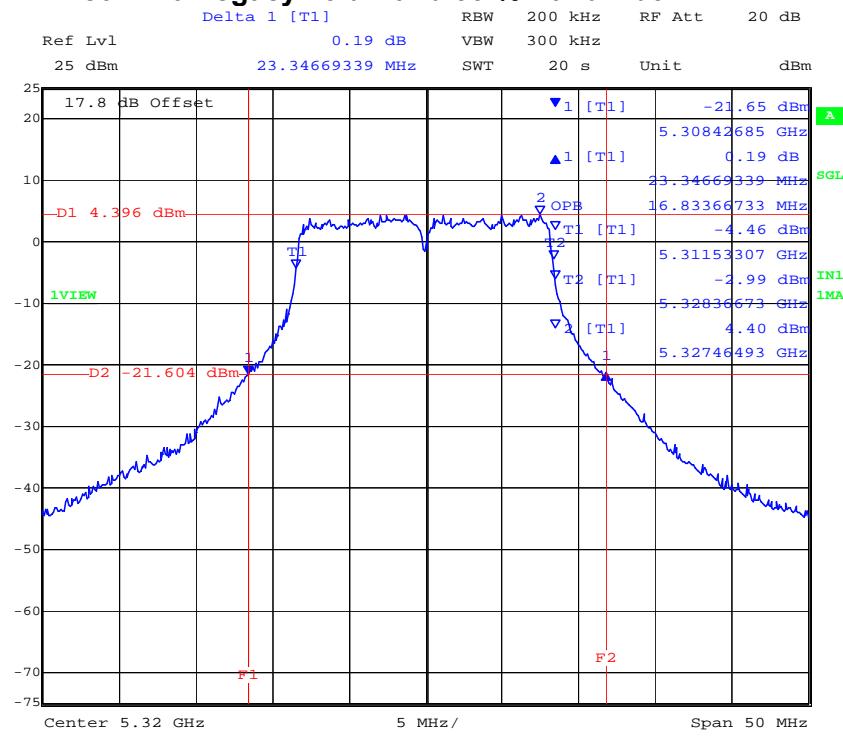

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,320 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

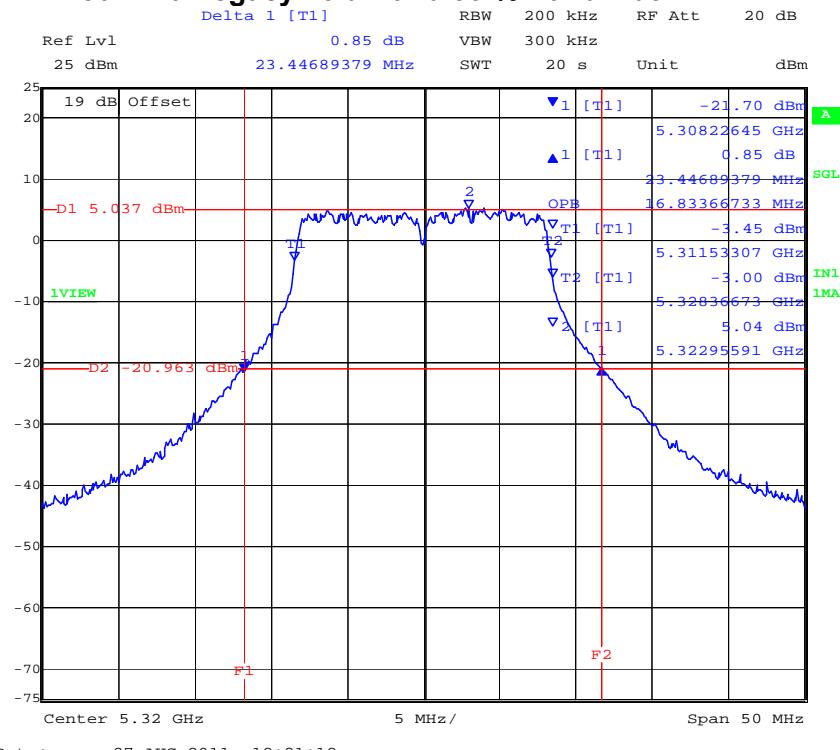

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 46 of 223

Measurement Results for 26 dB and 99 % Operational Bandwidth(s)

TABLE OF RESULTS – 802.11n HT20 5250 – 5350 MHz

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (x):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.0 Vdc		
Notes 1:			
Notes 2:			

26 dB Bandwidth

Test Frequency	26 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz						
MHz	a	b	c	d	kHz	MHz	MHz
5260	28.557000	26.653000	24.950000		500	0.5	-24.450000
5300	25.050000	24.749000	24.850000				-24.249000
5320	27.054000	24.248000	24.549000				-23.748000


99% Bandwidth

Test Frequency	99 % Bandwidth						
	MHz						
MHz	a	b	c	d			
5260	18.337000	18.136000	18.136000				
5300	18.036000	18.036000	18.136000				
5320	18.036000	18.136000	18.136000				


Measurement uncertainty:	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,260 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

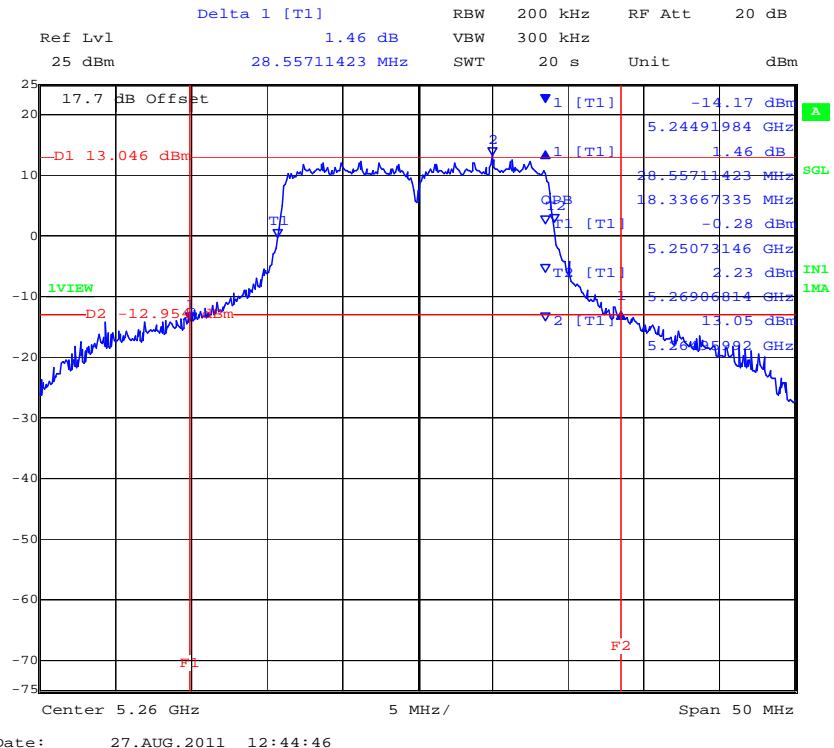


PORT B 5,260 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

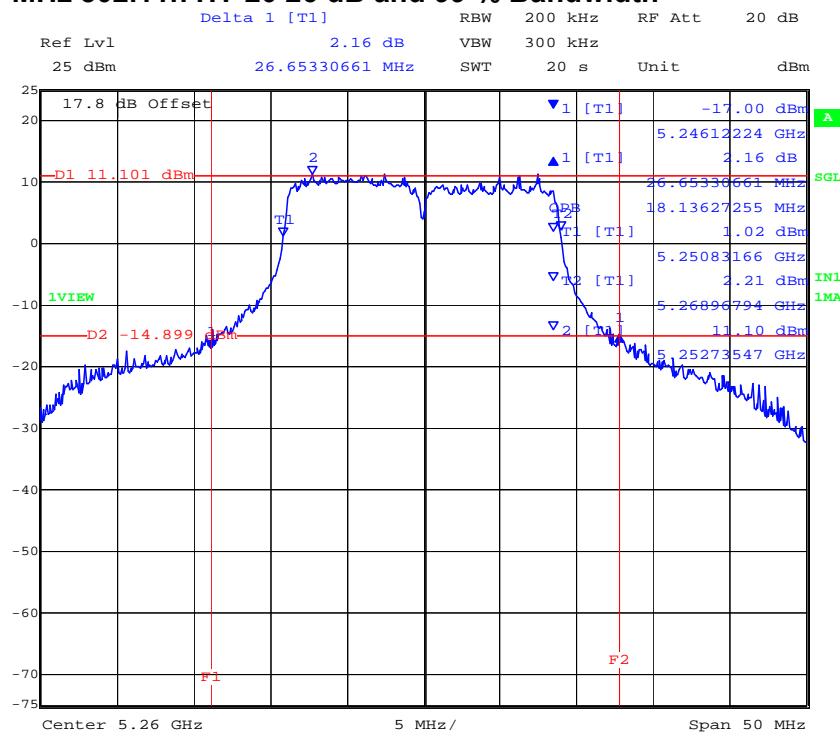


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,260 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

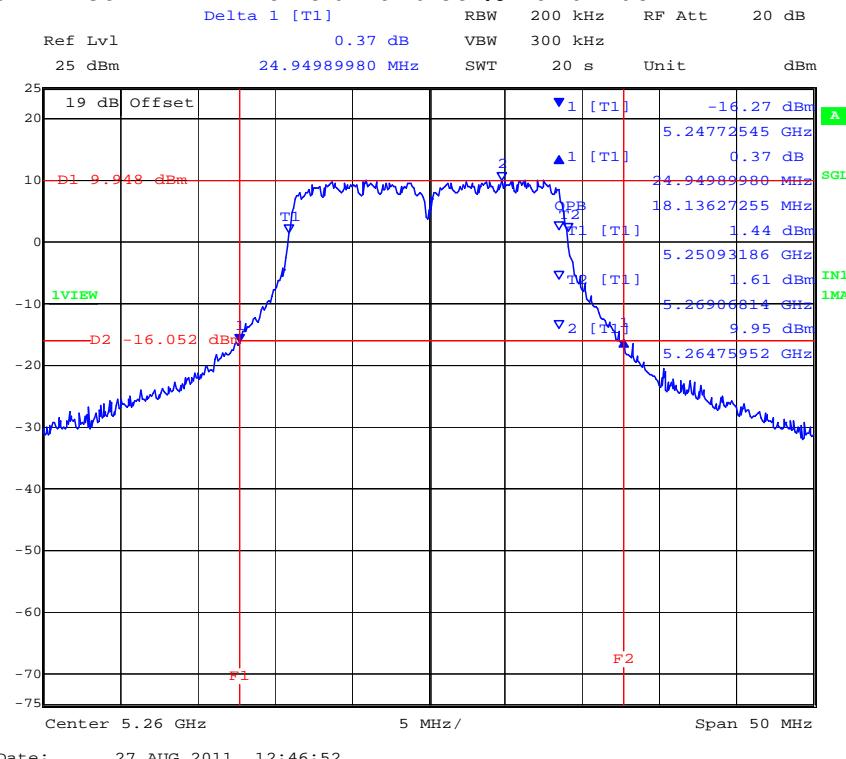


PORT A 5300 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

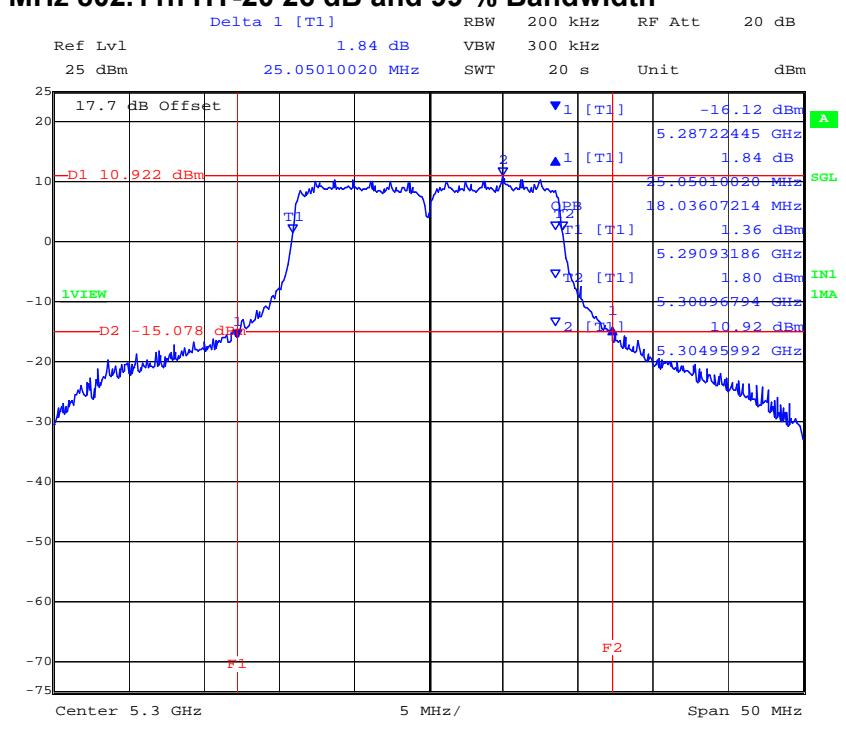


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT B 5,300 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

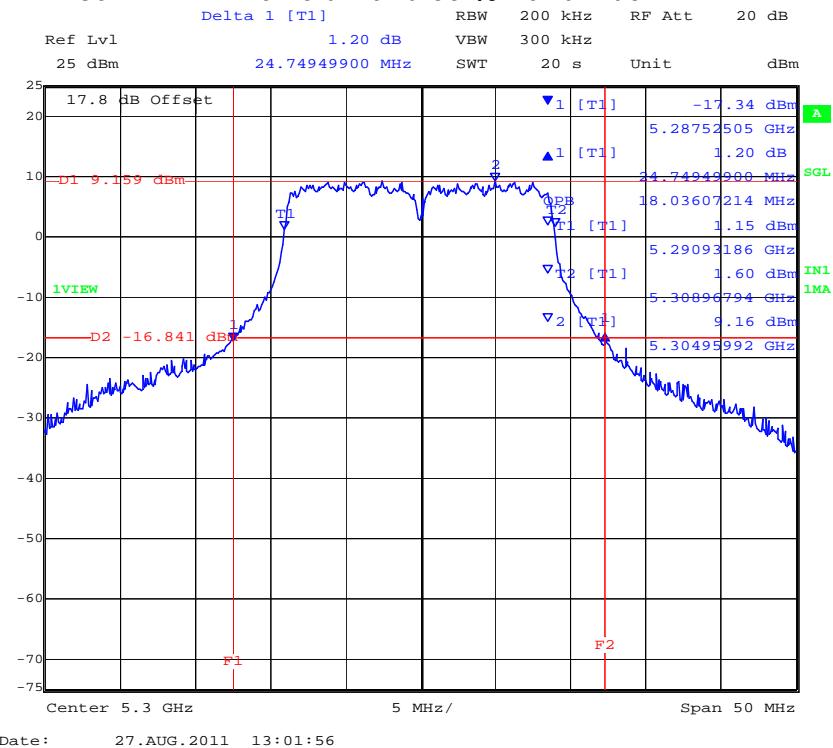


PORT C 5,300 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

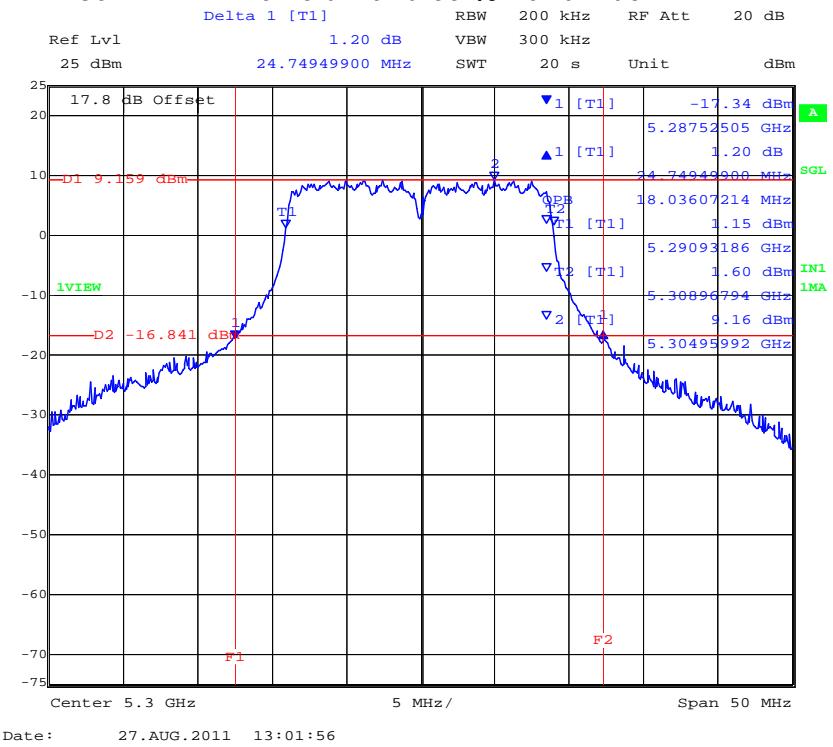


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,320 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

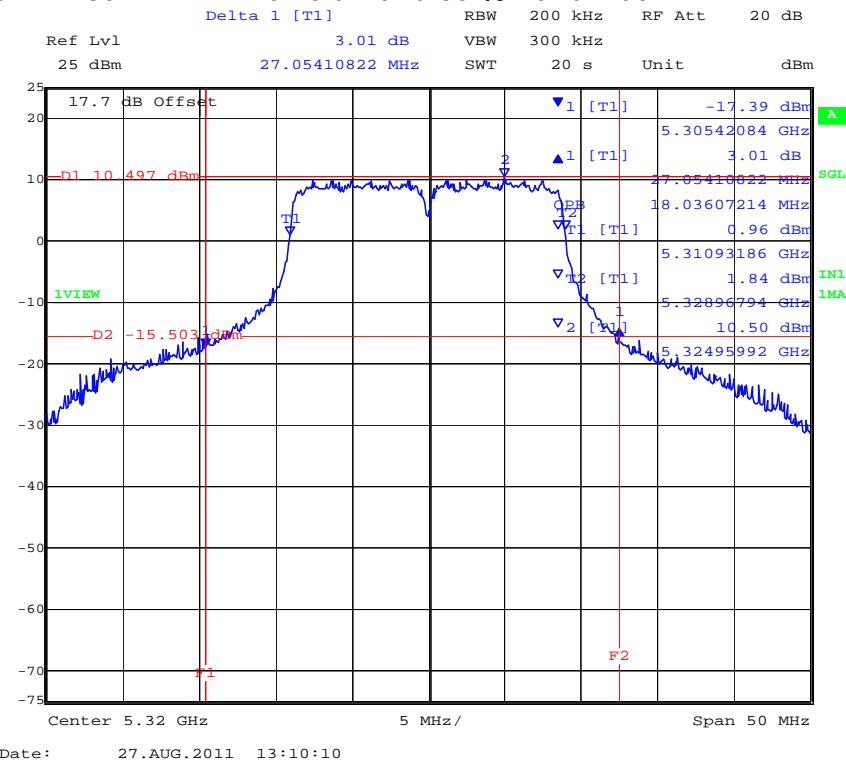


PORT B 5,320 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

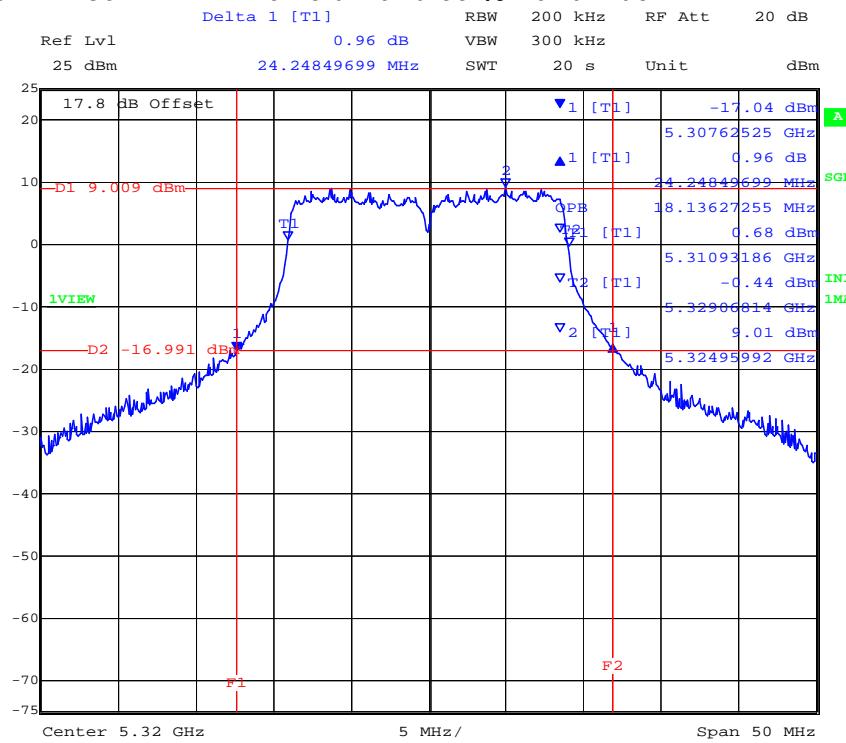

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,320 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

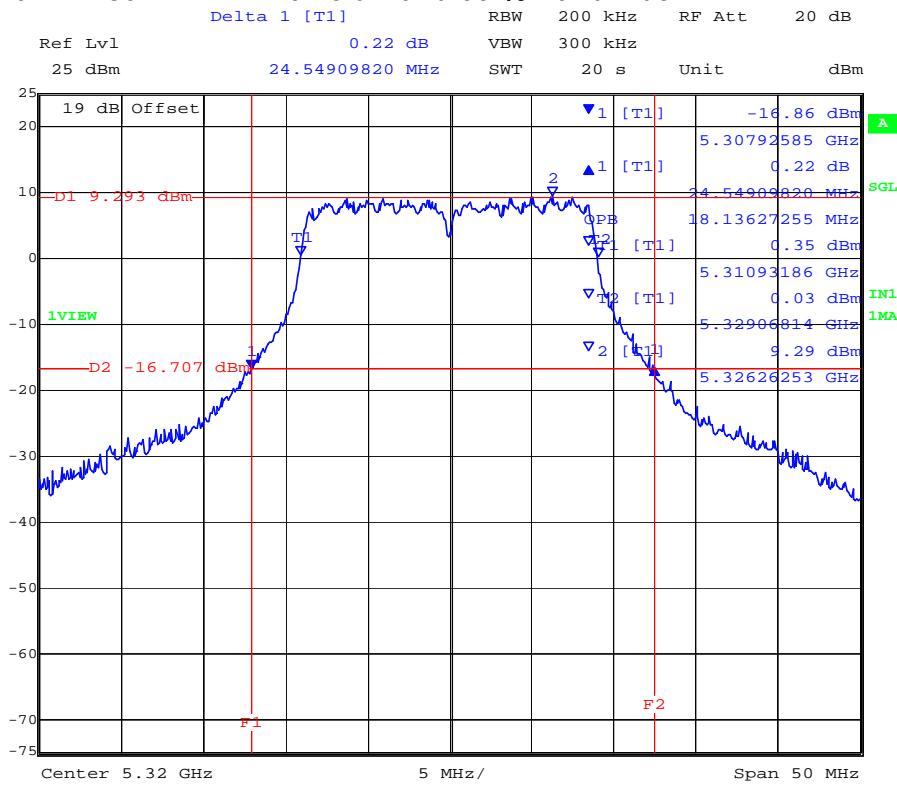

Date: 27.AUG.2011 13:12:19

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 52 of 223

Measurement Results for 26 dB and 99 % Operational Bandwidth(s)

TABLE OF RESULTS – 802.11n HT40 5250 – 5350 MHz

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (x):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.0 Vdc		
Notes 1:			
Notes 2:			

26 dB Bandwidth

Test Frequency	26 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz						
MHz	a	b	c	d	kHz	MHz	MHz
5270	56.513000	59.519000	47.495000		500	0.5	-46.995000
5310	51.503000	49.499000	45.491000				-44.991000


99% Bandwidth

Test Frequency	99 % Bandwidth						
	MHz						
MHz	a	b	c	d			
5270	36.673000	36.673000	36.473000				
5310	36.673000	36.273000	36.473000				


Measurement uncertainty:	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,270 MHz 802.11n HT-40 26 dB and 99 % Bandwidth

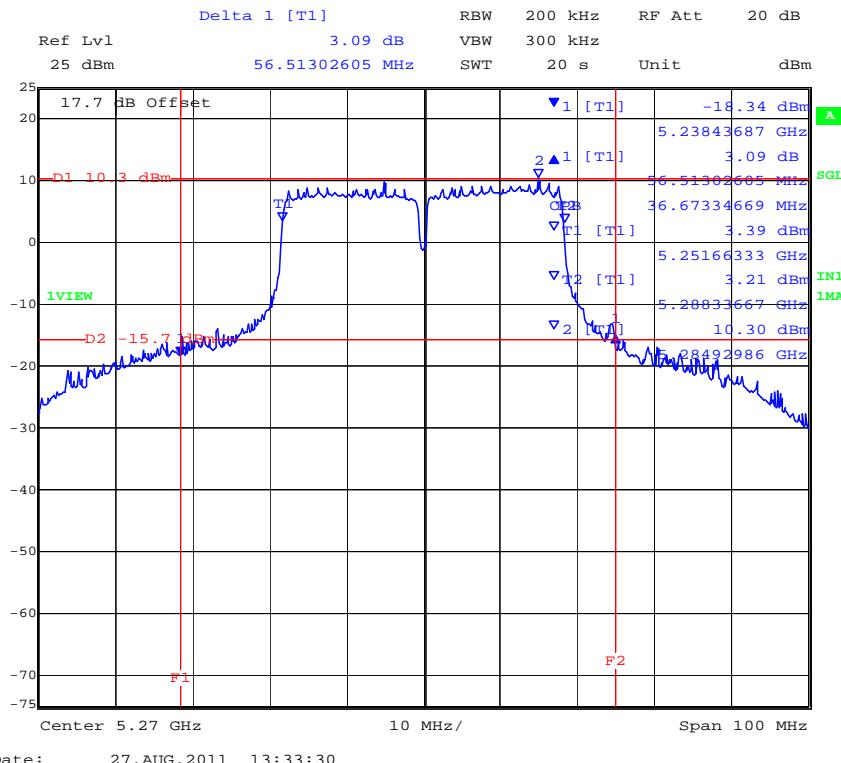


PORT B 5,270 MHz 802.11n HT-40 26 dB and 99 % Bandwidth

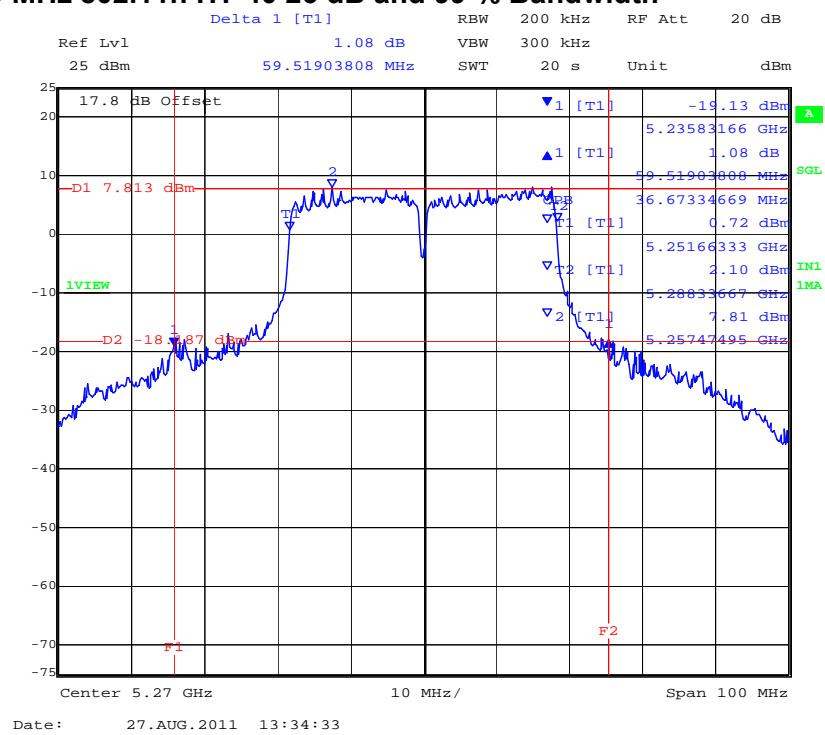


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,270 MHz 802.11n HT-40 26 dB and 99 % Bandwidth

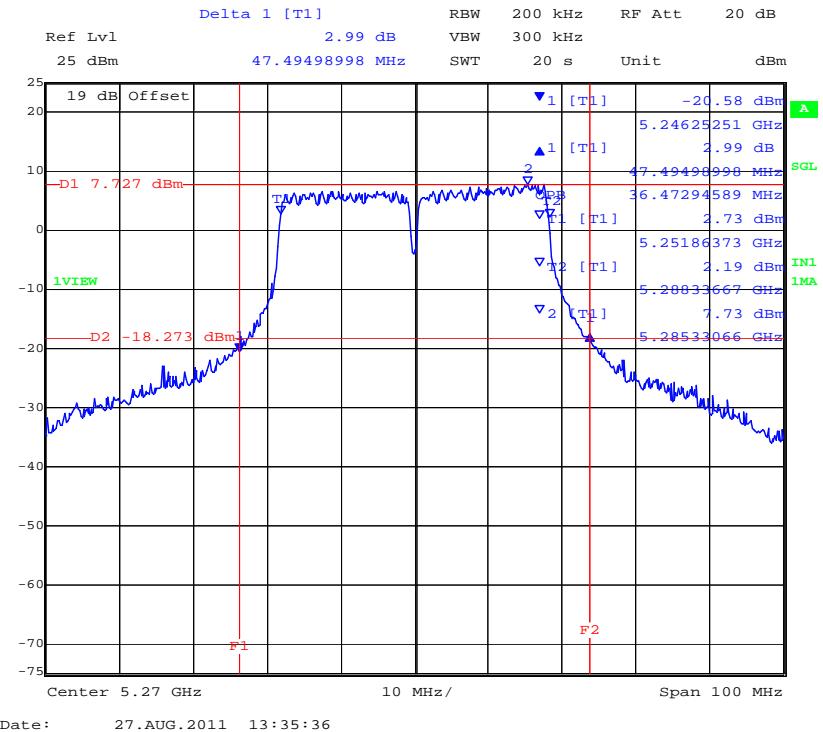


PORT A 5,310 MHz 802.11n HT-40 26 dB and 99 % Bandwidth

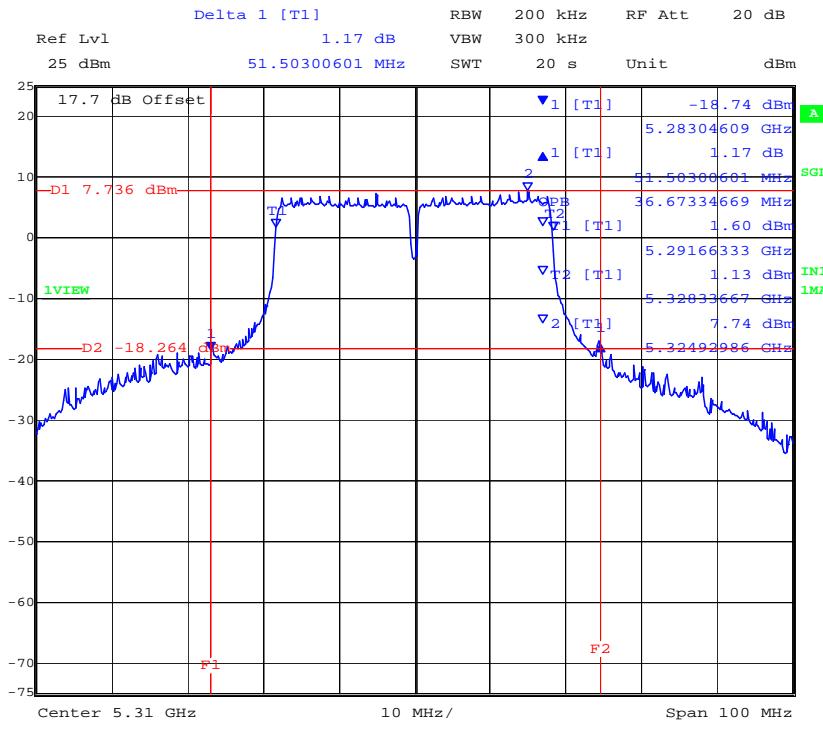


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT B 5,310 MHz 802.11n HT-40 26 dB and 99 % Bandwidth

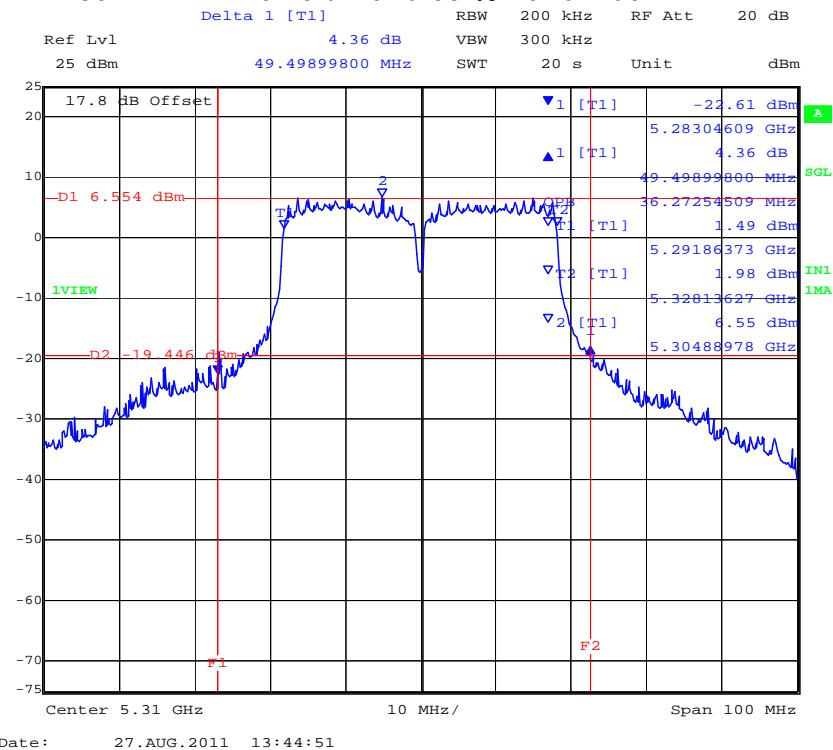

PORT C 5,310 MHz 802.11n HT-40 26 dB and 99 % Bandwidth

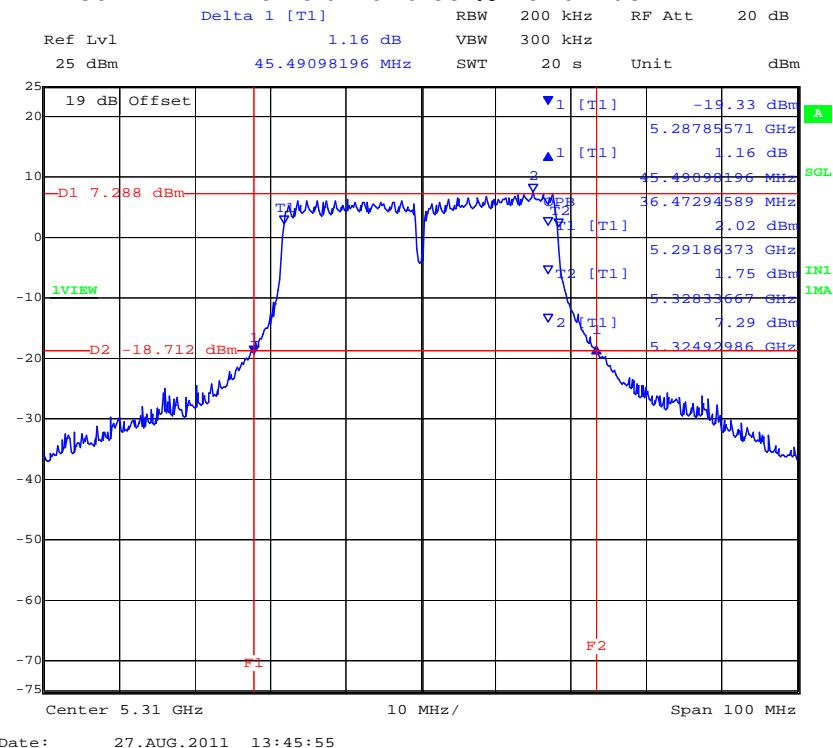

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 56 of 223

TABLE OF RESULTS – 802.11a Legacy 5500 – 5700 MHz

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11a	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (x):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.0 Vdc		
Notes 1:			
Notes 2:			

26 dB Bandwidth

Test Frequency	26 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz						
MHz	a	b	c	d	kHz	MHz	MHz
5500	23.647000	23.146000	23.146000	--	500	0.5	-22.646000
5580	23.747000	23.347000	23.447000	--			-22.847000
5700	24.950000	24.048000	23.146000	--			-22.646000


99% Bandwidth

Test Frequency	99 % Bandwidth						
	MHz						
MHz	a	b	c	d			
5500	16.834000	16.733000	16.934000	--			
5580	16.834000	16.834000	16.934000	--			
5700	17.034000	16.934000	17.034000	--			


Measurement uncertainty:	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,500 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

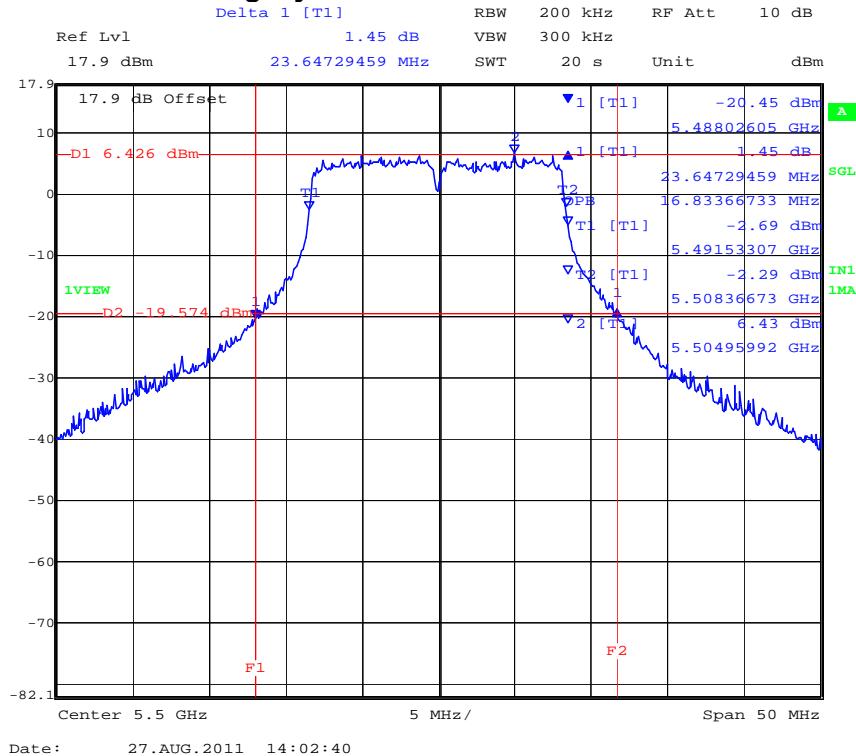


PORT B 5,500 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

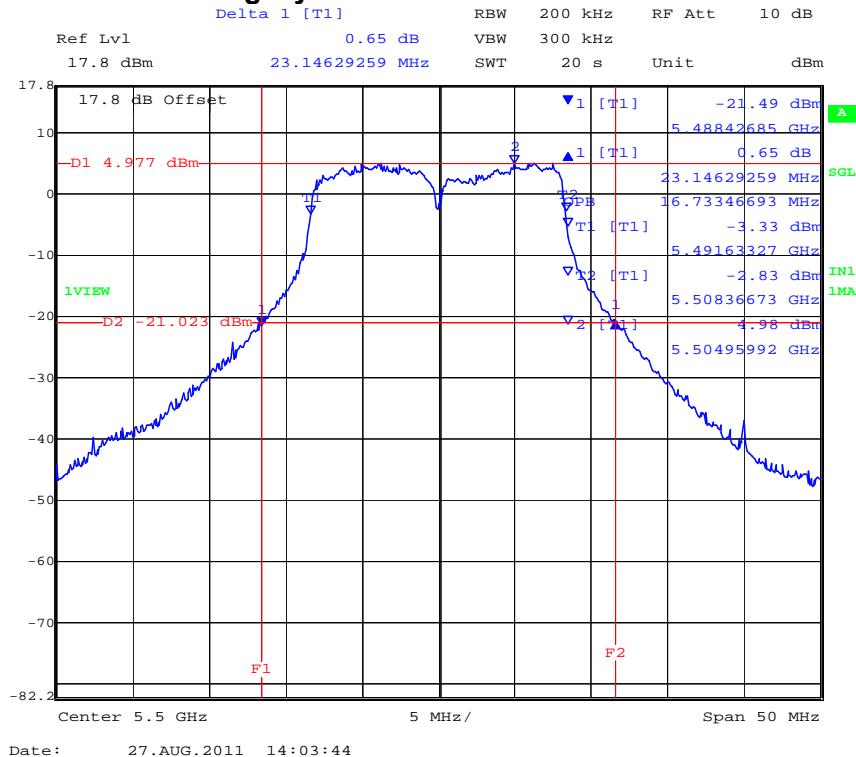


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,500 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

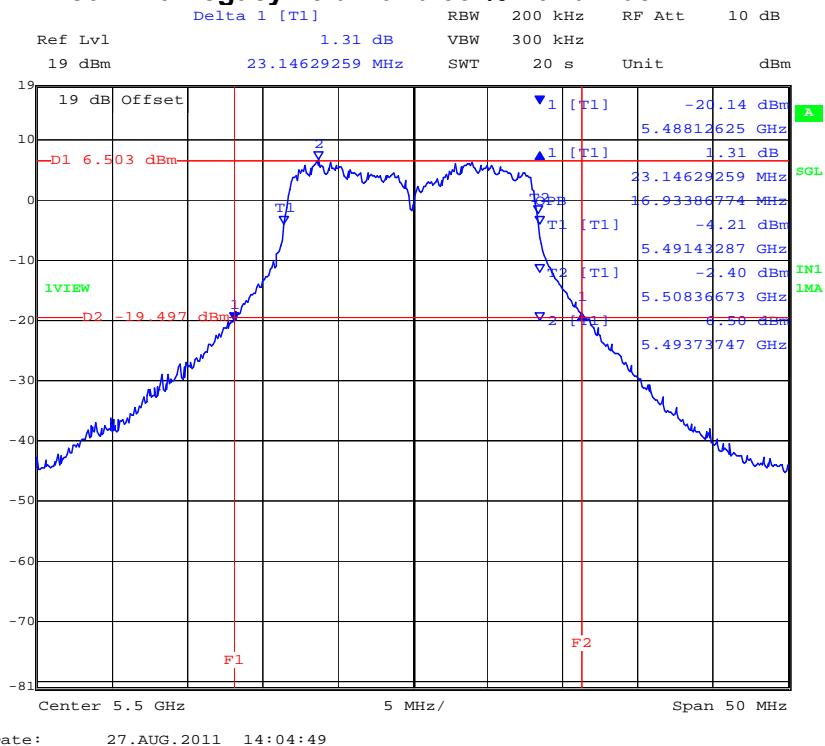

Date: 27.AUG.2011 14:04:49


PORT A 5,580 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

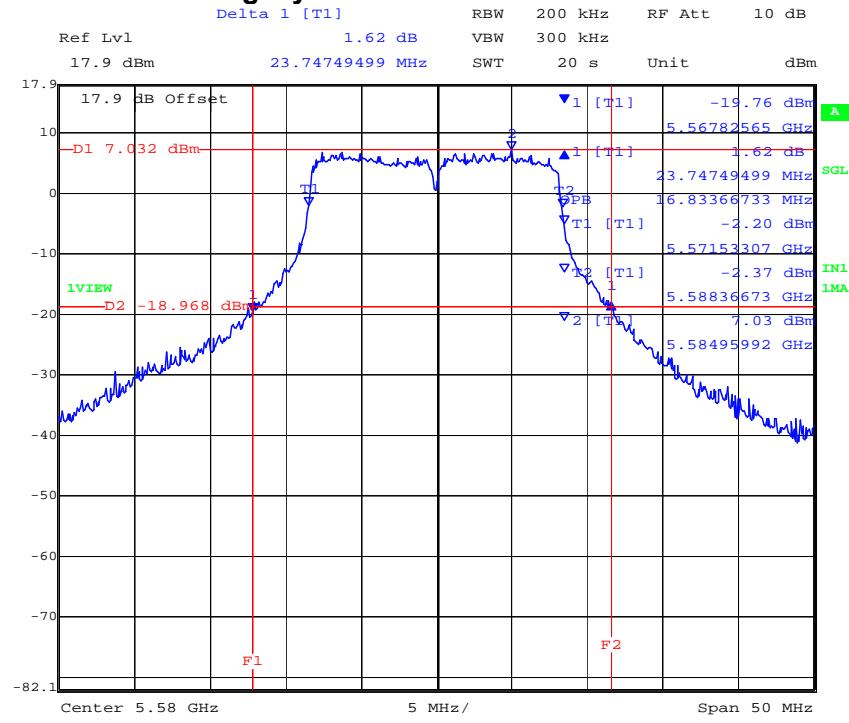


Date: 27.AUG.2011 14:14:03

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT B 5,580 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

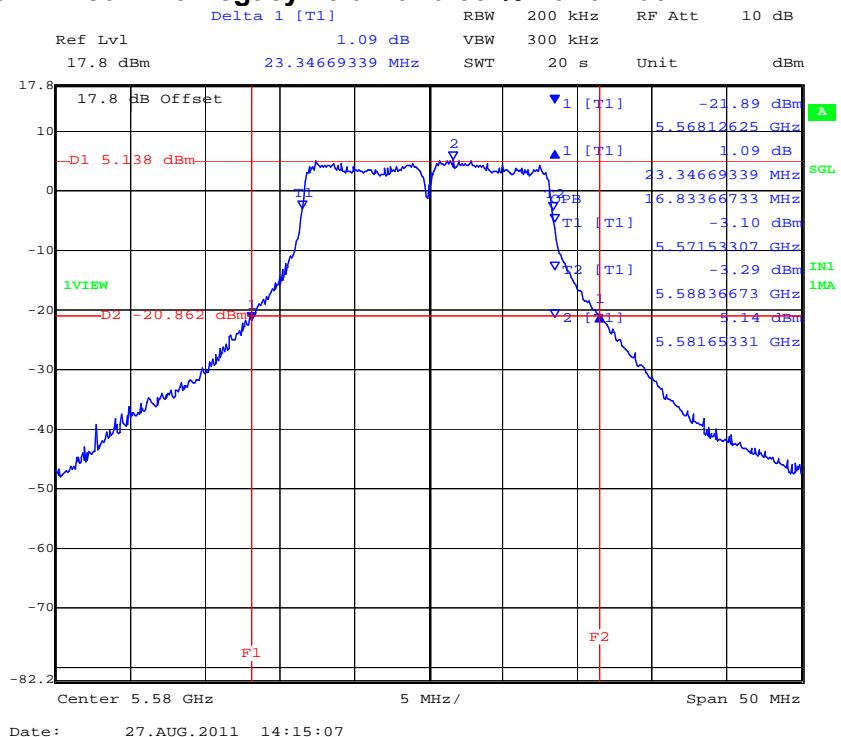


PORT C 5,580 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

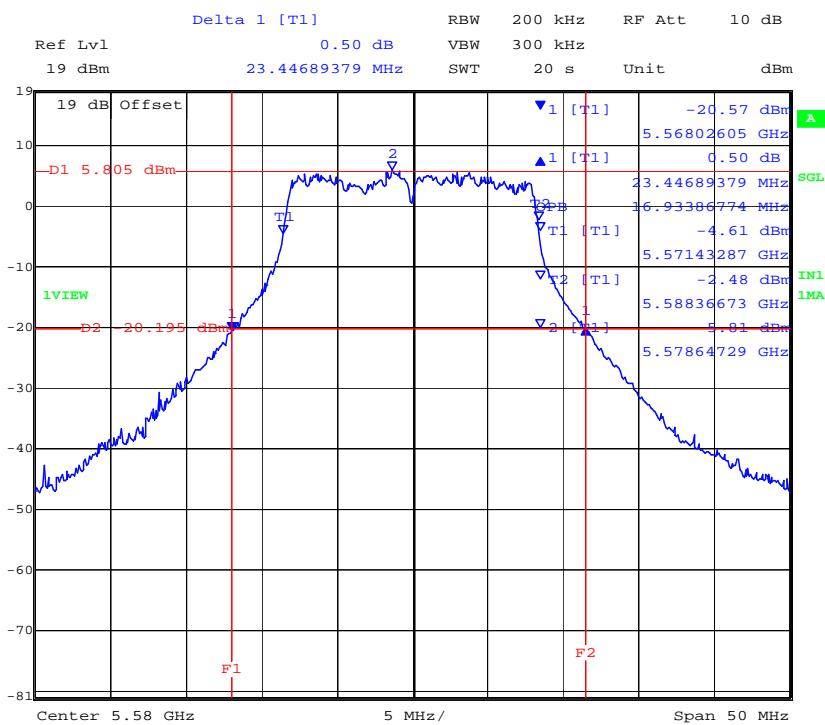


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,700 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

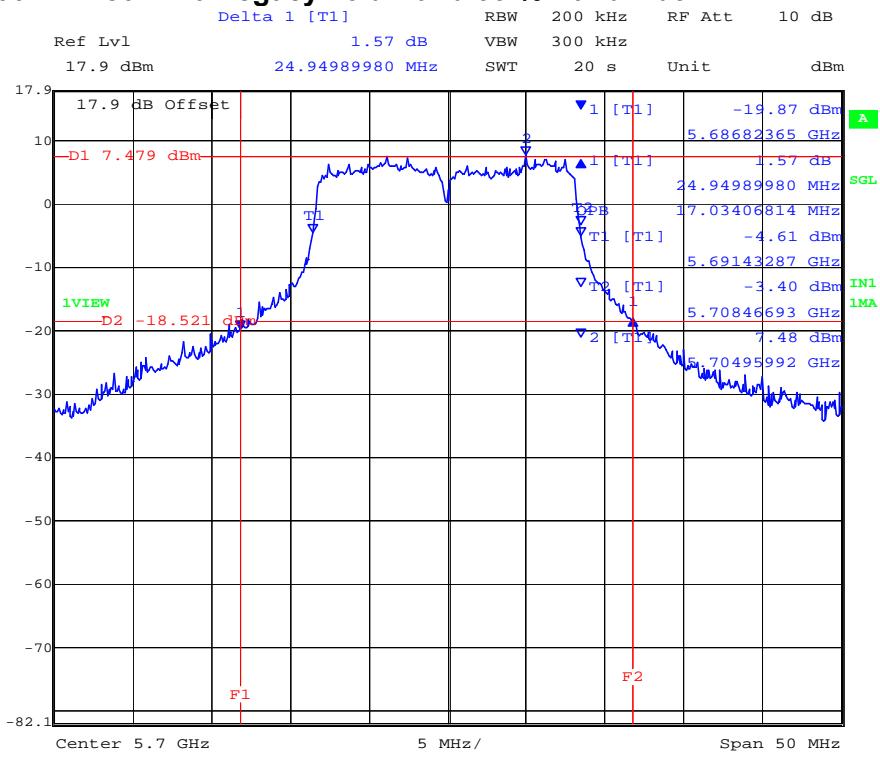


PORT B 5,700 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

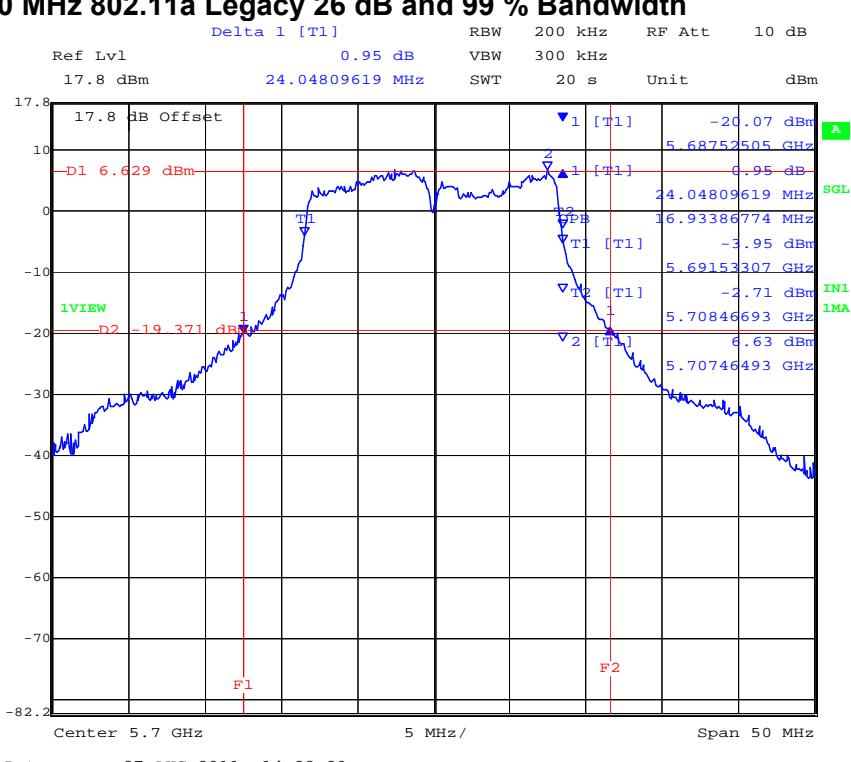

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,700 MHz 802.11a Legacy 26 dB and 99 % Bandwidth

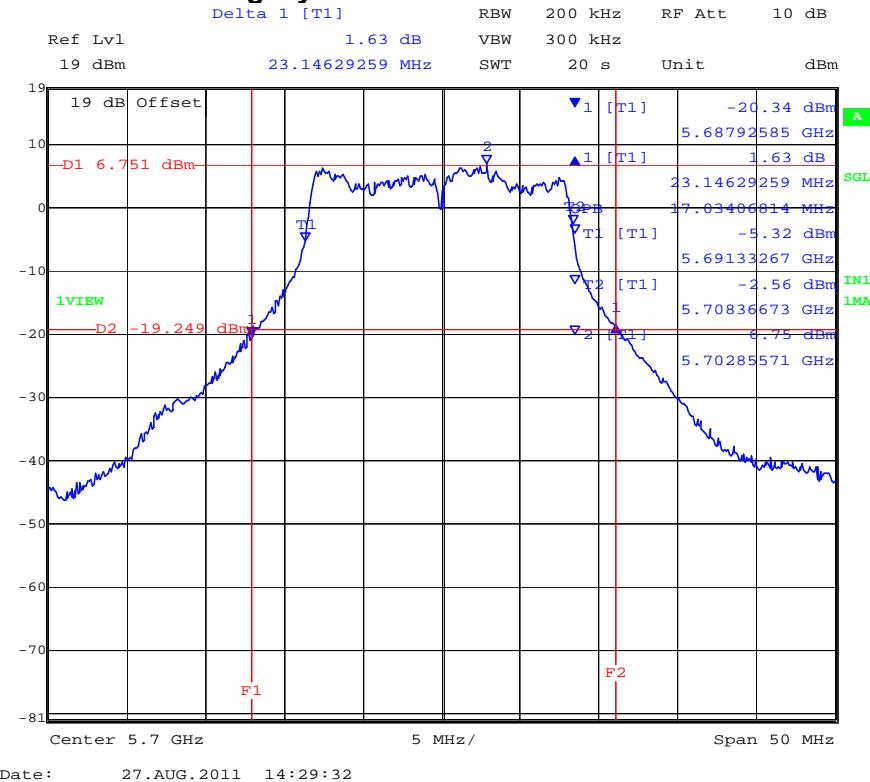

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 62 of 223

TABLE OF RESULTS – 802.11n HT-20 5500 – 5700 MHz

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (x):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.0 Vdc		
Notes 1:			
Notes 2:			

26 dB Bandwidth

Test Frequency	26 dB Bandwidth				Minimum 6dB Bandwidth Limit	Margin
	MHz					
MHz	a	b	c	d	kHz	MHz
5500	26.253000	24.950000	24.349000	--	500	0.5
5580	31.263000	25.651000	24.549000	--		
5700	36.072000	25.551000	26.553000	--		


99% Bandwidth

Test Frequency	99 % Bandwidth					
	MHz					
MHz	a	b	c	d		
5500	18.036000	18.036000	17.936000	--		
5580	18.537000	18.036000	18.036000	--		
5700	18.737000	18.337000	18.236000	--		


Measurement uncertainty:	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,500 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

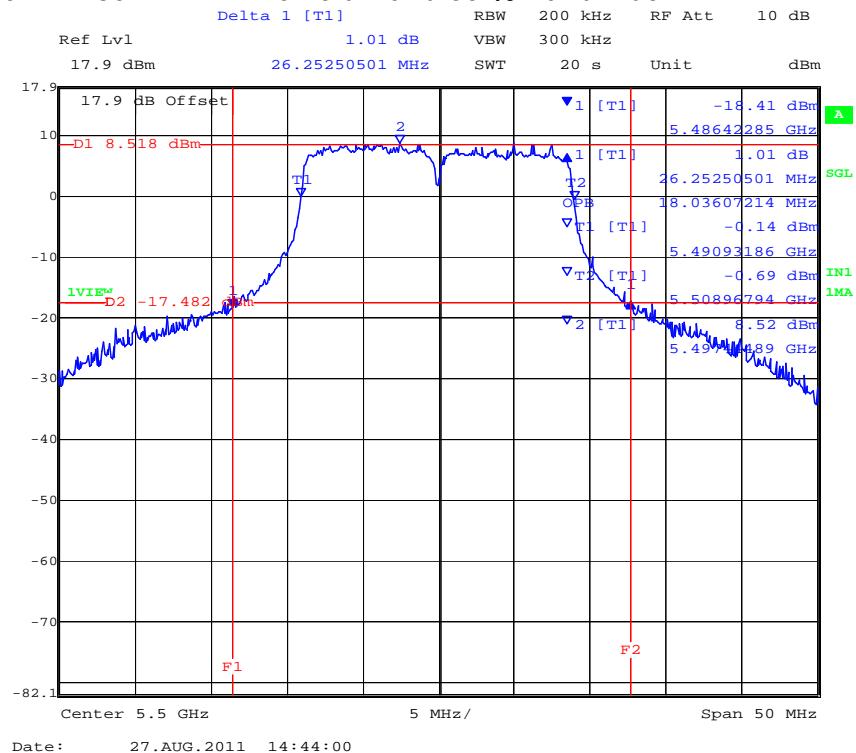


PORT B 5,500 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

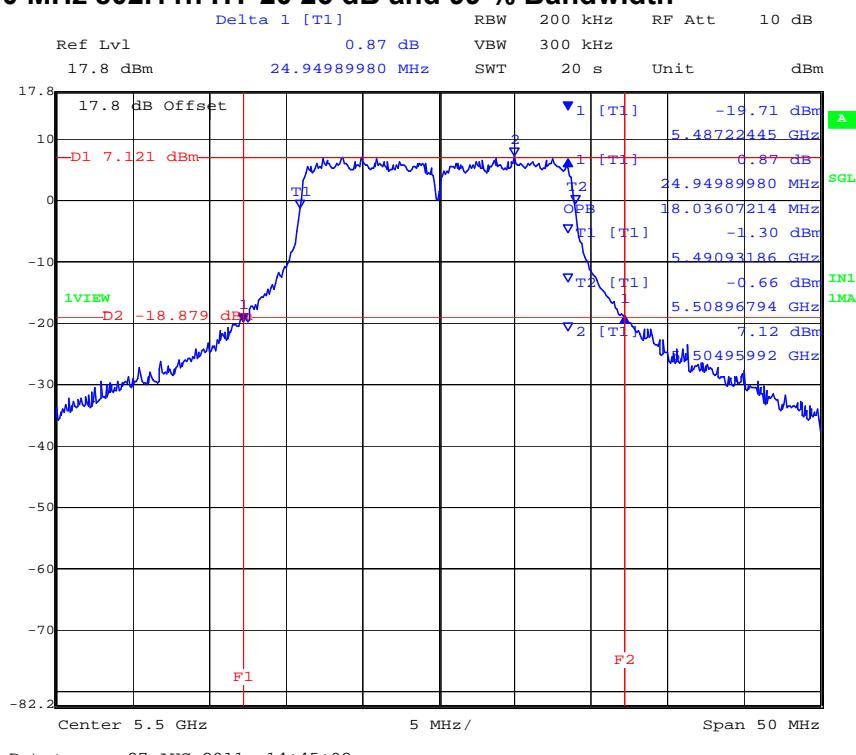


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,500 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

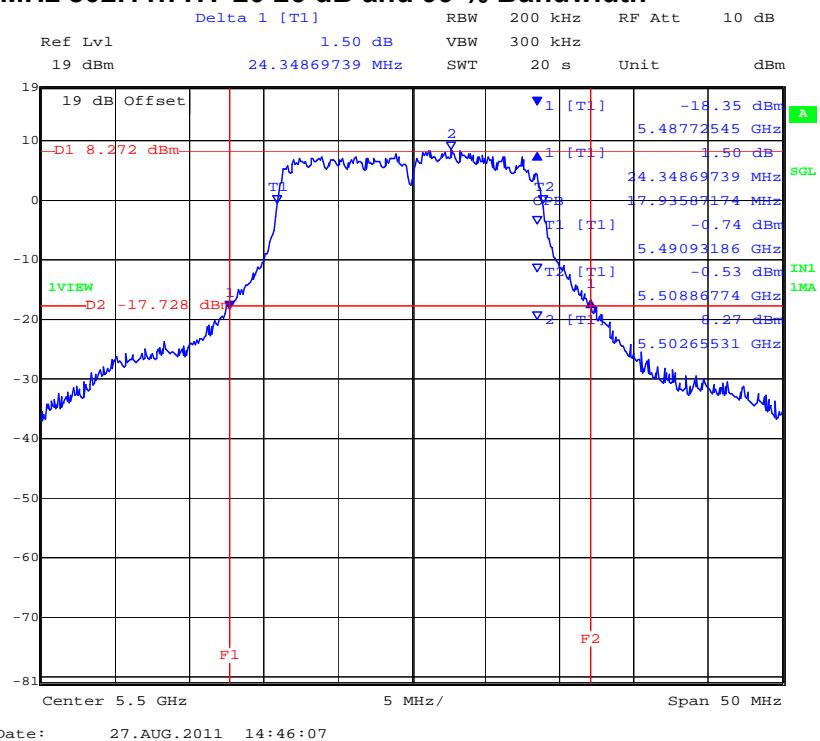


PORT A 5,580 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

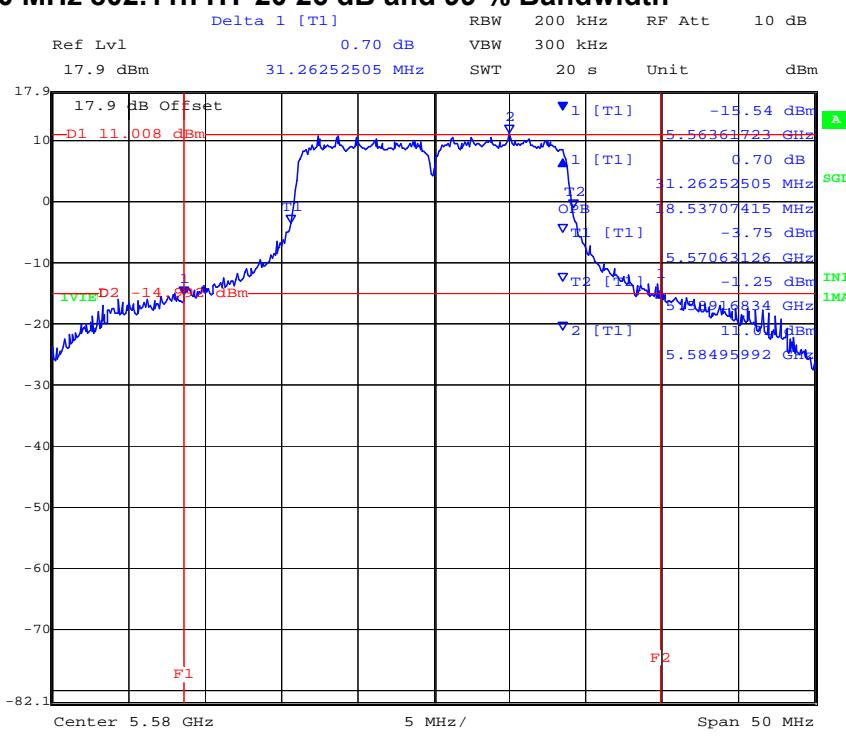


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT B 5,580 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

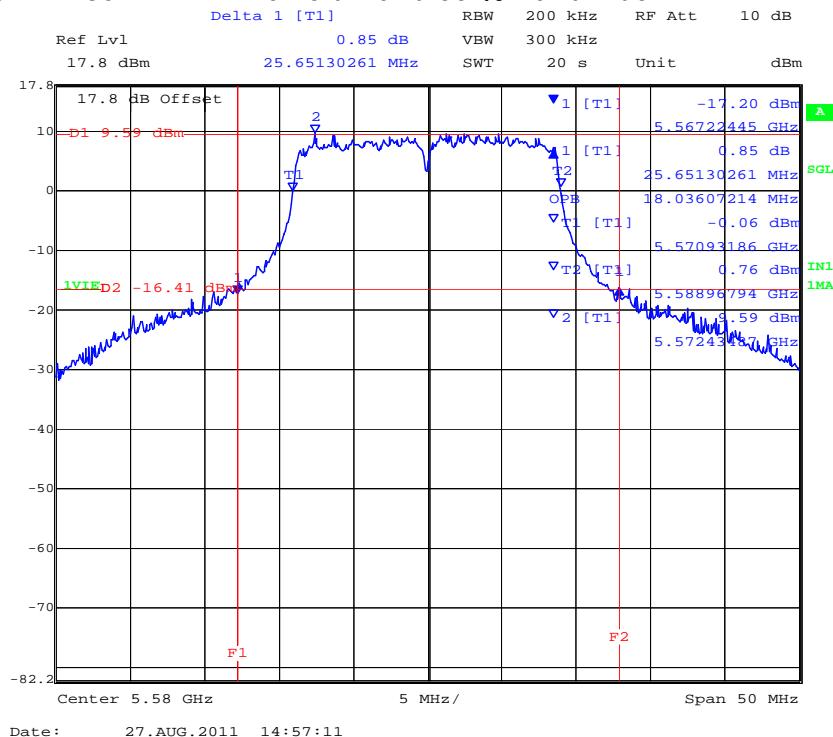


PORT C 5,580 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

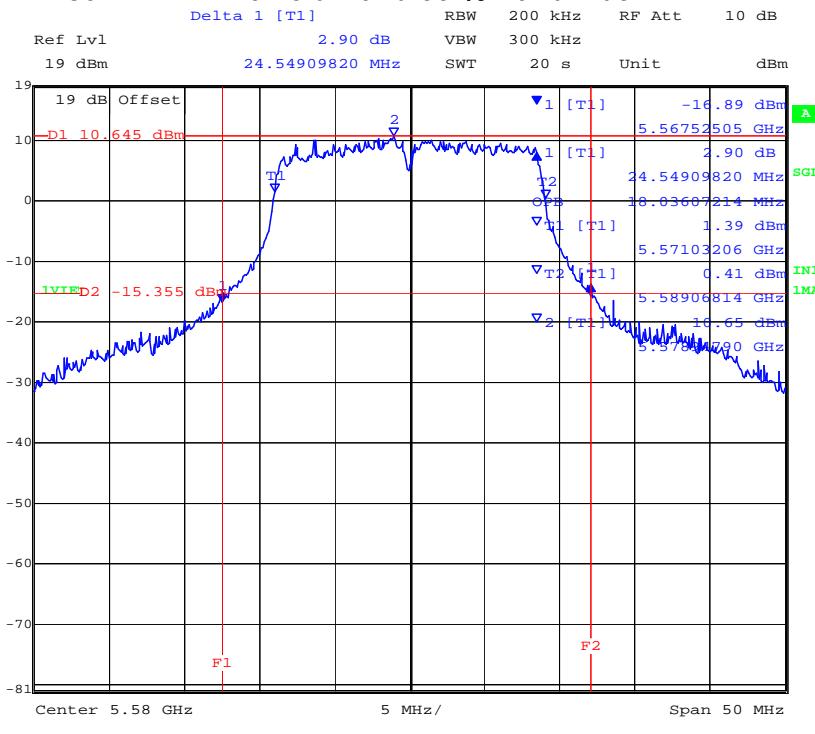


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,700 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

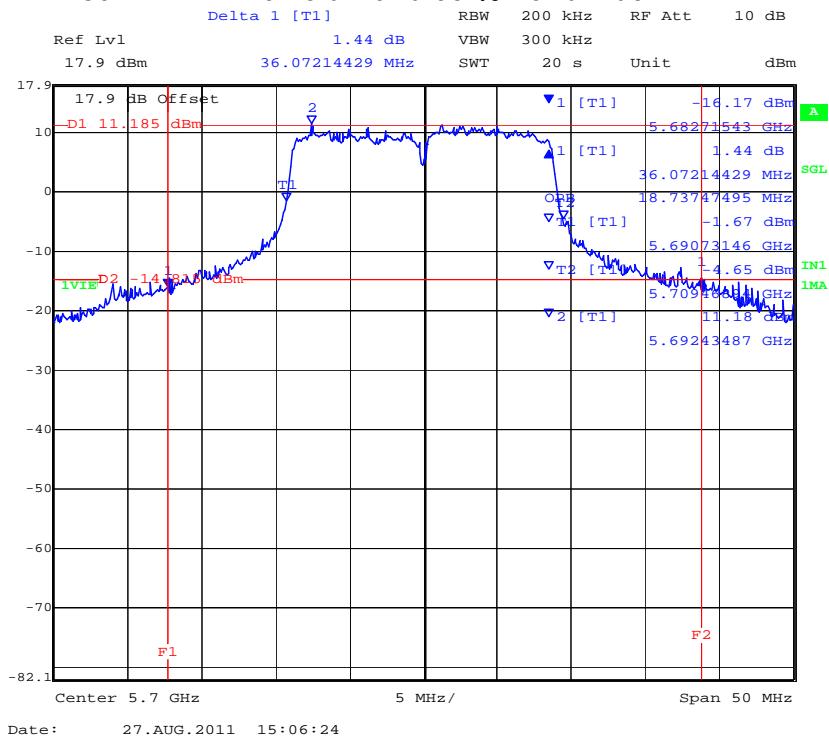

Date: 27.AUG.2011 15:06:24


PORT B 5,700 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

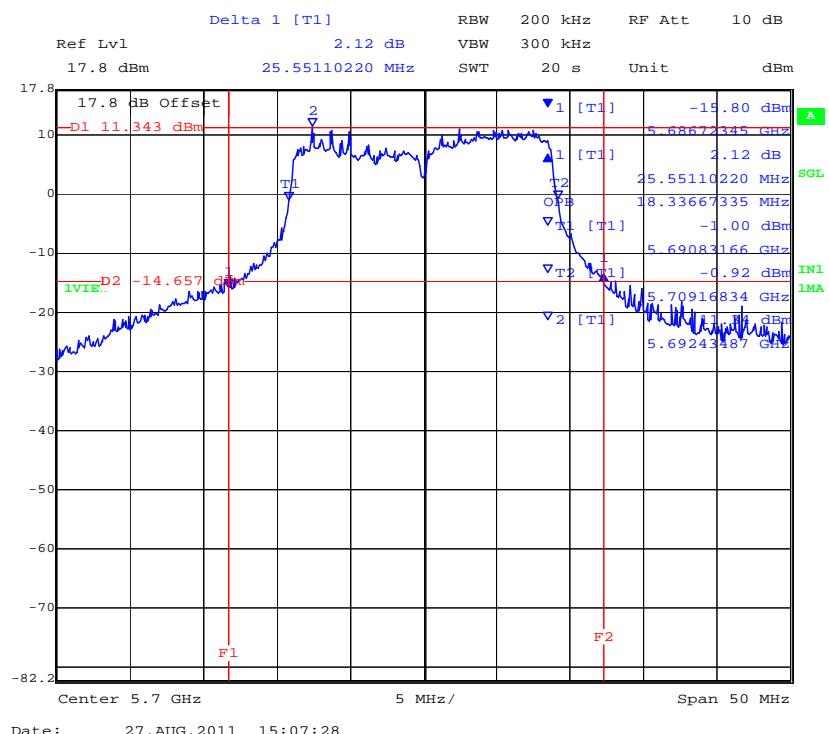

Date: 27.AUG.2011 15:07:28

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,700 MHz 802.11n HT-20 26 dB and 99 % Bandwidth

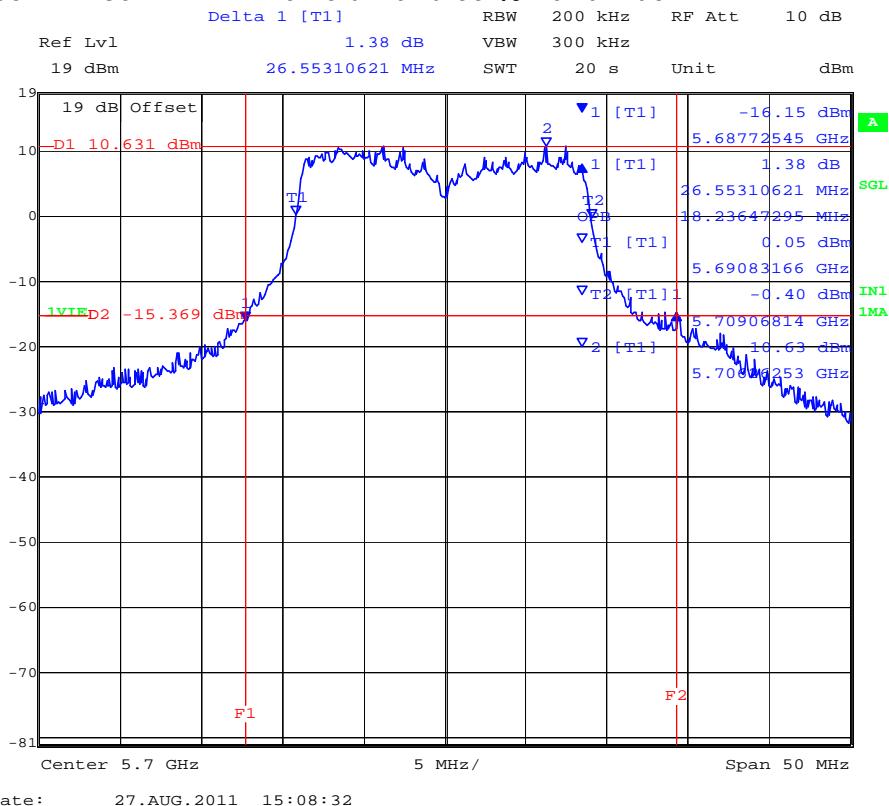

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 68 of 223

TABLE OF RESULTS – 802.11n HT-40 5500 – 5700 MHz

Test Conditions:	15.247 (a)(2)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (x):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.0 Vdc		
Notes 1:			
Notes 2:			

26 dB Bandwidth

Test Frequency	26 dB Bandwidth				Minimum 6dB Bandwidth Limit		Margin
	MHz						
MHz	a	b	c	d	kHz	MHz	MHz
5510	67.735000	58.517000	47.896000	--	500	0.5	-47.396000
5550	67.735000	60.321000	48.297000	--			-47.797000
5670	67.735000	57.315000	47.695000	--			-47.195000


99% Bandwidth

Test Frequency	99 % Bandwidth						
	MHz						
MHz	a	b	c	d			
5510	37.074000	36.673000	36.673000	--			
5550	36.874000	36.673000	36.673000	--			
5670	36.874000	36.673000	36.673000	--			


Measurement uncertainty:	±2.81 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5.510 MHz 802.11n HT-40 26 dB and 99 % Bandwidth

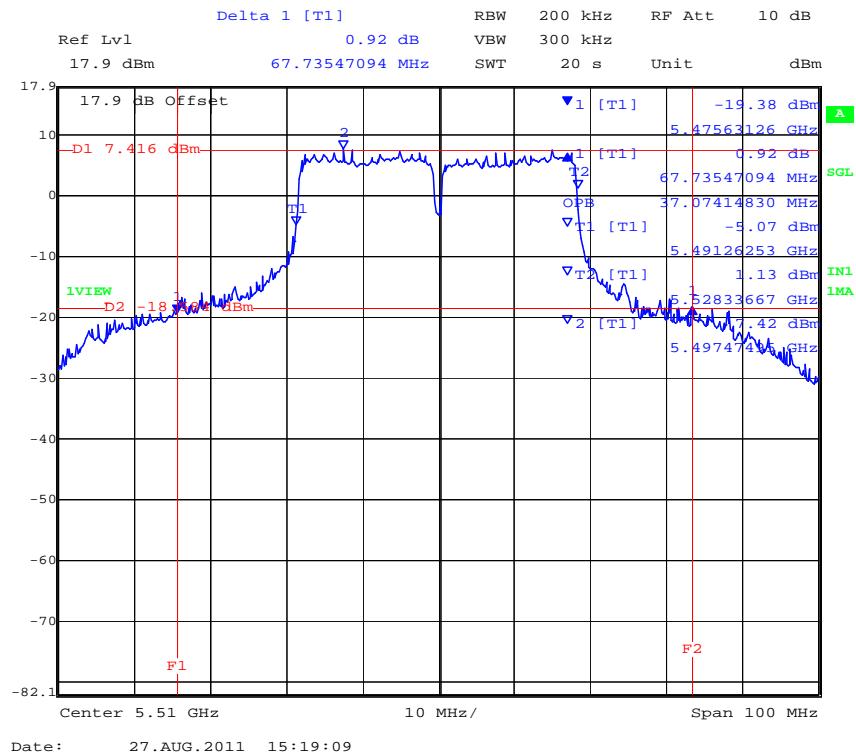


PORT B 5.510 MHz 802.11n HT-40 26 dB and 99 % Bandwidth

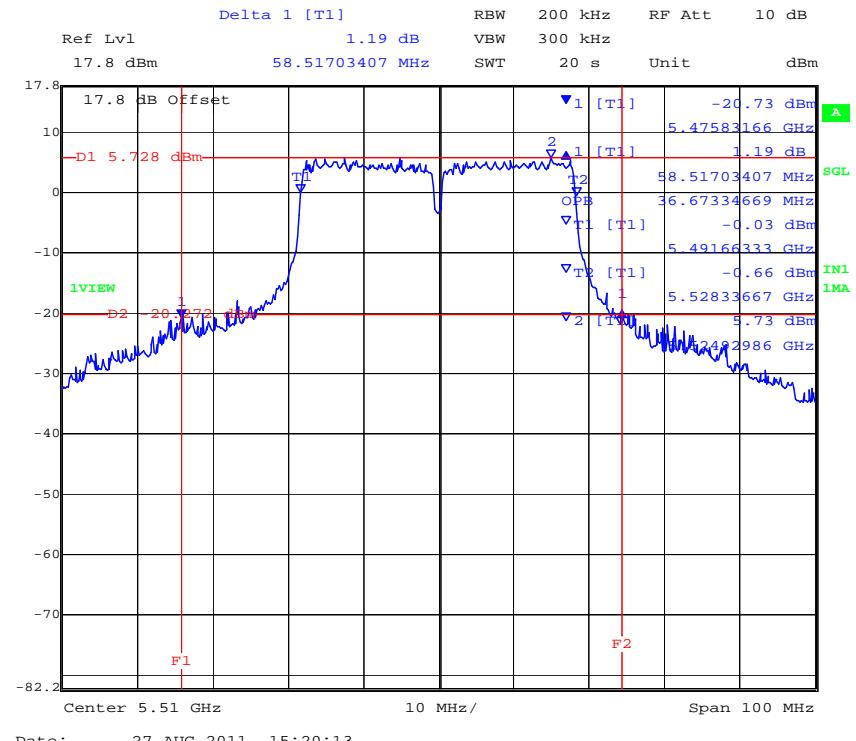


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,510 MHz 802.11n HT-40 26 dB and 99 % Bandwidth

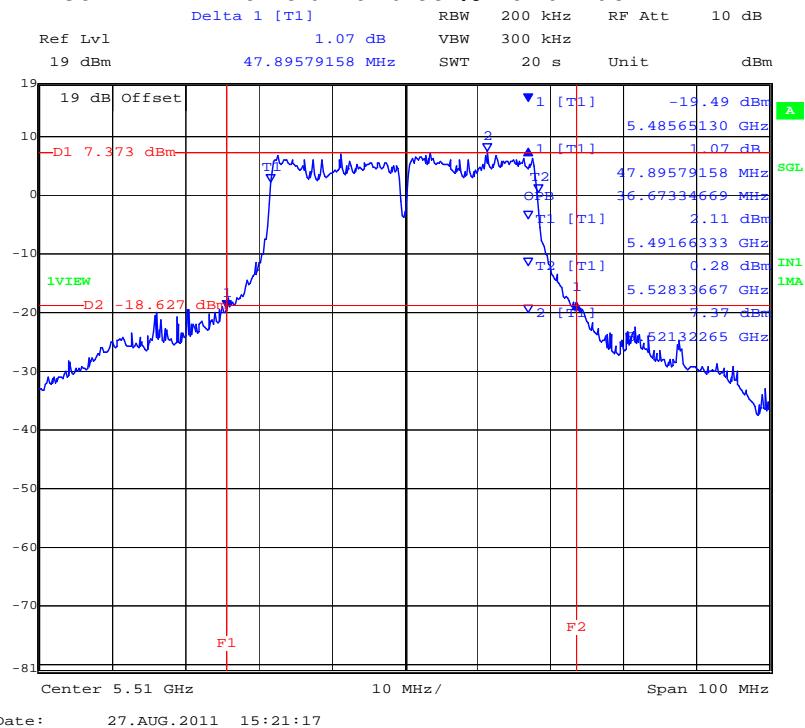


PORT A 5,550 MHz 802.11n HT-40 26 dB and 99 % Bandwidth

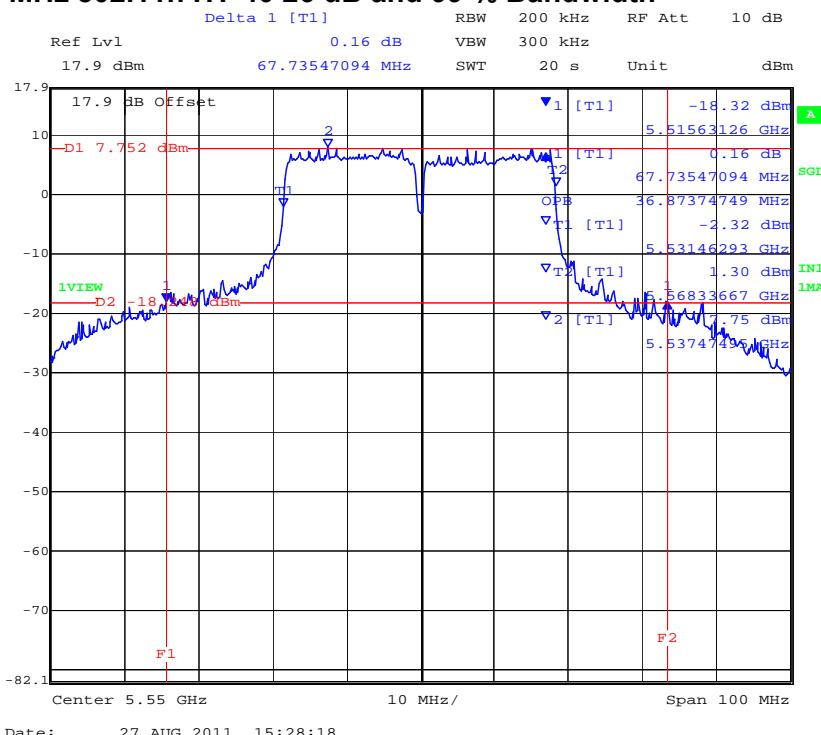


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT B 5,550 MHz 802.11n HT-40 26 dB and 99 % Bandwidth

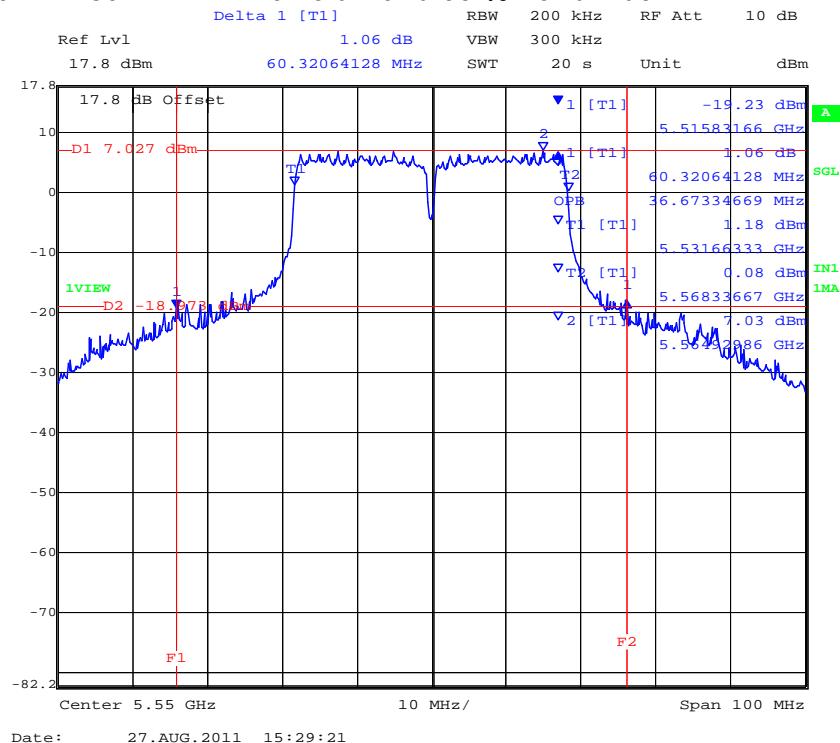


PORT C 5,550 MHz 802.11n HT-40 26 dB and 99 % Bandwidth

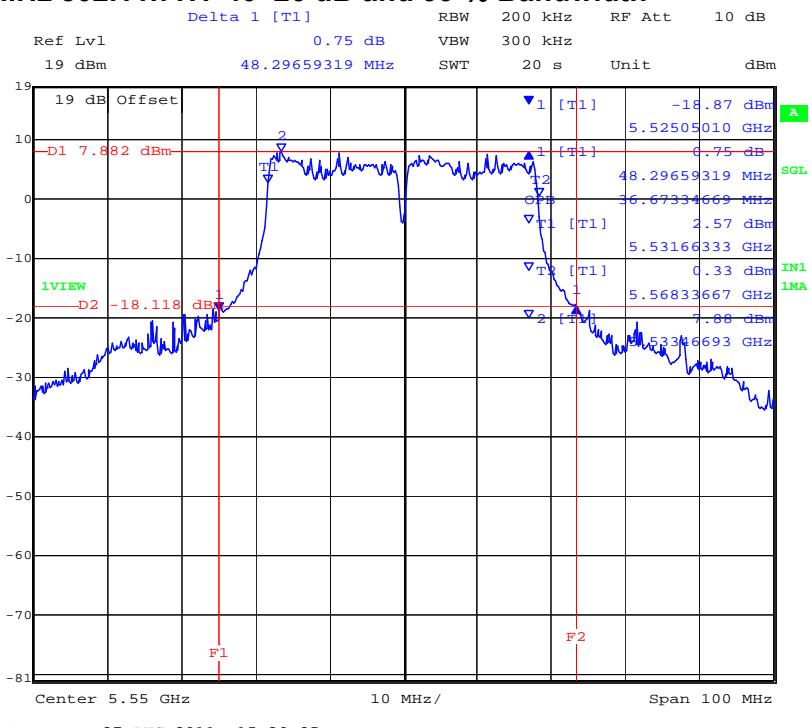


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,670 MHz 802.11n HT-40 26 dB and 99 % Bandwidth

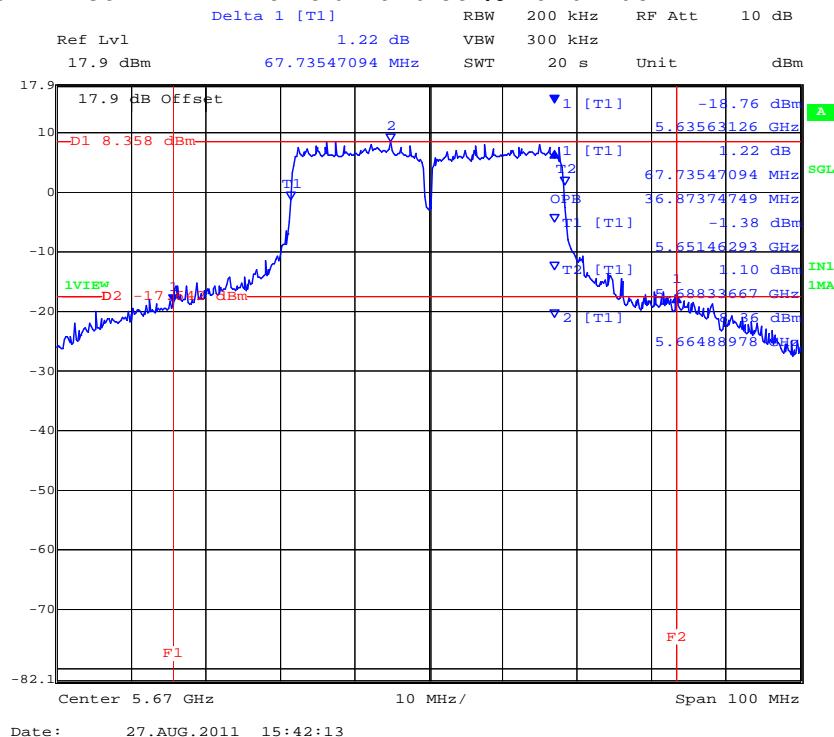


PORT B 5,670 MHz 802.11n HT-40 26 dB and 99 % Bandwidth

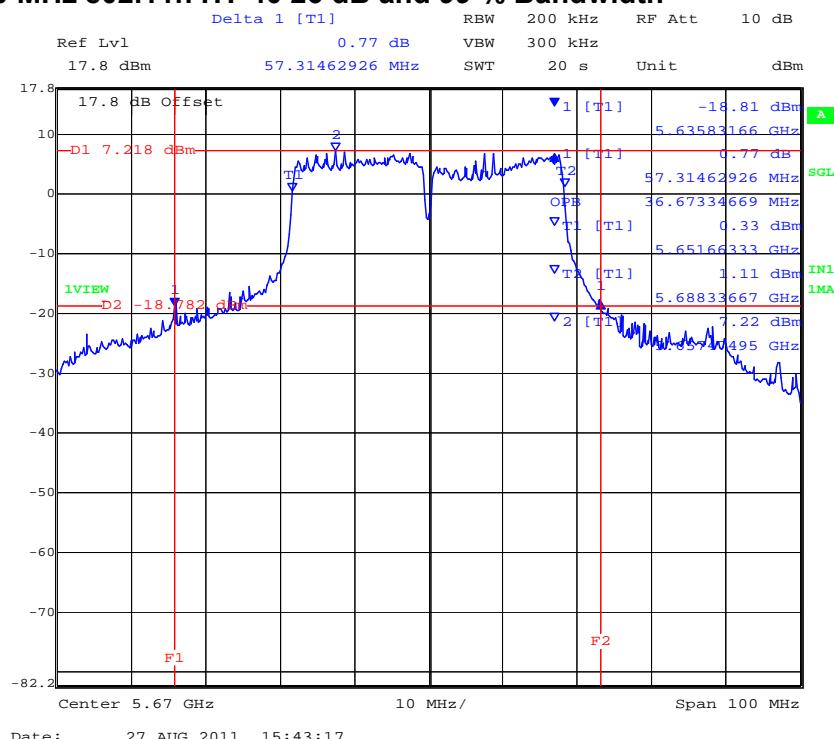

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,670 MHz 802.11n HT-40 26 dB and 99 % Bandwidth

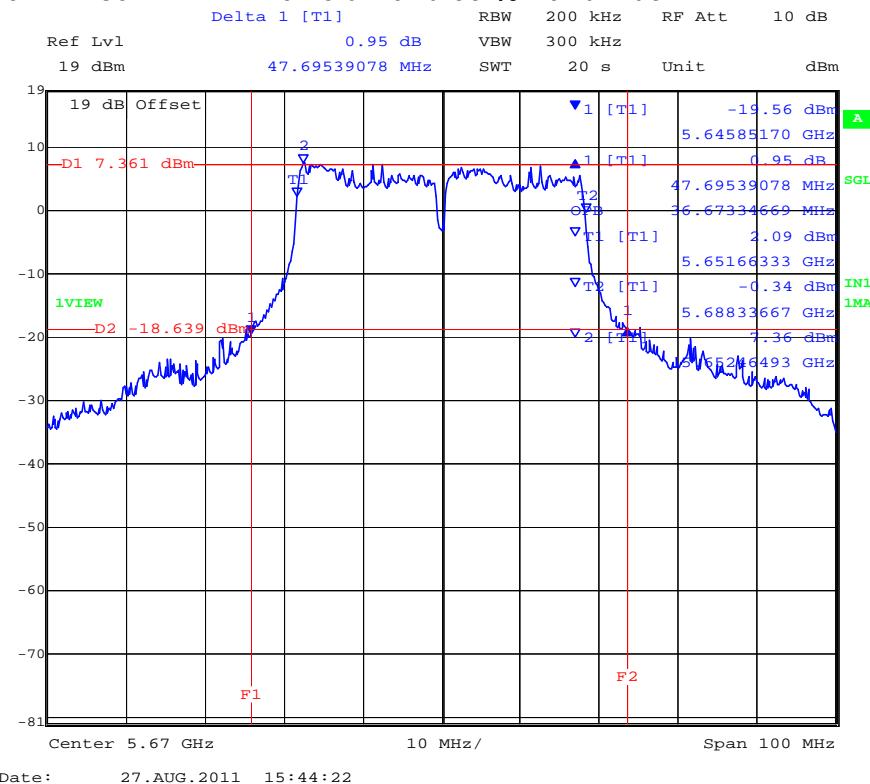

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 74 of 223

Specification

Limits

FCC, Part 15 §15.407 (a)(1), (a)(2) and Industry Canada RSS-210 § A9.2(2)

(a)(1) For the band 5.15-5.25 GHz the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $+4 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

(a)(2) For the 5.25-5.35 GHz band the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $+11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

Industry Canada RSS-Gen 4.4

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

Laboratory Measurement Uncertainty for Spectrum Measurement

Measurement uncertainty	±2.81 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Spectrum Mask'	0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.2. Transmit Output Power

FCC, Part 15 Subpart C §15.407(a)


Industry Canada RSS-210 §9.9(2)

Industry Canada RSS-Gen 4.6

Test Procedure

The transmitter terminal of EUT was connected to the input of an average power meter. Measurements were made while EUT was operating in a continuous transmission mode i.e. 100 % duty cycle at the appropriate center frequency. All cable losses and offsets were taken into consideration in the measured result.

Test Measurement Set up

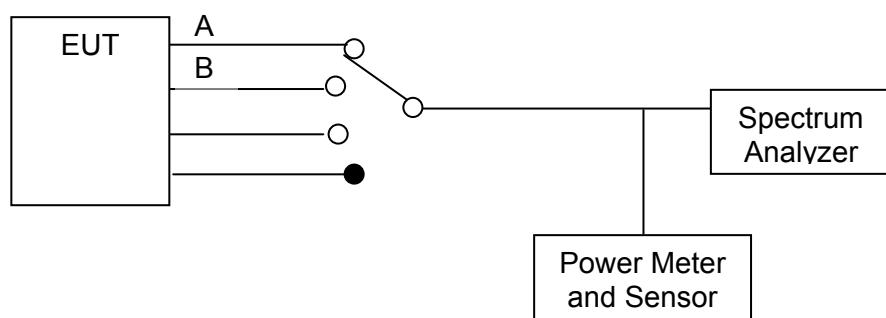

Measurement set up for Transmitter Output Power

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 76 of 223

Maximum Transmit (Conducted) Power, FCC Limits and Industry Canada Limits

Bands 5150 – 5250 MHz

FCC Limits

Conducted Power Limit lesser of: 50 mW or $4 \text{ dBm} + 10 \log (B) \text{ dBm}$. B is the 26 dB emission bandwidth in MHz.

Mode	Frequency Range (MHz)	Maximum 26 dB Bandwidth (MHz)	4 + 10 Log (B) (dBm)	Limit (dBm)
a	5150 – 5250	23.94	+17.79	+17.00
HT-20		33.27	+19.22	+17.00
HT-40		47.09	+20.73	+17.00

Industry Canada Limits

EIRP Limit 5150 – 5250 MHz: Lesser of 200 mW (+23 dBm) or $10 + 10 \log (B) \text{ dBm}$. B is the 99% emission bandwidth in MHz.

Mode	Frequency Range (MHz)	Maximum 99 % Bandwidth (MHz)	4 + 10 Log (B) (dBm)	EIRP Limit (dBm)
a	5150 – 5250	16.93	+22.29	+23.00
HT-20		18.03	+22.56	+23.00
HT-40		36.47	+25.62	+23.00

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 77 of 223

FCC Limits Bands 5250 – 5350 and 5470 – 5725 MHz

Limit lesser of: 250 mW or 11 dBm + 10 log (B) dBm. B is the 26 dB emission bandwidth in MHz.

Mode	Frequency Range (MHz)	Maximum 26 dB Bandwidth (MHz)	11 + 10 Log (B) (dBm)	Limit (dBm)
a	5250 – 5350	23.6	+24.79	+24.00
HT-20		28.6	+25.56	+24.00
HT-40		59.5	+28.74	+24.00

Mode	Frequency Range (MHz)	Maximum 26 dB Bandwidth (MHz)	11 + 10 Log (B) (dBm)	Limit (dBm)
a	5470 – 5725	23.7	+24.75	+24.00
HT-20		36.0	+26.60	+24.00
HT-40		67.7	+29.30	+24.00

Industry Canada Limits

Bands 5250 – 5350 and 5470 – 5725 MHz

Limit lesser of: 250 mW or 11 dBm + 10 log (B) dBm. B is the 99% emission bandwidth in MHz.

Mode	Frequency Range (MHz)	Maximum 26 dB Bandwidth (MHz)	11 + 10 Log (B) (dBm)	Limit (dBm)
a	5250 – 5350	16.8	+23.25	+23.25
HT-20		18.1	+23.58	+23.58
HT-40		36.7	+26.65	+24.00

Mode	Frequency Range (MHz)	Maximum 26 dB Bandwidth (MHz)	11 + 10 Log (B) (dBm)	Limit (dBm)
a	5470 – 5725	17.0	+23.30	+23.3
HT-20		18.7	+23.72	+23.7
HT-40		37.1	+26.69	+24.00

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 78 of 223

Antenna Beam and Non-Beam Forming Power Levels

15. 407 (a)(1), (a) (2) Operation with directional antenna gains greater than 6 dBi.

If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. Further FCC KDB 662911 D01 Multiple Transmitter Output v01 requires that the gain of antennas transmitting the same data (legacy 802.11a mode) must be increased by $10 * \log(N)$ when N is the number of antenna elements.

Operating Frequency Band 5150-5250 MHz

MIMO Operation

Antenna	Gain	Max. Allowable Conducted Peak Power (dBm)		Maximum EIRP
(dB)	(dBi)	Non-Beam Forming	Beam Forming	(dBm)
Integral	3.0	+17.0	+15.23	+23.0

Non-MIMO Operation (Legacy)

Antenna	Gain dBi	Increased Gain V's No. Antenna Ports		Total Gain	Max. Allowable Conducted Peak Power	Maximum EIRP
(dB)		Ports	dB	dBi	(dBm)	(dBm)
Integral	3	3	4.77	7.77	+15.23	+23.0

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 79 of 223

MIMO Operation 5250-5350 and 5470 – 5725 MHz

Antenna	Gain	Max. Allowable Conducted Peak Power (dBm)		Maximum EIRP
(dB)	(dBi)	Non-Beam Forming	Beam Forming	(dBm)
Integral	3.0	+23.25	+21.48	+29.25

Non-MIMO Operation (Legacy) 5250-5350 and 5470 – 5725 MHz

Antenna	Gain dBi	Increased Gain V's No. Antenna Ports		Total Gain	Max. Allowable Conducted Peak Power	Maximum EIRP
(dB)		Ports	dB	dBi	(dBm)	(dBm)
Integral	3	3	4.77	7.77	+21.48	+29.25

Measurement Results for Transmit Output Power

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

EUT parameters.

Power Level: Maximum

Duty Cycle: 100%

Temperature: Ambient

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 80 of 223

TABLE OF RESULTS – 802.11a Legacy

Test Conditions:	15.407 (a)(1)	Rel. Humidity (%):	35 to 42
Variant:	802.11a	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (x):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.0 Vdc		
Notes 1:			
Notes 2:			

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	Combined	Calculated	dBm	dB
5180	8.36	7.68	8.08	--	N/A	12.82	15.23	-2.41
5200	8.39	8.31	8.67	--	N/A	13.23	15.23	-2.00
5240	6.74	6.54	6.93	--	N/A	11.51	15.23	-3.72

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

Test Conditions:	15.407 (a)(1)	Rel. Humidity (%):	35 to 42
Variant:	802.11a	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (x):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.0 Vdc		
Notes 1:			
Notes 2:			

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	Combined	Calculated	dBm	dB
5260	16.15	15.10	15.03	--	N/A	20.23	21.48	-1.25
5300	15.90	14.47	14.75	--	N/A	19.86	21.48	-1.62
5320	15.81	13.82	14.63	--	N/A	19.60	21.48	-1.88

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 81 of 223

Test Conditions:	15.407 (a)(1)	Rel. Humidity (%):	35	to	42
Variant:	802.11a	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (x):	100		
Beam Forming Gain (Y):	N/A	Antenna Gain:	3	dBi	
Applied Voltage:	48.0	Vdc			
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	Combined	Calculated	dBm	dB
5500	15.82	13.98	14.79	--	N/A	19.70	21.48	-1.78
5580	15.91	14.62	15.59	--	N/A	20.18	21.48	-1.30
5700	15.75	15.06	15.38	--	N/A	20.18	21.48	-1.30

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 82 of 223

TABLE OF RESULTS – 802.11n HT20

Test Conditions:	15.407 (a)(1)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (x):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi		
Applied Voltage:	48.0 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	Combined	Calculated	dBm	dB
5180	12.29	11.33	11.02	--	N/A	16.35	17.00	-0.65
5200	12.17	11.52	11.46	--	N/A	16.50	17.00	-0.50
5240	12.41	11.38	11.15	--	N/A	16.45	17.00	-0.55

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

Test Conditions:	15.407 (a)(1)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (x):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi		
Applied Voltage:	48.0 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	Combined	Calculated	dBm	dB
5260	18.63	18.07	18.19	--	N/A	23.07	23.25	-0.18
5300	18.85	17.60	18.21	--	N/A	23.02	23.25	-0.23
5320	18.52	17.24	17.72	--	N/A	22.63	23.25	-0.62

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 83 of 223

Test Conditions:	15.407 (a)(1)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (x):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi		
Applied Voltage:	48.0 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	Combined	Calculated	dBm	dB
5500	18.71	17.65	18.41	--	N/A	23.05	23.25	-0.20
5580	18.51	17.87	18.21	--	N/A	22.98	23.25	-0.27
5700	18.73	17.74	18.06	--	N/A	22.97	23.25	-0.28

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 84 of 223

TABLE OF RESULTS – 802.11n HT40

Test Conditions:	15.407 (a)(1)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (x):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi		
Applied Voltage:	48.0 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	Combined	Calculated	dBm	dB
5190	12.51	11.68	11.83	--	N/A	16.79	17.00	-0.21
5230	11.70	11.59	11.77	--	N/A	16.46	17.00	-0.54

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

Test Conditions:	15.407 (a)(1)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (x):	100		
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi		
Applied Voltage:	48.0 Vdc				
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	Combined	Calculated	dBm	dB
5270	18.53	18.08	17.91	--	N/A	22.95	23.25	-0.30
5310	18.65	17.11	18.03	--	N/A	22.75	23.25	-0.50

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 85 of 223

Test Conditions:	15.407 (a)(1)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (x):	100		
Beam Forming Gain (Y):	N/A	Antenna Gain:	3	dBi	
Applied Voltage:	48.0	Vdc			
Notes 1:					
Notes 2:					

Test Frequency	Measured Peak Power				Total Power (dBm)		Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	Combined	Calculated	dBm	dB
5510	18.45	17.15	18.21	--	N/A	22.74	23.25	-0.51
5550	18.43	17.81	18.38	--	N/A	22.99	23.25	-0.26
5670	18.86	17.54	18.19	--	N/A	23.00	23.25	-0.25

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 86 of 223

Specification

Limits

FCC, Part 15 §15.407 (a)(1), (a)(2) and Industry Canada RSS-210 § A9.2(2)

(a)(1) For the band 5.15-5.25 GHz the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW or $+4 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

(a)(2) For the 5.25-5.35 and 5470-5725 MHz GHz band the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $+11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

Industry Canada RSS-210 §A9.2(2)

For the band 5150-5250 MHz, the maximum equivalent isotropically radiated power (e.i.r.p.) shall not exceed 200 mW or $10 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz. The e.i.r.p. spectral density shall not exceed 10 dBm in any 1.0 MHz band.

For the band 5250-5350 MHz and 5470-5725 MHz, the maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever power is less. The power spectral density shall not exceed 11 dBm in any 1.0 MHz band. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever power is less. B is the 99% emission bandwidth in MHz.

Industry Canada RSS-Gen 4.4

When an occupied bandwidth value is not specified in the applicable RSS, the transmitted signal bandwidth to be reported is to be its 99% emission bandwidth, as calculated or measured.

Laboratory Measurement Uncertainty for Power Measurements

Measurement uncertainty	±1.33 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.3. Peak Power Spectral Density

FCC, Part 15 Subpart C §15.407(a)
Industry Canada RSS-210 § A9.2(2)

Test Procedure

The transmitter output was connected to a spectrum analyzer and the peak power spectral density measured. Method 2 Sample Detection and power averaging, specified in FCC document DA 02-2138 (Normative Reference (ix) Section 2.1 “Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices”) was used to determine the peak power spectral density of the emission for each antenna port. The Peak Power Spectral Density is the highest level found across the emission in a 1 MHz resolution bandwidth.

Emissions Testing of Transmitters with Multiple Outputs in the Same Band


The In-Band power spectral density was measured using the measure and sum approach per FCC KDB 662911 (D01 Multiple Transmitter Output v01.)

(1) Measure and sum the spectra across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The individual spectra are then summed mathematically in linear power units. Unlike in-band power measurements, in which the sum involves a single measured value (output power) from each output, measurements for compliance with PSD limits involve summing entire spectra across corresponding frequency bins on the various outputs [i.e., for a device with N transmitter outputs, if the spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value (in watts or milliwatts) in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the N th output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

The summed spectral values were calculated on a computer and the results read as a data file by the spectrum analyzer to produce plot of total power density across the spectra.

Test Measurement Set up

Test Measurement Set up

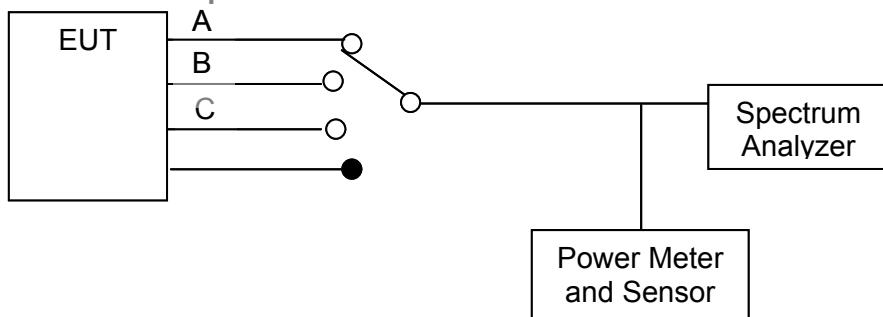

Measurement set up for Peak Power Spectral Density

Measurement Results for Peak Power Spectral Density

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier

Power: Maximum Default Power

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 89 of 223

TABLE OF RESULTS – 802.11a Legacy 5150 – 5250 MHz

Test Conditions:	15.407 (a)	Rel. Humidity (%):	35 to 42
Variant:	802.11a	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.0 Vdc	Antenna Ports (N):	3
Notes 1:			
Notes 2:			


Test Frequency	Measured Peak Power				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
5180.00	-4.96	-4.68	-5.74	--		-1.05	4.00	-5.05
5200.00	-4.78	-4.22	-4.32	--		-0.79	4.00	-4.79
5240.00	-4.99	-4.74	-4.28	--		-0.34	4.00	-4.34

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,180 MHz 802.11a Legacy Power Spectral Density

(Summed power density across the spectra)

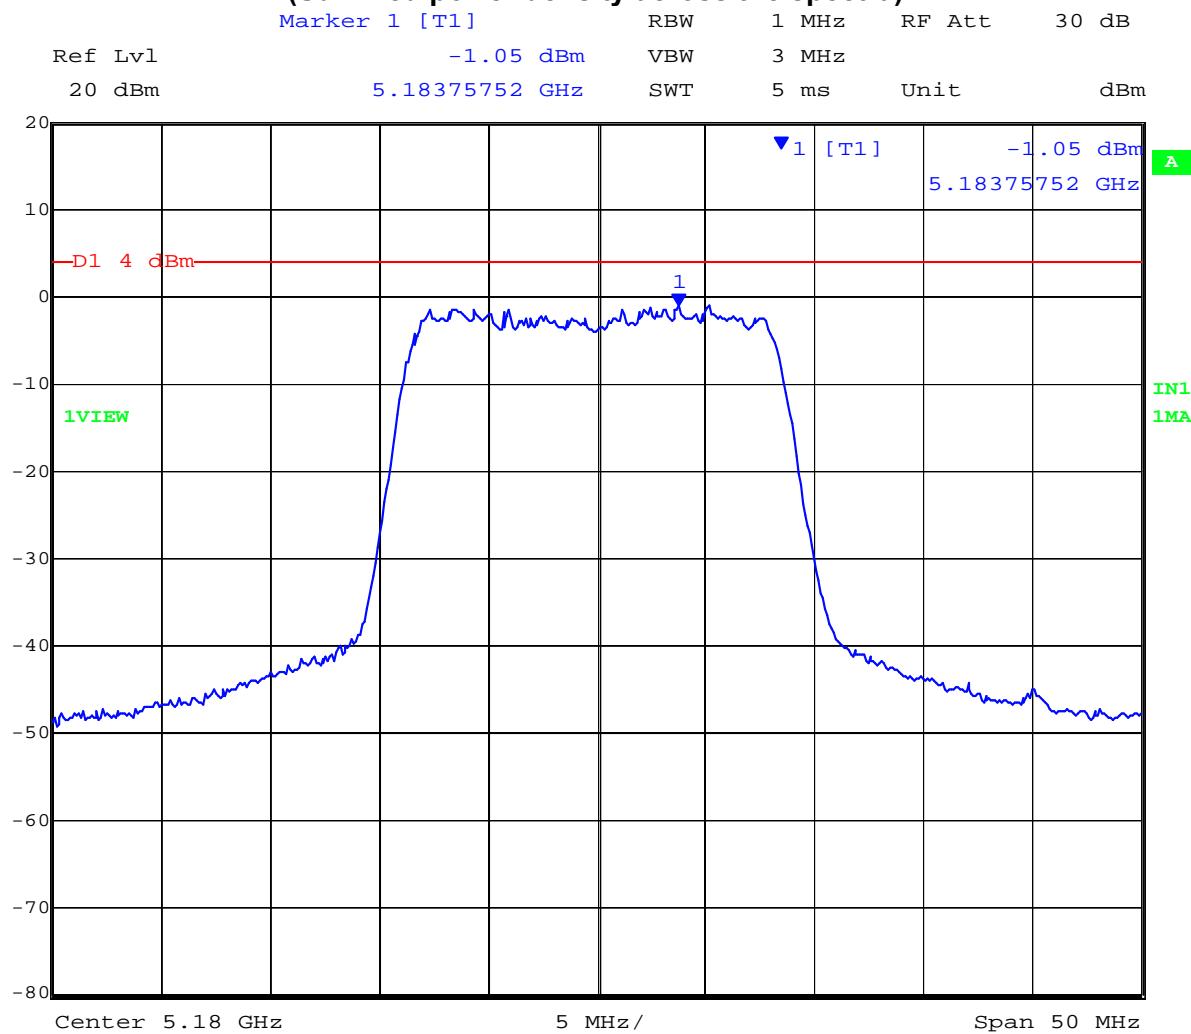

Date: 29.AUG.2011 12:30:02


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 91 of 223

5,200 MHz 802.11a Legacy Power Spectral Density

(Summed power density across the spectra)

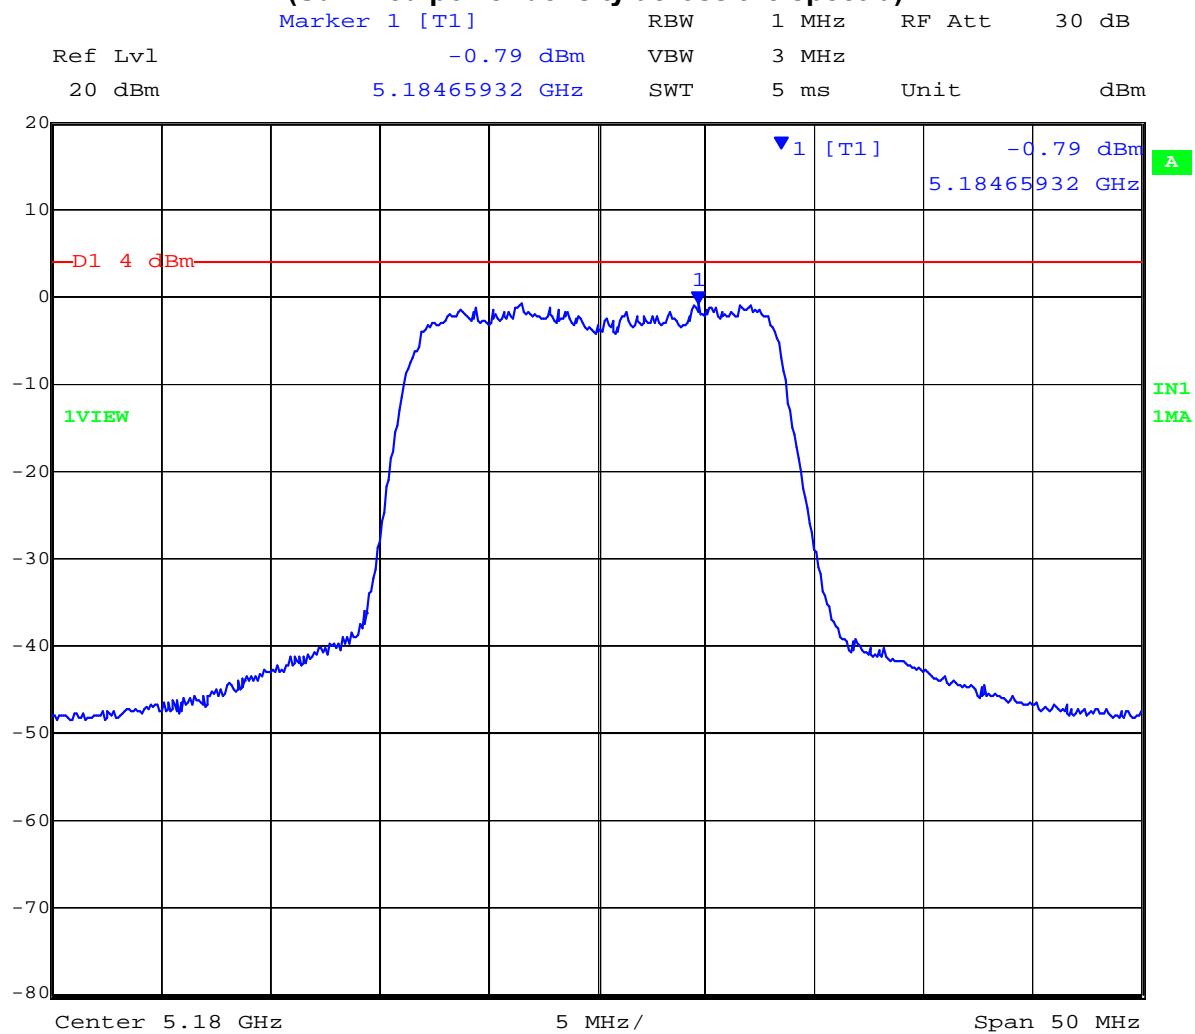


Date: 29.AUG.2011 12:31:02

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,240 MHz 802.11a Legacy Power Spectral Density

(Summed power density across the spectra)

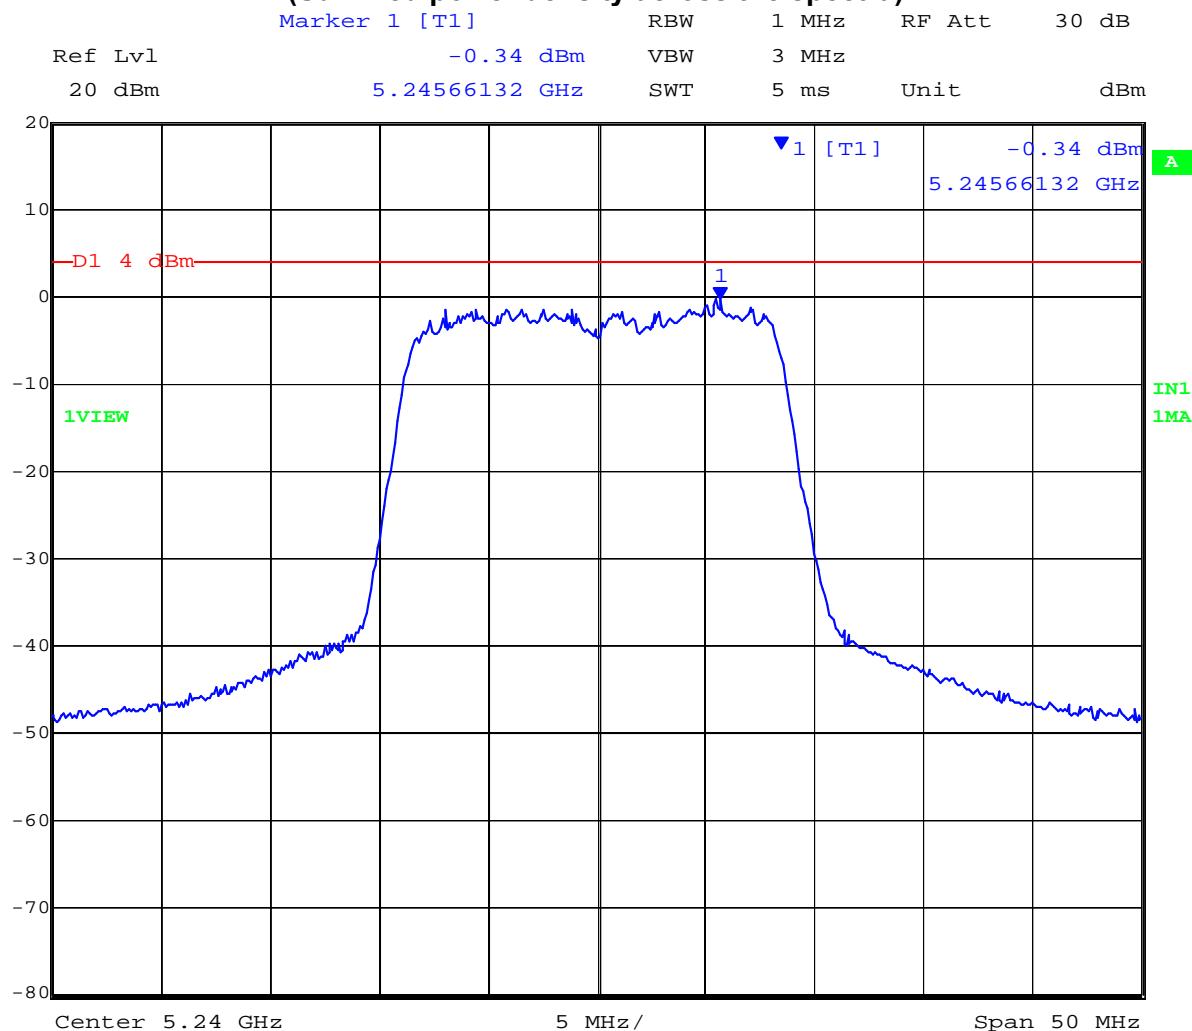

Date: 29.AUG.2011 12:31:47

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 93 of 223

TABLE OF RESULTS – 802.11n HT-20 5150 – 5250 MHz

Test Conditions:	15.407 (a)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.0 Vdc	Antenna Ports (N):	3
Notes 1:			
Notes 2:			


Test Frequency	Measured Peak Power				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
5180.00	-0.47	-1.93	-1.11	--		2.84	4.00	-1.16
5200.00	-0.42	0.07	-1.14	--		3.87	4.00	-0.13
5240.00	-0.08	0.05	-1.68	--		3.65	4.00	-0.35

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,180 MHz 802.11n HT-20 Power Spectral Density

(Summed power density across the spectra)

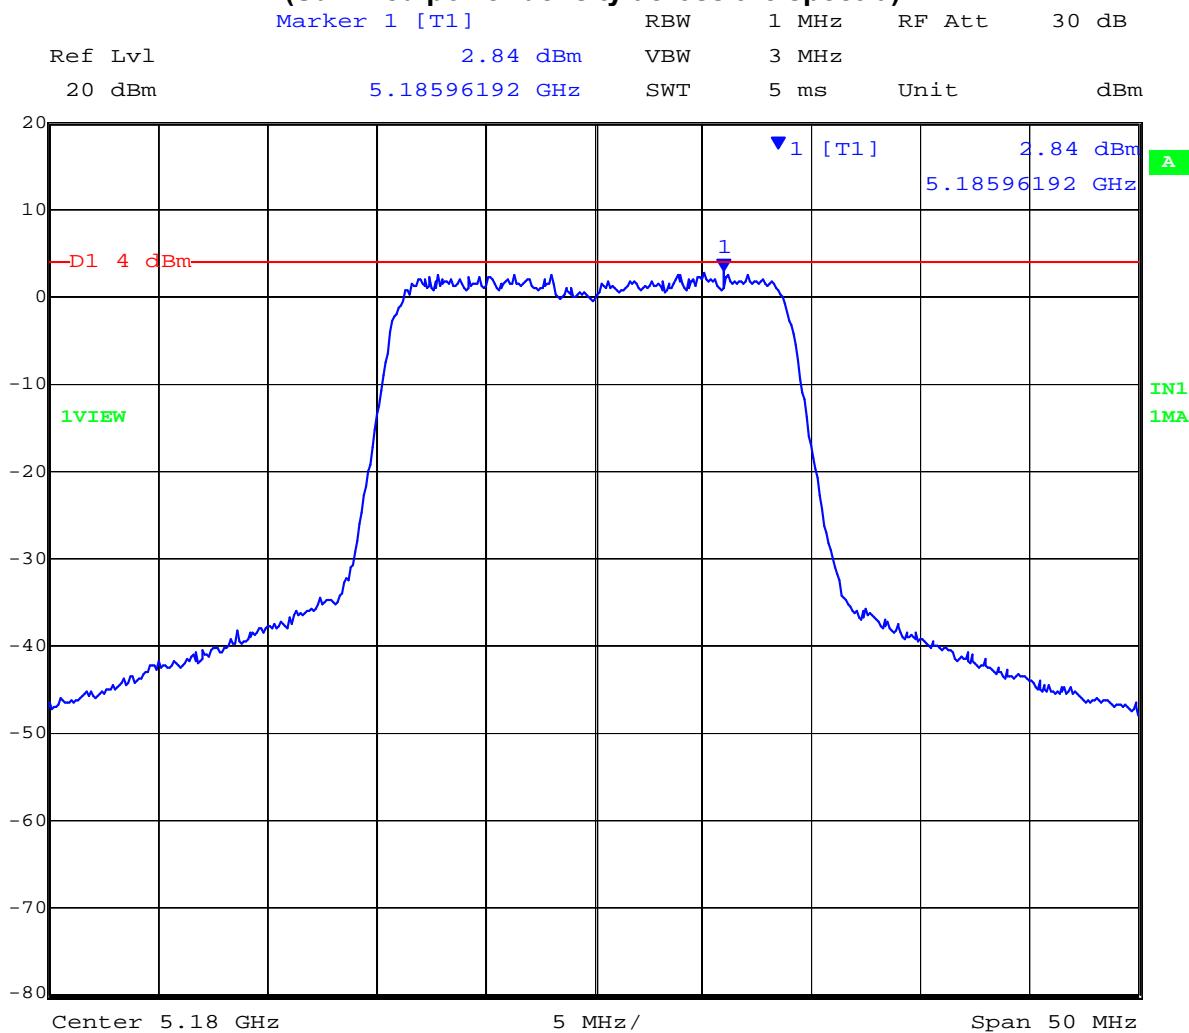


Date: 29.AUG.2011 12:34:02

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,200 MHz 802.11n HT-20 Power Spectral Density

(Summed power density across the spectra)

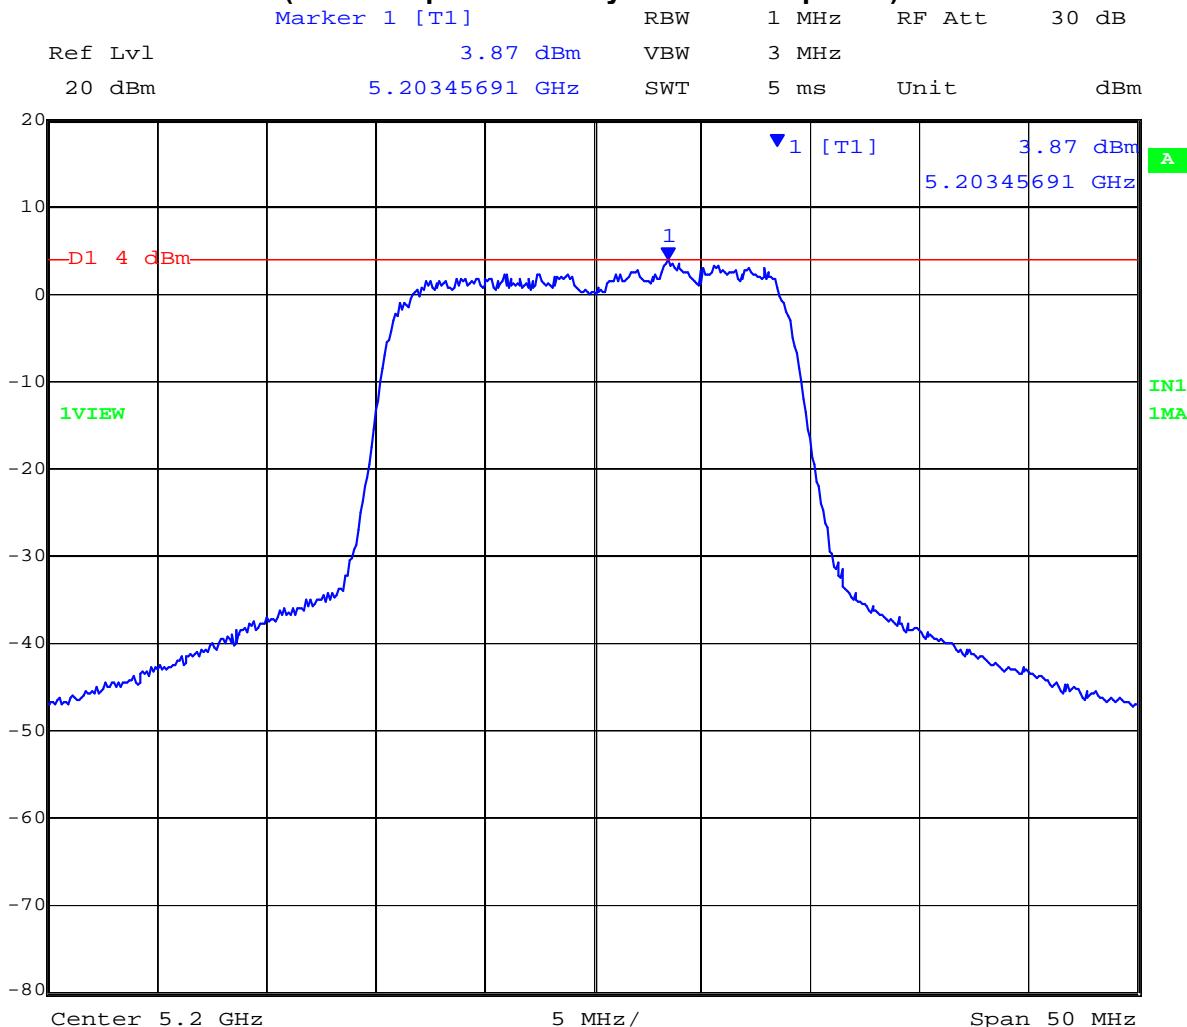


Date: 29.AUG.2011 12:35:04

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,240 MHz 802.11n HT-20 Power Spectral Density

(Summed power density across the spectra)

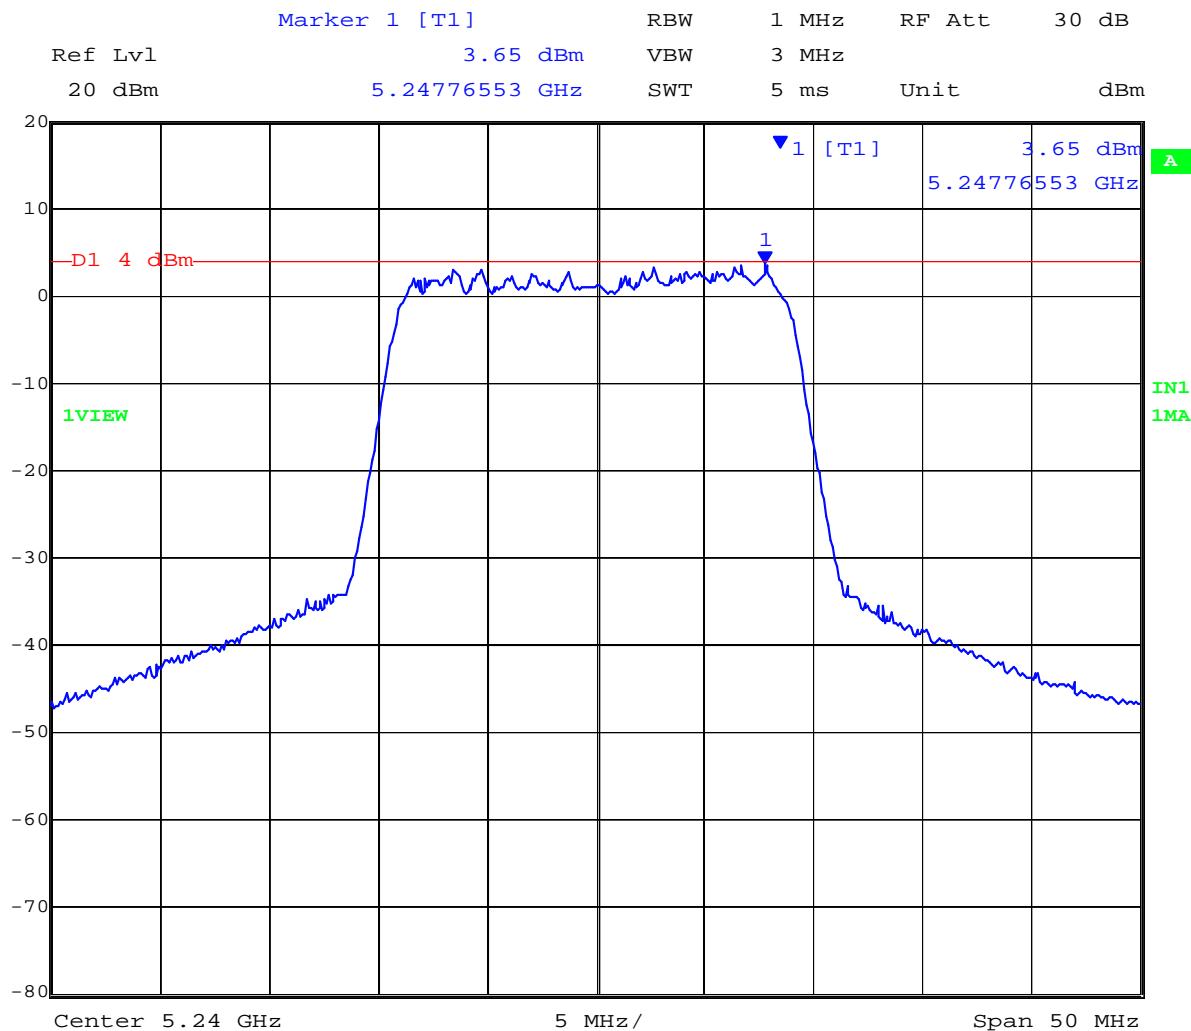

Date: 29.AUG.2011 12:35:58

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 97 of 223

TABLE OF RESULTS – 802.11n HT-40 5150 – 5250 MHz

Test Conditions:	15.407 (a)	Rel. Humidity (%):	35	to	42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A	Antenna Gain:	3	dBi	
Applied Voltage:	48.0	Antenna Ports (N):	3		
Notes 1:					
Notes 2:					


Test Frequency	Measured Peak Power				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
5190.00	-2.49	-4.27	-3.02	--		0.45	4.00	-3.55
5230.00	-2.34	-3.79	-3.45	--		0.68	4.00	-3.32

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,190 MHz 802.11n HT-40 Power Spectral Density

(Summed power density across the spectra)

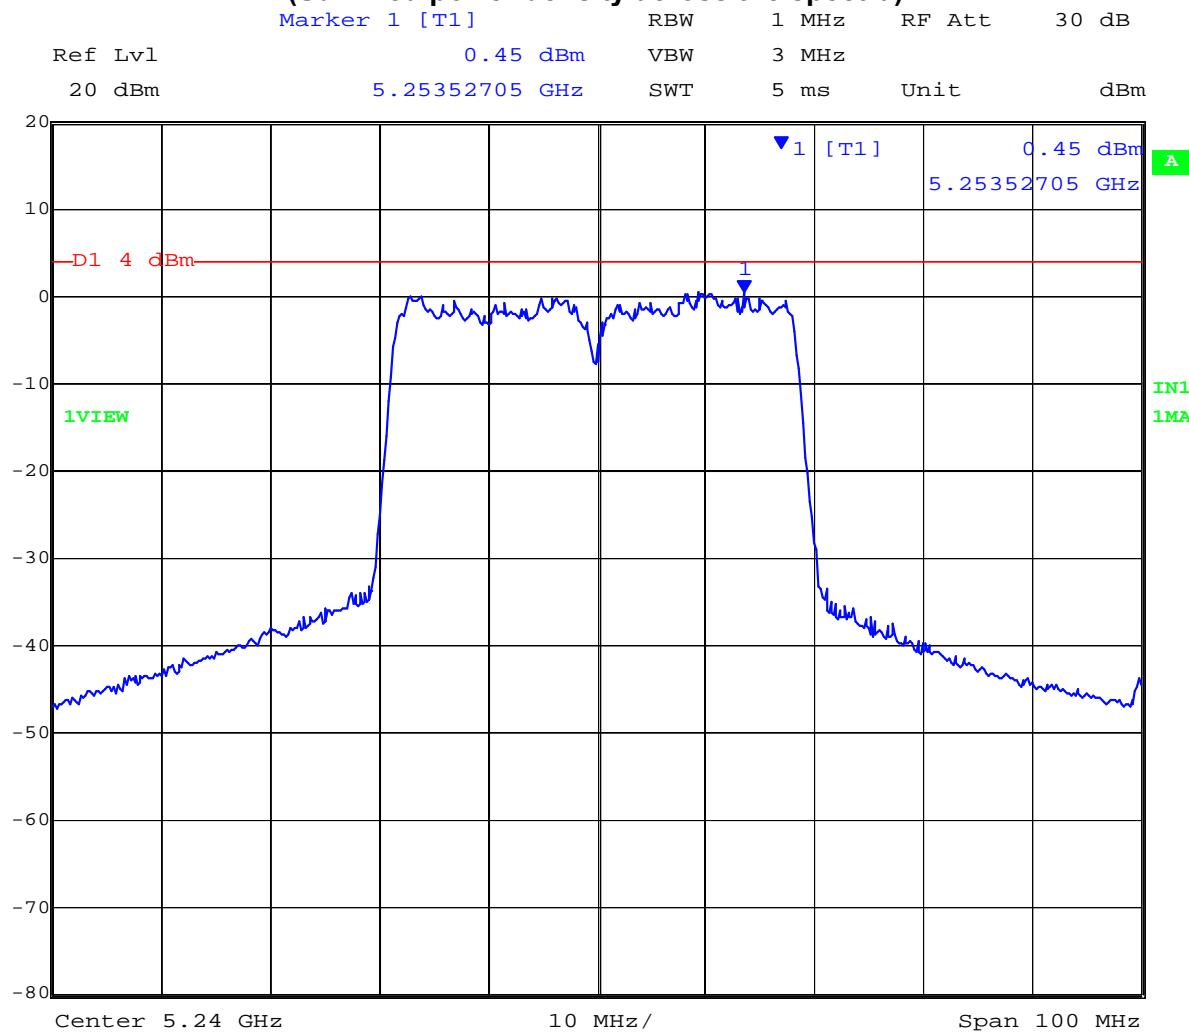


Date: 29.AUG.2011 12:39:19

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,230 MHz 802.11n HT-40 Power Spectral Density

(Summed power density across the spectra)

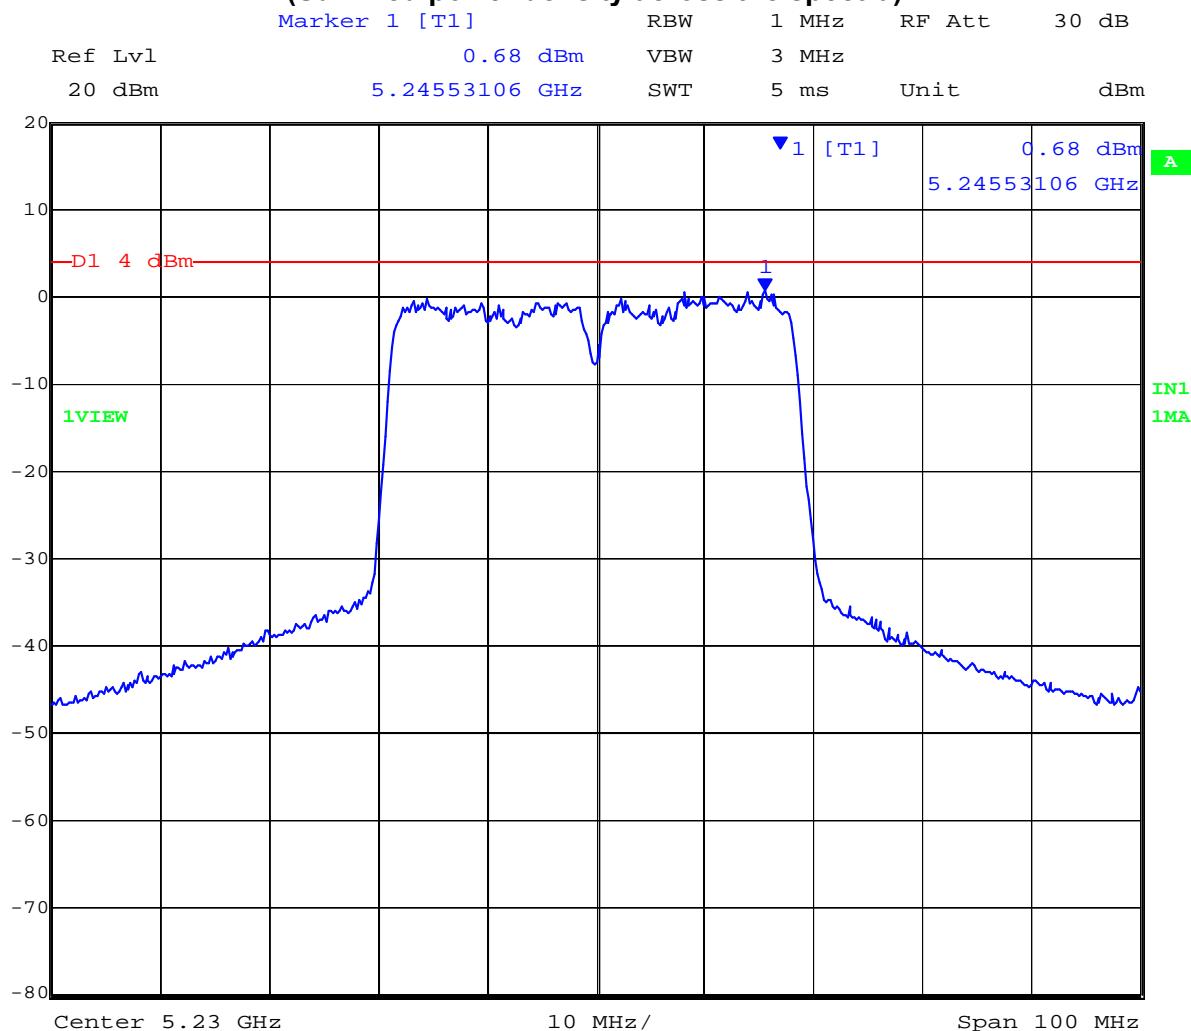

Date: 29.AUG.2011 12:40:09

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 100 of 223

TABLE OF RESULTS – 802.11a Legacy 5250 – 5350 MHz

Test Conditions:	15.407 (a)	Rel. Humidity (%):	35 to 42
Variant:	802.11a	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.0 Vdc	Antenna Ports (N):	3
Notes 1:			
Notes 2:			


Test Frequency	Measured Peak Power				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
5260.00	3.25	2.12	1.20	--		6.03	11.00	-4.97
5300.00	2.54	2.92	1.64	--		6.26	11.00	-4.74
5320.00	2.68	1.01	1.30	--		5.59	11.00	-5.41

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,260 MHZ 802.11a Legacy Power Spectral Density

(Summed power density across the spectra)

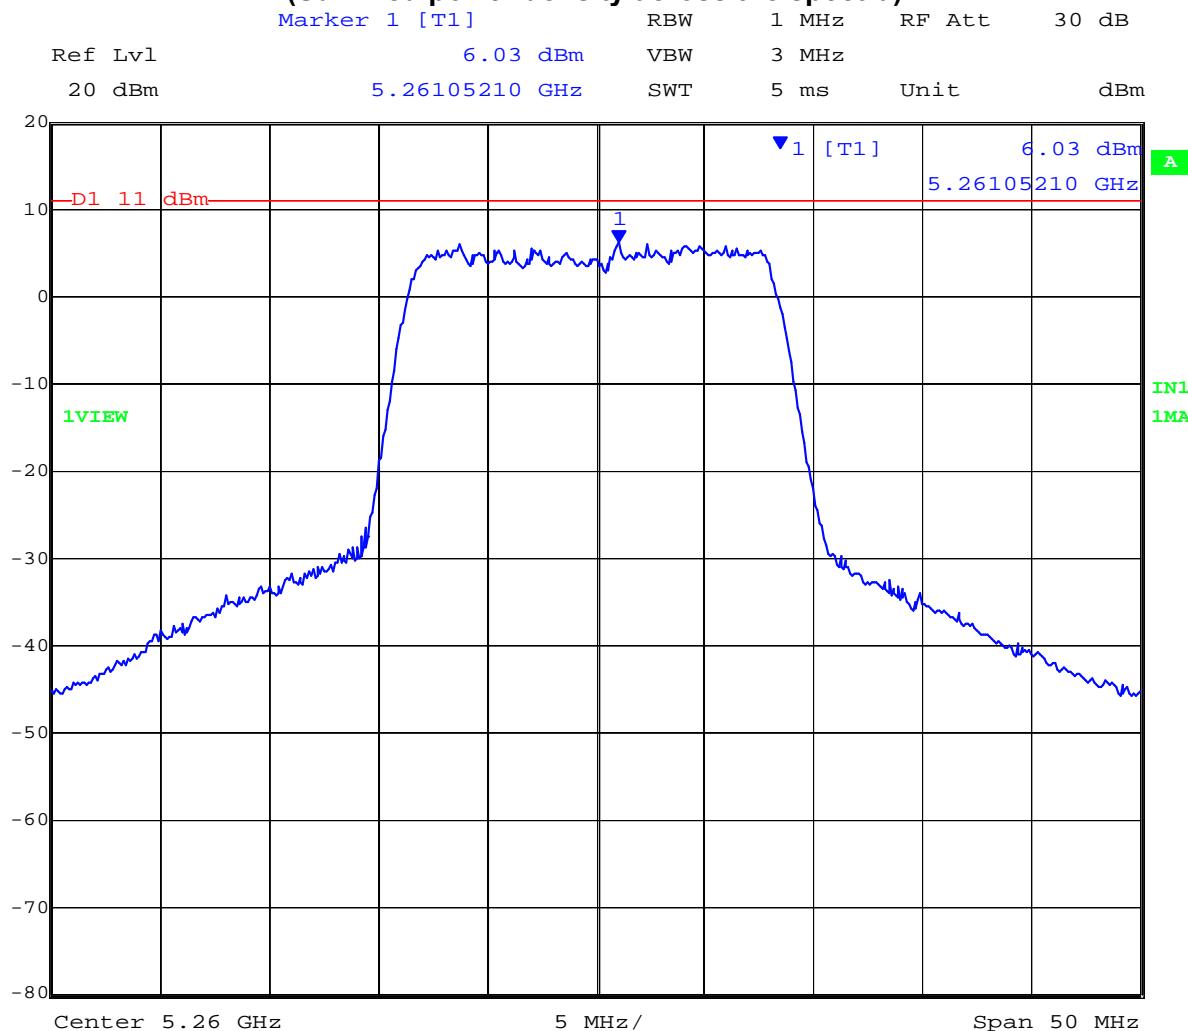


Date: 29.AUG.2011 11:46:14

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,300 MHZ 802.11a Legacy Power Spectral Density

(Summed power density across the spectra)

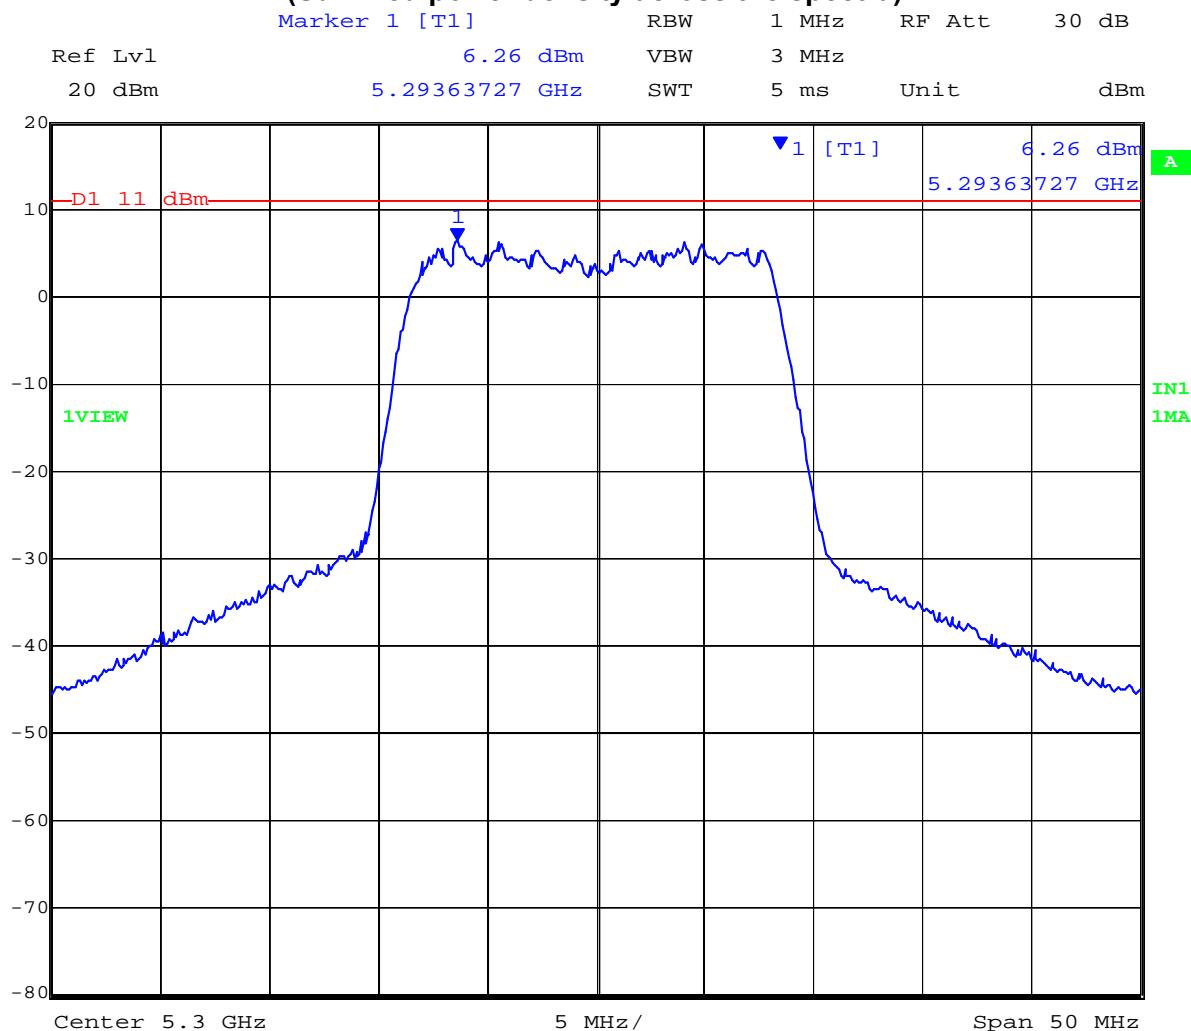


Date: 29.AUG.2011 11:47:06

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,320 MHZ 802.11a Legacy Power Spectral Density

(Summed power density across the spectra)

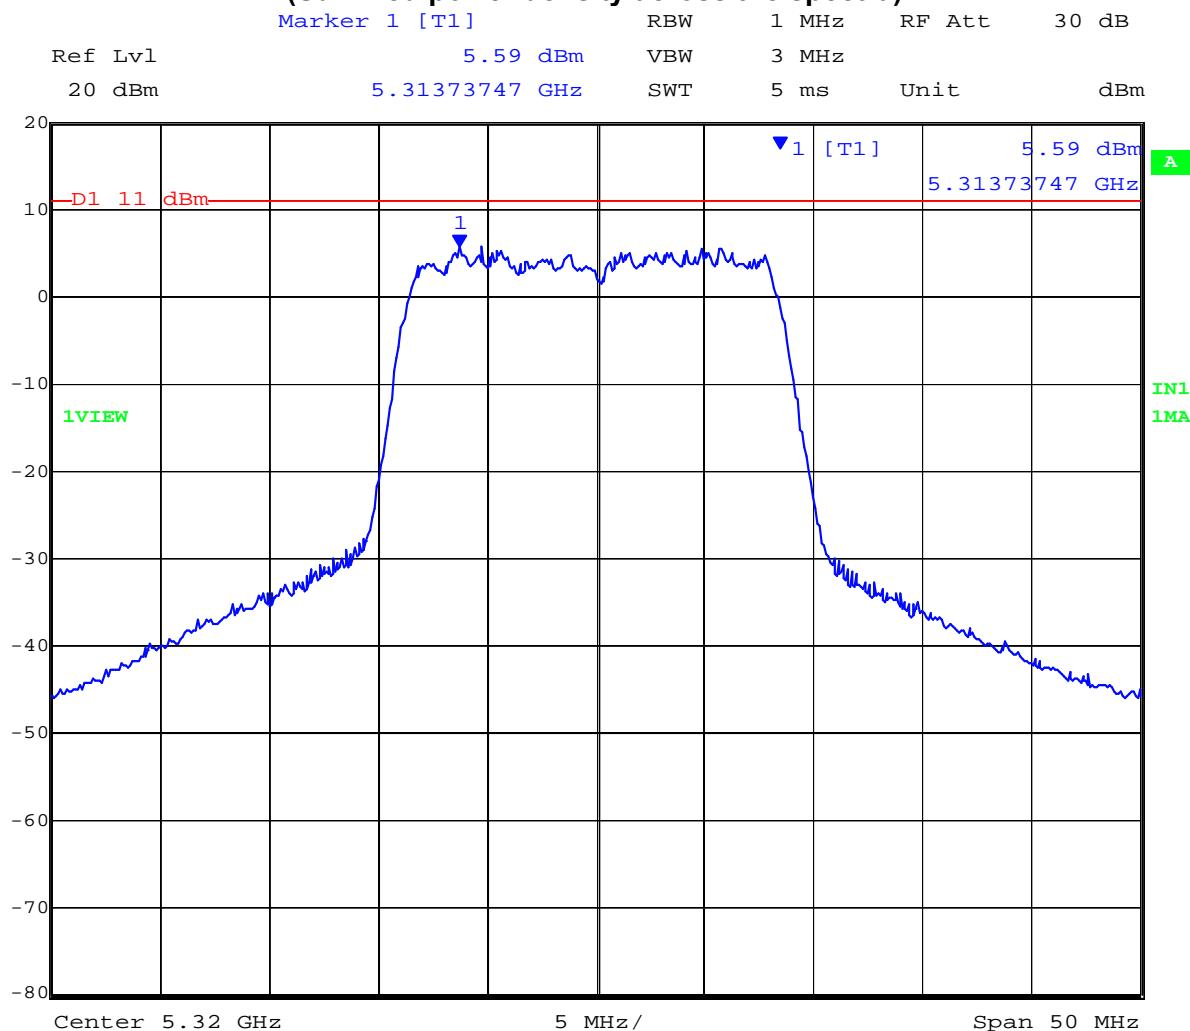

Date: 29.AUG.2011 11:47:51

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 104 of 223

TABLE OF RESULTS – 802.11n HT-20 5250 – 5350 MHz

Test Conditions:	15.407 (a)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.0 Vdc	Antenna Ports (N):	3
Notes 1:			
Notes 2:			


Test Frequency	Measured Peak Power				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
5260	8.19	6.96	6.25	--		10.99	11.00	-0.01
5300	6.73	5.69	5.73	--		9.72	11.00	-1.28
5320	6.24	4.86	4.98	--		9.15	11.00	-1.85

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,260 MHZ 802.11n HT-20 Power Spectral Density

(Summed power density across the spectra)

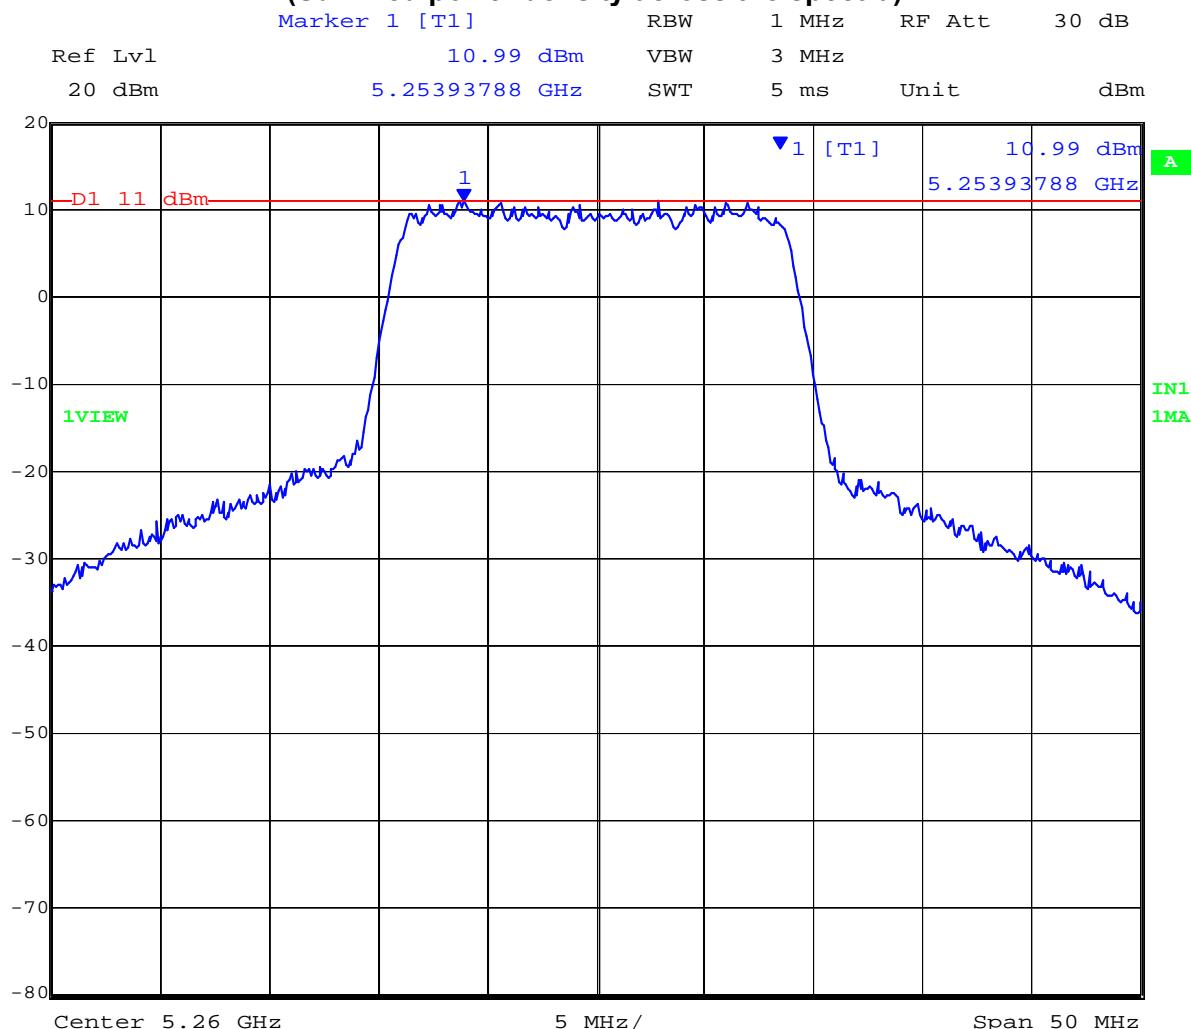


Date: 29.AUG.2011 11:51:46

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,300 MHZ 802.11n HT-20 Power Spectral Density

(Summed power density across the spectra)

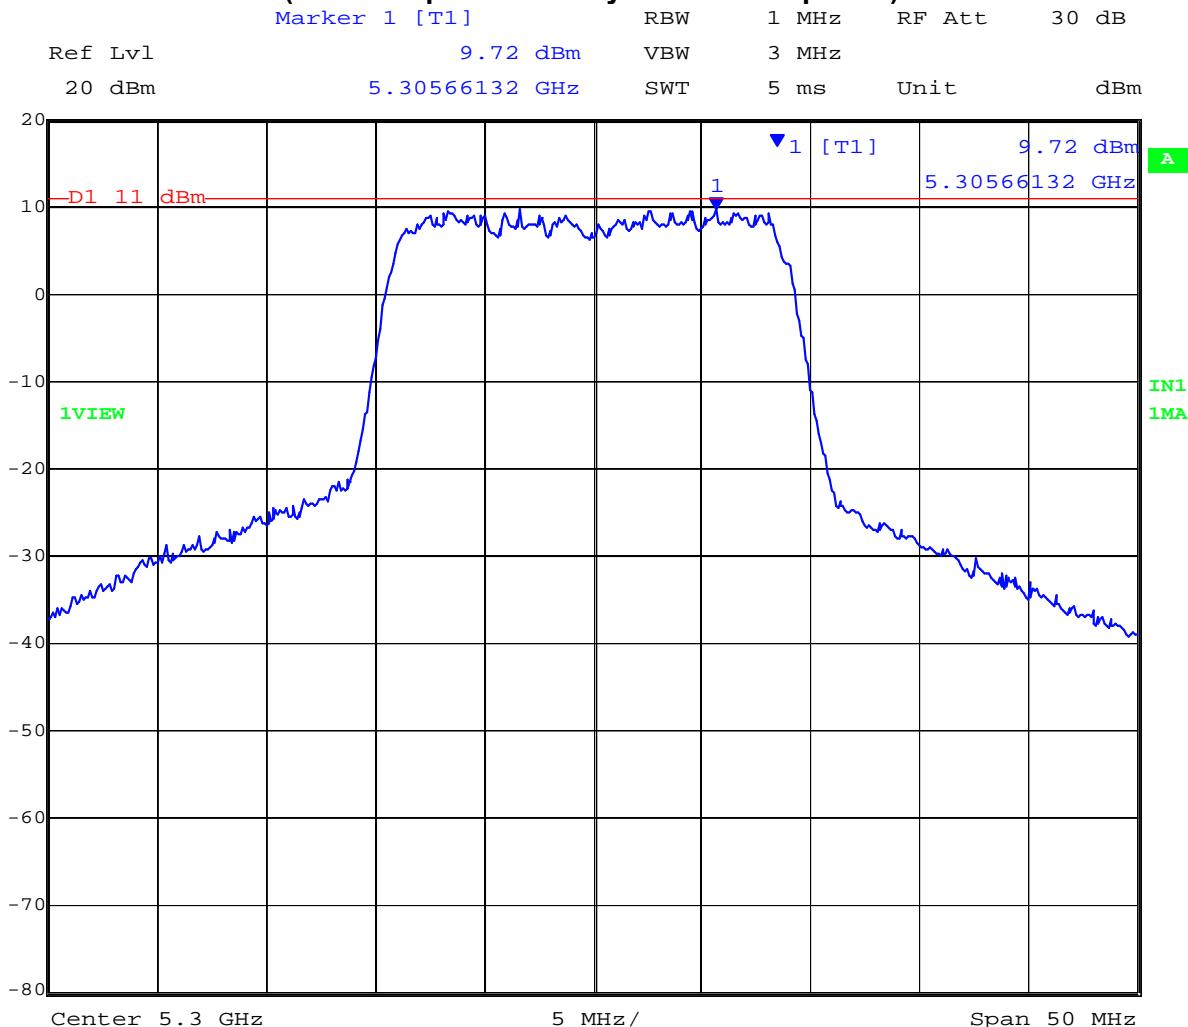


Date: 29.AUG.2011 11:53:18

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,320 MHZ 802.11n HT-20 Power Spectral Density

(Summed power density across the spectra)

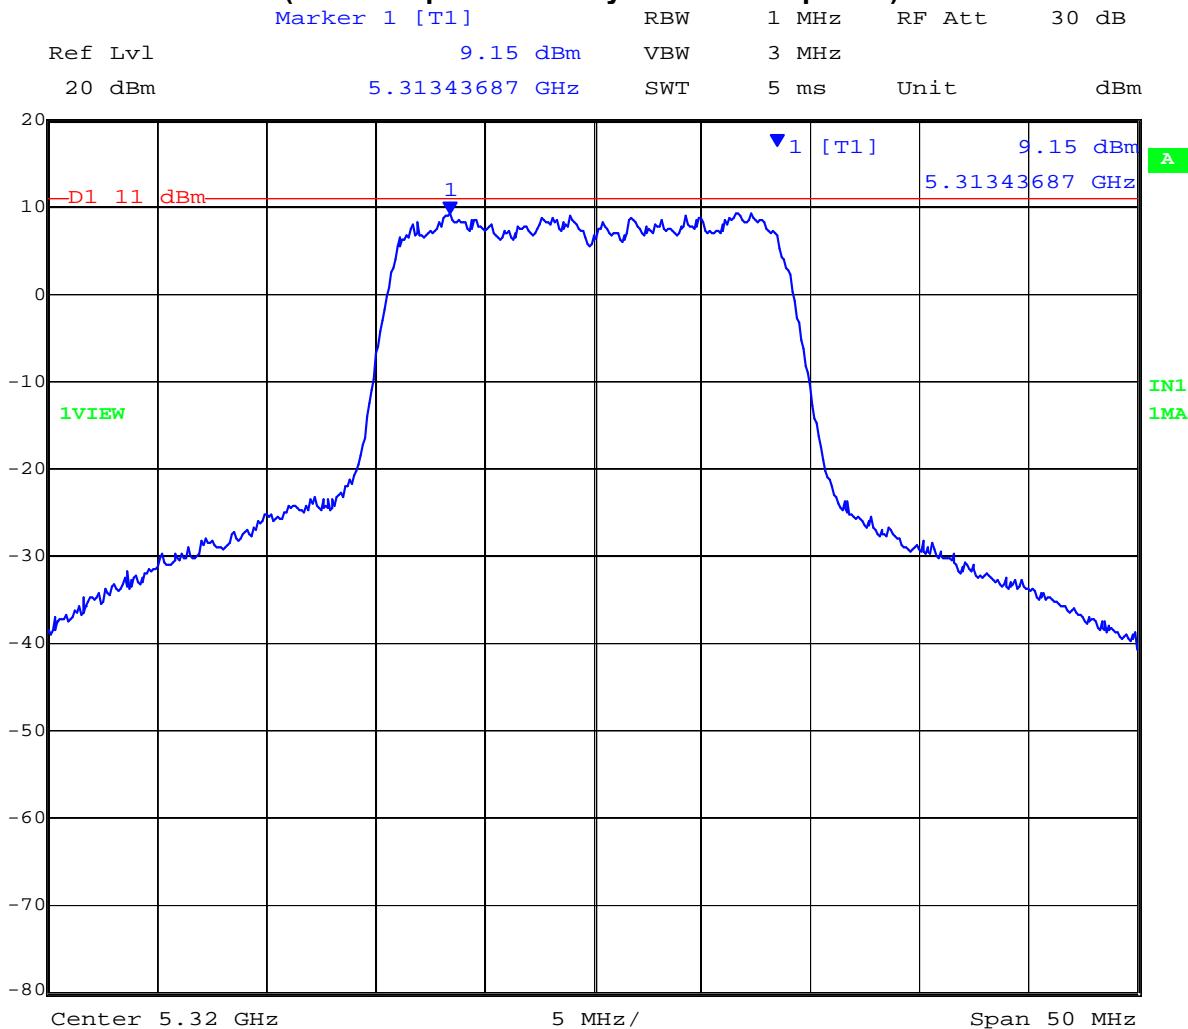

Date: 29.AUG.2011 11:54:17

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 108 of 223

TABLE OF RESULTS – 802.11n HT-40 5250 – 5350 MHz

Test Conditions:	15.407 (a)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.0 Vdc	Antenna Ports (N):	3
Notes 1:			
Notes 2:			


Test Frequency	Measured Peak Power				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
5270.00	4.26	3.29	3.49	--		7.60	11.00	-3.40
5310.00	2.16	1.69	2.69	--		5.71	11.00	-5.29

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,270 MHz 802.11n HT-40 Power Spectral Density

(Summed power density across the spectra)

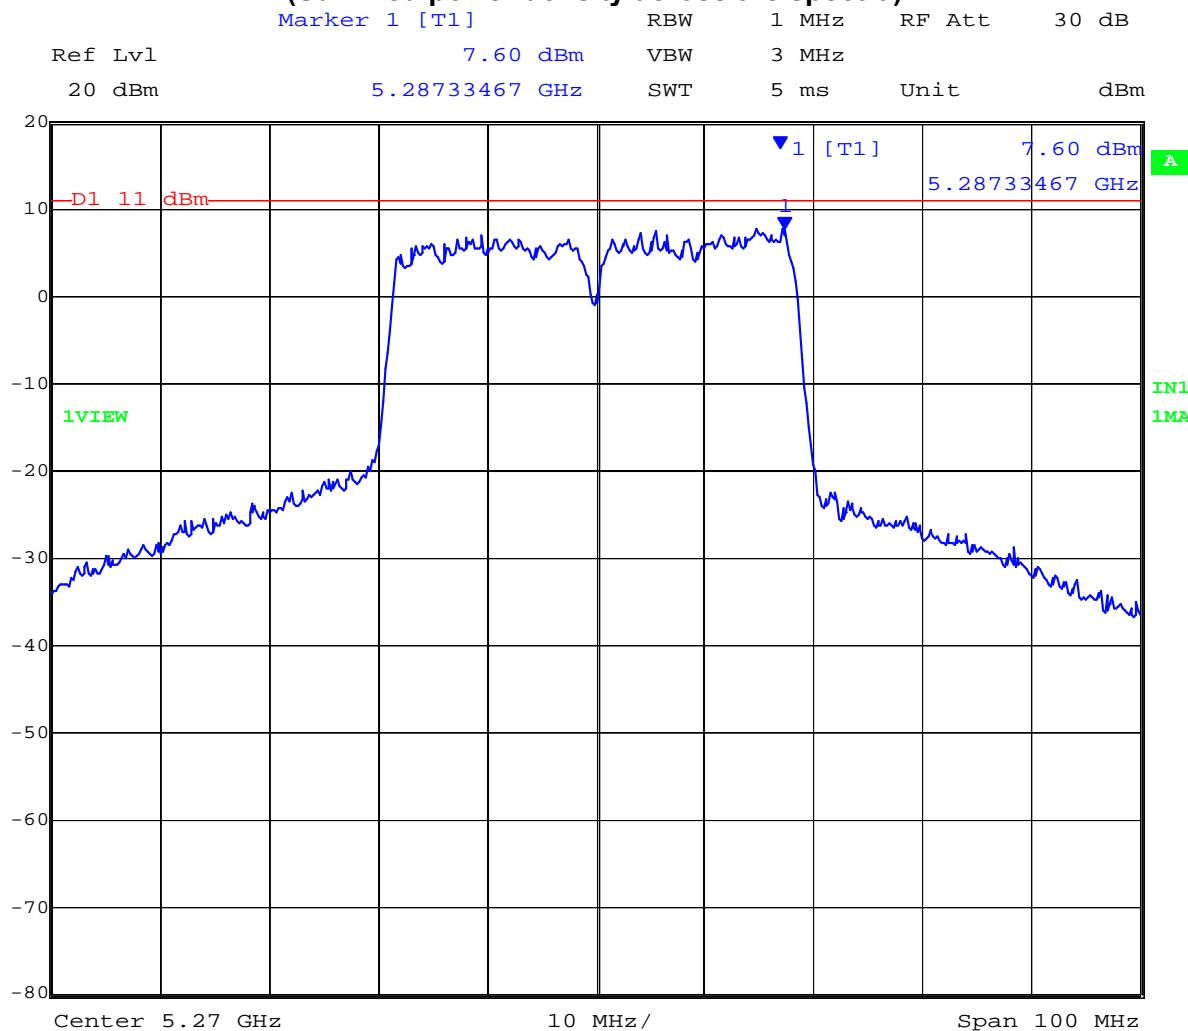


Date: 29.AUG.2011 11:56:10

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,310 MHz 802.11n HT-40 Power Spectral Density

(Summed power density across the spectra)

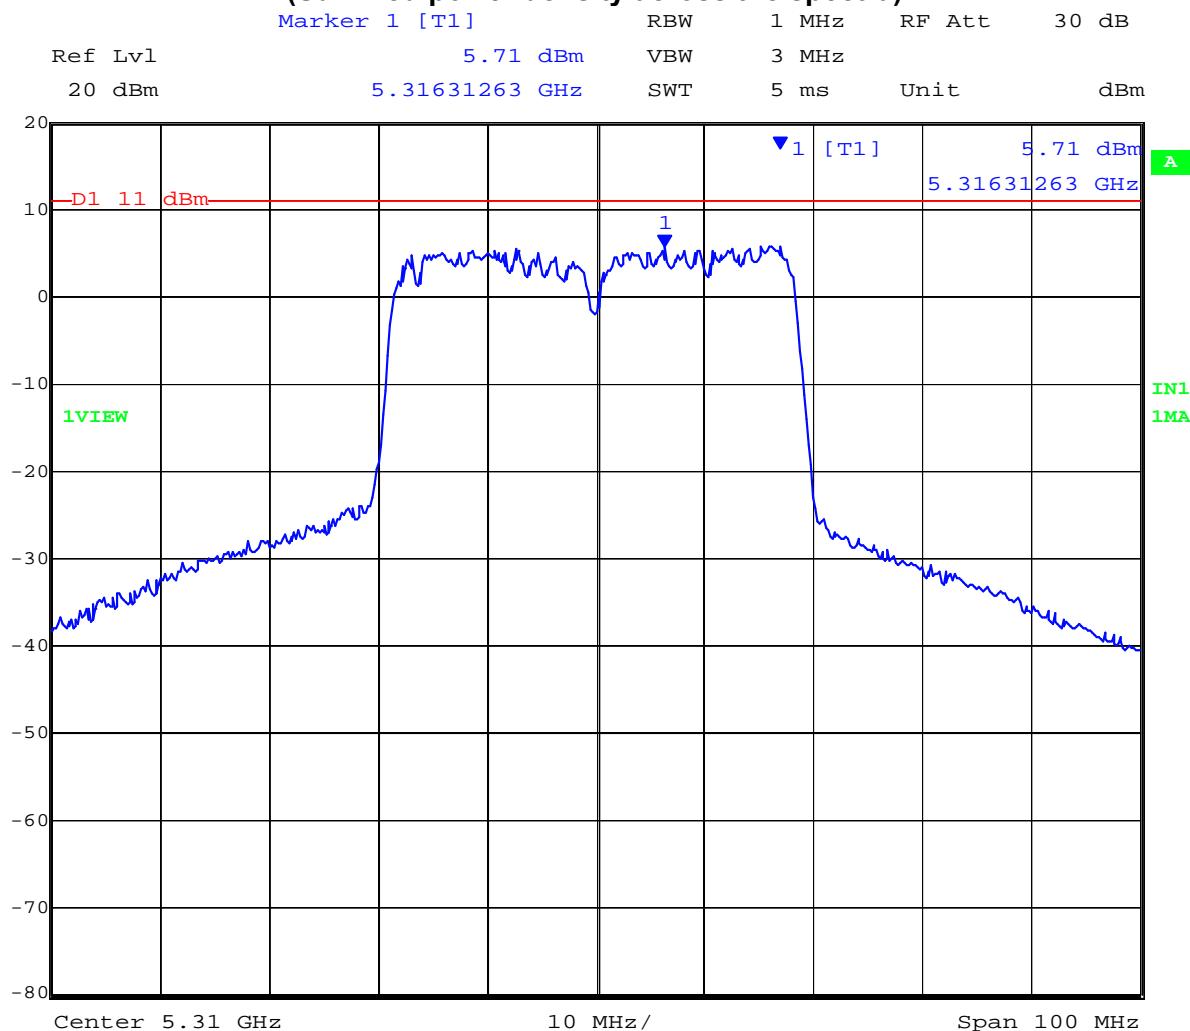

Date: 29.AUG.2011 11:57:15

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 111 of 223

TABLE OF RESULTS – 802.11a Legacy 5470 – 5725 MHz

Test Conditions:	15.407 (a)	Rel. Humidity (%):	35	to	42
Variant:	802.11a	Ambient Temp. (°C):	19	to	22
TPC:	HIGH	Pressure (mBars):	998	to	1003
Modulation:	ON	Duty Cycle (%):	100		
Beam Forming Gain (Y):	N/A	Antenna Gain:	3	dBi	
Applied Voltage:	48.0	Antenna Ports (N):	3		
Notes 1:					
Notes 2:					


Test Frequency	Measured Peak Power				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
5500	2.26	1.03	3.55	--		6.07	11.00	-4.93
5580	2.65	1.47	2.14	--		6.21	11.00	-4.79
5700	3.17	3.03	1.84	--		6.32	11.00	-4.68

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,500 MHZ 802.11a Legacy Power Spectral Density

(Summed power density across the spectra)

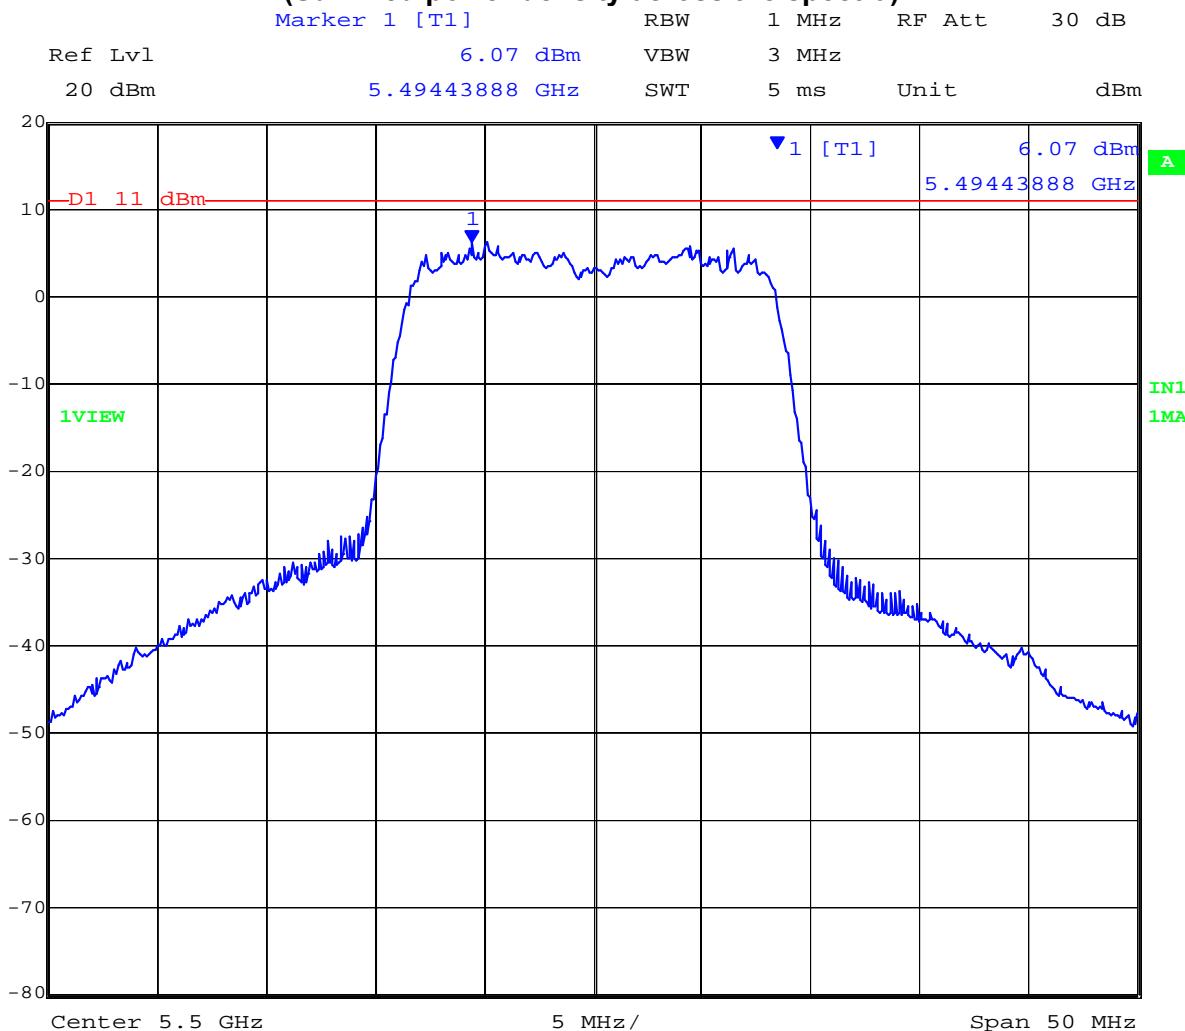


Date: 29.AUG.2011 11:21:04

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,580 MHZ 802.11a Legacy Power Spectral Density

(Summed power density across the spectra)

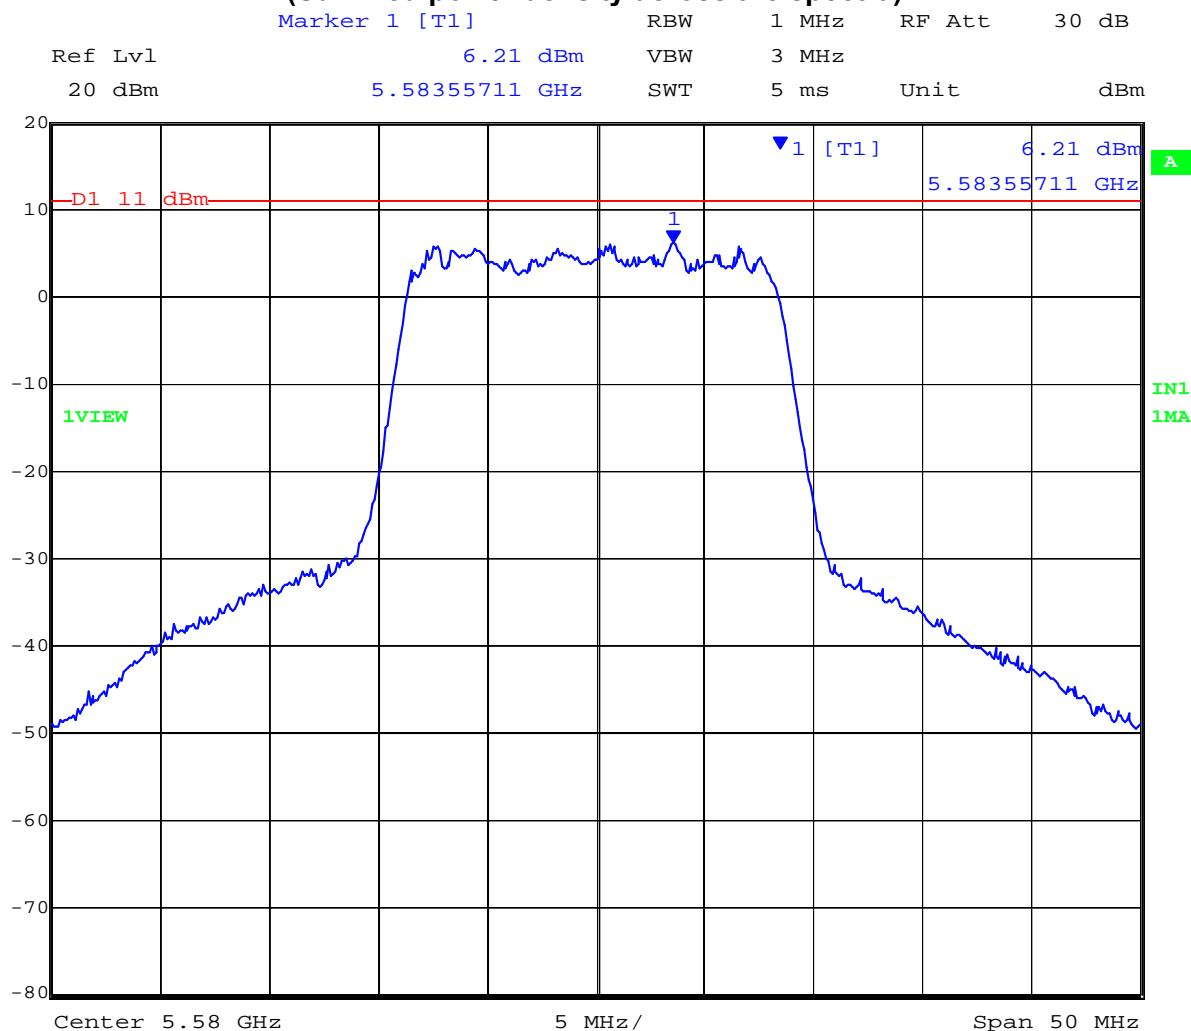


Date: 29.AUG.2011 11:22:49

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,700 MHZ 802.11a Legacy Power Spectral Density

(Summed power density across the spectra)

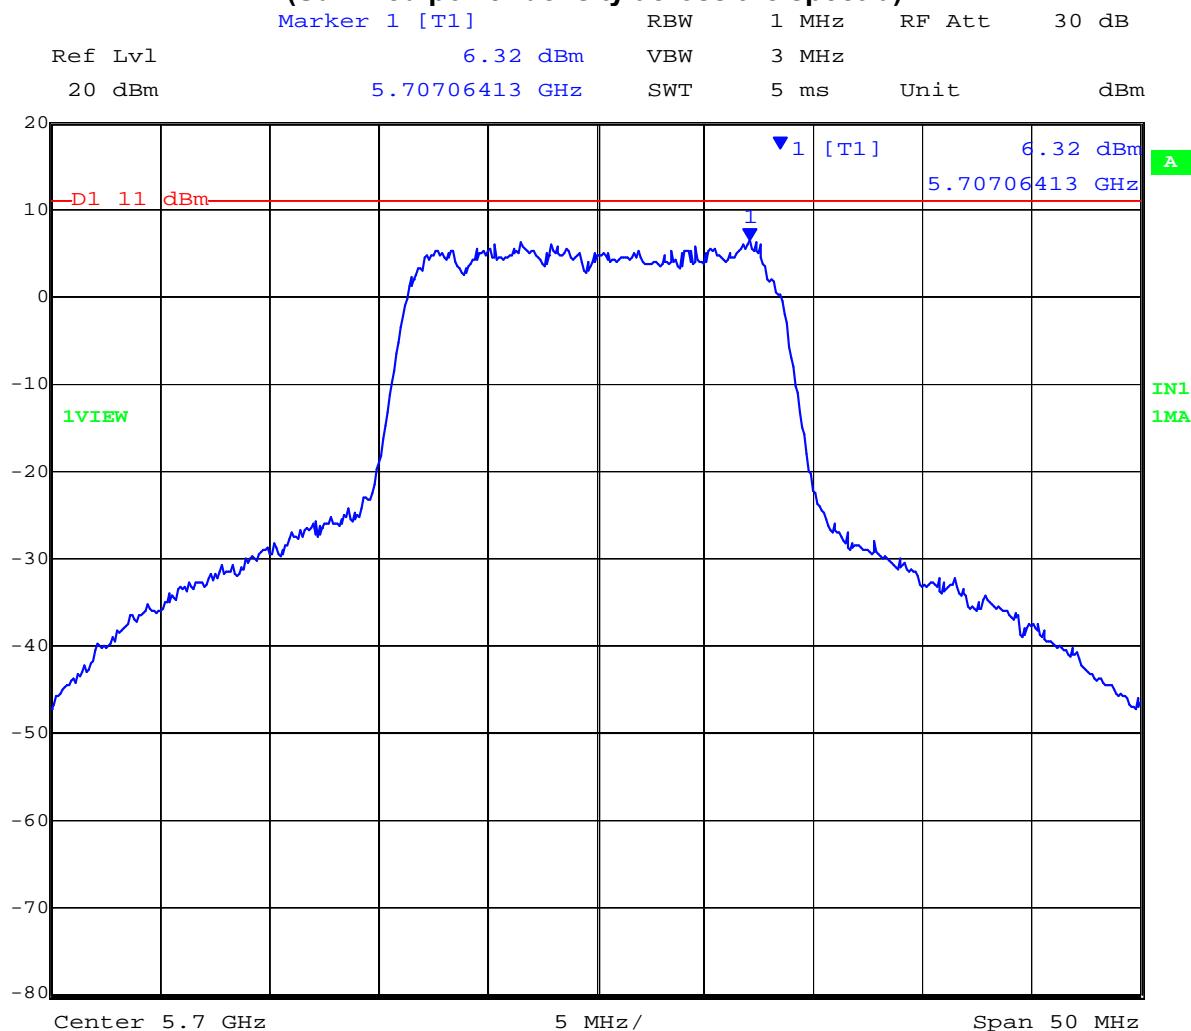

Date: 29.AUG.2011 11:24:30

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 115 of 223

TABLE OF RESULTS – 802.11n HT-20 5470 – 5725 MHz

Test Conditions:	15.407 (a)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.0 Vdc	Antenna Ports (N):	3
Notes 1:			
Notes 2:			


Test Frequency	Measured Peak Power				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
5500	3.46	3.24	4.26	--	7.38	11.00	-3.62	
5580	6.75	5.93	6.58	--	10.03	11.00	-0.97	
5700	7.56	6.90	6.15	--	10.59	11.00	-0.41	

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,500 MHZ 802.11n HT-20 Power Spectral Density

(Summed power density across the spectra)

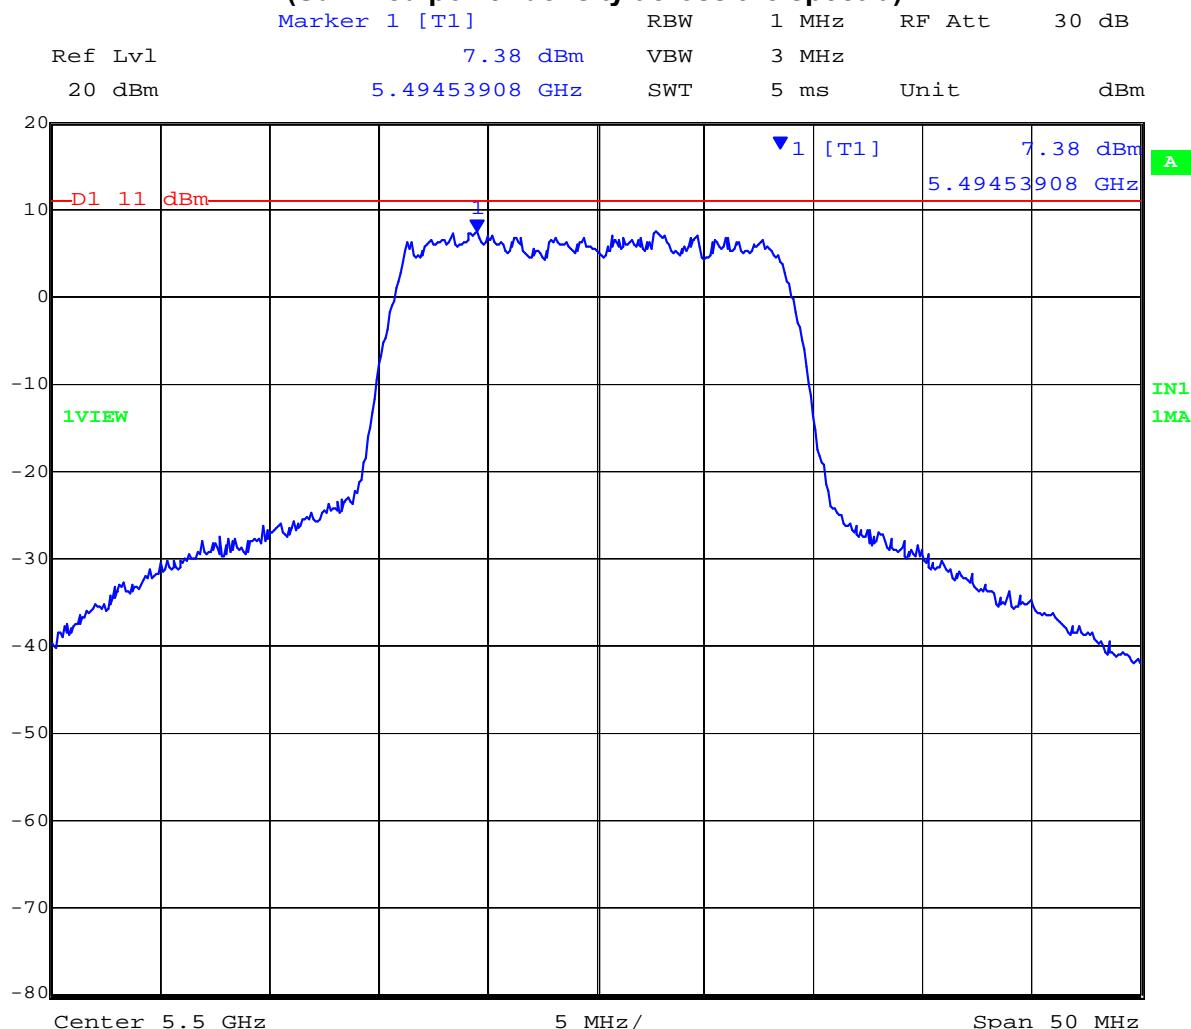


Date: 29.AUG.2011 11:28:49

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,580 MHZ 802.11n HT-20 Power Spectral Density

(Summed power density across the spectra)

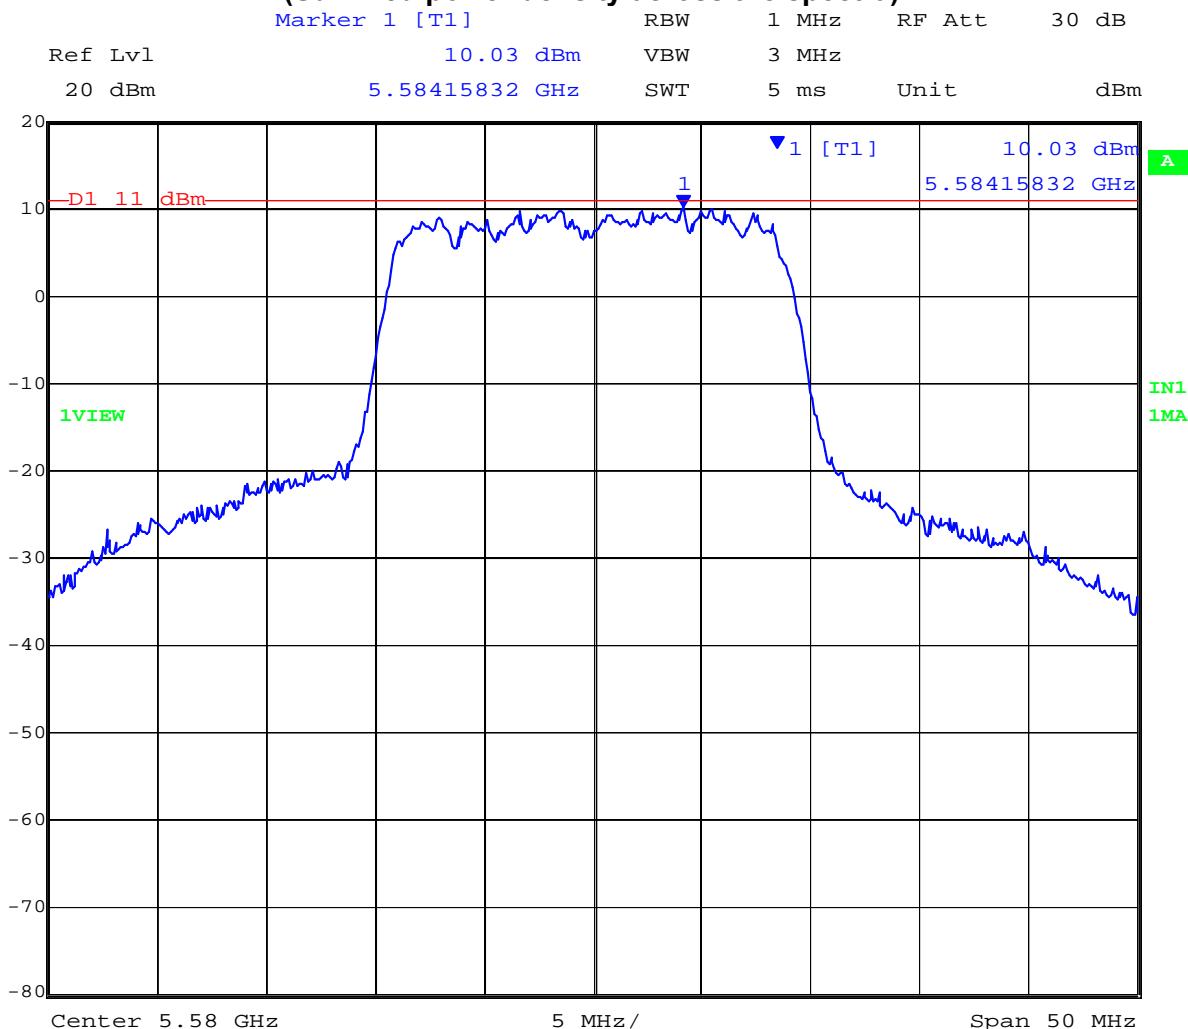


Date: 29.AUG.2011 11:30:03

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,700 MHZ 802.11n HT-20 Power Spectral Density

(Summed power density across the spectra)

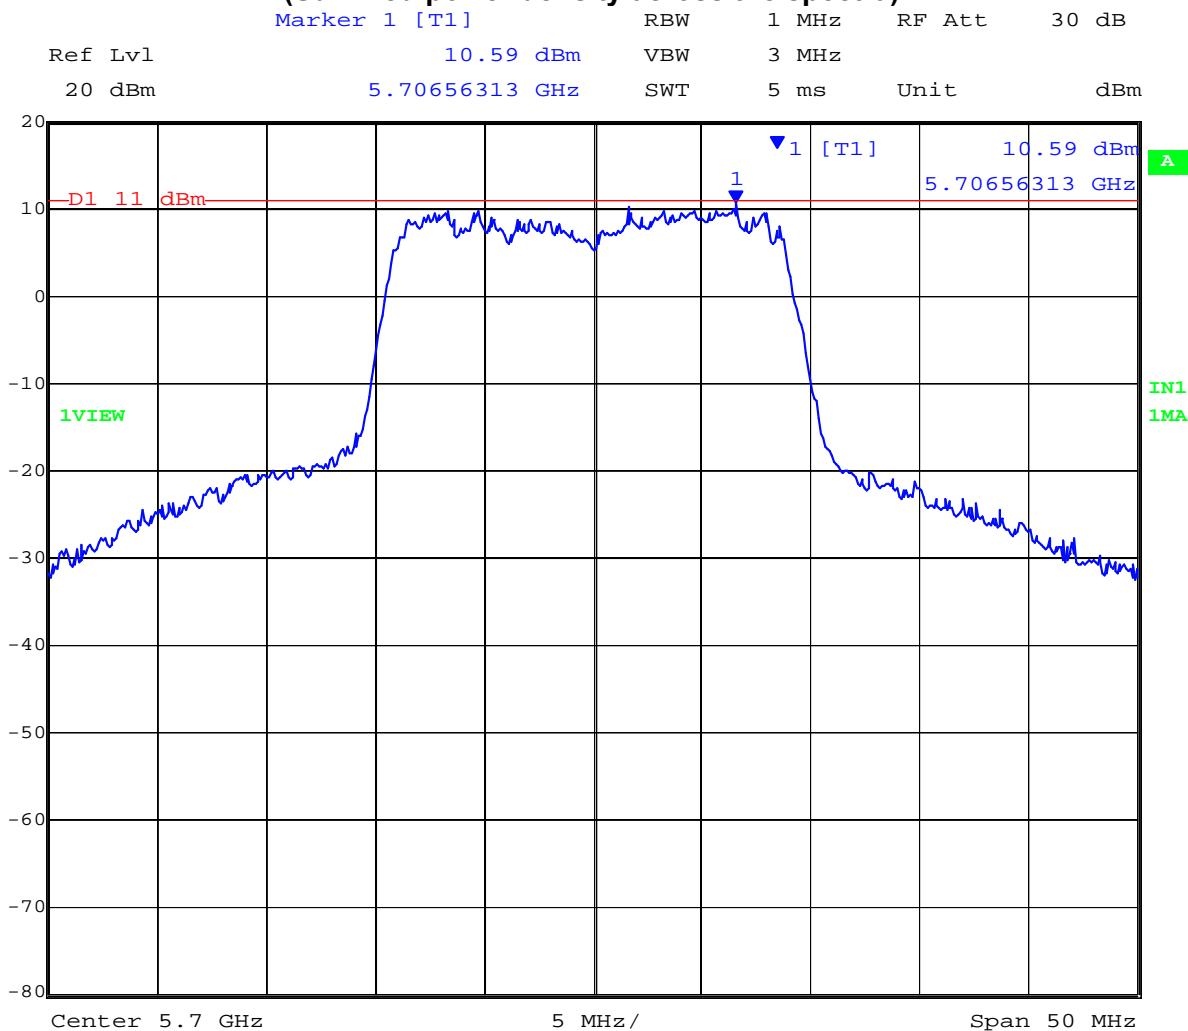

Date: 29.AUG.2011 11:38:39

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 119 of 223

TABLE OF RESULTS – 802.11n HT-40 5470 – 5725 MHz

Test Conditions:	15.407 (a)		Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-40		Ambient Temp. (°C):	19 to 22
TPC:	HIGH		Pressure (mBars):	998 to 1003
Modulation:	ON		Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB		Antenna Gain:	3 dBi
Applied Voltage:	48.0	Vdc	Antenna Ports (N):	3
Notes 1:				
Notes 2:				


Test Frequency	Measured Peak Power				Correction factor	Peak Power Spectral Density	Limit	Margin
	RF Port (dBm)							
MHz	a	b	c	d	10Log(N)	dBm	dBm	dB
5510	2.98	0.52	3.18	--		5.70	11.00	-5.30
5550	3.20	1.45	2.99	--		7.97	11.00	-3.03
5670	3.69	2.24	2.69	--		8.46	11.00	-2.54

Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,510 MHz 802.11n HT-40 Power Spectral Density

(Summed power density across the spectra)

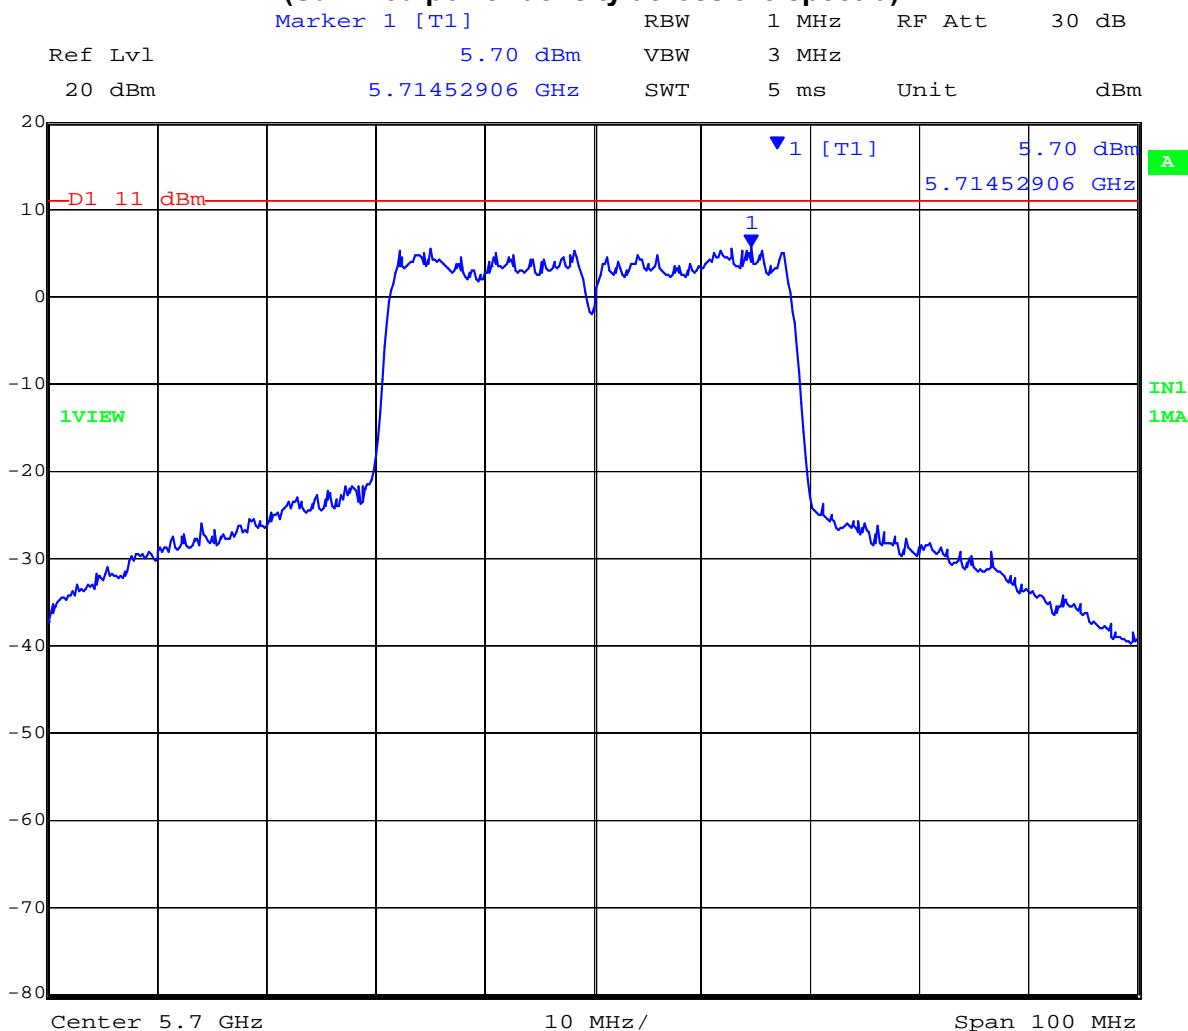


Date: 29.AUG.2011 11:34:38

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,550 MHz 802.11n HT-40 Power Spectral Density


(Summed power density across the spectra)

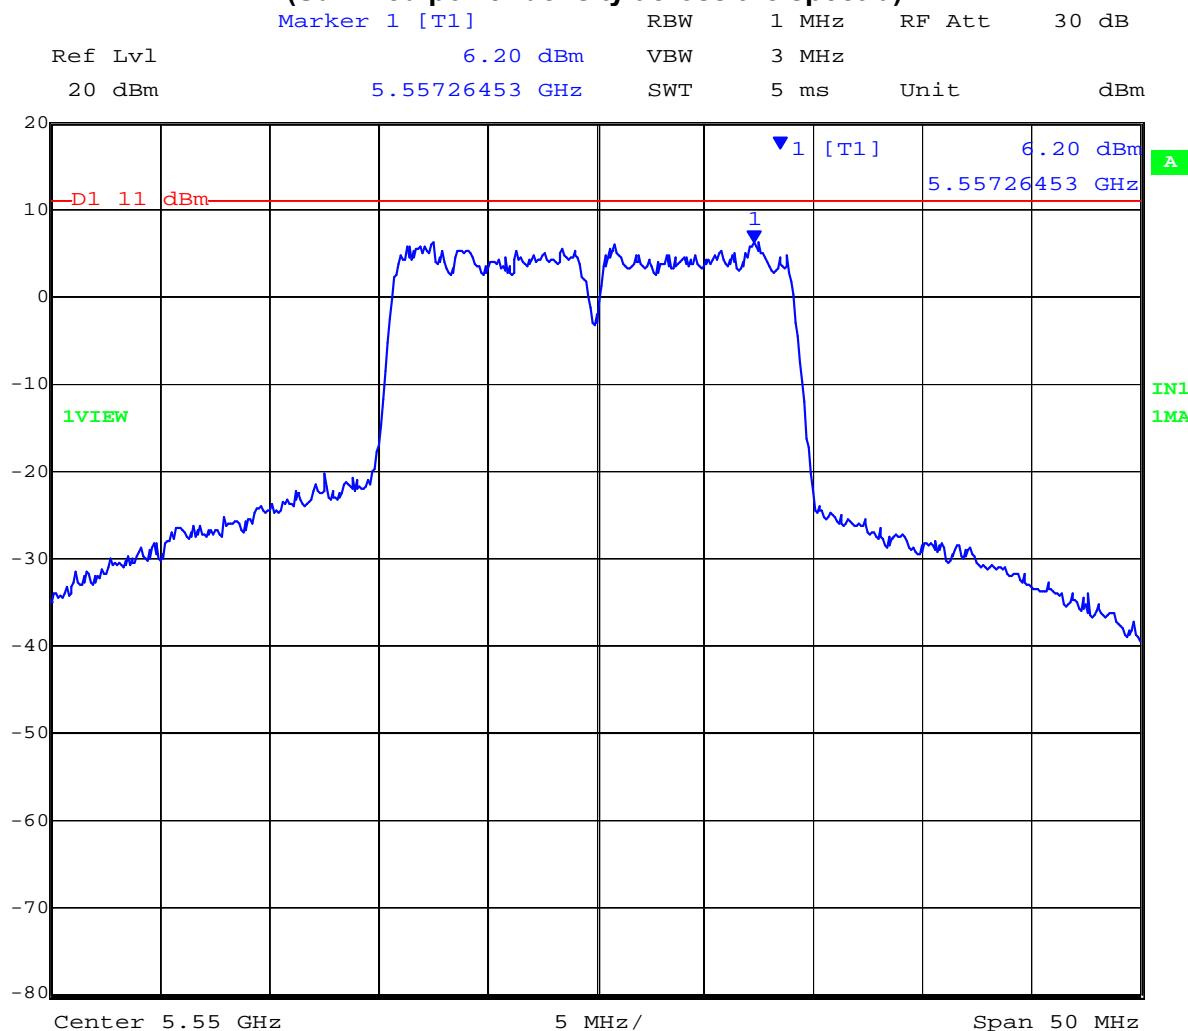

Date: 29.AUG.2011 11:40:52

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5,670 MHz 802.11n HT-40 Power Spectral Density
(Summed power density across the spectra)

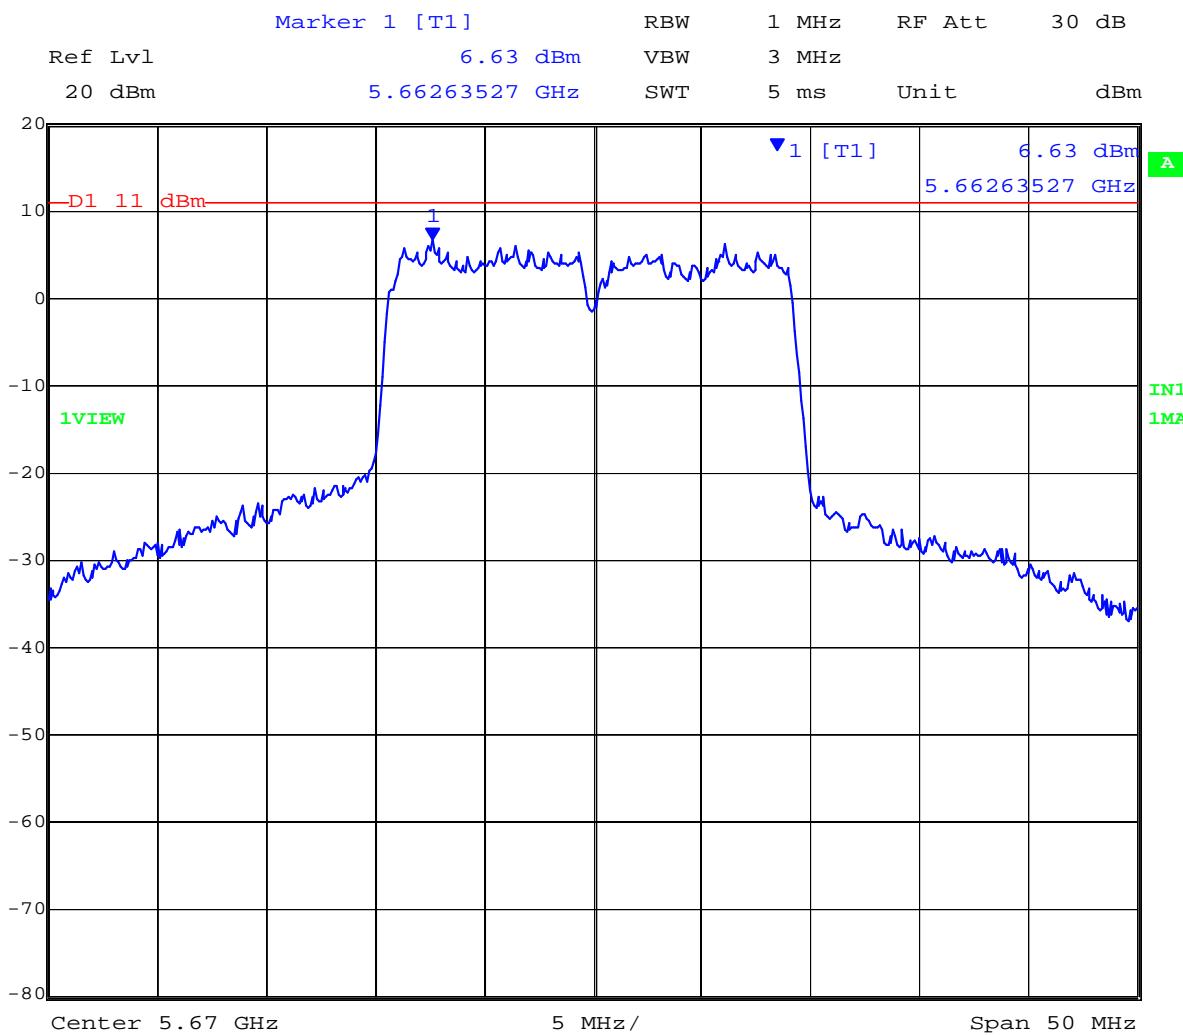

Date: 29.AUG.2011 11:41:48

This test report may be reproduced in full only. The document may only be updated by MiCOM
 Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 123 of 223

Specification

FCC, Part 15 §15.407 (a)(1), (a)(2)

5150 – 5250 MHz

(a)(1) The peak power spectral density shall not exceed +4 dBm in any 1 megahertz band.

5250 – 5350 MHz & 5470 – 5725 MHz

(a)(2) The peak power spectral density shall not exceed +11 dBm in any 1 megahertz band.

Industry Canada RSS-210 § A9.2(1), A9.2(2)

5150 – 5250 MHz

§ A9.2(1) The eirp spectral density shall not exceed +10 dBm in any 1 MHz band

5250 – 5350 MHz & 5470 – 5725 MHz

§ A9.2(2) The power spectral density shall not exceed +11 dBm in any 1 MHz band

Laboratory Measurement Uncertainty for Spectral Density

Measurement uncertainty	±1.33 dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-01 'Measuring RF Output Power'	0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5.1.4. Peak Excursion Ratio

FCC, Part 15 Subpart C §15.407(a)(6)

Test Procedure

Normative Reference (xi) Section 2.1 Measurement Procedure DA 02-2138 "Measurement Procedure Updated for Peak Transmit Power in the UNII Bands" was implemented to determine the Peak Excursion Ratio. This is a conducted measurement using a spectrum analyzer. The Peak Excursion Ratio is the difference in amplitude (dB) between the two traces.

Test Measurement Set up

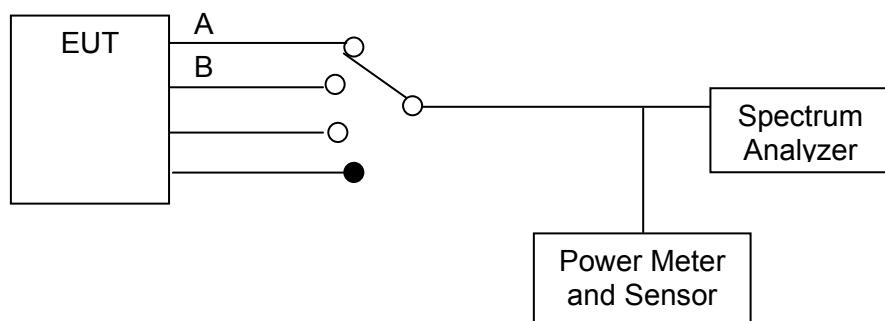

Measurement set up for Peak Excursion Ratio

Measurement Results for Peak Excursion Ratio

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57% Pressure: 999 to 1012 mbar

Radio Parameters

Duty Cycle: 100%

Output: Modulated Carrier

Power: Maximum Default Power

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 125 of 223

TABLE OF RESULTS – 802.11a Legacy 5150 – 5250 MHz


Test Conditions:	15.407 (a)	Rel. Humidity (%):	35 to 42
Variant:	802.11a	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	N/A Vdc		
Notes 1:			
Notes 2:			

Test Frequency	Trace Δ Marker				Limit	Margin
	Port A	Port B	Port C	Port D		
MHz	dB	dB	dB	dB	dB	dB
5180	-12.36	-11.20	-11.02	--	-13.00	-1.98
5200	-11.96	-11.48	-11.01	--		-1.99
5240	-11.91	-12.02	-9.99	--		-3.01


Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,180 MHz 802.11a Legacy Peak Excursion Ratio

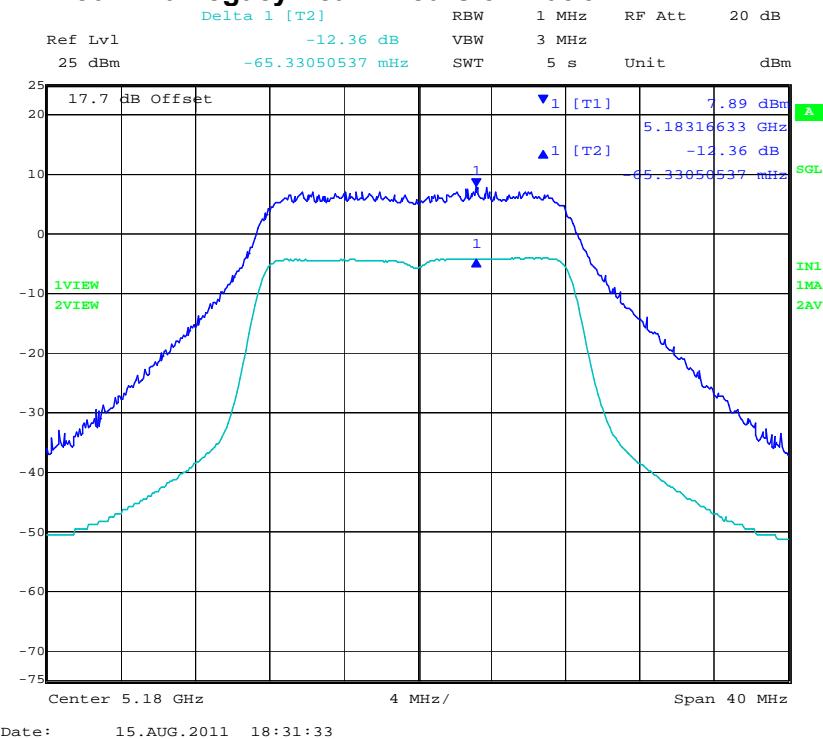


PORT B 5,180 MHz 802.11a Legacy Peak Excursion Ratio

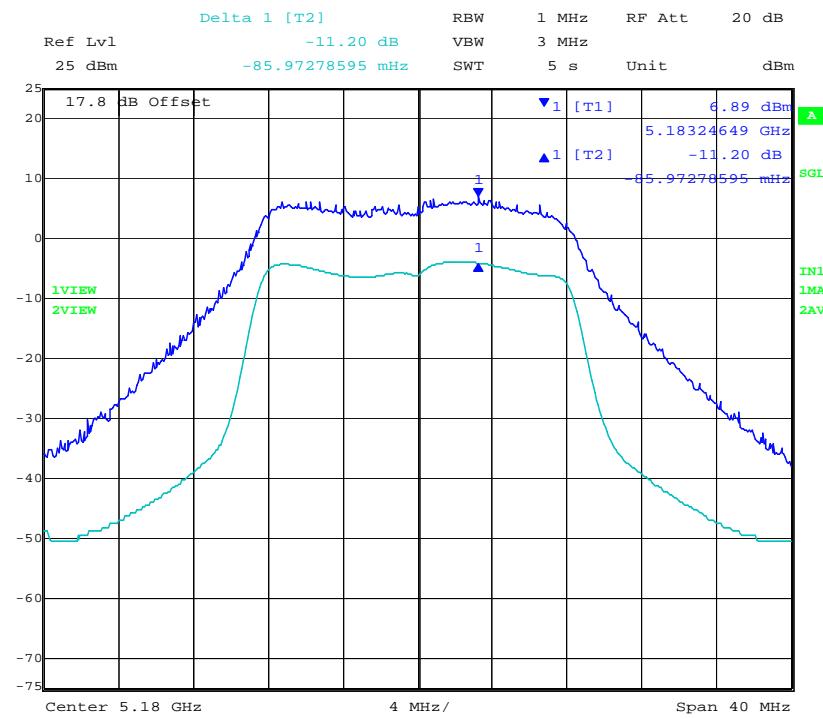

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


PORT C 5,180 MHz 802.11a Legacy Excursion Ratio

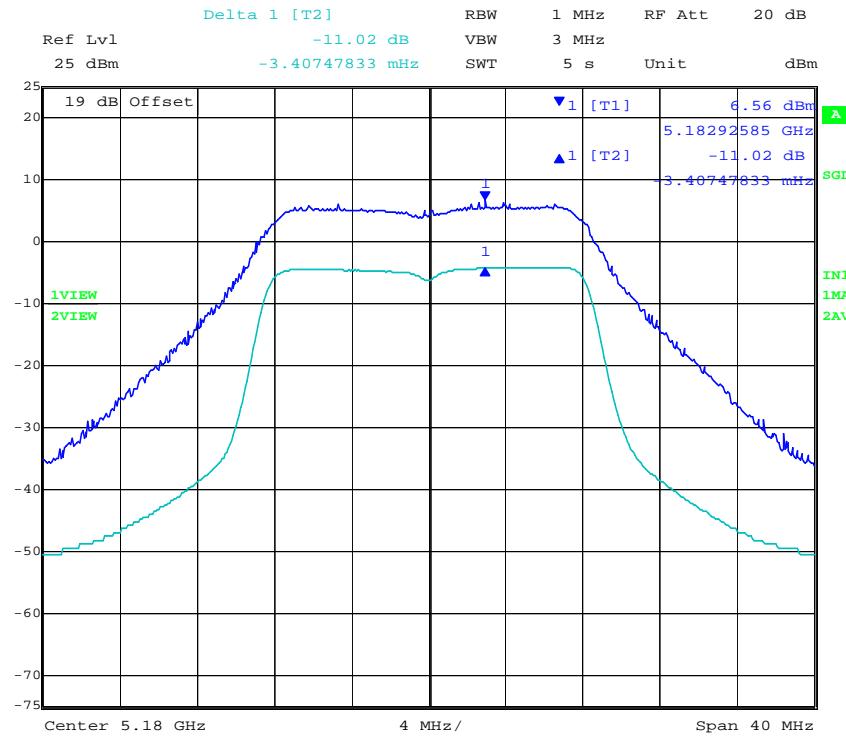


Date: 15.AUG.2011 18:32:49

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,200 MHz 802.11a Legacy Peak Excursion Ratio

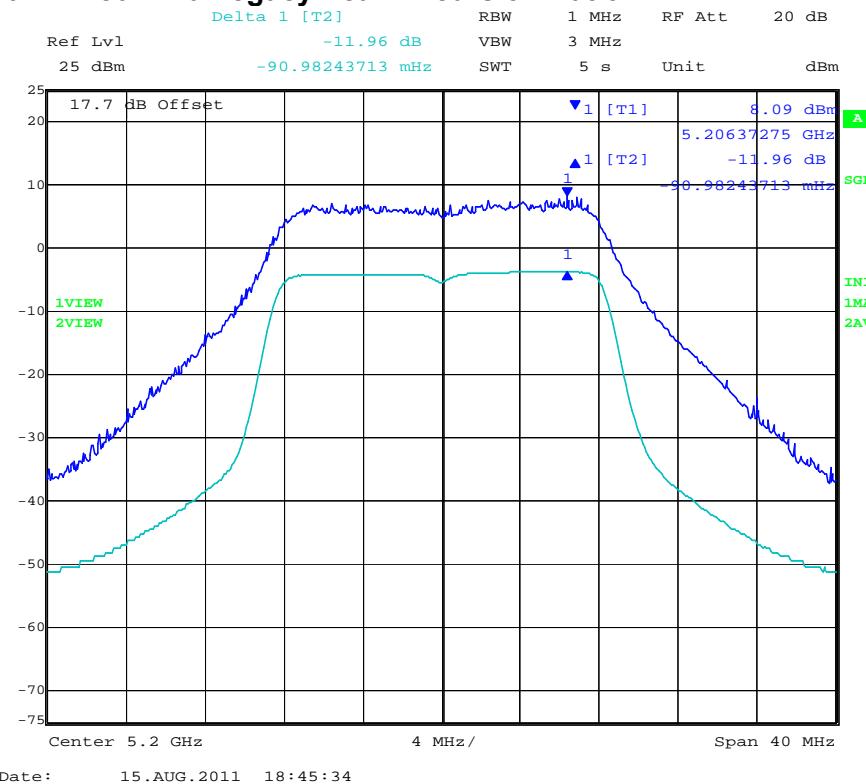


PORT B 5,200 MHz 802.11a Legacy Peak Excursion Ratio

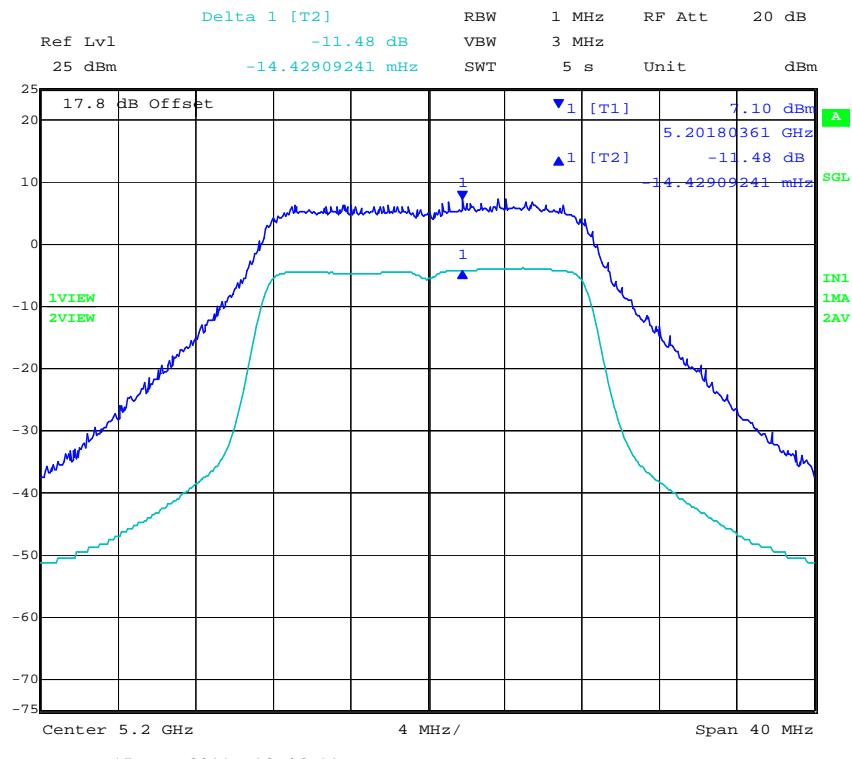


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,200 MHz 802.11a Legacy Peak Excursion Ratio

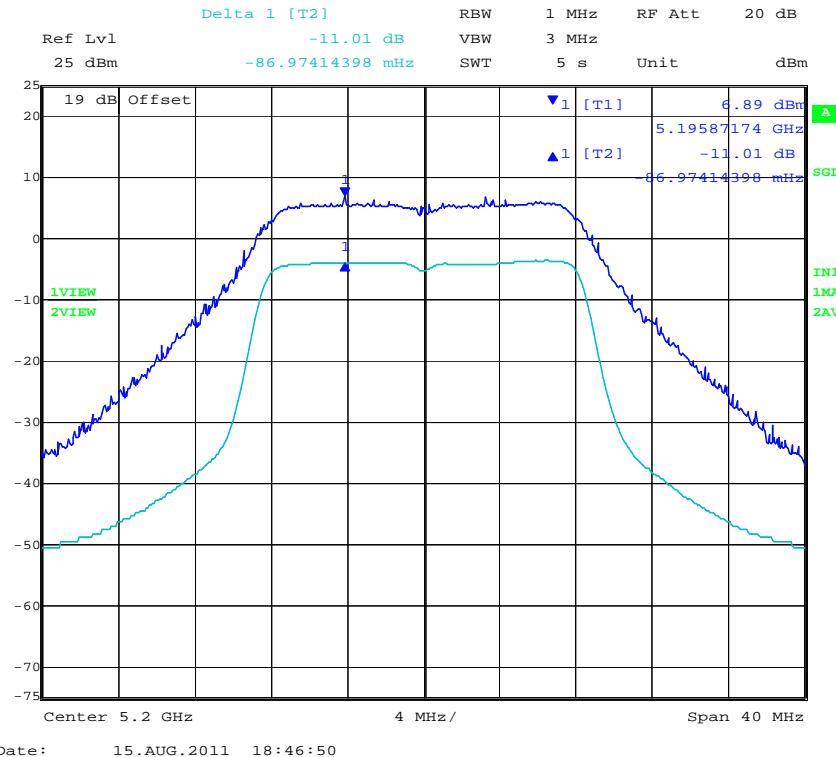


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,240 MHz 802.11a Legacy Peak Excursion Ratio

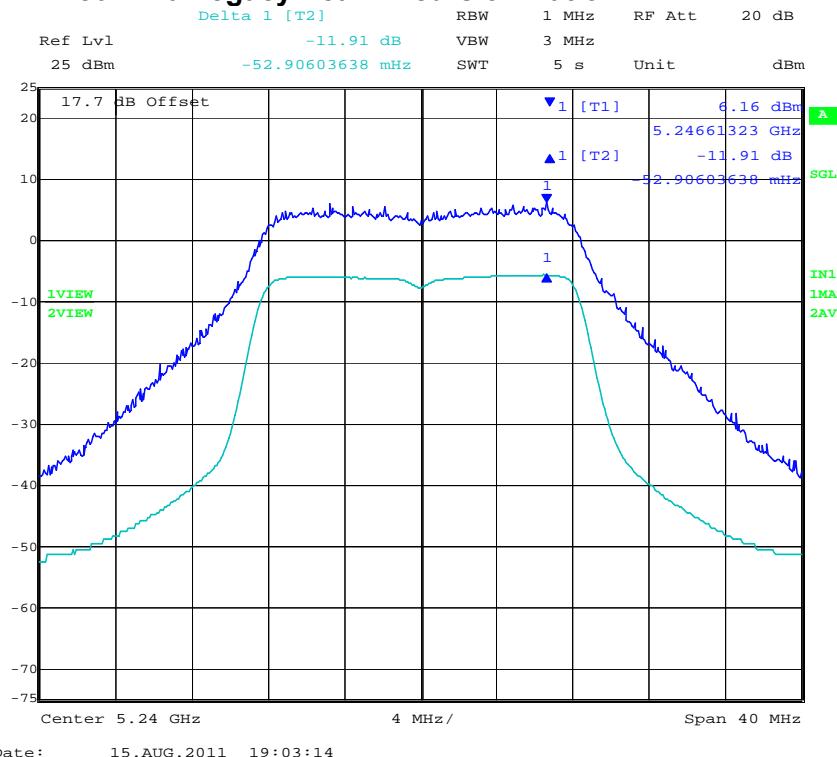


PORT B 5,240 MHz 802.11a Legacy Peak Excursion Ratio

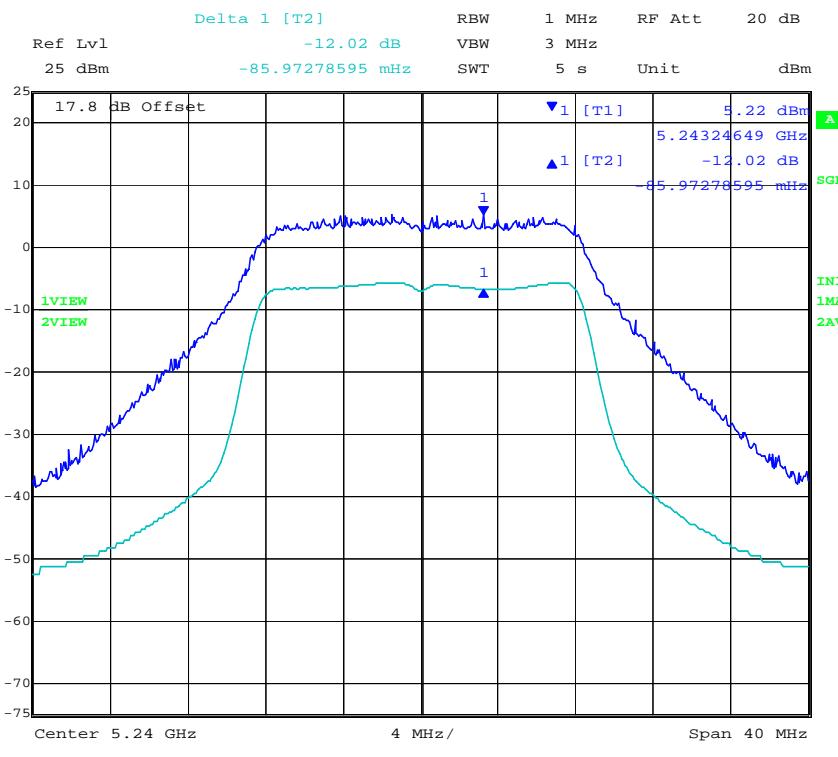

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,240 MHz 802.11a Legacy Peak Excursion Ratio

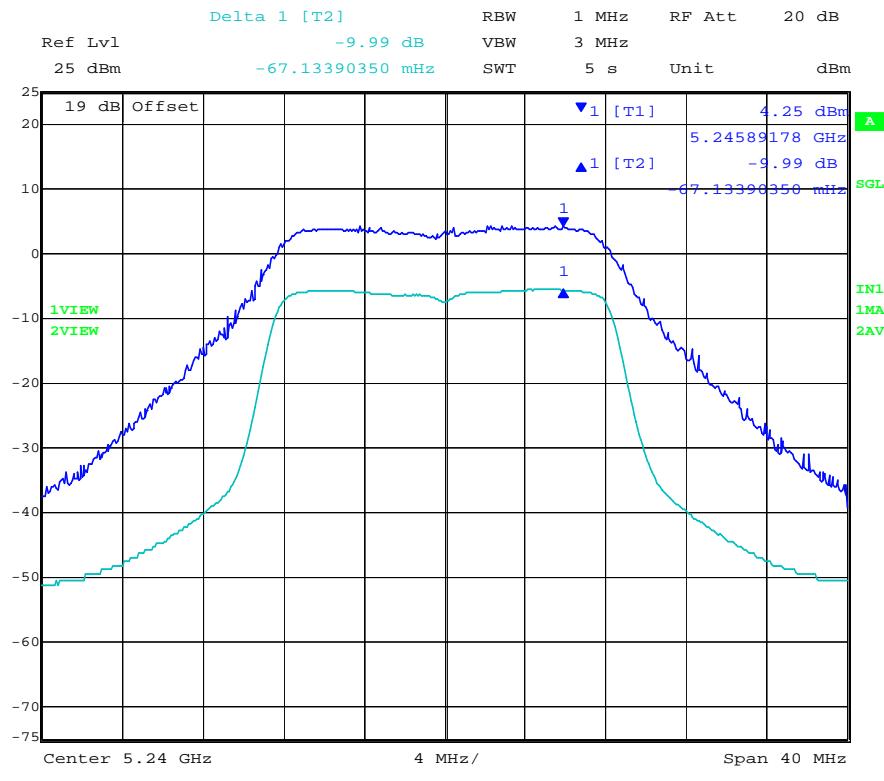

Date: 15.AUG.2011 19:04:29

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 132 of 223

TABLE OF RESULTS – 802.11n HT-20 5150 – 5250 MHz


Test Conditions:	15.407 (a)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.0 Vdc		
Notes 1:			
Notes 2:			

Test Frequency	Trace Δ Marker				Limit	Margin
	Port A	Port B	Port C	Port D		
MHz	dB	dB	dB	dB	dB	dB
5180	-11.59	-11.22	-10.54	--	-13.00	-2.46
5200	-11.73	-10.97	-10.14	--		-2.86
5240	-11.56	-11.04	-11.06	--		-1.96


Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,180 MHz 802.11n HT-20 Peak Excursion Ratio

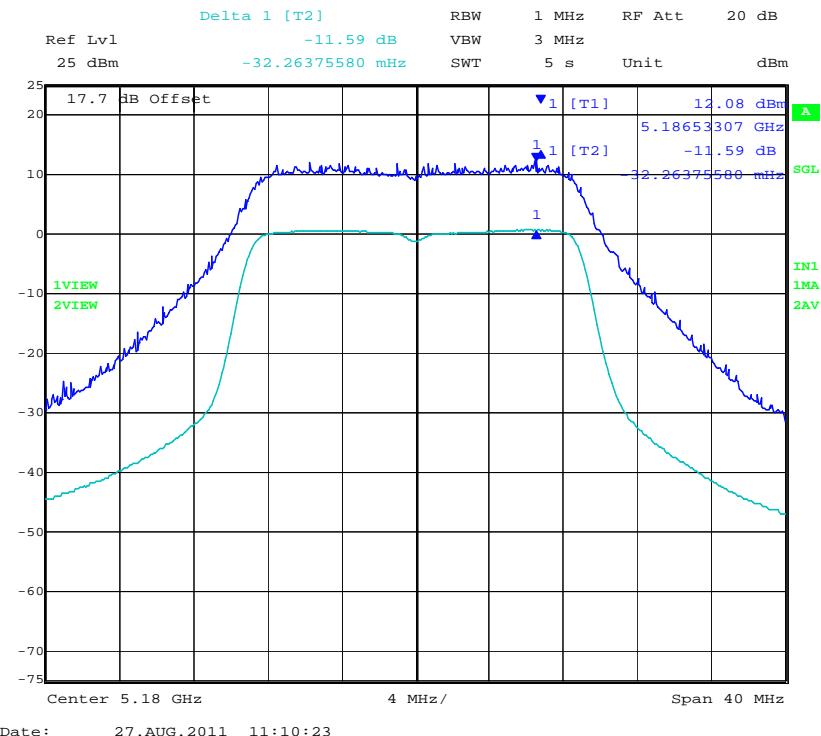


PORT B 5,180 MHz 802.11n HT-20 Peak Excursion Ratio

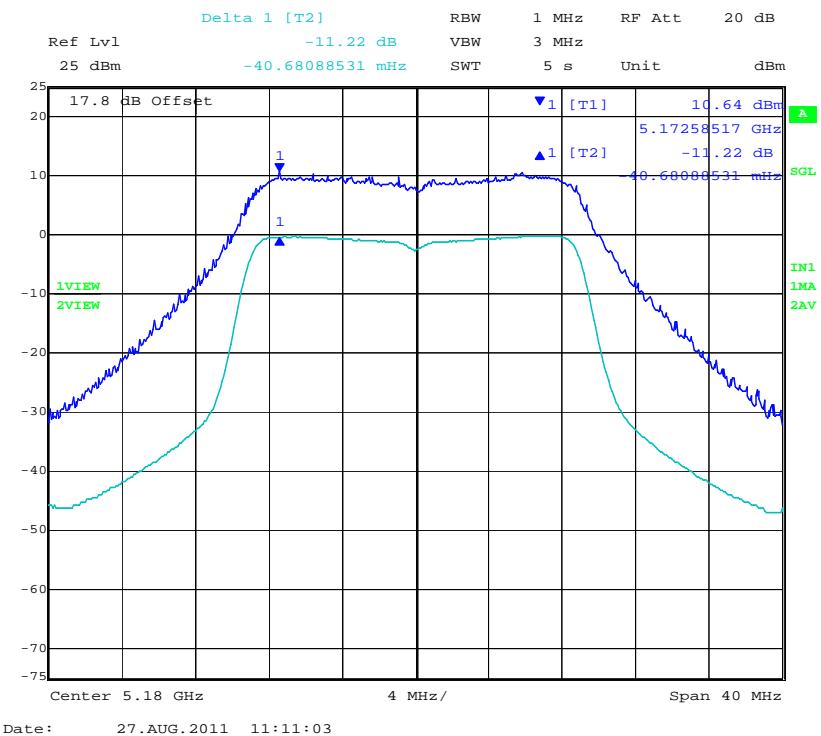

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5.180 MHz 802.11n HT-20 Peak Excursion Ratio

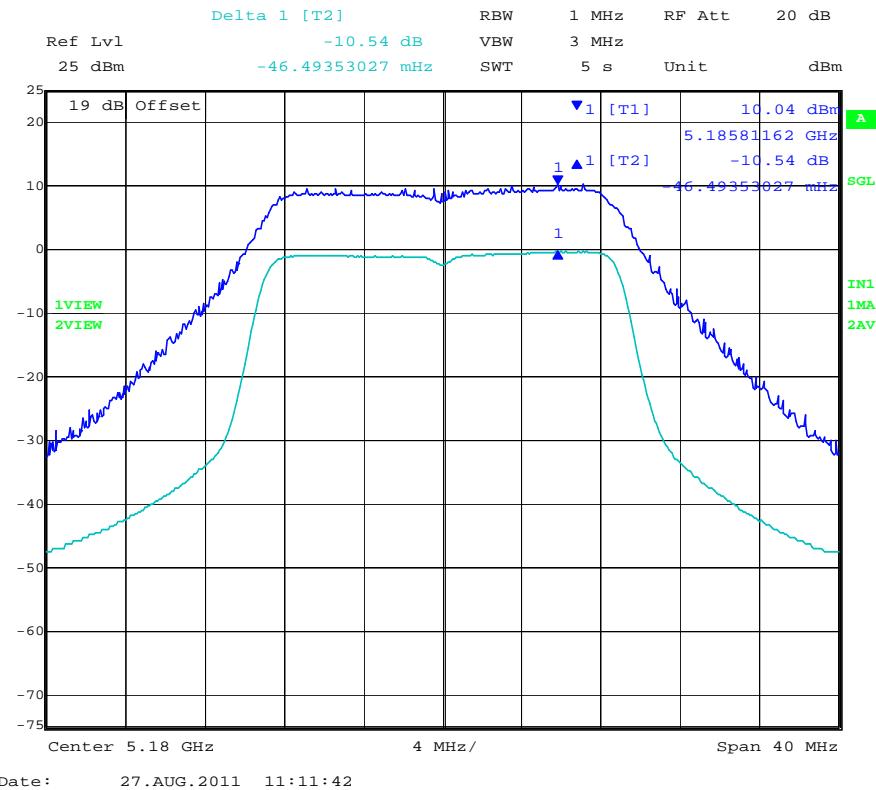


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 135 of 223

PORT A 5,200 MHz 802.11n HT-20 Peak Excursion Ratio

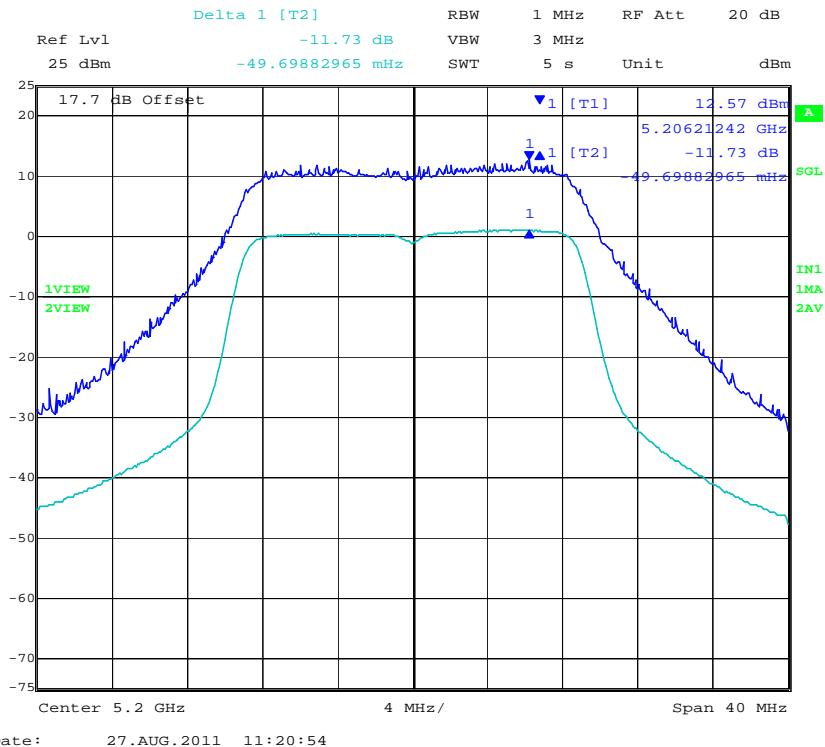

PORT B 5,200 MHz 802.11n HT-20 Peak Excursion Ratio

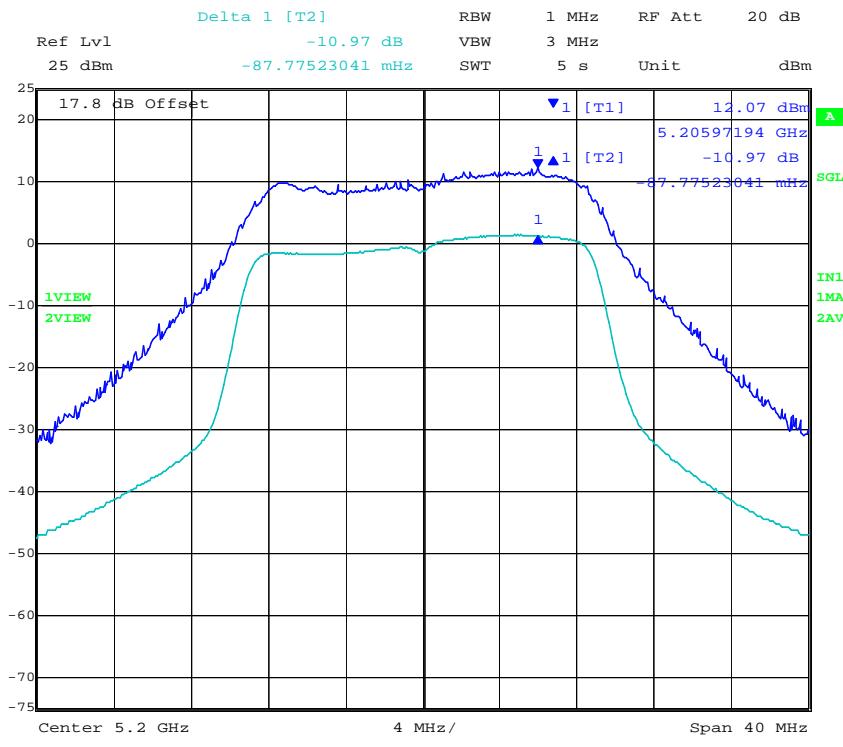


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 136 of 223


PORT C 5,200 MHz 802.11n HT-20 Peak Excursion Ratio

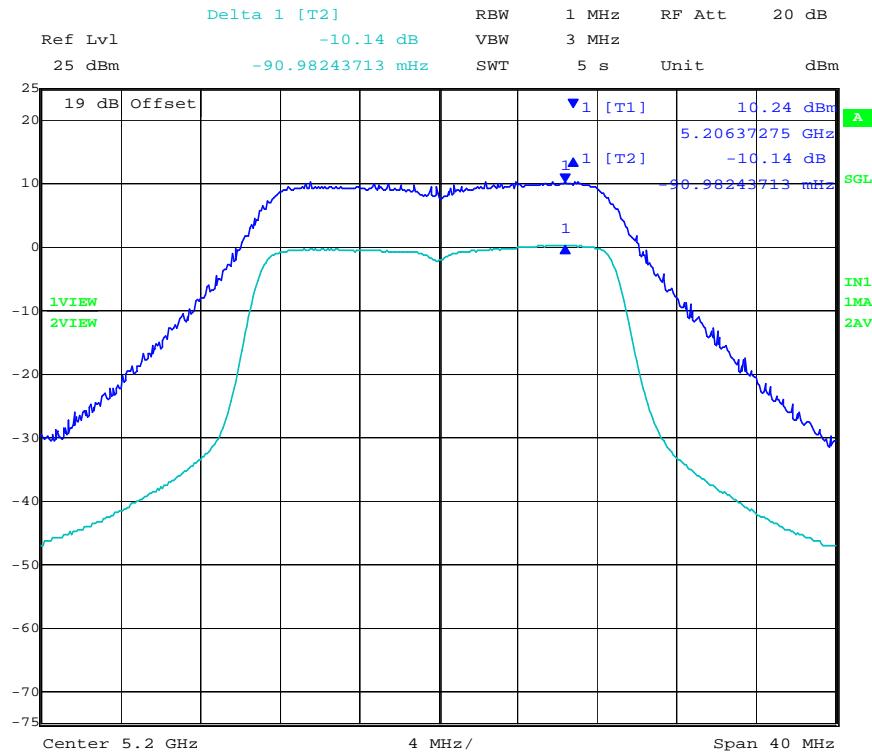


Date: 27.AUG.2011 11:22:14

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,240 MHz 802.11n HT-20 Peak Excursion Ratio

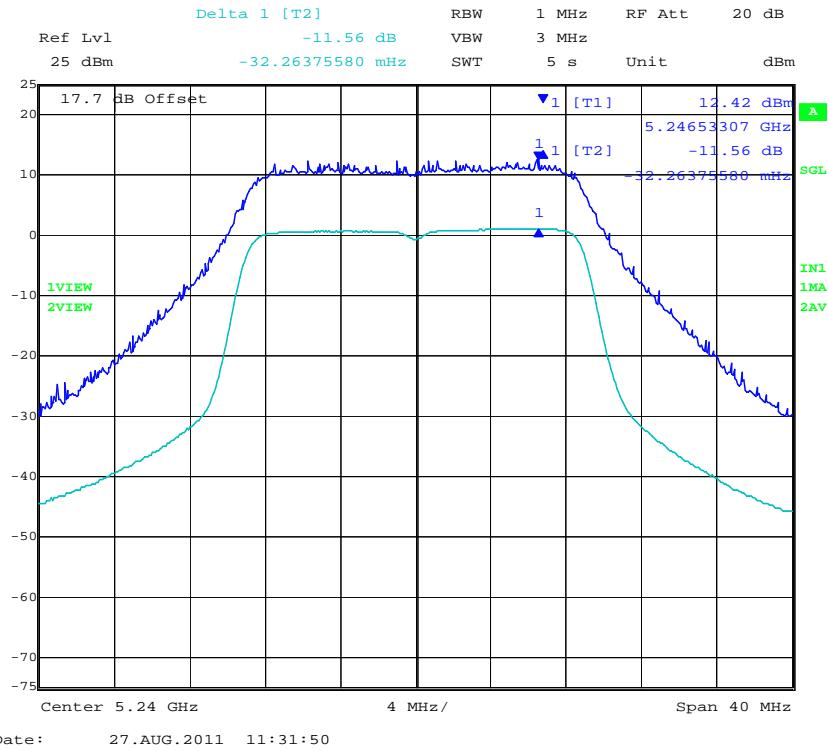


PORT B 5,240 MHz 802.11n HT-20 Peak Excursion Ratio

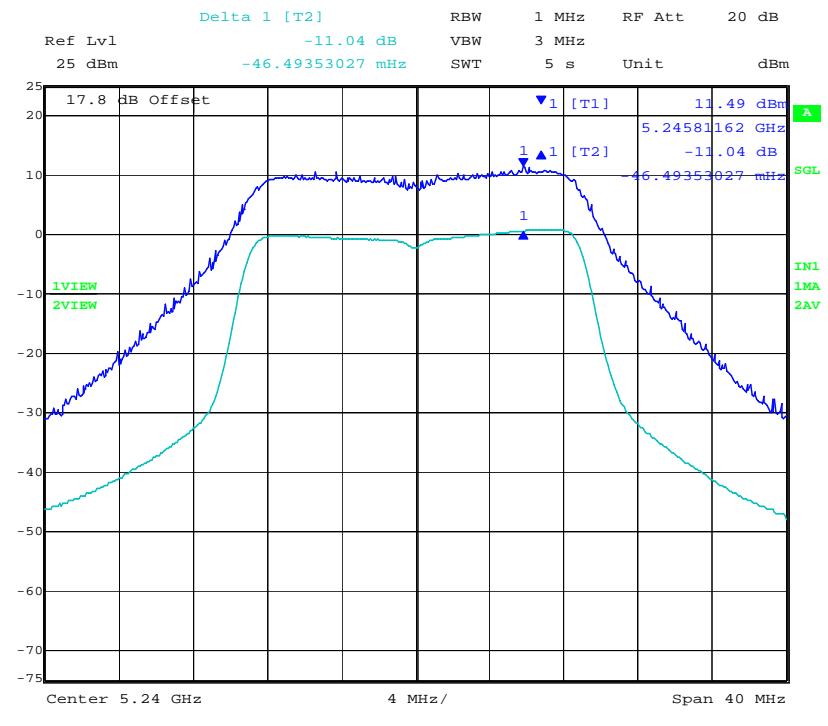

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,240 MHz 802.11n HT-20 Peak Excursion Ratio

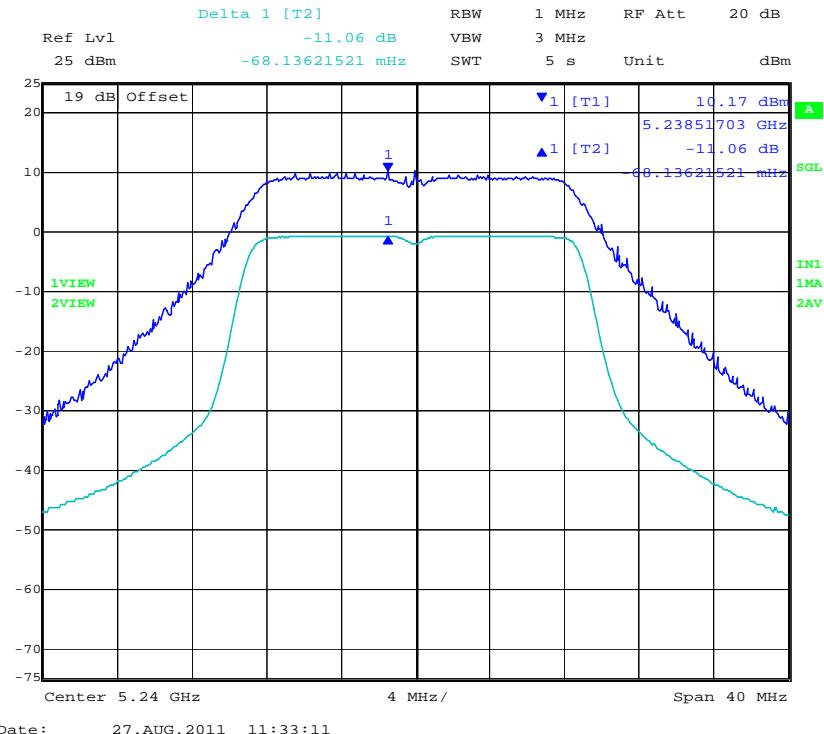

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 139 of 223

TABLE OF RESULTS – 802.11n HT-40 5150 – 5250 MHz


Test Conditions:	15.407 (a)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.0 Vdc		
Notes 1:			
Notes 2:			

Test Frequency	Trace Δ Marker				Limit	Margin
	Port A	Port B	Port C	Port D		
MHz	dB	dB	dB	dB	dB	dB
5190	-12.10	-11.97	-10.48	--	-13.00	-2.53
5230	-11.75	-11.18	-10.59	--		-2.41


Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,190 MHz 802.11n HT-40 Peak Excursion Ratio

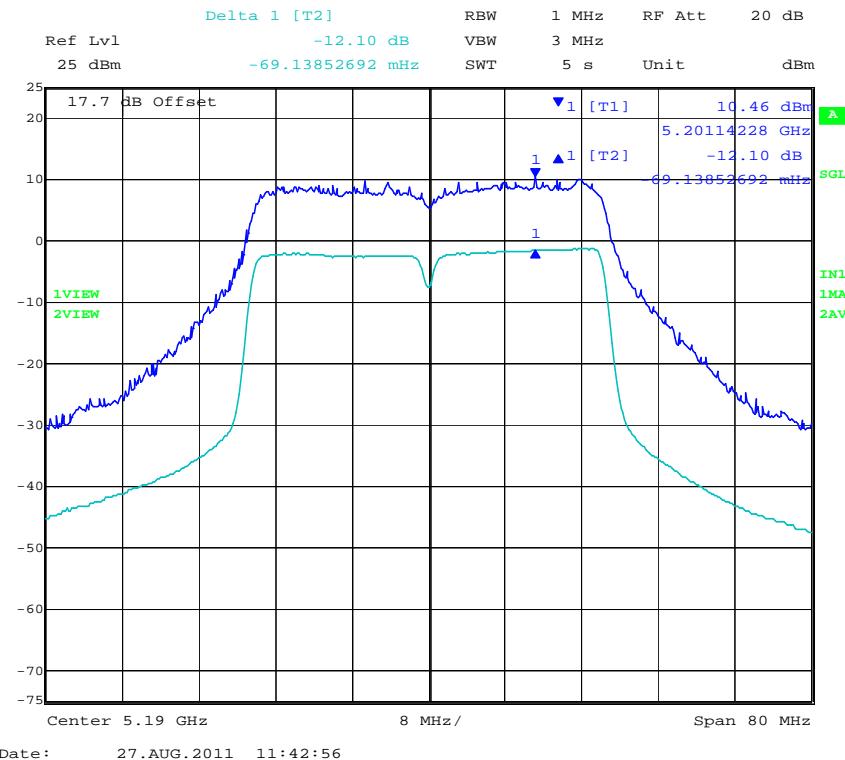


PORT B 5,190 MHz 802.11n HT-40 Peak Excursion Ratio

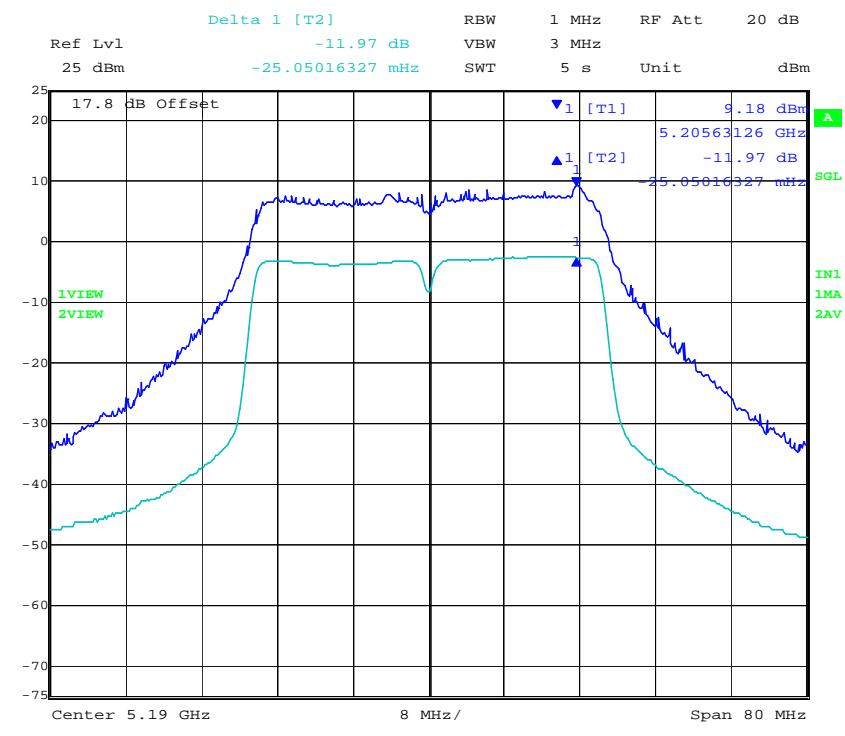

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


PORT C 5,190 MHz 802.11n HT-40 Peak Excursion Ratio

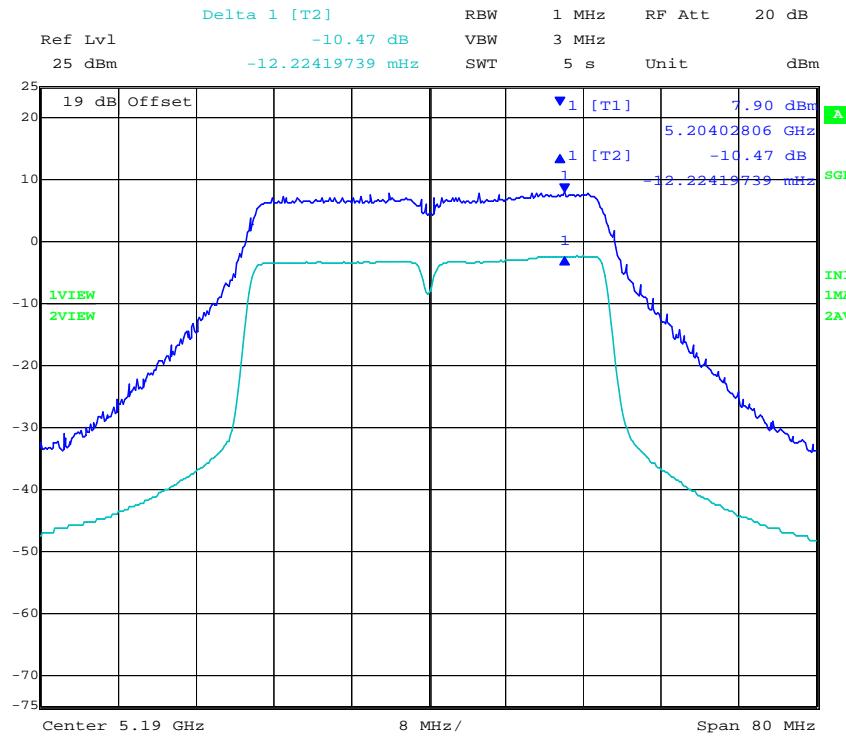


Date: 27.AUG.2011 11:44:13

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,230 MHz 802.11n HT-40 Peak Excursion Ratio

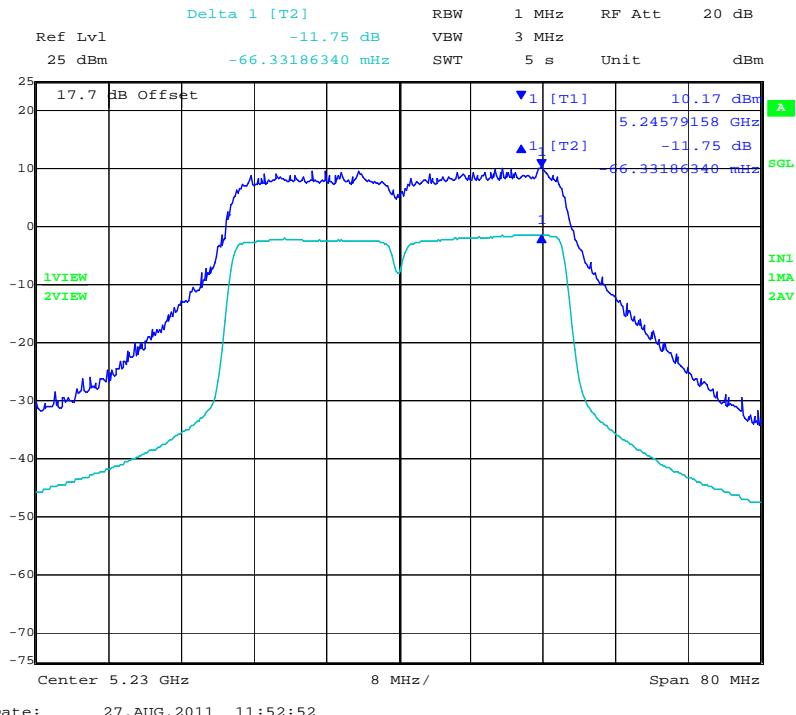


PORT B 5,230 MHz 802.11n HT-40 Peak Excursion Ratio

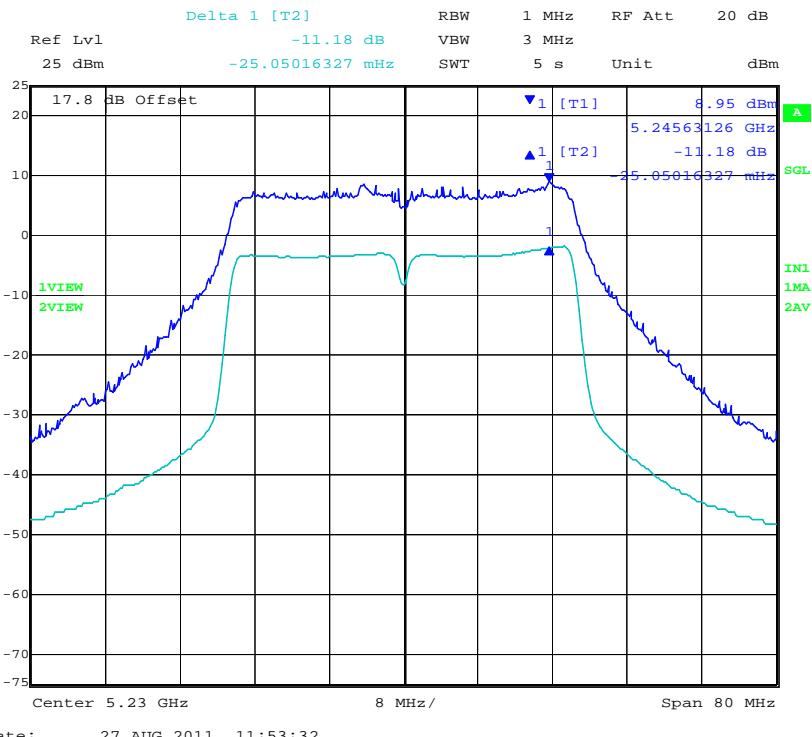

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,230 MHz 802.11n HT-40 Peak Excursion Ratio

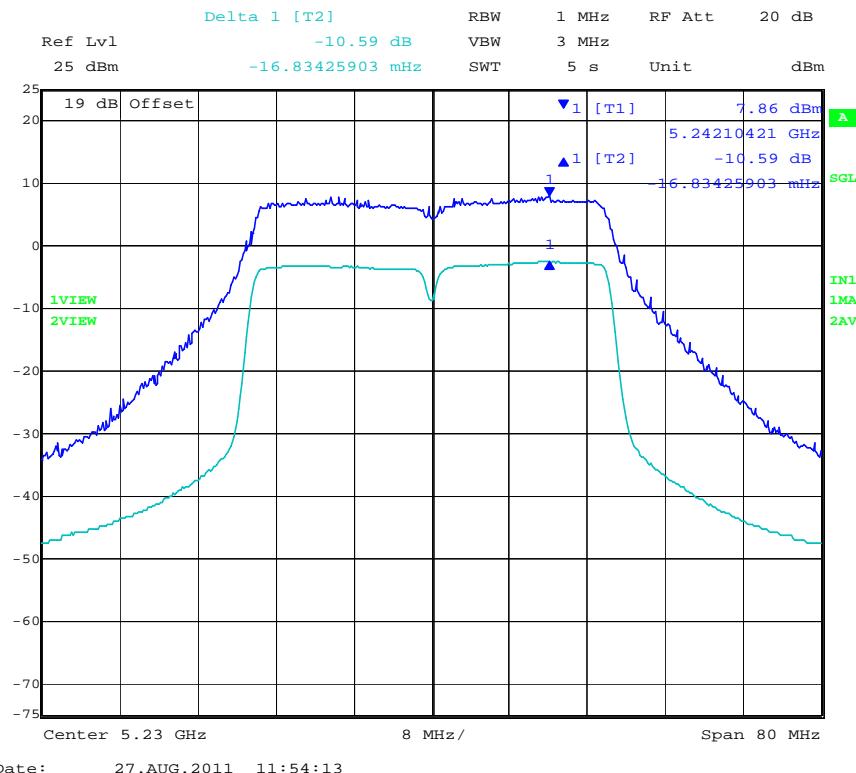

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 144 of 223

TABLE OF RESULTS – 802.11a Legacy 5250 -5350 MHz


Test Conditions:	15.407 (a)	Rel. Humidity (%):	35 to 42
Variant:	802.11a	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.0 Vdc		
Notes 1:			
Notes 2:			

Test Frequency	Trace Δ Marker				Limit	Margin
	Port A	Port B	Port C	Port D		
MHz	dB	dB	dB	dB	dB	dB
5260	-12.96	-11.25	-10.91	--		-2.09
5300	-12.31	-11.29	-10.85	--		-2.15
5320	-12.47	-11.10	-11.21	--		-1.90


Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,260 MHz 802.11a Legacy Peak Excursion Ratio

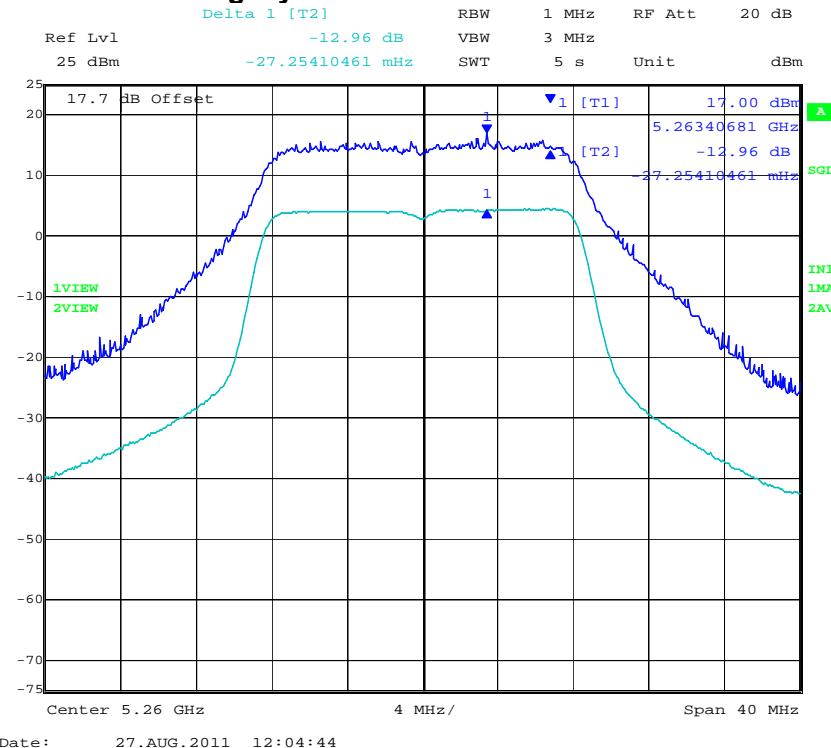


PORT B 5,260 MHz 802.11a Legacy Peak Excursion Ratio

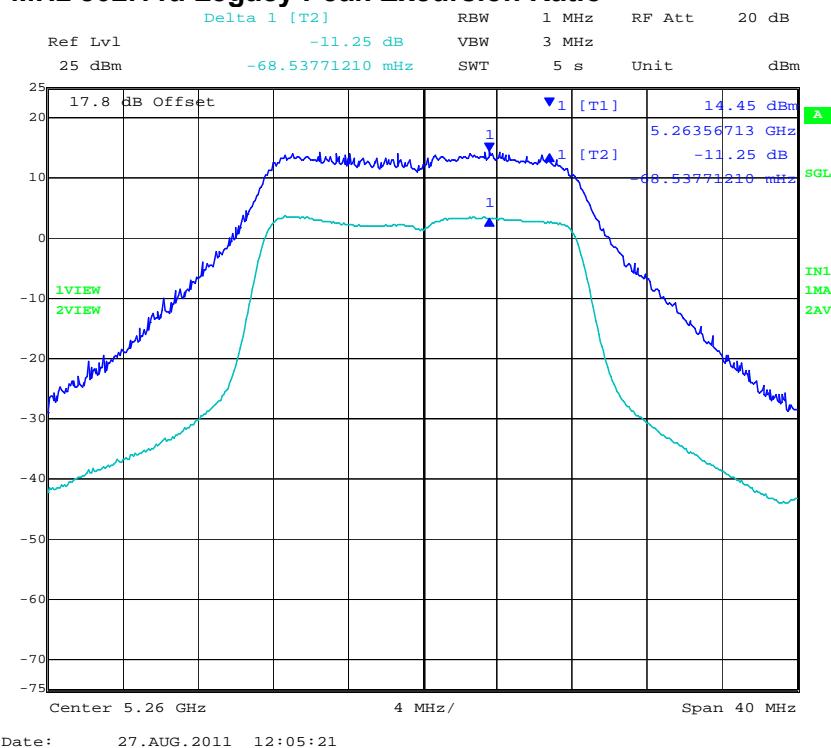


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,260 MHz 802.11a Legacy Peak Excursion Ratio

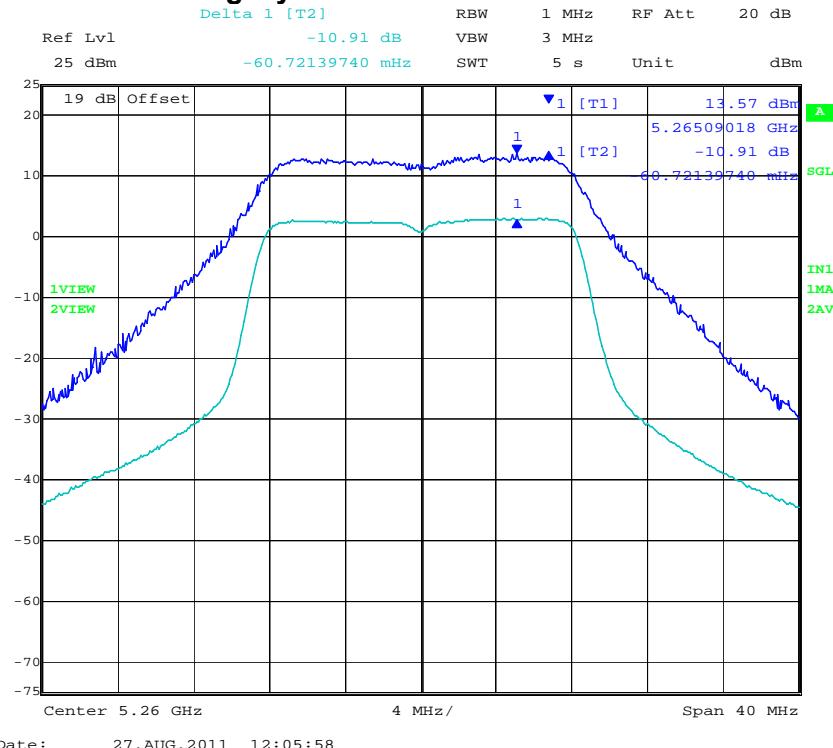

Date: 27.AUG.2011 12:05:58


PORT A 5300 MHz 802.11a Legacy Peak Excursion Ratio

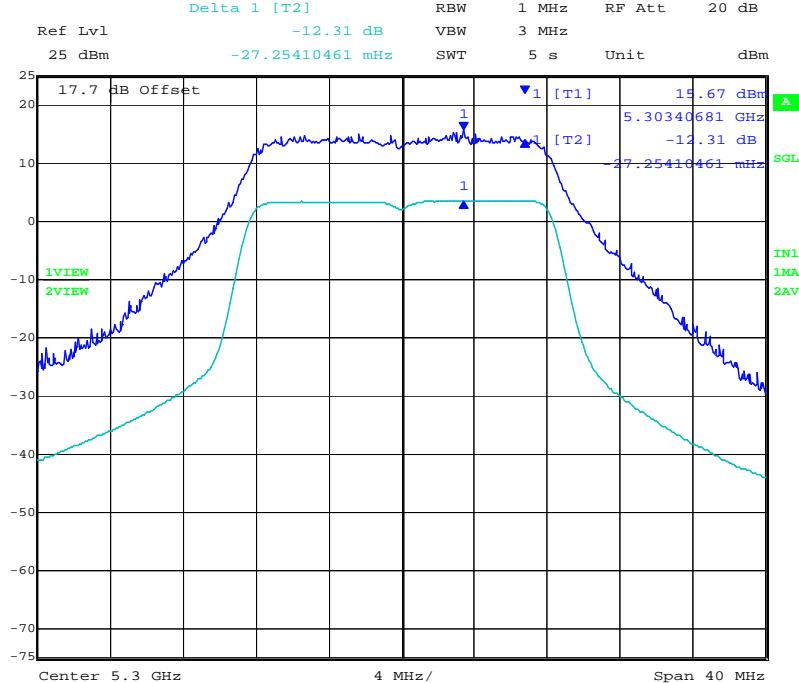


Date: 27.AUG.2011 12:15:39

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT B 5,300 MHz 802.11a Legacy Peak Excursion Ratio

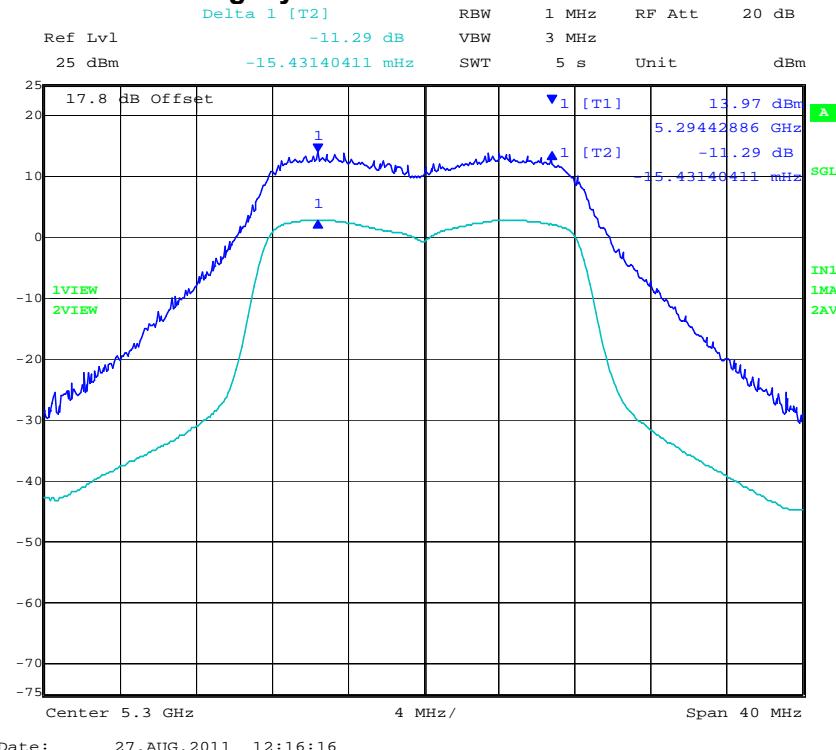


PORT C 5,300 MHz 802.11a Legacy Peak Excursion Ratio

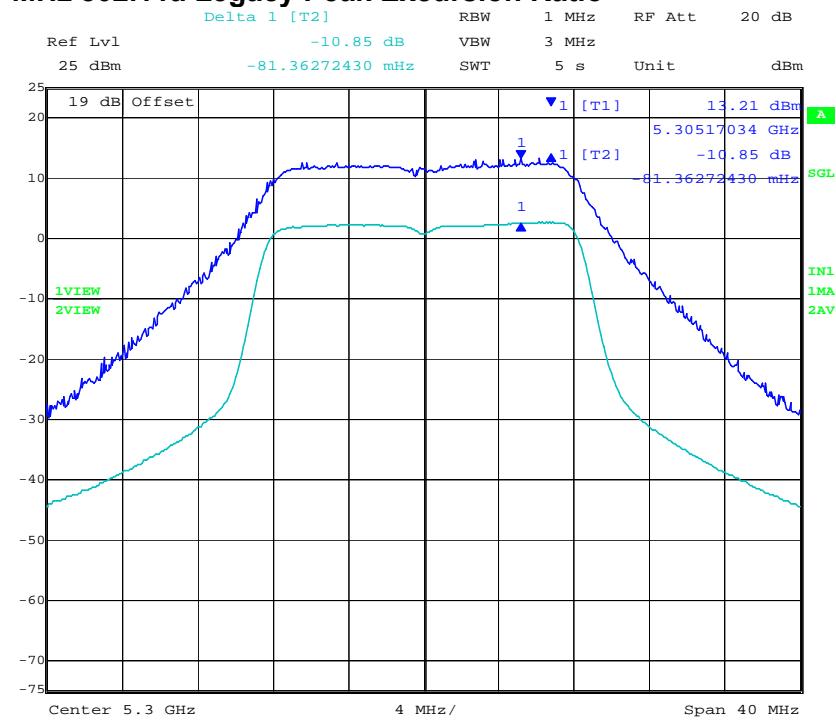


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5.320 MHz 802.11a Legacy Peak Excursion Ratio

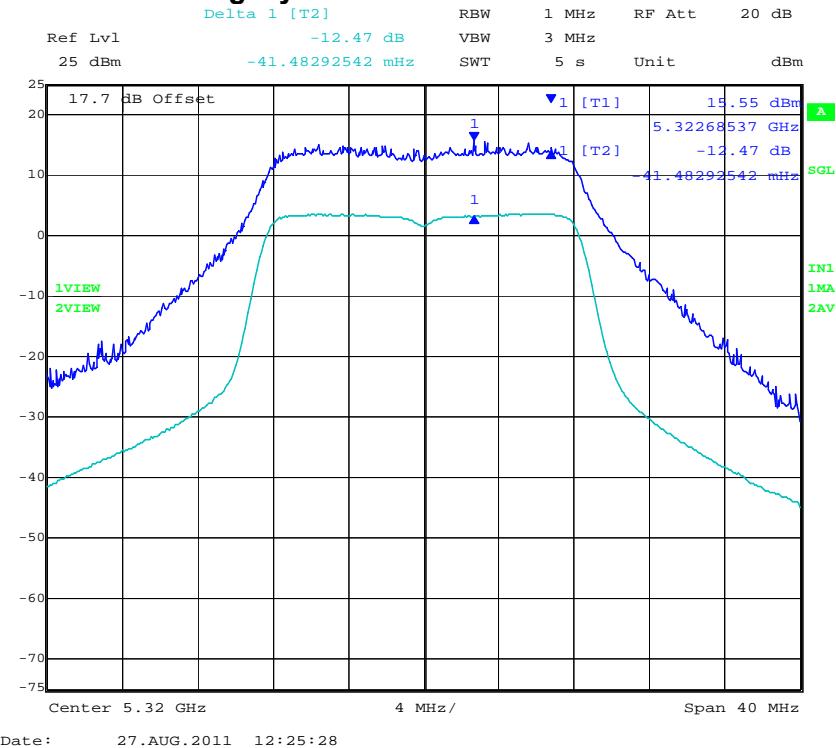


PORT B 5.320 MHz 802.11a Legacy Peak Excursion Ratio

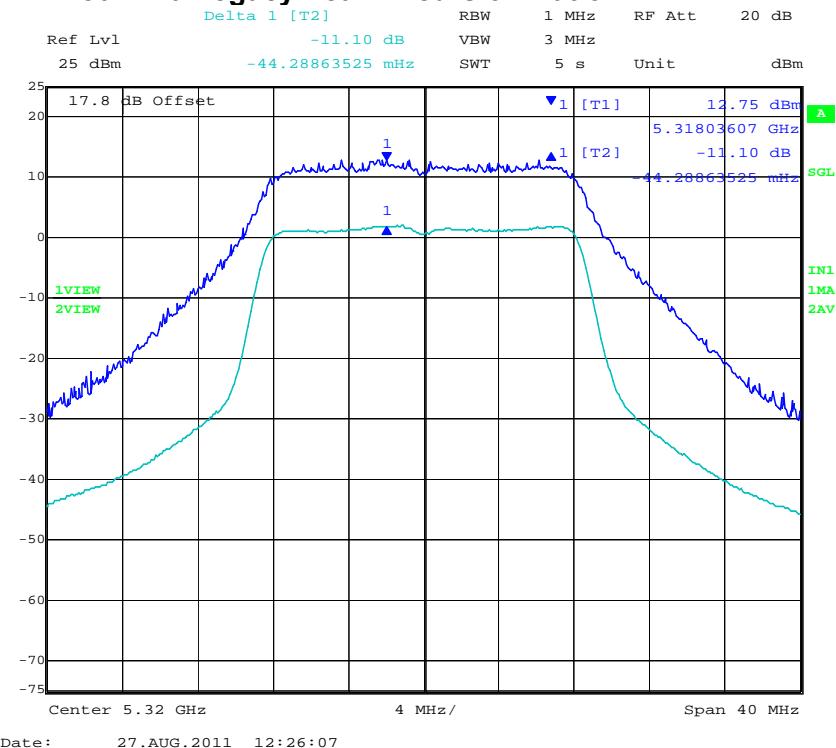

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,320 MHz 802.11a Legacy Peak Excursion Ratio

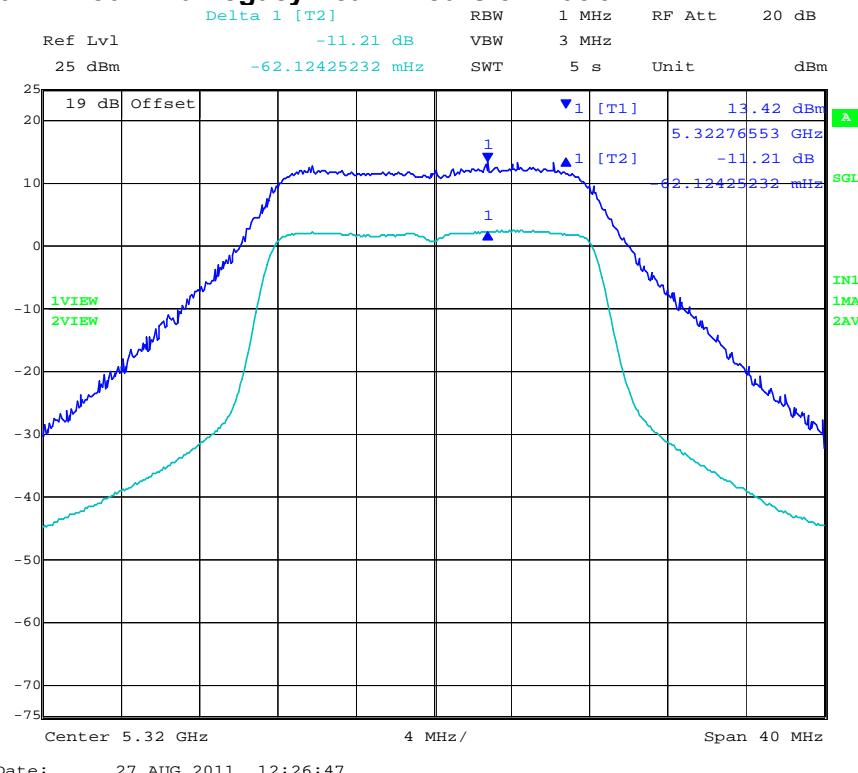

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 150 of 223

TABLE OF RESULTS – 802.11n HT-20 5250-5350 MHz


Test Conditions:	15.407 (a)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.0 Vdc		
Notes 1:			
Notes 2:			

Test Frequency	Trace Δ Marker				Limit	Margin
	Port A	Port B	Port C	Port D		
MHz	dB	dB	dB	dB	dB	dB
5260	-11.13	-10.80	-12.42	--	-13.00	-0.58
5300	-11.50	-11.13	-11.15	--		-1.50
5320	-11.63	-11.06	-12.07	--		-0.93

Measurement uncertainty:	±1.33 dB
---------------------------------	----------


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,260 MHz 802.11n HT-20 Peak Excursion Ratio

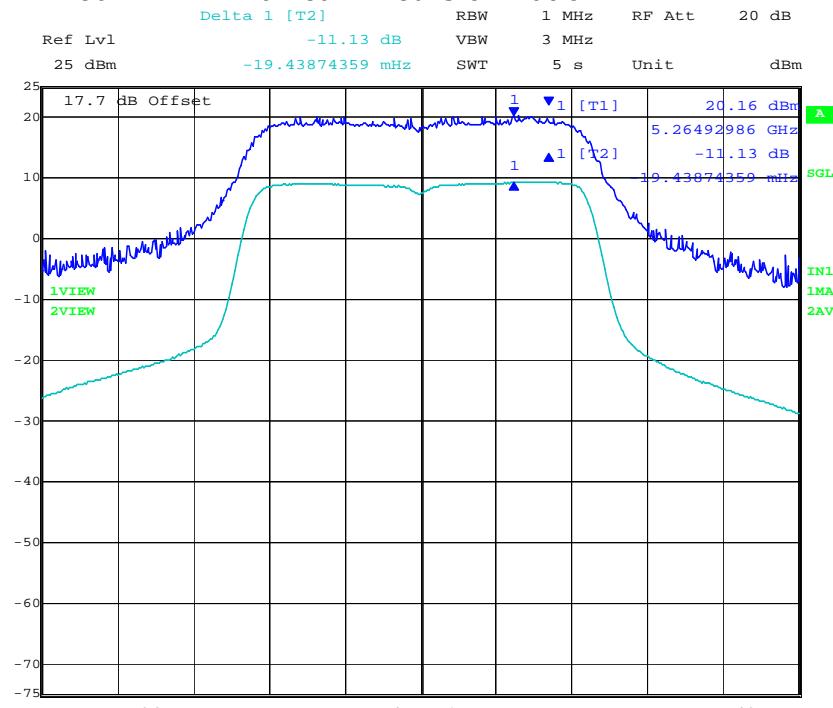

Date: 27.AUG.2011 12:50:55


PORT B 5,260 MHz 802.11n HT-20 Peak Excursion Ratio

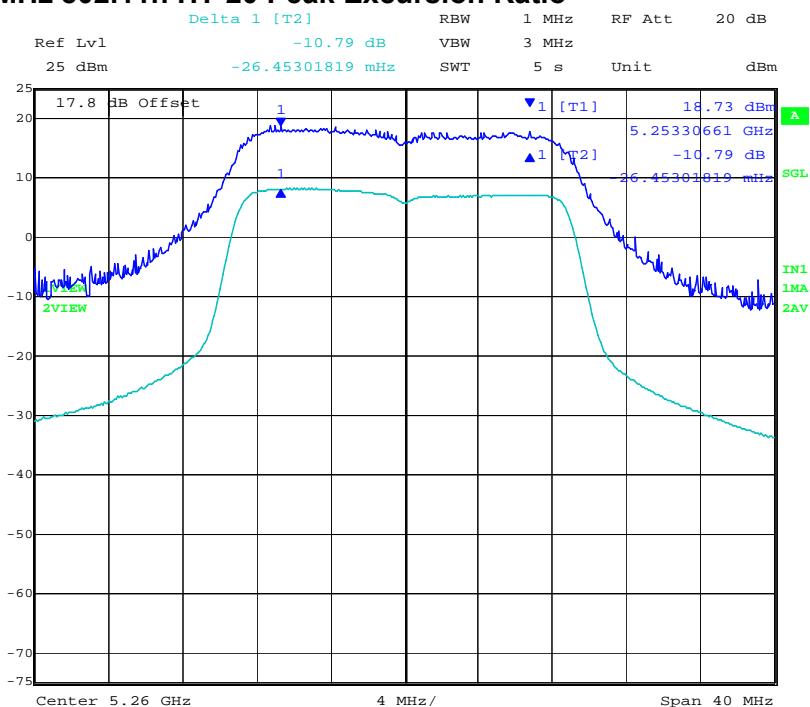


Date: 27.AUG.2011 12:51:32

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,260 MHz 802.11n HT-20 Peak Excursion Ratio

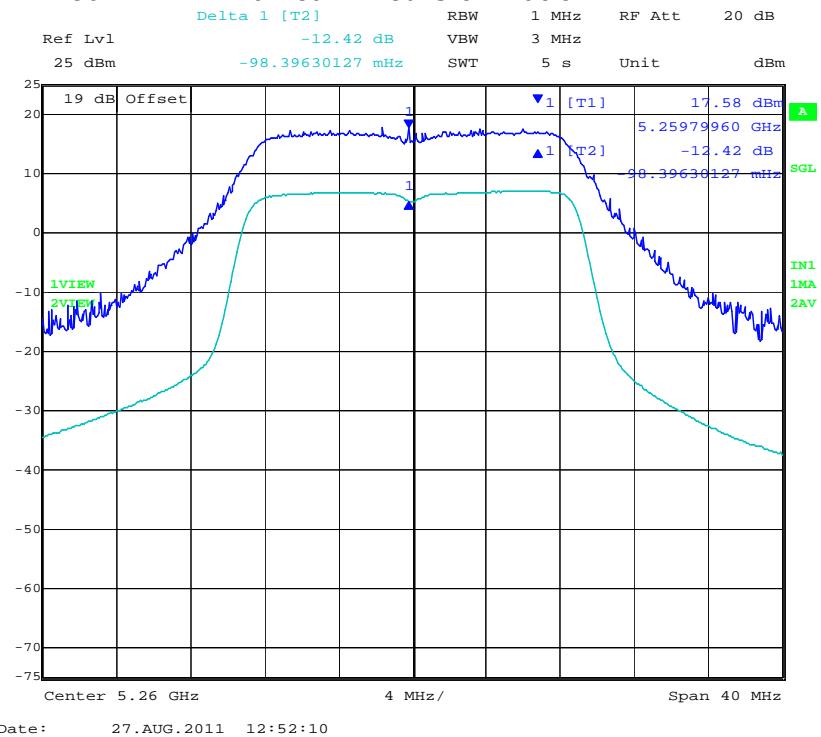


PORT A 5300 MHz 802.11n HT-20 Peak Excursion Ratio

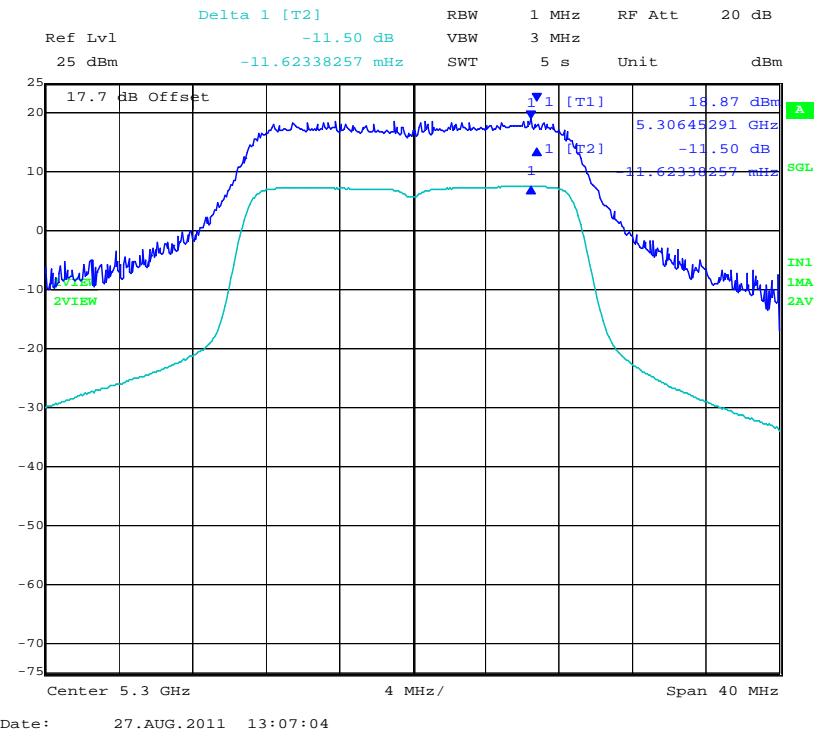


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT B 5,300 MHz 802.11n HT-20 Peak Excursion Ratio

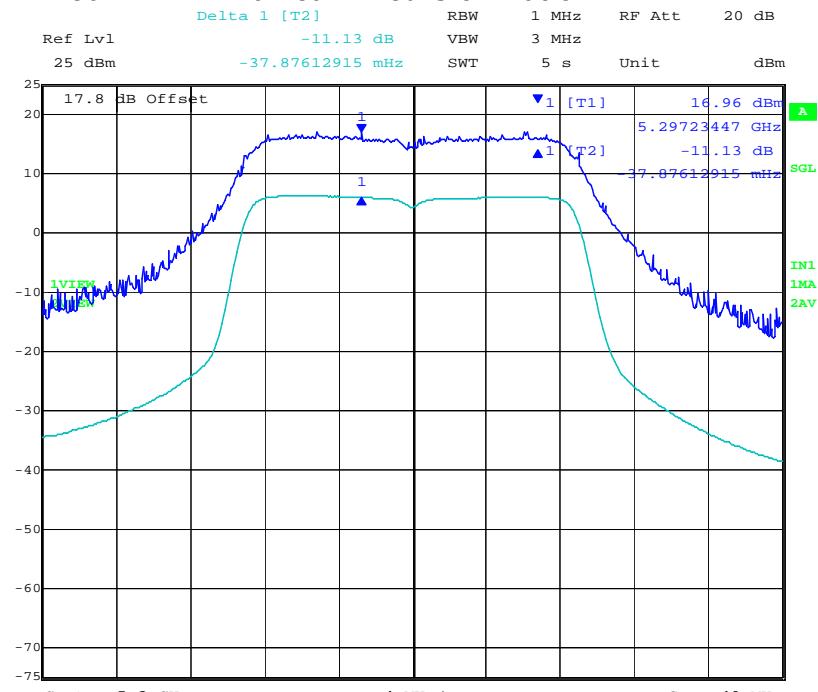

Date: 27.AUG.2011 13:07:41


PORT C 5,300 MHz 802.11n HT-20 Peak Excursion Ratio

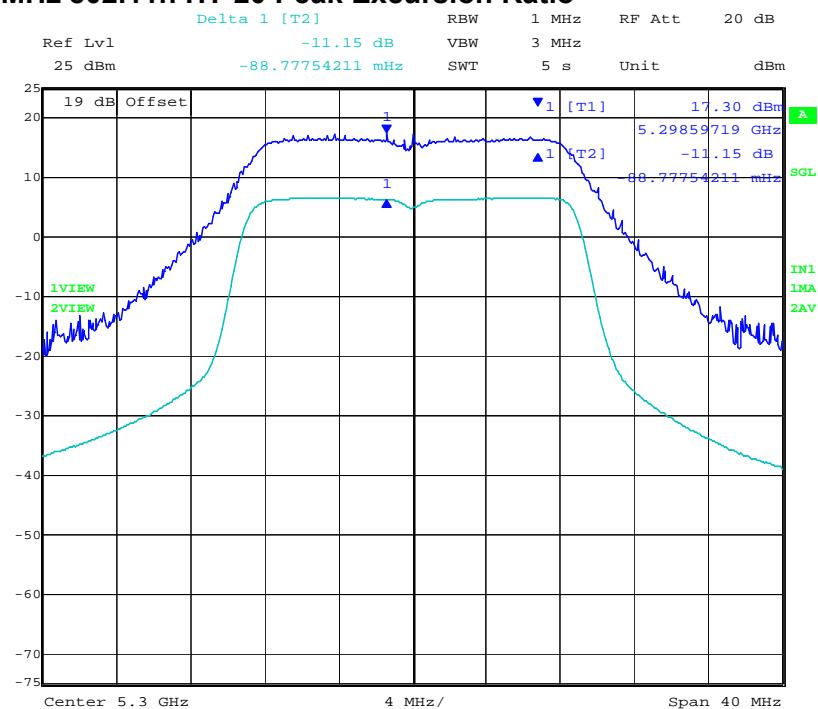


Date: 27.AUG.2011 13:08:19

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5.320 MHz 802.11n HT-20 Peak Excursion Ratio

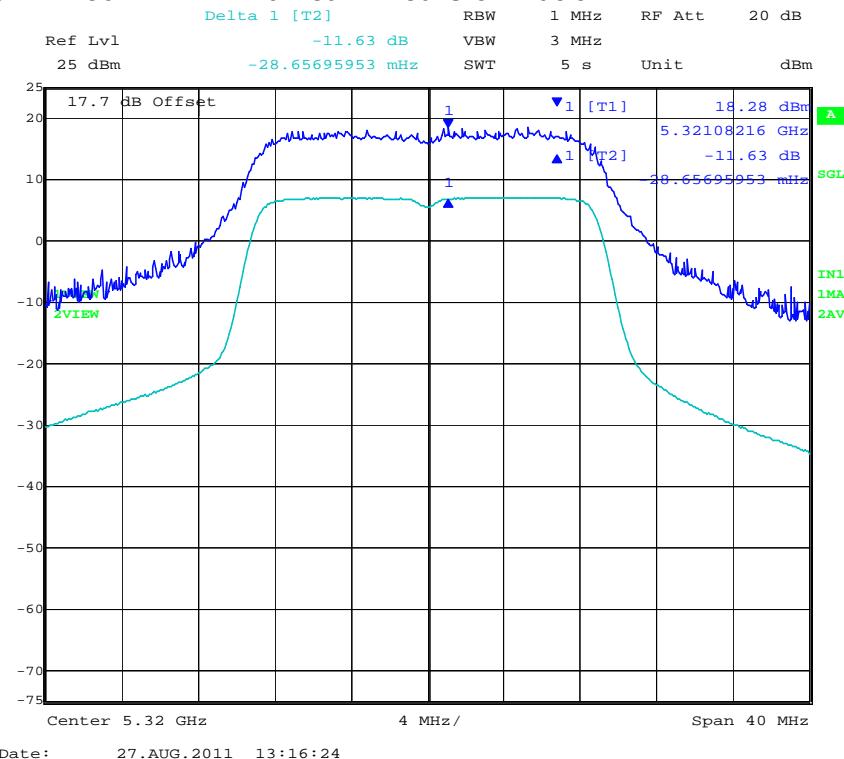


PORT B 5.320 MHz 802.11n HT-20 Peak Excursion Ratio

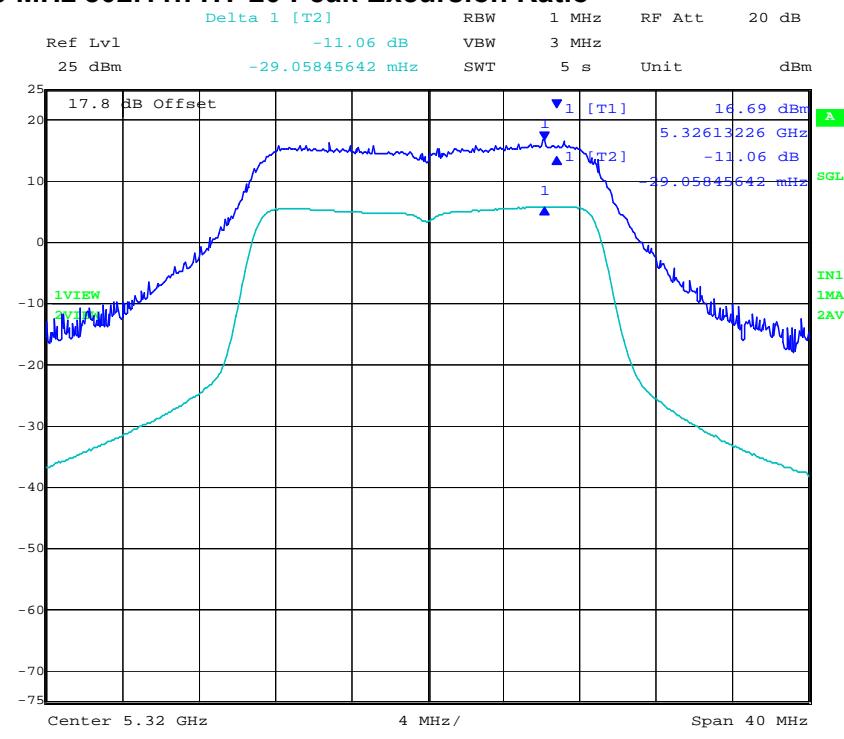

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,320 MHz 802.11n HT-20 Peak Excursion Ratio

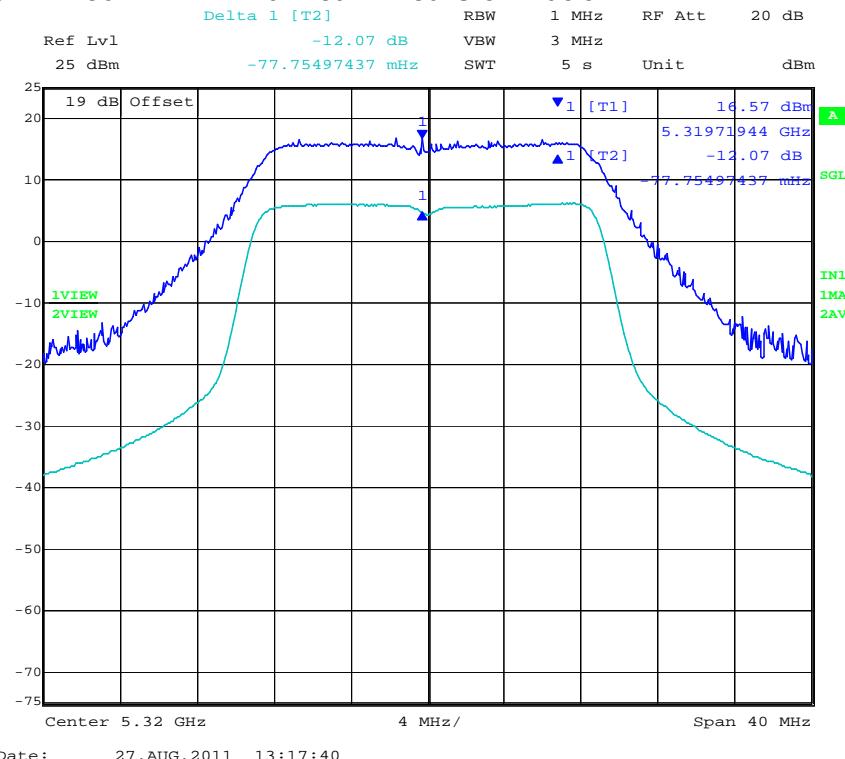

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 156 of 223

TABLE OF RESULTS – 802.11n HT-40 5250-5350 MHz


Test Conditions:	15.407 (a)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.0 Vdc		
Notes 1:			
Notes 2:			

Test Frequency	Trace Δ Marker				Limit	Margin
	Port A	Port B	Port C	Port D		
MHz	dB	dB	dB	dB	dB	dB
5270	-11.53	-11.21	-10.75	--	-13.00	-2.25
5310	-12.05	-12.15	-10.72	--		-2.28


Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,270 MHz 802.11n HT-40 Peak Excursion Ratio

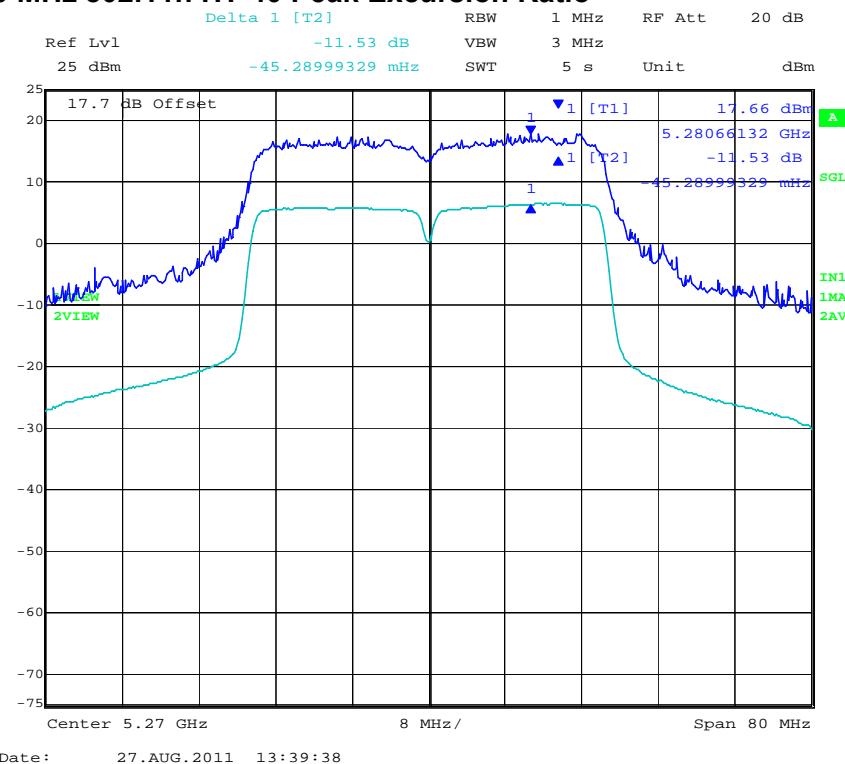


PORT B 5,270 MHz 802.11n HT-40 Peak Excursion Ratio

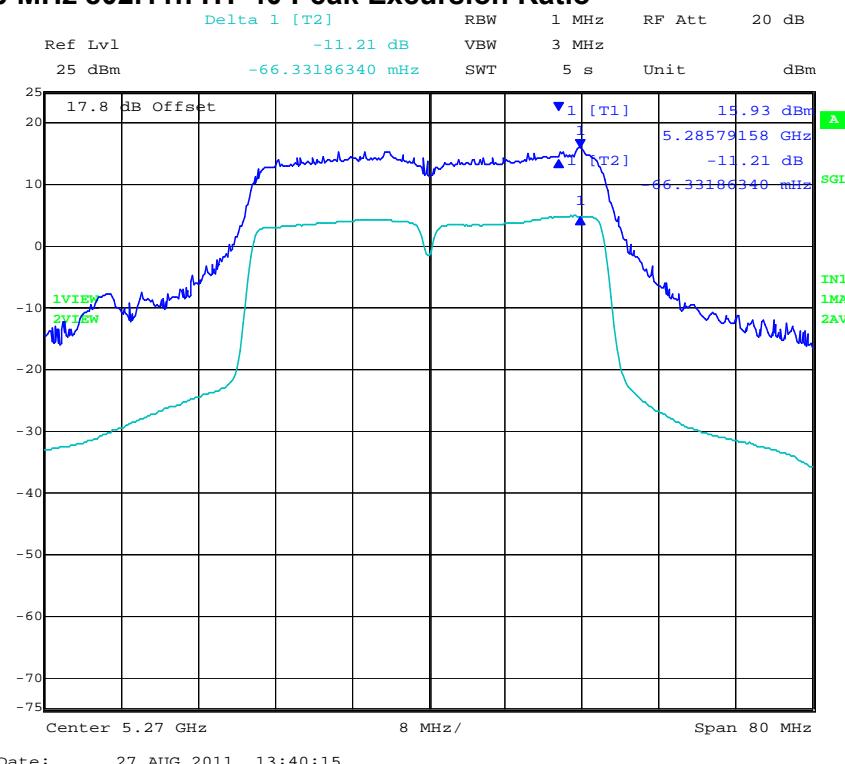


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,270 MHz 802.11n HT-40 Peak Excursion Ratio

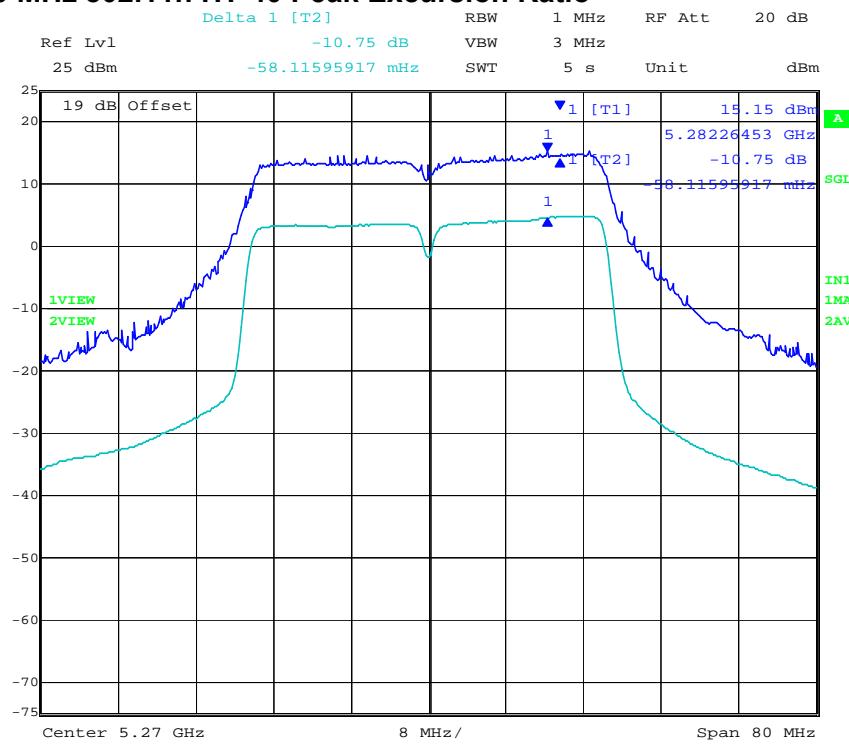

Date: 27.AUG.2011 13:40:53


PORT A 5,310 MHz 802.11n HT-40 Peak Excursion Ratio

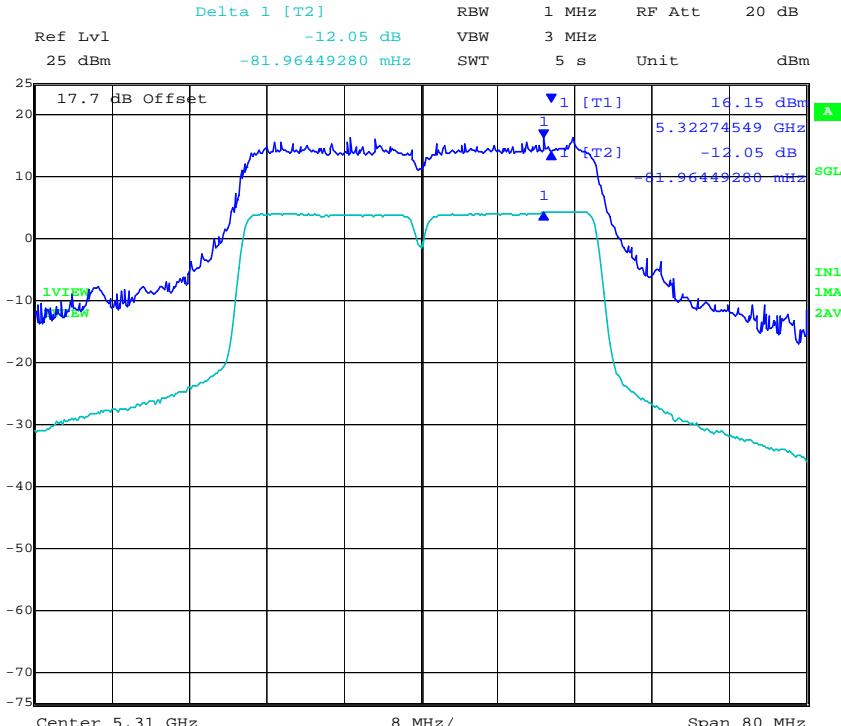


Date: 27.AUG.2011 13:50:01

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT B 5,310 MHz 802.11n HT-40 Peak Excursion Ratio

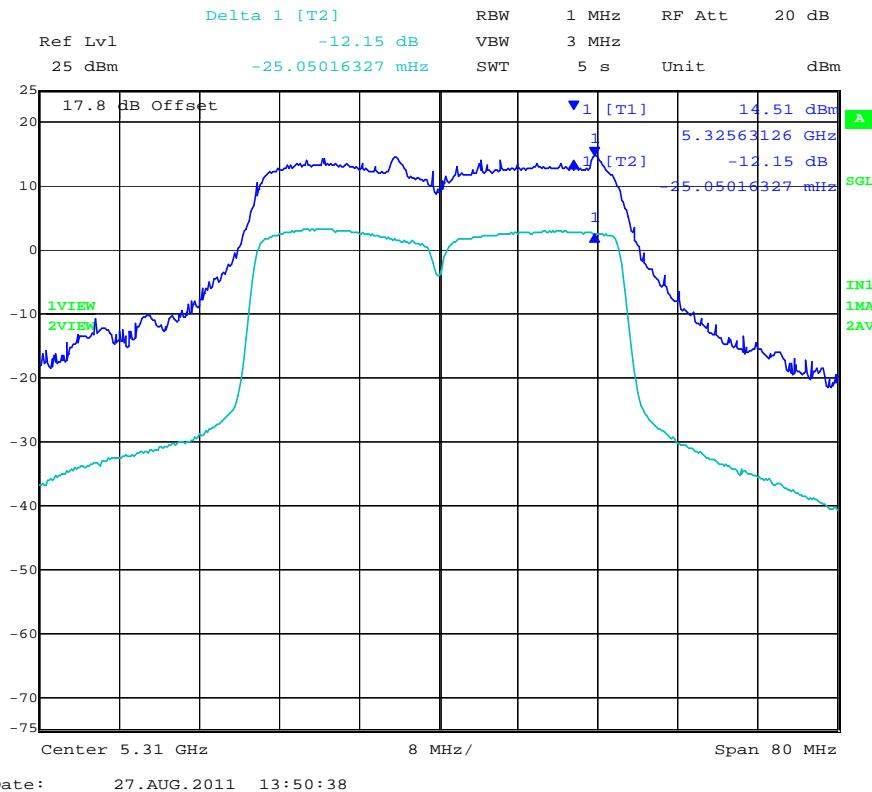

PORT C 5,310 MHz 802.11n HT-40 Peak Excursion Ratio

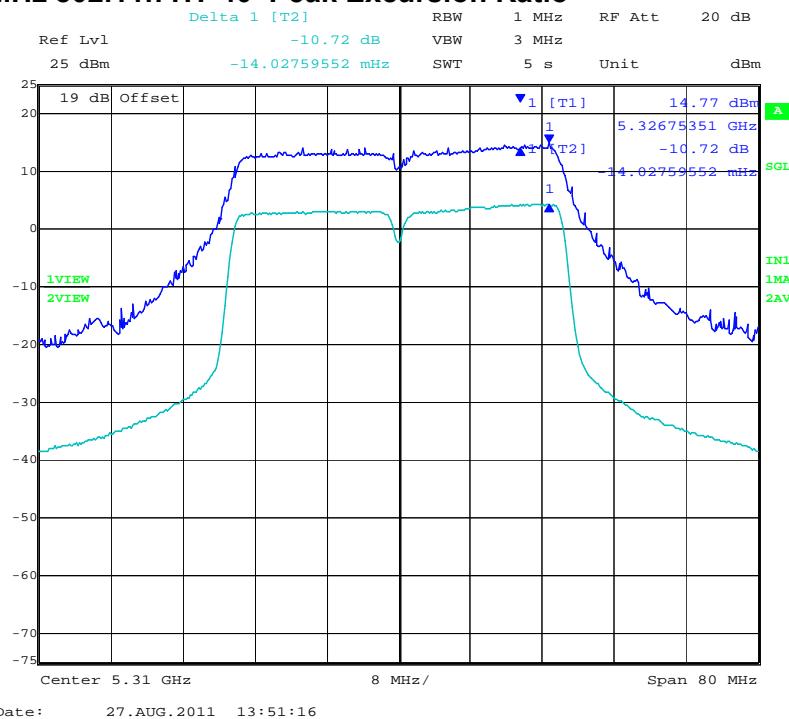

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 160 of 223

TABLE OF RESULTS – 802.11a Legacy 5500 - 5700 MHz


Test Conditions:	15.407 (a)	Rel. Humidity (%):	35 to 42
Variant:	802.11a	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.0 Vdc		
Notes 1:			
Notes 2:			

Test Frequency	Trace Δ Marker				Limit	Margin
	Port A	Port B	Port C	Port D		
MHz	dB	dB	dB	dB	dB	dB
5500.00	-11.77	-11.33	-10.14	--	-13.00	-1.23
5580.00	-12.35	-11.79	-11.06	--		-0.65
5700.00	-11.31	-11.06	-10.48	--		-1.69

Measurement uncertainty:	±1.33 dB
---------------------------------	----------


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,500 MHz 802.11a Legacy Peak Excursion Ratio

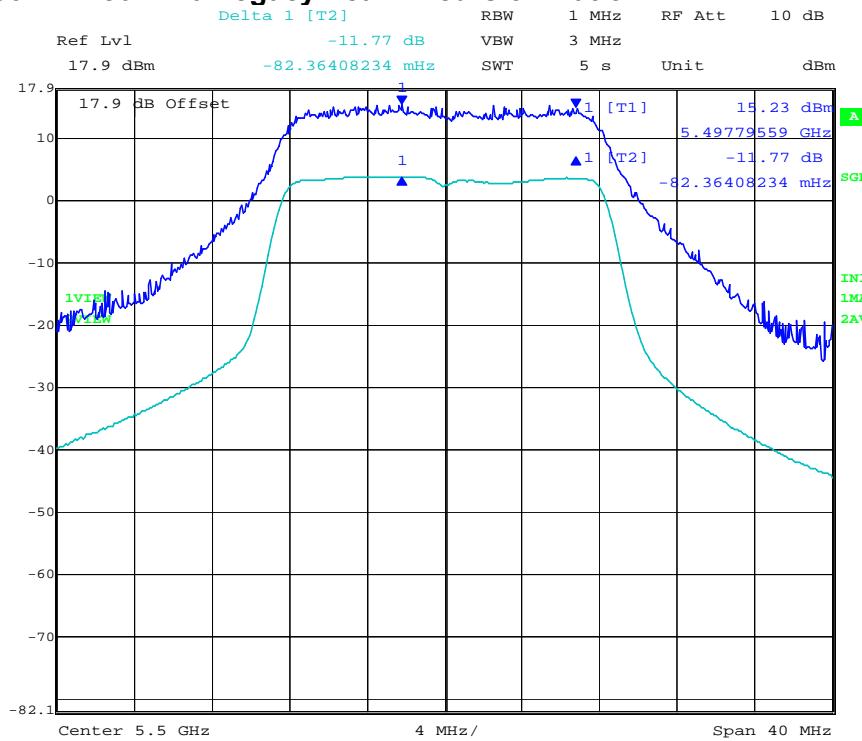

Date: 27.AUG.2011 14:09:00


PORT B 5,500 MHz 802.11a Legacy Peak Excursion Ratio

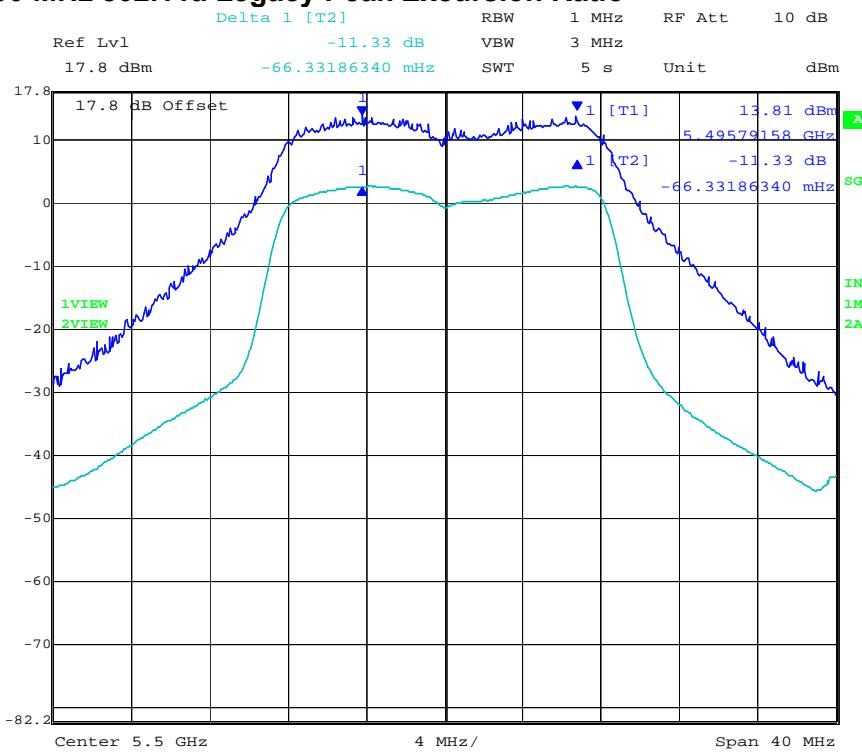


Date: 27.AUG.2011 14:09:38

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,500 MHz 802.11a Legacy Peak Excursion Ratio

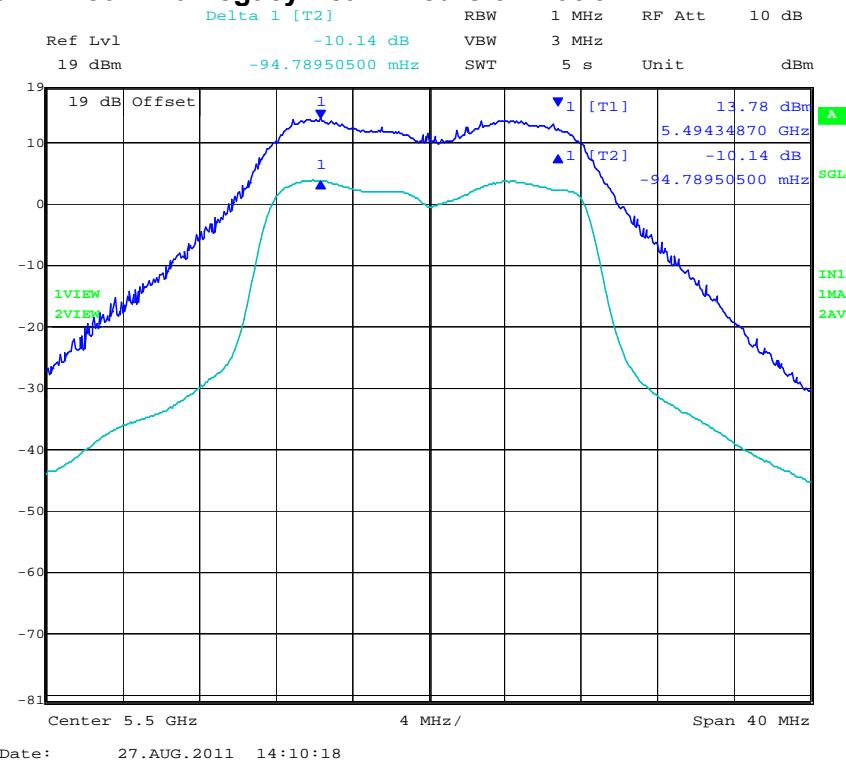


PORT A 5,580 MHz 802.11a Legacy Peak Excursion Ratio

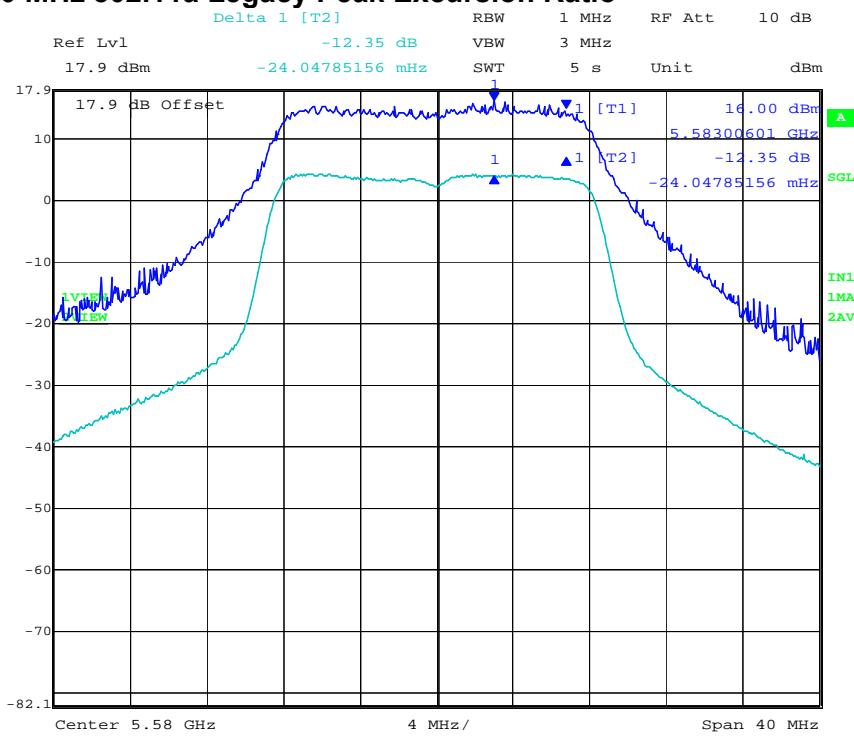


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT B 5,580 MHz 802.11a Legacy Peak Excursion Ratio

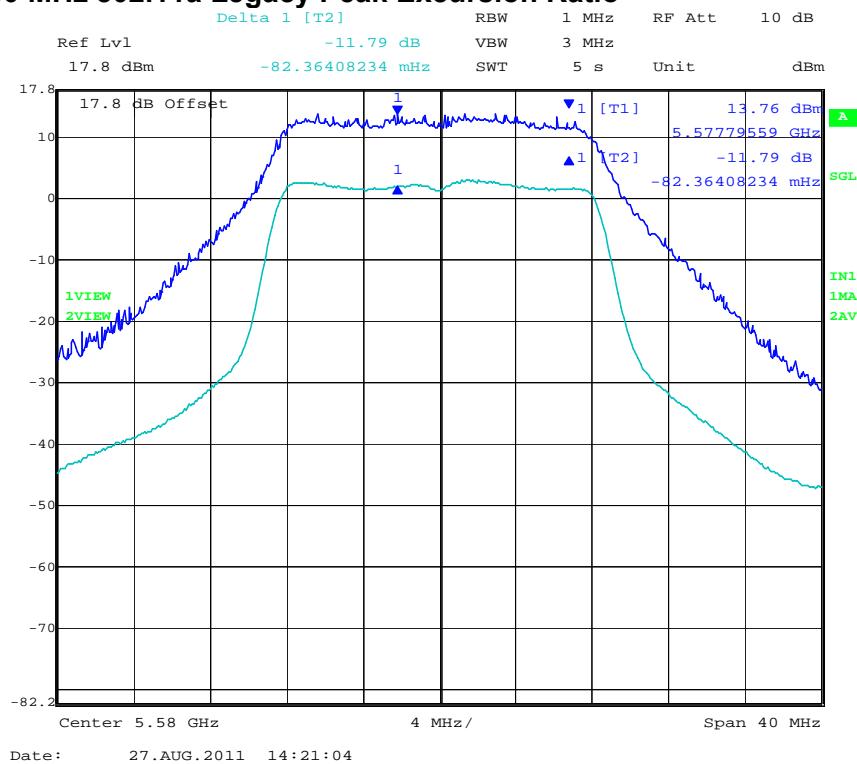


PORT C 5,580 MHz 802.11a Legacy Peak Excursion Ratio

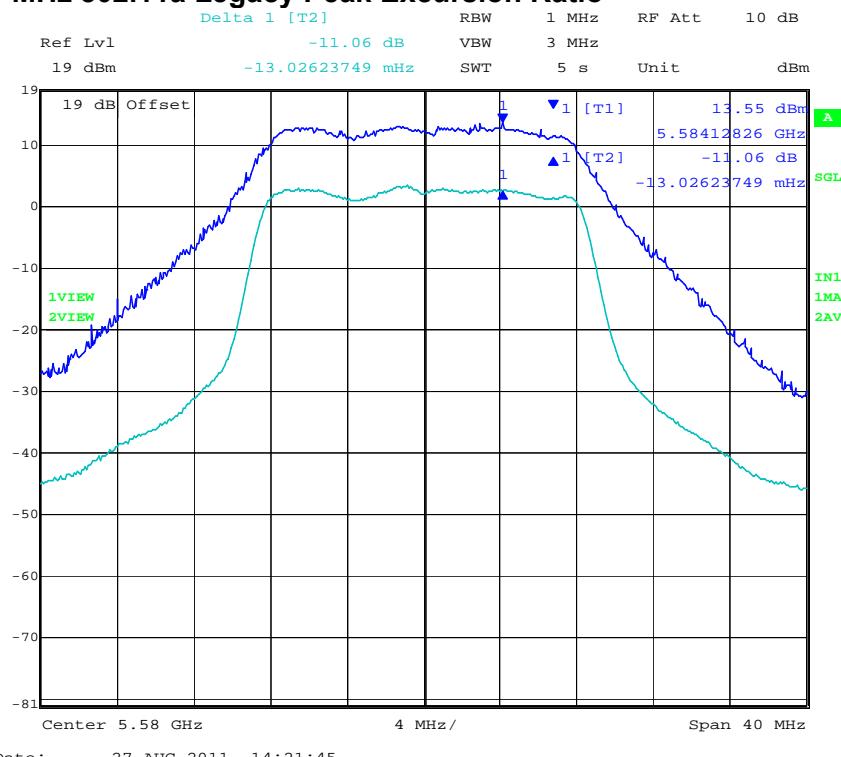


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,700 MHz 802.11a Legacy Peak Excursion Ratio

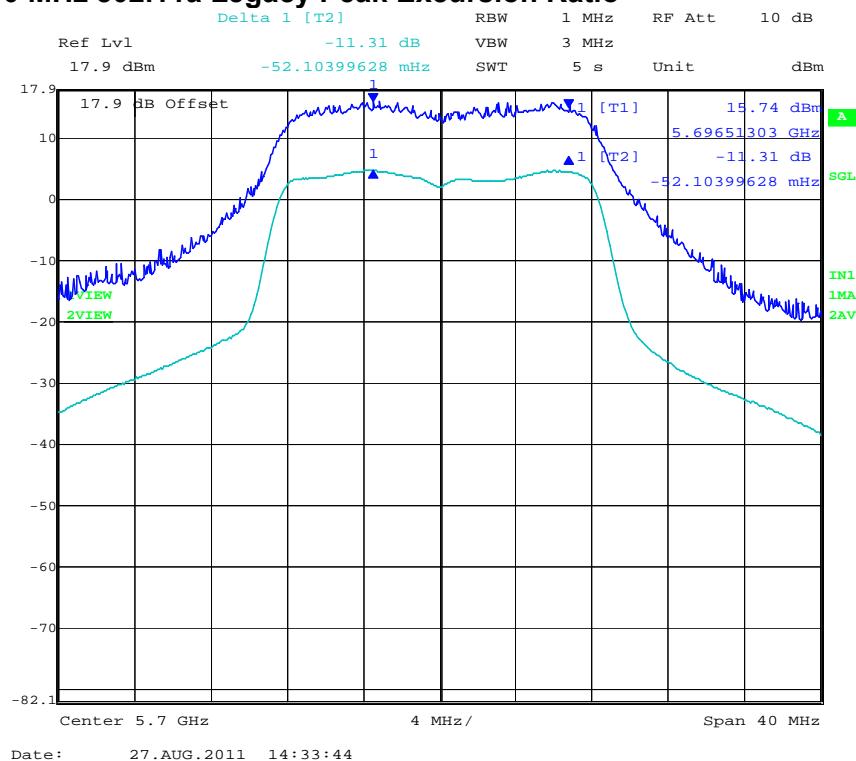


PORT B 5,700 MHz 802.11a Legacy Peak Excursion Ratio

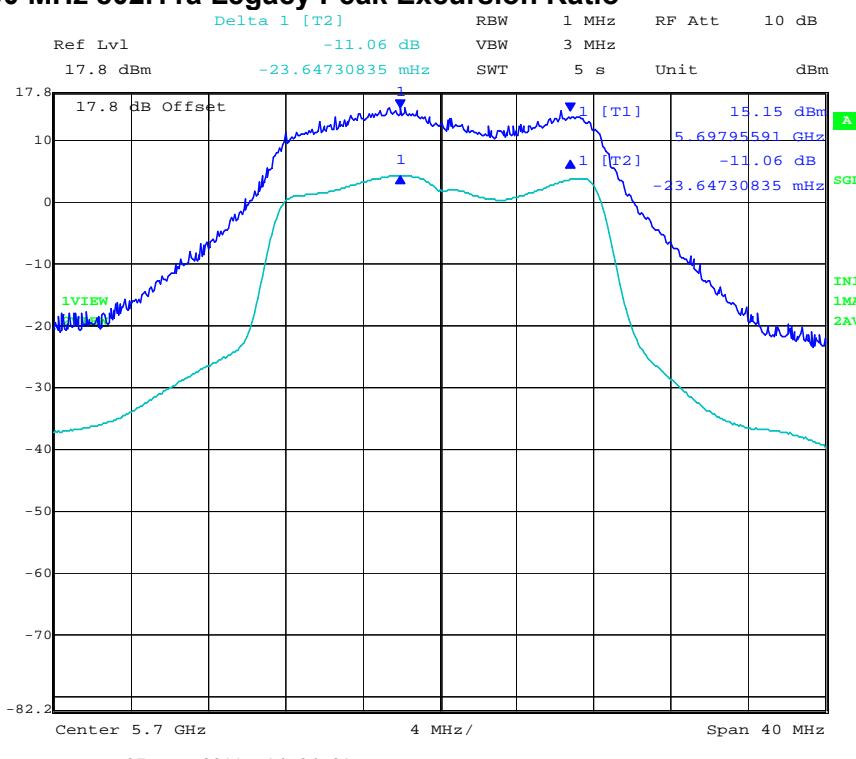

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,700 MHz 802.11a Legacy Peak Excursion Ratio

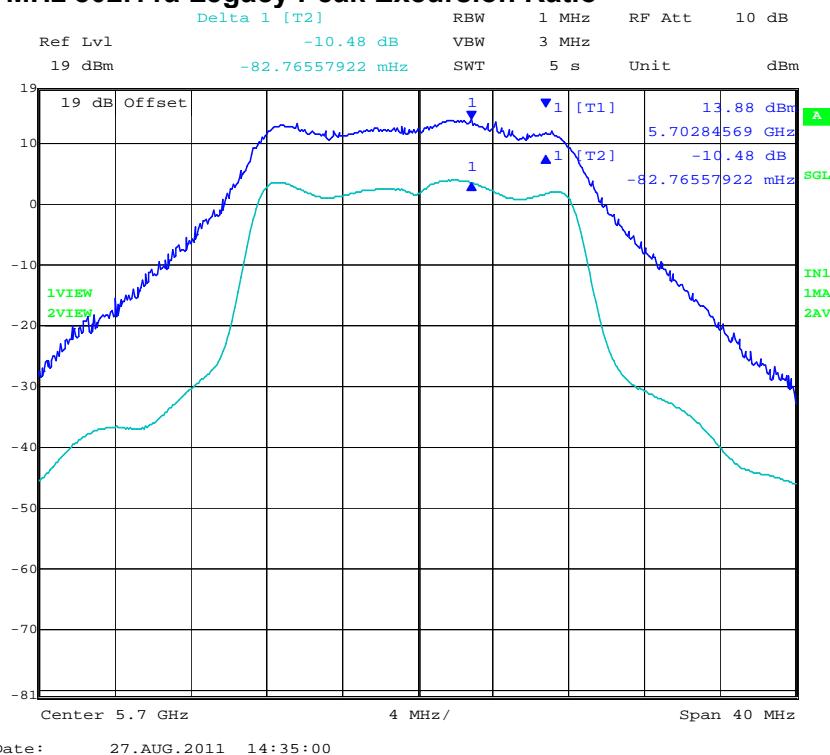

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 166 of 223

TABLE OF RESULTS – 802.11n HT-20 5500 - 5700 MHz


Test Conditions:	15.407 (a)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-20	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.0 Vdc		
Notes 1:			
Notes 2:			

Test Frequency	Trace Δ Marker				Limit	Margin
	Port A	Port B	Port C	Port D		
MHz	dB	dB	dB	dB	dB	dB
5500	-11.31	-11.04	-10.49	--	-13.00	-1.69
5580	-11.08	-10.79	-10.52	--		-1.92
5700	-11.38	-10.80	-10.51	--		-1.62

Measurement uncertainty:	±1.33 dB
---------------------------------	----------


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,500 MHz 802.11n HT-20 Peak Excursion Ratio

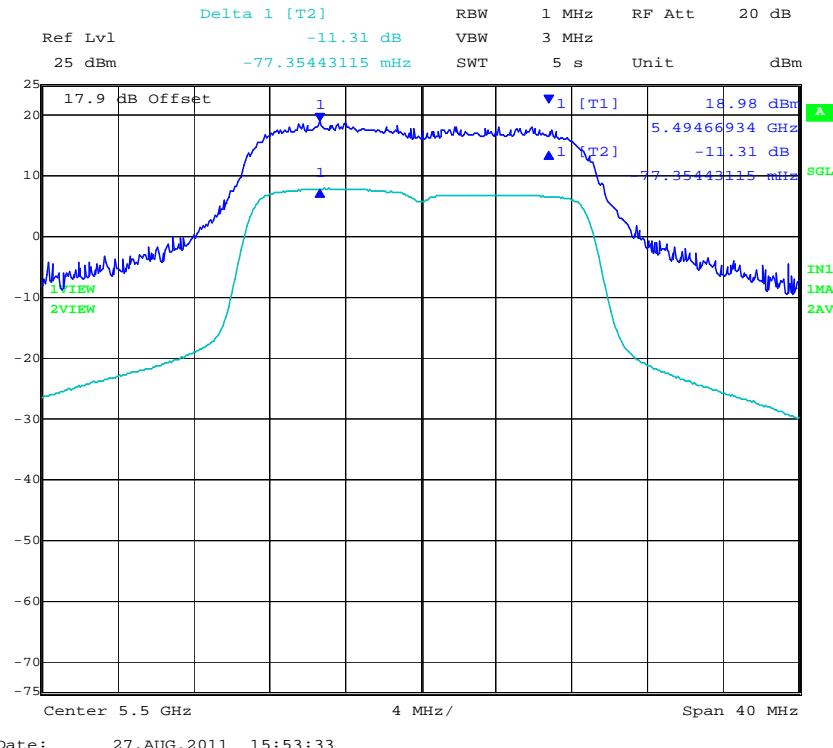

Date: 27.AUG.2011 15:53:33


PORT B 5,500 MHz 802.11n HT-20 Peak Excursion Ratio

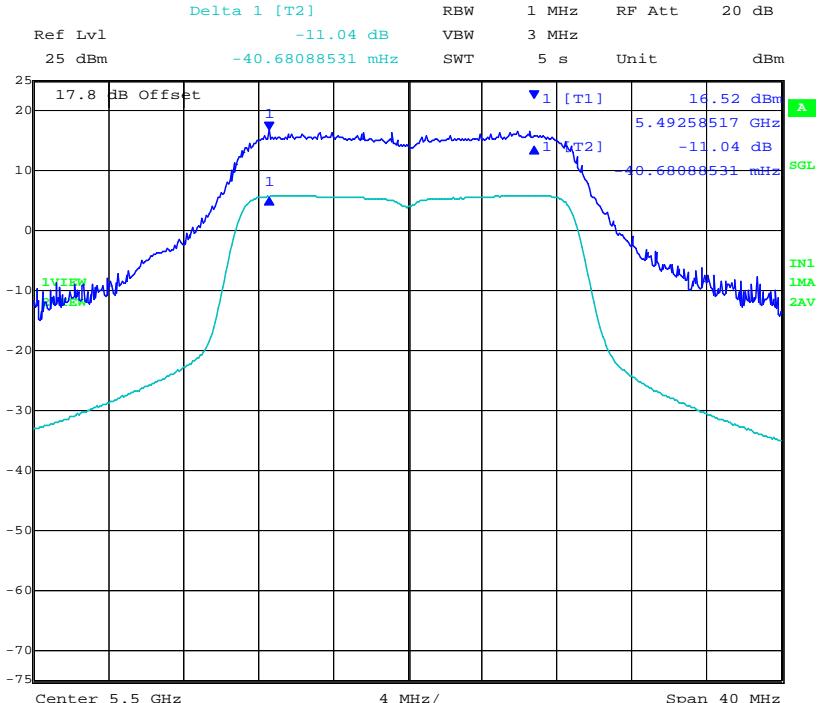


Date: 27.AUG.2011 15:54:09

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,500 MHz 802.11n HT-20 Peak Excursion Ratio

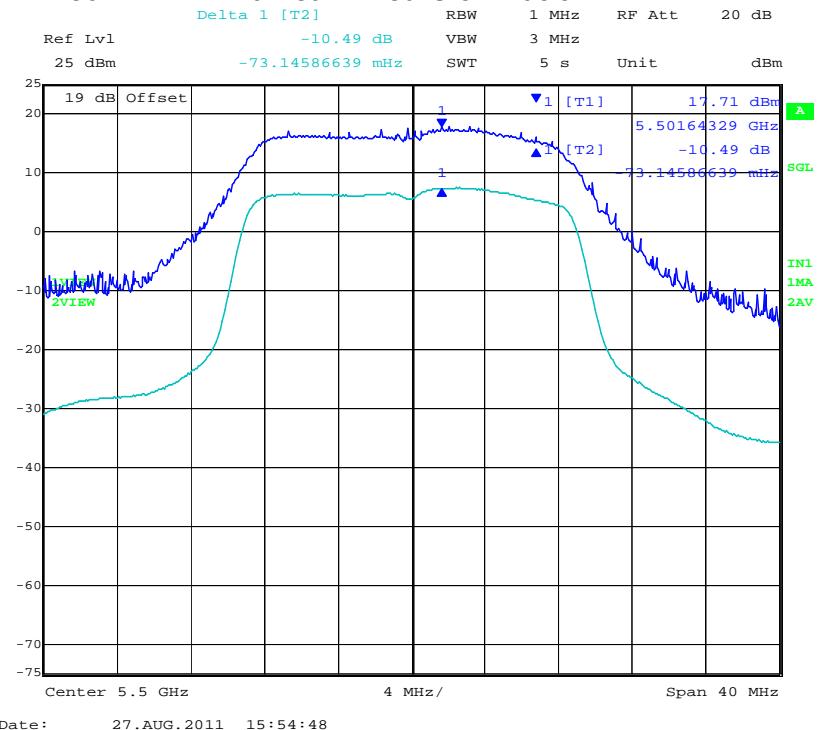


PORT A 5,580 MHz 802.11n HT-20 Peak Excursion Ratio

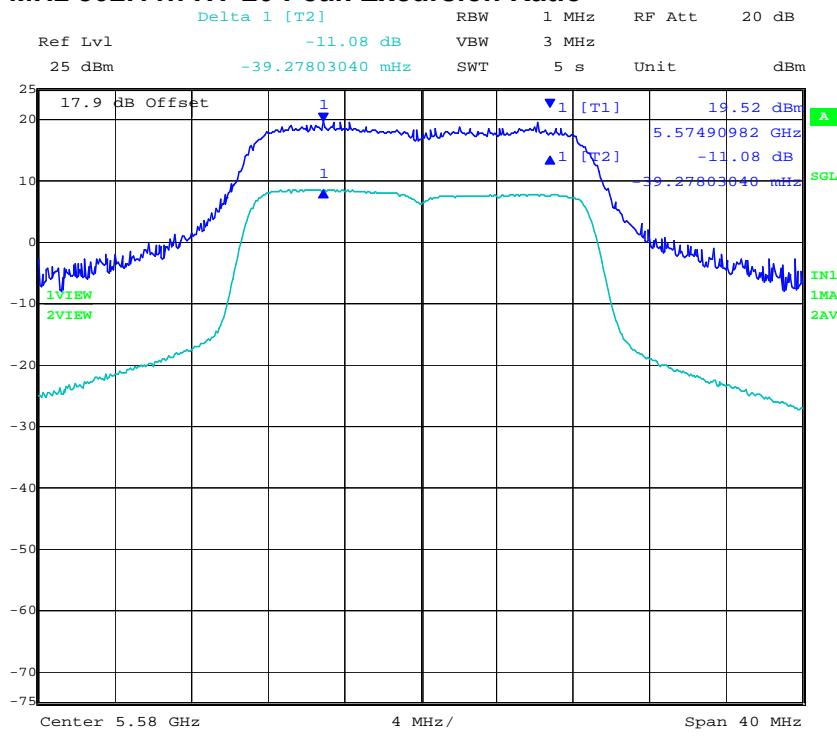


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT B 5,580 MHz 802.11n HT-20 Peak Excursion Ratio

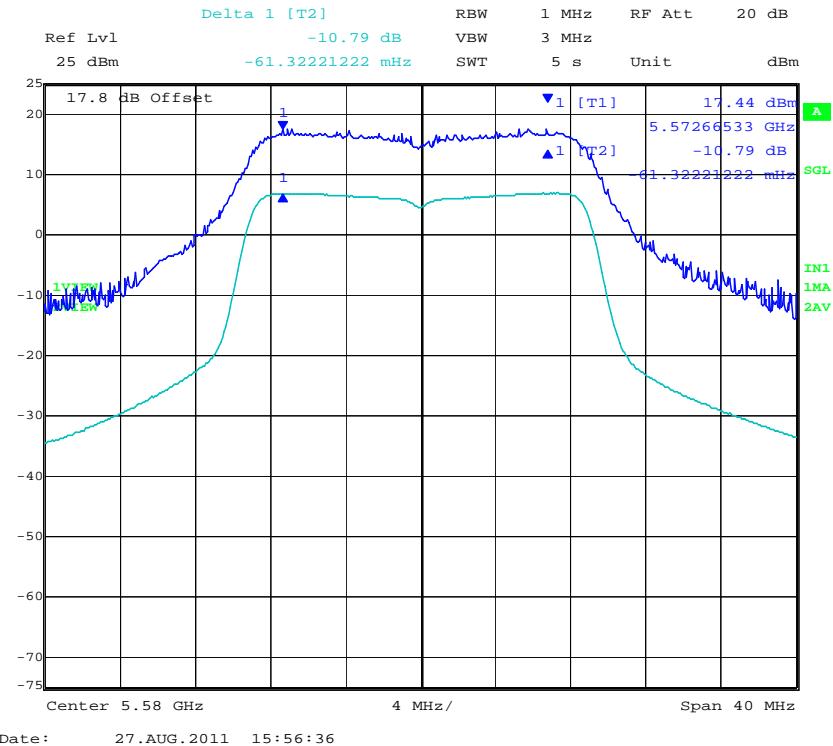


PORT C 5,580 MHz 802.11n HT-20 Peak Excursion Ratio

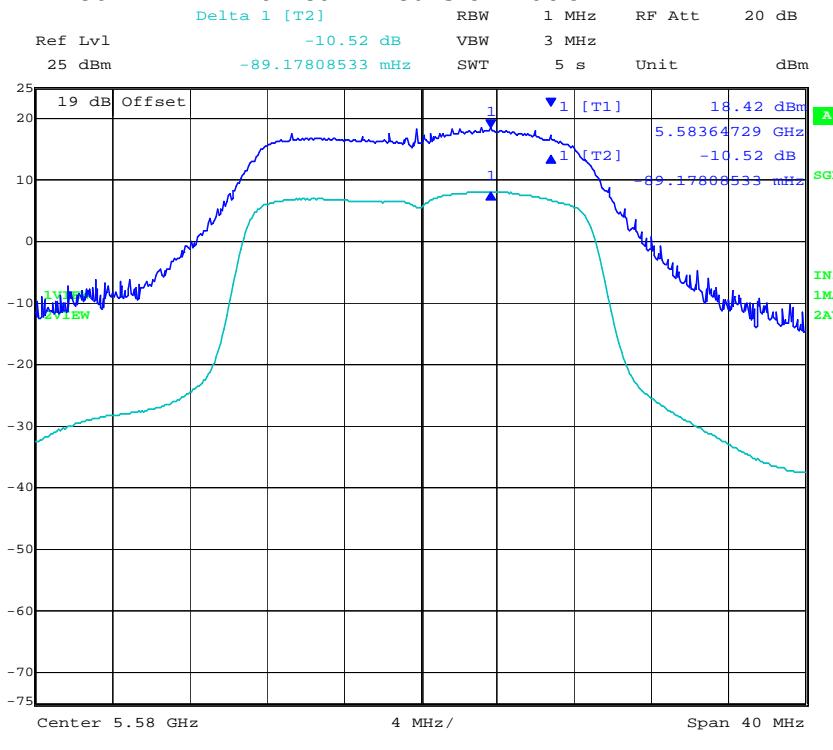


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,700 MHz 802.11n HT-20 Peak Excursion Ratio

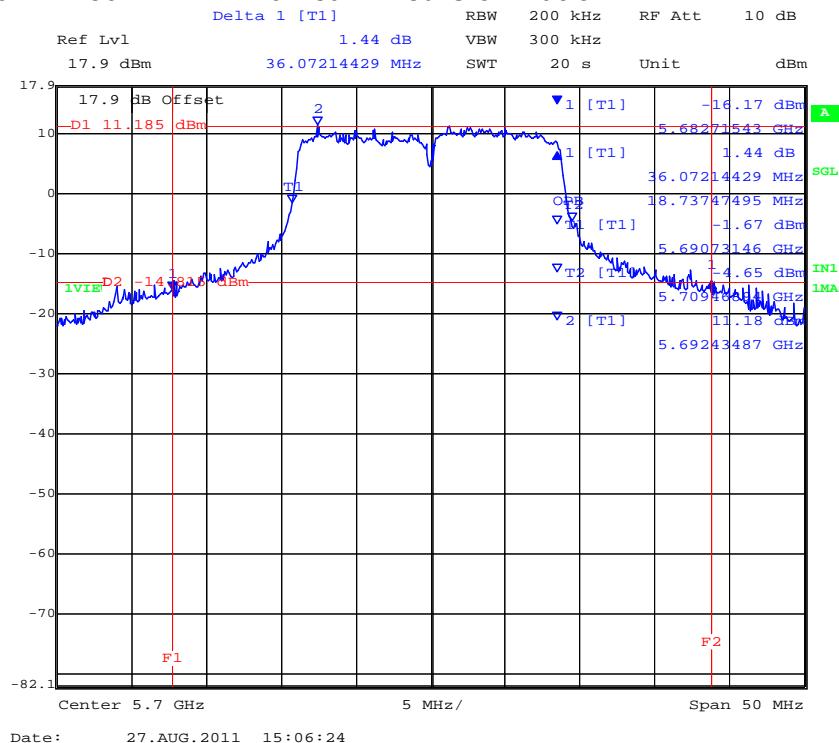


PORT B 5,700 MHz 802.11n HT-20 Peak Excursion Ratio

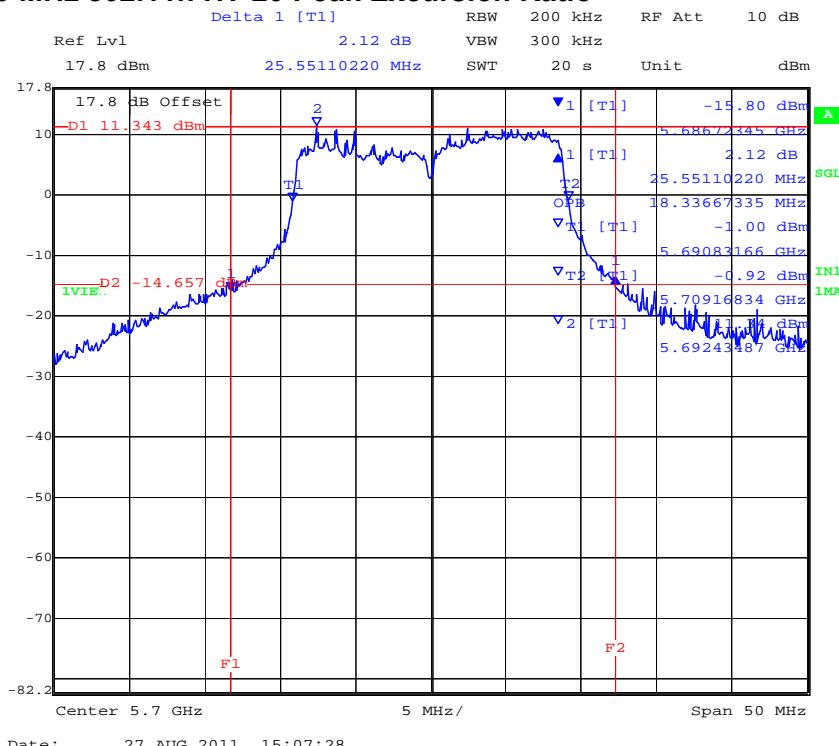

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,700 MHz 802.11n HT-20 Peak Excursion Ratio

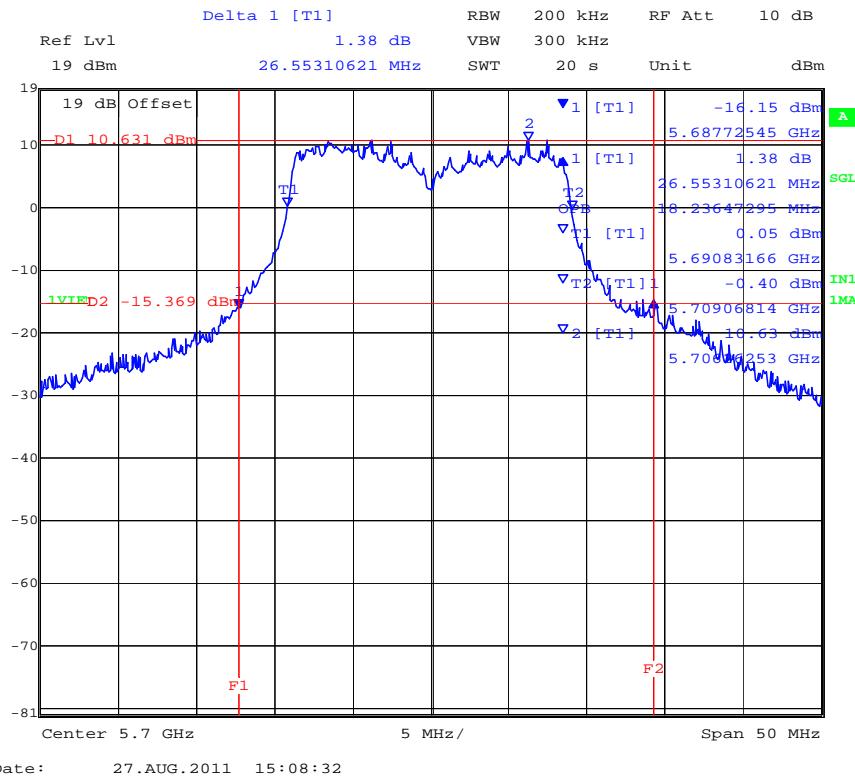

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 172 of 223

TABLE OF RESULTS – 802.11n HT-40 5500 - 5700 MHz


Test Conditions:	15.407 (a)	Rel. Humidity (%):	35 to 42
Variant:	802.11n HT-40	Ambient Temp. (°C):	19 to 22
TPC:	HIGH	Pressure (mBars):	998 to 1003
Modulation:	ON	Duty Cycle (%):	100
Beam Forming Gain (Y):	N/A dB	Antenna Gain:	3 dBi
Applied Voltage:	48.0 Vdc		
Notes 1:			
Notes 2:			

Test Frequency	Trace Δ Marker				Limit	Margin
	Port A	Port B	Port C	Port D		
MHz	dB	dB	dB	dB	dB	dB
5510	-12.45	-11.53	-10.35	--	-13.00	-0.55
5550	-12.10	-11.95	-10.53	--		-0.90
5670	-12.77	-11.30	-10.78	--		-0.23


Measurement uncertainty:	±1.33 dB
---------------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,510 MHz 802.11n HT-40 Peak Excursion Ratio

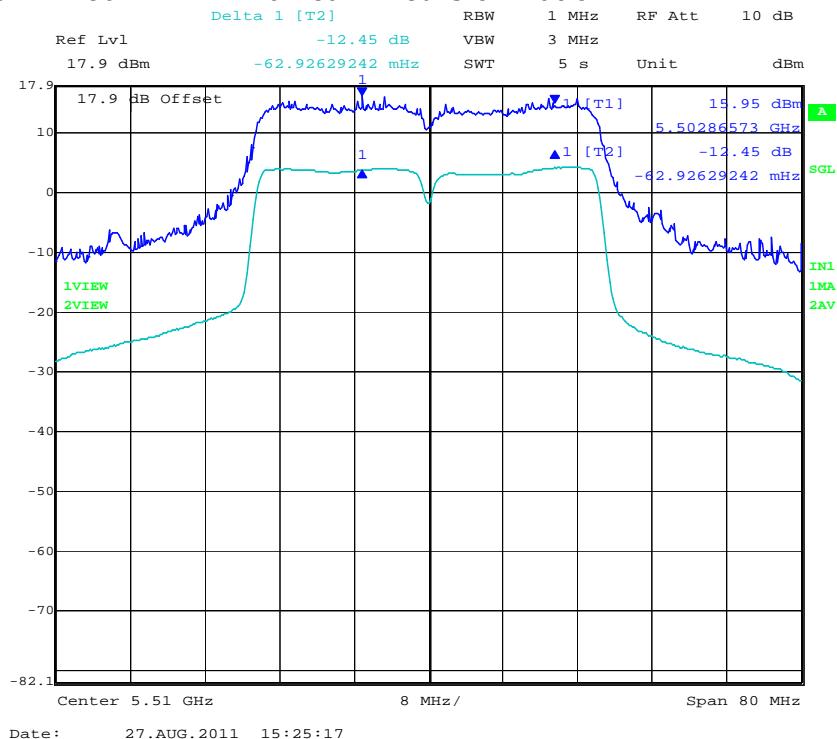


PORT B 5,510 MHz 802.11n HT-40 Peak Excursion Ratio

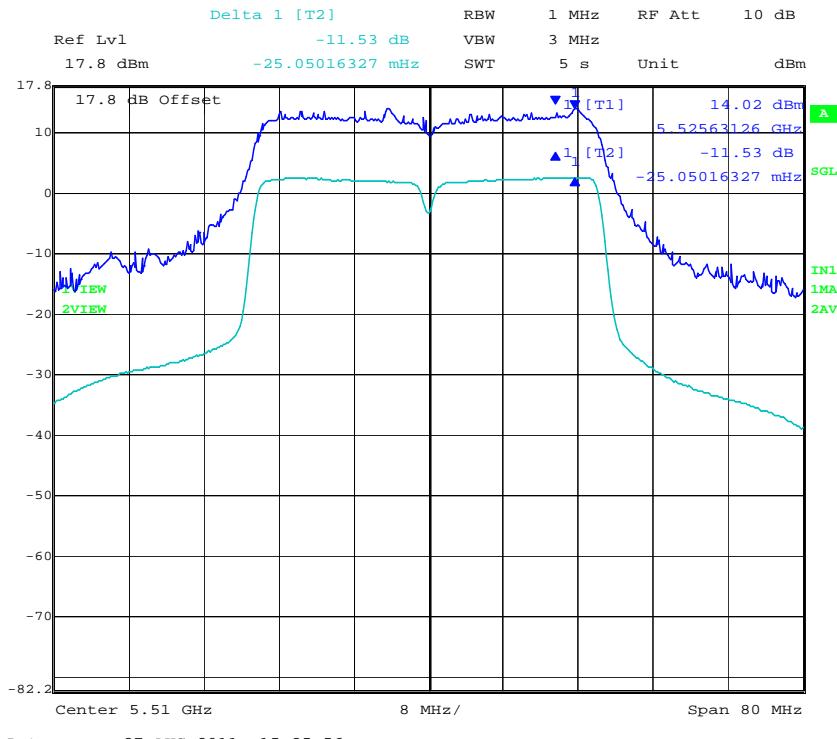


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,510 MHz 802.11n HT-40 Peak Excursion Ratio

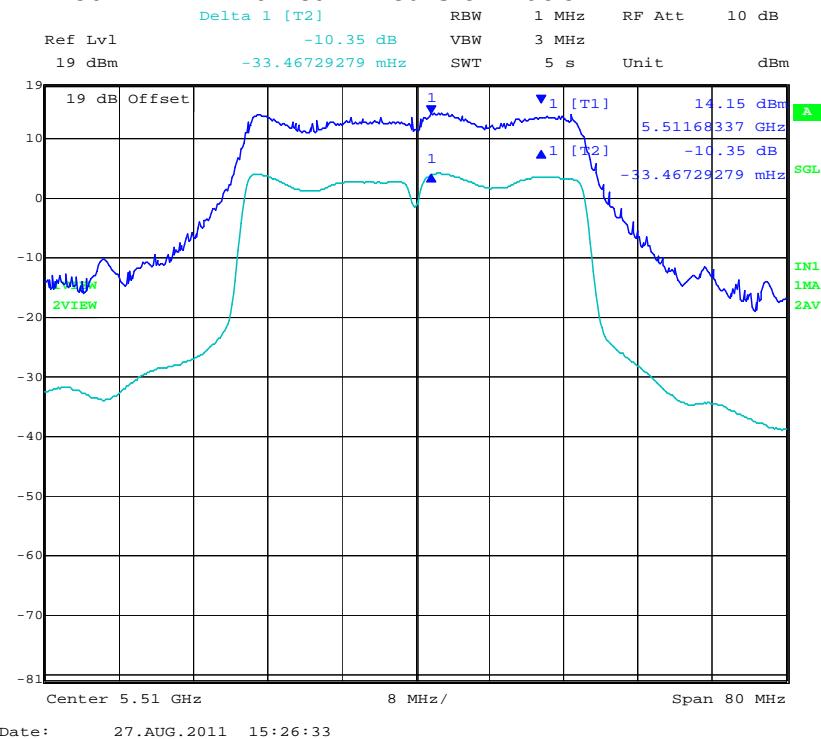


PORT A 5,550 MHz 802.11n HT-40 Peak Excursion Ratio

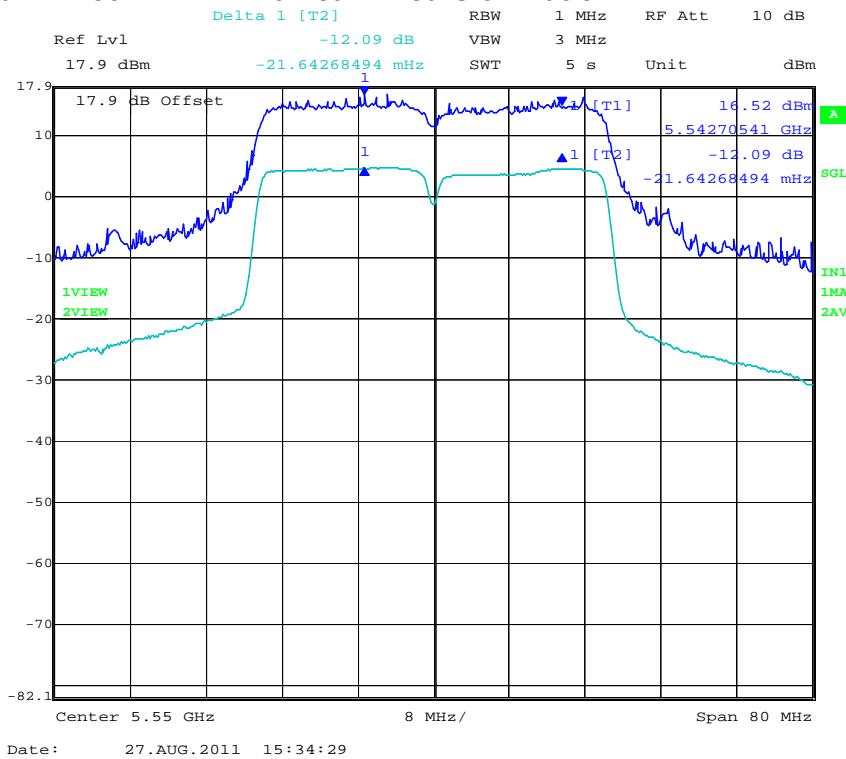


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT B 5,550 MHz 802.11n HT-40 Peak Excursion Ratio

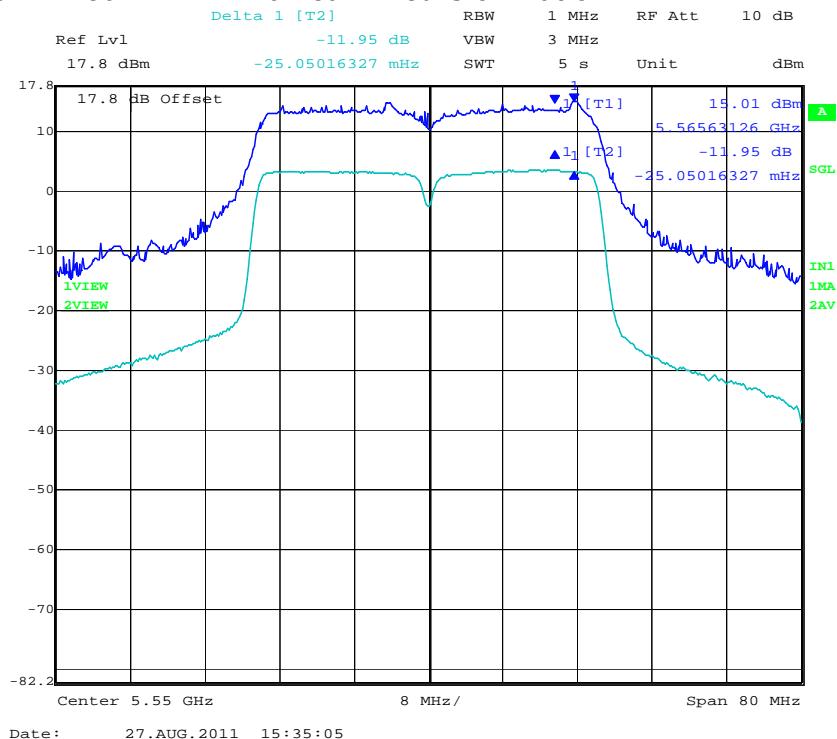


PORT C 5,550 MHz 802.11n HT-40 Peak Excursion Ratio

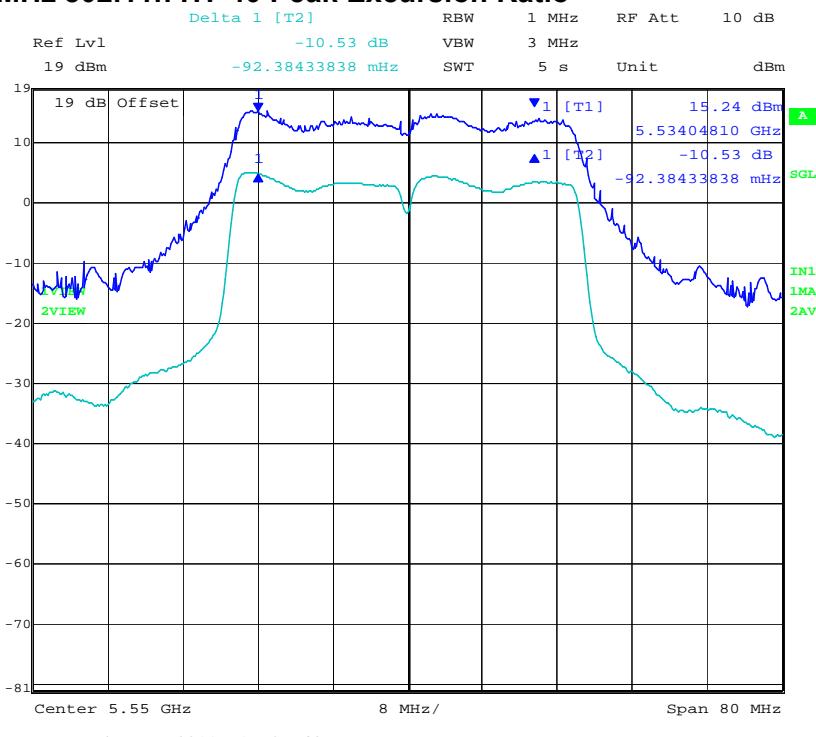


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT A 5,670 MHz 802.11n HT-40 Peak Excursion Ratio

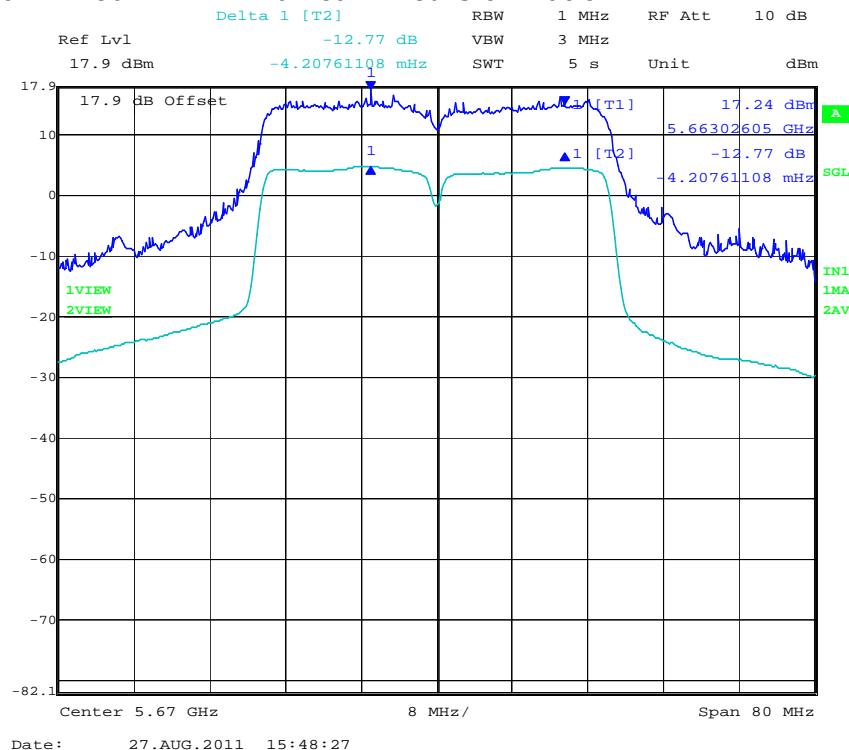


PORT B 5,670 MHz 802.11n HT-40 Peak Excursion Ratio

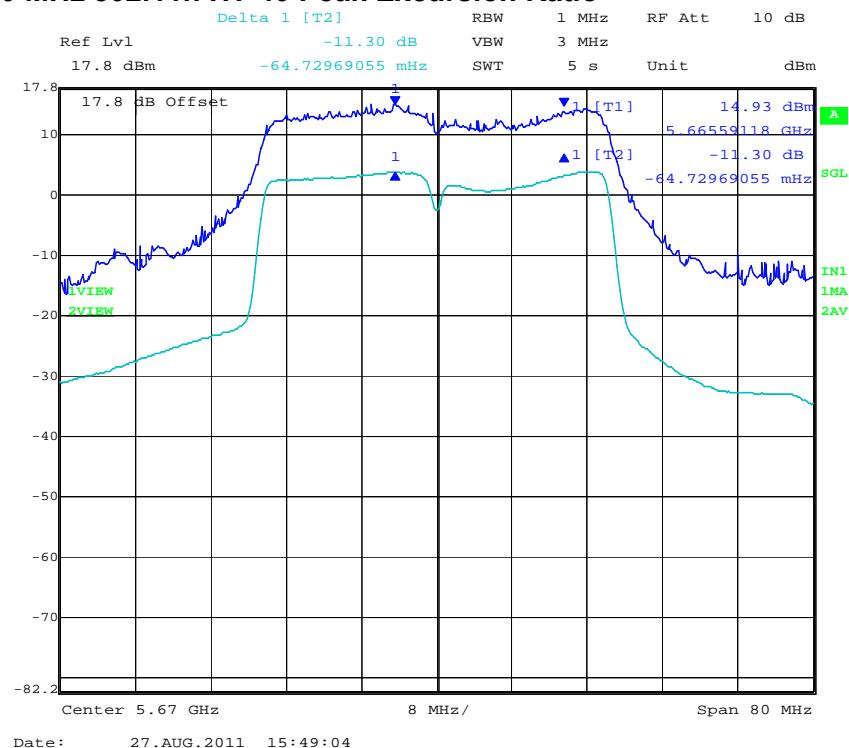

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

PORT C 5,670 MHz 802.11n HT-40 Peak Excursion Ratio

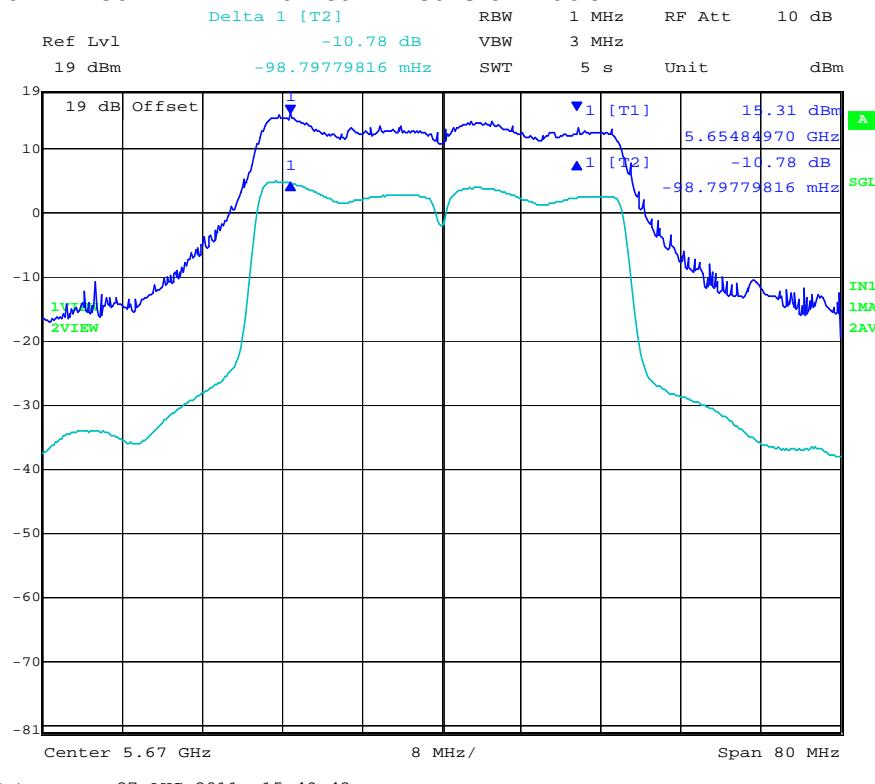

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 178 of 223

Specification

Limits

§15.407 (a)(6) The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified in this paragraph) shall not exceed 13dB across any 1MHz bandwidth or the emission bandwidth whichever is less

Laboratory Measurement Uncertainty for Spectrum Measurement

Measurement uncertainty	± 2.81dB
-------------------------	----------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of RF Spectrum Mask'	0158, 0287, 0252, 0313, 0314, 0070, 0116, 0117

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 179 of 223

5.1.5. Frequency Stability

FCC, Part 15 Subpart C §15.407(g)
Industry Canada RSS-210 §2.1

Test Procedure

The manufacturer of the equipment is responsible for ensuring that the frequency stability is such that emissions are always maintained within the band of operation under all conditions.

Manufacturer Declaration

The frequency stability of the reference oscillator sets the frequency stability of the RF transceiver signals. Therefore all of the RF signals should have ± 20 ppm stability.

This stability accounts for room temp tolerance of the crystal oscillator circuit, frequency variation across temperature, and crystal ageing.

± 20 ppm at 5.250 GHz translates to a maximum frequency shift of ± 105 KHz. As the edge of the channels is at least one MHz from either of the band edges, ± 105 KHz is more than sufficient to guarantee that the intentional emission will remain in the band over the entire operating range of the EUT.

Specification

Limits

§15.407 (g) Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 180 of 223

5.1.6. Maximum Permissible Exposure

FCC, Part 15 Subpart C §15.407(f)

Industry Canada RSS-Gen §5.5

Calculations for Maximum Permissible Exposure Levels

$$\text{Power Density} = P_d \text{ (mW/cm}^2\text{)} = \text{EIRP}/(4\pi d^2)$$

$$\text{EIRP} = P * G$$

P = Peak output power (mW)

G = Antenna numeric gain (numeric)

d = Separation distance (cm)

$$\text{Numeric Gain} = 10 ^ (G \text{ (dBi)})/10$$

The Juniper WLA532 has three transmitters operating in each band. The peak power in the table below is calculated by assuming a worst case scenario where all transmitters are operating simultaneously in the same channel.

Because the EUT belongs to the General Population/Uncontrolled Exposure the limit of power density is 1.0 mW/cm²

Freq. Band (MHz)	Antenna Gain (dBi)	Numeric Gain (numeric)	Peak Output Power (dBm)	Peak Output Power (mW)	Calculated Safe Distance @ 1mW/cm ² Limit(cm)	Minimum Separation Distance (cm)
5150 - 5250	3.0	1.99	+17.00	47.8	2.75	20.00
5250 - 5350	3.0	1.99	+23.07	202.8	5.67	20.00
5470 - 5725	3.0	1.99	+23.05	201.9	5.65	20.00

Note: for mobile or fixed location transmitters the minimum separation distance is 20cm, even if calculations indicate the MPE distance to be less.

Specification

Maximum Permissible Exposure Limits

FCC §1.1310 Limit = 1mW / cm² from 1.310 Table 1

RSS-Gen §5.5 Before equipment certification is granted, the application requirements of RSS-102 shall be met.

Laboratory Measurement Uncertainty for Power Measurements

Measurement uncertainty	±1.33 dB
-------------------------	----------

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 181 of 223

5.1.7. Radiated Emissions

FCC, Part 15 Subpart C §15.407(b)(2), §15.205(a)/15.209(a)
Industry Canada RSS-210 §A9.3(2); §2.2; §2.6; RSS-Gen §4.7

Test Procedure

Testing was performed in a 3-meter anechoic chamber. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. Preliminary emissions were recorded with in Spectrum Analyzer mode, using a maximum peak detector while in peak hold mode. Depending on the frequency band spanned a notch filter and/or waveguide filter was used to remove the fundamental frequency.

Emissions nearest the limits were chosen for maximization and formal measurement using a CISPR compliant receiver. Emissions above 1000 MHz are measured utilizing a CISPR compliant average detector with a tuned receiver, using a bandwidth of 1 MHz. Emissions from 30 MHz – 1000 MHz are measured utilizing a CISPR compliant quasi-peak detector with a tuned receiver, using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. All factors are included in the reported data.

$$\mathbf{FS = R + AF + CORR - FO}$$

FS = Field Strength

R = Measured Spectrum analyzer Input Amplitude

AF = Antenna Factor

$$\mathbf{CORR = Correction\ Factor = CL - AG + NFL}$$

CL = Cable Loss

AG = Amplifier Gain

FO = Distance Falloff Factor

NFL = Notch Filter Loss or Waveguide Loss

Field Strength Calculation Example:

Given receiver input reading of 51.5 dB μ V; Antenna Factor of 8.5 dB; Cable Loss of 1.3 dB; Falloff Factor of 0 dB, an Amplifier Gain of 26 dB and Notch Filter Loss of 1 dB. The Field Strength of the measured emission is:

$$\mathbf{FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3\ dB\mu V/m}$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:

$$\mathbf{Level\ (dB\mu V/m) = 20 * Log\ (level\ (\mu V/m))}$$

$$40\ dB\mu V/m = 100\ \mu V/m$$

$$48\ dB\mu V/m = 250\ \mu V/m$$

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 182 of 223

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength (dB μ V/m);

$$E = \frac{1000000 \times \sqrt{30P}}{3} \mu\text{V/m}$$


where P is the EIRP in Watts

Therefore: -27 dBm/MHz = 68.23 dB μ V/m

Note: The data in this Section identifies that the EUT is in compliance with the -27dBm/MHz EIRP limit (68.23 dB μ V/m) for out of band emissions. All out of band emissions are less than 68.23 dB μ V/m.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Radiated Emission Measurement Setup – Above 1 GHz

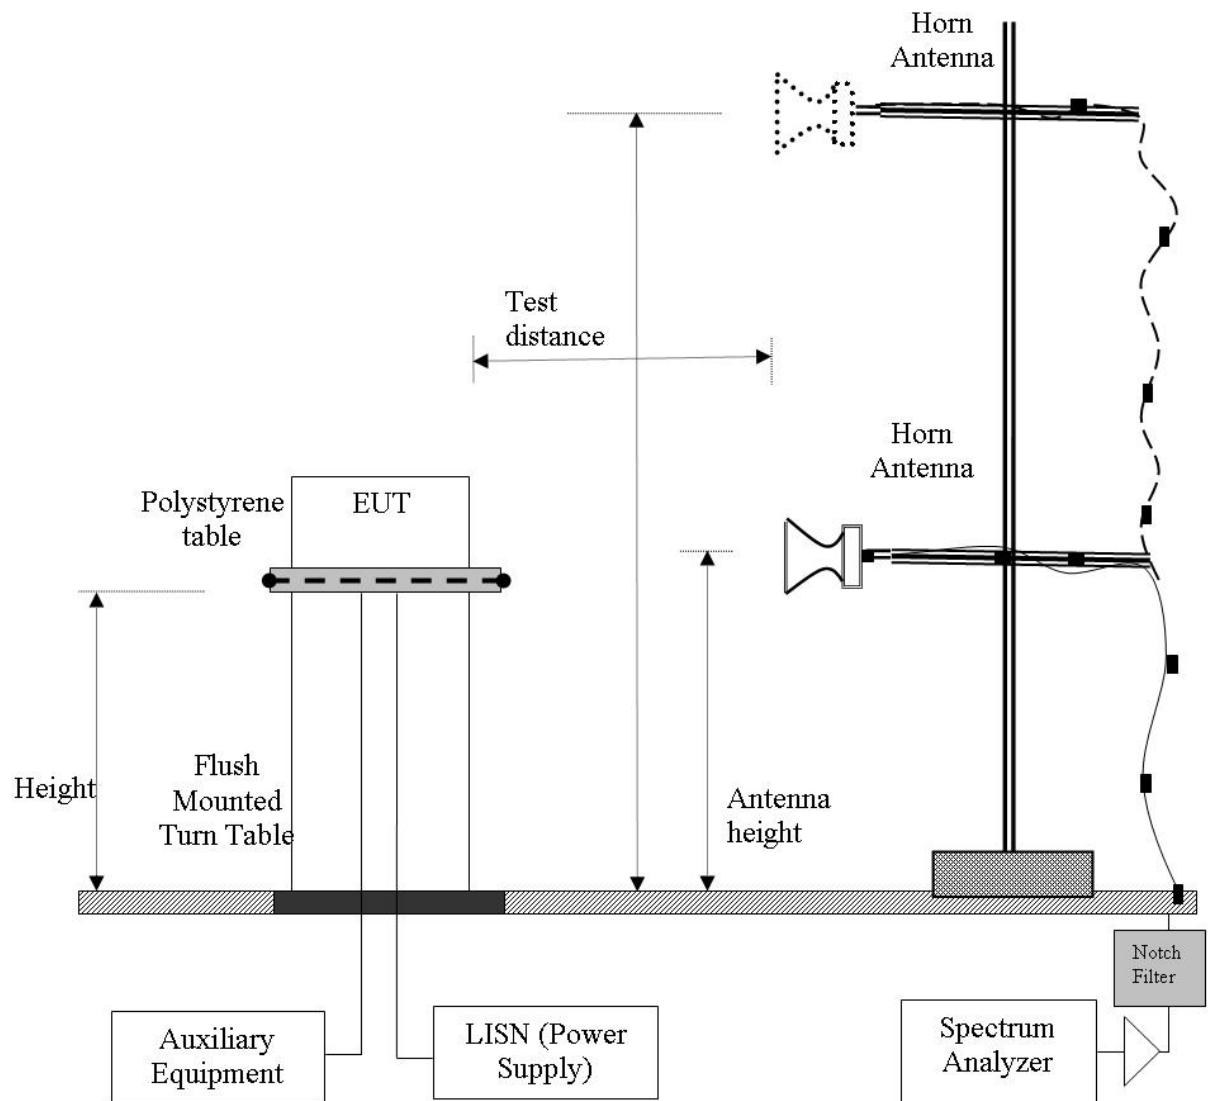

NOTE: KDB 662911 was implemented for Out-of-Band measurements. Where necessary Option (2) Measure and add $10 \log (N)$ dB was implemented



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 184 of 223

Specification

Radiated Spurious Emissions

15.407 (b)(2). All emissions outside of the 5,150-5,350MHz band shall not exceed an EIRP of -27dBm/MHz.

FCC §15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

FCC §15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

FCC §15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

RSS-210 §A9.3(2) For transmitters operating in the 5250-5350 MHz band, all emissions outside the 5150-5350 MHz band shall not exceed -27 dBm/MHz e.i.r.p. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band shall not exceed out of band emission limit of 27 dBm/MHz e.i.r.p. in the 5150-5250 MHz band in order to operate indoor/outdoor, or alternatively shall comply with the spectral power density for operation within the 5150-5250 MHz band and shall be labeled "for indoor use only".

RSS-Gen §4.7 The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate of carrier frequency), or from 30 MHz, whichever is the lowest frequency, to the 5th harmonic of the highest frequency generated without exceeding 40 GHz.

RSS-Gen §6 Receiver Spurious Emission Standard

If a radiated measurement is made, all spurious emissions shall comply with the limits of the following Table. The resolution bandwidth of the spectrum analyzer shall be 100 kHz for spurious emission measurements below 1.0 GHz and 1.0 MHz for measurements above 1.0 GHz

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 185 of 223

Table 1: FCC 15.209 Spurious Emissions Limits

Frequency (MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Laboratory Measurement Uncertainty for Spectrum Measurement

Measurement Uncertainty	+5.6/ -4.5 dB
--------------------------------	---------------


Traceability:

Method	Test Equipment Used
Work instruction WI-03	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

5.1.7.1. Integral Antenna

Test Freq.	5180 MHz	Engineer	GMH
Variant	802.11a; 6 Mbs	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	31
Power Setting	ART = 8	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

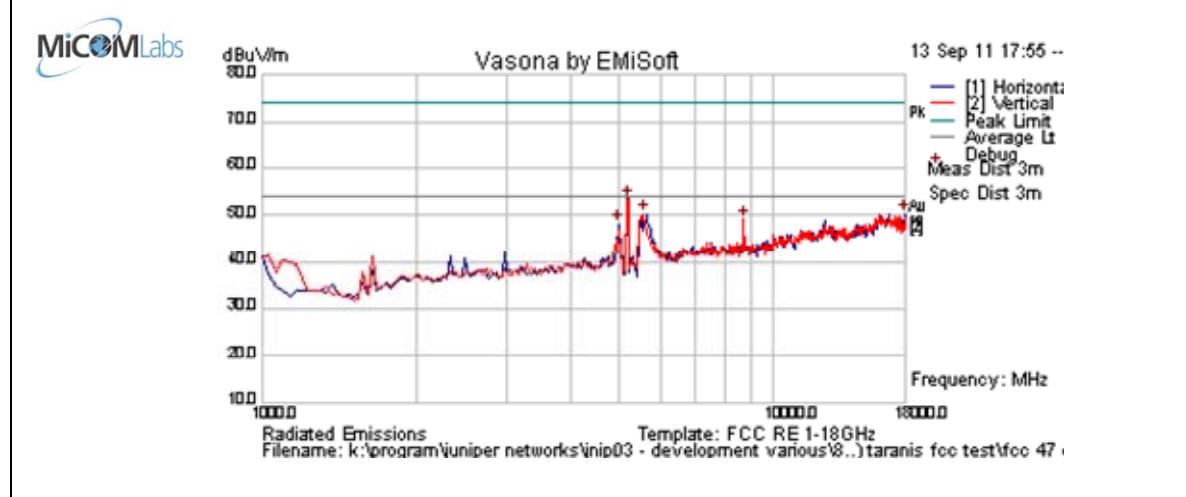


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5190.381	58.5	4.6	-9.6	53.5	Peak [Scan]	V						FUND
18000	40.9	8.8	0.8	50.5	Peak [Scan]	H	100	0	54.0	-3.5	Pass	NOISE
5565.130	54.7	4.7	-9.1	50.3	Peak [Scan]	V	100	0	54	-3.7	Pass	BE
8733.467	47.7	6.1	-4.5	49.3	Peak [Scan]	V	100	0	54	-4.7	Pass	NRB
4985.972	53.4	4.6	-9.9	48.1	Peak [Scan]	H	100	0	54	-5.9	Pass	BE

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5200 MHz	Engineer	GMH
Variant	802.11a; 6 Mbs	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	31
Power Setting	ART = 8	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

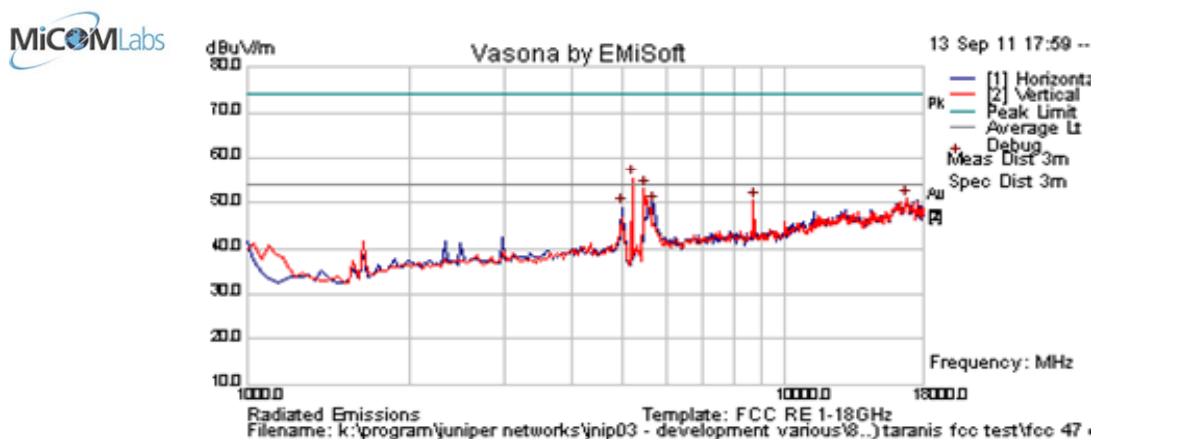

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5190.381	60.3	4.6	-9.6	55.3	Peak [Scan]	V						FUND
5462.92585	57.6	4.6	-9.2	53.0	Peak [Scan]	V	100	0	54.0	-1.0	Pass	BE
16773.547	41.1	8.6	1.2	51.0	Peak [Scan]	V	100	0	54	-3.1	Pass	NOISE
8733.467	48.8	6.1	-4.5	50.4	Peak [Scan]	V	100	0	54	-3.7	Pass	NRB
5701.403	53.8	4.7	-8.9	49.7	Peak [Scan]	H	100	0	54	-4.3	Pass	BE
4985.972	54.3	4.6	-9.9	49.0	Peak [Scan]	H	100	0	54	-5.0	Pass	BE


Legend: TX = Transmitter Emissions; DG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 188 of 223

Test Freq.	5240 MHz	Engineer	GMH
Variant	802.11a; 6 Mbs	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	31
Power Setting	ART = 8	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

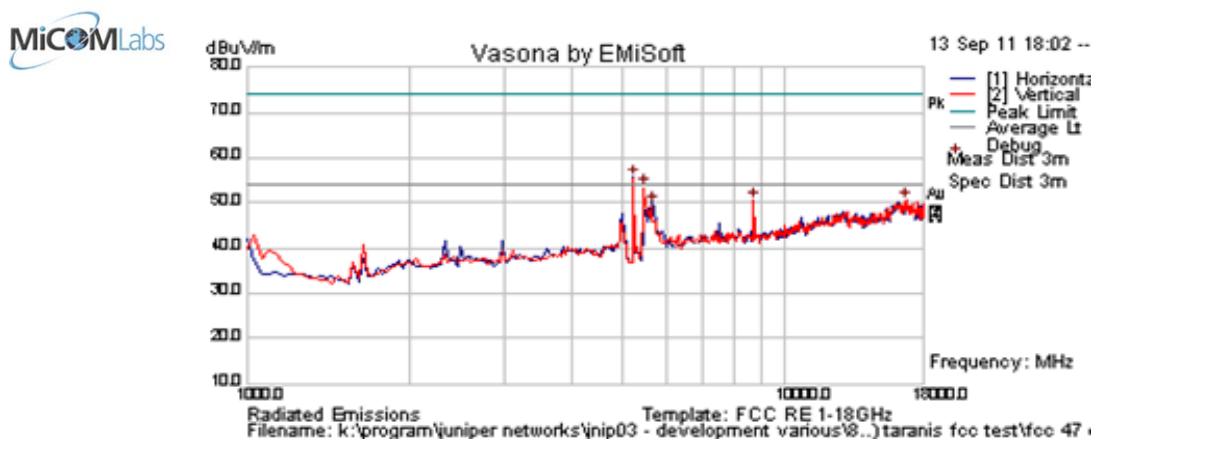

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5224.449	60.7	4.6	-9.6	55.7	Peak [Scan]	H						FUND
5462.92585	57.8	4.6	-9.2	53.2	Peak [Scan]	V	100	0	54.0	-0.8	Pass	BE
16807.615	40.9	8.6	1.1	50.6	Peak [Scan]	V	100	0	54	-3.4	Pass	NOISE
8733.467	48.9	6.1	-4.5	50.4	Peak [Scan]	V	100	0	54	-3.6	Pass	NRB
5701.403	53.6	4.7	-8.9	49.4	Peak [Scan]	H	100	0	54	-4.6	Pass	BE

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission

NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5180 MHz	Engineer	GMH
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	31
Power Setting	ART = 12.5	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

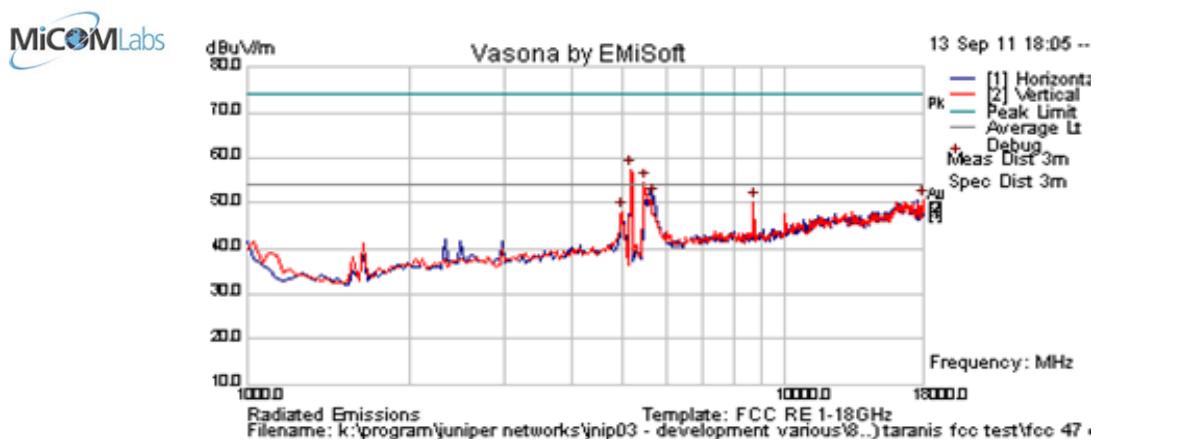


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5156.313	62.5	4.6	-9.6	57.5	Peak [Scan]	V						FUND
5462.92585	59.2	4.6	-9.2	54.5	Peak [Scan]	V					Pass	BE
5701.403	55.4	4.7	-8.9	51.2	Peak [Scan]	H	100	0	54	-2.8	Pass	BE
18000.000	41.4	8.8	0.8	51.0	Peak [Scan]	V	100	0	54	-3.0	Pass	NOISE
8733.467	48.6	6.1	-4.5	50.2	Peak [Scan]	V	100	0	54	-3.8	Pass	NRB
4985.972	53.3	4.6	-9.9	48.1	Peak [Scan]	V	100	0	54	-5.9	Pass	BE

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5200 MHz	Engineer	GMH
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	31
Power Setting	ART = 12.5	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

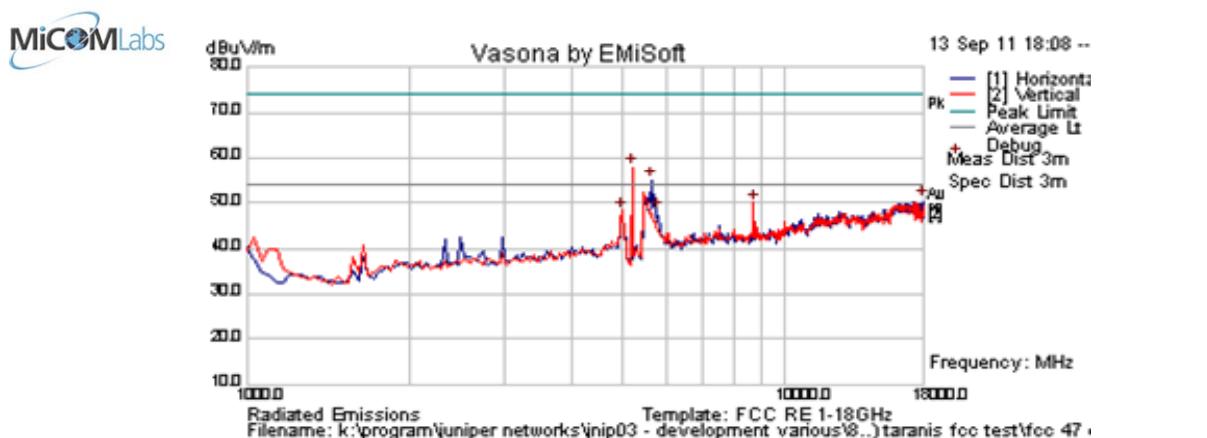

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5190.381	63.0	4.6	-9.6	58.0	Peak [Scan]	H						FUND
5633.26653	59.3	4.7	-9.0	55.1	Peak [Scan]	H					Pass	BE
18000.000	41.2	8.8	0.8	50.8	Peak [Scan]	H	100	0	54	-3.2	Pass	NOISE
8733.467	48.4	6.1	-4.5	50.0	Peak [Scan]	V	100	0	54	-4.0	Pass	NRB
4985.972	53.5	4.6	-9.9	48.3	Peak [Scan]	V	100	0	54	-5.8	Pass	BE
5769.539	52.3	4.8	-8.9	48.2	Peak [Scan]	H	100	0	54	-5.8	Pass	BE


Legend: TX = Transmitter Emissions; DG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 191 of 223

Test Freq.	5240 MHz	Engineer	GMH
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	31
Power Setting	ART = 12.5	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

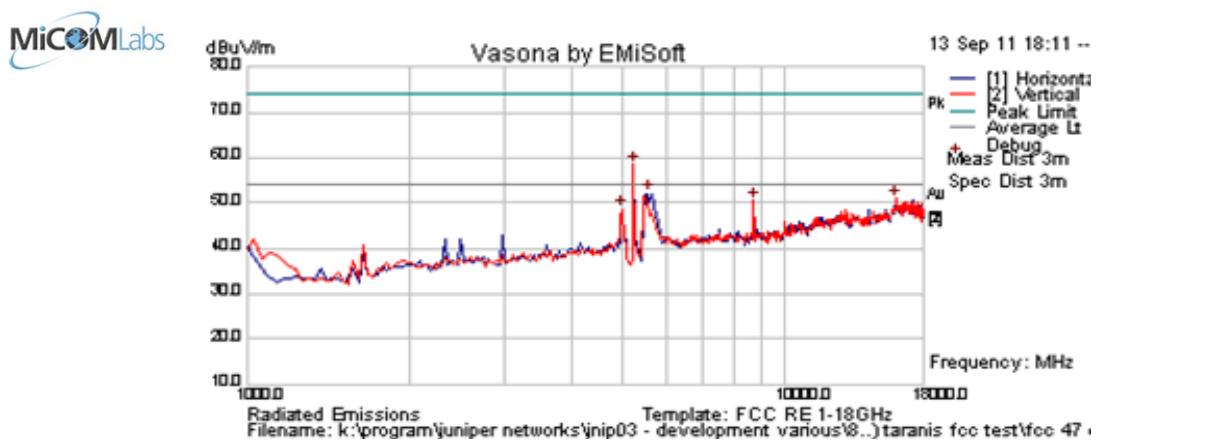


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5224.449	63.6	4.6	-9.6	58.6	Peak [Scan]	V						FUND
5565.13026	56.4	4.7	-9.1	52.0	Peak [Scan]	H	100	0	54.0	-2.0	Pass	BE
16058.116	41.5	9.0	0.4	50.9	Peak [Scan]	V	100	0	54	-3.2	Pass	NOISE
8733.467	48.8	6.1	-4.5	50.4	Peak [Scan]	V	100	0	54	-3.6	Pass	NRB
4985.972	53.8	4.6	-9.9	48.5	Peak [Scan]	V	100	0	54	-5.5	Pass	BE

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5190 MHz	Engineer	GMH
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	31
Power Setting	ART = 12.5	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

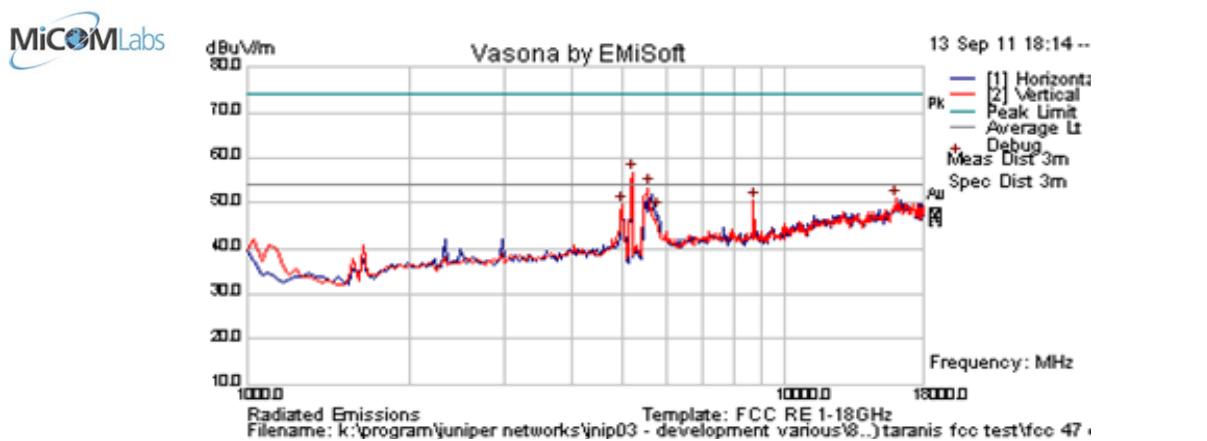

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5190.381	61.7	4.6	-9.6	56.7	Peak [Scan]	V						FUND
5565.13026	57.6	4.7	-9.1	53.2	Peak [Scan]	V	100	0	54.0	-0.8	Pass	BE
16058.116	41.5	9.0	0.4	50.9	Peak [Scan]	V	100	0	54	-3.1	Pass	NOISE
8733.467	48.8	6.1	-4.5	50.4	Peak [Scan]	V	100	0	54	-3.7	Pass	NRB
4985.972	54.8	4.6	-9.9	49.5	Peak [Scan]	V	100	0	54	-4.5	Pass	BE
5769.539	52.2	4.8	-8.9	48.1	Peak [Scan]	H	100	0	54	-5.9	Pass	BE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 193 of 223

Test Freq.	5230 MHz	Engineer	GMH
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	31
Power Setting	ART = 12.5	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

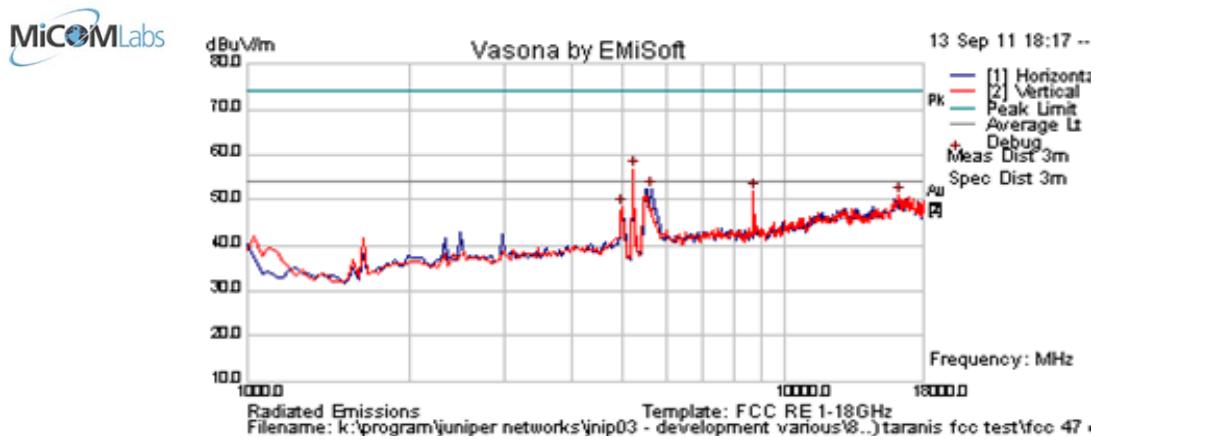

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5224.449	61.7	4.6	-9.6	56.7	Peak [Scan]	V						FUND
5633.26653	56.4	4.7	-9.0	52.2	Peak [Scan]	H	100	0	54.0	-1.8	Pass	BE
8733.467	50.2	6.1	-4.5	51.8	Peak [Scan]	V	100	0	54	-2.2	Pass	NRB
16262.525	41.9	8.9	0.2	51.0	Peak [Scan]	V	100	0	54	-3.0	Pass	NOISE
4985.972	53.6	4.6	-9.9	48.3	Peak [Scan]	V	100	0	54	-5.7	Pass	BE

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission

NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 194 of 223

Peak Emissions

The peak emission level is present when the EUT is in the centre channel in the 5150 – 5250 MHz band in 11a mode.

Test Freq.	5200 MHz	Engineer	GMH
Variant	802.11a; 6 Mbs	Temp (°C)	29
Freq. Range	5150 - 5260 MHz	Rel. Hum. (%)	30
Power Setting	ART = 8	Press. (mBars)	996
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

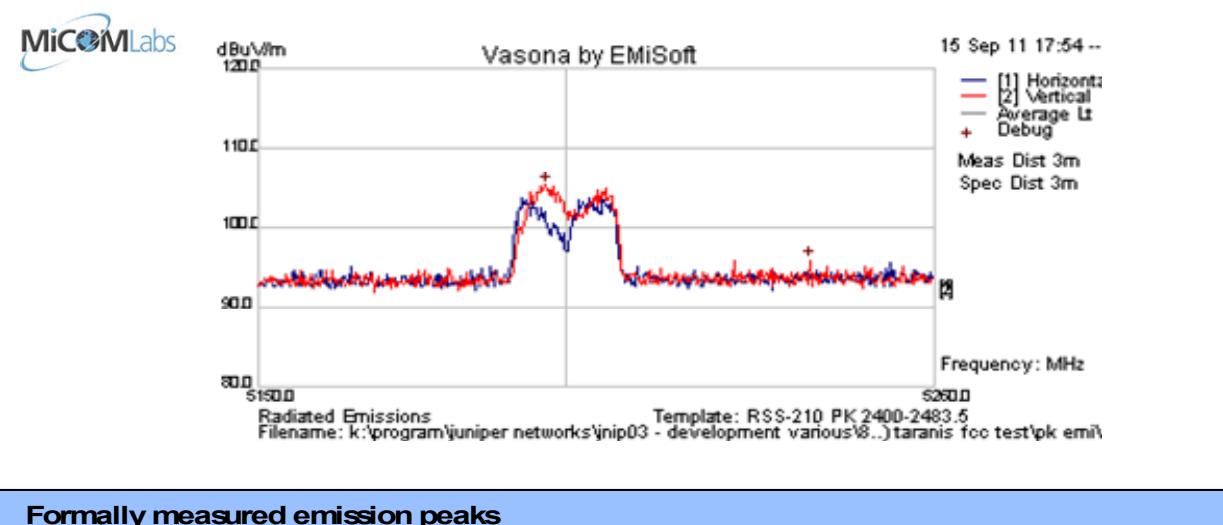

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5196.513	56.3	14.6	34.4	105.4	Peak [Scan]	V						FUND
5239.71944	46.9	14.6	34.4	95.9	Peak [Scan]	V						NRB
Legend:	TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission											
	PK = Peak emissions of Fundamental											


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 195 of 223

Radiated Spurious Emissions 5250 – 5350 MHz

Test Freq.	5260 MHz	Engineer	GMH
Variant	802.11a; 6 Mbs	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	31
Power Setting	ART = 15.5	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

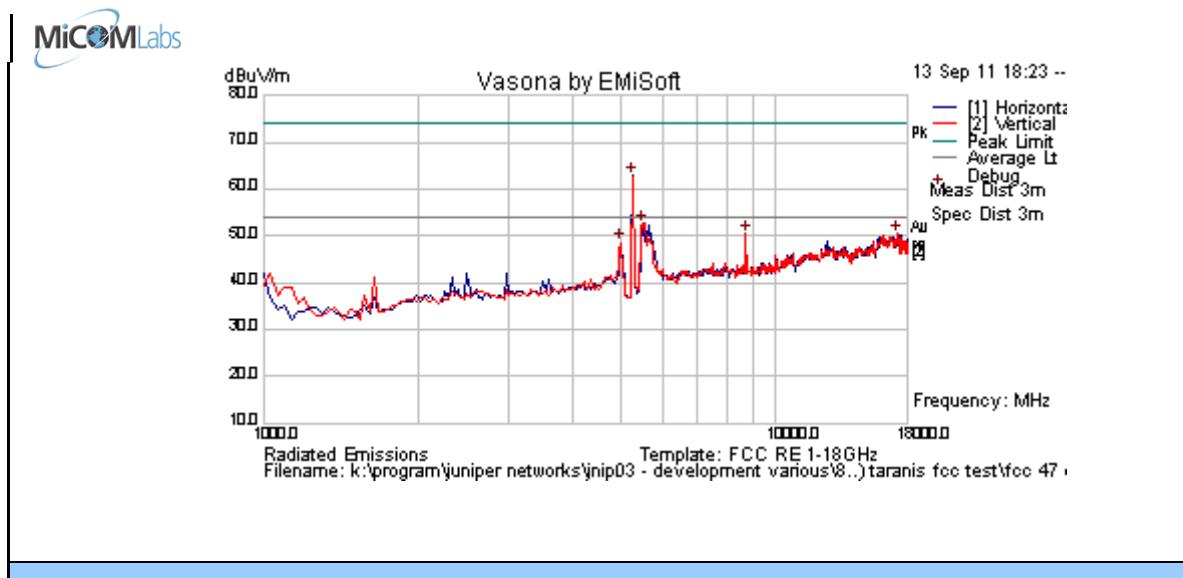

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5258.517	68.0	4.6	-9.6	63.0	Peak [Scan]	H						FUND
5496.99399	57.3	4.6	-9.2	52.7	Peak [Scan]	V					Pass	BE
17216.433	41.0	8.6	1.0	50.6	Peak [Scan]	V	100	0	54	-3.4	Pass	NOISE
8733.467	48.9	6.1	-4.5	50.5	Peak [Scan]	V	100	0	54	-3.5	Pass	NRB
4985.972	53.9	4.6	-9.9	48.6	Peak [Scan]	V					Pass	BE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 196 of 223

Test Freq.	5300 MHz	Engineer	GMH
Variant	802.11a; 6 Mbs	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	31
Power Setting	ART = 15.5	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

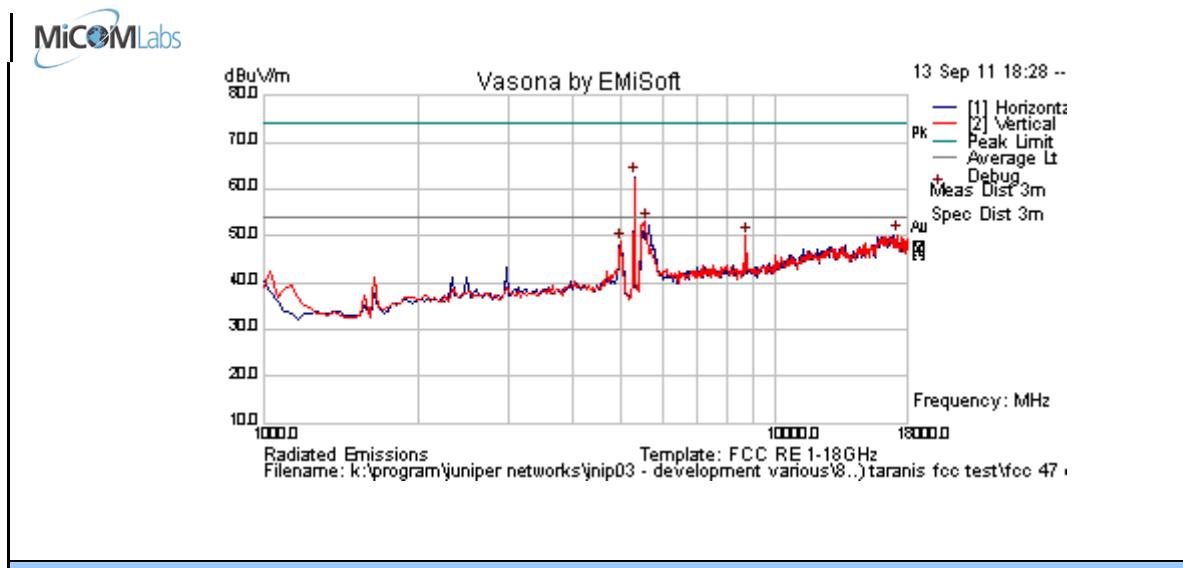

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5292.585	67.6	4.6	-9.5	62.7	Peak [Scan]	H						FUND
5565.13026	57.5	4.7	-9.1	53.1	Peak [Scan]	V					Pass	BE
17216.433	40.6	8.6	1.0	50.2	Peak [Scan]	V	100	0	54	-3.8	Pass	NOISE
8733.467	48.4	6.1	-4.5	50.0	Peak [Scan]	V	100	0	54	-4.0	Pass	NRB
4985.972	54.1	4.6	-9.9	48.8	Peak [Scan]	V					Pass	BE

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission

NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5320 MHz	Engineer	GMH
Variant	802.11a; 6 Mbs	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	31
Power Setting	ART = 15.5	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

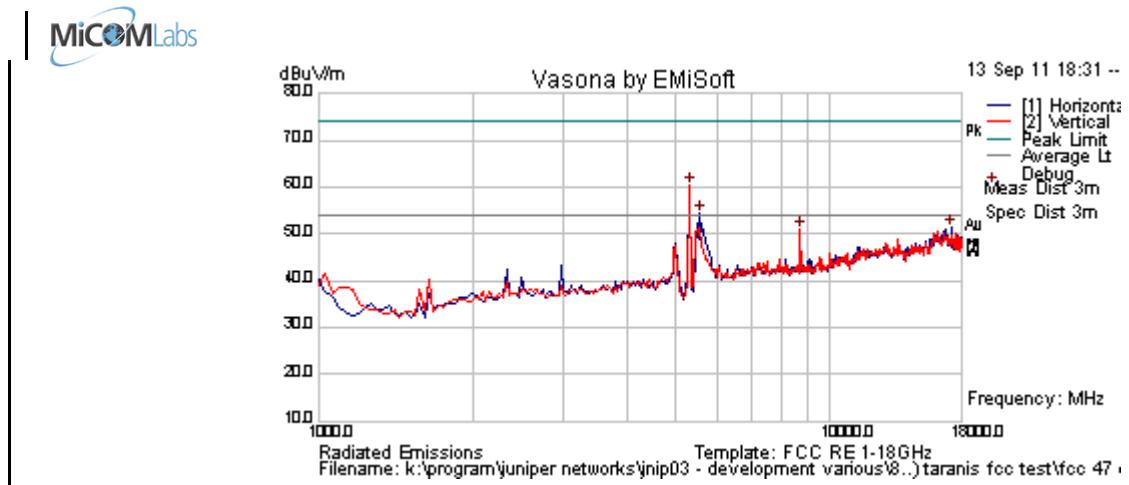


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5326.653	65.2	4.6	-9.5	60.4	Peak [Scan]	V						FUND
5565.13026	58.8	4.7	-9.1	54.4	Peak [Scan]	H					Pass	BE
17216.433	41.7	8.6	1.0	51.2	Peak [Scan]	H	100	0	54	-2.8	Pass	NOISE
8733.467	49.4	6.1	-4.5	51.0	Peak [Scan]	V	100	0	54	-3.0	Pass	NRB
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5260 MHz	Engineer	GMH
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	31
Power Setting	ART = 19.5	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

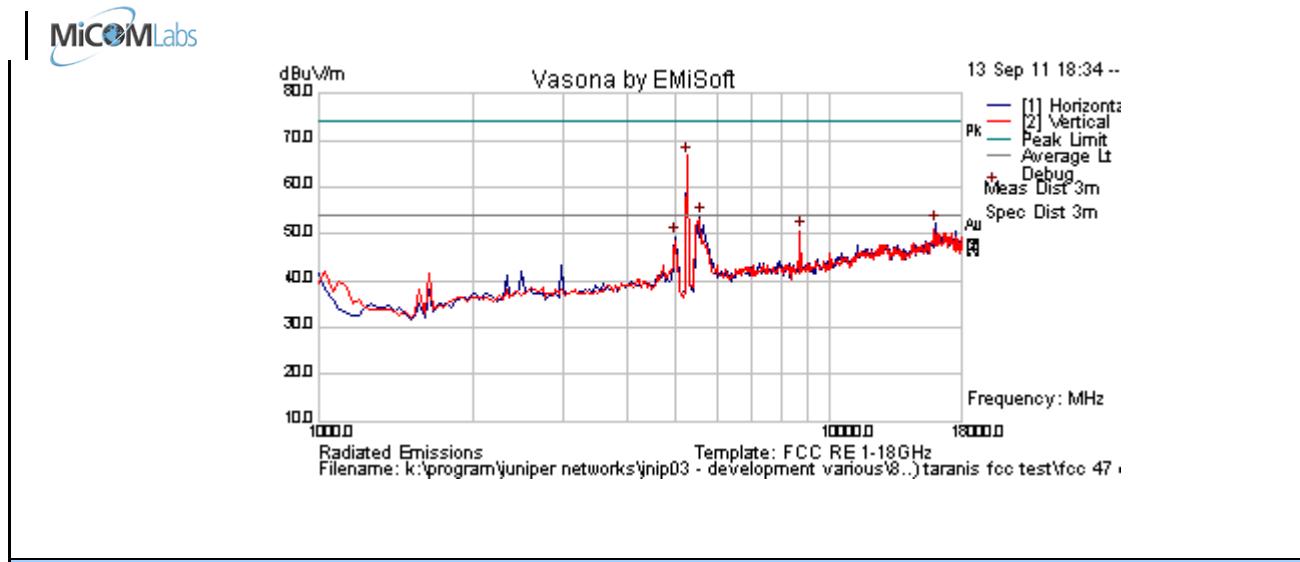


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5258.517	71.8	4.6	-9.6	66.8	Peak [Scan]	V						FUND
5565.13026	58.4	4.7	-9.1	54.0	Peak [Scan]	H					Pass	BE
15989.980	42.8	9.0	0.2	52.1	Peak [Scan]	H	100	0	54	-1.9	Pass	NOISE
8733.467	49.1	6.1	-4.5	50.7	Peak [Scan]	V	100	0	54	-3.3	Pass	NRB
4985.972	54.6	4.6	-9.9	49.3	Peak [Scan]	H					Pass	BE

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5300 MHz	Engineer	GMH
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	31
Power Setting	ART = 19.5	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

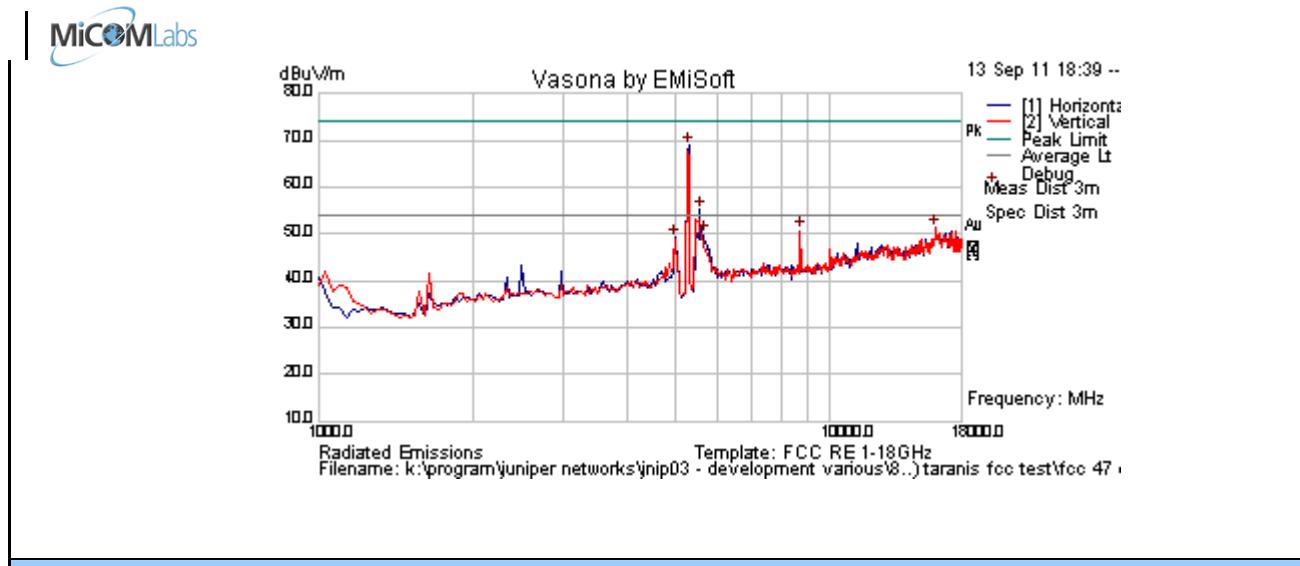


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5292.585	73.8	4.6	-9.5	68.9	Peak [Scan]	H						FUND
5565.13026	59.6	4.7	-9.1	55.3	Peak [Scan]	H					Pass	BE
16058.116	41.8	9.0	0.4	51.2	Peak [Scan]	V	100	0	54	-2.8	Pass	NOISE
8733.467	49.2	6.1	-4.5	50.7	Peak [Scan]	V	100	0	54	-3.3	Pass	NRB
5667.335	54.0	4.7	-8.9	49.8	Peak [Scan]	H					Pass	BE
4985.972	54.5	4.6	-9.9	49.2	Peak [Scan]	H					Pass	BE

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5320 MHz	Engineer	GMH
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	31
Power Setting	ART = 19.5	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

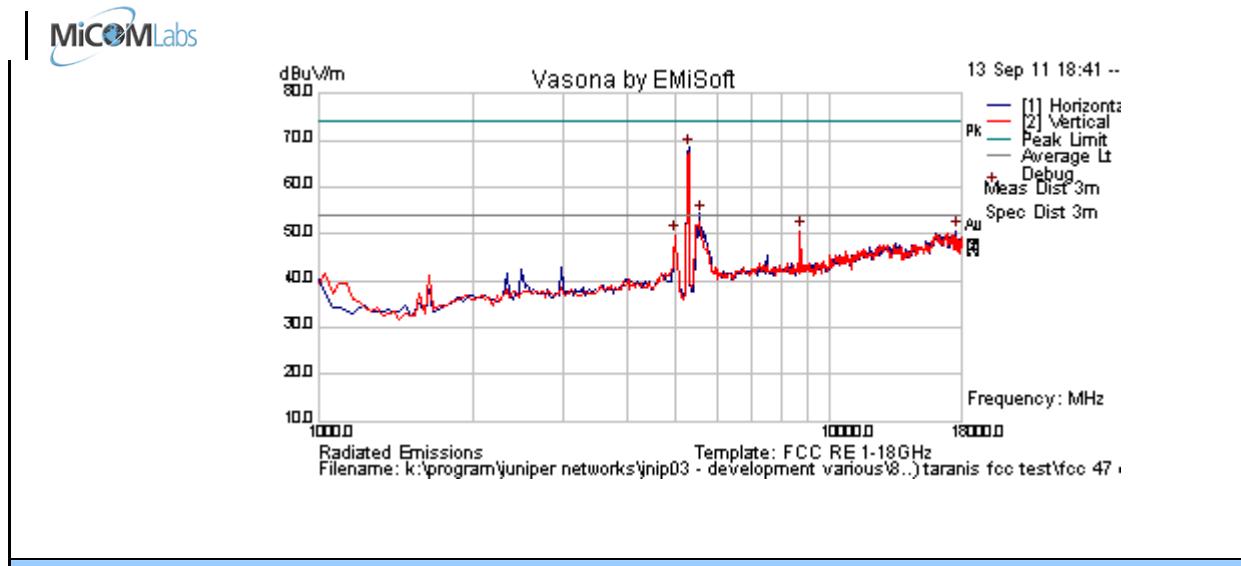


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5292.585	73.5	4.6	-9.5	68.5	Peak [Scan]	H						FUND
5565.13026	58.8	4.7	-9.1	54.4	Peak [Scan]	H					Pass	BE
17625.251	41.2	8.8	0.8	50.8	Peak [Scan]	H	100	0	54	-3.2	Pass	NOISE
8733.467	49.2	6.1	-4.5	50.7	Peak [Scan]	V	100	0	54	-3.3	Pass	NRB
4985.972	55.1	4.6	-9.9	49.8	Peak [Scan]	V					Pass	BE

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5270 MHz	Engineer	GMH
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	31
Power Setting	ART = 19	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

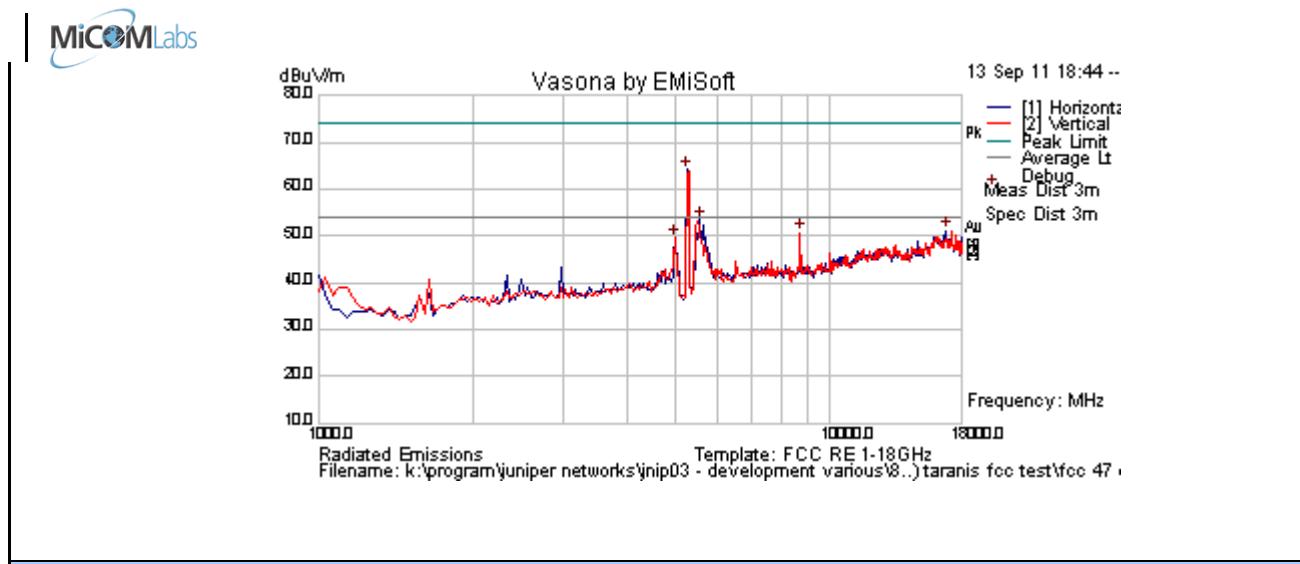


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5258.517	69.2	4.6	-9.6	64.2	Peak [Scan]	H						FUND
5565.13026	57.8	4.7	-9.1	53.4	Peak [Scan]	H					Pass	BE
16841.683	41.5	8.6	1.0	51.1	Peak [Scan]	H	100	0	54	-2.9	Pass	NOISE
8733.467	49.0	6.1	-4.5	50.6	Peak [Scan]	V	100	0	54	-3.4	Pass	NRB
4985.972	55.0	4.6	-9.9	49.7	Peak [Scan]	H					Pass	BE

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5310 MHz	Engineer	GMH
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	31
Power Setting	ART = 19	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

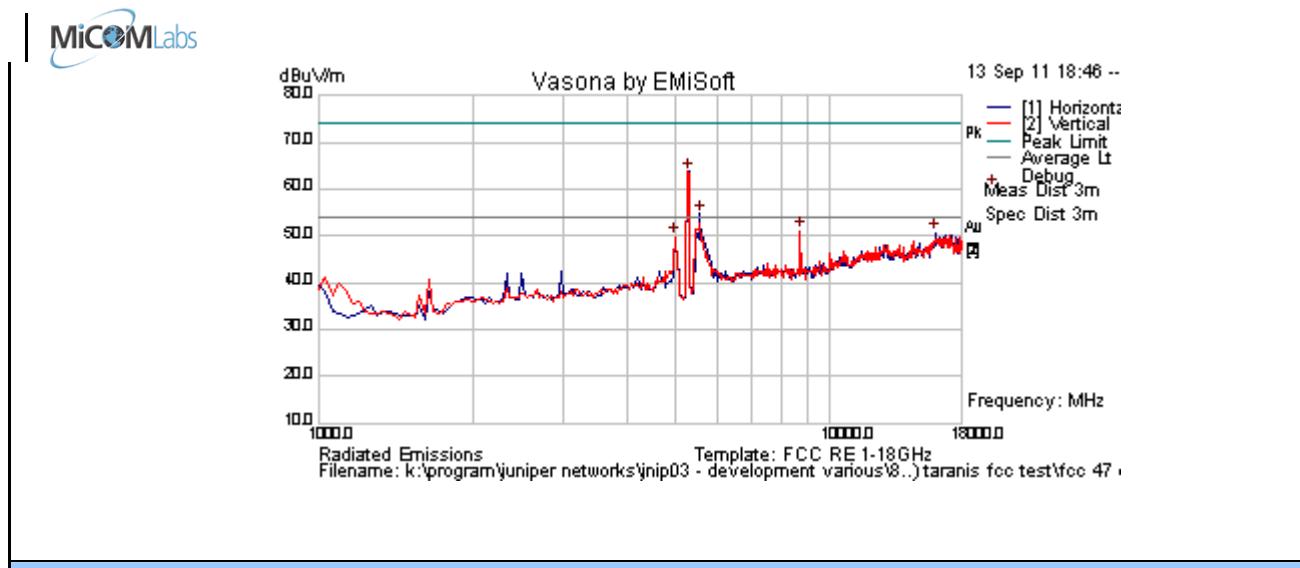

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5292.585	68.7	4.6	-9.5	63.8	Peak [Scan]	H						FUND
5565.13026	59.3	4.7	-9.1	54.9	Peak [Scan]	H					Pass	BE
8733.467	49.5	6.1	-4.5	51.1	Peak [Scan]	V	100	0	54	-2.9	Pass	NRB
16058.116	41.3	9.0	0.4	50.7	Peak [Scan]	H	100	0	54	-3.3	Pass	NOISE
4985.972	55.1	4.6	-9.9	49.8	Peak [Scan]	V					Pass	BE


Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Peak Emission 5250 – 5350 MHz

The peak emission level is present when the EUT is in the high channel in the 5250 – 5350 MHz band in 11a mode.

Test Freq.	5320 MHz	Engineer	GMH
Variant	802.11a; 6 Mbs	Temp (°C)	29
Freq. Range	5250 - 5350 MHz	Rel. Hum. (%)	30
Power Setting	ART = 15.5	Press. (mBars)	996
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

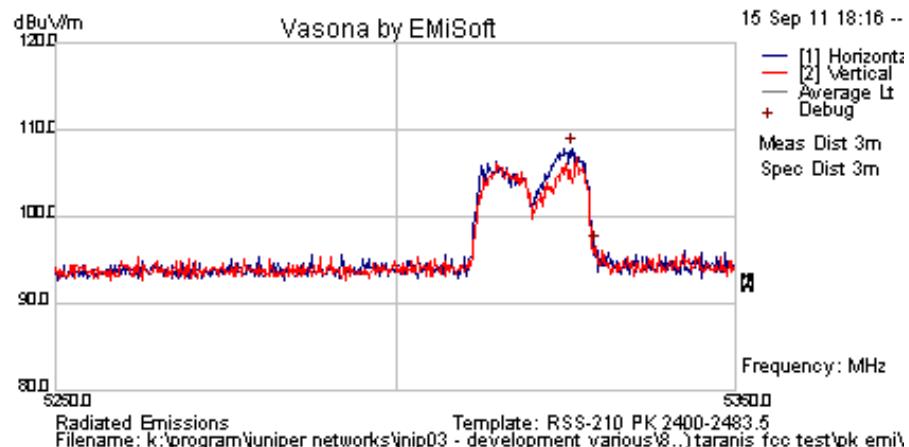


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5325.952	58.7	14.6	34.5	107.9	Peak [Scan]	H						FUND
5329.35872	47.5	14.6	34.6	96.6	Peak [Scan]	V						BE
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Radiated Spurious Emissions 5470 – 5725 MHz

Test Freq.	5500 MHz	Engineer	GMH
Variant	802.11a; 6 Mbs	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	31
Power Setting	ART = 16.5	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

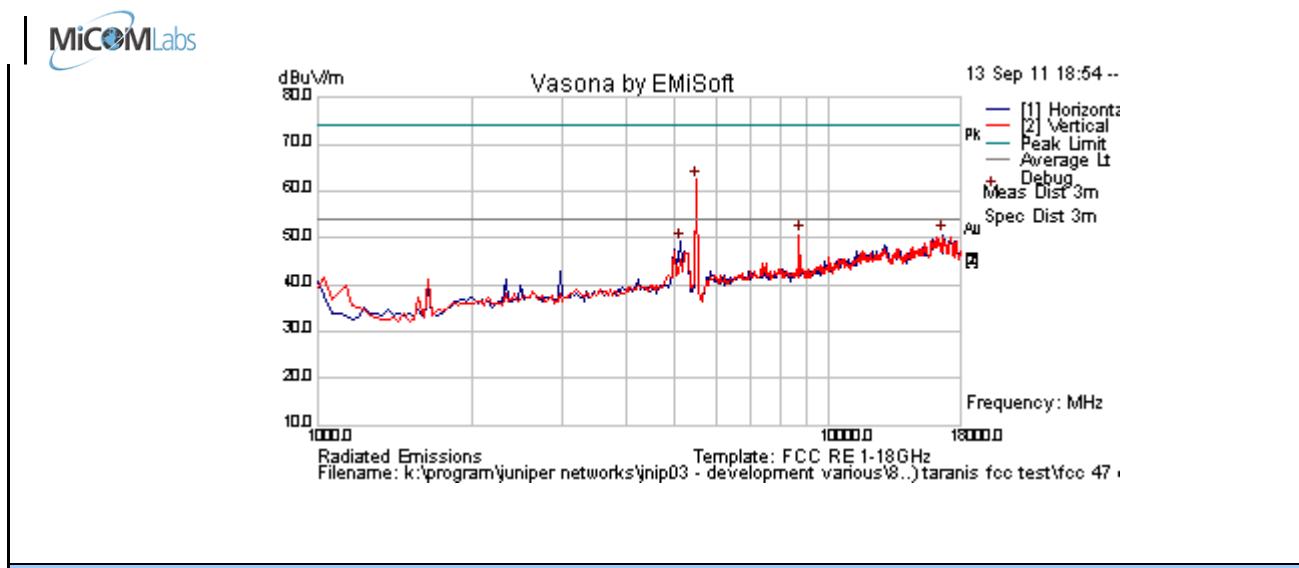


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5496.994	66.9	4.6	-9.2	62.4	Peak [Scan]	V						FUND
8733.46693	49.0	6.1	-4.5	50.6	Peak [Scan]	V	100	0	54.0	-3.4	Pass	NRB
16671.343	41.1	8.7	0.9	50.6	Peak [Scan]	H	100	0	54	-3.4	Pass	NOISE
5122.244	54.2	4.6	-9.7	49.1	Peak [Scan]	H					Pass	BE
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


Test Freq.	5580 MHz	Engineer	GMH
Variant	802.11a; 6 Mbs	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	31
Power Setting	ART = 16.0	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

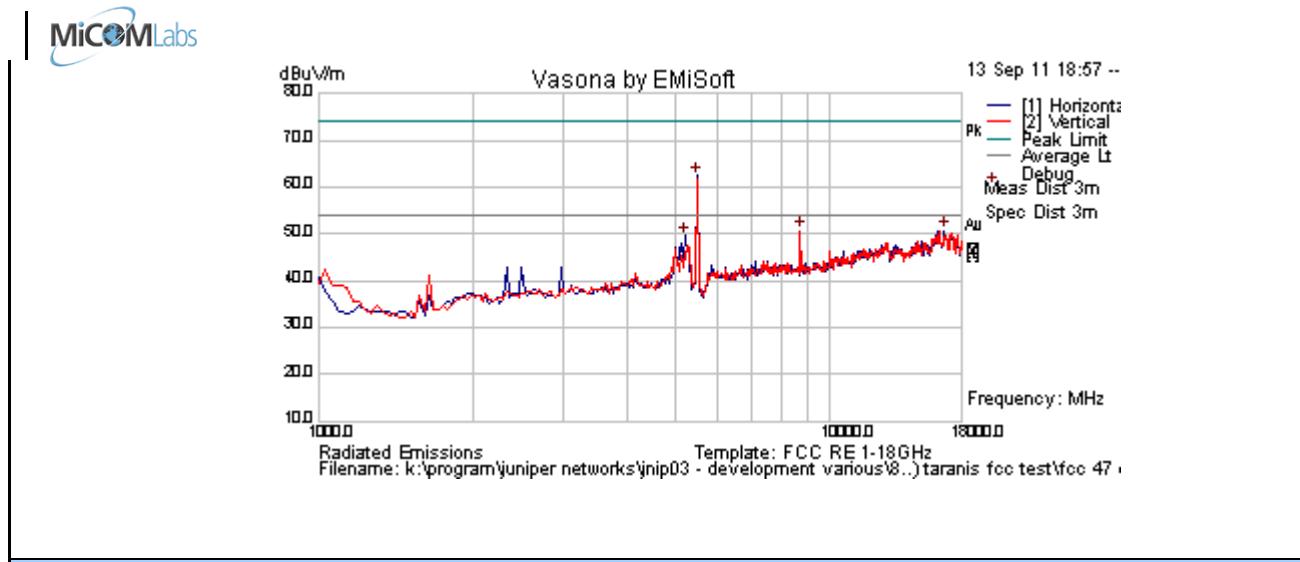

Formally measured emission peaks													
Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments	
5496.994	67.0	4.6	-9.2	62.5	Peak [Scan]	H						FUND	
16705.411	41.1	8.7	1.0	50.8	Peak [Scan]	H	100	0	54.0	-3.2	Pass	NOISE	
8733.467	49.1	6.1	-4.5	50.7	Peak [Scan]	V	100	0	54	-3.3	Pass	NRB	
5190.381	54.5	4.6	-9.6	49.5	Peak [Scan]	H					Pass	BE	
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205													

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5700 MHz	Engineer	GMH
Variant	802.11a; 6 Mbs	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	31
Power Setting	ART = 15.5	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

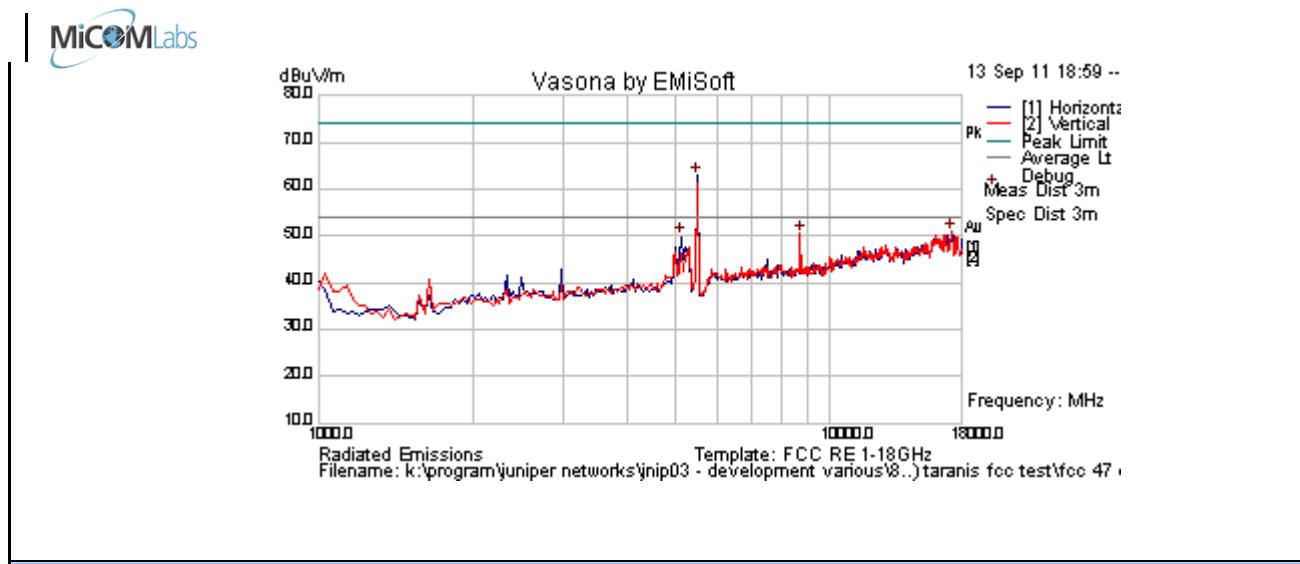

Formally measured emission peaks


Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5496.994	67.5	4.6	-9.2	63.0	Peak [Scan]	H						FUND
17216.433	41.2	8.6	1.0	50.8	Peak [Scan]	V	100	0	54.0	-3.2	Pass	NOISE
8733.467	48.9	6.1	-4.5	50.5	Peak [Scan]	V	100	0	54	-3.6	Pass	NRB
5122.244	54.9	4.6	-9.7	49.8	Peak [Scan]	H					Pass	BE
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 207 of 223

Test Freq.	5500 MHz	Engineer	GMH
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	31
Power Setting	ART = 21	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

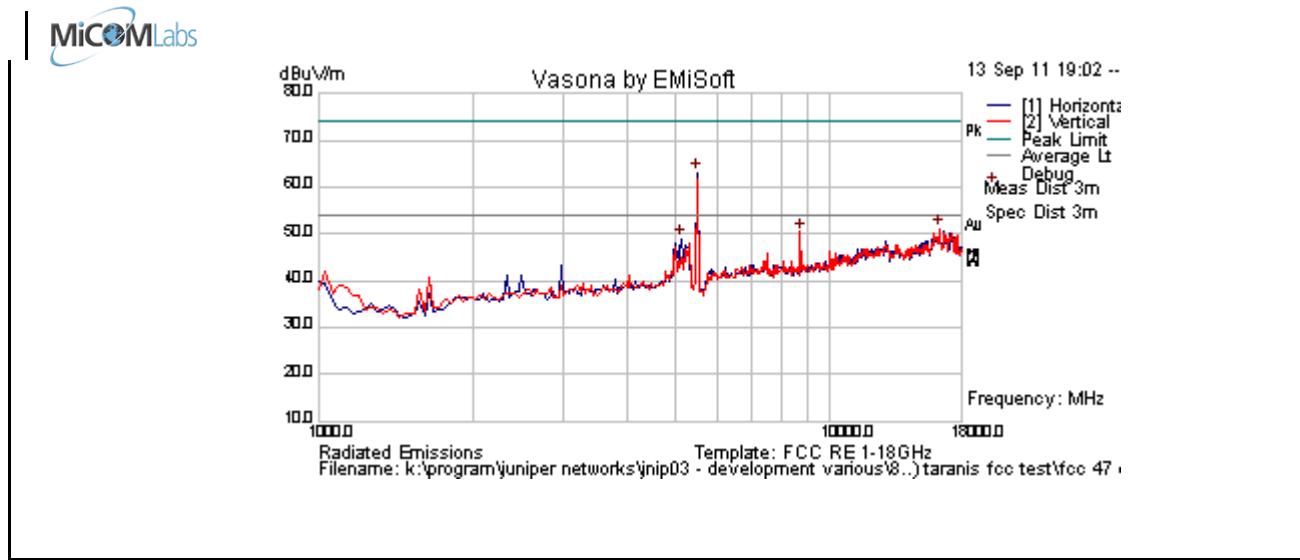


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5496.994	67.7	4.6	-9.2	63.1	Peak [Scan]	H						FUND
16330.661	42.0	8.9	0.3	51.1	Peak [Scan]	V	100	0	54.0	-2.9	Pass	NOISE
8733.467	48.9	6.1	-4.5	50.5	Peak [Scan]	V	100	0	54	-3.5	Pass	NRB
5122.244	54.1	4.6	-9.7	49.0	Peak [Scan]	H					Pass	BE
<hr/>												
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5580 MHz	Engineer	GMH
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	31
Power Setting	ART = 20.5	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

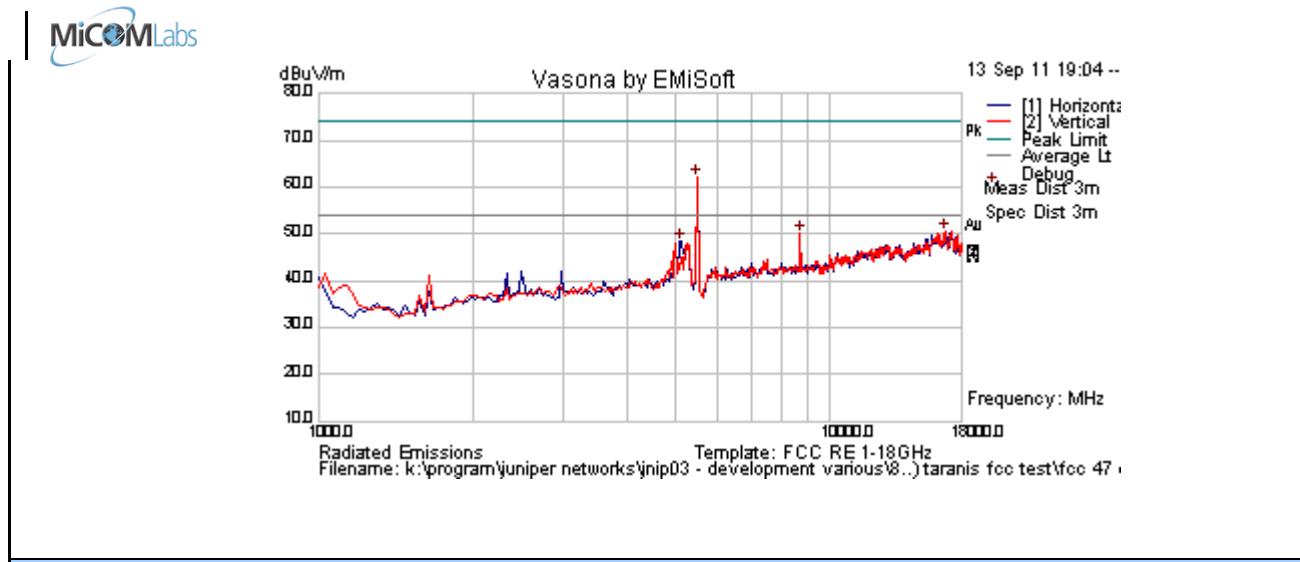


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5496.994	66.6	4.6	-9.2	62.0	Peak [Scan]	H						FUND
16739.479	40.7	8.7	1.1	50.5	Peak [Scan]	V	100	0	54.0	-3.5	Pass	NOISE
8733.467	48.5	6.1	-4.5	50.1	Peak [Scan]	V	100	0	54	-3.9	Pass	NRB
5122.244	53.5	4.6	-9.7	48.4	Peak [Scan]	H					Pass	BE
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5700 MHz	Engineer	GMH
Variant	802.11n HT-20; 6.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	31
Power Setting	ART = 20	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

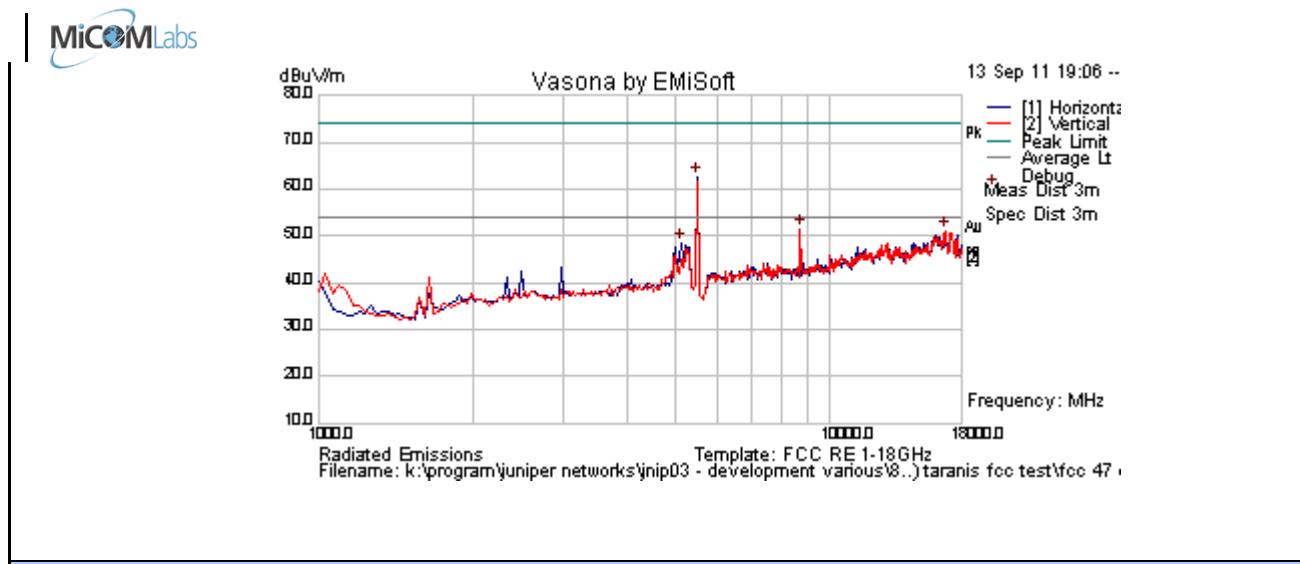


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5496.994	67.2	4.6	-9.2	62.7	Peak [Scan]	H						FUND
8733.46693	50.0	6.1	-4.5	51.6	Peak [Scan]	V	100	0	54.0	-2.4	Pass	NRB
16739.479	41.3	8.7	1.1	51.0	Peak [Scan]	V	100	0	54	-3.0	Pass	NOISE
5122.244	53.7	4.6	-9.7	48.6	Peak [Scan]	H					Pass	BE
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5510 MHz	Engineer	GMH
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	31
Power Setting	ART = 21	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

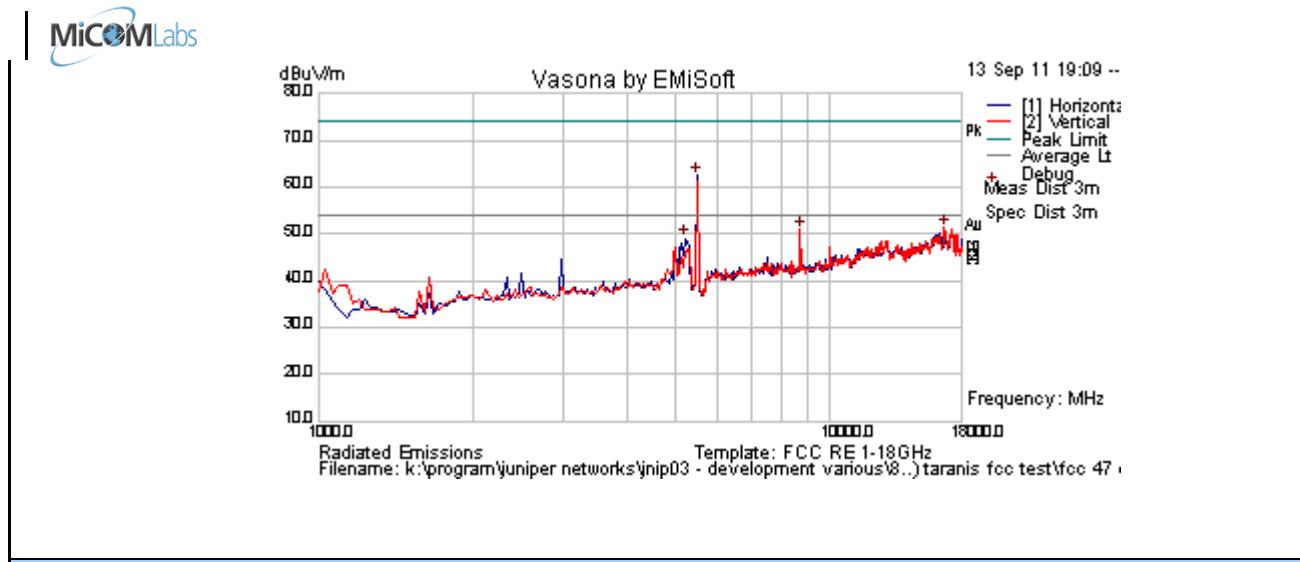


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5496.994	67.0	4.6	-9.2	62.5	Peak [Scan]	H						FUND
16705.411	41.7	8.7	1.0	51.3	Peak [Scan]	V	100	0	54.0	-2.7	Pass	NOISE
8733.467	49.3	6.1	-4.5	50.9	Peak [Scan]	V	100	0	54	-3.1	Pass	NRB
5190.381	54.0	4.6	-9.6	49.0	Peak [Scan]	H					Pass	BE
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5550 MHz	Engineer	GMH
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	31
Power Setting	ART = 21	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

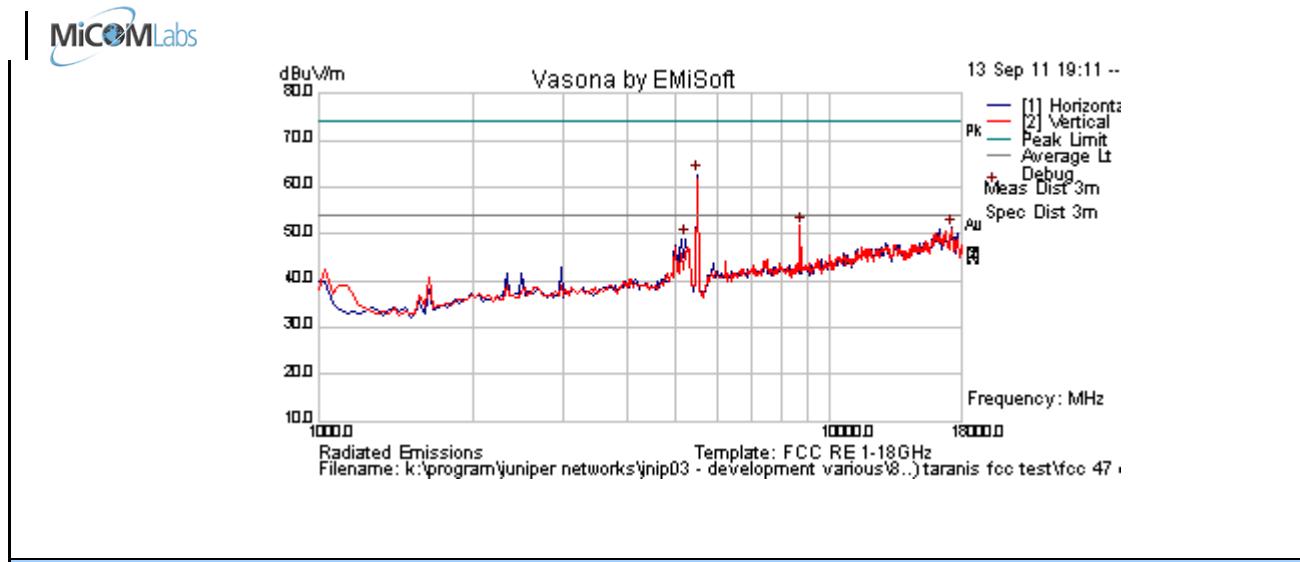


Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5496.994	67.2	4.6	-9.2	62.7	Peak [Scan]	H						FUND
8733.46693	50.2	6.1	-4.5	51.7	Peak [Scan]	V	100	0	54.0	-2.3	Pass	NRB
17250.501	41.5	8.6	1.2	51.2	Peak [Scan]	H	100	0	54	-2.8	Pass	NOISE
5190.381	54.1	4.6	-9.6	49.1	Peak [Scan]	H					Pass	BE
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	5670 MHz	Engineer	GMH
Variant	802.11n HT-40; 13.5 MCS	Temp (°C)	30
Freq. Range	1000 MHz - 18000 MHz	Rel. Hum. (%)	31
Power Setting	ART = 20.5	Press. (mBars)	1001
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

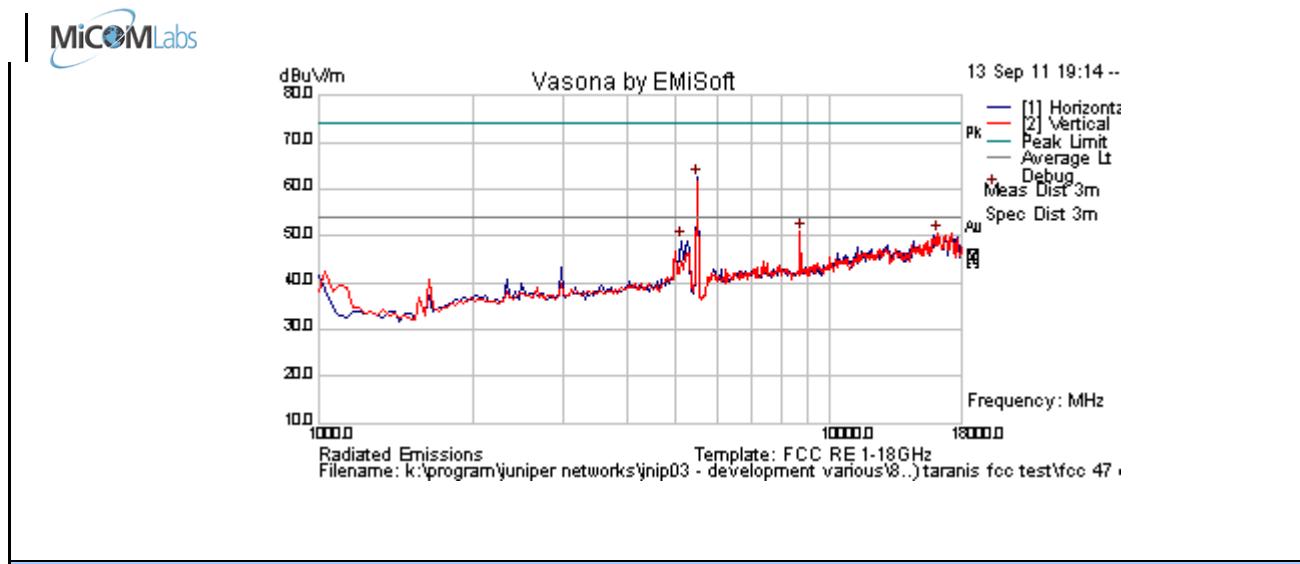

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5496.994	67.0	4.6	-9.2	62.5	Peak [Scan]	H						FUND
8733.46693	49.2	6.1	-4.5	50.8	Peak [Scan]	V	100	0	54.0	-3.2	Pass	NRB
16126.253	41.2	9.0	0.3	50.4	Peak [Scan]	V	100	0	54	-3.6	Pass	NOISE
5122.244	54.0	4.6	-9.7	48.9	Peak [Scan]	H					Pass	BE

Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission
 NRB = Non-Restricted Band. Limit = 68.23 dBuV/m; RB = Restricted Band. Limits per 15.205

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.




Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 213 of 223

Peak Emission 5470 – 5725 MHz

The peak emission level is present when the EUT is in the low channel in the 5250 – 5350 MHz band in 11a mode

Test Freq.	5500 MHz	Engineer	GMH
Variant	802.11a; 6 Mbs	Temp (°C)	29
Freq. Range	5470 - 5725 MHz	Rel. Hum.(%)	30
Power Setting	ART = 16.5	Press. (mBars)	996
Antenna	Integral Gain 3 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

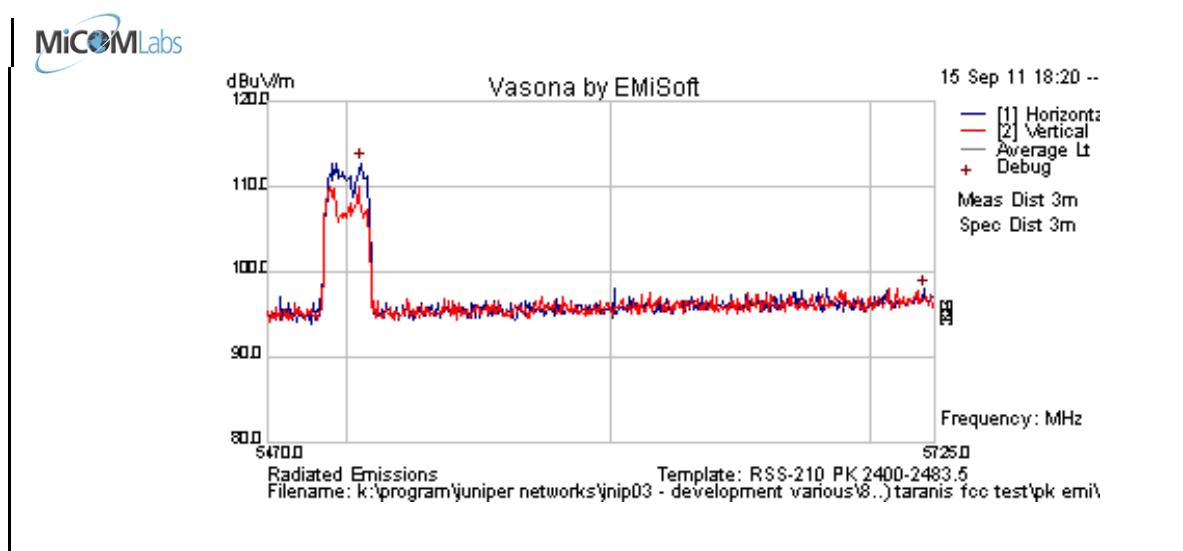

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
5505.261	63.3	14.6	34.8	112.8	Peak [Scan]	H						FUND
5720.91182	48.3	14.7	35.0	98.0	Peak [Scan]	H						NOISE
Legend: TX = Transmitter Emissions; DIG = Digital Emissions; FUND = Fundamental; WB = Wideband Emission												
PK = Peak emissions of Fundamental												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 214 of 223

5.1.7.2. Radiated Spurious Emissions – 30MHz – 1000MHz

FCC, Part 15 Subpart C §15.205/ §15.209
Industry Canada RSS-210 §2.2

Test Procedure

Testing 30M-1 GHz was performed in a 3-meter anechoic chamber using a CISPR compliant receiver. Preliminary radiated emissions were measured on every azimuth and with the receiving antenna in both horizontal and vertical polarizations. To further maximize emissions the receive antenna was varied between 1 and 4 meters. The emissions are recorded with receiver in peak hold mode. Emissions closest to the limits are measured in the quasi-peak mode with the tuned receiver using a bandwidth of 120 kHz. Only the highest emissions relative to the limit are listed. The anechoic chamber test set-up is identified in Section 6 Test Set-Up Photographs.

The EUT had two methods of powering on ac/dc converter and Power over Ethernet (POE). Both modes were tested for emissions below 1GHz.

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Loss, and subtracting Amplifier Gain from the measured reading. In this test facility, the Antenna Factor, Cable Loss, and Amplifier Gains are loaded into the Rohde & Schwarz Receiver and the corrected field strength can be read directly on the receiver.

$$FS = R + AF + CORR$$

where:

FS = Field Strength

R = Measured Receiver Input Amplitude

AF = Antenna Factor

CORR = Correction Factor = CL – AG + NFL

CL = Cable Loss

AG = Amplifier Gain

For example:

Given a Receiver input reading of 51.5dB μ V; Antenna Factor of 8.5dB; Cable Loss of 1.3dB; Falloff Factor of 0dB, an Amplifier Gain of 26dB and Notch Filter Loss of 1dB. The Field Strength of the measured emission is:

$$FS = 51.5 + 8.5 + 1.3 - 26.0 + 1 = 36.3dB\mu V/m$$

Conversion between dB μ V/m (or dB μ V) and μ V/m (or μ V) are done as:


$$\text{Level (dB}\mu\text{V/m)} = 20 * \text{Log} (\text{level} (\mu\text{V/m}))$$

$$40 \text{ dB}\mu\text{V/m} = 100\mu\text{V/m}$$

$$48 \text{ dB}\mu\text{V/m} = 250\mu\text{V/m}$$


This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Radiated Emission Measurement Setup – Below 1 GHz

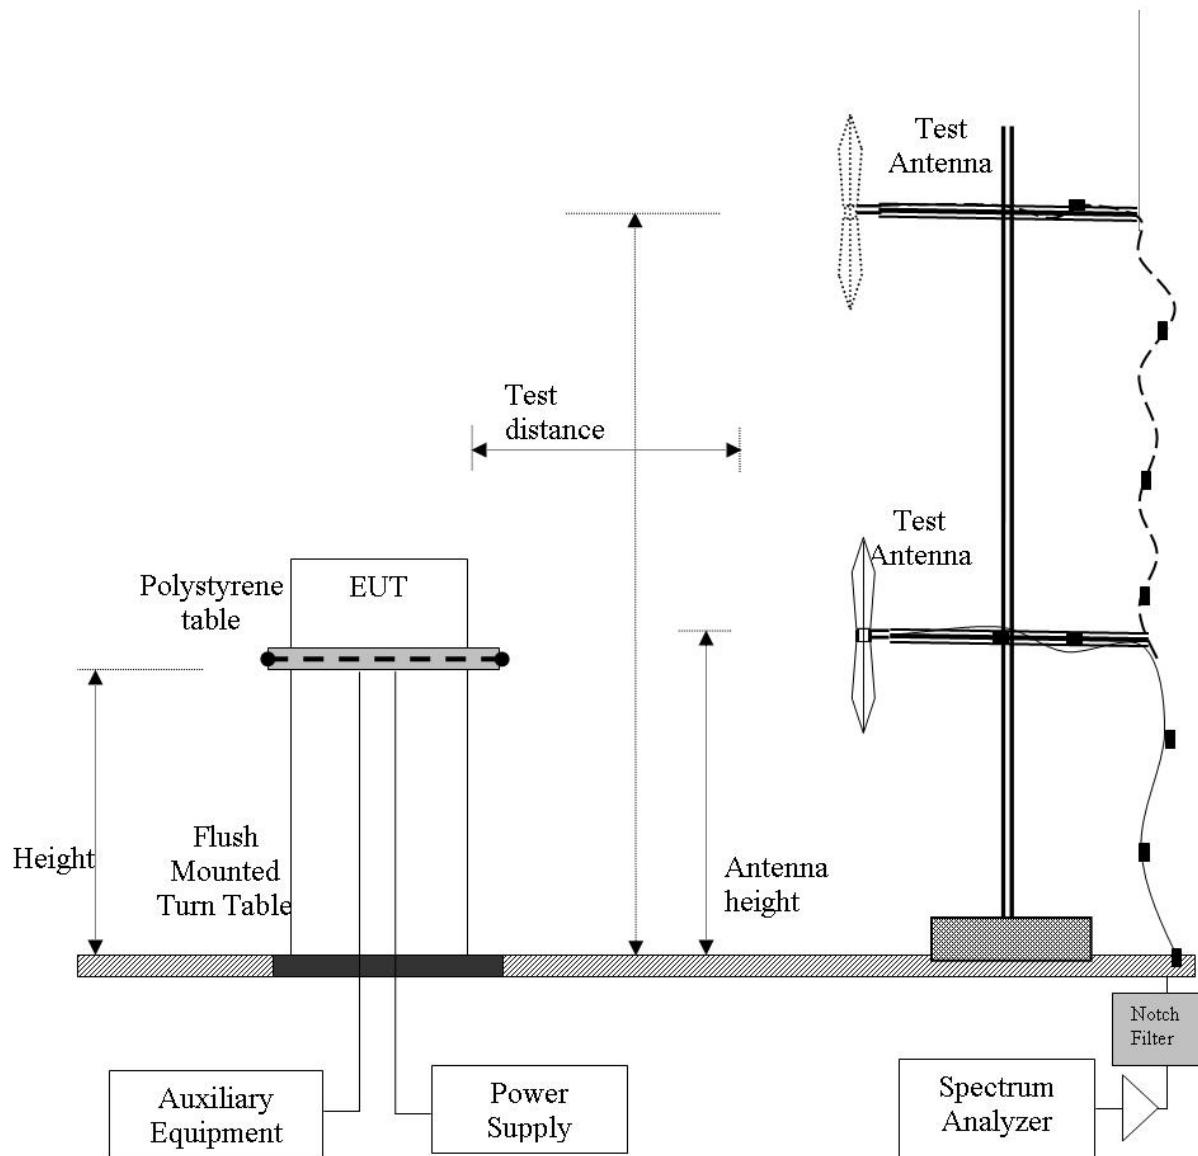

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

Test Freq.	2437 MHz	Engineer	GMH
Variant	Digital Emissions	Temp (°C)	29
Freq. Range	30 MHz - 1000 MHz	Rel. Hum.(%)	30
Power Setting	ART = 23	Press. (mBars)	996
Antenna	Integral Gain 2 dBi	Duty Cycle (%)	
Test Notes 1			
Test Notes 2			

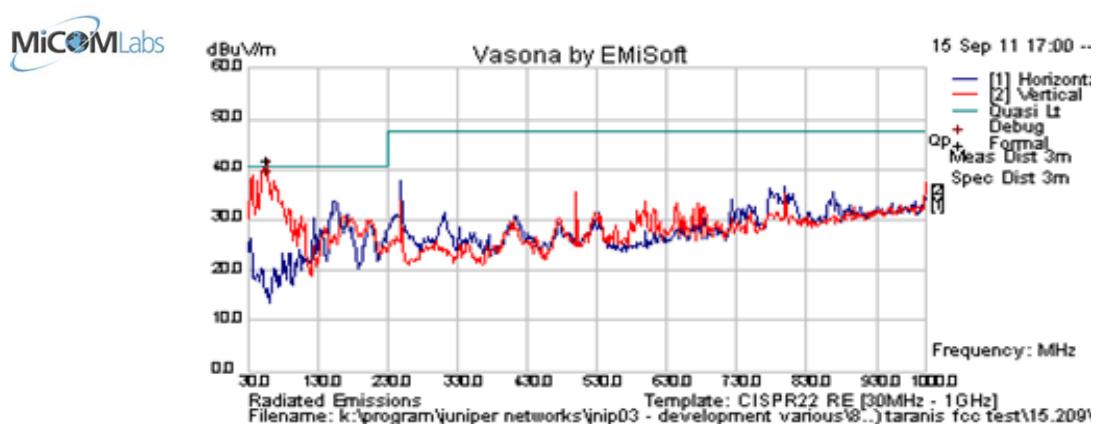

Formally measured emission peaks

Frequency MHz	Raw dBuV	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail	Comments
57.535	57.9	3.8	-23.7	38.0	Quasi Peak	V	98	86	40.5	-2.5	Pass	
Legend: DIG = Digital Device Emission; TX = Transmitter Emission; FUND = Fundamental Frequency												
NRB = Non-Restricted Band, Limit is 20 dB below Fundamental; RB = Restricted Band												

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 217 of 223

Specification

Limits

§15.205 (a) Except as shown in paragraph (d) of 15.205 (a), only spurious emissions are permitted in any of the frequency bands listed.

§15.205 (a) Except as shown in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table.

§15.209 (a) and RSS-Gen §2.2 Limit Matrix

Frequency(MHz)	Field Strength (μ V/m)	Field Strength (dB μ V/m)	Measurement Distance (meters)
30-88	100	40.0	3
88-216	150	43.5	3
216-960	200	46.0	3
Above 960	500	54.0	3

Laboratory Measurement Uncertainty for Radiated Emissions

Measurement uncertainty	+5.6/ -4.5 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-03 'Measurement of Radiated Emissions'	0088, 0158, 0134, 0304, 0311, 0315, 0310, 0312

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


5.1.8. AC Wireline Conducted Emissions (150 kHz – 30 MHz)

FCC, Part 15 Subpart C §15.207
Industry Canada RSS-Gen §7.2.2

Test Procedure

The EUT is configured in accordance with ANSI C63.4. The conducted emissions are measured in a shielded room with a spectrum analyzer in peak hold in the first instance. Emissions closest to the limit are measured in the quasi-peak mode (QP) with the tuned receiver using a bandwidth of 9 kHz. The emissions are maximized further by cable manipulation. The highest emissions relative to the limit are listed.

Test Measurement Set up

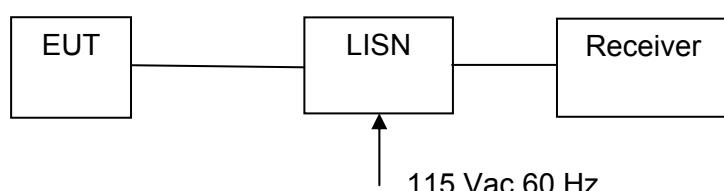

Measurement set up for AC Wireline Conducted Emissions Test

Measurement Results for AC Wireline Conducted Emissions (150 kHz – 30 MHz)

Ambient conditions.

Temperature: 17 to 23 °C Relative humidity: 31 to 57 % Pressure: 999 to 1012 mbar

Not required - EUT is POE only.

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 219 of 223

Specification

Limit

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu\Omega$ line impedance stabilization network (LISN), see §15.207 (a) matrix below. Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

RSS-Gen §7.2.2

The radio frequency voltage that is conducted back into the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table below. The tighter limit applies at the frequency range boundaries.

§15.207 (a) and RSS-Gen §7.2.2 Limit Matrix

The lower limit applies at the boundary between frequency ranges

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

Laboratory Measurement Uncertainty for Conducted Emissions

Measurement uncertainty	± 2.64 dB
-------------------------	---------------

Traceability

Method	Test Equipment Used
Measurements were made per work instruction WI-EMC-01 'Measurement of Conducted Emissions'	0158, 0184, 0287, 0190, 0293, 0307

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.


6. PHOTOGRAPHS

6.1. Conducted Test Setup



This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.

6.2. Radiated Test Setup > 1 GHz

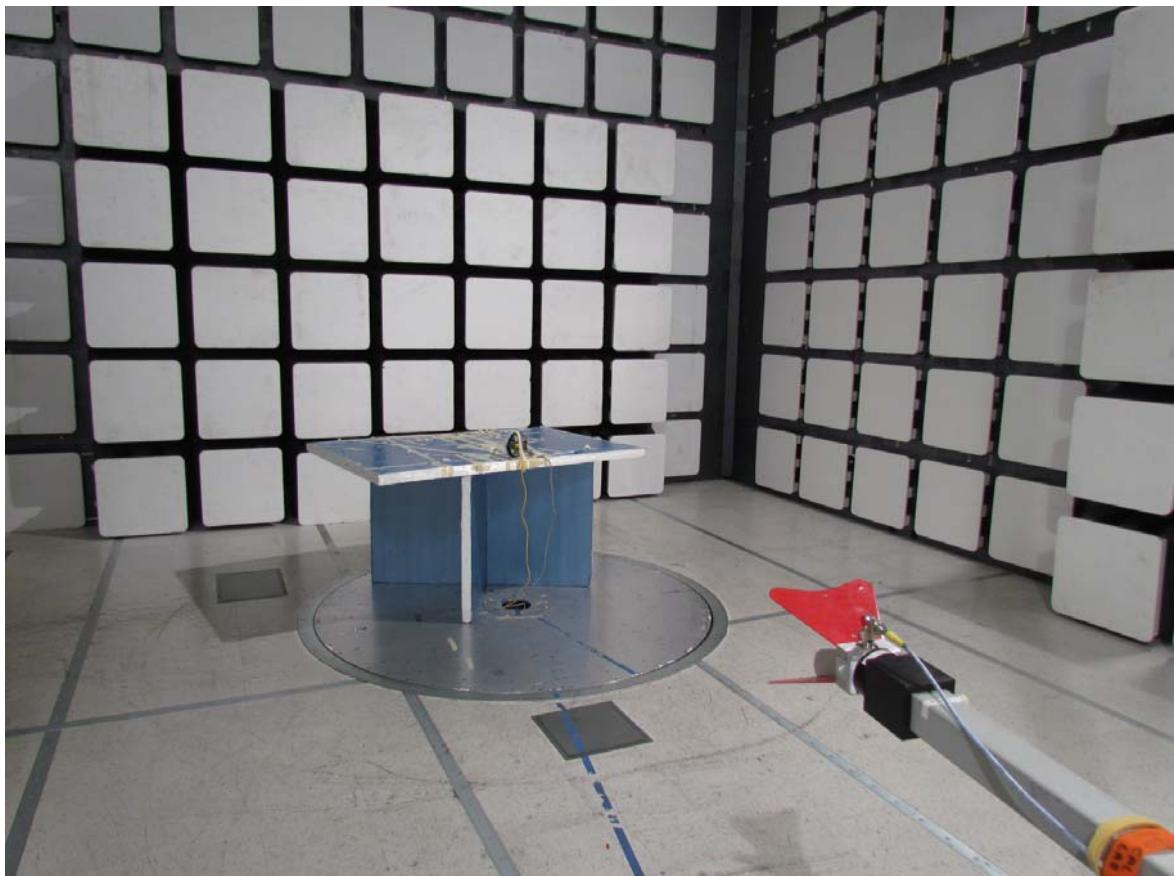

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



Title: Juniper Networks WLA532-US Wireless LAN Access Point
To: FCC 47 CFR Part 15.407 & IC RSS-210
Serial #: JNIP03-U3a Rev A
Issue Date: 15th February 2012
Page: 222 of 223

7. TEST EQUIPMENT DETAILS

Asset #	Instrument	Manufacturer	Part #	Serial #
0088	Spectrum Analyzer	Hewlett Packard	8564E	3410A00141
0134	Amplifier	Com Power	PA 122	181910
0158	Barometer /Thermometer	Control Co.	4196	E2846
0287	EMI Receiver	Rhode & Schwartz	ESIB 40	100201
0252	SMA Cable	Megaphase	Sucoflex 104	None
0310	2m SMA Cable	Micro-Coax	UFA210A-0-0787-3G03G0	209089-001
0312	3m SMA Cable	Micro-Coax	UFA210A-1-1181-3G0300	209092-001
0313	Coupler	Hewlett Packard	86205A	3140A01285
0314	30dB N-Type Attenuator	ARRA	N9444-30	1623
0070	Power Meter	Hewlett Packard	437B	3125U11552
0116	Power Sensor	Hewlett Packard	8485A	3318A19694
0117	Power Sensor	Hewlett Packard	8487D	3318A00371
0184	Pulse Limiter	Rhode & Schwartz	ESH3Z2	357.8810.52
0190	LISN	Rhode & Schwartz	ESH3Z5	836679/006
0293	BNC Cable	Megaphase	1689 1GVT4	15F50B001
0301	5.6 GHz Notch Filter	Micro-Tronics	RBC50704	001
0302	5.25 GHz Notch Filter	Micro-Tronics	BRC50703	002
0303	5.8 GHz Notch Filter	Micro-Tronics	BRC50705	003
0304	2.4GHzHz Notch Filter	Micro-Tronics	--	001
0307	BNC Cable	Megaphase	1689 1GVT4	15F50B002
0335	1-18GHz Horn Antenna	ETS- Lindgren	3117	00066580
0337	Amplifier	MiCOM Labs	--	--
0338	Antenna	Sunol Sciences	JB-3	A052907

This test report may be reproduced in full only. The document may only be updated by MiCOM Labs personnel. Any changes will be noted in the Document History section of the report.



440 Boulder Court, Suite 200
Pleasanton, CA 94566, USA
Tel: 1.925.462.0304
Fax: 1.925.462.0306
www.micomlabs.com