


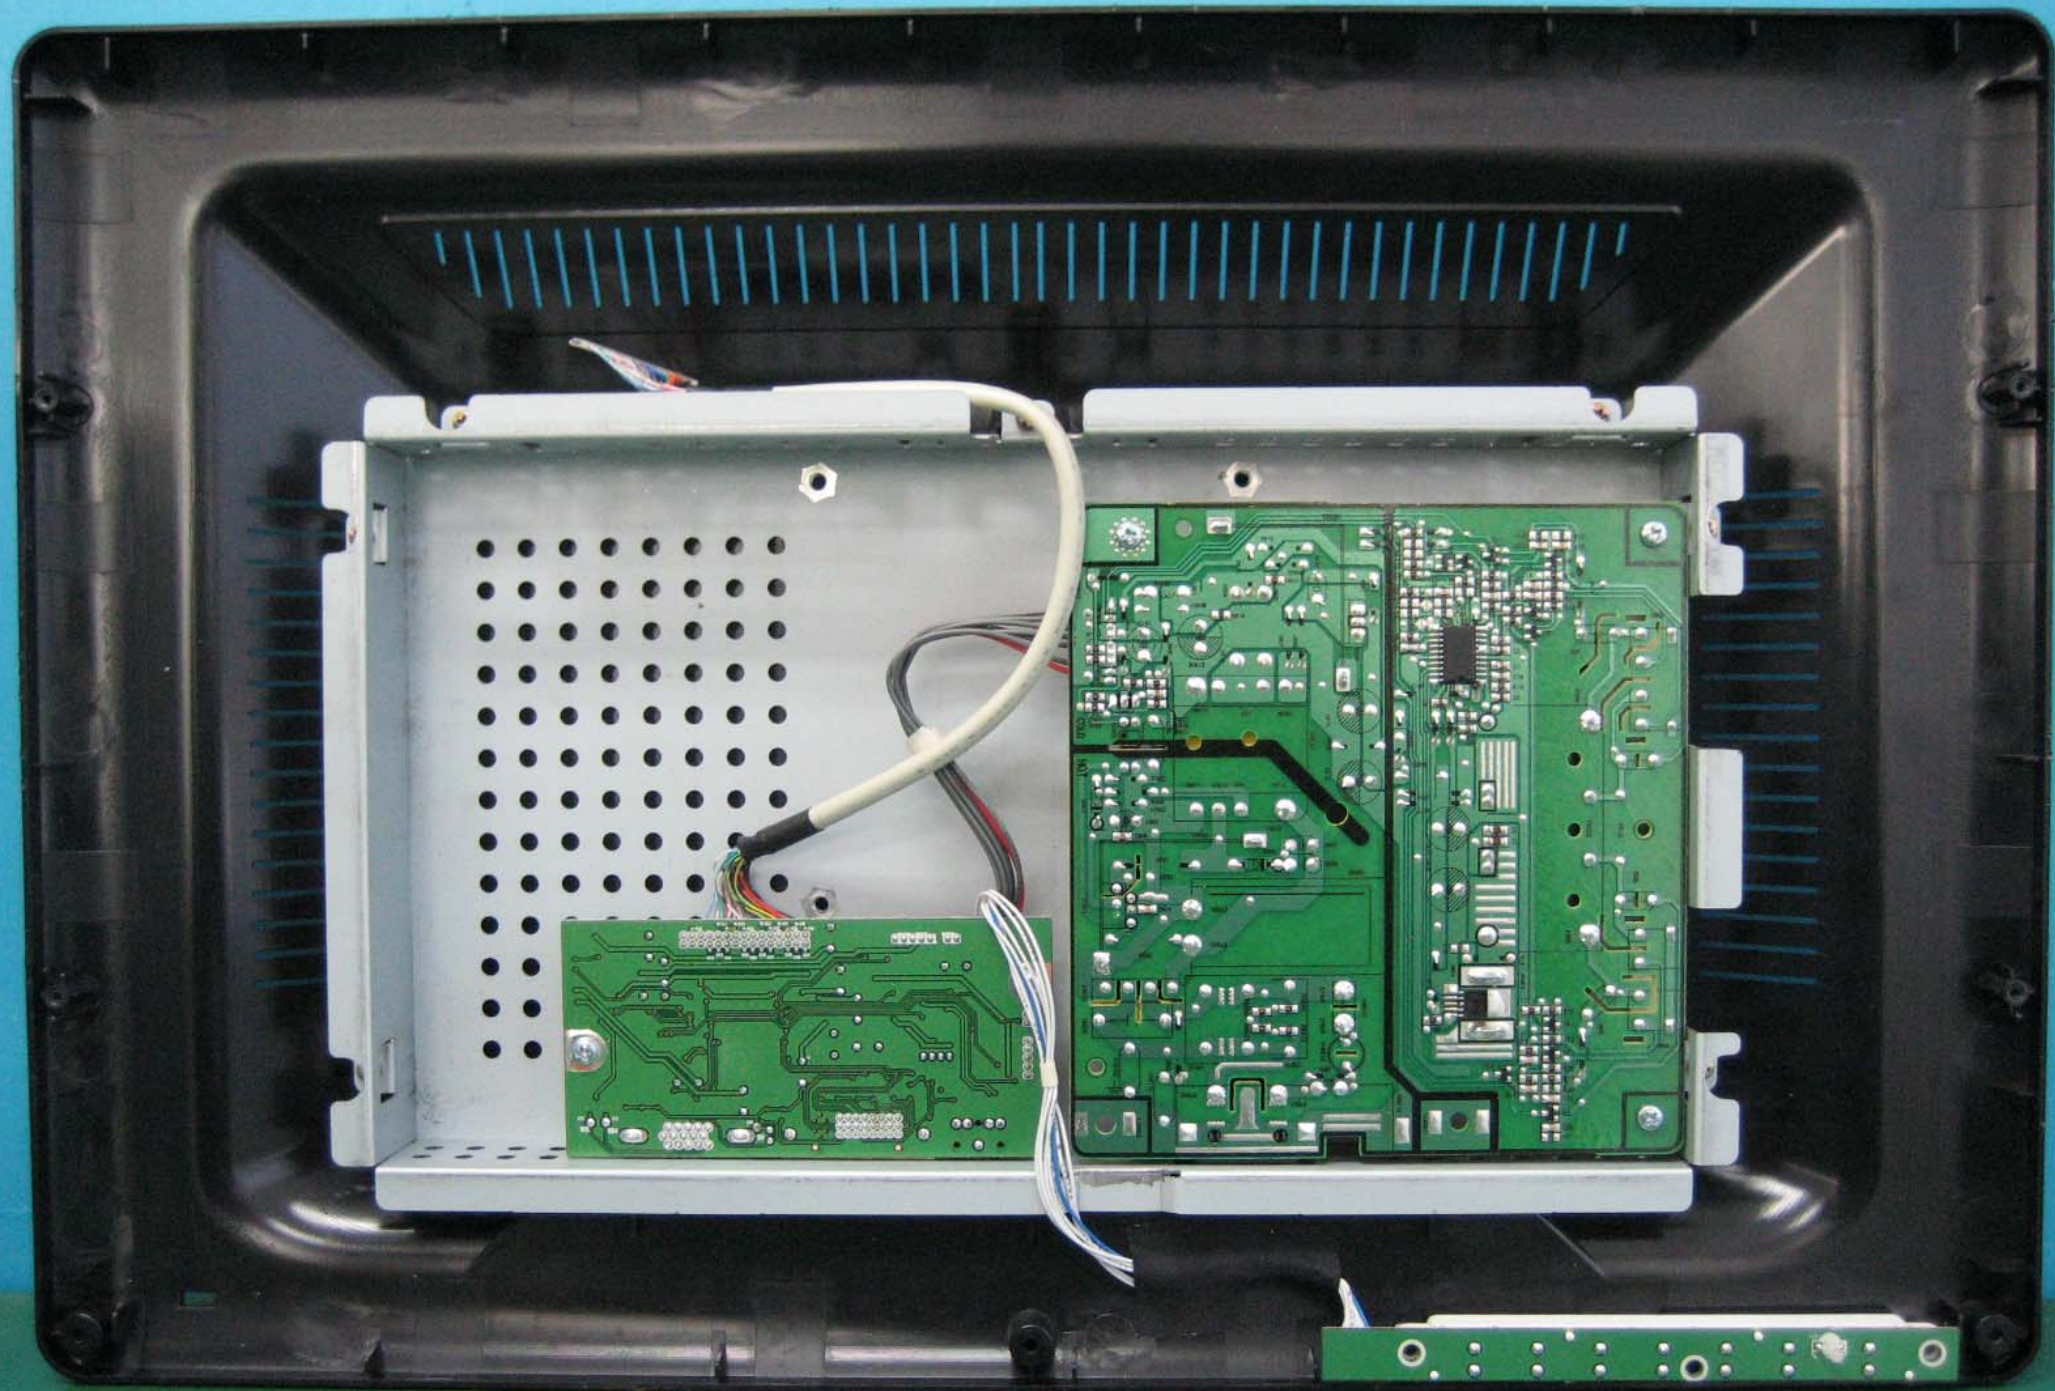

1 2 3 4 5 6 7 8 9 10 11 12

AC INPUT: 100-240 Vac, 50-60Hz, 1.3A
 DC OUTPUT: +5.1Vdc/1.75Amax +14.5Vdc/0.4Amax
 CN604, CN606 : 700Vac 7.5mA rms EACH

DIP

CAUTION: (FH601S)
 250V T3.15AL
 FOR CONTINUED PROTECTION
 AGAINST FIRE HAZARD
 REPLACE ONLY WITH SAME
 TYPE AND SIZE

ATTENTION: (FH601S)
 PAR MESURE DE SECURITE
 LES INCENDIES REMPLACER
 PAR UN FUSIBLE DE MEME
 TYPE ET VALEUR DE COURANT

DANGER !
 HIGH VOLTAGE


Suntronix

DML-1902
 MODEL : SP-U5F(D)
 9A 1V-0▲

US
 E191877
 REV:MP1.0
 2007.01.12


Suntronix DML - 1902
 S/N : 0701V0040

CT FT1 B/I FT2 I/C

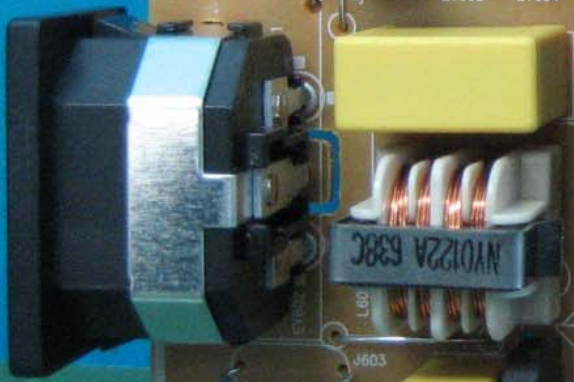

HI-POT
 O.K

HOT
 COLD
 14.5V
 5.1V
 GND
 0V

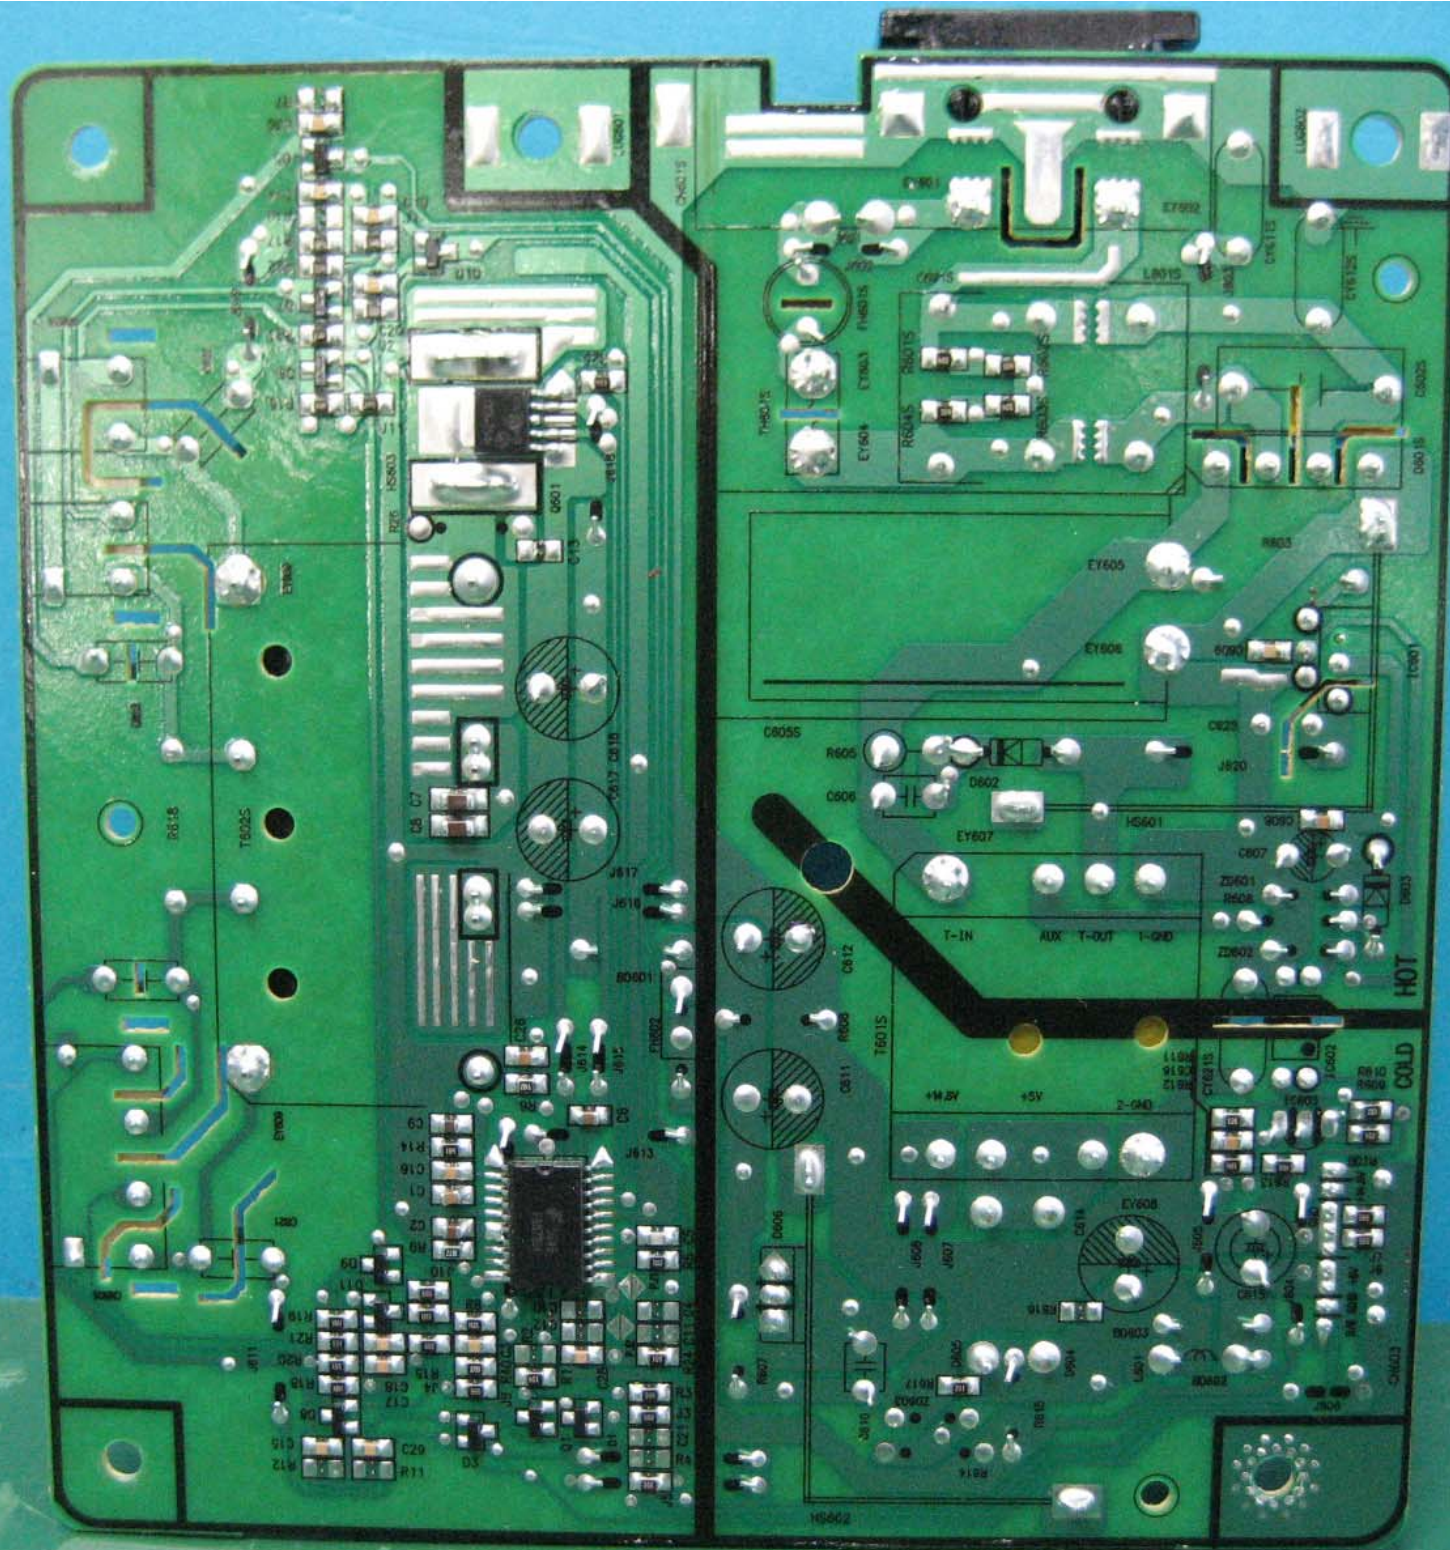

EY609

C621

J611

Suntromix
DML-1902
MODEL : SIP-U5F(D)
FA 1V-0 ▲

J612

PA[®]
US

E191877



REV:MP1.0


2007.01.12


D606


R607


Suntromix[®] DML — 1902

S/N: 0701V0040

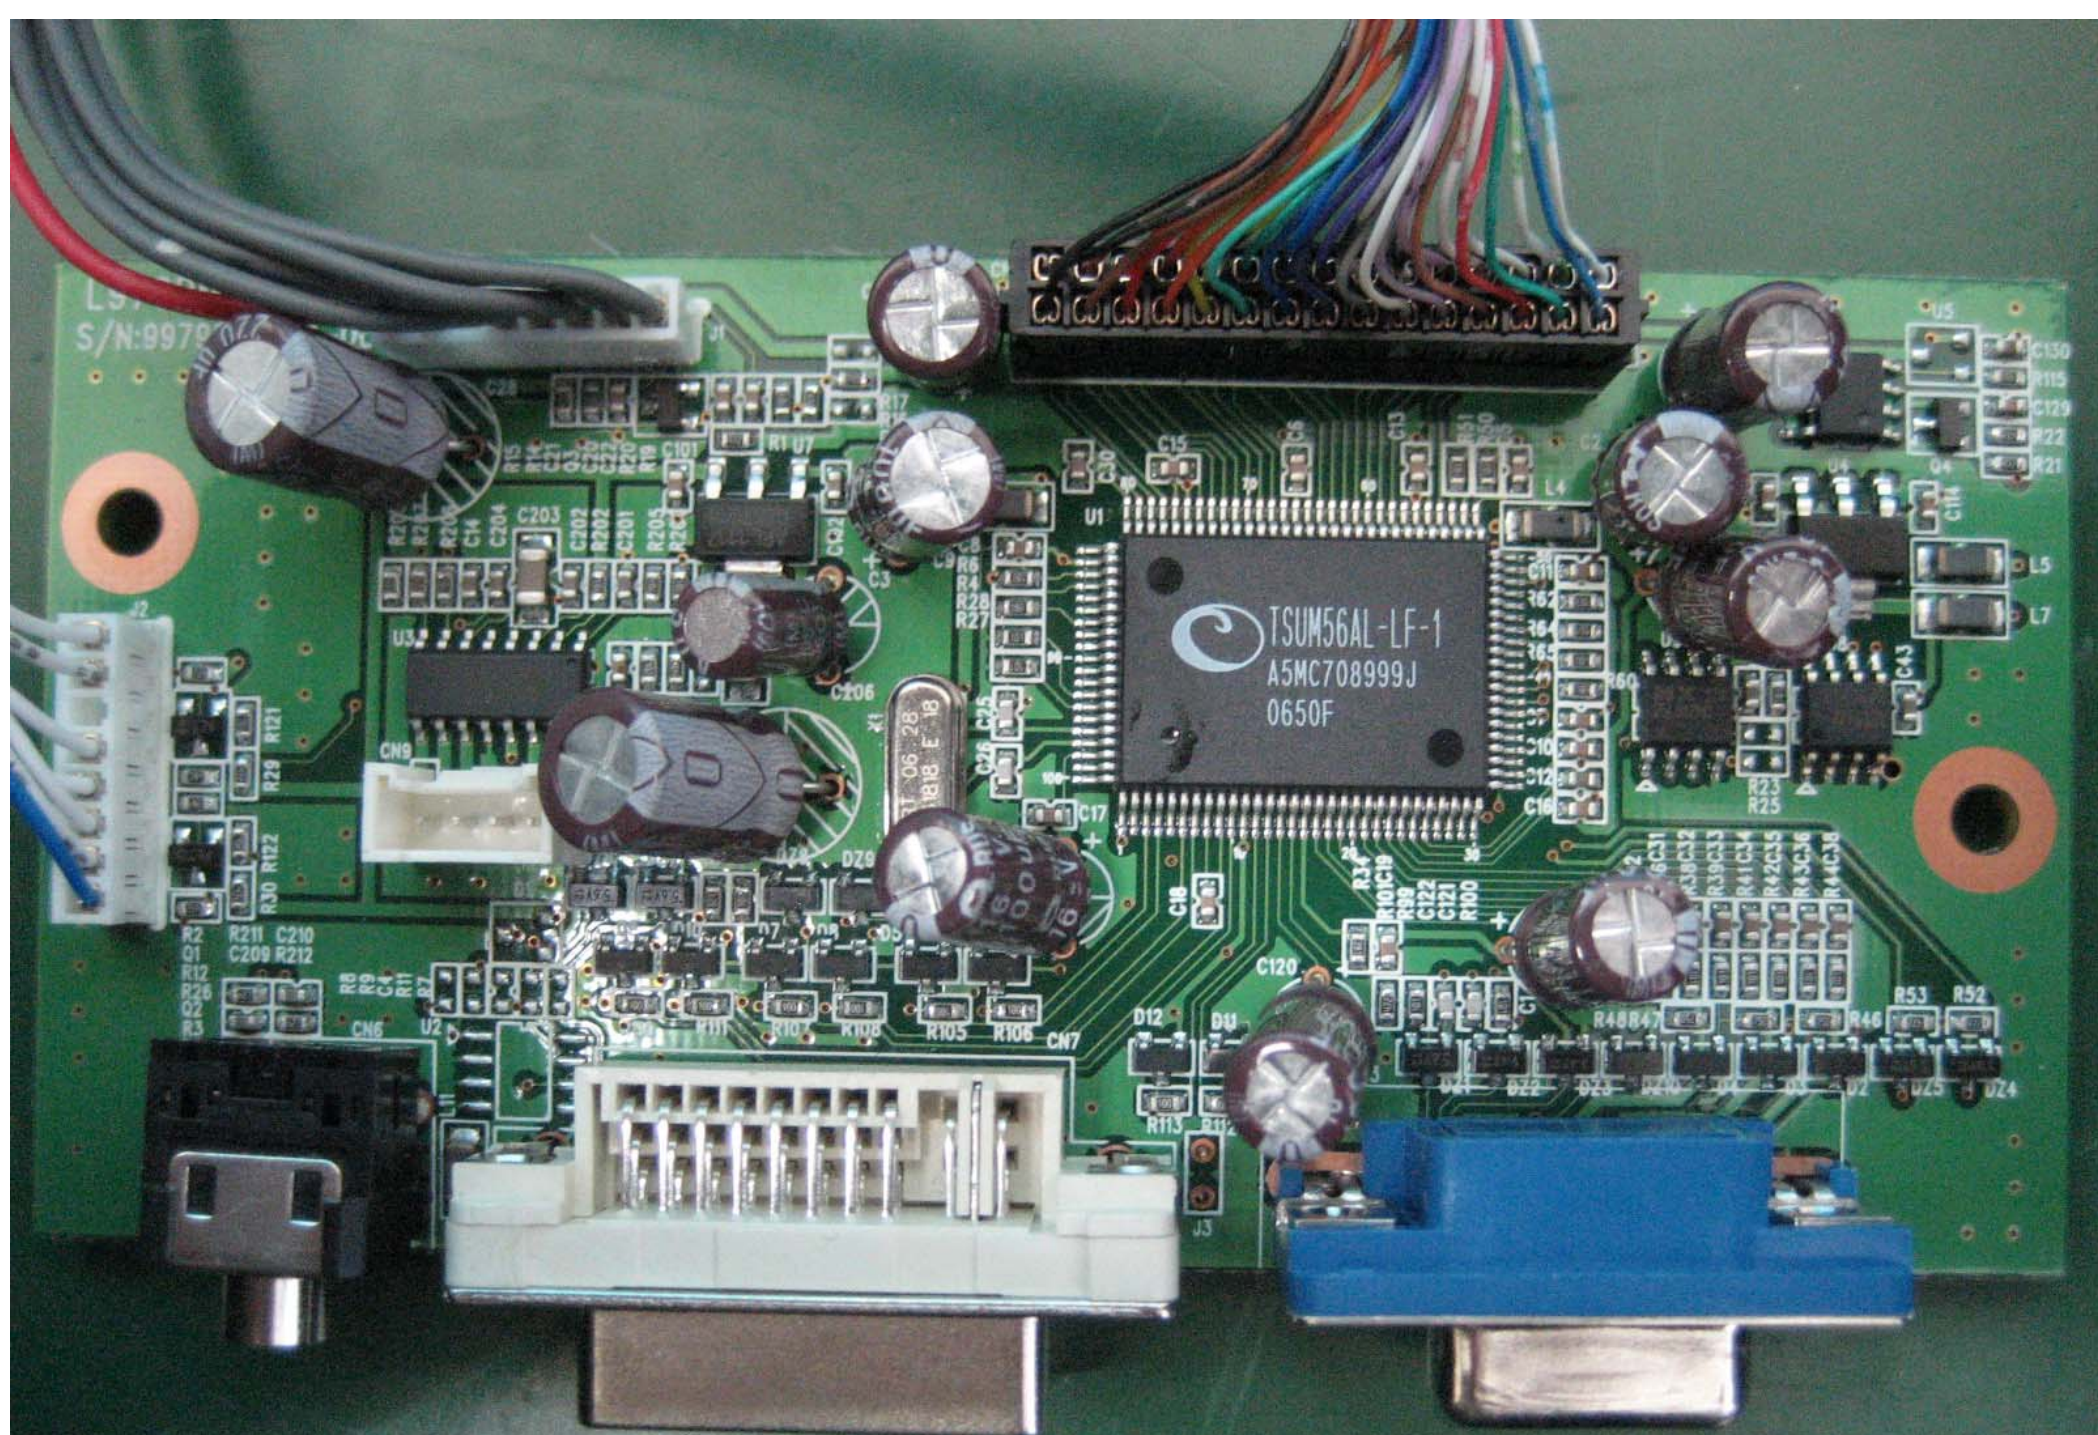

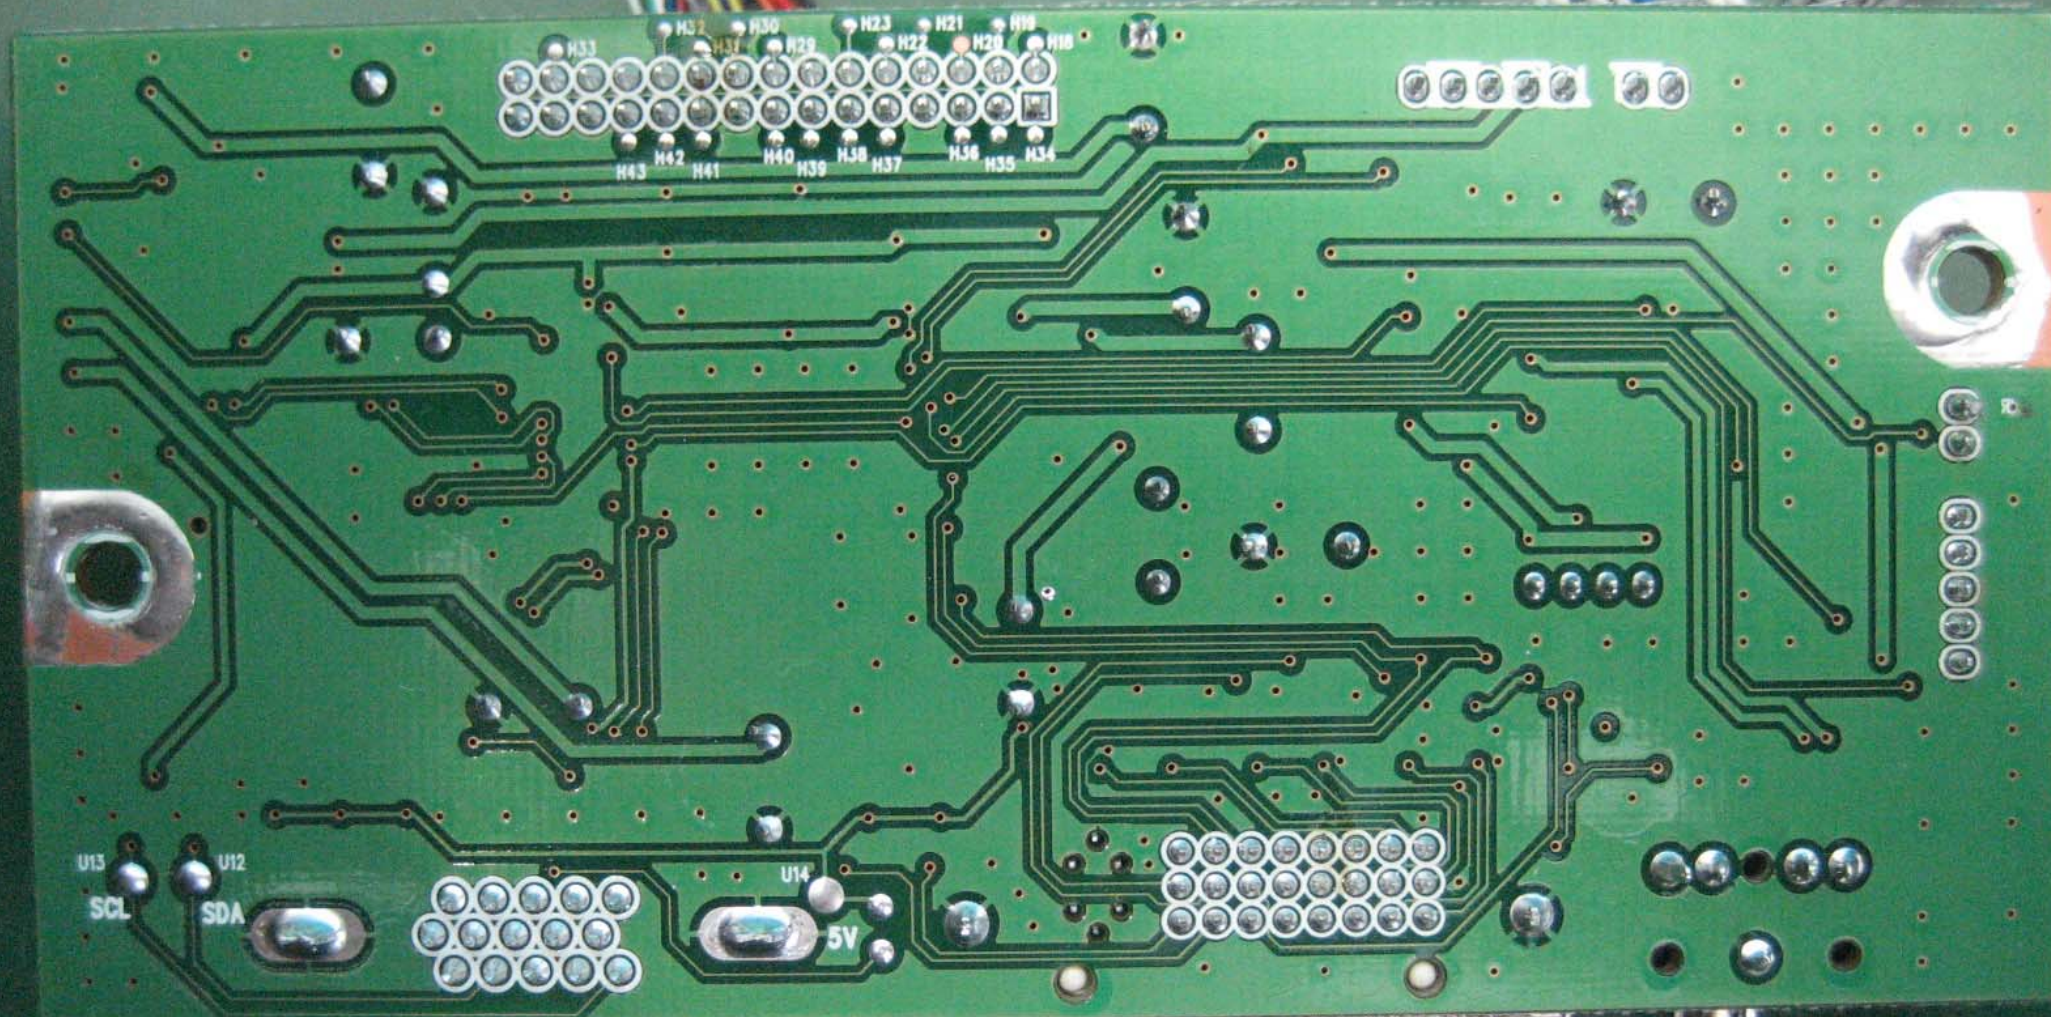

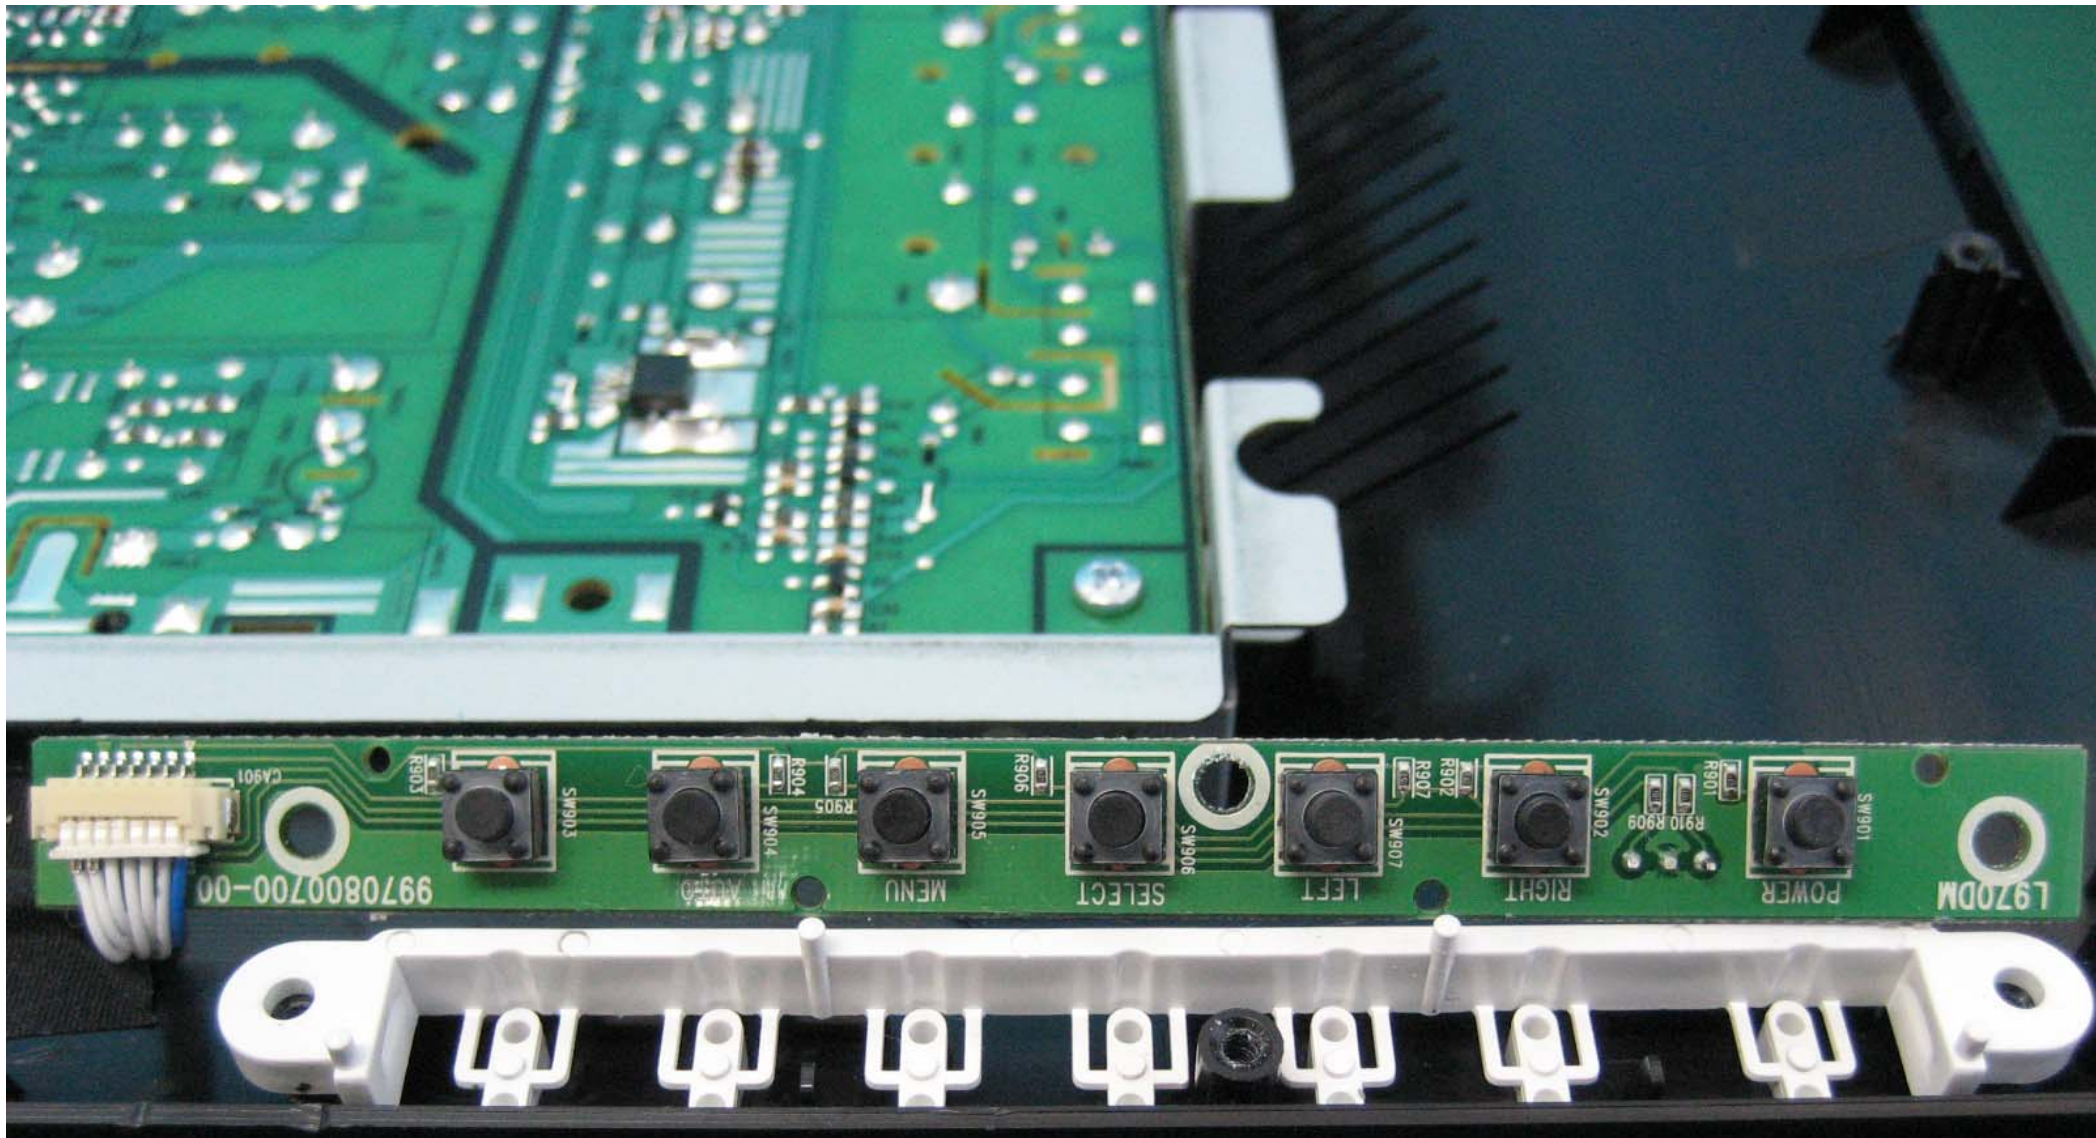

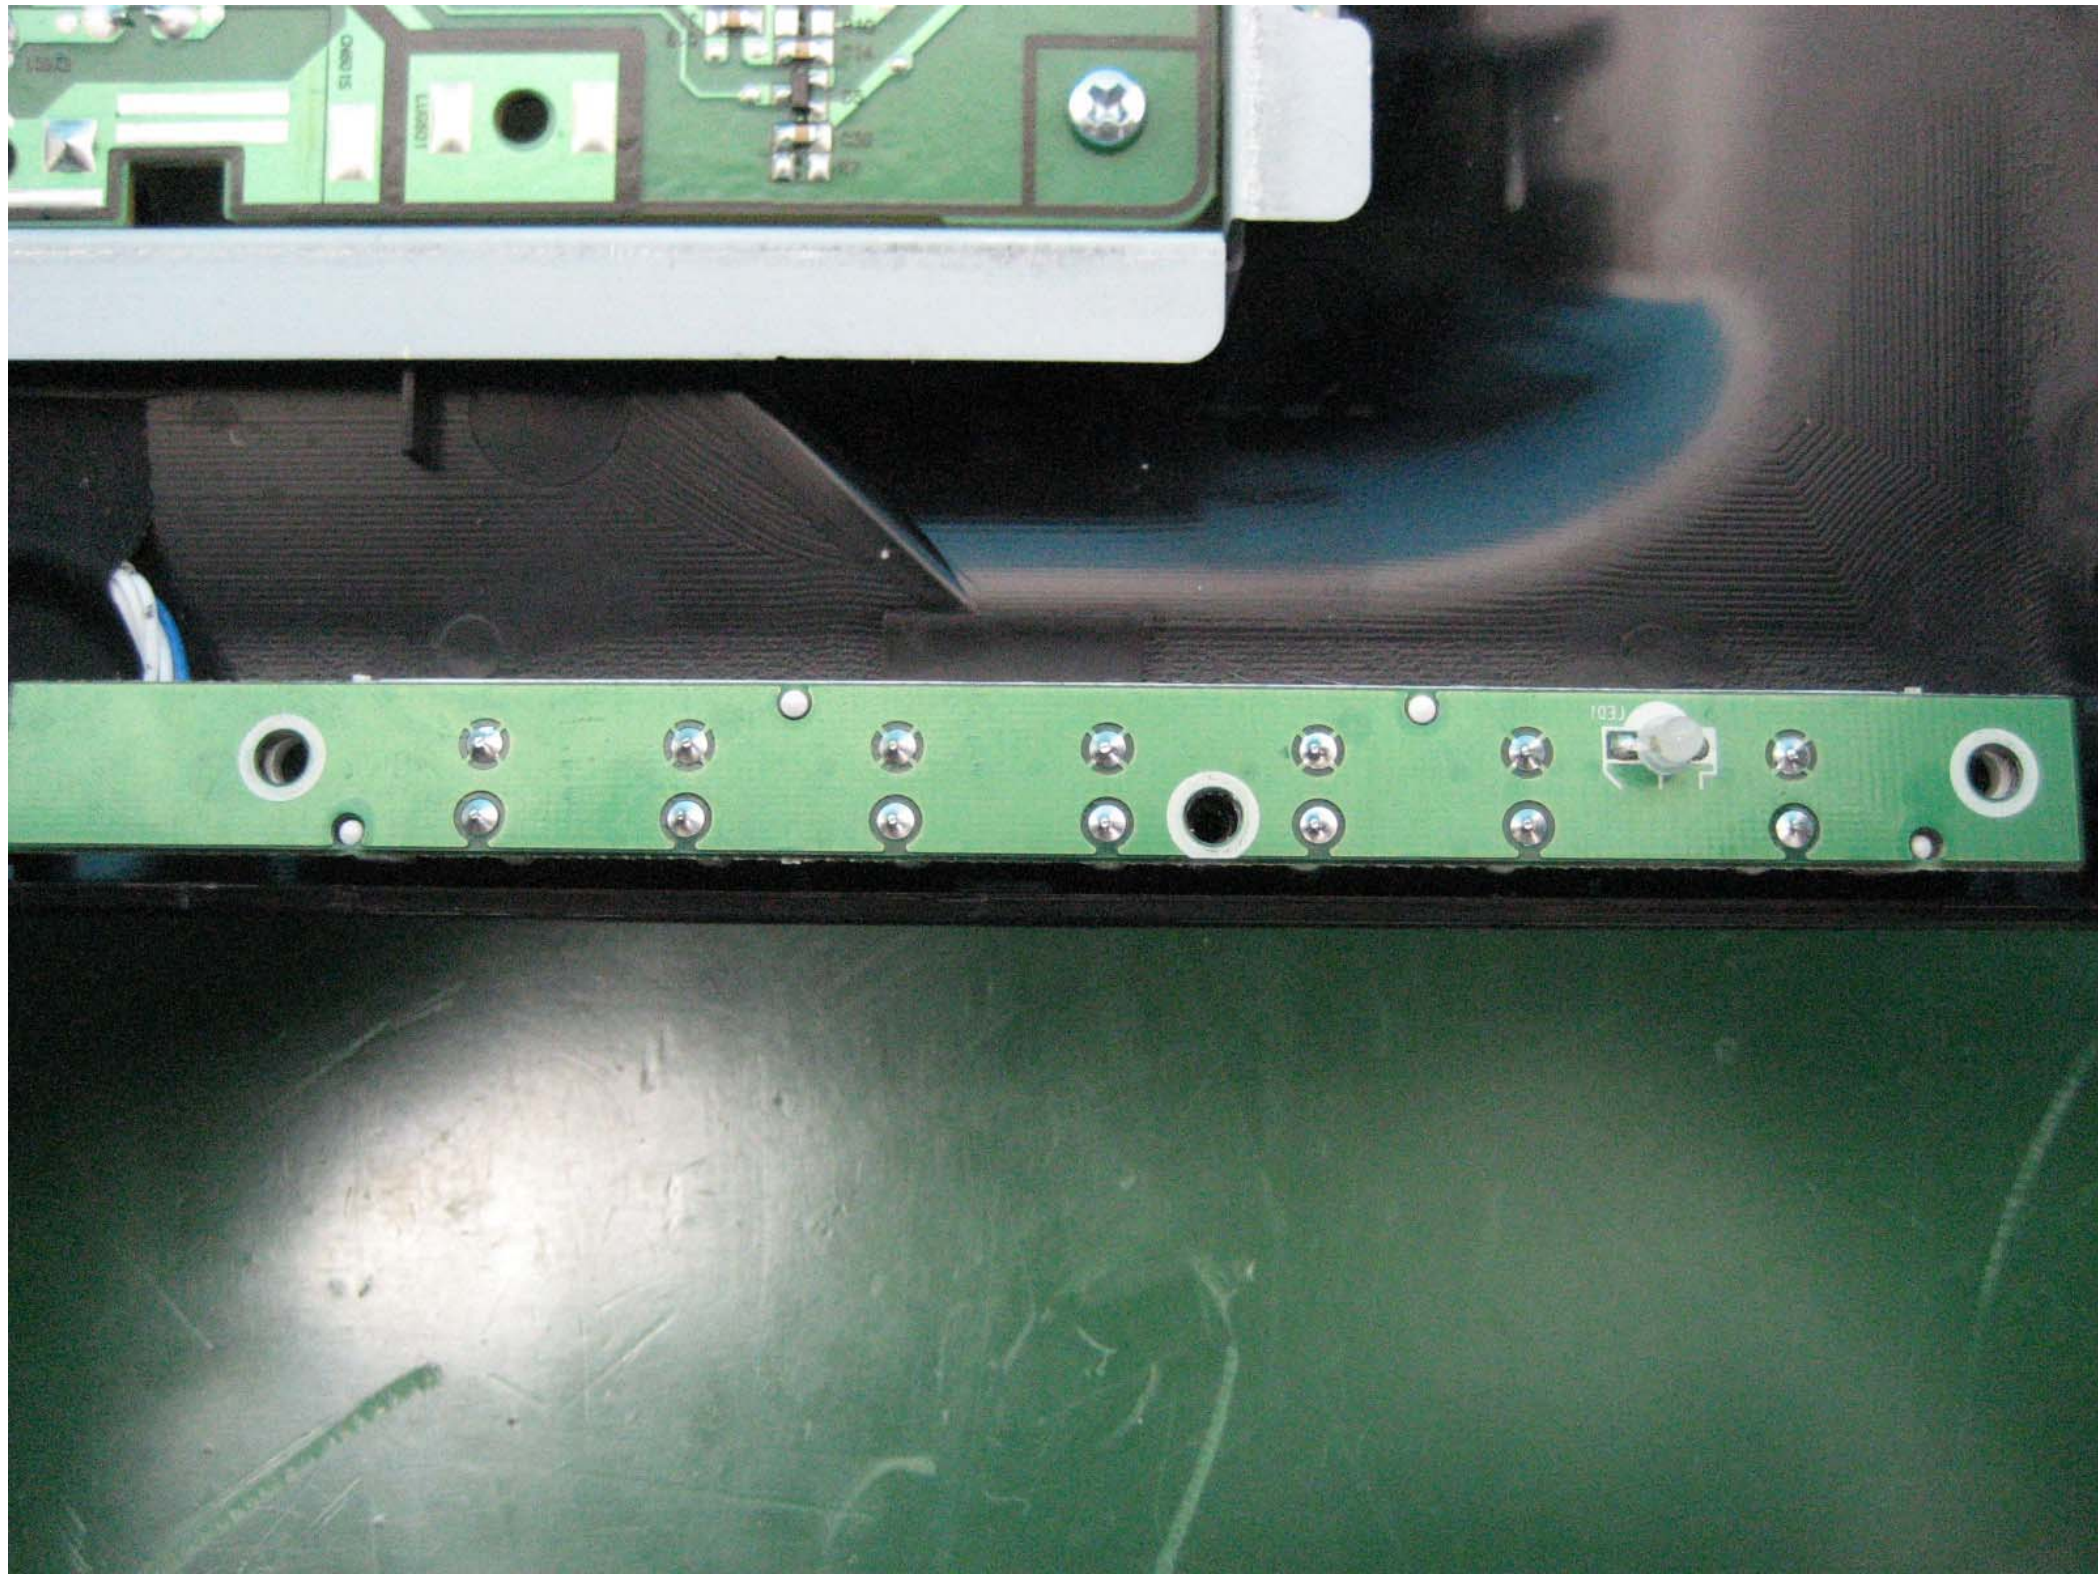






ECO
RoHS Compliant



HT190WG1-101

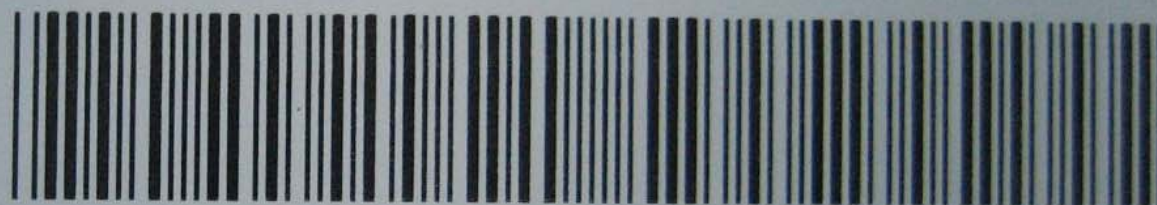

MADE IN CHINA

9MQA071524000295B

HT190WG1-100 S1



HIGH VOLTAGE
CAUTION

RISK OF ELECTRIC SHOCK
DISCONNECT THE ELECTRIC

S170115A0

TAGE
ON

C SHOCK

COLD CATHODE FLUORESCENT
PANEL CONTAINS A SMALL AMOU

PLEASE FOLLOW