

# FCC Test Report On Behalf of W Global Inc.

## 2.4G Receiver Model No.: CW-01

Prepared By : Anbotek Compliance Laboratory Limited  
Address : 1/F, 1 /Build, SEC Industrial Park, No. 4 Qianhai Road, Nanshan District, Shenzhen, 518054, China  
Tel: (86) 755-26014771  
Fax: (86) 755-26014772

Report Number : 201210785F-2  
Date of Test : Oct. 25 to Dec. 11, 2012  
Date of Report : Dec. 11, 2012

**TABLE OF CHONENTS**

## Description

	Page
Test Report Verification	
<b>1.GENERAL INFORMATION .....</b>	<b>4</b>
1.1. Description of Device (EUT) .....	4
1.2. Description of Test Facility.....	5
1.3. Measurement Uncertainty .....	5
1.4. Test Summary .....	5
<b>2.POWER LINE CONDUCTED MEASUREMENT .....</b>	<b>6</b>
2.1. Test Equipment .....	6
2.2. Block Diagram of Test Setup .....	6
2.3. Power Line Conducted Emission Measurement Limits (FCC Part 15 Class B) .....	6
2.4. Configuration of EUT on Measurement.....	7
2.5. Operating Condition of EUT.....	7
2.6. Test Procedure.....	7
2.7. Power Line Conducted Emission Measurement Results.....	7
<b>3.RADIATED EMISSION MEASUREMENT.....</b>	<b>10</b>
3.1. Test Equipment .....	10
3.2. Block Diagram of Test Setup .....	10
3.3. Radiated Emission Limit (Subpart B Class B) .....	11
3.4. EUT Configuration on Measurement .....	11
3.5. Operating Condition of EUT .....	11
3.6. Test Procedure.....	11
3.7. Radiated Emission Measurement Results .....	11

## TEST REPORT VERIFICATION

Applicant : W Global Inc.  
Manufacturer : W Global Inc.  
EUT : 2.4GHz Receiver  
Model No. : CW-01  
Serial No. : N/A  
Rating : DC 5V  
Trade Mark : 

Measurement Procedure Used:

FCC Rules and Regulations Part 15 Subpart B 2010 & FCC / ANSI C63.4-2009

The device described above is tested by Anbotek Compliance Laboratory Limited To determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart B Class B limits both radiated and conducted emissions. The measurement results are contained in this test report and Anbotek Compliance Laboratory Limited Is assumed full responsibility for the accuracy and completeness of these measurements. Also, this report shows that the Equipment Under Test (EUT) is to be technically compliant with the FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Anbotek Compliance Laboratory Limited

Date of Test :

Oct. 25 to Dec. 11, 2012

Prepared by



:

(Engineer / Andy Chen)


Reviewer



:

(Project Manager / Jerry Du)

Approved & Authorized Signer



:

(Manager / Tom Chen)

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

Description : 2.4GHz Receiver  
Model Number : CW-01

Test Power Supply : DC 5V  
Applicant : W Global Inc.  
Address : #612 A-dong Woolimlionsvalley 2 cha,  
Sangdaewon-dong, Jungwon-gu, Seongnam-si,  
Gyeonggi-do, Korea

Manufacturer : W Global Inc.  
Address : #612 A-dong Woolimlionsvalley 2 cha,  
Sangdaewon-dong, Jungwon-gu, Seongnam-si,  
Gyeonggi-do, Korea

MONITOR : Manufacturer: DELL  
M/N: E170Sc  
S/N: CN-00V539-64180-055-0UPS  
CE , FCC: DOC

KEYBOARD : Manufacturer: DELL  
M/N: SK-8115  
S/N: CN-0DJ313-71616-06C-02XN  
CE , FCC: DOC  
Cable: 1m, unshielded

MOUSE : Manufacturer: DELL  
M/N: M-UARDEL7  
S/N: N/A  
CE , FCC: DOC  
Cable: 1m, unshielded

Printer : Manufacturer:Brother  
M/N: MFC-3360C  
S/N: N/A  
CE, FCC:DOC

Date of Sample received : Oct. 25., 2012

Date of Test : Oct. 25 to Dec. 11, 2012

## 1.2. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### **CNAS - LAB Code: L3503**

Anbotek Compliance Laboratory Limited., Laboratory has been assessed and in compliance with CNAS/CL01: 2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

### **FCC-Registration No.: 752021**

Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, August 20, 2010

### **IC-Registration No.: 8058A-1**

Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A-1, August 30, 2010

### **Test Location**

All Emissions tests were performed

Anbotek Compliance Laboratory Limited. at 1/F, 1 /Build, SEC Industrial Park, No. 4 Qianhai Road, Nanshan District, Shenzhen, 518054, China

## 1.3. Measurement Uncertainty

Radiation Uncertainty : Ur = 4.3dB

Conduction Uncertainty : Uc = 3.4dB

## 1.4. Test Summary

For the EUT described above. The standards used were FCC Part 15 Subpart B for Emissions.

Table 1 : Tests Carried Out Under FCC Part 15 Subpart B

Standard	Test Items	Status
FCC Part 15 Subpart B	Power Line Conducted Emission Test (150KHz To 30MHz)	✓
FCC Part 15 Subpart B	Radiated Emission Test (30MHz To 1000MHz)	✓

✓ Indicates that the test is applicable

✗ Indicates that the test is not applicable

## 2. POWER LINE CONDUCTED MEASUREMENT


### 2.1. Test Equipment

The following test equipments are used during the power line conducted measurement:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Receiver	Rohde & Schwarz	ESCI	100627	May. 12, 2012	1 Year
2.	Two-Line V-network	Rohde & Schwarz	ENV216	10055	May. 19, 2012	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May. 19, 2012	1 Year
4.	EMI Test Software	ES-K1	N/A	N/A	N/A	N/A

### 2.2. Block Diagram of Test Setup

#### 2.2.1. Block diagram of connection between the EUT and simulators

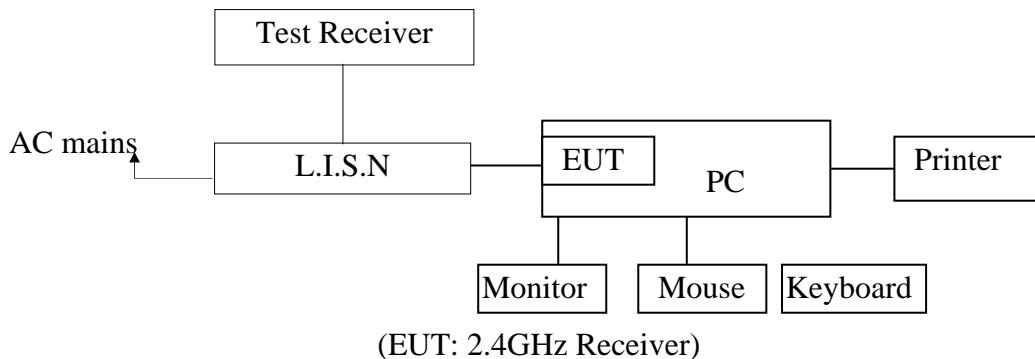

### 2.3. Power Line Conducted Emission Measurement Limits (FCC Part 15)

#### Class B)

Frequency MHz	Limits dB( $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. \*Decreasing linearly with logarithm of frequency.  
2. The lower limit shall apply at the transition frequencies.

## 2.4. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

EUT : 2.4GHz Receiver  
Model Number : CW-01  
Applicant : W Global Inc.

## 2.5. Operating Condition of EUT

- 2.5.1. Setup the EUT and simulator as shown as Section 2.2.
- 2.5.2. Turn on the power of all equipment.
- 2.5.3. Let the EUT work in test mode (On) and measure it.

## 2.6. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2009 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

The test result are reported on Section 2.7.

## 2.7. Power Line Conducted Emission Measurement Results

**PASS.**


The frequency range from 150KHz to 30 MHz is investigated.

The test curves are shown in the following pages.

**CONDUCTED EMISSION TEST DATA**

EUT: 2.4G Receiver M/N: CW-01  
 Operating Condition: On  
 Test Site: 1# Shielded Room  
 Operator: Andy Chen  
 Test Specification: DC 5V  
 Comment: L  
 Tem:25°C Hum:50%

**SCAN TABLE: "Voltage (150K~30M) FIN"**  
 Short Description: 150K-30M Disturbance Voltages

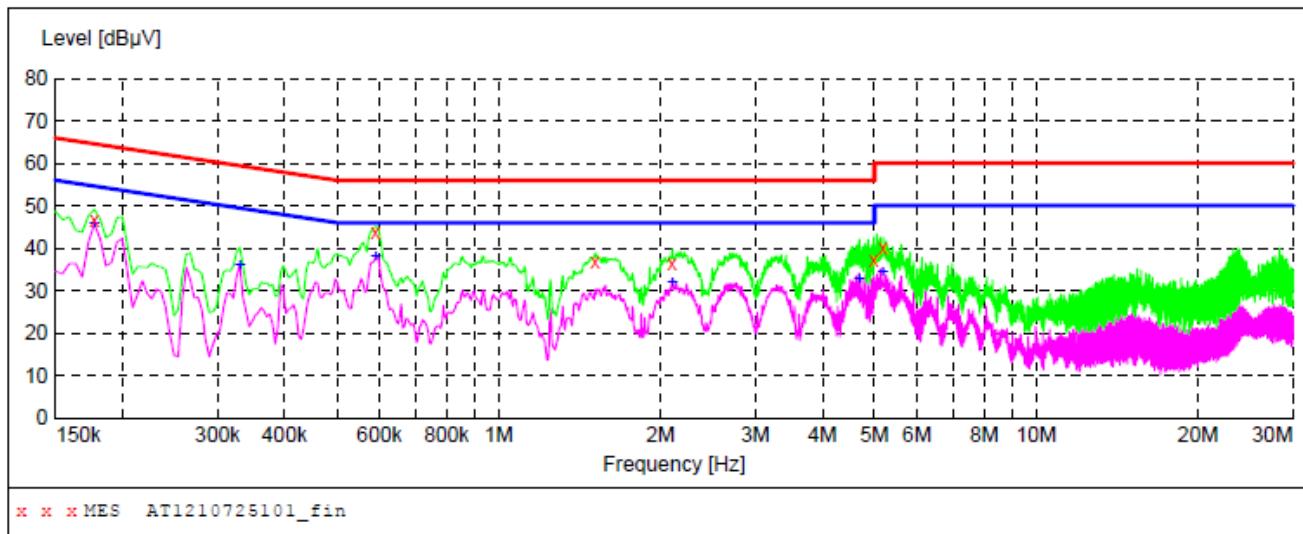**MEASUREMENT RESULT: "AT1210725101\_fin"**

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.177000	46.70	20.1	65	17.9	QP	L1	GND
0.591000	43.90	20.1	56	12.1	QP	L1	GND
1.513000	36.80	20.3	56	19.2	QP	L1	GND
2.102500	36.40	20.3	56	19.6	QP	L1	GND
4.987000	37.40	20.5	56	18.6	QP	L1	GND
5.189500	39.90	20.5	60	20.1	QP	L1	GND


**MEASUREMENT RESULT: "AT1210725101\_fin2"**

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.177000	45.80	20.1	55	8.8	AV	L1	GND
0.330000	36.10	20.1	50	13.4	AV	L1	GND
0.591000	38.10	20.1	46	7.9	AV	L1	GND
2.102500	32.00	20.3	46	14.0	AV	L1	GND
4.681000	32.80	20.5	46	13.2	AV	L1	GND
5.189500	34.50	20.5	50	15.5	AV	L1	GND

**CONDUCTED EMISSION TEST DATA**

EUT: 2.4G Receiver M/N: CW-01  
 Operating Condition: On  
 Test Site: 1# Shielded Room  
 Operator: Andy Chen  
 Test Specification: DC 5V  
 Comment: N  
 Tem:25°C Hum:50%

**SCAN TABLE: "Voltage (150K~30M) FIN"**  
 Short Description: 150K-30M Disturbance Voltages

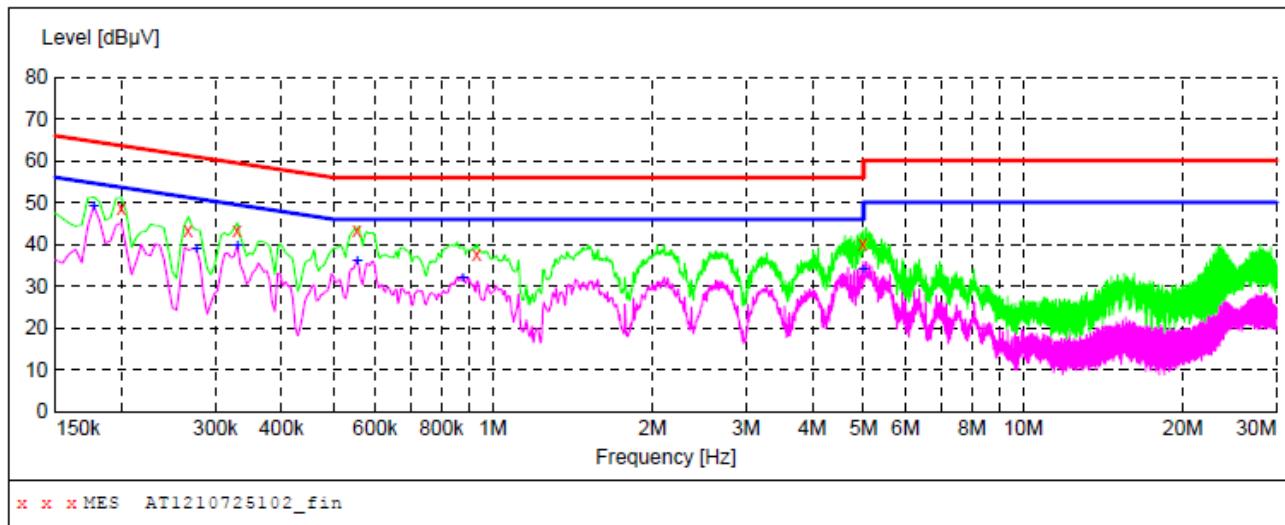**MEASUREMENT RESULT: "AT1210725102\_fin"**

10/29/2012 4:06PM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB $\mu$ V	dB	dB $\mu$ V	dB			
	0.199500	48.70	20.1	64	14.9	QP	N	GND
	0.267000	43.30	20.1	61	17.9	QP	N	GND
	0.330000	43.30	20.1	60	16.2	QP	N	GND
	0.555000	43.30	20.1	56	12.7	QP	N	GND
	0.933000	37.60	20.1	56	18.4	QP	N	GND
	4.991500	40.10	20.5	56	15.9	QP	N	GND

**MEASUREMENT RESULT: "AT1210725102\_fin2"**

10/29/2012 4:06PM	Frequency	Level	Transd	Limit	Margin	Detector	Line	PE
	MHz	dB $\mu$ V	dB	dB $\mu$ V	dB			
	0.177000	49.10	20.1	55	5.5	AV	N	GND
	0.276000	38.80	20.1	51	12.1	AV	N	GND
	0.330000	39.80	20.1	50	9.7	AV	N	GND
	0.555000	36.20	20.1	46	9.8	AV	N	GND
	0.879000	32.10	20.1	46	13.9	AV	N	GND
	4.991500	34.10	20.5	46	11.9	AV	N	GND

### 3. RADIATED EMISSION MEASUREMENT

#### 3.1. Test Equipment


The following test equipments are used during the radiated emission measurement:

##### 3.1.1. For Anechoic Chamber

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	May. 12, 2012	1 Year
2.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	100015	May. 17, 2012	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	May. 19, 2012	1 Year
4.	EMI Test Software	ES-K1	N/A	N/A	N/A	N/A


#### 3.2. Block Diagram of Test Setup

##### 3.2.1. Block diagram of connection between the EUT and simulators

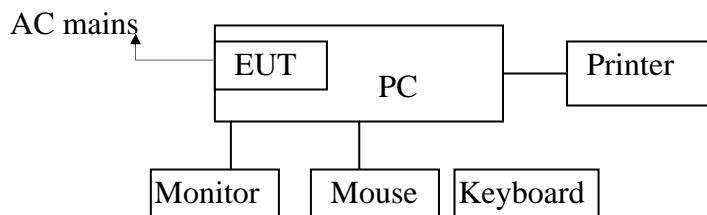

(EUT: 2.4GHz Receiver)

##### 3.2.2. Anechoic Chamber Test Setup Diagram

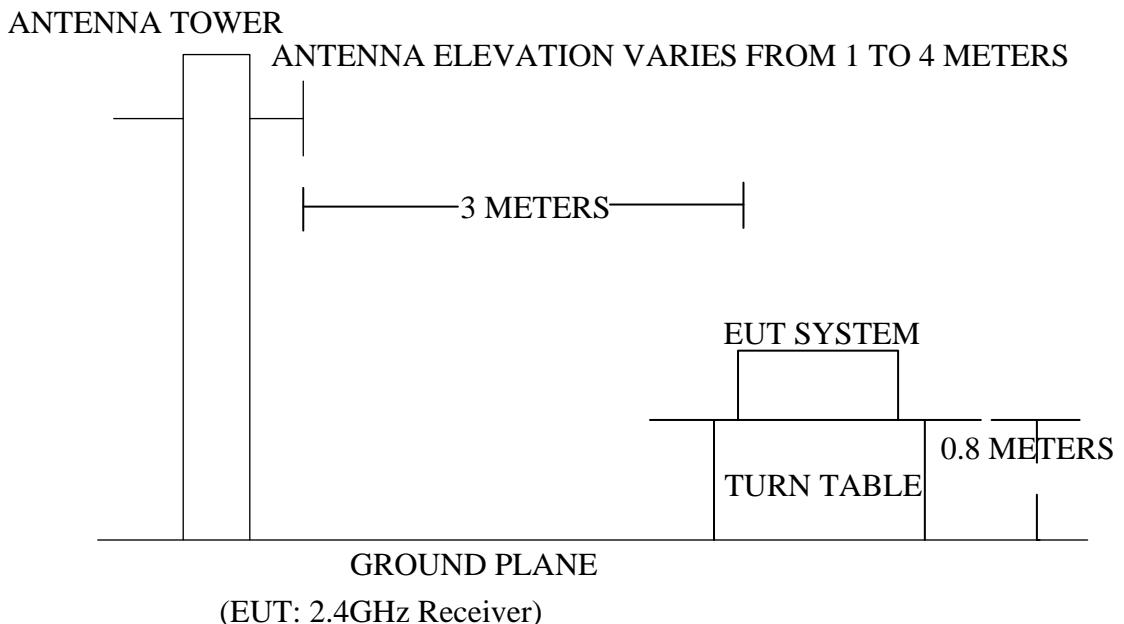

### 3.3. Radiated Emission Limit (Subpart B Class B)

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		μV/m	dB(μV)/m
30~88	3	100	40.0
88~216	3	150	43.5
216~960	3	200	46.0
960~1000	3	500	54.0

Remark : (1) Emission level (dB) $\mu$ V = 20 log Emission level  $\mu$ V/m  
 (2) The smaller limit shall apply at the cross point between two frequency bands.  
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

### 3.4. EUT Configuration on Measurement

The following equipments are installed on Radiated Emission Measurement to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

EUT : 2.4GHz Receiver  
 Model Number : CW-01  
 Applicant : W Global Inc.

### 3.5. Operating Condition of EUT

3.5.1. Setup the EUT as shown in Section 3.2.  
 3.5.2. Let the EUT work in test mode (On) and measure it.

### 3.6. Test Procedure

EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. EUT is set 3.0 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1.0 meter and 4 meters to find out the maximum emission level. Broadband antenna (Trilog Broadband Antenna) is used as receiving antenna. Both horizontal and vertical polarizations of the antenna are set on measurement. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2009 on radiated emission measurement.

The bandwidth of the EMI test receiver (ESCI) is set at 120kHz.

The frequency range from 30MHz to 1000MHz is checked.

The test mode (On) is tested in chamber and all the test results are listed in Section 3.7.

### 3.7. Radiated Emission Measurement Results

**PASS.**

The test curves are shown in the following pages.



## Anbotek Compliance Laboratory Limited

1/F, 1 /Building, SEC Industrial Park, No.4 Qianhai Road,  
Nanshan District, Shenzhen, 518054, China


Tel: (86)755-26014771

Fax: (86)755-26014772

Http://www.anbotek.com

**Job No.:** AT1210725F-1  
**Standard:** (RE)FCC PART15 B \_3m  
**Test item:** Radiation Test  
**Temp.(C)/Hum.(%RH):** 24.3( C)/55%RH  
**EUT:** 2.4GHz Receiver  
**Model:** CW-01  
**Mode:** On

**Polarization:** Horizontal  
**Power Source:** DC 5V  
**Date:** 2012/10/22  
**Time:** 9:37:00  
**Test By:** Andy Chen  
**Distance:** 3m

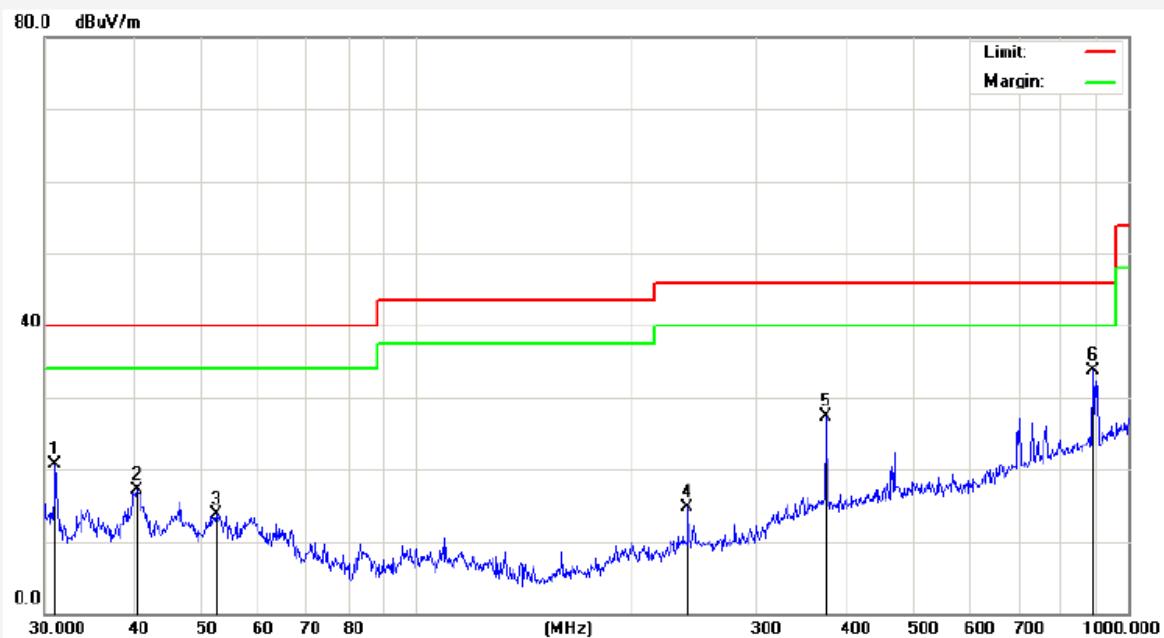

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	30.9619	46.98	-26.30	20.68	40.00	-19.32	peak			
2	40.2757	41.98	-24.83	17.15	40.00	-22.85	peak			
3	52.2079	38.74	-25.01	13.73	40.00	-26.27	peak			
4	239.9874	41.38	-26.60	14.78	46.00	-31.22	peak			
5	375.9385	49.11	-21.90	27.21	46.00	-18.79	peak			
6	890.7278	45.63	-11.86	33.77	46.00	-12.23	peak			



## Anbotech Compliance Laboratory Limited

1/F, 1 /Building, SEC Industrial Park, No.4 Qianhai Road,  
Nanshan District, Shenzhen, 518054, China

Tel: (86)755-26014771  
Fax: (86)755-26014772  
Http://www.anbotech.com

Job No.:	AT1210725F-1	Polarization:	Vertical							
Standard:	(RE)FCC PART15 B _3m	Power Source:	DC 5V							
Test item:	Radiation Test	Date:	2012/10/22							
Temp.(C)/Hum.(%RH):	24.3( C)/55%RH	Time:	9:40:20							
EUT:	2.4GHz Receiver	Test By:	Andy Chen							
Model:	CW-01	Distance:	3m							
Mode:	On									
No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	38.3462	47.41	-25.28	22.13	40.00	-17.87	peak			
2	53.1313	42.96	-25.04	17.92	40.00	-22.08	peak			
3	132.6850	42.90	-26.67	16.23	43.50	-27.27	peak			
4	239.9874	41.75	-22.60	19.15	46.00	-26.85	peak			
5	375.9384	47.00	-20.90	26.10	46.00	-19.90	peak			
6	801.7862	44.22	-12.59	31.63	46.00	-14.37	peak			