

FCC TEST REPORT
for
W Global Inc.

2.4G Wireless Mouse

Prepared By : Anbotek Compliance Laboratory Limited
Address : 1/F, 1 /Building, SEC Industrial Park, No. 4 Qianhai Road,
Nanshan District, Shenzhen, 518054, China
Tel: (86) 755-26066544
Fax: (86) 755-26014772

Report Number : 201210785F
Date of Test : Oct. 25 to Dec. 11, 2012
Date of Report : Dec. 11, 2012

TABLE OF CONTENTS

Description	Page
Test Report	
1. GENERAL INFORMATION	4
1.1. Description of Device (EUT)	4
1.2. Auxiliary Equipment Used during Test	5
1.3. Description of Test Facility	6
1.4. Measurement Uncertainty	6
2. TEST EQUIPMENT	7
2.1. Radiated Emission Measurement.....	7
2.2. Radiated Emission Measurement (RF)	7
3. TEST PROCEDURE	7
3. RADIATION INTERFERENCE.....	9
3.1. Requirements (15.249, 15.209):	9
3.2 Test Procedure	9
3.3 Test Results.....	9
4. OCCUPIED BANDWIDTH.....	13
4.1. Requirements (15.249):	13
4.2. Test Procedure	13
4.3. Test Configuration:.....	13
4.4. Test Results.....	13
5. PHOTOGRAPH.....	15
5.1. Photo of Power Line Conducted Emission Measurement	15
5.2. Photo of Radiation Emission Test	15
APPENDIX (Photos of EUT) (3 Pages)	

TEST REPORT

Applicant : W Global Inc.
 Manufacturer : W Global Inc..
 EUT : 2.4G Wireless Mouse
 Model No. : CW-01
 Serial No. : N/A
 Rating : DC 3.7V From Battery
 Trade Mark : 

Measurement Procedure Used:

FCC Part15 Subpart C, Paragraph 15.207, 15.249 & 15.209

The device described above is tested by Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Anbotek Compliance Laboratory Limited

Date of Test :

Oct. 25 to Dec. 11, 2012

Prepared by




(Engineer / Andy Chen)

Reviewer



(Project Manager / Jerry Du)

Approved & Authorized Signer



(Manager / Tom Chen)

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : 2.4G Wireless Mouse
Model Number : CW-01
Test Power Supply : DC 3.7V
Frequency : 2402MHz-2483.5MHz
Antenna Gain : 0 dBi
Applicant : W Global Inc.
Address : #612 A-dong Woolimlionsvalley 2 cha, Sangdaewon-dong,
Jungwon-gu, Seongnam-si, Gyeonggi-do, Korea
Manufacturer : W Global Inc..
Address : #612 A-dong Woolimlionsvalley 2 cha, Sangdaewon-dong,
Jungwon-gu, Seongnam-si, Gyeonggi-do, Korea
Date of receiver : Oct. 25, 2012
Date of Test : Oct. 25 to Dec. 11, 2012

1.2. Auxiliary Equipment Used during Test

PC	: Manufacturer: DELL M/N: OPTIPLEX 380 S/N: 1J63X2X CE , FCC: DOC
MONITOR	: Manufacturer: DELL M/N: E170Sc S/N: CN-00V539-64180-055-0UPS CE , FCC: DOC
MOUSE	: Manufacturer: DELL M/N: M-UARDEL7 S/N: N/A CE , FCC: DOC Cable: 1m, unshielded
Printer	: Manufacturer: Brother M/N: MFC-3360C S/N: N/A CE, FCC: DOC
Power Line	: Non-Shielded, 1.5m
VGA Cable	: Non-Shielded, 1.5m
USB Cable	: Non-Shielded, 0.5m

1.3. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS - LAB Code: L3503

Anbotek Compliance Laboratory Limited., Laboratory has been assessed and in compliance with CNAS/CL01: 2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

FCC-Registration No.: 752021

Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, August 20, 2010.

IC-Registration No.: 8058A-1

Anbotek Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A-1, August 30, 2010.

Test Location

All Emissions tests were performed at

Anbotek Compliance Laboratory Limited. at 1/F, 1 /Building, SEC Industrial Park, No. 4 Qianhai Road, Nanshan District, Shenzhen, 518054, China

1.4. Measurement Uncertainty

Radiation Uncertainty : Ur = 4.3dB

Conduction Uncertainty : Uc = 3.4dB

2. Test Equipment

2.1. Radiated Emission Measurement

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	May 12, 2012	1 Year
2.	Trilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	May 17, 2012	1 Year
3.	Pre-amplifier	Compliance Direction	PAP-0203	22008	May 19, 2012	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

Radiation Uncertainty : Ur = 4.3dB

2.2. Radiated Emission Measurement (RF)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum Analysis	Agilent	E4407B	US39390582	July 03, 2012	1 Year
2.	Preamplifier	Instruments corporation	EMC01183 0	980100	July 03, 2012	1 Year
3.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Apr. 07, 2012	1 Year
4.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A

Radiation Uncertainty : Ur = 4.3dB

3. Test Procedure

GENERAL: This report shall NOT be reproduced except in full without the written approval of Anbotek Compliance Laboratory Limited. The EUT was transmitting a test signal during the testing.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-2009 using a spectrum analyzer with a pre-selector. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100KHz and the video bandwidth was 300KHz up to 1.0GHz and 1.0MHz with a video BW of 3.0MHz above 1.0GHz. The ambient temperature of the EUT was 74.3oF with a humidity of 69%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example:

FCC ID: QZUCW-01

Freq (MHz) METER READING + ACF = FS
20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

ANSI STANDARD C63.4-2009 10.1.7 MEASUREMENT PROCEDURES: The EUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The EUT was placed in the center of the table (1.5m side). The table used for radiated measurements is capable of continuous rotation. When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

3. Radiation Interference

3.1. Requirements (15.249, 15.209):

FIELD STRENGTH of Fundamental: 902-928 MHZ 2.4-2.4835 GHz 94 dB μ V/m @3m	FIELD STRENGTH of Harmonics 54 dB μ V/m @3m	S15.209 30 - 88 MHz 88 - 216 MHz 216 - 960 MHz ABOVE 960 MHz	40 dB μ V/m @3M 43.5 46 54dB μ V/m
---	---	--	---

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in 15.209, whichever is the lesser attenuation.

3.2 Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

All readings from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120kHz. All reading are above 1GHz, peak & average values with a resolution bandwidth of 1MHz. The EUT is tested in 9*6*6 Chamber.

The test results are listed in Section 5.3.

3.3 Test Results

PASS.

Please refer the following pages.

Data:Horizontal
CH Low(2403MHz)

Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dB μ V	Level dB μ V/m	Limit dB μ V/m	Over Limit dB	Remark
239.98	1.58	13.50	38.90	57.26	33.44	46.00	-12.56	QP
2403.00	2.17	31.21	35.30	86.45	84.53	114.0	-29.47	Peak
2403.00	2.17	31.21	35.30	84.51	82.59	94.0	-11.41	AV
4806.10	2.56	34.01	34.71	39.95	41.81	74.0	-32.19	Peak
4806.10	2.56	34.01	34.71	38.13	39.99	54.0	-14.01	AV
7209.97	2.98	36.16	35.15	38.23	42.22	74.0	-31.78	Peak
7209.97	2.98	36.16	35.15	35.34	39.33	54.0	-14.67	AV
9612.00	---	---	---	---	---	---	---	---
12015.00	---	---	---	---	---	---	---	---
14418.00	---	---	---	---	---	---	---	---
16821.00	---	---	---	---	---	---	---	---
19224.00	---	---	---	---	---	---	---	---
21627.00	---	---	---	---	---	---	---	---
24030.00	---	---	---	---	---	---	---	---

CH Middle(2444MHz)

Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dB μ V	Level dB μ V/m	Limit dB μ V/m	Over Limit dB	Remark
312.18	1.60	13.52	38.82	56.21	32.51	46.00	-13.49	QP
2444.00	2.19	31.22	34.60	85.26	84.07	114.0	-29.93	Peak
2444.00	2.19	31.22	34.60	83.34	82.15	94.0	-11.85	AV
4888.08	2.57	35.00	34.58	39.51	42.50	74.0	-31.50	Peak
4888.08	2.57	35.00	34.58	37.37	40.36	54.0	-13.64	AV
7332.05	3.00	36.17	35.14	38.68	42.71	74.0	-31.29	Peak
7332.05	3.00	36.17	35.14	35.89	39.92	54.0	-14.08	AV
9776.00	---	---	---	---	---	---	---	---
12220.00	---	---	---	---	---	---	---	---
14664.00	---	---	---	---	---	---	---	---
17108.00	---	---	---	---	---	---	---	---
19552.00	---	---	---	---	---	---	---	---
21996.00	---	---	---	---	---	---	---	---
24440.00	---	---	---	---	---	---	---	---

FCC ID: QZUCW-01

CH High(2480MHz)

Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dB μ V	Level dB μ V/m	Limit dB μ V/m	Over Limit dB	Remark
312.18	1.60	13.52	38.82	54.00	30.30	46.00	-15.70	QP
2480.00	2.20	31.65	36.00	92.57	90.42	114.0	-23.58	Peak
2480.00	2.20	31.65	36.00	89.41	87.26	94.0	-6.74	AV
4960.05	2.58	35.06	34.79	41.75	44.60	74.0	-29.40	Peak
4960.05	2.58	35.06	34.79	39.08	41.93	54.0	-12.07	AV
7439.97	3.02	36.19	34.90	39.31	43.62	74.0	-30.38	Peak
7439.97	3.02	36.20	35.20	37.28	41.30	54.0	-12.70	AV
9920.00	---	---	---	---	---	---	---	---
12400.00	---	---	---	---	---	---	---	---
14880.00	---	---	---	---	---	---	---	---
17360.00	---	---	---	---	---	---	---	---
19840.00	---	---	---	---	---	---	---	---
22320.00	---	---	---	---	---	---	---	---
24800.00	---	---	---	---	---	---	---	---

Vertical
CH Low(2403MHz)

Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dB μ V	Level dB μ V/m	Limit dB μ V/m	Over Limit dB	Remark
239.98	1.43	12.13	38.45	53.40	28.51	40.00	-11.49	QP
2403.00	2.17	31.21	35.30	84.02	82.10	114.0	-31.90	Peak
2403.00	2.17	31.21	35.30	81.74	79.82	94.0	-14.18	AV
4806.10	2.56	34.01	34.71	40.85	42.71	74.0	-31.29	Peak
4806.10	2.56	34.01	34.71	38.40	40.26	54.0	-13.74	AV
7209.97	2.98	36.16	35.15	37.34	41.33	74.0	-32.67	Peak
7209.97	2.98	36.16	35.15	34.40	38.39	54.0	-15.61	AV
9612.00	---	---	---	---	---	---	---	---
12015.00	---	---	---	---	---	---	---	---
14418.00	---	---	---	---	---	---	---	---
16821.00	---	---	---	---	---	---	---	---
19224.00	---	---	---	---	---	---	---	---
21627.00	---	---	---	---	---	---	---	---
24030.00	---	---	---	---	---	---	---	---

FCC ID: QZUCW-01

CH Middle(2444MHz)

Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dB μ V	Level dB μ V/m	Limit dB μ V/m	Over Limit dB	Remark
312.18	1.50	13.40	38.89	53.71	29.72	43.50	-13.78	QP
2444.00	2.19	31.22	34.60	82.32	81.13	114.0	-32.87	Peak
2444.00	2.19	31.22	34.60	80.86	79.67	94.0	-14.33	AV
4888.08	2.57	35.00	34.58	40.04	43.03	74.0	-30.97	Peak
4888.08	2.57	35.00	34.58	37.66	40.65	54.0	-13.35	AV
7332.05	3.00	36.17	35.14	38.52	42.55	74.0	-31.45	Peak
7332.05	3.00	36.17	35.14	35.87	39.90	54.0	-14.10	AV
9776.00	---	---	---	---	---	---	---	---
12220.00	---	---	---	---	---	---	---	---
14664.00	---	---	---	---	---	---	---	---
17108.00	---	---	---	---	---	---	---	---
19552.00	---	---	---	---	---	---	---	---
21996.00	---	---	---	---	---	---	---	---
24440.00	---	---	---	---	---	---	---	---

CH High(2480MHz)

Frequency MHz	Cable Loss dB	Ant Factor dB/m	Preamp Factor dB	Read Level dB μ V	Level dB μ V/m	Limit dB μ V/m	Over Limit dB	Remark
408.80	1.62	13.54	38.45	51.03	27.74	46.00	-18.26	QP
2480.00	2.20	31.65	36.00	83.31	81.16	114.0	-32.84	Peak
2480.00	2.20	31.65	36.00	81.90	79.75	94.0	-14.25	AV
4960.10	2.58	35.06	34.79	39.98	42.83	74.0	-31.17	Peak
4960.10	2.58	35.06	34.79	38.00	40.85	54.0	-13.15	AV
7439.97	3.02	36.19	34.90	38.46	42.77	74.0	-31.23	Peak
7439.97	3.02	36.20	35.20	36.22	40.24	54.0	-13.76	AV
9920.00	---	---	---	---	---	---	---	---
12400.00	---	---	---	---	---	---	---	---
14880.00	---	---	---	---	---	---	---	---
17360.00	---	---	---	---	---	---	---	---
19840.00	---	---	---	---	---	---	---	---
22320.00	---	---	---	---	---	---	---	---
24800.00	---	---	---	---	---	---	---	---

NOTE: “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

4. Occupied Bandwidth


4.1. Requirements (15.249):

The field strength of any emissions appearing outside the band edges and up to 10 kHz above and below the band edges shall be attenuated at least 50 dB below the level of the carrier or to the general limits of 15.249.

4.2. Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

4.3. Test Configuration:

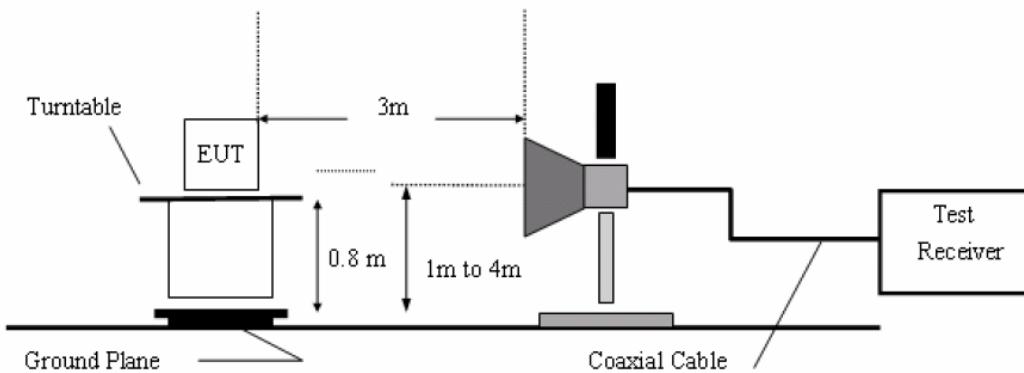


4.4. Test Results

Pass.


Please refer the following plot.

(Note: Marker 3 means the highest value in 2.31GHz~2.39GHz or 2.4835~2.5GHz)

FCC ID: QZUCW-01

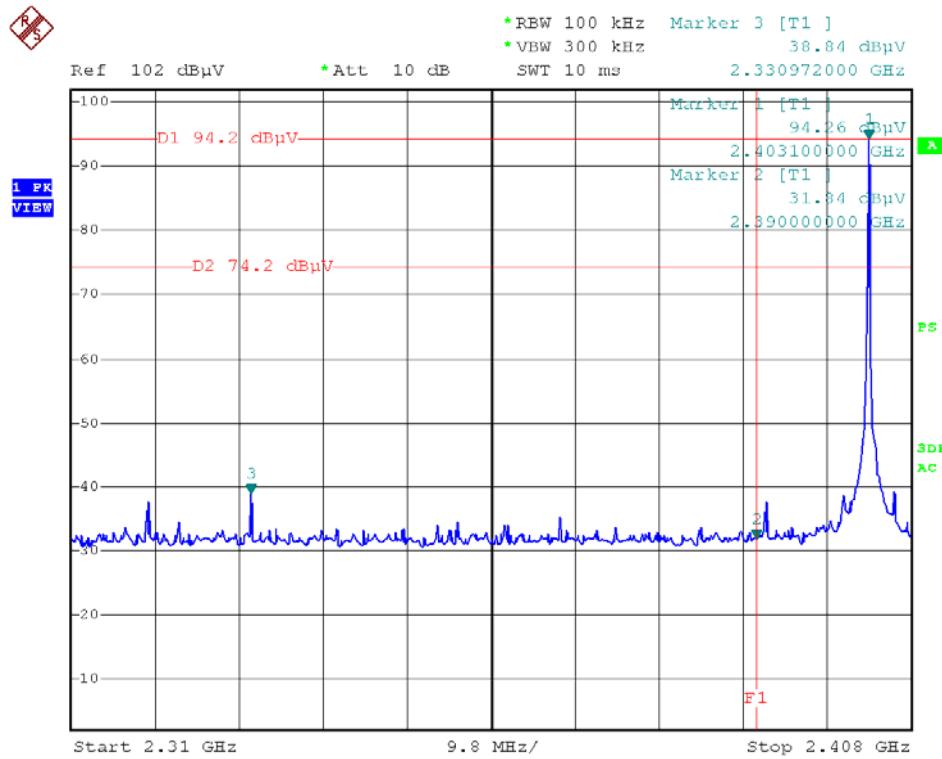

Date: 28.NOV.2012 18:21:03

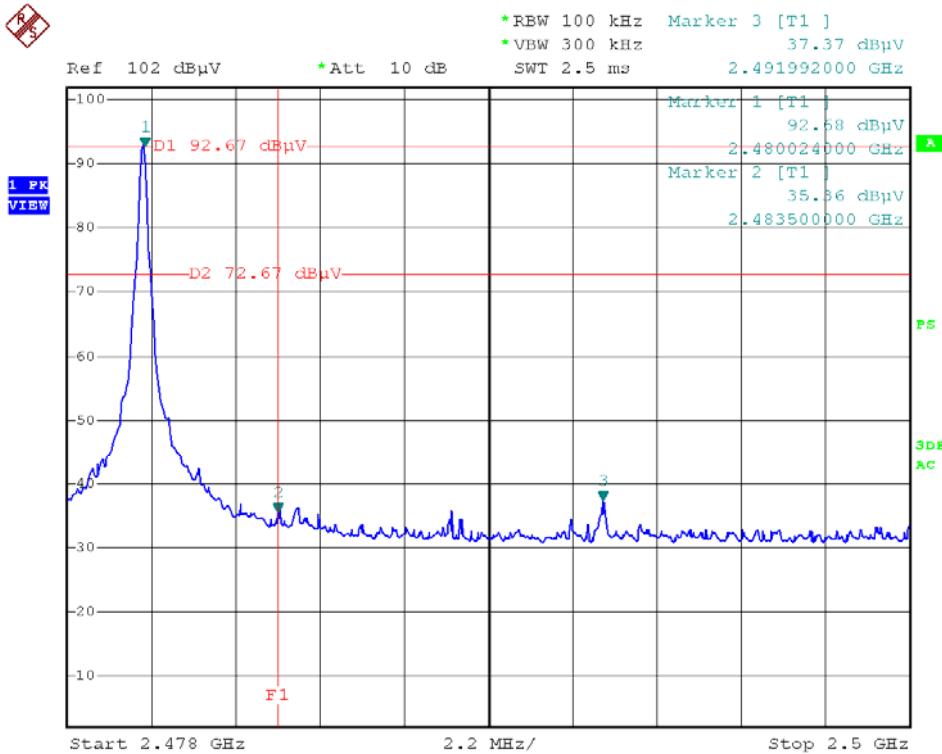

Date: 28.NOV.2012 18:19:38