

# Allegation

TEST REPORT FOR

**Single Tech Reader  
Model: SM10**

Tested To The Following Standards:

**FCC Part 15 Subpart C Section(s)**

**15.207 & 15.225  
(13.110-14.010 MHz)**

**Report No.: 99087-3**

Date of issue: December 16, 2016



This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of EMC testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

## TABLE OF CONTENTS

Administrative Information .....	3
Test Report Information .....	3
Report Authorization .....	3
Test Facility Information .....	4
Software Versions.....	4
Site Registration & Accreditation Information .....	4
Summary of Results .....	5
Modifications During Testing.....	5
Conditions During Testing.....	5
Equipment Under Test.....	6
General Product Information.....	6
FCC Part 15 Subpart C .....	7
15.215(c) Occupied Bandwidth (20dB BW) .....	7
15.225(a)-(c) Field Strength of Fundamental.....	10
15.225(d) Radiated Emissions.....	16
Supplemental Information.....	24
Measurement Uncertainty .....	24
Emissions Test Details.....	24

## ADMINISTRATIVE INFORMATION

### Test Report Information

**REPORT PREPARED FOR:**

Allegion  
500 Golden Ridge Road, Bldg 1, Suite 160  
Golden, CO 80401

**REPORT PREPARED BY:**

Terri Rayle  
CKC Laboratories, Inc.  
5046 Sierra Pines Drive  
Mariposa, CA 95338

REPRESENTATIVE: Bryan Hoff  
Customer Reference Number: 4071752

Project Number: 99087

**DATE OF EQUIPMENT RECEIPT:**  
**DATE(S) OF TESTING:**

November 14, 2016  
November 14-15, 2016

### Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the sample equipment tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.



*Steve Behm*  
Director of Quality Assurance & Engineering Services  
CKC Laboratories, Inc.

## Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):  
CKC Laboratories, Inc.  
5046 Sierra Pines Drive  
Mariposa, CA 95338

## Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.03.02

## Site Registration & Accreditation Information

Location	CB #	TAIWAN	CANADA	FCC	JAPAN
Mariposa A	US0103	SL2-IN-E-1147R	3082A-2	US1024	A-0136

## SUMMARY OF RESULTS

### Standard / Specification: FCC Part 15 Subpart C - 15.225

Test Procedure	Description	Modifications	Results
15.215(c)	Occupied Bandwidth	NA	Pass
15.225(a)-(c)	Field Strength of Fundamental	NA	Pass
15.225(e)	Frequency Stability	NA	NP
15.225(d)	Field Strength of Spurious Emissions	NA	Pass
15.207	AC Conducted Emissions	NA	NP

NA = Not Applicable

NP = CKC Laboratories was not contracted to perform test.

## Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

### Summary of Conditions

No modifications were made during testing.

**Modifications listed above must be incorporated into all production units.**

## Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

### Summary of Conditions

Since previous testing, the manufacturer has made the following modifications to the EUT.

Testing was performed to demonstrate continued compliance with the incorporated modifications.

1. U1 – NXP CLRC663
  - Added more vias to the pad footprint
  - Moved traces from under the part on inner layers 3 and 4
    - SPI Com Port – MOSI,MISO,SCK,NSS
    - Communication Select Lines
2. U4 – NXP P5FD081
  - Added more vias to the pad footprint
  - Moved traces from under the part on inner layers 3 and 4
    - SPI Com Port – MOSI,MISO,SCK,NSS
    - Single Wire UART
    - Reset Line

## EQUIPMENT UNDER TEST (EUT)

During testing, numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

### Configuration 1

#### *Equipment Tested:*

Device	Manufacturer	Model #	S/N
Single Tech Reader	Allegion	SM10	16440001

#### *Support Equipment:*

Device	Manufacturer	Model #	S/N
DC Power Supply	HP	6205C	2228A01775

## General Product Information:

Product Information	Manufacturer-Provided Details
Equipment Type:	Stand-Alone Equipment
Modulation Type(s):	CW
Maximum Duty Cycle:	Not Performed
Antenna Type(s) and Gain:	PCB Trace (.002445m^2) Gain: 0dB
Antenna Connection Type:	Integral
Nominal Input Voltage:	12VDC
Firmware / Software used for Test:	X14_14

## FCC Part 15 Subpart C

### 15.215(c) Occupied Bandwidth (20dB BW)

Test Setup/Conditions			
Test Location:	Mariposa Lab A	Test Engineer:	Benny Lovan
Test Method:	ANSI C63.10 (2013)	Test Date(s):	11/14/16
Configuration:	1		
Test Setup:	Radiated Emissions Fundamental Measurements (13.56MHz) Modulation: CW Antenna Type: Integral (PCB Trace) Antenna Gain 0dB Gain Antenna Size: .002445m <sup>2</sup> The EUT is powered by a DC power supply at 12VDC. The customer declares the EUT standard method of installation is wall mounted in the upright/vertical (Y-axis) orientation. The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz. Preliminary measurements indicated that the Y-Axis was worst case. The data presented was taken in the Y-Axis.		


Environmental Conditions			
Temperature (°C)	20	Relative Humidity (%):	38

Test Equipment					
Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
P06231	Cable	Andrew	CXTA04A-70	3/3/2016	3/3/2018
P06847	Cable	Times Microwave Systems	LMR195-FR-6	7/9/2015	7/9/2017
P06232	Cable	Andrew	CXTA04A-35	3/3/2016	3/3/2018
AN00226	Loop Antenna	EMCO	6502	4/4/2016	4/4/2018
02668	Spectrum Analyzer	Agilent	E4446A	8/26/2016	8/26/2017

### Test Data Summary

Frequency (MHz)	Antenna Port	Modulation	Measured (kHz)	Limit (kHz)	Results
13.56MHz	Integral	CW	0.023076	None	NA

### Plot

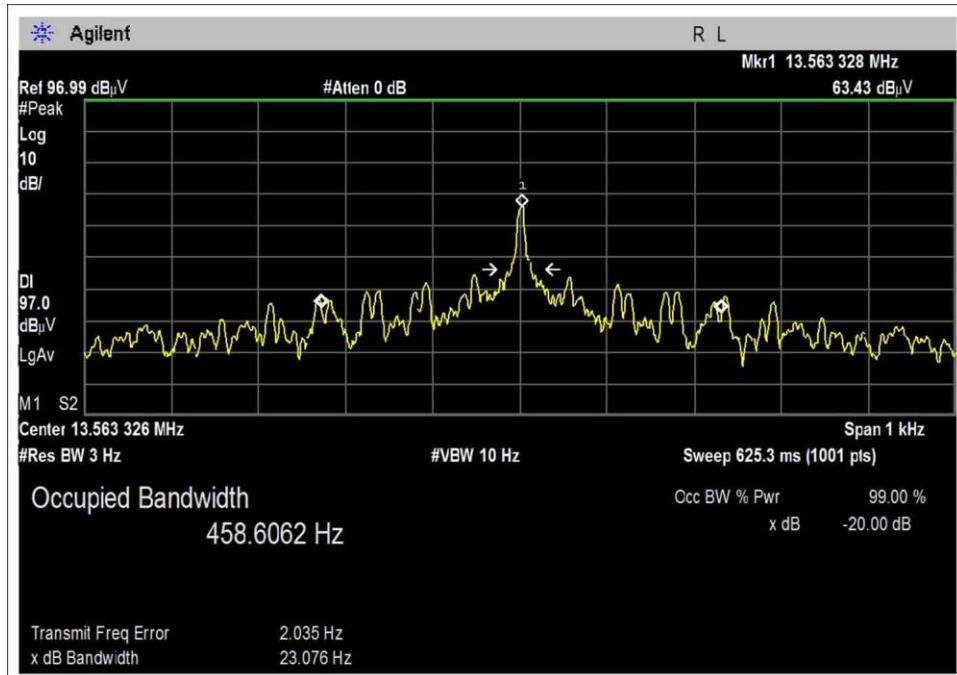

**Test Setup Photos**



## 15.225(a)-(c) Field Strength of Fundamental

Test Data Summary - Voltage Variations					
Frequency (MHz)	Modulation / Ant Port	V <sub>Minimum</sub> (dBuV/m)	V <sub>Nominal</sub> (dBuV/m)	V <sub>Maximum</sub> (dBuV/m)	Max Deviation from V <sub>Nominal</sub> (dB)
13.56 Parallel	CW / Integral Antenna	37.3	37.2	37.5	0.3
13.56 Perpendicular	CW / Integral Antenna	28.2	26.6	28.3	1.7
13.56 Ground Parallel	CW / Integral Antenna	37.3	37.2	37.5	0.3

Test performed using operational mode with the highest output power, representing worst case.

Worst case orientation for this unit was the Y-Axis.


### ***Parameter Definitions:***

Measurements performed at input voltage according to manufacturer specification.

Parameter	Value
V <sub>Nominal</sub> :	12.0 VDC
V <sub>Minimum</sub> :	5 VDC
V <sub>Maximum</sub> :	16 VDC

Test Data Summary – Radiated Field Strength Measurement					
Frequency (MHz)	Modulation	Ant. Type	Measured (dBuV/m @ 30m)	Limit (dBuV/m @ 30m)	Results
13.560 (Parallel)	CW	Integral PCB Trace	37.2	≤ 84	Pass
13.560 (Perpendicular)	CW	Integral PCB Trace	26.6	≤ 84	Pass
13.560 (Ground Parallel)	CW	Integral PCB Trace	37.2	≤ 84	Pass

## Emissions Mask Data

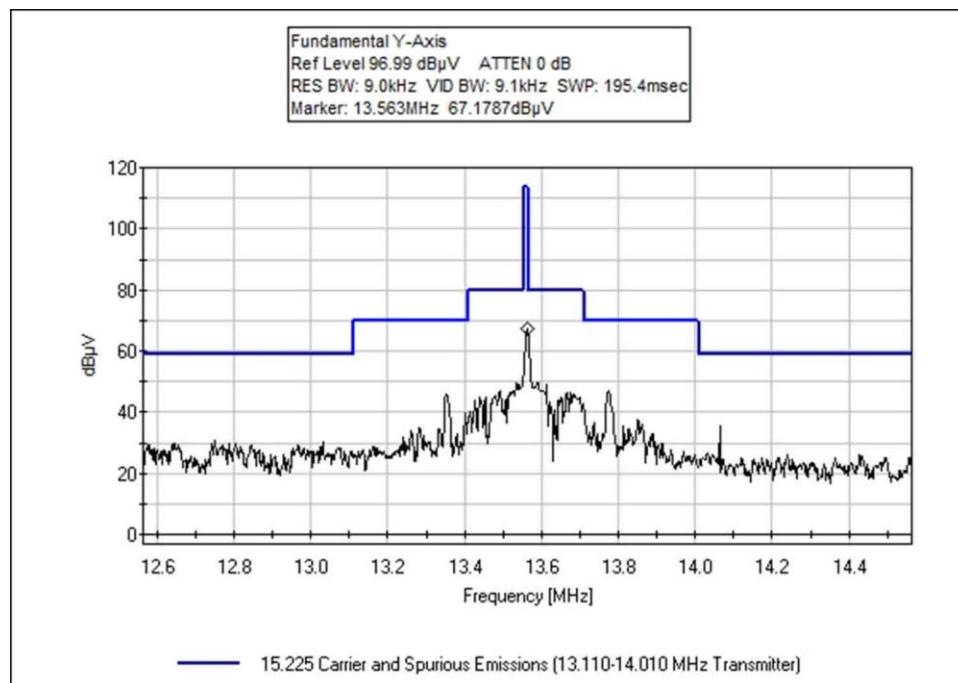

## Test Setup / Conditions / Data

Test Location: CKC Laboratories Inc. • 5046 Sierra Pines Dr. • Mariposa, CA 95338 • 209-966-5240  
 Customer: **Allegion**  
 Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
 Work Order #: **99087** Date: 11/14/2016  
 Test Type: **Radiated Scan** Time: 15:12:51  
 Tested By: Benny Lovan Sequence#: 1  
 Software: EMITest 5.03.02

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Test Conditions / Notes:***

Radiated Emissions Fundamental Measurements (13.56MHz)

Temperature: 20°C

Humidity: 38%

Atmospheric Pressure: 97.6 kPa

Method: ANSI C63.10 2013

Modulation: CW

Antenna Type: Integral (PCB Trace)

Antenna Gain 0dB Gain


Antenna Size: .002445m^2

The EUT is powered by a DC power supply at 12VDC. The customer declares the EUT standard method of installation is wall mounted in the upright/vertical (Y-axis) orientation.

The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz. Preliminary measurements indicated that the Y-Axis was worst case.

Voltage variation was performed at the declared limits of the power supply as specified by the manufacturer (5VDC and 16VDC).

Allegion WO#: 99087 Sequence#: 1 Date: 11/14/2016  
15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 3 Meters Ground Parallel

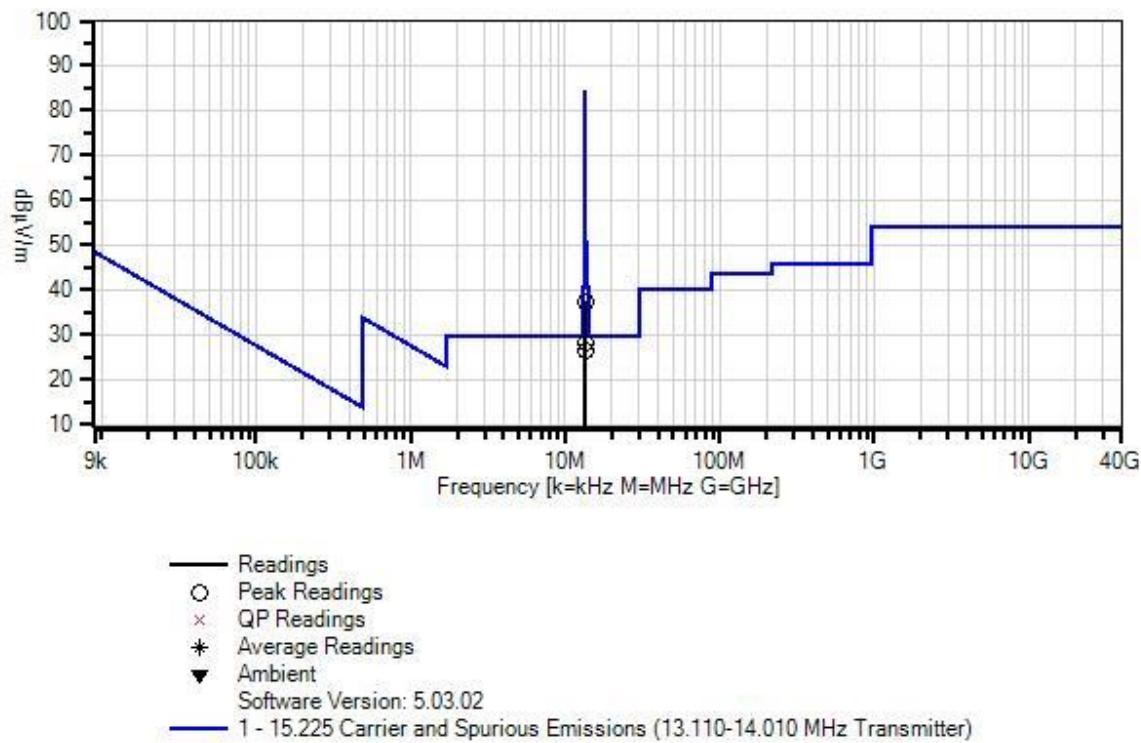


**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN00226	Loop Antenna	6502	4/4/2016	4/4/2018
T2	ANP06232	Cable	CXTA04A-35	3/3/2016	3/3/2018
T3	ANP06231	Cable	CXTA04A-70	3/3/2016	3/3/2018
T4	ANP06847	Cable	LMR195-FR-6	7/9/2015	7/9/2017
	AN02668	Spectrum Analyzer	E4446A	8/26/2016	8/26/2017

**Measurement Data:** Reading listed by margin. Test Distance: 3 Meters

#	Freq MHz	Rdng dB $\mu$ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB $\mu$ V/m	Spec dB $\mu$ V/m	Margin dB	Polar Ant
1	13.563M	67.1	+9.6	+0.2	+0.5	+0.1	-40.0	37.5	84.0	-46.5	Paral 16VDC Voltage VAR
2	13.563M	67.1	+9.6	+0.2	+0.5	+0.1	-40.0	37.5	84.0	-46.5	Groun 16VDC Voltage VAR
3	13.563M	66.9	+9.6	+0.2	+0.5	+0.1	-40.0	37.3	84.0	-46.7	Paral 5VDC Voltage VAR
4	13.563M	66.9	+9.6	+0.2	+0.5	+0.1	-40.0	37.3	84.0	-46.7	Groun 5VDC Voltage VAR
5	13.563M	66.8	+9.6	+0.2	+0.5	+0.1	-40.0	37.2	84.0	-46.8	Groun 12VDC Nominal
6	13.563M	66.8	+9.6	+0.2	+0.5	+0.1	-40.0	37.2	84.0	-46.8	Paral 12VDC Nominal
7	13.564M	57.9	+9.6	+0.2	+0.5	+0.1	-40.0	28.3	84.0	-55.7	Perpe 16VDC Voltage VAR
8	13.564M	57.8	+9.6	+0.2	+0.5	+0.1	-40.0	28.2	84.0	-55.8	Perpe 5VDC Voltage VAR
9	13.564M	56.2	+9.6	+0.2	+0.5	+0.1	-40.0	26.6	84.0	-57.4	Perpe 12VDC Nominal

**Test Setup Photos**

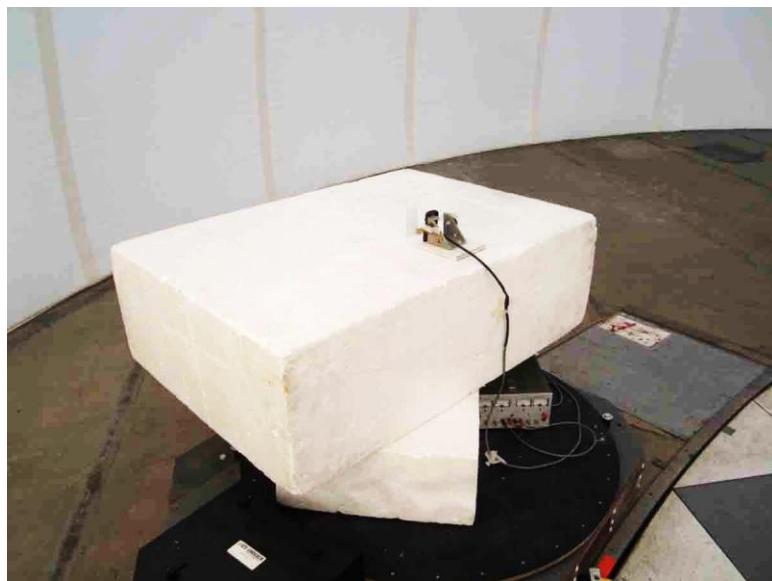

## 15.225(d) Radiated Emissions

### Test Data

Test Location: CKC Laboratories Inc. • 5046 Sierra Pines Dr. • Mariposa, CA 95338 • 209-966-5240  
 Customer: Allegion  
 Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
 Work Order #: **99087** Date: 11/15/2016  
 Test Type: **Radiated Scan** Time: 14:47:59  
 Tested By: Benny Lovan Sequence#: 1  
 Software: EMITest 5.03.02

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Test Conditions / Notes:***

Radiated Emissions Spurious Measurements (9kHz - 30MHz)

Temperature: 20°C

Humidity: 45%

Atmospheric Pressure: 98.2 kPa

Method: ANSI C63.10 2013

Modulation: CW

Antenna Type: Integral (PCB Trace)

Antenna Gain 0dB Gain


Antenna Size: .002445m^2

The EUT is powered by a DC power supply at 12VDC. The customer declares the EUT standard method of installation is wall mounted in the upright/vertical (Y-axis) orientation.

The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz.

Preliminary measurements indicated that the Y-Axis was worst case. The data presented was taken in the Y-Axis.

Allegion WO#: 99087 Sequence#: 1 Date: 11/15/2016  
15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 10 Meters Perpendicular

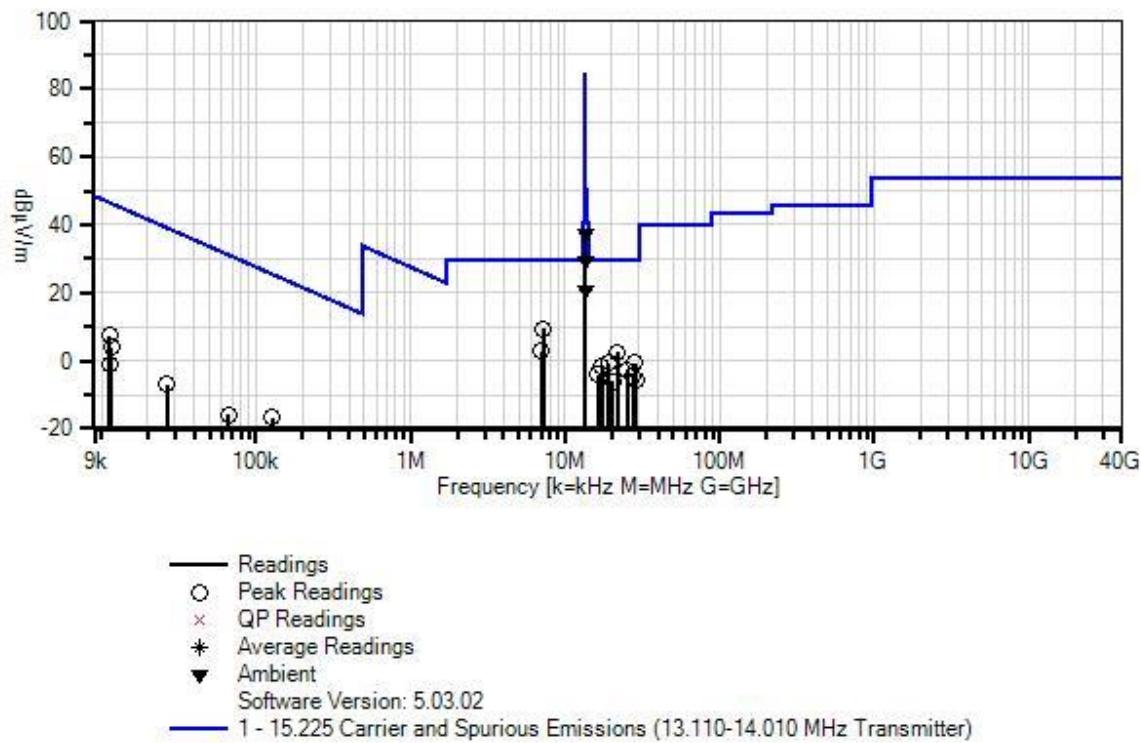

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN00226	Loop Antenna	6502	4/4/2016	4/4/2018
T2	ANP06847	Cable	LMR195-FR-6	7/9/2015	7/9/2017
T3	ANP04249	Cable	CXTA04A-50	3/3/2016	3/3/2018
T4	ANP06230	Cable	CXTA04A-50	3/3/2016	3/3/2018
	AN02668	Spectrum Analyzer	E4446A	8/26/2016	8/26/2017

**Measurement Data:** Reading listed by margin. Test Distance: 10 Meters

#	Freq MHz	Rdng dB $\mu$ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB $\mu$ V/m	Spec dB $\mu$ V/m	Margin dB	Polar Ant
1	7.237M	17.9	+9.9	+0.1	+0.2	+0.3	-19.1	9.3	29.5	-20.2	Groun
2	6.980M	11.3	+9.9	+0.1	+0.2	+0.3	-19.1	2.7	29.5	-26.8	Paral
3	21.823M	12.9	+7.8	+0.1	+0.4	+0.5	-19.1	2.6	29.5	-26.9	Groun
4	28.279M	11.5	+5.8	+0.1	+0.4	+0.6	-19.1	-0.7	29.5	-30.2	Groun
5	19.162M	9.2	+8.3	+0.1	+0.3	+0.5	-19.1	-0.7	29.5	-30.2	Perpe
6	17.250M	7.8	+8.9	+0.1	+0.3	+0.5	-19.1	-1.5	29.5	-31.0	Paral
7	25.173M	8.2	+7.2	+0.1	+0.4	+0.6	-19.1	-2.6	29.5	-32.1	Groun
8	16.180M	5.0	+9.2	+0.1	+0.3	+0.5	-19.1	-4.0	29.5	-33.5	Perpe
9	27.451M	7.1	+6.2	+0.1	+0.4	+0.6	-19.1	-4.7	29.5	-34.2	Perpe
10	28.500M	6.4	+5.7	+0.1	+0.4	+0.6	-19.1	-5.9	29.5	-35.4	Paral
11	20.117M	3.9	+8.1	+0.1	+0.4	+0.5	-19.1	-6.1	29.5	-35.6	Perpe
12	11.350k	50.7	+15.7	+0.0	+0.0	+0.0	-59.1	7.3	46.5	-39.2	Perpe
13	126.751k	31.8	+10.5	+0.0	+0.1	+0.1	-59.1	-16.6	25.5	-42.1	Groun
14	11.555k	47.6	+15.6	+0.0	+0.0	+0.0	-59.1	4.1	46.3	-42.2	Paral
15	26.695k	39.8	+12.4	+0.0	+0.0	+0.1	-59.1	-6.8	39.1	-45.9	Paral

16	13.564M Ambient	46.1	+9.6	+0.1	+0.3	+0.5	-19.1	37.5	84.0	-46.5	Paral
17	66.315k	32.7	+10.6	+0.0	+0.0	+0.0	-59.1	-15.8	31.2	-47.0	Perpe
18	11.475k	42.5	+15.6	+0.0	+0.0	+0.0	-59.1	-1.0	46.4	-47.4	Groun
19	146.315k	25.7	+10.2	+0.0	+0.0	+0.1	-59.1	-23.1	24.3	-47.4	Perpe
20	13.564M Ambient	38.0	+9.6	+0.1	+0.3	+0.5	-19.1	29.4	84.0	-54.6	Groun
21	13.564M Ambient	29.6	+9.6	+0.1	+0.3	+0.5	-19.1	21.0	84.0	-63.0	Perpe
											Fundamental

Test Location: CKC Laboratories Inc. • 5046 Sierra Pines Dr. • Mariposa, CA 95338 • 209-966-5240  
 Customer: **Allegion**  
 Specification: **15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter)**  
 Work Order #: **99087** Date: 11/15/2016  
 Test Type: **Radiated Scan** Time: 16:09:15  
 Tested By: Benny Lovan Sequence#: 1  
 Software: EMITest 5.03.02

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 1			

***Test Conditions / Notes:***

Radiated Emissions Spurious Measurements (30MHz-1000MHz)

Temperature: 20°C

Humidity: 45%

Atmospheric Pressure: 98.2 kPa

Method: ANSI C63.10 2013

Modulation: CW

Antenna Type: Integral (PCB Trace)

Antenna Gain 0dB Gain


Antenna Size: .002445m<sup>2</sup>

The EUT is powered by a DC power supply at 12VDC. The customer declares the EUT standard method of installation is wall mounted in the upright/vertical (Y-axis) orientation.

The EUT is setup on an 80cm foam block. It has been programmed to continuously transmit the RFID signal at 13.56MHz.

Preliminary measurements indicated that the Y-Axis was worst case. The data presented was taken in the Y-Axis.

Allegion WO#: 99087 Sequence#: 1 Date: 11/15/2016  
15.225 Carrier and Spurious Emissions (13.110-14.010 MHz Transmitter) Test Distance: 10 Meters Horiz

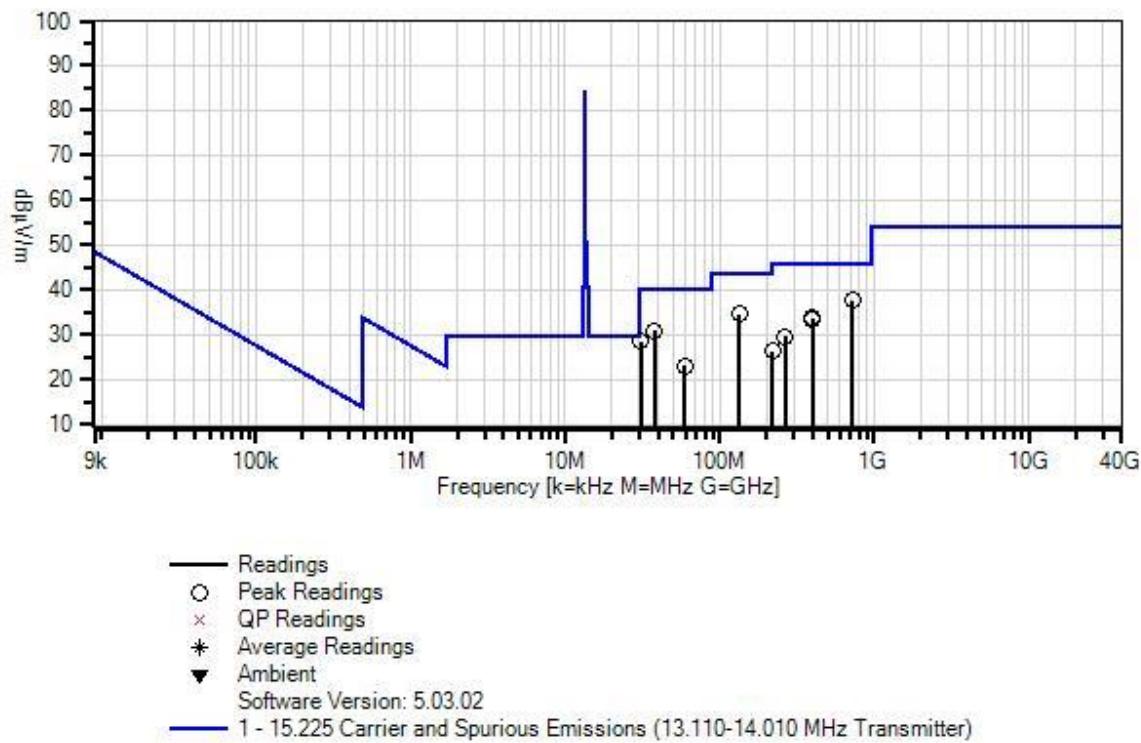

**Test Equipment:**

ID	Asset #/Serial #	Description	Model	Calibration Date	Cal Due Date
T1	ANP06847	Cable	LMR195-FR-6	7/9/2015	7/9/2017
T2	ANP04249	Cable	CXTA04A-50	3/3/2016	3/3/2018
T3	ANP06230	Cable	CXTA04A-50	3/3/2016	3/3/2018
T4	ANP06883	Cable	LMR195-FR-3	10/27/2015	10/27/2017
T5	AN00449	Preamp-Top Amp (dB)	8447F	2/18/2016	2/18/2018
T6	ANP05656	Attenuator	PE7004-6	12/22/2015	12/22/2017
T7	AN01993	Biconilog Antenna	CBL6111C	3/11/2016	3/11/2018
	AN02668	Spectrum Analyzer	E4446A	8/26/2016	8/26/2017

**Measurement Data:**

Reading listed by margin.

Test Distance: 10 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7	dB	Table	dB $\mu$ V/m	dB $\mu$ V/m	dB	Ant
MHz	dB $\mu$ V	dB	dB	dB	dB	Table	dB $\mu$ V/m	dB $\mu$ V/m	dB	Ant	
1	718.300M	19.8	+0.7	+2.2	+3.3	+0.4	+10.5	37.7	46.0	-8.3	Vert
			-27.9	+6.0	+22.7						
2	132.860M	30.5	+0.3	+0.9	+1.3	+0.2	+10.5	34.5	43.5	-9.0	Horiz
			-26.9	+6.0	+11.7						
3	37.558M	25.7	+0.2	+0.5	+0.7	+0.1	+10.5	30.9	40.0	-9.1	Horiz
			-27.1	+6.0	+14.3						
4	31.014M	19.6	+0.1	+0.4	+0.6	+0.1	+10.5	28.5	40.0	-11.5	Vert
			-27.2	+6.0	+18.4						
5	395.950M	23.3	+0.5	+1.6	+2.4	+0.3	+10.5	33.7	46.0	-12.3	Horiz
			-27.0	+6.0	+16.1						
6	399.640M	22.8	+0.5	+1.6	+2.4	+0.3	+10.5	33.2	46.0	-12.8	Verti
			-27.1	+6.0	+16.2						
7	263.156M	22.3	+0.4	+1.3	+1.9	+0.3	+10.5	29.5	46.0	-16.5	Verti
			-26.3	+6.0	+13.1						
8	59.334M	25.7	+0.2	+0.6	+0.9	+0.1	+10.5	23.0	40.0	-17.0	Horiz
			-27.1	+6.0	+6.1						
9	217.860M	22.3	+0.4	+1.2	+1.7	+0.2	+10.5	26.4	46.0	-19.6	Horiz
			-26.5	+6.0	+10.6						

**Test Setup Photos**



## SUPPLEMENTAL INFORMATION

### Measurement Uncertainty

Uncertainty Value	Parameter
4.73 dB	Radiated Emissions
3.34 dB	Mains Conducted Emissions
3.30 dB	Disturbance Power

Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ . Compliance is deemed to occur provided measurements are below the specified limits.

### Emissions Test Details

#### TESTING PARAMETERS

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

#### CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in  $\text{dB}\mu\text{V}/\text{m}$ , the spectrum analyzer reading in  $\text{dB}\mu\text{V}$  was corrected by using the following formula. This reading was then compared to the applicable specification limit. Individual measurements were compared with the displayed limit value in the margin column. The margin was calculated based on subtracting the limit value from the corrected measurement value; a positive margin represents a measurement exceeding the limit, while a negative margin represents a measurement less than the limit.

SAMPLE CALCULATIONS	
Meter reading	( $\text{dB}\mu\text{V}$ )
+ Antenna Factor	( $\text{dB}/\text{m}$ )
+ Cable Loss	(dB)
- Distance Correction	(dB)
- Preamplifier Gain	(dB)
= Corrected Reading	( $\text{dB}\mu\text{V}/\text{m}$ )

## TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9 kHz	150 kHz	200 Hz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

## SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or caret ("^") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

### Peak

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

### Quasi-Peak

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

### Average

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point the measuring device is set into the linear mode and the scan time is reduced.