

12. TEST CONFIGURATION POSITIONS


12.1 The exterior of the device

	
· Position: Front of EUT	· Position: Rear of EUT
	
· Position: Bottom of EUT	· Position: Top of EUT
	
· Position: Right of EUT	· Position: Left of EUT

12. TEST CONFIGURATION POSITIONS(Continued)


12.2 The following test configurations have been applied in this test report(only WiMAX):

SAR test was performed with following two orientations on the following closest separation distance to the edge or surface with all modulations by positioning the modem 1 cm away from the flat phantom (air-gap).
(Refer to attached manufacturer's drawings to determine closest separation between antenna and surfaces or edges)

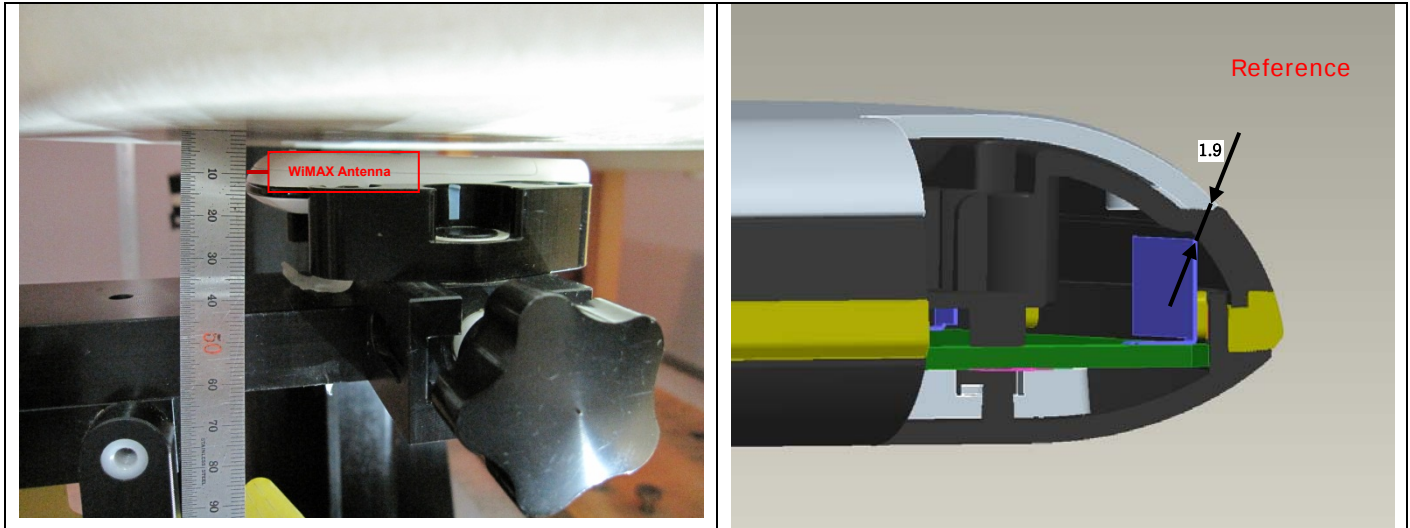

A: Laptop Model : PSME4K-014001 (Horizontal Down)

The Horizontal Down of the EUT face to the phantom with 10 mm separation distance.

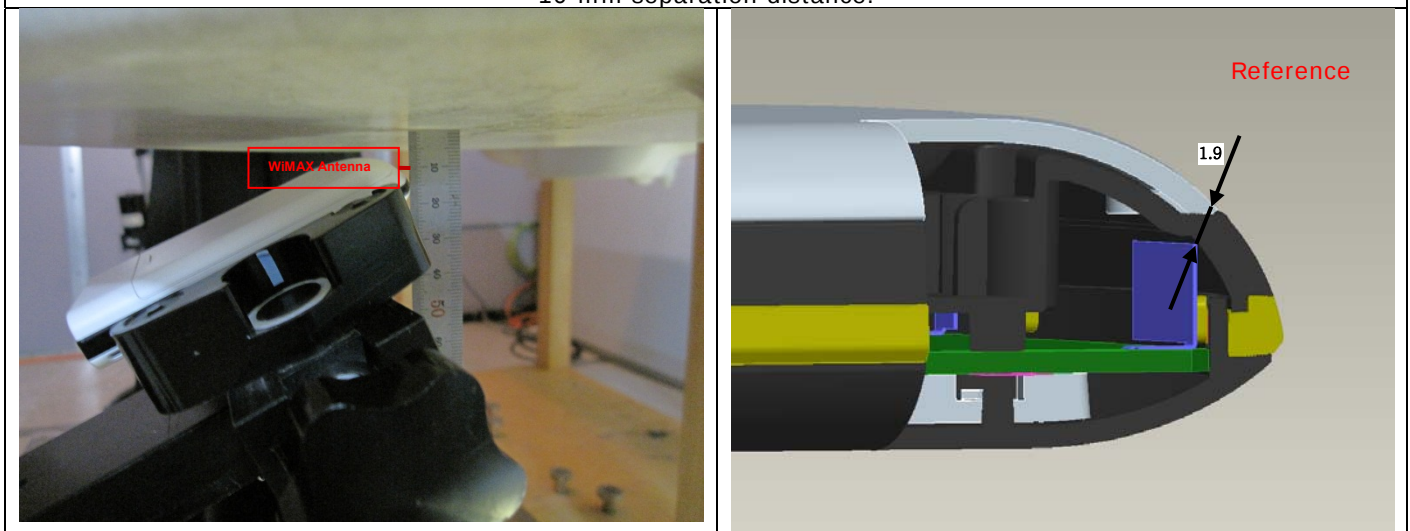

B: Laptop Model : PSME4K-014001 (Horizontal Down curve)

The Horizontal Down curve of the EUT face to the phantom with 10 mm separation distance.