



# Electromagnetic Emission

# FCC MEASUREMENT REPORT

## CERTIFICATION OF

## FCC PART15 COMPLIANCE

<b>PRODUCT</b>	: Power Supply
<b>MODEL/TYPE NO</b>	: SUPER365, SUPER310, SUPER300
<b>FCC ID</b>	: R2QSUPER365310300
<b>TRADE NAME</b>	: NETCOMKOREA
<b>APPLICANT</b>	: NETCOMKOREA Co., Ltd. #306, Daerung Techno Town 5 <sup>TH</sup> , 493, Gasan-Dong, Geumcheon-Gu, Seoul, 153-023, Korea Attn. : Jung, Sook-Ho / President
<b>FCC CLASSIFICATION</b>	: JBP : Part 15 Class B
<b>FCC RULE PART(S)</b>	: FCC Part 15 Subpart B Class B
<b>FCC PROCEDURE</b>	: Certification
<b>DATES OF TEST</b>	: March 23 2004
<b>DATES OF ISSUE</b>	: March 23 2004
<b>TEST REPORT No.</b>	: BWS-04-EF-0016
<b>TEST LAB.</b>	: BWS TECH Inc. (Registration No.: 553281)

This **Power Supply** has been tested in accordance with the measurement procedures specified in ANSI C63.4-2000 at the BWS TECH/EMC Test Laboratory and has been shown to be complied with the electromagnetic emission limits specified in FCC Rule Part15 Subpart B Section15.107 and 15.109.

I attest to the accuracy of data. All measurement herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Lee Young-Soo  
Chief of Laboratory Division  
BWS TECH Inc.

**BWS TECH Inc.**

[www.bws.co.kr](http://www.bws.co.kr)

294-9, Jungdae-Dong, Kwangju-Si, Kyunggi-Do, 464-080, Korea  
TEL: +82 31 762 0124 FAX: +82 31 762 0126

## TABLE OF CONTENTS

---

	Pages
1. General Information	3
2. Description of Test Facility	4
3. Product Information	5
4. Description of Tests	6~7
5. Test Condition	8~9
6. Test Results	10~14
7. Sample Calculation and Other Information	15
8. Test Equipment List	16
Appendix 1. Test Setup Photos	
Appendix 2. FCC ID Label and location	
Appendix 3. External Photos of EUT	
Appendix 4. Internal Photos of EUT	
Appendix 5. Block Diagram	
Appendix 6. User Manual	

## FCC TEST REPORT

**Scope** - *Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC).*

### 1. General Information

#### Applicant Information

Company Name : NETCOMKOREA Co., Ltd.  
Company Address : #306, Daerung Techno Town 5<sup>TH</sup>, 493, Gasan-Dong, Geumcheon-Gu, Seoul, 153-023, Korea  
Phone/Fax : Phone: +82-2-2107-7477 Fax: +82-2-2107-7479

#### Manufacturer Information

Company Name : NETCOMKOREA Co., Ltd.  
Company Address : #306, Daerung Techno Town 5<sup>TH</sup>, 493, Gasan-Dong, Geumcheon-Gu, Seoul, 153-023, Korea  
Phone/Fax : Phone: +82-2-2107-7477 Fax: +82-2-2107-7479

- EUT Type : Power Supply
- Model Number : SUPER365, SUPER310, SUPER300
- FCC Identifier : **R2QSUPER365310300**
- S/N : Prototype
- FCC Rule Part(s) : Part 15 Subpart B Class B
- Test Procedure : ANSI C63.4-2000
- Date of Tests : March 23 2004
- Place of Tests : BWS TECH Inc.  
EMC Testing Lab (FCC Registration Number : 553281)  
294-9, Jungdae-Dong, Kwangju-Si,  
Kyunggi-Do, 464-080, Korea  
TEL: +82 31 762 0124 FAX: +82 31 762 0126
- Test Report No. : BWS-04-EF-0016

## 2. Description of Test Facility

---

The measurement for radiated emission test were practiced at the open area test site of BWS TECH Inc. Measurement for conducted emission test were practiced at the semi EMC Anechoic Chamber test site of BWS TECH Inc. facility located at 294-9, Jungdae-Dong, Kwangju-Si, Kyunggi-Do, Korea. The site is constructed in conformance with the requirements of the ANSI C63.4-2000 and CISPR Publication 16. The BWS TECH measurement facility has been filed to the Commission with the FCC for 3 and 10meter site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-2000 and registered to the Federal Communications Commission(Registration Number : 553281 ).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C.63.4-2000) was used in determining radiated and conducted emissions from the NETCOMKOREA Co., Ltd. Power Supply Model: SUPER365, SUPER310, SUPER300.

### 3. Product Information

#### 3.1 Equipment Description

The Equipment Under Test(EUT) is the NETCOMKOREA Co., Ltd. Power Supply. model: SUPER365, SUPER310, SUPER300 (FCC ID : R2QSUPER365310300 ). This Power Supply is installed in the Personal Computer.

#### 3.2 General Specification

SUPER POWER								
PENTIUM 4 SWITCHING POWER SUPPLY								
AC ~ INPUT	100 ~ 120	200 ~ 240	4.0A / 6.3A	47 ~ 63 HZ				
DC ~ OUTPUT	+3.3	+5	+12	-5	-12	+5SB	+3.3V,+5V and +12V max	TOTAL
SUPER 300	9-28A	18-30A	16A	0.3A	0.8A	2.0A	285W	300W
SUPER 310	9-28A	18-30A	16A	0.3A	0.8A	2.0A	285W	300W
SUPER 365	10-28A	20-30A	18A	0.3A	1.2A	2.2A	325W	350W
To prevent electric shock, Do not open cover, refer servicing to qualified service personnel.								

#### 3.3 Variations covered by this report

Model Difference: N/A

Technical Deviation: N/A

#### 3.4 Additional Information Related to Testing

Test results apply only to the particular sample tested and functionality described in this test report. This report may be reproduced in full. Partial reproduction may only be made with the written permission of the BWS TECH Inc.

## 4. Description of Tests

---

### 4.1 Conducted Emission Measurement

Conducted emissions measurements were made in accordance with section 11, "Measurement of Information Technology Equipment" of ANSI C63.4-2000. The measurement were performed over the frequency range of 0.15MHz to 30MHz using a 50 /50uH LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within an bandwidth of 10KHz or for "quasi-peak" within a bandwidth of 9KHz.

The line-conducted emission test is conducted inside a shielded anechoic chamber room with 1m x 1.5m x 0.8m wooden table which is placed 40cm away from the vertical wall and 1.5m away from the side wall of the chamber room. Two LISNs are bonded to the shielded room. The EUT is powered from the PMM LISN and the support equipment is powered from the another Koritsu LISN. Power to the LISNs is filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner  $\phi$  1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the EMCO LISN. All interconnecting cables more than 1m were shortened by non-inductive bundling(serprntine fashion) to a 1m length. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the R3261A Spectrum Analyzer to determine the frequency producing the max. emission from the EUT. The frequency producing the max. level was reexamined using the detector function set to the CISPR Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.45 to 30MHz. The bandwidth of the Spectrum Analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was maximized by switching power lines, varying the mode of operation or resolution, clock or data exchange speed, if applicable, whichever determined the worst-case emission. Each emission reported was calibrated using self-calibrating mode.

Photographs of the worst-case emission can be seen in photographs of conducted emission test setup.

## 4.2 Radiated Emission Measurement

Preliminary measurements were made at indoors 3meter semi EMC Anechoic Chamber using broadband antennas, broadband amplifier, and spectrum analyzer to determine the emission frequencies producing the maximum EME.

Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 1000MHz using biconilog antenna and above 1000MHz, linearly polarized double ridge horn antennas were used. Above 1GHz, linearly polarized double ridge horn antennas were used. The measurements were performed with three frequencies which were selected as bottom, middle and top frequency in the operating band. Emission level from the EUT with various configurations were examined on the spectrum analyzer connected with the RF amplifier and plotted graphically.

Final measurements were made outdoors open site at 10-meter test range using biconical and logperiodic antenna. The output from the antenna was connected, via a preselector or a preamplifier, to the input of the EMI Measuring Receiver and Spectrum analyzer(for above 1GHz). The detector function was set to the quasi-peak or peak mode as appropriate. The measurement bandwidth on the Field strength receiver was set to at least 120kHz (1MHz for measurement above 1GHz), with all post-detector filtering no less than 10 times the measurement bandwidth. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition.

Each frequency found during preliminary measurement was examined and investigated as the same set up and configuration which produced the maximum emission. The EUT, support equipment and interconnecting cables were configured to the set-up producing the maximum emission for the frequency and were placed on top of a 0.8-meter high non-metallic 1m x 1.5 meter table. The turntable containing the system was rotated and the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the maximum emission.

Each emission was maximized by varying the mode of operating frequencies of the EUT. The system was tested in all the three orthogonal planes and changing the polarity of the antenna. The worst case emissions are recorded in the data tables. If necessary, the radiated emission measurement could be performed at a closer distance to ensure higher accuracy and the results were extrapolated to the specified distance using an inverse linear distance extrapolation factor(20dB/decade) as per section 15.31(f).

Photographs of the worst-case emission test setup can be seen in Appendix A.

## 5. Test Condition

### 5.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the EUT and the supported equipments were installed to meet FCC requirement and operated in a manner which tends to maximize its emission level in a typical application.


#### Radiated Emission Test

Preliminary radiated emission tests were conducted using the procedure in ANSI C63.4/2000 Clause 8.3.1.1 to determine the worst operating condition. Final radiated emission tests were conducted at 10 meter open field test site.

### 5.2 EUT operation

EUT was tested according to the following operation modes provided by the specifications given by the manufacturer, and reported the worst emissions.

### 5.3 Test System layout on EUT and peripherals

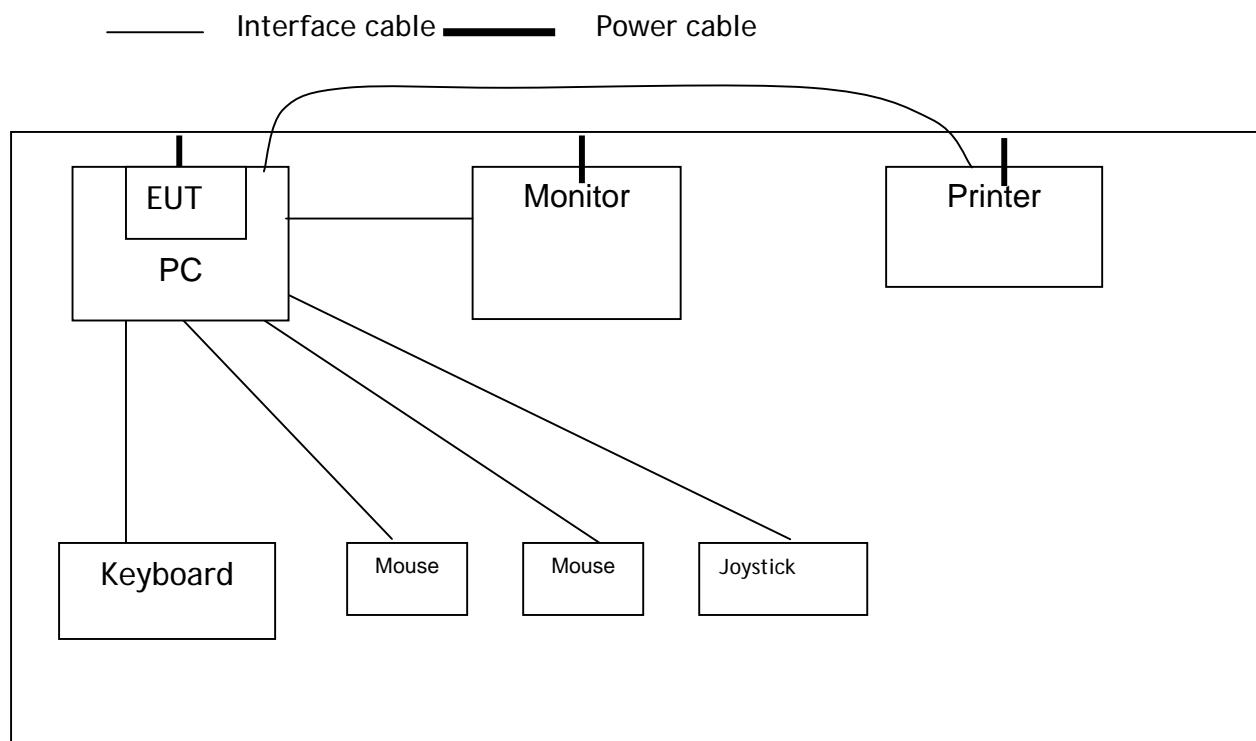

## 5.4 Peripherals / Support Equipment Used

Following peripheral devices and interface cables were connected during the measurement:

### Type of Peripheral Equipment Used:

Description	Model Name	Serial No.	Manufacturer	FCC ID
EUT	SUPER365, SUPER310, SUPER300	N/A	NETCOMKOREA Co., Ltd.	R2QSUPE R3653103 00
PC	BWS TEST-9	N/A	BWS TECH Inc.	DOC
Monitor	M782	BH68-00440P-09	Samsung Elec.	DOC
Printer	STYLUS COLOR 680	CPHY007222	Epson Korea.	DOC
Keyboard	KB-9963	B28ACONGANB5UY	COMPAQ	DOC
Mouse	Wheel Mouse 3.0 PS/2 COMPATIBLE	3218746-2	Microsoft	DOC
Mouse	Wheel Mouse 3.0 COMPATIBLE	3198287-2	Microsoft	DOC
Joystick	Side Winder Game Pad USB	N/A	Microsoft	DOC

### Type of Cables Used:

Device from	Device to	Type of Cable	Length(m)	Type of shield
PC	Monitor	VIDEO	1.8	Shielded
PC	Keyboard	PS/2	2.1	Unshielded
PC	Mouse	PS/2	1.8	Unshielded
PC	Mouse	Serial	1.5	Unshielded
PC	Joystick	USB	1.8	Unshielded
PC	Printer	Parallel	1.9	Shielded
EUT	Power Concenct	INLET	1.5	Unshielded

## 6. TEST RESULTS

---

### 6.1 Summary of Test Results

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

FCC Rule Parts	Measurement Required	Result
15.107(a)	Conducted Emission	Passed by - 3.78 dB
15.109(g)	Radiated Emissions	Passed by - 2.76 dB

The data collected shows that the NETCOMKOREA Co., Ltd. Power Supply - SUPER365, SUPER310, SUPER300 complies with technical requirements of the Part 15.107 and 15.109 of the FCC Rules.

#### Note: Modification to EUT

The device tested is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.

## 6.2 Conducted Emissions

EUT	: Power Supply Model: SUPER365, SUPER310, SUPER300 (SN:Prototype)	
Limit apply to	: FCC Part15 Subpart B Class B Section 15.107(a)	
Test Date	: March 23 2004	
Operating Condition	: Windows Operation Mode	
Environment Condition	: Humidity Level : 35 %RH, Temperature : 21	
Result	: Passed by - 3.78 dB	

The following table shows the highest levels of conducted emissions on both phase of Hot and Neutral line.

Tabulated Conducted Emission Test Data

Freq [MHz]	Correcon		Phase [H/N]	Quasi-Peak Mode				Average Mode				
	AMN	C.L		Limit	Reading	Emission Level	Margin	Limit	Reading	Emission Level	Margin	
				[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	
0.155	0.06	0.03	H	65.90	49.50	49.59	-16.31	55.90	40.90	40.99	-14.91	
0.170	0.06	0.03	H	65.40	42.10	42.19	-23.21	55.40	28.00	28.09	-27.31	
0.234	0.07	0.10	H	63.70	41.80	41.97	-21.73	53.70	32.70	32.87	-20.83	
0.316	0.08	0.22	N	61.30	44.90	45.20	-16.10	51.30	34.90	35.20	-16.10	
0.393	0.08	0.24	N	59.10	45.00	45.32	-13.78	49.10	45.00	45.32	-3.78	
0.470	0.07	0.28	H	56.90	50.00	50.35	-6.55	46.90	41.10	41.45	-5.45	
0.547	0.07	0.30	H	56.00	51.80	52.17	-3.83	46.00	41.10	41.47	-4.53	
0.630	0.07	0.30	N		49.00	49.37	-6.63		39.20	39.57	-6.43	
0.863	0.06	0.33	H		44.80	45.19	-10.81		37.90	38.29	-7.71	
1.253	0.04	0.44	H		43.20	43.68	-12.32		34.60	35.08	-10.92	
1.651	0.03	0.50	N		44.10	44.63	-11.37		36.40	36.93	-9.07	
2.037	0.03	0.55	H		43.30	43.88	-12.12		33.90	34.48	-11.52	
8.230	0.06	1.00	H	60.00	42.90	43.96	-16.04	50.00	23.50	24.56	-25.44	
9.330	0.07	1.01	H		46.90	47.98	-12.02		36.60	37.68	-12.32	
9.720	0.07	1.02	H		48.40	49.49	-10.51		38.50	39.59	-10.41	
10.190	0.08	1.04	H		50.80	51.92	-8.08		39.90	41.02	-8.98	
10.380	0.07	1.04	N		50.90	52.01	-7.99		38.90	40.01	-9.99	
10.820	0.06	1.06	H		46.60	47.72	-12.28		37.10	38.22	-11.78	

NOTES:

1. H : Hot Line , N : Neutral Line
2. Emission Level = Reading + Correction Factor
3. Measurements were performed at the AC Power Inlet of the host PC with the EUT plugged in the frequency band of 150 kHz ~30 MHz.



Tested by **Hyung Seok, Lee**

### 6.3 Radiated Emissions

EUT : Power Supply Model: SUPER365, SUPER310, SUPER300 (SN:Prototype)  
 Limit apply to : FCC Part15 Subpart B Class B Section 15.109(g)  
 Test Date : March 23 2004  
 Operating Condition : Windows Operation Mode  
 Environment Condition : Humidity Level : 18 %RH, Temperature : 11  
 Result : Passed by - 2.76 dB

### Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical.

Detector mode: CISPR Quasi-Peak mode (6dB Bandwidth: 120 kHz).

Measurement Distance: 3 meters.

Frequency [MHz]	Reading [dB $\mu$ V]	Polarization [*H/**V]	Ant.Factor [dB]	Cable Loss [dB]	Limit [dB $\mu$ V/m]	Emission Level [dB $\mu$ V/m]	Margin 04 [dB]
36.42	19.92	V	15.97	1.36	40.00	37.24	-2.76
41.85	20.92	V	14.03	1.45	40.00	36.41	-3.59
47.48	21.11	V	12.16	1.55	40.00	34.82	-5.18
61.37	26.15	V	7.75	1.76	40.00	35.66	-4.34
121.85	21.25	V	13.23	2.41	43.50	36.89	-6.61
132.64	19.17	V	13.95	2.52	43.50	35.64	-7.86
240.00	18.66	H	16.99	3.44	46.00	39.09	-6.91
336.12	22.85	H	13.71	4.08	46.00	40.64	-5.36
466.35	16.82	V	16.98	4.87	46.00	38.68	-7.32
510.15	16.79	H	18.09	5.14	46.00	40.02	-5.98
666.38	15.38	H	20.51	5.96	46.00	41.85	-4.15
782.52	14.01	H	22.48	6.65	46.00	43.14	-2.86


#### NOTES:

1. \* H : Horizontal polarization , \*\* V : Vertical polarization
2. Emission Level = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Emission Level
4. All other emissions not reported were more than 25dB below the permitted limit.




Tested by Lee, Hyung Seok

### Plots of Conducted Emission Test

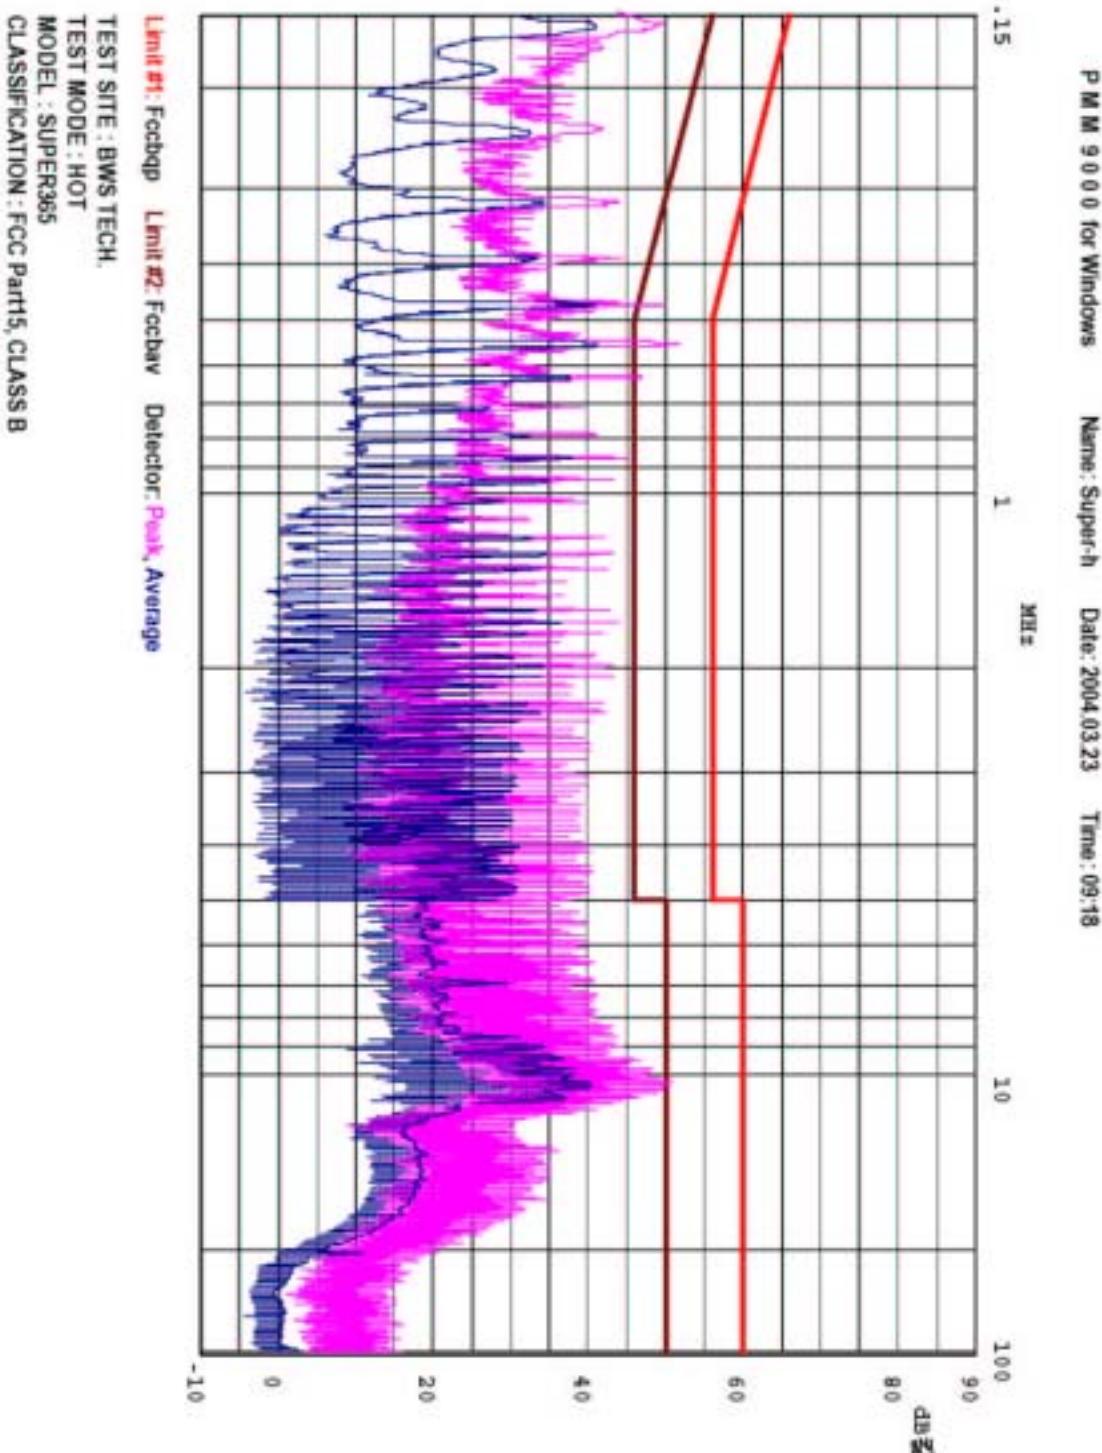

### Plots of Conducted Emission Test

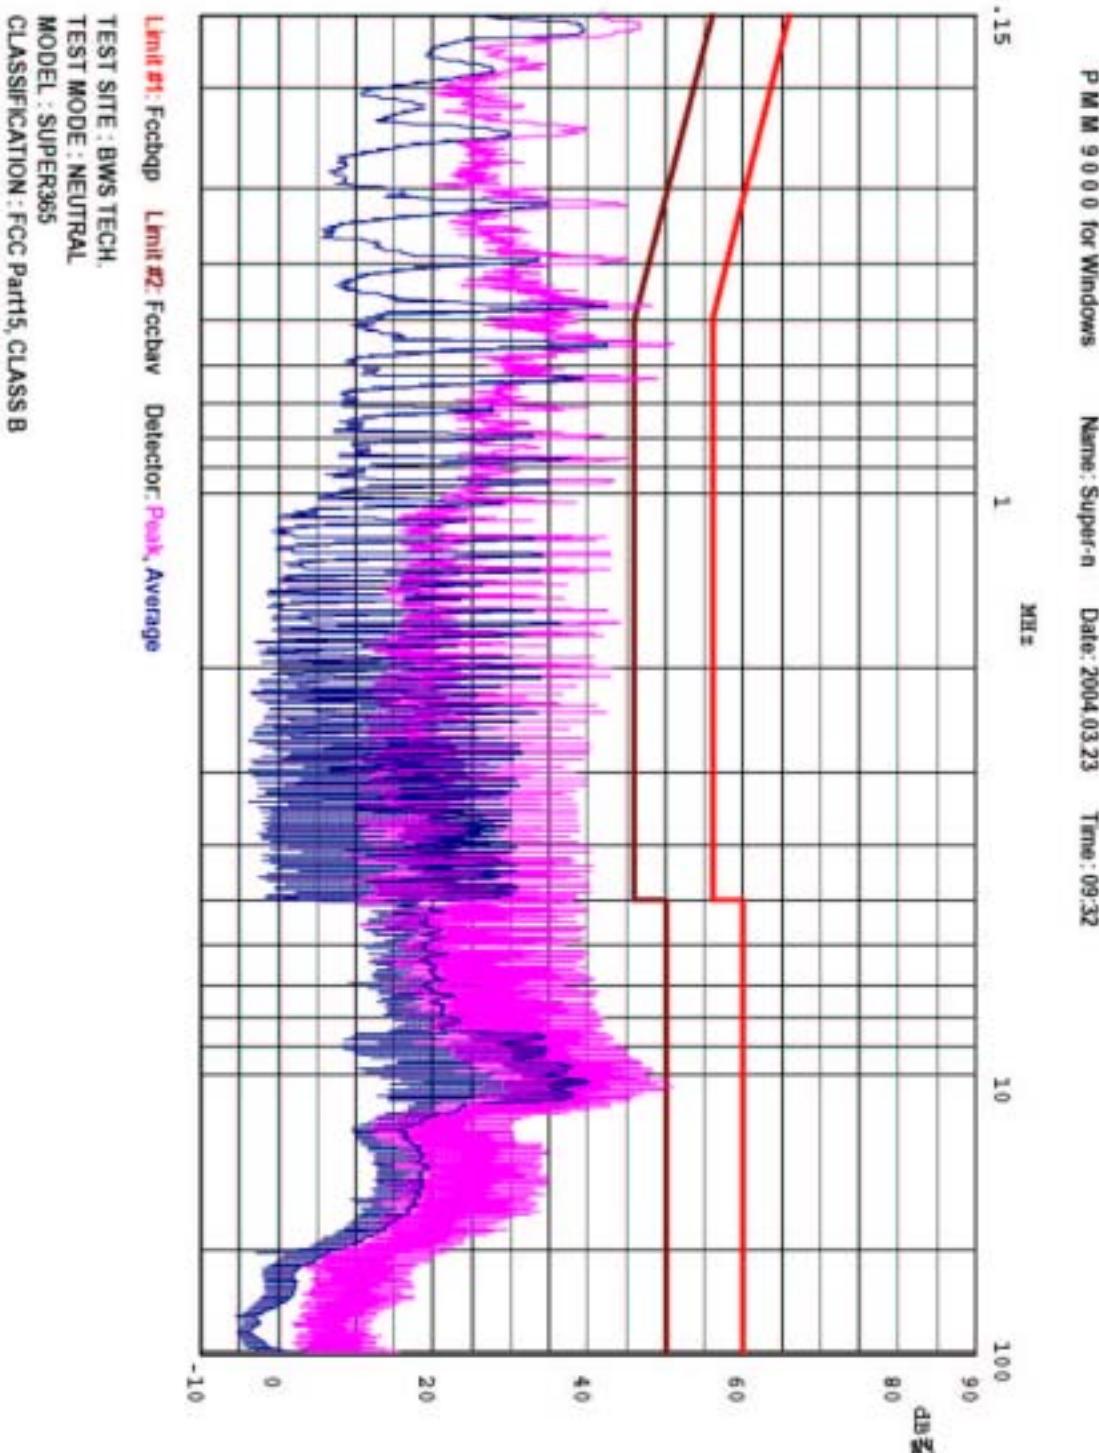

## 7. Sample Calculation and Other Information

### 7.1 Sample Calculations

$$\text{dB}\mu\text{V} = 20 \log 10 (\mu\text{V}/\text{m})$$

$$\mu\text{V} = 10^{(\text{dB}\mu\text{V}/20)}$$

#### EX. 1

@ 0.393 MHz Class B limit(Everage) = 49.10 dB $\mu$ V

Reading = 45.00 dB $\mu$ V (calibrated level)

AMN factor + Cable Loss = 0.32 dB

Total = 45.32 dB $\mu$ V/m

$$10^{(45.32/20)} = \mu\text{V}$$

Margin = 45.32 - 49.10 = - 3.78

3.78 dB; below limit

#### EX. 2

@ 36.42 MHz Class B limit = 40.00 dB $\mu$ V/m

Reading = 19.92 dB $\mu$ V(calibrated level)

Antenna factor + Cable Loss = 17.33 dB

Total = 37.24 dB $\mu$ V/m

$$10^{(37.24/20)} = \mu\text{V}/\text{m}$$

Margin = 37.24 - 40.00 = -2.76 dB

2.76 dB; below limit

### 7.2. Measurement Uncertainty

Measurement uncertainty of RFI Voltage Measurement test was estimated at  $\pm 3.51$  dB (k=2).

Measurement uncertainty of RFI Field Strength Measurement test was estimated at  $\pm 4.34$  dB (k=2).

## 8. TEST EQUIPMENTS LIST

The listing below denotes the test equipments utilized for the test(s).

<u>Test Equipment</u>	<u>Manufacture Model Number</u>	<u>Serial Number</u>	<u>Calibration Due date</u>
Signal Analyzer	PMM PMM9000	3100570602	09/09/04
Spectrum Analyzer	ADVANTEST R3261C	61720002	08/14/04
Amplifier (0.1MHz-1.3GHz)	HP 8447E	2945A02712	08/14/04
Biconical Antenna	SWALZBECK BBA9106	N/A	02/04/05
Log Periodic Antenna	SCHAFFNER UPA6109	N/A	02/04/05
Plotter	HP 7475A	007475A	N/A
Shield Room 7m x 4m x 4m	SEMITECH	000815	N/A
Turn Table	JAEMC JAC-2	N/A	N/A
Antenna Mast	Dae-il EMC JAC-1	N/A	N/A
Artificial Mains Network	KYORITSU KNW-242C	8-920-20	09/09/04
Artificial Mains Network	FCC FCC-LISN-50-50-2-02	03074	10/07/04
Antenna Turntable	JAEMC Controller	N/A JAC-2	N/A