


Block Diagram : **ecom[®] J2K-BA**


Oscillator frequencies
generated or used
in the device: : 12.000MHz / 14.7456MHz

J2K Basis (R2ZJ2K-BA)

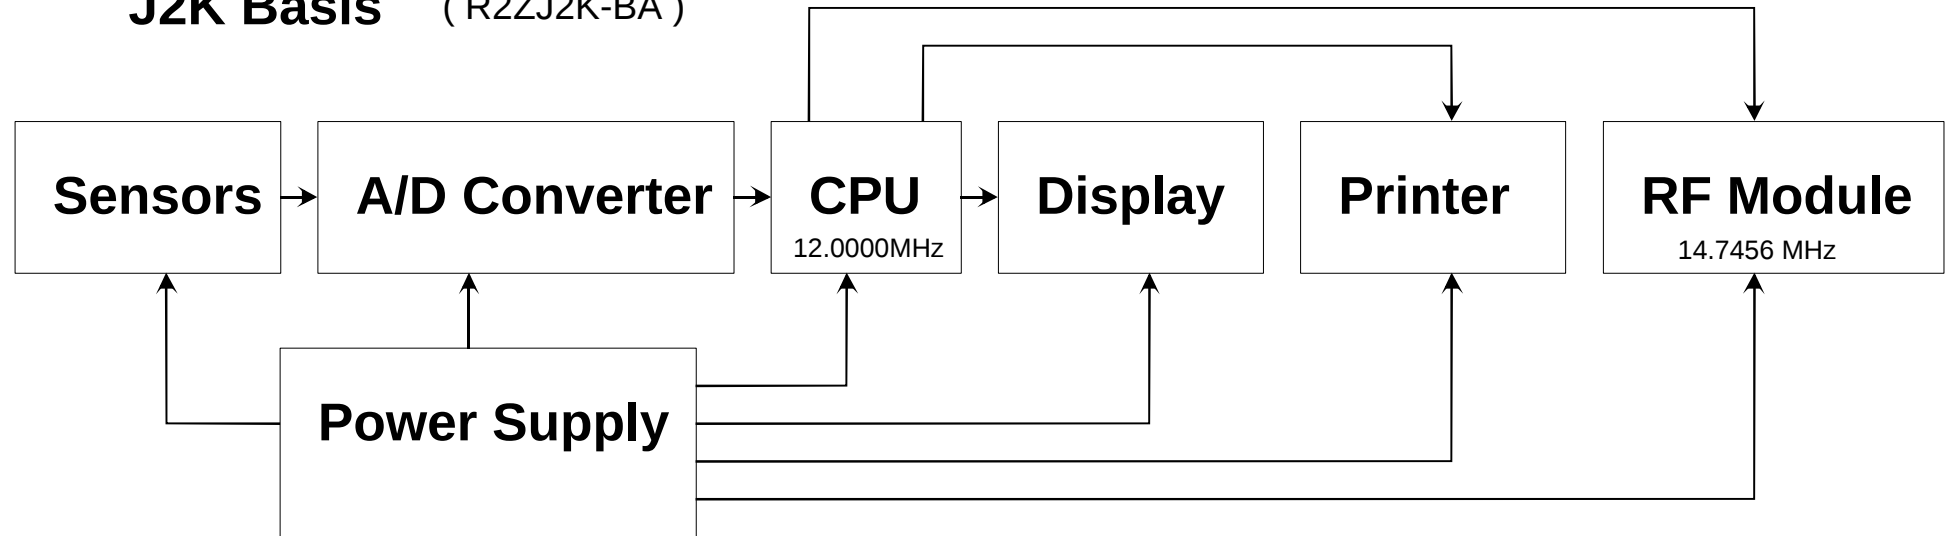

Control Module

(R2ZJ2K-BE)

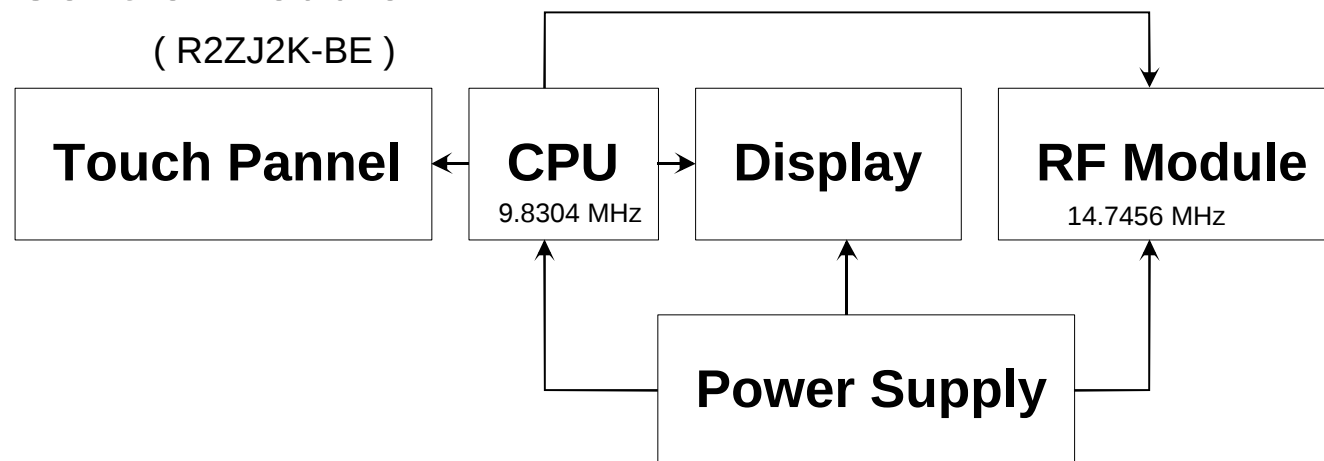

**Block Diagram J2K
21.04.04**