


This document contains confidential information proprietary to Control4 and may not be copied in whole or in part by any means without the prior authorization of Control4.

REVISION SPECIFICATION

REV: C
NAME: --
RELEASE DATE: --

BETA RELEASE

RELEASE TO PRODUCTION

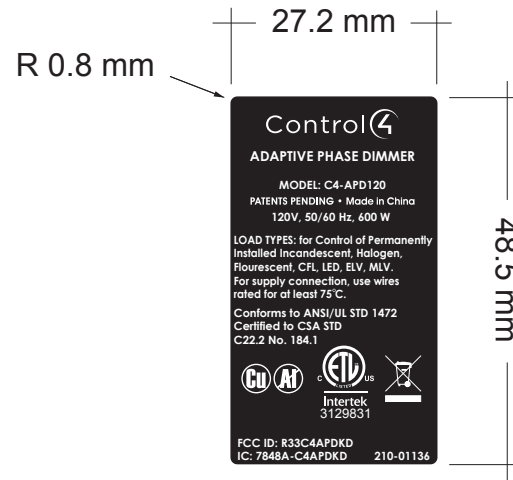

DOCUMENT SCHEDULE

SHEET 1: ARTWORK
SHEET 2: LABEL PLACEMENT

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL

PREMIUM COATED, THERMAL TRANSFER POLYESTER PAPER LABEL STOCK

SEE PART NUMBER 211-00023 FOR MATERIAL SPECIFICATION AND APPROVED MANUFACTURES

COLOR: BLACK

2. PRINTING

USE ARTWORK SHOWN ON SHEET 2 OF ADOBE ILLUSTRATOR FILE
PDF DOCUMENT IS FOR REFERENCE ONLY
PRINT COLOR: PANTONE 7541 C (White)

CHECKED	--	DATE	--	PLOT DATE	--
APPROVED	--	DATE	--	DRAWN BY	HELGA KINKADE
				DATE	1/3/2013
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		DESCRIPTION			
TOLERANCES		Adaptive Phase Dimmer 120V			
ANGLES: $\pm 1^\circ$		SIZE	A	PART #	210-01136
2 PLACE DIMS: ± 0.02				REV	C
3 PLACE DIMS: ± 0.005		SCALE	1:1	DO NOT SCALE	SHEET 1 OF 2


This document contains confidential information proprietary to Control4 and may not be copied in whole or in part by any means without the prior authorization of Control4.

REVISION SPECIFICATION

REV: C
NAME: --
RELEASE DATE: --

BETA RELEASE

RELEASE TO PRODUCTION

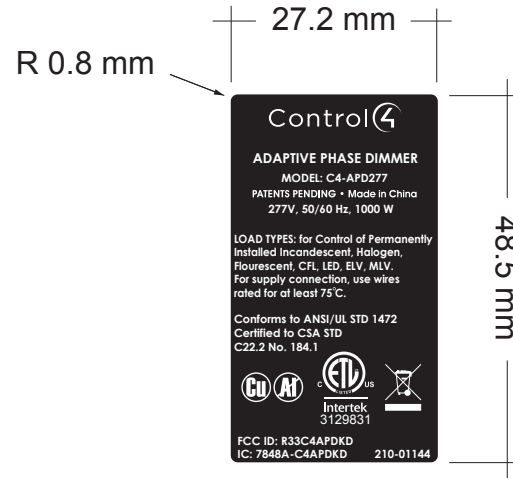

DOCUMENT SCHEDULE

SHEET 1: ARTWORK
SHEET 2: LABEL PLACEMENT

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL

PREMIUM COATED, THERMAL TRANSFER POLYESTER PAPER LABEL STOCK

SEE PART NUMBER 211-00023 FOR MATERIAL SPECIFICATION AND APPROVED MANUFACTURES

COLOR: BLACK

2. PRINTING

USE ARTWORK SHOWN ON SHEET 2 OF ADOBE ILLUSTRATOR FILE
PDF DOCUMENT IS FOR REFERENCE ONLY
PRINT COLOR: PANTONE 7541 C (White)

CHECKED	--	DATE	--	PLOT DATE	--
APPROVED	--	DATE	--	DRAWN BY	HELGA KINKADE
				DATE	1/3/2013
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		DESCRIPTION			
TOLERANCES		Adaptive Phase Dimmer 277V			
ANGLES: $\pm 1^\circ$		SIZE	A	PART #	210-01144
2 PLACE DIMS: ± 0.02				REV	C
3 PLACE DIMS: ± 0.005		SCALE	1:1	DO NOT SCALE	SHEET 1 OF 2


This document contains confidential information proprietary to Control4 and may not be copied in whole or in part by any means without the prior authorization of Control4.

REVISION SPECIFICATION

REV: C
NAME: --
RELEASE DATE: --

BETA RELEASE

RELEASE TO PRODUCTION

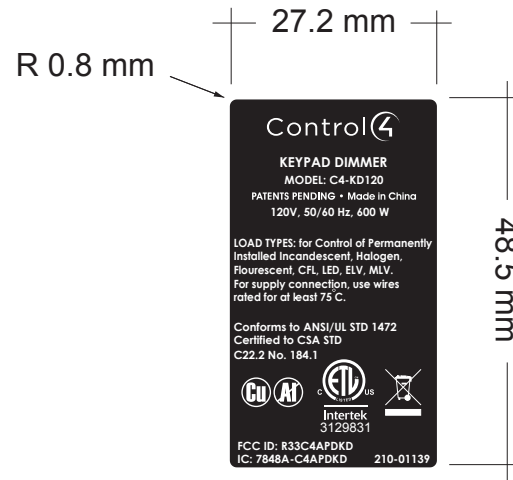

DOCUMENT SCHEDULE

SHEET 1: ARTWORK
SHEET 2: LABEL PLACEMENT

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL

PREMIUM COATED, THERMAL TRANSFER POLYESTER PAPER LABEL STOCK

SEE PART NUMBER 211-00023 FOR MATERIAL SPECIFICATION AND APPROVED MANUFACTURES

COLOR: BLACK

2. PRINTING

USE ARTWORK SHOWN ON SHEET 2 OF ADOBE ILLUSTRATOR FILE
PDF DOCUMENT IS FOR REFERENCE ONLY
PRINT COLOR: PANTONE 7541 C (White)

CHECKED	--	DATE	--	PLOT DATE	--
APPROVED	--	DATE	--	DRAWN BY	HELGA KINKADE
				DATE	1/3/2013
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		DESCRIPTION			
TOLERANCES		Combo Keypad Dimmer 120V			
ANGLES: $\pm 1^{\circ}$		SIZE	A	PART #	210-01139
2 PLACE DIMS: ± 0.02		SCALE		DO NOT SCALE	SHEET 1 OF 2
3 PLACE DIMS: ± 0.005				REV	C


This document contains confidential information proprietary to Control4 and may not be copied in whole or in part by any means without the prior authorization of Control4.

REVISION SPECIFICATION

REV: C
NAME: --
RELEASE DATE:

BETA RELEASE

RELEASE TO PRODUCTION

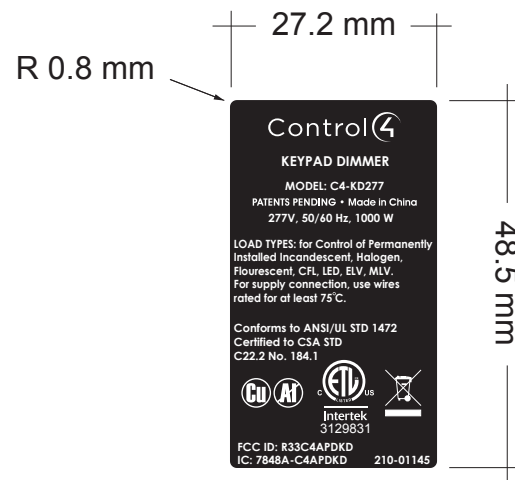

DOCUMENT SCHEDULE

SHEET 1: ARTWORK
SHEET 2: LABEL PLACEMENT

NOTES: UNLESS OTHERWISE SPECIFIED

1. MATERIAL

PREMIUM COATED, THERMAL TRANSFER POLYESTER PAPER LABEL STOCK

SEE PART NUMBER 211-00023 FOR MATERIAL SPECIFICATION AND APPROVED MANUFACTURES

COLOR: BLACK

2. PRINTING

USE ARTWORK SHOWN ON SHEET 2 OF ADOBE ILLUSTRATOR FILE
PDF DOCUMENT IS FOR REFERENCE ONLY
PRINT COLOR: PANTONE 7541 C (White)

CHECKED	--	DATE	--	PLOT DATE	--
APPROVED	--	DATE	--	DRAWN BY	HELGA KINKADE
				DATE	1/3/2013
UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES		DESCRIPTION			
TOLERANCES		Combo Keypad Dimmer 277V			
ANGLES: $\pm 1^\circ$		SIZE	A	PART #	210-01145
2 PLACE DIMS: ± 0.02		SCALE		DO NOT SCALE	SHEET 1 OF 2
3 PLACE DIMS: ± 0.005				REV	C