

Nemko-CCL, Inc.
1940 West Alexander Street
Salt Lake City, UT 84119
801-972-6146

Test Report
Certification

Test Of: C4-TW7C0 and SCH-7IN-TS

FCC ID: R33C4TW7C0

Test Specifications:
FCC PART 15, Subpart C

Test Report Serial No: 190368-13.5

Applicant:
Control4
11734 S. Election Road, Suite 200
Draper, UT 84020

Dates of Test: May 9 and 23-24, 2012

Report Issue Date: June 7, 2012

Accredited Testing Laboratory By:



NVLAP Lab Code 100272-0

CERTIFICATION OF ENGINEERING REPORT


This report has been prepared by Nemko-CCL, Inc. to document compliance of the device described below with the requirements of Federal Communications Commission (FCC) Part 15, Subpart C. This report may be reproduced in full, partial reproduction may only be made with the written consent of the laboratory. The results in this report apply only to the sample tested.

- Applicant: Control4
- Manufacturer: Control4
- Brand Name: Control4
- Model Numbers: C4-TW7C0
- Brand Name: CISCO
- Model Numbers: SCH-7IN-TS
- FCC ID Number: R33C4TW7C0

On this 7th day of June 2012, I, individually and for Nemko-CCL, Inc., certify that the statements made in this engineering report are true, complete, and correct to the best of my knowledge, and are made in good faith.

Although NVLAP has recognized that the Nemko-CCL, Inc. EMC testing facilities are in good standing, this report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government.

Nemko-CCL, Inc.



Tested by: Norman P. Hansen
EMC Technician

TABLE OF CONTENTS

| | PAGE |
|--|-------------|
| <u>SECTION 1.0 CLIENT INFORMATION</u> | 4 |
| <u>SECTION 2.0 EQUIPMENT UNDER TEST (EUT)</u> | 5 |
| <u>SECTION 3.0 TEST SPECIFICATION, METHODS & PROCEDURES</u> | 8 |
| <u>SECTION 4.0 OPERATION OF EUT DURING TESTING</u> | 14 |
| <u>SECTION 5.0 SUMMARY OF TEST RESULTS</u> | 15 |
| <u>SECTION 6.0 802.11b/g/n TRANSCEIVER – MEASUREMENTS AND RESULTS</u> | 16 |
| <u>APPENDIX 1 TEST PROCEDURES AND TEST EQUIPMENT</u> | 74 |
| <u>APPENDIX 2 PHOTOGRAPHS</u> | 80 |

SECTION 1.0 CLIENT INFORMATION

1.1 Applicant:

Company Name: Control4
11734 S. Election Road, Suite 200
Draper, UT 84020

Contact Name: Roger Midgley
Title: Sr. Regulatory Compliance Engineer

1.2 Manufacturer:

Company Name: Control4
11734 S. Election Road, Suite 200
Draper, UT 84020

Contact Name: Roger Midgley
Title: Sr. Regulatory Compliance Engineer

SECTION 2.0 EQUIPMENT UNDER TEST (EUT)**2.1 Identification of EUT:**

Brand Name: Control4
Model Number: C4-TW7C0
Serial Number: 5023C4
Dimensions: Display – 12.7 x 17.78 x 1.27 cm
Back Box – 5.715 x 9.25 x 3.81 cm

2.2 Description of EUT:

The C4-TW7C0 is a 7" display with capacitive touchscreen for use in Control4 home automation and security systems. The C4-TW7C0 may be powered by the AC mains or by power over the Ethernet port. Configurations using both power options were tested. For POE power, an Ault PW130 power supply/injector was used to power the C4-TSWMC7. The C4-TW7C0 has an 802.11b/g/n transceiver and an Ethernet port for interfacing the Control4 system.

This report also covers the SCH-7IN-TS. This device is exactly the same as the C4-TW7CO except in branding. The SCH model numbers are branded for Cisco. Both models can be housed in a black or white plastic casing.

The C4-TW7C0 802.11b/g/n transceiver uses 11 channels in the 2400 to 2483.5 MHz frequency range. The antenna is an inverted F trace antenna on the PCB. The channels and the maximum transmitter power settings to be incorporated in production software are shown below.

| Channel | Frequency (MHz) | Power Setting | | |
|---------|-----------------|---------------|---------|---------|
| | | 802.11b | 802.11g | 802.11n |
| 1 | 2412 | +15 | +16 | +15 |
| 2 | 2417 | +15 | +20 | +19 |
| 3 | 2422 | +15 | +20 | +19 |
| 4 | 2427 | +15 | +20 | +19 |
| 5 | 2432 | +15 | +20 | +19 |
| 6 | 2437 | +15 | +20 | +19 |
| 7 | 2442 | +15 | +20 | +19 |
| 8 | 2447 | +15 | +20 | +19 |
| 9 | 2452 | +15 | +20 | +19 |
| 10 | 2457 | +15 | +20 | +19 |
| 11 | 2462 | +15 | +16 | +15 |

Testing was performed at the upper, middle, and lower channels using 802.11b, 802.11g, and 802.11n.

This report covers the circuitry of the devices subject to FCC Part 15, Subpart C. The

circuitry of the device subject to FCC Subpart B was found to be compliant and is covered in Nemko-CCL, Inc. report #190368-12

2.3 EUT and Support Equipment:

The FCC ID numbers for all the EUT and support equipment used during the test are listed below:

| Brand Name Model Number Serial Number | FCC ID Number or Compliance | Description | Name of Interface Ports / Interface Cables |
|---|--------------------------------|-----------------------------|---|
| BN: Control4 MN: C4-TW7C0 (Note 1) SN: 5023C4 | R33C4TW7C0 | In-wall touchscreen display | See Section 2.4 |
| BN: Dell MN: Latitude SN: None | DoC | Computer | Ethernet/Cat 5e cable |
| BN: TRENDnet MN: TEG-S50TXE SN: 0243C3A16540 | DoC | 5 port LAN switch | Ethernet/Cat 5 cable w/RJ45 connectors (Note 2) |
| BN: Control4 MN: C4-HC250-BL SN: F83 | R33C4HC250 | Home Controller | Ethernet/Cat 5e cable |

Note: (1) EUT
(2) Interface port connected to EUT (See Section 2.4)

The support equipment listed above was not modified in order to achieve compliance with this standard.

2.4 Interface Ports on EUT:

| Name of Ports | No. of Ports Fitted to EUT | Cable Descriptions/Length |
|---------------|----------------------------|--|
| Ethernet | 1 | Cat 5e cable with Steward 28A2025-0A2 ferrite/7 meters |
| AC | 1 | 2 unshielded conductors in power cord/1.2 meters (Not connected when operating over POE) |

2.5 Modification Incorporated/Special Accessories on EUT:

The following modifications were made to the EUT by the Client during testing to comply with the specification. This report is not complete without an accompanying signed attestation that the product will have all of the documented modifications incorporated into the product when manufactured and placed on the market.

1. L2 and L3 on the 040-00175 PCB were changed from $120\ \Omega$ at 100 MHz ferrite beads to 470Ω at 100 MHz ferrite beads.
2. R7 was changed from $5.11K\ \Omega$ to $5.49K\Omega$.

SECTION 3.0 TEST SPECIFICATION, METHODS & PROCEDURES**3.1 Test Specification:**

Title: FCC PART 15, Subpart C (47 CFR 15)
15.203, 15.207, and 15.247

Limits and methods of measurement of radio interference characteristics of radio frequency devices.

Purpose of Test: The tests were performed to demonstrate initial compliance.

3.2 Methods & Procedures:**3.2.1 §15.203 Antenna Requirement**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

3.2.2 §15.207 Conducted Limits

(a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

| Frequency of Emission (MHz) | Conducted Limit (dB μ V) | |
|-----------------------------|------------------------------|-----------|
| | Quasi-peak | Average |
| 0.15 – 0.5* | 66 to 56* | 56 to 46* |
| 0.5 – 5 | 56 | 46 |
| 5 - 30 | 60 | 50 |

*Decreases with the logarithm of the frequency.

3.2.3 §15.247 Operation within the bands 902 – 928 MHz, 2400 – 2483.5 MHz, and 5725 – 5850 MHz

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400 – 2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

(ii) Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any

channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 non-overlapping channels are used.

(2) Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

(b) The maximum peak output power of the intentional radiator shall not exceed the following:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

(2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725 – 5850 MHz bands: 1 watt. As an alternative to a peak power measurement, compliance with the Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

(4) The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(c) Operation with directional antenna gains greater than 6 dBi.

(1) Fixed point-to-point operation:

(i) Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

(ii) Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

(iii) Fixed, point-to-point operation, as used in paragraphs (b)(4)(i) and (b)(4)(ii) of this section, excludes the use of point-to-multipoint systems, omnidirectional applications, and multiple co-located intentional radiators transmitting the same information. The operator of the spread spectrum or digitally modulated intentional radiator or, if the equipment is professionally installed, the installer is responsible for ensuring that the system is used exclusively for fixed, point-to-point operations. The instruction manual furnished with the intentional radiator shall contain language in the installation instructions informing the operator and the installer of this responsibility.

(2) In addition to the provisions in paragraphs (b)(1), (b)(3), (b)(4) and (c)(1)(i) of this section, transmitters operating in the 2400-2483.5 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:

(i) Different information must be transmitted to each receiver.

(ii) If the transmitter employs an antenna system that emits multiple directional beams but does not emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device, i.e., the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (b)(1) or (b)(3) of this section, as applicable. However, the total conducted output power shall be reduced by 1 dB below the specified limits for each 3 dB that the directional gain of the antenna /antenna array exceeds 6 dBi. The directional antenna gain shall be computed as follows:

(A) The directional gain shall be calculated as the sum of $10 \log$ (number of array elements or staves) plus the directional gain of the element or stave having the highest gain.

(B) A lower value for the directional gain than that calculated in paragraph (c)(2)(ii)(A) of this section will be accepted if sufficient

evidence is presented, e.g., due to shading of the array or coherence loss in the beamforming.

(iii) If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels, the power supplied to each emission beam is subject to the power limit specified in paragraph (c)(2)(ii) of this section. If transmitted beams overlap, the power shall be reduced to ensure that their aggregate power does not exceed the limit specified in paragraph (c)(2)(ii) of this section. In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the limit specified in paragraph (c)(2)(ii) of this section by more than 8 dB.

(iv) Transmitters that emit a single directional beam shall operate under the provisions of paragraph (c)(1) of this section.

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

(f) For the purposes of this section, hybrid systems are those that employ a combination of both frequency hopping and digital modulation techniques. The frequency hopping operation of the hybrid system, with the direct sequence or digital modulation operation turned off, shall have an average time of occupancy on any frequency not to exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4. The digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

(g) Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

(h) The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hopsets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

(i) Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this Chapter.

Note: Spread spectrum systems are sharing these bands on a noninterference basis with systems supporting critical Government requirements that have been allocated the usage of these bands, secondary only to ISM equipment operated under the provisions of Part 18 of this Chapter. Many of these Government systems are airborne radiolocation systems that emit a high EIRP which can cause interference to other users. Also, investigations of the effect of spread spectrum interference to U. S. Government operations in the 902-928 MHz band may require a future decrease in the power limits allowed for spread spectrum operation.

3.2.3 Test Procedure

The conducted disturbance at mains ports and radiated disturbance testing was performed according to the procedures in ANSI C63.4: 2003 and KDB 558074 D01 DTS Measurement Guidance v01. Testing was performed at Nemko-CCL, Inc.'s Wanship open area test site #2, located at 29145 Old Lincoln Highway, Wanship, UT. This site has been fully described in a report submitted to the FCC, and was accepted in a letter dated February 15, 2012 (90504).

Nemko-CCL, Inc. is accredited by National Voluntary Laboratory Accreditation Program (NVLAP); NVLAP Lab Code: 100272-0, which is effective until September 30, 2012.

For radiated emissions testing at 30 MHz or above that is performed at distances closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

SECTION 4.0 OPERATION OF EUT DURING TESTING

4.1 Operating Environment:

Power Supply: 120 VAC/ 60 Hz, or 48 VDC using POE

4.2 Operating Modes:

The 802.11b/g/n transmitter was tested while in a constant transmit mode at the upper, middle, and lower channels. 802.11b, 802.11g, and 802.11n modes were tested. Data rates were at 1 mbps for testing in 802.11b mode. The data rate was at 6 mbps for 802.11g testing. The data rate was at 6.5 mbps for 802.11n testing. The AC power was varied in accordance with FCC §15.31(e). No change was seen in transmitter characteristics. The transmitter was tested while powered by the AC mains and when powered by POE. No change in transmitter characteristics was seen with the different power sources.

The radiated band edge plots and data are from testing at the power levels shown in the table of Section 2.2 of this report. All other testing was performed at the maximum power level shown for each mode in the table of Section 2.2 (802.11b at +15, 802.11g at +20, and 802.11n at +19).

4.3 EUT Exercise Software:

Control4 software was used to exercise the transmitters.

SECTION 5.0 SUMMARY OF TEST RESULTS**5.1 FCC Part 15, Subpart C**

The C4-TW7C0 802.11b/g/n transceiver was subjected to each of the tests shown in the summary table below.

5.1.1 Summary of Tests:

| Section | Environmental Phenomena | Frequency Range (MHz) | Result |
|-----------|--------------------------------------|------------------------|----------------|
| 15.203 | Antenna Requirements | Structural requirement | Complied |
| 15.207 | Conducted Disturbance at Mains Ports | 0.15 to 30 | Complied |
| 15.247(a) | Bandwidth Requirement | 2400 – 2483.5 | Complied |
| 15.247(b) | Peak Output Power | 2400 – 2483.5 | Complied |
| 15.247(c) | Antenna Conducted Spurious Emissions | 0.15 - 25000 | Complied |
| 15.247(c) | Radiated Spurious Emissions | 0.15 - 25000 | Complied |
| 15.247(d) | Peak Power Spectral Density | 2400 – 2483.5 | Complied |
| 15.247(e) | Reserved Paragraph | N/A | Not Applicable |
| 15.247(f) | Hybrid System Requirements | 2400 – 2483.5 | Not Applicable |
| 15.247(g) | Frequency Hopping Channel Usage | 2400 – 2438.5 | Not Applicable |
| 15.247(h) | Frequency Hopping Intelligence | 2400 – 2483.5 | Not Applicable |

5.2 Result

In the configuration tested, the 802.11b/g/n transceiver complied with the requirements of the specification.

SECTION 6.0 802.11b/g/n TRANSCEIVER – MEASUREMENTS AND RESULTS**6.1 General Comments:**

This section contains the test results only. Details of the test methods used and a list of the test equipment used during the measurements can be found in Appendix 1 of this report.

6.2 Test Results:**6.2.1 §15.203 Antenna Requirements**

The EUT uses an inverted F trace antenna on the PCB and is not user replaceable.

RESULT

The EUT complied with the specification.

6.2.2 §15.207 Conducted Disturbance at the AC Mains Ports

| Frequency (MHz) | AC Mains Lead | Detector | Measured Level (dB μ V) | Limit (dB μ V) | Margin (dB) |
|-----------------|---------------|---------------------|-----------------------------|--------------------|-------------|
| 0.40 | Hot Lead | Quasi-Peak (Note 2) | 45.6 | 57.9 | -12.3 |
| 0.40 | Hot Lead | Average (Note 2) | 38.1 | 47.9 | -9.8 |
| 0.67 | Hot Lead | Quasi-Peak (Note 2) | 49.8 | 56.0 | -6.2 |
| 0.67 | Hot Lead | Average (Note 2) | 40.3 | 46.0 | -5.7 |
| 0.72 | Hot Lead | Quasi-Peak (Note 2) | 47.1 | 56.0 | -8.9 |
| 0.72 | Hot Lead | Average (Note 2) | 39.8 | 46.0 | -6.2 |
| 4.76 | Hot Lead | Quasi-Peak (Note 2) | 46.4 | 56.0 | -9.6 |
| 4.76 | Hot Lead | Average (Note 2) | 38.7 | 46.0 | -7.3 |
| 5.33 | Hot Lead | Quasi-Peak (Note 2) | 44.9 | 60.0 | -15.1 |
| 5.33 | Hot Lead | Average (Note 2) | 37.1 | 50.0 | -12.9 |
| 8.55 | Hot Lead | Quasi-Peak (Note 2) | 47.2 | 60.0 | -12.8 |
| 8.55 | Hot Lead | Average (Note 2) | 38.4 | 50.0 | -11.6 |
| 0.41 | Neutral Lead | Quasi-Peak (Note 2) | 46.9 | 57.7 | -10.8 |

| Frequency (MHz) | AC Mains Lead | Detector | Measured Level (dB μ V) | Limit (dB μ V) | Margin (dB) |
|-----------------|---------------|---------------------|-----------------------------|--------------------|-------------|
| 0.41 | Neutral Lead | Average (Note 2) | 37.7 | 47.7 | -10.0 |
| 0.67 | Neutral Lead | Quasi-Peak (Note 2) | 52.6 | 56.0 | -3.4 |
| 0.67 | Neutral Lead | Average (Note 2) | 42.2 | 46.0 | -3.8 |
| 0.72 | Neutral Lead | Quasi-Peak (Note 2) | 48.1 | 56.0 | -7.9 |
| 0.72 | Neutral Lead | Average (Note 2) | 41.0 | 46.0 | -5.0 |
| 4.45 | Neutral Lead | Quasi-Peak (Note 2) | 46.3 | 56.0 | -9.7 |
| 4.45 | Neutral Lead | Average (Note 2) | 38.1 | 46.0 | -7.9 |
| 4.76 | Neutral Lead | Quasi-Peak (Note 2) | 46.3 | 56.0 | -9.7 |
| 4.76 | Neutral Lead | Average (Note 2) | 37.9 | 46.0 | -8.1 |
| 8.63 | Neutral Lead | Quasi-Peak (Note 2) | 46.0 | 60.0 | -14.0 |
| 8.63 | Neutral Lead | Average (Note 2) | 37.9 | 50.0 | -12.1 |

Note 2: The reference detector used for the measurements was quasi-peak and average and the data was compared to the respective limits.

RESULT

In the configuration tested, the EUT complied with the specification by 3.4 dB.


6.2.3 §15.247(a)(2) Emission Bandwidth

| Frequency (MHz) | 802.11b Emission 6 dB bandwidth (MHz) | 802.11g Emission 6 dB bandwidth (MHz) | 802.11n Emission 6 dB bandwidth (MHz) |
|-----------------|---------------------------------------|---------------------------------------|---------------------------------------|
| 2412 | 8.58 | 16.24 | 17.36 |
| 2437 | 8.58 | 16.14 | 17.38 |
| 2462 | 8.60 | 16.14 | 17.38 |

RESULT


In the configuration tested, the 6 dB bandwidth was greater than 500 kHz; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plots below).

Lowest Channel 802.11b Emission 6 dB Bandwidth

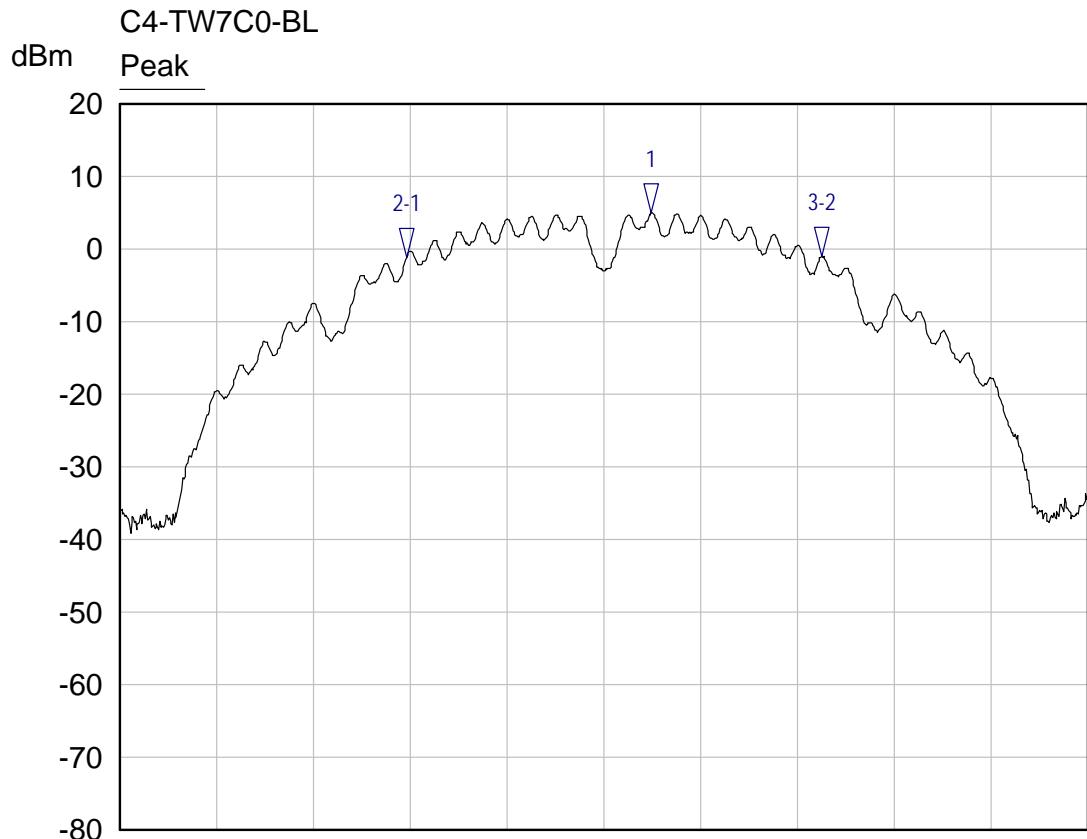


| Mkr | Trace | X-Axis | Value | Notes |
|------|-------|-------------|----------|-------|
| 1 ▽ | Peak | 2.4130 GHz | 5.02 dBm | |
| 2-1▽ | Peak | -5.0600 MHz | -6.15 dB | |
| 3-2▽ | Peak | 8.5800 MHz | 0.16 dB | |

Middle Channel 802.11b Emission 6 dB Bandwidth

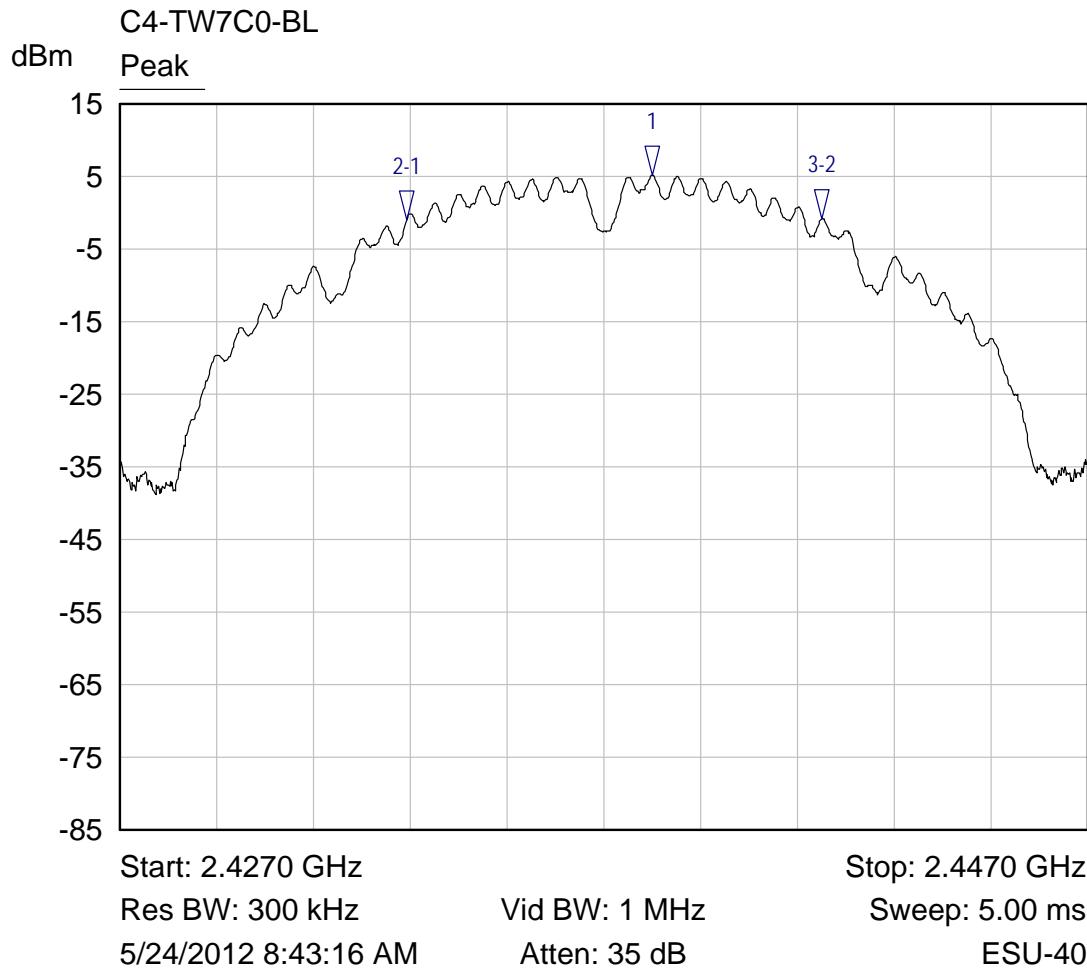


| Mkr | Trace | X-Axis | Value | Notes |
|-------|-------|-------------|----------|-------|
| 1 ▽ | Peak | 2.4380 GHz | 5.15 dBm | |
| 2-1 ▽ | Peak | -5.0800 MHz | -6.18 dB | |
| 3-2 ▽ | Peak | 8.5800 MHz | 0.12 dB | |

Highest Channel 802.11b Emission 6 dB Bandwidth

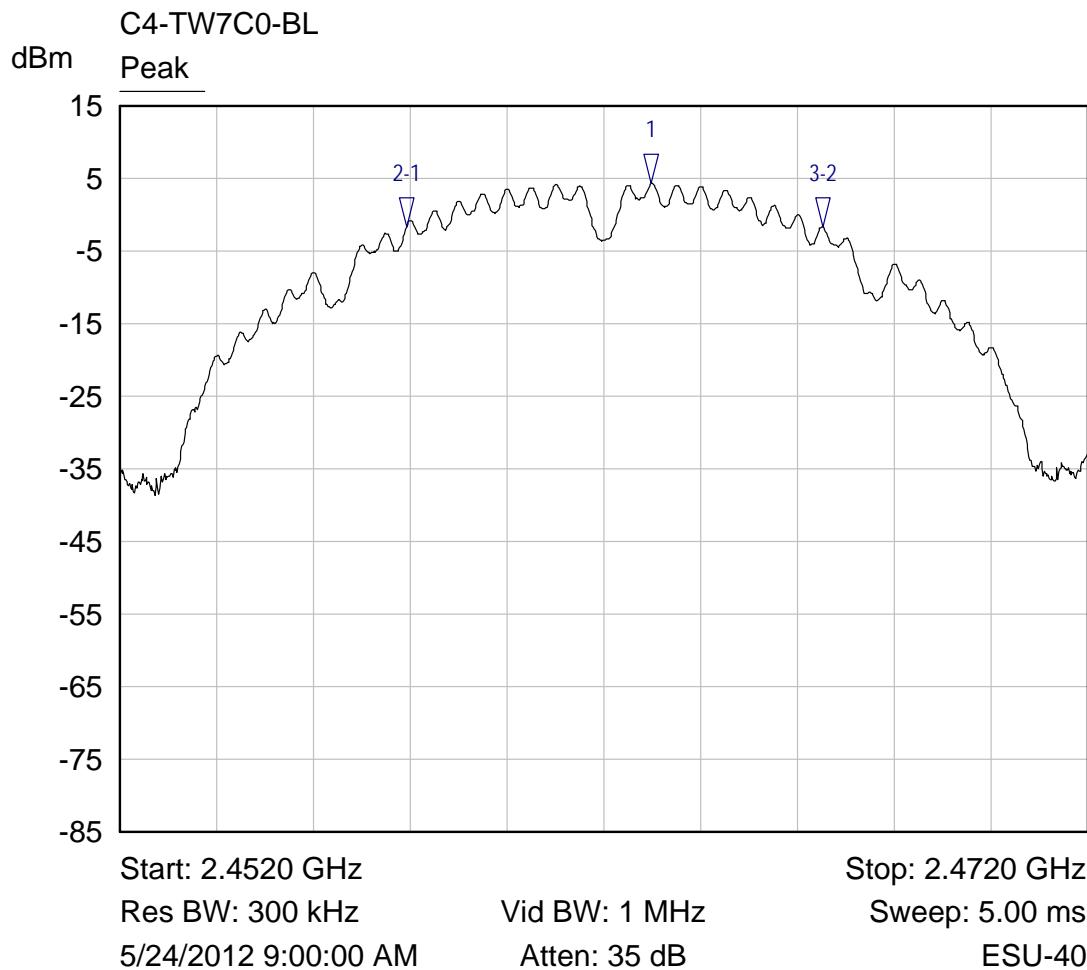


| Mkr | Trace | X-Axis | Value | Notes |
|-------|-------|-------------|----------|-------|
| 1 ▽ | Peak | 2.4630 GHz | 4.30 dBm | |
| 2-1 ▽ | Peak | -5.0600 MHz | -6.01 dB | |
| 3-2 ▽ | Peak | 8.6000 MHz | 0.03 dB | |

Lowest Channel 802.11g Emission 6 dB Bandwidth

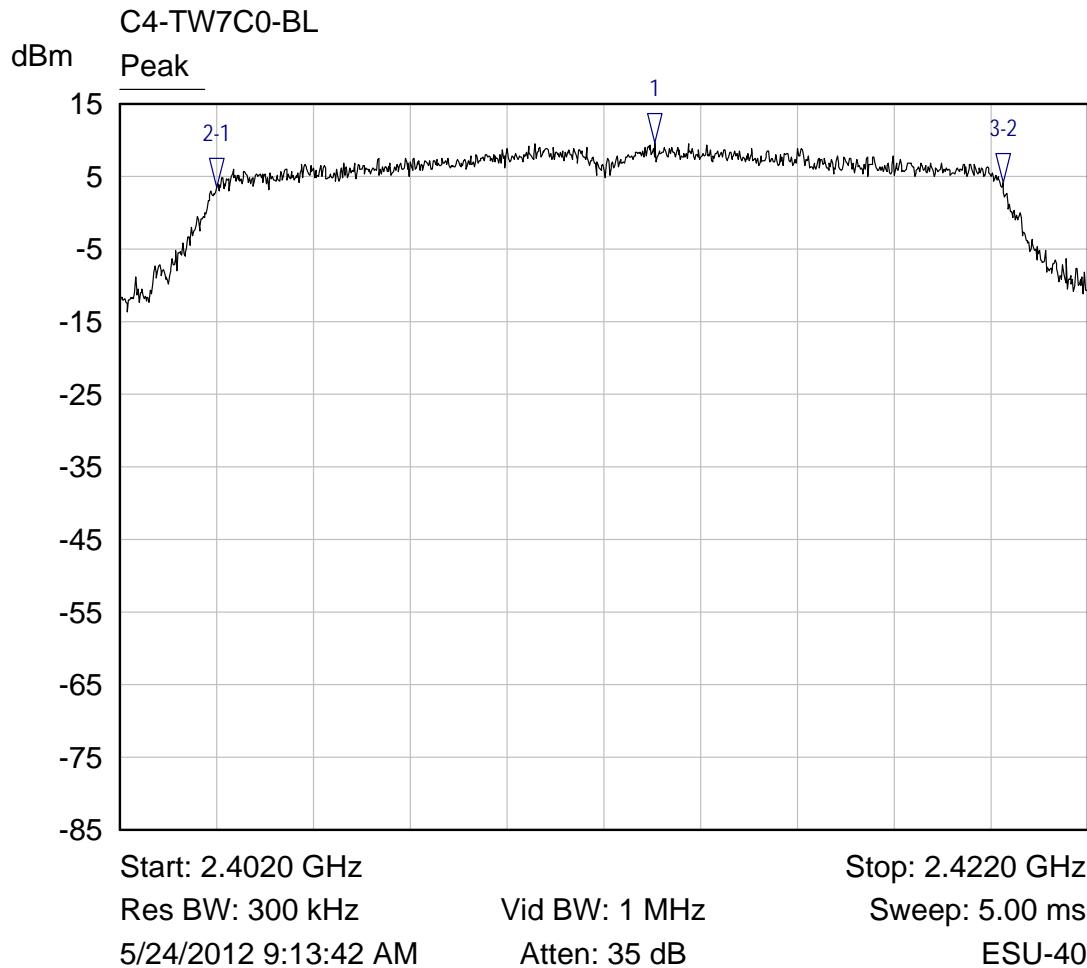


| Mkr | Trace | X-Axis | Value | Notes |
|-------|-------|-------------|----------|-------|
| 1 ▽ | Peak | 2.4130 GHz | 9.75 dBm | |
| 2-1 ▽ | Peak | -9.0600 MHz | -6.16 dB | |
| 3-2 ▽ | Peak | 16.2400 MHz | 0.53 dB | |

Middle Channel 802.11g Emission 6 dB Bandwidth

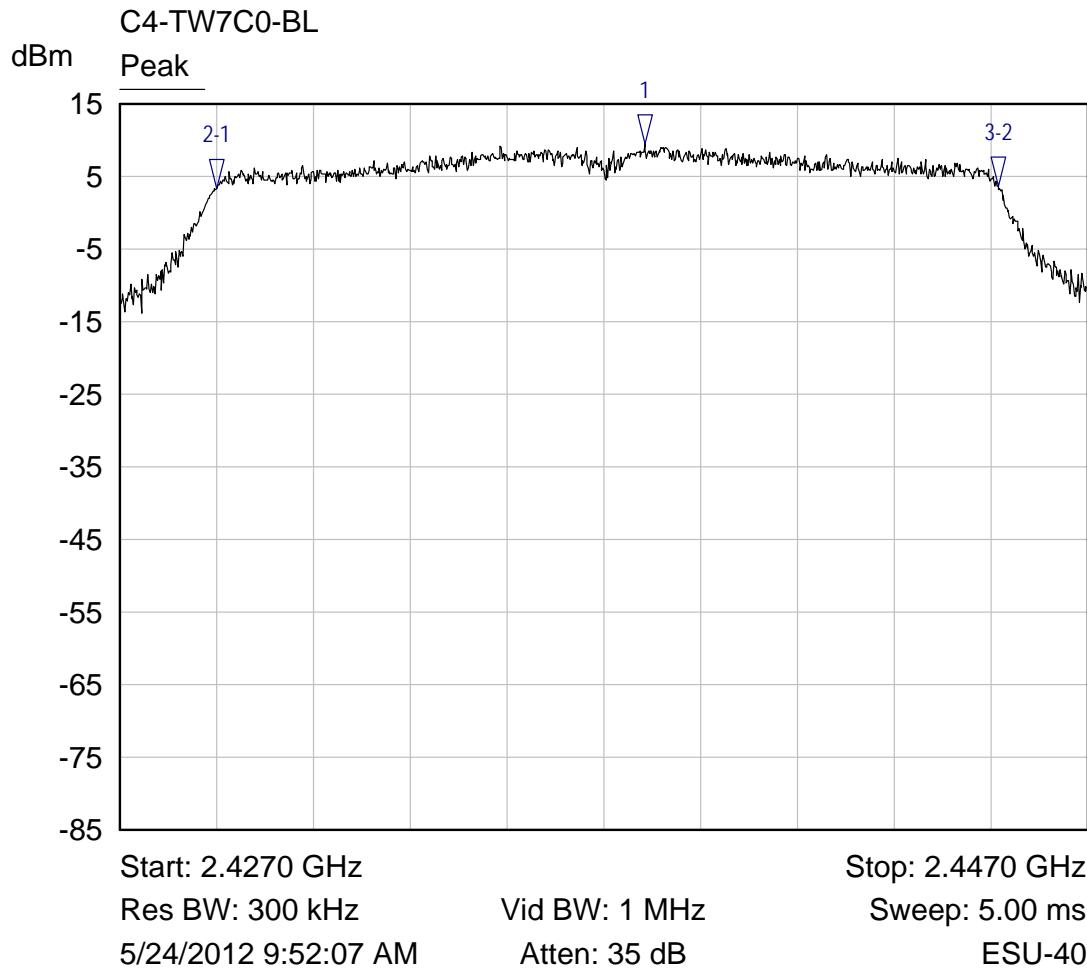


| Mkr | Trace | X-Axis | Value | Notes |
|------|-------|-------------|----------|-------|
| 1 ▽ | Peak | 2.4378 GHz | 9.55 dBm | |
| 2-1▽ | Peak | -8.8400 MHz | -6.20 dB | |
| 3-2▽ | Peak | 16.1400 MHz | 0.27 dB | |

Highest Channel 802.11g Emission 6 dB Bandwidth

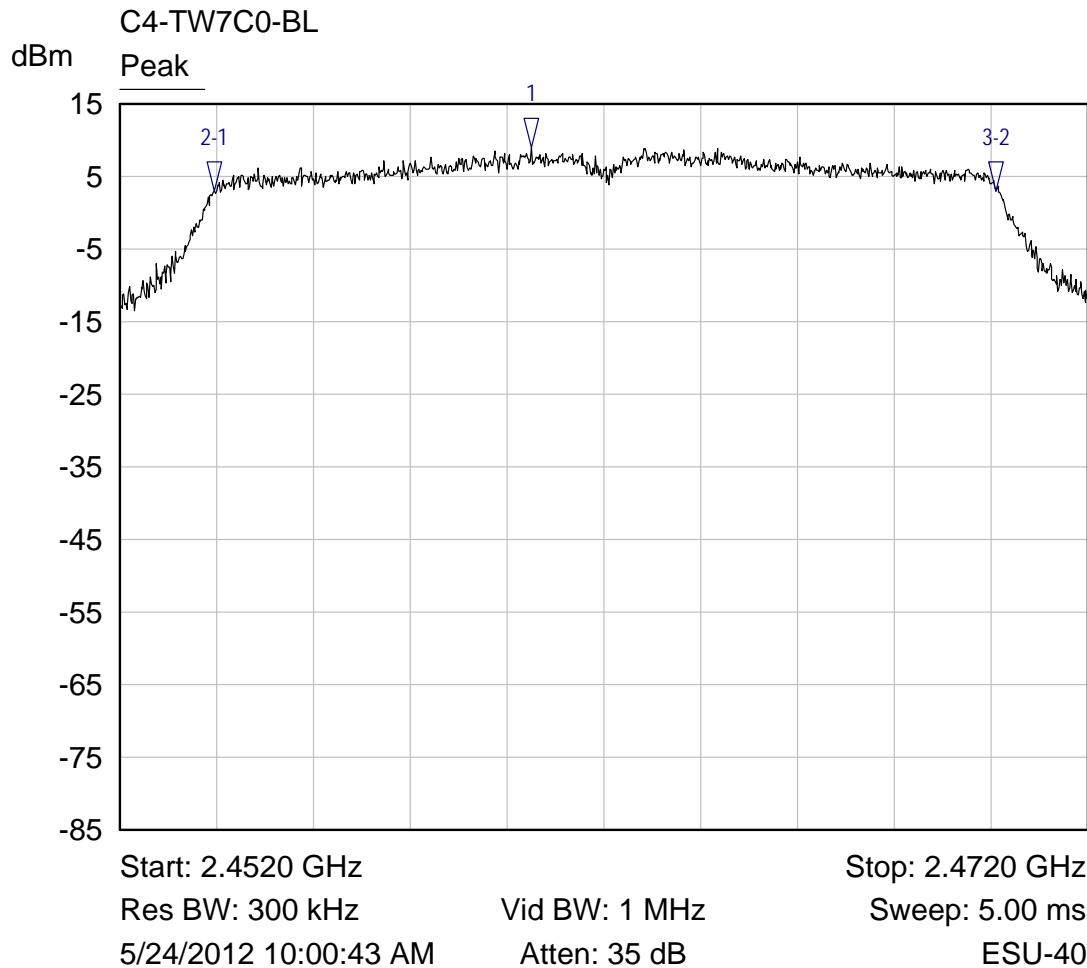


| Mkr | Trace | X-Axis | Value | Notes |
|-------|-------|-------------|----------|-------|
| 1 ▽ | Peak | 2.4605 GHz | 9.08 dBm | |
| 2-1 ▽ | Peak | -6.5400 MHz | -6.01 dB | |
| 3-2 ▽ | Peak | 16.1400 MHz | -0.01 dB | |

Lowest Channel 802.11n Emission 6 dB Bandwidth

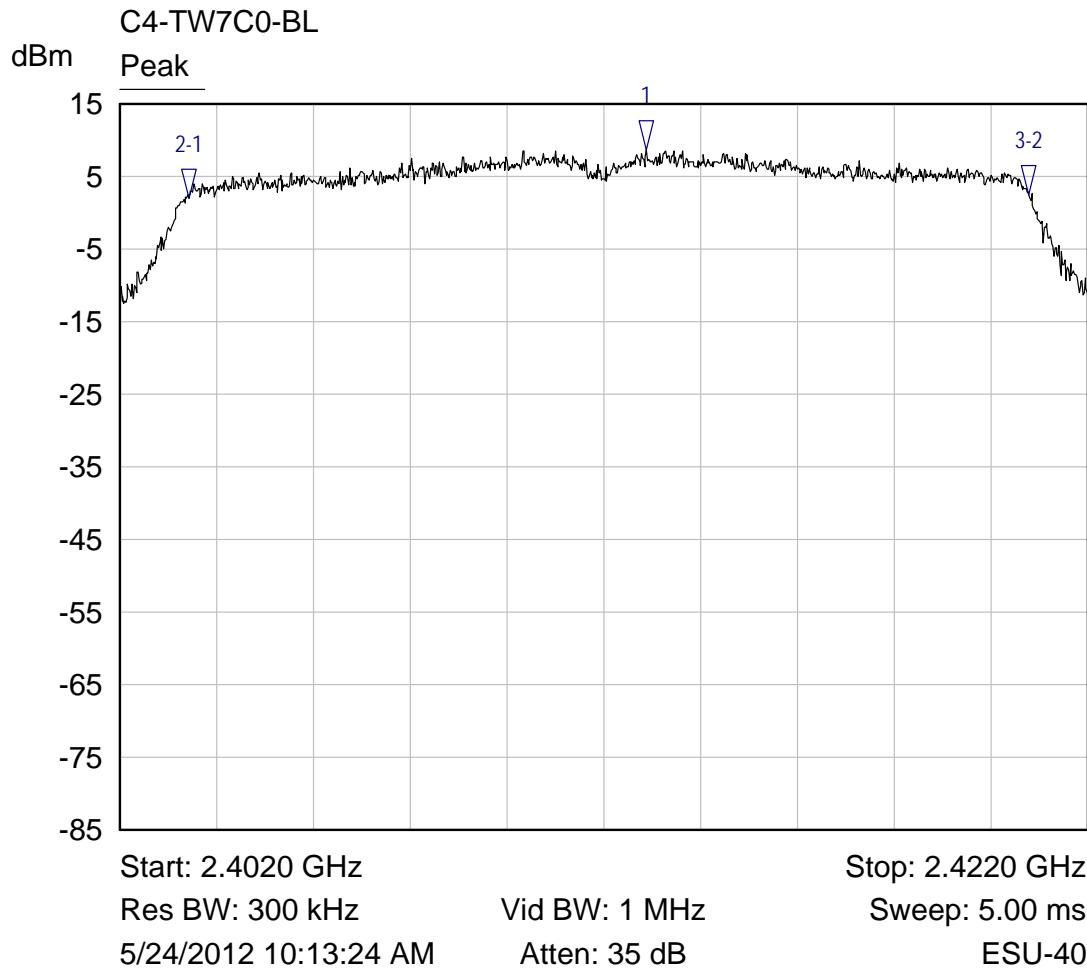


| Mkr | Trace | X-Axis | Value | Notes |
|-------|-------|-------------|----------|-------|
| 1 ▽ | Peak | 2.4129 GHz | 8.64 dBm | |
| 2-1 ▽ | Peak | -9.4600 MHz | -6.57 dB | |
| 3-2 ▽ | Peak | 17.3600 MHz | 0.42 dB | |

Middle Channel 802.11n Emission 6 dB Bandwidth

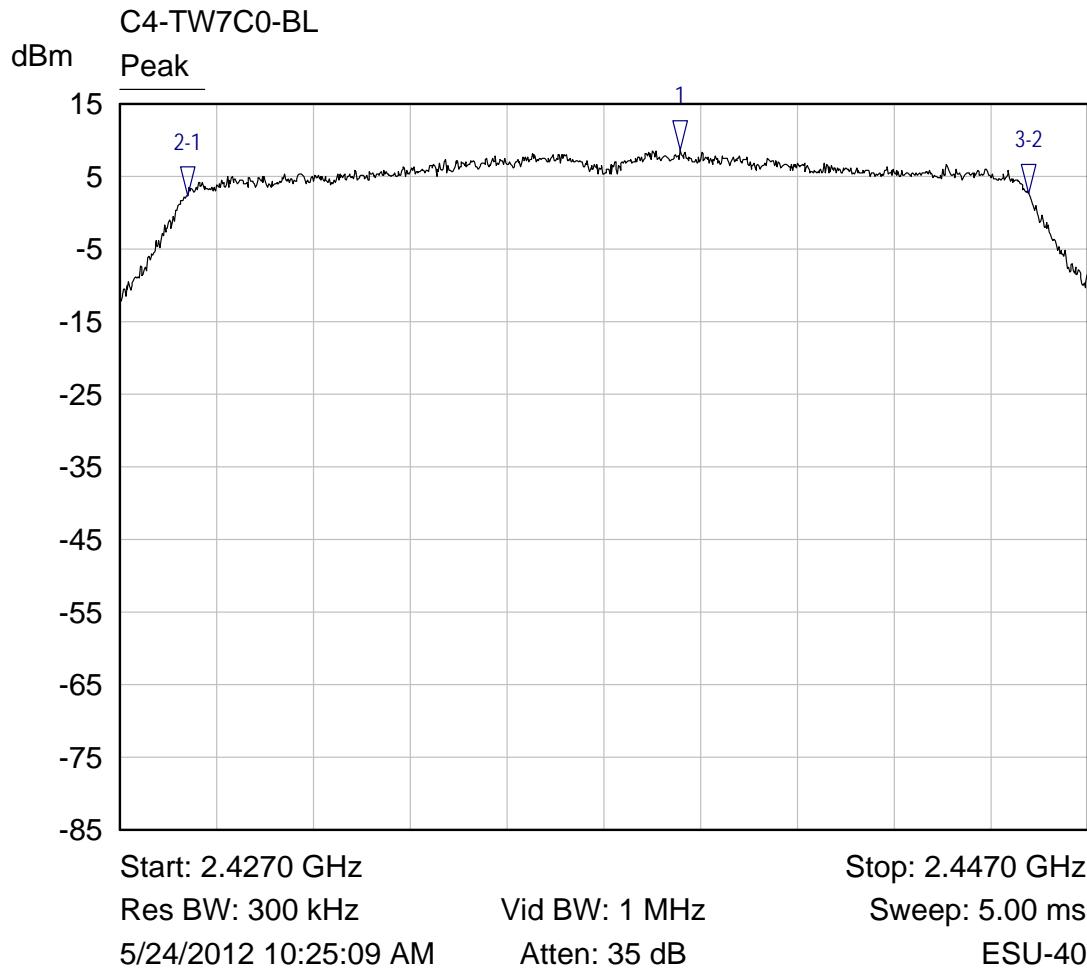

| Mkr | Trace | X-Axis | Value | Notes |
|-------|-------|--------------|----------|-------|
| 1 ▽ | Peak | 2.4386 GHz | 8.66 dBm | |
| 2-1 ▽ | Peak | -10.1800 MHz | -6.33 dB | |
| 3-2 ▽ | Peak | 17.3800 MHz | 0.33 dB | |

Highest Channel 802.11n Emission 6 dB Bandwidth

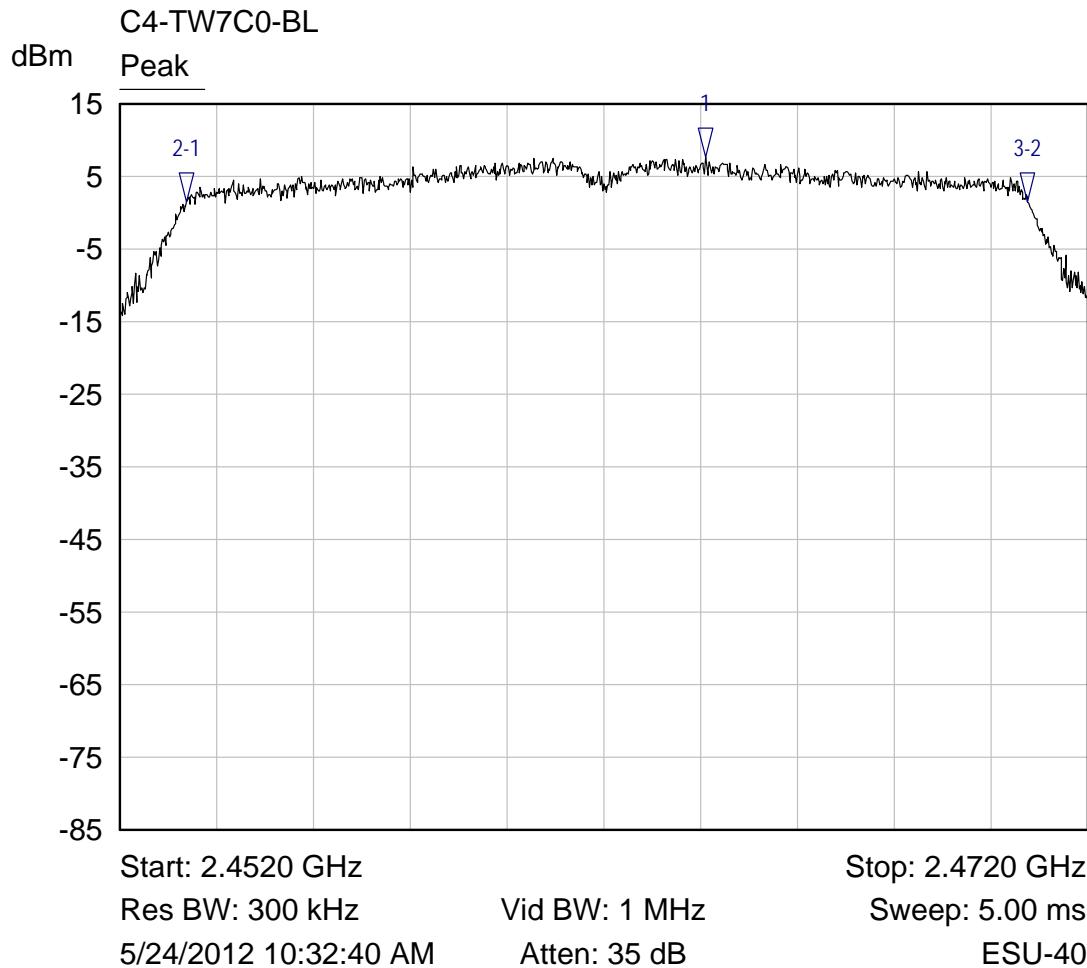

| Mkr | Trace | X-Axis | Value | Notes |
|------|-------|--------------|----------|-------|
| 1 ▽ | Peak | 2.4641 GHz | 7.67 dBm | |
| 2-1▽ | Peak | -10.7200 MHz | -6.22 dB | |
| 3-2▽ | Peak | 17.3800 MHz | -0.03 dB | |

6.2.4 §15.247(b)(3) Peak Output Power

The maximum peak RF Conducted output power measured for this device was 25.00 dBm or 316 mW. The limit is 30 dBm or 1 Watt when using antennas with 6 dBi or less gain. The 802.11b/g/n inverted F antenna has a maximum gain less than 6 dBi.


The method described in KDB 558074 D01 DTS Measurement Guidance v01 5.2.1.2 was used to measure the peak power.

| Frequency (MHz) | 802.11b Measured Output Power (dBm) | 802.11b Measured Output Power (mW) | 802.11g Measured Output Power (dBm) | 802.11g Measured Output Power (mW) | 802.11n Measured Output Power (dBm) | 802.11n Measured Output Power (mW) |
|-----------------|-------------------------------------|------------------------------------|-------------------------------------|------------------------------------|-------------------------------------|------------------------------------|
| 2412 | 15.42 | 34.83 | 25.00 | 316.23 | 23.96 | 248.89 |
| 2437 | 16.07 | 40.46 | 24.80 | 302.00 | 23.56 | 226.99 |
| 2462 | 15.09 | 32.28 | 24.23 | 264.85 | 23.41 | 219.28 |

RESULT

In the configuration tested, the RF peak output power was less than 1 Watt; therefore, the EUT complied with the requirements of the specification (see spectrum analyzer plots below).


Lowest Channel 802.11b Output Power Plot

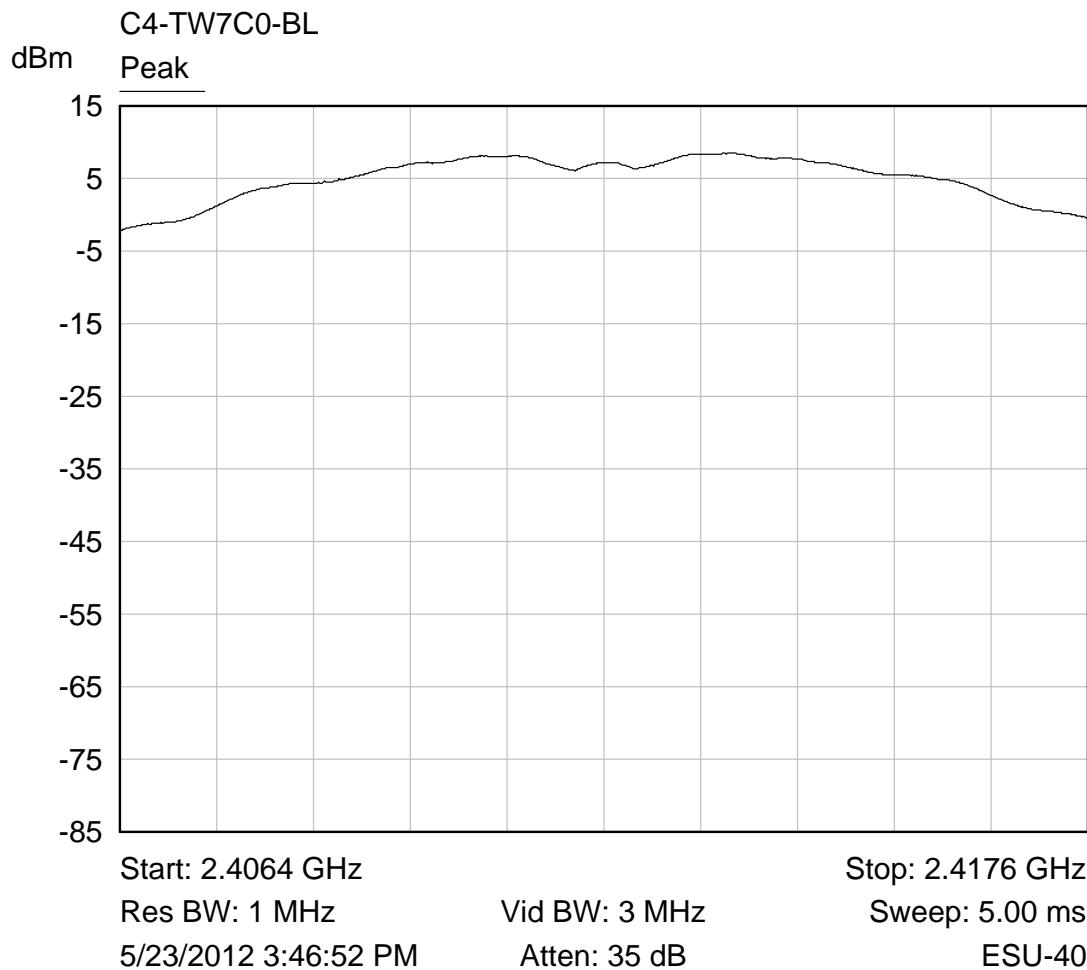

Peak


| Measurement Parameter | Value |
|-----------------------|-----------|
| Channel power | 15.42 dBm |

Middle Channel 802.11b Output Power Plot

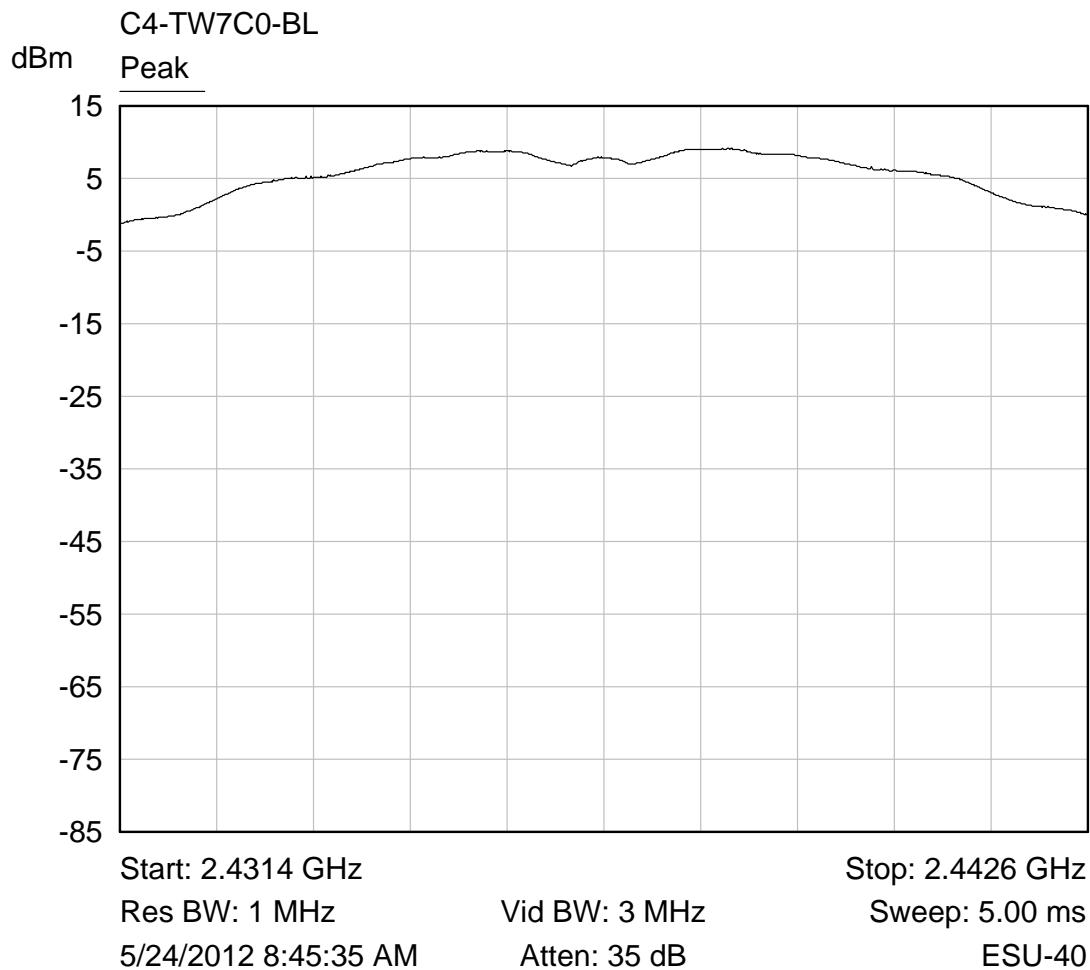

| Peak | |
|-----------------------|-----------|
| Measurement Parameter | Value |
| Channel power | 16.07 dBm |


Highest Channel 802.11b Output Power Plot

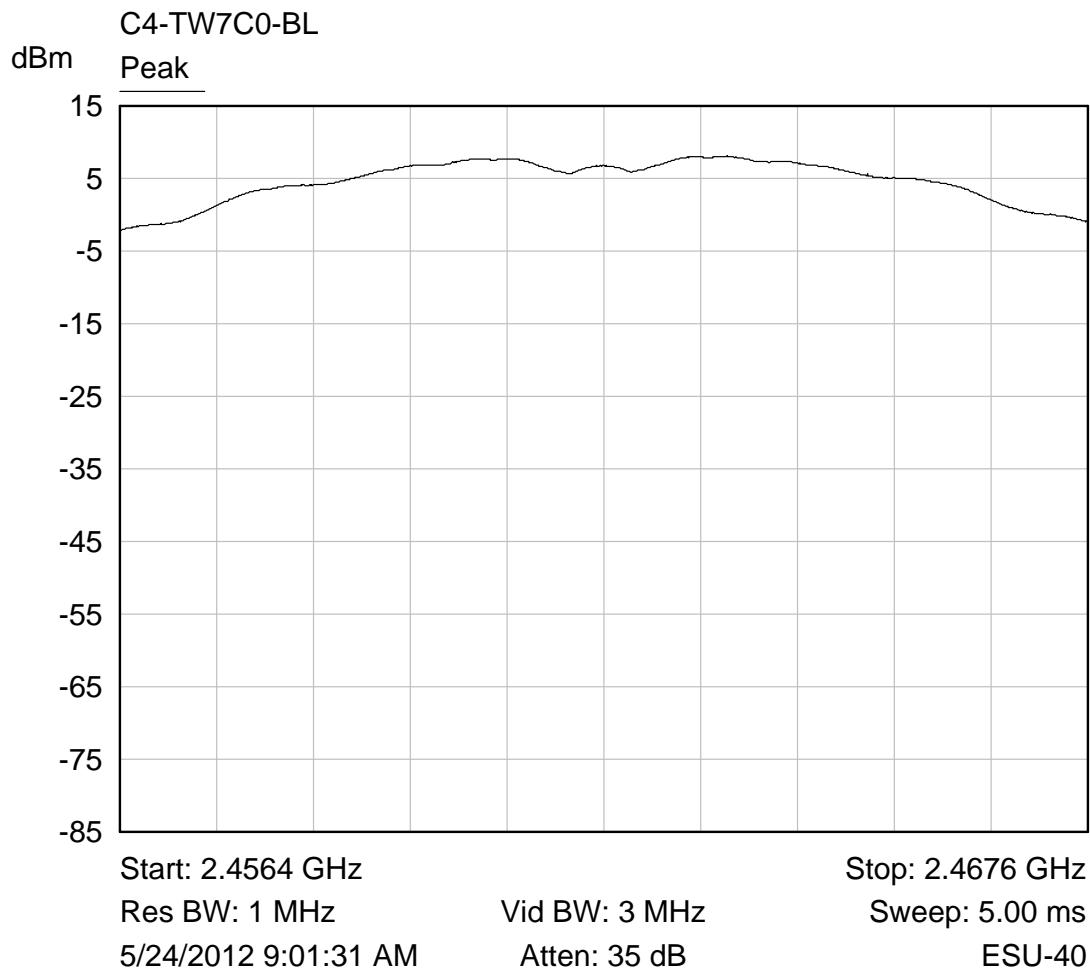

Peak

| Measurement Parameter | Value |
|-----------------------|-----------|
| Channel power | 15.09 dBm |


Lowest Channel 802.11g Output Power Plot

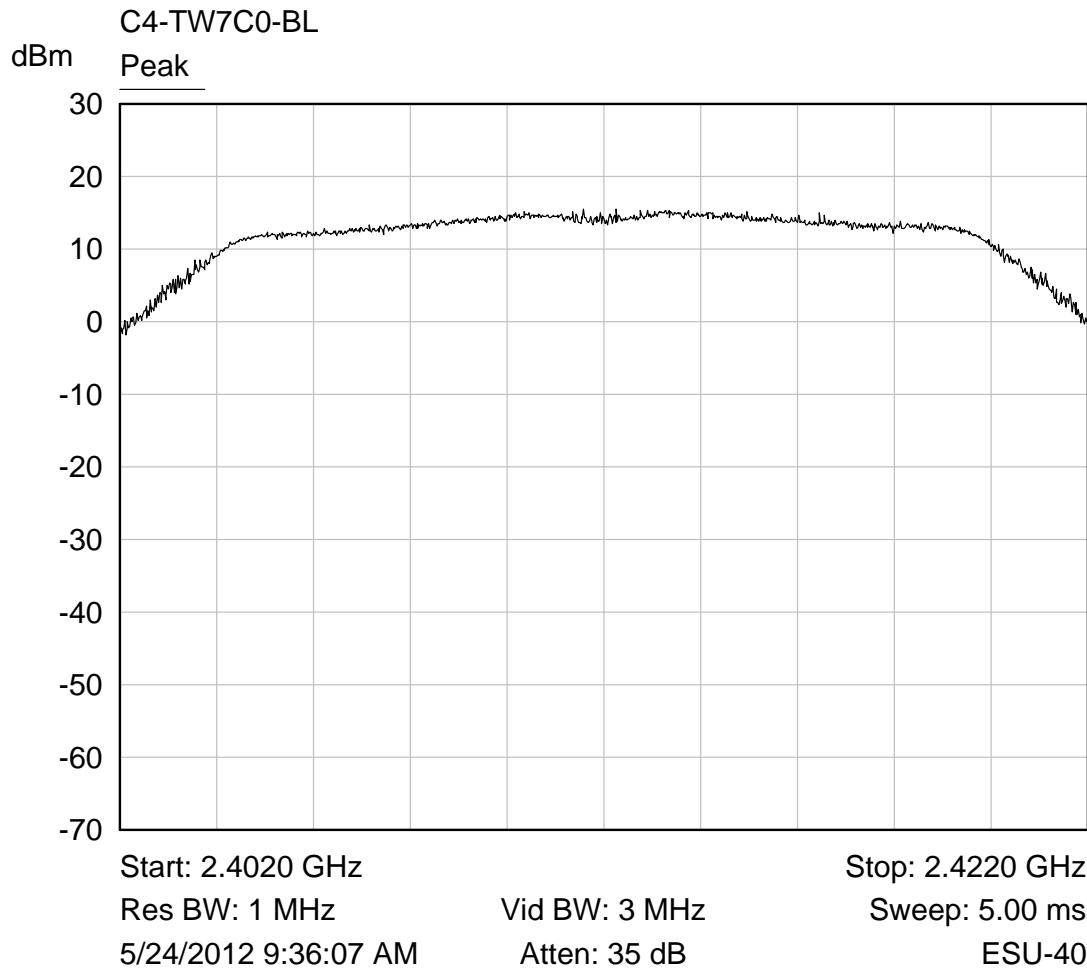

Peak

| Measurement Parameter | Value |
|-----------------------|-----------|
| Channel power | 25.00 dBm |


Middle Channel 802.11g Output Power Plot

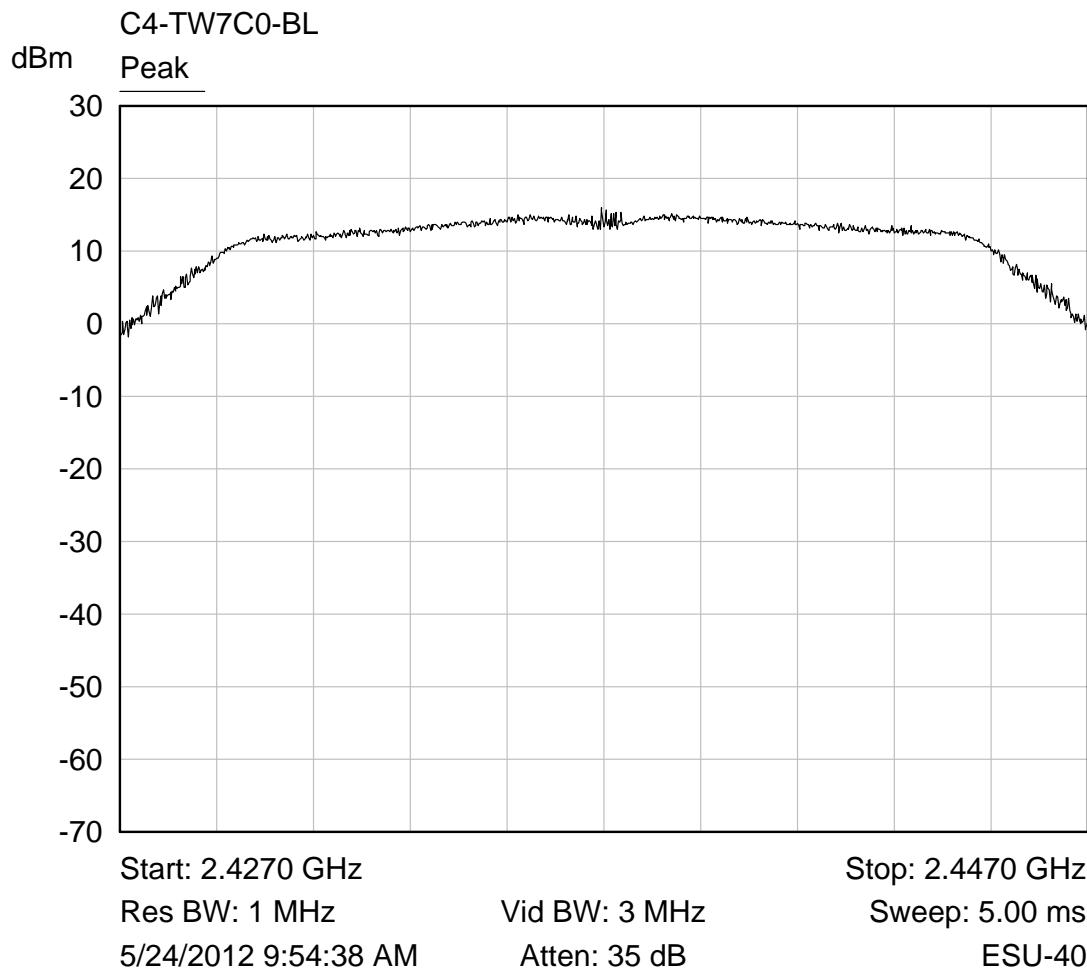

Peak

| Measurement Parameter | Value |
|-----------------------|-----------|
| Channel power | 24.80 dBm |


Highest Channel 802.11g Output Power Plot

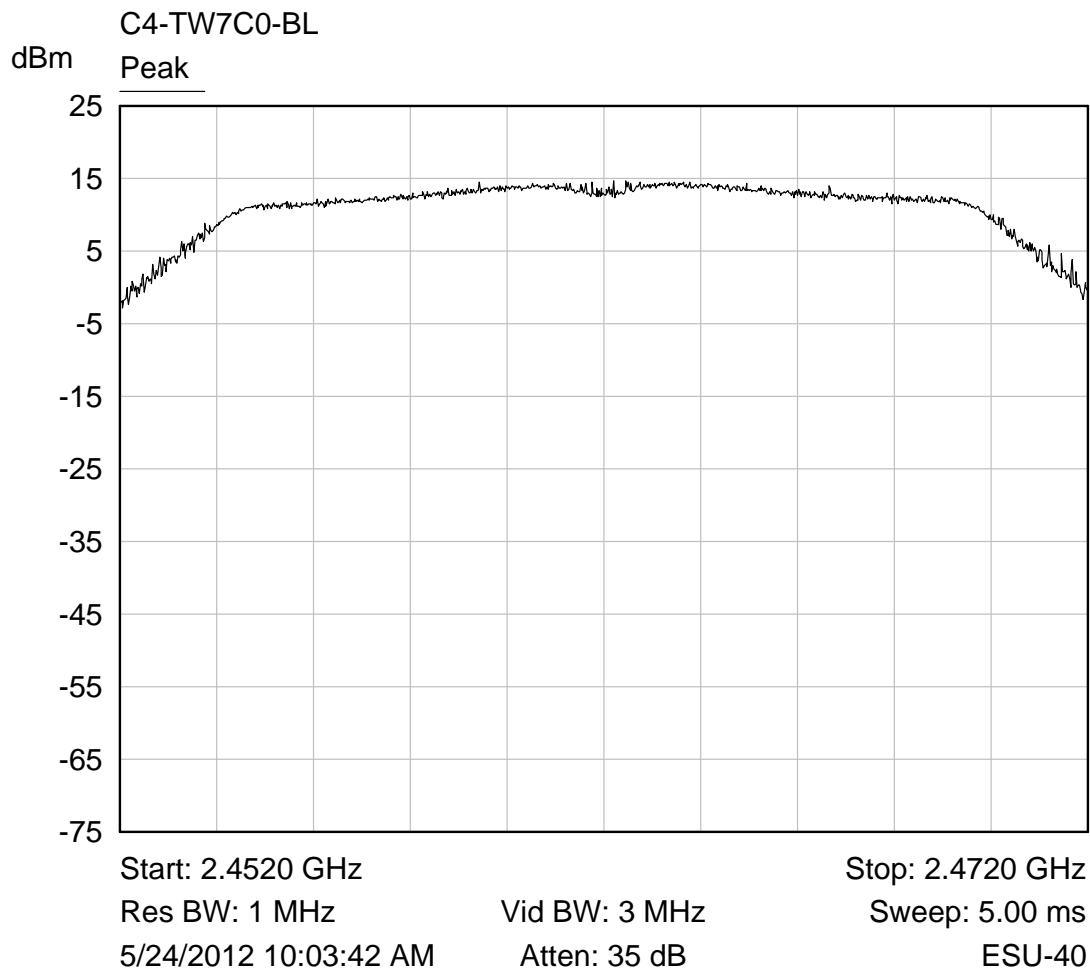

Peak

| Measurement Parameter | Value |
|-----------------------|-----------|
| Channel power | 24.23 dBm |


Lowest Channel 802.11n Output Power Plot

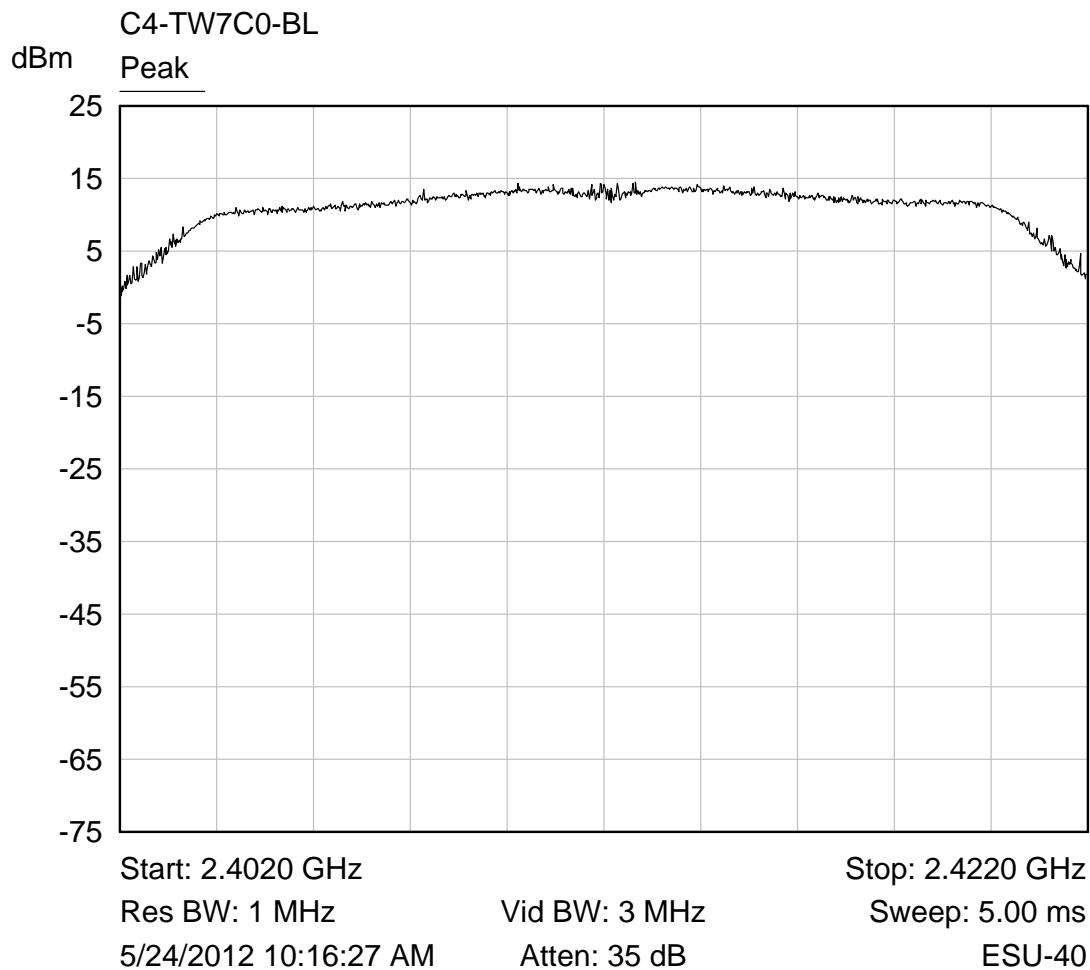

Peak

| Measurement Parameter | Value |
|-----------------------|-----------|
| Channel power | 23.96 dBm |


Middle Channel 802.11n Output Power Plot

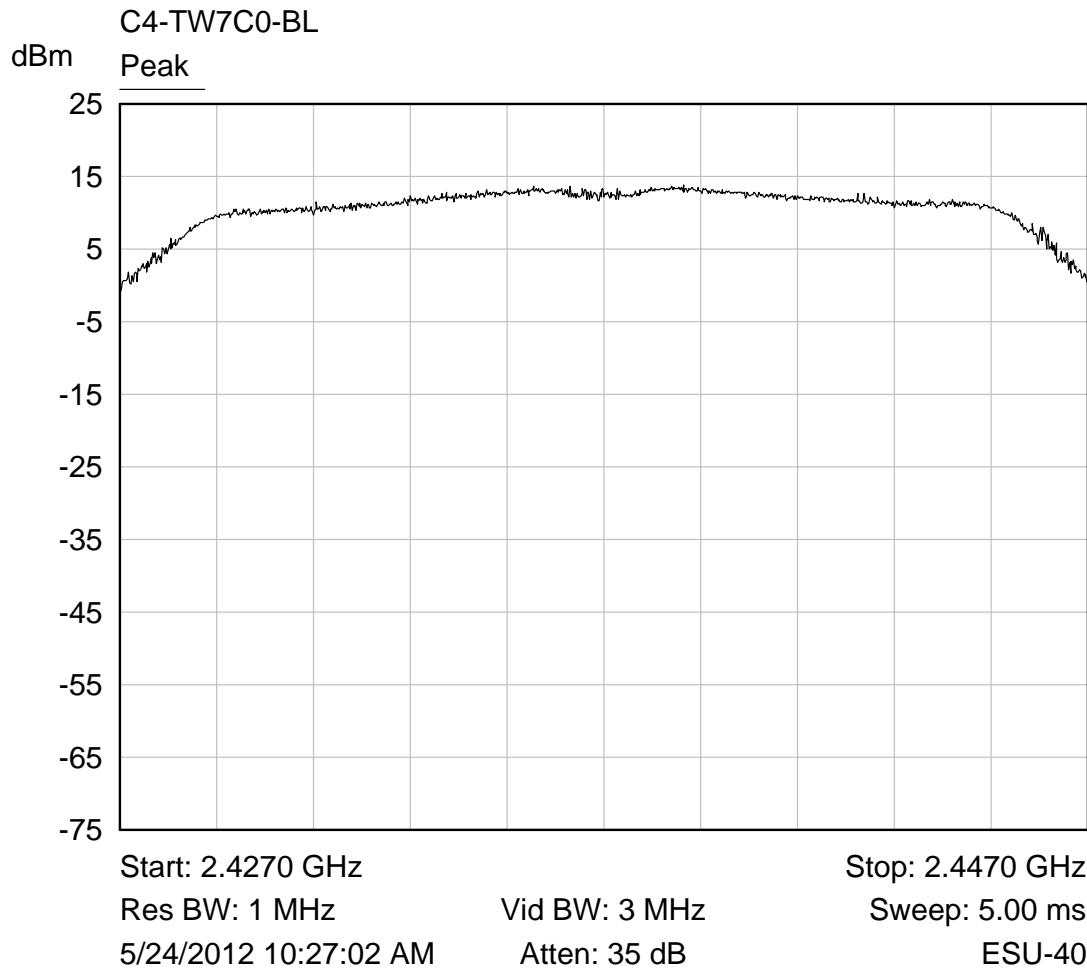

Peak

| Measurement Parameter | Value |
|-----------------------|-----------|
| Channel power | 23.56 dBm |

Highest Channel 802.11n Output Power Plot

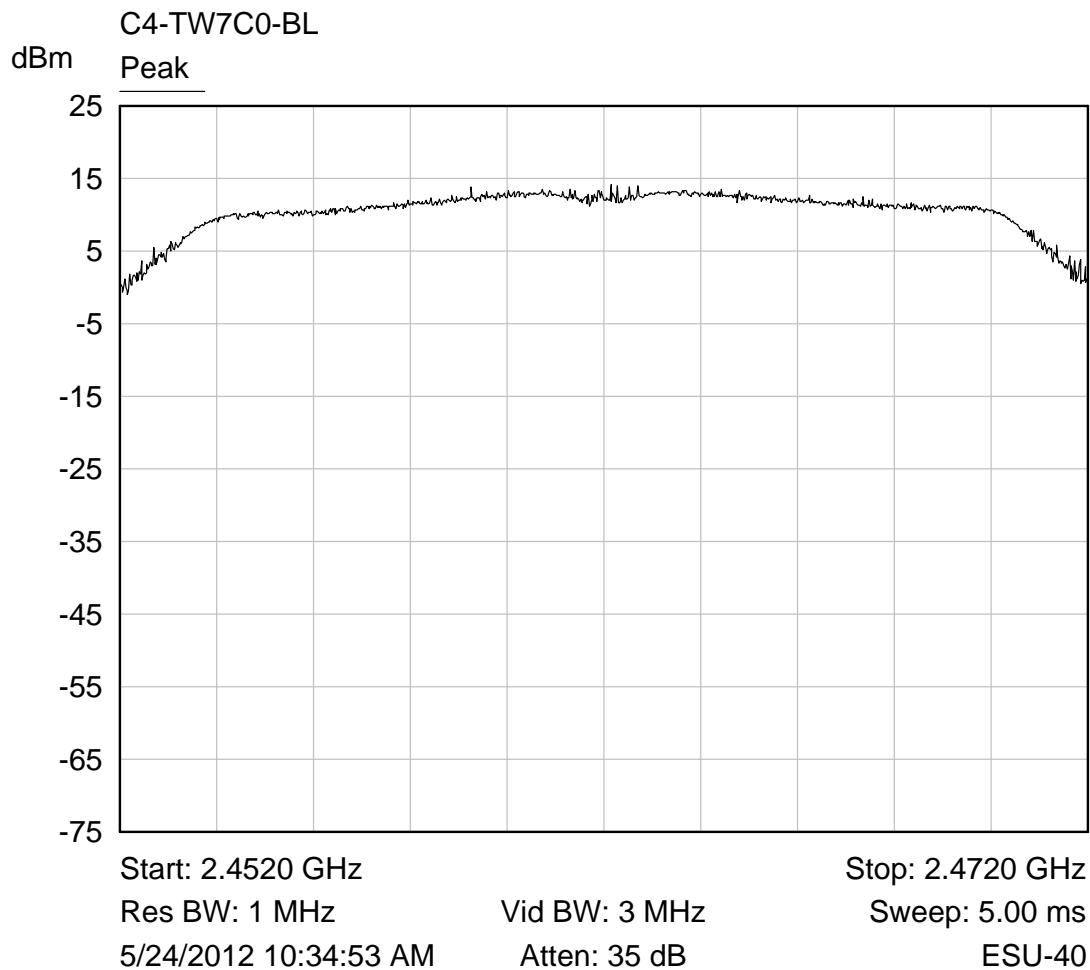

Peak

| Measurement Parameter | Value |
|-----------------------|-----------|
| Channel power | 23.41 dBm |

6.2.5 §15.247(c) Spurious Emissions

6.2.5.1 Conducted Spurious Emissions

The frequency range from 0.15 MHz to the tenth harmonic of the highest fundamental frequency was investigated to measure any antenna-conducted emissions. The tables show the measurement data from spurious emissions noted across the frequency range when transmitting at the lowest frequency, middle frequency, and upper frequency. Shown below are plots with the EUT tuned to the upper and lower channels. These demonstrate compliance with the provisions of this section at the band edges.

The emissions must be attenuated 20 dB below the highest power level measured within the authorized band as measured with a 100 kHz RBW. The highest level measured in 802.11b mode was 5.0 dBm; therefore, the criteria is $5.0 - 20.0 = -15.0$ dBm. For 802.11g mode, the maximum level was 7.9 dBm; therefore, the criteria is $7.9 - 20 = -12.1$ dBm. For 802.11n mode, the maximum level was 7.0 dBm; therefore, the criteria is $7.0 - 20 = -13.0$ dBm.

RESULT

Conducted spurious emissions were attenuated 20 dB or more from the fundamental; therefore, the EUT complies with the specification.

6.2.5.1.1 802.11b Mode

Transmitting on the Lowest Channel – 802.11b

| Frequency (MHz) | Corrected Level (dBm) | Criteria (dBm) | Margin (dB) |
|--------------------|--------------------------|-------------------|----------------|
| 4824 | -41.2 | -15.0 | -26.2 |
| 7236 | -59.1 | -15.0 | -44.1 |
| 9648 | -59.1 | -15.0 | -44.1 |
| 12060 | -58.8 | -15.0 | -43.8 |
| 14472 | -61.8 | -15.0 | -46.8 |
| 16884 | -58.0 | -15.0 | -43.0 |
| 19296 | -57.4 | -15.0 | -42.4 |
| 21708 | -57.2 | -15.0 | -42.2 |
| 24120 | -56.2 | -15.0 | -41.2 |


Transmitting on the Middle Channel – 802.11b

| Frequency (MHz) | Corrected Level (dBm) | Criteria (dBm) | Margin (dB) |
|-----------------|-----------------------|----------------|-------------|
| 4874 | -42.9 | -15.0 | -27.9 |
| 7311 | -59.1 | -15.0 | -44.1 |
| 9748 | -59.6 | -15.0 | -44.6 |
| 12185 | -58.1 | -15.0 | -43.1 |
| 14662 | -58.9 | -15.0 | -43.9 |
| 17059 | -57.6 | -15.0 | -42.6 |
| 19496 | -57.8 | -15.0 | -42.8 |
| 21993 | -57.7 | -15.0 | -42.7 |
| 24370 | -56.0 | -15.0 | -41.0 |


Transmitting on the Highest Channel – 802.11b

| Frequency (MHz) | Corrected Level (dBm) | Criteria (dBm) | Margin (dB) |
|-----------------|-----------------------|----------------|-------------|
| 4924 | -46.8 | -15.0 | -31.8 |
| 7386 | -58.9 | -15.0 | -43.9 |
| 9848 | -60.0 | -15.0 | -45.0 |
| 12310 | -58.2 | -15.0 | -43.2 |
| 14772 | -57.8 | -15.0 | -42.8 |
| 17234 | -58.0 | -15.0 | -43.0 |
| 19696 | -58.1 | -15.0 | -43.1 |
| 22158 | -57.6 | -15.0 | -42.6 |
| 24620 | -56.0 | -15.0 | -41.0 |

Lower Band Edge Plot – 802.11b

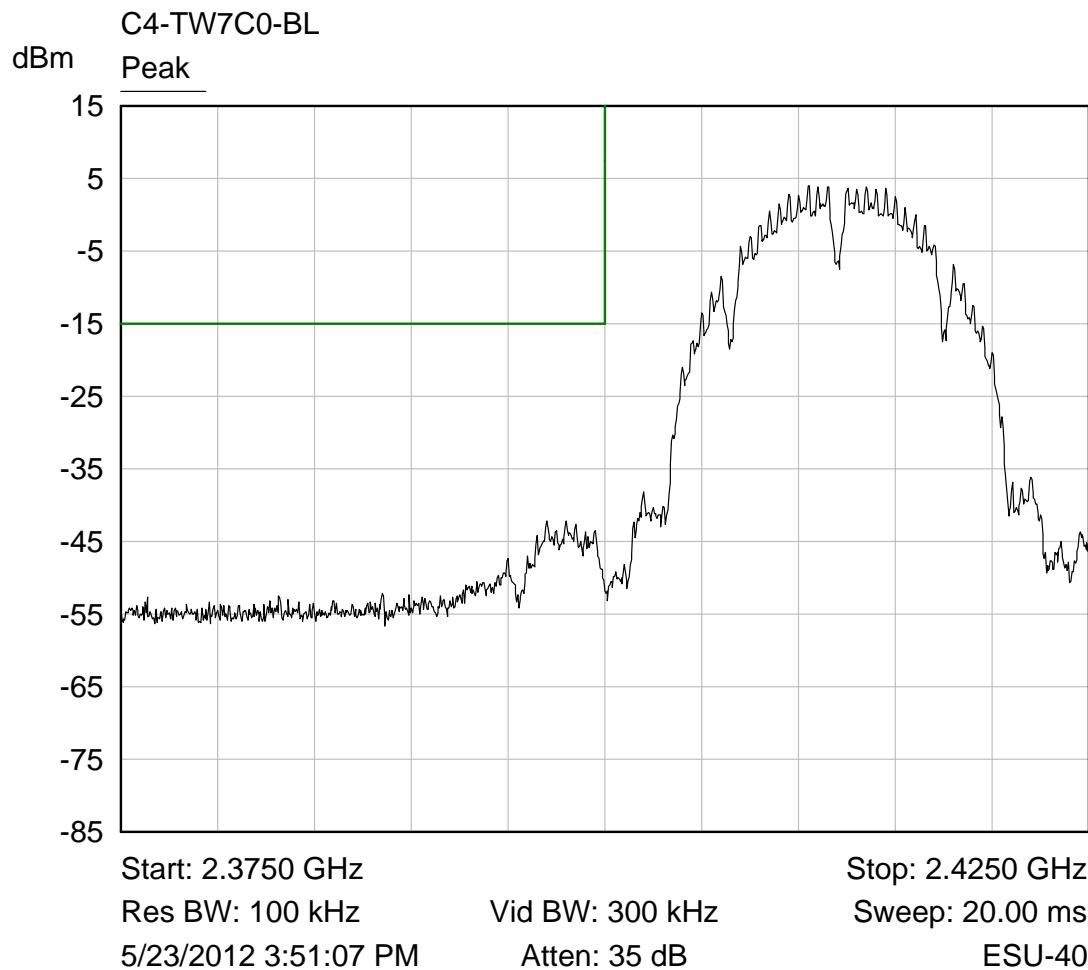

Upper Band Edge Plot – 802.11b

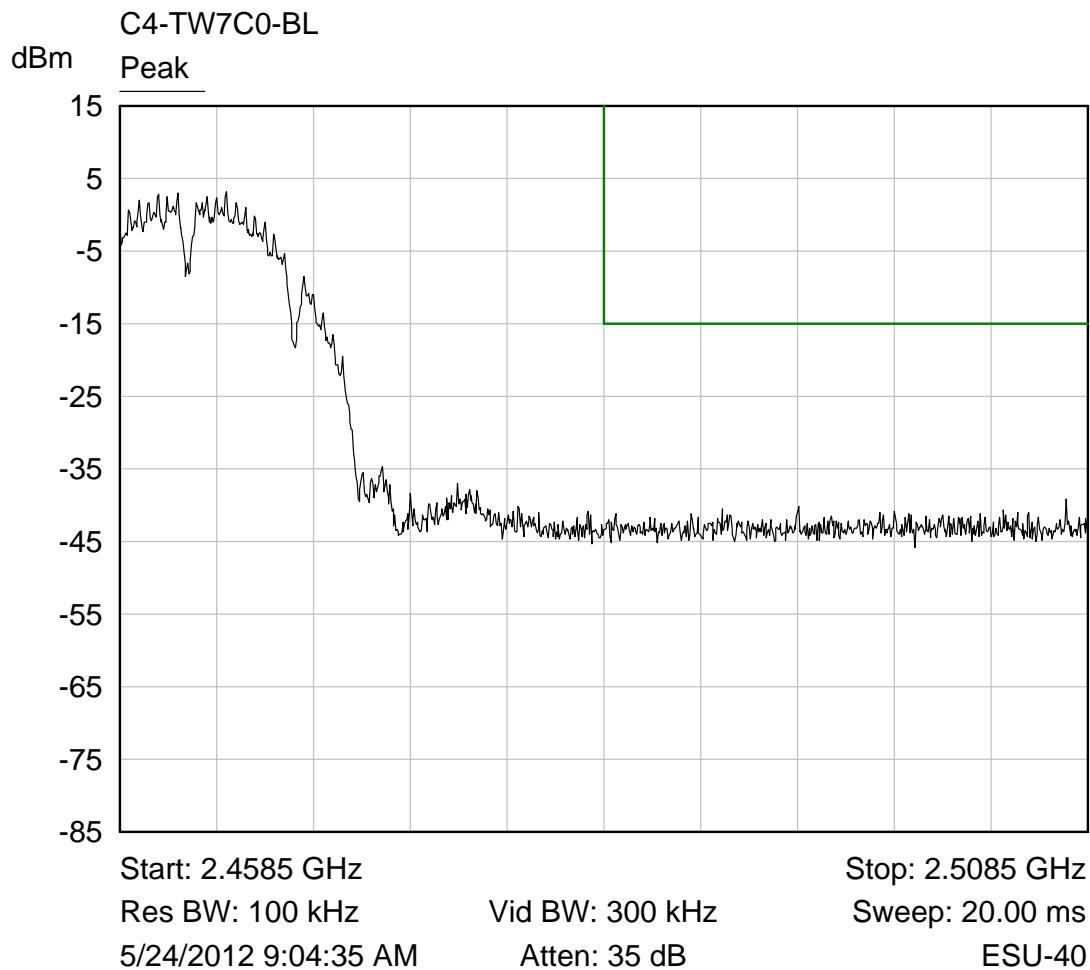

6.2.5.1.2 802.11g Mode

Transmitting on the Lowest Channel – 802.11g

| Frequency (MHz) | Corrected Level (dBm) | Criteria (dBm) | Margin (dB) |
|-----------------|-----------------------|----------------|-------------|
| 4824 | -48.8 | -12.1 | -36.7 |
| 7236 | -57.9 | -12.1 | -45.8 |
| 9648 | -58.4 | -12.1 | -46.3 |
| 12060 | -56.6 | -12.1 | -44.5 |
| 14472 | -58.1 | -12.1 | -46.0 |
| 16884 | -57.6 | -12.1 | -45.5 |
| 19296 | -55.9 | -12.1 | -43.8 |
| 21708 | -57.1 | -12.1 | -45.0 |
| 24120 | -56.5 | -12.1 | -44.4 |


Transmitting on the Middle Channel – 802.11g

| Frequency (MHz) | Corrected Level (dBm) | Criteria (dBm) | Margin (dB) |
|-----------------|-----------------------|----------------|-------------|
| 4874 | -48.5 | -12.1 | -36.4 |
| 7311 | -57.5 | -12.1 | -45.4 |
| 9748 | -57.6 | -12.1 | -45.5 |
| 12185 | -57.2 | -12.1 | -45.1 |
| 14662 | -57.6 | -12.1 | -45.5 |
| 17059 | -57.3 | -12.1 | -45.2 |
| 19496 | -57.4 | -12.1 | -45.3 |
| 21993 | -56.2 | -12.1 | -44.1 |
| 24370 | -55.9 | -12.1 | -43.8 |


Transmitting on the Highest Channel – 802.11g

| Frequency (MHz) | Corrected Level (dBm) | Criteria (dBm) | Margin (dB) |
|-----------------|-----------------------|----------------|-------------|
| 4924 | -49.8 | -12.1 | -37.7 |
| 7386 | -58.3 | -12.1 | -46.2 |
| 9848 | -58.9 | -12.1 | -46.8 |
| 12310 | -57.8 | -12.1 | -45.7 |
| 14772 | -57.2 | -12.1 | -45.1 |
| 17234 | -57.1 | -12.1 | -45.0 |
| 19696 | -56.6 | -12.1 | -44.5 |
| 22158 | -56.9 | -12.1 | -44.8 |
| 24620 | -55.4 | -12.1 | -43.3 |

Lower Band Edge Plot – 802.11g

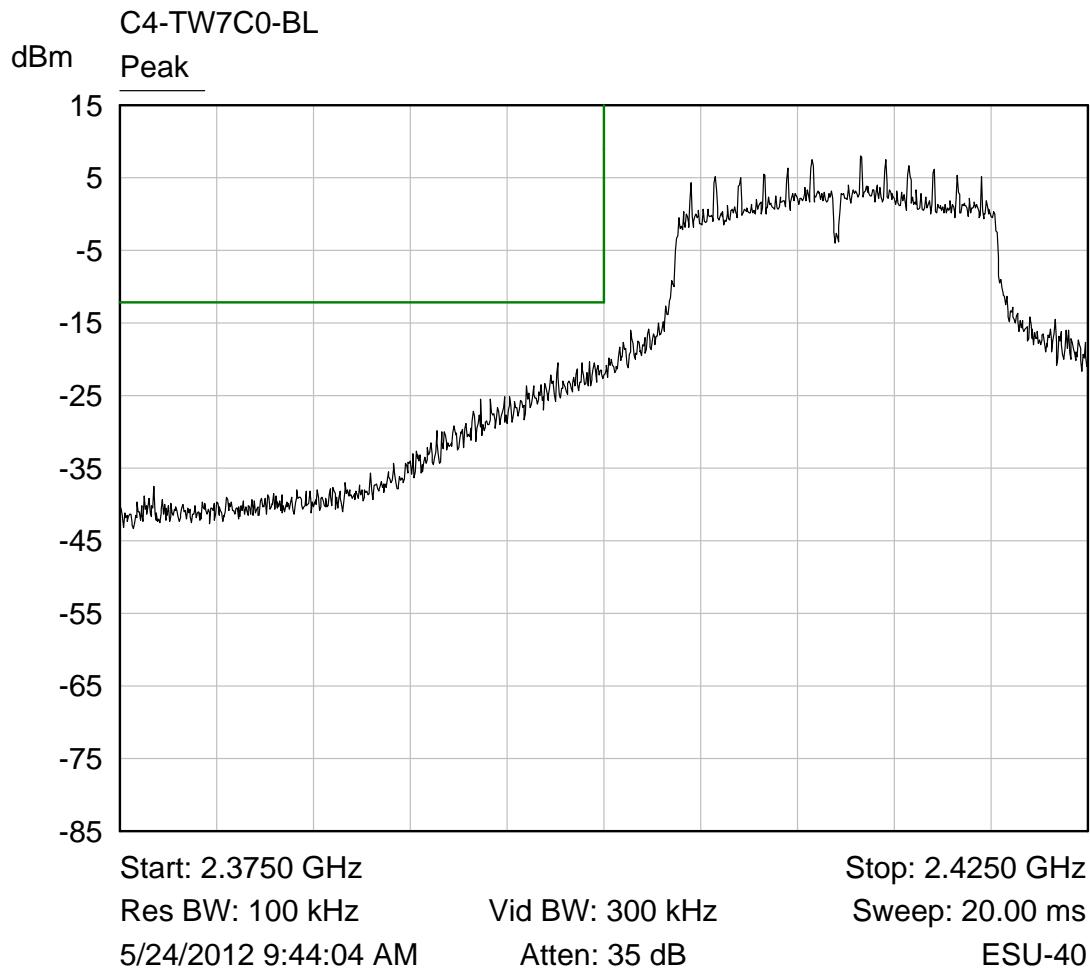

Upper Band Edge Plot – 802.11g

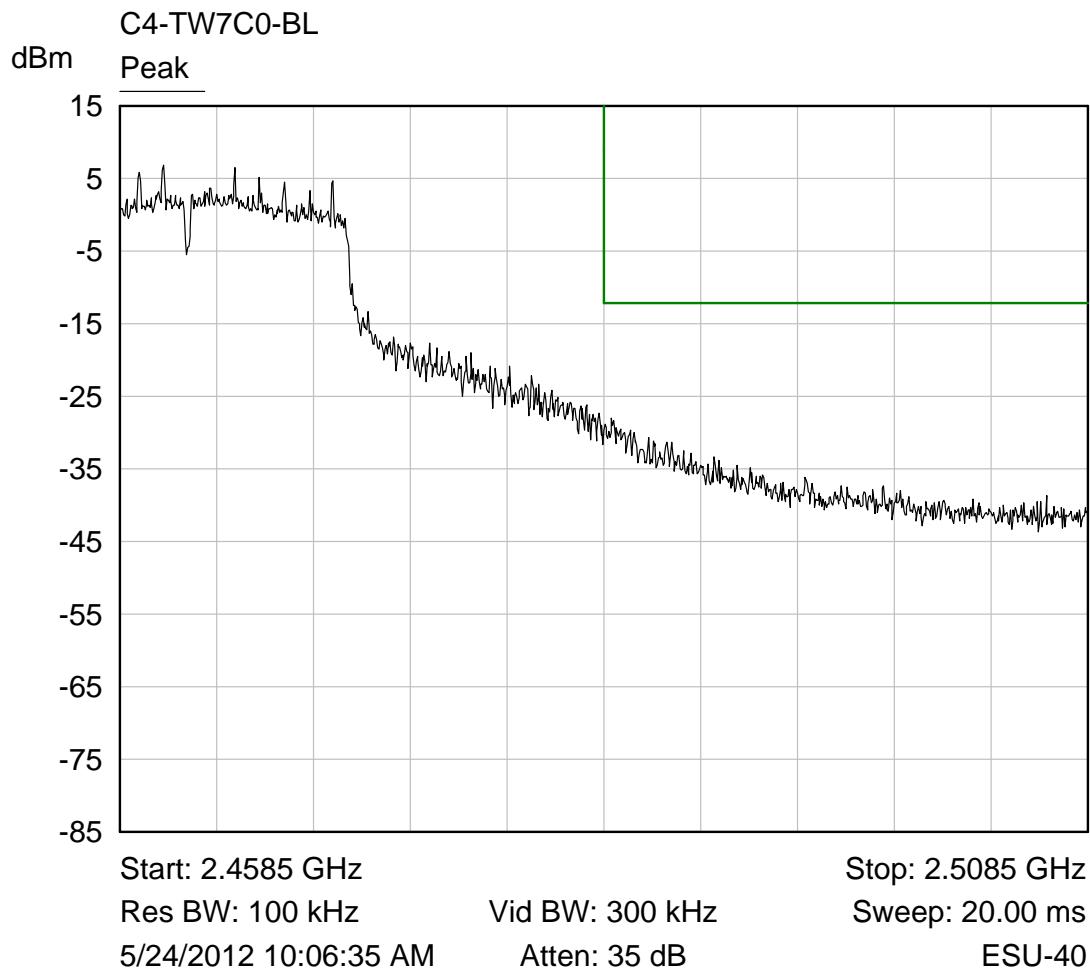

6.2.5.1.3 802.11n Mode

Transmitting on the Lowest Channel – 802.11n

| Frequency (MHz) | Corrected Level (dBm) | Criteria (dBm) | Margin (dB) |
|-----------------|-----------------------|----------------|-------------|
| 4824 | -48.7 | -13.0 | -35.7 |
| 7236 | -57.9 | -13.0 | -44.9 |
| 9648 | -58.7 | -13.0 | -45.7 |
| 12060 | -57.9 | -13.0 | -44.9 |
| 14472 | -57.3 | -13.0 | -44.3 |
| 16884 | -57.2 | -13.0 | -44.2 |
| 19296 | -57.3 | -13.0 | -44.3 |
| 21708 | -57.1 | -13.0 | -44.1 |
| 24120 | -55.9 | -13.0 | -42.9 |


Transmitting on the Middle Channel – 802.11n

| Frequency (MHz) | Corrected Level (dBm) | Criteria (dBm) | Margin (dB) |
|-----------------|-----------------------|----------------|-------------|
| 4874 | -50.4 | -13.0 | -37.4 |
| 7311 | -57.3 | -13.0 | -44.3 |
| 9748 | -58.3 | -13.0 | -45.3 |
| 12185 | -57.5 | -13.0 | -44.5 |
| 14662 | -57.6 | -13.0 | -44.6 |
| 17059 | -56.7 | -13.0 | -43.7 |
| 19496 | -56.3 | -13.0 | -43.3 |
| 21993 | -56.9 | -13.0 | -43.9 |
| 24370 | -55.0 | -13.0 | -42.0 |


Transmitting on the Highest Channel – 802.11n

| Frequency (MHz) | Corrected Level (dBm) | Criteria (dBm) | Margin (dB) |
|-----------------|-----------------------|----------------|-------------|
| 4924 | -49.3 | -13.0 | -36.3 |
| 7386 | -57.4 | -13.0 | -44.4 |
| 9848 | -58.3 | -13.0 | -45.3 |
| 12310 | -57.9 | -13.0 | -44.9 |
| 14772 | -57.7 | -13.0 | -44.7 |
| 17234 | -57.4 | -13.0 | -44.4 |
| 19696 | -57.4 | -13.0 | -44.4 |
| 22158 | -57.5 | -13.0 | -44.5 |
| 24620 | -55.6 | -13.0 | -42.6 |

Lower Band Edge Plot – 802.11n

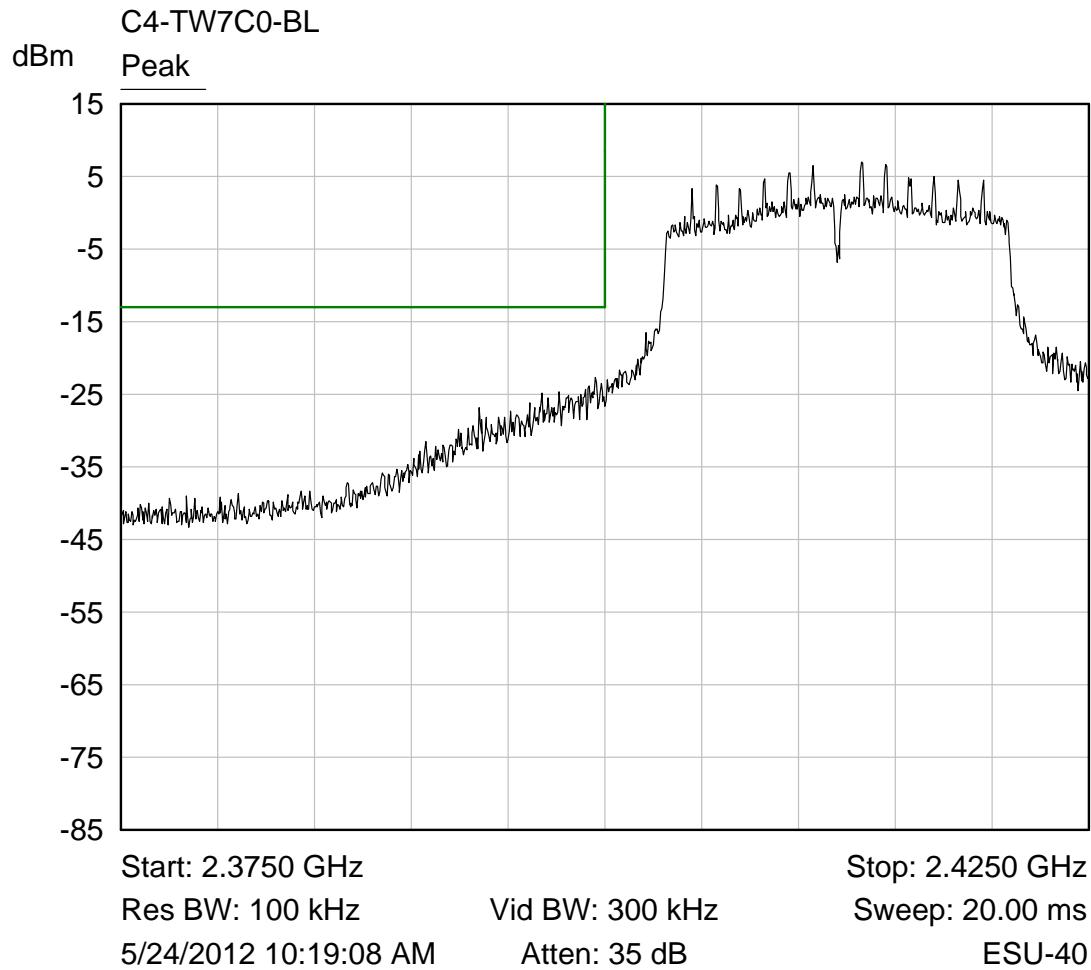

Upper Band Edge Plot – 802.11n

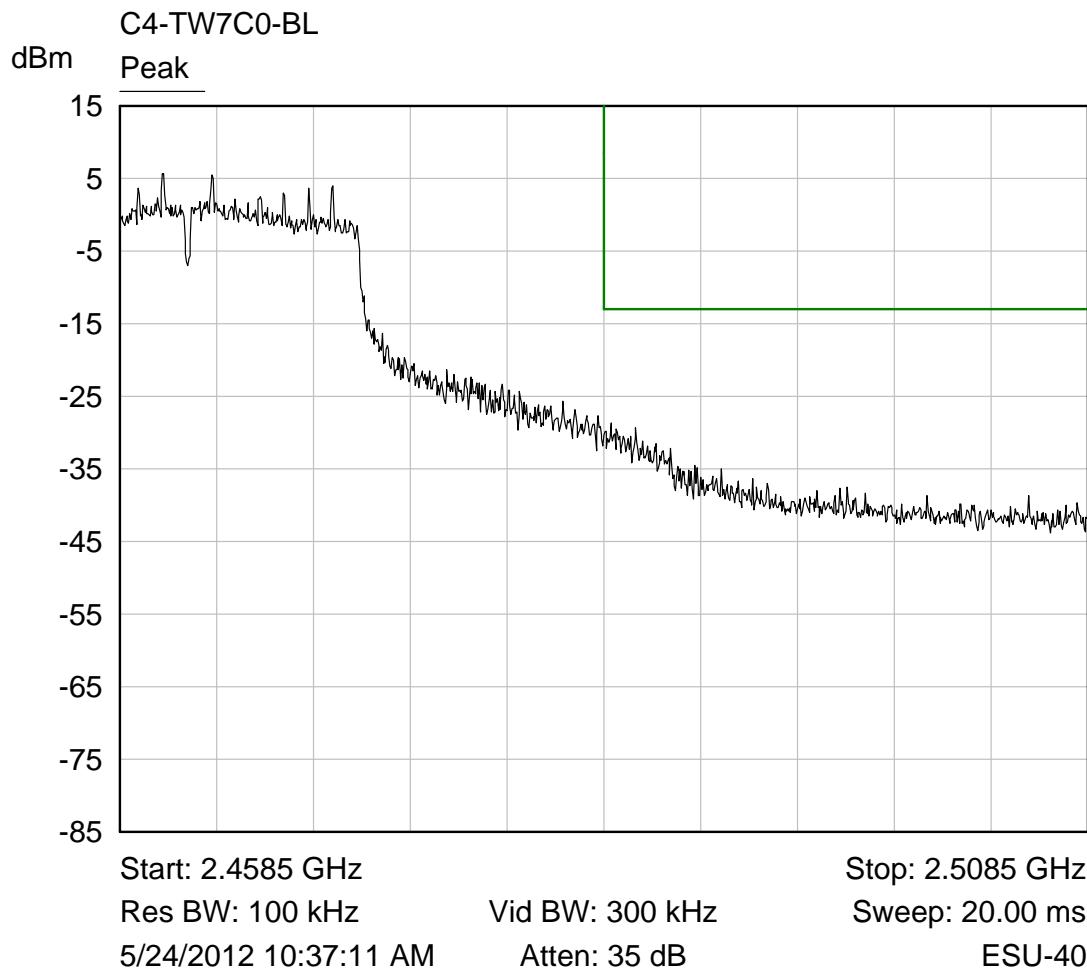

6.2.5.2 Radiated Emissions in the Restricted Bands of §15.205

The frequency range from 0.15 MHz to 25 GHz was investigated to measure any radiated emissions in the restricted bands. The following tables show measurements of any emission that fell into the restricted bands of §15.205. The tables show the worst-case emission measured from the C4-TW7C0. For frequencies above 12.5 GHz, a measurement distance of 1 meter was used. The noise floor was a minimum of 6 dB below the limit. The emissions in the restricted bands must meet the limits specified in §15.209. Tabular data for each of the spurious emissions is shown below for each of the units. Plots of the band edges are also shown. Since the upper and lower channels using 802.11g and 80.211n operate at a lower power level than the other channels, band edge plots are also shown for channels 2 and 10 at the higher power setting.

For frequencies from 150 kHz to 30 MHz RBW = 9 kHz and VBW = 30 kHz. For frequencies from 30 to 1000 MHz RBW = 100 kHz and VBW = 300 kHz. For frequencies above 1000 MHz RBW = 1 MHz and VBW = 3 MHz.

AVERAGE FACTOR

There was no average factor applied.

RESULT

All emissions in the restricted bands of §15.205 met the limits specified in §15.209; therefore, the EUT complies with the specification.

6.2.5.2.1 802.11b

Transmitting at the Lowest Frequency – 802.11b

| Frequency (MHz) | Detection Mode | Antenna Polarity | Receiver Reading (dB μ V) | Correction Factor (dB) | Field Strength (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|----------------|------------------|-------------------------------|------------------------|-------------------------------|----------------------|-------------|
| 4824.0 | Peak | Vertical | 18.4 | 37.8 | 56.2 | 74.0 | -17.8 |
| 4824.0 | Average | Vertical | 15.9 | 37.8 | 53.7 | 54.0 | -0.3 |
| 4824.0 | Peak | Horizontal | 18.2 | 37.8 | 56.0 | 74.0 | -18.0 |
| 4824.0 | Average | Horizontal | 15.8 | 37.8 | 53.6 | 54.0 | -0.4 |
| 7236.0 | Peak | Vertical | 2.8 | 42.1 | 44.9 | 74.0 | -29.1 |
| 7236.0 | Average | Vertical | -7.5 | 42.1 | 34.6 | 54.0 | -19.4 |

| Frequency (MHz) | Detection Mode | Antenna Polarity | Receiver Reading (dB μ V) | Correction Factor (dB) | Field Strength (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|----------------|------------------|-------------------------------|------------------------|-------------------------------|----------------------|-------------|
| 7236.0 | Peak | Horizontal | 3.8 | 42.1 | 45.9 | 74.0 | -28.1 |
| 7236.0 | Average | Horizontal | -5.9 | 42.1 | 36.2 | 54.0 | -17.8 |
| 12060.0 | Peak | Vertical | 0.4 | 47.1 | 47.5 | 74.0 | -26.5 |
| 12060.0 | Average | Vertical | -11.4 | 47.1 | 35.7 | 54.0 | -18.3 |
| 12060.0 | Peak | Horizontal | -0.1 | 47.1 | 47.0 | 74.0 | -27.0 |
| 12060.0 | Average | Horizontal | -11.4 | 47.1 | 35.7 | 54.0 | -18.3 |

Transmitting at the Middle Frequency – 802.11b


| Frequency (MHz) | Detection Mode | Antenna Polarity | Receiver Reading (dB μ V) | Correction Factor (dB) | Field Strength (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|----------------|------------------|-------------------------------|------------------------|-------------------------------|----------------------|-------------|
| 4874.0 | Peak | Vertical | 16.6 | 37.9 | 54.5 | 74.0 | -19.5 |
| 4874.0 | Average | Vertical | 13.9 | 37.9 | 51.8 | 54.0 | -2.2 |
| 4874.0 | Peak | Horizontal | 15.4 | 37.9 | 53.3 | 74.0 | -20.7 |
| 4874.0 | Average | Horizontal | 12.7 | 37.9 | 50.6 | 54.0 | -3.4 |
| 7311.0 | Peak | Vertical | 2.0 | 42.3 | 44.3 | 74.0 | -29.7 |
| 7311.0 | Average | Vertical | -8.0 | 42.3 | 34.3 | 54.0 | -19.7 |
| 7311.0 | Peak | Horizontal | 3.1 | 42.3 | 45.4 | 74.0 | -28.6 |
| 7311.0 | Average | Horizontal | -7.8 | 42.3 | 34.5 | 54.0 | -19.5 |
| 12185.0 | Peak | Vertical | -0.2 | 47.0 | 46.8 | 74.0 | -27.2 |
| 12185.0 | Average | Vertical | -11.4 | 47.0 | 35.6 | 54.0 | -18.4 |
| 12185.0 | Peak | Horizontal | -0.2 | 47.0 | 46.8 | 74.0 | -27.2 |
| 12185.0 | Average | Horizontal | -11.8 | 47.0 | 35.2 | 54.0 | -18.8 |

Transmitting at the Highest Frequency – 802.11b

| Frequency (MHz) | Detection Mode | Antenna Polarity | Receiver Reading (dB μ V) | Correction Factor (dB) | Field Strength (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|----------------|------------------|-------------------------------|------------------------|-------------------------------|----------------------|-------------|
| 4924.0 | Peak | Vertical | 13.9 | 38.0 | 51.9 | 74.0 | -22.1 |
| 4924.0 | Average | Vertical | 11.0 | 38.0 | 49.0 | 54.0 | -5.0 |
| 4924.0 | Peak | Horizontal | 12.1 | 38.0 | 50.1 | 74.0 | -23.9 |
| 4924.0 | Average | Horizontal | 8.3 | 38.0 | 46.3 | 54.0 | -7.7 |
| 7386.0 | Peak | Vertical | 2.4 | 42.5 | 44.9 | 74.0 | -29.1 |
| 7386.0 | Average | Vertical | -9.1 | 42.5 | 33.4 | 54.0 | -20.6 |
| 7386.0 | Peak | Horizontal | 2.9 | 42.5 | 45.4 | 74.0 | -28.6 |
| 7386.0 | Average | Horizontal | -9.0 | 42.5 | 33.5 | 54.0 | -20.5 |
| 12310.0 | Peak | Vertical | -0.4 | 47.0 | 46.6 | 74.0 | -27.4 |
| 12310.0 | Average | Vertical | -11.4 | 47.0 | 35.6 | 54.0 | -18.4 |
| 12310.0 | Peak | Horizontal | 0.7 | 47.0 | 47.7 | 74.0 | -26.3 |
| 12310.0 | Average | Horizontal | -11.6 | 47.0 | 35.4 | 54.0 | -18.6 |


No other emissions were seen in the restricted bands. Noise floor was greater than 6 dB below the limit. At frequencies above 12.5 GHz, a 1 meter measurement distance was used.

Radiated Lower Band Edge Plot – 802.11b

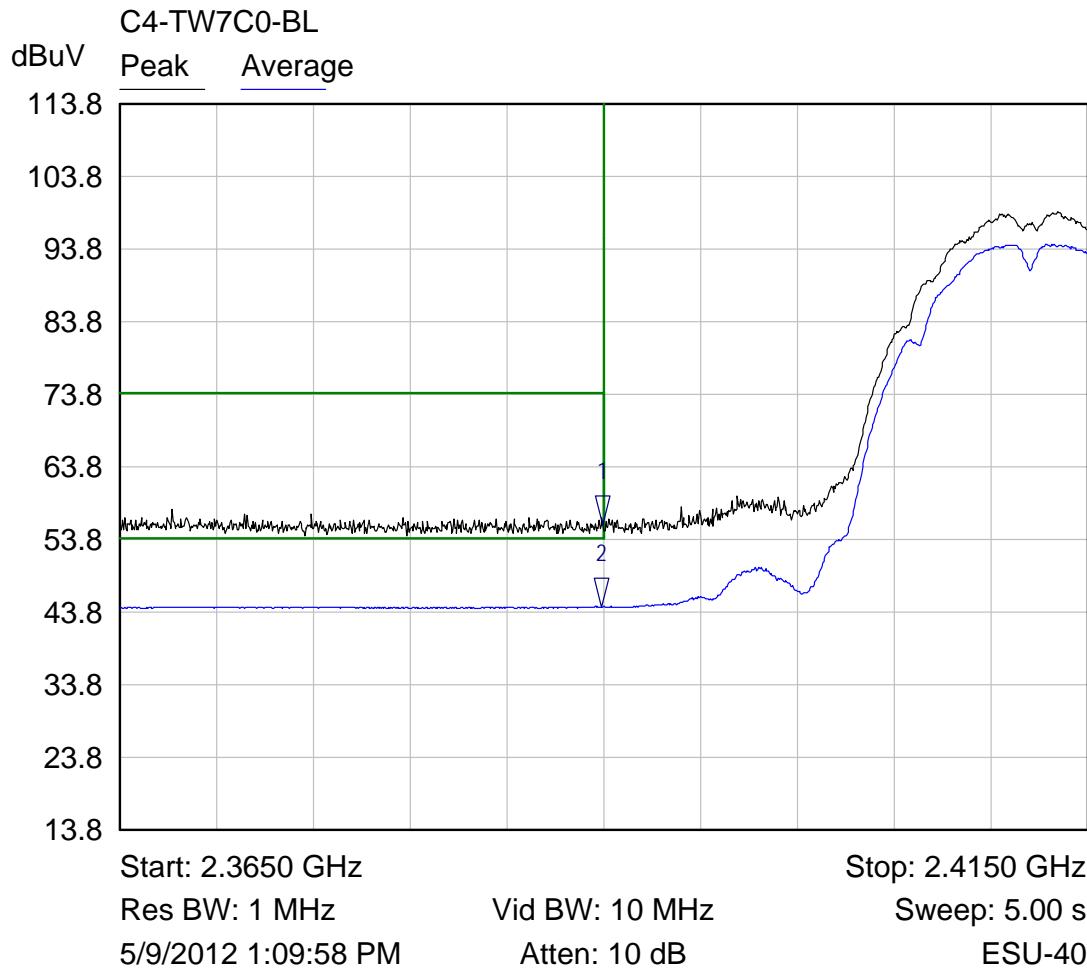

| Mkr | Trace | X-Axis | Value | Notes |
|-----|---------|------------|------------|-------|
| 1 | Peak | 2.3900 GHz | 55.72 dBuV | |
| 2 | Average | 2.3899 GHz | 44.52 dBuV | |

Radiated Upper Band Edge Plot – 802.11b

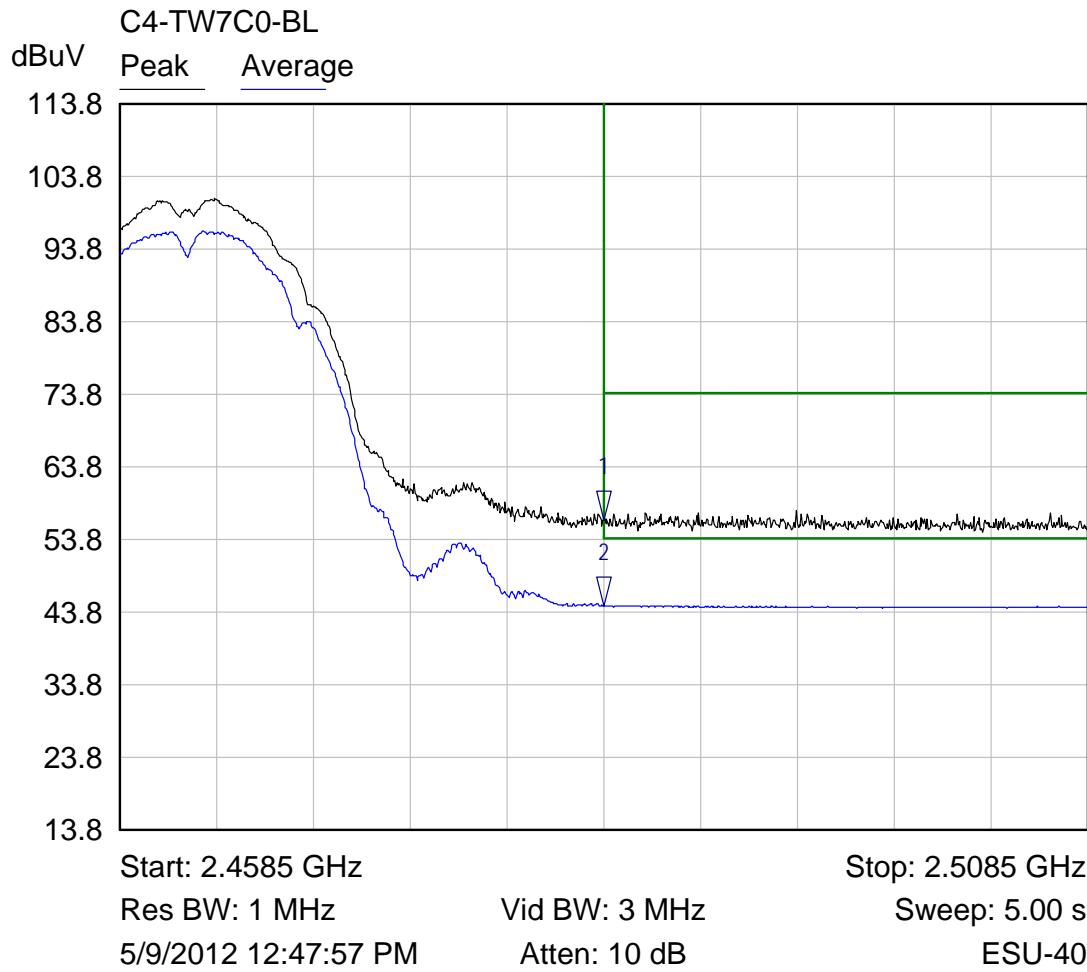

| Mkr | Trace | X-Axis | Value | Notes |
|-----|---------|------------|------------|-------|
| 1 | Peak | 2.4835 GHz | 56.42 dBuV | |
| 2 | Average | 2.4835 GHz | 44.68 dBuV | |

6.2.5.2.2 802.11g

Transmitting at the Lowest Frequency – 802.11g

| Frequency (MHz) | Detection Mode | Antenna Polarity | Receiver Reading (dB μ V) | Correction Factor (dB) | Field Strength (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|----------------|------------------|-------------------------------|------------------------|-------------------------------|----------------------|-------------|
| 4824.0 | Peak | Vertical | 22.3 | 37.8 | 60.1 | 74.0 | -13.9 |
| 4824.0 | Average | Vertical | 9.8 | 37.8 | 47.6 | 54.0 | -6.4 |
| 4824.0 | Peak | Horizontal | 20.0 | 37.8 | 57.8 | 74.0 | -16.2 |
| 4824.0 | Average | Horizontal | 6.9 | 37.8 | 44.7 | 54.0 | -9.3 |
| 7236.0 | Peak | Vertical | 11.6 | 42.1 | 53.7 | 74.0 | -20.3 |
| 7236.0 | Average | Vertical | -1.0 | 42.1 | 41.1 | 54.0 | -12.9 |
| 7236.0 | Peak | Horizontal | 10.6 | 42.1 | 52.7 | 74.0 | -21.3 |
| 7236.0 | Average | Horizontal | -2.6 | 42.1 | 39.5 | 54.0 | -14.5 |
| 12060.0 | Peak | Vertical | 1.8 | 47.1 | 48.9 | 74.0 | -25.1 |
| 12060.0 | Average | Vertical | -11.9 | 47.1 | 35.2 | 54.0 | -18.8 |
| 12060.0 | Peak | Horizontal | 1.2 | 47.1 | 48.3 | 74.0 | -25.7 |
| 12060.0 | Average | Horizontal | -10.9 | 47.1 | 36.2 | 54.0 | -17.8 |

Transmitting at the Middle Frequency – 802.11g

| Frequency (MHz) | Detection Mode | Antenna Polarity | Receiver Reading (dB μ V) | Correction Factor (dB) | Field Strength (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|----------------|------------------|-------------------------------|------------------------|-------------------------------|----------------------|-------------|
| 4874.0 | Peak | Vertical | 19.0 | 37.9 | 56.9 | 74.0 | -17.1 |
| 4874.0 | Average | Vertical | 7.5 | 37.9 | 45.4 | 54.0 | -8.6 |
| 4874.0 | Peak | Horizontal | 17.5 | 37.9 | 55.4 | 74.0 | -18.6 |
| 4874.0 | Average | Horizontal | 4.7 | 37.9 | 42.6 | 54.0 | -11.4 |
| 7311.0 | Peak | Vertical | 6.8 | 42.3 | 49.1 | 74.0 | -24.9 |
| 7311.0 | Average | Vertical | -5.5 | 42.3 | 36.8 | 54.0 | -17.2 |


| Frequency (MHz) | Detection Mode | Antenna Polarity | Receiver Reading (dB μ V) | Correction Factor (dB) | Field Strength (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|----------------|------------------|-------------------------------|------------------------|-------------------------------|----------------------|-------------|
| 7311.0 | Peak | Horizontal | 9.5 | 42.3 | 51.8 | 74.0 | -22.2 |
| 7311.0 | Average | Horizontal | -2.9 | 42.3 | 39.4 | 54.0 | -14.6 |
| 12185.0 | Peak | Vertical | 0.9 | 47.0 | 47.9 | 74.0 | -26.1 |
| 12185.0 | Average | Vertical | -11.4 | 47.0 | 35.6 | 54.0 | -18.4 |
| 12185.0 | Peak | Horizontal | 0.6 | 47.0 | 47.6 | 74.0 | -26.4 |
| 12185.0 | Average | Horizontal | -11.6 | 47.0 | 35.4 | 54.0 | -18.6 |

Transmitting at the Highest Frequency – 802.11g

| Frequency (MHz) | Detection Mode | Antenna Polarity | Receiver Reading (dB μ V) | Correction Factor (dB) | Field Strength (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|----------------|------------------|-------------------------------|------------------------|-------------------------------|----------------------|-------------|
| 4924.0 | Peak | Vertical | 17.9 | 38.0 | 55.9 | 74.0 | -18.1 |
| 4924.0 | Average | Vertical | 4.9 | 38.0 | 42.9 | 54.0 | -11.1 |
| 4924.0 | Peak | Horizontal | 15.3 | 38.0 | 53.3 | 74.0 | -20.7 |
| 4924.0 | Average | Horizontal | 2.1 | 38.0 | 40.1 | 54.0 | -13.9 |
| 7386.0 | Peak | Vertical | 5.3 | 42.5 | 47.8 | 74.0 | -26.2 |
| 7386.0 | Average | Vertical | -6.5 | 42.5 | 36.0 | 54.0 | -18.0 |
| 7386.0 | Peak | Horizontal | 10.0 | 42.5 | 52.5 | 74.0 | -21.5 |
| 7386.0 | Average | Horizontal | -3.4 | 42.5 | 39.1 | 54.0 | -14.9 |
| 12310.0 | Peak | Vertical | 1.0 | 47.0 | 48.0 | 74.0 | -26.0 |
| 12310.0 | Average | Vertical | -11.1 | 47.0 | 35.9 | 54.0 | -18.1 |
| 12310.0 | Peak | Horizontal | 1.0 | 47.0 | 48.0 | 74.0 | -26.0 |
| 12310.0 | Average | Horizontal | -11.4 | 47.0 | 35.6 | 54.0 | -18.4 |


No other emissions were seen in the restricted bands. Noise floor was greater than 6 dB below the limit. At frequencies above 12.5 GHz, a 1 meter measurement distance was used.

Radiated Lower Band Edge Plot Channel 1 – 802.11g – Power level at +16

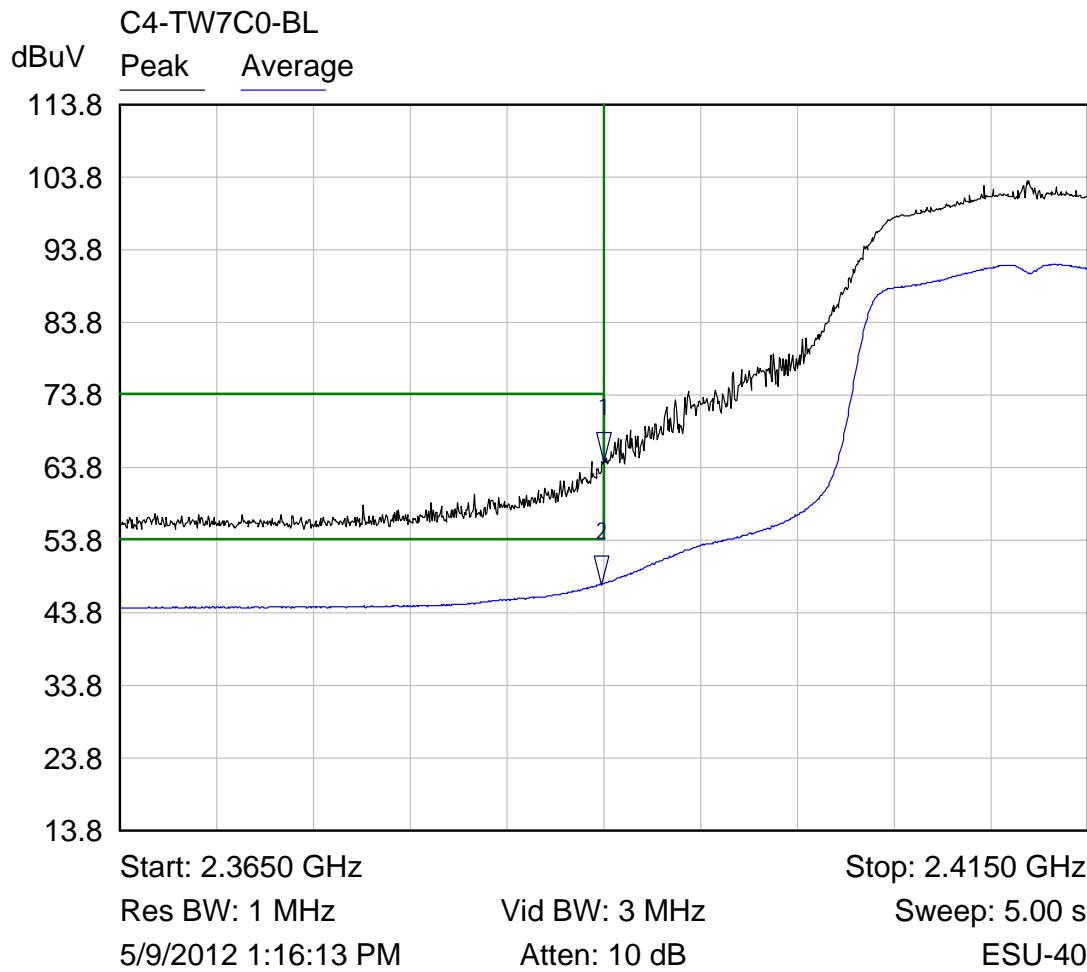


| Mkr | Trace | X-Axis | Value | Notes |
|-----|---------|------------|------------|-------|
| 1 | Peak | 2.3900 GHz | 64.66 dBuV | |
| 2 | Average | 2.3899 GHz | 47.71 dBuV | |

Radiated Lower Band Edge Plot Channel 2 – 802.11g – Power level at +20

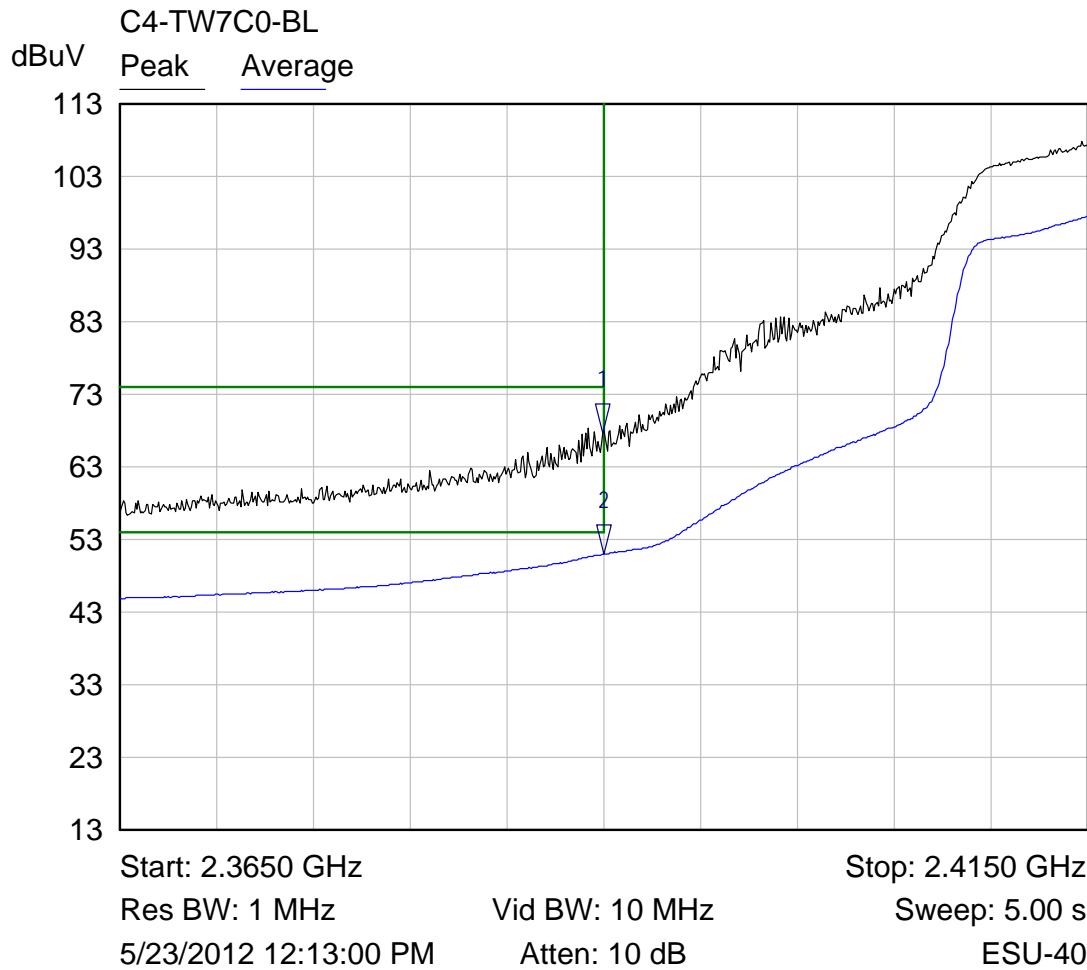


| Mkr | Trace | X-Axis | Value | Notes |
|-----|---------|------------|------------|-------|
| 1 ▽ | Peak | 2.3899 GHz | 67.59 dBuV | |
| 2 ▽ | Average | 2.3900 GHz | 51.00 dBuV | |

Radiated Upper Band Edge Plot Channel 10 – 802.11g – Power level at +20

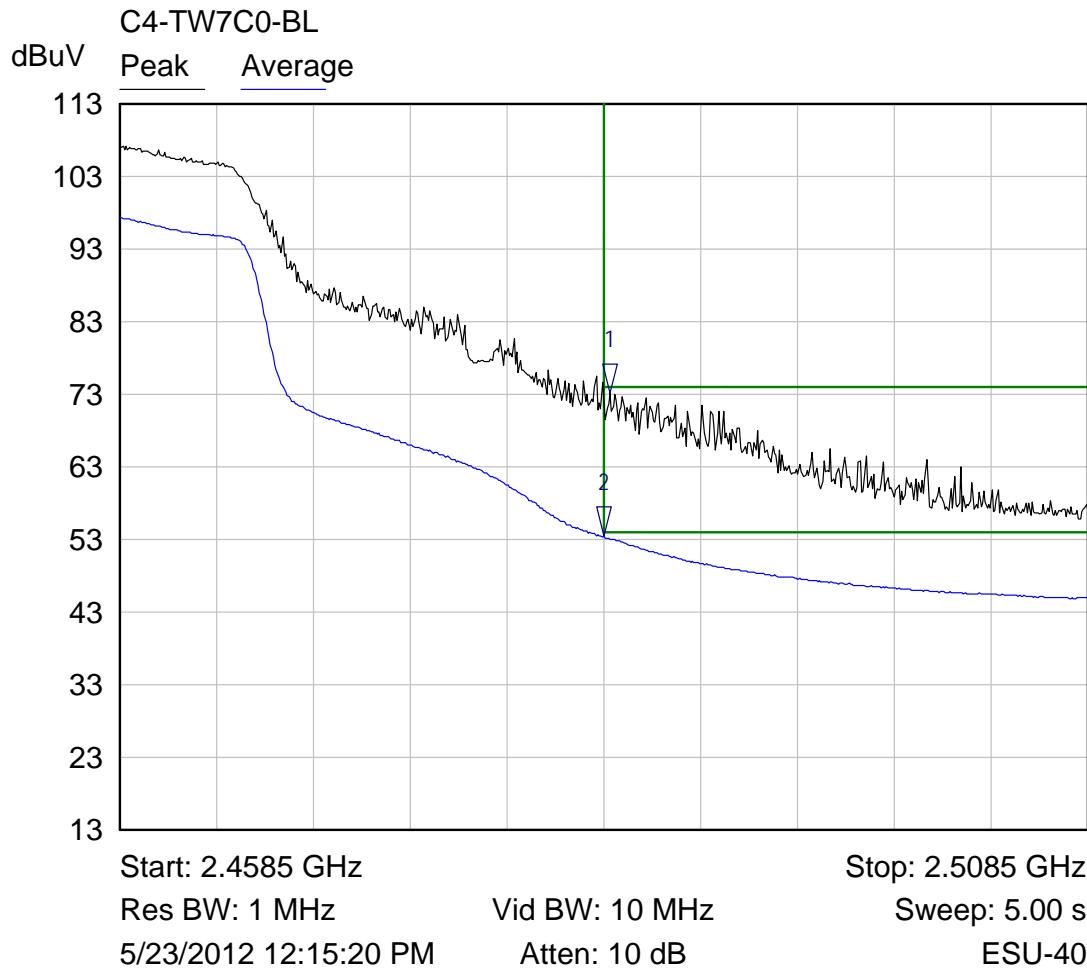

| Mkr | Trace | X-Axis | Value | Notes |
|-----|---------|------------|------------|-------|
| 1 ▽ | Peak | 2.4838 GHz | 73.10 dBuV | |
| 2 ▽ | Average | 2.4835 GHz | 53.43 dBuV | |

Radiated Upper Band Edge Plot Channel 11 – 802.11g – Power level at +16

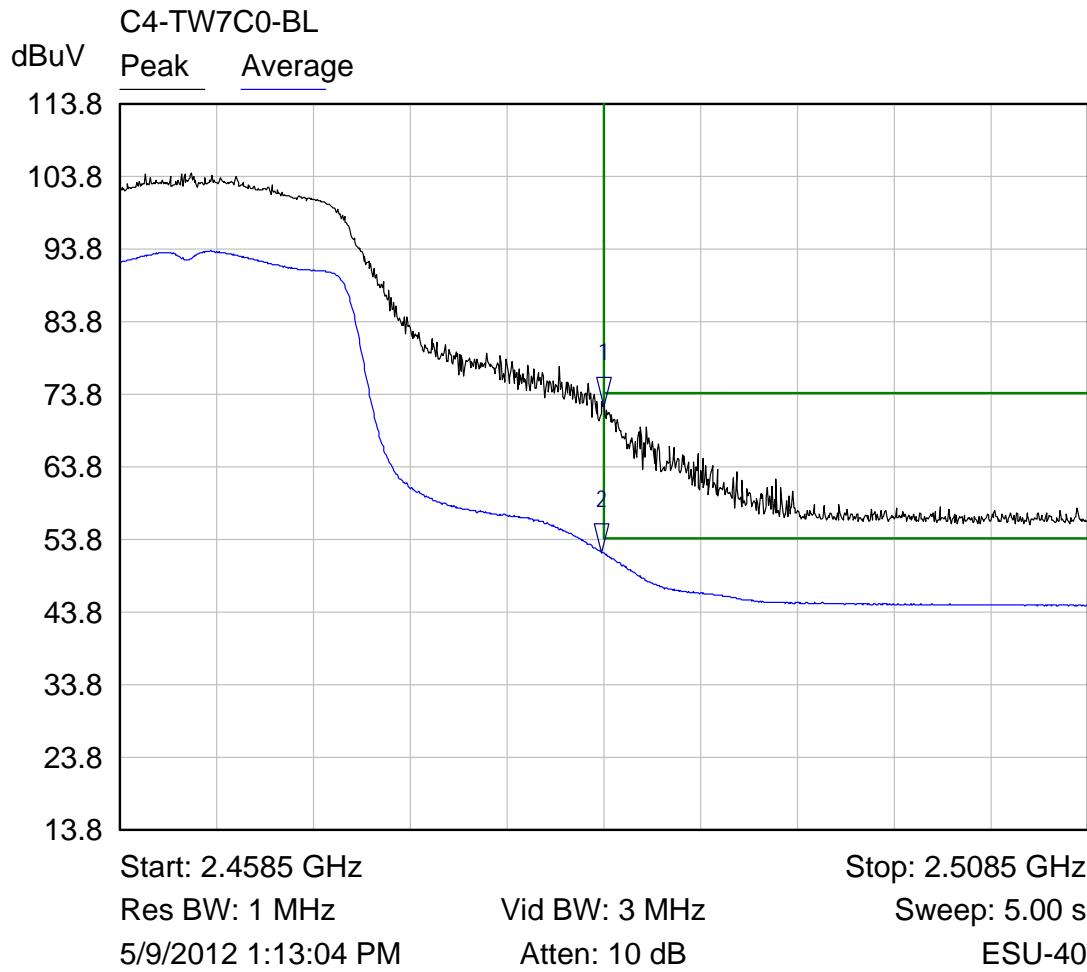

| Mkr | Trace | X-Axis | Value | Notes |
|-----|---------|------------|------------|-------|
| 1 | Peak | 2.4835 GHz | 72.08 dBuV | |
| 2 | Average | 2.4834 GHz | 52.04 dBuV | |

6.2.5.2.3 802.11n

Transmitting at the Lowest Frequency (2412 MHz)

| Frequency (MHz) | Detection Mode | Antenna Polarity | Receiver Reading (dB μ V) | Correction Factor (dB) | Field Strength (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|----------------|------------------|-------------------------------|------------------------|-------------------------------|----------------------|-------------|
| 4824.0 | Peak | Vertical | 22.4 | 37.8 | 60.2 | 74.0 | -13.8 |
| 4824.0 | Average | Vertical | 9.0 | 37.8 | 46.8 | 54.0 | -7.2 |
| 4824.0 | Peak | Horizontal | 17.3 | 37.8 | 55.1 | 74.0 | -18.9 |
| 4824.0 | Average | Horizontal | 4.3 | 37.8 | 42.1 | 54.0 | -11.9 |
| 7236.0 | Peak | Vertical | 8.6 | 42.1 | 50.7 | 74.0 | -23.3 |
| 7236.0 | Average | Vertical | -4.1 | 42.1 | 38.0 | 54.0 | -16.0 |
| 7236.0 | Peak | Horizontal | 8.2 | 42.1 | 50.3 | 74.0 | -23.7 |
| 7236.0 | Average | Horizontal | -5.0 | 42.1 | 37.1 | 54.0 | -16.9 |
| 12060.0 | Peak | Vertical | 1.0 | 47.1 | 48.1 | 74.0 | -25.9 |
| 12060.0 | Average | Vertical | -11.2 | 47.1 | 35.9 | 54.0 | -18.1 |
| 12060.0 | Peak | Horizontal | 1.5 | 47.1 | 48.6 | 74.0 | -25.4 |
| 12060.0 | Average | Horizontal | -11.1 | 47.1 | 36.0 | 54.0 | -18.0 |

Transmitting at the Middle Frequency (2437 MHz)

| Frequency (MHz) | Detection Mode | Antenna Polarity | Receiver Reading (dB μ V) | Correction Factor (dB) | Field Strength (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|----------------|------------------|-------------------------------|------------------------|-------------------------------|----------------------|-------------|
| 4874.0 | Peak | Vertical | 18.9 | 37.9 | 56.8 | 74.0 | -17.2 |
| 4874.0 | Average | Vertical | 5.6 | 37.9 | 43.5 | 54.0 | -10.5 |
| 4874.0 | Peak | Horizontal | 16.9 | 37.9 | 54.8 | 74.0 | -19.2 |
| 4874.0 | Average | Horizontal | 3.7 | 37.9 | 41.6 | 54.0 | -12.4 |
| 7311.0 | Peak | Vertical | 5.2 | 42.3 | 47.5 | 74.0 | -26.5 |
| 7311.0 | Average | Vertical | -7.1 | 42.3 | 35.2 | 54.0 | -18.8 |


| Frequency (MHz) | Detection Mode | Antenna Polarity | Receiver Reading (dB μ V) | Correction Factor (dB) | Field Strength (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|----------------|------------------|-------------------------------|------------------------|-------------------------------|----------------------|-------------|
| 7311.0 | Peak | Horizontal | 7.0 | 42.3 | 49.3 | 74.0 | -24.7 |
| 7311.0 | Average | Horizontal | -5.5 | 42.3 | 36.8 | 54.0 | -17.2 |
| 12185.0 | Peak | Vertical | 0.9 | 47.0 | 47.9 | 74.0 | -26.1 |
| 12185.0 | Average | Vertical | -11.7 | 47.0 | 35.3 | 54.0 | -18.7 |
| 12185.0 | Peak | Horizontal | 1.0 | 47.0 | 48.0 | 74.0 | -26.0 |
| 12185.0 | Average | Horizontal | -11.4 | 47.0 | 35.6 | 54.0 | -18.4 |

Transmitting at the Highest Frequency (2462 MHz)

| Frequency (MHz) | Detection Mode | Antenna Polarity | Receiver Reading (dB μ V) | Correction Factor (dB) | Field Strength (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-----------------|----------------|------------------|-------------------------------|------------------------|-------------------------------|----------------------|-------------|
| 4924.0 | Peak | Vertical | 16.6 | 38.0 | 54.6 | 74.0 | -19.4 |
| 4924.0 | Average | Vertical | 5.0 | 38.0 | 43.0 | 54.0 | -11.0 |
| 4924.0 | Peak | Horizontal | 14.6 | 38.0 | 52.6 | 74.0 | -21.4 |
| 4924.0 | Average | Horizontal | 0.4 | 38.0 | 38.4 | 54.0 | -15.6 |
| 7386.0 | Peak | Vertical | 2.9 | 42.5 | 45.4 | 74.0 | -28.6 |
| 7386.0 | Average | Vertical | -8.1 | 42.5 | 34.4 | 54.0 | -19.6 |
| 7386.0 | Peak | Horizontal | 6.8 | 42.5 | 49.3 | 74.0 | -24.7 |
| 7386.0 | Average | Horizontal | -5.5 | 42.5 | 37.0 | 54.0 | -17.0 |
| 12310.0 | Peak | Vertical | 0.9 | 47.0 | 47.9 | 74.0 | -26.1 |
| 12310.0 | Average | Vertical | -11.3 | 47.0 | 35.7 | 54.0 | -18.3 |
| 12310.0 | Peak | Horizontal | 1.3 | 47.0 | 48.3 | 74.0 | -25.7 |
| 12310.0 | Average | Horizontal | -11.4 | 47.0 | 35.6 | 54.0 | -18.4 |


No other emissions were seen in the restricted bands. Noise floor was greater than 6 dB below the limit. At frequencies above 12.5 GHz, a 1 meter measurement distance was used.

Radiated Lower Band Edge Plot Channel 1 – 802.11n – Power level at +15

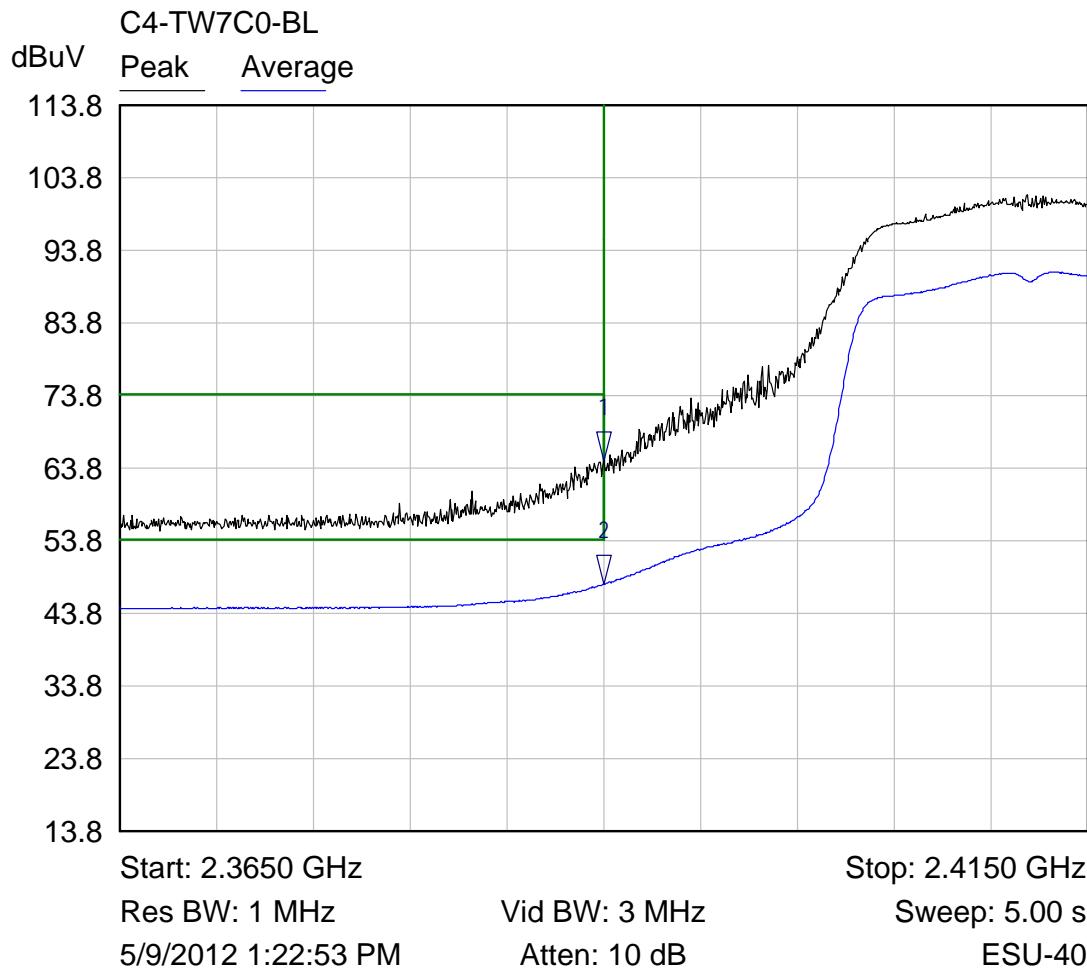


| Mkr | Trace | X-Axis | Value | Notes |
|-----|---------|------------|------------|-------|
| 1 ▽ | Peak | 2.3900 GHz | 64.72 dBuV | |
| 2 ▽ | Average | 2.3900 GHz | 47.74 dBuV | |

Radiated Lower Band Edge Plot Channel 2 – 802.11n – Power level at +19

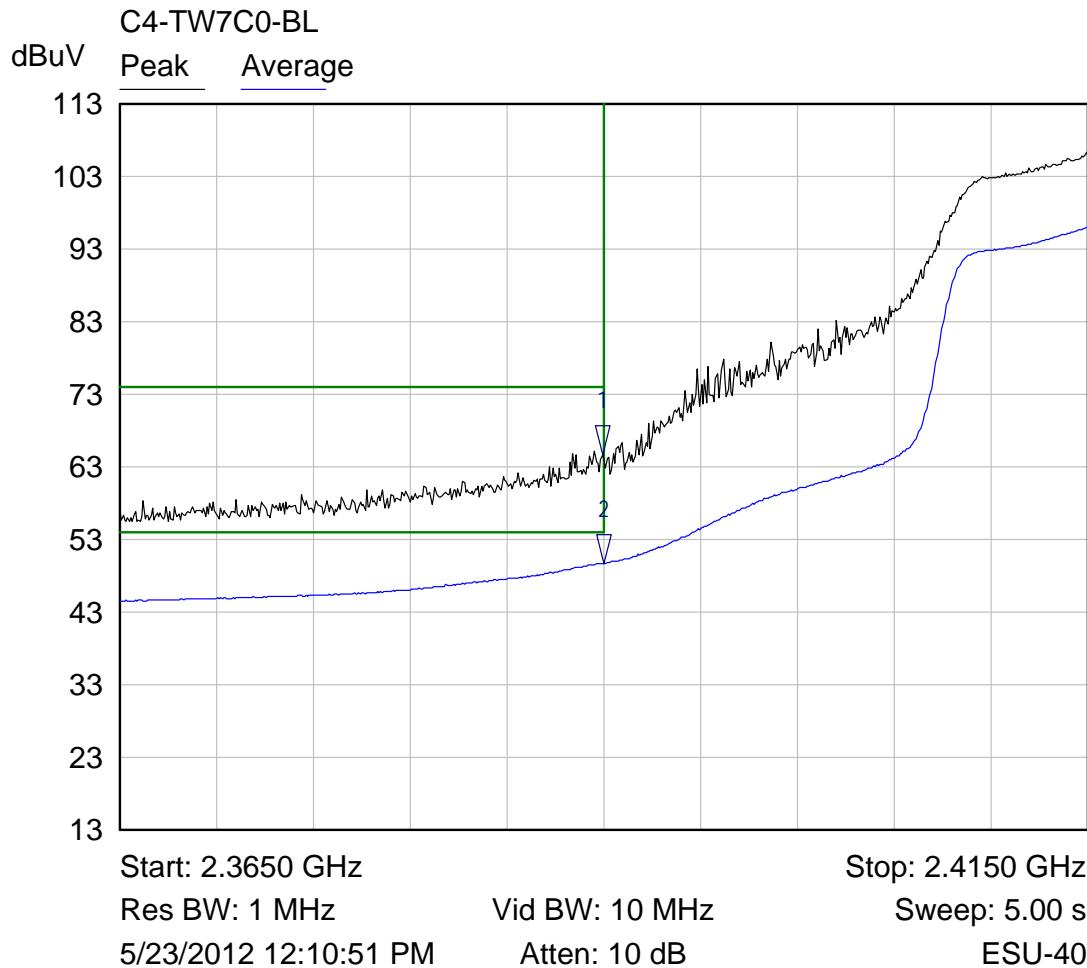


| Mkr | Trace | X-Axis | Value | Notes |
|-----|---------|------------|------------|-------|
| 1 | Peak | 2.3899 GHz | 64.73 dBuV | |
| 2 | Average | 2.3900 GHz | 49.70 dBuV | |

Radiated Upper Band Edge Plot Channel 10 – 802.11n – Power level at +19

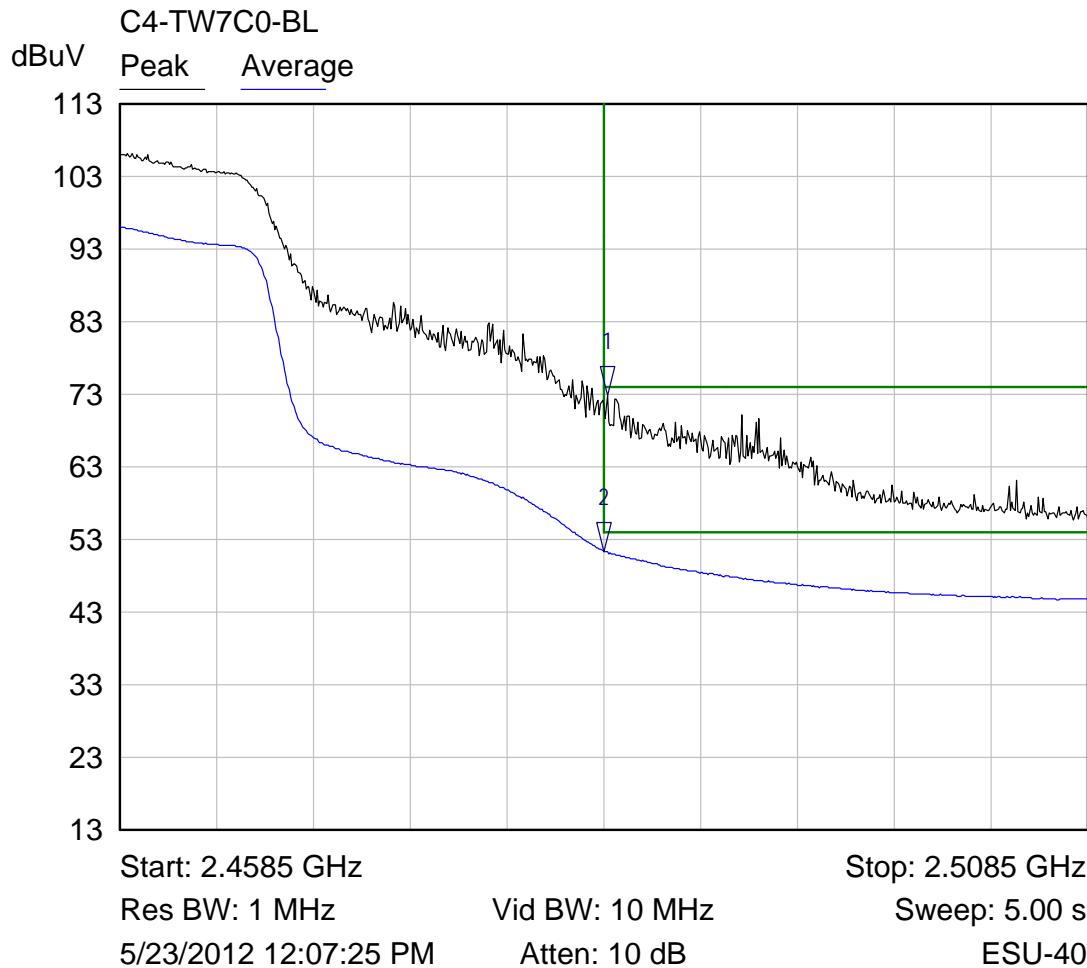

| Mkr | Trace | X-Axis | Value | Notes |
|-----|---------|------------|------------|-------|
| 1 ▽ | Peak | 2.4837 GHz | 72.83 dBuV | |
| 2 ▽ | Average | 2.4835 GHz | 51.41 dBuV | |

Radiated Upper Band Edge Plot Channel 11 – 802.11n – Power level at +15

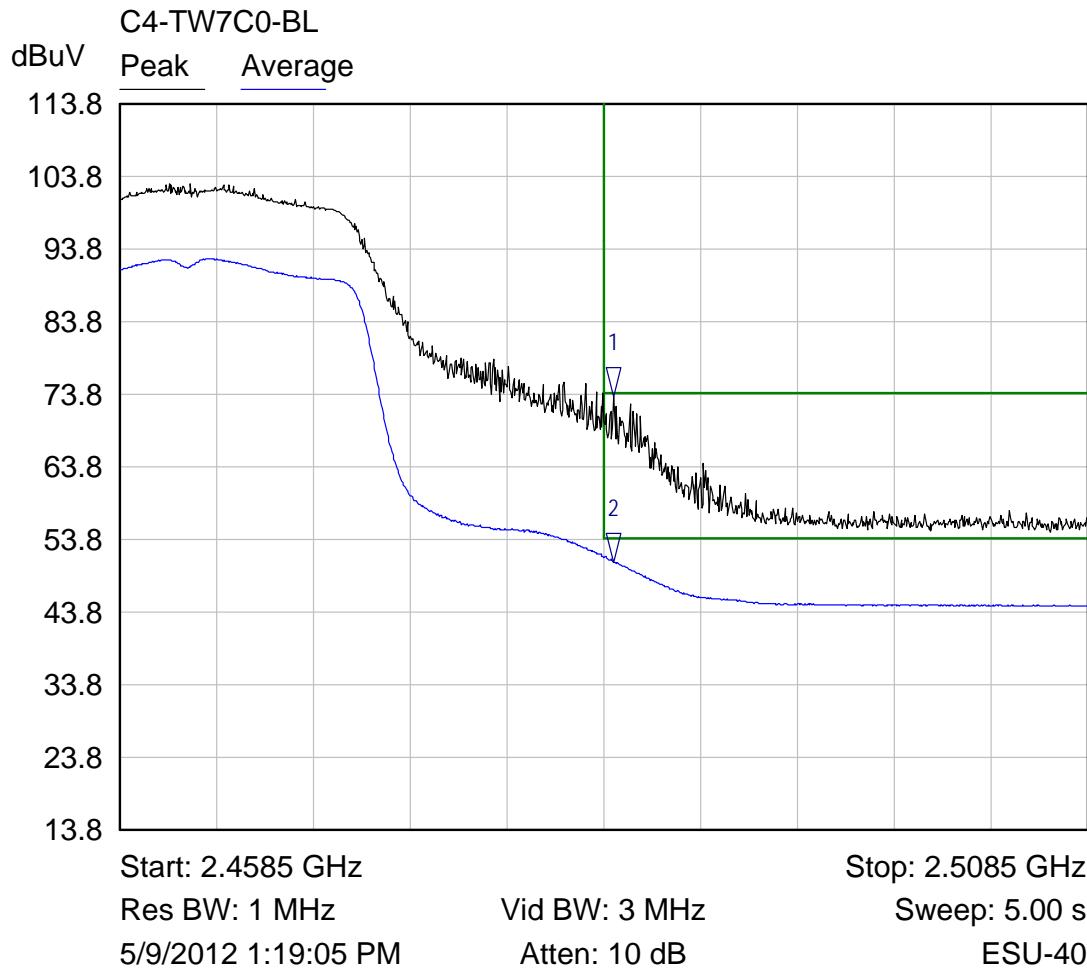

| Mkr | Trace | X-Axis | Value | Notes |
|-----|---------|------------|------------|-------|
| 1 ▽ | Peak | 2.4840 GHz | 73.40 dBuV | |
| 2 ▽ | Average | 2.4840 GHz | 50.69 dBuV | |

6.2.6 §15.247(d) Peak Power Spectral Density


The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. KDB 558074 DTS D01 Measurement Guidance v01 5.3.1 was used to measure the 3 kHz power spectral density of the emission. The result of this testing is summarized in the table below.

| Frequency (MHz) | 802.11b Measurement (dBm) | 802.11g Measurement (dBm) | 802.11n Measurement (dBm) |
|-----------------|---------------------------|---------------------------|---------------------------|
| 2412 | -10.86 | -7.34 | -8.25 |
| 2437 | -10.20 | -7.55 | -8.76 |
| 2462 | -11.85 | -8.12 | -9.25 |

RESULT


The maximum peak power spectral density was -7.34 dBm. The EUT complies with the specification by 15.34 dB.

Lowest channel – 802.11b

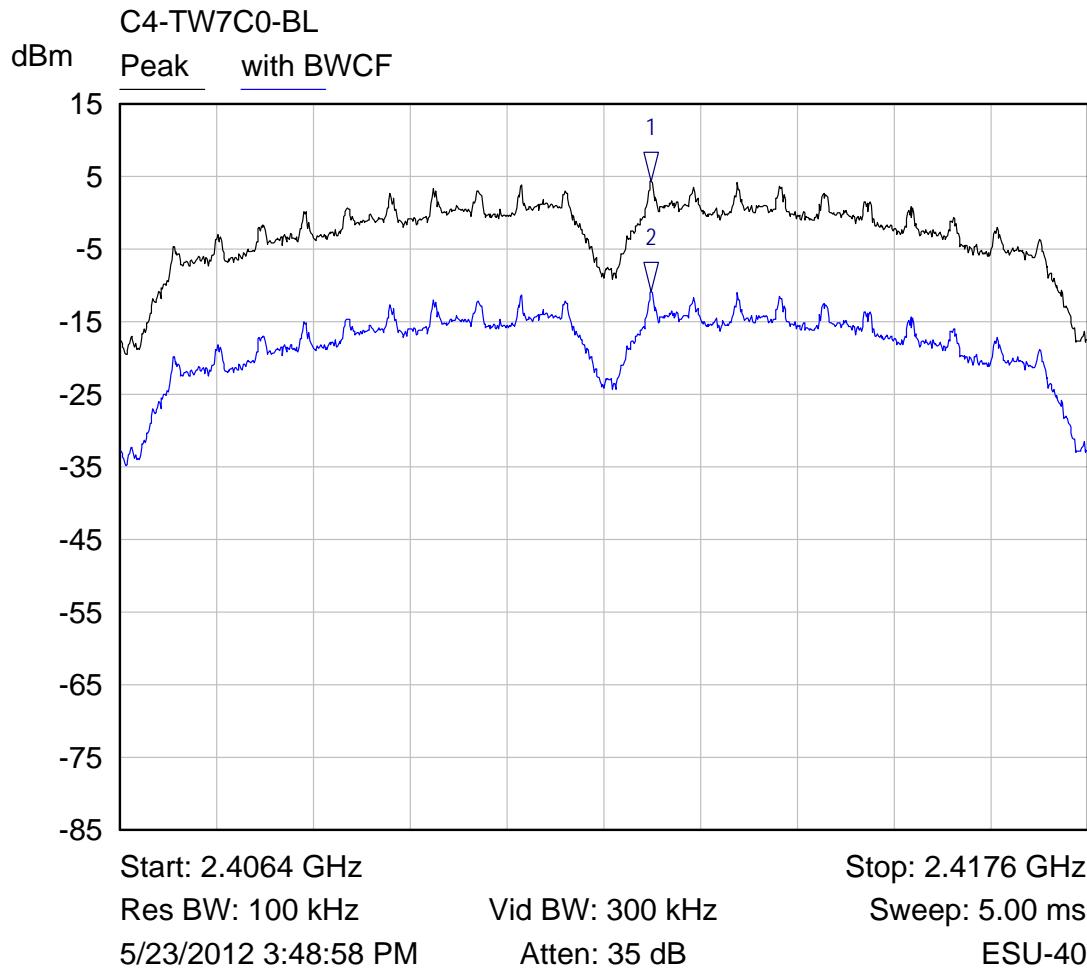


| Mkr | Trace | X-Axis | Value | Notes |
|-----|-----------|------------|------------|-------|
| 1 ▽ | Peak | 2.4125 GHz | 4.34 dBm | |
| 2 ▽ | with BWCF | 2.4125 GHz | -10.86 dBm | |

Middle channel – 802.11b

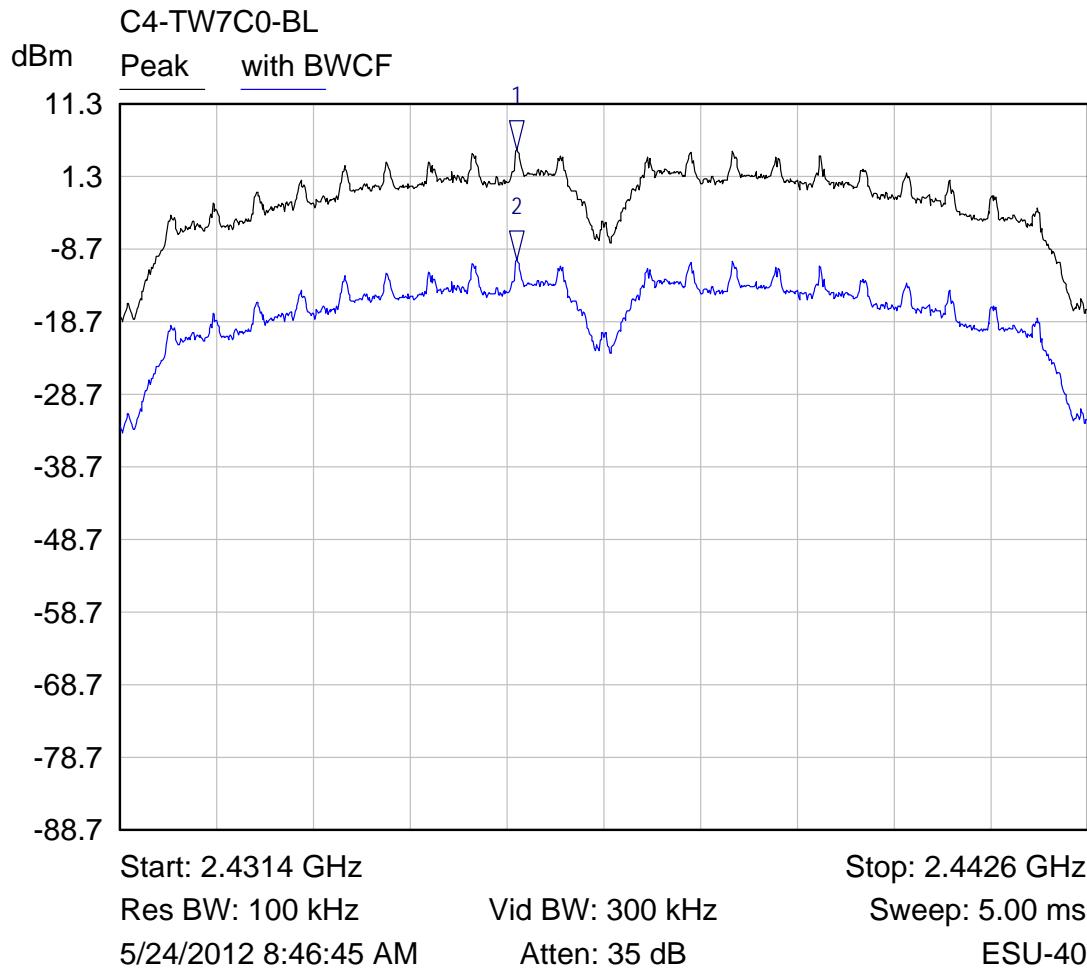


| Mkr | Trace | X-Axis | Value | Notes |
|-----|-----------|------------|------------|-------|
| 1 ▽ | Peak | 2.4360 GHz | 5.00 dBm | |
| 2 ▽ | with BWCF | 2.4360 GHz | -10.20 dBm | |

Upper channel – 802.11b

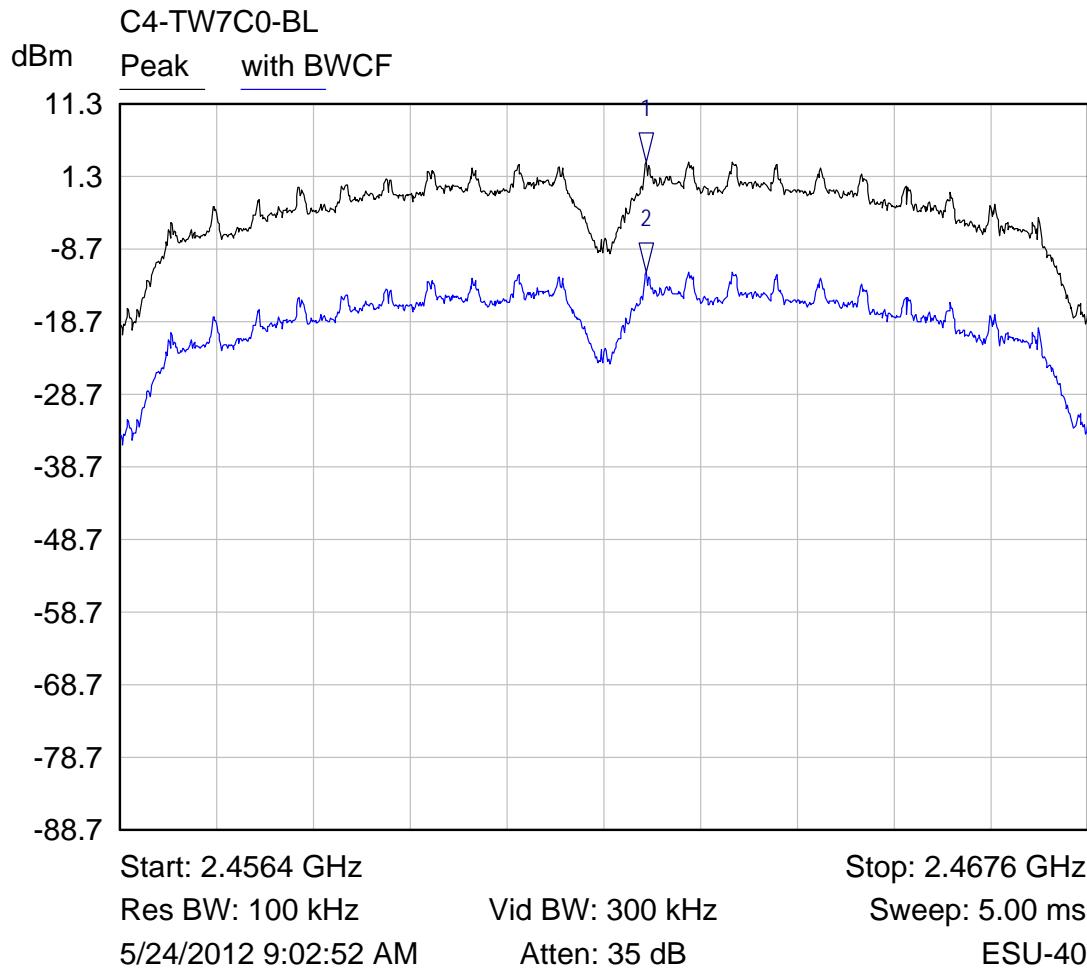


| Mkr | Trace | X-Axis | Value | Notes |
|-----|-----------|------------|------------|-------|
| 1 ▽ | Peak | 2.4625 GHz | 3.35 dBm | |
| 2 ▽ | with BWCF | 2.4625 GHz | -11.85 dBm | |

Lower channel – 802.11g

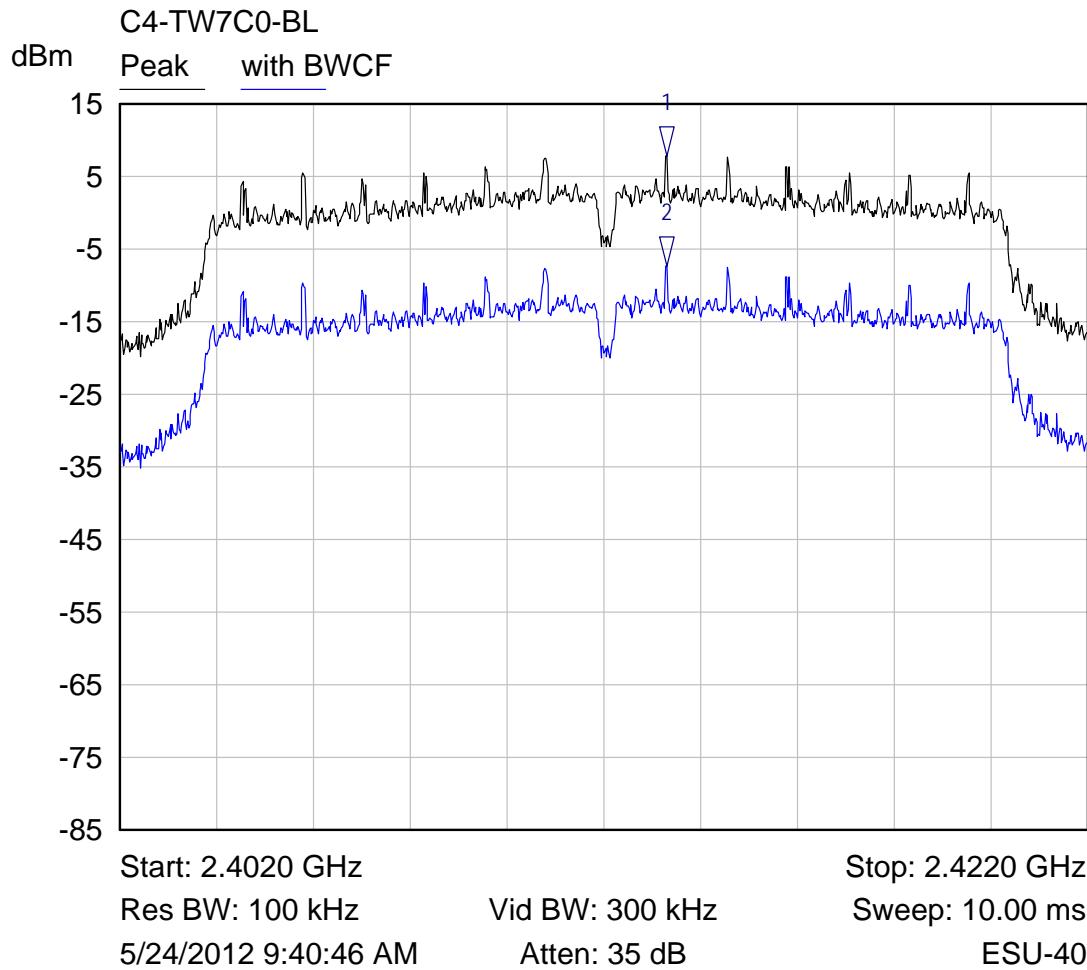


| Mkr | Trace | X-Axis | Value | Notes |
|-----|-----------|------------|-----------|-------|
| 1 ▽ | Peak | 2.4133 GHz | 7.86 dBm | |
| 2 ▽ | with BWCF | 2.4133 GHz | -7.34 dBm | |

Middle channel – 802.11g

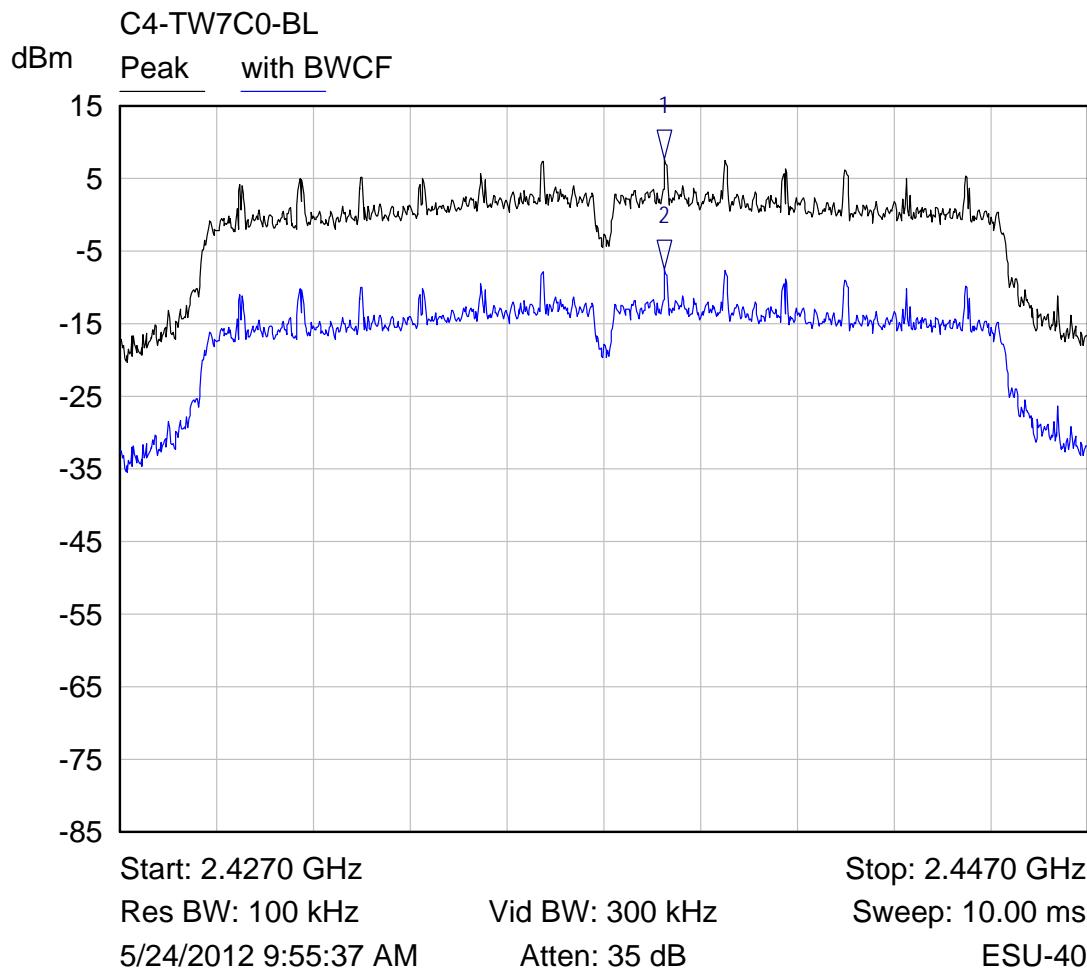


| Mkr | Trace | X-Axis | Value | Notes |
|-----|-----------|------------|-----------|-------|
| 1 ▽ | Peak | 2.4383 GHz | 7.65 dBm | |
| 2 ▽ | with BWCF | 2.4383 GHz | -7.55 dBm | |

Upper channel – 802.11g

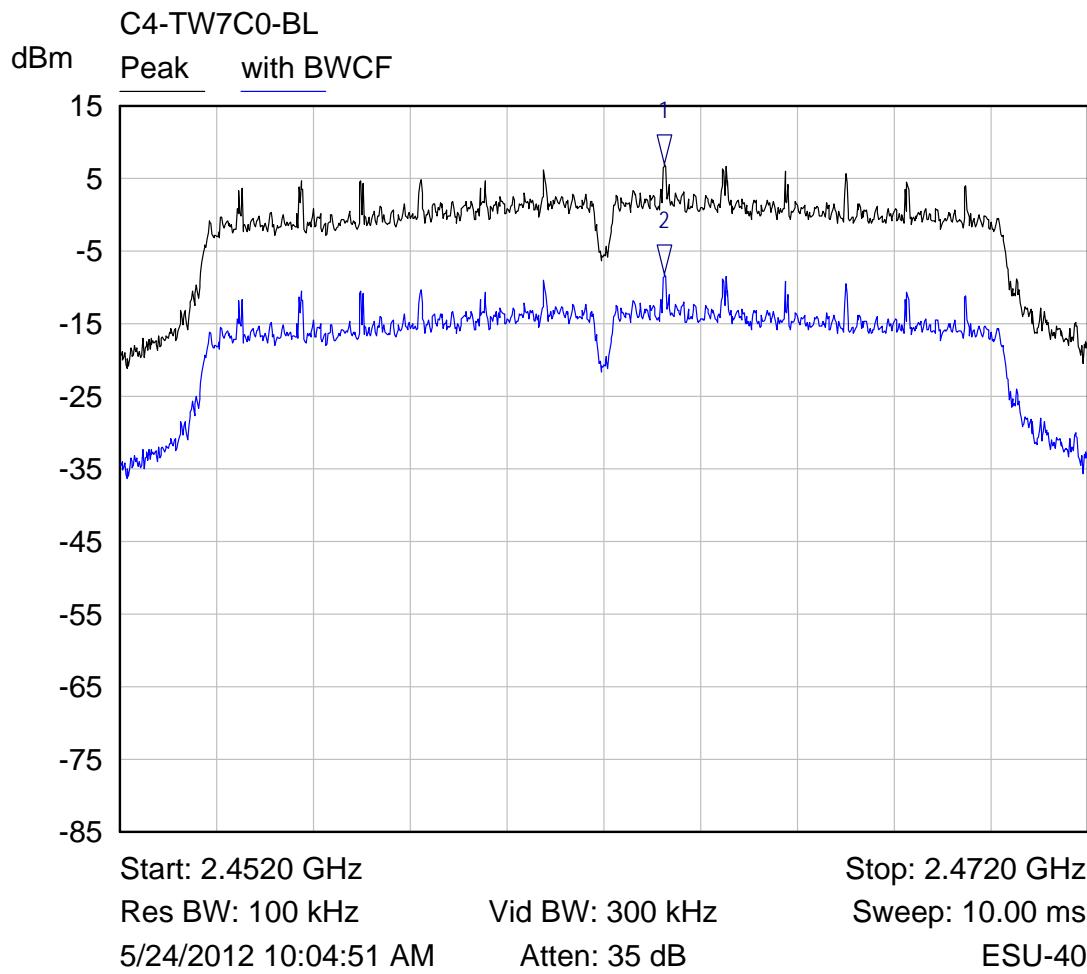


| Mkr | Trace | X-Axis | Value | Notes |
|-----|-----------|------------|-----------|-------|
| 1 ▽ | Peak | 2.4633 GHz | 7.08 dBm | |
| 2 ▽ | with BWCF | 2.4633 GHz | -8.12 dBm | |

Lower channel – 802.11n

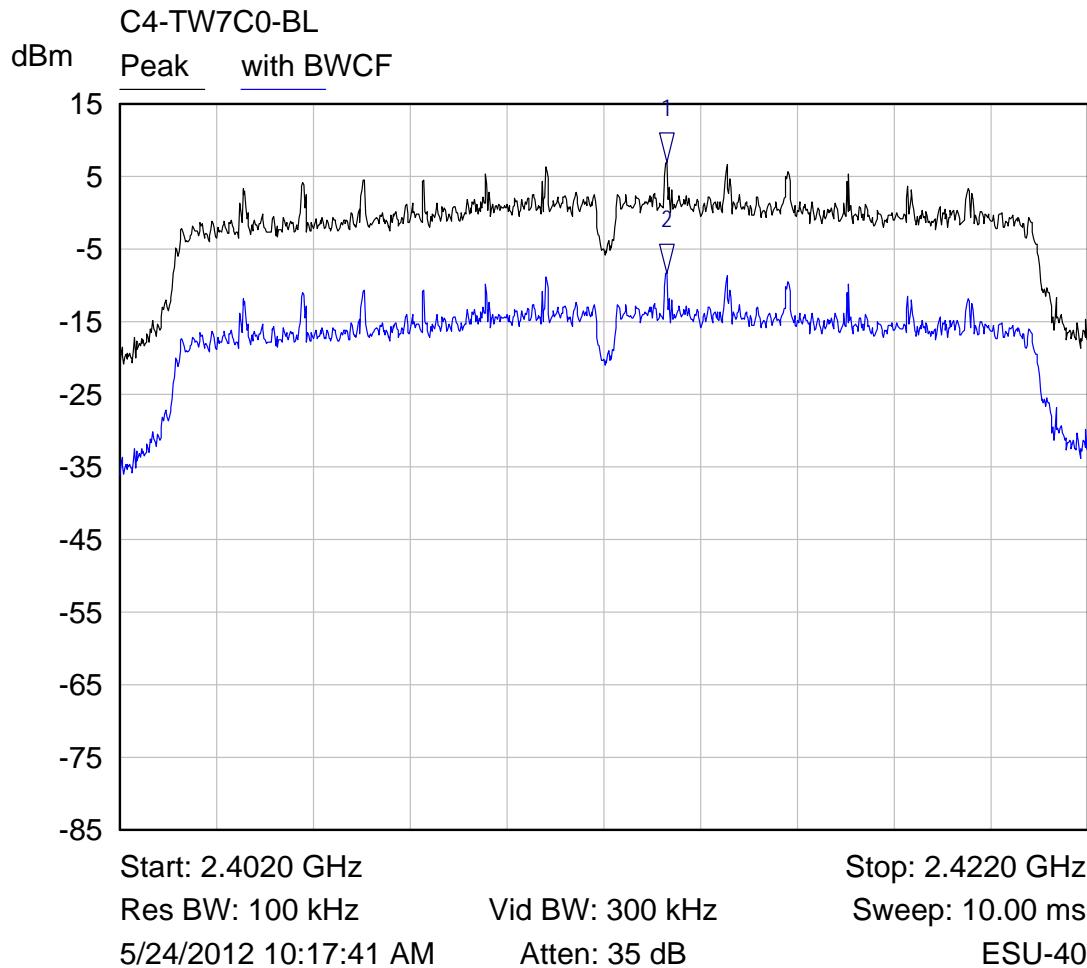


| Mkr | Trace | X-Axis | Value | Notes |
|-----|-----------|------------|-----------|-------|
| 1 ▽ | Peak | 2.4133 GHz | 6.95 dBm | |
| 2 ▽ | with BWCF | 2.4133 GHz | -8.25 dBm | |

Middle channel – 802.11n

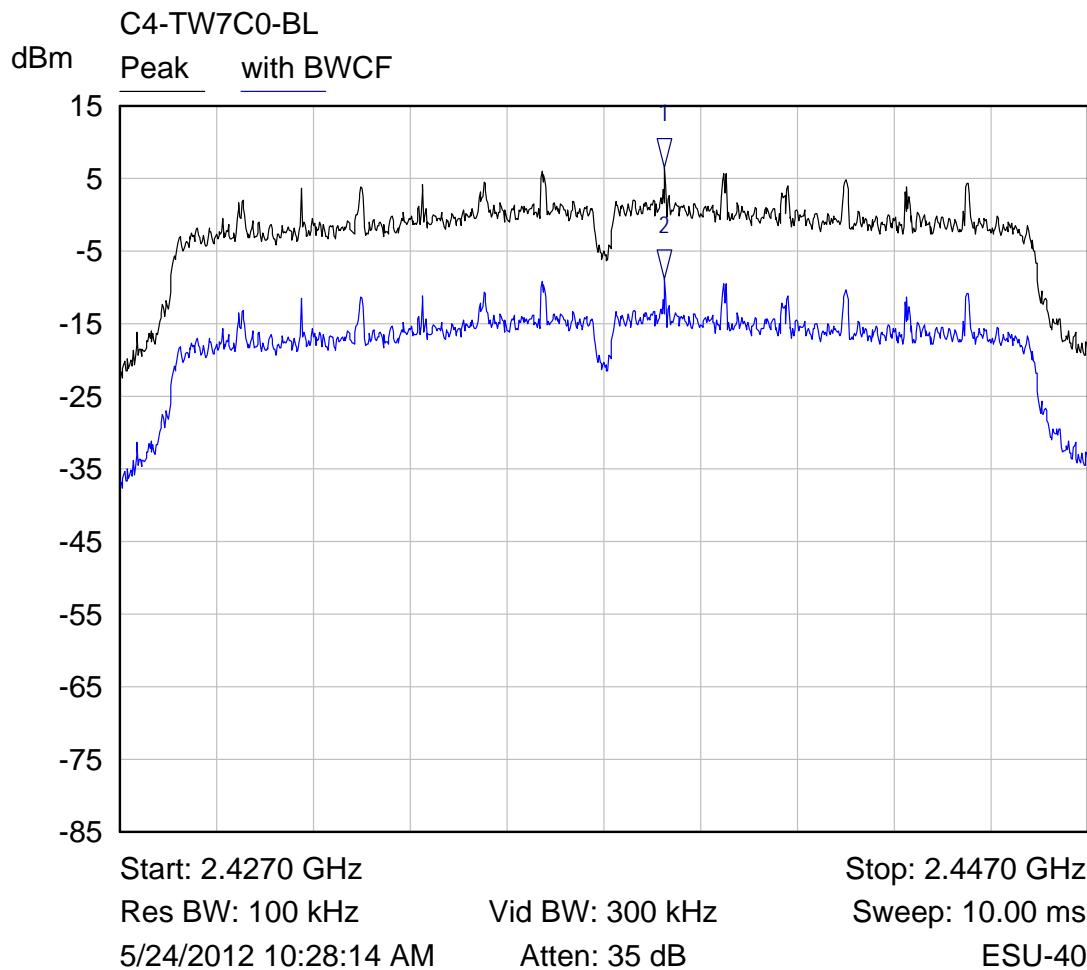

| Mkr | Trace | X-Axis | Value | Notes |
|-----|-----------|------------|-----------|-------|
| 1 | Peak | 2.4383 GHz | 6.44 dBm | |
| 2 | with BWCF | 2.4383 GHz | -8.76 dBm | |

Upper channel – 802.11n

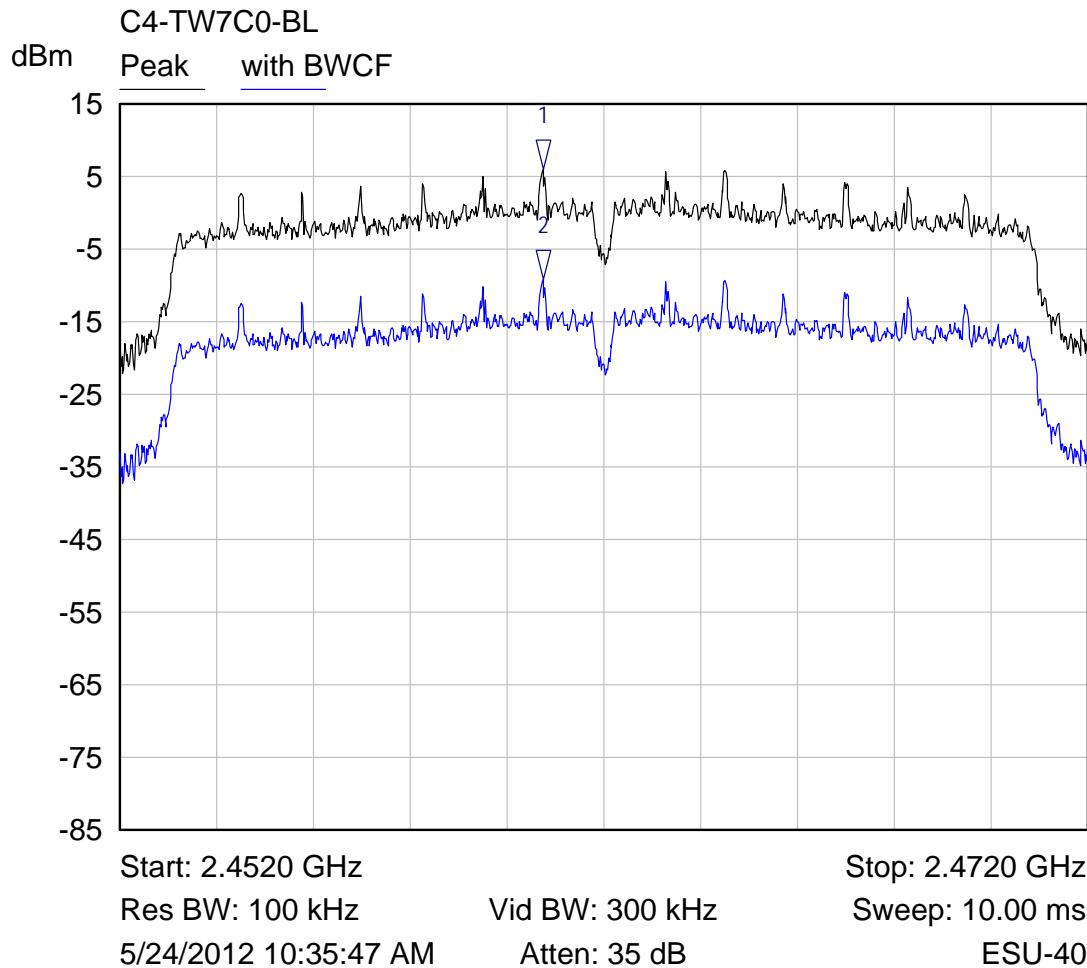

| Mkr | Trace | X-Axis | Value | Notes |
|-----|-----------|------------|-----------|-------|
| 1 ▽ | Peak | 2.4607 GHz | 5.95 dBm | |
| 2 ▽ | with BWCF | 2.4607 GHz | -9.25 dBm | |

APPENDIX 1 TEST PROCEDURES AND TEST EQUIPMENT

A1.1 §15.207 Conducted Disturbance at the AC Mains

The conducted disturbance at mains ports from the EUT was measured using a spectrum analyzer with a quasi-peak adapter for peak, quasi-peak and average readings. The quasi-peak adapter uses a bandwidth of 9 kHz, with the spectrum analyzer's resolution bandwidth set at 100 kHz, for readings in the 150 kHz to 30 MHz frequency ranges.

The conducted disturbance at mains ports measurements are performed in a screen room using a (50 Ω/50 μH) Line Impedance Stabilization Network (LISN).

Where mains flexible power cords are longer than 1 m, the excess cable is folded back and forth as far as possible so as to form a bundle not exceeding 0.4 m in length.

Where the EUT is a collection of equipment with each device having its own power cord, the point of connection for the LISN is determined from the following rules:

- a) Each power cord, which is terminated in a mains supply plug, shall be tested separately.
- b) Power cords, which are not specified by the manufacturer to be connected via a host unit, shall be tested separately.
- c) Power cords which are specified by the manufacturer to be connected via a host unit or other power supplying equipment shall be connected to that host unit and the power cords of that host unit connected to the LISN and tested.
- d) Where a special connection is specified, the necessary hardware to effect the connection is supplied by the manufacturer for the testing purpose.
- e) When testing equipment with multiple mains cords, those cords not under test are connected to an artificial mains network (AMN) different than the AMN used for the mains cord under test.


For AC mains port testing the desktop EUT are placed on a non-conducting table at least 0.8 meters from the metallic floor. The equipment is placed a minimum of 40 cm from all walls. Floor standing equipment is placed directly on the earth grounded floor.

| Type of Equipment | Manufacturer | Model Number | Serial Number | Date of Last Calibration |
|--------------------------------|-----------------|---------------------|---------------|--------------------------|
| Wanship Open Area Test Site #2 | Nemko-CCL, Inc. | N/A | N/A | 11/16/2011 |
| Test Software | Nemko-CCL, Inc. | Conducted Emissions | Revision 1.2 | N/A |
| Spectrum Analyzer | Hewlett Packard | 8566B | 2230A01711 | 01/17/2012 |
| Quasi-Peak Detector | Hewlett Packard | 85650A | 2043A00137 | 01/18/2012 |

| Type of Equipment | Manufacturer | Model Number | Serial Number | Date of Last Calibration |
|--------------------------------------|-----------------|--------------|---------------|--------------------------|
| LISN | EMCO | 3825/2 | 9305-2099 | 03/12/2012 |
| Conductance Cable Wanship Site #2 | Nemko-CCL, Inc. | Cable J | N/A | 12/14/2011 |
| Transient Limiter | Hewlett Packard | 11947A | 3107A02266 | 12/14/2011 |

An independent calibration laboratory or Nemko-CCL, Inc. personnel calibrates all the equipment listed above at intervals defined in ANSI C63.4:2003 Section 4.4 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to tractability is on file and is available for examination upon request.


Conducted Emissions Test Setup

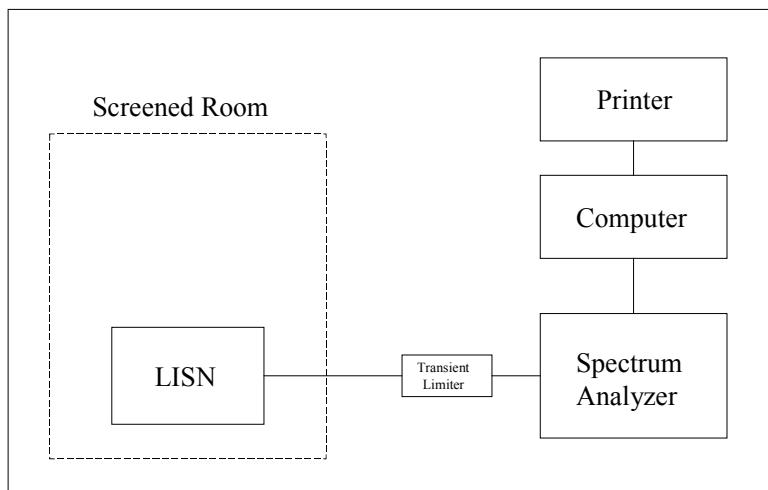

A1.2 Direct Connection at the Antenna Port Tests

| Type of Equipment | Manufacturer | Model Number | Serial Number |
|----------------------------|-----------------|--------------|---------------|
| Spectrum Analyzer | Hewlett Packard | 8566B | 2230A01711 |
| Quasi-Peak Detector | Hewlett Packard | 85650A | 2043A00137 |
| Spectrum Analyzer/Receiver | Rohde & Schwarz | 1302.6005.40 | 100064 |
| Low Loss Cable (1 dB) | N/A | N/A | N/A |

An independent calibration laboratory or Nemko-CCL, Inc. personnel calibrates all the equipment listed above at intervals defined in ANSI C63.4:2003 Section 4.4 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to tractability is on file and is available for examination upon request.

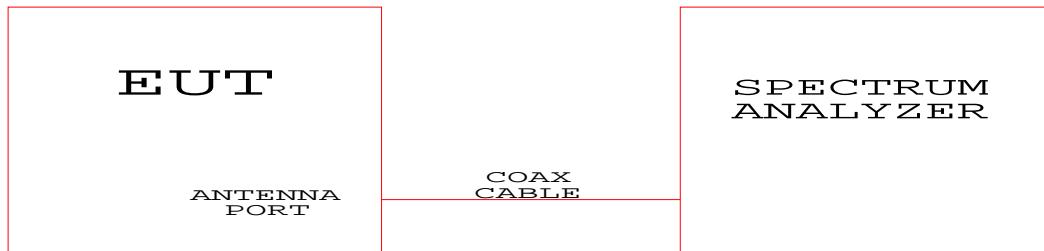Test Configuration Block Diagram

A1.5 §15.247(c) Radiated Spurious Emissions in the Restricted Bands

The radiated emissions from the intentional radiator were measured using a spectrum analyzer with a quasi-peak adapter for peak and quasi-peak readings.

A loop antenna was used to measure emissions below 30 MHz. Emission readings more than 20 dB below the limit at any frequency may not be listed in the reported data. For frequencies between 9 kHz and 30 MHz, or the lowest frequency generated or used in the device greater than 9 kHz, and less than 30 MHz, the spectrum analyzer resolution bandwidth was set to 9 kHz and the video bandwidth was set to 30 kHz. For average measurements, the spectrum analyzer average detector was used.

For frequencies above 30 MHz, an amplifier and preamplifier were used to increase the sensitivity of the measuring instrumentation. The quasi-peak adapter uses a bandwidth of 120 kHz, with the spectrum analyzer's resolution bandwidth set at 1 MHz, for readings in the 30 to 1000 MHz frequency ranges. For peak emissions above 1000 MHz the spectrum analyzer's resolution bandwidth was set to 1 MHz and the video bandwidth was set to 3 MHz. For average measurements above 1000 MHz the spectrum analyzer's resolution bandwidth was set to 1 MHz and the average detector of the analyzer was used.

A biconilog antenna was used to measure the frequency range of 30 to 1000 MHz and a Double Ridge Guide Horn antenna was used to measure the frequency range of 1 GHz to 18 GHz, and a Pyramidal Horn antenna was used to measure the frequency range of 18 GHz to 25 GHz, at a distance of 3 meters and 1 meter from the EUT. The readings obtained by the antenna are correlated to the levels obtained with a tuned dipole antenna by adding antenna factors.


The configuration of the intentional radiator was varied to find the maximum radiated emission. The intentional radiator was connected to the peripherals listed in Section 2.4 via the interconnecting cables listed in Section 2.5. These interconnecting cables were manipulated manually by a technician to obtain worst case radiated emissions. The intentional radiator was rotated 360 degrees, and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission. Where there are multiple interface ports all of the same type, cables are either placed on all of the ports or cables added to these ports until the emissions do not increase by more than 2 dB.

Desktop intentional radiators are measured on a non-conducting table 80 centimeters above the ground plane. The table is placed on a turntable which is level with the ground plane. The turntable has slip rings, which supply AC power to the intentional radiator. For equipment normally placed on floors, the equipment shall be placed directly on the turntable.

| Type of Equipment | Manufacturer | Model Number | Serial Number | Date of Last Calibration |
|--|-----------------|------------------------|---------------|--------------------------|
| Wanship Open Area Test Site #2 | Nemko-CCL, Inc. | N/A | N/A | 11/16/2011 |
| Test Software | Nemko-CCL, Inc. | Radiated Emissions | Revision 1.3 | N/A |
| Spectrum Analyzer/Receiver | Rohde & Schwarz | 1302.6005.40 | 100064 | 07/28/2011 |
| Spectrum Analyzer | Hewlett Packard | 8566B | 2230A01711 | 01/17/2012 |
| Quasi-Peak Detector | Hewlett Packard | 85650A | 2043A00137 | 01/18/2012 |
| Loop Antenna | EMCO | 6502 | 2011 | 03/11/2011 |
| Biconilog Antenna | EMCO | 3142 | 9601-1009 | 04/21/2011 |
| Double Ridged Guide Antenna | EMCO | 3115 | 9604-4779 | 03/10/2011 |
| Pyramidal Standard Gain Horn | EMC Test System | 3160-09 | 0003-1197 | 04/04/09 |
| Pyramidal Standard Gain Horn | EMC Test System | 3160-10 | 0001-1116 | 11/09/2010 |
| 2.4 GHz Filter | Microtronics | HPM50111-03 | 001 | 06/22/2011 |
| High Frequency Amplifier | Miteq | AFS4-01001800-43-10P-4 | 1096455 | 06/22/2011 |
| 6' High Frequency Cable | Microcoax | UFB197C-0-0720-000000 | 1296 | 05/10/2011 |
| 20' High Frequency Cable | Microcoax | UFB197C-1-3120-000000 | 1297 | 05/10/2011 |
| 3 Meter Radiated Emissions Cable Wanship Site #2 | Microcoax | UFB205A-0-4700-000000 | 1295 | 05/10/2011 |
| Pre/Power-Amplifier | Hewlett Packard | 8447F | 3113A05161 | 08/25/2011 |
| 6 dB Attenuator | Hewlett Packard | 8491A | 32835 | 12/14/2011 |

An independent calibration laboratory or Nemko-CCL, Inc. personnel calibrates all the equipment listed above at intervals defined in ANSI C63.4:2003 Section 4.4 following outlined calibration procedures. All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Supporting documentation relative to tractability is on file and is available for examination upon request.

Radiated Emissions Test Setup

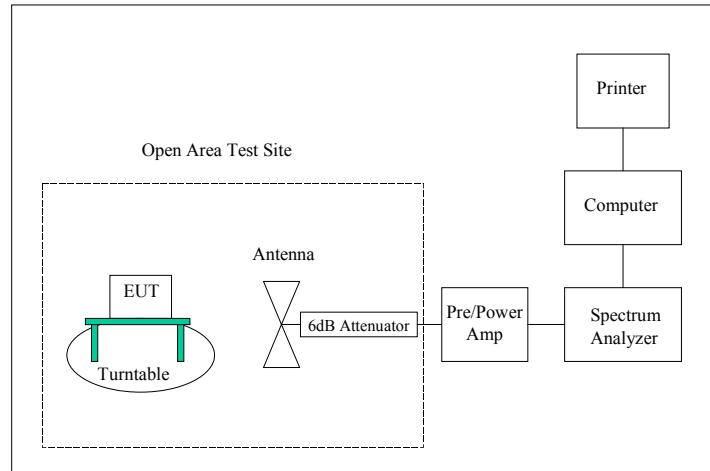

APPENDIX 2 PHOTOGRAPHS

Photograph 1 – Front View Radiated Spurious Emissions – POE Configuration




Photograph 2 – Back View Radiated Spurious Emissions – POE Configuration



Photograph 3 – Front View Radiated Spurious Emissions – AC Powered Configuration



Photograph 4 – Back View Radiated Spurious Emissions – AC Powered Configuration

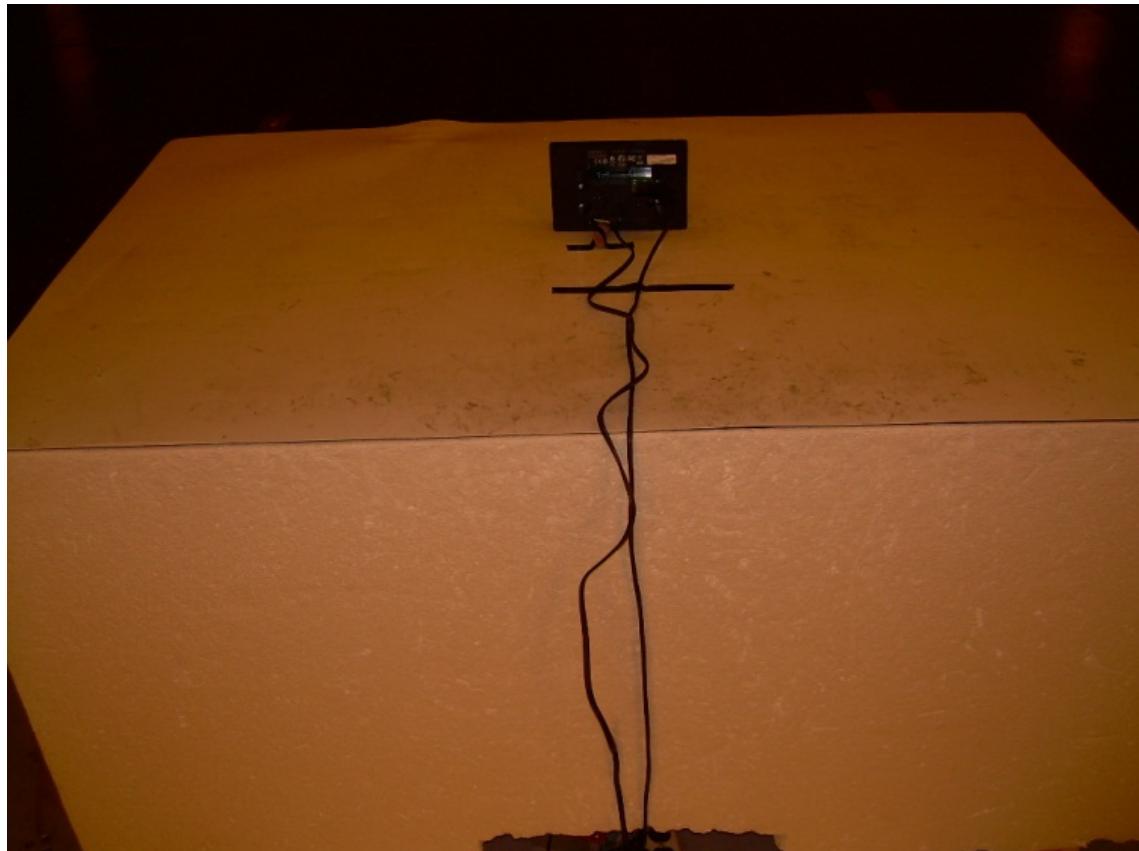

Photograph 5 – Front View Conducted Disturbance – POE Configuration



Photograph 6 – Back View Conducted Disturbance – POE Configuration



Photograph 7 – Front View Conducted Disturbance – AC Powered Configuration



Photograph 8 –Back View Conducted Disturbance – AC Powered Configuration



Photograph 9 – Front View of the EUT




Photograph 10 – Back View of the EUT




Photograph 11- View of the EUT with Back Box Removed




Photograph 12 – View of the Back Box to Display Interface

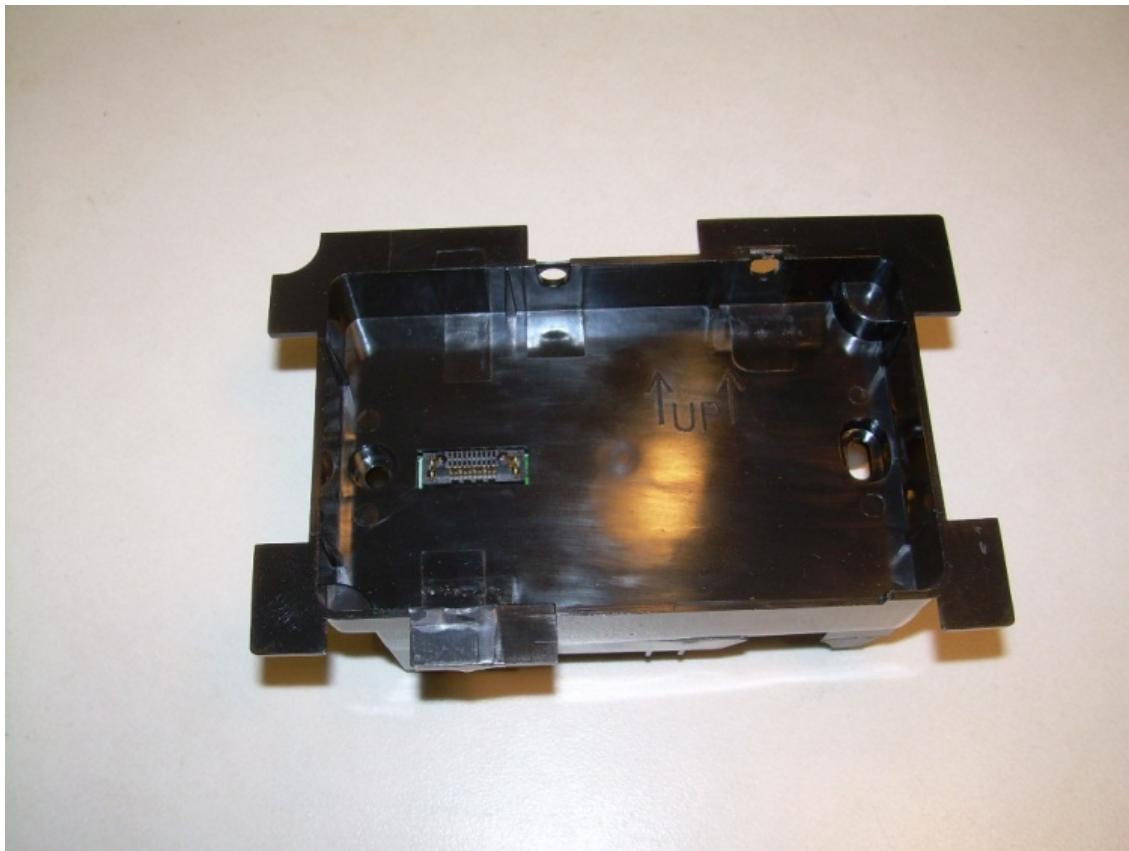


Photograph 13 – View of Component Side of Back Box PCB

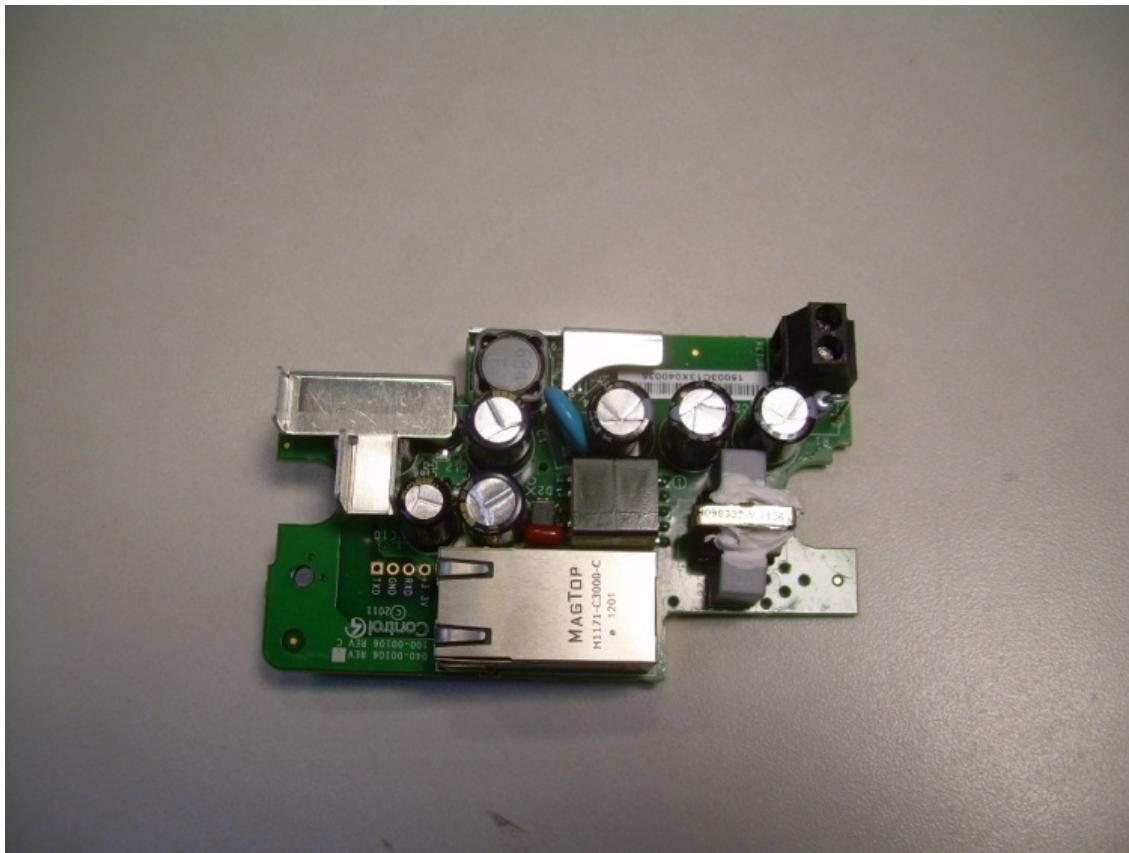


Photograph 14 – View of Trace Side of Back Box PCB

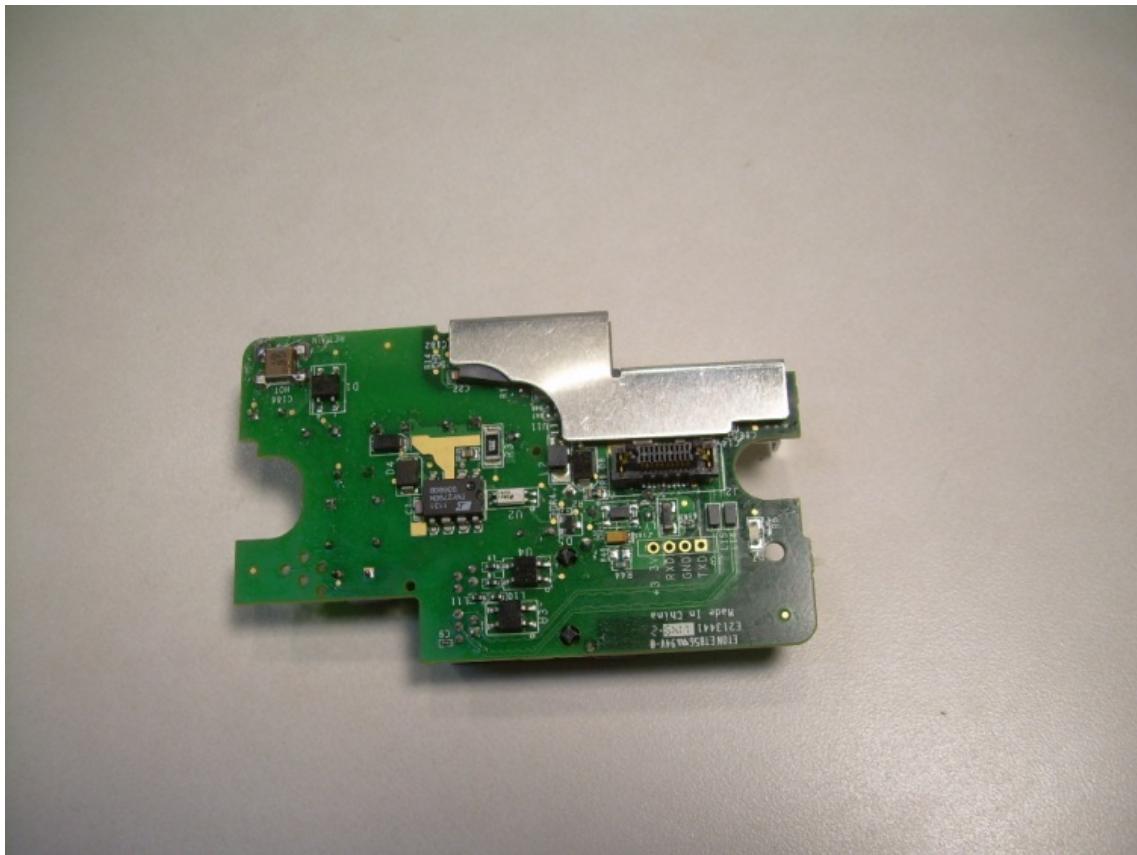

Photograph 15 – View of Component Side of Back Box PCB with Heatsink Removed

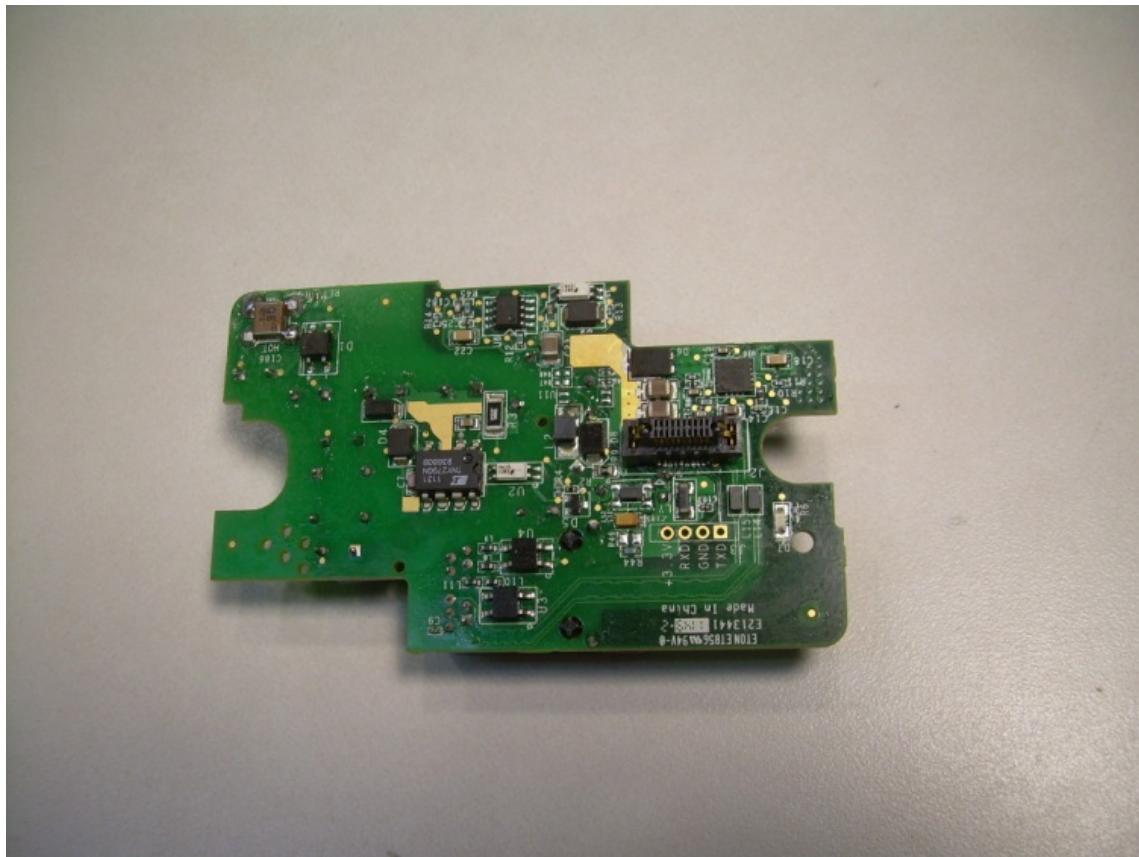


Photograph 16 – View of Trace Side of Back Box PCB with Heatsink Removed

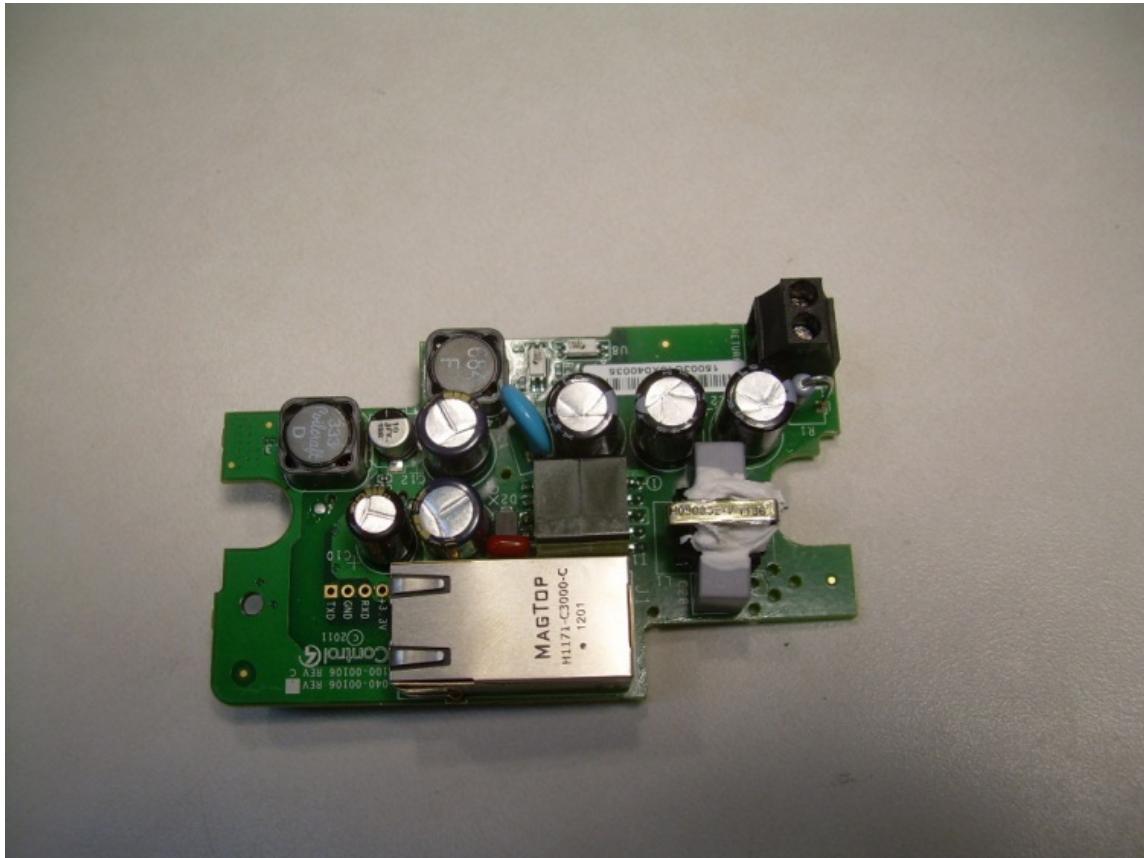


Photograph 17 – Back View of Display Unit with Cover Removed




Photograph 18 – Back View of Display with Cover Removed

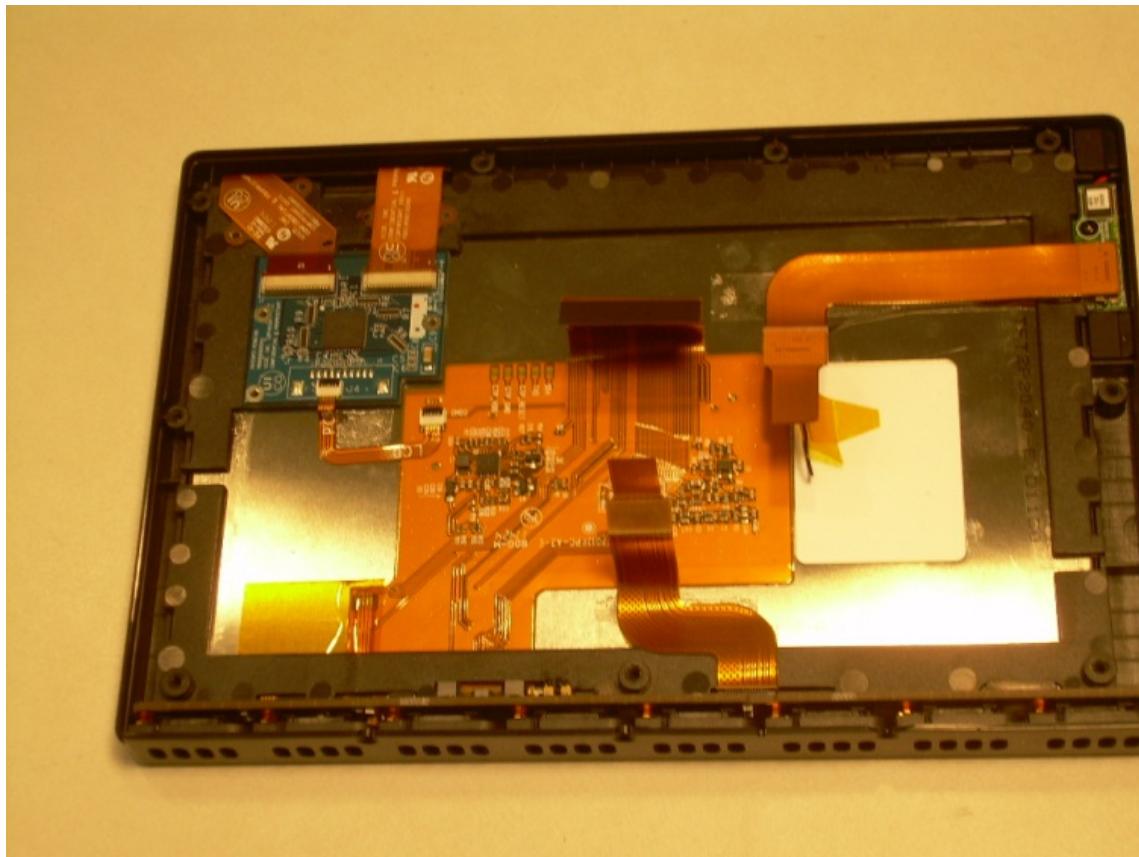


Photograph 19 – View of the Back Side of the Display PCB

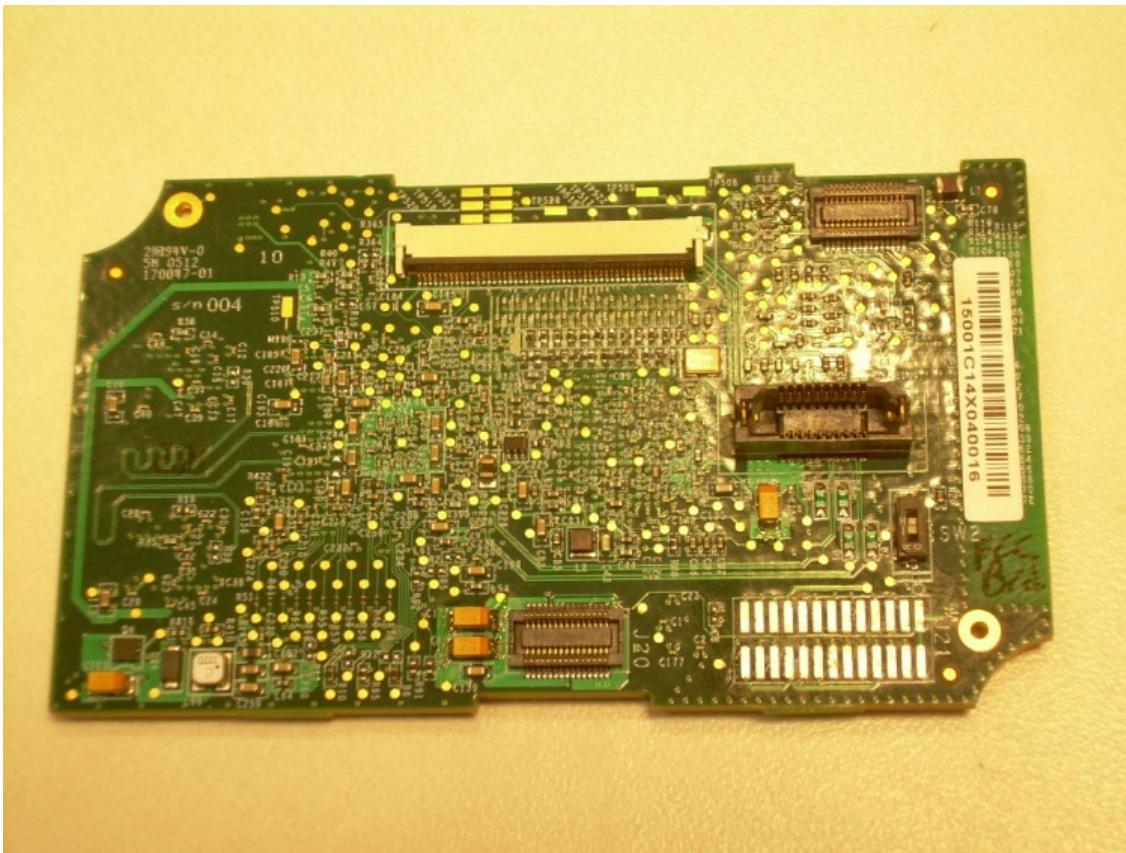


Photograph 20 – View of the Front Side of the Display PCB

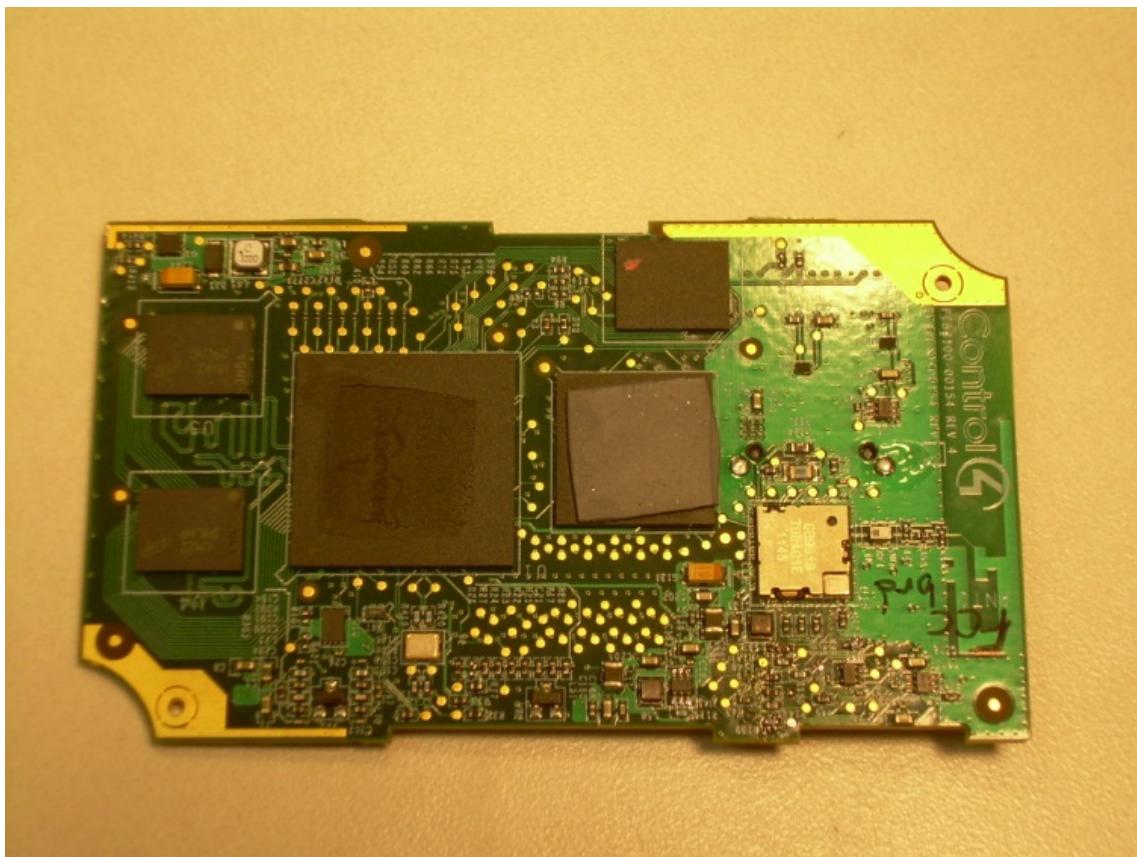


Photograph 21 – View of the Back Side of the Camera/Microphone PCB

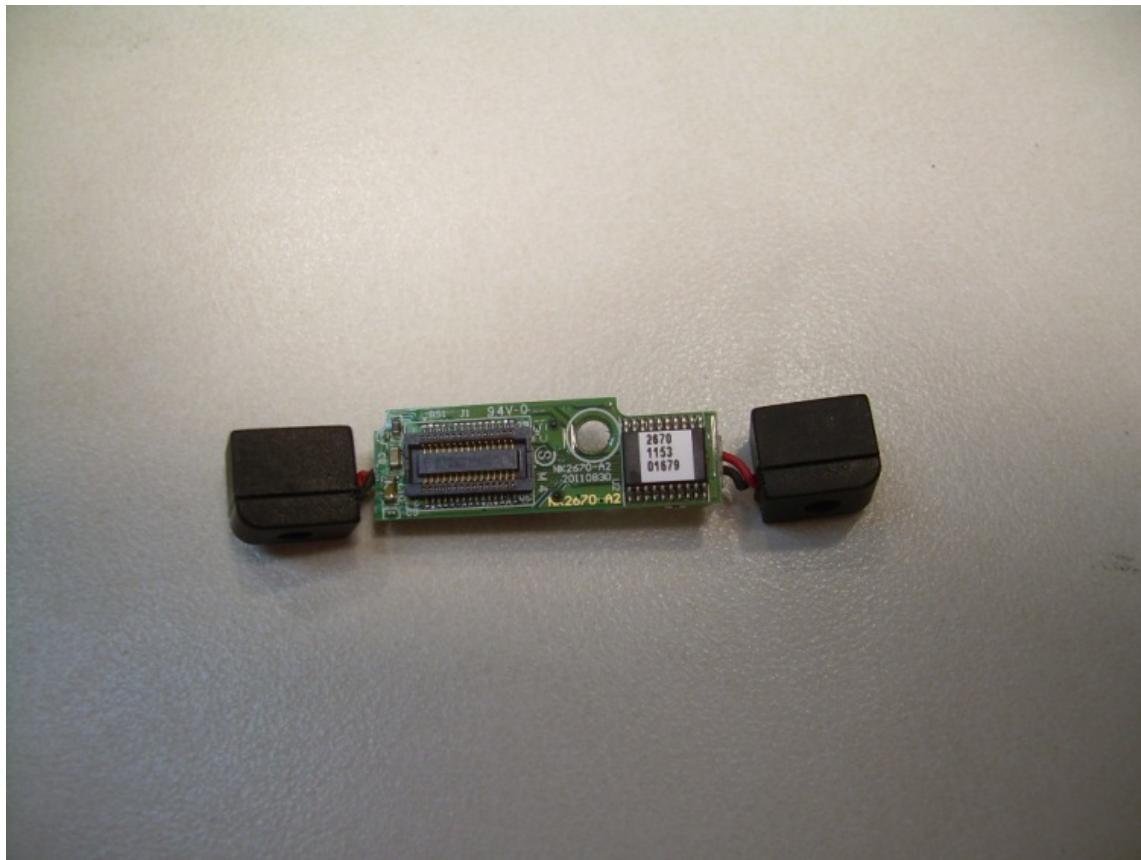

Photograph 22 – View of the Front Side of the Camera/Microphone PCB

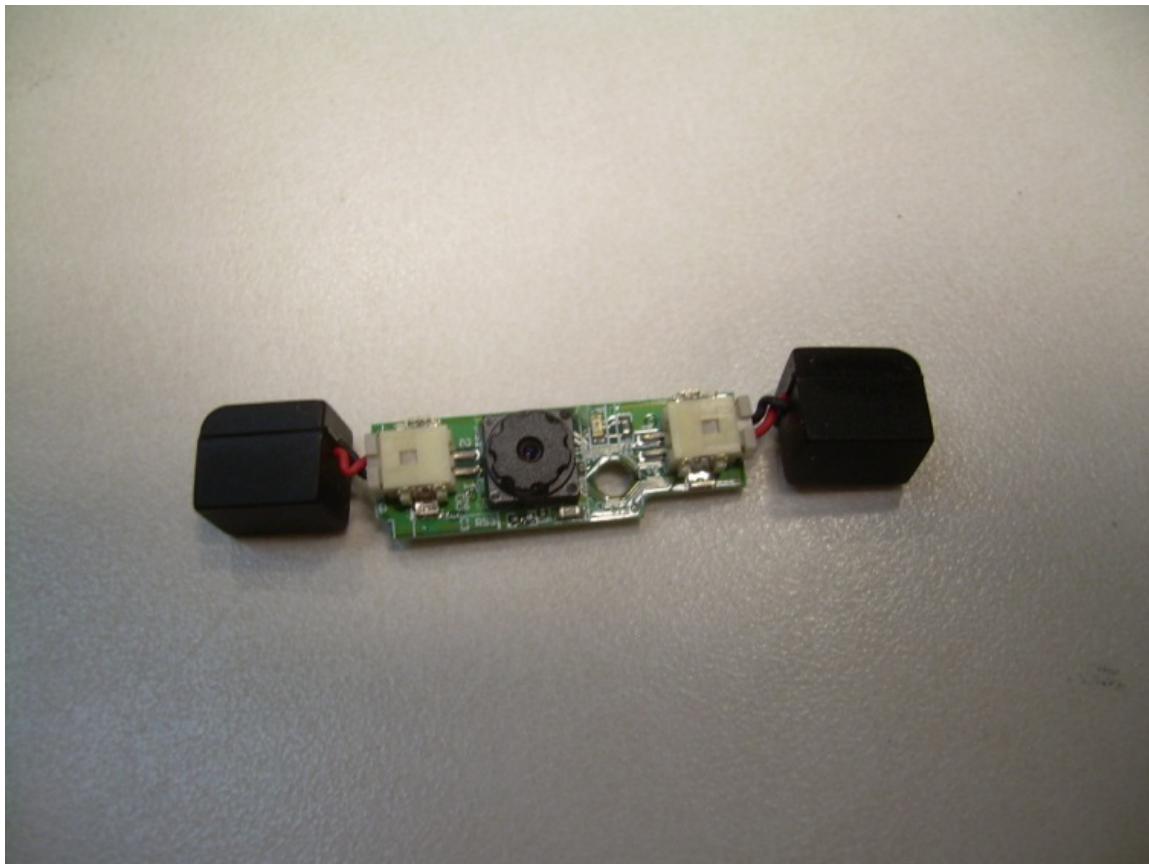

Photograph 23 – View of the Component Side of the Touch Interface PCB

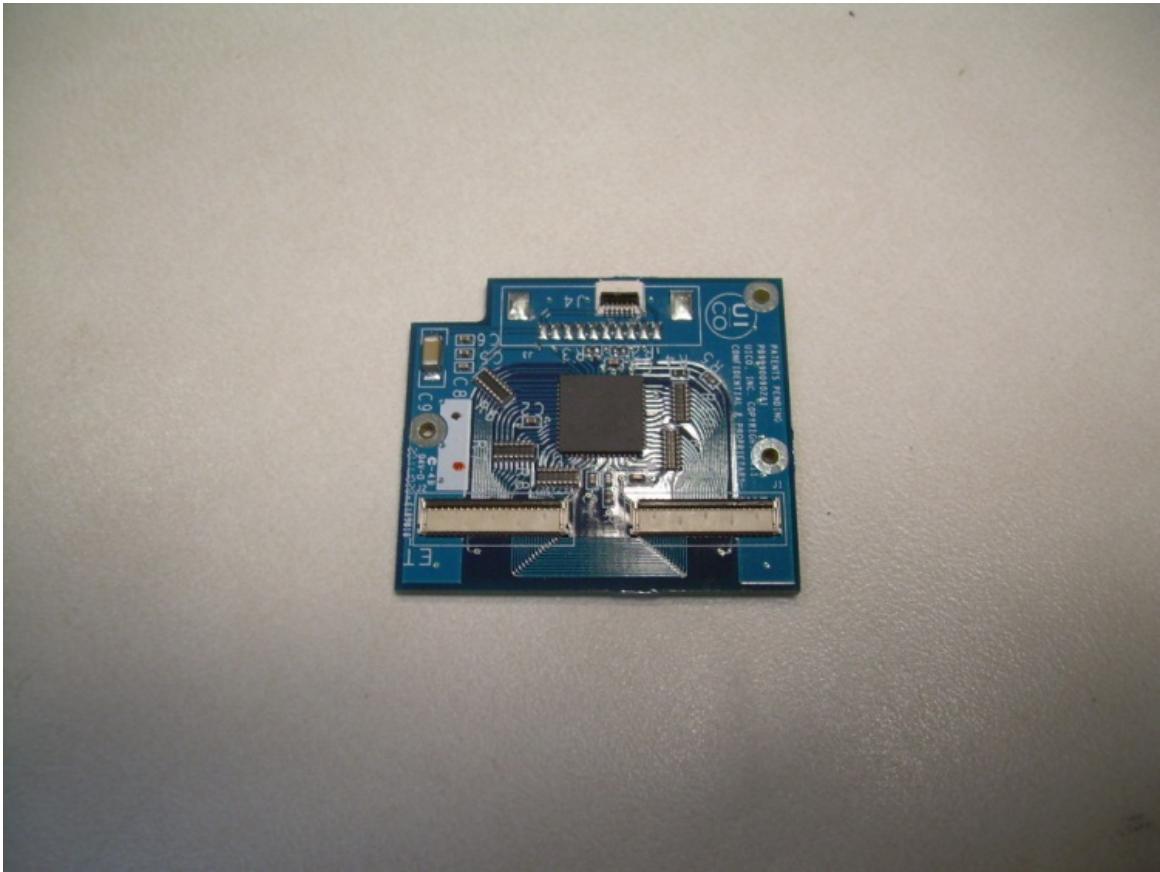

Photograph 24 – View of the Trace Side of the Touch Interface PCB

