



Product Service

---

**Choose certainty.  
Add value.**

# Report On

EMC Testing of the  
Datawind  
Pocket Surfer 2

**COMMERCIAL-IN-CONFIDENCE**

FCC ID: R37-DWRC04

Document 75902048 Report 07 Issue 2

December 2007



Product Service

TUV Product Service Ltd, Octagon House, Concorde Way, Segensworth North,  
Fareham, Hampshire, United Kingdom, PO15 5RL  
Tel: +44 (0) 1489 558100. Website: [www.tuvps.co.uk](http://www.tuvps.co.uk)

COMMERCIAL-IN-CONFIDENCE

**REPORT ON**

EMC Testing of the  
Datawind  
Pocket Surfer 2

Document 75902048 Report 07 Issue 2

December 2007

**PREPARED FOR**

Datawind  
555 Rene Levesque West #1130  
Montreal  
Quebec, Canada  
H2Z 1B1

**PREPARED BY**

  
J. Plummer  
Technical Author

**APPROVED BY**

  
J. Adams  
Authorised Signatory

**DATED**

6<sup>th</sup> December 2007

**This report has been up-issued to Issue 2 to correct typographical errors.**





## CONTENTS

<b>Section</b>		<b>Page No</b>
<b>1</b>	<b>REPORT SUMMARY .....</b>	<b>3</b>
1.1	Introduction .....	4
1.2	Brief Summary of Results .....	5
1.3	Declaration of Build Status .....	6
1.4	Product Information .....	7
1.5	Test Conditions .....	9
1.6	Deviations From the Standard .....	9
1.7	Modification Record .....	9
<b>2</b>	<b>TEST DETAILS .....</b>	<b>10</b>
2.1	Radiated Emissions (Enclosure Port) .....	11
2.2	Radiated Emissions (Enclosure Port) .....	13
<b>3</b>	<b>TEST EQUIPMENT USED .....</b>	<b>15</b>
3.1	Test Equipment Used .....	16
3.2	Measurement Uncertainty .....	17
<b>4</b>	<b>PHOTOGRAPHS.....</b>	<b>18</b>
4.1	Photographs of Equipment Under Test (EUT) .....	19
<b>5</b>	<b>ACCREDITATION, DISCLAIMERS AND COPYRIGHT.....</b>	<b>21</b>
5.1	Accreditation, Disclaimers and Copyright.....	22



## **SECTION 1**

### **REPORT SUMMARY**

EMC Testing of the  
Datawind  
Pocket Surfer 2



## 1.1 INTRODUCTION

The information contained in this report is intended to show verification of the Datawind Pocket Surfer 2 to the requirements of FCC 47 CFR Part 22: 2006 and FCC 47 CFR Part 24: 2006.

Objective	To perform Electromagnetic Compatibility (EMC) Qualification Approval Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	Datawind
Model Number(s)	Pocket Surfer 2
Serial Number(s)	P3140729x0023xxx (the serial number can be found only through standard factory installed firmware, or by opening the unit)
Software Version	1.0.106 or newer (factory unit), 1.0.94 (initial units)
Hardware Version	DW-RC04_D54
Number of Samples Tested	One
Test Specification/Issue/Date	FCC 47 CFR Part 22: 2006 FCC 47 CFR Part 24: 2006
Disposal	Held Pending Disposal
Reference Number	Not Applicable
Date	Not Applicable
Start of Test	16 <sup>th</sup> October 2007
Finish of Test	18 <sup>th</sup> October 2007
Name of Engineer(s)	A Guy P Harrison G Lawler
Related Document(s)	ANSI C63.4: 2006 FCC: DA 00-705: 2000



## 1.2 BRIEF SUMMARY OF RESULTS

A brief summary of results, in accordance with FCC 47 CFR Part 22: 2006, is shown below.

Configuration 1 - Operating with AC Charger attached				
Section	Part Number	Test Description	Result	Base Standard
2.1	22.913	Output Power	Pass	Part 22
2.1	22.917	Radiated Emissions (Enclosure Port)	Pass	Part 22

A brief summary of results, in accordance with FCC 47 CFR Part 24: 2006, is shown below.

Configuration 1 - Operating with AC Charger attached				
Section	Part Number	Test Description	Result	Base Standard
2.2	24.232	Output Power	Pass	Part 24
2.2	24.238	Radiated Emissions (Enclosure Port)	Pass	Part 24



## 1.3 DECLARATION OF BUILD STATUS

MAIN EUT	
<b>MANUFACTURING DESCRIPTION</b>	Mobile Internet Browser
<b>MANUFACTURER</b>	DATAWIND
<b>TYPE</b>	Pocket Surfer 2
<b>PART NUMBER</b>	DW-RC04
<b>SERIAL NUMBER</b>	P3140729x0023xxx (the serial number can be found only through standard factory installed firmware, or by opening the unit)
<b>HARDWARE VERSION</b>	DW-RC04_D54
<b>SOFTWARE VERSION</b>	1.0.106 or newer (factory unit), 1.0.94 (initial units)
<b>TRANSMITTER OPERATING RANGE</b>	GSM 850,900,1800, 1900
<b>RECEIVER OPERATING RANGE</b>	GSM 850,900,1800, 1900, GPS
<b>INTERMEDIATE FREQUENCIES</b>	See data of SIM340 GSM/GPRS module
<b>HIGHEST INTERNALLY GENERATED FREQUENCY</b>	288MHz – CPU PLL,
<b>OUTPUT POWER (W or dBm)</b>	33dBm @ 850/900MHz , 30dBm @ 1800/1900MHz (Std. GSM bands)
<b>TECHNICAL DESCRIPTION (a brief description of the intended use and operation)</b>	The device makes use of an embedded GPRS modem to connect to a proxy server. Making use of proprietary technology is able to browse the internet web pages at speeds comparable to LAN connected computers, while using only a fraction of the bandwidth (standard GSM/GPRS bandwidth). It also renders web pages in format similar to laptop/desktop PCs as opposed to other small format devices that reformat the web pages (like phones or blackberry devices).
BATTERY/POWER SUPPLY	
<b>MANUFACTURING DESCRIPTION</b>	Soft pack Li-Poly with electronic protection circuit (Overcharge, Overload, Under voltage)
<b>MANUFACTURER</b>	Power Long
<b>TYPE</b>	
<b>PART NUMBER</b>	PL4324137
<b>VOLTAGE</b>	3.7V
<b>SERIAL NUMBER</b>	Not Serialized
ANCILLARIES (if applicable)	
<b>MANUFACTURING DESCRIPTION</b>	Wall Plug charging adapter (in 100-240V, 50/60Hz; out 5VDC, 1A)
<b>MANUFACTURER</b>	Kuantech
<b>TYPE</b>	
<b>PART NUMBER</b>	KSAA0500100W1xx (xx = US, UK, AU)
<b>SERIAL NUMBER</b>	Not Serialized

**Note:** This document has been prepared to enable manufacturers with no mechanism for producing their own Declaration of Build Status, to declare the build state of the equipment submitted for test.

No responsibility will be accepted by BABT/TÜV Product Service as to the accuracy of the information declared in this document by the manufacturer.

## 1.4 PRODUCT INFORMATION

### 1.4.1 Technical Description

The Equipment Under Test (EUT) was a Datawind Pocket Surfer 2 as shown in the photograph below. A full technical description can be found in the Manufacturers documentation.



Equipment Under Test



#### 1.4.2 Test Configuration

##### Configuration: Operating with AC Charger attached

The EUT was configured in accordance with FCC 47 CFR Part 22: 2006 and FCC 47 CFR Part 24: 2006.

#### 1.4.3 Modes of Operation

Modes of operation of each EUT during testing were as follows:

Mode 1 - 850 Top Channel Transmitting (848.8 MHz).

Mode 2 - 850 Middle Channel Transmitting (836.4 MHz).

Mode 3 - 850 Bottom Channel Transmitting (824.2 MHz).

Mode 4 - 1900 Top Channel Transmitting (1909.8 MHz).

Mode 5 - 1900 Middle Channel Transmitting (1880.0 MHz).

Mode 6 - 1900 Bottom Channel Transmitting (1850.2 MHz).

Information on the specific test modes utilised are detailed in the test procedure for each individual test.



## 1.5 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

FCC Accreditation  
90987 Octagon House, Fareham Test Laboratory

The EUT was powered from via an AC 230V charger.

## 1.6 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standards.

## 1.7 MODIFICATION RECORD

No modifications were made to the EUT during testing.



## **SECTION 2**

### **TEST DETAILS**

EMC Testing of the  
Datawind  
Pocket Surfer 2



## 2.1 RADIATED EMISSIONS (ENCLOSURE PORT)

### 2.1.1 Specification Reference

FCC 47 CFR Part 22: 2006

### 2.1.2 Equipment Under Test

Pocket Surfer 2

### 2.1.3 Date of Test

18<sup>th</sup> October 2007

### 2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

### 2.1.5 Test Method and Operating Modes

The test was applied in accordance with the test method requirements of FCC 47 CFR Part 22.

The test was performed with the EUT in the following configurations and modes of operation:

- Configuration Operating with AC Charger attached
  - Mode 850 Top Channel Transmitting (848.8 MHz)
  - Mode 850 Middle Channel Transmitting (836.4 MHz)
  - Mode 850 Bottom Channel Transmitting (824.2 MHz)

### 2.1.6 Environmental Conditions

Ambient Temperature	19°C
Relative Humidity	43%
Atmospheric Pressure	1031mbar



### 2.1.7 Test Results

For the period of test the EUT met the requirements of FCC 47 CFR Part 22: 2006 for Radiated Emissions (Enclosure Port).

The test results are shown below.

#### Radiated Output Power (ERP)

Frequency MHz	Result dBm	Limit dBm	Result W	Limit W
824.20	20.48	38.45	0.1117	7.000
836.40	20.05	38.45	0.1011	7.000
848.80	17.84	38.45	0.0681	7.000

#### ERP Measurements over the frequency range 30MHz to 9GHz

##### Configuration Operating with AC Charger attached - Mode 850 Top Channel Transmitting (848.8 MHz)

No emissions were detected within 20dB of the specification Limit.

##### Configuration Operating with AC Charger attached - Mode 850 Middle Channel Transmitting (836.4 MHz)

No emissions were detected within 20dB of the specification Limit.

##### Configuration Operating with AC Charger attached - Mode 850 Bottom Channel Transmitting (824.2 MHz)

No emissions were detected within 20dB of the specification Limit.



## 2.2 RADIATED EMISSIONS (ENCLOSURE PORT)

### 2.2.1 Specification Reference

FCC 47 CFR Part 24: 2006

### 2.2.2 Equipment Under Test

Pocket Surfer 2

### 2.2.3 Date of Test

16<sup>th</sup> October 2007

### 2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

### 2.2.5 Test Method and Operating Modes

The test was applied in accordance with the test method requirements of FCC 47 CFR Part 24.

The test was performed with the EUT in the following configurations and modes of operation:

- Configuration Operating with AC Charger attached
  - Mode 1900 Top Channel Transmitting (1909.8 MHz)
  - Mode 1900 Middle Channel Transmitting (1880.0 MHz)
  - Mode 1900 Bottom Channel Transmitting (1850.2 MHz)

### 2.2.6 Environmental Conditions

Ambient Temperature	20.4°C
Relative Humidity	63%
Atmospheric Pressure	1010mbar



## 2.2.7 Test Results

For the period of test the EUT met the requirements of FCC 47 CFR Part 24: 2006 for Radiated Emissions (Enclosure Port).

The test results are shown below.

### Radiated Output Power (EIRP)

Frequency MHz	Result dBm	Limit dBm	Result W	Limit W
1909.8	26.6	33.00	0.4570	2.000
1880.0	26.6	33.00	0.4570	2.000
1850.2	29.3	33.00	0.8511	2.000

### EIRP Measurements over the frequency range 30MHz to 20GHz

Configuration Operating with AC Charger attached - Mode 1900 Top Channel Transmitting (1909.8 MHz)

No emissions were detected within 20dB of the specification limit.

Configuration Operating with AC Charger attached - Mode 1900 Middle Channel Transmitting (1880.0 MHz)

No emissions were detected within 20dB of the specification limit.

Configuration Operating with AC Charger attached - Mode 1900 Bottom Channel Transmitting (1850.2 MHz)

No emissions were detected within 20dB of the specification limit.



### **SECTION 3**

#### **TEST EQUIPMENT USED**



### 3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No	TE Number	Calibration Due
Sections 2.1 and 2.2 EMC - Maximum Output Power				
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	234	29-Jun-2008
Dual Power Supply Unit	Thurlby	PL320	288	TU
Communications Tester	Rohde & Schwarz	CMU 200	442	21-Jun-2008
Test Receiver	Rohde & Schwarz	ESIB40	1006	21-Apr-2008
Screened Room (5)	Rainford	Rainford	1545	1-Mar-2008
Signal Generator	Marconi	2031	2015	18-Nov-2007
Antenna (DRG Horn)	ETS-LINDGREN	3115	3125	21-Apr-2008
Sections 2.1 and 2.2 EMC - Radiated Emissions				
Amplifier	Miteq Corp	AMF-3D-001080-18-13P	231	TU
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	234	29-Jun-2008
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	235	29-Jun-2008
Antenna (Bilog)	Schaffner	CBL6143	287	13-Jan-2008
Dual Power Supply Unit	Thurlby	PL320	288	TU
Communications Tester	Rohde & Schwarz	CMU 200	442	21-Jun-2008
Filter (High Pass, 4GHz)	RLC Electronics	F-100-4000-5-R	564	21-May-2008
Test Receiver	Rohde & Schwarz	ESIB40	1006	21-Apr-2008
Antenna (Double Ridge Guide)	Q-Par Angus Ltd	QSH 180K	1511	TU
Pre-Amplifier	Phase One	PS04-0086	1533	TU
Pre-Amplifier	Phase One	PS04-0087	1534	TU
Screened Room (5)	Rainford	Rainford	1545	1-Mar-2008
Mast Controller	Inn-Co GmbH	CO 1000	1606	TU
Turntable/Mast Controller	EMCO	2090	1607	TU
Signal Generator	Marconi	2031	2015	18-Nov-2007
Antenna (Bilog)	Chase	CBL6143	2904	10-Nov-2007
Comb Generator	Schaffner	RSG1000	3034	TU
Antenna (DRG Horn)	ETS-LINDGREN	3115	3125	21-Apr-2008
Compliance 3 Emissions	Schaffner	C3e Software V.4.00.00	3274	N/A - Software
High Pass Filter (3GHz)	RLC Electronics	F-100-3000-5-R	3349	13-Apr-2008

TU – Traceability Unscheduled



### 3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	Frequency / Parameter	MU
Substitution Antenna, Radiated Field	30MHz to 18GHz Amplitude	2.6dB

Worst case error for both Time and Frequency measurement 12 parts in  $10^6$ .



## **SECTION 4**

### **PHOTOGRAPHS**




**4.1 PHOTOGRAHPS OF EQUIPMENT UNDER TEST (EUT)**



Radiated Emissions Test Setup



Product Service

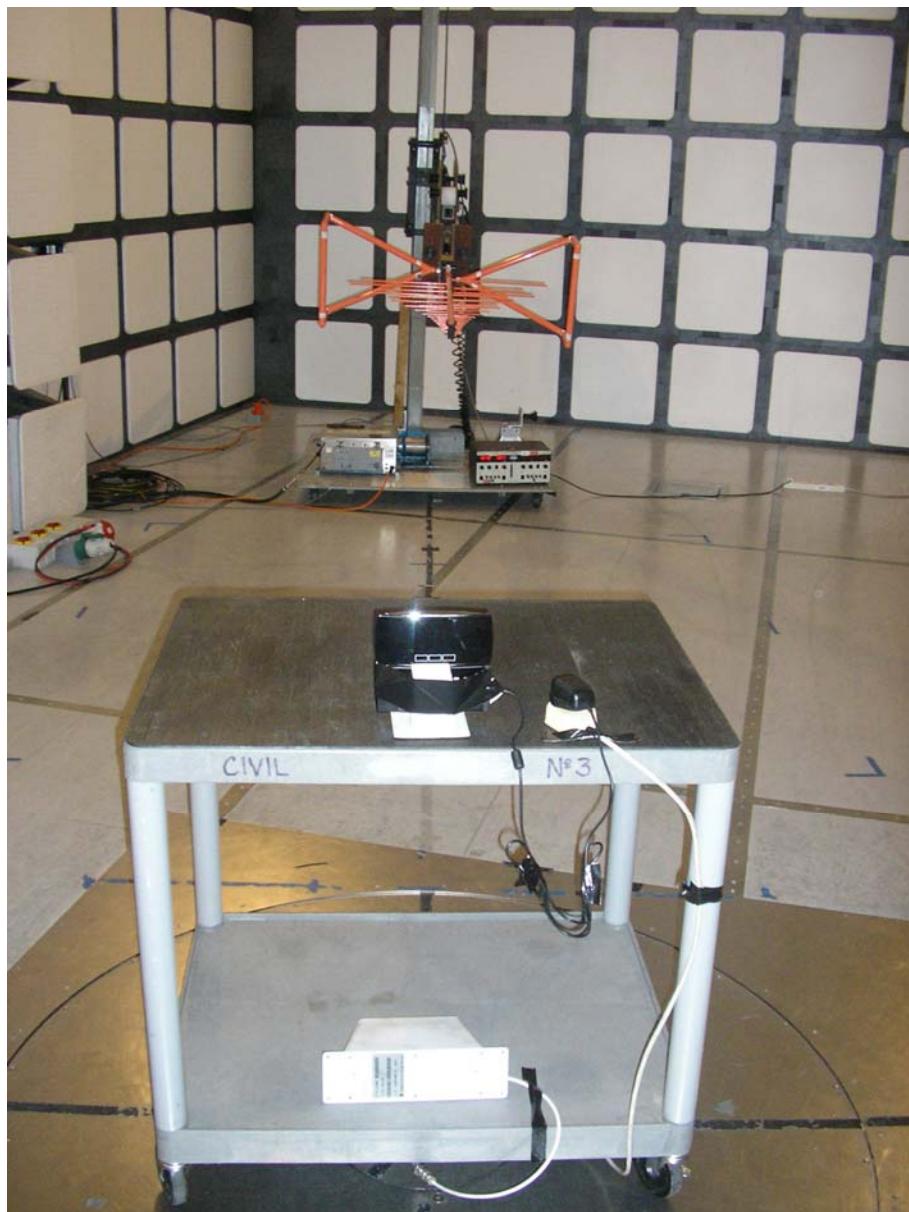

Radiated Emissions Test Setup



Product Service

## **SECTION 5**

### **ACCREDITATION, DISCLAIMERS AND COPYRIGHT**



Product Service

## 5.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA  
(Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of  
TÜV Product Service Limited

© 2007 TÜV Product Service Limited