



**FCC PART 15C
TEST REPORT
No. I18N00901-BT**

for

Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd

Feature phone

3311A

with

Hardware Version: V1

Software Version: 8.1.3311A.TMO.180830.05

FCC ID: R38YL3311A

Issued Date: 2018-09-06

Designation Number: CN1210

ISED Assigned Code: 23289

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

Test Laboratory:

Shenzhen Academy of Information and Communications Technology

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518026.

Tel: +86(0)755-33322000, Fax: +86(0)755-33322001, Email: yewu@caict.ac.cn. www.csit.com

REPORT HISTORY

Report Number	Revision	Description	Issue Date
I18N00901-BT	Rev.0	1st edition	2018-09-06

CONTENTS

CONTENTS	3
1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT	4
1.3. PROJECT DATA	4
1.4. SIGNATURE	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT	6
3.2. INTERNAL IDENTIFICATION OF EUT	6
3.3. INTERNAL IDENTIFICATION OF AE	6
3.4. GENERAL DESCRIPTION	6
4. REFERENCE DOCUMENTS	7
4.1. DOCUMENTS SUPPLIED BY APPLICANT.....	7
4.2. REFERENCE DOCUMENTS FOR TESTING	7
5. TEST RESULTS	8
5.1. SUMMARY OF TEST RESULTS	8
5.2. STATEMENTS.....	8
5.3. TERMS USED IN THE RESULT TABLE.....	8
5.4. LABORATORY ENVIRONMENT	9
6. TEST FACILITIES UTILIZED.....	10
7. MEASUREMENT UNCERTAINTY	11
ANNEX A: DETAILED TEST RESULTS	12
A.0 ANTENNA REQUIREMENT	12
A.1 MAXIMUM PEAK OUTPUT POWER.....	13
A.2 BAND EDGES COMPLIANCE.....	14
A.3 CONDUCTED EMISSION.....	21
A.4 RADIATED EMISSION	37
A.5 20dB BANDWIDTH	50
A.6 TIME OF OCCUPANCY (DWELL TIME).....	55
A.7 NUMBER OF HOPPING CHANNELS	59
A.8 CARRIER FREQUENCY SEPARATION.....	63
A.9 AC POWER LINE CONDUCTED EMISSION	65

1. Test Laboratory

1.1. Testing Location

Location: Shenzhen Academy of Information and Communications Technology
Address: Building G, Shenzhen International Innovation Center, No.1006
Shennan Road, Futian District, Shenzhen, Guangdong Province, China
Postal Code: 518026
Telephone: +86(0)755-33322000
Fax: +86(0)755-33322001

1.2. Testing Environment

Normal Temperature: 15-30°C
Relative Humidity: 35-60%

1.3. Project data

Testing Start Date: 2018-07-30
Testing End Date: 2018-08-22

1.4. Signature



An Ran

(Prepared this test report)



Tang Weisheng

(Reviewed this test report)



Zhang Bojun

(Approved this test report)

2. Client Information

2.1. Applicant Information

Company Name: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Address: Coolpad Information Harbor, High-tech Industrial Park (North),
Nanshan District, Shenzhen, P.R.C.
Contact Person: Chen yanting
E-Mail: Chenyanting@yulong.com
Telephone: +86 15927320221
Fax: /

2.2. Manufacturer Information

Company Name: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd
Address: Coolpad Information Harbor, High-tech Industrial Park (North),
Nanshan District, Shenzhen, P.R.C.
Contact Person: Chen yanting
E-Mail: Chenyanting@yulong.com
Telephone: +86 15927320221
Fax: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	Feature phone
Model Name	3311A
Market Name	Coolpad Snap
Frequency Band	2400MHz~2483.5MHz
Type of Modulation	GFSK/ $\pi/4$ DQPSK/8DPSK
Number of Channels	79
Antenna Type	Integrated
Antenna Gain	2.5dBi
Power Supply	3.7V DC by Battery
FCC ID	R38YL3311A
Condition of EUT as received	No abnormality in appearance (eg.)

Note: Components list, please refer to documents of the manufacturer.

3.2. Internal Identification of EUT

EUT ID*	IMEI	HW Version	SW Version	Receive Date
EUT1	86271804 0006938	V1	8.1.3311A.TMO.180830.05	2018-07-30

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE

AE ID*	Description	Mode	Manufacturer	
AE1	Switching Adapter	RD0501000-USBA-18 MG	SHENZHEN ELECTRONIC CO.,LTD	RUIDE INDUSTRIAL

*AE ID: is used to identify the test sample in the lab internally.

3.4. General Description

The Equipment Under Test (EUT) are a model of Mobile Phone with integrated antenna.

It consists of normal options: travel charger, USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

4. Reference Documents

4.1. Documents supplied by applicant

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902–928MHz, 2400–2483.5 MHz, and 5725–5850 MHz	2017
ANSI C63.10	American National Standard of Procedures for Compliance 2013 Testing of Unlicensed Wireless Devices	

5. Test Results

5.1. Summary of Test Results

No	Test cases	Sub-clause of Part 15C	Sub-clause of IC	Verdict
0	Antenna Requirement	15.203	/	P
1	Maximum Peak Output Power	15.247 (b)	RSS-247 section 5.4	P
2	Band Edges Compliance	15.247 (d)	RSS-247 section 5.1	P
3	Conducted Spurious Emission	15.247 (d)	RSS-247 section 5.5/ RSS-Gen section 6.13	P
4	Radiated Spurious Emission	15.247,15.205,15.209	RSS-247 section 5.5/ RSS-Gen section 6.13	P
5	Occupied 20dB bandwidth	15.247(a)	RSS-247 section 5.1	P
6	Time of Occupancy (Dwell Time)	15.247(a)	RSS-247 section 5.1	P
7	Number of Hopping Channel	15.247(a)	RSS-247 section 5.1	P
8	Carrier Frequency Separation	15.247(a)	RSS-247 section 5.1	P
9	AC Power line Conducted Emission	15.107,15.207	RSS-Gen section 8.8	P

See **ANNEX A** and **below** for details.

5.2. Statements

SAICT has evaluated the test cases requested by the applicant/manufacturer as listed in section 5.1 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2.

5.3. Terms used in the result table

Terms used in Verdict column

P	Pass
NA	Not Available
F	Fail

Abbreviations

AC	Alternating Current
AFH	Adaptive Frequency Hopping
BW	Band Width
E.I.R.P.	equivalent isotropic radiated power
ISM	Industrial, Scientific and Medical
R&TTE	Radio and Telecommunications Terminal Equipment
RF	Radio Frequency
Tx	Transmitter

5.4. Laboratory Environment

Semi-anechoic chamber did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz > 60 dB; 1MHz-18000MHz > 90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 3 m distance, from 30 to 1000 MHz

Shielded room did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz > 60 dB; 1MHz-10000MHz > 90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω

Fully-anechoic chamber did not exceed following limits along the EMC testing

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz > 60 dB; 1MHz-18000MHz > 90 dB
Electrical insulation	> 2MΩ
Ground system resistance	< 4 Ω
Voltage Standing Wave Ratio (VSWR)	≤ 6 dB, from 1 to 18 GHz, 3 m distance
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

6. Test Facilities Utilized

Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Vector Signal Analyzer	FSV40	100903	Rohde & Schwarz	2019.01.17	1 year
2	Bluetooth Tester	CBT32	100584	Rohde & Schwarz	2019.01.03	1 year
3	Test Receiver	ESCI	100702	Rohde & Schwarz	2019.06.20	1 year
4	LISN	ENV216	102067	Rohde & Schwarz	2019.07.18	1 year

Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Due date	Calibration Period
1	Chamber	FACT3-2.0	1285	ETS-Lindgren	2020.07.20	3 years
2	Test Receiver	ESR7	101676	Rohde & Schwarz	2018.11.29	1 year
3	Spectrum Analyser	FSV40	101192	Rohde & Schwarz	2019.05.21	1 year
4	BiLog Antenna	3142E	00224831	ETS	2021.05.11	3 years
5	Horn Antenna	3117	00066577	ETS-Lindgren	2019.04.05	3 years
6	Loop Antenna	HLA6120	35779	TESEQ	2019.05.02	3 years
7	Antenna	QSH-SL-1 8-26-S-20	17013	Q-par	2020.01.15	3 years

Test software

No.	Equipment	Manufacturer	Version
1	TechMgr Software	CAICT	2.1.1
2	EMC32	Rohde & Schwarz	8.53.0
3	EMC32	Rohde & Schwarz	10.01.00

EUT is engineering software provided by the customer to control the transmitting signal.

The EUT was programmed to be in continuously transmitting mode.

Anechoic chamber

Fully anechoic chamber by ETS-Lindgren

7. Measurement Uncertainty

Test Name	Uncertainty	
1. RF Output Power - Conducted	$\pm 1.32\text{dB}$	
2. Time of Occupancy - Conducted	$\pm 0.58\text{ms}$	
3. Occupied channel bandwidth - Conducted	$\pm 66\text{Hz}$	
4 Transmitter Spurious Emission - Conducted	$30\text{MHz} \leq f \leq 1\text{GHz}$	$\pm 1.41\text{dB}$
	$1\text{GHz} \leq f \leq 7\text{GHz}$	$\pm 1.92\text{dB}$
	$7\text{GHz} \leq f \leq 13\text{GHz}$	$\pm 2.31\text{dB}$
	$13\text{GHz} \leq f \leq 26\text{GHz}$	$\pm 2.61\text{dB}$
5. Transmitter Spurious Emission - Radiated	$9\text{kHz} \leq f \leq 30\text{MHz}$	$\pm 1.84\text{dB}$
	$30\text{MHz} \leq f \leq 1\text{GHz}$	$\pm 4.90\text{dB}$
	$1\text{GHz} \leq f \leq 18\text{GHz}$	$\pm 5.12\text{dB}$
	$18\text{GHz} \leq f \leq 40\text{GHz}$	$\pm 4.66\text{dB}$
6. AC Power line Conducted Emission	$150\text{kHz} \leq f \leq 30\text{MHz}$	$\pm 3.10\text{dB}$

ANNEX A: Detailed Test Results

A.0 Antenna requirement

Measurement Limit:

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

Conclusion:The Directional gains of antenna used for transmitting is 2.5dBi.

The RF transmitter uses an integrate antenna without connector.

A.1 Maximum Peak Output Power

Method of Measurement: See ANSI C63.10-clause 7.8.5.

Use the following spectrum analyzer settings:

- a) Set Span = 6 MHz.
- b) Set RBW = 3 MHz.
- c) Set VBW = 3 MHz.
- d) Sweep time = auto.
- e) Detector = peak.
- f) Trace = max hold.
- g) Allow trace to stabilize.
- h) Use the marker-to-peak function to set the marker to the peak of the emission.
- I) The indicated level is the peak output power.

Measurement Limit:

Standard	Limit (dBm)
FCC CRF Part 15.247(b)(1) & RSS-247 Section 5.4	< 21

Measurement Results:

Mode	Peak Conducted Output Power (dBm)		
	2402MHz (Ch0)	2441MHz (Ch39)	2480 MHz (Ch78)
GFSK	8.06	8.46	7.96
$\pi/4$ DQPSK	8.89	9.31	8.86
8DPSK	9.12	9.59	9.21

See below for test graphs.

Conclusion: Pass

A.2 Band Edges Compliance

Measurement Limit:

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d) & RSS-247 Section 5.5	> 20

Measurement Result:

Mode	Channel	Hopping	Test Results	Conclusion
GFSK	0	ON	Fig.1	P
	78	ON	Fig.2	P
$\pi/4$ DQPSK	0	ON	Fig.3	P
	78	ON	Fig.4	P
8DPSK	0	ON	Fig.5	P
	78	ON	Fig.6	P

Mode	Channel	Hopping	Test Results	Conclusion
GFSK	0	OFF	Fig.7	P
	78	OFF	Fig.8	P
$\pi/4$ DQPSK	0	OFF	Fig.9	P
	78	OFF	Fig.10	P
8DPSK	0	OFF	Fig.11	P
	78	OFF	Fig.12	P

See below for test graphs.

Conclusion: Pass



Fig. 1 Band Edges (GFSK, Ch 0, Hopping ON)

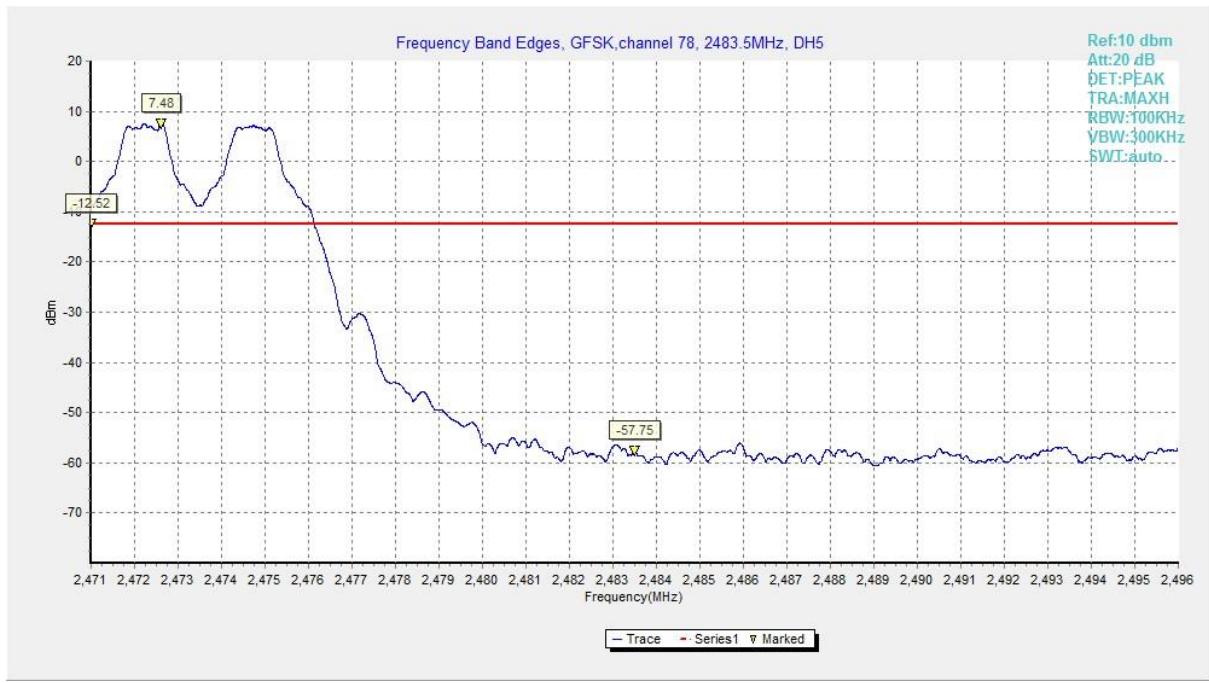


Fig. 2 Band Edges (GFSK, Ch 78, Hopping ON)

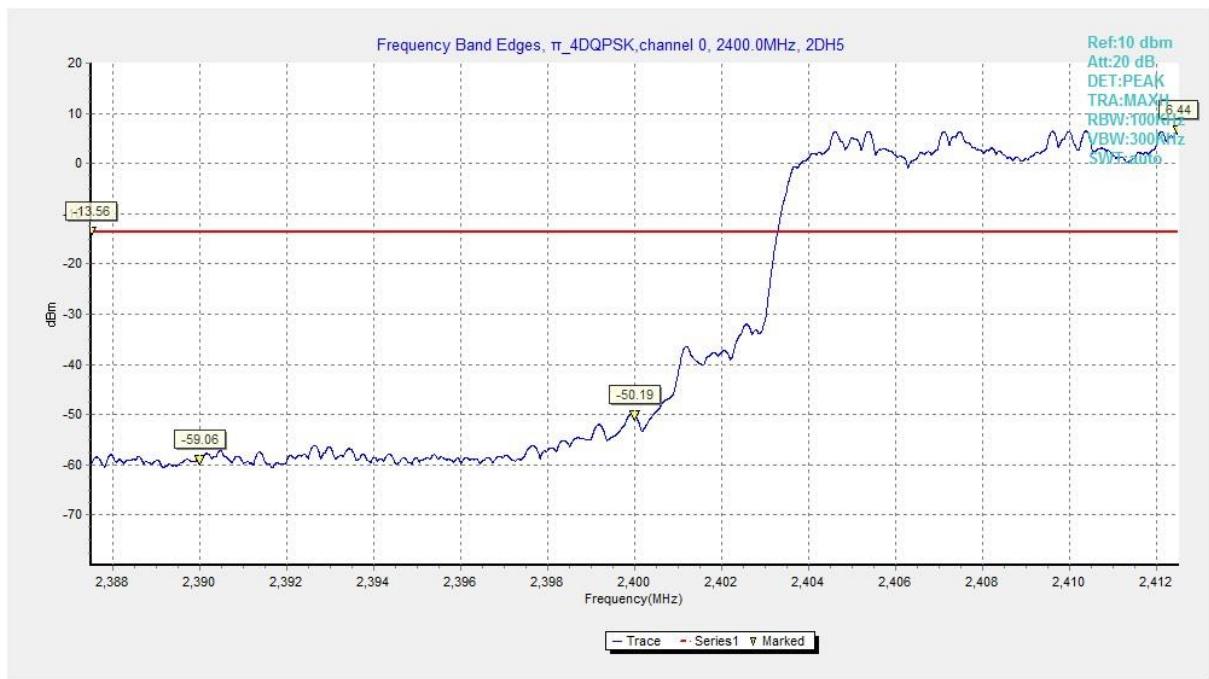


Fig. 3 Band Edges (π /4 DQPSK, Ch 0, Hopping ON)



Fig. 4 Band Edges (π /4 DQPSK, Ch 78, Hopping ON)

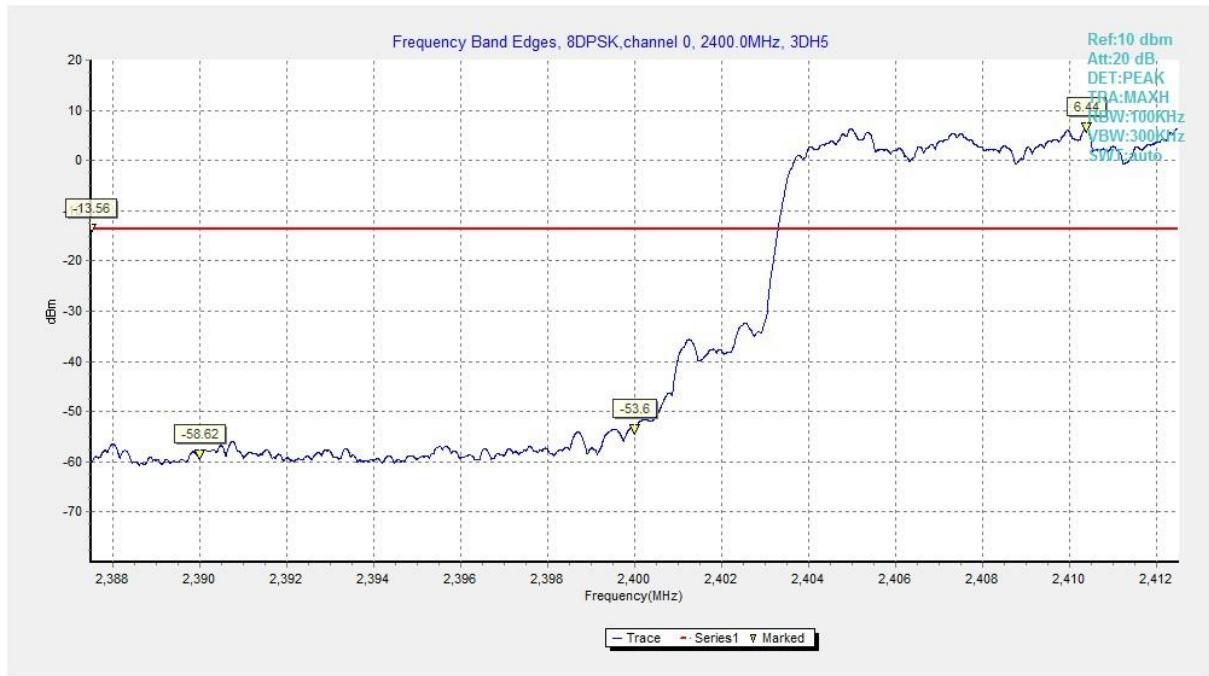


Fig. 5 Band Edges (8DPSK, Ch 0, Hopping ON)

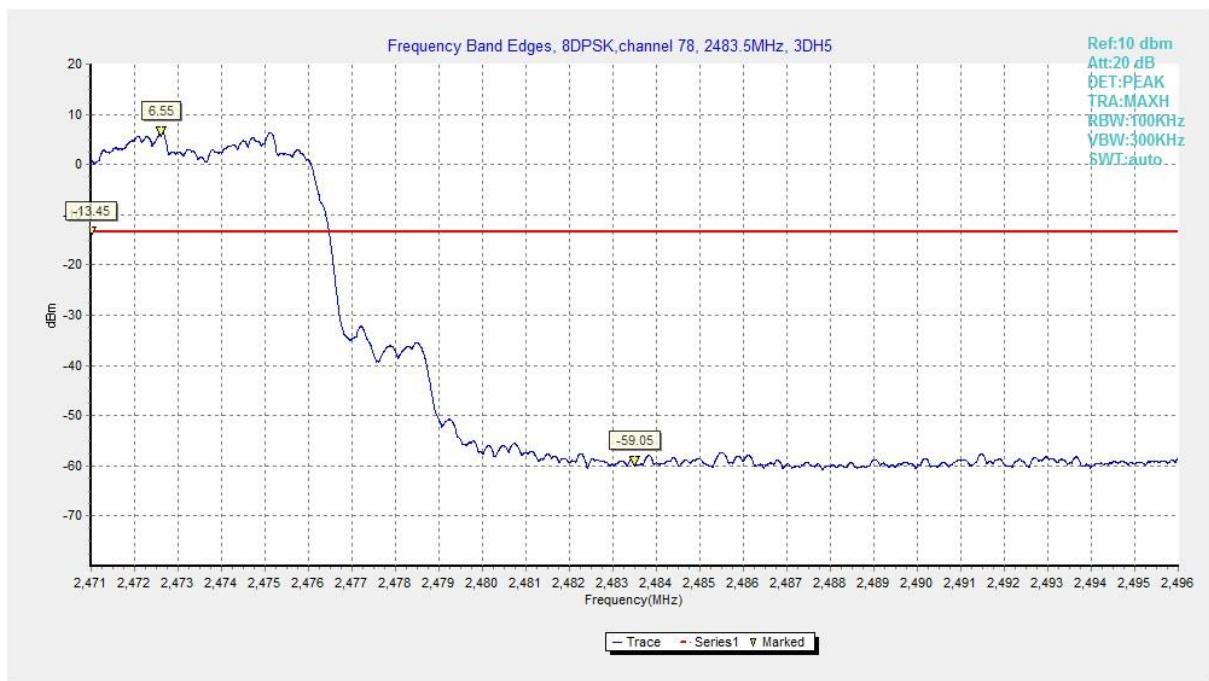


Fig. 6 Band Edges (8DPSK, Ch 78, Hopping ON)

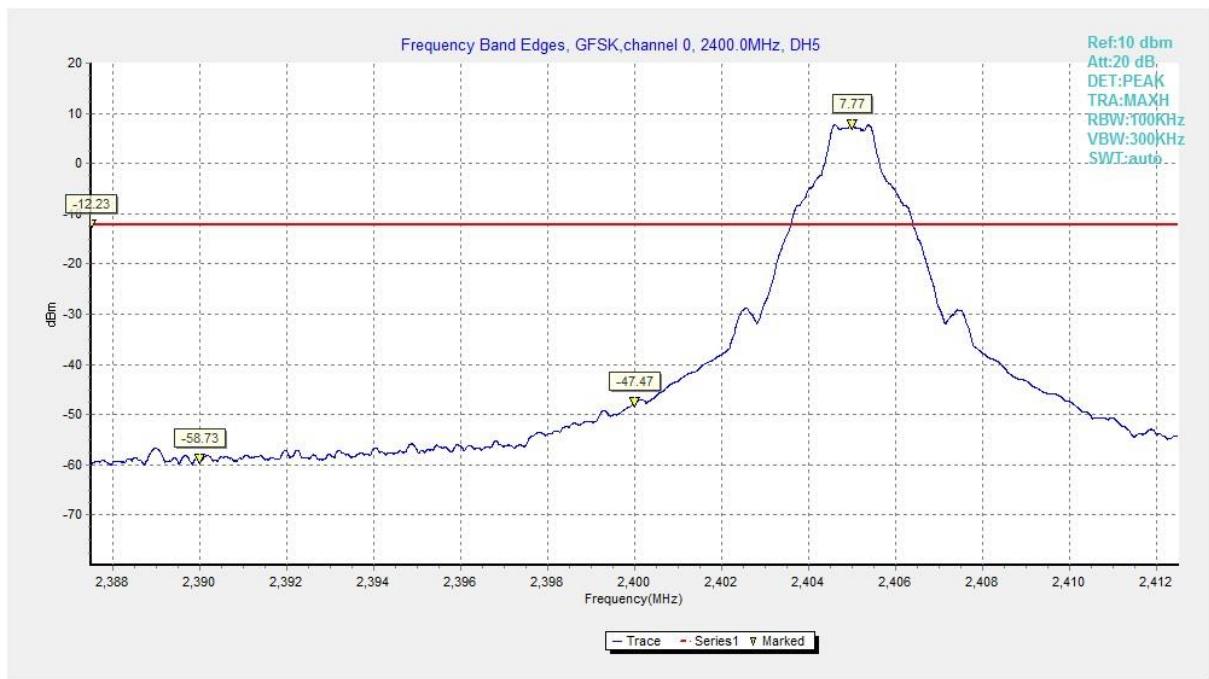


Fig. 7 Band Edges (GFSK, Ch 0, Hopping OFF)

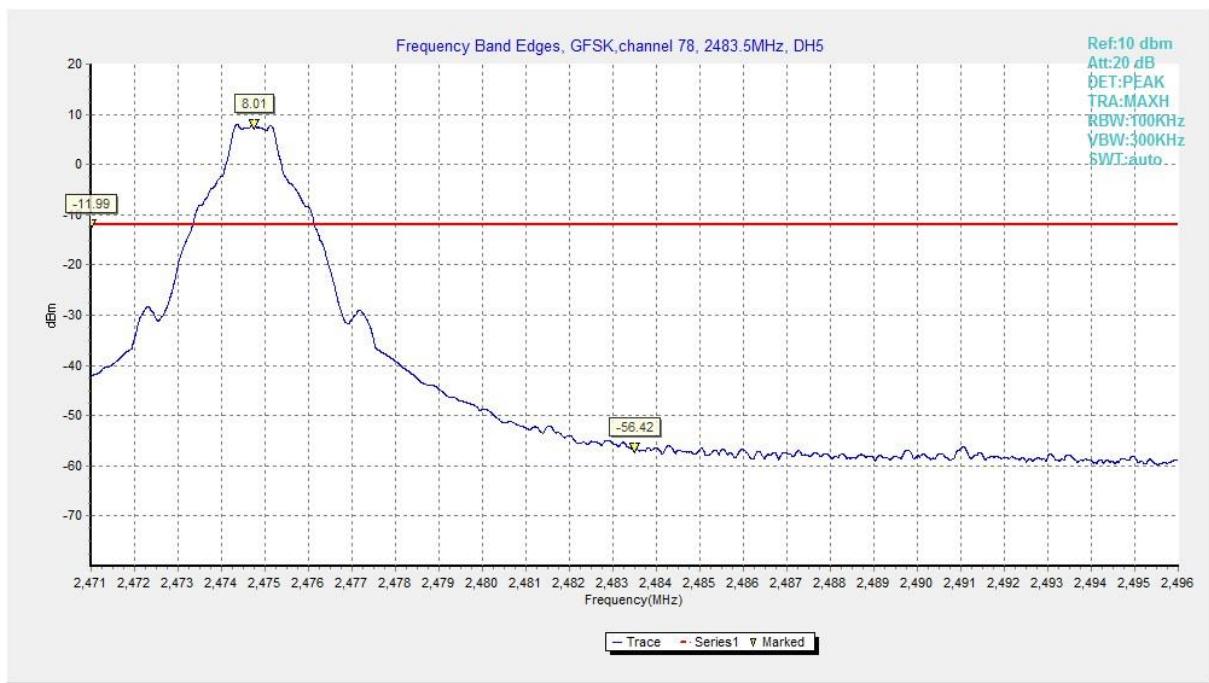


Fig. 8 Band Edges (GFSK, Ch 78, Hopping OFF)

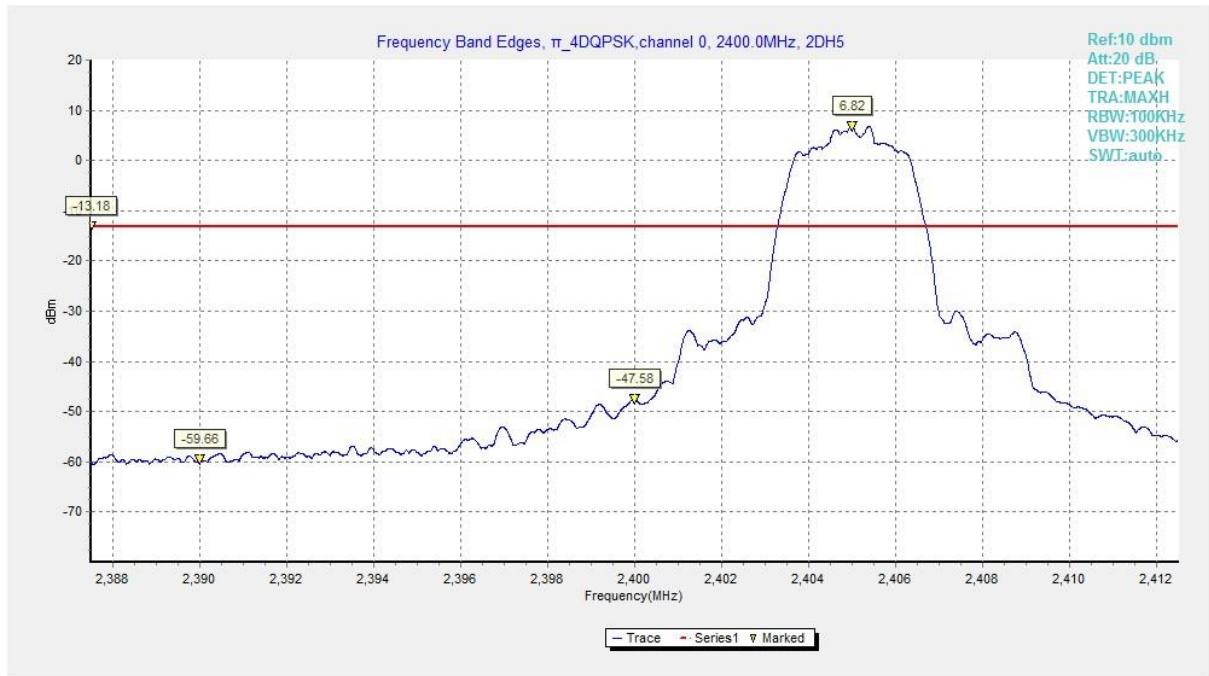


Fig. 9 Band Edges ($\pi/4$ DQPSK, Ch 0, Hopping OFF)

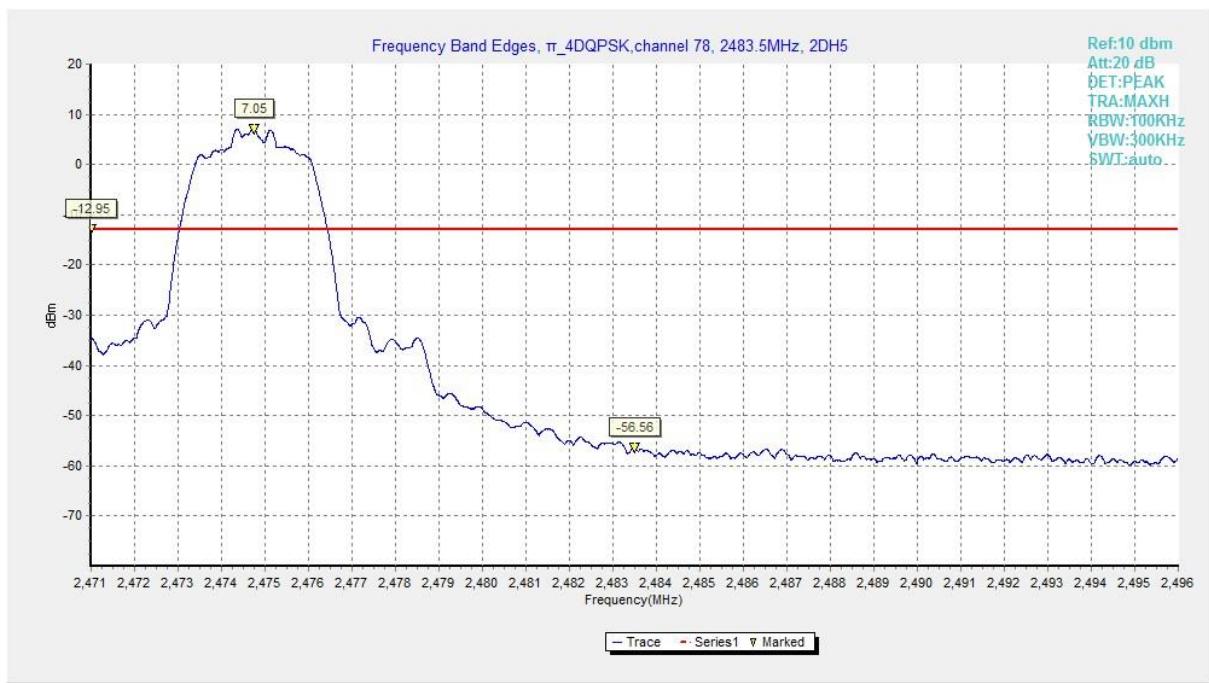


Fig. 10 Band Edges ($\pi/4$ DQPSK, Ch 78, Hopping OFF)

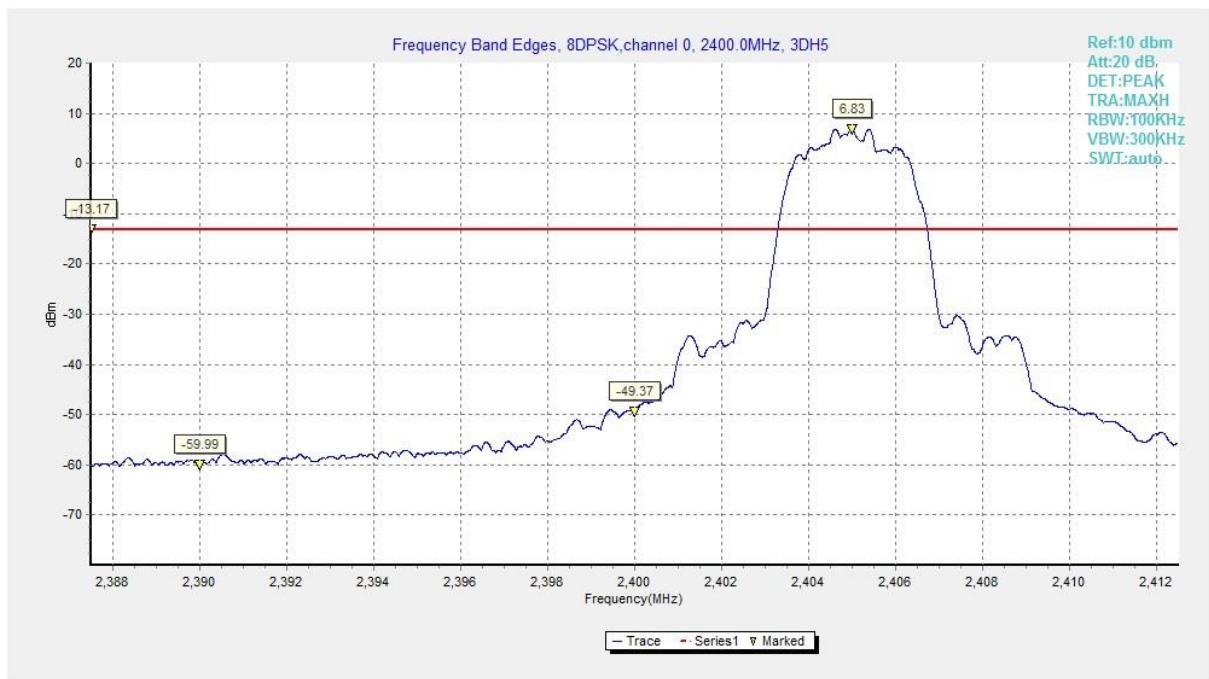


Fig. 11 Band Edges (8DPSK, Ch 0, Hopping OFF)

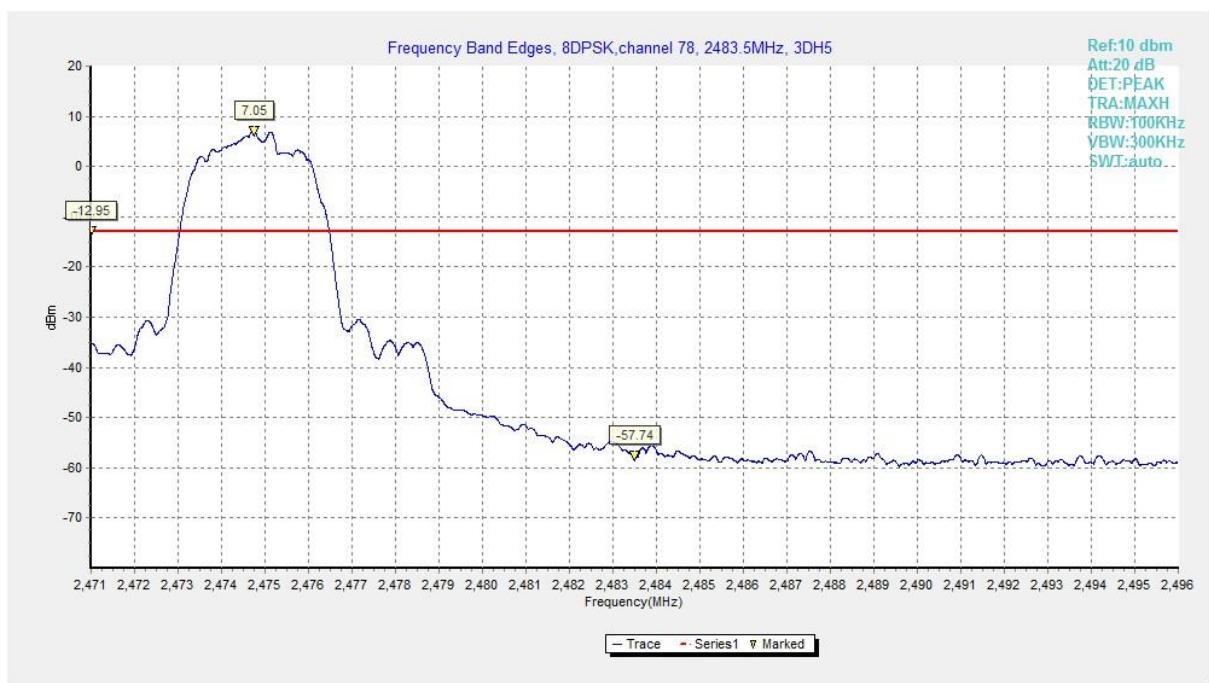


Fig. 12 Band Edges (8DPSK, Ch 78, Hopping OFF)

A.3 Conducted Emission

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247 (d) & RSS-247 Section 5.5	20dB below peak output power in 100 kHz bandwidth

Measurement Results:

MODE	Channel	Frequency Range	Test Results	Conclusion
GFSK	0	2.402 GHz	Fig.13	P
		1GHz-3GHz	Fig.14	P
		3GHz-10GHz	Fig.15	P
	39	2.441 GHz	Fig.16	P
		1GHz-3GHz	Fig.17	P
		3GHz-10GHz	Fig.18	P
	78	2.480 GHz	Fig.19	P
		1GHz-3GHz	Fig.20	P
		3GHz-10GHz	Fig.21	P
$\pi/4$ DQPSK	0	2.402 GHz	Fig.22	P
		1GHz-3GHz	Fig.23	P
		3GHz-10GHz	Fig.24	P
	39	2.441 GHz	Fig.25	P
		1GHz-3GHz	Fig.26	P
		3GHz-10GHz	Fig.27	P
	78	2.480 GHz	Fig.28	P
		1GHz-3GHz	Fig.29	P
		3GHz-10GHz	Fig.30	P
8DPSK	0	2.402 GHz	Fig.31	P
		1GHz-3GHz	Fig.32	P
		3GHz-10GHz	Fig.33	P
	39	2.441 GHz	Fig.34	P
		1GHz-3GHz	Fig.35	P
		3GHz-10GHz	Fig.36	P
	78	2.480 GHz	Fig.37	P
		1GHz-3GHz	Fig.38	P
		3GHz-10GHz	Fig.39	P
/	All channels	30 MHz-1GHz	Fig.40	P
		10GHz-26GHz	Fig.41	P

See below for test graphs.

Conclusion: Pass

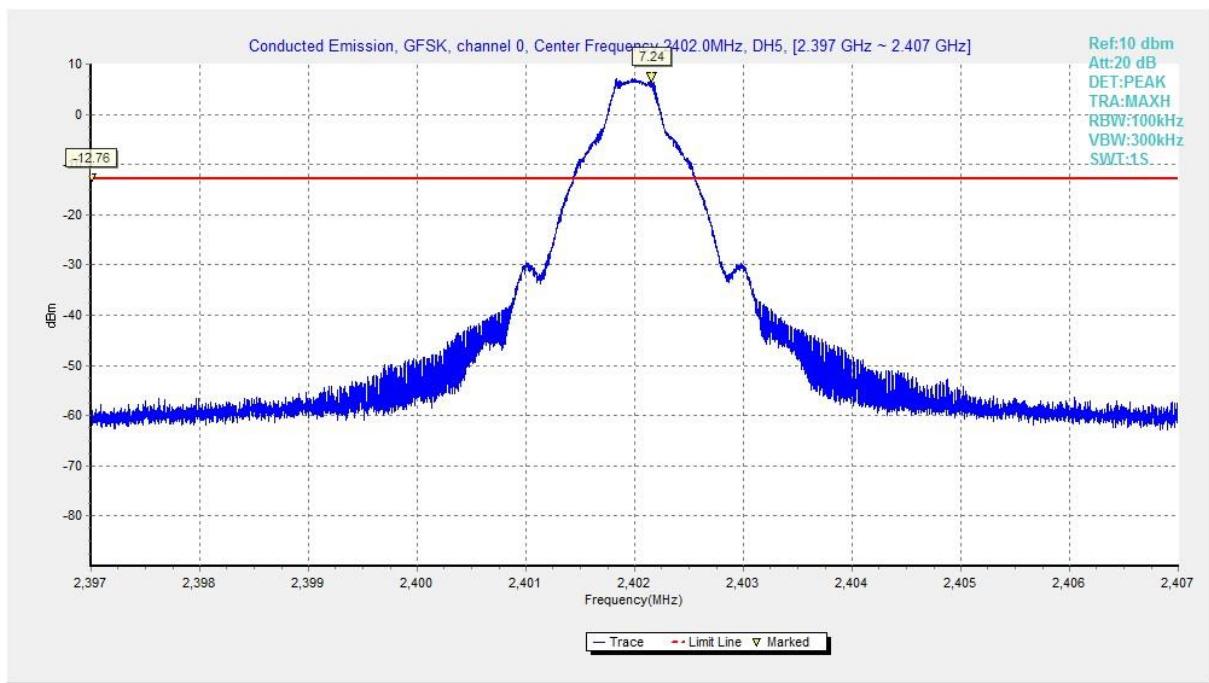


Fig. 13 Conducted Spurious Emission (GFSK, Ch0, 2.402GHz)

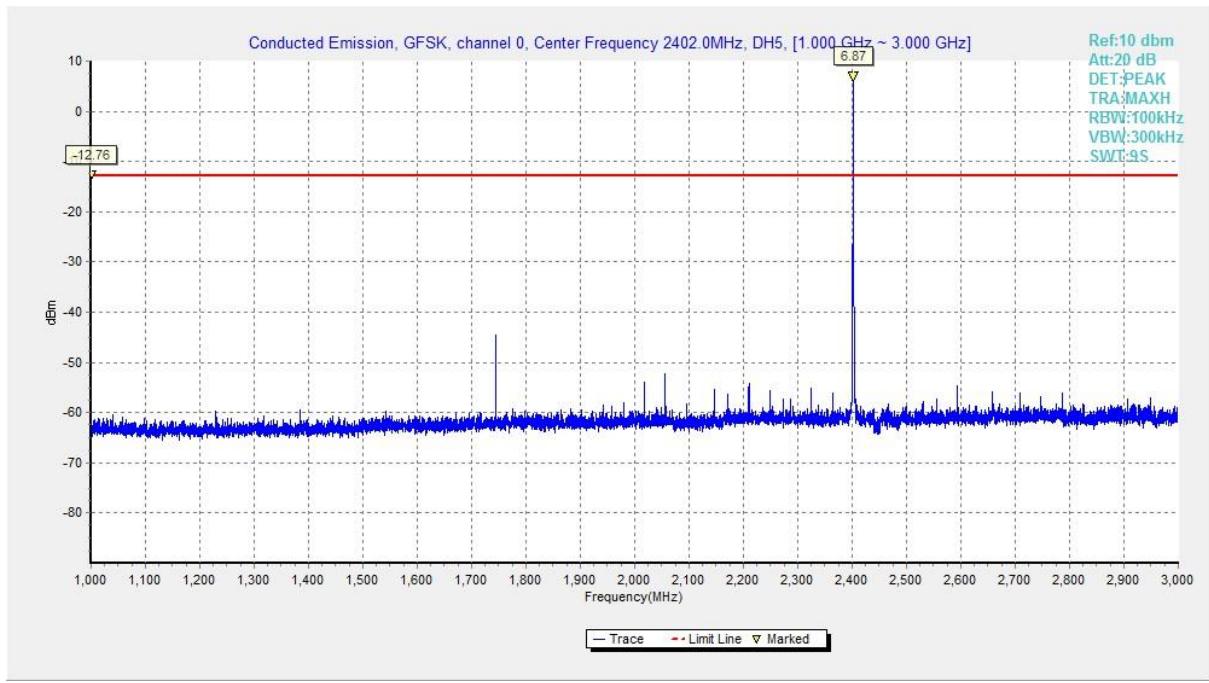


Fig. 14 Conducted Spurious Emission (GFSK, Ch0, 1 GHz-3 GHz)

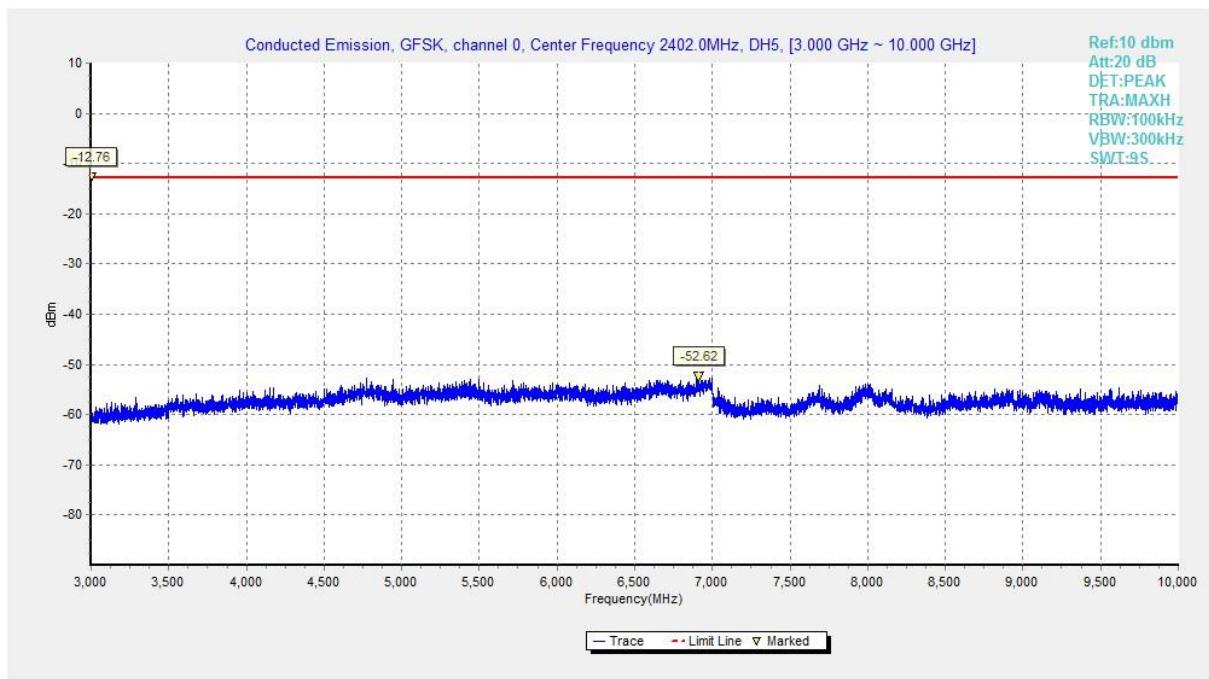


Fig. 15 Conducted Spurious Emission (GFSK, Ch0, 3GHz-10 GHz)

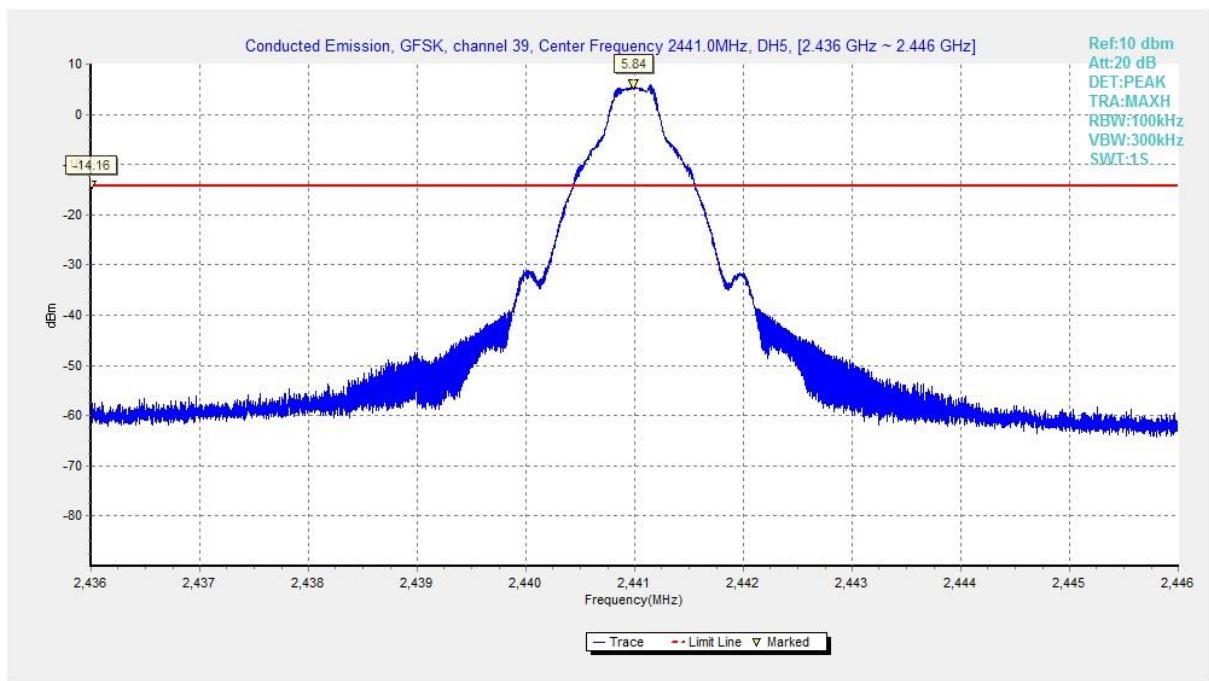


Fig. 16 Conducted Spurious Emission (GFSK, Ch39, 2.441GHz)

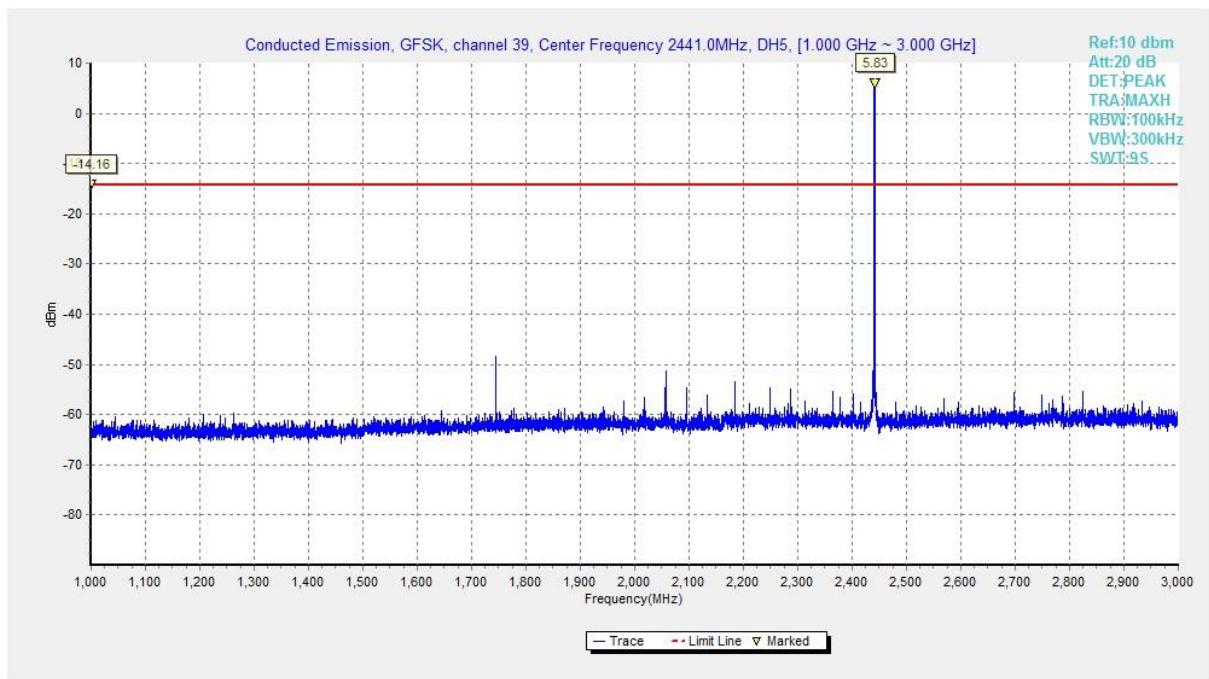


Fig. 17 Conducted Spurious Emission (GFSK, Ch39, 1GHz-3 GHz)

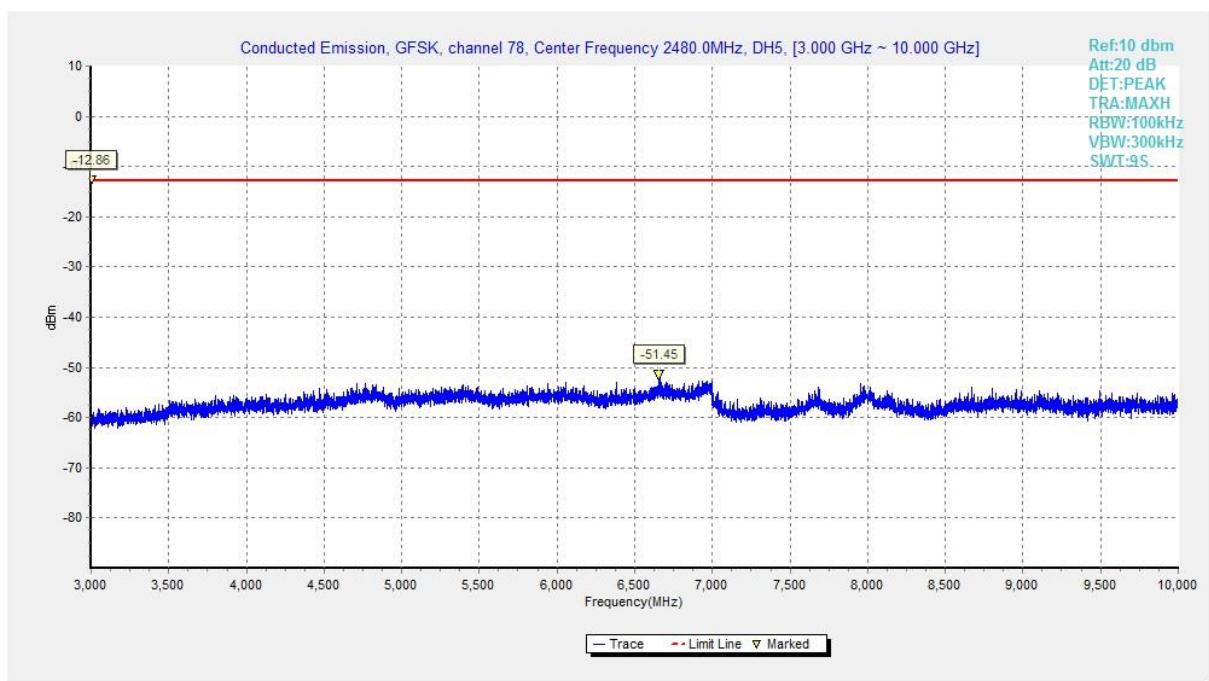


Fig. 18 Conducted Spurious Emission (GFSK, Ch39, 3GHz-10 GHz)

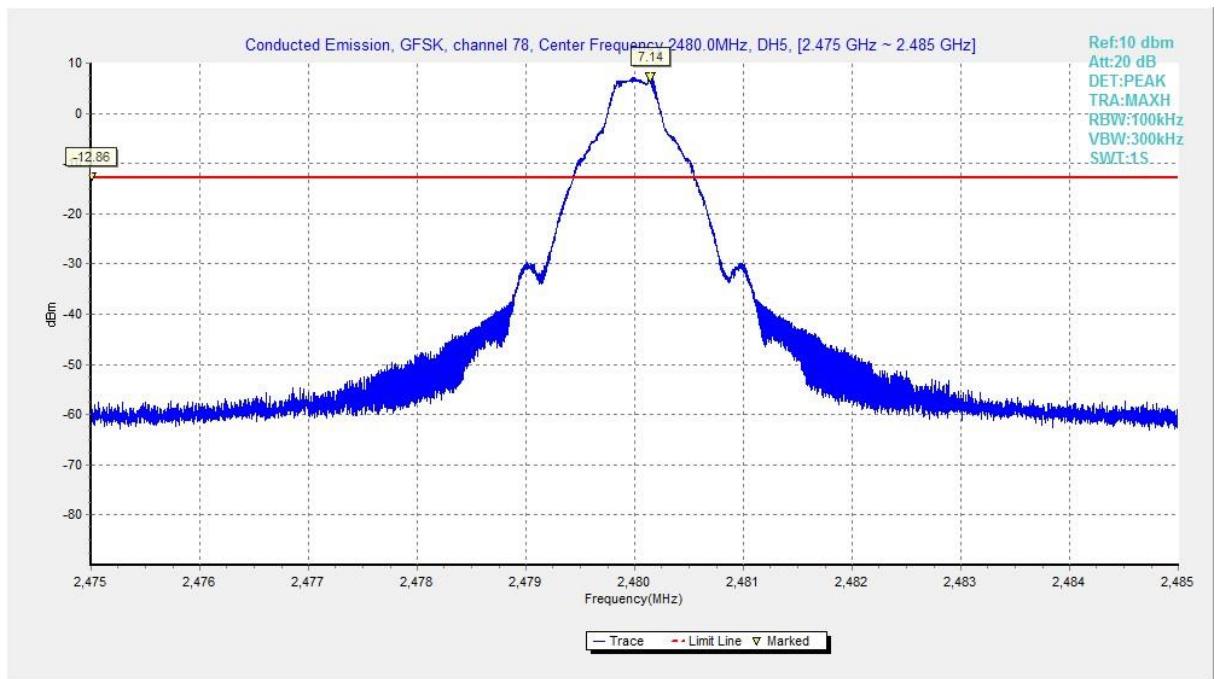


Fig. 19 Conducted Spurious Emission (GFSK, Ch78, 2.480GHz)

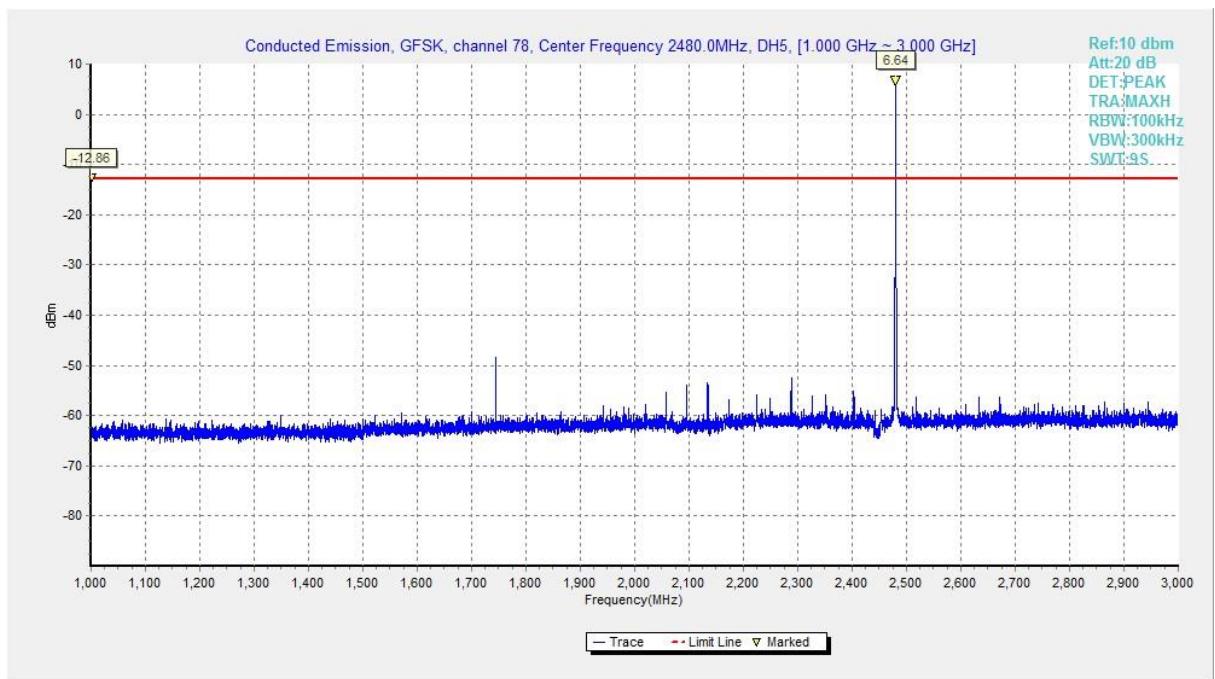


Fig. 20 Conducted Spurious Emission (GFSK, Ch78, 1GHz-3 GHz)

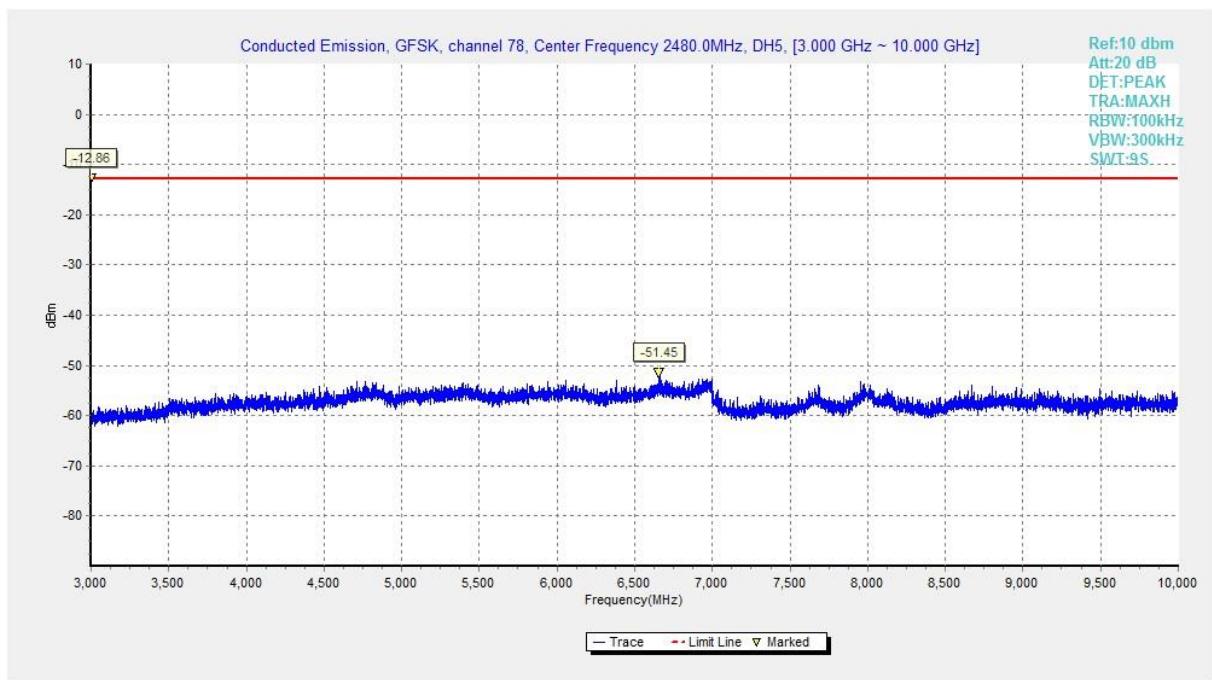


Fig. 21 Conducted Spurious Emission (GFSK, Ch78, 3GHz-10 GHz)

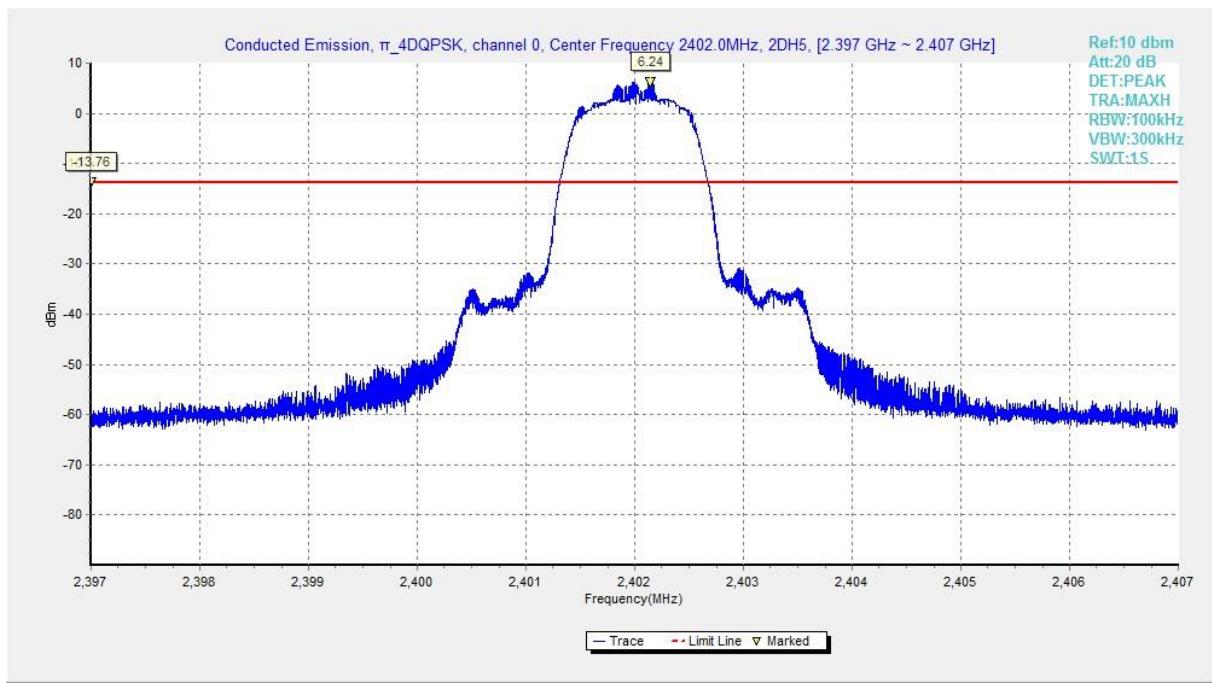


Fig. 22 Conducted Spurious Emission (π/4 DQPSK, Ch0, 2.402GHz)

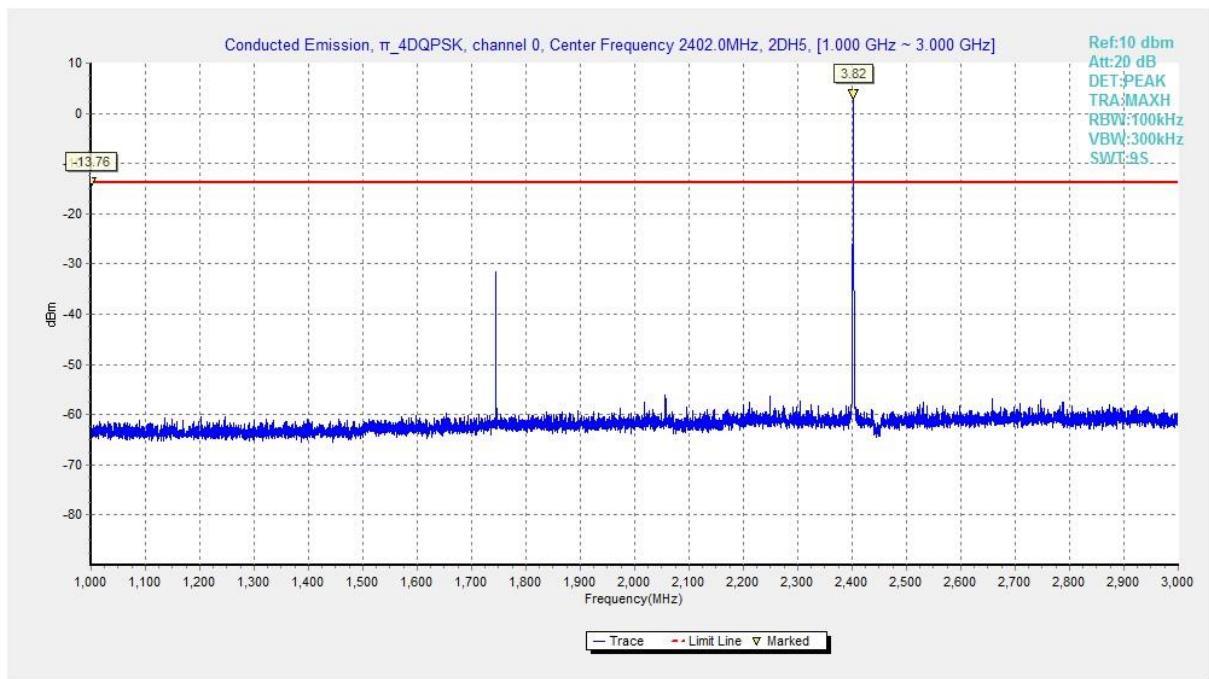


Fig. 23 Conducted Spurious Emission ($\pi/4$ DQPSK, Ch0, 1GHz-3 GHz)

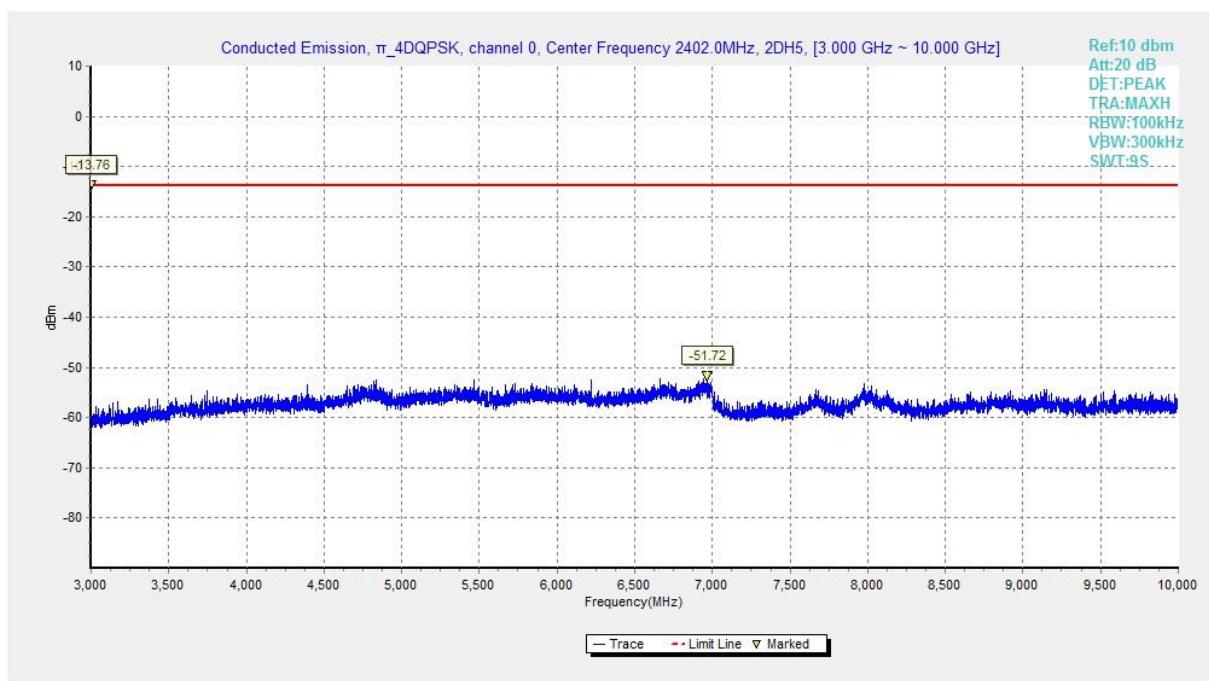


Fig. 24 Conducted Spurious Emission ($\pi/4$ DQPSK, Ch0, 3GHz-10 GHz)

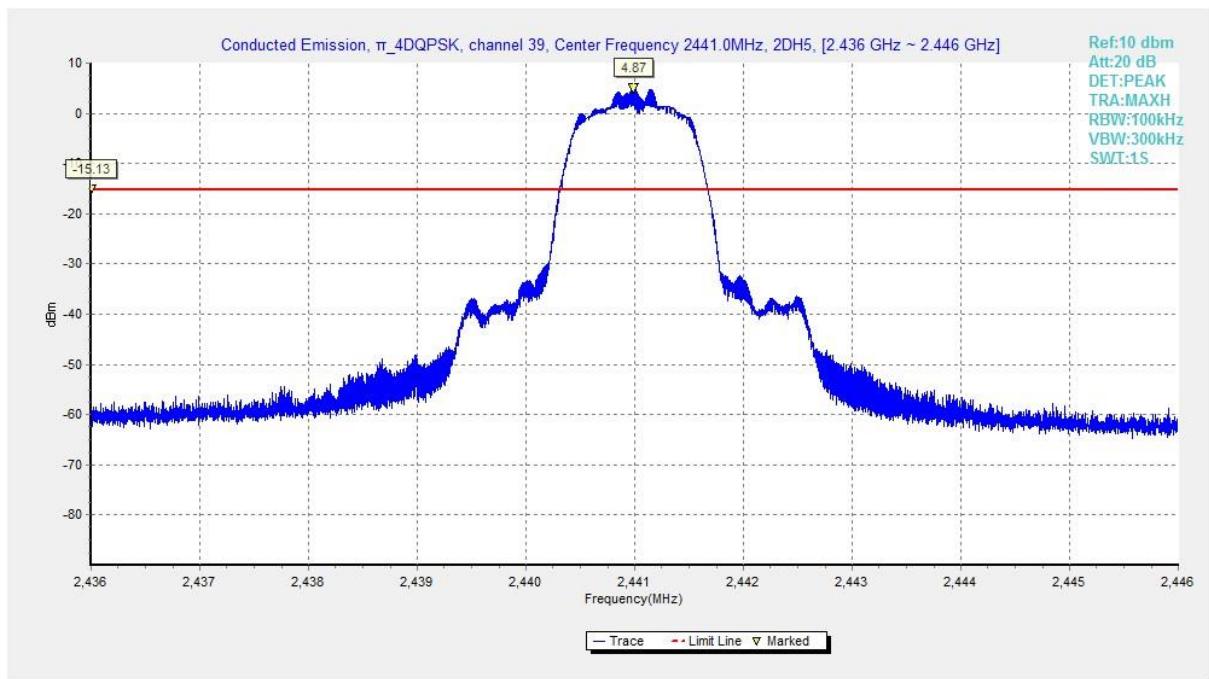


Fig. 25 Conducted Spurious Emission ($\pi/4$ DQPSK, Ch39, 2.441GHz)

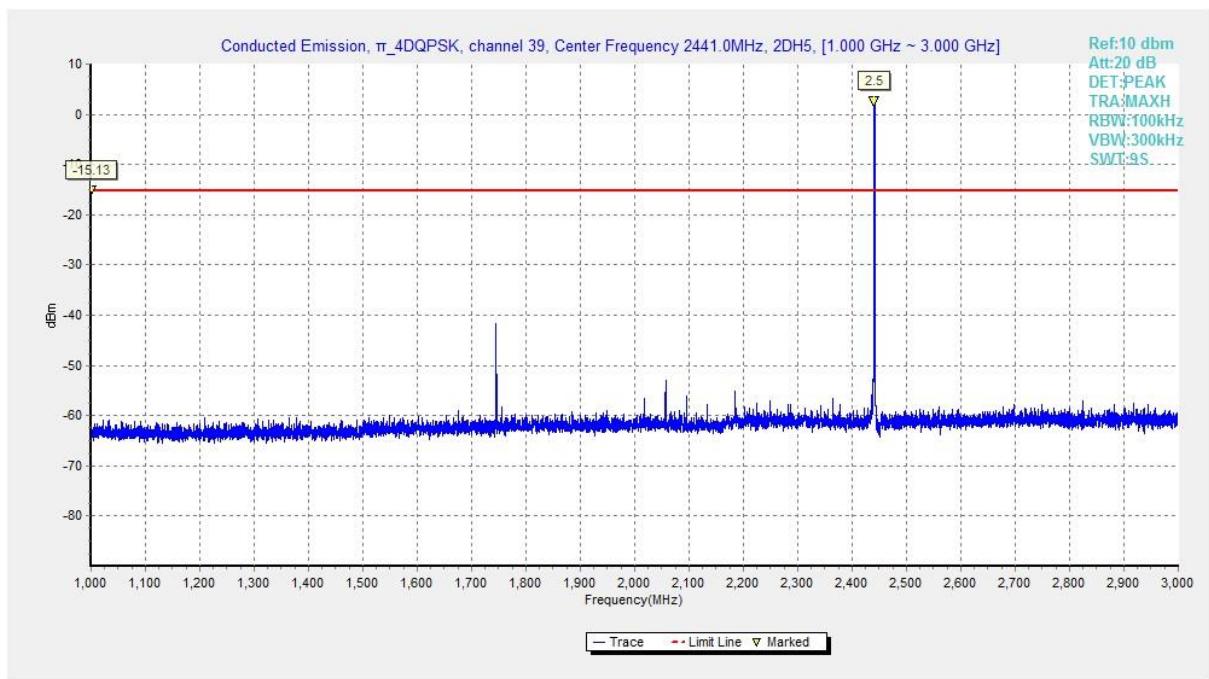


Fig. 26 Conducted Spurious Emission ($\pi/4$ DQPSK, Ch39, 1GHz-3 GHz)

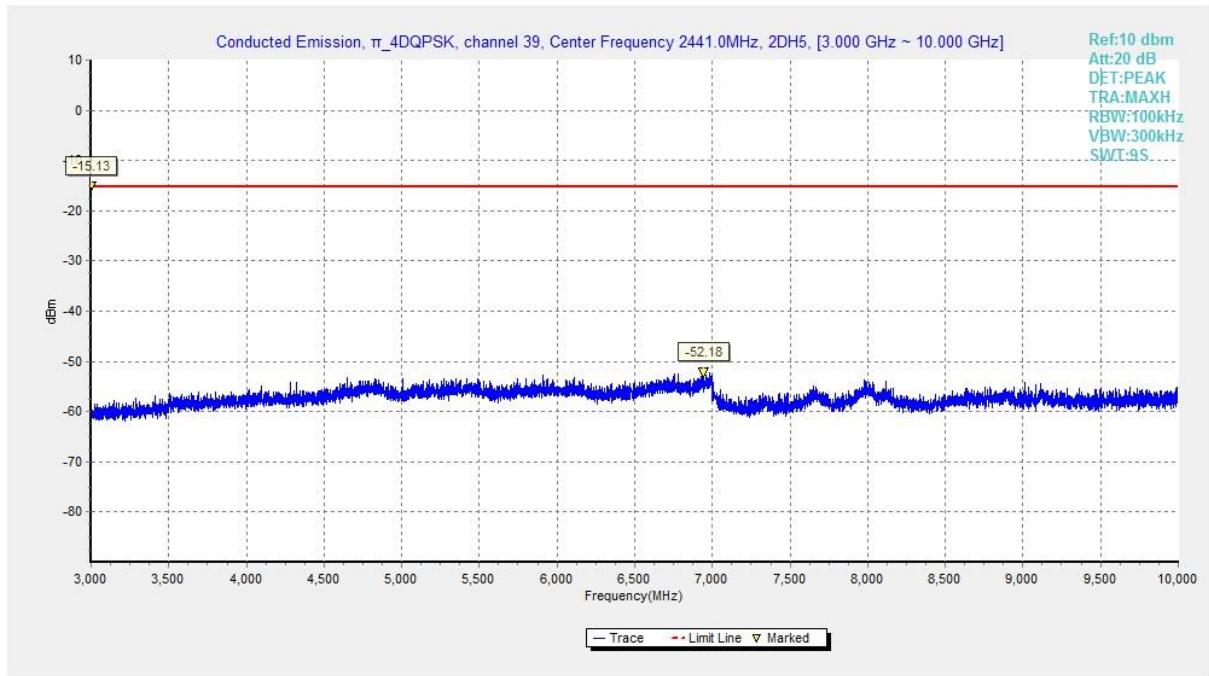


Fig. 27 Conducted Spurious Emission ($\pi/4$ DQPSK, Ch39, 3GHz-10 GHz)

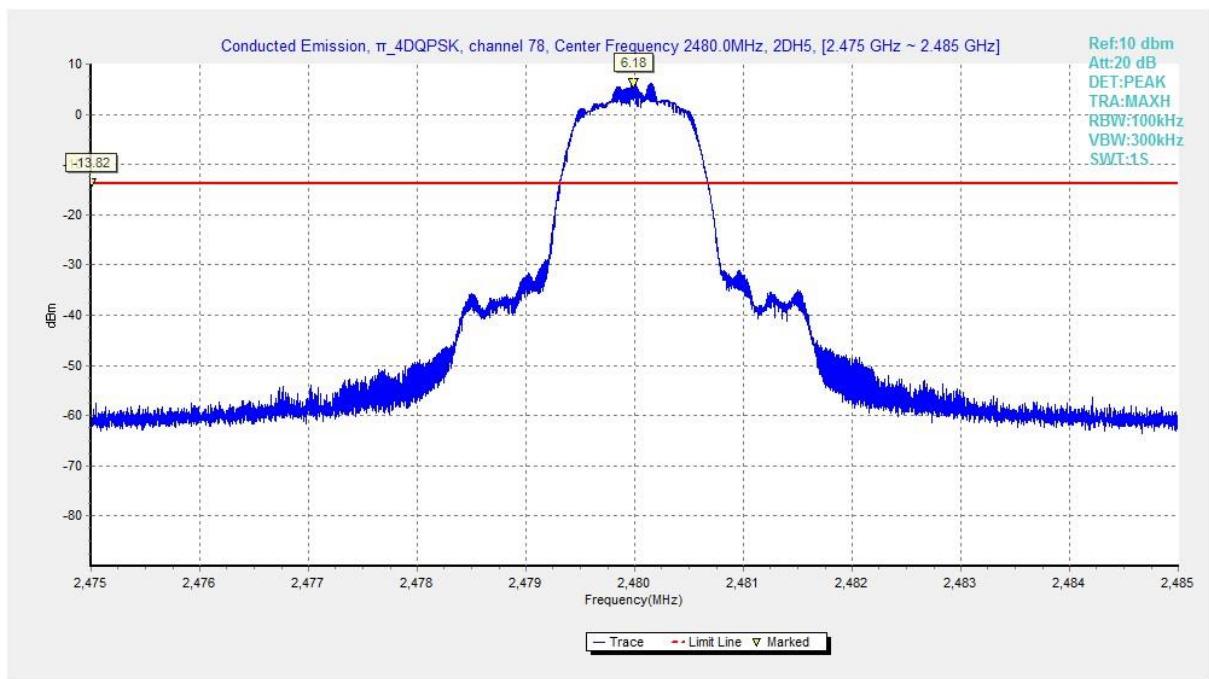


Fig. 28 Conducted Spurious Emission ($\pi/4$ DQPSK, Ch78, 2.480GHz)

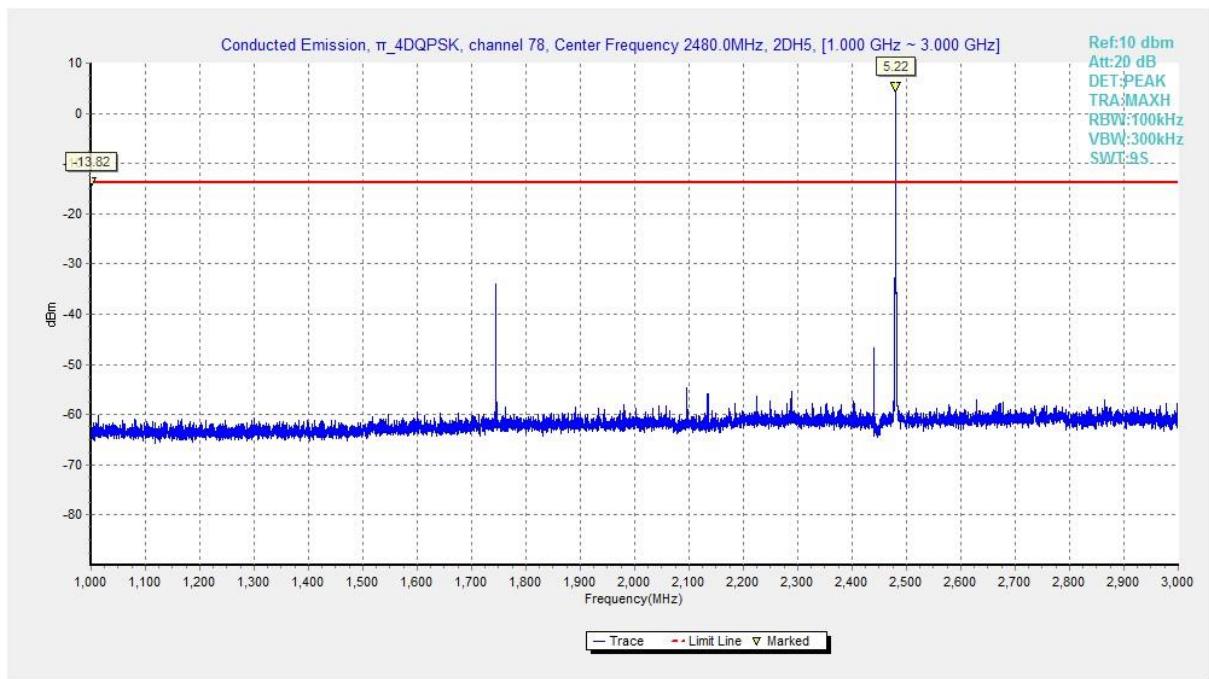


Fig. 29 Conducted Spurious Emission (π /4 DQPSK, Ch78, 1GHz-3 GHz)

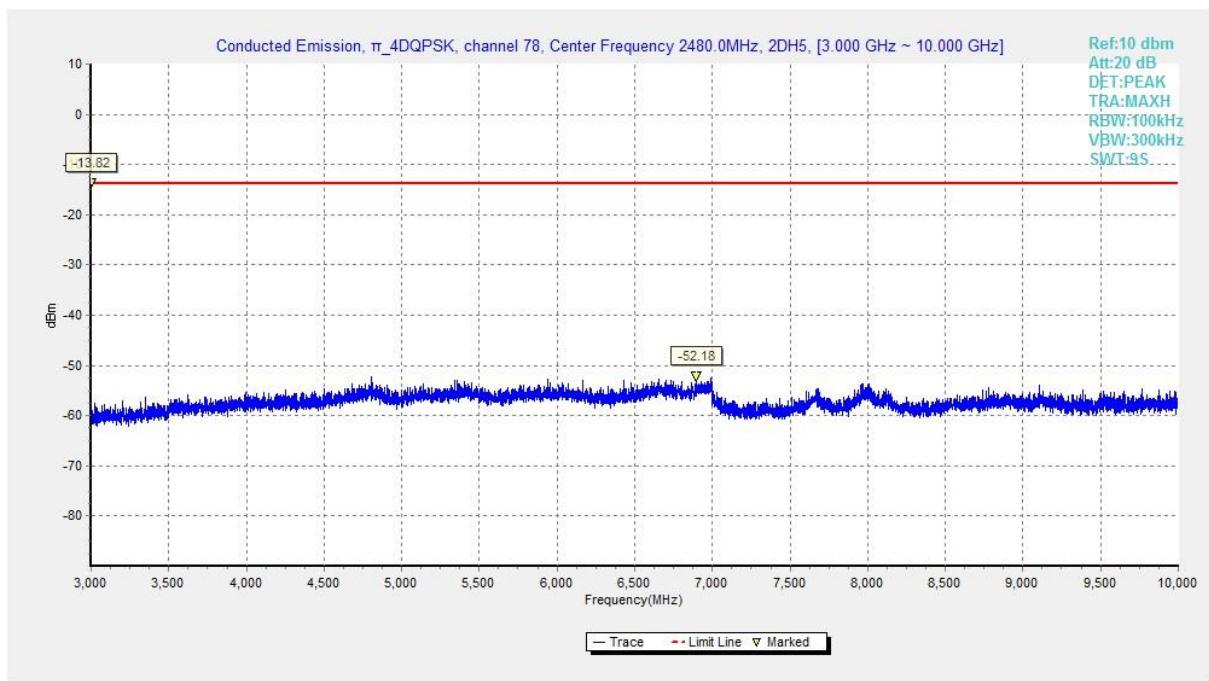


Fig. 30 Conducted Spurious Emission (π /4 DQPSK, Ch78, 3GHz-10 GHz)

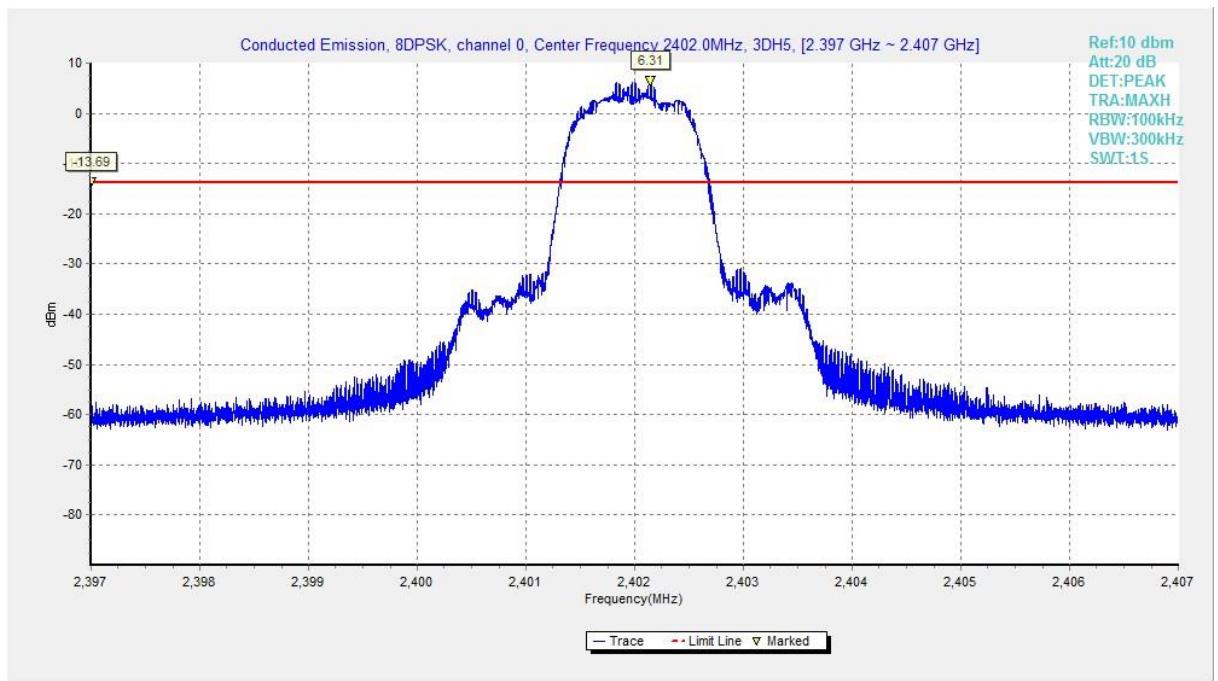


Fig. 31 Conducted Spurious Emission (8DPSK, Ch0, 2.402GHz)

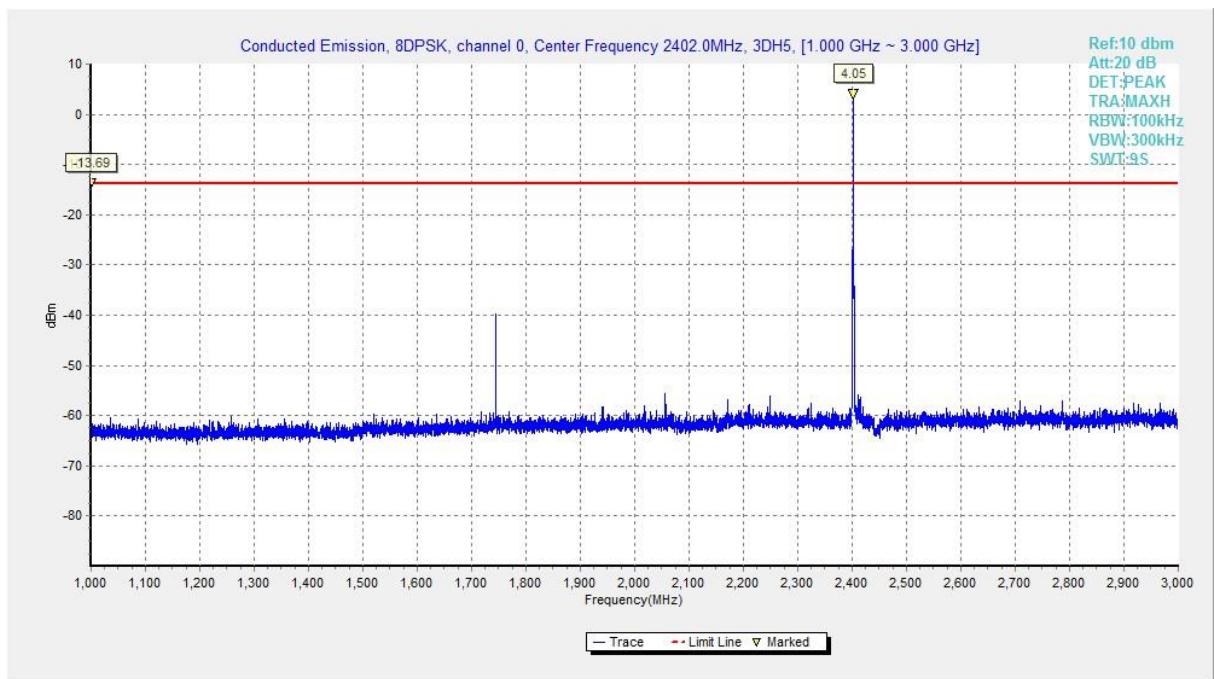


Fig. 32 Conducted Spurious Emission (8DPSK, Ch0, 1GHz-3 GHz)

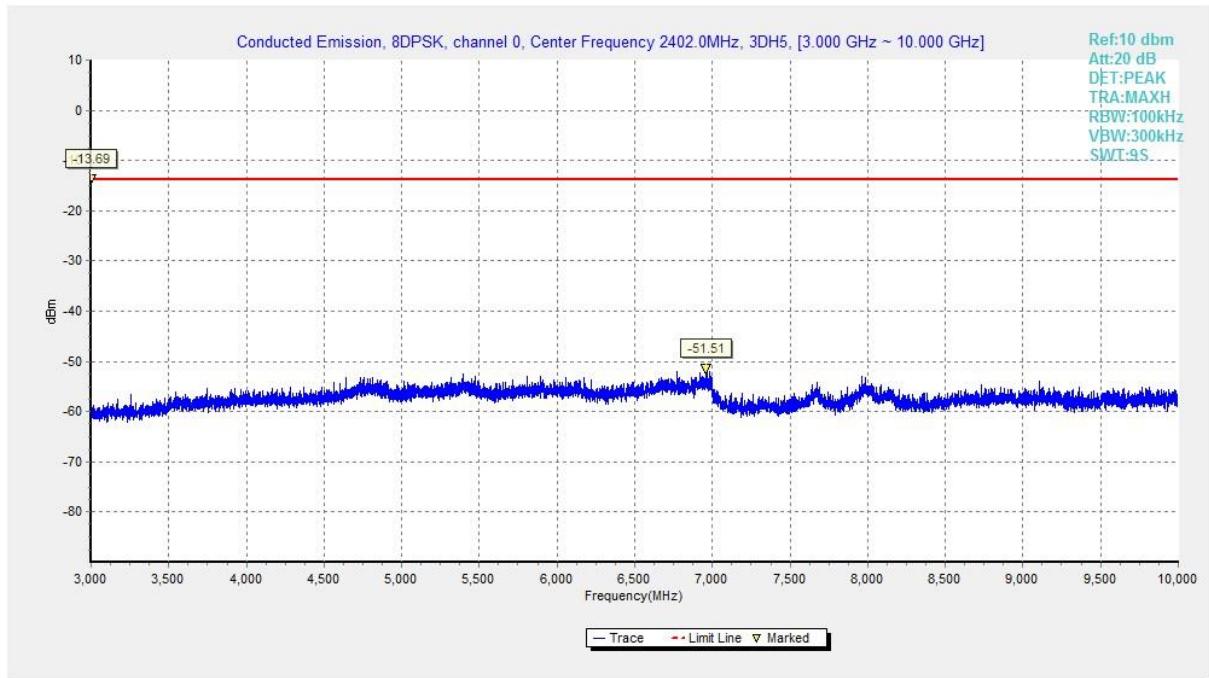


Fig. 33 Conducted Spurious Emission (8DPSK, Ch0, 3GHz-10 GHz)

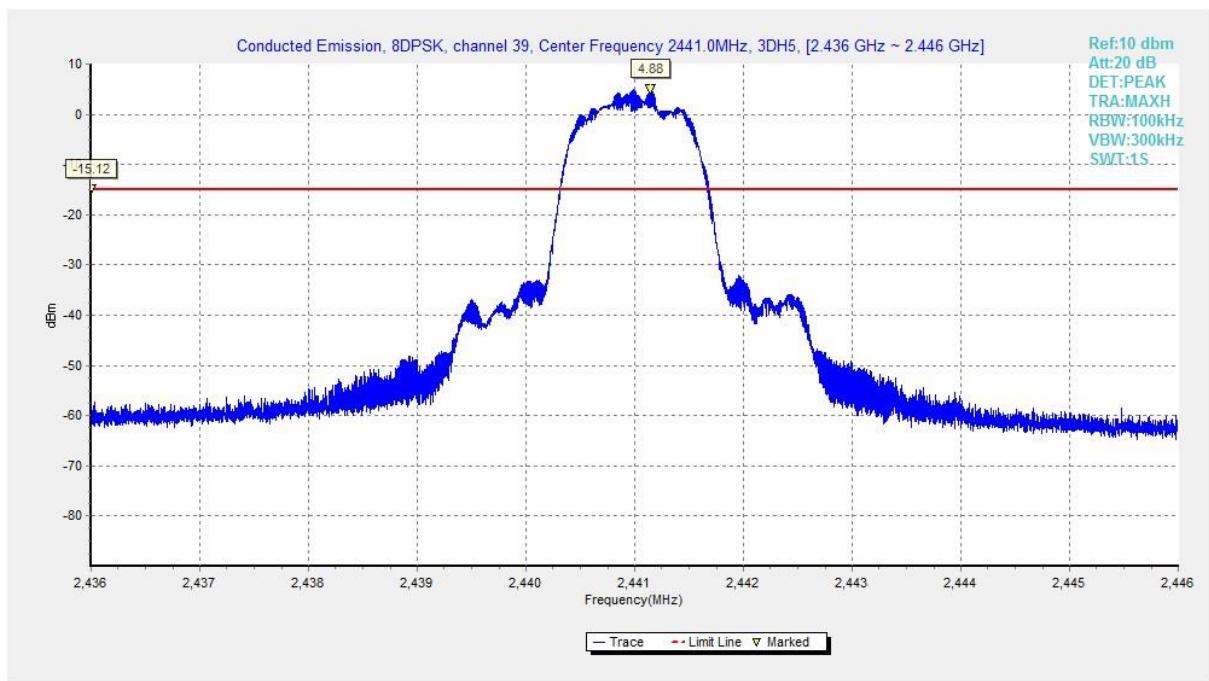


Fig. 34 Conducted Spurious Emission (8DPSK, Ch39, 2.441GHz)

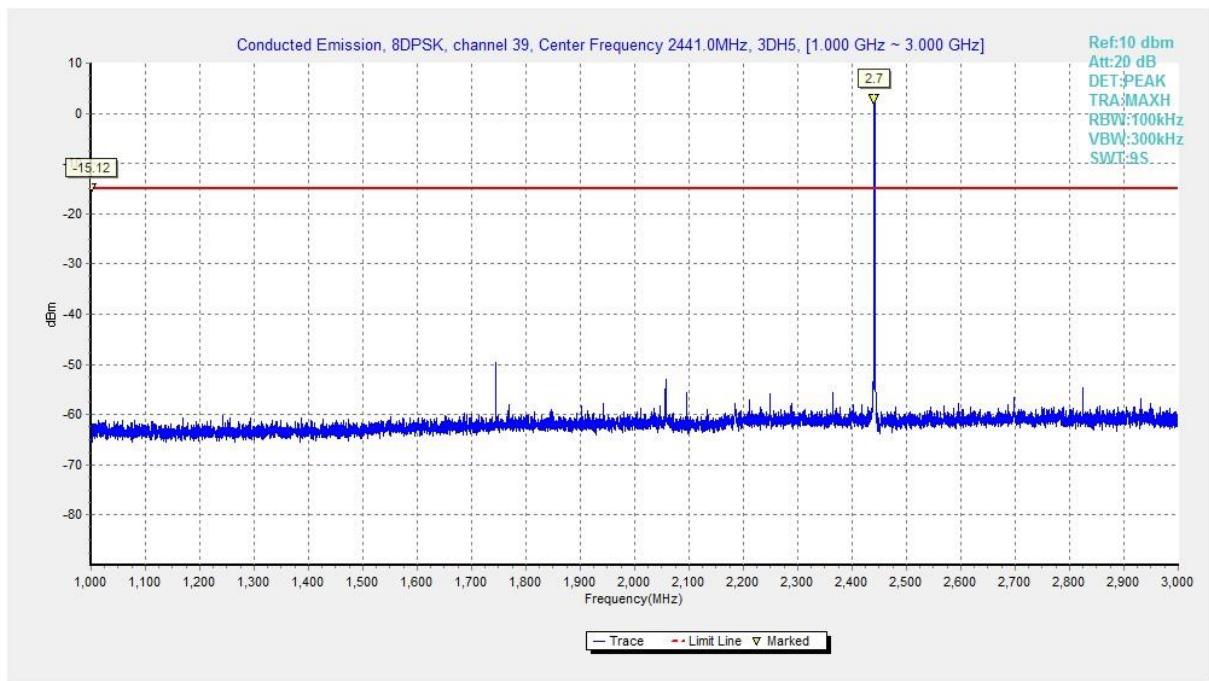


Fig. 35 Conducted Spurious Emission (8DPSK, Ch39, 1GHz-3 GHz)

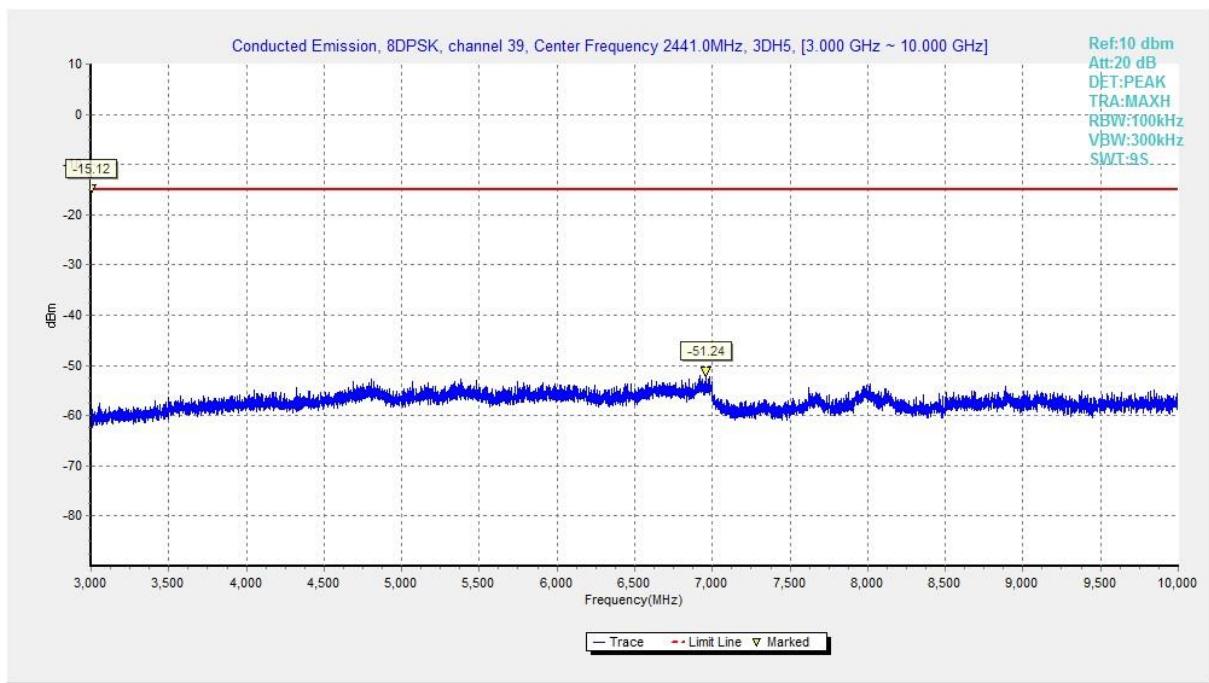


Fig. 36 Conducted Spurious Emission (8DPSK, Ch39, 3GHz-10 GHz)

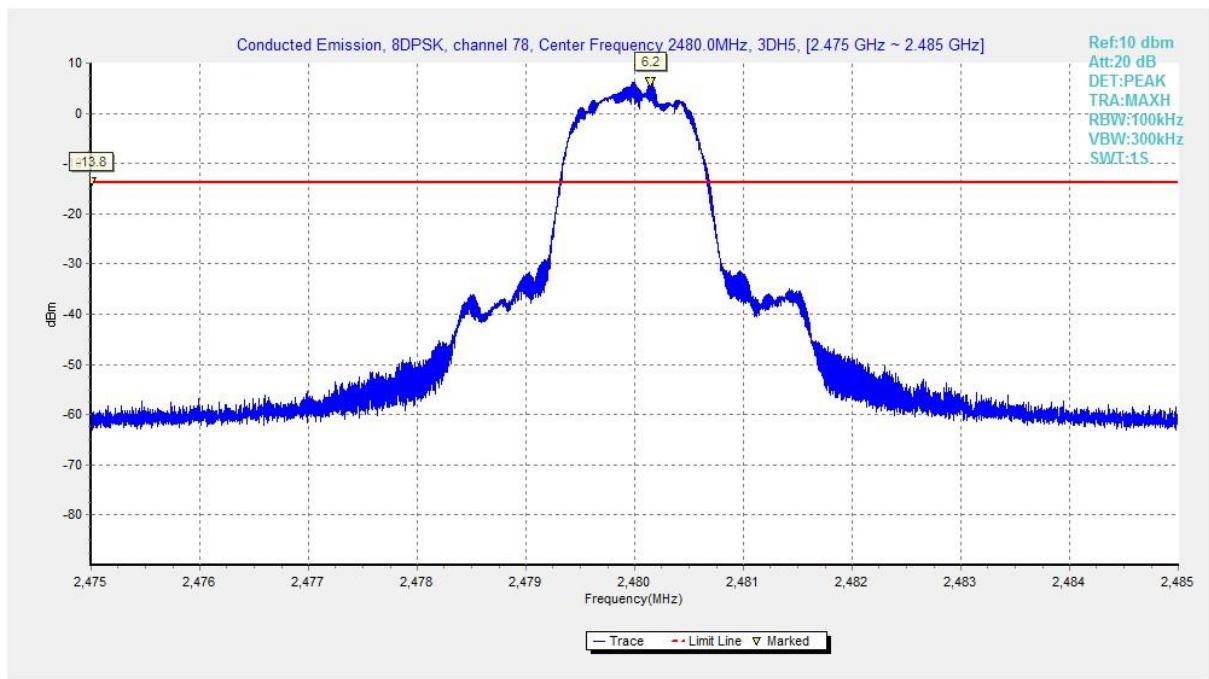


Fig. 37 Conducted Spurious Emission (8DPSK, Ch78, 2.480GHz)

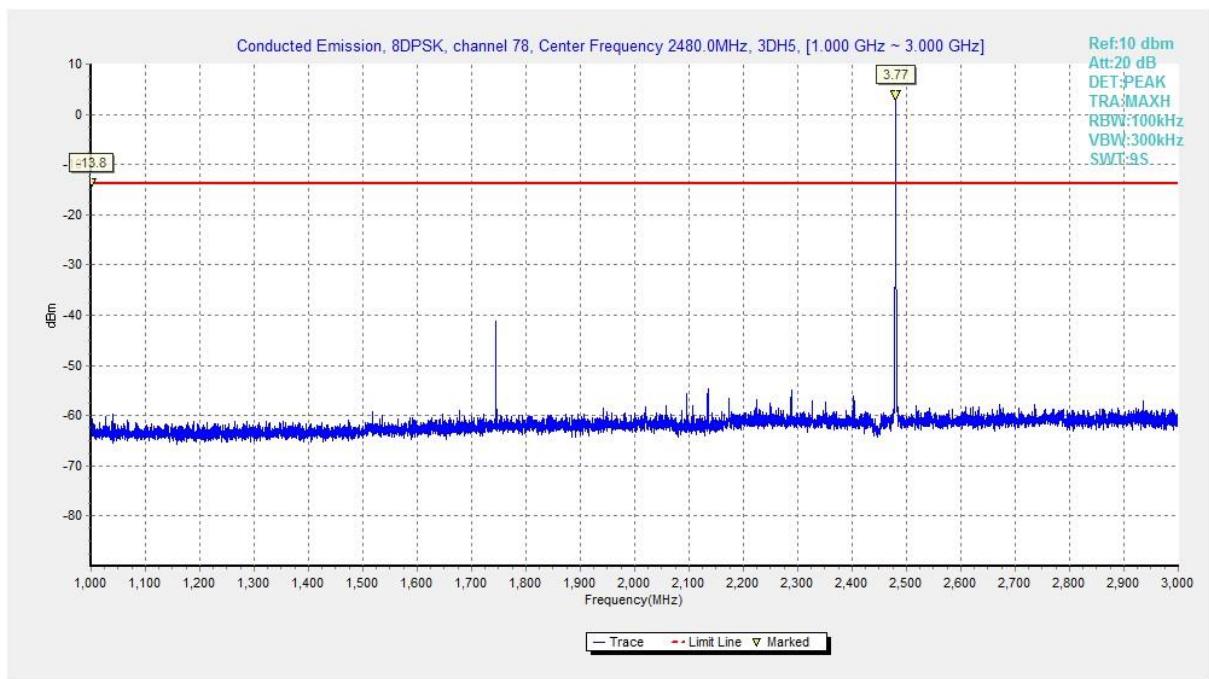


Fig. 38 Conducted Spurious Emission (8DPSK, Ch78, 1GHz-3 GHz)

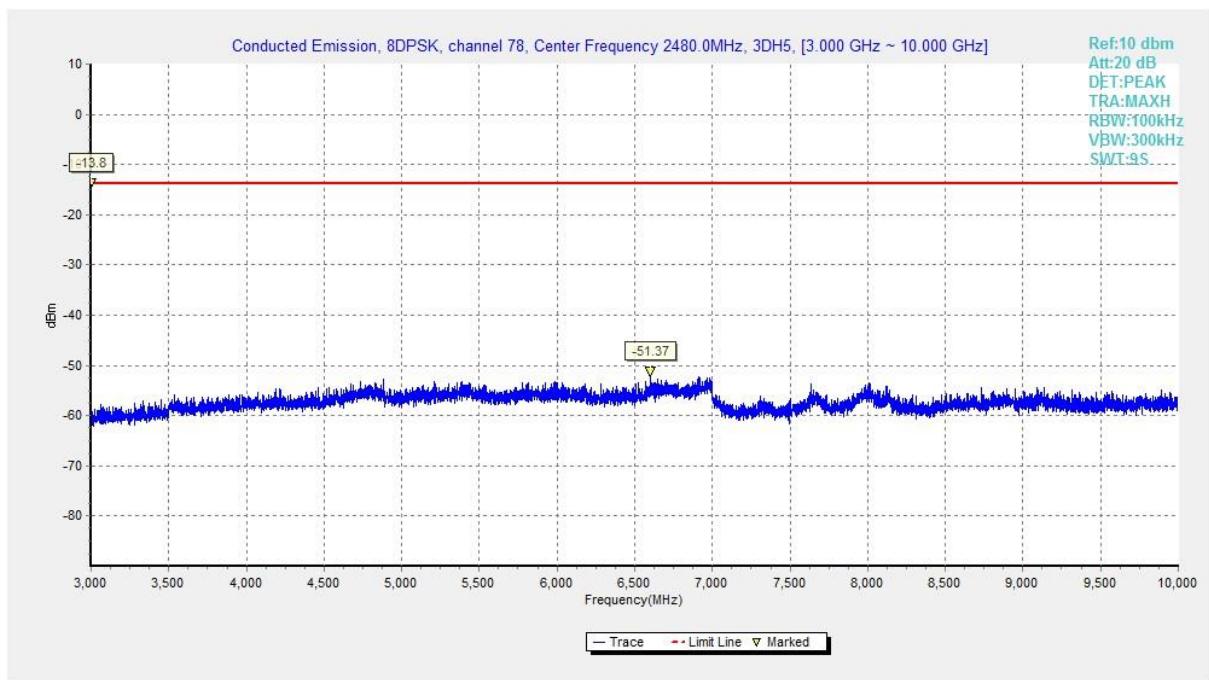


Fig. 39 Conducted Spurious Emission (8DPSK, Ch78, 3GHz-10 GHz)

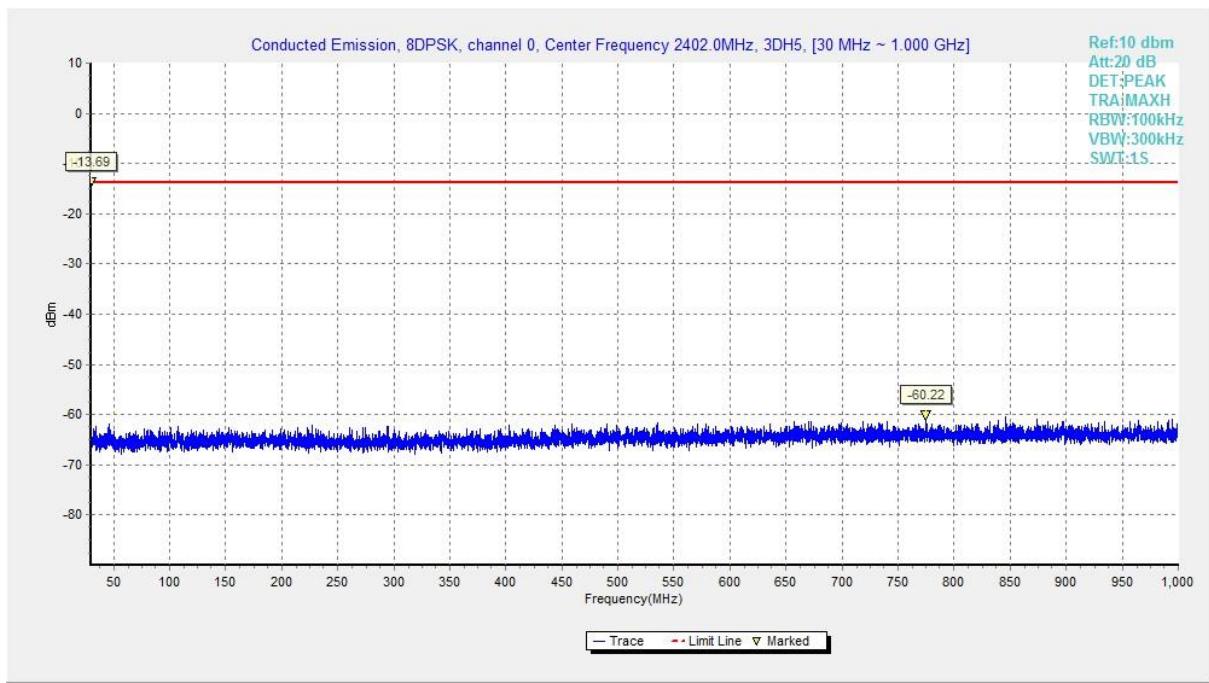


Fig. 40 Conducted Spurious Emission (All channel, 30 MHz-1 GHz)