

# Variant FCC RF Test Report

**APPLICANT** : Yulong Computer Telecommunication  
Scientific (Shenzhen) Co., Ltd.  
**EQUIPMENT** : mobile phone  
**BRAND NAME** : Coolpad  
**MODEL NAME** : Coolpad 801ES  
**FCC ID** : R38YL801ES  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System


This is a variant report which is only valid together with the original test report. The product was received on Oct. 17, 2013 and testing was completed on Oct. 12, 2013. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown to be compliant with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.



---

Reviewed by: Joseph Lin / Supervisor



---

Approved by: Jones Tsai / Manager



**SPORTON INTERNATIONAL (SHENZHEN) INC.**

No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District,  
Shenzhen, Guangdong, P.R.C.

## TABLE OF CONTENTS

|                                                                 |           |
|-----------------------------------------------------------------|-----------|
| REVISION HISTORY .....                                          | 3         |
| SUMMARY OF TEST RESULT .....                                    | 4         |
| <b>1 GENERAL DESCRIPTION .....</b>                              | <b>5</b>  |
| 1.1 Applicant .....                                             | 5         |
| 1.2 Manufacturer .....                                          | 5         |
| 1.3 Feature of Equipment Under Test .....                       | 5         |
| 1.4 Product Specification of Equipment Under Test .....         | 5         |
| 1.5 Modification of EUT .....                                   | 6         |
| 1.6 Testing Site .....                                          | 6         |
| 1.7 Applied Standards .....                                     | 6         |
| <b>2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>       | <b>7</b>  |
| 2.1 Test Mode .....                                             | 7         |
| 2.2 Connection Diagram of Test System .....                     | 8         |
| 2.3 Description of RF Function Operation Test Setup .....       | 8         |
| <b>3 TEST RESULT .....</b>                                      | <b>9</b>  |
| 3.1 Radiated Band Edges and Spurious Emission Measurement ..... | 9         |
| 3.2 Antenna Requirements .....                                  | 16        |
| <b>4 LIST OF MEASURING EQUIPMENT .....</b>                      | <b>17</b> |
| <b>5 UNCERTAINTY OF EVALUATION .....</b>                        | <b>18</b> |
| <b>APPENDIX A. SETUP PHOTOGRAPHS</b>                            |           |

## REVISION HISTORY

| REPORT NO.   | VERSION | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                                                                                           | ISSUED DATE   |
|--------------|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| FR311602-02C | Rev. 01 | EUT is variant version of Coolpad 801E (FCC ID: R38YL801E), and now the variant sample is with FCC ID: R38YL801ES, please refer the product equality declaration exhibit submitted. Due to the similarity, the parent sample RF performance is representative and part of test data (Sporton Report Number FR311602C for FCC ID: R38YL801E) is referenced; only the worst case of Radiated Spurious Emission was verified for the differences for the variant sample. | Oct. 30, 2013 |
|              |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |
|              |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |
|              |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |
|              |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |
|              |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |
|              |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |
|              |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |
|              |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |
|              |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |
|              |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |
|              |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |
|              |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |
|              |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |
|              |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |
|              |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |
|              |         |                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |

## SUMMARY OF TEST RESULT

| Report Section | FCC Rule           | Description                               | Limit                 | Result | Remark                                   |
|----------------|--------------------|-------------------------------------------|-----------------------|--------|------------------------------------------|
| 3.1            | 15.247(d)          | Radiated Band Edges and Spurious Emission | 15.209(a) & 15.247(d) | Pass   | Under limit<br>9.04 dB at<br>645.950 MHz |
| 3.2            | 15.203 & 15.247(b) | Antenna Requirement                       | N/A                   | Pass   | -                                        |

# 1 General Description

## 1.1 Applicant

**Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd.**

Coolpad Information Harbor, 2nd Mengxi Road, Northern Part of Science&Technology Park, Nanshan district, Shenzhen, P.R.China

## 1.2 Manufacturer

**Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd.**

Coolpad Information Harbor, 2nd Mengxi Road, Northern Part of Science&Technology Park, Nanshan district, Shenzhen, P.R.China

## 1.3 Feature of Equipment Under Test

| Product Feature                 |                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------|
| Equipment                       | mobile phone                                                                               |
| Brand Name                      | Coolpad                                                                                    |
| Model Name                      | Coolpad 801ES                                                                              |
| FCC ID                          | R38YL801ES                                                                                 |
| EUT supports Radios application | CDMA/EV-DO/LTE/<br>WLAN 2.4GHz 802. 11b/g/n HT20<br>Bluetooth v3.0 + EDR<br>Bluetooth v4.0 |
| HW Version                      | P0                                                                                         |
| SW Version                      | 4.1.001.P0.130904.801ES                                                                    |
| EUT Stage                       | Identical Prototype                                                                        |

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4 Product Specification of Equipment Under Test

| Product Specification subjective to this standard |                                                |
|---------------------------------------------------|------------------------------------------------|
| Tx/Rx Frequency Range                             | 2402 MHz ~ 2480 MHz                            |
| Number of Channels                                | 40                                             |
| Carrier Frequency of Each Channel                 | 40 Channel(37 hopping + 3 advertising channel) |
| Antenna Type                                      | PIFA Antenna with gain 0.8 dBi                 |
| Type of Modulation                                | Bluetooth 4.0 - LE : GFSK                      |

## 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6 Testing Site

|                    |                                                                                                                                                            |                      |
|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| Test Site          | SPORTON INTERNATIONAL (SHENZHEN) INC.                                                                                                                      |                      |
| Test Site Location | No. 3 Building, the third floor of south, Shahe River west, Fengzeyuan warehouse, Nanshan District, Shenzhen, Guangdong, P.R.C.<br>TEL: +86-755- 3320-2398 |                      |
| Test Site No.      | Sporton Site No.                                                                                                                                           | FCC Registration No. |
|                    | 03CH01-SZ                                                                                                                                                  | 831040               |

The test site complies with ANSI C63.4 2003 requirement.

## 1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01
- ♦ ANSI C63.4-2003

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 2 Test Configuration of Equipment Under Test


### 2.1 Test Mode

The following summary table is showing all test modes to demonstrate in compliance with the standard.

| Summary table of Test Cases |                                          |
|-----------------------------|------------------------------------------|
| Test Item                   | Data Rate / Modulation                   |
|                             | Bluetooth 4.0 – LE / GFSK                |
| Radiated TCs                | Mode 1: Bluetooth Tx CH39_2480 MHz_1Mbps |

## 2.2 Connection Diagram of Test System

<Bluetooth 4.0 – LE Tx Mode>

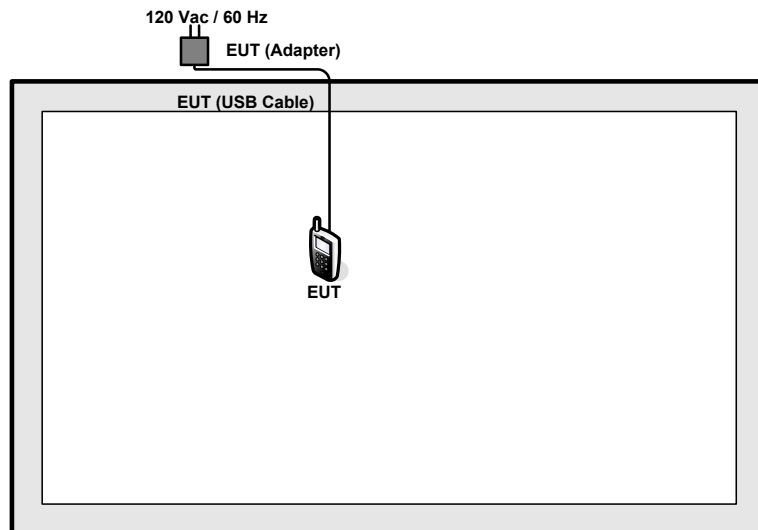

## 2.3 Description of RF Function Operation Test Setup

For Bluetooth 4.0 – LE function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

### 3 Test Result

#### 3.1 Radiated Band Edges and Spurious Emission Measurement

##### 3.1.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

| Frequency<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|--------------------|--------------------------------------|----------------------------------|
| 0.009 – 0.490      | 2400/F(kHz)                          | 300                              |
| 0.490 – 1.705      | 24000/F(kHz)                         | 30                               |
| 1.705 – 30.0       | 30                                   | 30                               |
| 30 – 88            | 100                                  | 3                                |
| 88 – 216           | 150                                  | 3                                |
| 216 - 960          | 200                                  | 3                                |
| Above 960          | 500                                  | 3                                |

##### 3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r01.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.


For average measurement:

  - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
  - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


| Band               | Duty Cycle(%) | T(ms) | 1/T(kHz) | VBW Setting |
|--------------------|---------------|-------|----------|-------------|
| Bluetooth 4.0 - LE | 32.484        | 0.204 | 4.902    | 10kHz       |

### 3.1.4 Test Setup


For radiated emissions below 30MHz

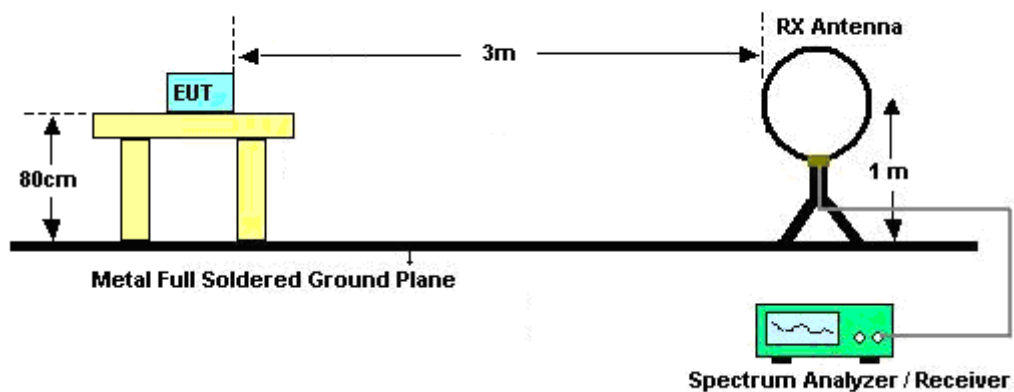

For radiated emissions from 30MHz to 1GHz

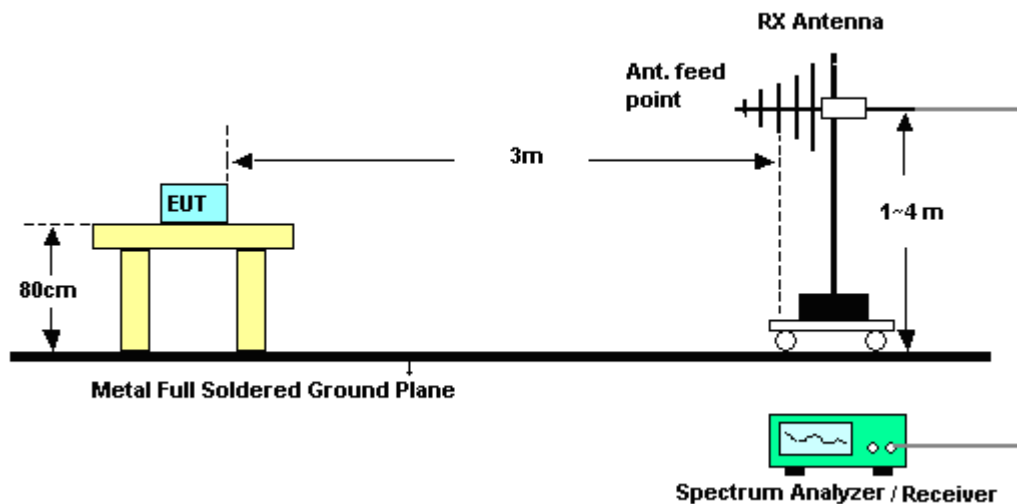

For radiated emissions above 1GHz

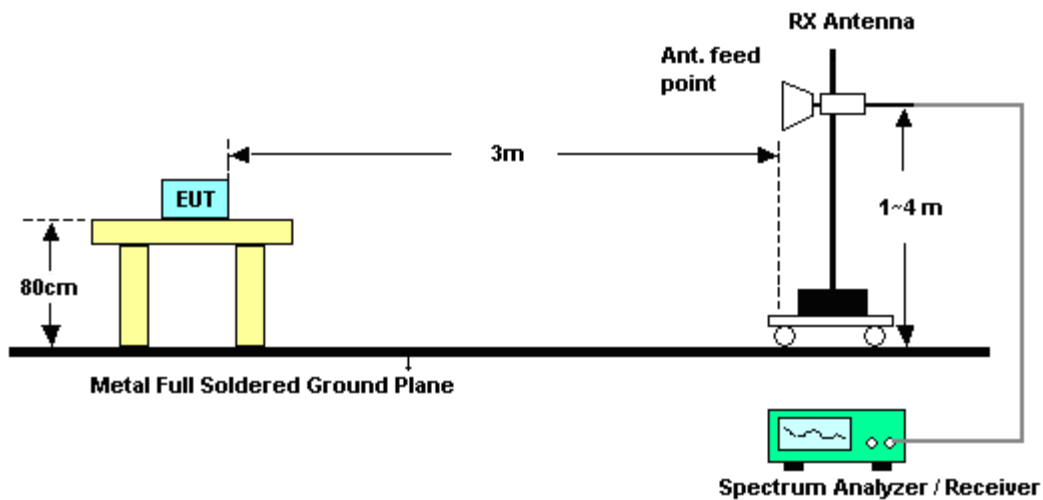

### 3.1.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

### 3.1.6 Test Result of Radiated Spurious at Band Edges

|                       |        |                            |           |
|-----------------------|--------|----------------------------|-----------|
| <b>Test Mode :</b>    | Mode 1 | <b>Temperature :</b>       | 25~28°C   |
| <b>Test Channel :</b> | 39     | <b>Relative Humidity :</b> | 49~52%    |
|                       |        | <b>Test Engineer :</b>     | Robin Luo |

| ANTENNA POLARITY : HORIZONTAL |                     |                         |                             |                         |                             |                         |                            |                      |                         |         |
|-------------------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )          | Level<br>(dBμV /m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>(dBμV /m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2483.56                       | 49.74               | -24.26                  | 74                          | 41.52                   | 32.27                       | 5.71                    | 29.76                      | 125                  | 264                     | Peak    |
| 2483.53                       | 37.97               | -16.03                  | 54                          | 29.75                   | 32.27                       | 5.71                    | 29.76                      | 125                  | 264                     | Average |

| ANTENNA POLARITY : VERTICAL |                     |                         |                             |                         |                             |                         |                            |                      |                         |         |
|-----------------------------|---------------------|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| Frequency<br>( MHz )        | Level<br>(dBμV /m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>(dBμV /m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
| 2484.94                     | 47.08               | -26.92                  | 74                          | 38.86                   | 32.27                       | 5.71                    | 29.76                      | 114                  | 316                     | Peak    |
| 2485.84                     | 37.11               | -16.89                  | 54                          | 28.89                   | 32.27                       | 5.71                    | 29.76                      | 114                  | 316                     | Average |

### 3.1.7 Test Result of Radiated Spurious Emission (30MHz ~ 10<sup>th</sup> Harmonic)

**Note:** Pre-scanned all test modes and only choose the worst case mode recorded in the test report for radiated spurious emission below 1GHz.

|                        |                                                                                                                                                      |                            |            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------|
| <b>Test Mode :</b>     | Mode 1                                                                                                                                               | <b>Temperature :</b>       | 25~28°C    |
| <b>Test Channel :</b>  | 39                                                                                                                                                   | <b>Relative Humidity :</b> | 49~52%     |
| <b>Test Engineer :</b> | Robin Luo                                                                                                                                            | <b>Polarization :</b>      | Horizontal |
| <b>Remark :</b>        | 1. 2480 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |            |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>(dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 41.64                | 22.77               | -17.23                  | 40                         | 42.74                   | 9.7                         | 0.87                    | 30.54                      | -                    | -                       | Peak    |
| 212.36               | 18.94               | -24.56                  | 43.5                       | 37.97                   | 9.53                        | 1.73                    | 30.29                      | -                    | -                       | Peak    |
| 364.65               | 29.74               | -16.26                  | 46                         | 41.95                   | 15.38                       | 2.19                    | 29.78                      | -                    | -                       | Peak    |
| 450.98               | 29.73               | -16.27                  | 46                         | 39.94                   | 16.88                       | 2.41                    | 29.5                       | -                    | -                       | Peak    |
| 645.95               | 36.96               | -9.04                   | 46                         | 44.08                   | 19.18                       | 2.84                    | 29.14                      | 100                  | 360                     | Peak    |
| 895.24               | 27.49               | -18.51                  | 46                         | 31.92                   | 21.06                       | 3.32                    | 28.81                      | -                    | -                       | Peak    |
| 2480                 | 99.83               | -                       | -                          | 91.61                   | 32.27                       | 5.71                    | 29.76                      | 125                  | 264                     | Peak    |
| 2480                 | 99.13               | -                       | -                          | 90.91                   | 32.27                       | 5.71                    | 29.76                      | 125                  | 264                     | Average |
| 4960                 | 38.29               | -35.71                  | 74                         | 52.81                   | 34.01                       | 8.49                    | 57.02                      | 150                  | 135                     | Peak    |
| 7440                 | 39.81               | -34.19                  | 74                         | 51.39                   | 35.37                       | 10.04                   | 56.99                      | 175                  | 260                     | Peak    |

**Note:** Other harmonics are lower than background noise.

|                        |                                                                                                                                                      |                            |          |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|----------|
| <b>Test Mode :</b>     | Mode 1                                                                                                                                               | <b>Temperature :</b>       | 25~28°C  |
| <b>Test Channel :</b>  | 39                                                                                                                                                   | <b>Relative Humidity :</b> | 49~52%   |
| <b>Test Engineer :</b> | Robin Luo                                                                                                                                            | <b>Polarization :</b>      | Vertical |
| <b>Remark :</b>        | 1. 2480 MHz is fundamental signal which can be ignored.<br>2. Average measurement was not performed if peak level went lower than the average limit. |                            |          |

| Frequency<br>( MHz ) | Level<br>( dBμV/m ) | Over<br>Limit<br>( dB ) | Limit<br>Line<br>(dBμV/m ) | Read<br>Level<br>(dBμV) | Antenna<br>Factor<br>( dB ) | Cable<br>Loss<br>( dB ) | Preamp<br>Factor<br>( dB ) | Ant<br>Pos<br>( cm ) | Table<br>Pos<br>( deg ) | Remark  |
|----------------------|---------------------|-------------------------|----------------------------|-------------------------|-----------------------------|-------------------------|----------------------------|----------------------|-------------------------|---------|
| 41.64                | 29.96               | -10.04                  | 40                         | 49.93                   | 9.7                         | 0.87                    | 30.54                      | -                    | -                       | Peak    |
| 364.65               | 25.63               | -20.37                  | 46                         | 37.84                   | 15.38                       | 2.19                    | 29.78                      | -                    | -                       | Peak    |
| 454.86               | 28.2                | -17.8                   | 46                         | 38.42                   | 16.84                       | 2.42                    | 29.48                      | -                    | -                       | Peak    |
| 643.04               | 35.03               | -10.97                  | 46                         | 42.27                   | 19.06                       | 2.84                    | 29.14                      | 200                  | 0                       | Peak    |
| 755.56               | 28.81               | -17.19                  | 46                         | 34.18                   | 20.55                       | 3.07                    | 28.99                      | -                    | -                       | Peak    |
| 918.52               | 27.53               | -18.47                  | 46                         | 31.25                   | 21.68                       | 3.38                    | 28.78                      | -                    | -                       | Peak    |
| 2480                 | 93.81               | -                       | -                          | 85.59                   | 32.27                       | 5.71                    | 29.76                      | 114                  | 316                     | Peak    |
| 2480                 | 93.03               | -                       | -                          | 84.81                   | 32.27                       | 5.71                    | 29.76                      | 114                  | 316                     | Average |
| 4960                 | 38.56               | -35.44                  | 74                         | 53.08                   | 34.01                       | 8.49                    | 57.02                      | 150                  | 135                     | Peak    |
| 7440                 | 40.55               | -33.45                  | 74                         | 52.13                   | 35.37                       | 10.04                   | 56.99                      | 175                  | 260                     | Peak    |

**Note:** Other harmonics are lower than background noise.

## 3.2 Antenna Requirements

### 3.2.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

### 3.2.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

### 3.2.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

## 4 List of Measuring Equipment

| Instrument                | Manufacturer         | Model No. | Serial No.  | Characteristics           | Calibration Date | Test Date     | Due Date      | Remark                |
|---------------------------|----------------------|-----------|-------------|---------------------------|------------------|---------------|---------------|-----------------------|
| Spectrum Analyzer         | Agilent Technologies | N9038A    | MY52260185  | 20Hz~26.5GHz              | Apr. 04, 2013    | Oct. 12, 2013 | Apr. 03, 2014 | Radiation (03CH01-SZ) |
| Double Ridge Horn Antenna | ETS Lindgren         | 3117      | 00119436    | 1GHz~18GHz                | Nov. 12, 2012    | Oct. 12, 2013 | Nov. 11, 2013 | Radiation (03CH01-SZ) |
| Bilog Antenna             | SCHAFFNER            | CBL6112B  | 2614        | 30MHz~2GHz                | Nov. 03, 2012    | Oct. 12, 2013 | Nov. 02, 2013 | Radiation (03CH01-SZ) |
| Amplifier                 | ADVANTEST            | BB525C    | E9007003    | 9kHz-3000MHz<br>GAIN 30db | Mar. 28, 2013    | Oct. 12, 2013 | Mar. 27, 2014 | Radiation (03CH01-SZ) |
| Amplifier                 | Yiai                 | AV3860B   | 04030       | 2GHz~26.5GHz              | Mar. 28, 2013    | Oct. 12, 2013 | Mar. 27, 2014 | Radiation (03CH01-SZ) |
| SHF-EHF-Horn              | Schwarzbeck          | BBHA9170  | BBHA9170249 | 14GHz~40GHz               | Nov. 23, 2012    | Oct. 12, 2013 | Nov. 22, 2013 | Radiation (03CH01-SZ) |
| Loop Antenna              | R&S                  | HFH2-Z2   | 100321      | 9kHz-30MHz                | Oct. 22, 2012    | Oct. 12, 2013 | Oct. 21, 2013 | Radiation (03CH01-SZ) |
| Turn Table                | EM Electronics       | EM 1000   | N/A         | 0 ~ 360 degree            | N/A              | Oct. 12, 2013 | N/A           | Radiation (03CH01-SZ) |
| Antenna Mast              | EM Electronics       | EM 1000   | N/A         | 1 m - 4 m                 | N/A              | Oct. 12, 2013 | N/A           | Radiation (03CH01-SZ) |

## 5 Uncertainty of Evaluation

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|                                                                            |      |
|----------------------------------------------------------------------------|------|
| Measuring Uncertainty for a Level of Confidence<br>of 95% ( $U = 2Uc(y)$ ) | 2.54 |
|----------------------------------------------------------------------------|------|

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 40 GHz)

|                                                                            |      |
|----------------------------------------------------------------------------|------|
| Measuring Uncertainty for a Level of Confidence<br>of 95% ( $U = 2Uc(y)$ ) | 4.72 |
|----------------------------------------------------------------------------|------|