



# TEST REPORT

No. I20N00718-BLE

for

**Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd**

**smartphone**

**CP3706AS**

**With**

**Hardware Version: P1**

**Software Version: 3706AS.SPRINT.191220.2D**

**FCC ID: R38YLC3706AS**

**Issued Date: 2020-04-14**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of SAICT.

**Test Laboratory:**

**SAICT, Shenzhen Academy of Information and Communications Technology**

Building G, Shenzhen International Innovation Center, No.1006 Shennan Road, Futian District, Shenzhen, Guangdong, P. R. China 518026.

Tel: +86(0)755-33322000, Fax: +86(0)755-33322001

Email: yewu@caict.ac.cn. www.saict.ac.cn

## **CONTENTS**

|                                                                         |           |
|-------------------------------------------------------------------------|-----------|
| <b>CONTENTS .....</b>                                                   | <b>2</b>  |
| <b>1. SUMMARY OF TEST REPORT.....</b>                                   | <b>3</b>  |
| 1.1. TEST ITEMS.....                                                    | 3         |
| 1.2. TEST STANDARDS .....                                               | 3         |
| 1.3. TEST RESULT .....                                                  | 3         |
| 1.4. TESTING LOCATION .....                                             | 3         |
| 1.5. PROJECT DATA .....                                                 | 3         |
| 1.6. SIGNATURE .....                                                    | 3         |
| <b>2. CLIENT INFORMATION.....</b>                                       | <b>4</b>  |
| 2.1. APPLICANT INFORMATION .....                                        | 4         |
| 2.2. MANUFACTURER INFORMATION .....                                     | 4         |
| <b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b> | <b>5</b>  |
| 3.1. ABOUT EUT .....                                                    | 5         |
| 3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....          | 5         |
| 3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....           | 5         |
| 3.4. GENERAL DESCRIPTION.....                                           | 6         |
| <b>4. REFERENCE DOCUMENTS.....</b>                                      | <b>7</b>  |
| 4.1. DOCUMENTS SUPPLIED BY APPLICANT .....                              | 7         |
| 4.2. REFERENCE DOCUMENTS FOR TESTING.....                               | 7         |
| <b>5. TEST RESULTS .....</b>                                            | <b>8</b>  |
| 5.1. TESTING ENVIRONMENT.....                                           | 8         |
| 5.2. TEST RESULTS .....                                                 | 8         |
| 5.3. STATEMENTS.....                                                    | 8         |
| <b>6. TEST EQUIPMENTS UTILIZED .....</b>                                | <b>9</b>  |
| <b>7. LABORATORY ENVIRONMENT.....</b>                                   | <b>10</b> |
| <b>8. MEASUREMENT UNCERTAINTY .....</b>                                 | <b>11</b> |
| <b>ANNEX A: DETAILED TEST RESULTS.....</b>                              | <b>12</b> |
| A.0 ANTENNA REQUIREMENT .....                                           | 12        |
| A.1 MAXIMUM PEAK OUTPUT POWER .....                                     | 13        |
| A.2 PEAK POWER SPECTRAL DENSITY .....                                   | 14        |
| A.3 6dB BANDWIDTH.....                                                  | 19        |
| A.4 BAND EDGES COMPLIANCE .....                                         | 24        |
| A.5 TRANSMITTER SPURIOUS EMISSION - CONDUCTED .....                     | 28        |
| A.6 TRANSMITTER SPURIOUS EMISSION - RADIATED .....                      | 46        |
| A.7 AC POWER LINE CONDUCTED EMISSION .....                              | 70        |

## **1. Summary of Test Report**

### **1.1. Test Items**

|                     |                                                                  |
|---------------------|------------------------------------------------------------------|
| Description         | smartphone                                                       |
| Model Name          | CP3706AS                                                         |
| Applicant's name    | Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd |
| Manufacturer's Name | Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd |

### **1.2. Test Standards**

FCC Part15-2018; ANSI C63.10-2013

### **1.3. Test Result**

**Pass**

### **1.4. Testing Location**

Address: Building G, Shenzhen International Innovation Center, No.1006 Shennan Road,  
Futian District, Shenzhen, Guangdong, P. R. China

### **1.5. Project data**

|                     |            |
|---------------------|------------|
| Testing Start Date: | 2019-11-25 |
| Testing End Date:   | 2020-04-13 |

### **1.6. Signature**



---

**Lin Zechuang**  
**(Prepared this test report)**



---

**Tang Weisheng**  
**(Reviewed this test report)**



---

**Zhang Bojun**  
**(Approved this test report)**



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd  
Address: Building B, Boton Science Park, Chaguang Road, Xili Town, Nanshan District, Shenzhen  
Contact Person: Emily zhang  
E-Mail: zhangxuzhu@yulong.com  
Telephone: 15089742056  
Fax: /

### **2.2. Manufacturer Information**

Company Name: Yulong Computer Telecommunication Scientific (Shenzhen) Co., Ltd  
Address: Building B, Boton Science Park, Chaguang Road, Xili Town, Nanshan District, Shenzhen  
Contact Person: Emily zhang  
E-Mail: zhangxuzhu@yulong.com  
Telephone: 15089742056  
Fax: /

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

|                              |                              |
|------------------------------|------------------------------|
| Description                  | smartphone                   |
| Model Name                   | CP3706AS                     |
| Brand Name                   | coolpad                      |
| Frequency Range              | 2400MHz~2483.5MHz            |
| Type of Modulation           | GFSK                         |
| Number of Channels           | 40                           |
| Antenna Type                 | Integrated                   |
| Antenna Gain                 | 0.52dBi                      |
| Power Supply                 | 3.85V DC by Battery          |
| FCC ID                       | R38YLCP3706AS                |
| Condition of EUT as received | No abnormality in appearance |

Note1: According to the customer's description, the EUT is a variant of the CP3706AS. It just changed the model of charger, battery and USB cable. The part of AC Power line Conducted Emission have been rested, other test items results were from the initial model. The initial model report number is I20N02705-BLE.

Note2: Components list, please refer to documents of the manufacturer; it is also included in the original test record of Shenzhen Academy of Information and Communications Technology.

#### **3.2. Internal Identification of EUT used during the test**

| EUT ID* | IMEI            | HW Version | SW Version                  | Receive Date |
|---------|-----------------|------------|-----------------------------|--------------|
| EUT1    | 990015570002451 | P1         | 3706AS.SPRINT.191<br>220.2D | 2019-11-25   |
| EUT2    | 990015570014472 | P1         | 3706AS.SPRINT.191<br>220.2D | 2020-11-25   |

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

| AE ID* | Description  | AE ID* |
|--------|--------------|--------|
| AE1    | Charger      | Aa01a  |
| AE2    | Battery      | /      |
| AE3    | Type C Cable | Ca01a  |

##### **AE1**

|                   |        |
|-------------------|--------|
| Model             | 619043 |
| Manufacturer      | Kosun  |
| Length of DC line | /cm    |

##### **AE2**

|       |                |
|-------|----------------|
| Model | 1.1.0LS0025001 |
|-------|----------------|



|                 |           |
|-----------------|-----------|
| Manufacturer    | Lishen    |
| Capacitance     | 3980mAh   |
| Nominal Voltage | 3.85V     |
| AE3             |           |
| Model           | SYL-A147A |
| Manufacturer    | Saibao    |

\*AE ID: is used to identify the test sample in the lab internally.

### **3.4. General Description**

The Equipment under Test (EUT) is a model of smartphone with integrated antenna and battery.

It consists of normal options: Lithium Battery, Charger and USB Cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.



## **4. Reference Documents**

### **4.1. Documents supplied by applicant**

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

### **4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

| <b>Reference</b> | <b>Title</b>                                                                                                                                                                                                              | <b>Version</b> |
|------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| FCC Part15       | FCC CFR 47, Part 15, Subpart C:<br>15.205 Restricted bands of operation;<br>15.209 Radiated emission limits, general requirements;<br>15.247 Operation within the bands 902–928MHz,<br>2400–2483.5 MHz, and 5725–5850 MHz | 2018           |
| ANSI C63.10      | American National Standard of Procedures for Compliance<br>Testing of Unlicensed Wireless Devices                                                                                                                         | 2013           |

## 5. Test Results

### 5.1. Testing Environment

Normal Temperature: 15~35°C

Relative Humidity: 20~75%

### 5.2. Test Results

| No | Test cases                                | Sub-clause of Part 15C | Verdict  |
|----|-------------------------------------------|------------------------|----------|
| 0  | Antenna Requirement                       | 15.203                 | <b>P</b> |
| 1  | Maximum Peak Output Power                 | 15.247 (b)             | <b>P</b> |
| 2  | Peak Power Spectral Density               | 15.247 (e)             | <b>P</b> |
| 3  | Occupied 6dB Bandwidth                    | 15.247 (a)             | <b>P</b> |
| 4  | Band Edges Compliance                     | 15.247 (d)             | <b>P</b> |
| 5  | Transmitter Spurious Emission - Conducted | 15.247 (d)             | <b>P</b> |
| 6  | Transmitter Spurious Emission - Radiated  | 15.247, 15.205, 15.209 | <b>P</b> |
| 7  | AC Power line Conducted Emission          | 15.107, 15.207         | <b>P</b> |

See **ANNEX A** for details.

### 5.3. Statements

SAICT has evaluated the test cases requested by the applicant/manufacture as listed in section 5.2 of this report, for the EUT specified in section 3, according to the standards or reference documents listed in section 4.2.

## 6. Test Equipments Utilized

### Conducted test system

| No. | Equipment              | Model  | Serial Number | Manufacturer    | Calibration Due date | Calibration Period |
|-----|------------------------|--------|---------------|-----------------|----------------------|--------------------|
| 1   | Vector Signal Analyzer | FSV40  | 100903        | Rohde & Schwarz | 2021-01-01           | 1 year             |
| 2   | Test Receiver          | ESCI   | 100702        | Rohde & Schwarz | 2021-01-14           | 1 year             |
| 3   | LISN                   | ENV216 | 102067        | Rohde & Schwarz | 2020-07-17           | 1 year             |

### Radiated emission test system

| NO. | Equipment         | Model             | Serial Number | Manufacturer    | Calibration Due date | Calibration Period |
|-----|-------------------|-------------------|---------------|-----------------|----------------------|--------------------|
| 1   | Loop Antenna      | HLA6120           | 35779         | TESEQ           | 2022-04-25           | 3 years            |
| 2   | BiLog Antenna     | 3142E             | 00224831      | ETS-Lindgren    | 2021-05-17           | 3 years            |
| 3   | Horn Antenna      | 3117              | 00066577      | ETS-Lindgren    | 2022-04-02           | 3 years            |
| 4   | Test Receiver     | ESR7              | 101676        | Rohde & Schwarz | 2020-11-27           | 1 year             |
| 5   | Spectrum Analyser | FSV40             | 101192        | Rohde & Schwarz | 2021-01-14           | 1 year             |
| 6   | Chamber           | FACT3-2.0         | 1285          | ETS-Lindgren    | 2021-07-19           | 3 years            |
| 7   | Antenna           | QSH-SL-18-26-S-20 | 17013         | Q-par           | 2023-01-06           | 3 years            |
| 8   | Antenna           | QSH-SL-26-40-K-20 | 17014         | Q-par           | 2023-01-06           | 3 years            |

### Test software

| No. | Equipment        | Manufacturer    | Version  |
|-----|------------------|-----------------|----------|
| 1   | TechMgr Software | CAICT           | 2.1.1    |
| 2   | EMC32            | Rohde & Schwarz | 8.53.0   |
| 3   | EMC32            | Rohde & Schwarz | 10.01.00 |

EUT is engineering software provided by the customer to control the transmitting signal.  
The EUT was programmed to be in continuously transmitting mode.

### Anechoic chamber

Fully anechoic chamber by ETS-Lindgren

## 7. Laboratory Environment

### Semi-anechoic chambe

|                                   |                                             |
|-----------------------------------|---------------------------------------------|
| Temperature                       | Min. = 15 °C, Max. = 35 °C                  |
| Relative humidity                 | Min. = 15 %, Max. = 75 %                    |
| Shielding effectiveness           | 0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB   |
| Electrical insulation             | > 2MΩ                                       |
| Ground system resistance          | < 4 Ω                                       |
| Normalised site attenuation (NSA) | < ± 4 dB, 3 m distance, from 30 to 1000 MHz |

### Shielded room

|                          |                                          |
|--------------------------|------------------------------------------|
| Temperature              | Min. = 15 °C, Max. = 35 °C               |
| Relative humidity        | Min. =20 %, Max. = 75 %                  |
| Shielding effectiveness  | 0.014MHz-1MHz> 60 dB; 1MHz-1000MHz>90 dB |
| Electrical insulation    | > 2MΩ                                    |
| Ground system resistance | < 4 Ω                                    |

### Fully-anechoic chamber

|                                    |                                           |
|------------------------------------|-------------------------------------------|
| Temperature                        | Min. = 15 °C, Max. = 35 °C                |
| Relative humidity                  | Min. = 15 %, Max. = 75 %                  |
| Shielding effectiveness            | 0.014MHz-1MHz> 60 dB; 1MHz-18000MHz>90 dB |
| Electrical insulation              | > 2MΩ                                     |
| Ground system resistance           | < 4 Ω                                     |
| Voltage Standing Wave Ratio (VSWR) | ≤ 6 dB, from 1 to 18 GHz, 3 m distance    |
| Uniformity of field strength       | Between 0 and 6 dB, from 80 to 6000 MHz   |

## 8. Measurement Uncertainty

| Test Name                                   | Uncertainty ( $k=2$ )                    |        |
|---------------------------------------------|------------------------------------------|--------|
| 1. RF Output Power - Conducted              | 1.32dB                                   |        |
| 2. Power Spectral Density - Conducted       | 2.32dB                                   |        |
| 3. Occupied channel bandwidth - Conducted   | 66Hz                                     |        |
| 4 Transmitter Spurious Emission - Conducted | $30\text{MHz} \leq f \leq 1\text{GHz}$   | 1.41dB |
|                                             | $1\text{GHz} \leq f \leq 7\text{GHz}$    | 1.92dB |
|                                             | $7\text{GHz} \leq f \leq 13\text{GHz}$   | 2.31dB |
|                                             | $13\text{GHz} \leq f \leq 26\text{GHz}$  | 2.61dB |
| 5. Transmitter Spurious Emission - Radiated | $9\text{kHz} \leq f \leq 30\text{MHz}$   | 1.70dB |
|                                             | $30\text{MHz} \leq f \leq 1\text{GHz}$   | 4.90dB |
|                                             | $1\text{GHz} \leq f \leq 18\text{GHz}$   | 4.60dB |
|                                             | $18\text{GHz} \leq f \leq 40\text{GHz}$  | 4.10dB |
| 6. AC Power line Conducted Emission         | $150\text{kHz} \leq f \leq 30\text{MHz}$ | 3.00dB |

## **ANNEX A: Detailed Test Results**

### **A.0 Antenna requirement**

#### **Measurement Limit:**

| <b>Standard</b>        | <b>Requirement</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FCC CRF Part<br>15.203 | An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded. |

**Conclusion: The Directional gains of antenna used for transmitting is 0.52 dBi.  
The RF transmitter uses an integrate antenna without connector.**

## A.1 Maximum Peak Output Power

**Method of Measurement:** See ANSI C63.10-clause 11.9.1.1

Use the following spectrum analyzer settings:

- a) Set the RBW = 1 MHz.
- b) Set VBW = 3 MHz.
- c) Set span = 3 MHz.
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

**Measurement Limit:**

| Standard                  | Limit (dBm) |
|---------------------------|-------------|
| FCC 47 CRF Part 15.247(b) | < 30        |

**Measurement Results:**

| Mode     | RF output power (dBm) |               |               |
|----------|-----------------------|---------------|---------------|
|          | 2402MHz (Ch0)         | 2440MHz(Ch19) | 2480MHz(Ch39) |
| LE 1M    | 2.13                  | 3.54          | 5.25          |
| LE 2M    | 2.31                  | 3.66          | 5.47          |
| LE Coded | 2.44                  | 3.80          | 5.49          |

**Conclusion: Pass**

## A.2 Peak Power Spectral Density

Method of Measurement: See ANSI C63.10-clause 11.10.2

Measurement Limit:

| Standard                  | Limit         |
|---------------------------|---------------|
| FCC 47 CRF Part 15.247(e) | < 8 dBm/3 kHz |

Measurement Results:

| Mode     | Frequency (MHz) | Peak Power Spectral Density (dBm) |        | Conclusion |
|----------|-----------------|-----------------------------------|--------|------------|
| LE 1M    | 2402 (CH0)      | Fig.1                             | -11.16 | P          |
|          | 2440 (CH19)     | Fig.2                             | -10.40 | P          |
|          | 2480 (CH39)     | Fig.3                             | -8.78  | P          |
| LE 2M    | 2402 (CH0)      | Fig.4                             | -15.11 | P          |
|          | 2440 (CH19)     | Fig.5                             | -14.47 | P          |
|          | 2480 (CH39)     | Fig.6                             | -12.83 | P          |
| LE Coded | 2402 (CH0)      | Fig.7                             | -2.50  | P          |
|          | 2440 (CH19)     | Fig.8                             | -1.81  | P          |
|          | 2480 (CH39)     | Fig.9                             | -0.25  | P          |

See below for test graphs.

Conclusion: PASS



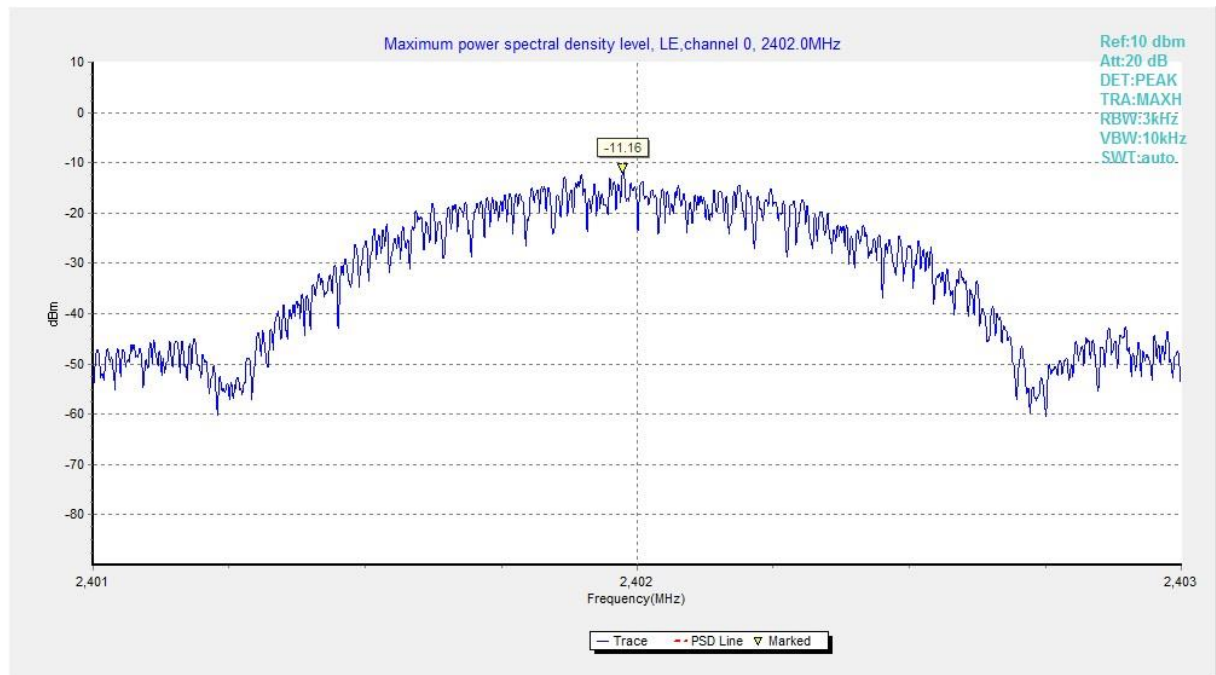



Fig.1 Power Spectral Density (Ch 0), LE 1M

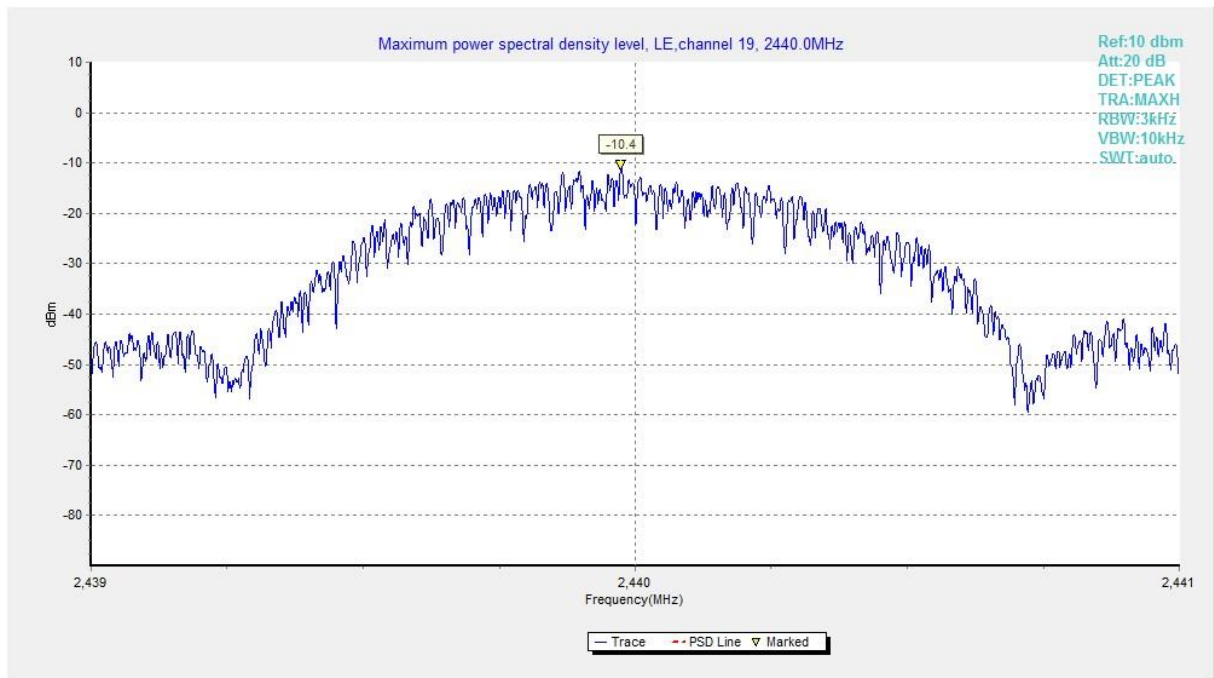


**Fig.2 Power Spectral Density (Ch 19), LE 1M**

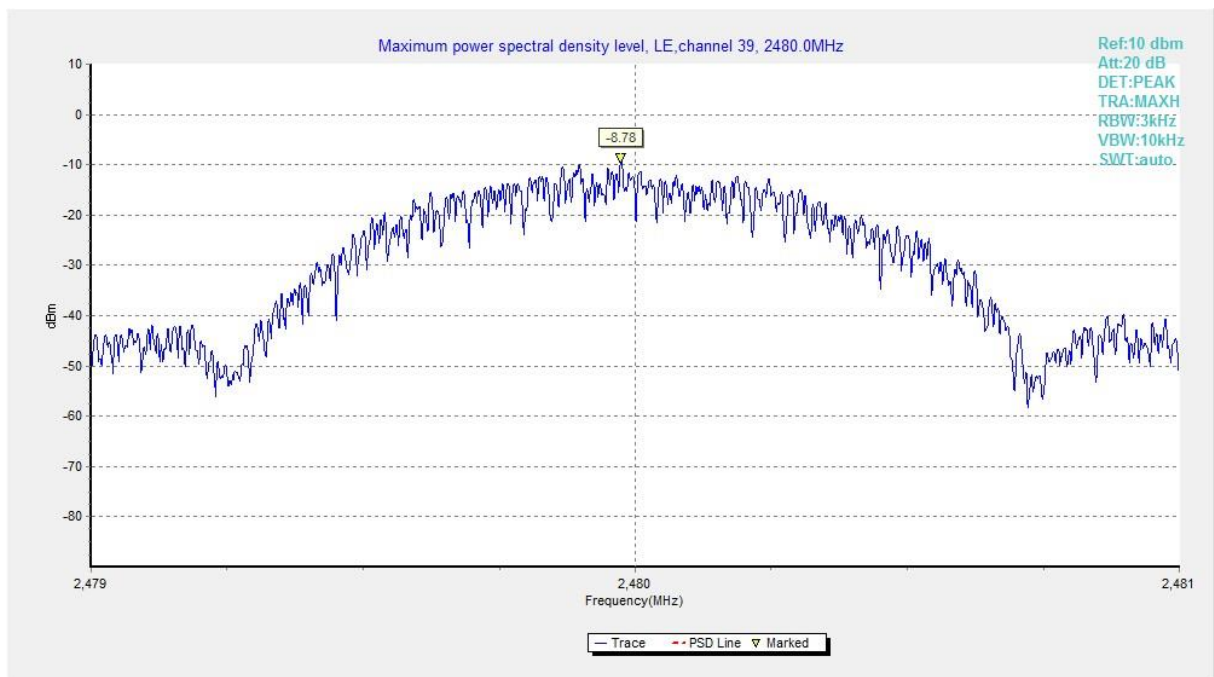


**Fig.3 Power Spectral Density (Ch 39), LE 1M**

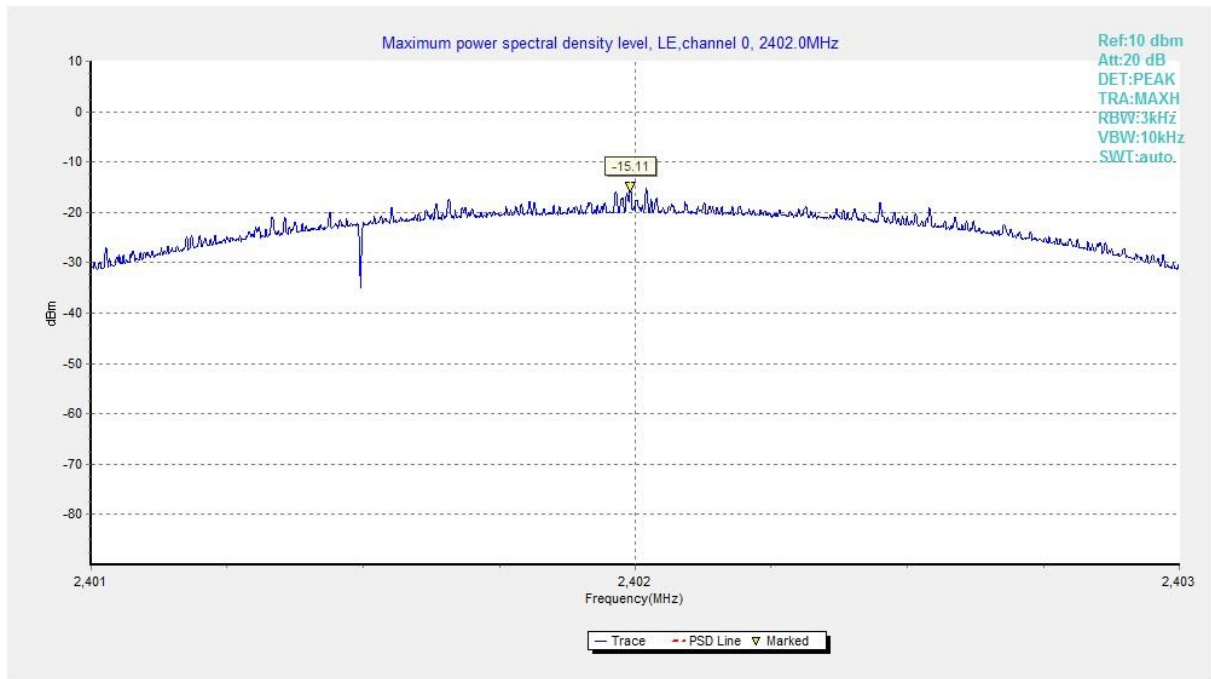


**Fig.4 Power Spectral Density (Ch 0), LE 2M**

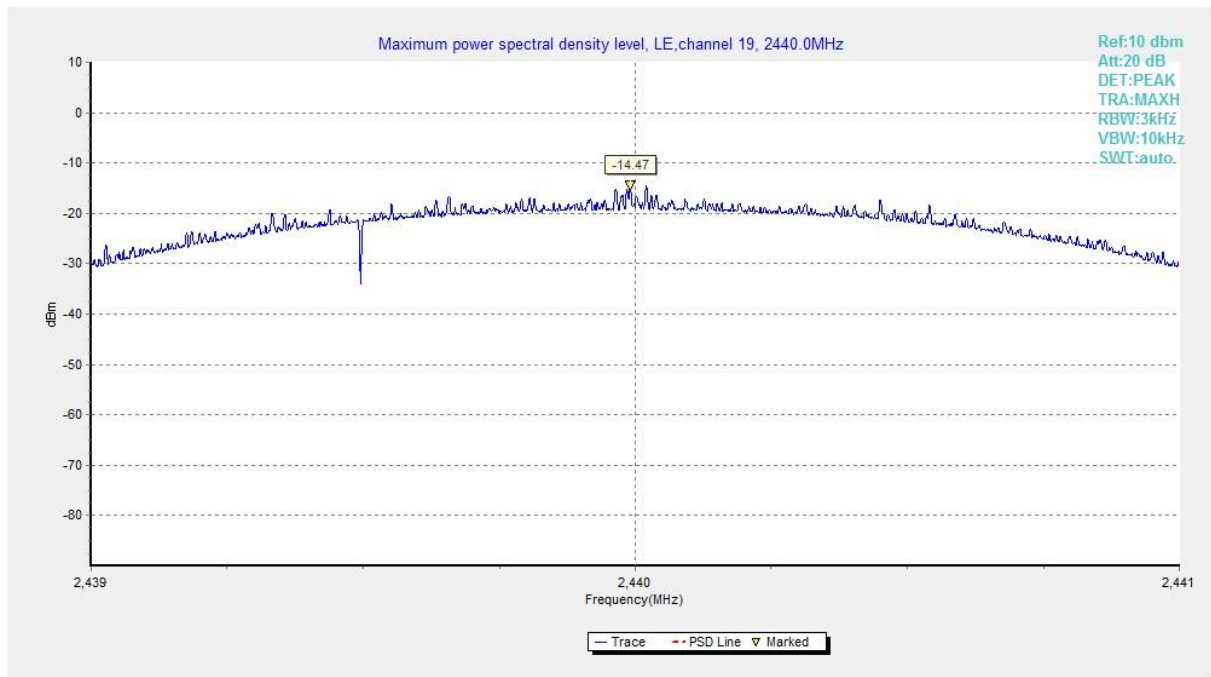


**Fig.5 Power Spectral Density (Ch 19), LE 2M**

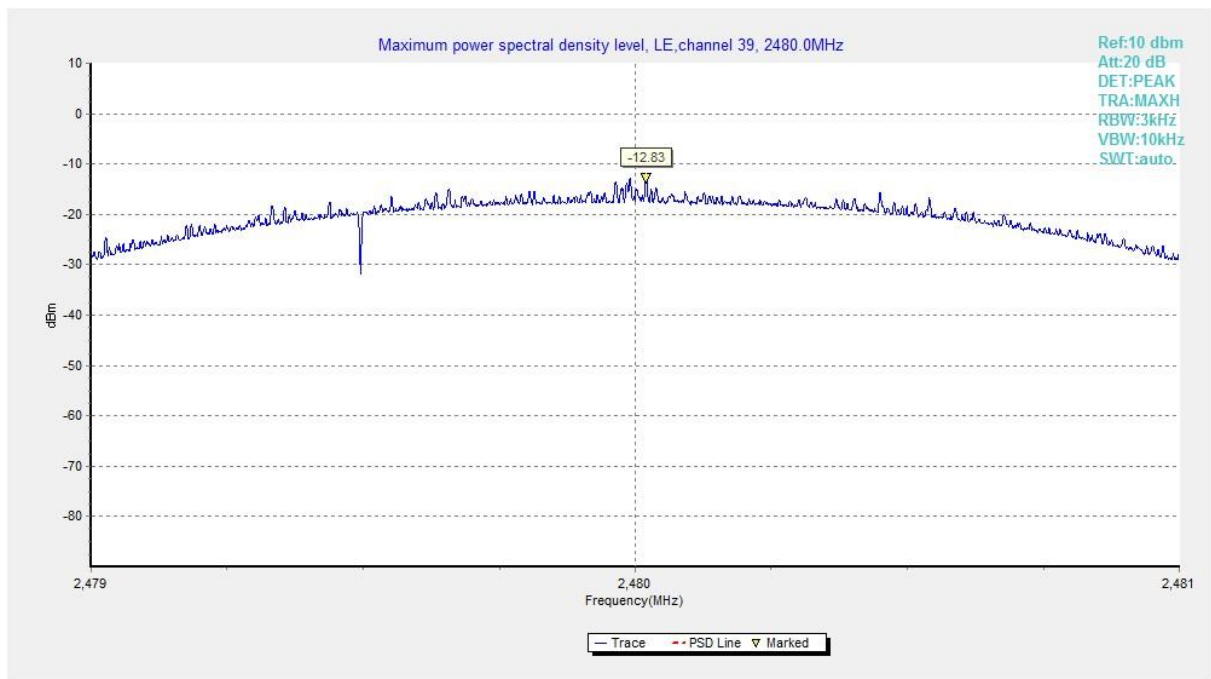


**Fig.6 Power Spectral Density (Ch 39), LE 2M**

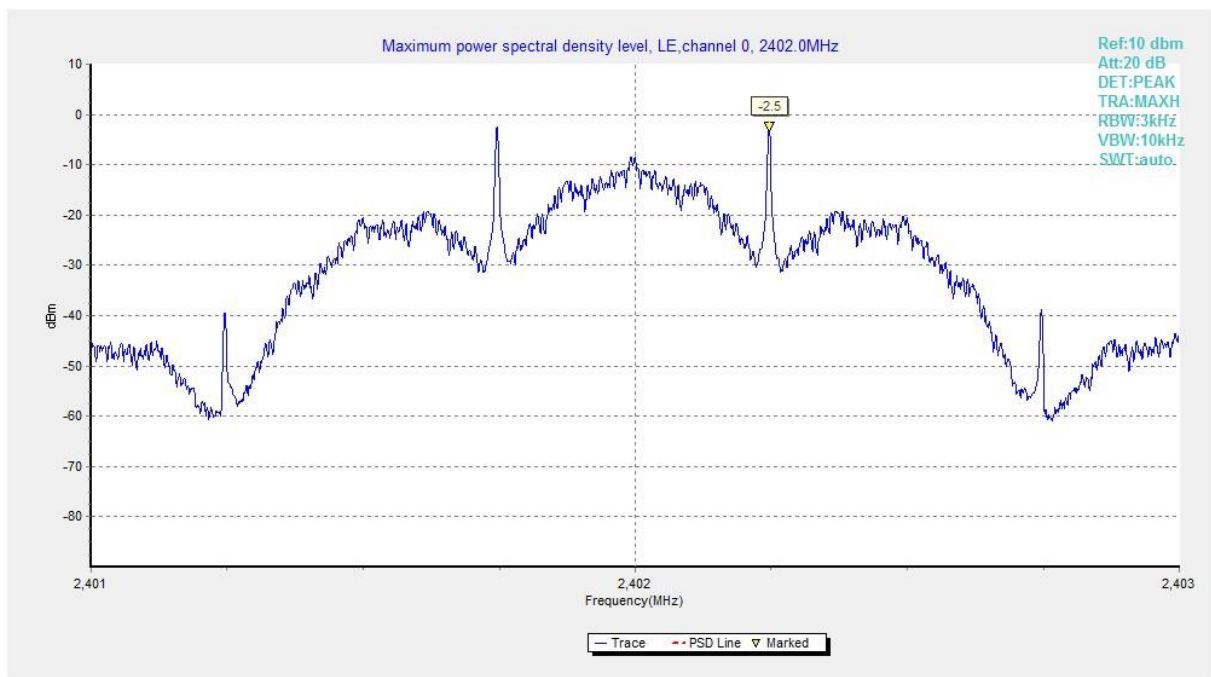

**Fig.7 Power Spectral Density (Ch 0), LE Coded**

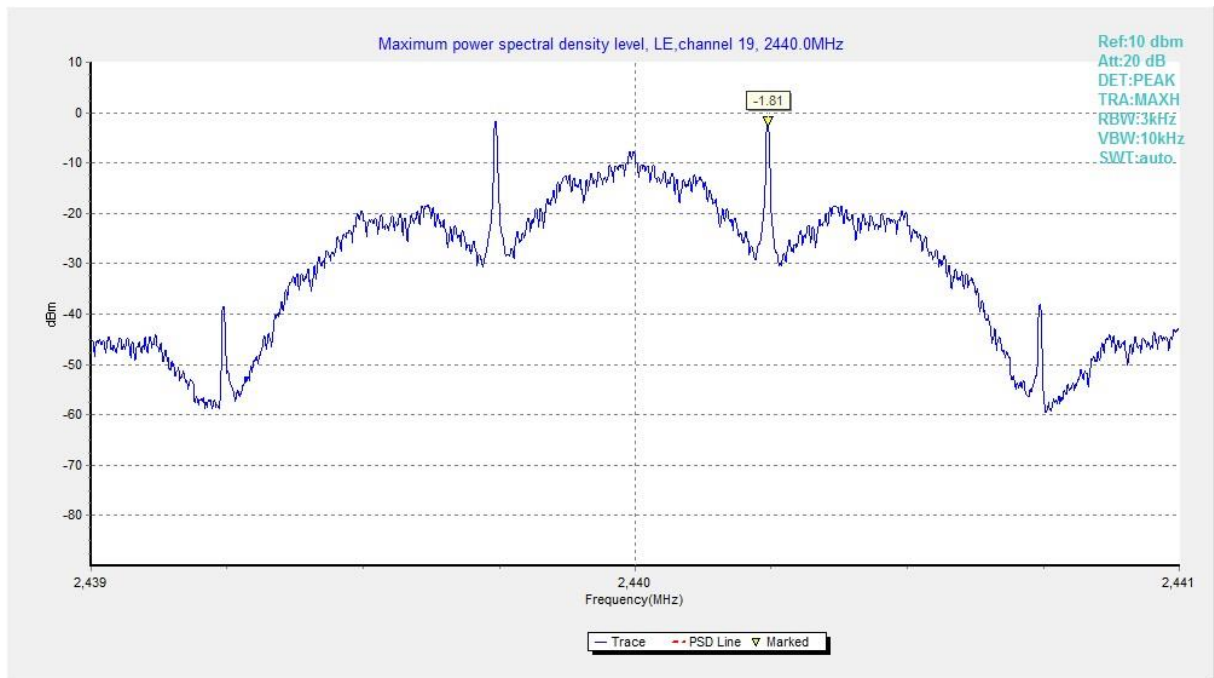

**Fig.8 Power Spectral Density (Ch 19), LE Coded**

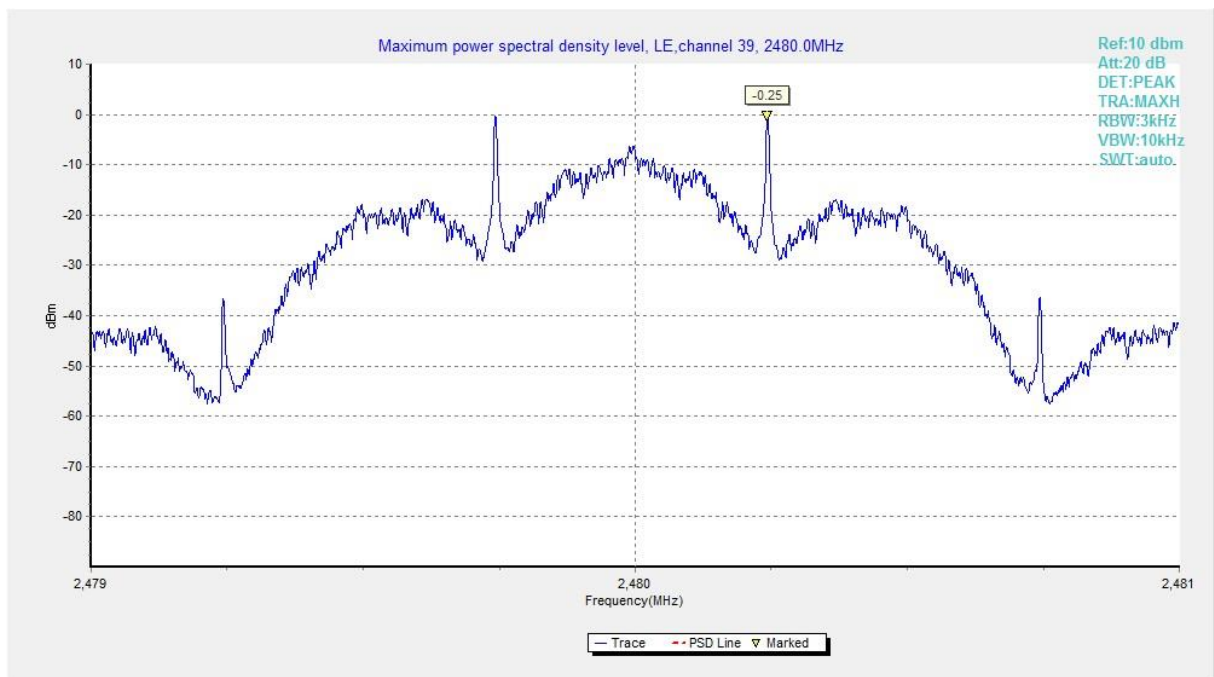

**Fig.9 Power Spectral Density (Ch 39), LE Coded**

### A.3 6dB Bandwidth

#### Measurement Limit:

| Standard                   | Limit (kHz) |
|----------------------------|-------------|
| FCC 47 CFR Part 15.247 (a) | $\geq 500$  |

#### Measurement Result:

| Mode     | Frequency (MHz) | Test Results ( kHz) |         | Conclusion |
|----------|-----------------|---------------------|---------|------------|
| LE 1M    | 2402(CH0)       | Fig.10              | 663.50  | P          |
|          | 2440(CH19)      | Fig.11              | 670.50  | P          |
|          | 2480(CH39)      | Fig.12              | 660.50  | P          |
| LE 2M    | 2402(CH0)       | Fig.13              | 1129.50 | P          |
|          | 2440(CH19)      | Fig.14              | 1136.00 | P          |
|          | 2480(CH39)      | Fig.15              | 1134.00 | P          |
| LE Coded | 2402(CH0)       | Fig.16              | 602.00  | P          |
|          | 2440(CH19)      | Fig.17              | 603.50  | P          |
|          | 2480(CH39)      | Fig.18              | 602.50  | P          |

See below for test graphs.

Conclusion: PASS



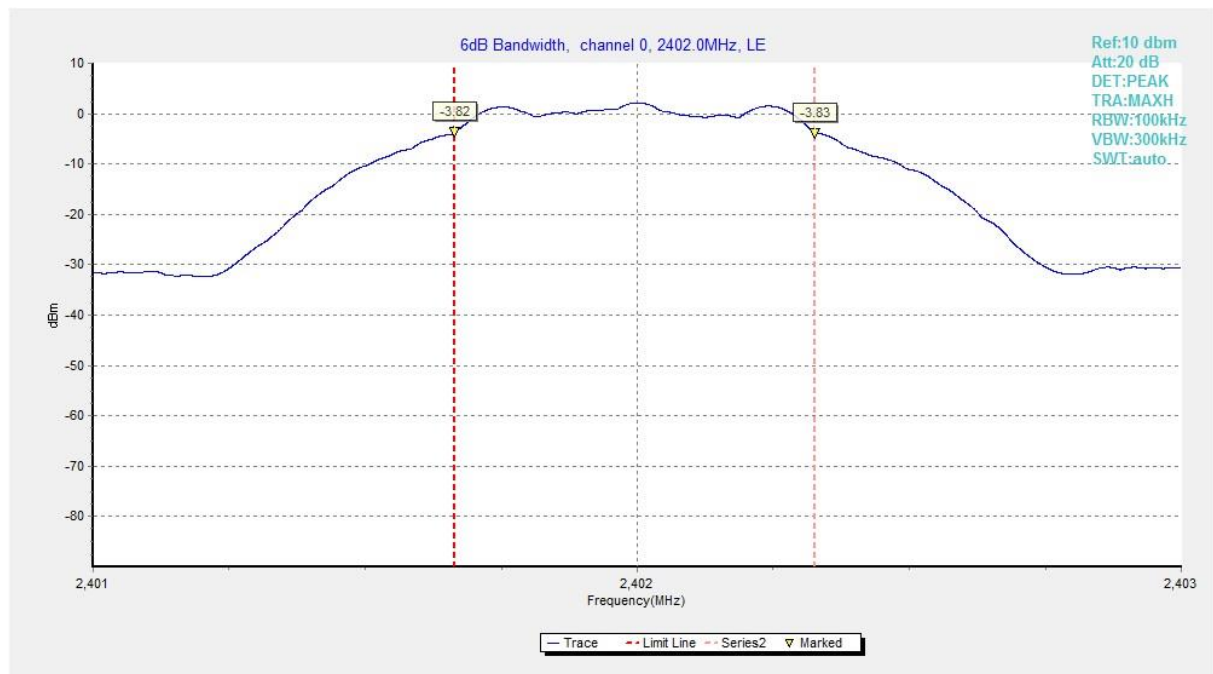


Fig.10 6dB Bandwidth (Ch 0), LE 1M

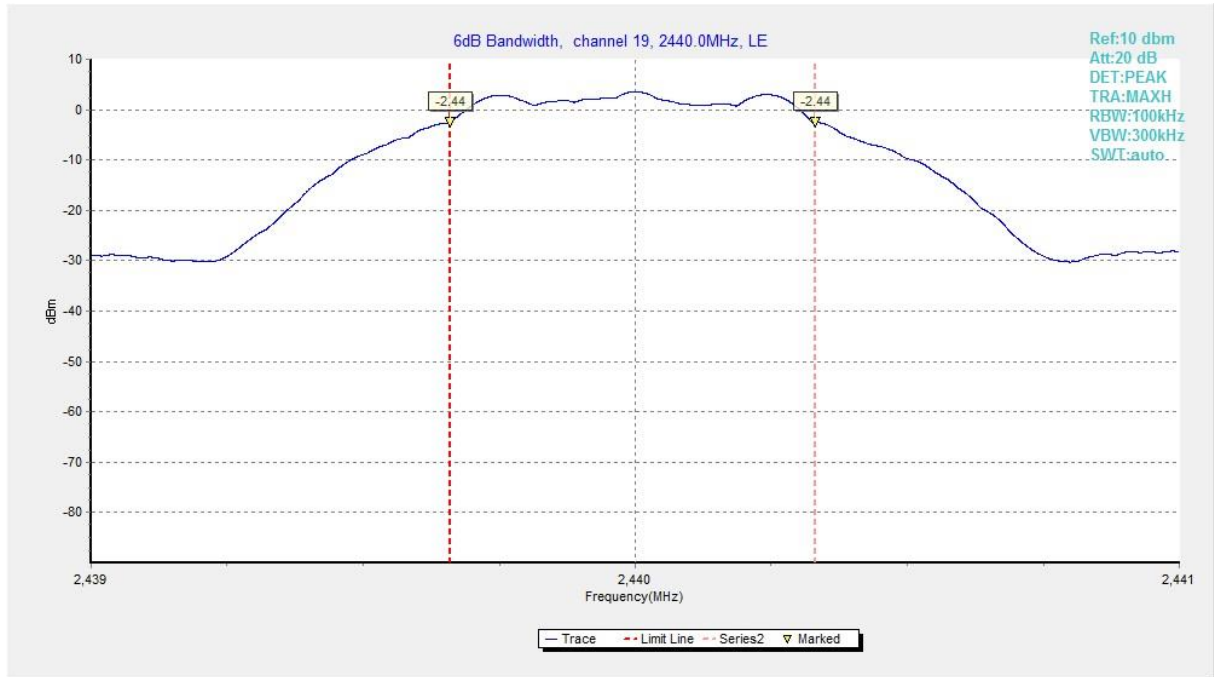

**Fig.11 6dB Bandwidth (Ch 19), LE 1M**

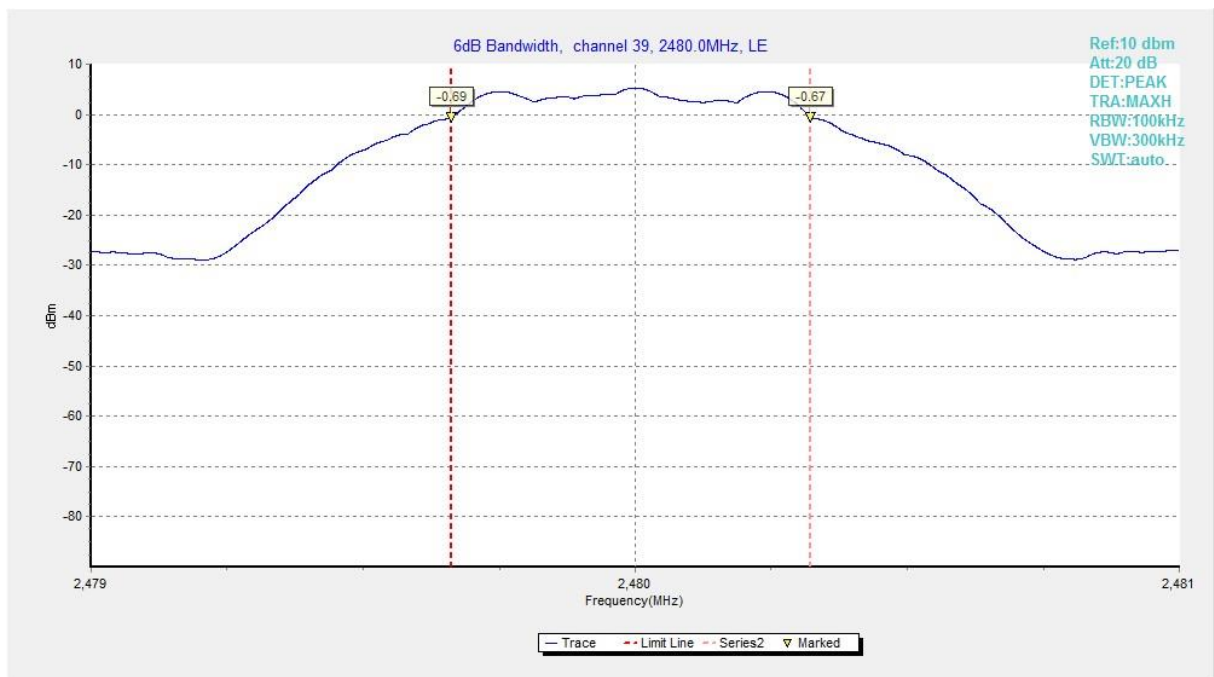

**Fig.12 6dB Bandwidth (Ch 39), LE 1M**

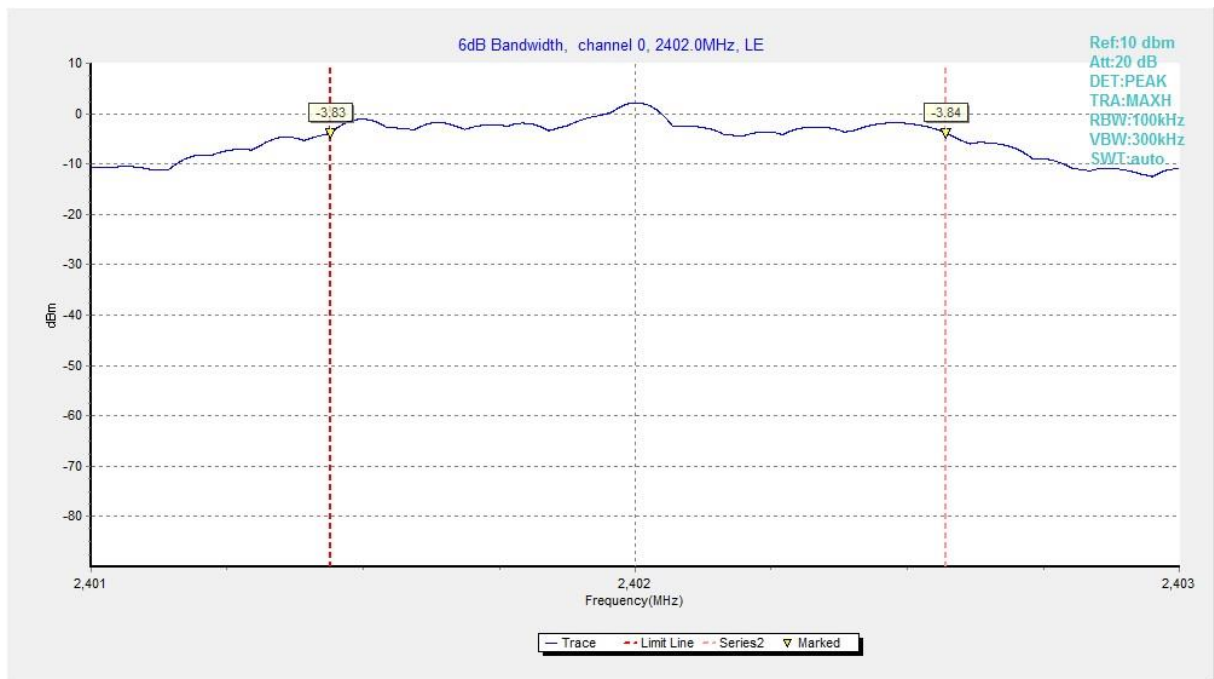


Fig.13 6dB Bandwidth (Ch 0), LE 2M

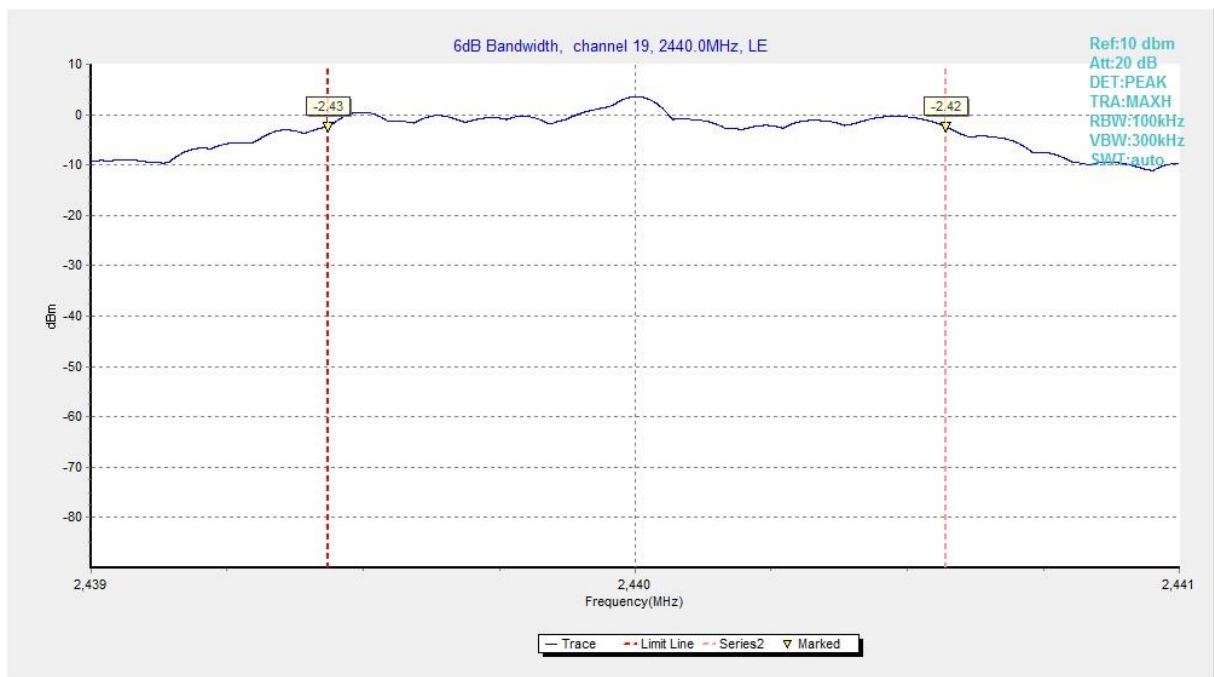


Fig.14 6dB Bandwidth (Ch 19), LE 2M

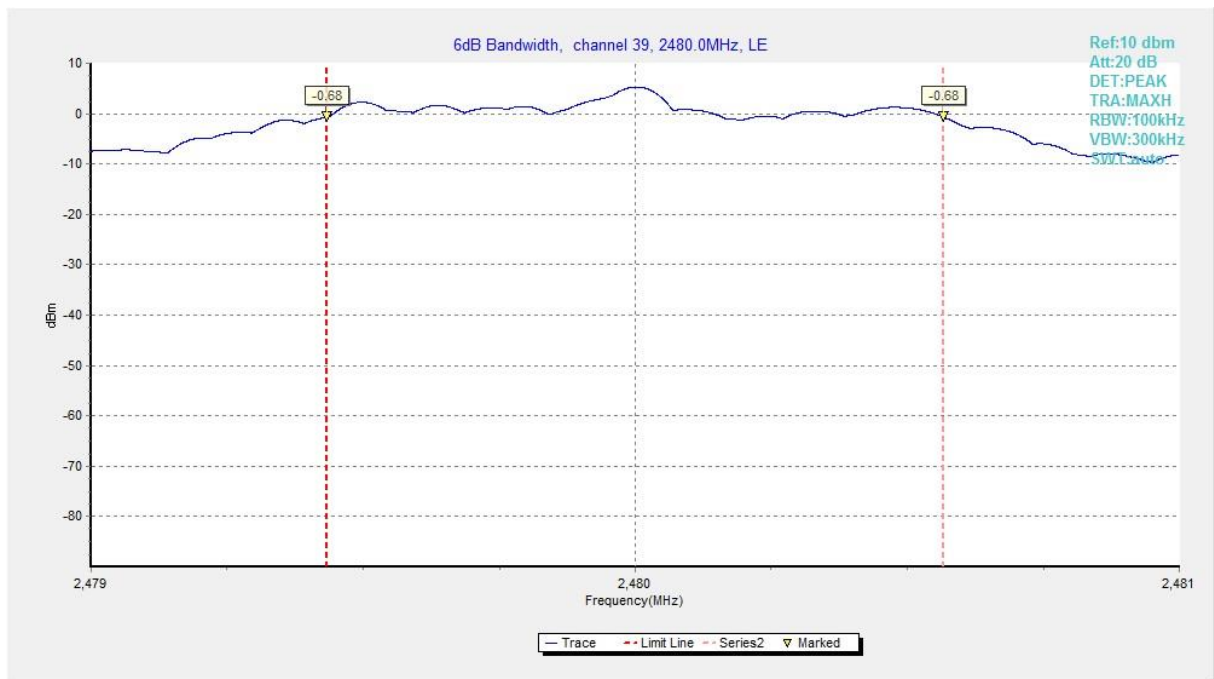


Fig.15 6dB Bandwidth (Ch 39), LE 2M

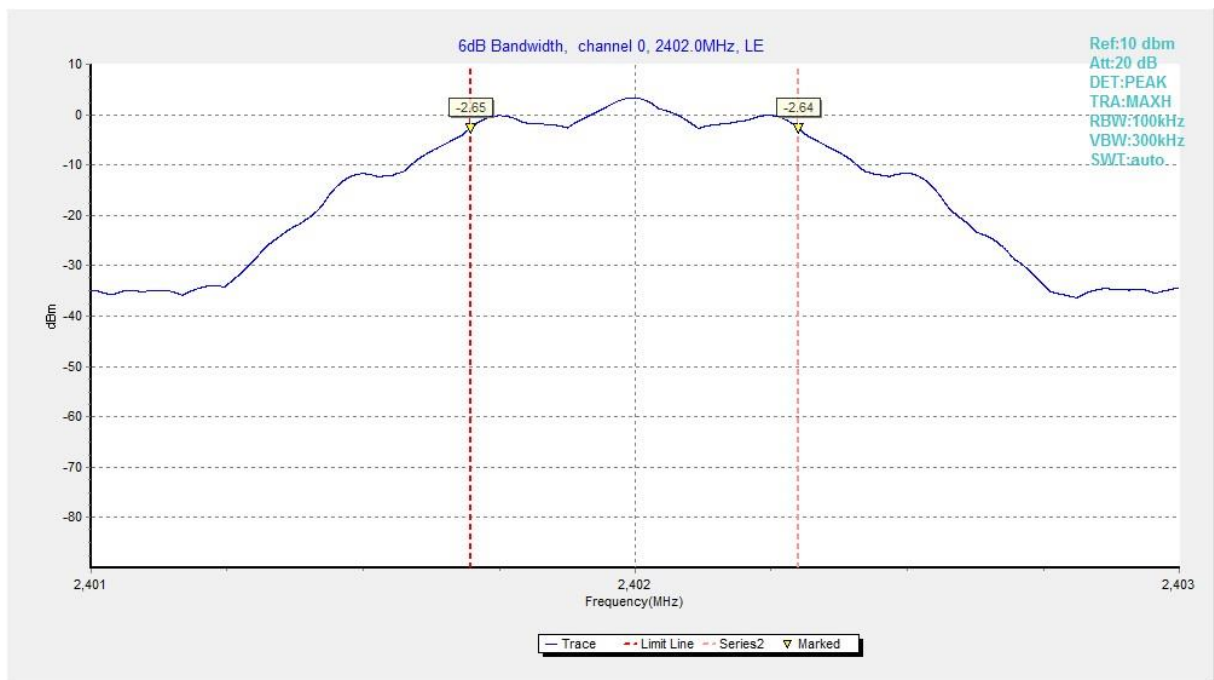


Fig.16 6dB Bandwidth (Ch 0), LE Coded

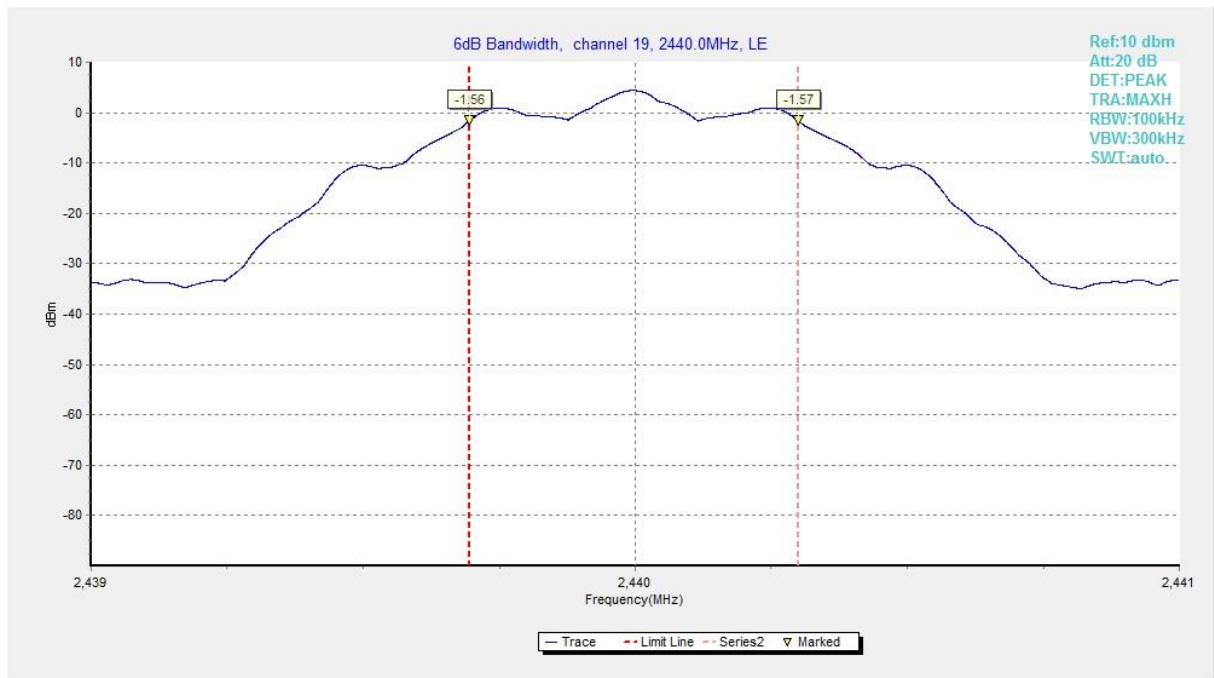


Fig.17 6dB Bandwidth (Ch 19), LE Coded

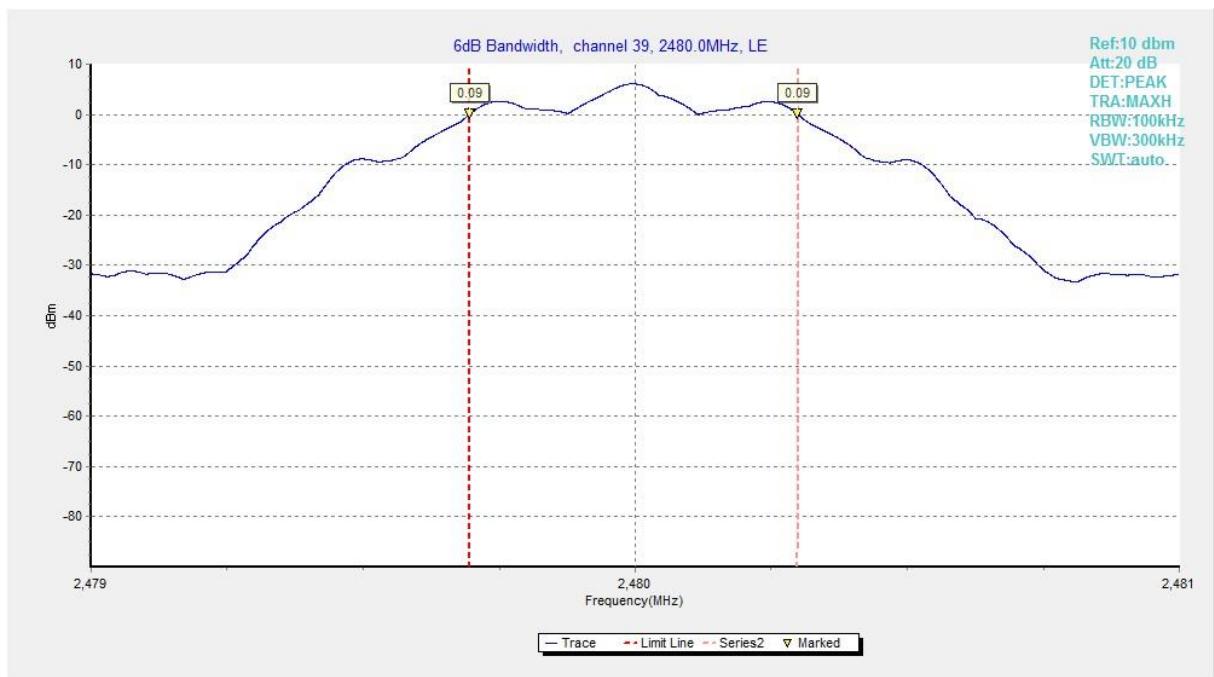


Fig.18 6dB Bandwidth (Ch 39), LE Coded

#### A.4 Band Edges Compliance

##### Measurement Limit:

| Standard                   | Limit (dBc) |
|----------------------------|-------------|
| FCC 47 CFR Part 15.247 (d) | > 20        |

##### Measurement Result:

| Mode     | Frequency (MHz) | Test Results |       | Conclusion |
|----------|-----------------|--------------|-------|------------|
| LE 1M    | 2402(CH0)       | Fig.19       | 56.19 | P          |
|          | 2480(CH39)      | Fig.20       | 63.85 | P          |
| LE 2M    | 2402(CH0)       | Fig.21       | 47.85 | P          |
|          | 2480(CH39)      | Fig.22       | 62.08 | P          |
| LE Coded | 2402(CH0)       | Fig.23       | 56.84 | P          |
|          | 2480(CH39)      | Fig.24       | 64.24 | P          |

See below for test graphs.

Conclusion: PASS

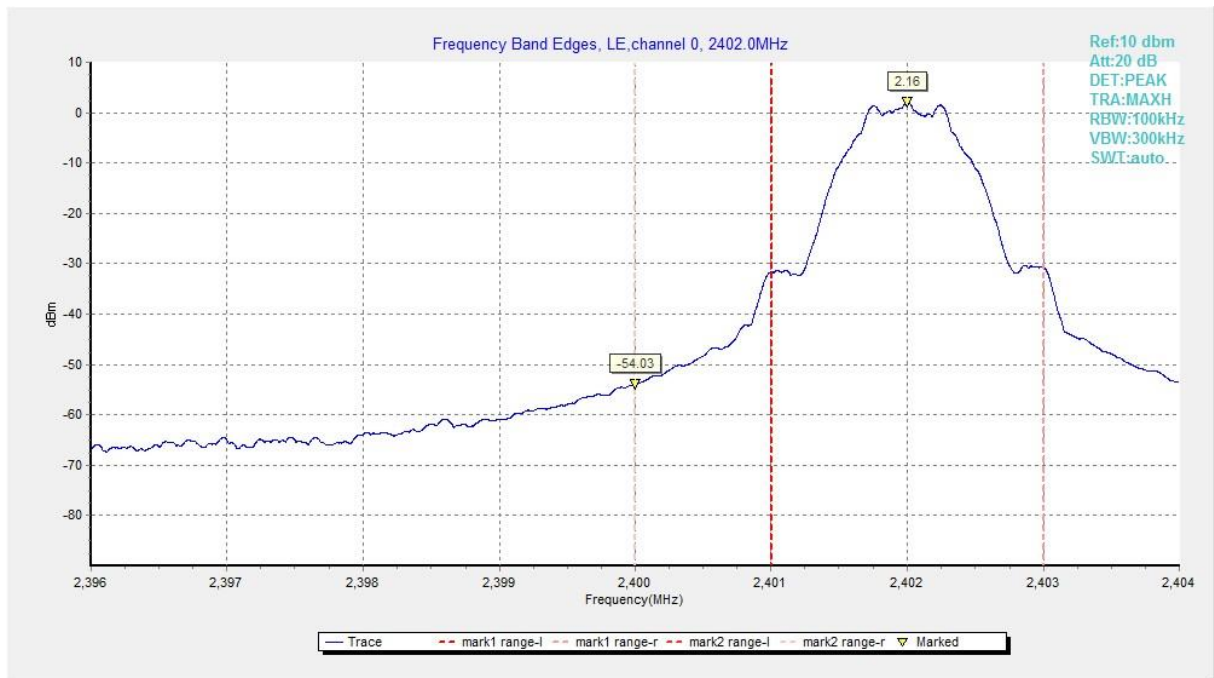


Fig.19 Band Edges (Ch 0), LE 1M

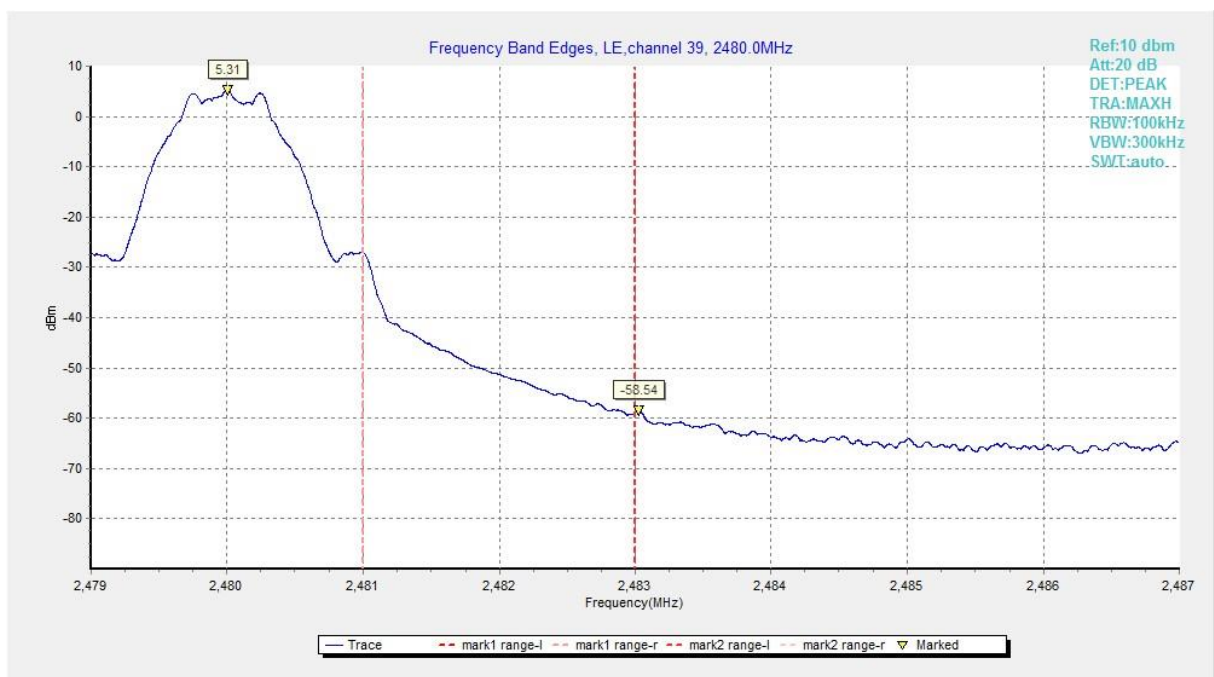


Fig.20 Band Edges (Ch 39), LE 1M

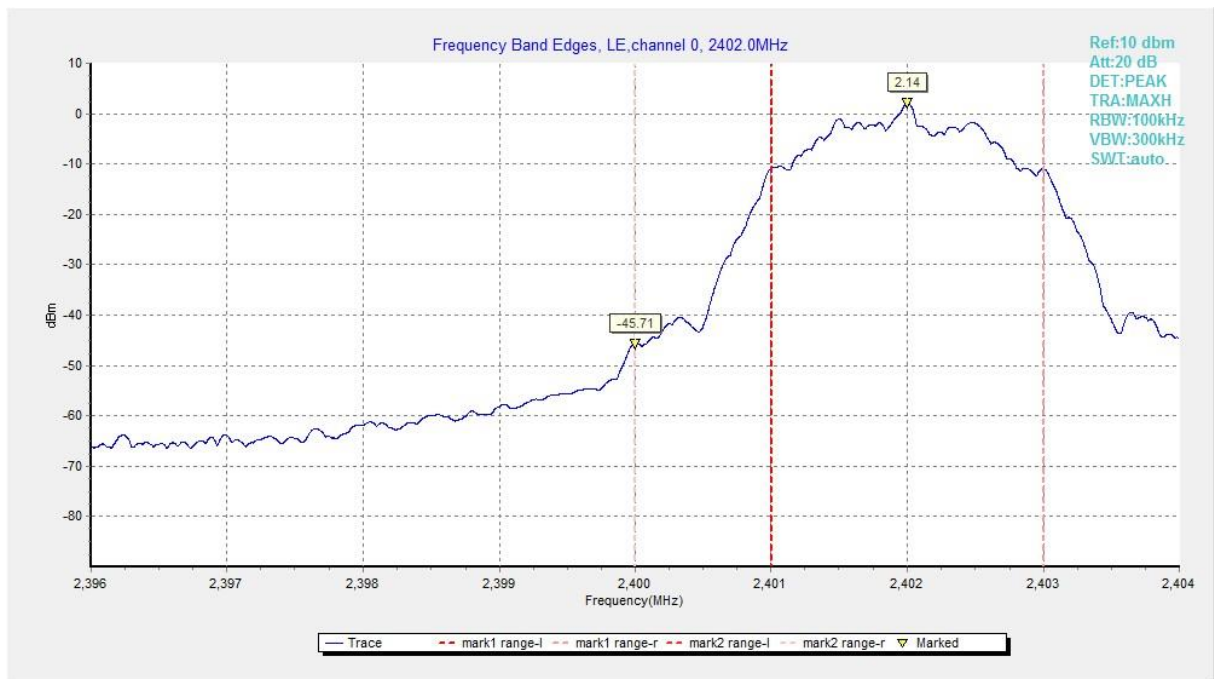


Fig.21 Band Edges (Ch 0), LE 2M

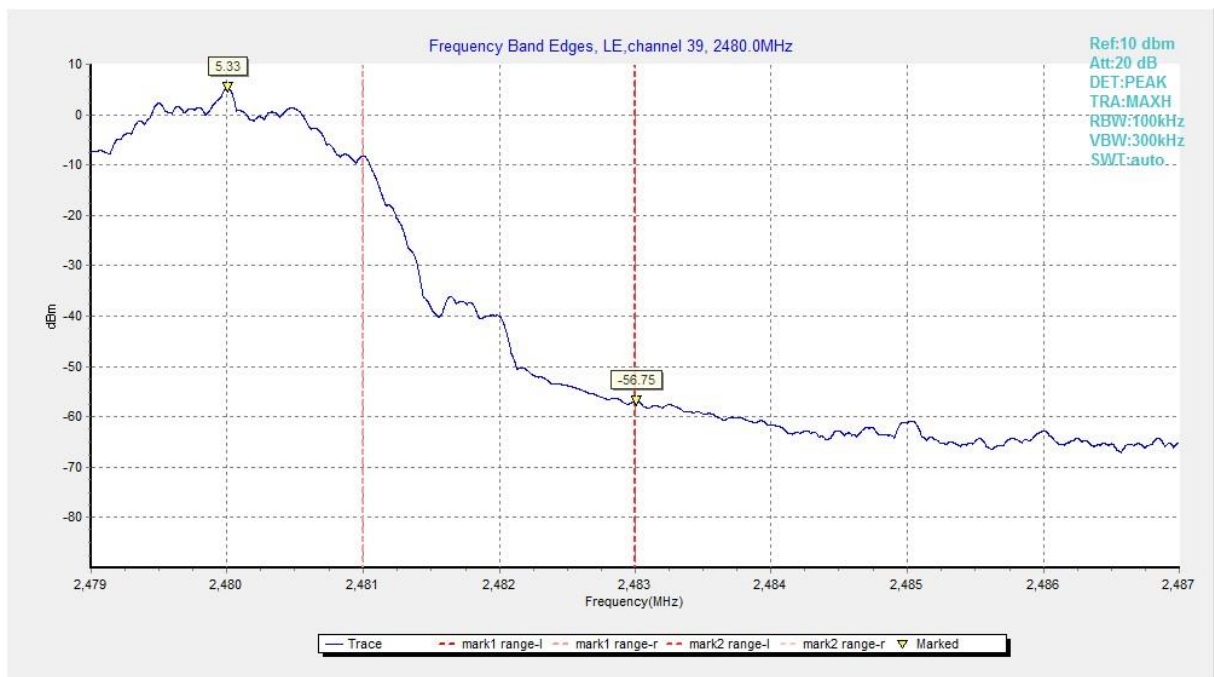


Fig.22 Band Edges (Ch 39), LE 2M

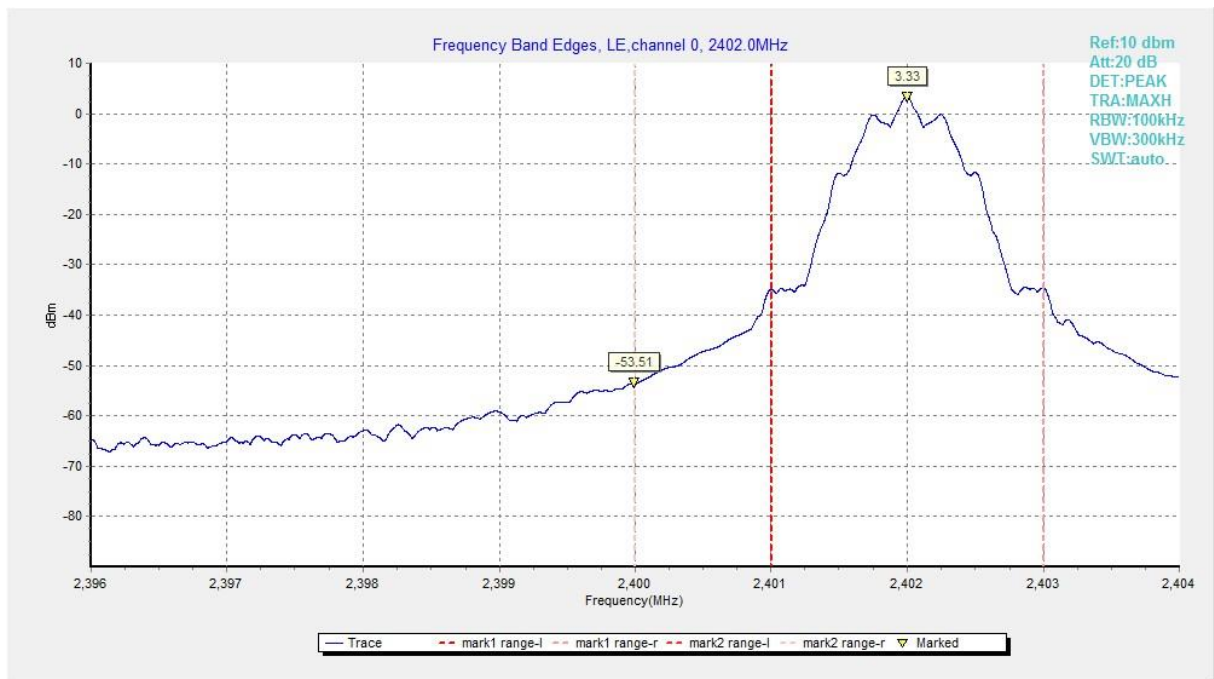


Fig.23 Band Edges (Ch 0), LE Coded

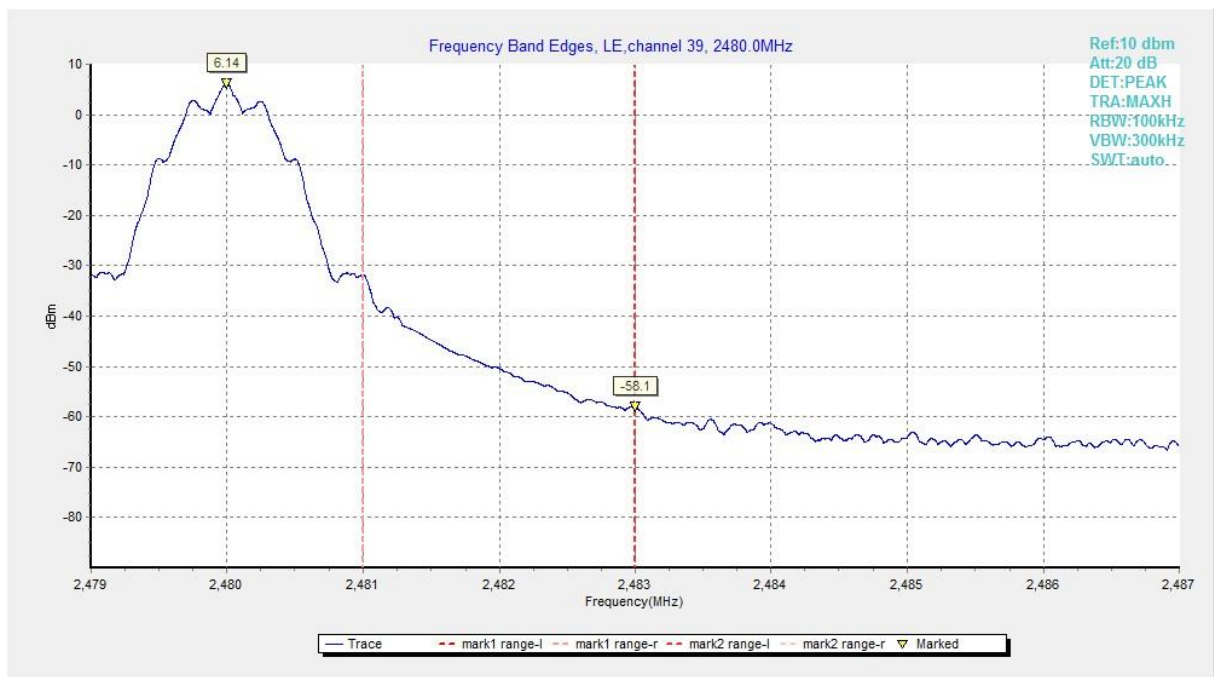


Fig.24 Band Edges (Ch 39), LE Coded

## A.5 Transmitter Spurious Emission - Conducted

### Measurement Limit:

| Standard                   | Limit                                             |
|----------------------------|---------------------------------------------------|
| FCC 47 CFR Part 15.247 (d) | 20dB below peak output power in 100 kHz bandwidth |

### Measurement Results:

| MODE     | Channel      | Frequency Range | Test Results | Conclusion |
|----------|--------------|-----------------|--------------|------------|
| LE 1M    | 0            | 2.402 GHz       | Fig.25       | P          |
|          |              | 1GHz -3GHz      | Fig.26       | P          |
|          |              | 3GHz-10GHz      | Fig.27       | P          |
|          | 19           | 2.440 GHz       | Fig.28       | P          |
|          |              | 1GHz -3GHz      | Fig.29       | P          |
|          |              | 3GHz-10GHz      | Fig.30       | P          |
|          | 39           | 2.480 GHz       | Fig.31       | P          |
|          |              | 1GHz -3GHz      | Fig.32       | P          |
|          |              | 3GHz-10GHz      | Fig.33       | P          |
|          | All channels | 30MHz-1GHz      | Fig.34       | P          |
|          |              | 10GHz-26GHz     | Fig.35       | P          |
| LE 2M    | 0            | 2.402 GHz       | Fig.36       | P          |
|          |              | 1GHz -3GHz      | Fig.37       | P          |
|          |              | 3GHz-10GHz      | Fig.38       | P          |
|          | 19           | 2.440 GHz       | Fig.39       | P          |
|          |              | 1GHz -3GHz      | Fig.40       | P          |
|          |              | 3GHz-10GHz      | Fig.41       | P          |
|          | 39           | 2.480 GHz       | Fig.42       | P          |
|          |              | 1GHz -3GHz      | Fig.43       | P          |
|          |              | 3GHz-10GHz      | Fig.44       | P          |
|          | All channels | 30MHz-1GHz      | Fig.45       | P          |
|          |              | 10GHz-26GHz     | Fig.46       | P          |
| LE Coded | 0            | 2.402 GHz       | Fig.47       | P          |
|          |              | 1GHz -3GHz      | Fig.48       | P          |
|          |              | 3GHz-10GHz      | Fig.49       | P          |
|          | 19           | 2.440 GHz       | Fig.50       | P          |
|          |              | 1GHz -3GHz      | Fig.51       | P          |
|          |              | 3GHz-10GHz      | Fig.52       | P          |
|          | 39           | 2.480 GHz       | Fig.53       | P          |
|          |              | 1GHz -3GHz      | Fig.54       | P          |
|          |              | 3GHz-10GHz      | Fig.55       | P          |
|          | All channels | 30MHz-1GHz      | Fig.56       | P          |
|          |              | 10GHz-26GHz     | Fig.57       | P          |

See below for test graphs.

Conclusion: Pass



Fig.25 Conducted Spurious Emission (Ch0, Center Frequency), LE 1M

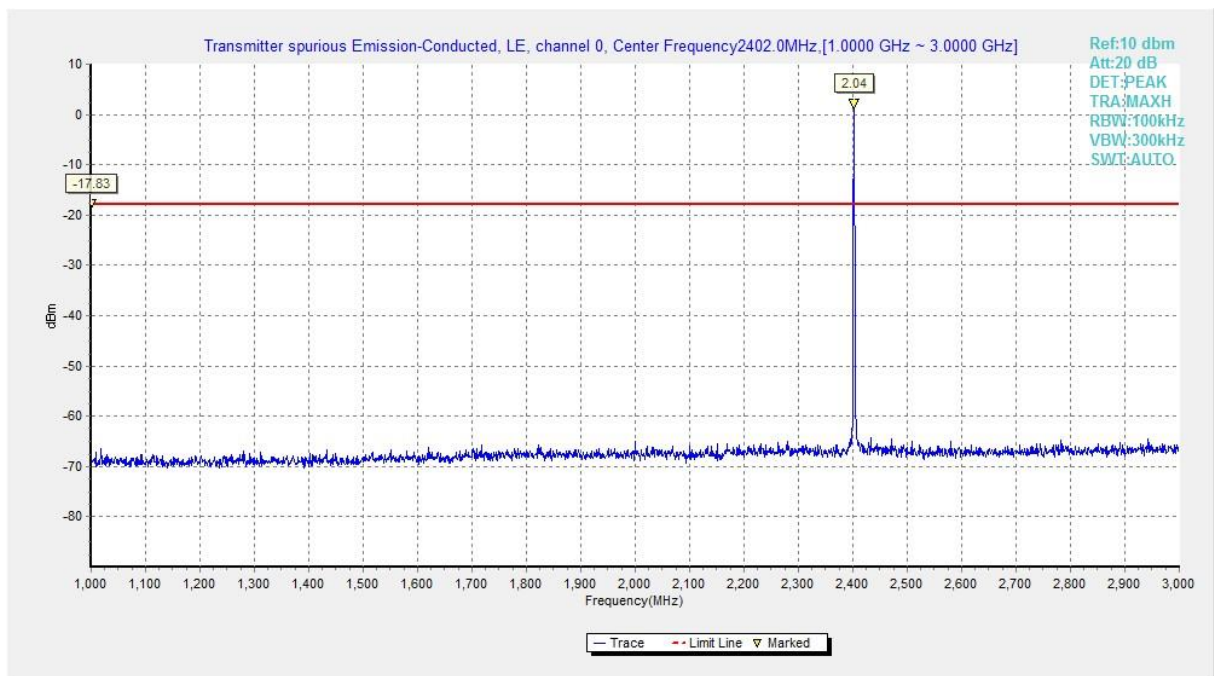


Fig.26 Conducted Spurious Emission (Ch0, 1 GHz-3 GHz), LE 1M

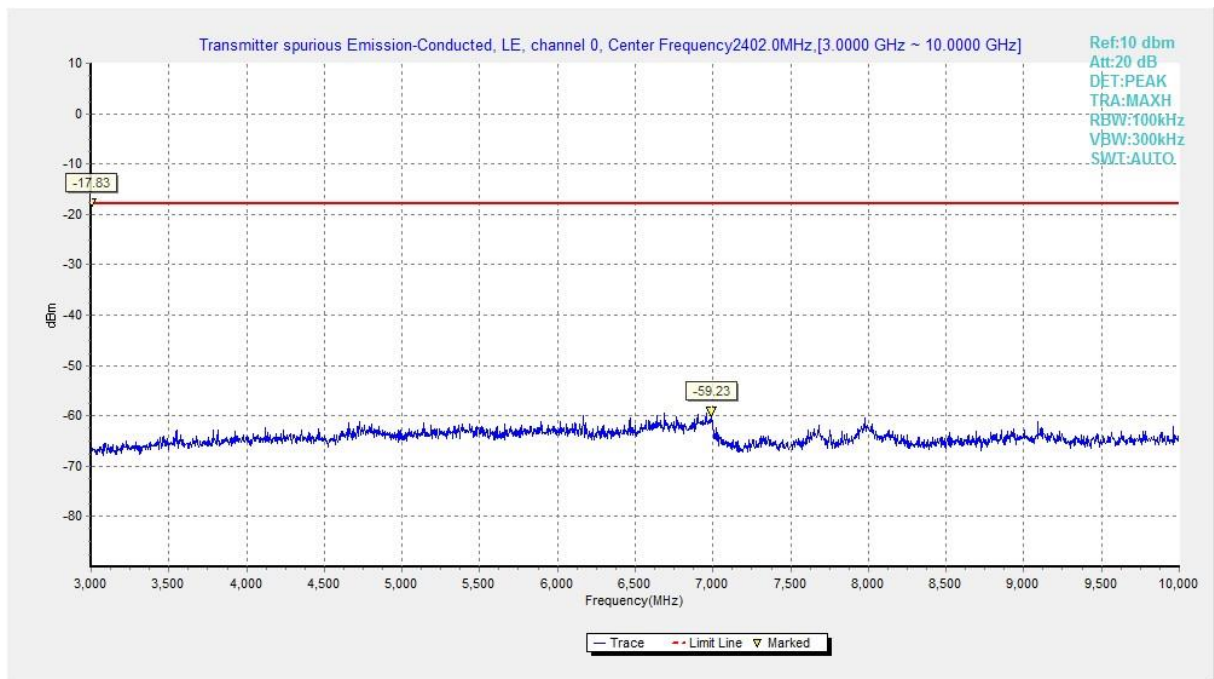


Fig.27 Conducted Spurious Emission (Ch0, 3 GHz-10 GHz), LE 1M

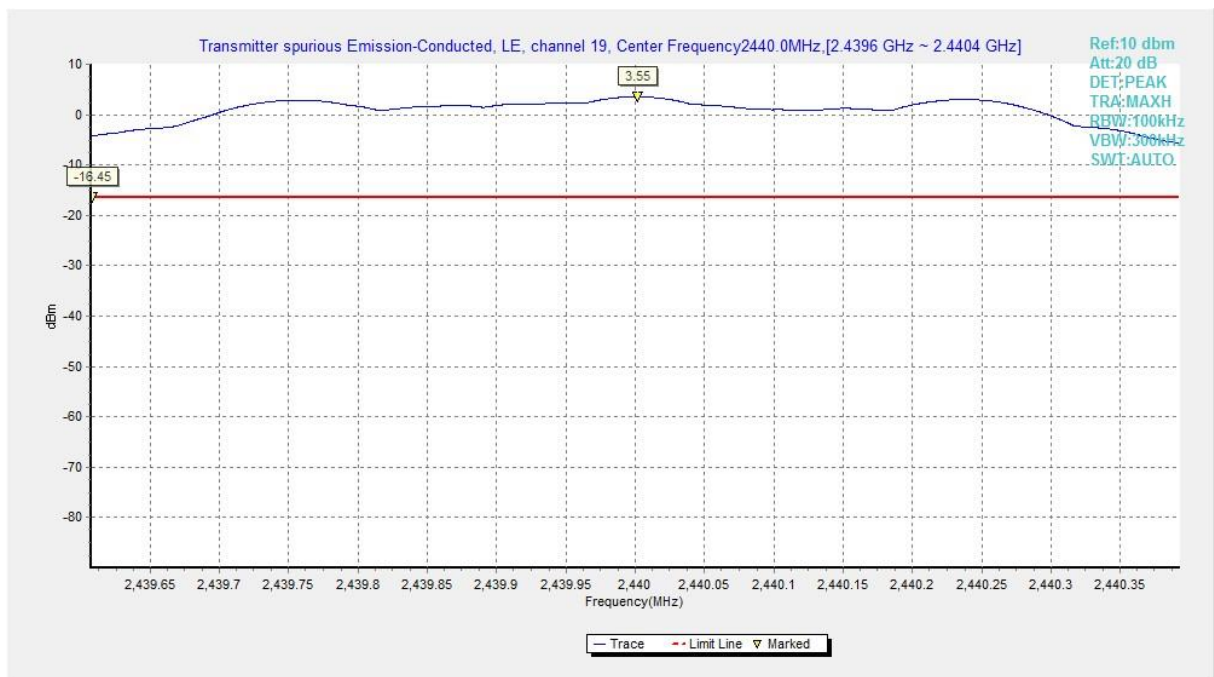


Fig.28 Conducted Spurious Emission (Ch19, Center Frequency), LE 1M

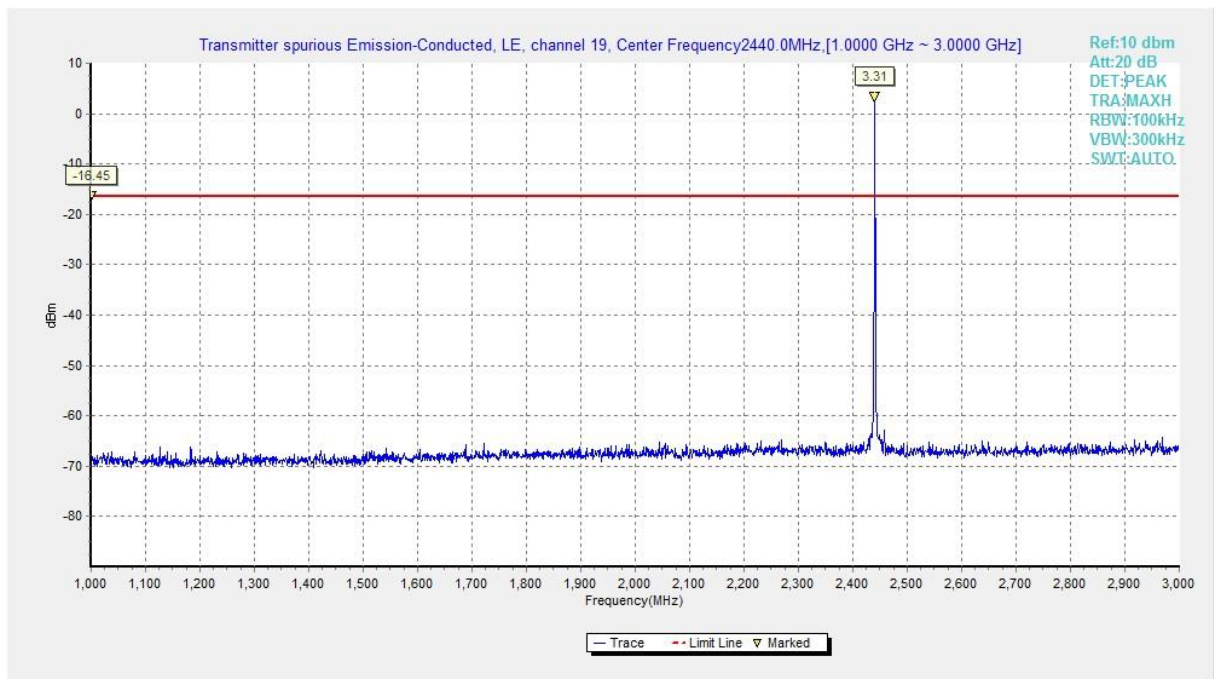


Fig.29 Conducted Spurious Emission (Ch19, 1 GHz-3 GHz), LE 1M

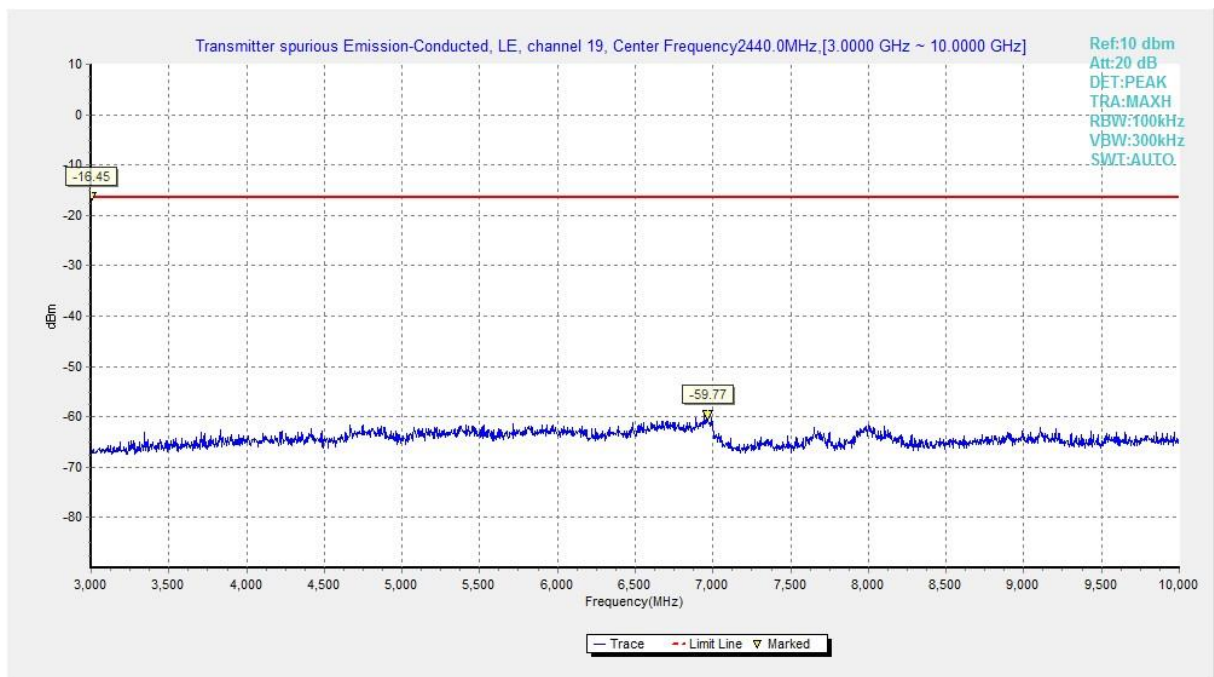


Fig.30 Conducted Spurious Emission (Ch19, 3 GHz-10 GHz), LE 1M

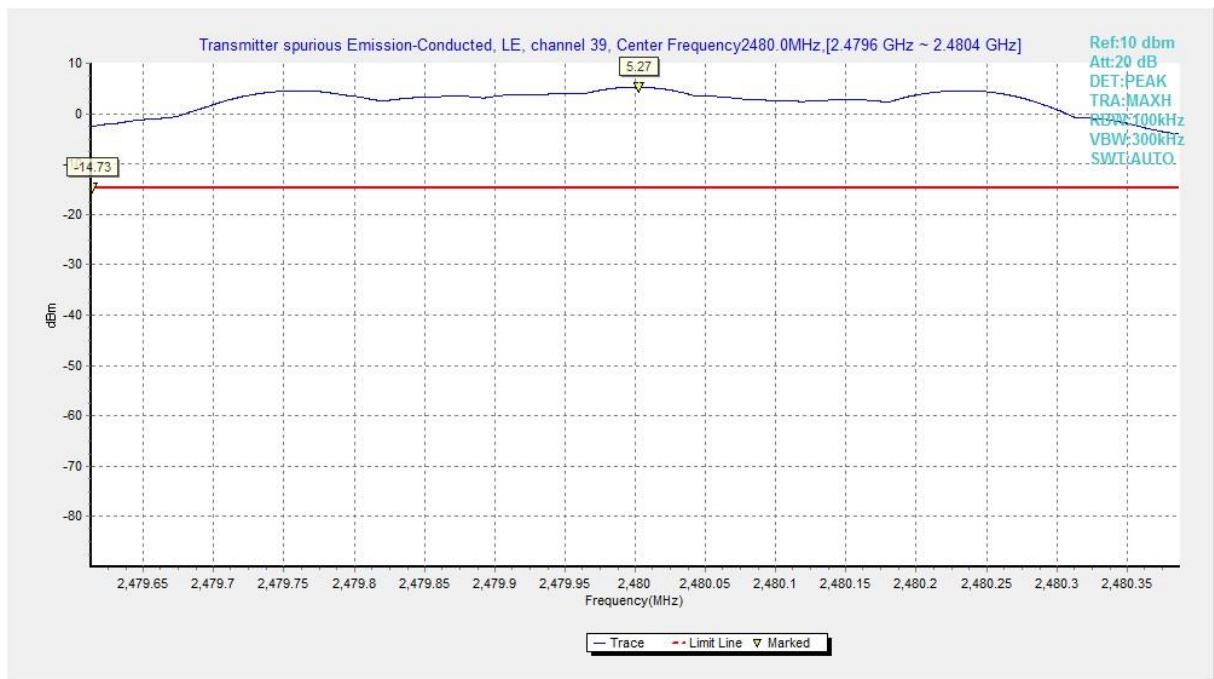


Fig.31 Conducted Spurious Emission (Ch39, Center Frequency), LE 1M

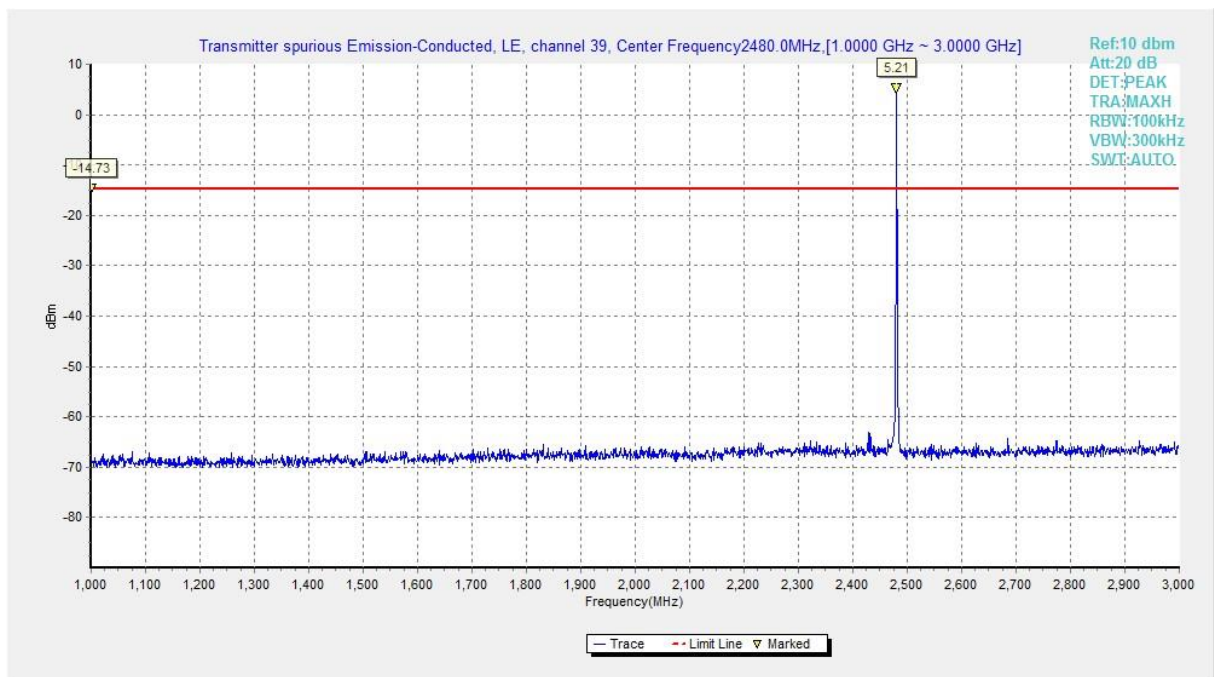


Fig.32 Conducted Spurious Emission (Ch39, 1 GHz-3 GHz), LE 1M

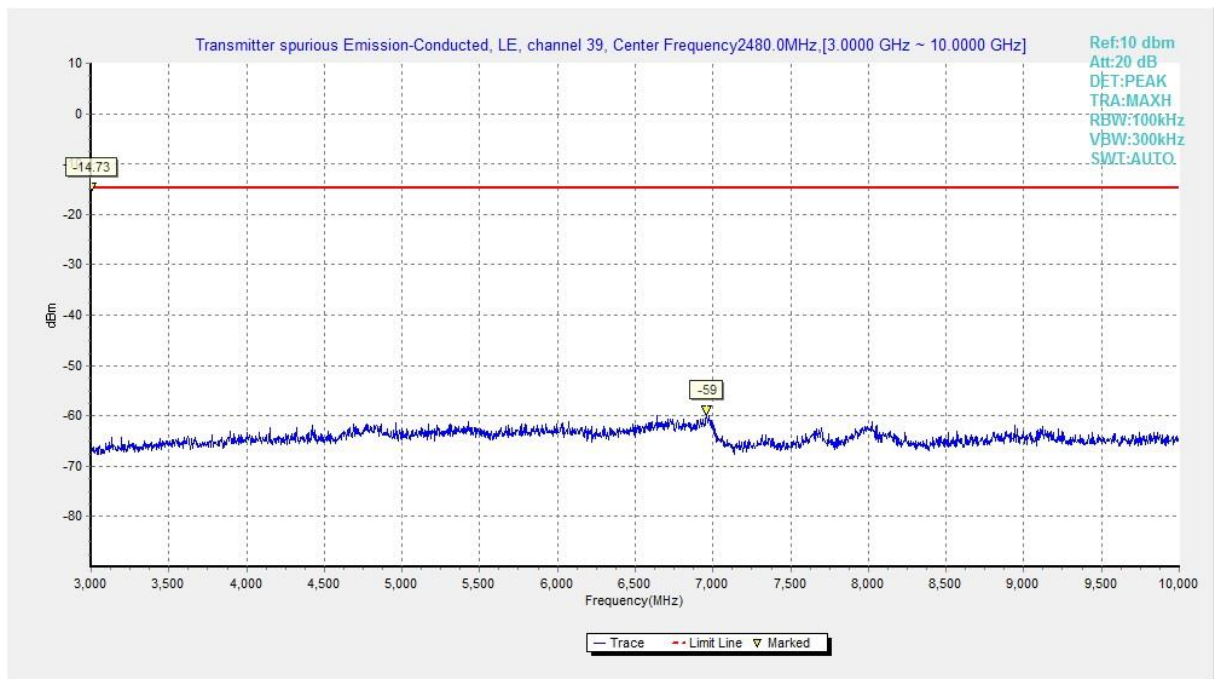


Fig.33 Conducted Spurious Emission (Ch39, 3 GHz-10 GHz), LE 1M

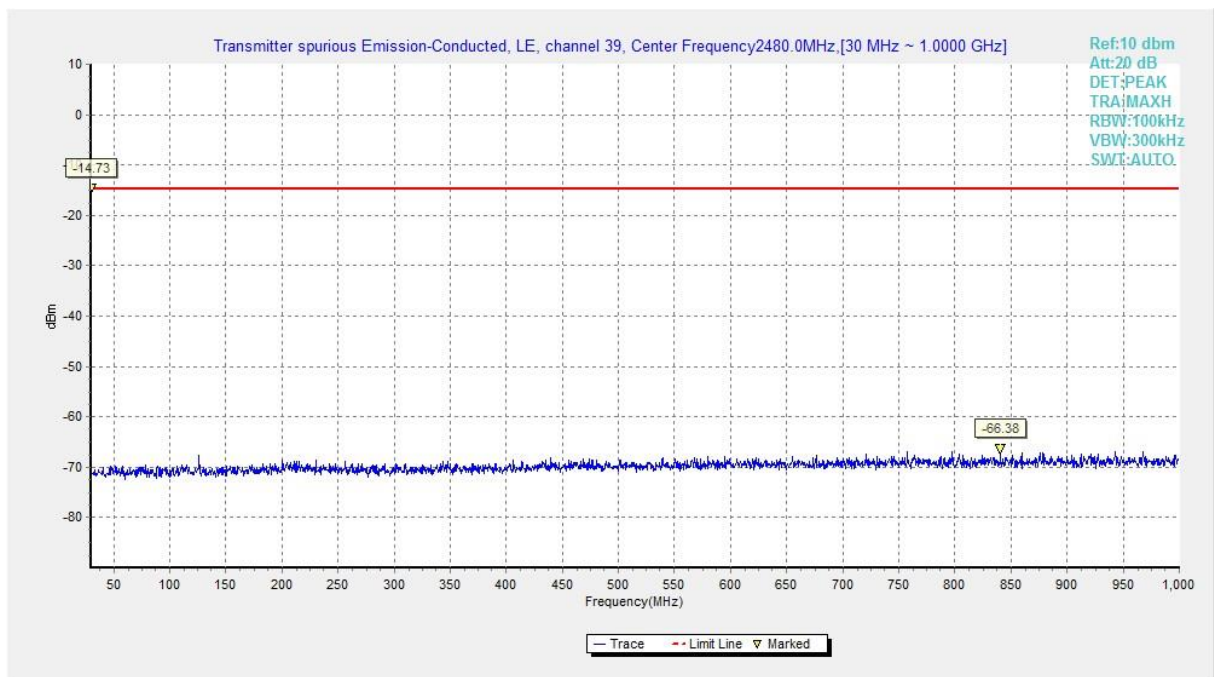


Fig.34 Conducted Spurious Emission (All channels, 30 MHz-1 GHz), LE 1M

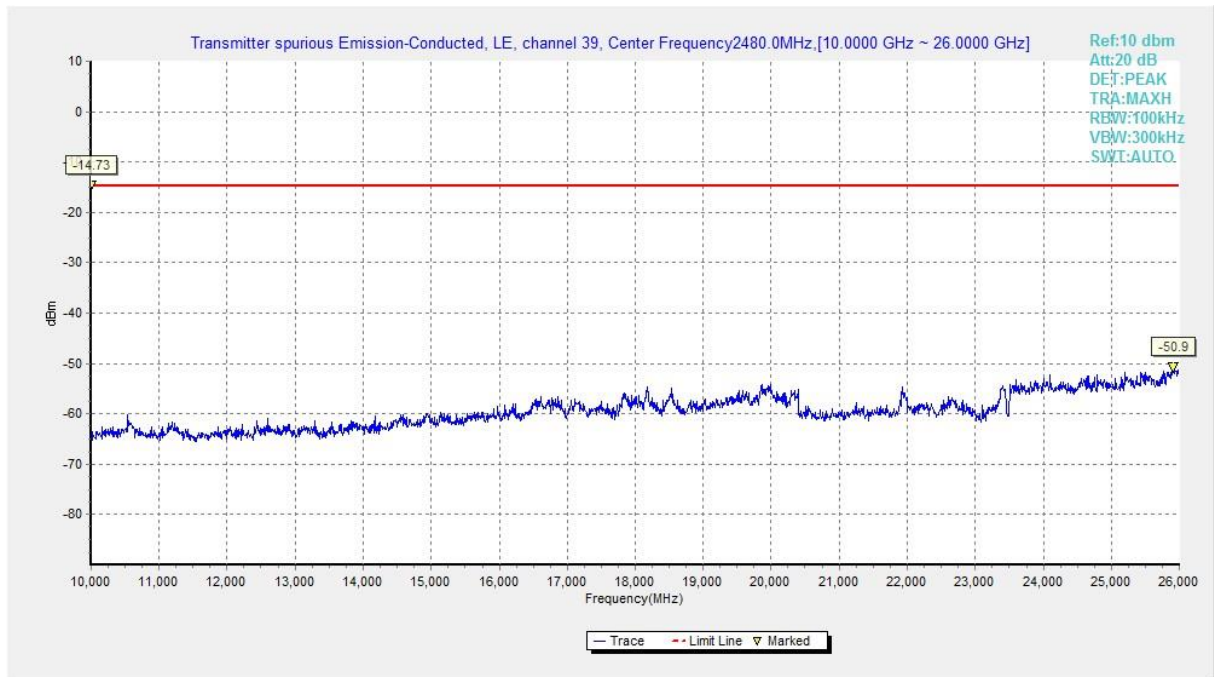


Fig.35 Conducted Spurious Emission (All channels, 10 GHz-26 GHz), LE 1M



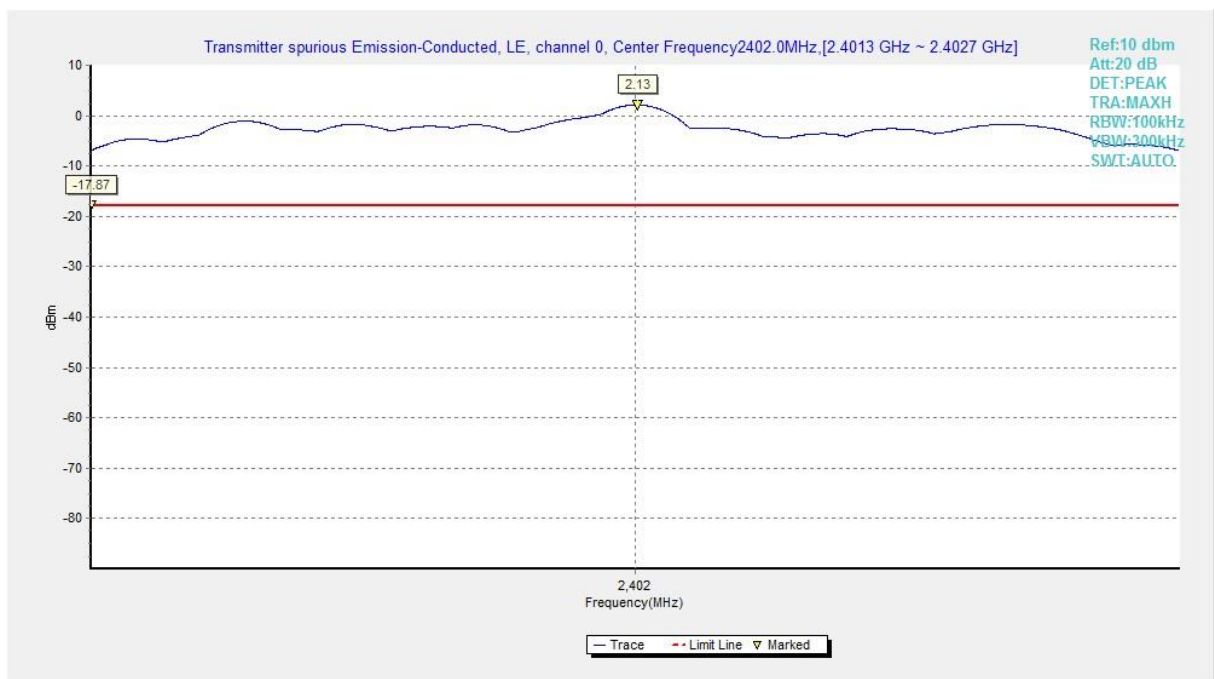



Fig.36 Conducted Spurious Emission (Ch0, Center Frequency), LE 2M

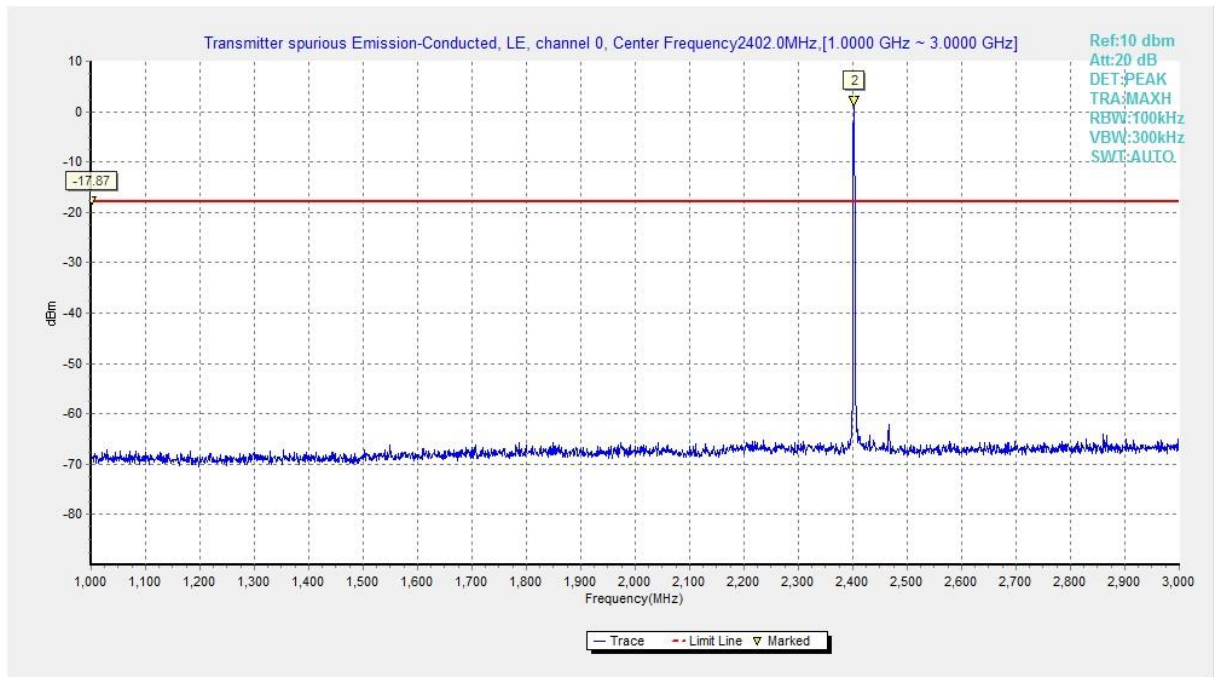


**Fig.37 Conducted Spurious Emission (Ch0, 1 GHz-3 GHz), LE 2M**

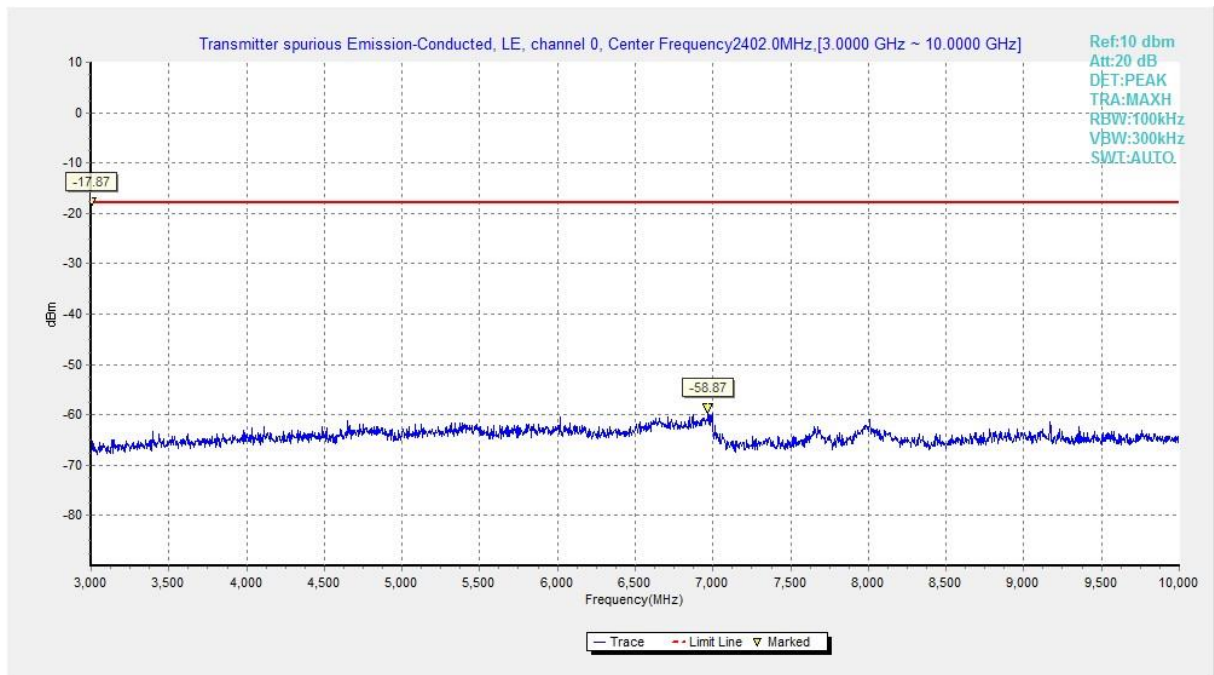


**Fig.38 Conducted Spurious Emission (Ch0, 3 GHz-10 GHz), LE 2M**

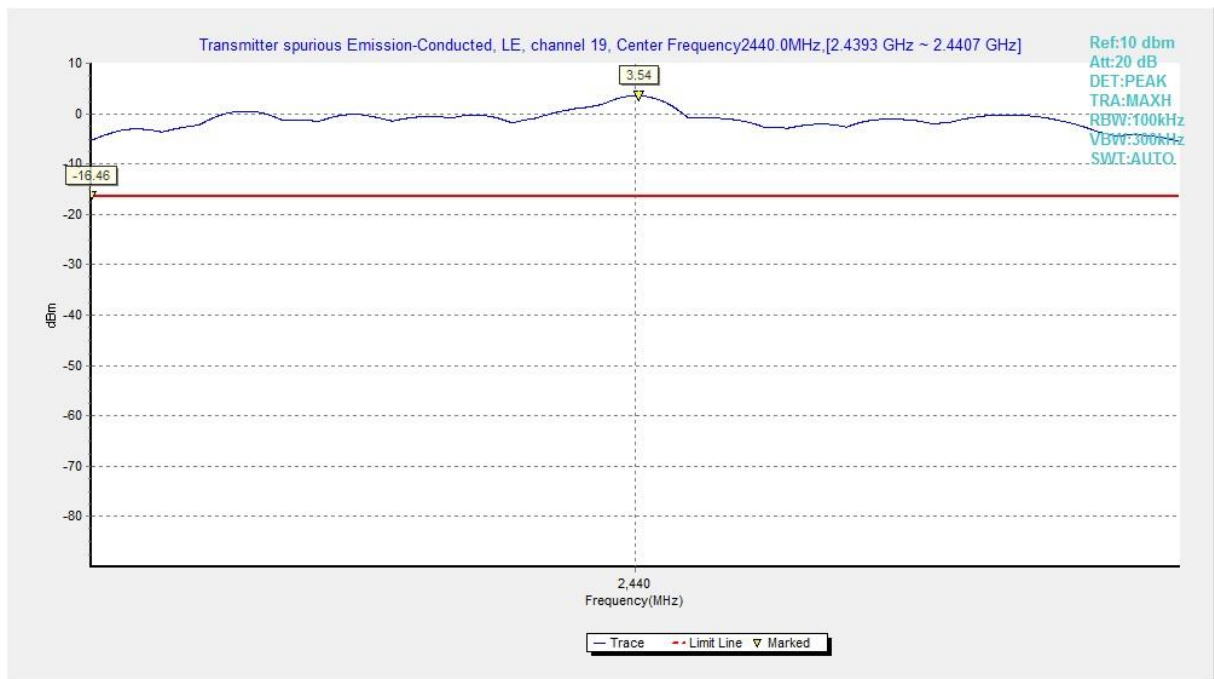


**Fig.39 Conducted Spurious Emission (Ch19, Center Frequency), LE 2M**

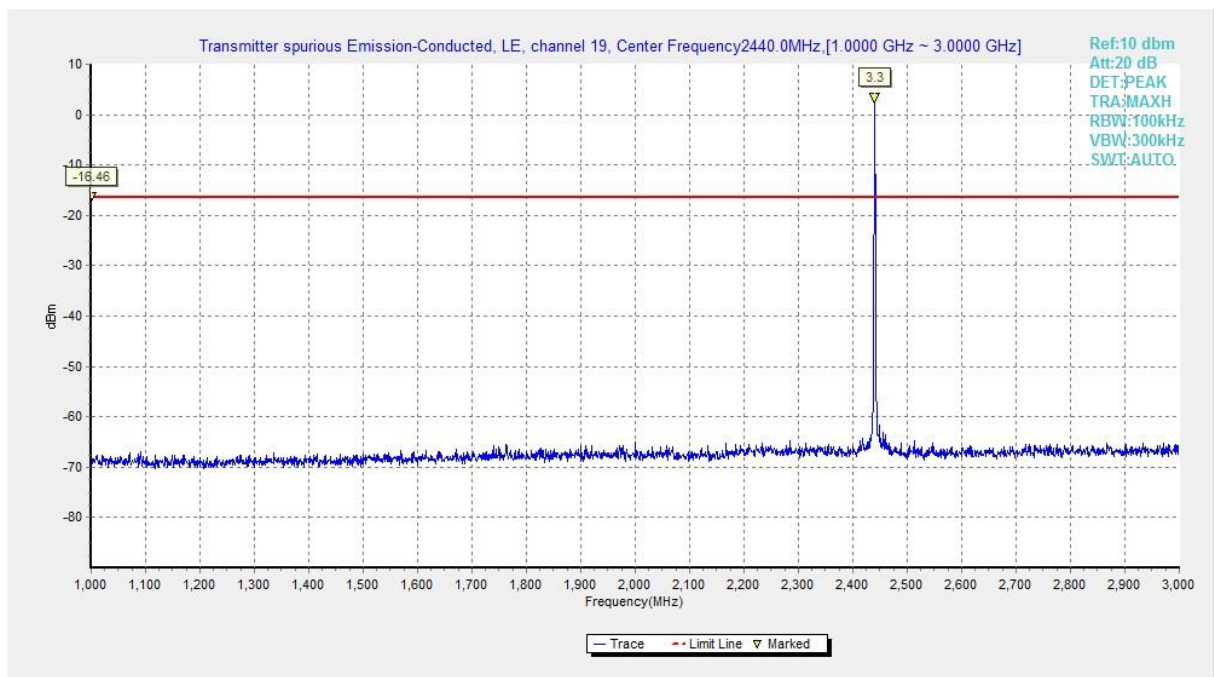

**Fig.40 Conducted Spurious Emission (Ch19, 1 GHz-3 GHz), LE 2M**

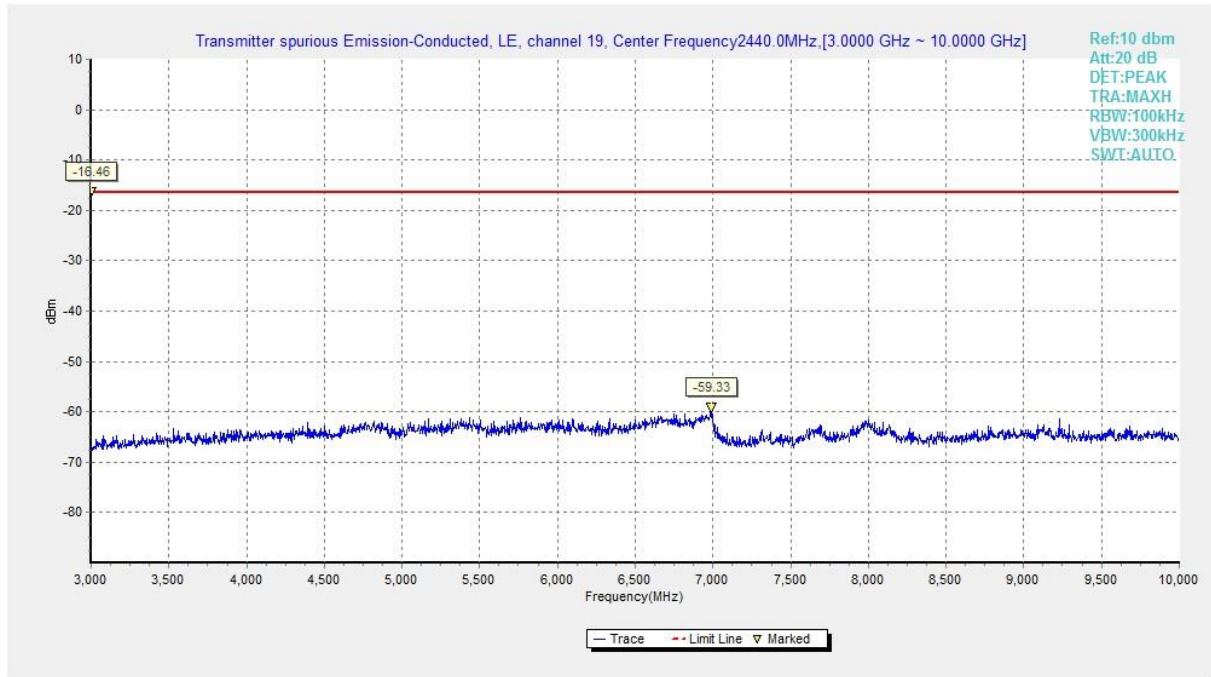

**Fig.41 Conducted Spurious Emission (Ch19, 3 GHz-10 GHz), LE 2M**

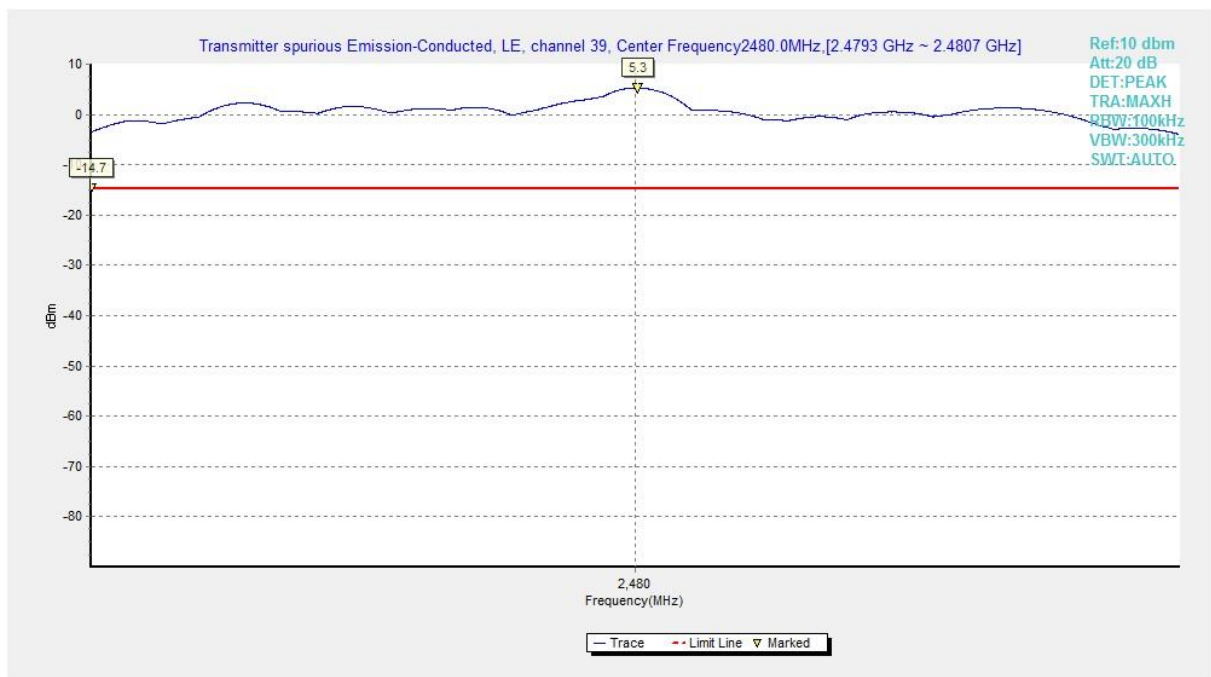

**Fig.42 Conducted Spurious Emission (Ch39, Center Frequency), LE 2M**

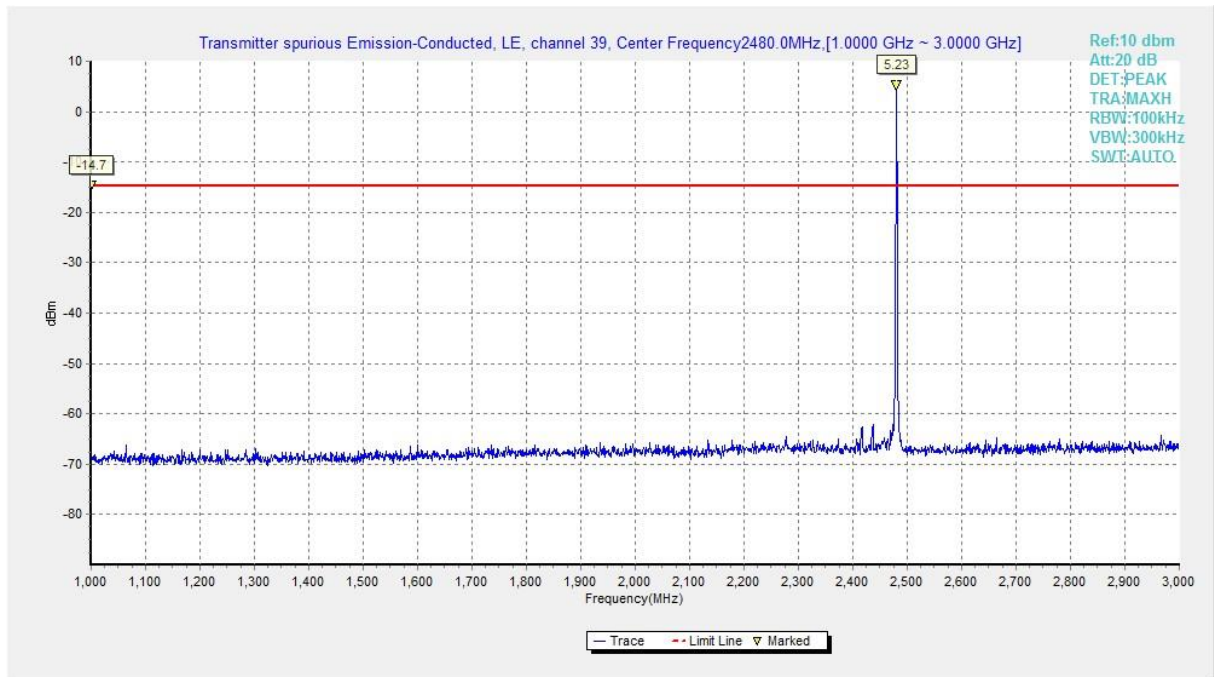


Fig.43 Conducted Spurious Emission (Ch39, 1 GHz-3 GHz), LE 2M



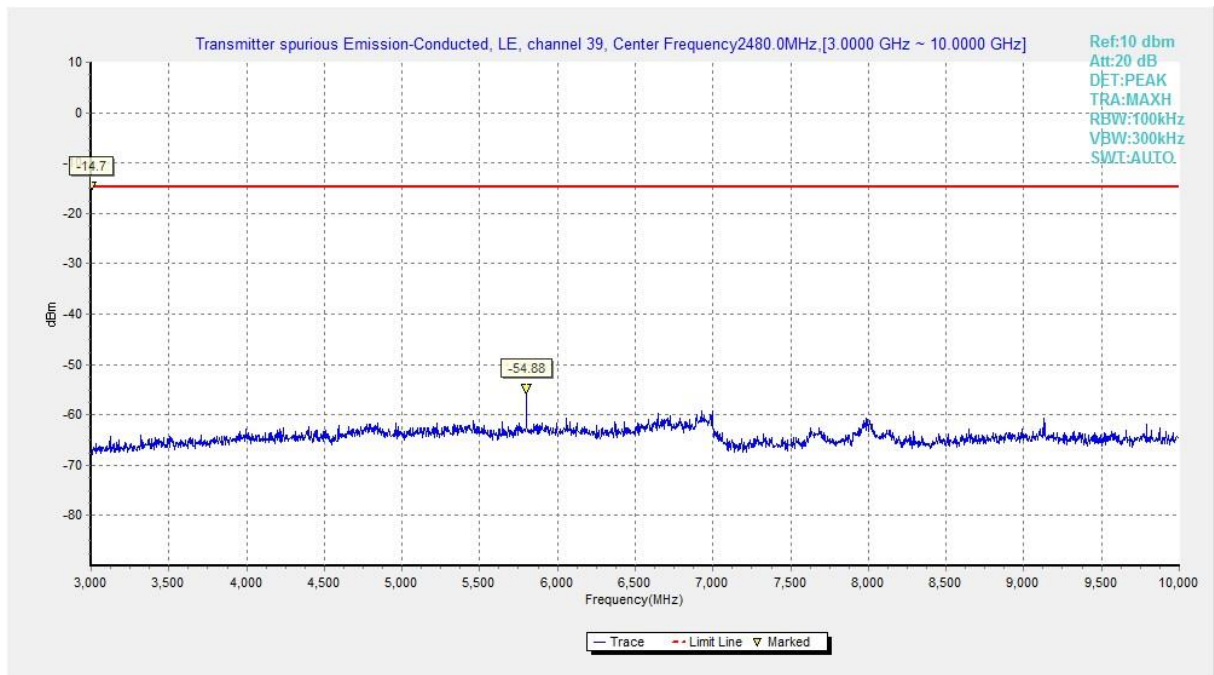



Fig.44 Conducted Spurious Emission (Ch39, 3 GHz-10 GHz), LE 2M

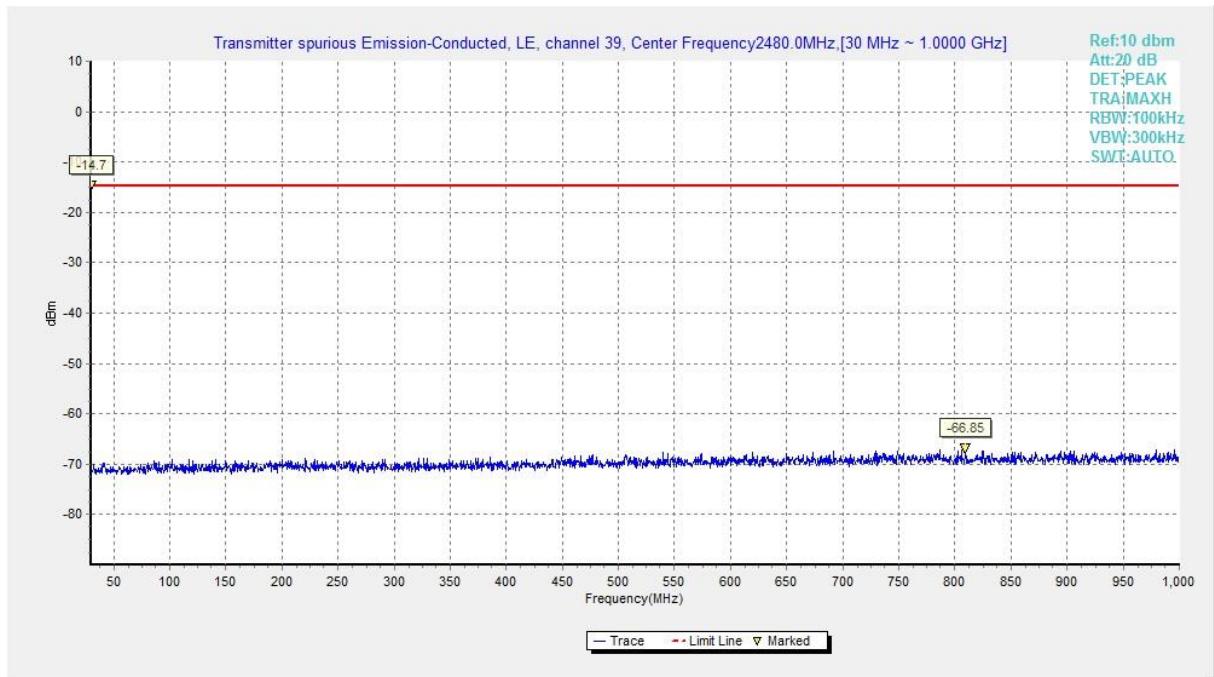


**Fig.45 Conducted Spurious Emission (All channels, 30 MHz-1 GHz), LE 2M**

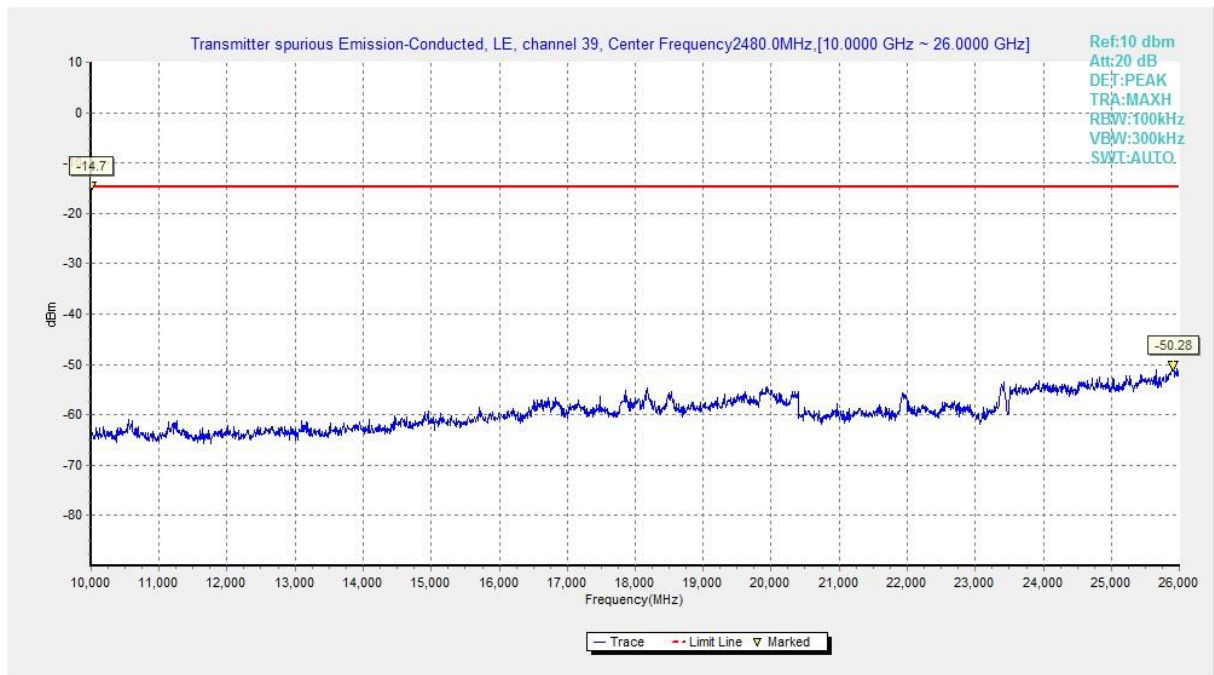


**Fig.46 Conducted Spurious Emission (All channels, 10 GHz-26 GHz), LE 2M**

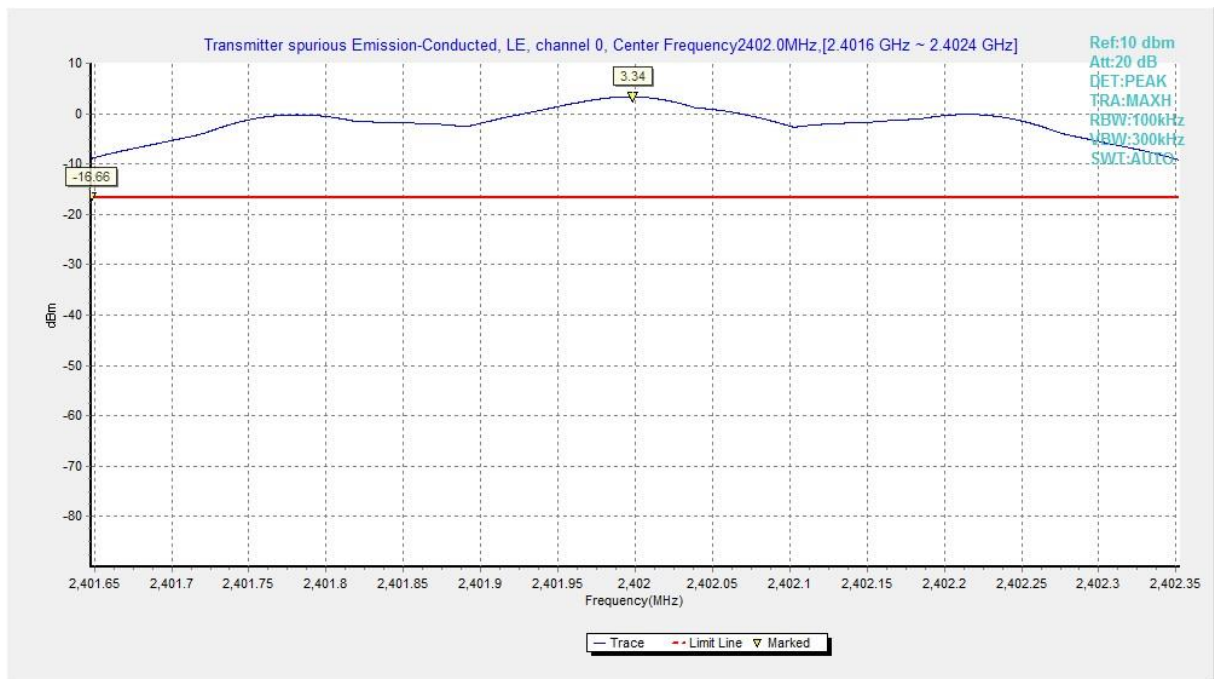


**Fig.47 Conducted Spurious Emission (Ch0, Center Frequency), LE Coded**

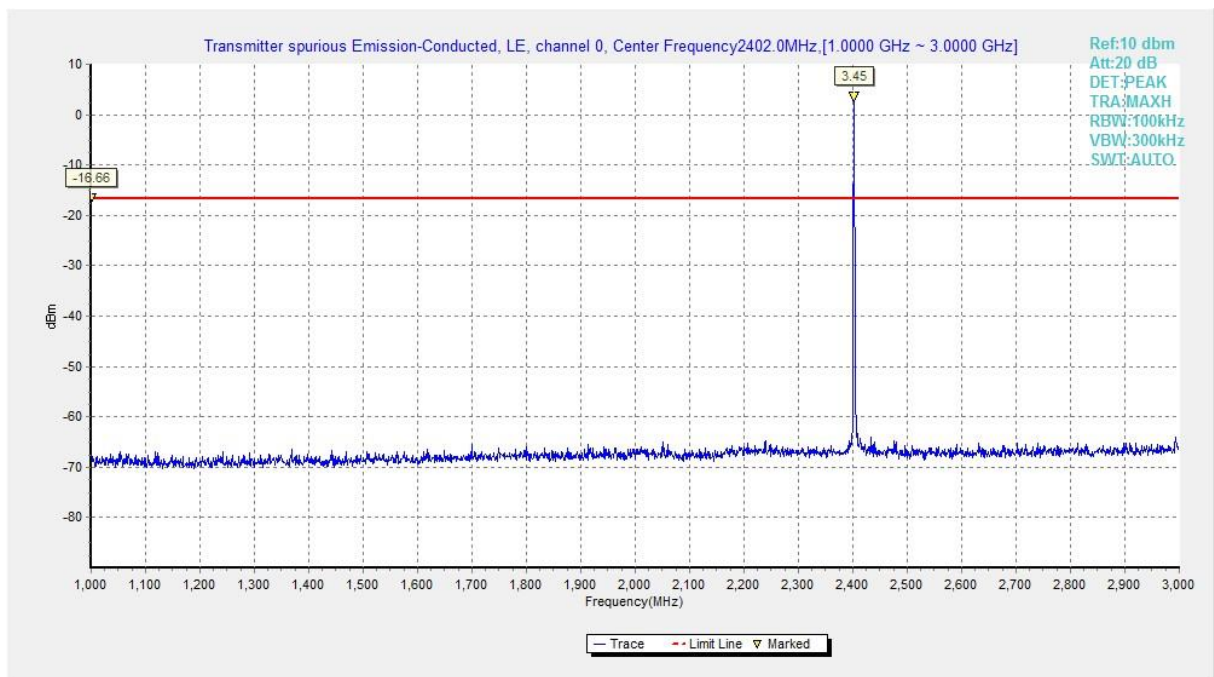


**Fig.48 Conducted Spurious Emission (Ch0, 1 GHz-3 GHz), LE Coded**

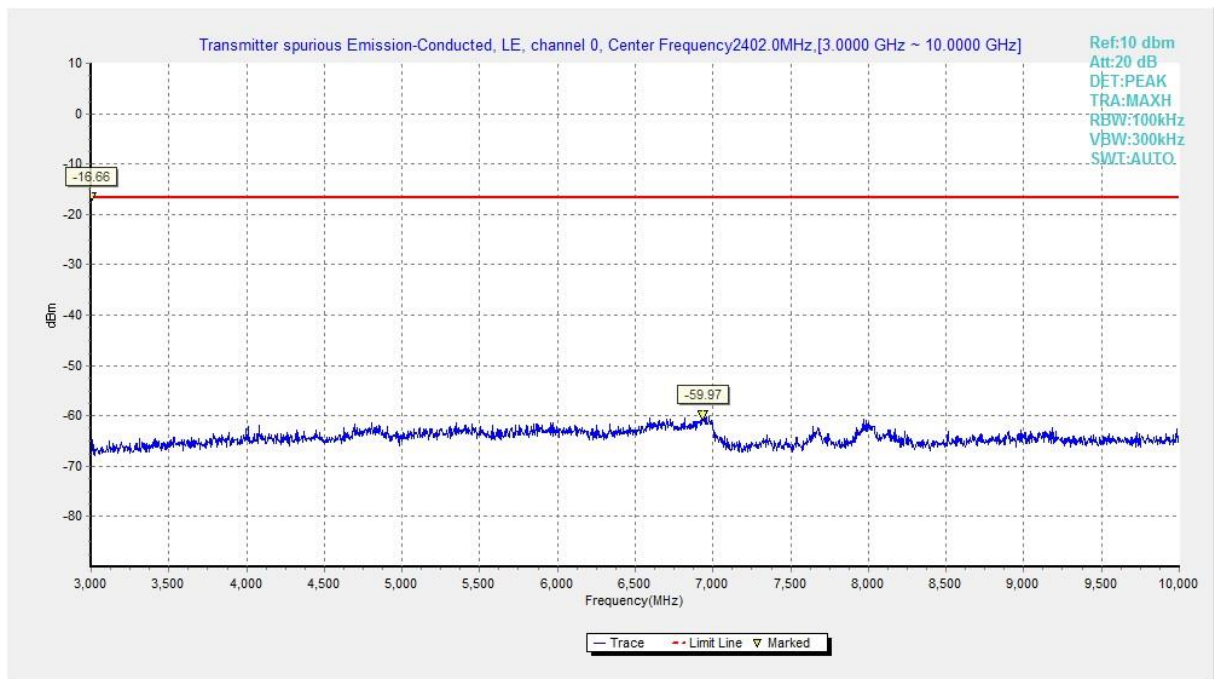


**Fig.49 Conducted Spurious Emission (Ch0, 3 GHz-10 GHz), LE Coded**

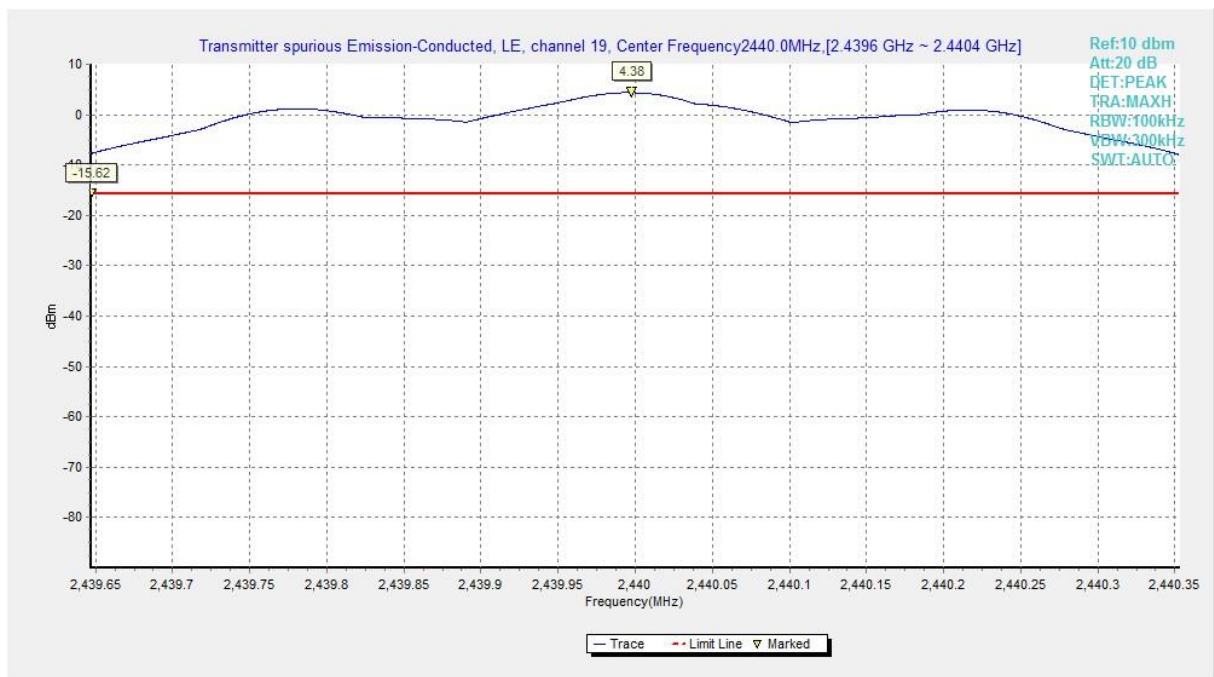


**Fig.50 Conducted Spurious Emission (Ch19, Center Frequency), LE Coded**

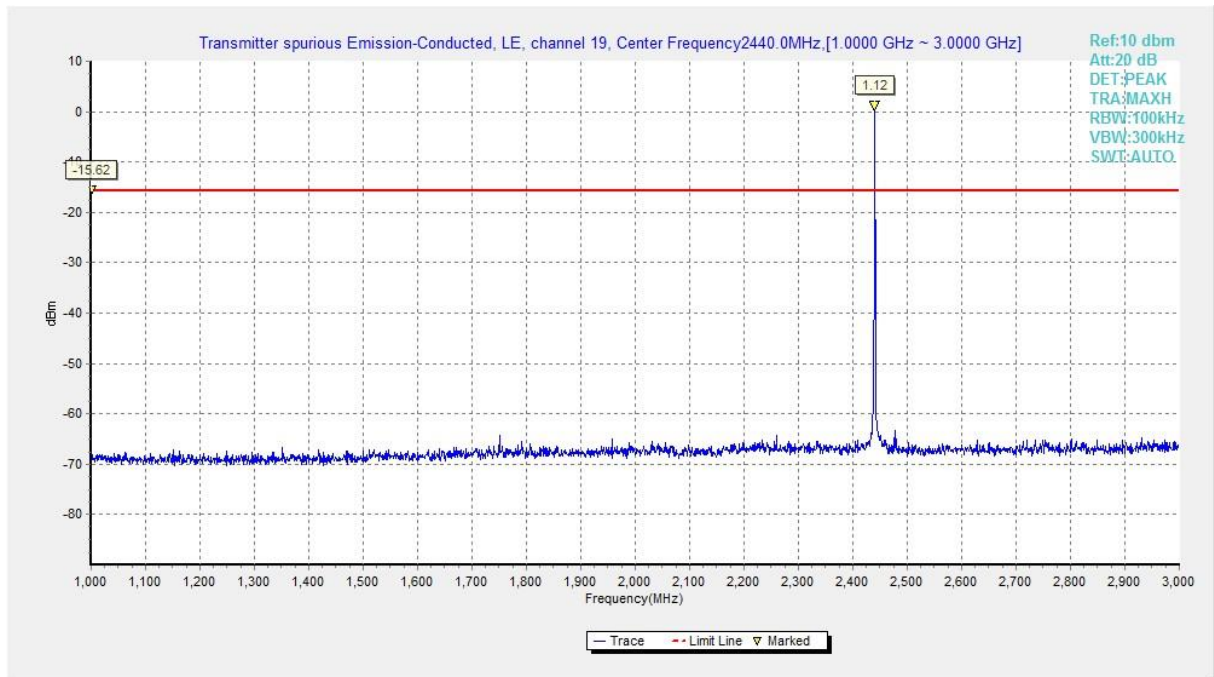


**Fig.51 Conducted Spurious Emission (Ch19, 1 GHz-3 GHz), LE Coded**

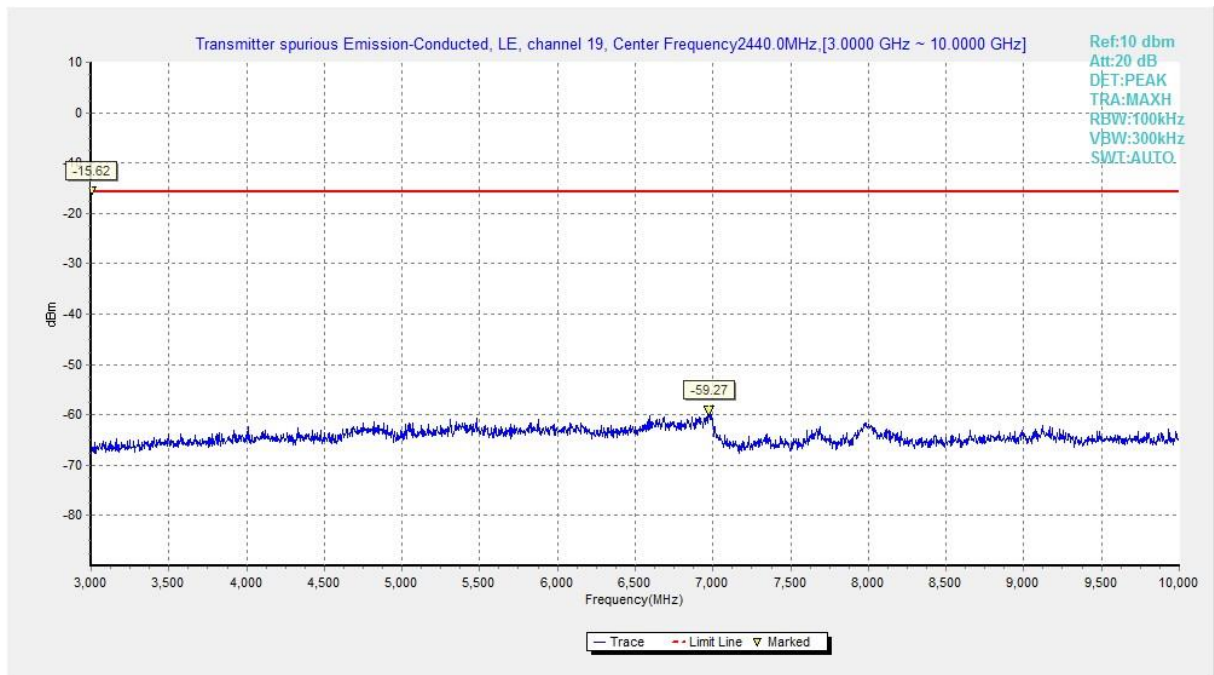


**Fig.52 Conducted Spurious Emission (Ch19, 3 GHz-10 GHz), LE Coded**

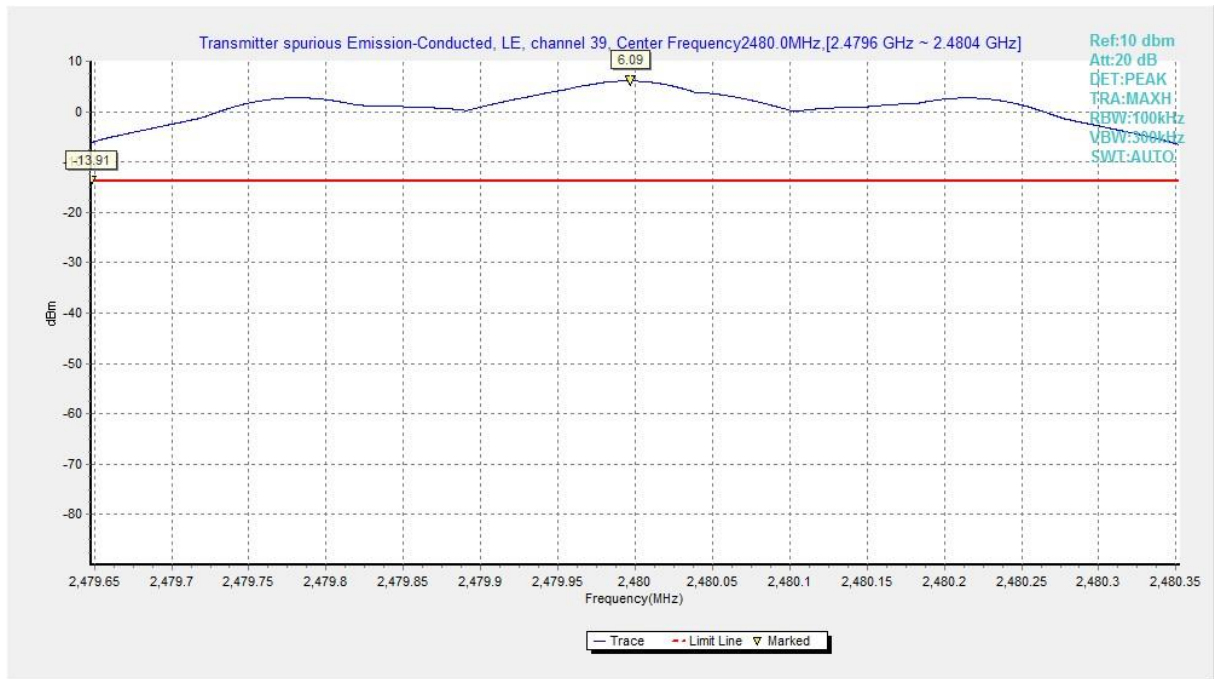


**Fig.53 Conducted Spurious Emission (Ch39, Center Frequency), LE Coded**

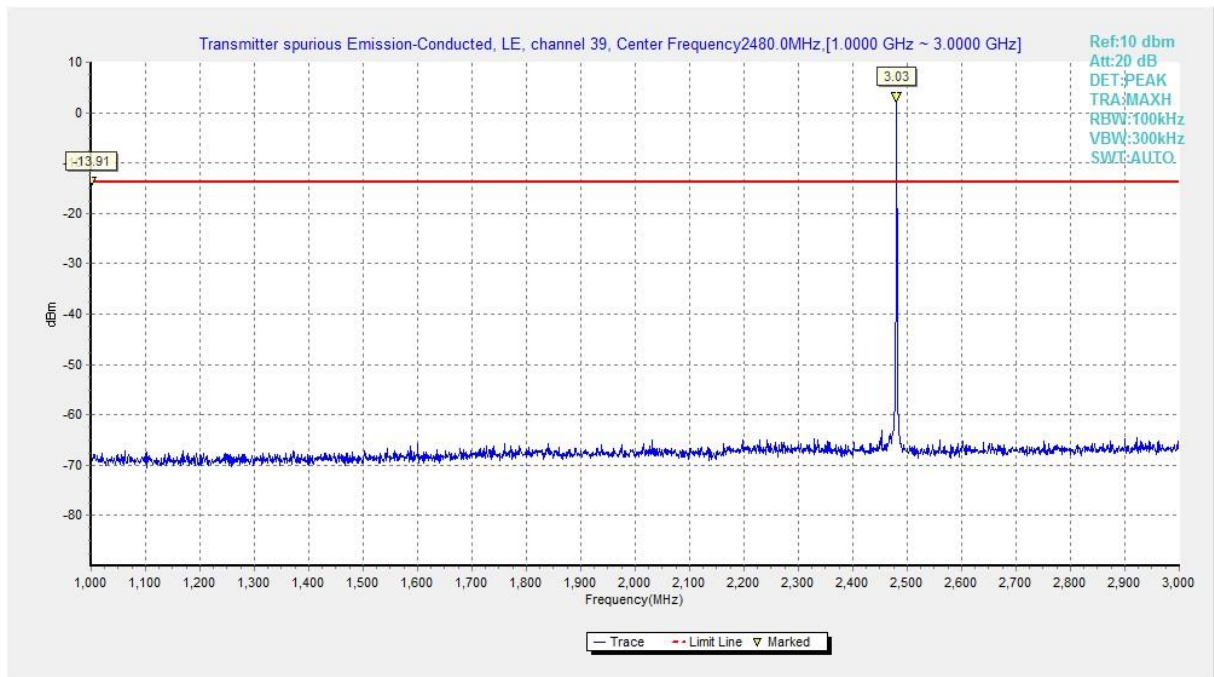


**Fig.54 Conducted Spurious Emission (Ch39, 1 GHz-3 GHz), LE Coded**

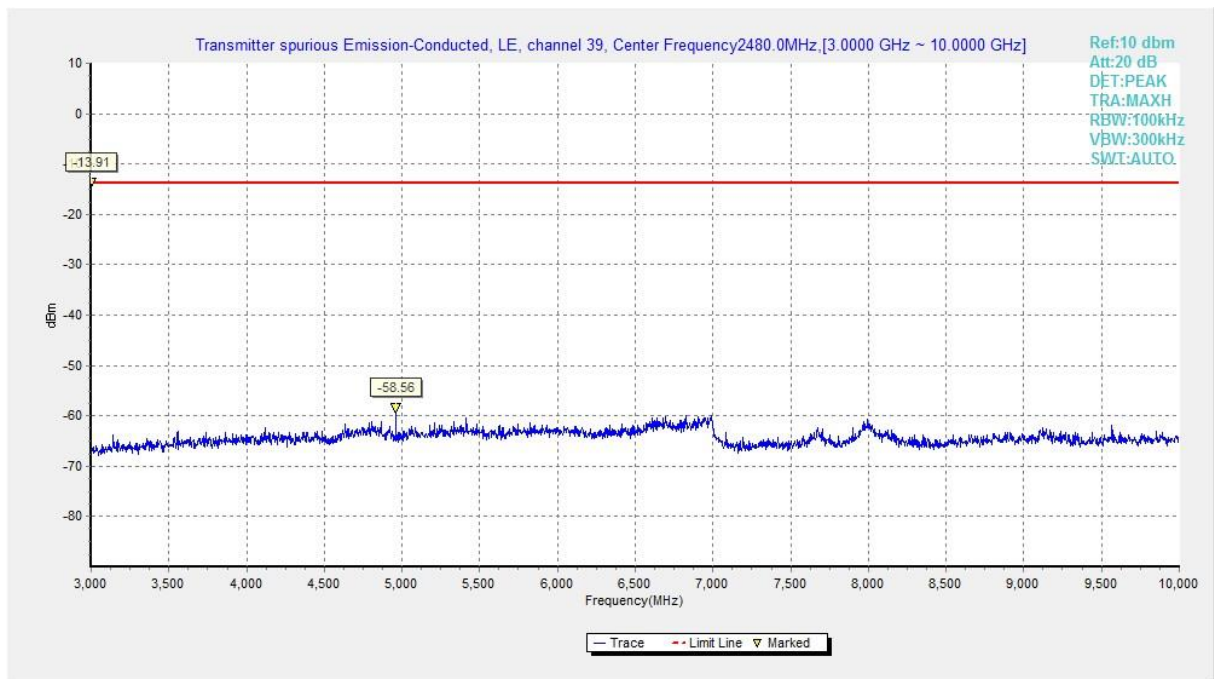

**Fig.55 Conducted Spurious Emission (Ch39, 3 GHz-10 GHz), LE Coded**

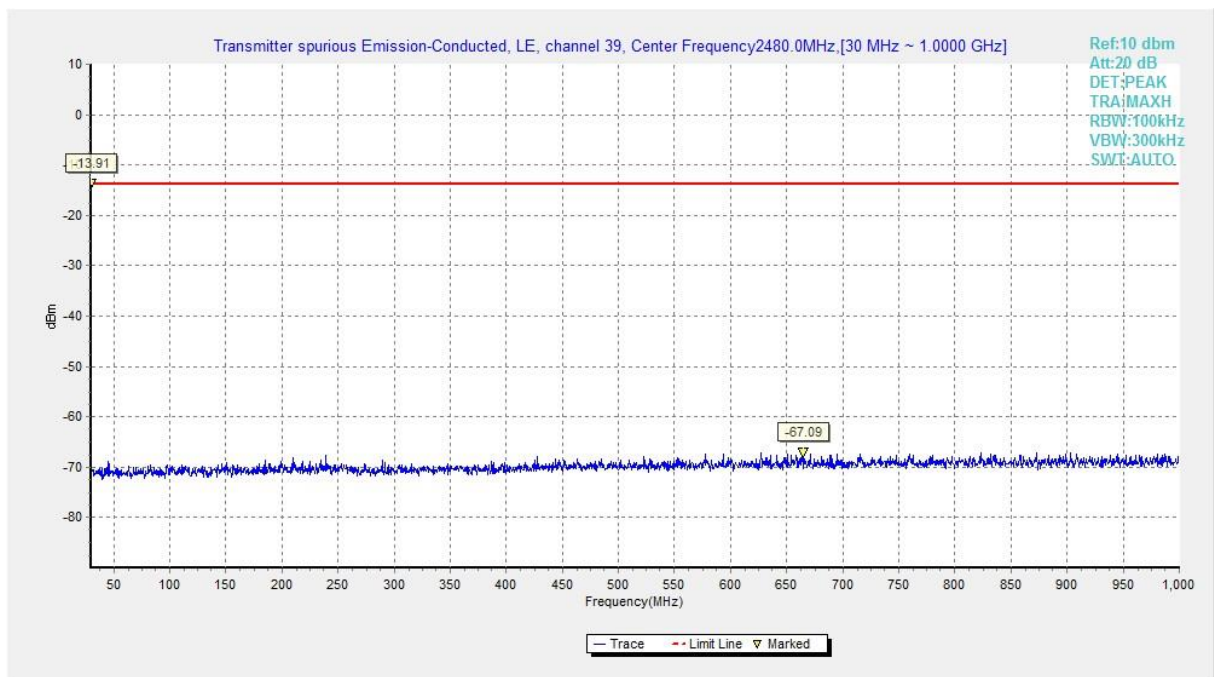

**Fig.56 Conducted Spurious Emission (All channels, 30 MHz-1 GHz), LE Coded**

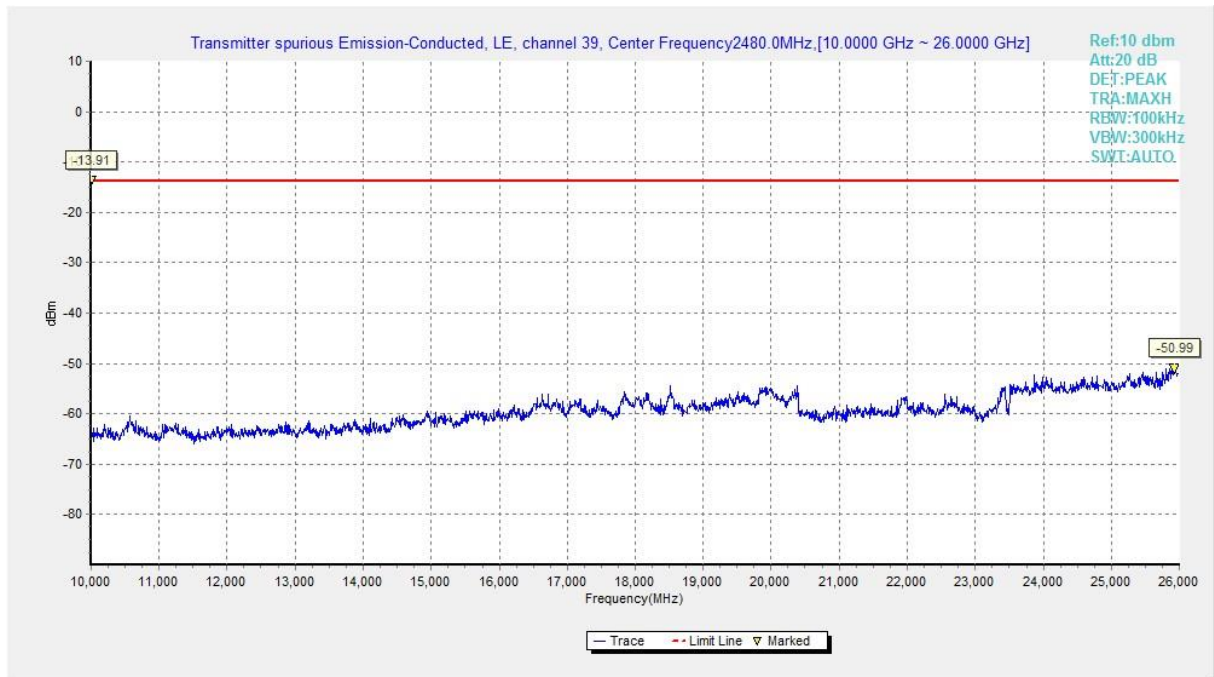

**Fig.57 Conducted Spurious Emission (All channels, 10 GHz-26 GHz), LE Coded**

## A.6 Transmitter Spurious Emission - Radiated

### Measurement Limit:

| Standard                               | Limit                        |
|----------------------------------------|------------------------------|
| FCC 47 CFR Part 15.247, 15.205, 15.209 | 20dB below peak output power |

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

### Limit in restricted band:

| Frequency of emission (MHz) | Field strength( $\mu$ V/m) | Measurement distance(meters) |
|-----------------------------|----------------------------|------------------------------|
| 0.009-0.490                 | 2400/F(kHz)                | 300                          |
| 0.490-1.705                 | 24000/F(kHz)               | 30                           |
| 1.705-30.0                  | 30                         | 30                           |
| 30-88                       | 100                        | 3                            |
| 88-216                      | 150                        | 3                            |
| 216-960                     | 200                        | 3                            |
| Above 960                   | 500                        | 3                            |

### Test Condition:

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

| Frequency of emission (MHz) | RBW/VBW       | Sweep Time(s) |
|-----------------------------|---------------|---------------|
| 30-1000                     | 120kHz/300kHz | 5             |
| 1000-4000                   | 1MHz/3MHz     | 15            |
| 4000-18000                  | 1MHz/3MHz     | 40            |
| 18000-26500                 | 1MHz/3MHz     | 20            |

**Note:** According to the performance evaluation, the radiated emission margin of EUT is over 20dB in the band from 9kHz to 30MHz. Therefore, the measurement starts from 30MHz to tenth harmonic. The measurement results include the horizontal polarization and vertical polarization measurements.

**Measurement Results:**

| Mode     | Channel               | Frequency Range     | Test Results | Conclusion |
|----------|-----------------------|---------------------|--------------|------------|
| LE 1M    | 0                     | 1 GHz ~3 GHz        | Fig.58       | <b>P</b>   |
|          |                       | 3 GHz ~18 GHz       | Fig.59       | <b>P</b>   |
|          | 19                    | 1 GHz ~3 GHz        | Fig.60       | <b>P</b>   |
|          |                       | 3 GHz ~18 GHz       | Fig.61       | <b>P</b>   |
|          | 39                    | 1 GHz ~3 GHz        | Fig.62       | <b>P</b>   |
|          |                       | 3 GHz ~18 GHz       | Fig.63       | <b>P</b>   |
|          | Restricted Band(CH0)  | 2.38 GHz ~ 2.45 GHz | Fig.64       | <b>P</b>   |
|          | Restricted Band(CH39) | 2.45 GHz ~ 2.5 GHz  | Fig.65       | <b>P</b>   |
|          | All channels          | 9 kHz ~30 MHz       | Fig.66       | <b>P</b>   |
|          |                       | 30 MHz ~1 GHz       | Fig.67       | <b>P</b>   |
|          |                       | 1 GHz ~18 GHz       | Fig.68       | <b>P</b>   |
| LE 2M    | 0                     | 1 GHz ~3 GHz        | Fig.69       | <b>P</b>   |
|          |                       | 3 GHz ~18 GHz       | Fig.70       | <b>P</b>   |
|          | 19                    | 1 GHz ~3 GHz        | Fig.71       | <b>P</b>   |
|          |                       | 3 GHz ~18 GHz       | Fig.72       | <b>P</b>   |
|          | 39                    | 1 GHz ~3 GHz        | Fig.73       | <b>P</b>   |
|          |                       | 3 GHz ~18 GHz       | Fig.74       | <b>P</b>   |
|          | Restricted Band(CH0)  | 2.38 GHz ~ 2.45 GHz | Fig.75       | <b>P</b>   |
|          | Restricted Band(CH39) | 2.45 GHz ~ 2.5 GHz  | Fig.76       | <b>P</b>   |
|          | All channels          | 9 kHz ~30 MHz       | Fig.77       | <b>P</b>   |
|          |                       | 30 MHz ~1 GHz       | Fig.78       | <b>P</b>   |
|          |                       | 1 GHz ~18 GHz       | Fig.79       | <b>P</b>   |
| LE Coded | 0                     | 1 GHz ~3 GHz        | Fig.80       | <b>P</b>   |
|          |                       | 3 GHz ~18 GHz       | Fig.81       | <b>P</b>   |
|          | 19                    | 1 GHz ~3 GHz        | Fig.82       | <b>P</b>   |
|          |                       | 3 GHz ~18 GHz       | Fig.83       | <b>P</b>   |
|          | 39                    | 1 GHz ~3 GHz        | Fig.84       | <b>P</b>   |
|          |                       | 3 GHz ~18 GHz       | Fig.85       | <b>P</b>   |
|          | Restricted Band(CH0)  | 2.38 GHz ~ 2.45 GHz | Fig.86       | <b>P</b>   |
|          | Restricted Band(CH39) | 2.45 GHz ~ 2.5 GHz  | Fig.87       | <b>P</b>   |
|          | All channels          | 9 kHz ~30 MHz       | Fig.88       | <b>P</b>   |
|          |                       | 30 MHz ~1 GHz       | Fig.89       | <b>P</b>   |
|          |                       | 1 GHz ~18 GHz       | Fig.90       | <b>P</b>   |

### Worst Case Result

LE 1M:

GFSK CH0 (1-18GHz)

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol | Corr. (dB) |
|-----------------|------------------|------------------|----------------|-------------|-----|------------|
| 12072.5000      | 46.81            | ---              | 74.00          | 27.19       | H   | 7.3        |
| 13325.0000      | 47.18            | ---              | 74.00          | 26.82       | V   | 8.9        |
| 15556.5000      | 48.72            | ---              | 74.00          | 25.28       | V   | 11.8       |
| 14490.0000      | 49.40            | ---              | 74.00          | 24.60       | H   | 11.4       |
| 16565.0000      | 50.59            | ---              | 74.00          | 23.41       | H   | 14.8       |
| 17930.0000      | 51.66            | ---              | 74.00          | 22.34       | V   | 16.1       |
| 11635.5000      | ---              | 37.36            | 54.00          | 16.64       | V   | 6.9        |
| 12523.5000      | ---              | 37.47            | 54.00          | 16.53       | H   | 8.0        |
| 13288.5000      | ---              | 38.13            | 54.00          | 15.87       | V   | 8.9        |
| 14884.5000      | ---              | 39.06            | 54.00          | 14.94       | V   | 11.1       |
| 16683.0000      | ---              | 41.30            | 54.00          | 12.70       | V   | 14.9       |
| 17926.0000      | ---              | 42.50            | 54.00          | 11.50       | H   | 16.1       |

GFSK CH19 (1-18GHz)

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol | Corr. (dB) |
|-----------------|------------------|------------------|----------------|-------------|-----|------------|
| 10640.0000      | 45.60            | ---              | 74.00          | 28.40       | H   | 4.9        |
| 11711.0000      | 46.88            | ---              | 74.00          | 27.12       | V   | 6.9        |
| 12932.5000      | 46.97            | ---              | 74.00          | 27.03       | V   | 8.6        |
| 14511.5000      | 49.18            | ---              | 74.00          | 24.82       | H   | 11.5       |
| 16120.0000      | 50.89            | ---              | 74.00          | 23.11       | V   | 14.1       |
| 17893.0000      | 51.56            | ---              | 74.00          | 22.44       | H   | 16.2       |
| 11699.0000      | ---              | 37.57            | 54.00          | 16.43       | V   | 7.0        |
| 12505.5000      | ---              | 37.37            | 54.00          | 16.63       | V   | 8.0        |
| 13310.0000      | ---              | 37.82            | 54.00          | 16.18       | V   | 9.0        |
| 14517.5000      | ---              | 39.99            | 54.00          | 14.01       | V   | 11.5       |
| 16748.0000      | ---              | 41.45            | 54.00          | 12.55       | H   | 14.9       |
| 17913.5000      | ---              | 42.40            | 54.00          | 11.60       | V   | 16.3       |

**GFSK CH39 (1-18GHz)**

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol | Corr. (dB) |
|-----------------|------------------|------------------|----------------|-------------|-----|------------|
| 10835.5000      | 46.08            | ---              | 74.00          | 27.92       | V   | 5.3        |
| 11855.5000      | 46.95            | ---              | 74.00          | 27.05       | H   | 6.8        |
| 13073.5000      | 47.01            | ---              | 74.00          | 26.99       | V   | 8.4        |
| 14496.0000      | 48.63            | ---              | 74.00          | 25.37       | V   | 11.4       |
| 16225.0000      | 50.65            | ---              | 74.00          | 23.35       | V   | 14.3       |
| 17914.0000      | 52.25            | ---              | 74.00          | 21.75       | H   | 16.3       |
| 10585.5000      | ---              | 36.06            | 54.00          | 17.94       | H   | 5.0        |
| 12034.0000      | ---              | 37.46            | 54.00          | 16.54       | V   | 7.2        |
| 13312.0000      | ---              | 37.65            | 54.00          | 16.35       | V   | 8.9        |
| 14519.5000      | ---              | 39.43            | 54.00          | 14.57       | H   | 11.5       |
| 16689.0000      | ---              | 41.41            | 54.00          | 12.59       | H   | 14.9       |
| 17916.5000      | ---              | 41.87            | 54.00          | 12.13       | H   | 16.2       |

**LE 2M:**
**GFSK CH0 (1-18GHz)**

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol | Corr. (dB) |
|-----------------|------------------|------------------|----------------|-------------|-----|------------|
| 10235.5000      | 46.10            | ---              | 74.00          | 27.90       | H   | 5.2        |
| 11663.0000      | 47.17            | ---              | 74.00          | 26.83       | H   | 6.9        |
| 12793.5000      | 47.71            | ---              | 74.00          | 26.29       | V   | 7.8        |
| 14458.5000      | 48.73            | ---              | 74.00          | 25.27       | V   | 11.2       |
| 16352.5000      | 50.52            | ---              | 74.00          | 23.48       | H   | 14.4       |
| 17873.5000      | 50.98            | ---              | 74.00          | 23.02       | V   | 16.3       |
| 10458.5000      | ---              | 36.21            | 54.00          | 17.79       | H   | 5.0        |
| 11899.5000      | ---              | 36.76            | 54.00          | 17.24       | V   | 7.1        |
| 13309.5000      | ---              | 37.99            | 54.00          | 16.01       | V   | 9.0        |
| 14631.0000      | ---              | 39.85            | 54.00          | 14.15       | V   | 11.3       |
| 16564.0000      | ---              | 41.50            | 54.00          | 12.50       | V   | 14.8       |
| 17957.5000      | ---              | 41.97            | 54.00          | 12.03       | V   | 16.1       |

**GFSK CH19 (1-18GHz)**

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol | Corr. (dB) |
|-----------------|------------------|------------------|----------------|-------------|-----|------------|
| 10181.0000      | 45.34            | ---              | 74.00          | 28.66       | V   | 5.1        |
| 11685.5000      | 46.60            | ---              | 74.00          | 27.40       | V   | 7.1        |
| 13376.5000      | 47.67            | ---              | 74.00          | 26.33       | V   | 8.5        |
| 14875.0000      | 48.91            | ---              | 74.00          | 25.09       | H   | 11.0       |
| 16382.5000      | 50.75            | ---              | 74.00          | 23.25       | V   | 14.0       |
| 17881.5000      | 51.69            | ---              | 74.00          | 22.31       | V   | 16.2       |
| 10596.5000      | ---              | 36.26            | 54.00          | 17.74       | H   | 4.9        |
| 12110.0000      | ---              | 37.33            | 54.00          | 16.67       | V   | 7.3        |
| 13308.0000      | ---              | 37.66            | 54.00          | 16.34       | H   | 9.0        |
| 14500.0000      | ---              | 39.11            | 54.00          | 14.89       | V   | 11.5       |
| 16684.5000      | ---              | 41.68            | 54.00          | 12.32       | H   | 14.9       |
| 17907.0000      | ---              | 42.02            | 54.00          | 11.98       | H   | 16.3       |

**GFSK CH39 (1-18GHz)**

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol | Corr. (dB) |
|-----------------|------------------|------------------|----------------|-------------|-----|------------|
| 10641.0000      | 45.32            | ---              | 74.00          | 28.68       | H   | 4.9        |
| 13295.0000      | 47.38            | ---              | 74.00          | 26.62       | V   | 8.9        |
| 11685.5000      | 47.42            | ---              | 74.00          | 26.58       | V   | 7.1        |
| 14498.5000      | 48.73            | ---              | 74.00          | 25.27       | H   | 11.4       |
| 16315.0000      | 50.87            | ---              | 74.00          | 23.13       | V   | 14.3       |
| 17899.5000      | 51.57            | ---              | 74.00          | 22.43       | H   | 16.3       |
| 10982.0000      | ---              | 35.97            | 54.00          | 18.03       | V   | 5.1        |
| 12101.0000      | ---              | 37.15            | 54.00          | 16.85       | V   | 7.4        |
| 13279.5000      | ---              | 37.94            | 54.00          | 16.06       | V   | 8.8        |
| 14506.5000      | ---              | 39.14            | 54.00          | 14.86       | H   | 11.5       |
| 16316.0000      | ---              | 41.37            | 54.00          | 12.63       | V   | 14.3       |
| 17899.0000      | ---              | 42.24            | 54.00          | 11.76       | H   | 16.3       |

LE Coded:

GFSK CH0 (1-18GHz)

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol | Corr. (dB) |
|-----------------|------------------|------------------|----------------|-------------|-----|------------|
| 10450.00        | 45.93            | ---              | 74.00          | 28.07       | V   | 5          |
| 12114.00        | 47.14            | ---              | 74.00          | 26.86       | V   | 7.3        |
| 13221.00        | 47.67            | ---              | 74.00          | 26.33       | V   | 8.6        |
| 14472.50        | 49.72            | ---              | 74.00          | 24.28       | V   | 11.3       |
| 17923.50        | 51.18            | ---              | 74.00          | 22.82       | V   | 16.2       |
| 16871.50        | 51.32            | ---              | 74.00          | 22.68       | V   | 14.9       |
| 10427.50        | ---              | 36.53            | 54.00          | 17.47       | V   | 5.1        |
| 11708.00        | ---              | 37.34            | 54.00          | 16.66       | H   | 6.9        |
| 12934.50        | ---              | 37.64            | 54.00          | 16.36       | V   | 8.6        |
| 14488.50        | ---              | 39.67            | 54.00          | 14.33       | V   | 11.3       |
| 16684.00        | ---              | 41.68            | 54.00          | 12.32       | V   | 14.9       |
| 17908.00        | ---              | 41.81            | 54.00          | 12.19       | V   | 16.3       |

GFSK CH19 (1-18GHz)

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol | Corr. (dB) |
|-----------------|------------------|------------------|----------------|-------------|-----|------------|
| 11549.50        | 46.40            | ---              | 74.00          | 27.60       | V   | 6.4        |
| 12332.50        | 46.89            | ---              | 74.00          | 27.11       | V   | 7.3        |
| 13238.00        | 47.28            | ---              | 74.00          | 26.72       | V   | 8.7        |
| 14504.50        | 49.06            | ---              | 74.00          | 24.94       | H   | 11.5       |
| 16733.00        | 51.17            | ---              | 74.00          | 22.83       | H   | 14.9       |
| 17833.50        | 51.40            | ---              | 74.00          | 22.60       | V   | 16.3       |
| 11405.50        | ---              | 36.60            | 54.00          | 17.40       | V   | 5.6        |
| 12541.00        | ---              | 37.87            | 54.00          | 16.13       | V   | 8.1        |
| 13292.00        | ---              | 38.10            | 54.00          | 15.90       | H   | 8.9        |
| 14544.00        | ---              | 39.57            | 54.00          | 14.43       | H   | 11.4       |
| 16218.00        | ---              | 40.96            | 54.00          | 13.04       | V   | 14.3       |
| 17923.50        | ---              | 42.31            | 54.00          | 11.69       | H   | 16.2       |

**GFSK CH39 (1-18GHz)**

| Frequency (MHz) | MaxPeak (dBuV/m) | Average (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Pol | Corr. (dB) |
|-----------------|------------------|------------------|----------------|-------------|-----|------------|
| 11658.00        | 46.92            | ---              | 74.00          | 27.08       | H   | 6.9        |
| 12526.50        | 47.68            | ---              | 74.00          | 26.32       | H   | 8          |
| 13309.00        | 48.42            | ---              | 74.00          | 25.58       | H   | 9          |
| 15251.00        | 48.67            | ---              | 74.00          | 25.33       | H   | 11.2       |
| 17953.50        | 51.91            | ---              | 74.00          | 22.09       | V   | 16.1       |
| 16930.50        | 52.31            | ---              | 74.00          | 21.69       | H   | 14.9       |
| 12316.00        | ---              | 37.48            | 54.00          | 16.52       | V   | 7.2        |
| 12916.50        | ---              | 37.71            | 54.00          | 16.29       | V   | 8.6        |
| 14503.00        | ---              | 39.53            | 54.00          | 14.47       | V   | 11.5       |
| 15883.00        | ---              | 39.89            | 54.00          | 14.11       | H   | 13.1       |
| 16645.00        | ---              | 41.36            | 54.00          | 12.64       | H   | 14.9       |
| 17897.00        | ---              | 42.15            | 54.00          | 11.85       | H   | 16.3       |

**Note:**


A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and Antenna Factor, the gain of the preamplifier, the cable loss.  $P_{Mea}$  is the field strength recorded from the instrument.

The measurement results are obtained as described below:


Result=  $P_{Mea}$  +Cable Loss +Antenna Factor-Gain of the preamplifier.

**See below for test graphs.**

**Conclusion: Pass**

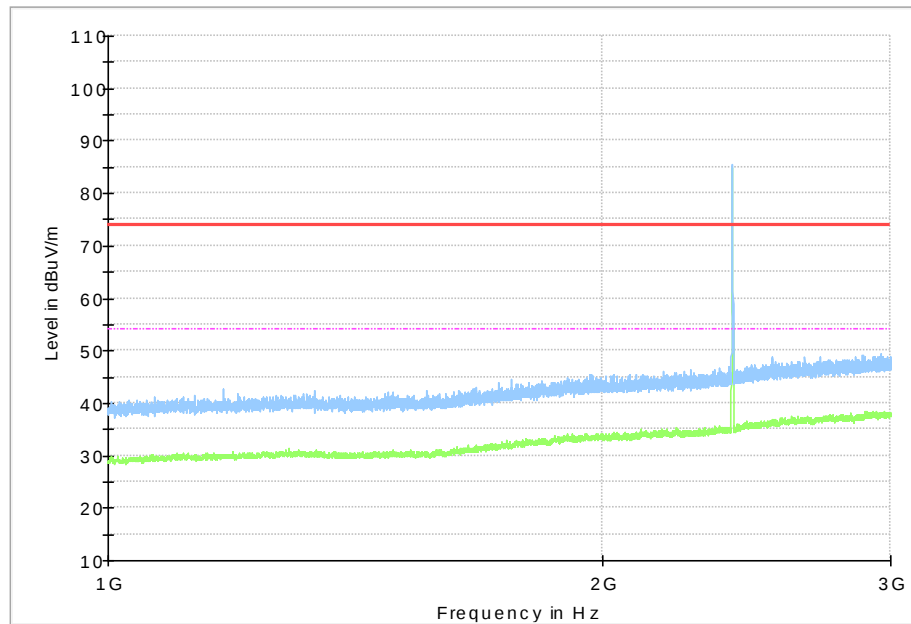

**Fig.58 Radiated Spurious Emission, LE 1M (GFSK, Ch0, 1 GHz ~3 GHz)**

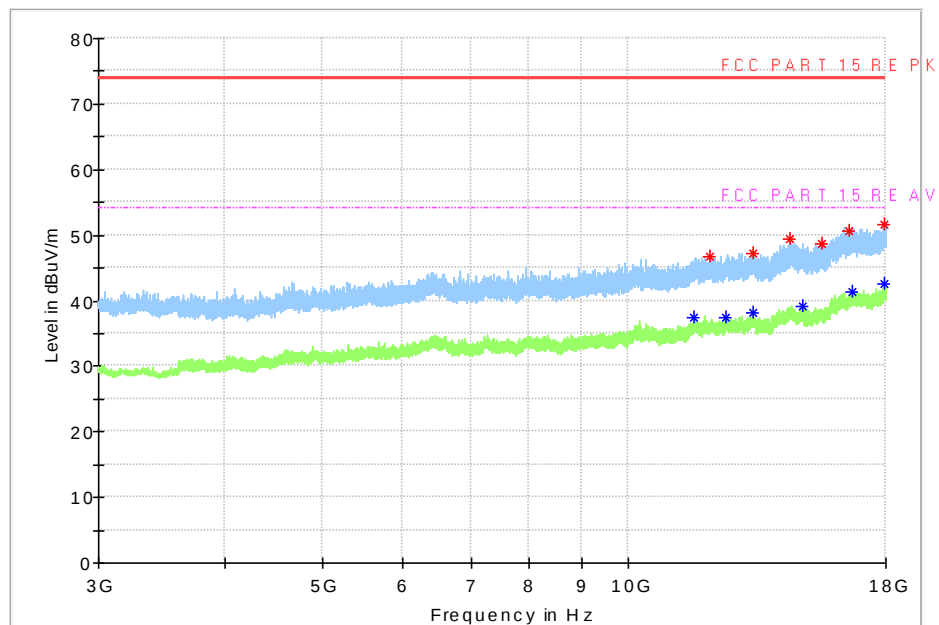

**Fig.59 Radiated Spurious Emission , LE 1M (GFSK, Ch0, 3 GHz ~18 GHz)**