


ICS-G101C Block Diagram

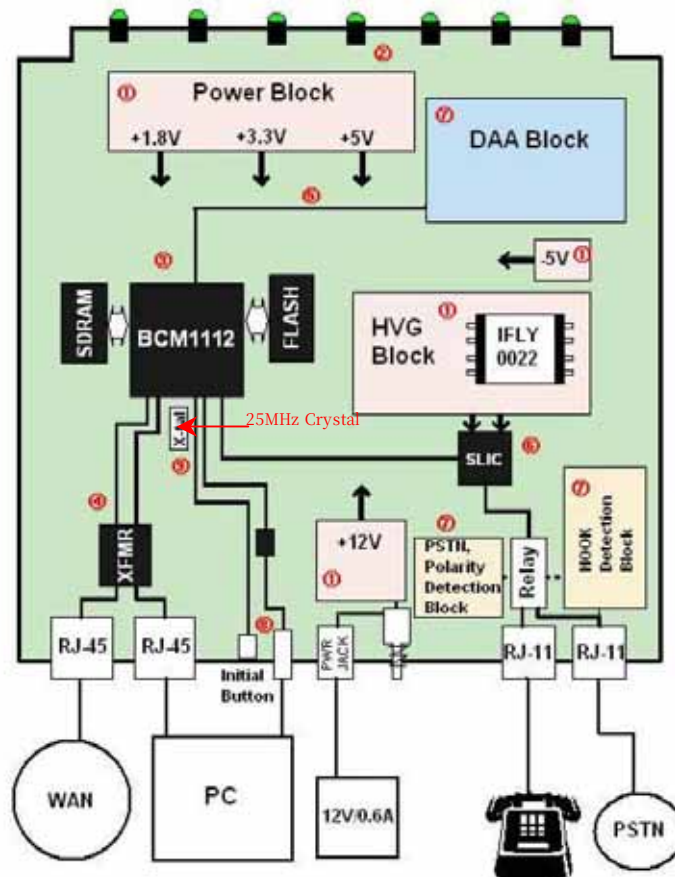

- ① Power Block : 1.8V, 3.3V, 5V, -5V, 12V, HVG Block(-24V, -75V)
- ② LED : Power, Ready, WAN, PC, PPP, TEL, PSTN
- ③ CPU, Memory Block : EBI and Data Bus Connection
- ④ Ethernet Block : 10/100Base-T, Auto MDIX
- ⑤ DAA Connection
- ⑥ VoIP Block : ISL5586 (Intersil)
- ⑦ DAA Block : PSTN Backup and Detections
- ⑧ Console and Initial Button: Serial Console and Factory Default
- ⑨ X-Tal : 25MHz Crystal