

## Electromagnetic Emission

# FCC MEASUREMENT REPORT

## **CERTIFICATION OF COMPLIANCE**

## FCC Part 15 Certification Measurement

<b>PRODUCT</b>	: TFT LCD Monitor
<b>MODEL/TYPE NO</b>	: M-17X
<b>FCC ID</b>	: R3OM-17X
<b>APPLICANT / ADDRESS</b>	: MTN INC. #San 131-7 Donghwa Ri Munmak Won Joo City, Korea Attn.: Hyone Goo Ji / Assistant Manager of Production Dept.
<b>FCC CLASSIFICATION</b>	: Class B personal computers and peripherals
<b>FCC RULE PART(S)</b>	: FCC Part 15 Subpart B
<b>FCC PROCEDURE</b>	: Certification
<b>TRADE NAME</b>	: MTN
<b>TEST REPORT No.</b>	: E04.0527.FCC.294N
<b>DATES OF TEST</b>	: May 24 ~ 26, 2004
<b>DATES OF ISSUE</b>	: May 27, 2004
<b>TEST LABORATORY</b>	: ETL Inc (FCC Registration Number: 95422) #584 Sangwhal-ri, Kanam-myon, Yaju-kun, Kyunggi-do, 469-885, Korea

This TFT LCD Monitor, Model M-17X has been tested in accordance with the measurement procedures specified in ANSI C63.4-1992 at the ETL/EMC Test Laboratory and has been shown to be complied with the electromagnetic radiated emission limits specified in FCC Rule Part15 Subpart B:

I attest to the accuracy of data. All measurement here in was performed by me or was made under my supervision and is correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

The results of testing in this report apply to the product/system, which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Yohan, Park

Yo Han, Park / Chief Engineer

ETL Inc.

#584 Sangwhal-ri, Kanam-myon, Yaju-kun,  
Kyounggi-do, 469-885, Korea



## Table of Contents

### FCC Measurement Report

- 1. Introduction**
- 2. Product Information**
- 3. Description of Tests**
- 4. Test Condition**
- 5. Test Results**
  - 5.1 Summary of Test Results**
  - 5.2 Conducted Emissions Measurement**
  - 5.3 Radiated Emissions Measurement**
- 6. Sample Calculations**
- 7. List of test Equipment used for Measurement**

### Appendix A. FCC ID Label and Location

### Appendix B. Test Setup Photographs

### Appendix C. External Photographs

### Appendix D. Internal Photographs

### Appendix E. Block Diagram

### Appendix F. User's Manual

### Appendix G. Schematics

## FCC MEASUREMENT REPORT

**Scope** – Measurement and determination of electromagnetic emission(EME) of radio frequency devices including intentional radiators and/or unintentional radiators for compliance with the technical rules and regulations of the U.S Federal Communications Commission(FCC)

### General Information

**Applicant Name :**

**Address :** #San 131-7 Dongwha Ri Munmak Won Joo City, Korea

**Attention :** Hyone Goo, Ji / Assistant Manager of Production Dept.

- **EUT Type:** TFT LCD Monitor
- **Model Number:** M-17X
- **FCC ID:** R3OM-17X
- **S/N:** N/A
- **FCC Rule Part(s):** FCC Part 15 Subpart B
- **Test Procedure:** ANSI C63.4-1992
- **FCC Classification:** Class B personal computers and peripherals
- **Dates of Tests:** May 24 ~ 26, 2004
- **Place of Tests:** ETL Inc  
EMC Testing Lab (FCC Registration Number: 95422)  
584, Sangwhal-Ri, Kanam-Myun, Yoju-Kun,  
Kyounggi-Do, Korea  
Tel: (031) 885-0072      Fax: (031) 885-0074
- **Test Report No.:** E04.0527.FCC.294N



# FCC TEST REPORT



## 1. INTRODUCTION

---

The measurement test for radiated and conducted emission test were conducted at the open area test site of E-RAE Testing Laboratory Inc. facility located at 584, Sangwhal-ri, Kanam-myun, Youju-kun, Kyounggi-do, Korea. The site is constructed in conformance with the requirements of the ANSI C63.4-1992 and CISPR Publication 16. The ETL has site descriptions on file with the FCC for 3 and 10meter site configurations. Detailed description of test facility was found to be in compliance with the requirements of Section 2.948 FCC Rules according to the ANSI C63.4-1992 and registered to the Federal Communications Commission (Registration Number: 95422).

The measurement procedure described in American National Standard for Method of Measurement of Radio-Noise Emission from Low-Voltage Electrical and Electronic Equipment in the Range of 9kHz to 40GHz (ANSI C.63.4-1992) was used in determining radiated and conducted emissions from the MTN INC., Model: M-17X

## 2. PRODUCT INFORMATION

### 2.1 Equipment Description

The Equipment Under Test (EUT) is the MTN INC. TFT LCD Monitor, M-17X

The EUT have three panel models.

One is SAMSUNG/ Model: LTM170EU-L11 and

Other is CHIMEI OPTOELECTRONICS/ Model: M170E5-L05 and LG.PHILIPS LCD/ Model: LM170E01 (A5)

### 2.2 General Specification

- Chassis Type : Metal & Plastic
- List of Each OSC. Or X-Tal. Freq. (>=1MHz) : X-Tal: 24.0MHz
- LCD Type : Active matrix color TFT LCD
- Viewable Area : 17" diagonal size
- Pixel Pitch : 0.264mm
- Brightness : 250cd/ m<sup>2</sup>
- Contrast Ratio : 500:1
- Viewing Angle (H/V) : 170 ° /170 °
- Response Speed : 25ms
- Interface : Dual (Analog & Digital)
- Horizontal Frequency : 30~80KHz
- Vertical : 60~75Hz
- Resolution : 1280 X 1024 @75Hz
- Input Video Signal : Analog RGB, DVI (Option)
- Input Connectors : 15 Pin D-Sub, DVI (Option)
- DDC : DDC 1/2B
- On Mode : 48 Watts (Max.)
- DPMS Mode : < 5 Watts

## 3. DESCRIPTION OF TESTS

### **3.1 Conducted Emission Measurement**

Conducted emissions measurements were made in accordance with § 12.2 in ANSI C63.4-1992 "Measurement of Information Technology Equipment ". The measurement were performed over the frequency range of 0.15MHz to 30MHz using a 50 /50uH LISN as the input transducer to a Spectrum Analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Peak" amplitude within a bandwidth of 10KHz or for "quasi-peak" within a bandwidth of 9KHz.

#### - Procedure of Test

The line-conducted facility is located inside a shielded room 1m X 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 1.5m away from the side wall of the shielded room. Two EMCO 3825/2 LISN are bonded to the shielded room. The EUT is powered from the EMCO LISN and the support equipment is powered from another EMCO LISN. Power to the LISNs are filtered by a noise cut power line filters. All electrical cables are shielded by braided tinned steel tubing with inner  $\phi$  1.2cm. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and these supply lines will be connected to the EMCO LISN. Non-inductive bundling to a 1m length shortened all interconnecting cables more than 1m. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the ESHS30 EMI Test Receiver to determine the frequency producing the max. emission from the EUT. The frequency producing max. level was reexamined using to set Quasi-Peak mode by manual, after scanned by automatic Peak mode from 0.15 to 30MHz. The bandwidth of the Spectrum Analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission.

## 3. DESCRIPTION OF TESTS

### 3.2 Radiated Emission Measurement

Radiated emission measurements were in accordance with § 12.2 in ANSI C63.4-1992 "Measurement of Information Technology Equipment ". The measurements were performed over the frequency range of 30MHz to 1GHz using antenna as the input transducer to a Spectrum analyzer or a Field Intensity Meter. The measurements were made with the detector set for "Quasi-peak" within a bandwidth of 120KHz.

#### - Procedure of Test

Preliminary measurements were made at 3 meter using broadband antennas, and spectrum analyzer to determined the frequency producing the max. emission in shielded room. Appropriate precaution was taken to ensure that all emission from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth and height with respect to the antenna were noted for each frequency found. The spectrum was scanned from 30 to 1000MHz using SchwarzBeck Log-Bicon antenna. Above 1GHz, linearly polarized double ridge horn antennas were used. Final measurements were made open site at 10-meters. The test equipment was placed on a wooden turntable. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. Each frequency found during pre-scan measurements was re-examined by manual. The detector function was set to CISPR Quasi-peak mode and the bandwidth of the receiver was set to 120kHz or 1MHz depending on the frequency of type of signal. The EUT, support equipment and interconnecting cables were re-configured to the set-up producing the max. emission for the frequency and were placed on top of a 0.8-meter high nonmetallic 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were re-arranged and manipulated to maximize each emission. The turntable containing the system was rotated; the antenna height was varied 1 to 4 meters and stopped at the azimuth or height producing the max. emission. Each emission was maximized by: varying the mode of operation to the EUT and/or support equipment and changing the polarity of the antenna, whichever determined the worst-case emission. Photographs of the worst-case emission can be seen in Photographs of the worst-case emission test setup can be seen in Appendix B.

## 4. TEST CONDITION

### 4.1 Test Configuration

The device was configured for testing in a typical fashion (as a customer would normally use it). During the tests, the following conditions and configurations were used.

### 4.2 EUT operation

Operating Mode	The worst operating condition
Stand-by mode	X
640 X 480 75Hz, Full "H" Pattern Display Analog Mode	X
800 X 600 75Hz, Full "H" Pattern Display Analog Mode	X
1024 X 768 75Hz, Full "H" Pattern Display Analog Mode	X
1280 X 1024 75Hz, Full "H" Pattern Display Analog Mode	O
640 X 480 75Hz, Full "H" Pattern Display Digital Mode	X
800 X 600 75Hz, Full "H" Pattern Display Digital Mode	X
1024 X 768 75Hz, Full "H" Pattern Display Digital Mode	X
1280 X 1024 75Hz, Full "H" Pattern Display Digital Mode	X

O: Worst case investigated during the Test

### 4.3 Support Equipment Used

Following peripheral devices and interface cables were connected during the measurement:

#### EUT – TFT LCD Monitor

FCC ID : R3OM-17X  
Model Name : M-17X  
Serial No. : N/A  
Manufacturer : MTN INC.  
Power Supply Type : Power supply from DC 12V of AC/DC Adapter  
Power Cord : Non-Shielded, Detachable, 2.3m  
Data Cable : 1.2m Shielded 15pin D-sub, 1.2m Shielded 29pin DVI, 1.2m Shielded Audio

#### Support Unit 1-Personal computer (DELL)

FCC ID : DOC  
Model Name : DHM  
Serial No. : G9MB71S  
Manufacturer : Dell Asia Pacific Sdn.  
Power Supply Type : Switching  
Power Cord : Non-shielded, Detachable: 1.2m  
Data Cable : Shielded Detachable: 1.2m

**Support Unit 2-Keyboard (COMPAQ)**

FCC ID : DOC  
Model Name : KB-9963  
Serial No. : B26960GBUKO13F  
Manufacturer : COMPAQ  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : Shielded, 1.5m

**Support Unit 3-Mouse (LOGITECH)**

FCC ID : DZL211029  
Model Name : M-S34  
Serial No. : LZC01002314  
Manufacturer : LOGITECH  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : None-Shielded, 1.2m

**Support Unit 4- USB Mouse (N/A)**

FCC ID : HLA311001  
Model Name : HL898W  
Serial No. : HL08011837  
Manufacturer : N/A  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : None-Shielded, 1.2m

**Support Unit 5- Serial Mouse (PETRA)**

FCC ID : JKGMUS5S01  
Model Name : MUS5S  
Serial No. : E183027  
Manufacturer : PETRA  
Power Supply Type : N/A  
Power Cord : N/A  
Data Cable : Shielded, 1.2m

**Support Unit 6- Printer (SINDORICO)**

FCC ID : N/A  
Model Name : Color Cap 330  
Serial No. : 11-03098  
Manufacturer : LEXMARK INTERNATIONAL INC.  
Power Supply Type : Switching  
Power Cord : Non-shielded, Detachable: 1.2m  
Data Cable : Shielded, 1.2m

## 5. TEST RESULTS

---

### 5.1 Summary of Test Results

Test Rule Parts	Measurement Required	Result
15.107	Conducted Emissions Measurement	Passed by 8.70dB
15.109	Radiated Emissions Measurement	Passed by 3.22dB

The measurement results were obtained with the EUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum emission of the EUT are reported.

The data collected shows that the **MTN INC. TFT LCD Monitor, M-17X** complies with technical requirements of above rules part 15.107 and 15.109(g) Class B Limits (CISPR Publication 22).

The equipment is not modified anything, mechanical or circuits to improve EMI status during a measurement. No EMI suppression device(s) was added and/or modified during testing.

## 5. TEST RESULTS

### 5.2.1 Conducted Emissions Measurement of SAMSUNG Panel

EUT	TFT LCD Monitor / M-17X (SN: N/A)
Limit apply to	FCC Part 15. 107 / CISPR Pub.22 Class B
Test Date	May 24, 2004
Operating Condition	1280 X 1024 75Hz, Full "H" Pattern display Mode
Environment Condition	Humidity Level : 48 %RH, Temperature : 26
Result	Passed by 10.10dB

#### Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarizations of Hot and neutral line.

Detector mode: CISPR Quasi-Peak mode (6dB Bandwidth: 9 KHz)

Frequency [MHz]	Reading [dB $\mu$ V]		Phase (*H/**N)	Limit [dB $\mu$ V]		Margin [dB]	
	Quasi-peak	Average		Quasi-peak	Average	Q.Peak	Average
0.184	54.20	43.40	N	64.3	54.3	10.10	10.90
0.246	49.90	38.70	N	61.9	51.9	12.00	13.20
0.307	43.70	-	N	60.0	50.0	16.30	-
0.555	29.80	-	N	56.0	46.0	26.20	-
2.583	29.40	-	H			26.60	-
10.583	36.50	-	N	60.0	50.0	23.50	-
13.377	32.30	-	N			27.70	-
16.244	32.10	-	N			27.90	-
18.131	28.00	-	N			32.00	-

#### NOTES:

1. \* H: HOT Line, \*\*N: Neutral Line
2. Margin value = Limit – Reading
3. Measurement were performed at the HOST AC power inlet in the frequency band of 150kHz ~ 30MHz according to the FCC Part 15 CLASS B / CISPR 22 Class B
4. If the reading Quasi-Peak value is bellowed the average limit, don't test average mode.




Test Engineer: C. S. Kim


## 5. TEST RESULTS

### *Line: HOT & Neutral Line*

M-17X / Hot / Samsung Panel

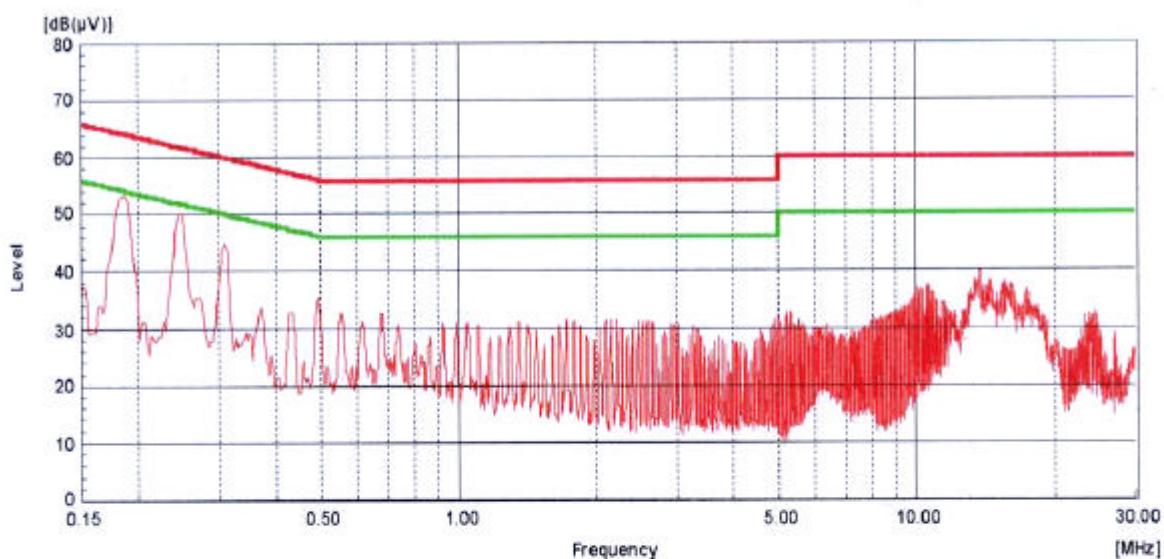

M-17X / Neutral / Samsung Panel

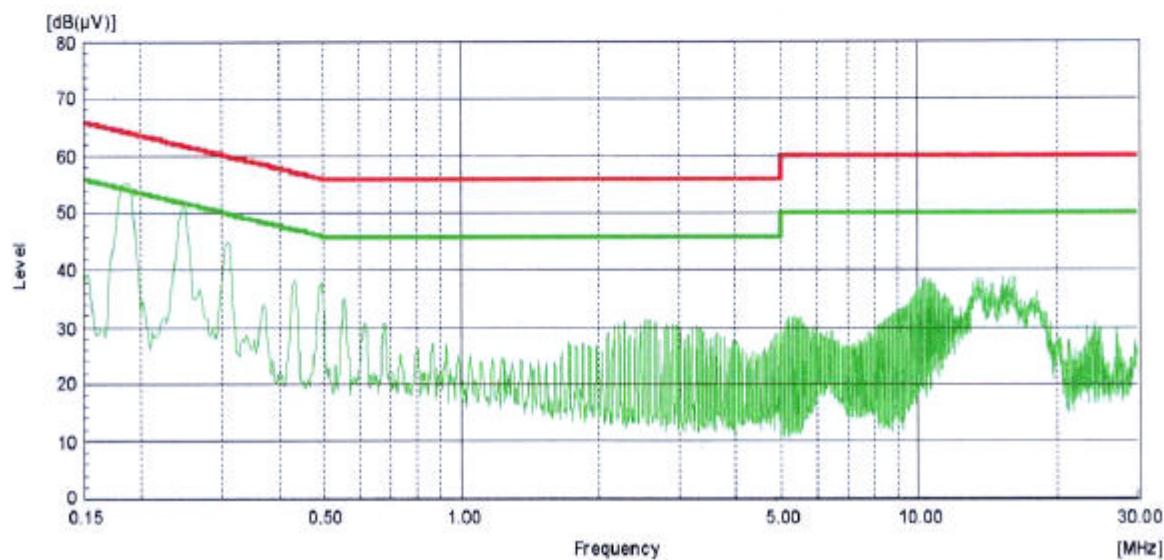

## 5. TEST RESULTS

### 5.2.2 Conducted Emissions Measurement of LG Panel

EUT	TFT LCD Monitor / M-17X (SN: N/A)
Limit apply to	FCC Part 15. 107 / CISPR Pub.22 Class B
Test Date	May 24, 2004
Operating Condition	1280 X 1024 75Hz, Full "H" Pattern display Mode
Environment Condition	Humidity Level : 48 %RH, Temperature : 26
Result	Passed by 9.9dB

#### Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarizations of Hot and neutral line.

Detector mode: CISPR Quasi-Peak mode (6dB Bandwidth: 9 KHz)

Frequency [MHz]	Reading [dB $\mu$ V]		Phase (*H/**N)	Limit [dB $\mu$ V]		Margin [dB]	
	Quasi-peak	Average		Quasi-peak	Average	Q.Pk	Average
0.183	54.40	43.40	N	64.3	54.3	9.9	10.9
0.246	49.80	38.50	N	61.9	51.9	12.1	13.4
0.307	43.90	-	N	60.0	50.0	16.1	-
0.553	32.90	-	N	56.0	46.0	23.1	-
2.400	30.40	-	H			25.6	-
5.352	31.00	-	H	60.0	50.0	29.0	-
10.39	36.60	-	N			23.4	-
13.41	26.90	-	H			33.1	-
16.12	32.90	-	N			27.1	-
23.99	33.40	-	H			26.6	-

#### NOTES:

5. \* H: HOT Line, \*\*N: Neutral Line
6. Margin value = Limit – Reading
7. Measurement were performed at the HOST AC power inlet in the frequency band of 150kHz ~ 30MHz according to the FCC Part 15 CLASS B / CISPR 22 Class B
8. If the reading Quasi-Peak value is bellowed the average limit, don't test average mode.




Test Engineer: C. S. Kim


## 5. TEST RESULTS

### *Line: HOT & Neutral Line*

M-17X / Hot / LG Panel

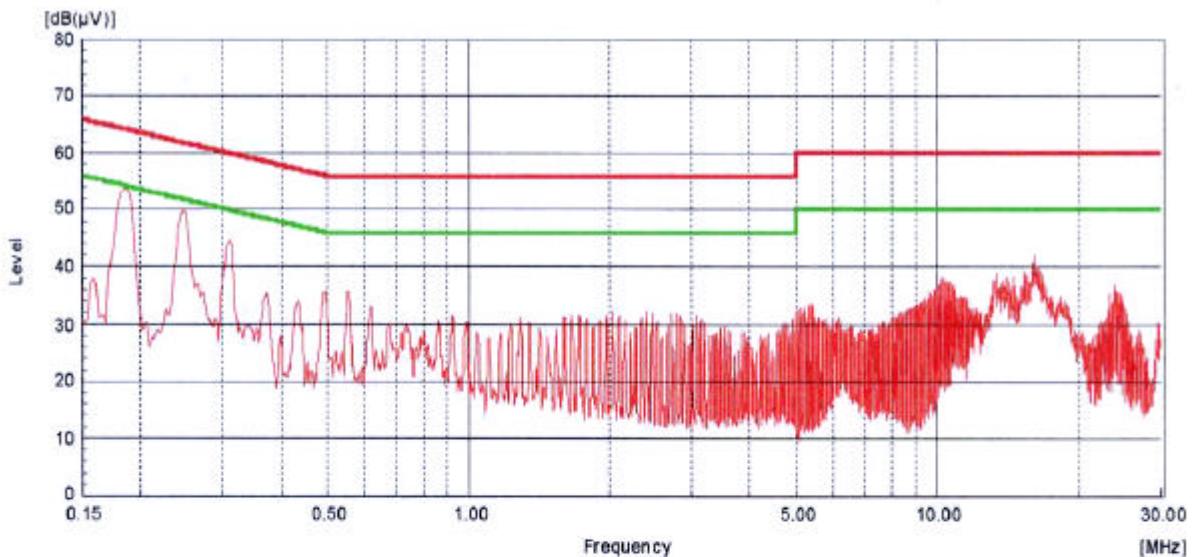

M-17X / Neutral / LG Panel

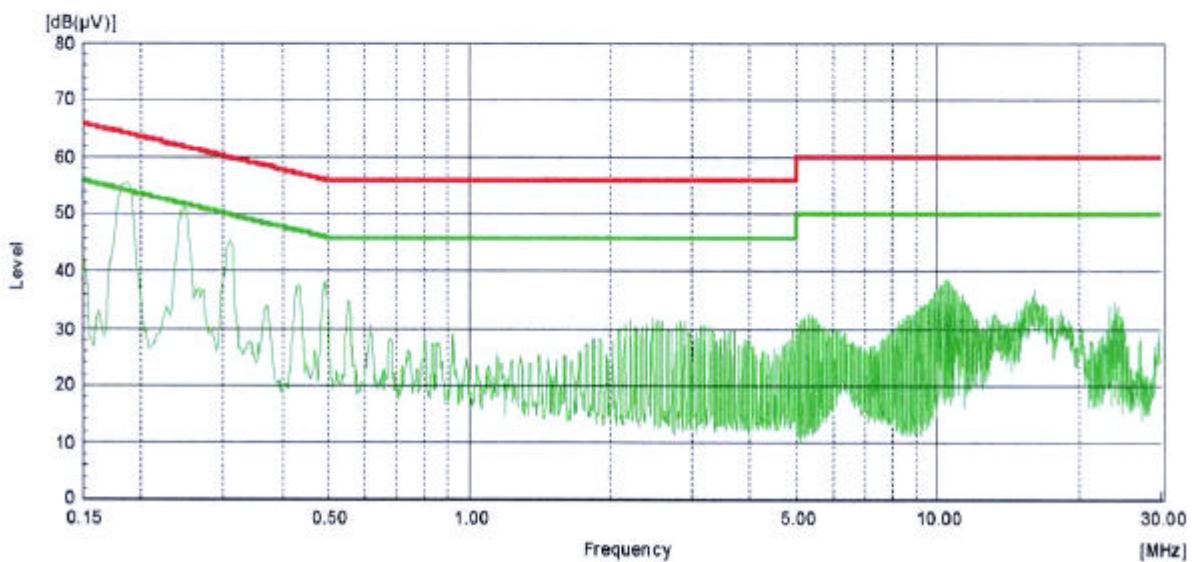

## 5. TEST RESULTS

### 5.2.3 Conducted Emissions Measurement of CHIMEI Panel

EUT	TFT LCD Monitor / M-17X (SN: N/A)
Limit apply to	FCC Part 15. 107 / CISPR Pub.22 Class B
Test Date	May 24, 2004
Operating Condition	1280 X 1024 75Hz, Full "H" Pattern display Mode
Environment Condition	Humidity Level : 48 %RH, Temperature : 26
Result	Passed by 8.70dB

#### Conducted Emission Test Data

The following table shows the highest levels of conducted emissions on both polarizations of Hot and neutral line.

Detector mode: CISPR Quasi-Peak mode (6dB Bandwidth: 9 KHz)

Frequency [MHz]	Reading [dB $\mu$ V]		Phase (*H/**N)	Limit [dB $\mu$ V]		Margin [dB]	
	Quasi-peak	Average		Quasi-peak	Average	Q.Pk	Average
0.185	55.50	42.80	N	64.2	54.2	8.70	11.40
0.246	50.30	37.10	N	61.9	51.9	11.60	14.80
0.307	44.10	29.70	N	60.0	50.0	15.90	20.30
0.556	32.40	-	N	56.0	46.0	23.60	-
5.231	31.80	-	H	60.0	50.0	28.20	-
10.54	34.20	-	N			25.80	-
13.07	27.30	-	N			32.70	-
15.88	29.0	-	N			31.00	-
18.20	24.90	-	N			35.10	-
24.24	29.40	-	H			30.60	-

#### NOTES:

9. \* H: HOT Line, \*\*N: Neutral Line
10. Margin value = Limit – Reading
11. Measurement were performed at the HOST AC power inlet in the frequency band of 150kHz ~ 30MHz according to the FCC Part 15 CLASS B / CISPR 22 Class B
12. If the reading Quasi-Peak value is bellowed the average limit, don't test average mode.




Test Engineer: C. S. Kim


## 5. TEST RESULTS

### ***Line: HOT & Neutral Line***

**M-17X/HOT/CHIMEI Panel**

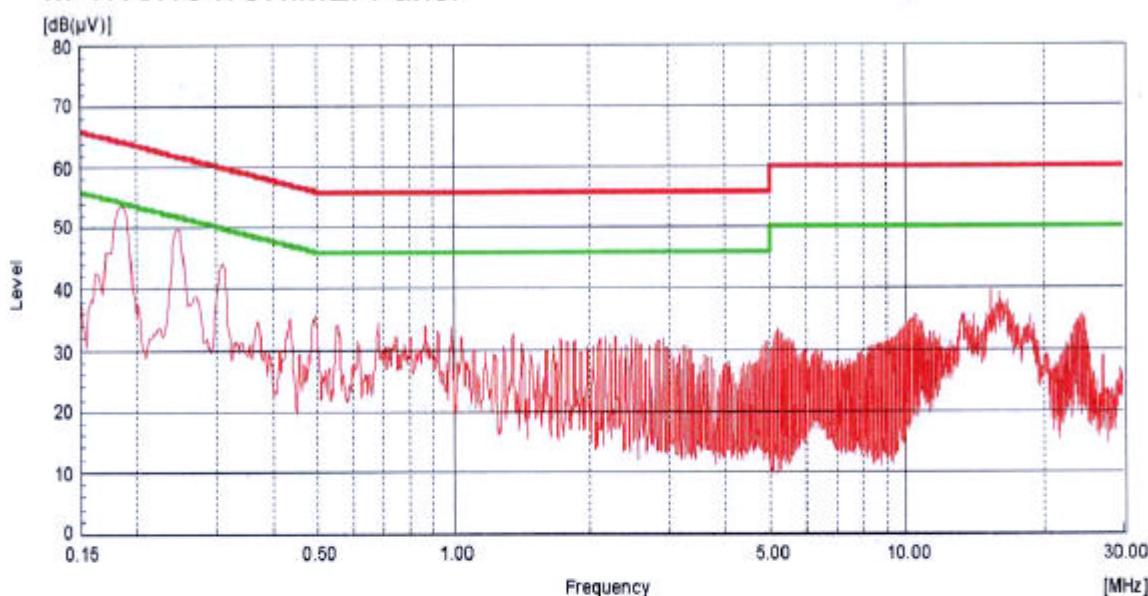

**M-17X/NEUTRAL/CHIMEI Panel**

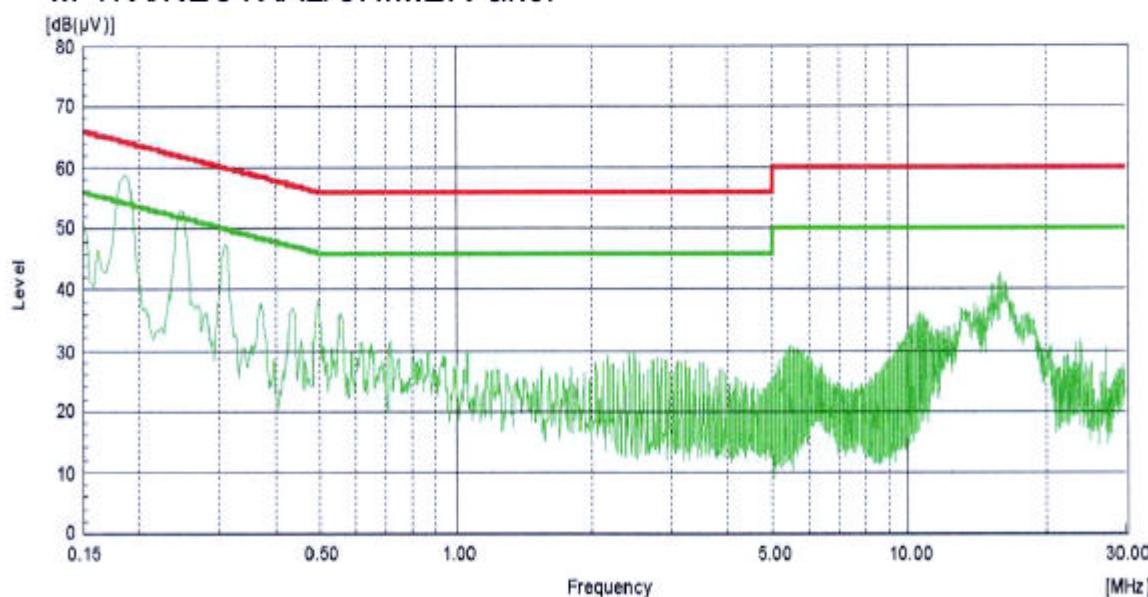

## 5. TEST RESULTS

### 5.3.1 Radiated Emissions Measurement of SAMSUNG Panel

EUT	TFT LCD Monitor / M-17X (SN: N/A)					
Limit apply to	FCC Part 15. 109 (g) / CISPR Pub.22 Class B					
Test Date	May 25, 2004					
Operating Condition	1280 X 1024 75Hz, Full "H" Pattern display Mode					
Environment Condition	Humidity Level : 35 %RH, Temperature : 25					
Result	Passed by 4.60dB					

### Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical. Detector mode: CISPR Quasi-Peak mode (6dB Bandwidth: 120 kHz)

Frequency [MHz]	Reading [dB $\mu$ V]	Polarization (*H/**V)	Ant. Factor [dB]	Cable Loss [dB]	Emission Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
120.0	6.67	V	11.90	3.80	22.37	30.0	7.63
144.0	8.10	V	13.26	4.04	25.40		4.60
168.0	5.49	H	12.50	4.28	22.27		7.73
192.0	9.01	V	9.99	4.52	23.52		6.48
204.0	9.44	V	9.59	4.62	23.65		6.35
216.0	8.52	H	10.57	4.68	23.77		6.23
288.0	4.28	H	13.38	5.84	23.50	37.0	13.50
312.0	2.94	V	14.42	6.32	23.68		13.32
360.0	4.17	V	15.47	6.78	26.42		10.58

#### NOTES:

1. \* H: Horizontal polarization, \*\* V: Vertical polarization
2. Emission Level = Reading + Antenna factor + Cable loss
3. Margin value = Limit - Emission Level
4. The measurement was performed for the frequency range 30MHz ~ 1000MHz according to the FCC Part 15 CLASS B / CISPR 22 Class B.



Test Engineer: C. S. Kim

## 5. TEST RESULTS

### 5.3.2 Radiated Emissions Measurement of LG Panel

EUT	TFT LCD Monitor / M-17X (SN: N/A)
Limit apply to	FCC Part 15. 109 (g) / CISPR Pub.22 Class B
Test Date	May 25, 2004
Operating Condition	1280 X 1024 75Hz, Full "H" Pattern display Mode
Environment Condition	Humidity Level : 35 %RH, Temperature : 25
Result	Passed by 3.30dB

#### Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical. Detector mode: CISPR Quasi-Peak mode (6dB Bandwidth: 120 kHz)

Frequency [MHz]	Reading [dB $\mu$ V]	Polarization (*H/**V)	Ant. Factor [dB]	Cable Loss [dB]	Emission Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
182.80	10.22	H	10.83	3.63	24.68	30.0	5.32
188.98	11.65	H	10.27	3.69	25.61		4.39
202.80	12.05	H	9.48	3.83	25.36		4.64
216.00	9.63	H	10.54	3.96	24.13		5.87
270.00	9.76	H	12.61	4.40	26.77	37.0	10.23
296.99	7.96	H	14.02	4.84	26.82		10.18
432.00	4.74	H	17.33	6.22	28.29		8.71
445.50	6.88	H	17.47	6.36	30.70		6.30
486.00	8.36	H	18.72	6.62	33.70		3.30

#### NOTES:

5. \* H: Horizontal polarization, \*\* V: Vertical polarization
6. Emission Level = Reading + Antenna factor + Cable loss
7. Margin value = Limit - Emission Level
8. The measurement was performed for the frequency range 30MHz ~ 1000MHz according to the FCC Part 15 CLASS B / CISPR 22 Class B.



Test Engineer: C. S. Kim

## 5. TEST RESULTS

### 5.3.3 Radiated Emissions Measurement of CHIMEI Panel

EUT	TFT LCD Monitor / M-17X (SN: N/A)						
Limit apply to	FCC Part 15. 109 (g) / CISPR Pub.22 Class B						
Test Date	May 25, 2004						
Operating Condition	1280 X 1024 75Hz, Full "H" Pattern display Mode						
Environment Condition	Humidity Level : 35 %RH, Temperature : 25						
Result	Passed by 3.22dB						

### Radiated Emission Test Data

The following table shows the highest levels of radiated emissions on both polarization of horizontal and vertical. Detector mode: CISPR Quasi-Peak mode (6dB Bandwidth: 120 kHz)

Frequency [MHz]	Reading [dB $\mu$ V]	Polarization (*H/**V)	Ant. Factor [dB]	Cable Loss [dB]	Emission Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]
162.00	6.09	H	13.20	3.42	22.71	30.0	7.29
182.85	7.51	H	10.82	3.63	21.96		8.04
202.70	9.24	H	9.48	3.83	22.54		7.46
216.00	8.65	H	10.54	3.96	23.15		6.85
432.02	5.70	H	17.33	6.22	29.25	37.0	7.75
486.00	7.81	H	18.72	6.62	33.15		3.85
526.61	6.91	H	18.97	6.86	32.74		4.26
540.00	7.20	H	18.84	6.94	32.98		4.02
648.02	6.61	H	19.49	7.68	33.78		3.22

#### NOTES:

9. \* H: Horizontal polarization, \*\* V: Vertical polarization
10. Emission Level = Reading + Antenna factor + Cable loss
11. Margin value = Limit - Emission Level
12. The measurement was performed for the frequency range 30MHz ~ 1000MHz according to the FCC Part 15 CLASS B / CISPR 22 Class B.



Test Engineer: C. S. Kim

## 6. SAMPLE CALCULATION

### Sample Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor.  
The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

$$dB(\mu V/m) = 20 \log_{10} (\mu V / m) : \text{Equation 1}$$

$$dB\mu V = dBm + 107 : \text{Equation 2}$$

#### Example 1: @ 0.185MHz

Class B Limit	=	16.21.81 $\mu V$	=	64.20dB $\mu V$
Reading	=	55.50dB $\mu V$		
Convert to $\mu V$	=	595.66 $\mu V$		
Margin	=	64.20 – 55.50 = 8.70dB $\mu V$		
	=	8.70dB $\mu V$ below Limit		

#### Example 2: @ 648.02MHz

Class B Limit	=	70.79 $\mu V$	=	37.0dB $\mu V$
Reading	=	6.61dB $\mu V$		
Antenna Factor + Cable Loss	=	27.17dB $\mu V$		
Total	=	33.78dB $\mu V$		
Margin	=	37.0 – 33.78 = 3.22dB $\mu V$		
	=	3.22dB $\mu V$ below Limit		

## 7. TEST EQUIPMENT LIST

### List of Test Equipments Used for Measurements

Test Equipment		Model	Mfg.	Serial No.	Cal. Due Date
<input checked="" type="checkbox"/>	Spectrum Analyzer	E7401A	H.P	US39110107	04-10-24
<input checked="" type="checkbox"/>	Spectrum Analyzer	R3261A	Advantest	21720033	04-10-24
<input checked="" type="checkbox"/>	Receiver	ESVS 10	R & S	835165/001	05-04-12
<input checked="" type="checkbox"/>	EMI TEST Receiver	ESHS30	Rohde & Schwarz	0401901/002	05-03-29
<input type="checkbox"/>	Preamplifier	HP 8347A	HP	2834A00544	04-04-12
<input checked="" type="checkbox"/>	LISN	3825/2	EMCO	9006-1669	05-04-13
<input checked="" type="checkbox"/>	LISN	3825/2	EMCO	9208-1995	05-01-29
<input checked="" type="checkbox"/>	TriLog Antenna	VULB9160	Schwarz Beck	3082	04-07-16
<input type="checkbox"/>	LogBicon	VULB9165	Schwarz Beck	2023	04-07-05
<input type="checkbox"/>	Dipole Antenna	VHAP	Schwarz Beck	964	05-05-17
<input type="checkbox"/>	Dipole Antenna	VHAP	Schwarz Beck	965	04-07-05
<input type="checkbox"/>	Dipole Antenna	UHAP	Schwarz Beck	949	04-07-05
<input type="checkbox"/>	Dipole Antenna	UHAP	Schwarz Beck	950	05-05-17
<input type="checkbox"/>	Broad band Horn Antenna	BBHA 9120D	Schwarz Beck	227	04-05-02
<input checked="" type="checkbox"/>	Turn-Table	DETT-03	Daeil EMC	-	N/A
<input checked="" type="checkbox"/>	Antenna Master	DEAM-03	Daeil EMC	-	N/A
<input checked="" type="checkbox"/>	Plotter	7440A	H.P	2725A 75722	N/A
<input checked="" type="checkbox"/>	Chamber	DTEC01	DAETONG	-	N/A
<input type="checkbox"/>	Impedance Matching Pad	6001.01.A	SUNNER	3252	04-10-24
<input checked="" type="checkbox"/>	Thermo Hygrograph	3-3122	ISUZU	3312201	05-04-16
<input checked="" type="checkbox"/>	BaroMeter	-	Regulus	-	-