




# FCC Test Report

**FCC ID** : R3UDSBT4  
**Equipment** : Bluetooth dongle  
**Model No.** : DSBT4  
**Brand Name** : EPOS  
**Applicant** : DSEA A/S  
**Address** : Kongebakken 9, DK-2765 Smoerum, Denmark  
**Standard** : 47 CFR FCC Part 15.247  
**Received Date** : Feb. 02, 2024  
**Tested Date** : Feb. 07 ~ Feb. 16, 2024

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:



Along Chen / Assistant Manager

Approved by:



Gary Chang / Manager

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Local Support Equipment List .....	8
1.3	Test Setup Chart .....	8
1.4	Test Equipment List and Calibration Data.....	9
1.5	Test Standards .....	11
1.6	Reference Guidance .....	11
1.7	Deviation from Test Standard and Measurement Procedure.....	11
1.8	Measurement Uncertainty .....	11
<b>2</b>	<b>TEST CONFIGURATION.....</b>	<b>12</b>
2.1	Testing Facility .....	12
2.2	The Worst Test Modes and Channel Details .....	12
<b>3</b>	<b>TRANSMITTER TEST RESULTS .....</b>	<b>13</b>
3.1	6dB and Occupied Bandwidth .....	13
3.2	Conducted Output Power.....	14
3.3	Power Spectral Density .....	15
3.4	Unwanted Emissions in Restricted Frequency Bands .....	16
3.5	Emissions in non-restricted Frequency Bands.....	18
3.6	AC Power Line Conducted Emissions .....	19
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>20</b>

**Appendix A. 6dB and Occupied Bandwidth**

**Appendix B. Conducted Output Power**

**Appendix C. Power Spectral Density**

**Appendix D. Unwanted Emissions into Restricted Frequency Bands**

**Appendix E. Emissions in Non-Restricted Frequency Bands**

**Appendix F. AC Power Line Conducted Emissions**

## Release Record

Report No.	Version	Description	Issued Date
FR420201AE	Rev. 01	Initial issue	Aug. 29, 2024
FR420201AE	Rev. 02	Modified antenna gain	Jun. 04, 2025

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.150MHz 49.95 (Margin -16.05dB) - QP	Pass
15.247(d) 15.209	Unwanted Emissions	[dBuV/m at 3m]: 120MHz 39.00 (Margin -4.50dB) - PK	Pass
15.247(b)(3)	Conducted Output Power	Power [dBm]: 15.17	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

### Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

## 1 General Description

### 1.1 Information

#### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Freq. (MHz)	Channel Number	Data Rate
2400-2483.5	LE	2402-2480	40	1 Mbps
		2404-2478	37	2 Mbps
Note: Bluetooth LE (Low energy) uses GFSK modulation.				

#### 1.1.2 Antenna Details

Ant. No.	Brand	Model	Type	Connector	Gain (dBi)
1	Epos	SPEED MINI - ANTENNA	Monopole	No	-3.89

#### 1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Type	5Vdc from host
------------	----------------

#### 1.1.4 Accessories

N/A

### 1.1.5 Channel List

Frequency band (MHz)				2402-2480 / BT-LE(1Mbps)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

Frequency band (MHz)				2404-2478 / BT-LE(2Mbps)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2404	10	2424	20	2446	30	2466
1	2406	11	2428	21	2448	31	2468
2	2408	12	2430	22	2450	32	2470
3	2410	13	2432	23	2452	33	2472
4	2412	14	2434	24	2454	34	2474
5	2414	15	2436	25	2456	35	2476
6	2416	16	2438	26	2458	36	2478
7	2418	17	2440	27	2460	--	--
8	2420	18	2442	28	2462	--	--
9	2422	19	2444	29	2464	--	--

### 1.1.6 Test Tool and Duty Cycle

<b>Test Tool</b>	Airoha.Tool.kit, V3.7.4	
Modulation Mode	Duty Cycle (%)	Duty Factor (dB)
BT-LE(1Mbps)	86.64%	0.62
BT-LE(2Mbps)	44.70%	3.50

### 1.1.7 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)		
	2402	2440	2480
BT-LE(1Mbps)	CG=63	CG=63	CG=63

Modulation Mode	Test Frequency (MHz)		
	2404	2440	2478
BT-LE(2Mbps)	CG=63	CG=63	CG=63

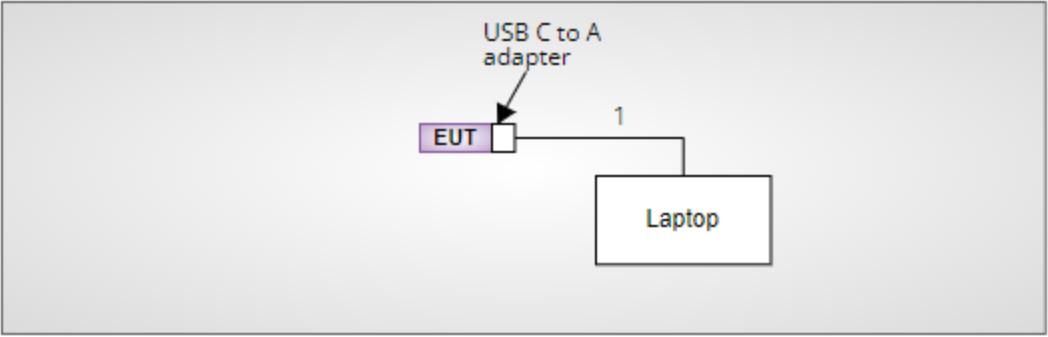
## 1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	USB C to A adapter	ICC	---	---	---
2	Laptop	DELL	Latitude 3440	DoC	---

## 1.3 Test Setup Chart

Test Setup Diagram	
No.	Signal cable / Length (m)
1	USB, 0.5m shielded.

Note: The support Laptop executed "RF test tool" to control EUT transmission RF function.



## 1.4 Test Equipment List and Calibration Data

<b>Test Item</b>	Conducted Emission				
<b>Test Site</b>	Conduction room 1 / (CO01-WS)				
<b>Tested Date</b>	Feb. 15, 2024				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Feb. 17, 2023	Feb. 16, 2024
LISN	R&S	ENV216	101579	May 09, 2023	May 08, 2024
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Feb. 24, 2023	Feb. 23, 2024
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 11, 2023	Oct. 10, 2024
50 ohm terminal	NA	50	03	Aug. 08, 2023	Aug. 07, 2024
Measurement Software	AUDIX	e3	6.120210k	NA	NA

Note: Calibration Interval of instruments listed above is one year.

<b>Test Item</b>	RF Conducted				
<b>Test Site</b>	(TH01-WS)				
<b>Tested Date</b>	Feb. 16, 2024				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101910	Apr. 14, 2023	Apr. 13, 2024
Power Meter	Anritsu	ML2495A	1241002	Nov. 21, 2023	Nov. 20, 2024
Power Sensor	Anritsu	MA2411B	1207366	Nov. 21, 2023	Nov. 20, 2024
Attenuator	Pasternack	PE7005-10	10-2	Oct. 05, 2023	Oct. 04, 2024
Measurement Software	Sporton	SENSE-15247_FS	V5.11	NA	NA

Note: Calibration Interval of instruments listed above is one year.

<b>Test Item</b>	Radiated Emission				
<b>Test Site</b>	966 chamber1 / (03CH01-WS)				
<b>Tested Date</b>	Feb. 07, 2024				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Mar. 03, 2023	Mar. 02, 2024
Spectrum Analyzer	R&S	FSV40	101498	Nov. 23, 2023	Nov. 22, 2024
Loop Antenna	R&S	HFH2-Z2	100330	Oct. 31, 2023	Oct. 30, 2024
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 31, 2023	Jul. 30, 2024
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Nov. 27, 2023	Nov. 26, 2024
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Oct. 30, 2023	Oct. 29, 2024
Preamplifier	EMC	EMC02325	980225	Jun. 28, 2023	Jun. 27, 2024
Preamplifier	EMC	EMC118A45SE	980898	Jul. 14, 2023	Jul. 13, 2024
Preamplifier	EMC	EMC184045SE	980903	Jul. 17, 2023	Jul. 16, 2024
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 03, 2023	Oct. 02, 2024
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 03, 2023	Oct. 02, 2024
LF cable 11M	EMC	EMCCFD400-NW-N W-11000	200801	Oct. 03, 2023	Oct. 02, 2024
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 03, 2023	Oct. 02, 2024
RF Cable	EMC	EMC104-35M-35M- 8000	210920	Oct. 03, 2023	Oct. 02, 2024
RF Cable	EMC	EMC104-35M-35M- 3000	210922	Oct. 03, 2023	Oct. 02, 2024
Attenuator	Pasternack	PE7005-10	10-1	Oct. 05, 2023	Oct. 04, 2024
HIGHPASS FILTER 3.1-18G	WHK	WHK3.1/18G-10SS	39	Oct. 05, 2023	Oct. 04, 2024
Measurement Software	Sporton	SENSE-15247_FS	V5.11	NA	NA
Measurement Software	Sporton	SENSE-EMI	V5.11	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

## 1.5 Test Standards

47 CFR FCC Part 15.247

ANSI C63.10-2013

## 1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

## 1.7 Deviation from Test Standard and Measurement Procedure

None

## 1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.130 Hz
Conducted power	±0.808 dB
Power density	±0.583 dB
Conducted emission	±2.715 dB
AC conducted emission	±2.92 dB
Unwanted Emission ≤ 1GHz	±3.41 dB
Unwanted Emission > 1GHz	±4.59 dB

## 2 Test Configuration

### 2.1 Testing Facility

Test Laboratory	International Certification Corporation
Test Site	CO01-WS, 03CH01-WS, TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

### 2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Test Configuration
AC Power Line Conducted Emissions	BT-LE(2Mbps)	2440	---
Unwanted Emissions $\leq$ 1GHz	BT-LE(2Mbps)	2440	---
Unwanted Emissions $>$ 1GHz	BT-LE(1Mbps) BT-LE(2Mbps)	2402, 2440, 2480 2404, 2440, 2478	---
Conducted Output Power 6dB bandwidth Power spectral density	BT-LE(1Mbps) BT-LE(2Mbps)	2402, 2440, 2480 2404, 2440, 2478	---

**NOTE:**

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **X-plane** results were found as the worst case and were shown in this report.

## 3 Transmitter Test Results

### 3.1 6dB and Occupied Bandwidth

#### 3.1.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

#### 3.1.2 Test Procedures

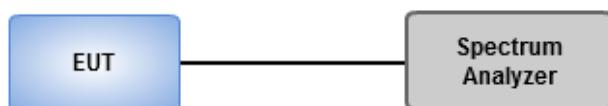
##### 6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

##### Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

#### 3.1.3 Test Setup



#### 3.1.4 Test Results

Ambient Condition	23°C / 66%	Tested By	Brad Wu
-------------------	------------	-----------	---------

Refer to Appendix A.

## 3.2 Conducted Output Power

### 3.2.1 Limit of Conducted Output Power

Conducted power shall not exceed 1Watt.

Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.

### 3.2.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

### 3.2.3 Test Setup



### 3.2.4 Test Results

Ambient Condition	23°C / 66%	Tested By	Brad Wu
-------------------	------------	-----------	---------

Refer to Appendix B.

### 3.3 Power Spectral Density

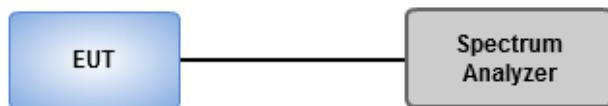
#### 3.3.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

#### 3.3.2 Test Procedures

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

#### 3.3.3 Test Setup



#### 3.3.4 Test Results

Ambient Condition	23°C / 66%	Tested By	Brad Wu
-------------------	------------	-----------	---------

Refer to Appendix C.

## 3.4 Unwanted Emissions in Restricted Frequency Bands

### 3.4.1 Limit of Unwanted Emissions in Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

### 3.4.2 Test Procedures

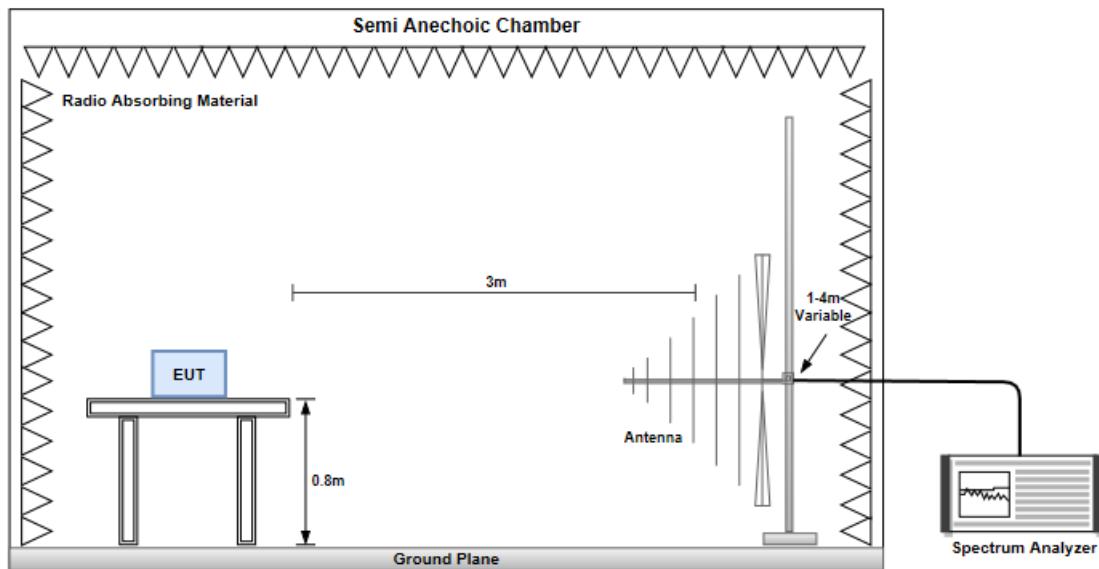
1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:

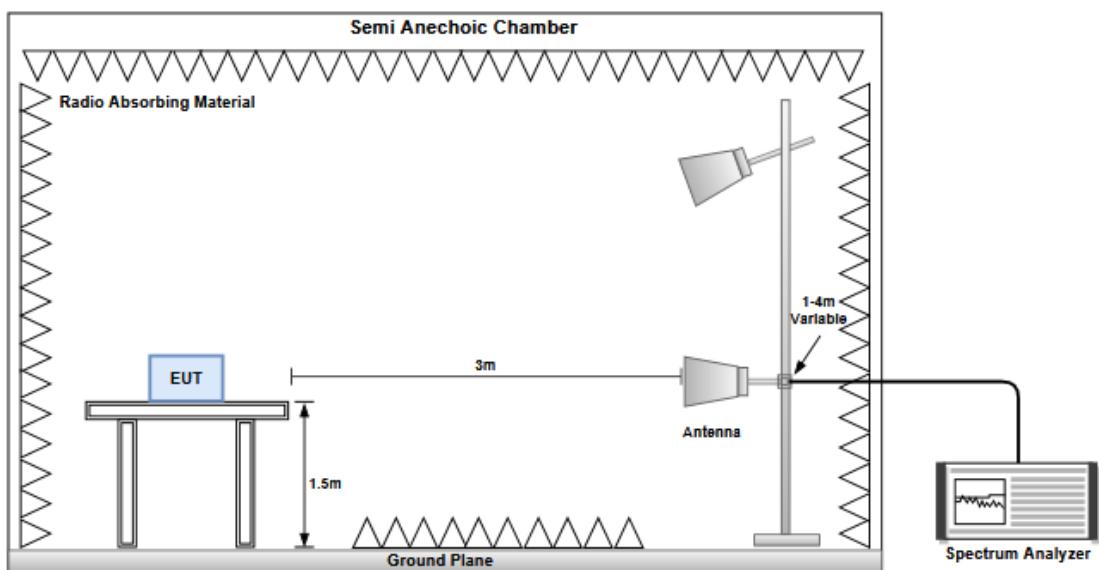
1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.4.3 Test Setup

#### Radiated Emissions below 1 GHz



#### Radiated Emissions above 1 GHz



### 3.4.4 Test Results

Refer to Appendix D.

## 3.5 Emissions in non-restricted Frequency Bands

### 3.5.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

### 3.5.2 Test Procedures

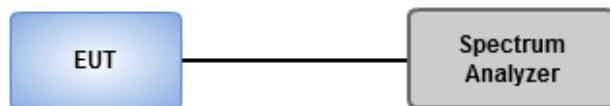
#### Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

#### Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

### 3.5.3 Test Setup



### 3.5.4 Test Results

Ambient Condition	23°C / 66%	Tested By	Brad Wu
-------------------	------------	-----------	---------

Refer to Appendix E.

## 3.6 AC Power Line Conducted Emissions

### 3.6.1 Limit of AC Power Line Conducted Emissions

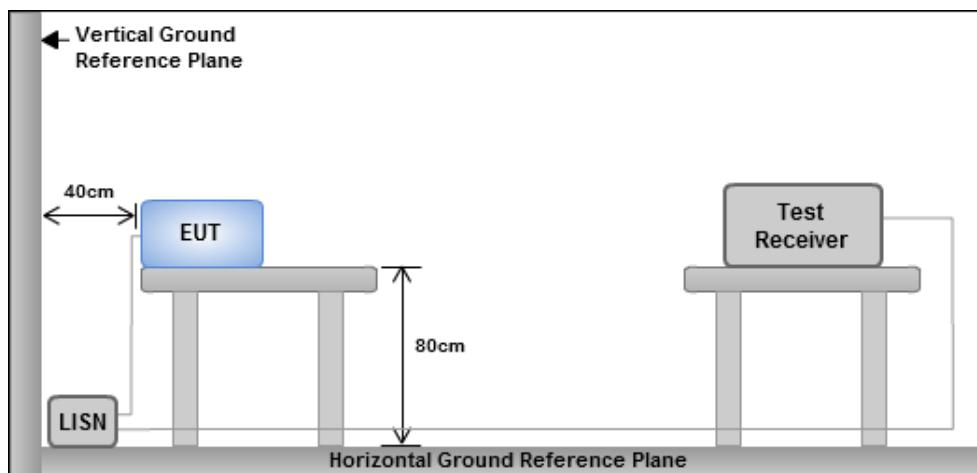
Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

### 3.6.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the  $50 \Omega$  LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

### 3.6.3 Test Setup



Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.6.4 Test Results

Refer to Appendix F.

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

### Linkou

Tel: 886-2-2601-1640  
No.30-2, Ding Fwu Tsuen, Lin Kou  
District, New Taipei City, Taiwan  
(R.O.C.)

### Kwei Shan

Tel: 886-3-271-8666  
No.3-1, Lane 6, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)  
No.2-1, Lane 6, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)

### Kwei Shan Site II

Tel: 886-3-271-8640  
No.14-1, Lane 19, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666  
Fax: 886-3-318-0155  
Email: ICC\_Service@icertifi.com.tw

—END—

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	666.25k	1.024M	1M02F1D	665k	1.019M
BT-LE(2Mbps)	1.24M	2.041M	2M04F1D	1.19M	2.034M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;

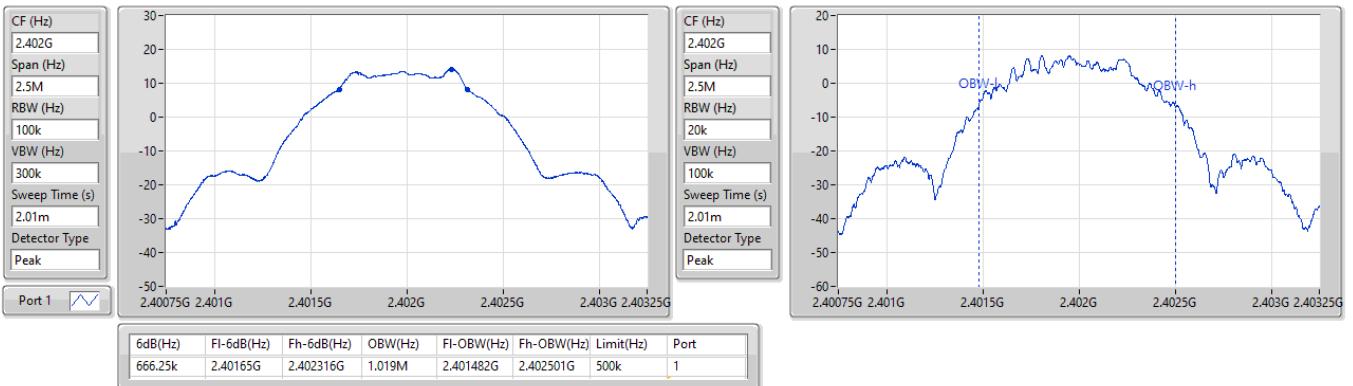
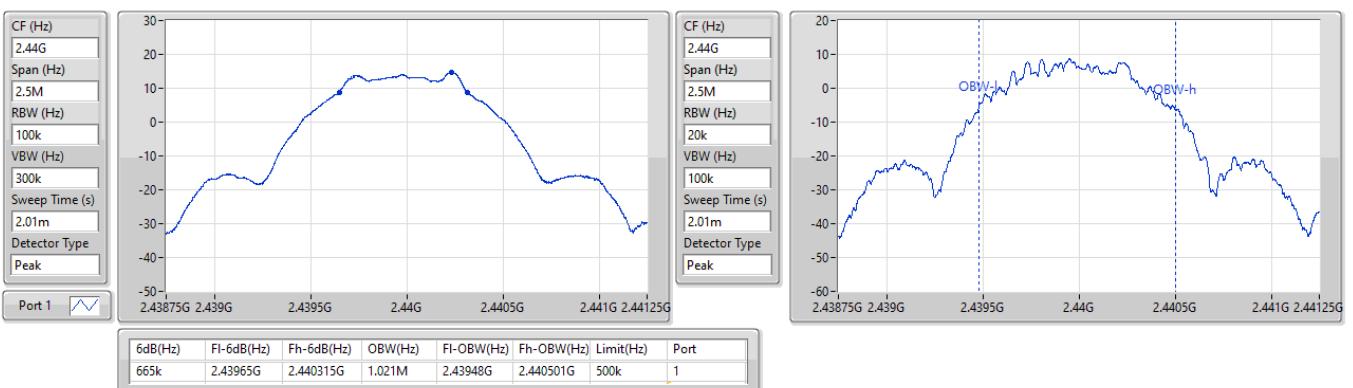
Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

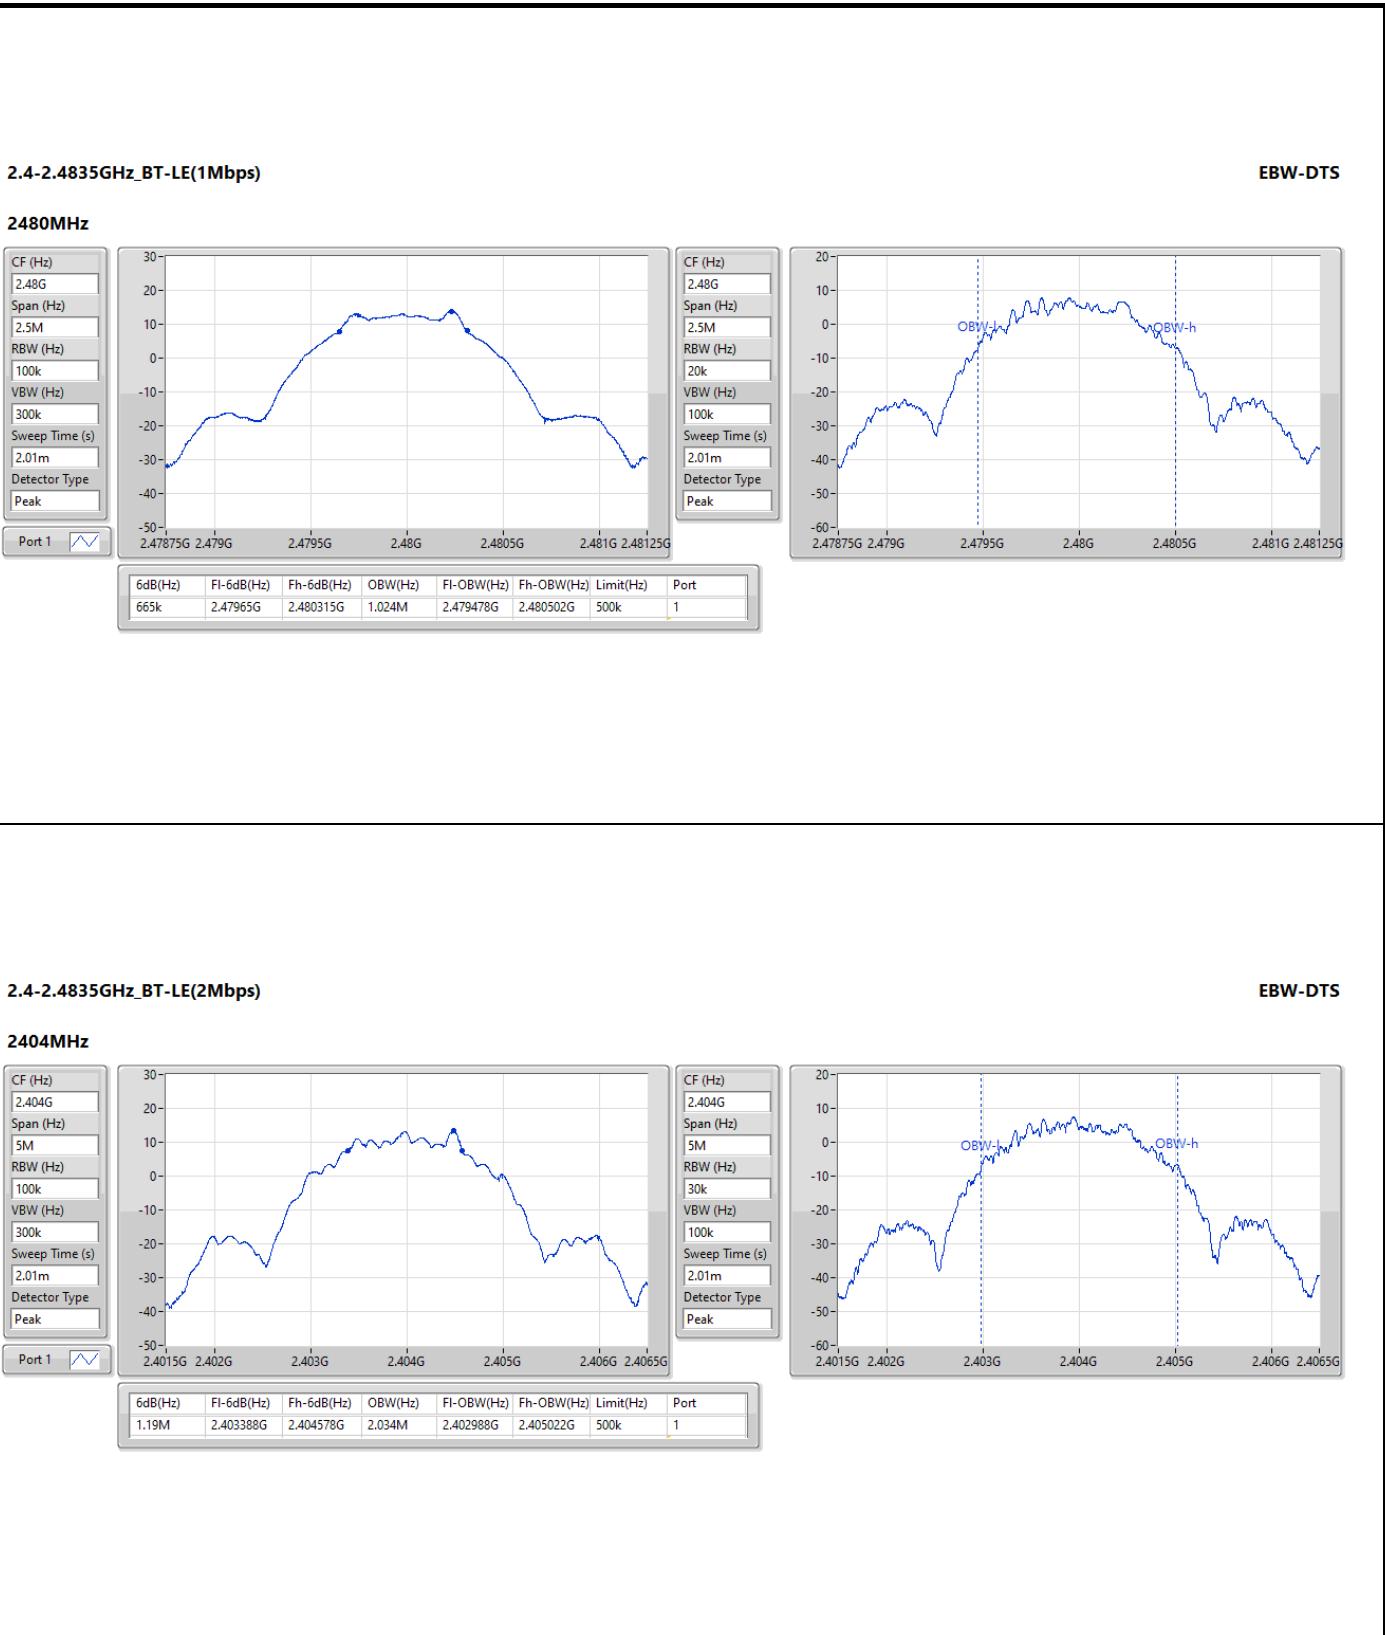
**Result**

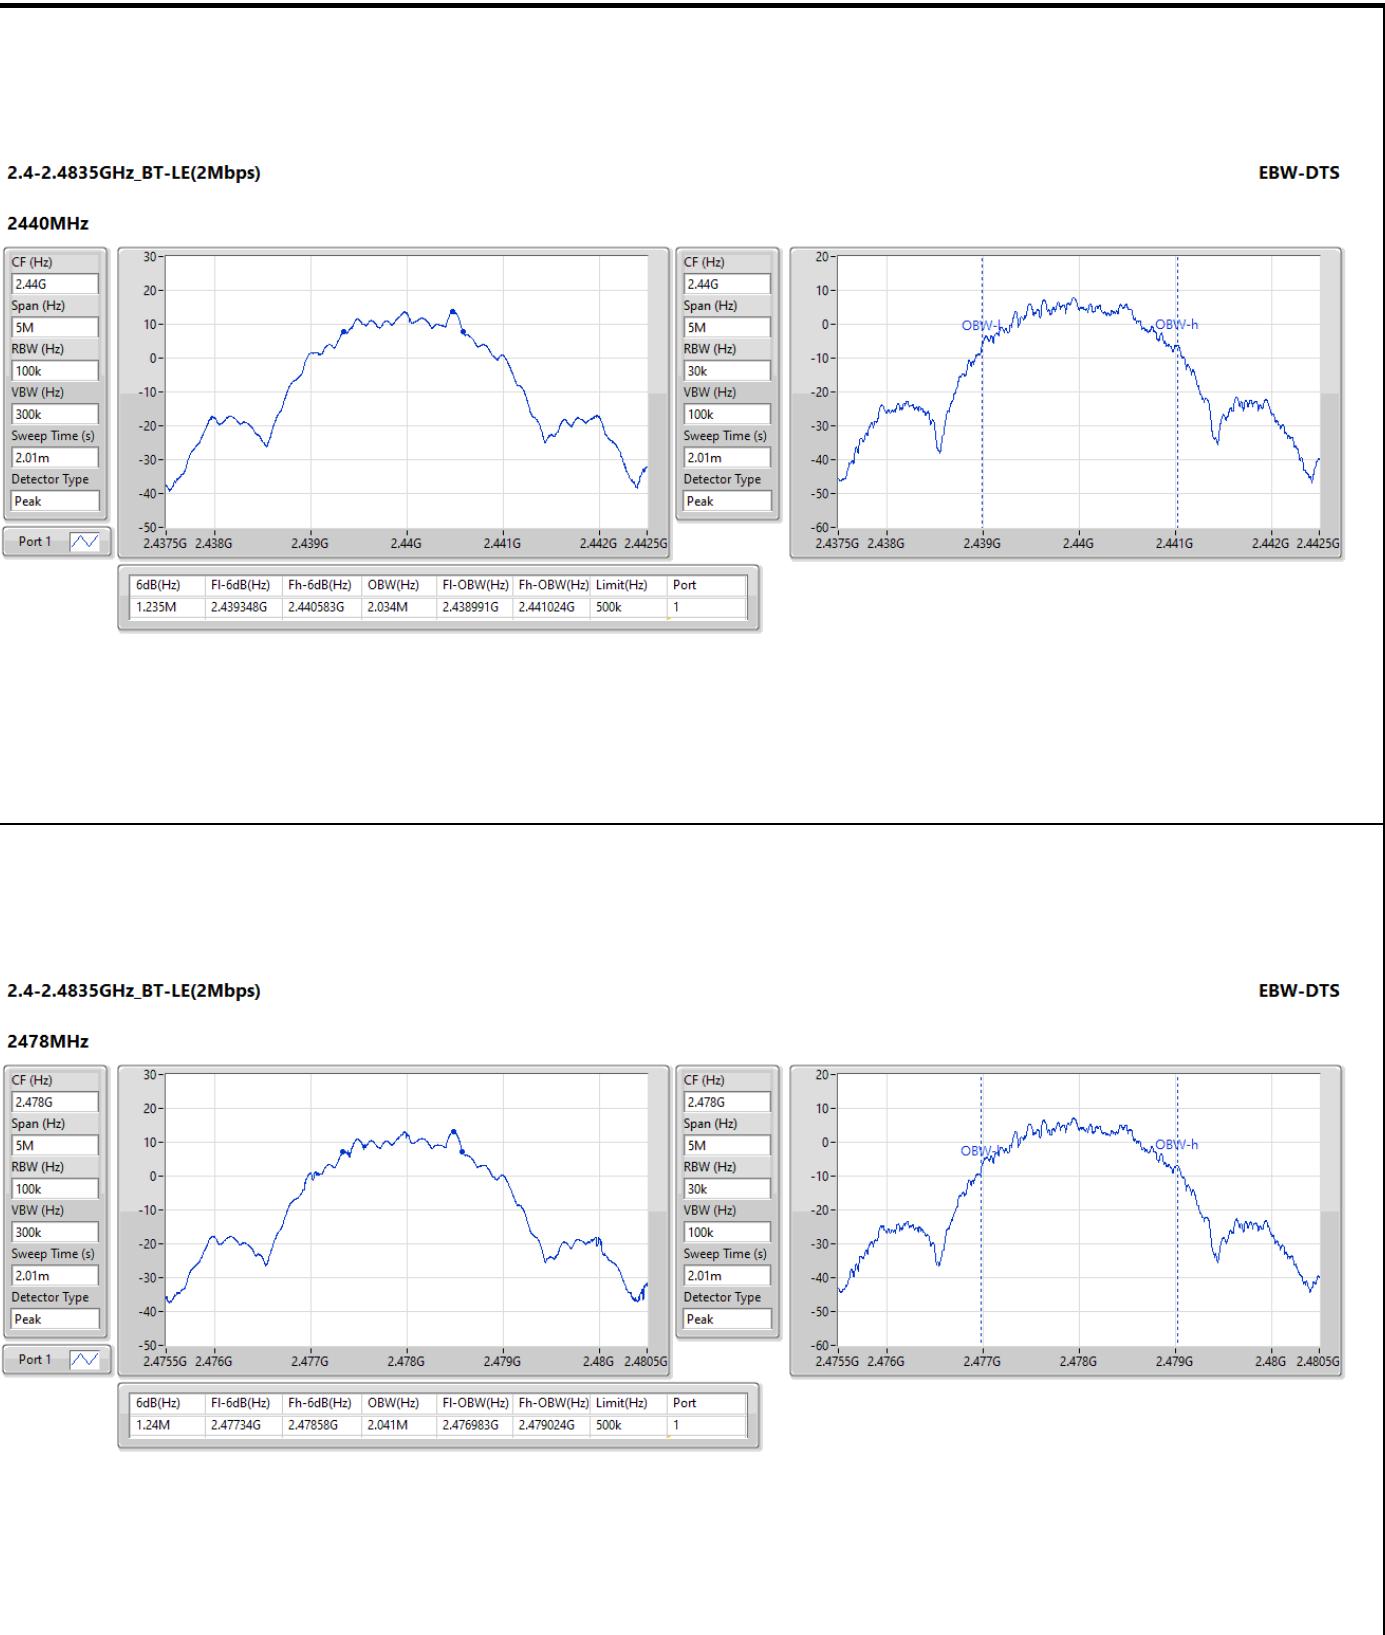
Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	666.25k	1.019M
2440MHz	Pass	500k	665k	1.021M
2480MHz	Pass	500k	665k	1.024M
BT-LE(2Mbps)	-	-	-	-
2404MHz	Pass	500k	1.19M	2.034M
2440MHz	Pass	500k	1.235M	2.034M
2478MHz	Pass	500k	1.24M	2.041M

Port X-N dB = Port X 6dB down bandwidth;

Port X-OBW = Port X 99% occupied bandwidth

**2.4-2.4835GHz\_BT-LE(1Mbps)**
**EBW-DTS**
**2402MHz**

**2.4-2.4835GHz\_BT-LE(1Mbps)**
**EBW-DTS**
**2440MHz**






**Summary**

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	15.01	0.03170
BT-LE(2Mbps)	15.17	0.03289

**Result**

Mode	Result	Antenna Gain (dBi)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
BT-LE(1Mbps)	-	-	-	-	-	-
2402MHz	Pass	-3.89	14.91	30.00	11.02	36.00
2440MHz	Pass	-3.89	15.01	30.00	11.12	36.00
2480MHz	Pass	-3.89	14.48	30.00	10.59	36.00
BT-LE(2Mbps)	-	-	-	-	-	-
2404MHz	Pass	-3.89	15.03	30.00	11.14	36.00
2440MHz	Pass	-3.89	15.17	30.00	11.28	36.00
2478MHz	Pass	-3.89	14.72	30.00	10.83	36.00

**Summary**

Mode	Total Power (dBm)	Total Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	14.96	0.03133
BT-LE(2Mbps)	15.08	0.03221

**Result**

Mode	Result	Antenna Gain (dBi)	Total Power (dBm)	Power Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
BT-LE(1Mbps)	-	-	-	-	-	-
2402MHz	Pass	-3.89	14.82	-	10.93	-
2440MHz	Pass	-3.89	14.96	-	11.07	-
2480MHz	Pass	-3.89	14.38	-	10.49	-
BT-LE(2Mbps)	-	-	-	-	-	-
2404MHz	Pass	-3.89	14.94	-	11.05	-
2440MHz	Pass	-3.89	15.08	-	11.19	-
2478MHz	Pass	-3.89	14.61	-	10.72	-

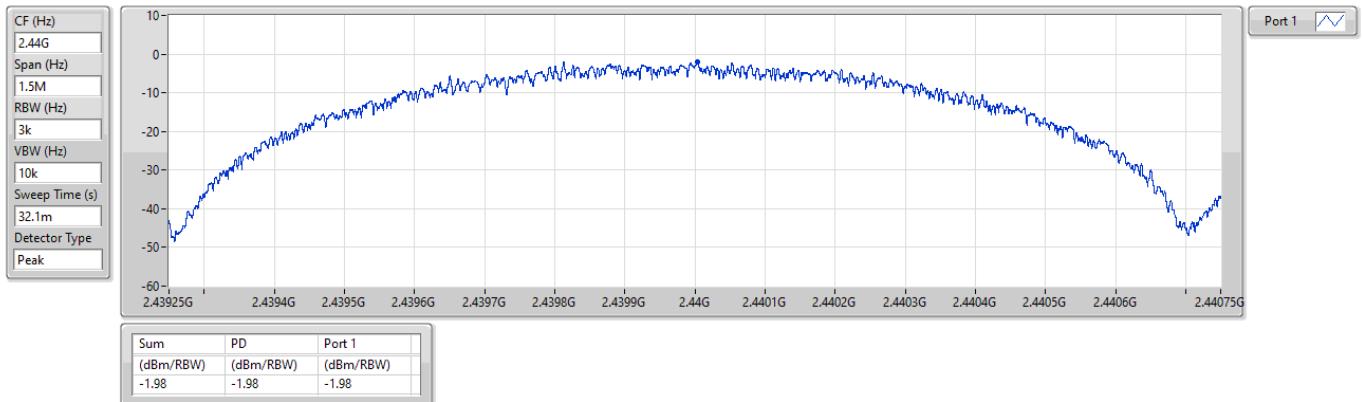
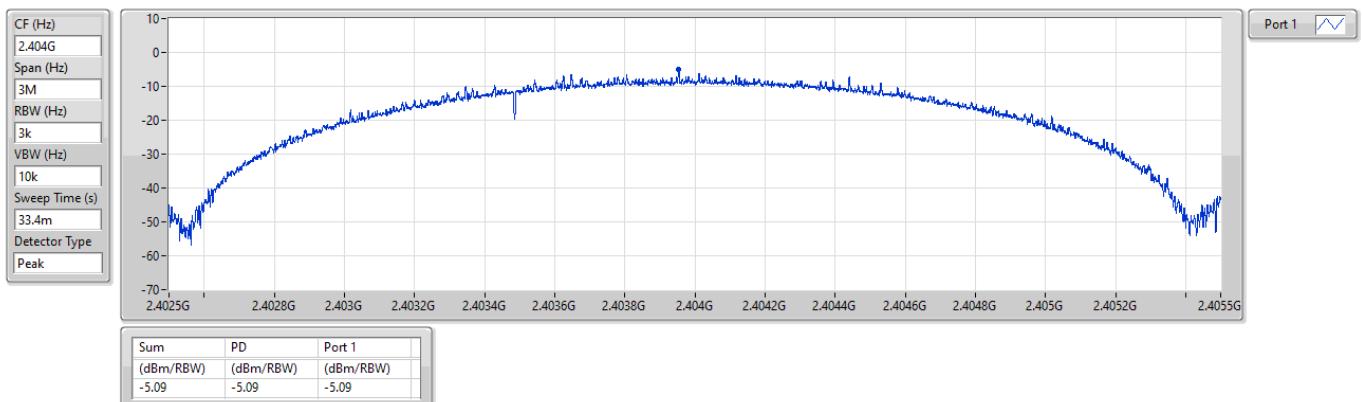
Note: Average power is for reference only.

**Summary**

Mode	PD (dBm/3kHz)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-1.98
BT-LE(2Mbps)	-5.09

**Result**

Mode	Result	Antenna Gain (dBi)	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	-3.89	-2.39	8.00
2440MHz	Pass	-3.89	-1.98	8.00
2480MHz	Pass	-3.89	-2.82	8.00
BT-LE(2Mbps)	-	-	-	-
2404MHz	Pass	-3.89	-5.09	8.00
2440MHz	Pass	-3.89	-5.18	8.00
2478MHz	Pass	-3.89	-5.13	8.00

**2.4-2.4835GHz\_BT-LE(1Mbps)**
**PSD**
**2440MHz**

**2.4-2.4835GHz\_BT-LE(2Mbps)**
**PSD**
**2404MHz**


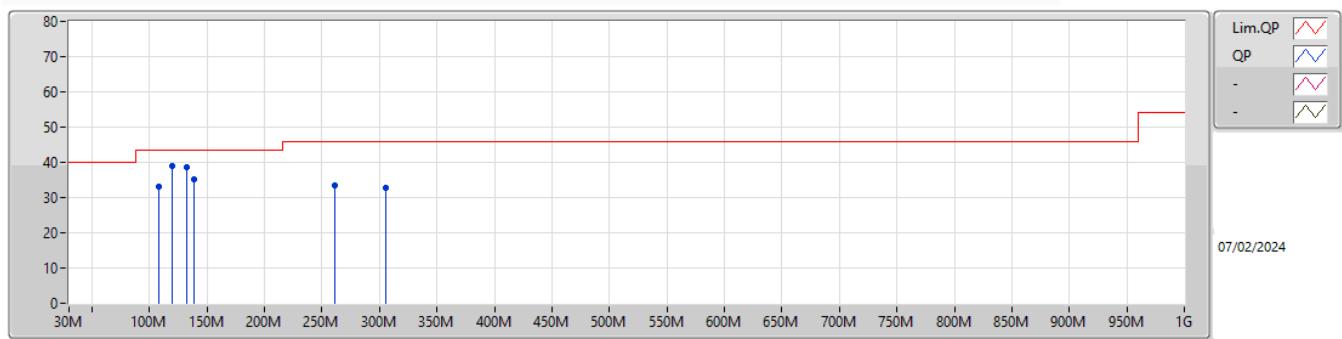


**Summary**

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Condition
Mode 1	Pass	PK	120M	39.00	43.50	-4.50	Horizontal



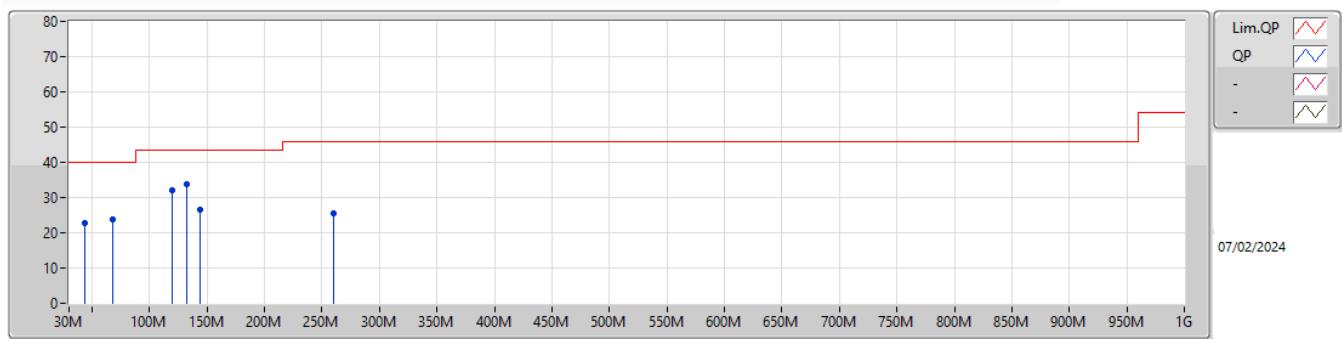
**Mode 1**



Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)	
PK	108M	33.11	43.50	-10.39	-12.10	3	Horizontal	-	-	-	45.21	15.30	0.98	28.38	
PK	120M	39.00	43.50	-4.50	-10.96	3	Horizontal	-	-	-	49.96	16.40	1.03	28.39	
QP	132M	38.78	43.50	-4.72	-10.02	3	Horizontal	36	1.38	-	48.80	17.30	1.08	28.40	
PK	138.4M	35.10	43.50	-8.40	-9.36	3	Horizontal	-	-	-	44.46	17.94	1.10	28.40	
PK	260.7M	33.59	46.00	-12.41	-9.48	3	Horizontal	-	-	-	43.07	17.43	1.52	28.43	
PK	305.4M	32.72	46.00	-13.28	-7.93	3	Horizontal	-	-	-	40.65	18.82	1.67	28.42	



**Mode 1**

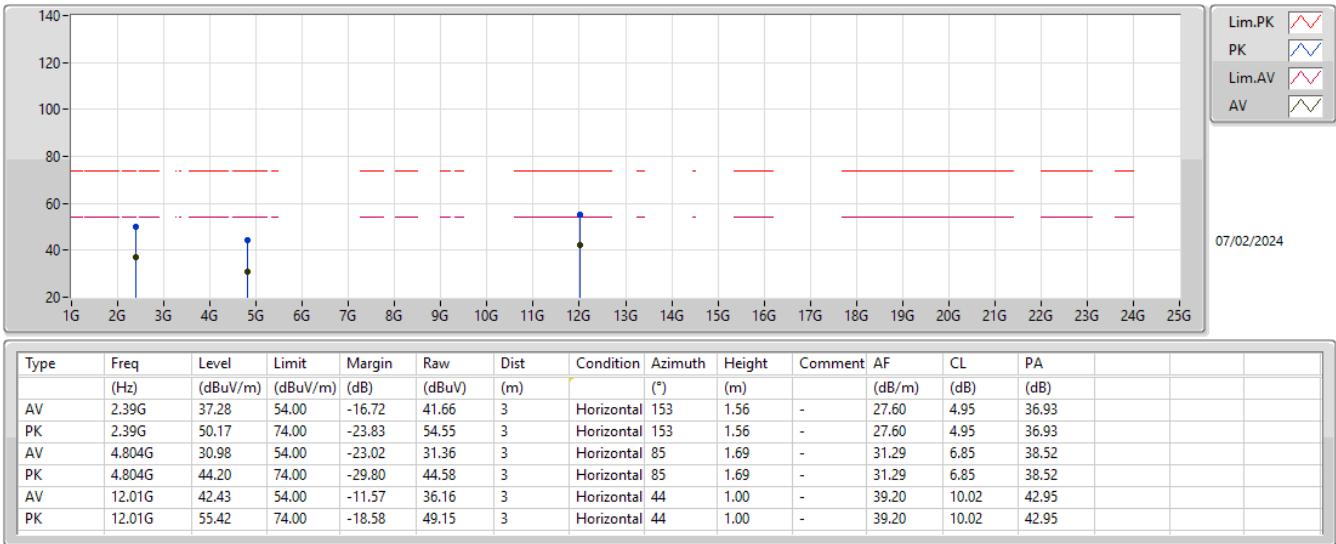


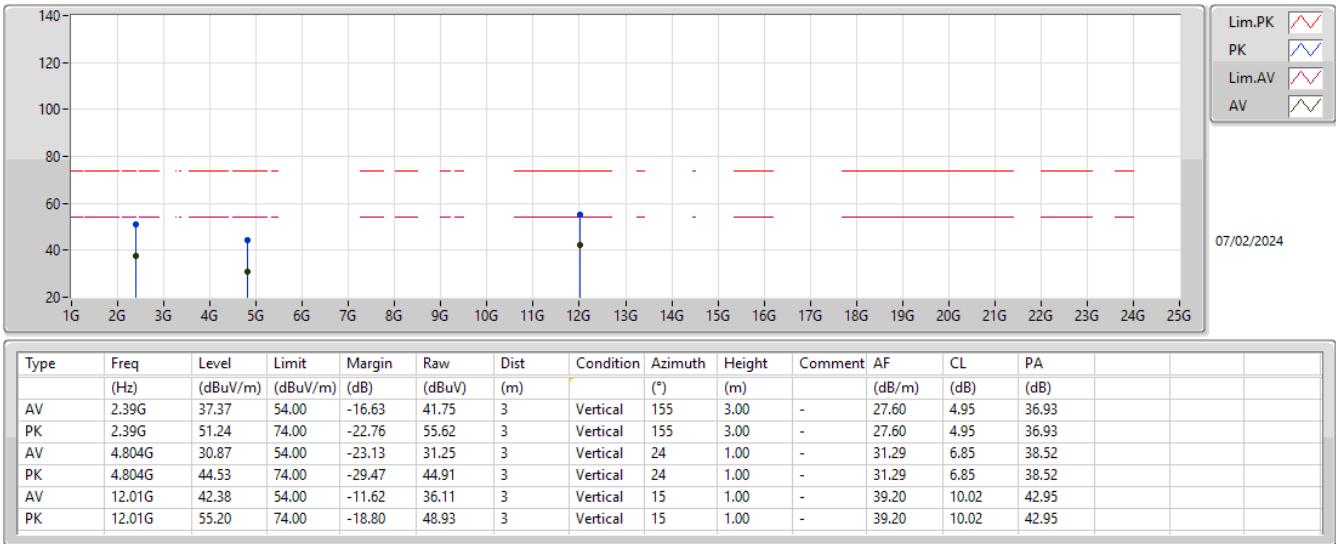
Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Factor (dB/m)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	Raw (dBuV)	AF (dB/m)	CL (dB)	PA (dB)	
PK	43.6M	22.81	40.00	-17.19	-8.41	3	Vertical	-	-	-	31.22	19.04	0.59	28.04	
PK	68.1M	23.84	40.00	-16.16	-10.37	3	Vertical	-	-	-	34.21	17.05	0.77	28.19	
PK	120M	32.10	43.50	-11.40	-10.96	3	Vertical	-	-	-	43.06	16.40	1.03	28.39	
PK	132M	33.66	43.50	-9.84	-10.02	3	Vertical	-	-	-	43.68	17.30	1.08	28.40	
PK	144M	26.55	43.50	-16.95	-8.99	3	Vertical	-	-	-	35.54	18.30	1.12	28.41	
PK	259.8M	25.62	46.00	-20.38	-9.52	3	Vertical	-	-	-	35.14	17.39	1.52	28.43	

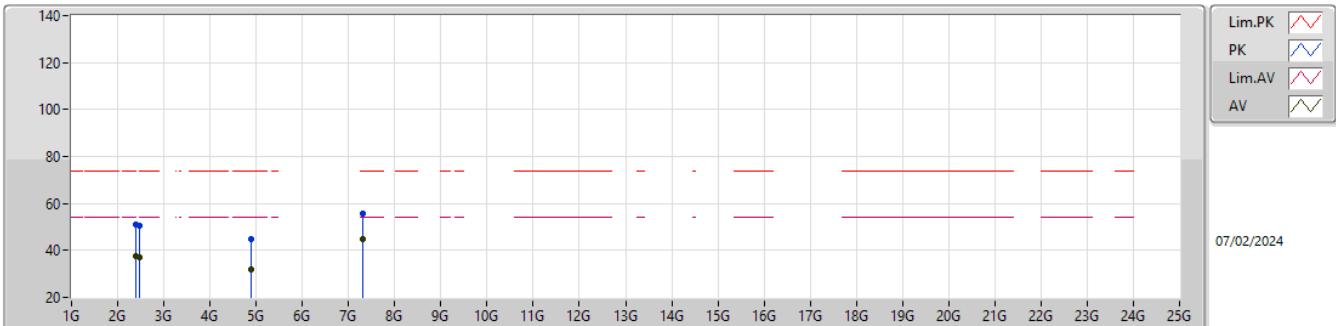


**Summary**

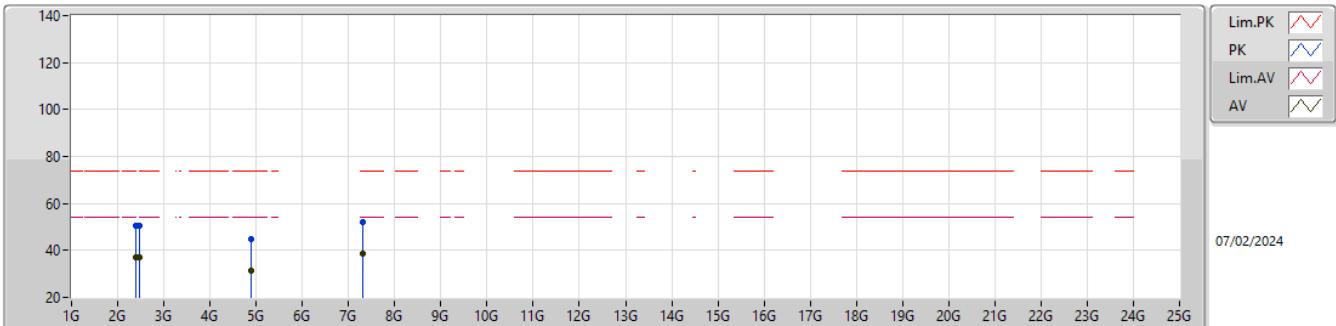
Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comments
2.4-2.4835GHz	-	-	-	-	-	-	-	-	-	-	-
BT-LE(1Mbps)	Pass	AV	7.44G	46.25	54.00	-7.75	3	Horizontal	181	2.11	-
BT-LE(2Mbps)	Pass	AV	7.32G	44.88	54.00	-9.12	3	Horizontal	182	2.36	-

**2.4-2.4835GHz\_BT-LE(1Mbps)**
**2402MHz\_TX**


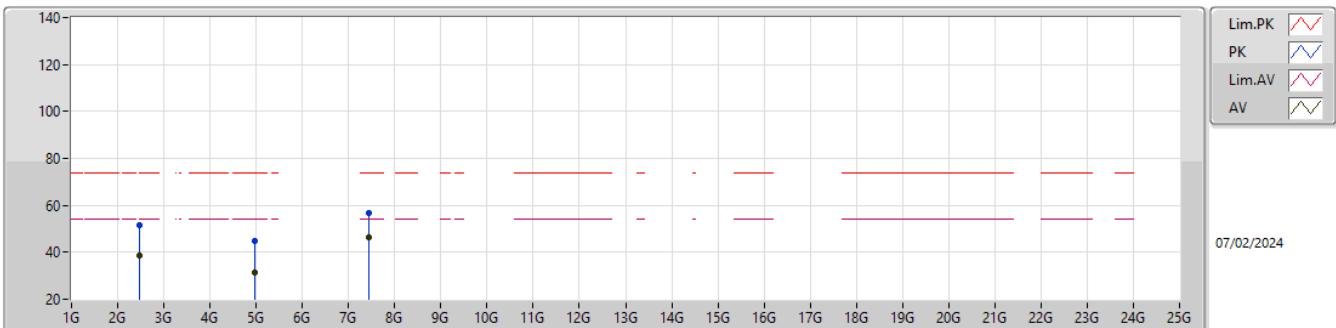
**2.4-2.4835GHz\_BT-LE(1Mbps)**
**2402MHz\_TX**


**2.4-2.4835GHz\_BT-LE(1Mbps)**
**2440MHz\_TX**


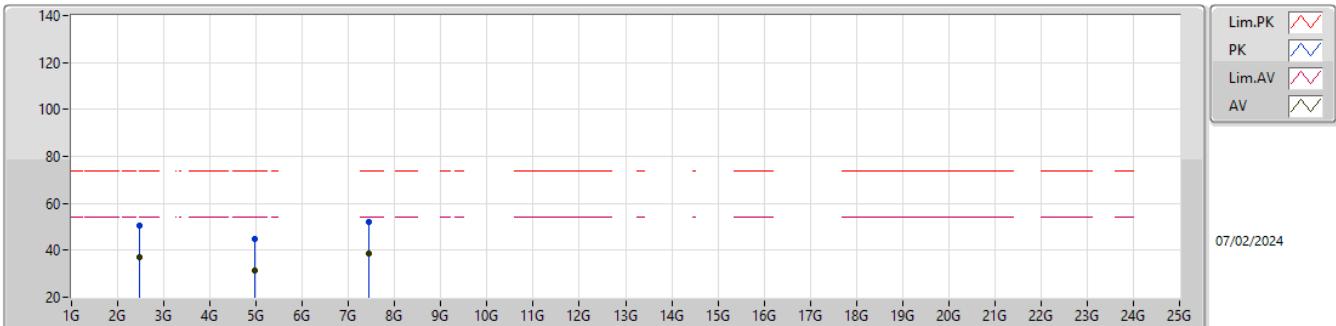
Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	2.39G	37.43	54.00	-16.57	41.81	3	Horizontal	152	1.58	-	27.60	4.95	36.93			
PK	2.39G	50.81	74.00	-23.19	55.19	3	Horizontal	152	1.58	-	27.60	4.95	36.93			
AV	2.4835G	37.01	54.00	-16.99	41.76	3	Horizontal	152	1.58	-	27.20	5.06	37.01			
PK	2.4835G	50.41	74.00	-23.59	55.16	3	Horizontal	152	1.58	-	27.20	5.06	37.01			
AV	4.88G	31.70	54.00	-22.30	32.21	3	Horizontal	90	1.84	-	31.14	6.92	38.57			
PK	4.88G	44.57	74.00	-29.43	45.08	3	Horizontal	90	1.84	-	31.14	6.92	38.57			
AV	7.32G	44.91	54.00	-9.09	39.78	3	Horizontal	187	2.31	-	36.16	8.43	39.46			
PK	7.32G	55.69	74.00	-18.31	50.56	3	Horizontal	187	2.31	-	36.16	8.43	39.46			

**2.4-2.4835GHz\_BT-LE(1Mbps)**
**2440MHz\_TX**


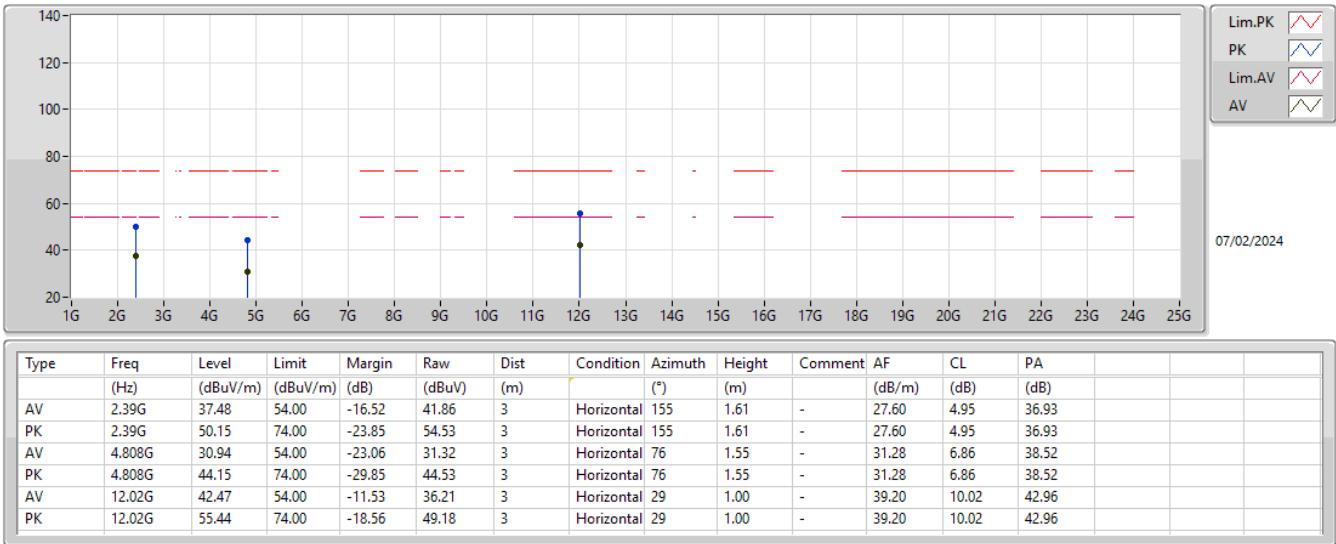
Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	2.39G	37.18	54.00	-16.82	41.56	3	Vertical	136	3.02	-	27.60	4.95	36.93			
PK	2.39G	50.68	74.00	-23.32	55.06	3	Vertical	136	3.02	-	27.60	4.95	36.93			
AV	2.4835G	37.11	54.00	-16.89	41.86	3	Vertical	136	3.02	-	27.20	5.06	37.01			
PK	2.4835G	50.67	74.00	-23.33	55.42	3	Vertical	136	3.02	-	27.20	5.06	37.01			
AV	4.88G	31.14	54.00	-22.86	31.65	3	Vertical	24	1.00	-	31.14	6.92	38.57			
PK	4.88G	44.66	74.00	-29.34	45.17	3	Vertical	24	1.00	-	31.14	6.92	38.57			
AV	7.32G	38.40	54.00	-15.60	33.27	3	Vertical	205	2.04	-	36.16	8.43	39.46			
PK	7.32G	51.91	74.00	-22.09	46.78	3	Vertical	205	2.04	-	36.16	8.43	39.46			

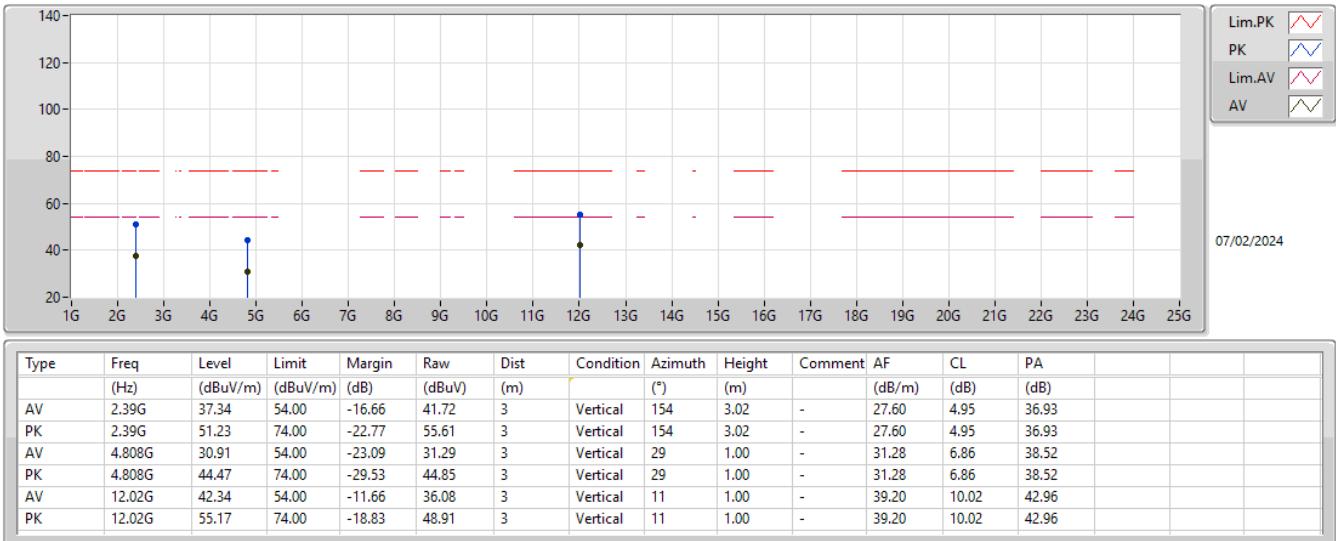
**2.4-2.4835GHz\_BT-LE(1Mbps)**
**2480MHz\_TX**


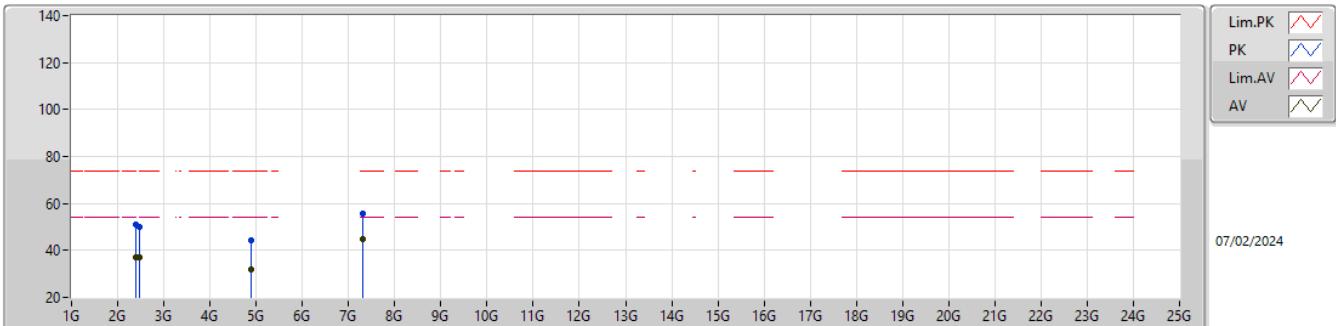
Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	2.4835G	38.40	54.00	-15.60	43.15	3	Horizontal	151	1.52	-	27.20	5.06	37.01			
PK	2.4835G	51.46	74.00	-22.54	56.21	3	Horizontal	151	1.52	-	27.20	5.06	37.01			
AV	4.96G	31.62	54.00	-22.38	31.89	3	Horizontal	82	1.66	-	31.36	6.99	38.62			
PK	4.96G	45.08	74.00	-28.92	45.35	3	Horizontal	82	1.66	-	31.36	6.99	38.62			
AV	7.44G	46.25	54.00	-7.75	41.02	3	Horizontal	181	2.11	-	36.34	8.50	39.61			
PK	7.44G	56.74	74.00	-17.26	51.51	3	Horizontal	181	2.11	-	36.34	8.50	39.61			

**2.4-2.4835GHz\_BT-LE(1Mbps)**
**2480MHz\_TX**


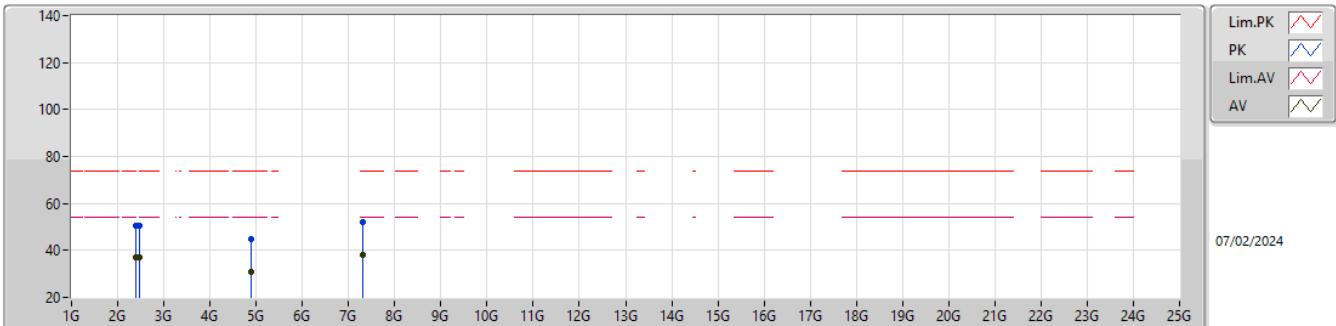
Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	2.4835G	37.30	54.00	-16.70	42.05	3	Vertical	186	2.87	-	27.20	5.06	37.01			
PK	2.4835G	50.65	74.00	-23.35	55.40	3	Vertical	186	2.87	-	27.20	5.06	37.01			
AV	4.96G	31.55	54.00	-22.45	31.82	3	Vertical	29	1.00	-	31.36	6.99	38.62			
PK	4.96G	44.94	74.00	-29.06	45.21	3	Vertical	29	1.00	-	31.36	6.99	38.62			
AV	7.44G	38.61	54.00	-15.39	33.38	3	Vertical	201	2.08	-	36.34	8.50	39.61			
PK	7.44G	52.11	74.00	-21.89	46.88	3	Vertical	201	2.08	-	36.34	8.50	39.61			

**2.4-2.4835GHz\_BT-LE(2Mbps)**
**2404MHz\_TX**


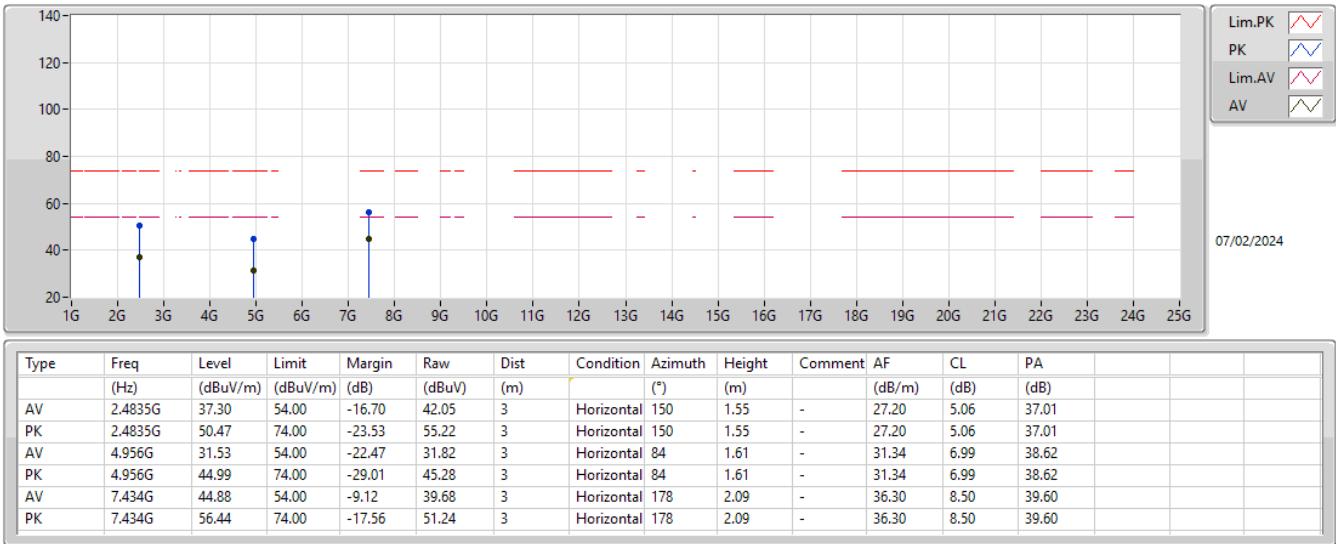
**2.4-2.4835GHz\_BT-LE(2Mbps)**
**2404MHz\_TX**


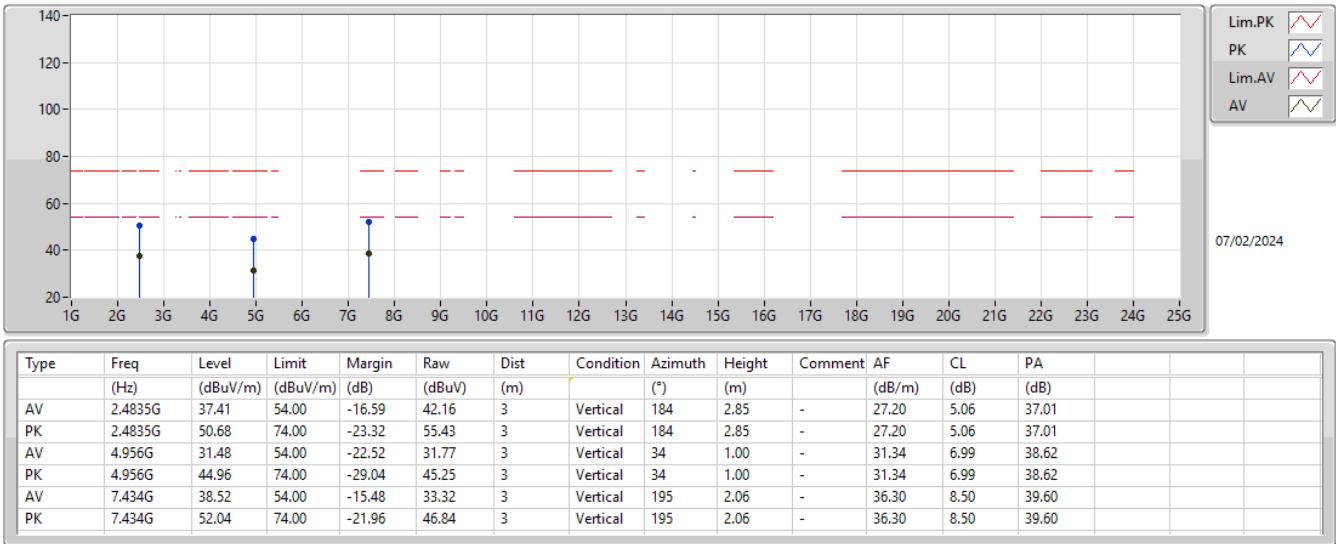
**2.4-2.4835GHz\_BT-LE(2Mbps)**
**2440MHz\_TX**


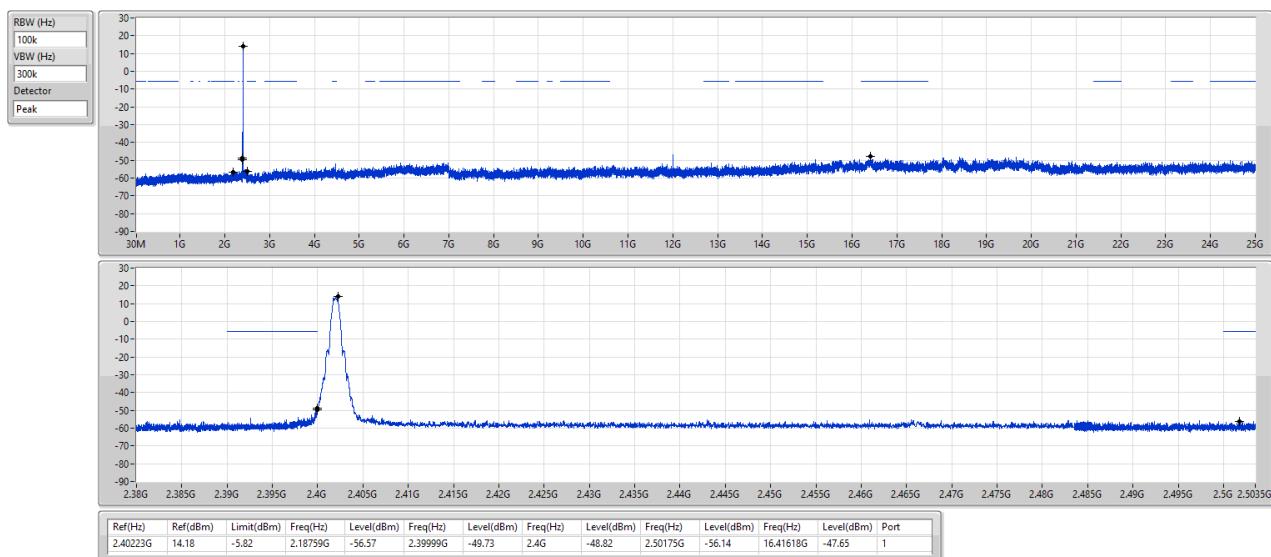
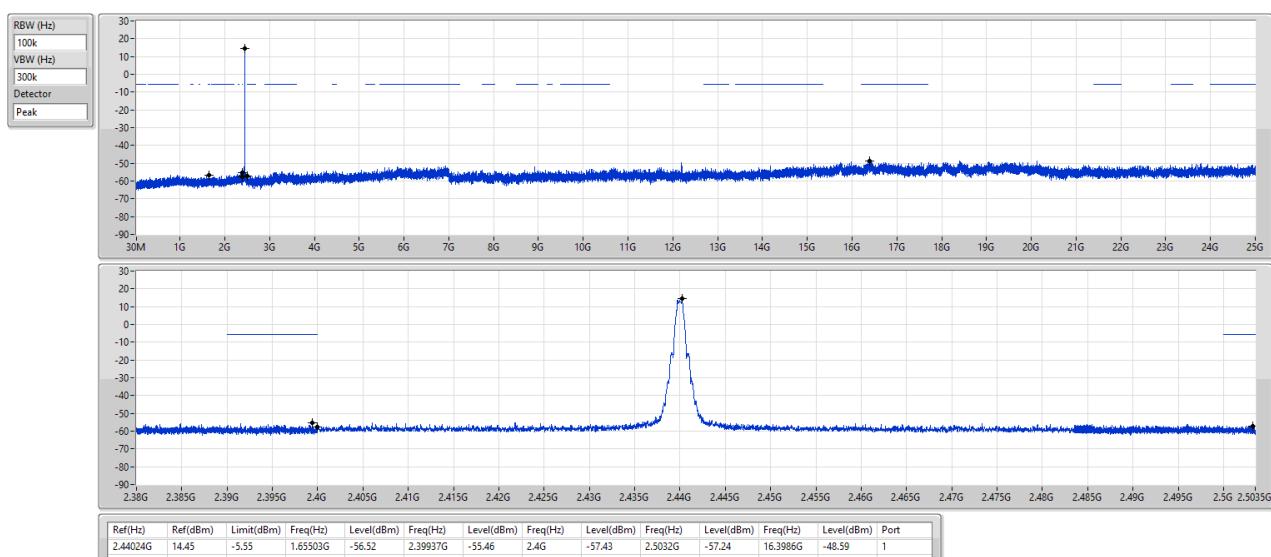
Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	2.39G	37.12	54.00	-16.88	41.50	3	Horizontal	151	1.63	-	27.60	4.95	36.93			
PK	2.39G	50.78	74.00	-23.22	55.16	3	Horizontal	151	1.63	-	27.60	4.95	36.93			
AV	2.4835G	36.99	54.00	-17.01	41.74	3	Horizontal	151	1.63	-	27.20	5.06	37.01			
PK	2.4835G	50.09	74.00	-23.91	54.84	3	Horizontal	151	1.63	-	27.20	5.06	37.01			
AV	4.88G	31.68	54.00	-22.32	32.19	3	Horizontal	85	1.81	-	31.14	6.92	38.57			
PK	4.88G	44.45	74.00	-29.55	44.96	3	Horizontal	85	1.81	-	31.14	6.92	38.57			
AV	7.32G	44.88	54.00	-9.12	39.75	3	Horizontal	182	2.36	-	36.16	8.43	39.46			
PK	7.32G	55.66	74.00	-18.34	50.53	3	Horizontal	182	2.36	-	36.16	8.43	39.46			

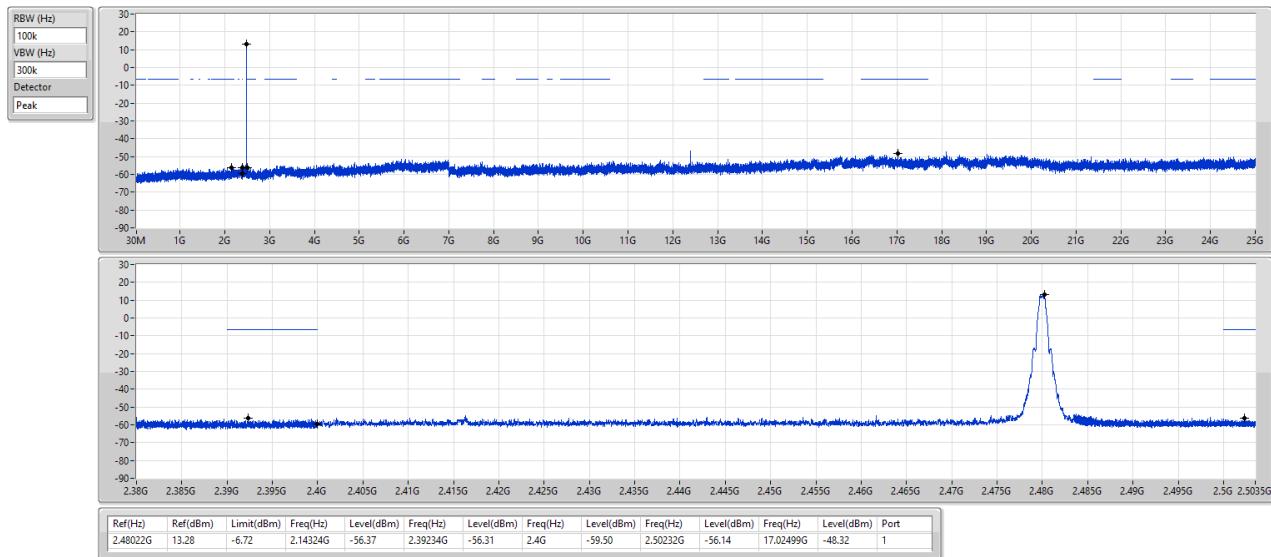
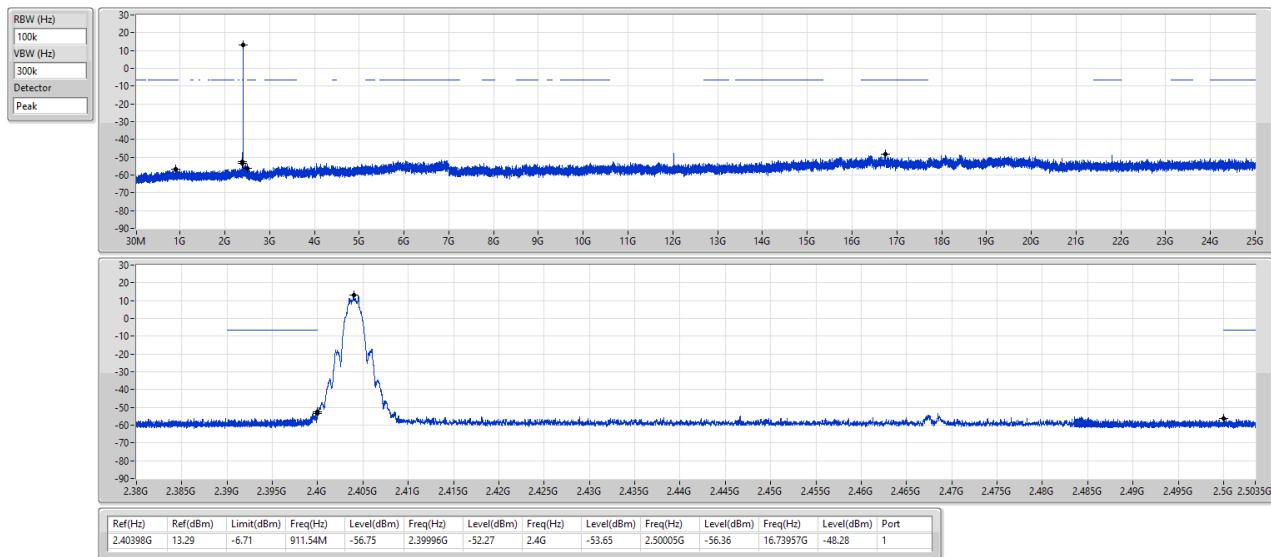
**2.4-2.4835GHz\_BT-LE(2Mbps)**
**2440MHz\_TX**


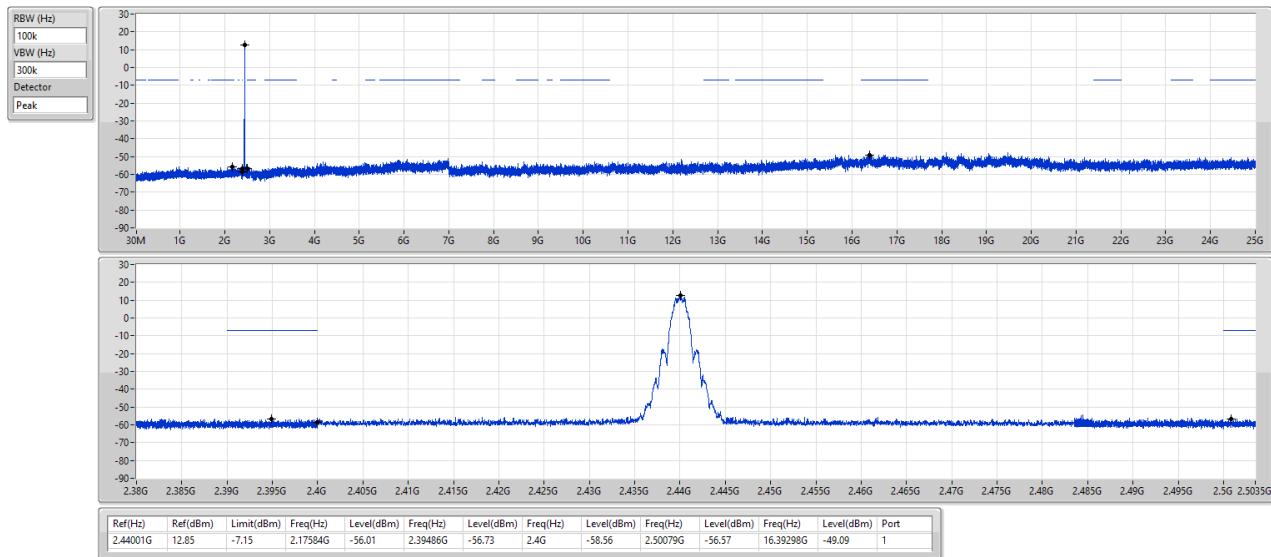
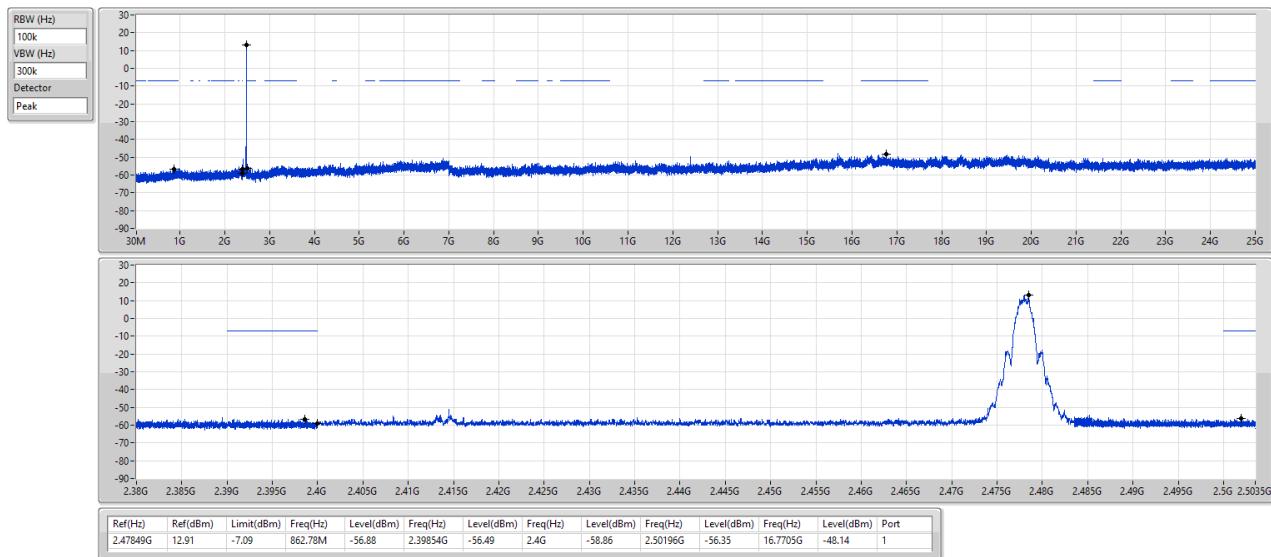
Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Raw (dBuV)	Dist (m)	Condition	Azimuth (°)	Height (m)	Comment	AF (dB/m)	CL (dB)	PA (dB)			
AV	2.39G	37.16	54.00	-16.84	41.54	3	Vertical	134	3.05	-	27.60	4.95	36.93			
PK	2.39G	50.65	74.00	-23.35	55.03	3	Vertical	134	3.05	-	27.60	4.95	36.93			
AV	2.4835G	36.94	54.00	-17.06	41.69	3	Vertical	134	3.05	-	27.20	5.06	37.01			
PK	2.4835G	50.71	74.00	-23.29	55.46	3	Vertical	134	3.05	-	27.20	5.06	37.01			
AV	4.88G	31.08	54.00	-22.92	31.59	3	Vertical	22	1.00	-	31.14	6.92	38.57			
PK	4.88G	44.61	74.00	-29.39	45.12	3	Vertical	22	1.00	-	31.14	6.92	38.57			
AV	7.32G	38.34	54.00	-15.66	33.21	3	Vertical	201	1.98	-	36.16	8.43	39.46			
PK	7.32G	51.87	74.00	-22.13	46.74	3	Vertical	201	1.98	-	36.16	8.43	39.46			

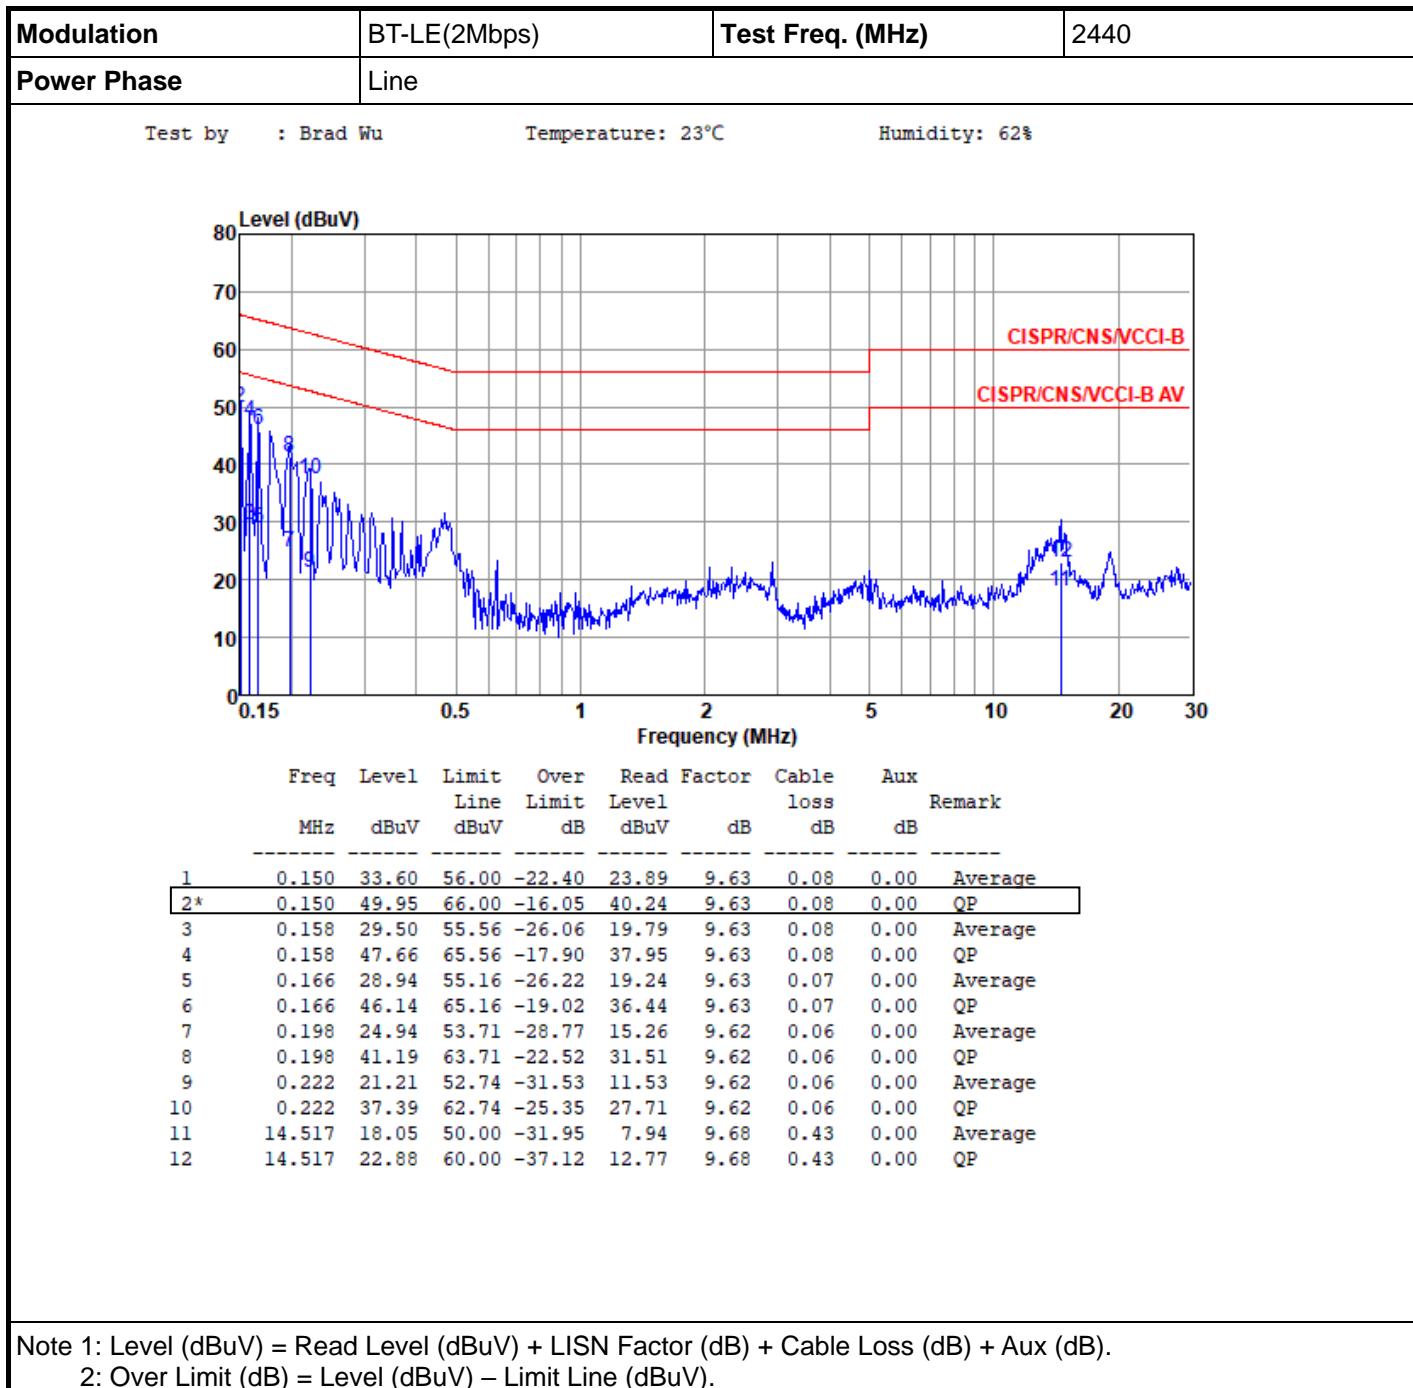
**2.4-2.4835GHz\_BT-LE(2Mbps)**
**2478MHz\_TX**


**2.4-2.4835GHz\_BT-LE(2Mbps)**
**2478MHz\_TX**


**2.4-2.4835GHz\_BT-LE(1Mbps)**
**CSEndB-DTS**
**2402MHz**

**2.4-2.4835GHz\_BT-LE(1Mbps)**
**CSEndB-DTS**
**2440MHz**


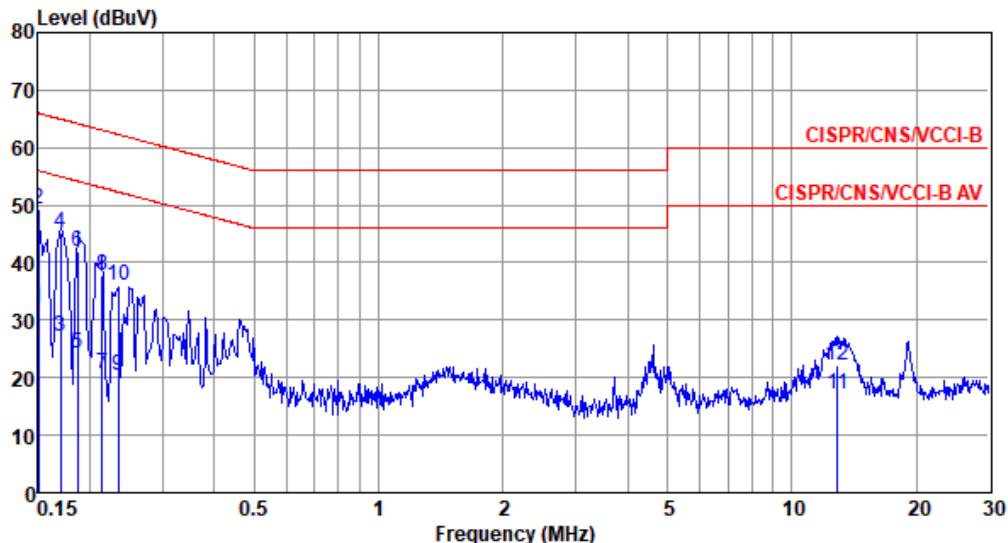
**2.4-2.4835GHz\_BT-LE(1Mbps)**
**CSEndB-DTS**
**2480MHz**

**2.4-2.4835GHz\_BT-LE(2Mbps)**
**CSEndB-DTS**
**2404MHz**


**2.4-2.4835GHz\_BT-LE(2Mbps)**
**CSEndB-DTS**
**2440MHz**

**2.4-2.4835GHz\_BT-LE(2Mbps)**
**CSEndB-DTS**
**2470MHz**




<b>Modulation</b>	BT-LE(2Mbps)	<b>Test Freq. (MHz)</b>	2440
<b>Power Phase</b>	Neutral		

Test by : Brad Wu      Temperature: 23°C      Humidity: 62%



Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Factor		Cable loss dB	Aux dB	Remark
				Level dBuV	Line dBuV			
1	0.150	32.12	56.00	-23.88	22.41	9.63	0.08	Average
2*	0.150	49.43	66.00	-16.57	39.72	9.63	0.08	QP
3	0.170	27.18	54.94	-27.76	17.48	9.63	0.07	Average
4	0.170	45.13	64.94	-19.81	35.43	9.63	0.07	QP
5	0.186	24.15	54.20	-30.05	14.46	9.63	0.06	Average
6	0.186	41.90	64.20	-22.30	32.21	9.63	0.06	QP
7	0.214	20.79	53.05	-32.26	11.10	9.63	0.06	Average
8	0.214	37.65	63.05	-25.40	27.96	9.63	0.06	QP
9	0.234	20.46	52.30	-31.84	10.77	9.63	0.06	Average
10	0.234	35.91	62.30	-26.39	26.22	9.63	0.06	QP
11	12.920	17.08	50.00	-32.92	6.93	9.74	0.41	Average
12	12.920	22.12	60.00	-37.88	11.97	9.74	0.41	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).