


Appendix B

Peak Output Power




Marker 1 [T1]	RBW	1 MHz	RF Att	60 dB
Ref Lvl	22.42 dBm	VBW	1 MHz	
30 dBm	2.40107704 GHz	SWT	5 ms	Unit dBm

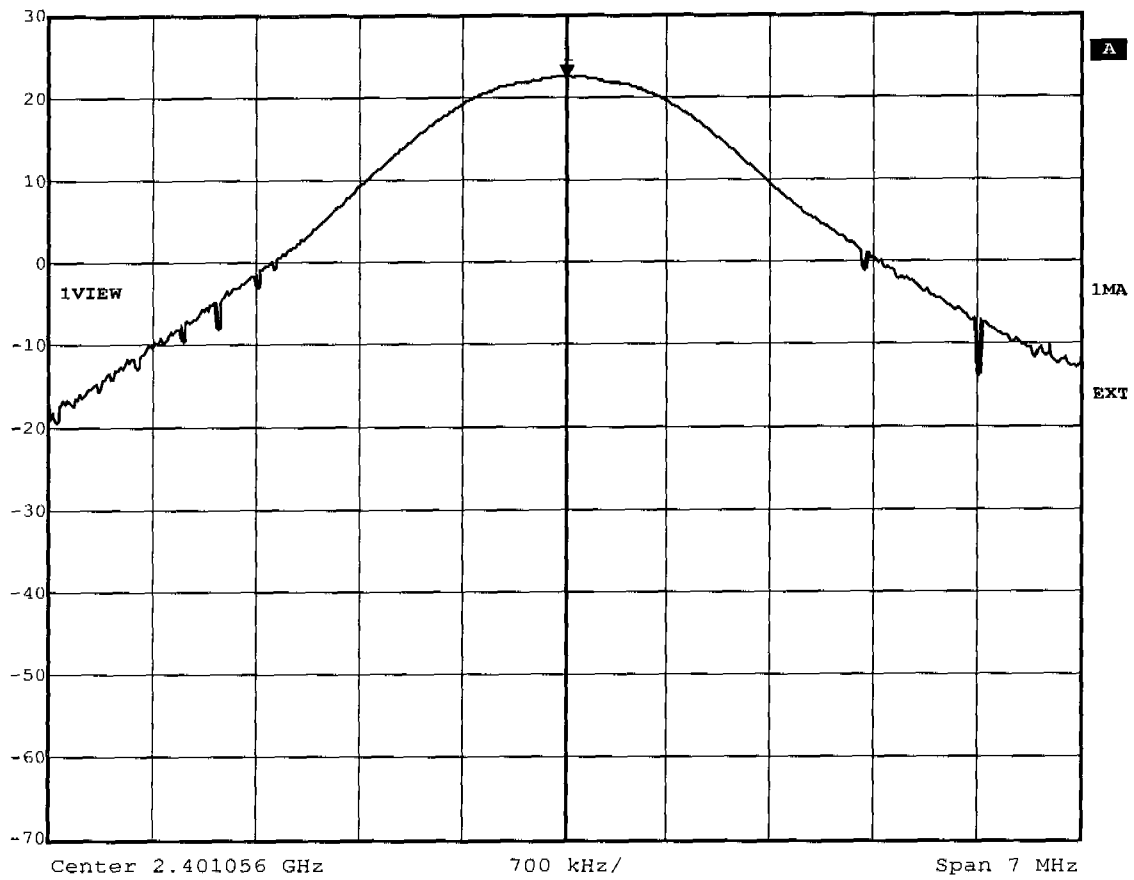

Title: Peak Output Power conducted Ch.: 0
Comment A: DW800 wireless system
Date: 14.JAN.2004 09:00:58




Marker 1 [T1] RBW 1 MHz RF Att 60 dB
Ref Lvl 22.33 dBm VBW 1 MHz
30 dBm 2.44161490 GHz SWT 5 ms Unit dBm

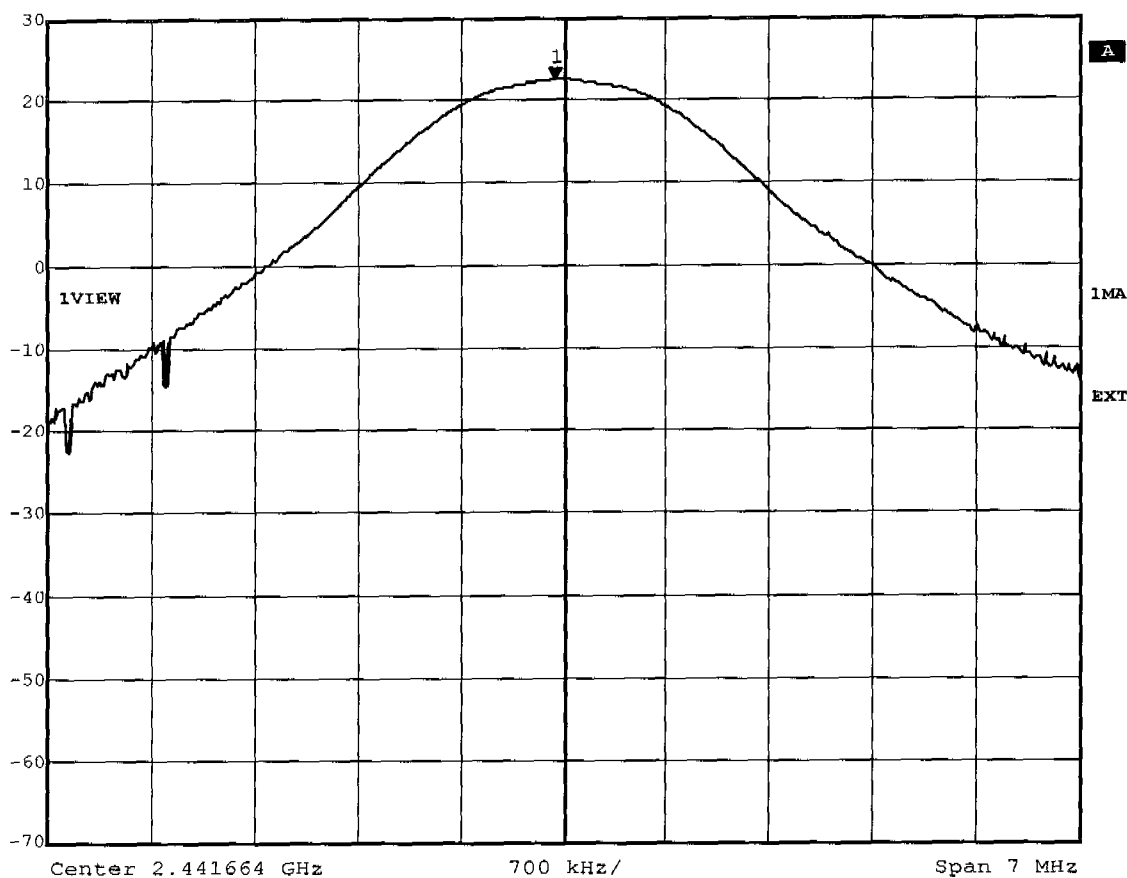

Title: Peak Output Power conducted Ch.: 47
Comment A: DW800 wireless system
Date: 14.JAN.2004 08:57:11




Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	60 dB
30 dBm	22.14 dBm	VBW	1 MHz		
	2.48226499 GHz	SWT	5 ms	Unit	dBm

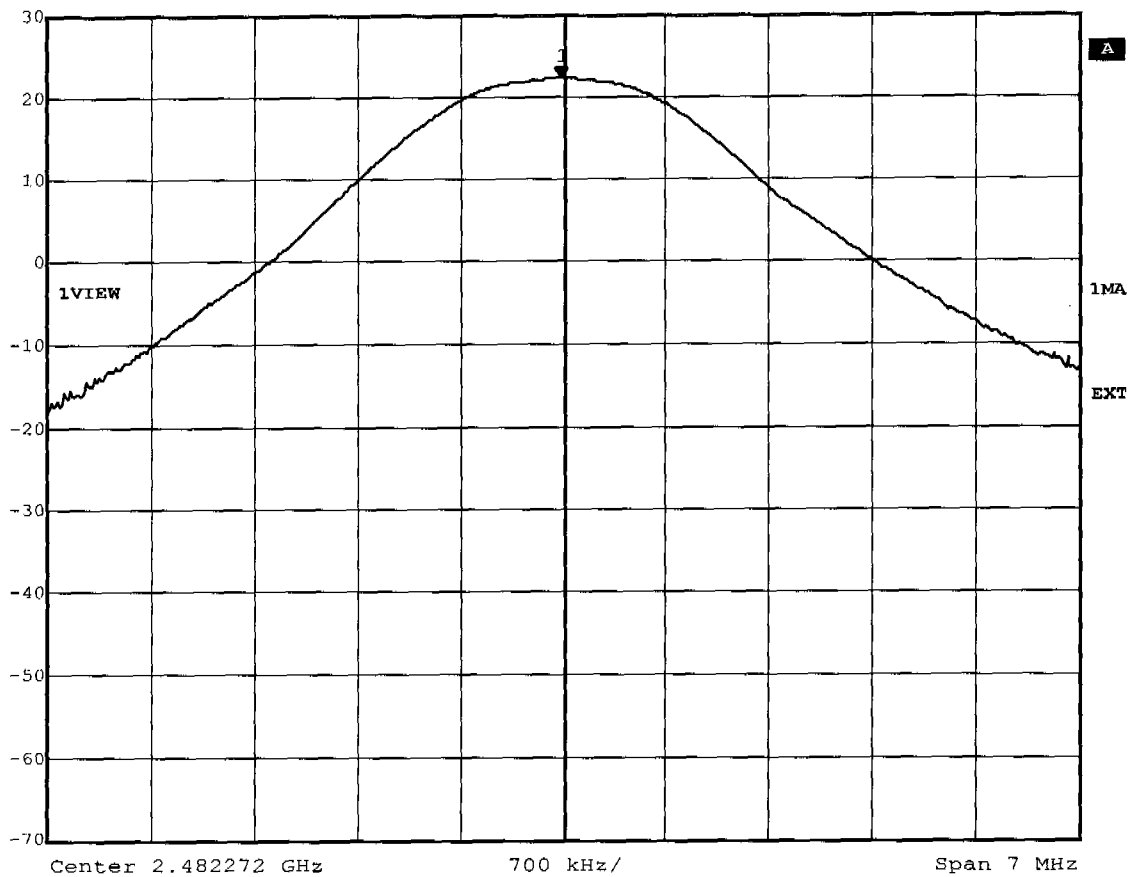

Title: Peak Output Power conducted Ch.: 94
Comment A: DW800 wireless system
Date: 14.JAN.2004 09:22:43


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 25.30dBm, RBW: 5MHz

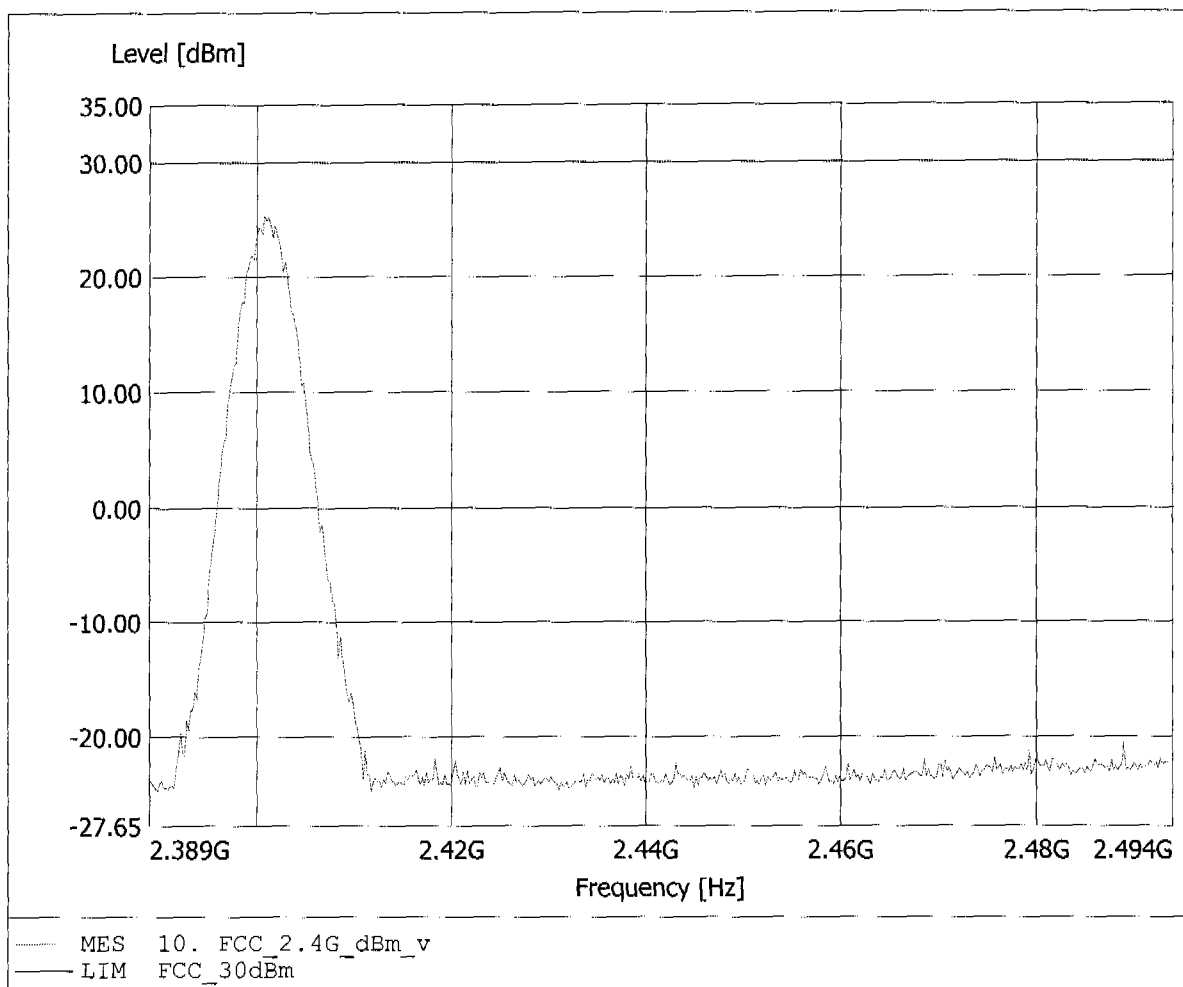


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 23.82dBm, RBW: 5MHz

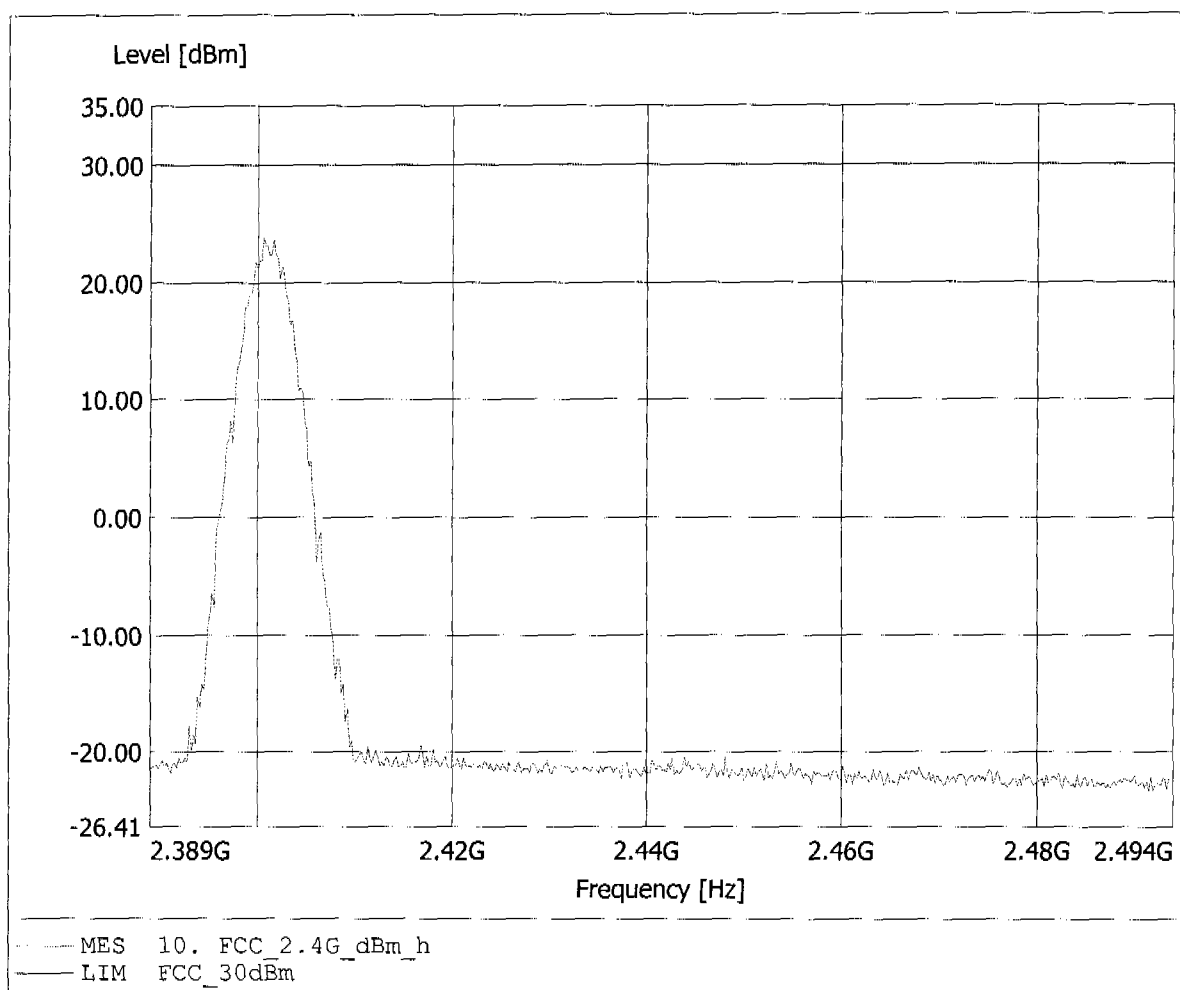


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 25.48dBm, RBW: 5MHz

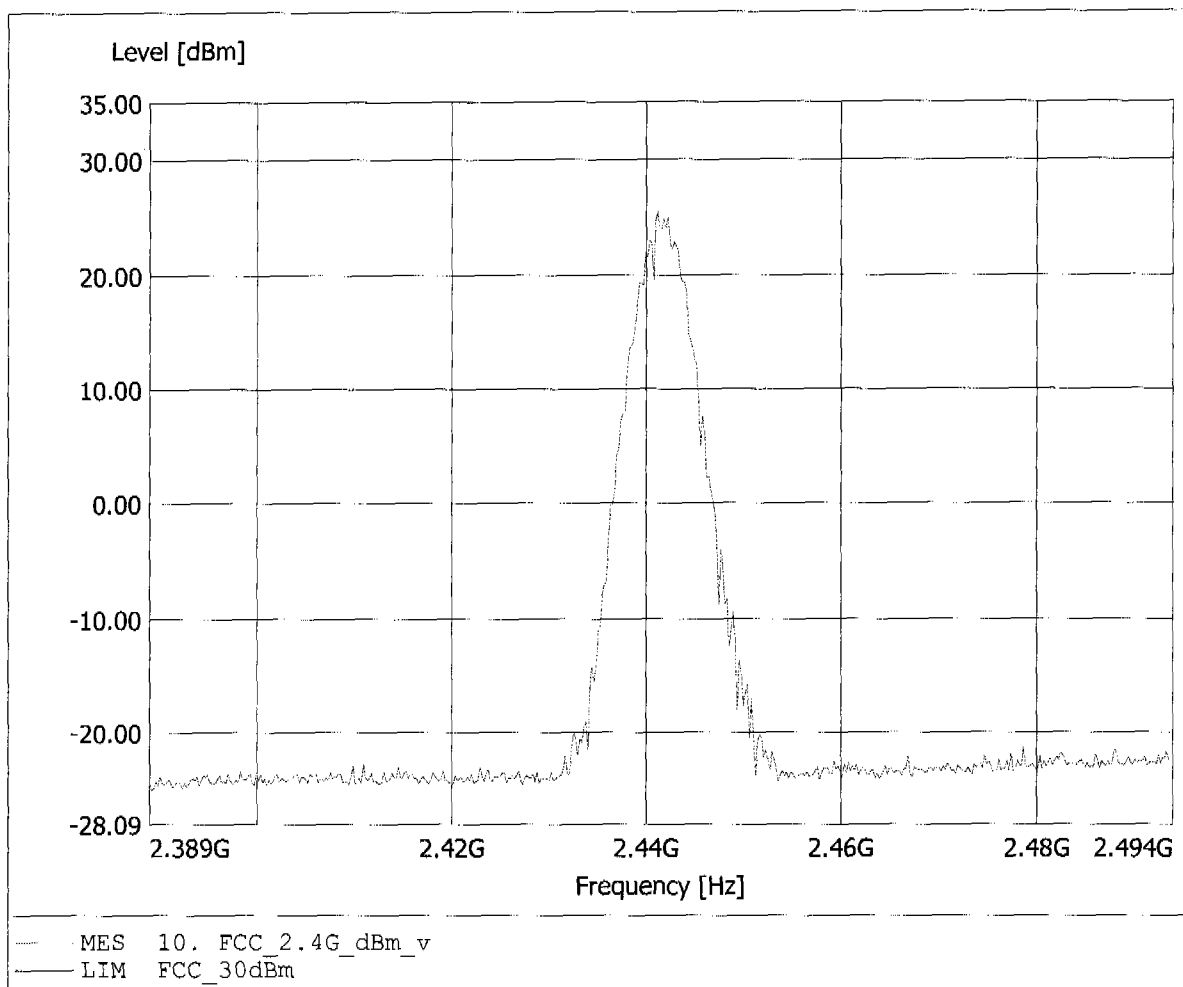


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 21.99dBm, RBW: 5MHz

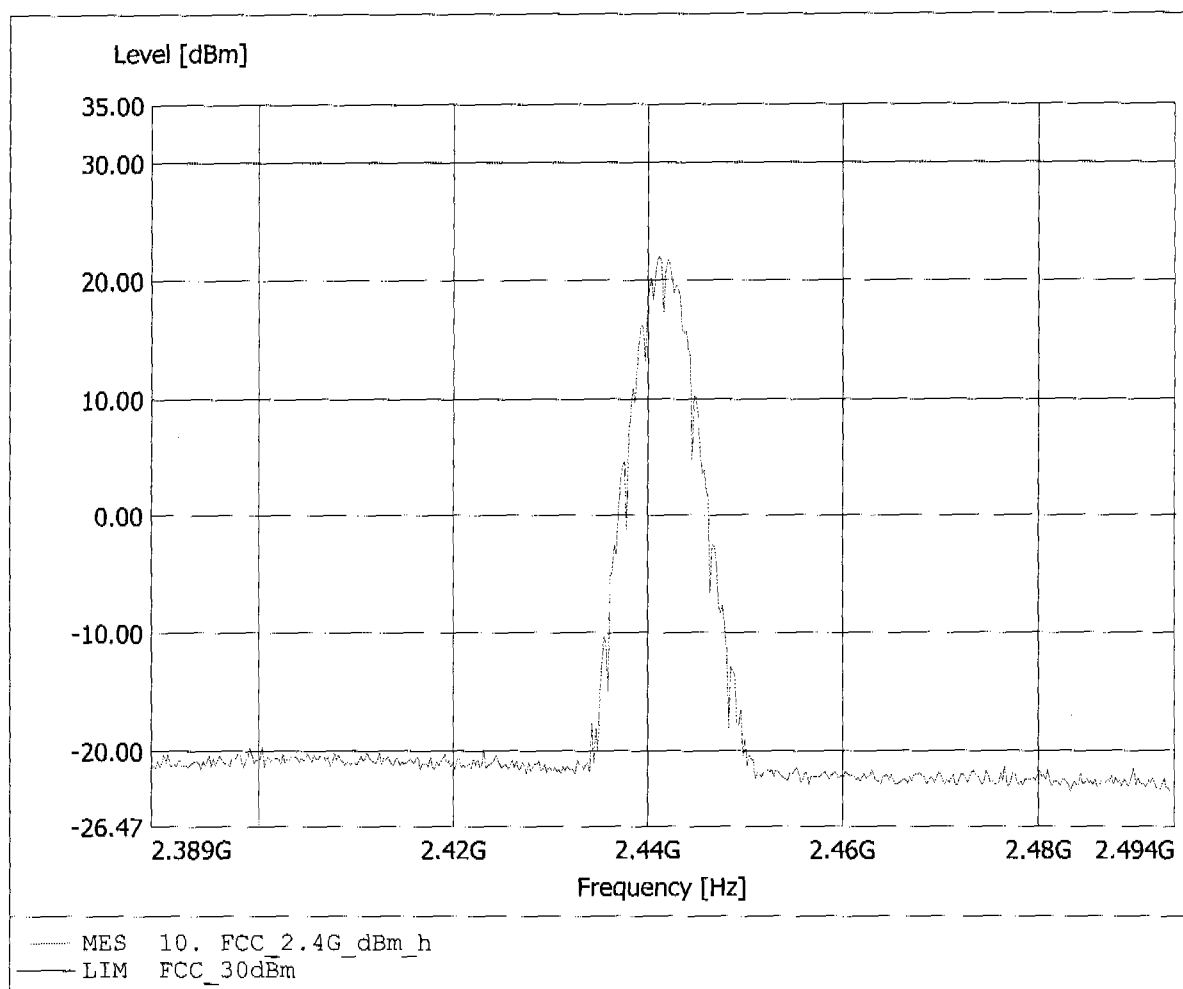


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 24.99dBm, RBW: 5MHz

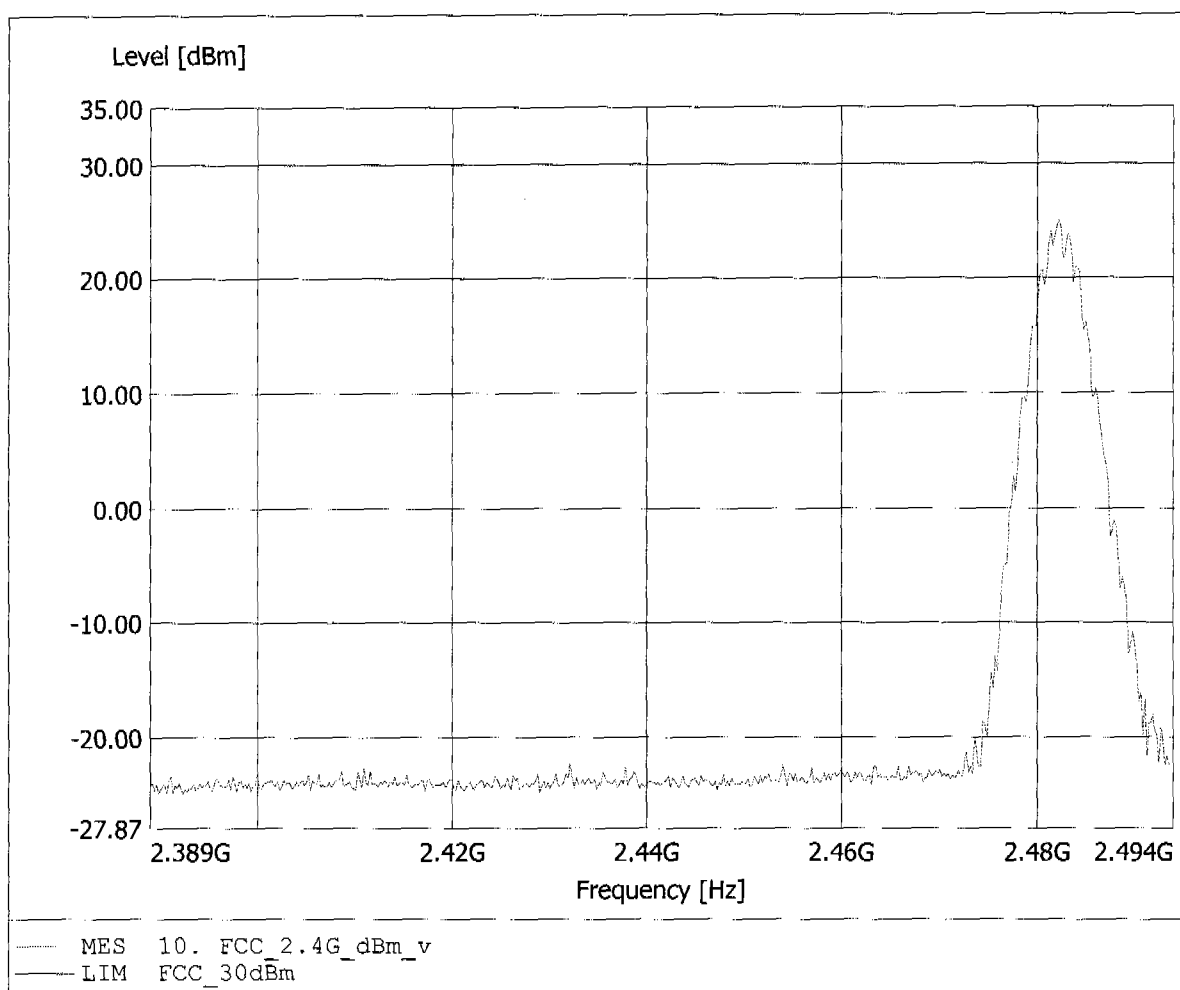


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 21.39dBm, RBW: 5MHz

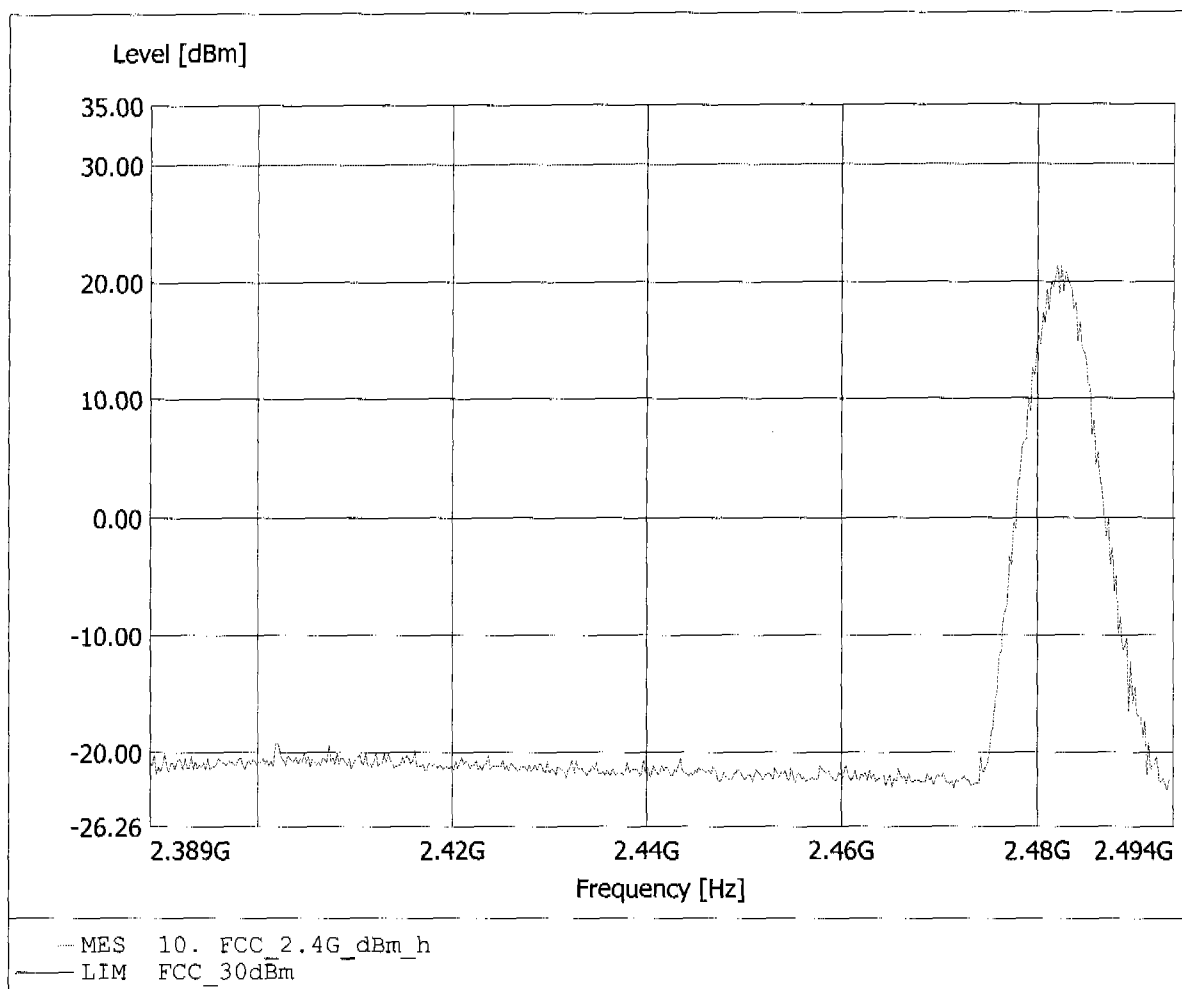


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 25.22dBm, RBW: 5MHz

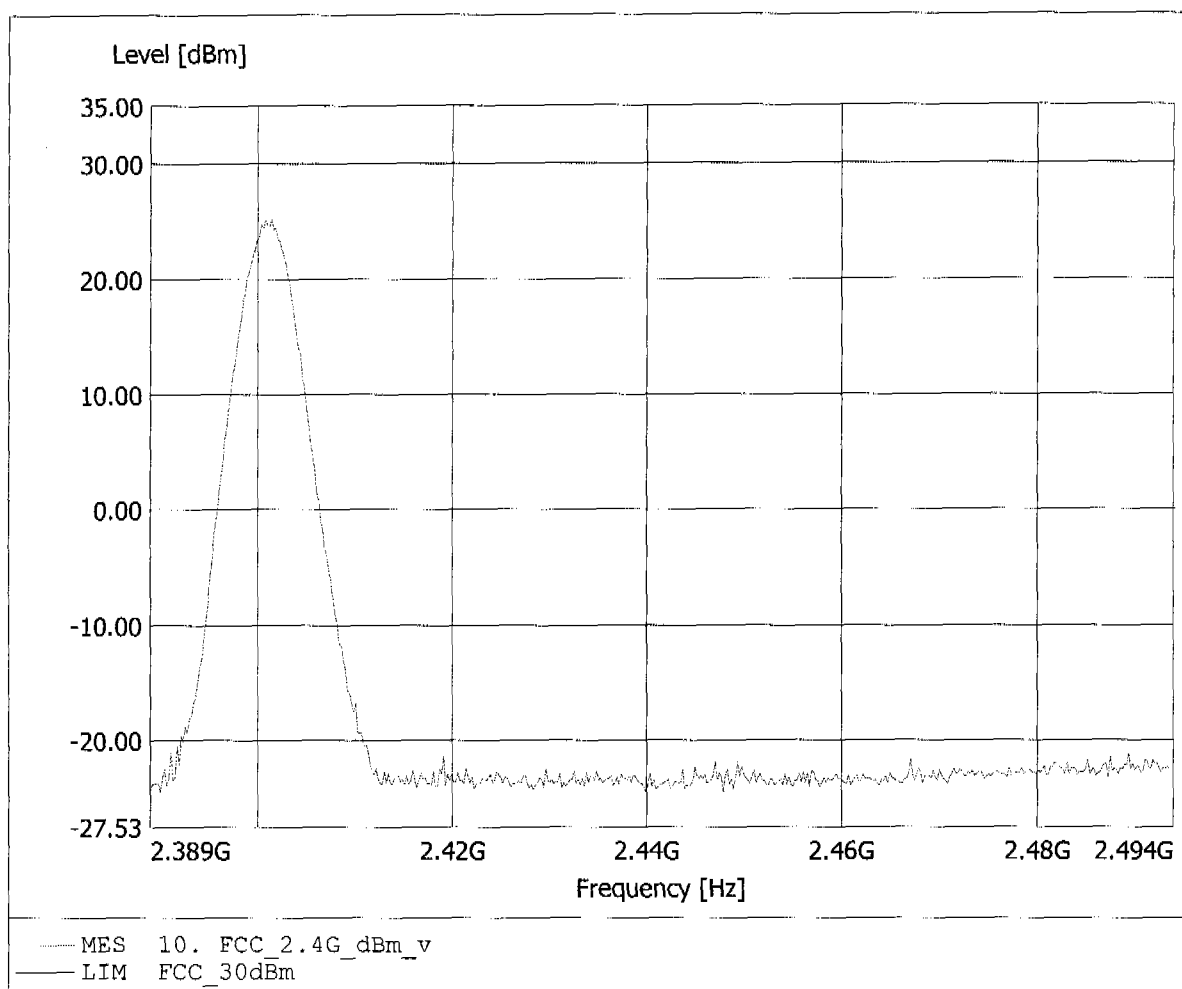


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 23.89dBm, RBW: 5MHz

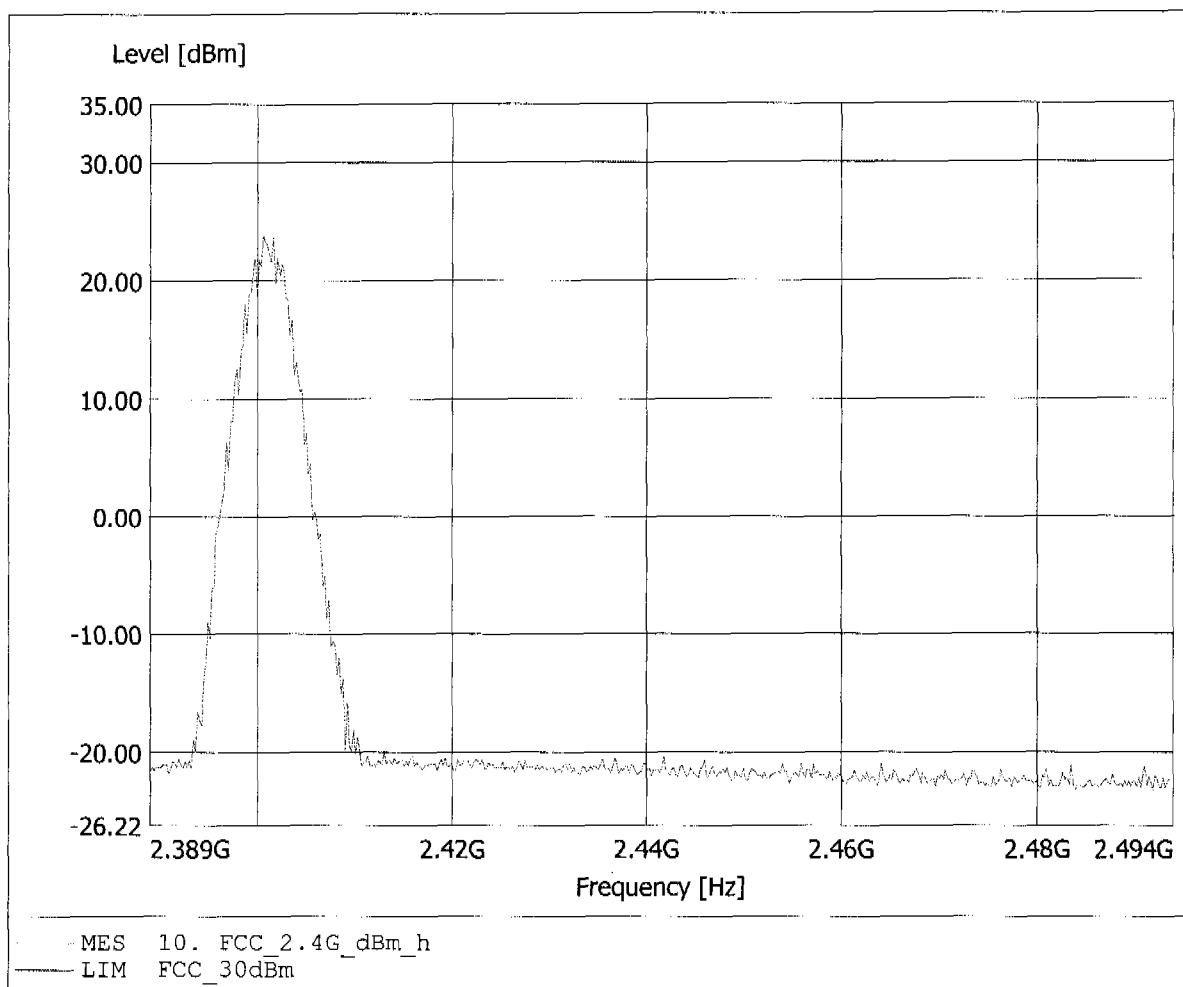


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 25.49dBm, RBW: 5MHz

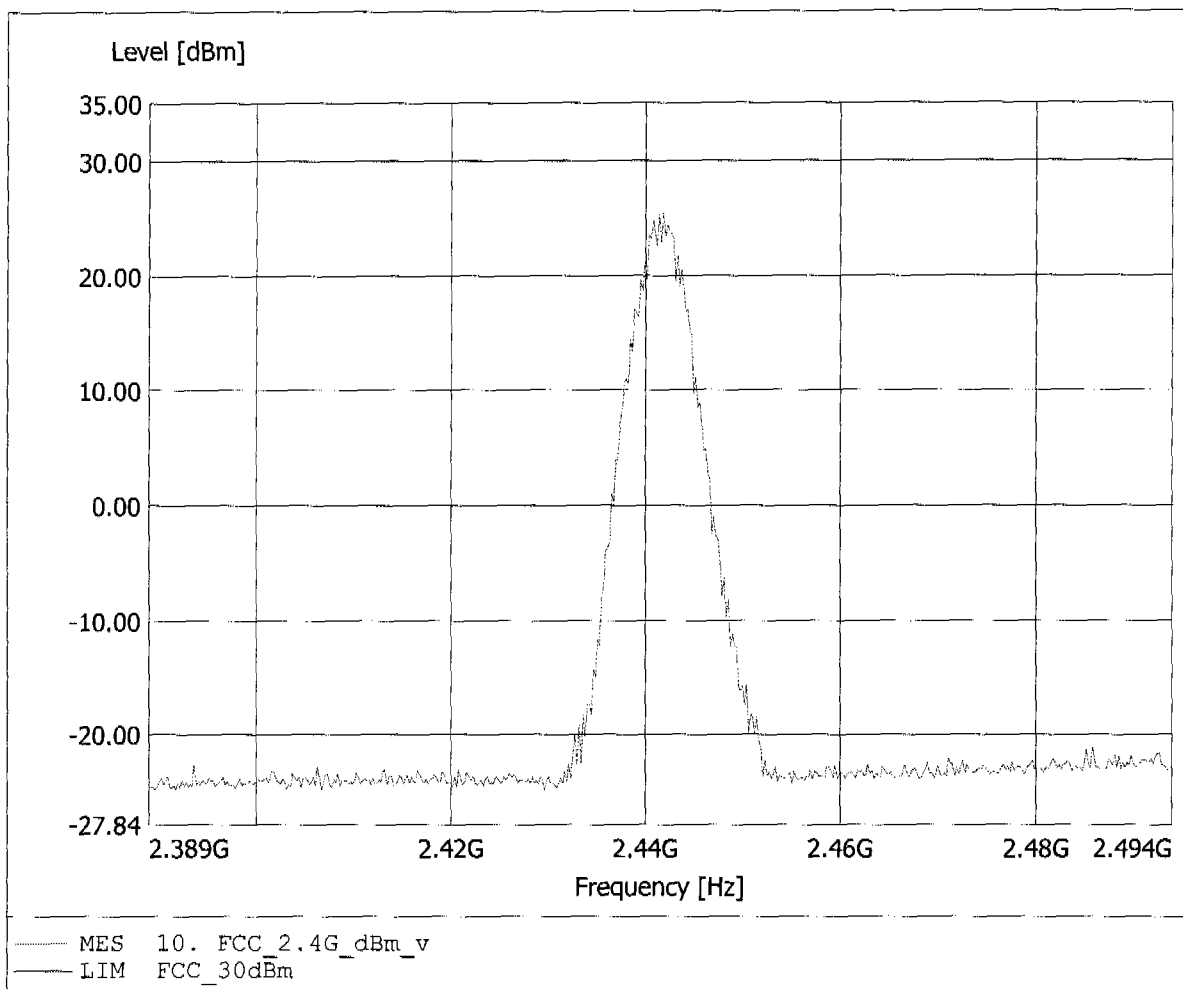


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 22.05dBm, RBW: 5MHz

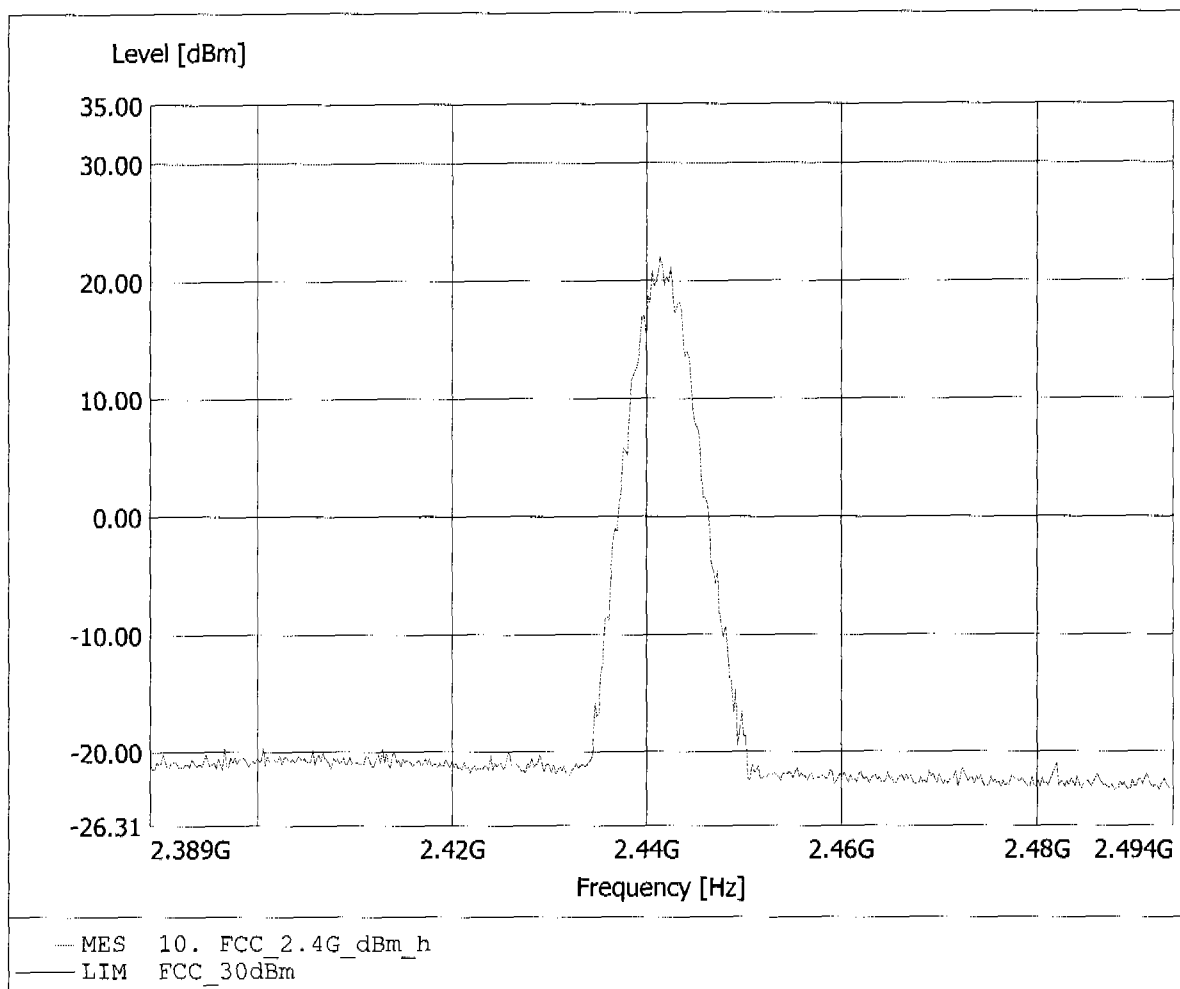


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 24.94dBm, RBW: 5MHz

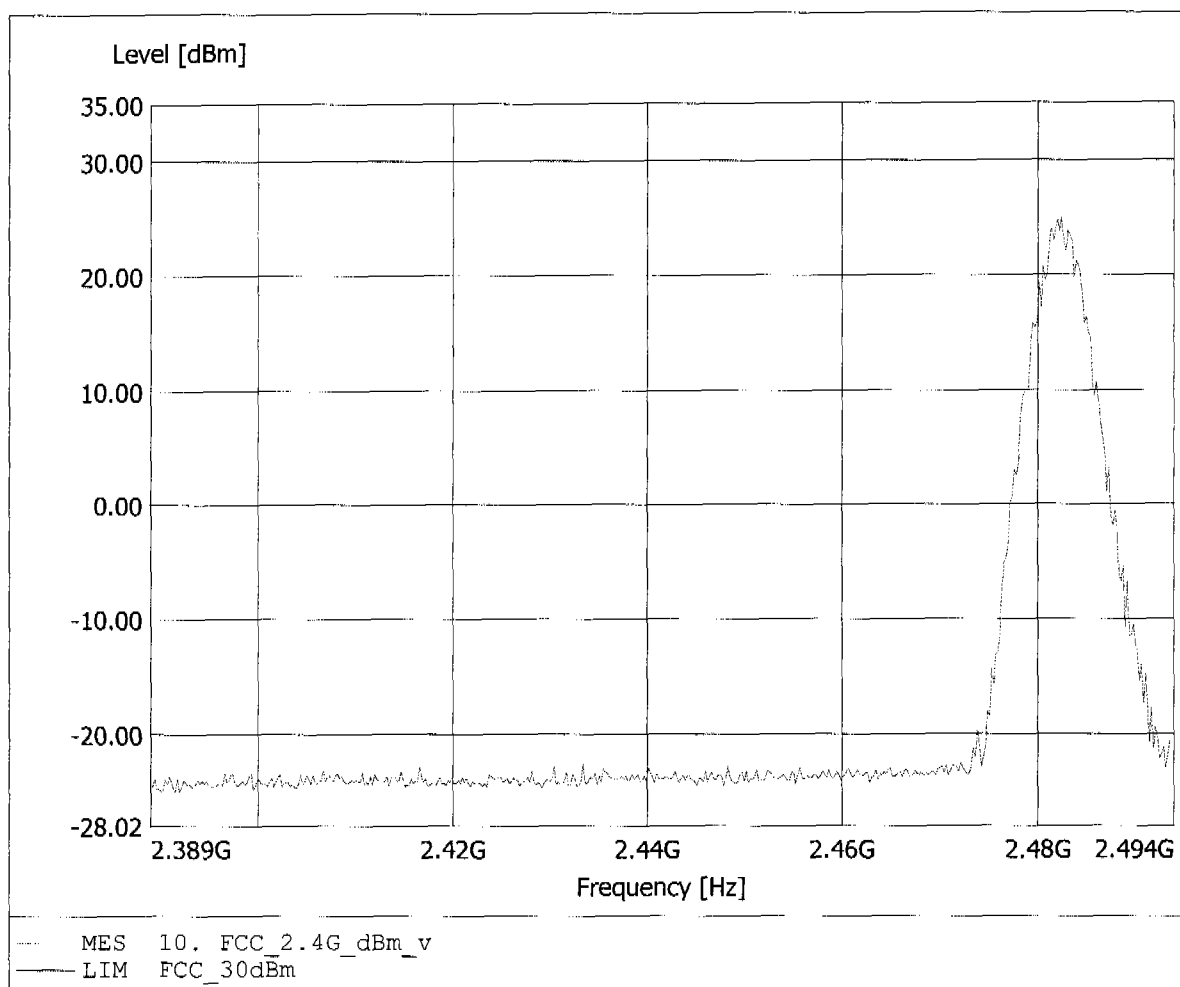


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 21.25dBm, RBW: 5MHz

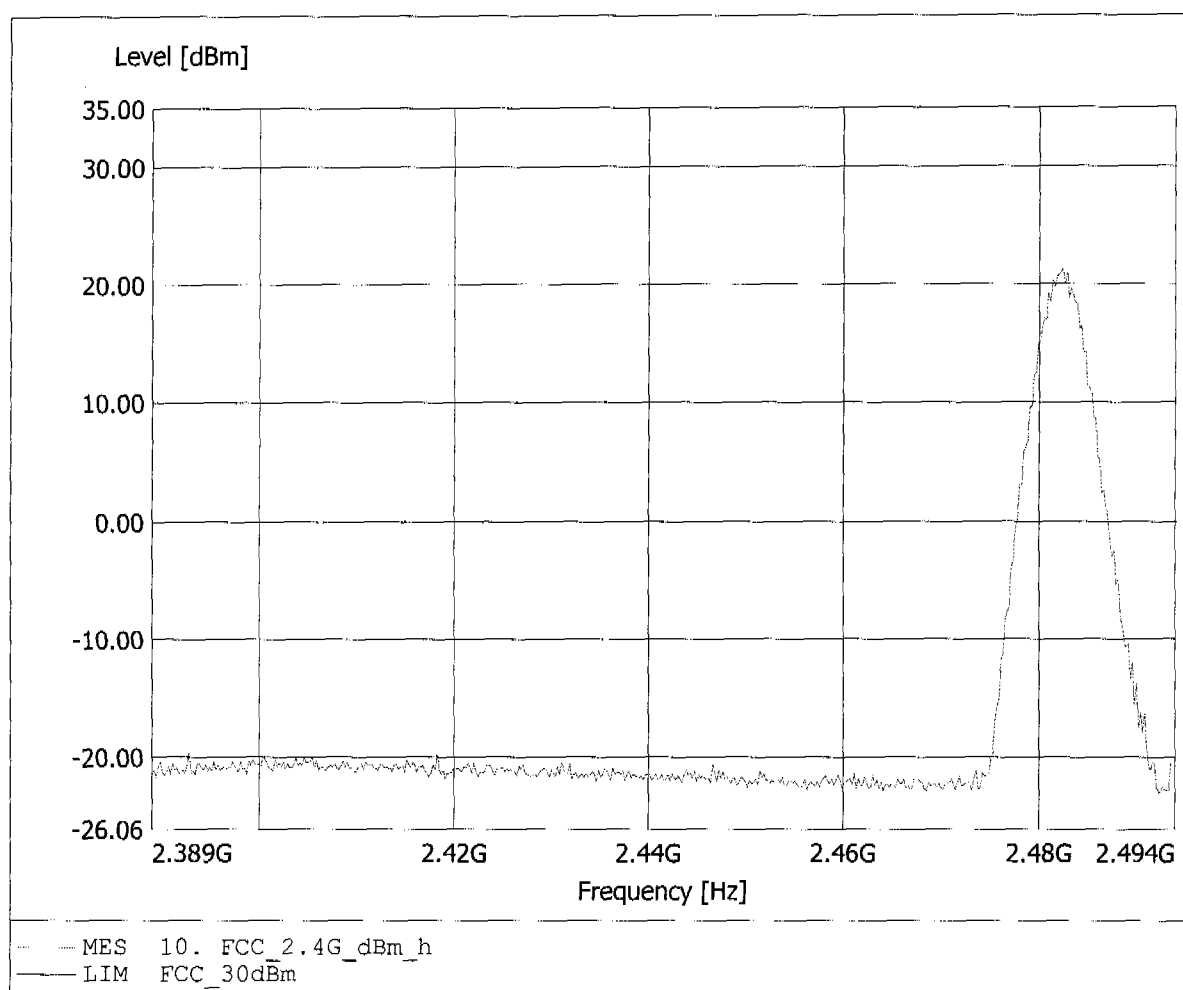


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 25.27dBm, RBW: 5MHz

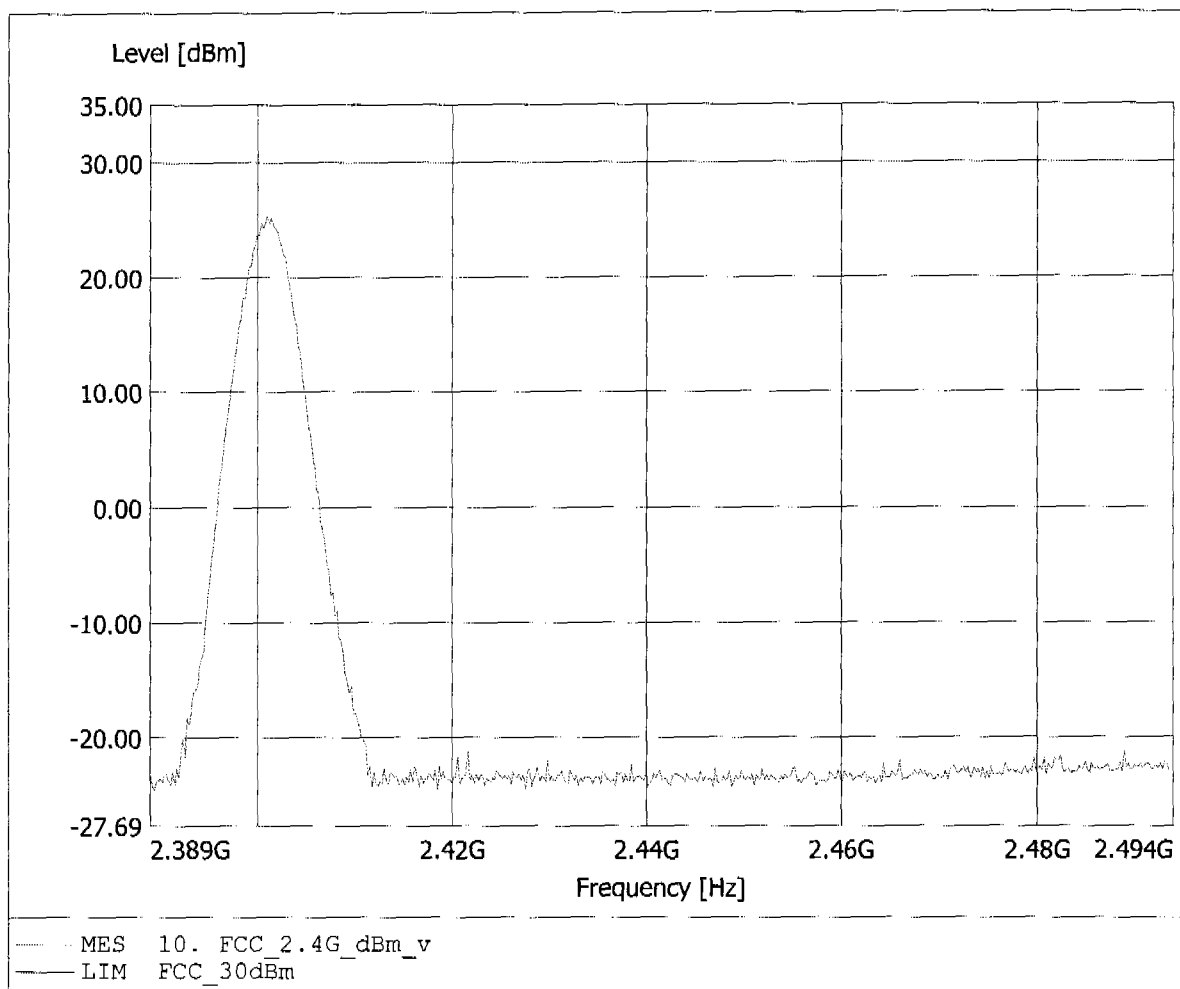


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 24.04dBm, RBW: 5MHz

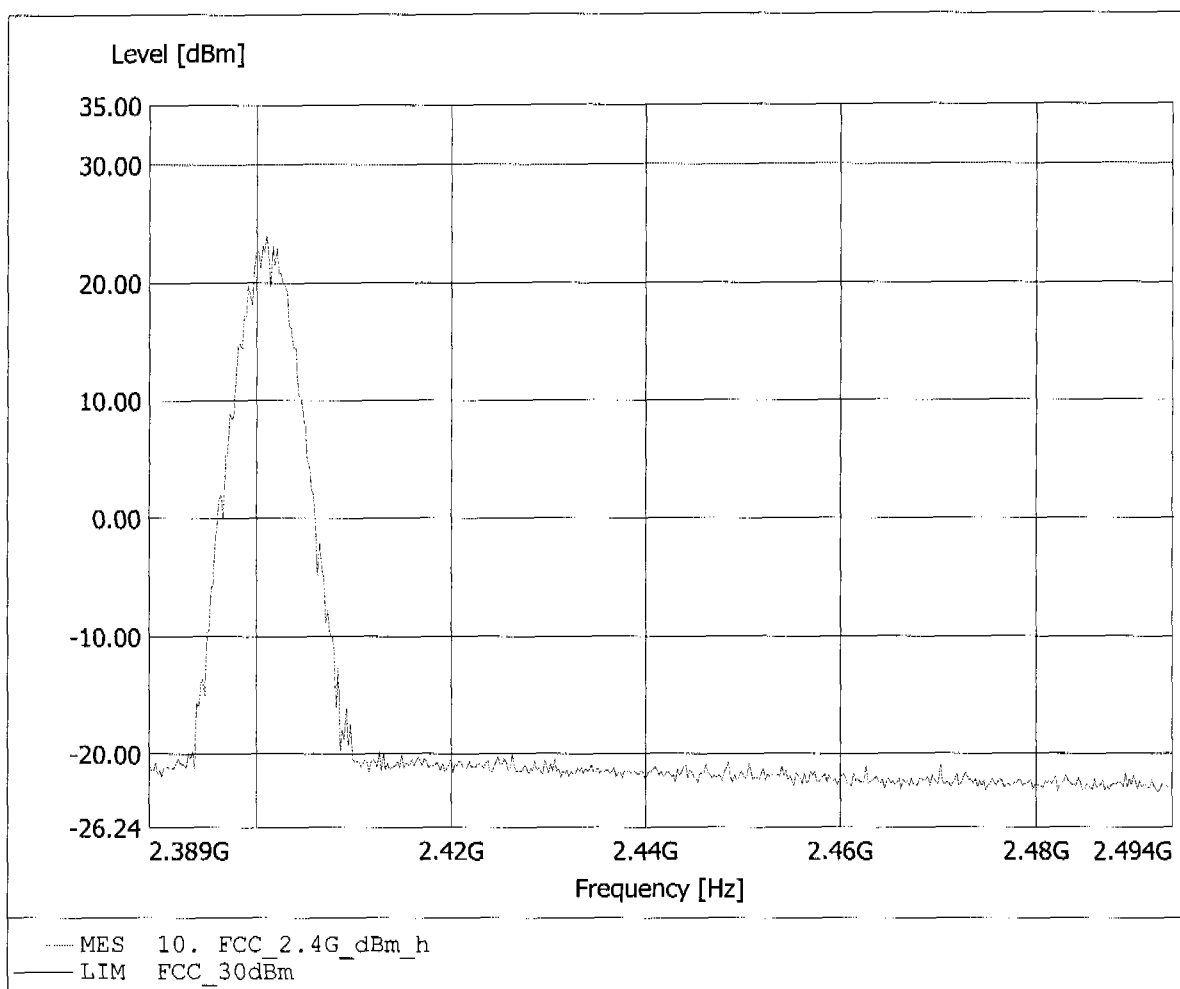


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 25.56dBm, RBW: 5MHz

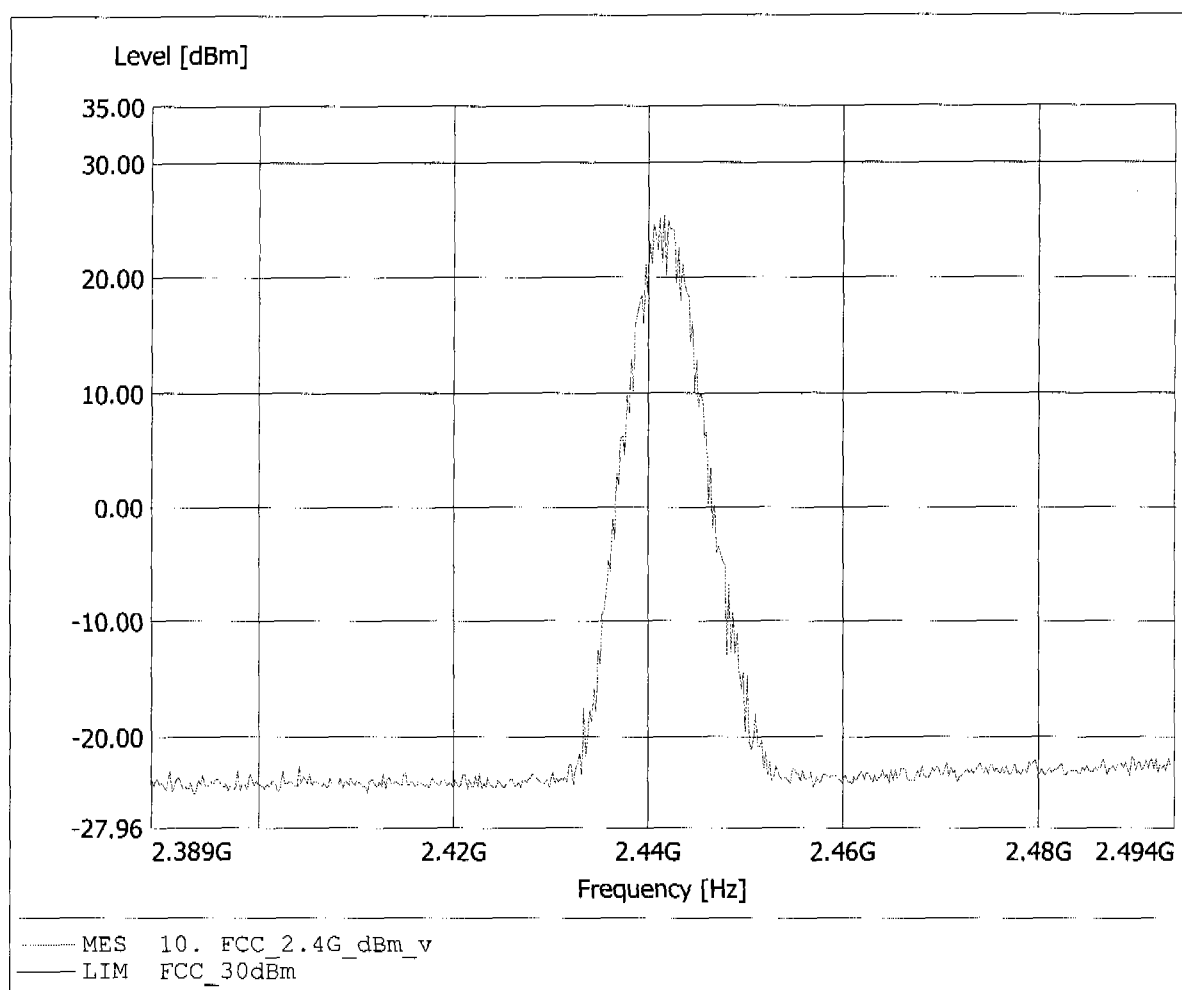


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 21.98dBm, RBW: 5MHz

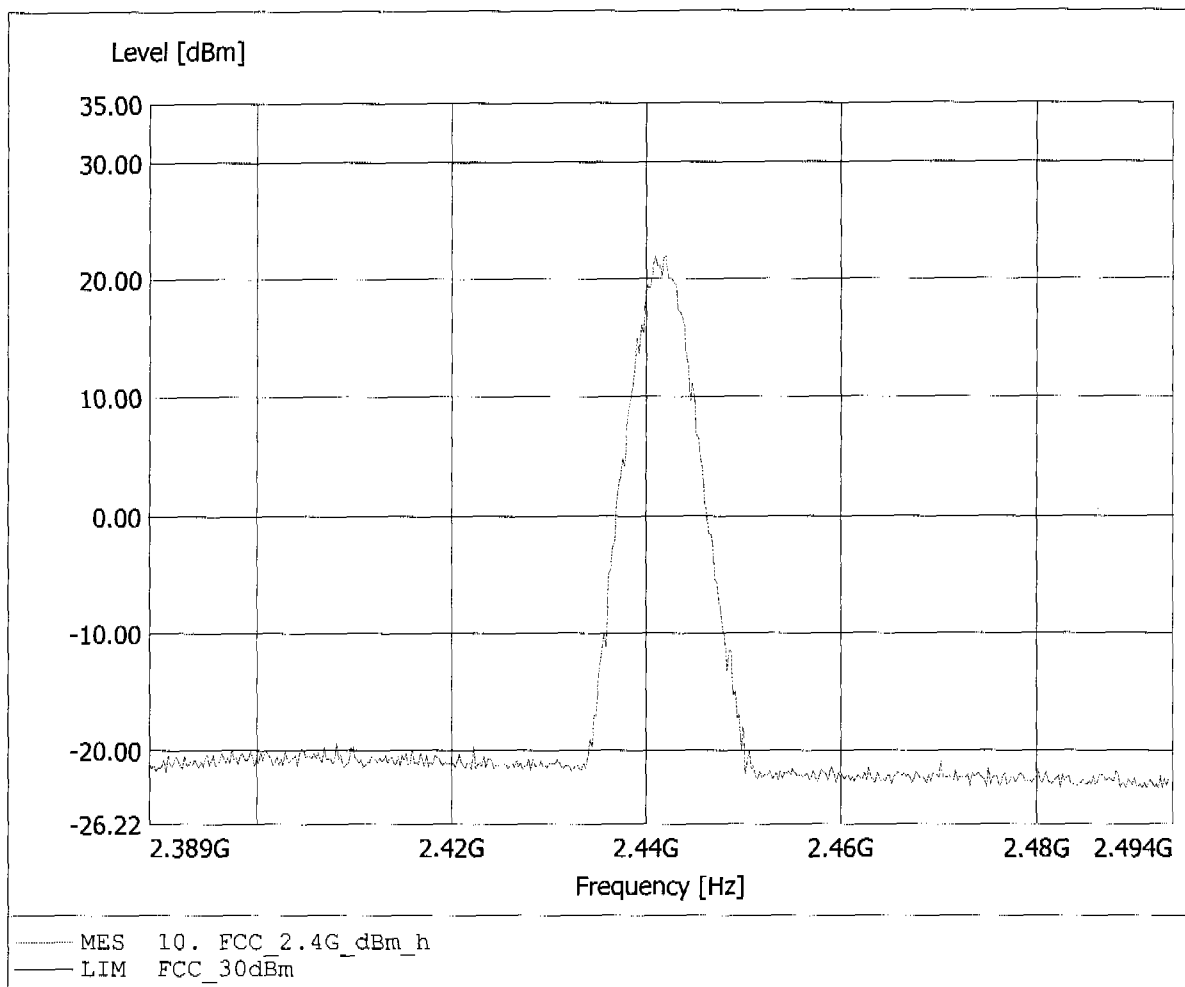


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 24.82dBm, RBW: 5MHz

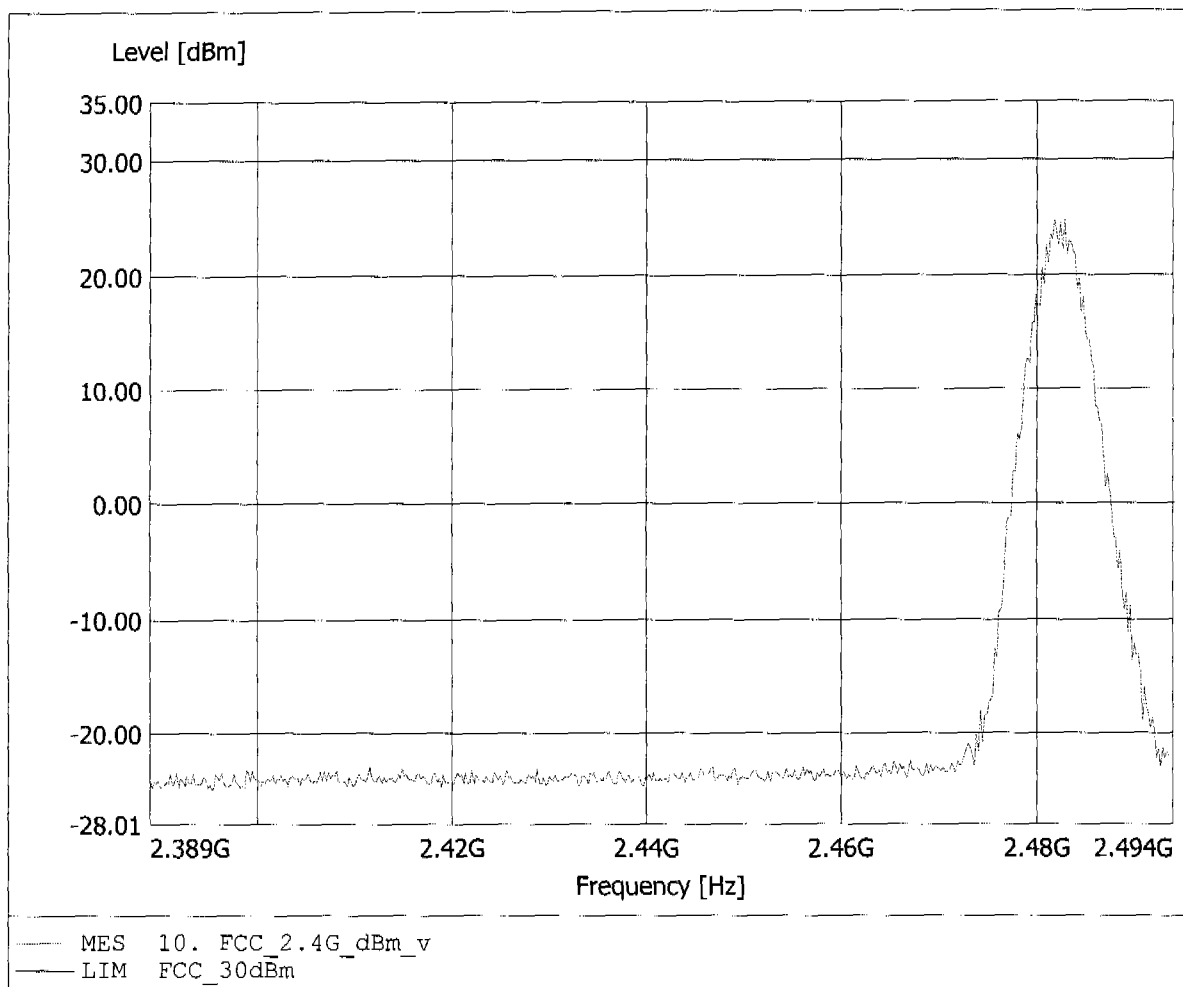


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.483GHz, Pmax: 21.38dBm, RBW: 5MHz

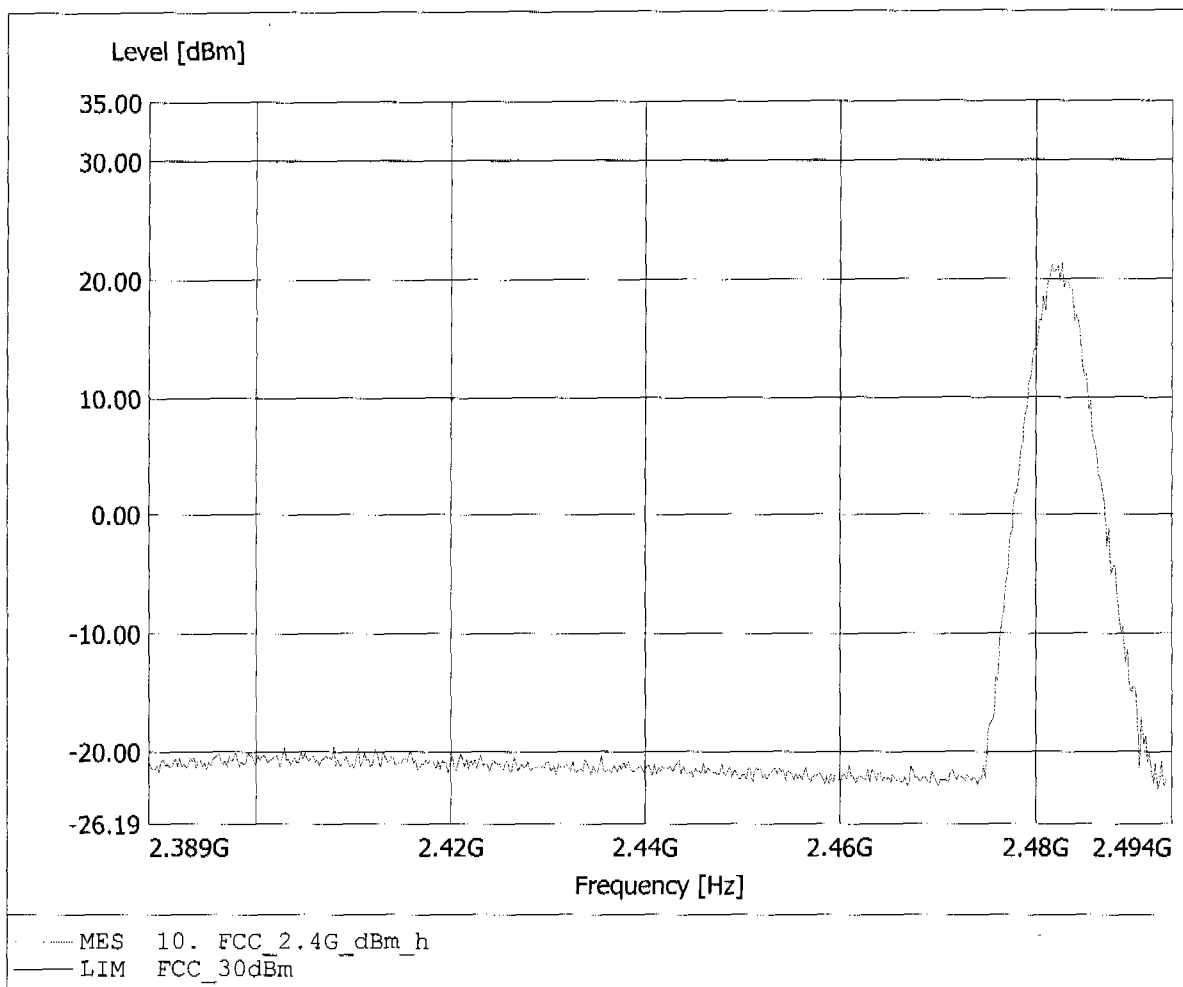


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 2 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 25.97dBm, RBW: 5MHz

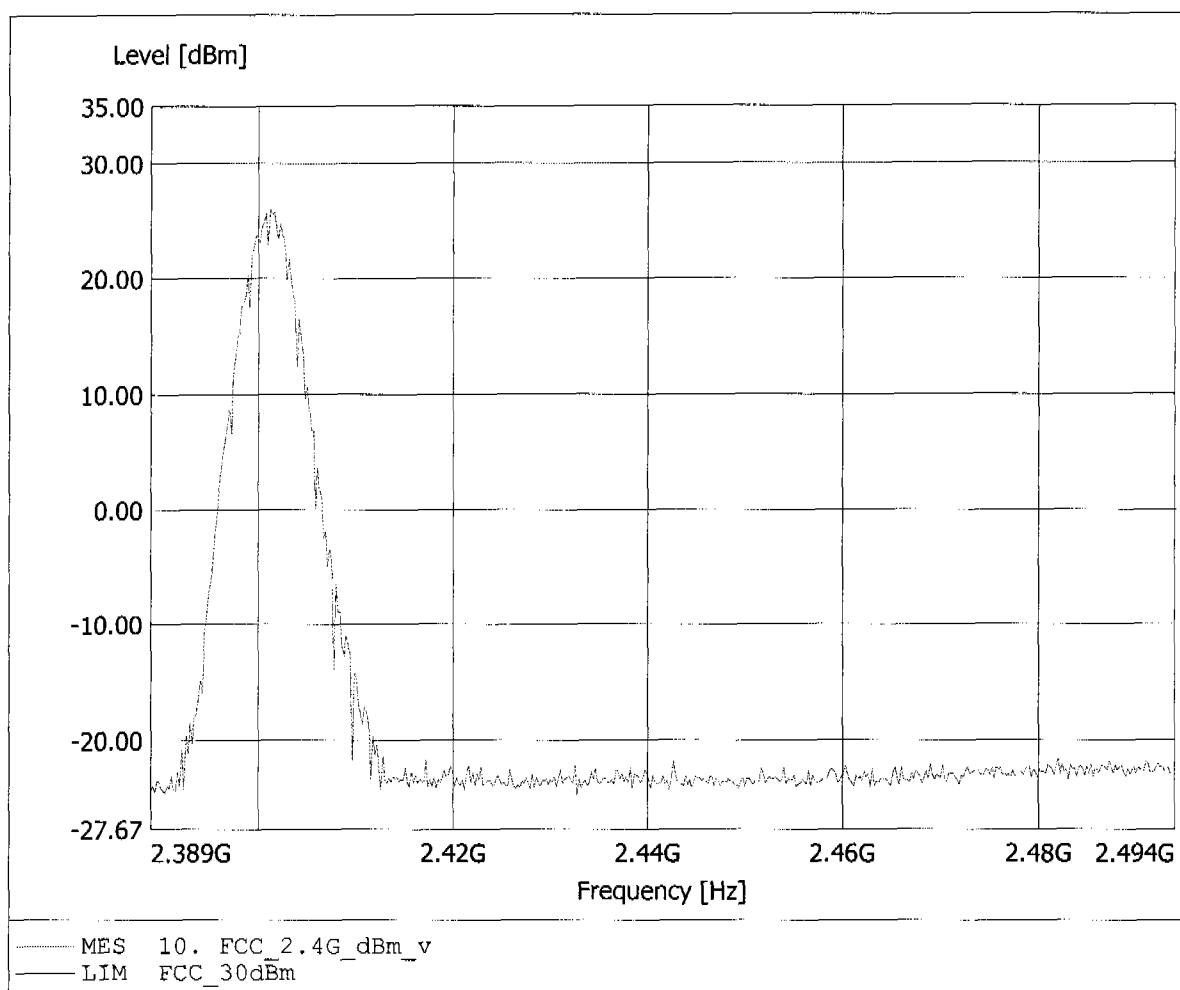


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 2 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 25.98dBm, RBW: 5MHz

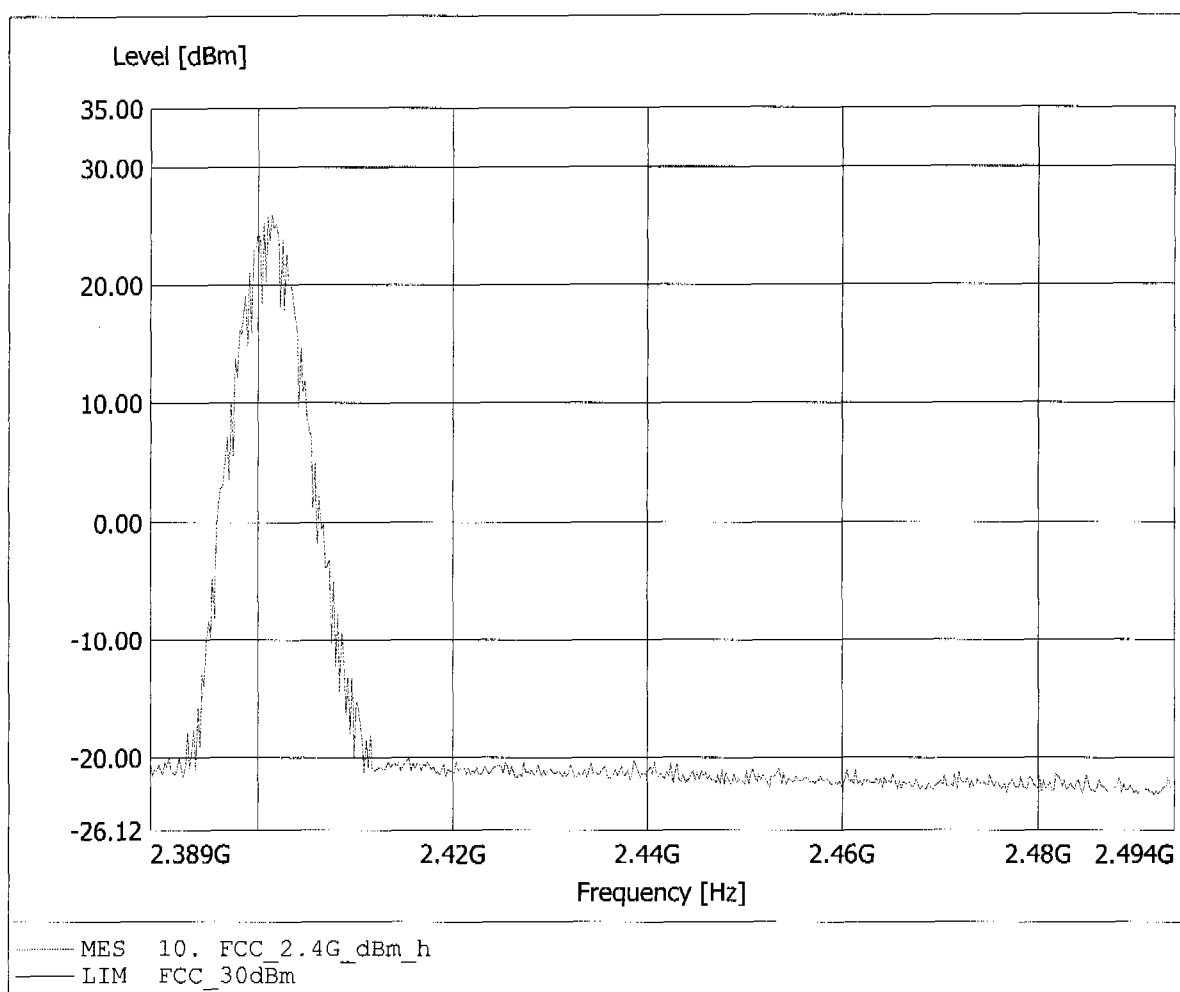


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 2 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 25.08dBm, RBW: 5MHz

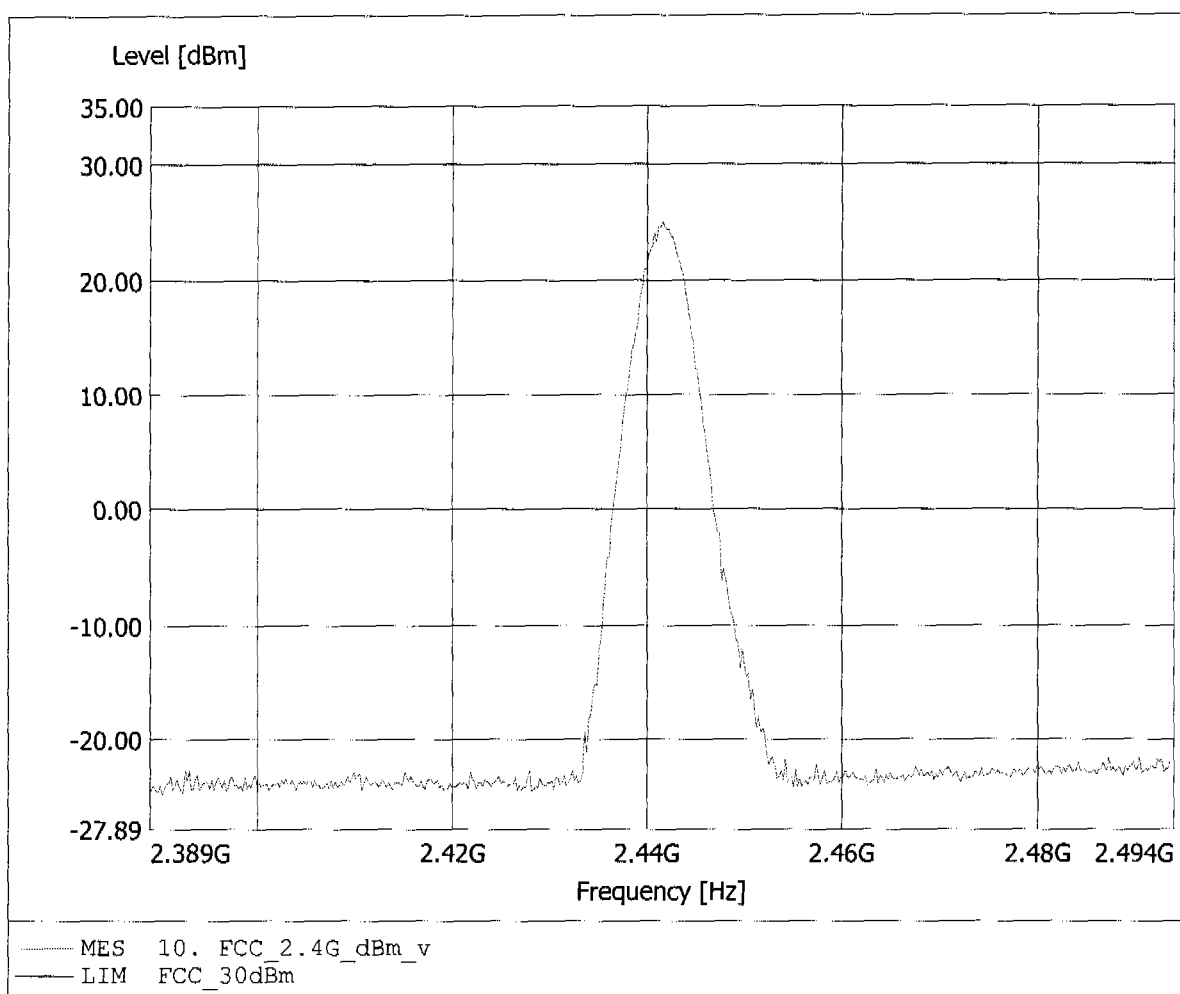


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 2 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 26.10dBm, RBW: 5MHz

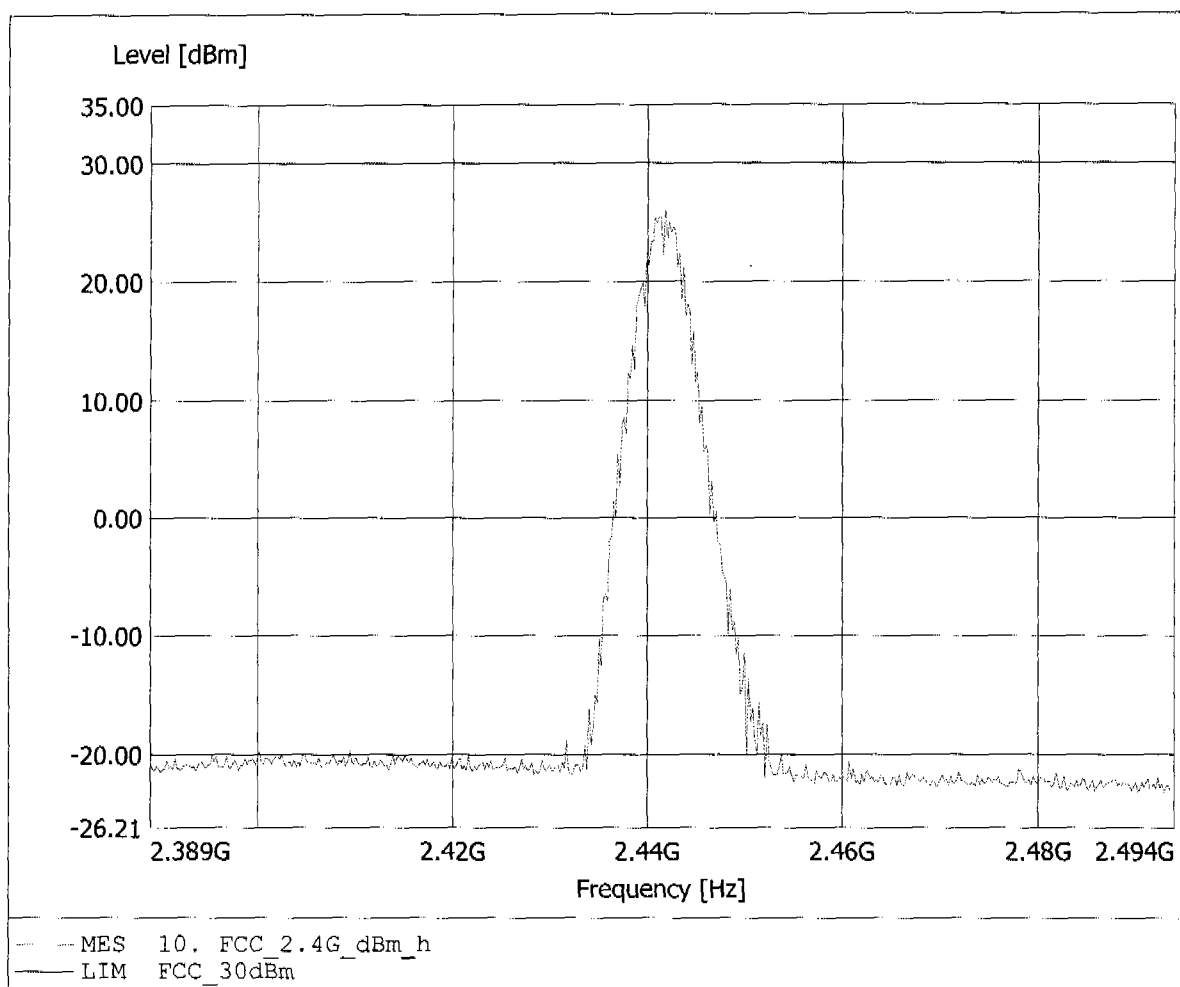


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 2 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 23.50dBm, RBW: 5MHz

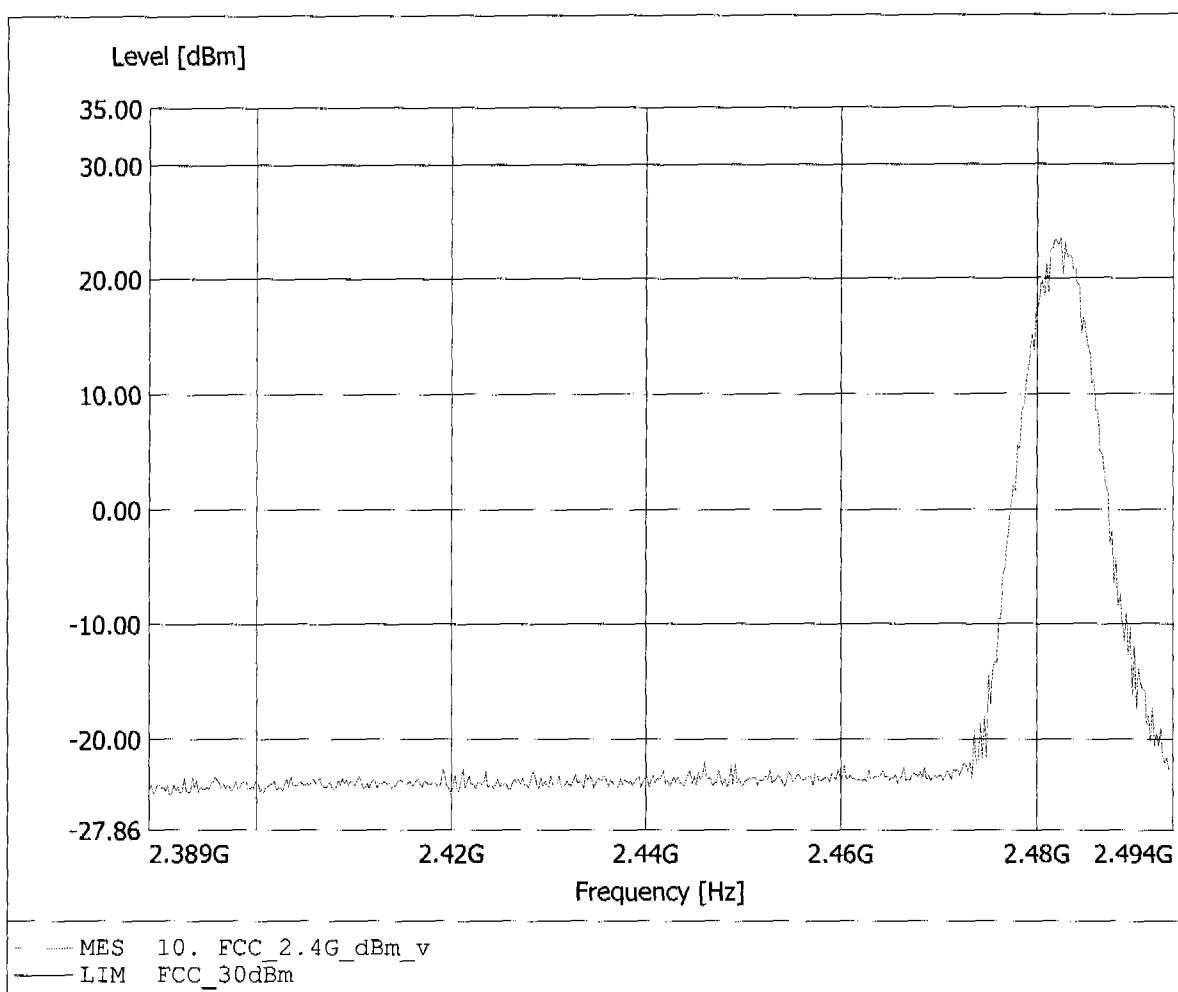


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 2 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 25.11dBm, RBW: 5MHz

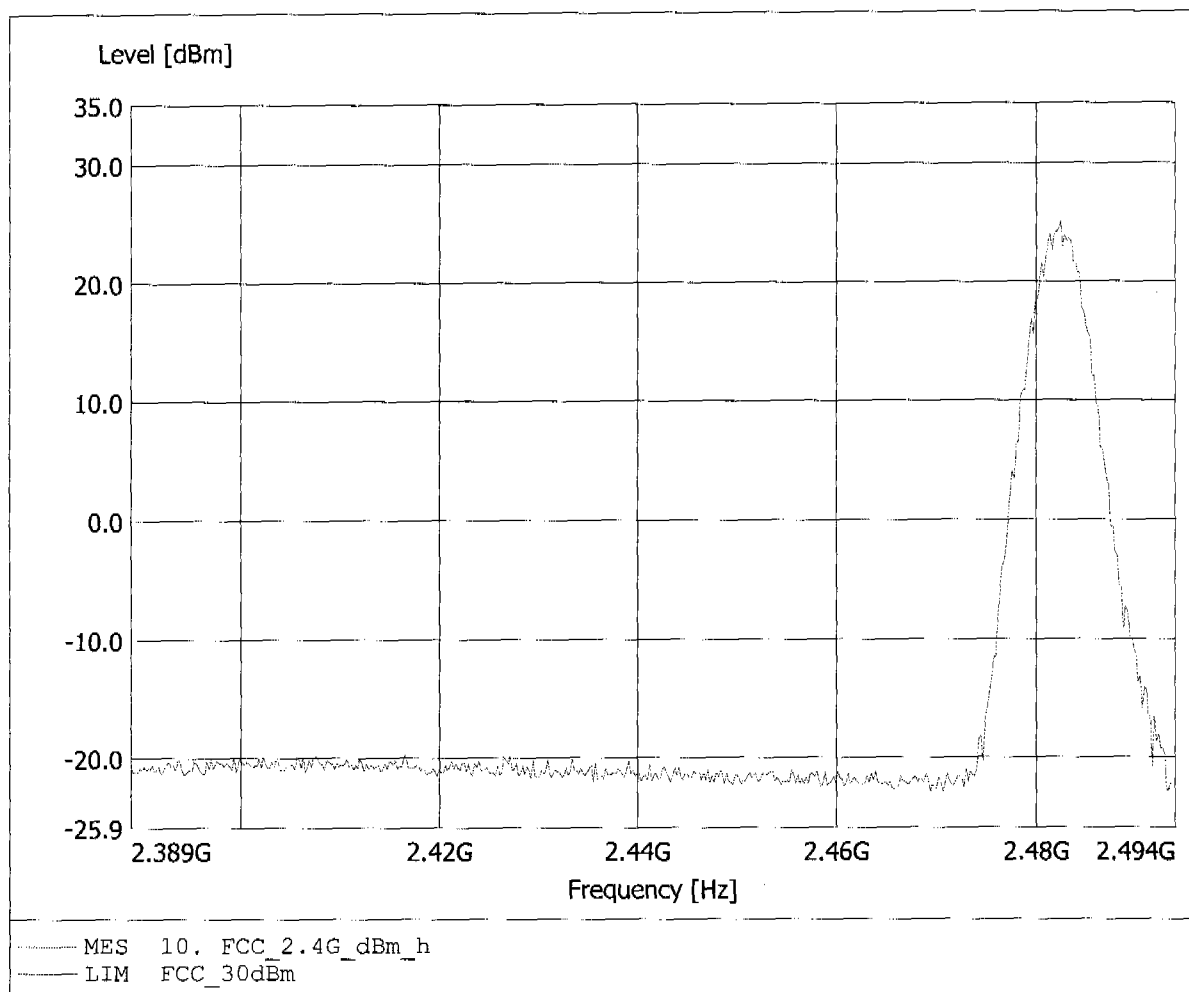


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 2 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 26.08dBm, RBW: 5MHz

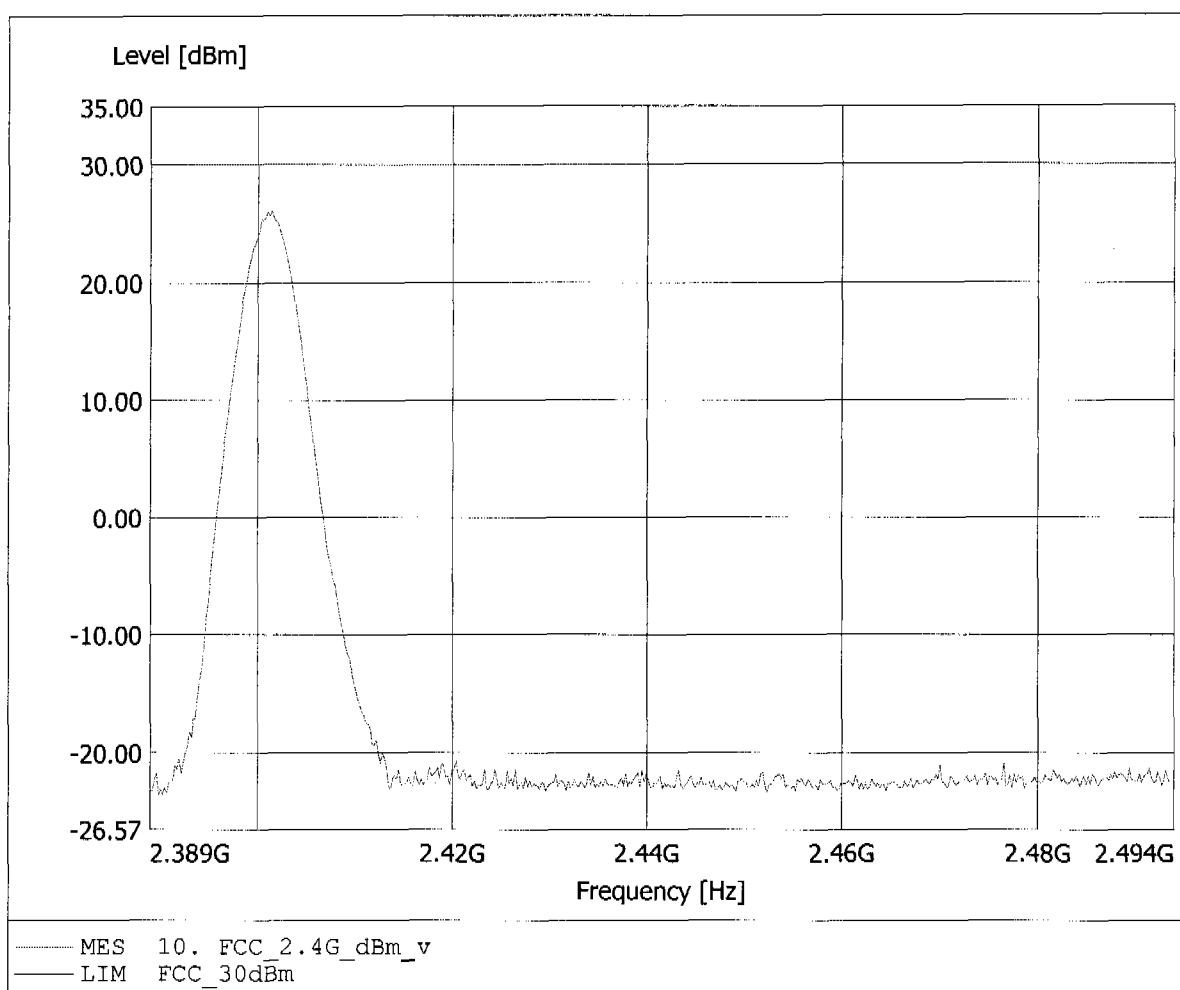


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 2 / Ch:0
 Model: DW800 wireless system / Base
 Approval Holder: Sennheiser Communications
 Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V-15% AC/DC adaptor)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to §15.247
 Comment 1: Dist.: 3m, Ant.: BBHA9120D
 Comment 2: Freq: 2.401GHz, Pmax: 26.09dBm, RBW: 5MHz

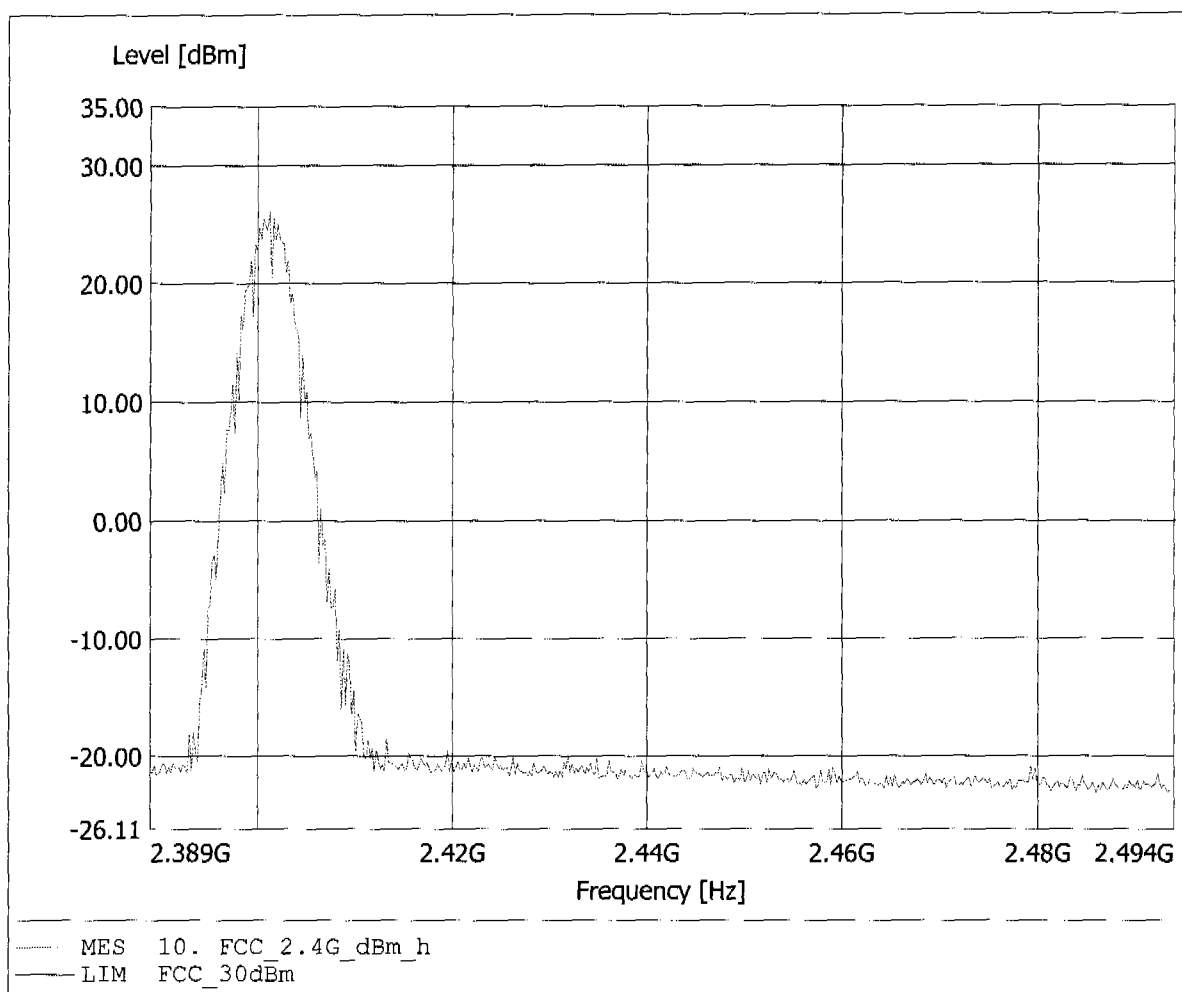


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 2 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 25.02dBm, RBW: 5MHz

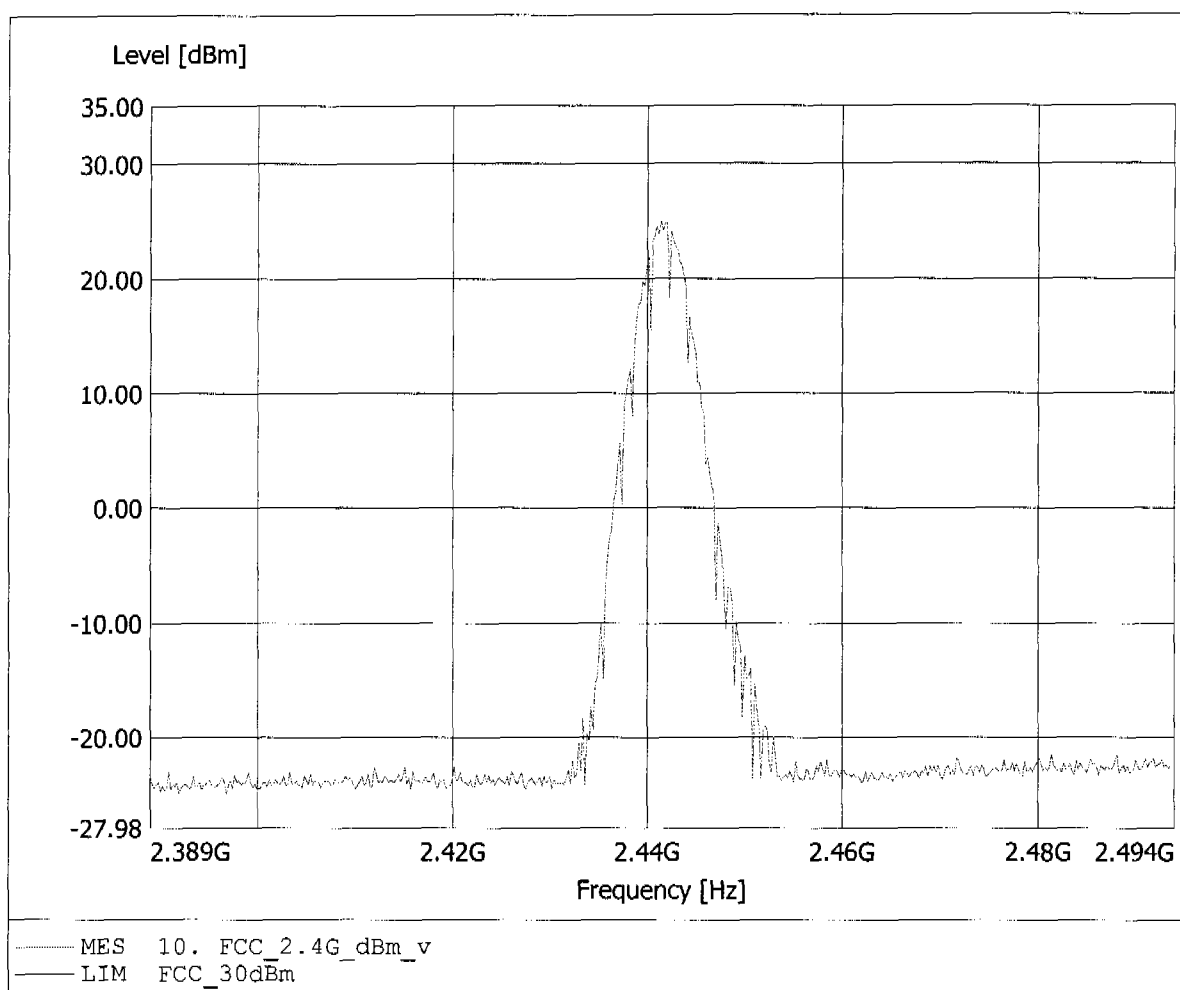


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 2 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 26.03dBm, RBW: 5MHz

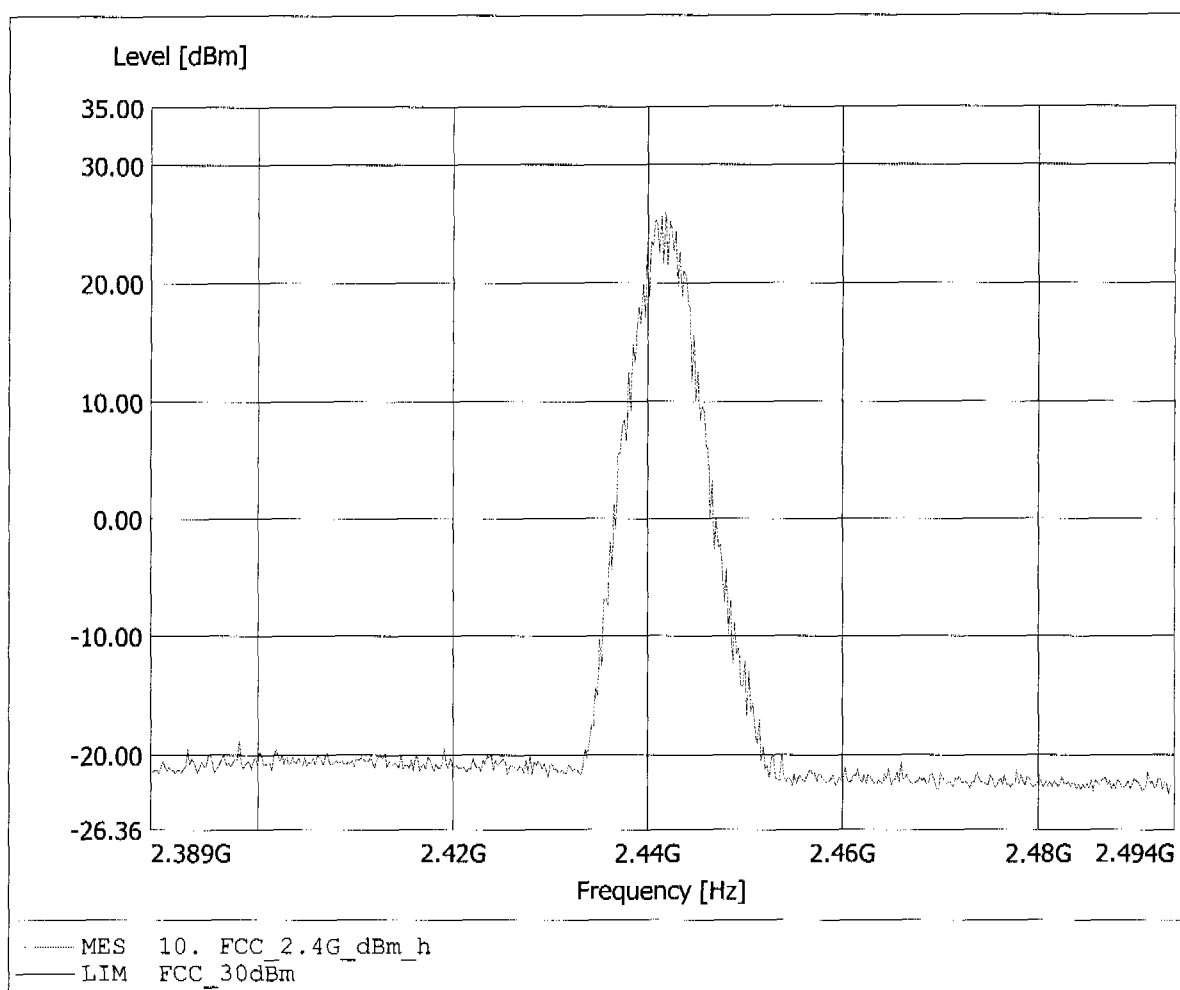


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 2 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 23.38dBm, RBW: 5MHz

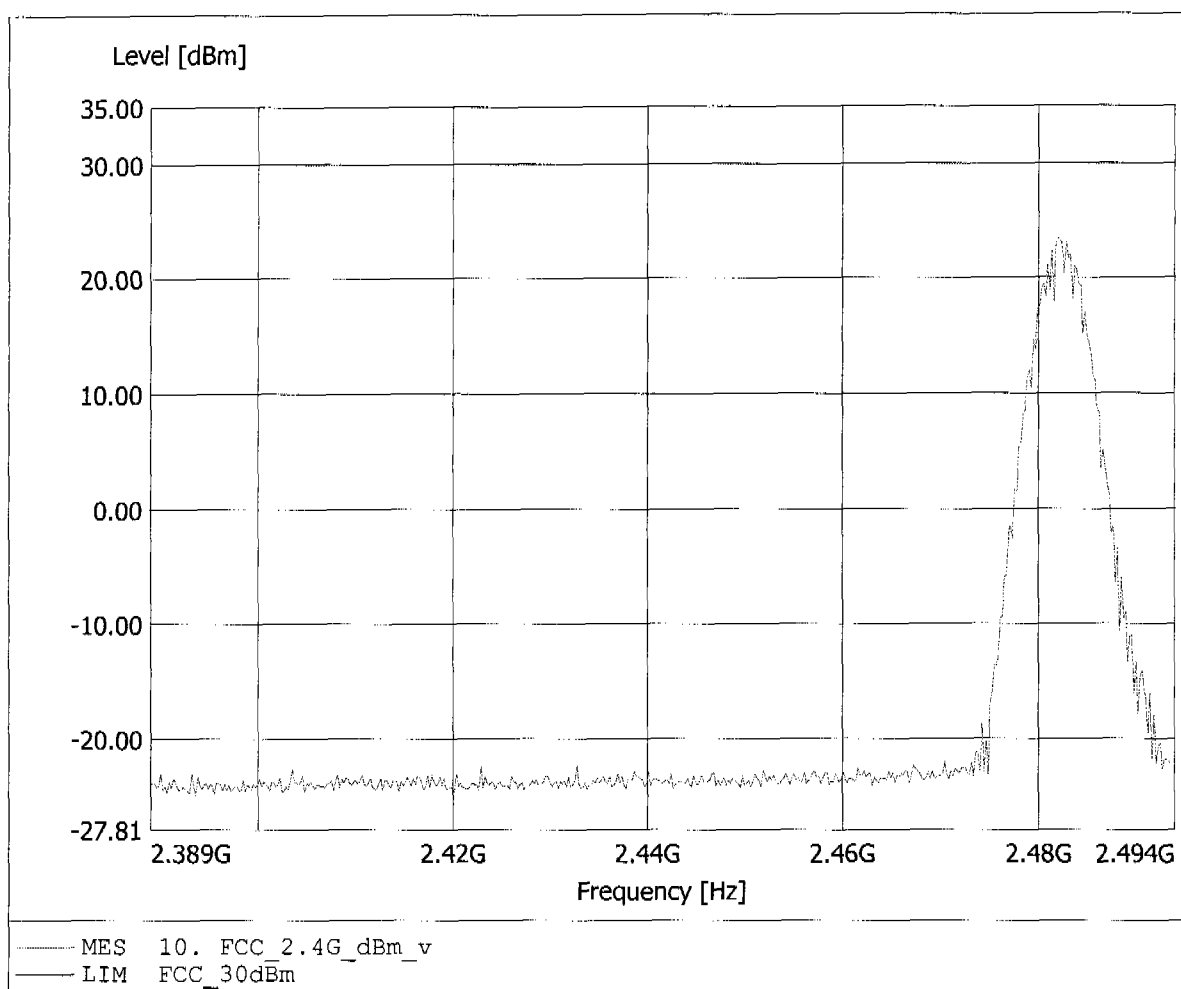


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 2 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V-15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 25.06dBm, RBW: 5MHz

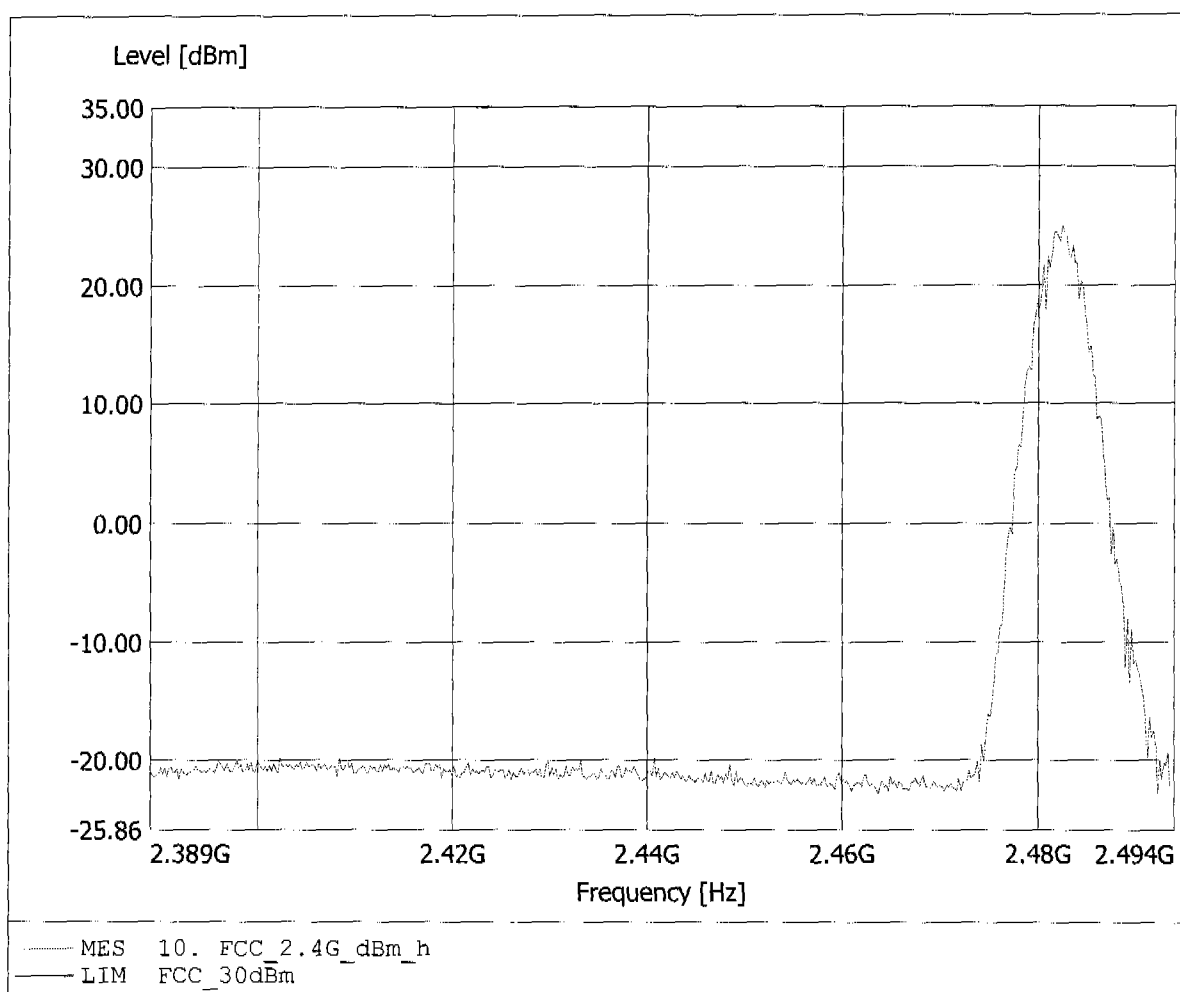


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 2 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 25.97dBm, RBW: 5MHz

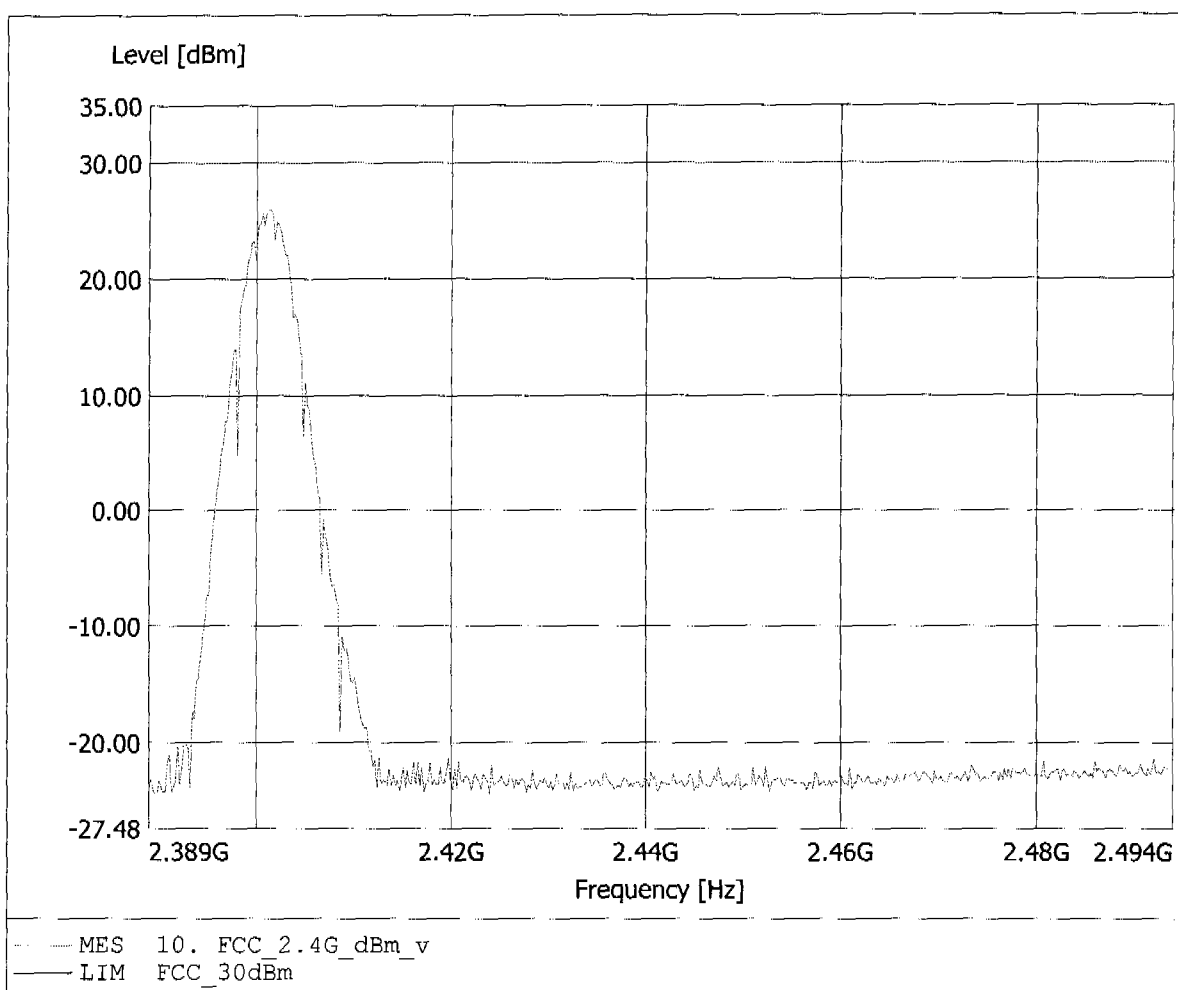


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 2 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 25.99dBm, RBW: 5MHz

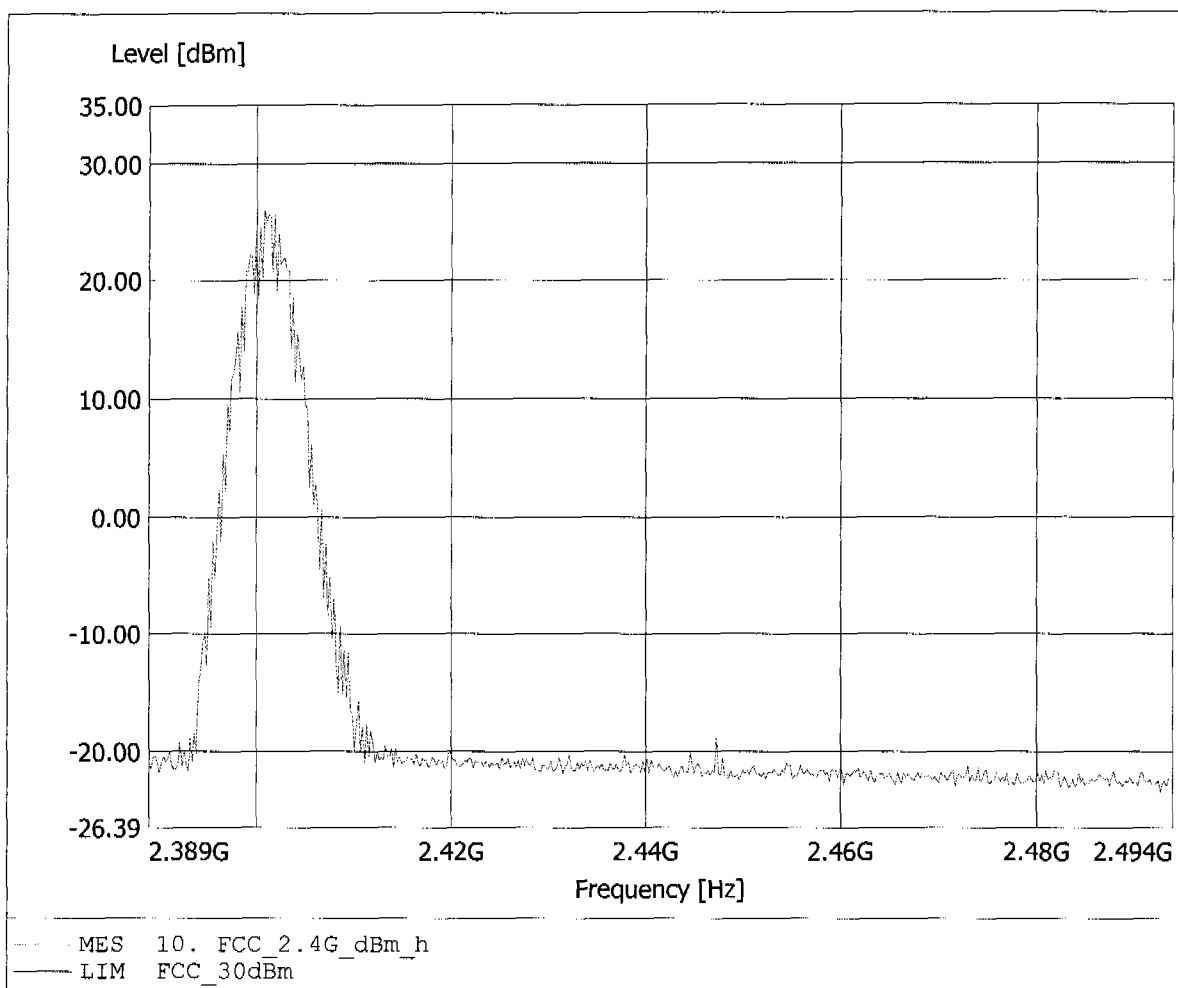


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 2 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 24.84dBm, RBW: 5MHz

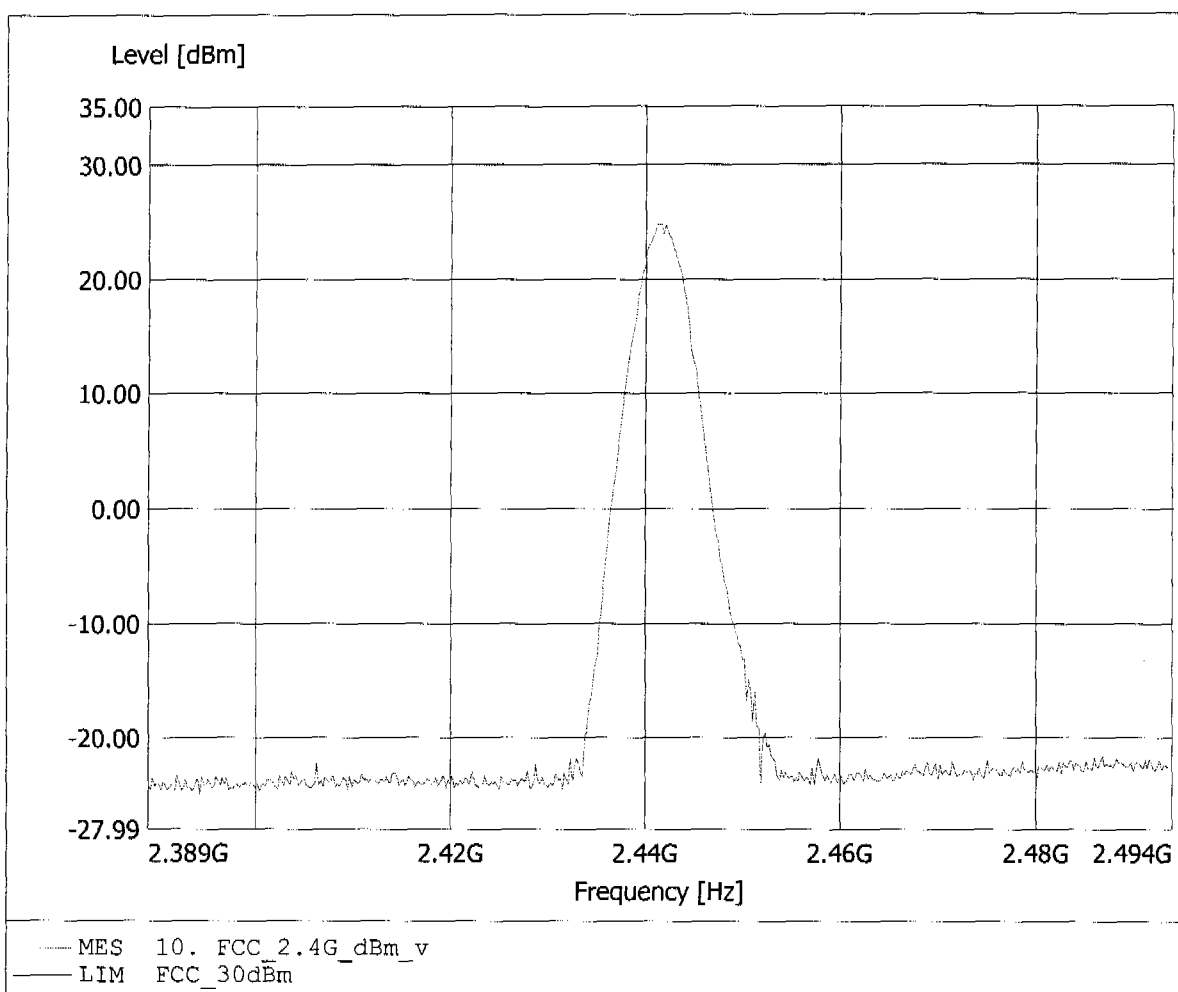


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 2 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 25.73dBm, RBW: 5MHz

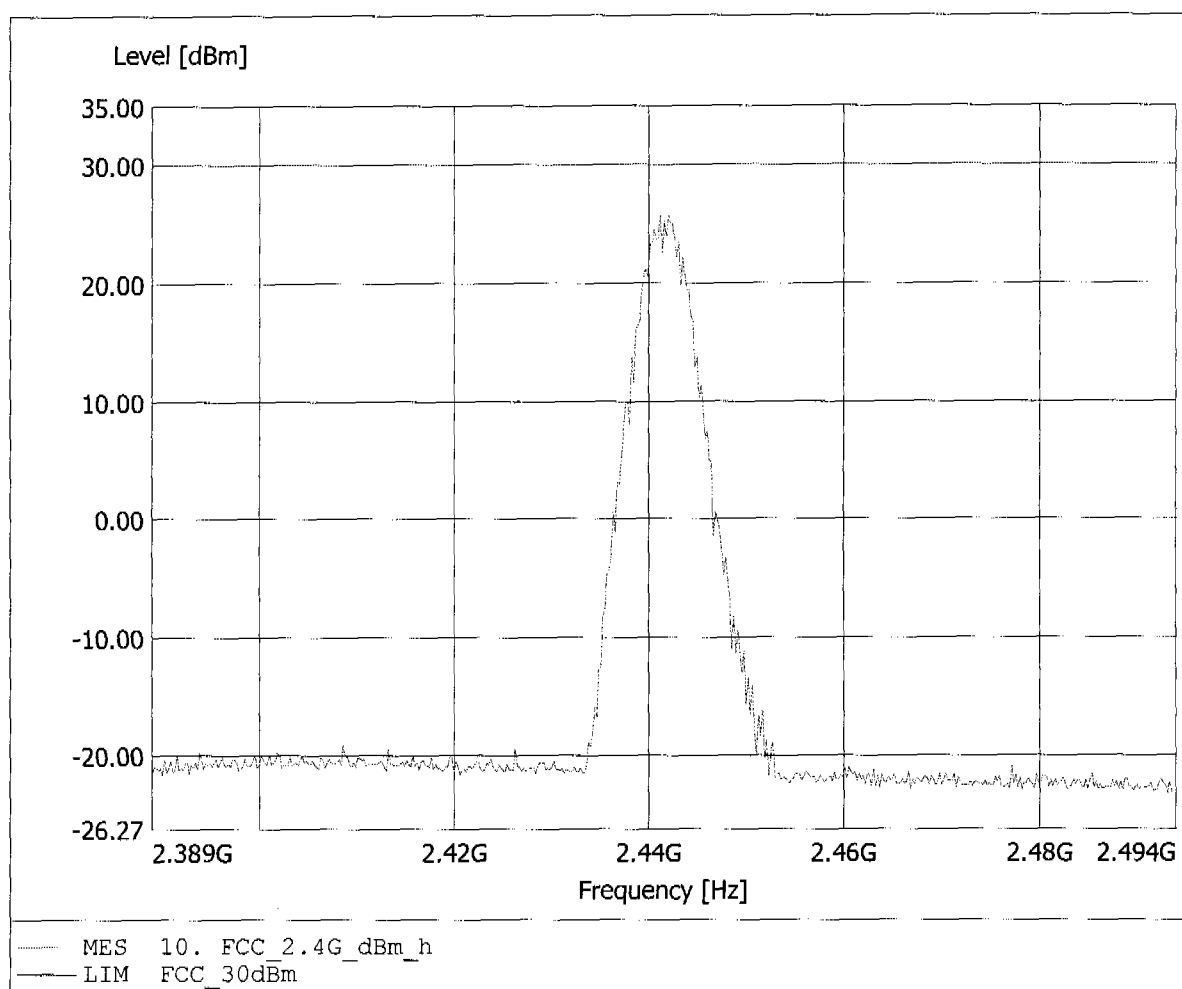


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 2 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 23.56dBm, RBW: 5MHz

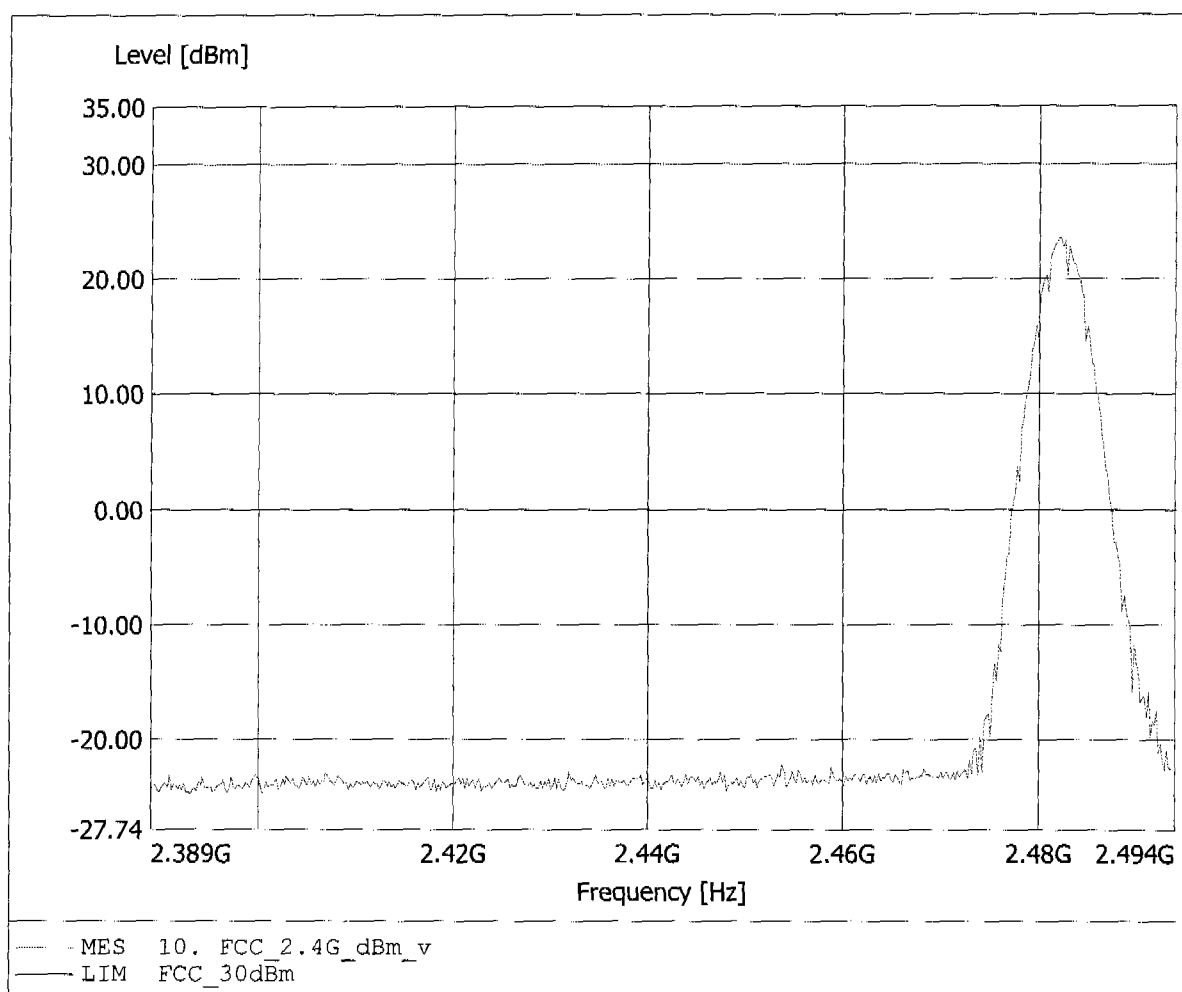

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 2 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V+15% AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 24.85dBm, RBW: 5MHz

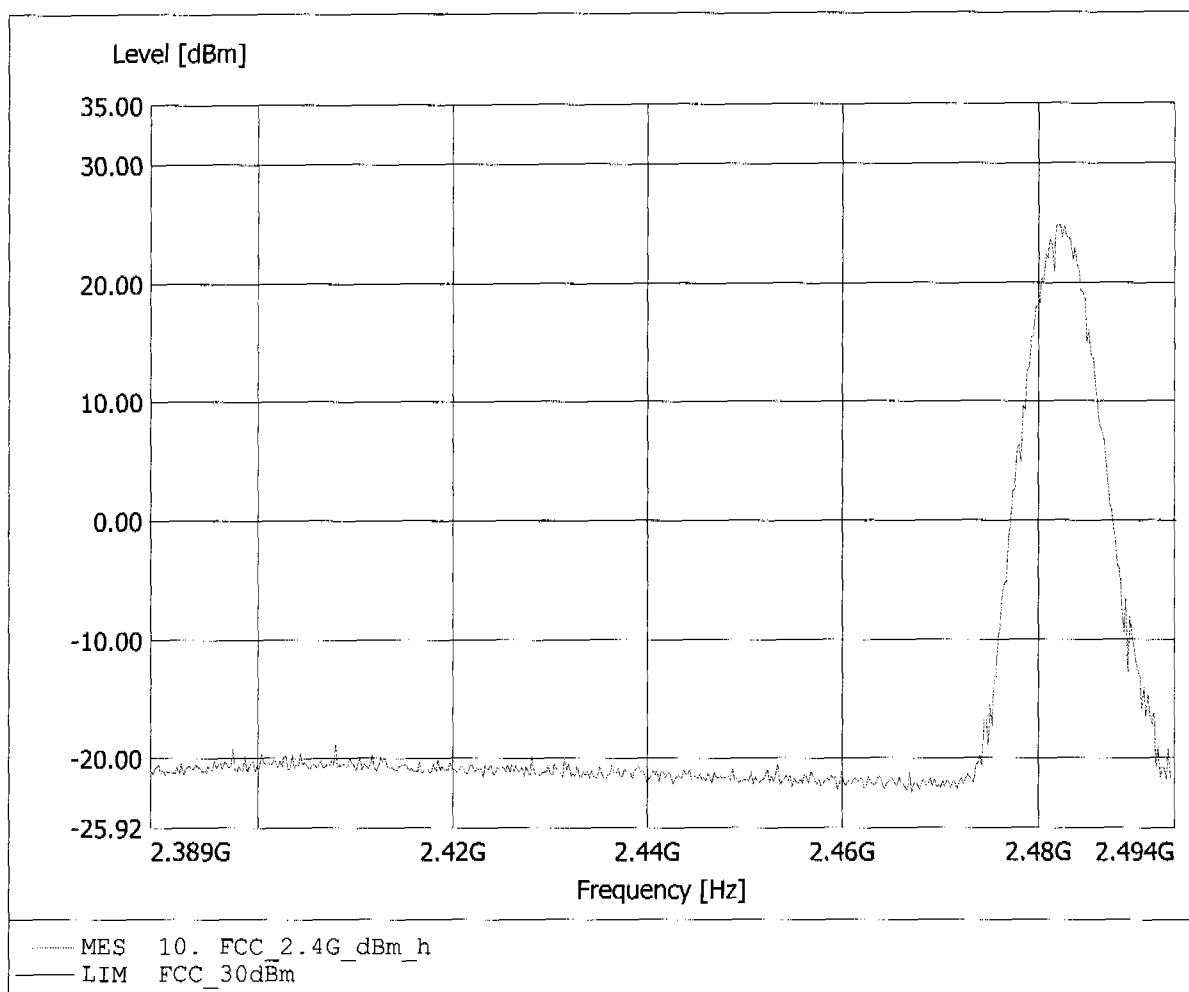


Appendix C

Spurious Emissions radiated - Transmitter operating


Carrier power (Field Strength)
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Emax: 119.90dBµV/m, RBW: 100kHz

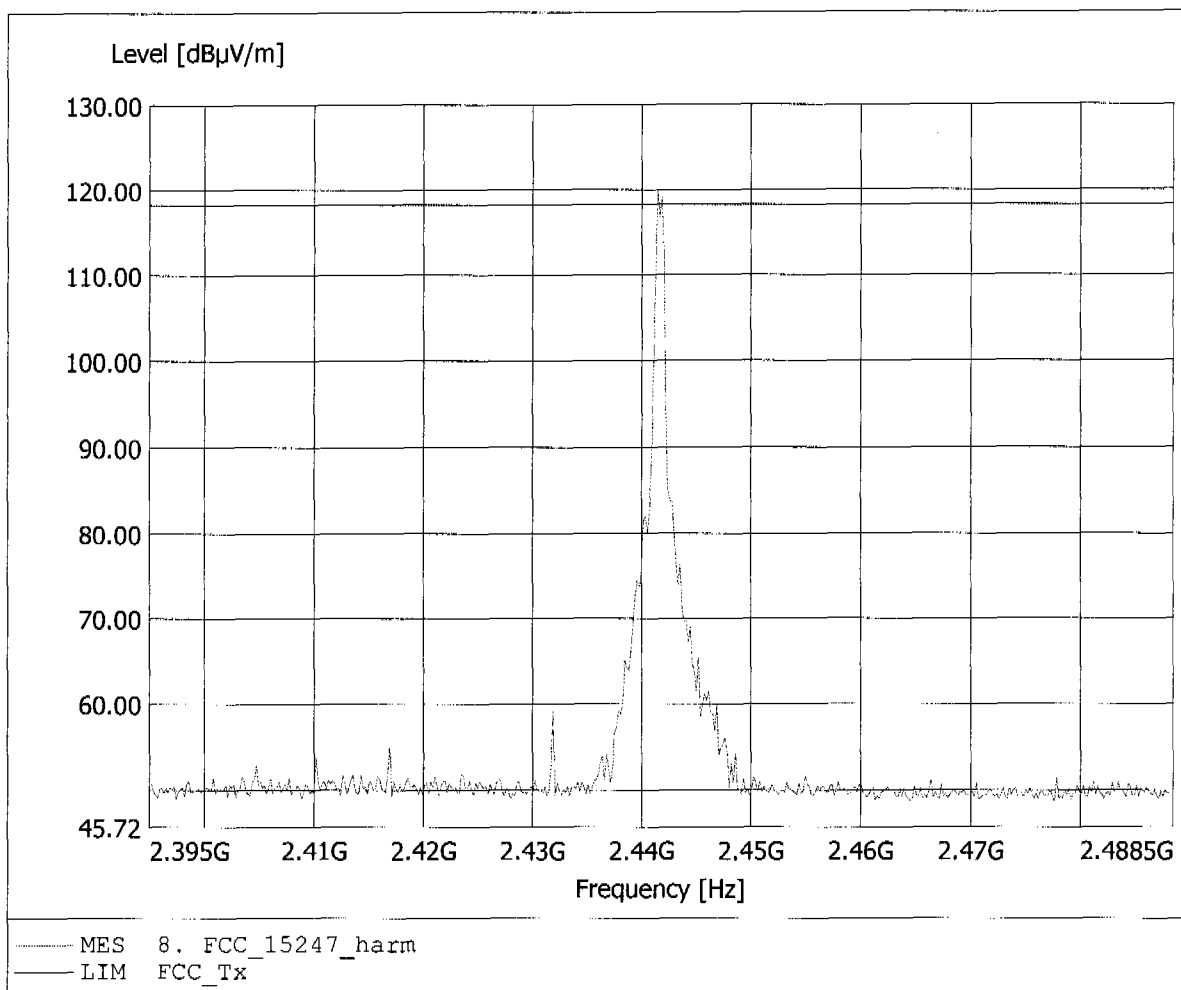




Delta 1 [T1] RBW 30 kHz RF Att 60 dB
Ref Lvl -46.80 dB VBW 30 kHz
30 dBm 1.22024048 MHz SWT 8.5 ms Unit dBm

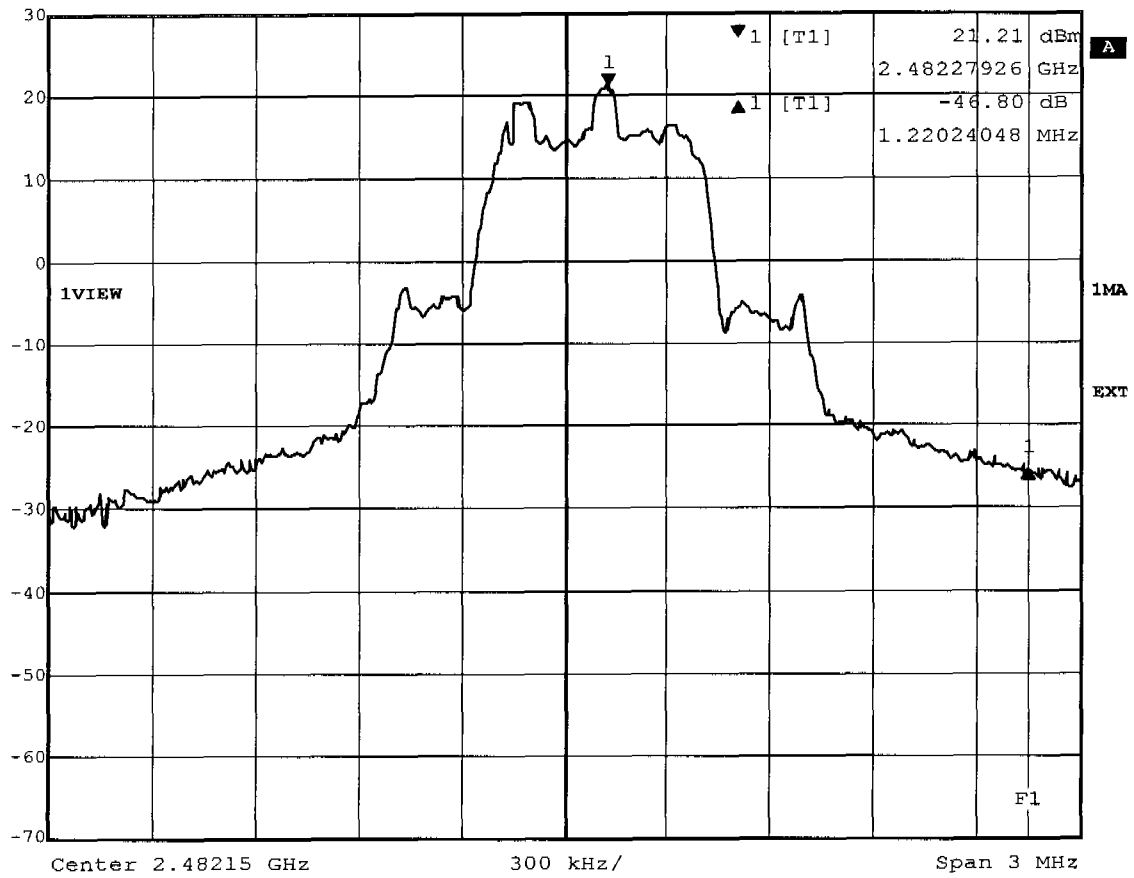

Title: Marker-Delta Method
Comment A: DW800 wireless system
Date: 14.JAN.2004 12:48:14


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.637MHz, Emax: 31.09dBµV/m, RBW: 100kHz

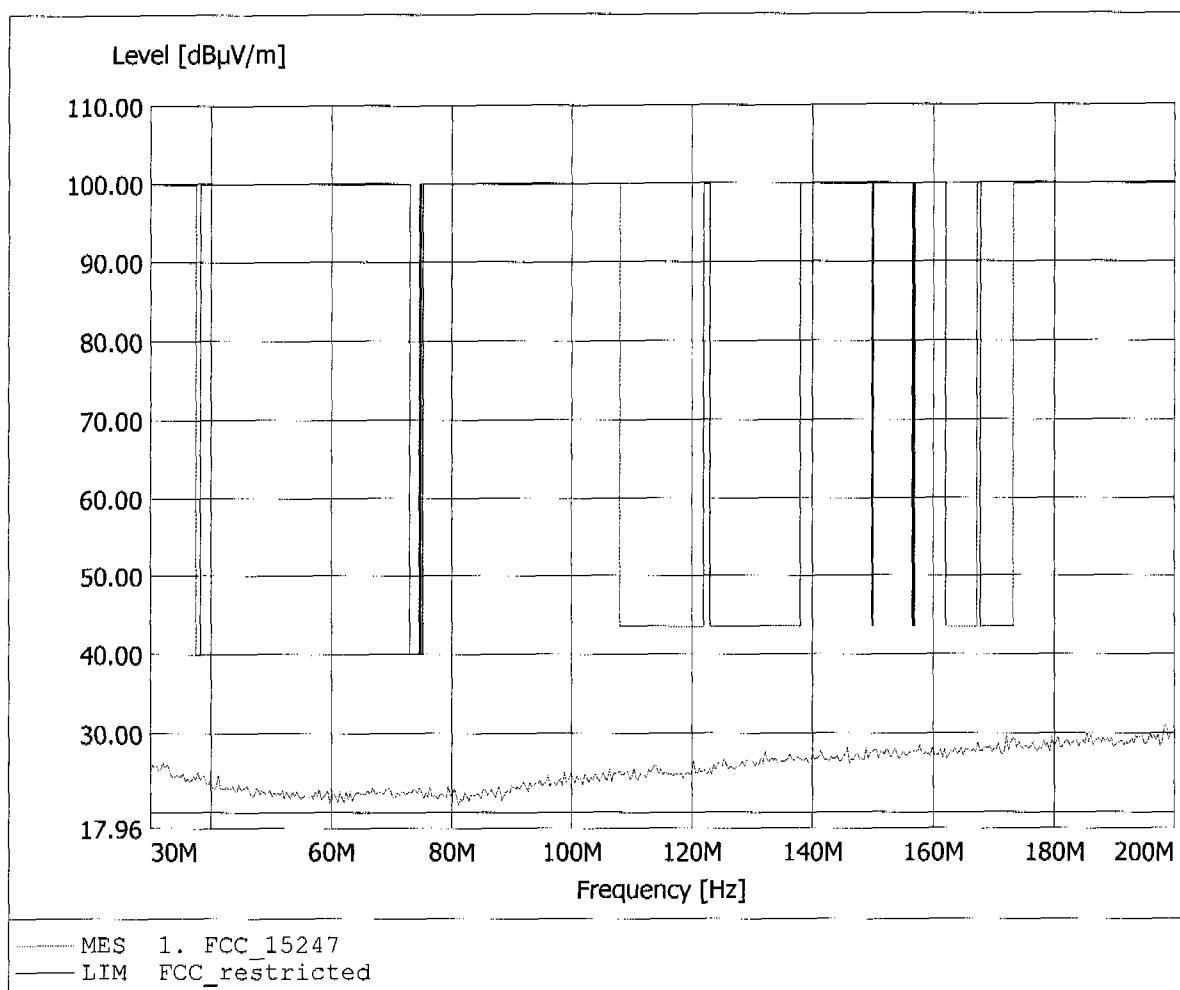


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 192.846MHz, Emax: 30.56dBµV/m, RBW: 100kHz

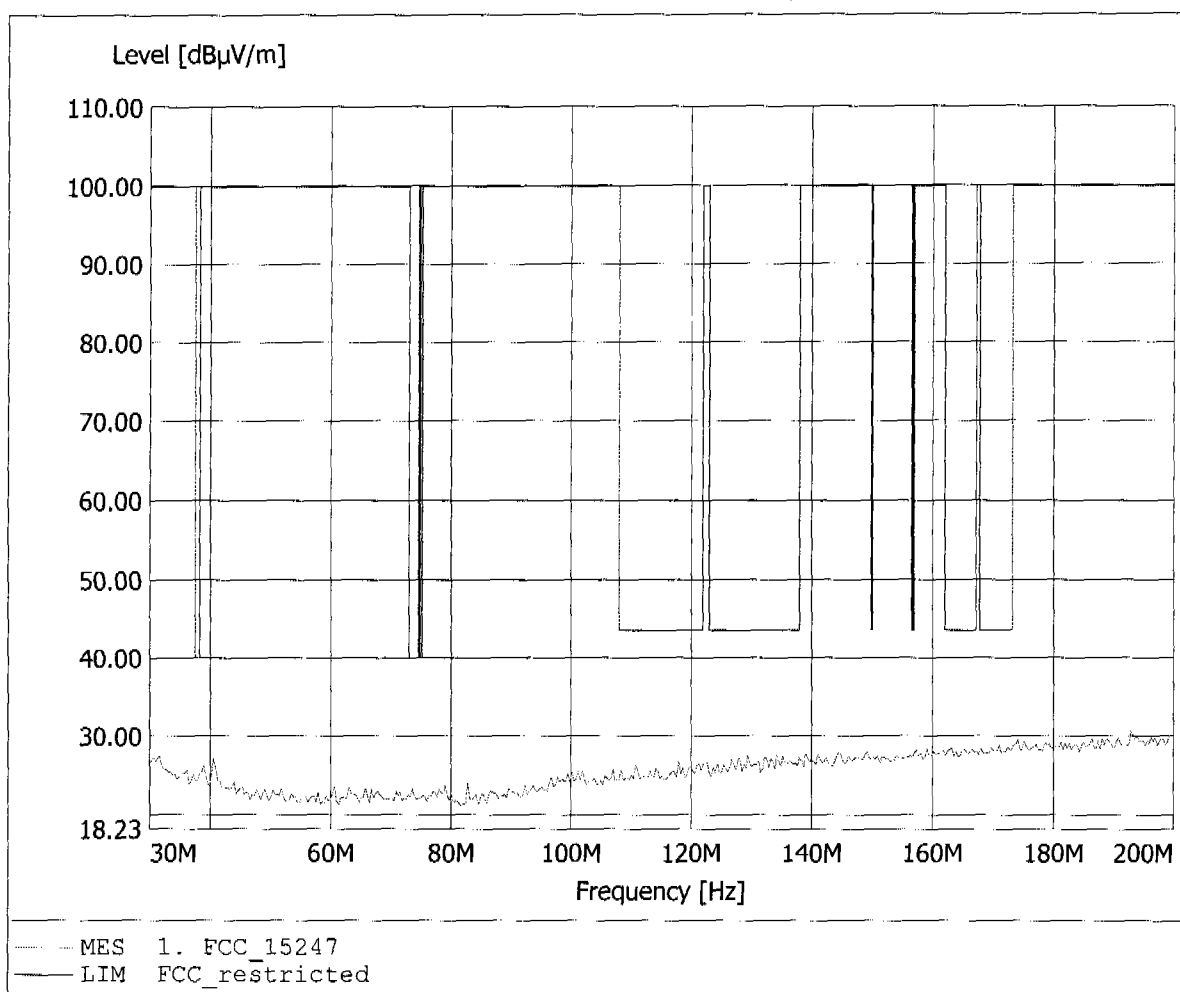


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 265.731MHz, Emax: 26.71dBµV/m, RBW: 100kHz

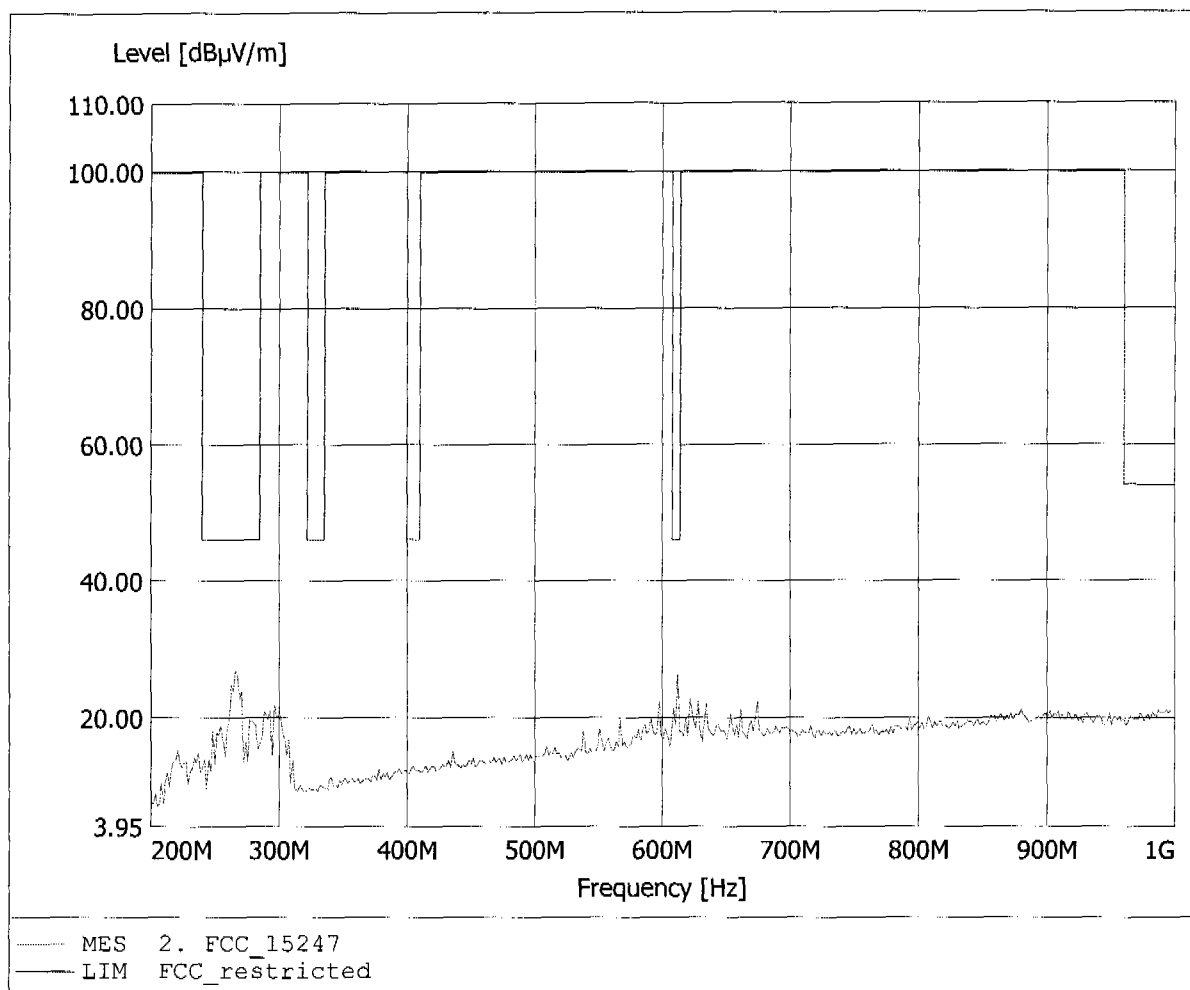


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 267.335MHz, Emax: 26.98dBµV/m, RBW: 100kHz

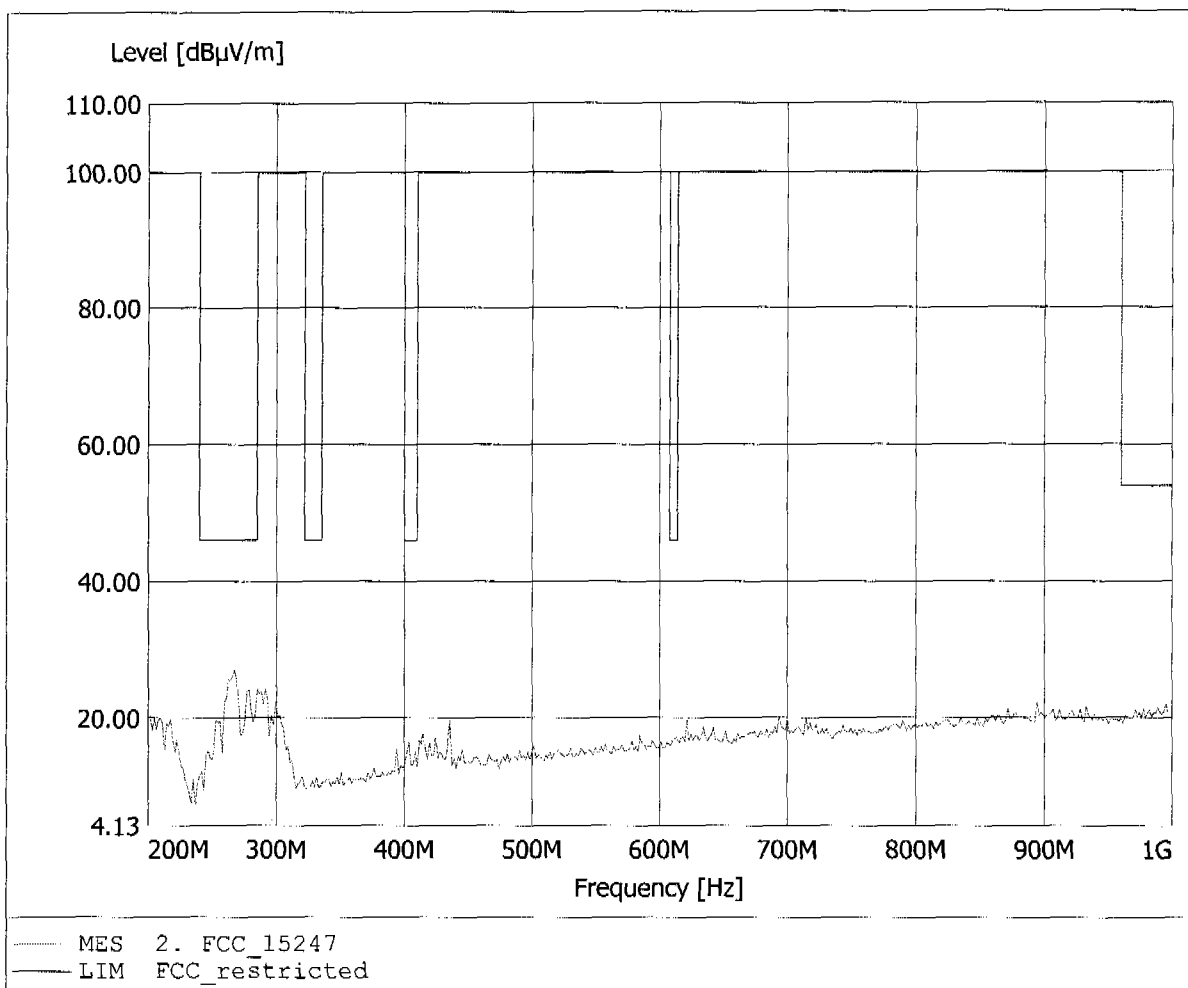


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 96.30dBµV/m, RBW: 1MHz

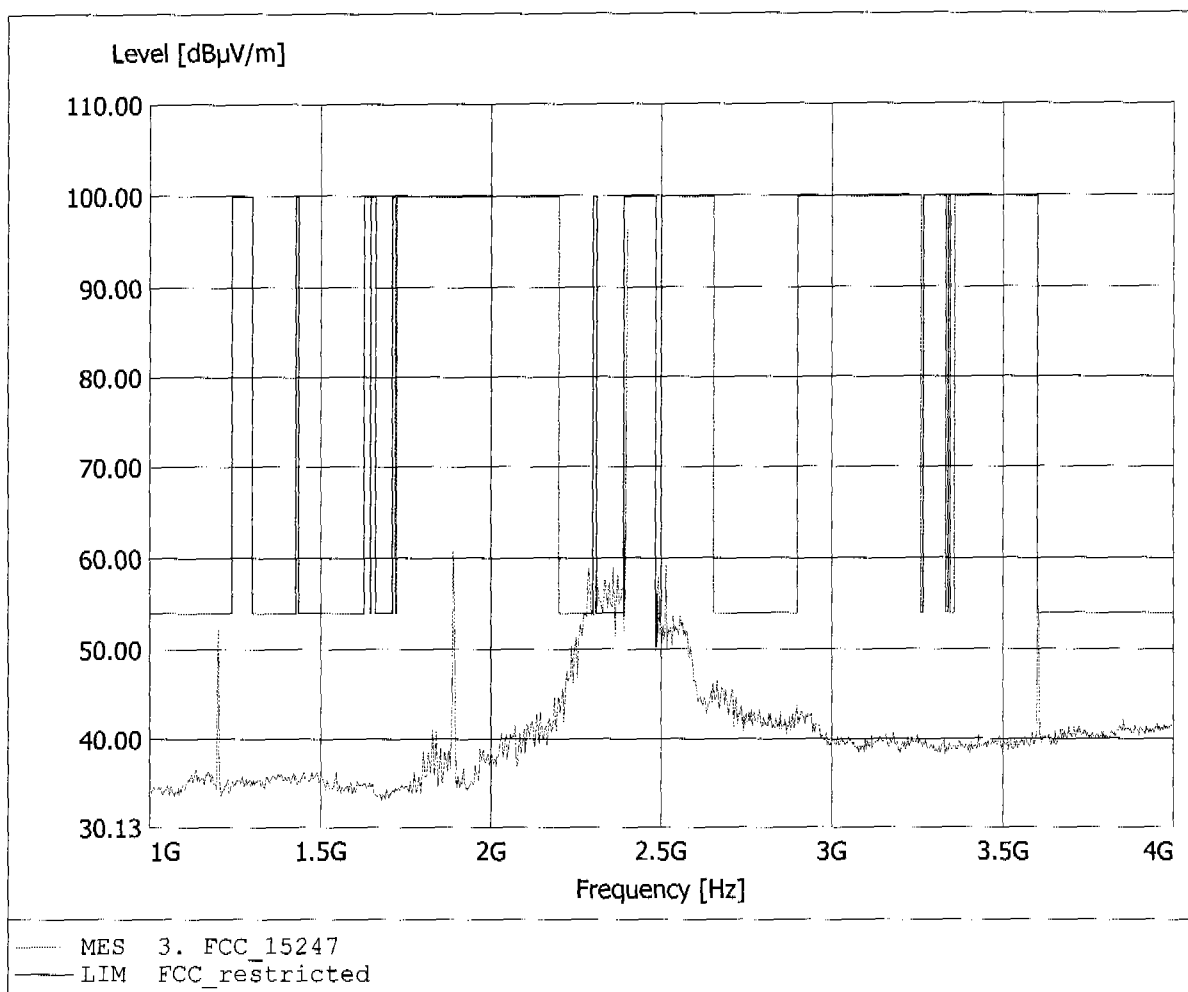


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 96.30dBµV/m, RBW: 1MHz

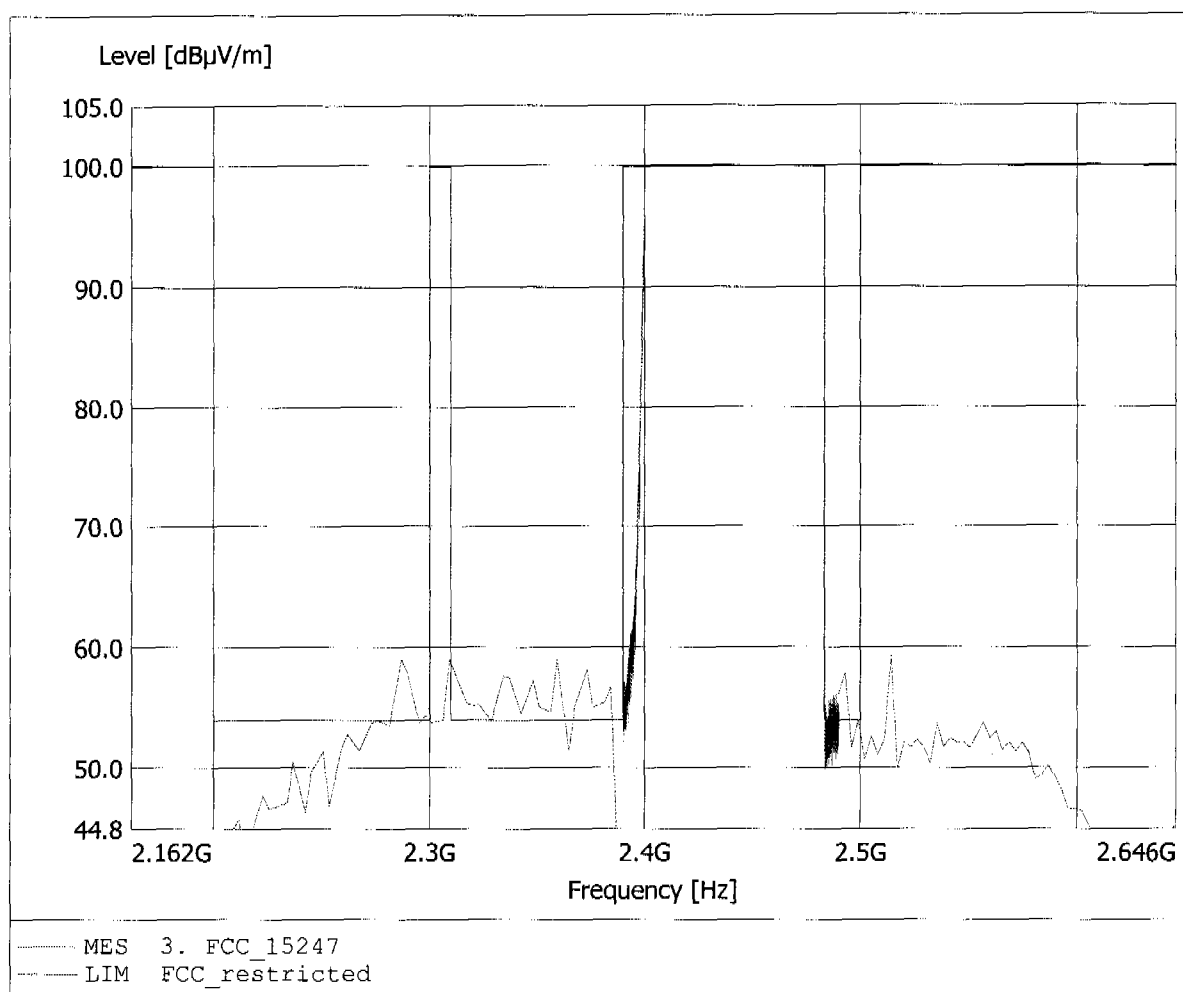


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 96.30dBµV/m, RBW: 1MHz

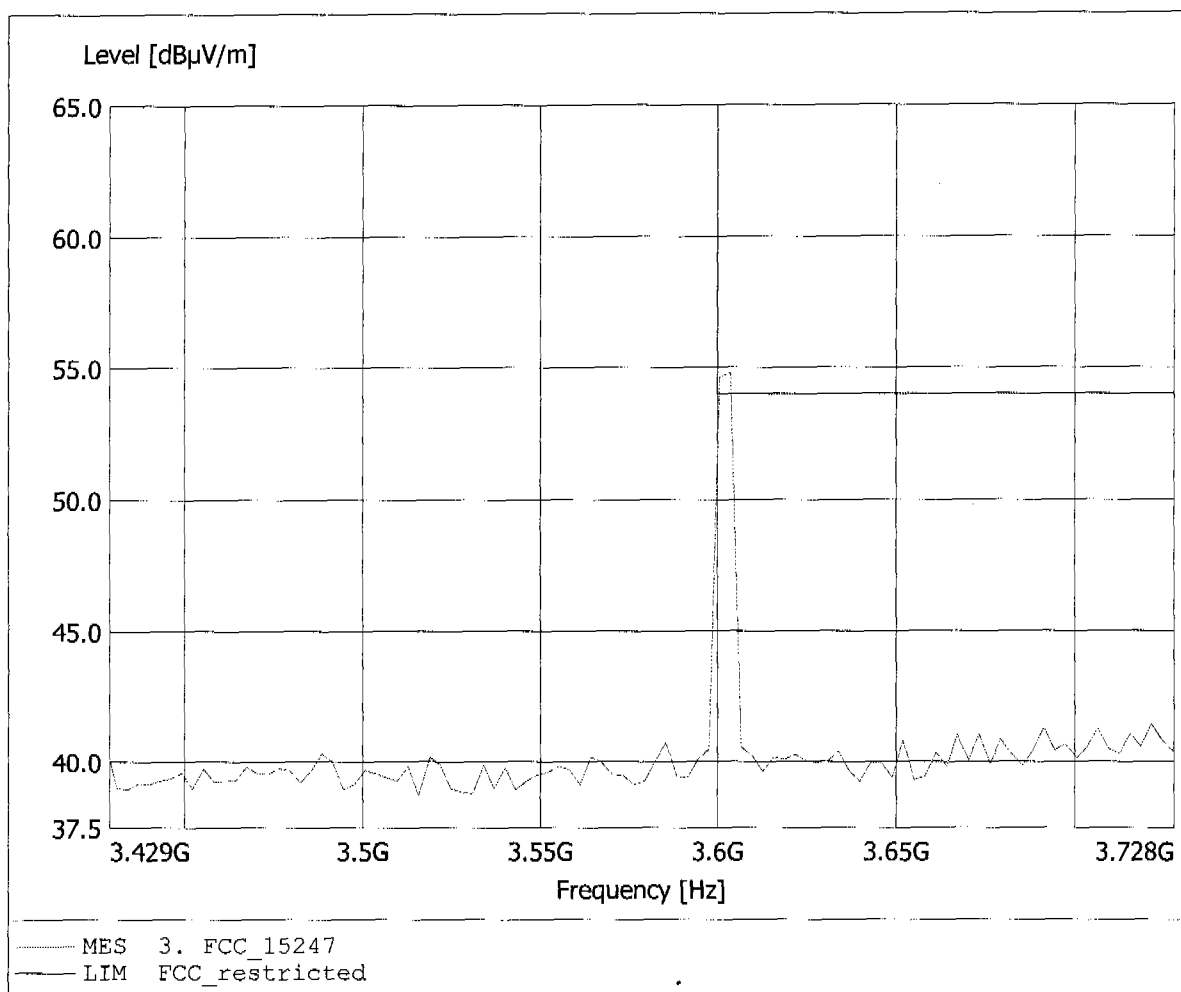


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 67.39dBµV/m, RBW: 1MHz

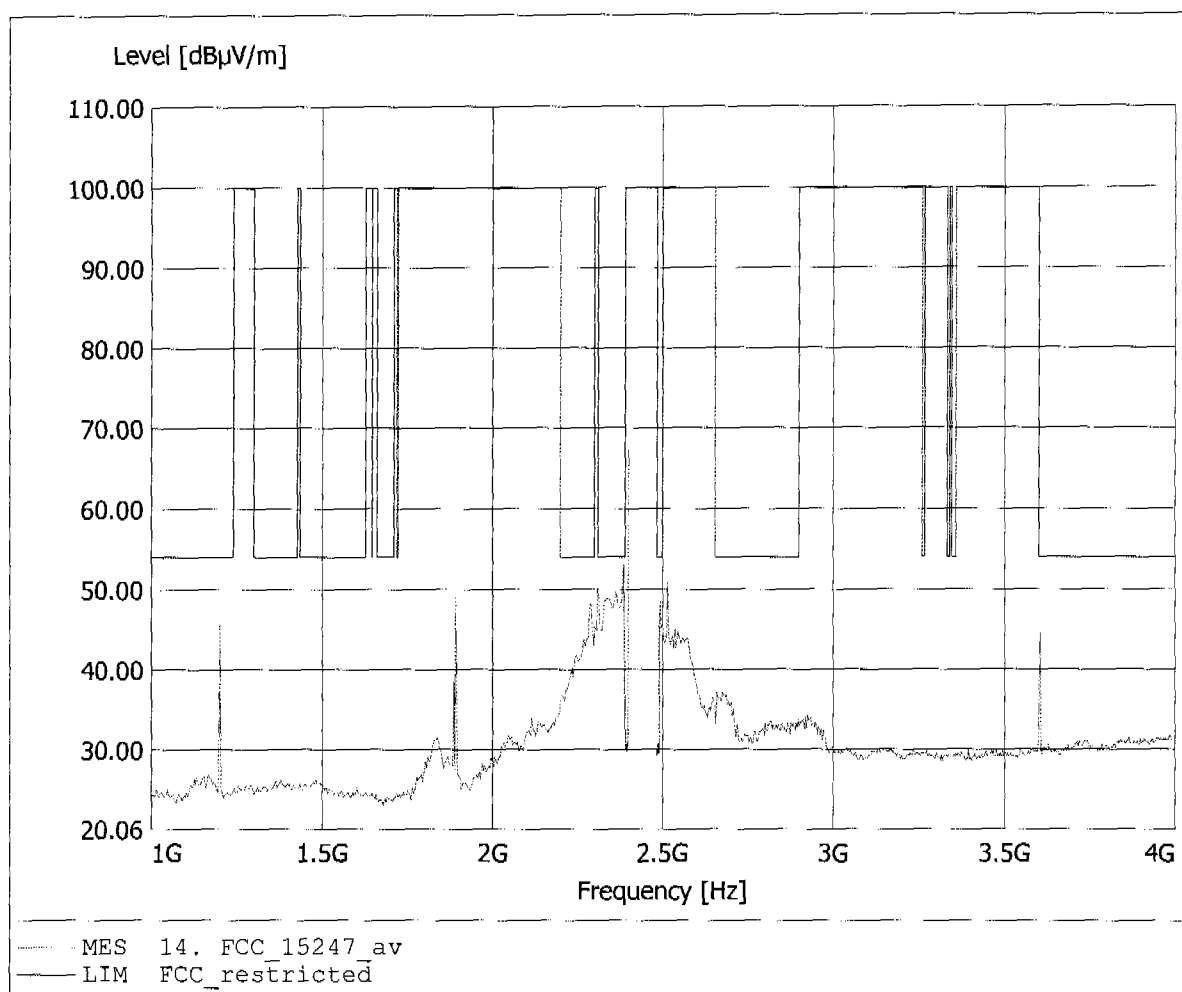


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 67.39dBμV/m, RBW: 1MHz

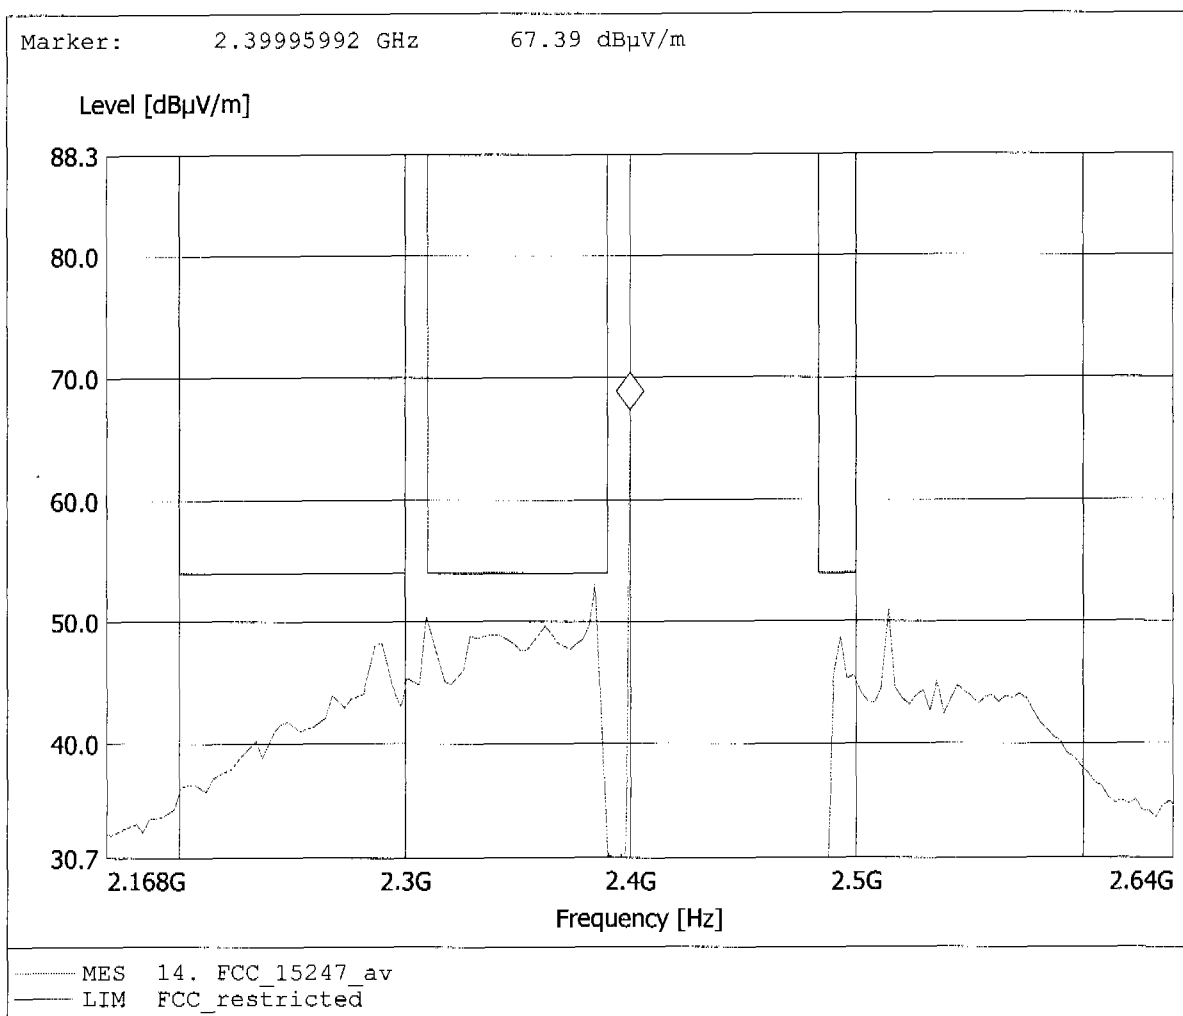


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Thom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 67.39dBµV/m, RBW: 1MHz

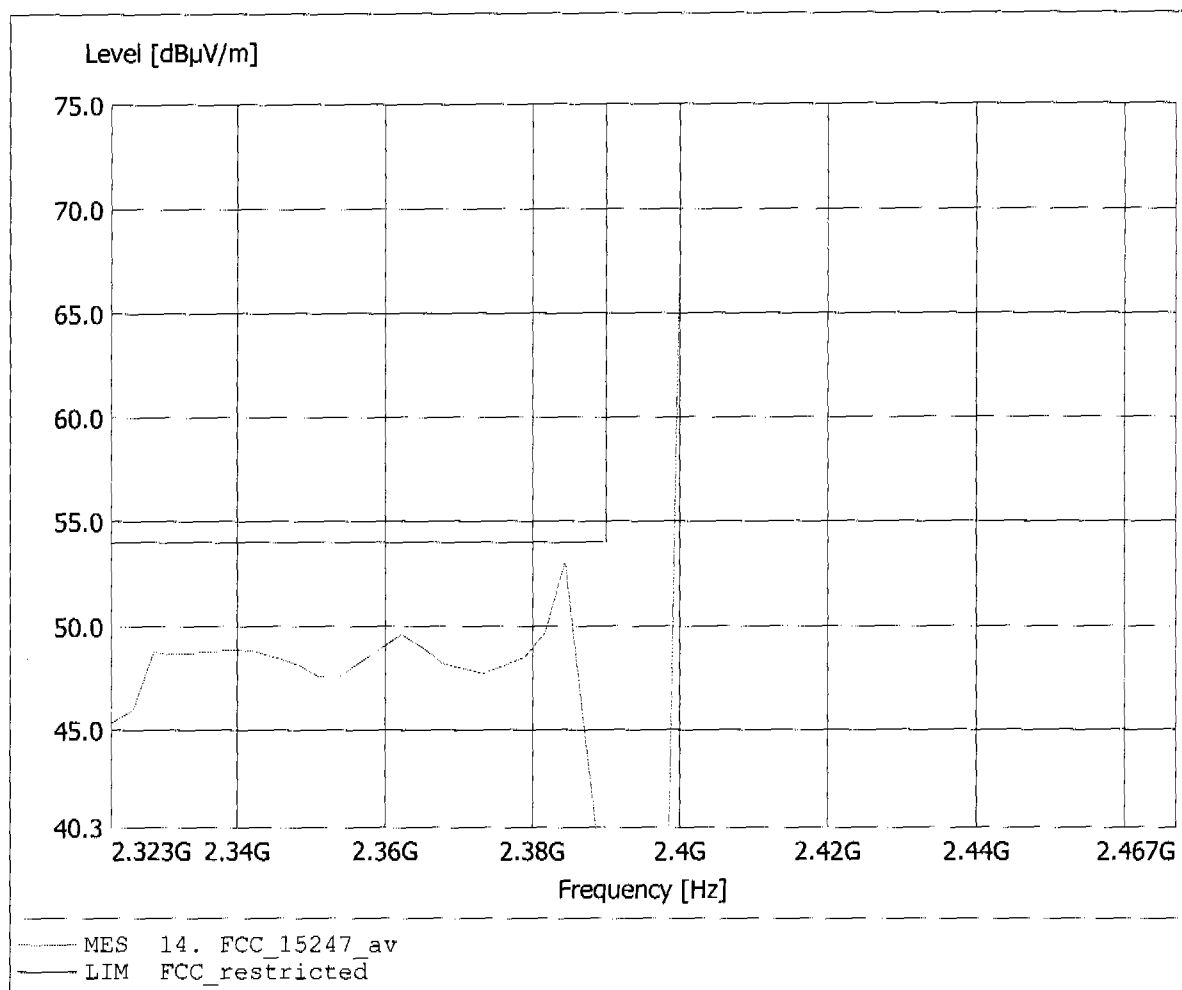


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 101.22dBuV/m, RBW: 1MHz

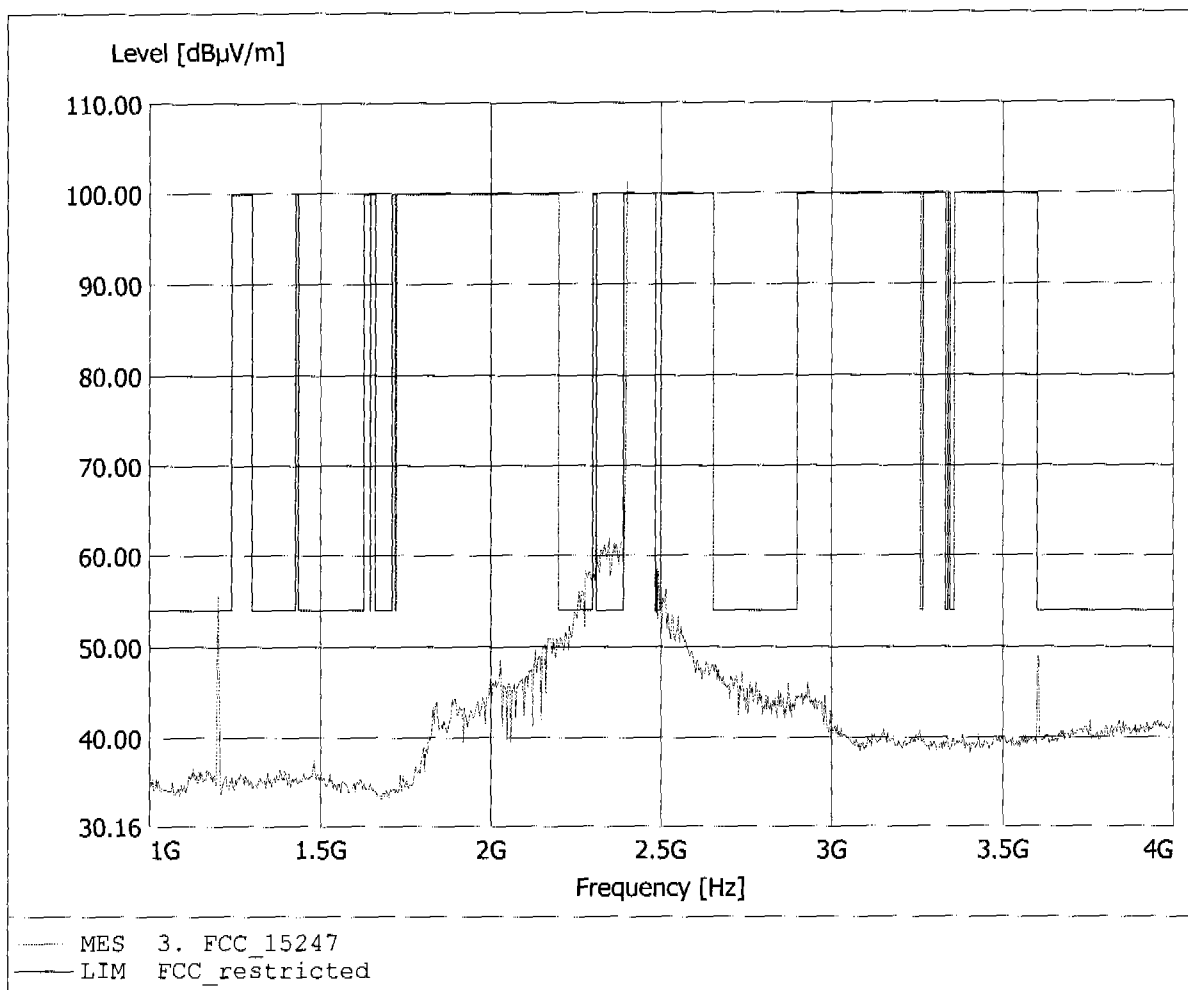


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 101.22dBµV/m, RBW: 1MHz

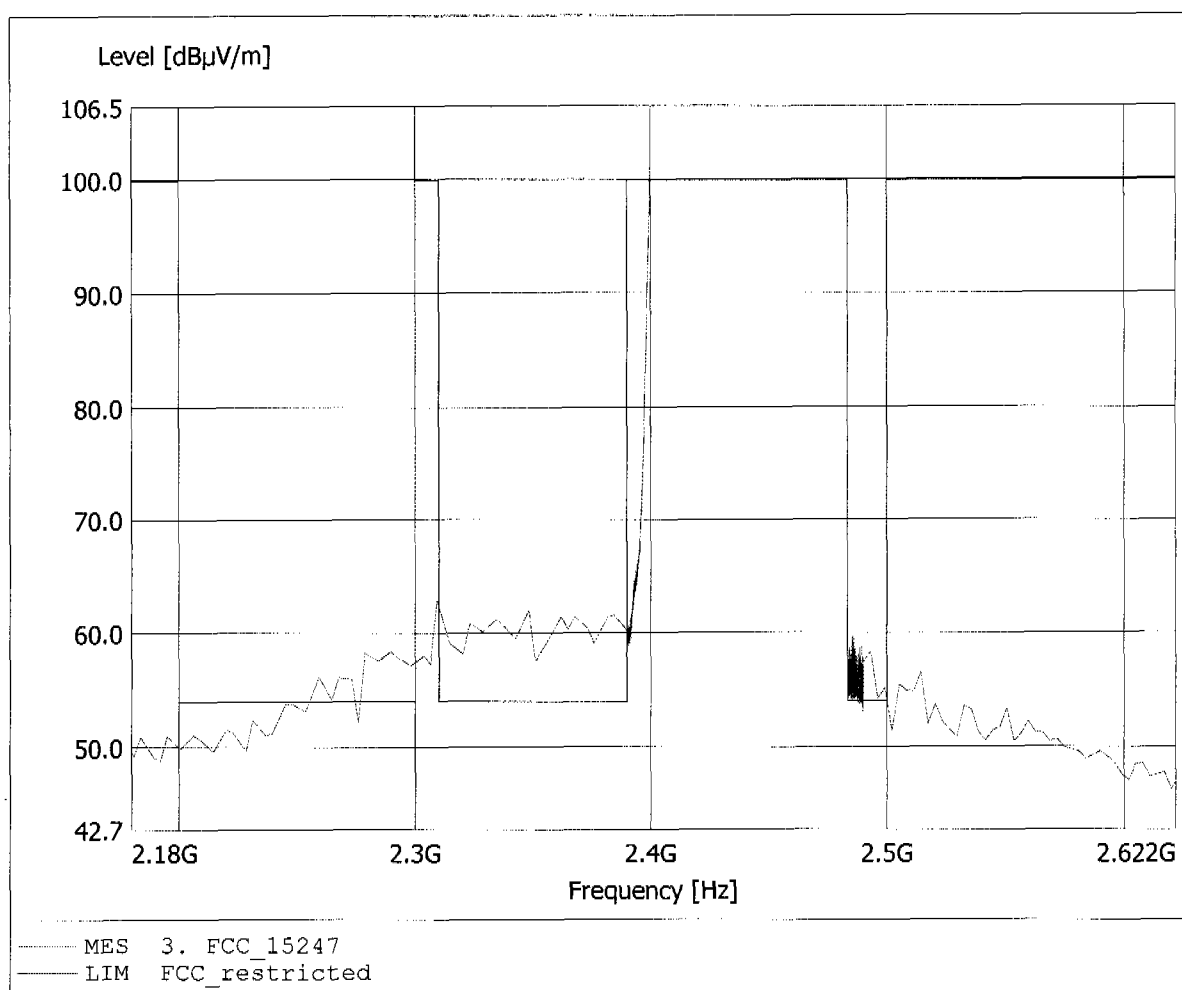


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 70.60dBµV/m, RBW: 1MHz

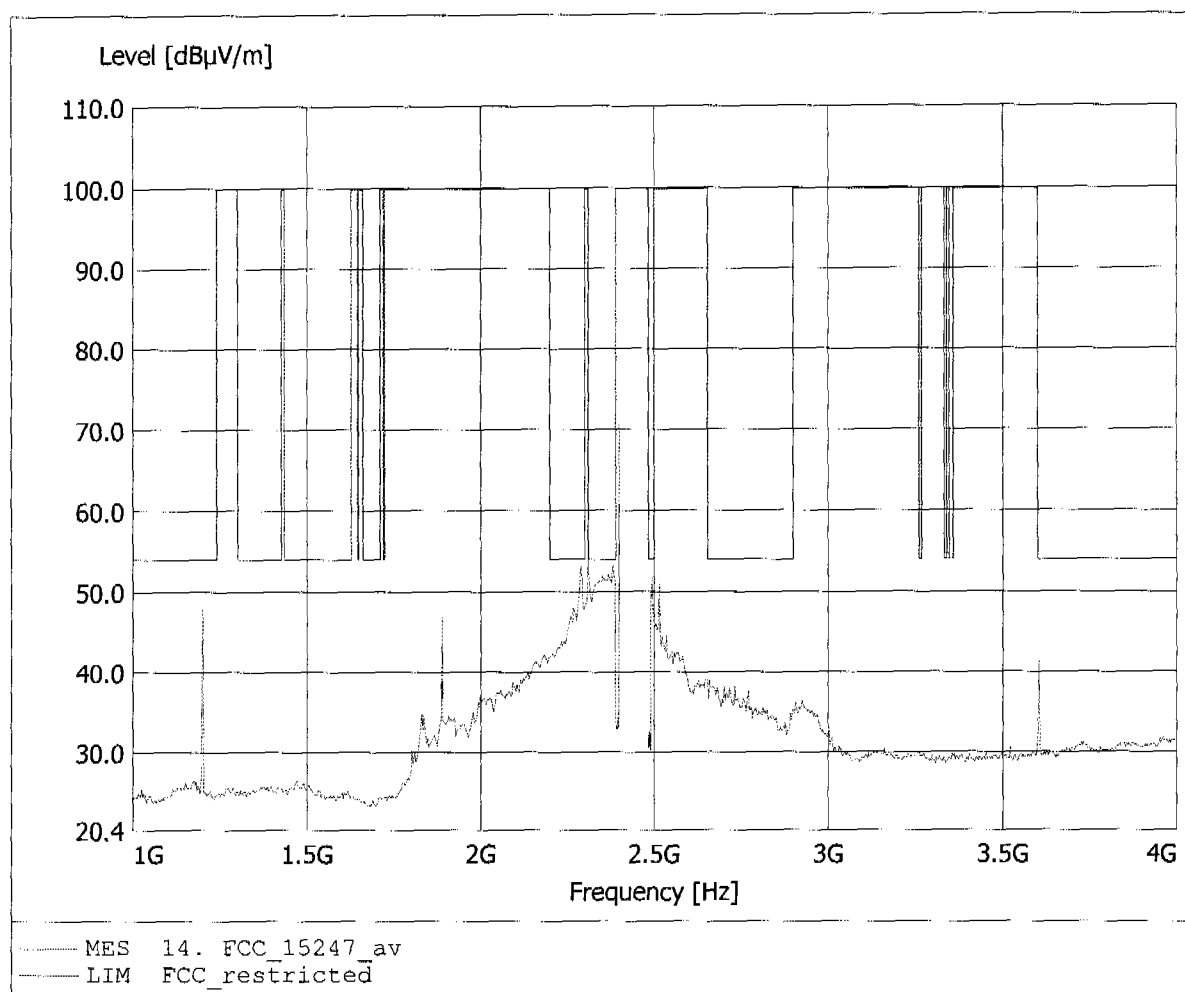


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 70.60dBµV/m, RBW: 1MHz

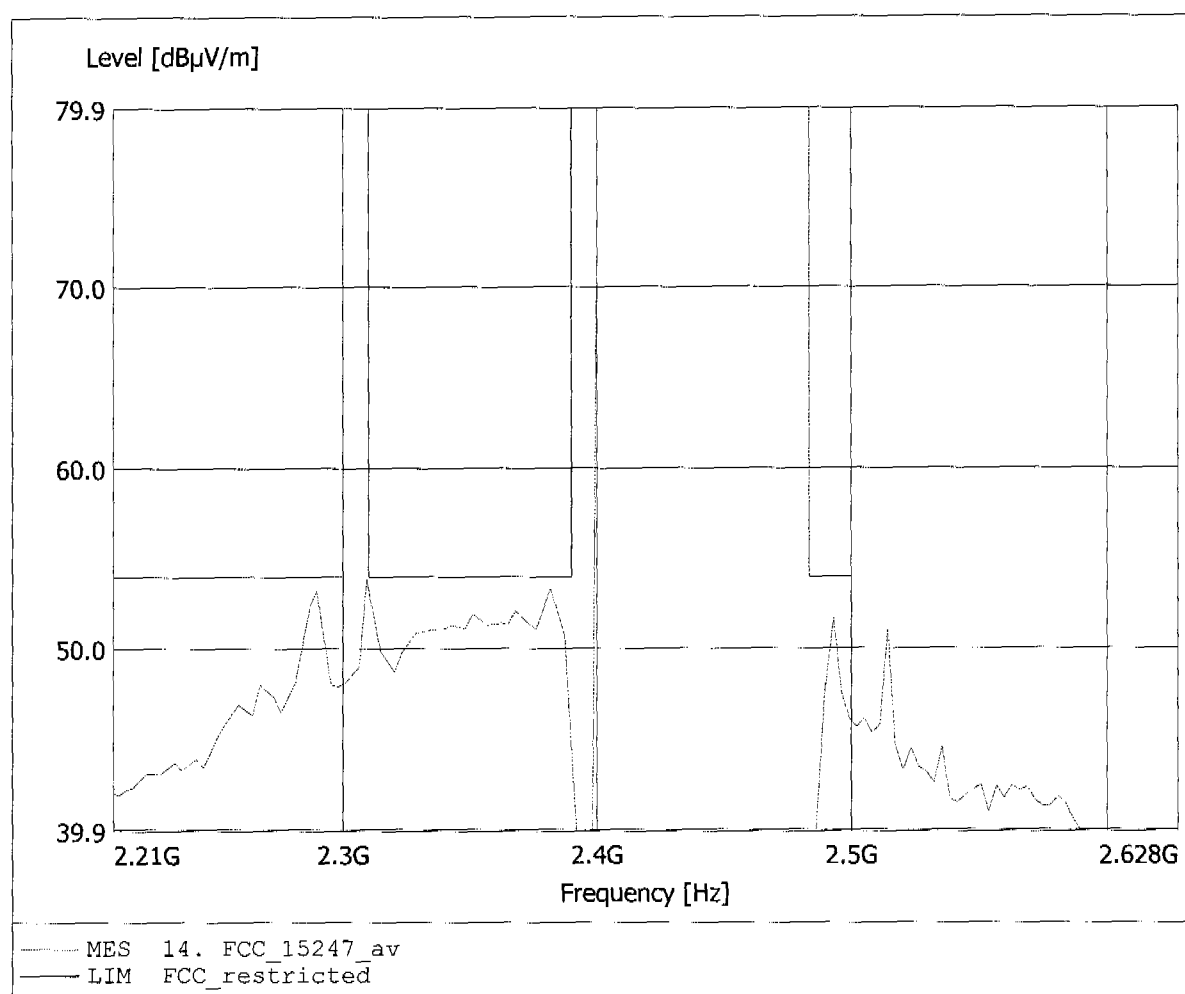


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 70.60dBµV/m, RBW: 1MHz

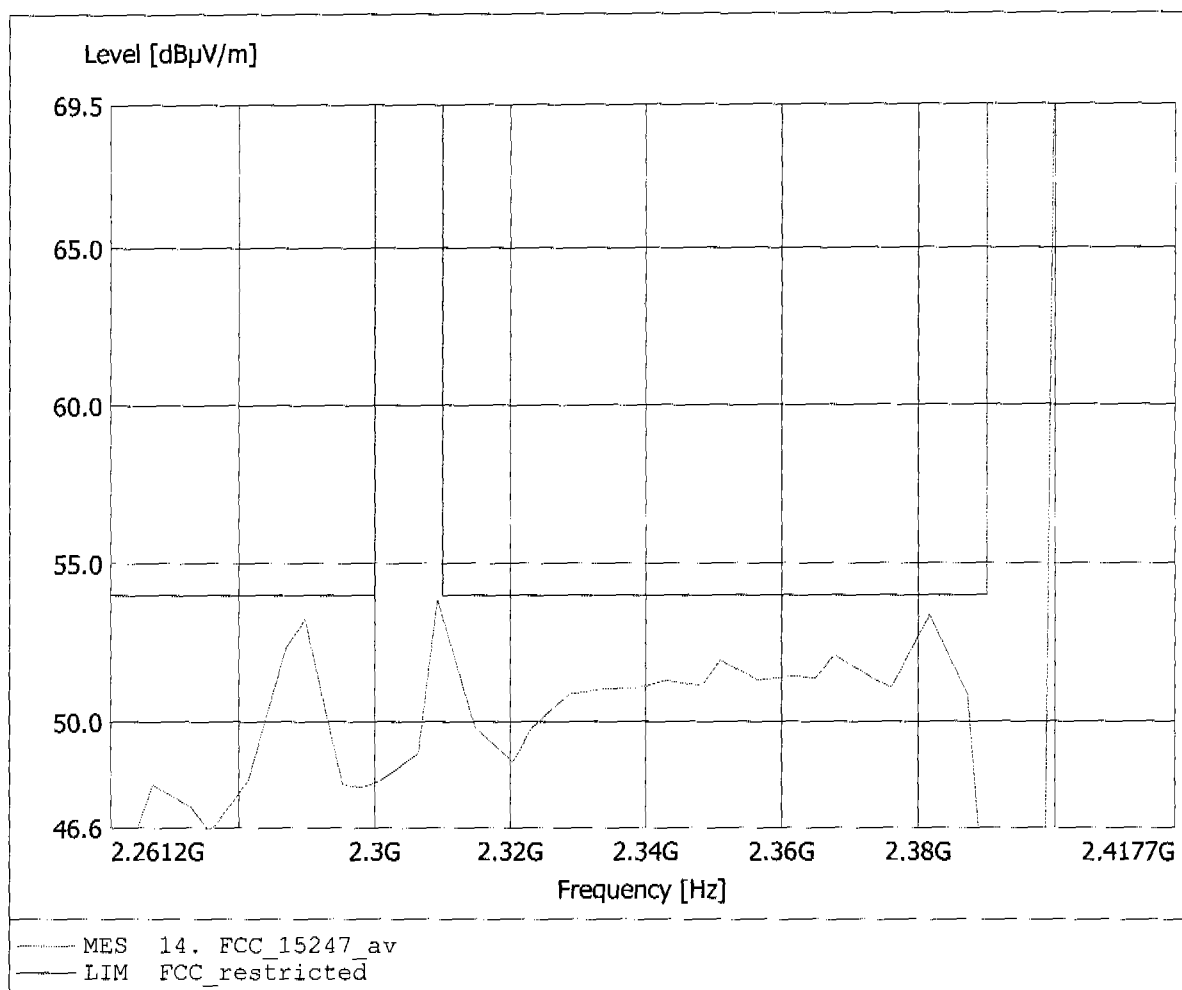


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 70.60dBµV/m, RBW: 1MHz

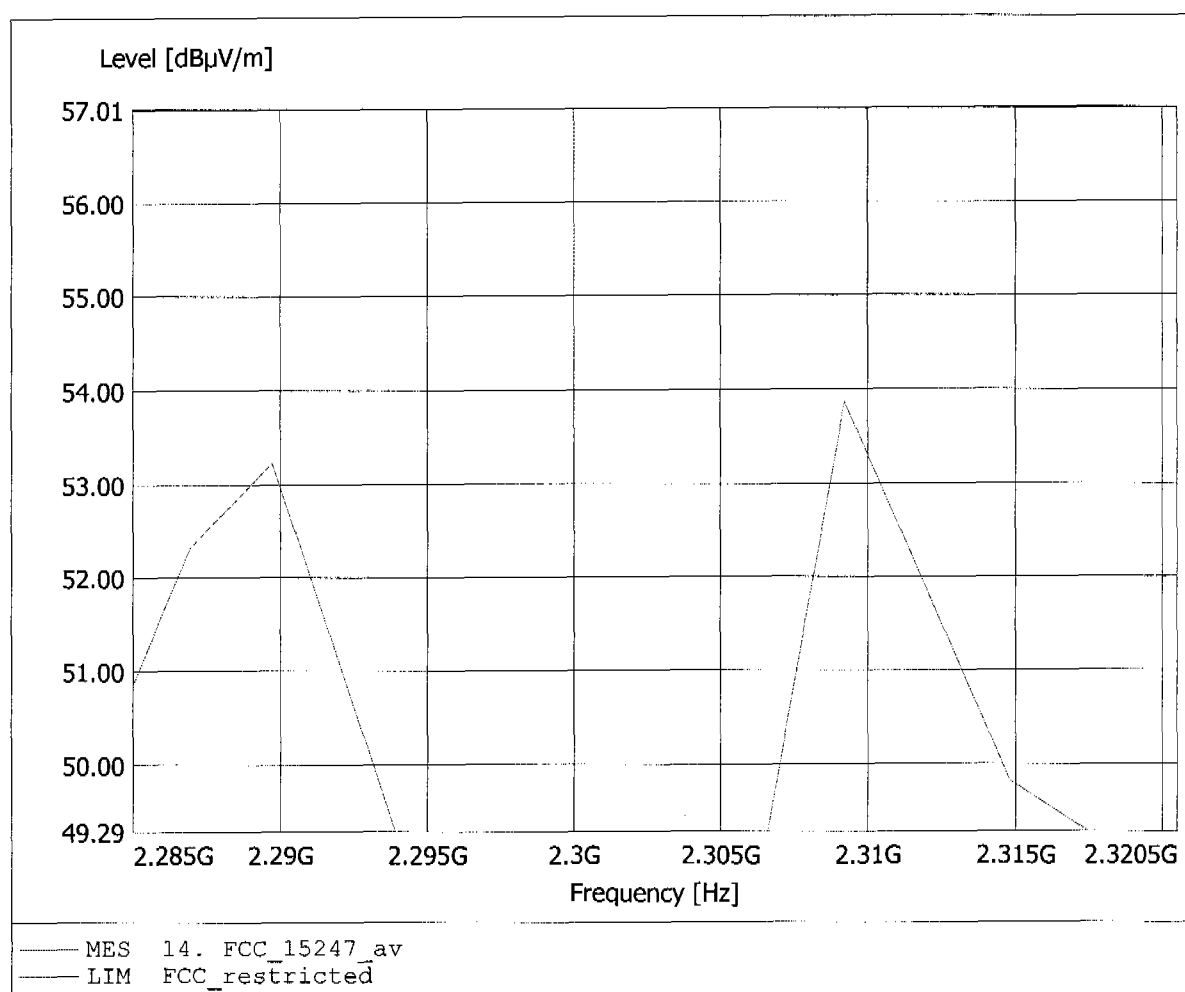


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.206GHz, Emax: 52.67dBuV/m, RBW: 1MHz

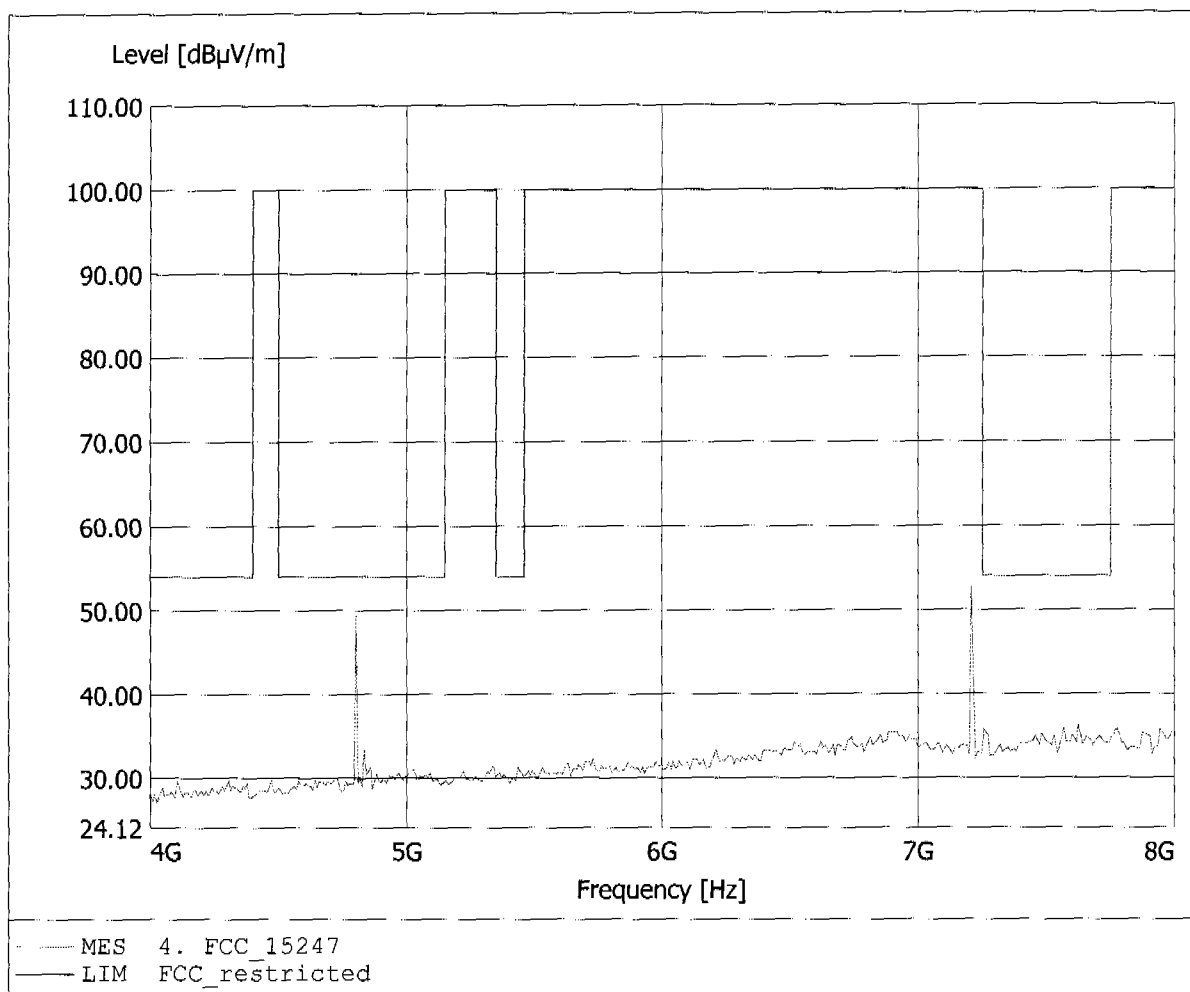


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.802GHz, Emax: 58.39dBµV/m, RBW: 1MHz

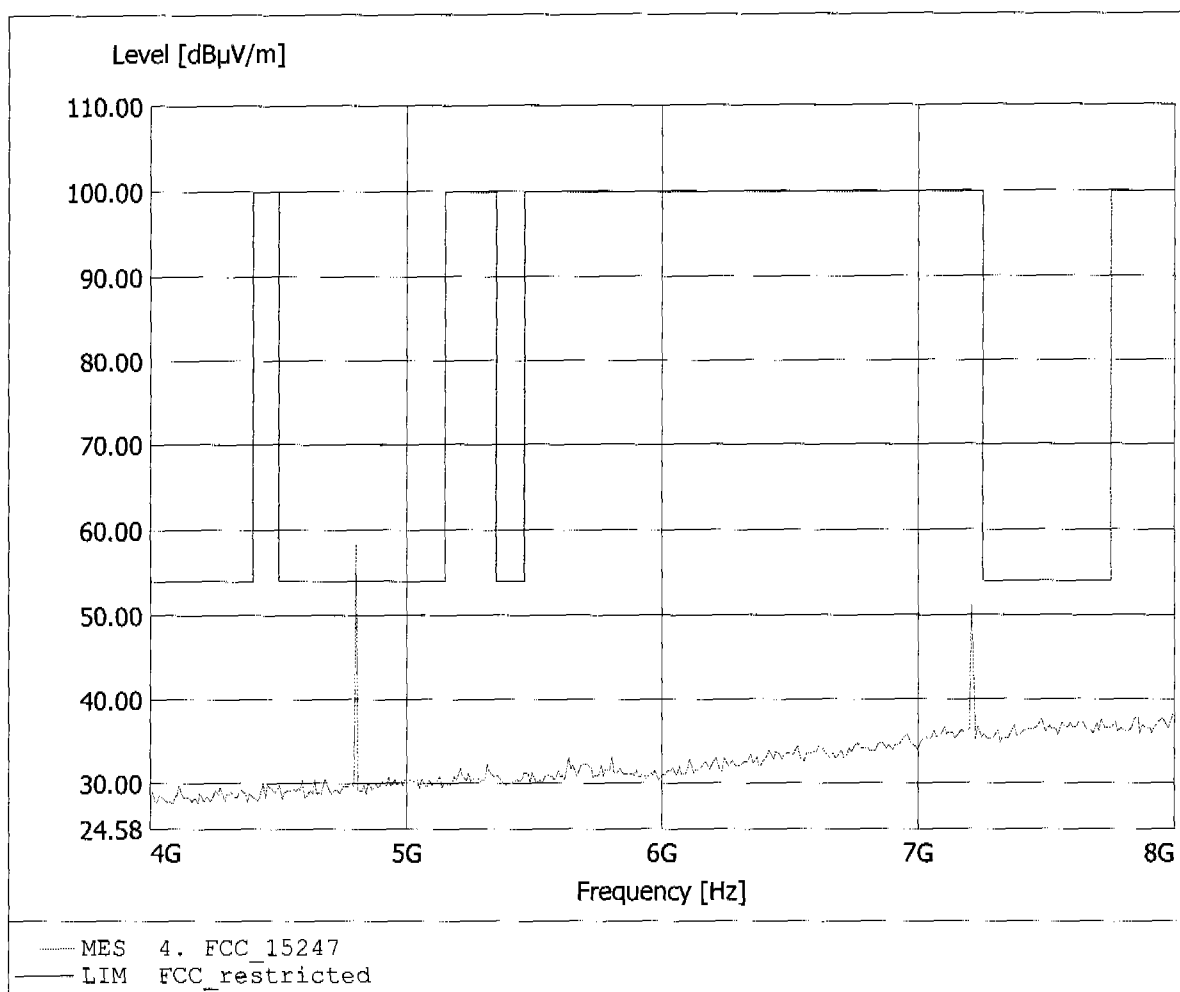


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.206GHz, Emax: 30.86dBμV/m, RBW: 1MHz

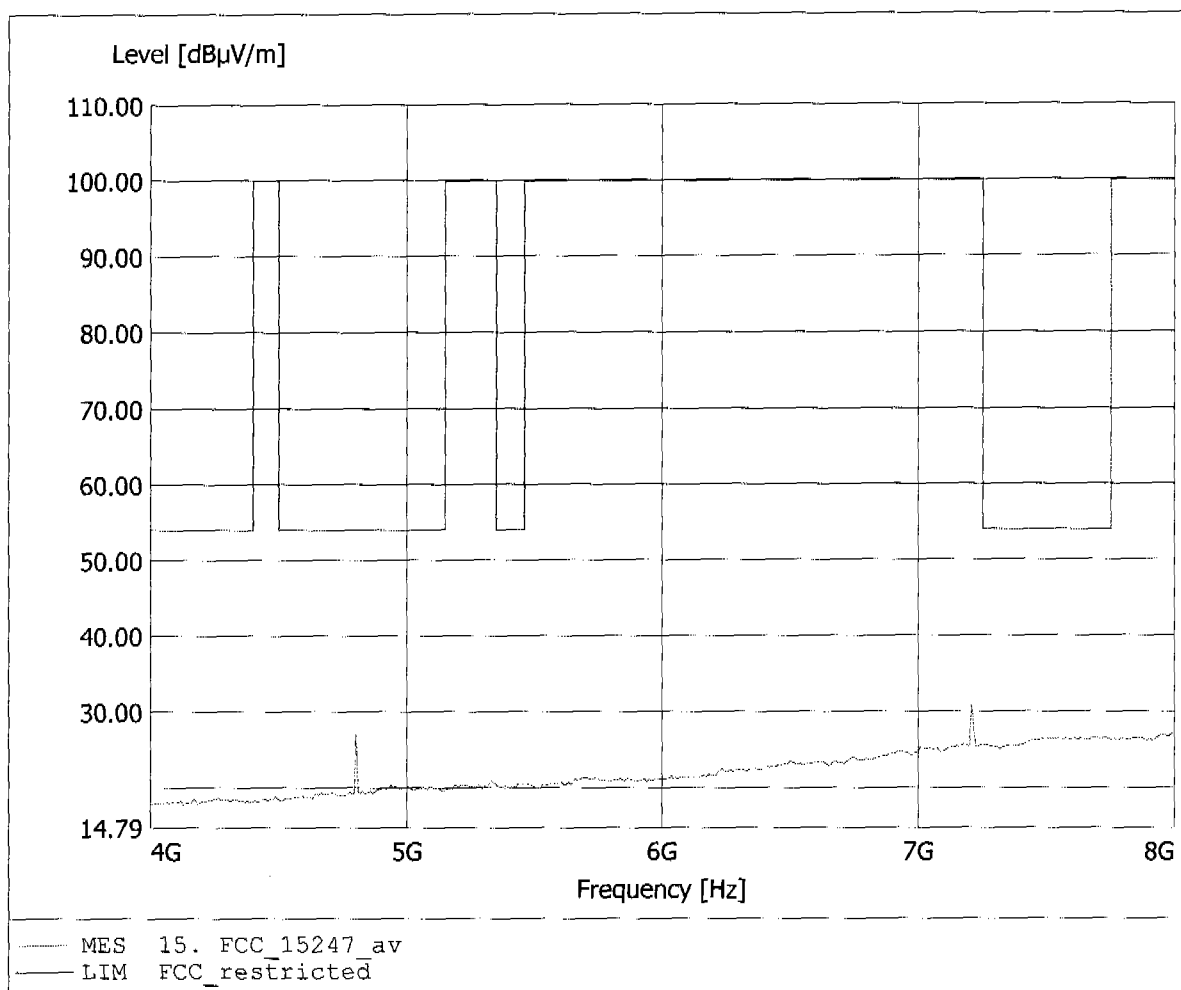


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.198GHz, Emax: 41.98dBµV/m, RBW: 1MHz

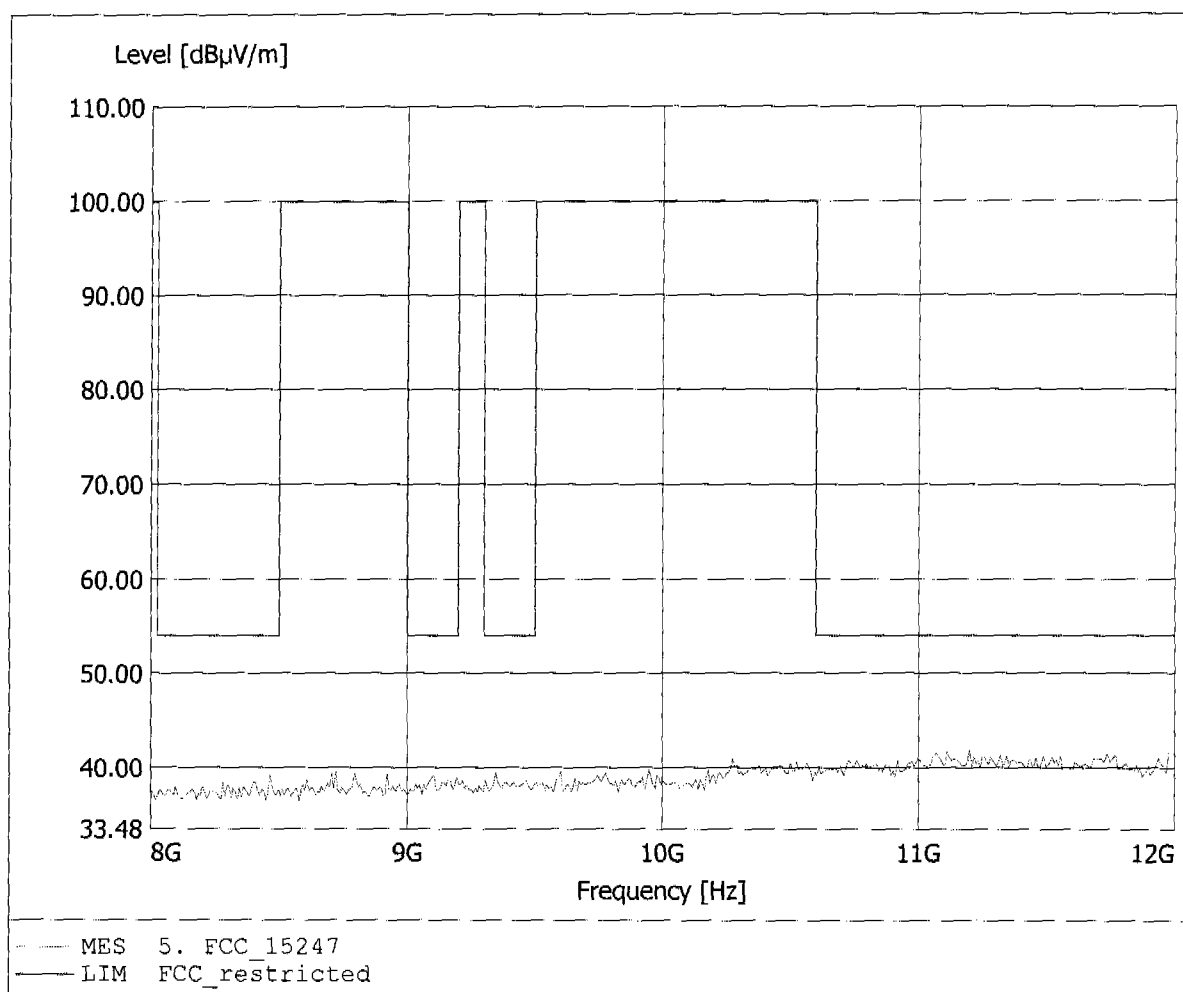


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.150GHz, Emax: 41.79dBuV/m, RBW: 1MHz

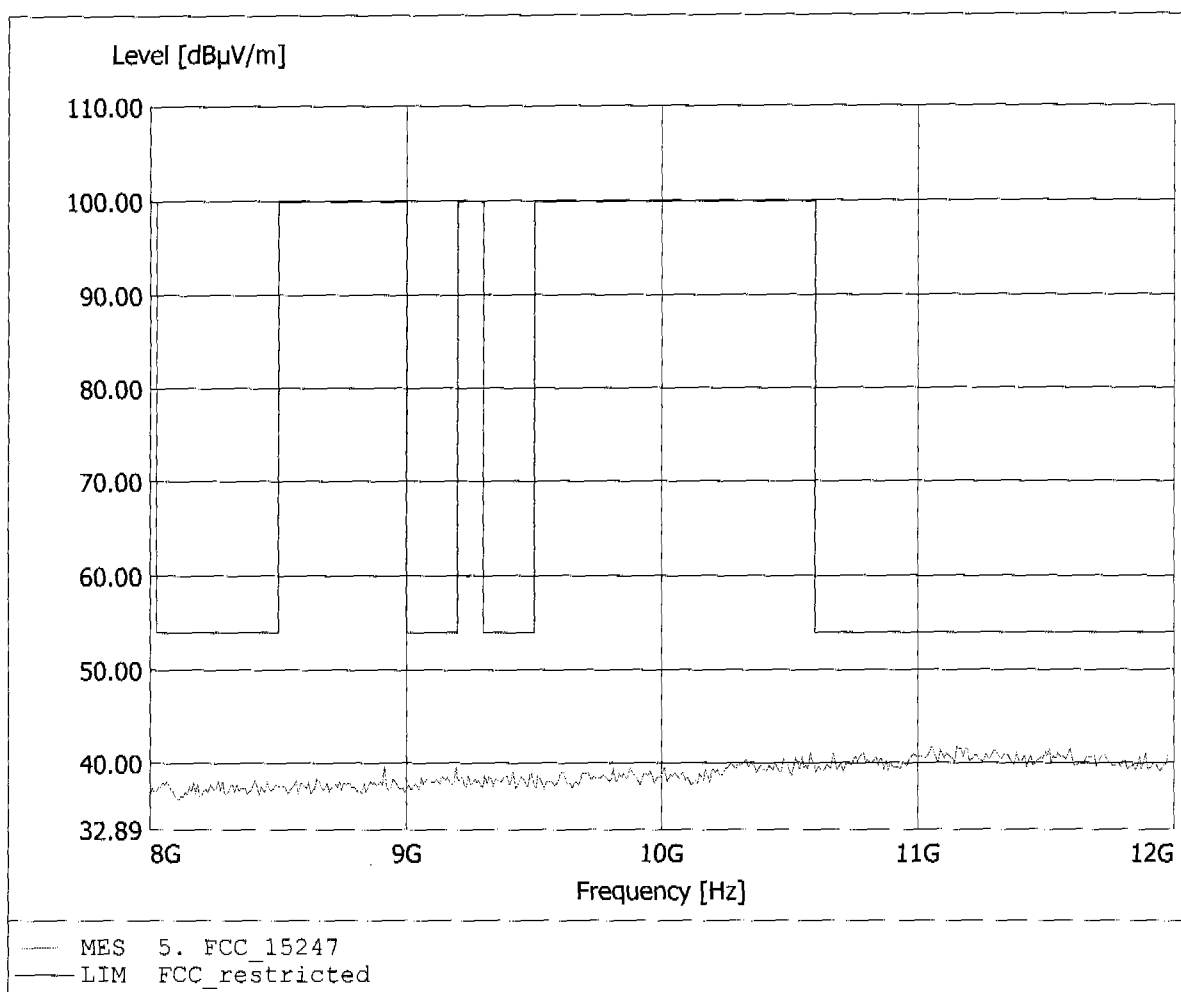


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.405GHz, Emax: 46.75dBuV/m, RBW: 1MHz

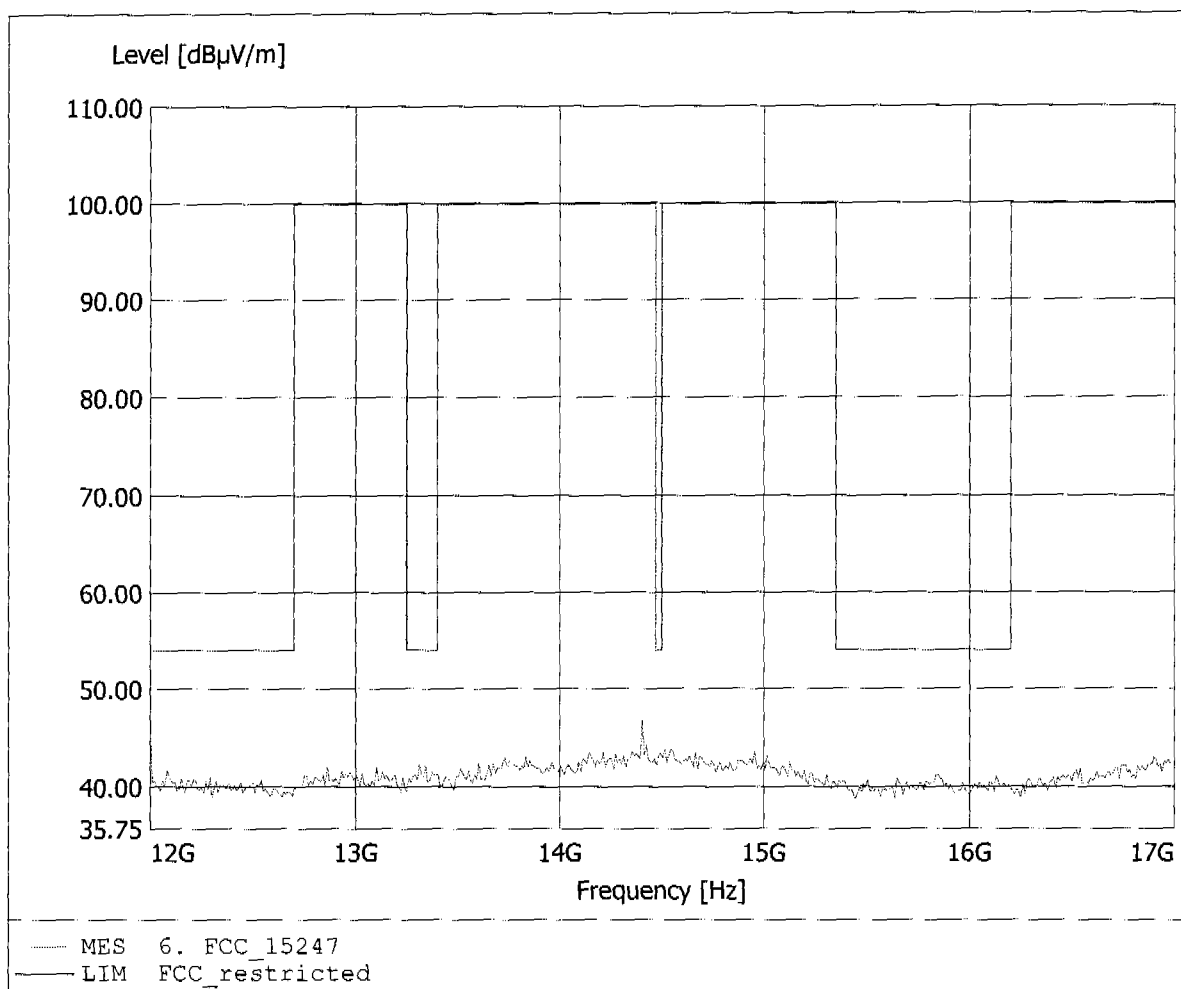


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.000GHz, Emax: 55.29dBµV/m, RBW: 1MHz

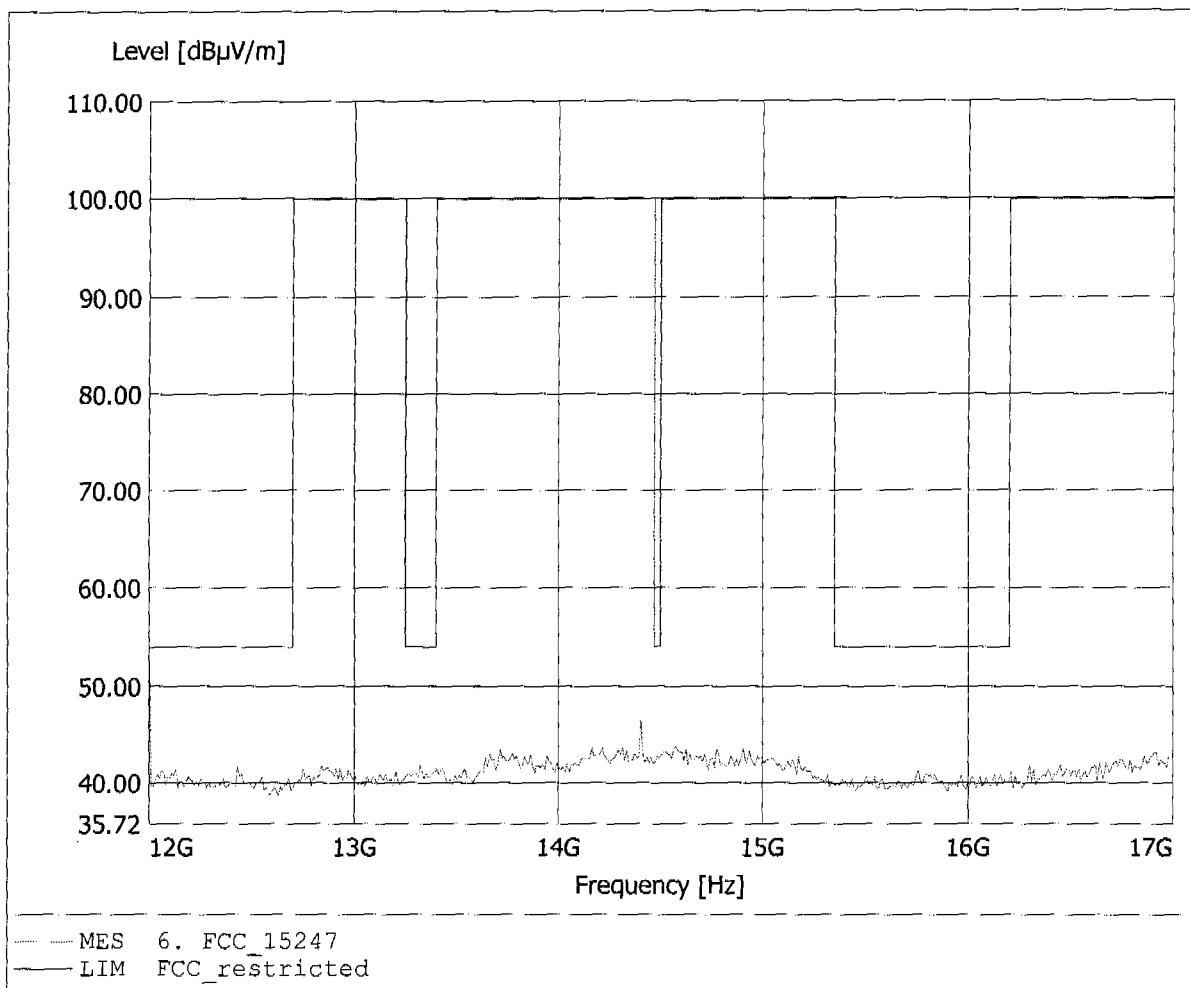


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.000GHz, Emax: 33.55dBµV/m, RBW: 1MHz

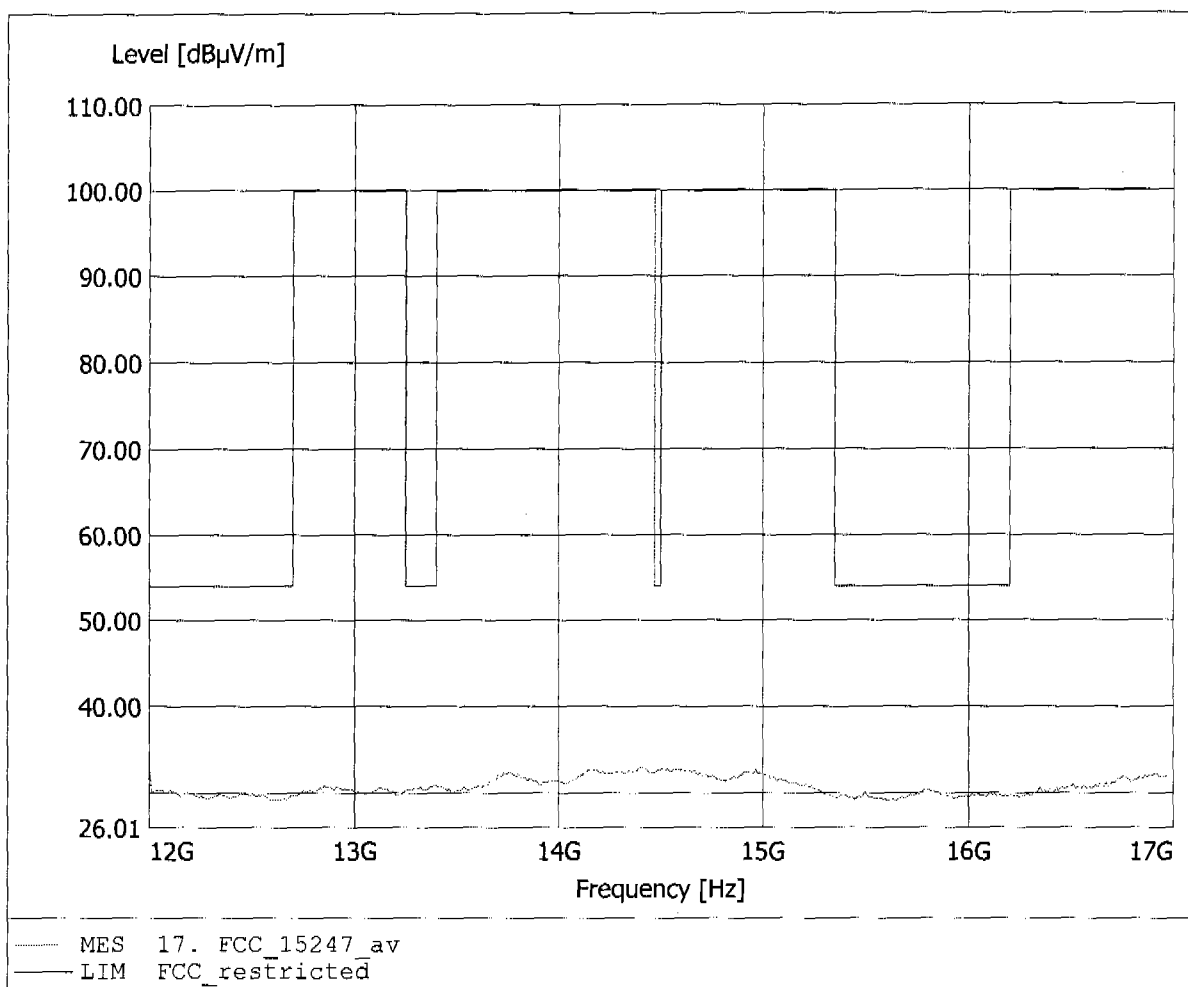


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 44.57dBµV/m, RBW: 1MHz

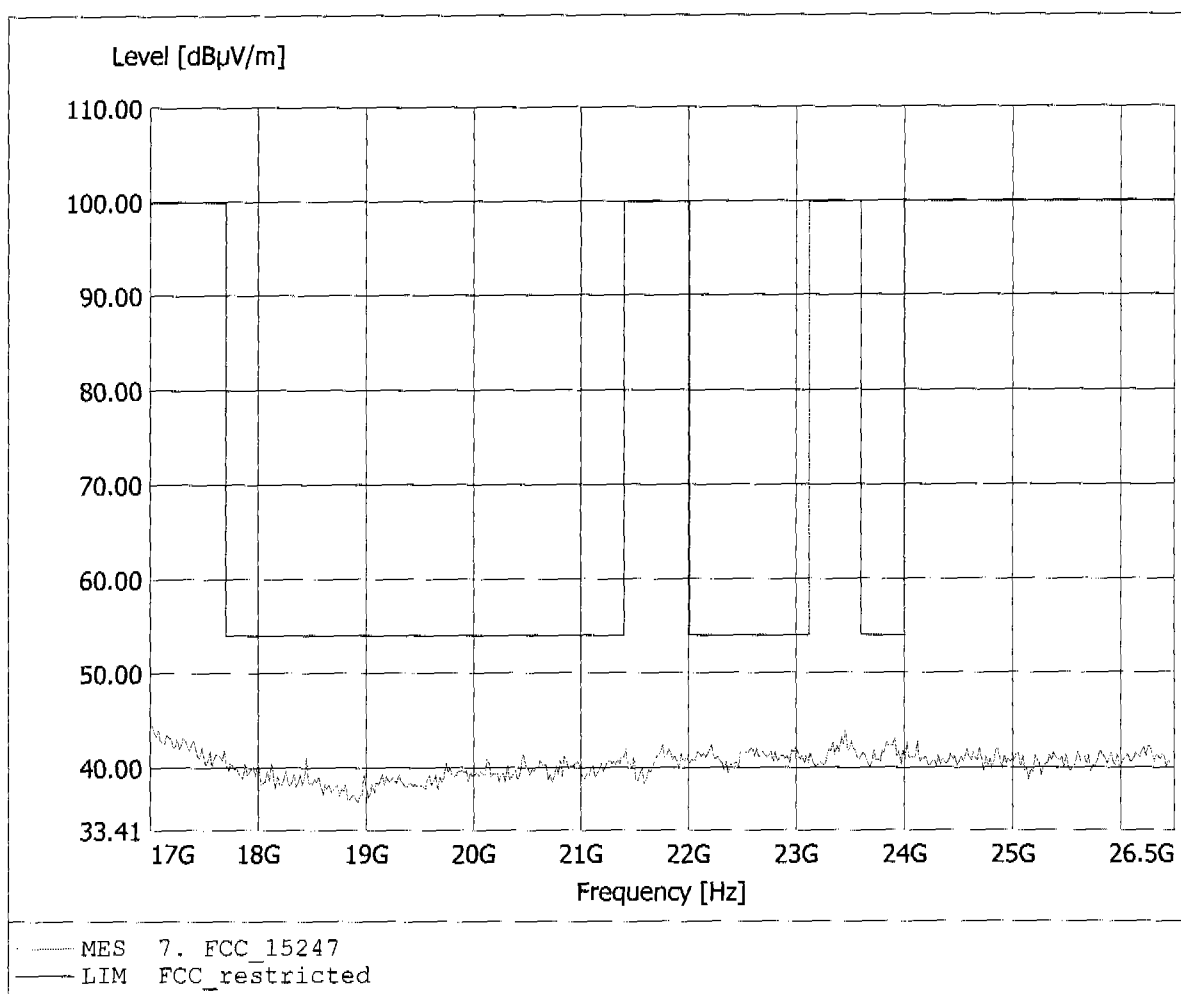


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:0
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 44.85dBuV/m, RBW: 1MHz

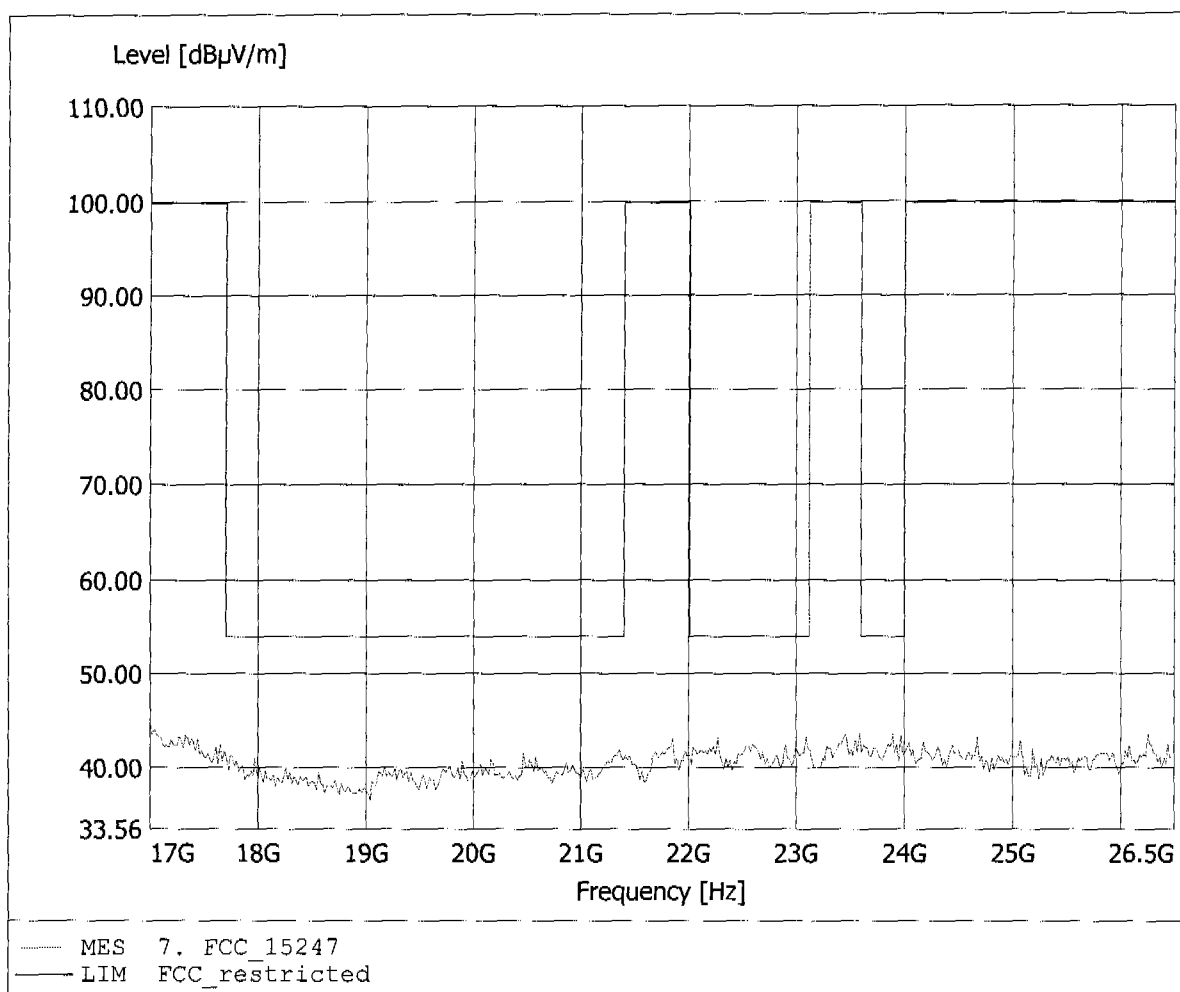


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 165.932MHz, Emax: 30.67dBµV/m, RBW: 100kHz

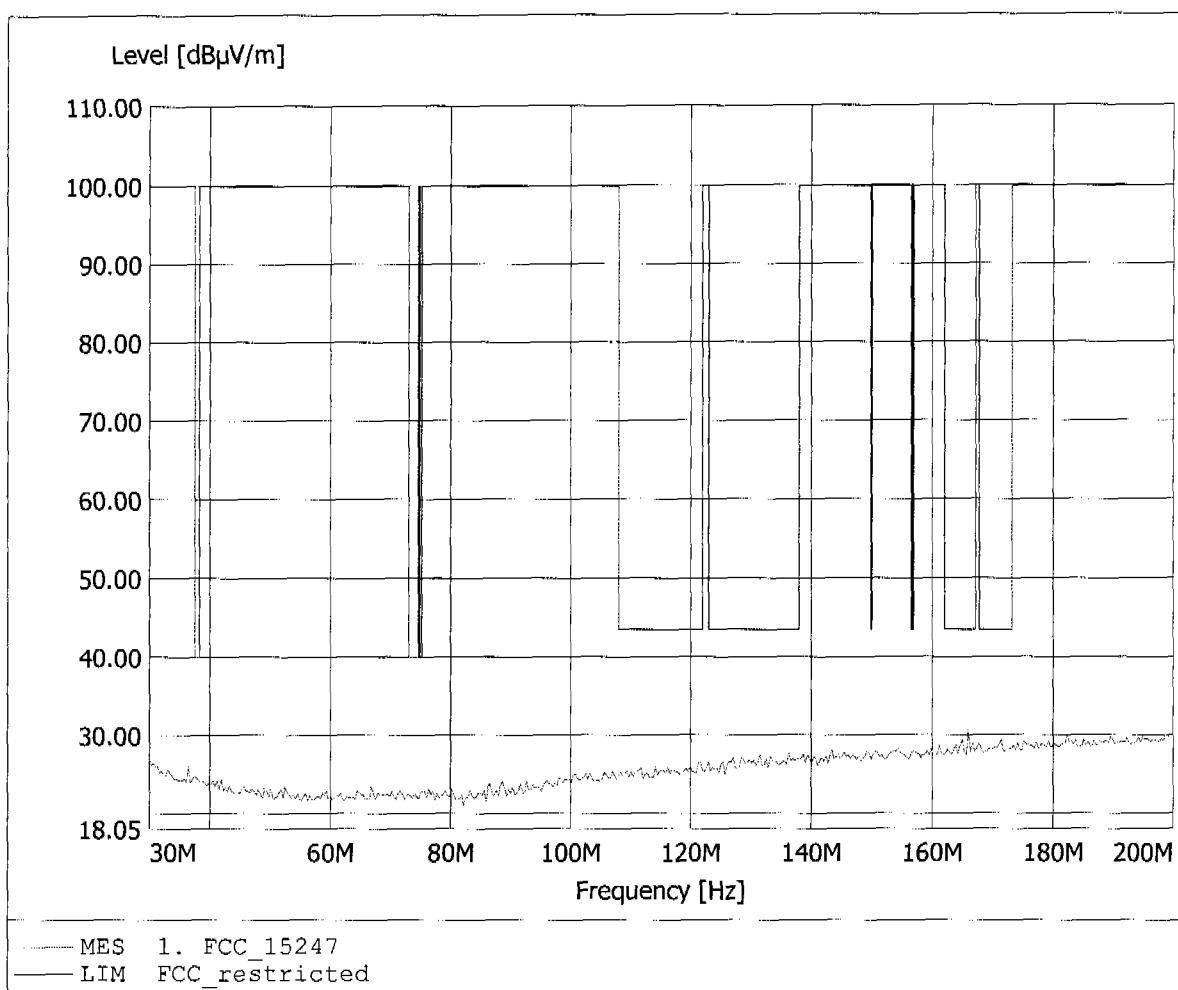


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.297MHz, Emax: 30.34dBµV/m, RBW: 100kHz

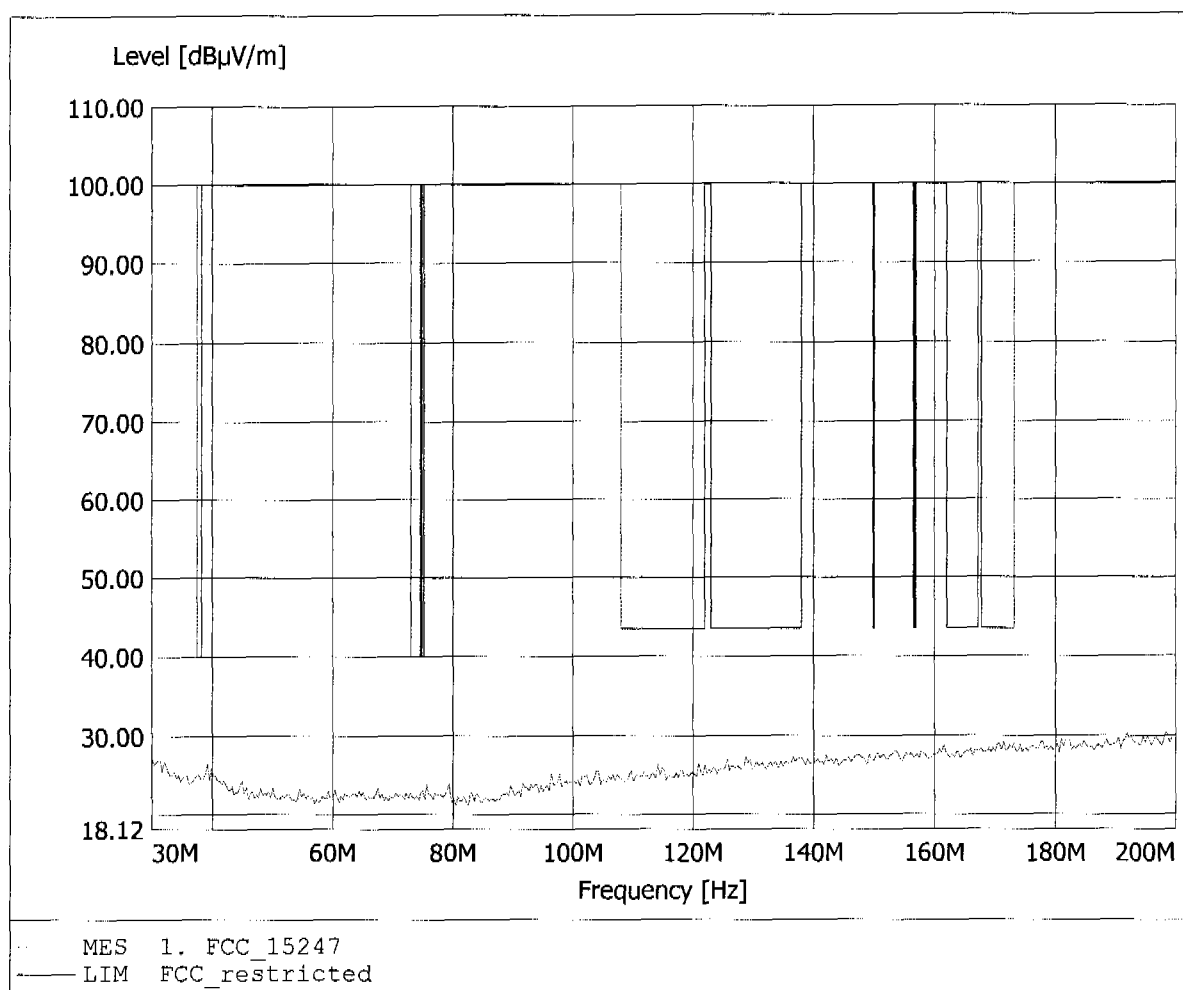


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 267.335MHz, Emax: 27.01dBµV/m, RBW: 100kHz

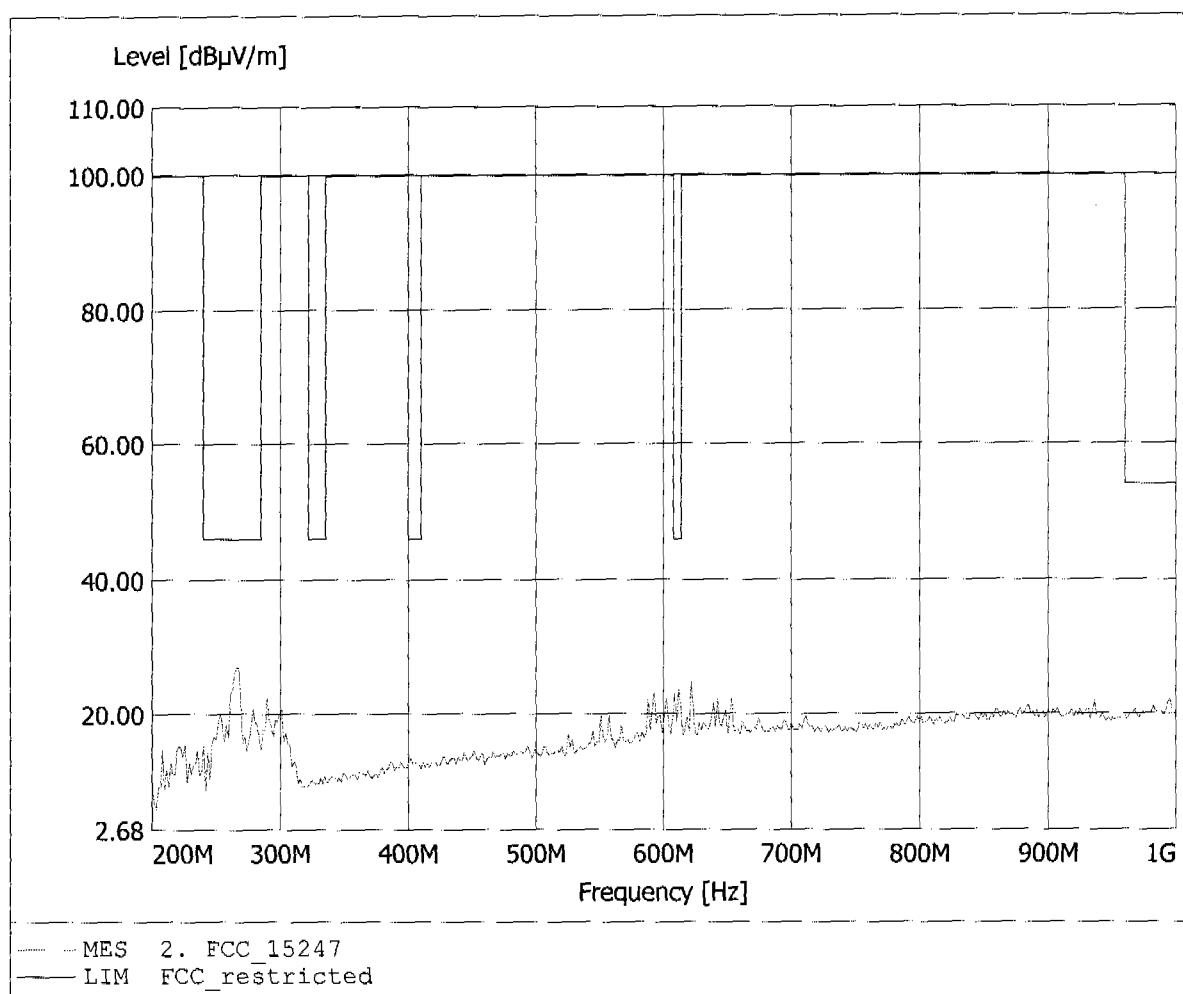


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 267.335MHz, Emax: 28.98dBµV/m, RBW: 100kHz

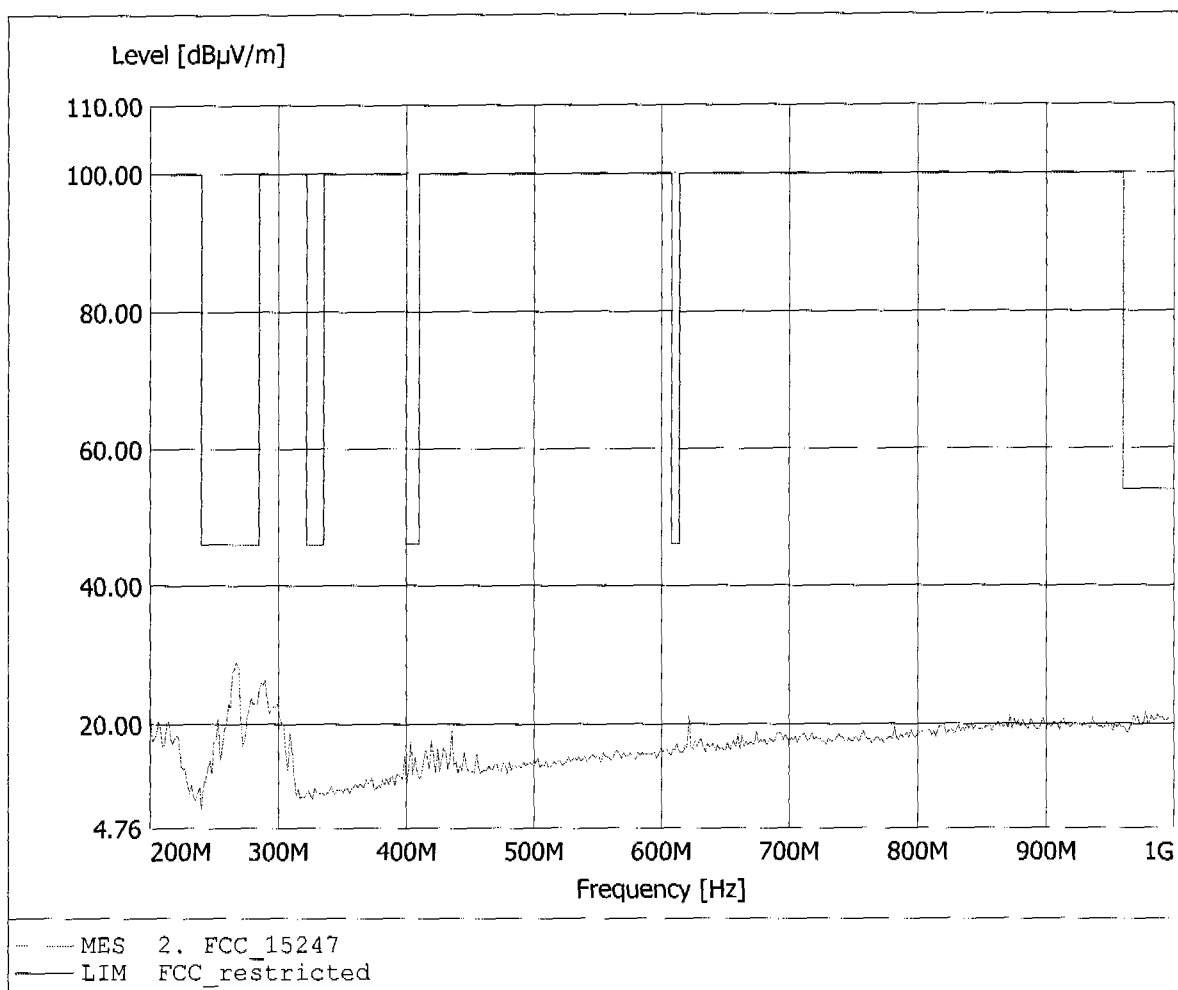


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.554GHz, Emax: 57.50dBμV/m, RBW: 1MHz

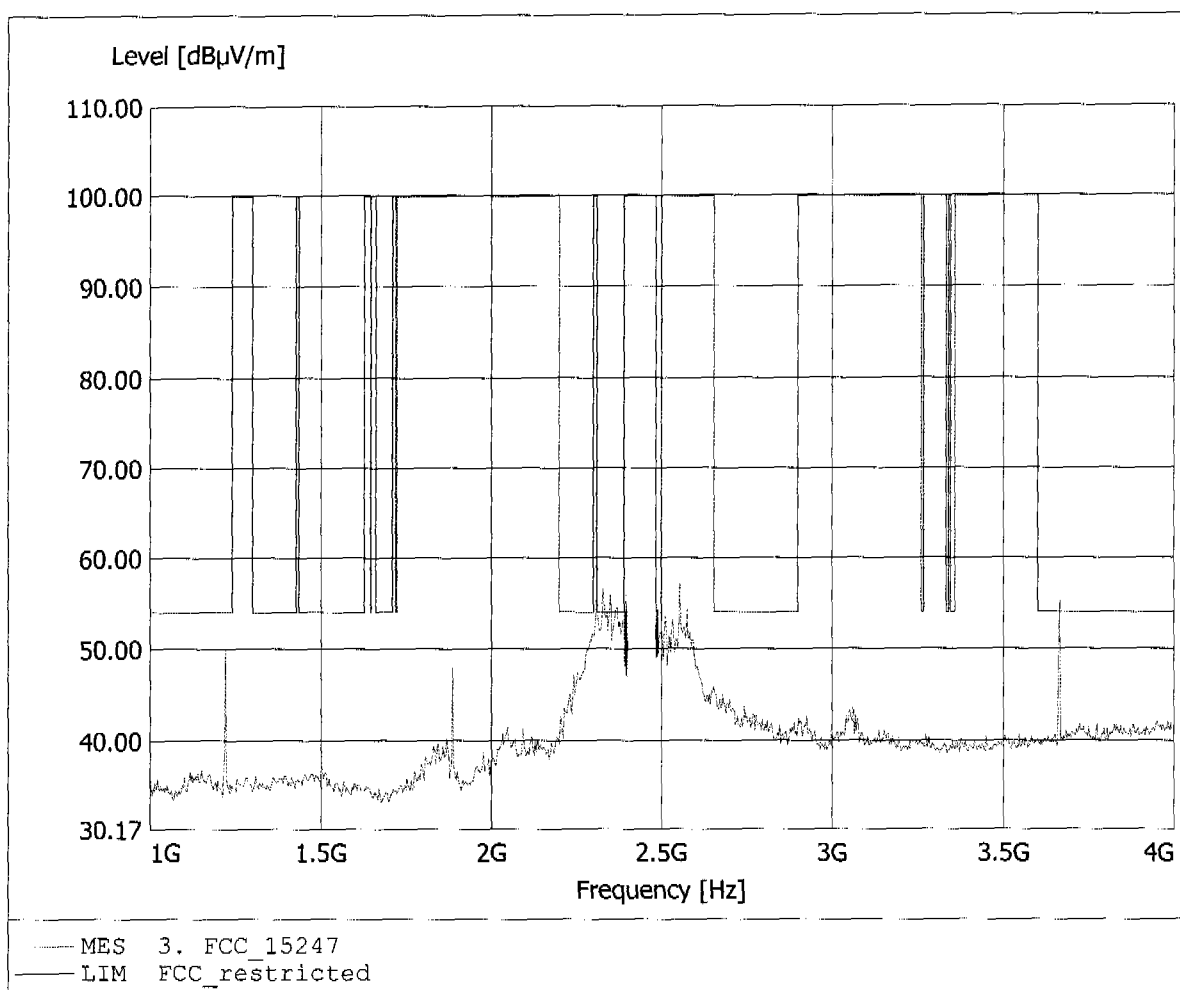


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.894GHz, Emax: 50.27dBµV/m, RBW: 1MHz

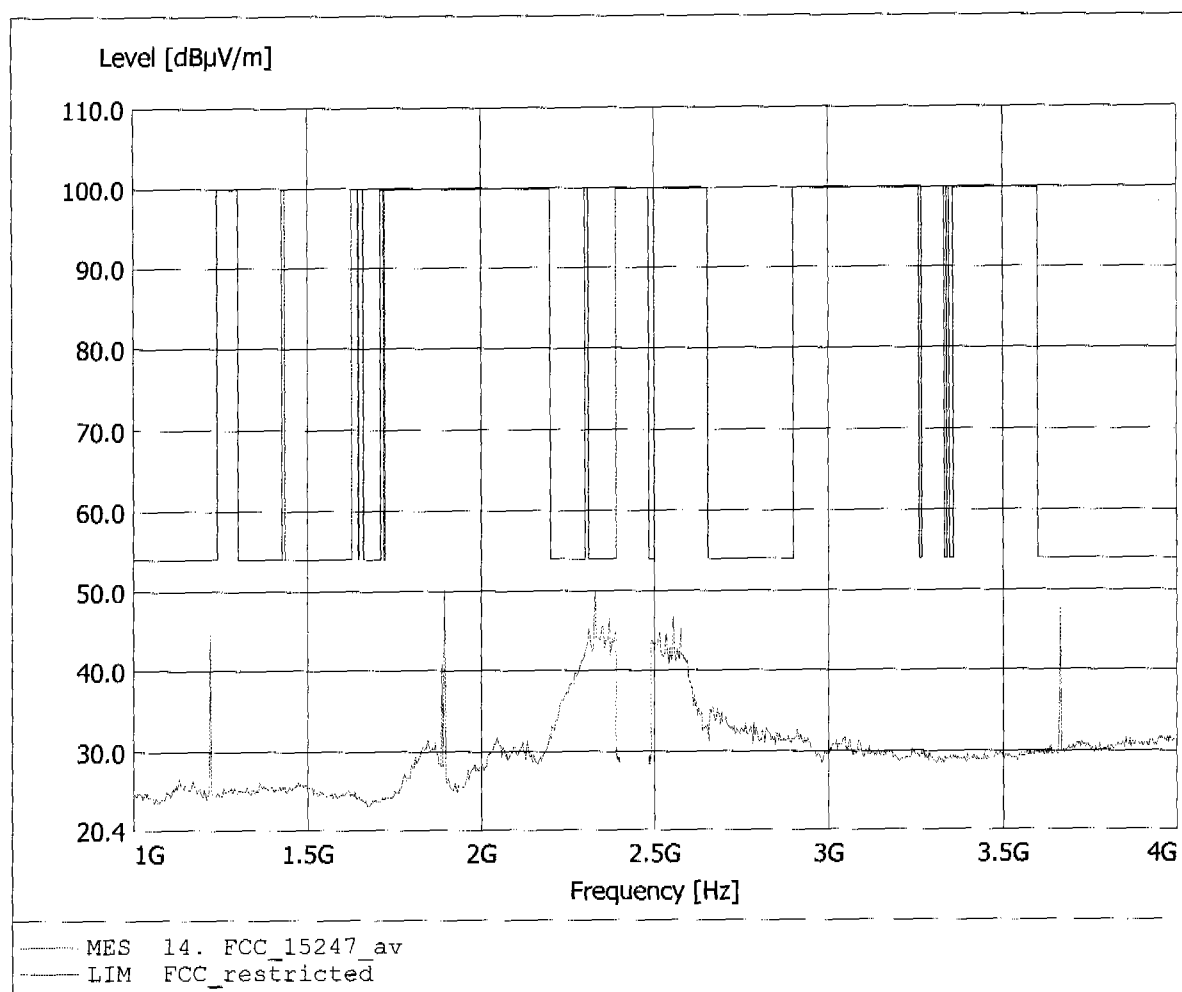


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.554GHz, Emax: 57.50dBμV/m, RBW: 1MHz

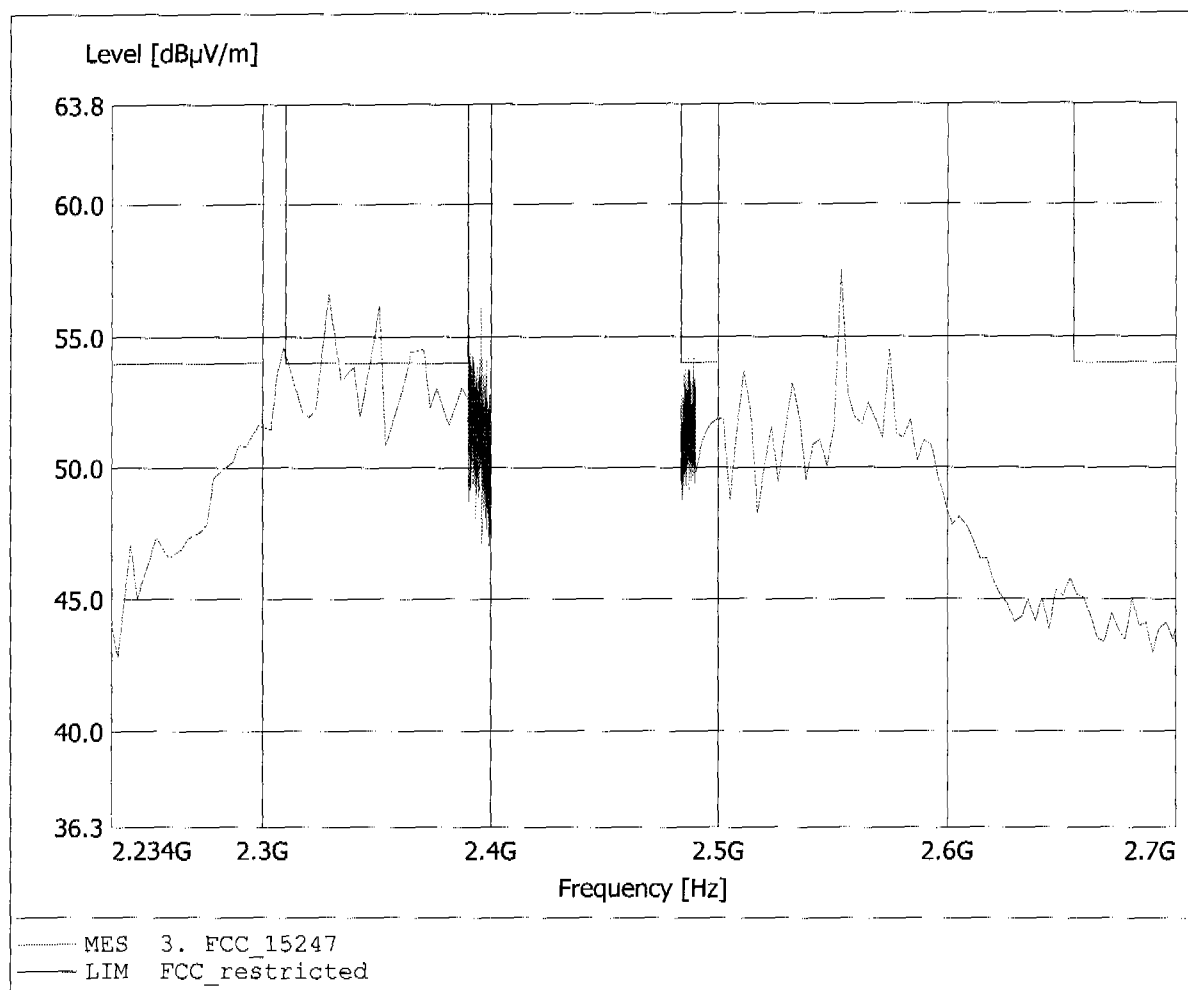


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
 Model: DW800 wireless system / Base
 Approval Holder: Sennheiser Communications
 Operating Condition: Thom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
 Test Site / Operator: ETS / Mr. Hoppe
 Test Specification: according to §15.247, average detector
 Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
 Comment 2: Freq: 1.894GHz, Emax: 50.27dBµV/m, RBW: 1MHz

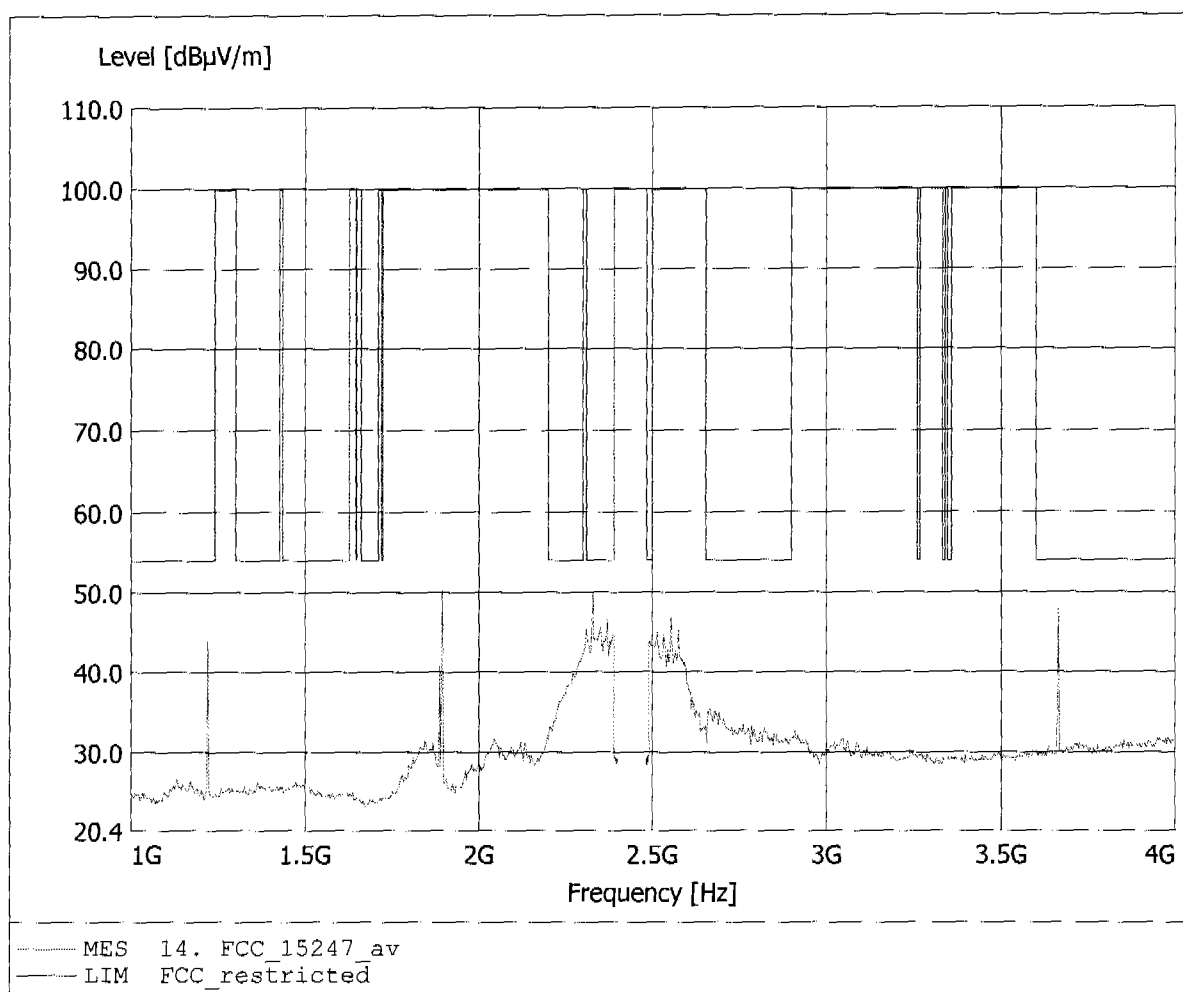


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.329GHz, Emax: 60.49dBµV/m, RBW: 1MHz

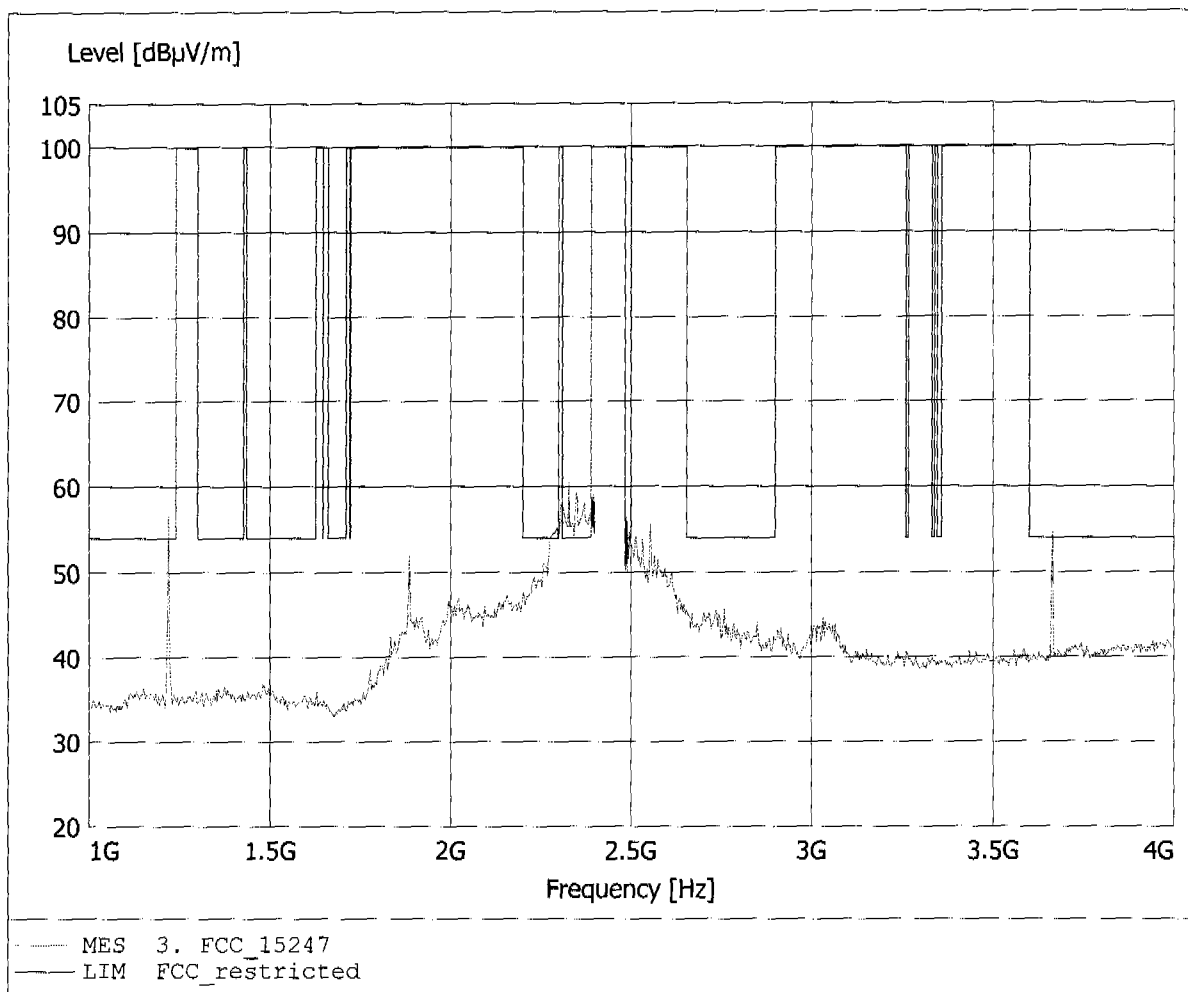


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.329GHz, Emax: 60.49dBµV/m, RBW: 1MHz

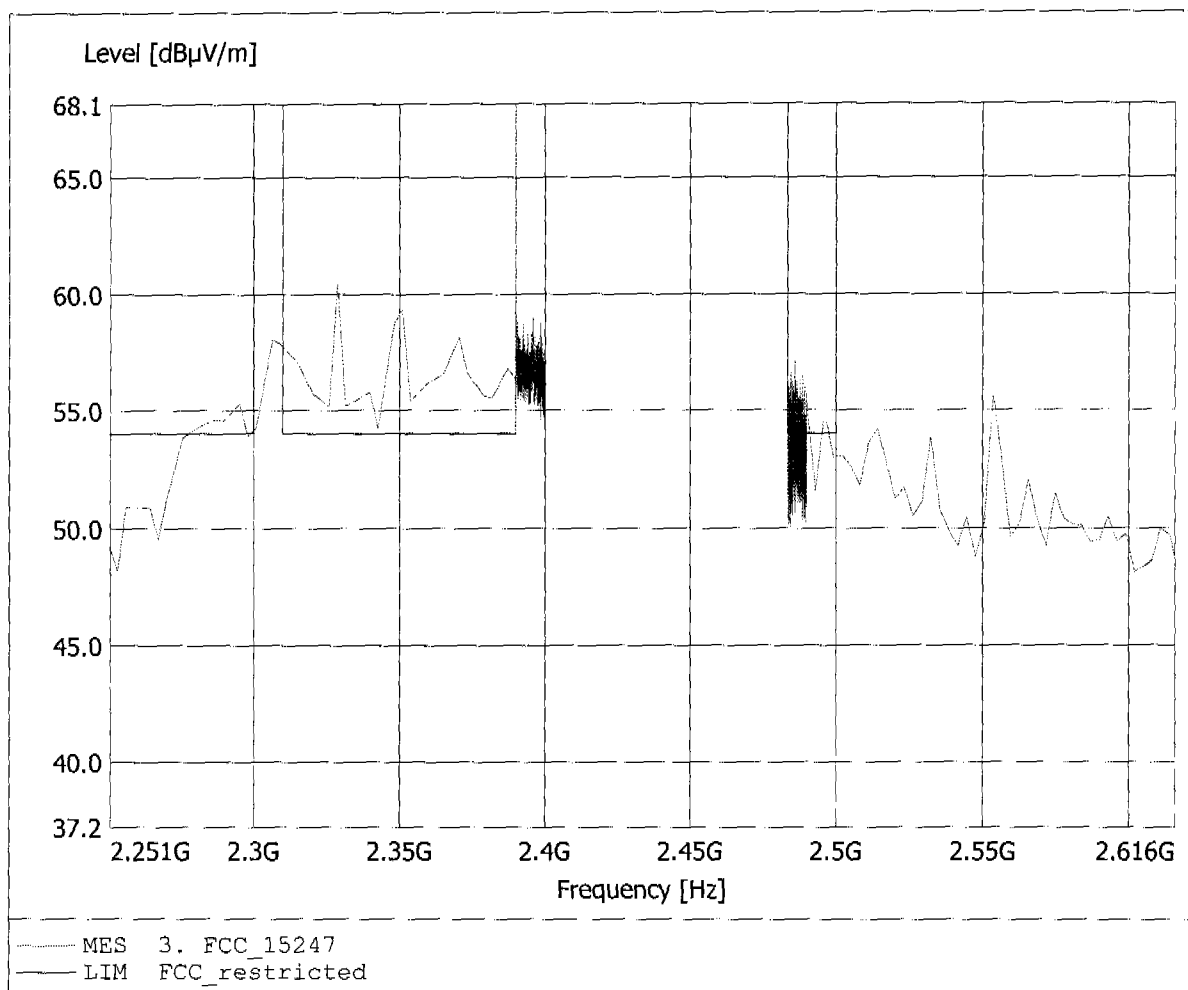


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Thom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.220GHz, Emax: 51.56dBµV/m, RBW: 1MHz

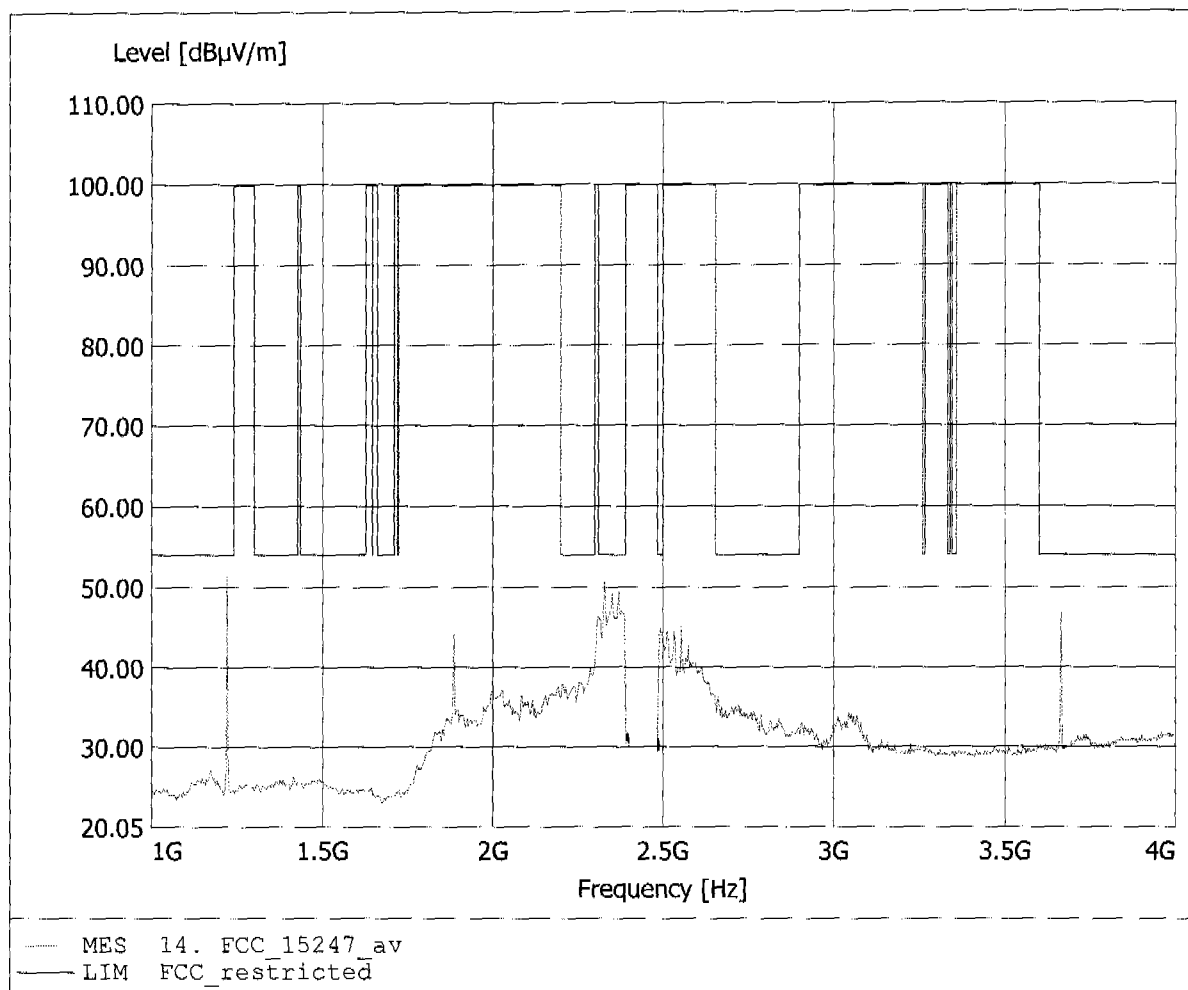


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 57.16dBµV/m, RBW: 1MHz

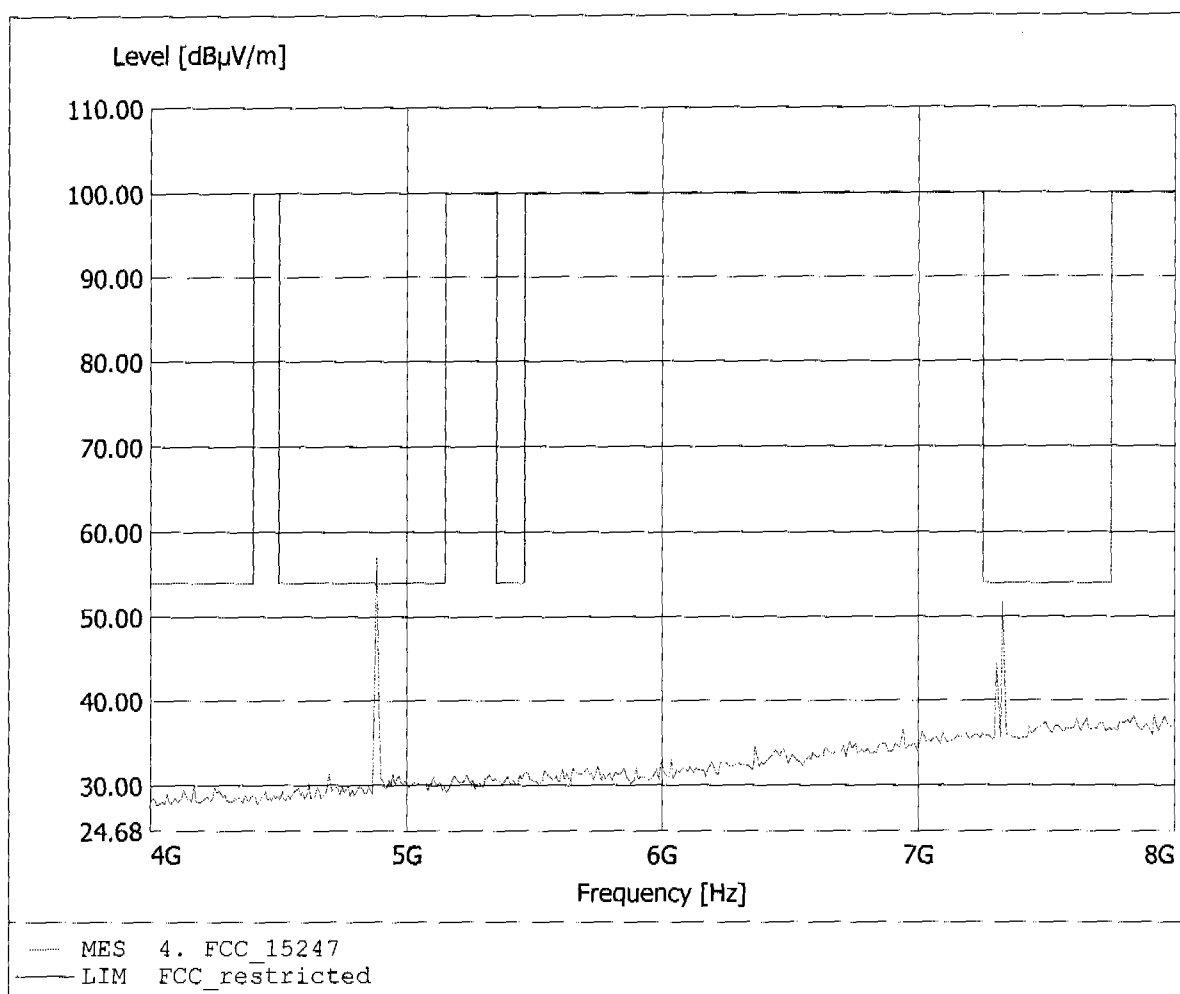


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.327GHz, Emax: 31.53dBµV/m, RBW: 1MHz

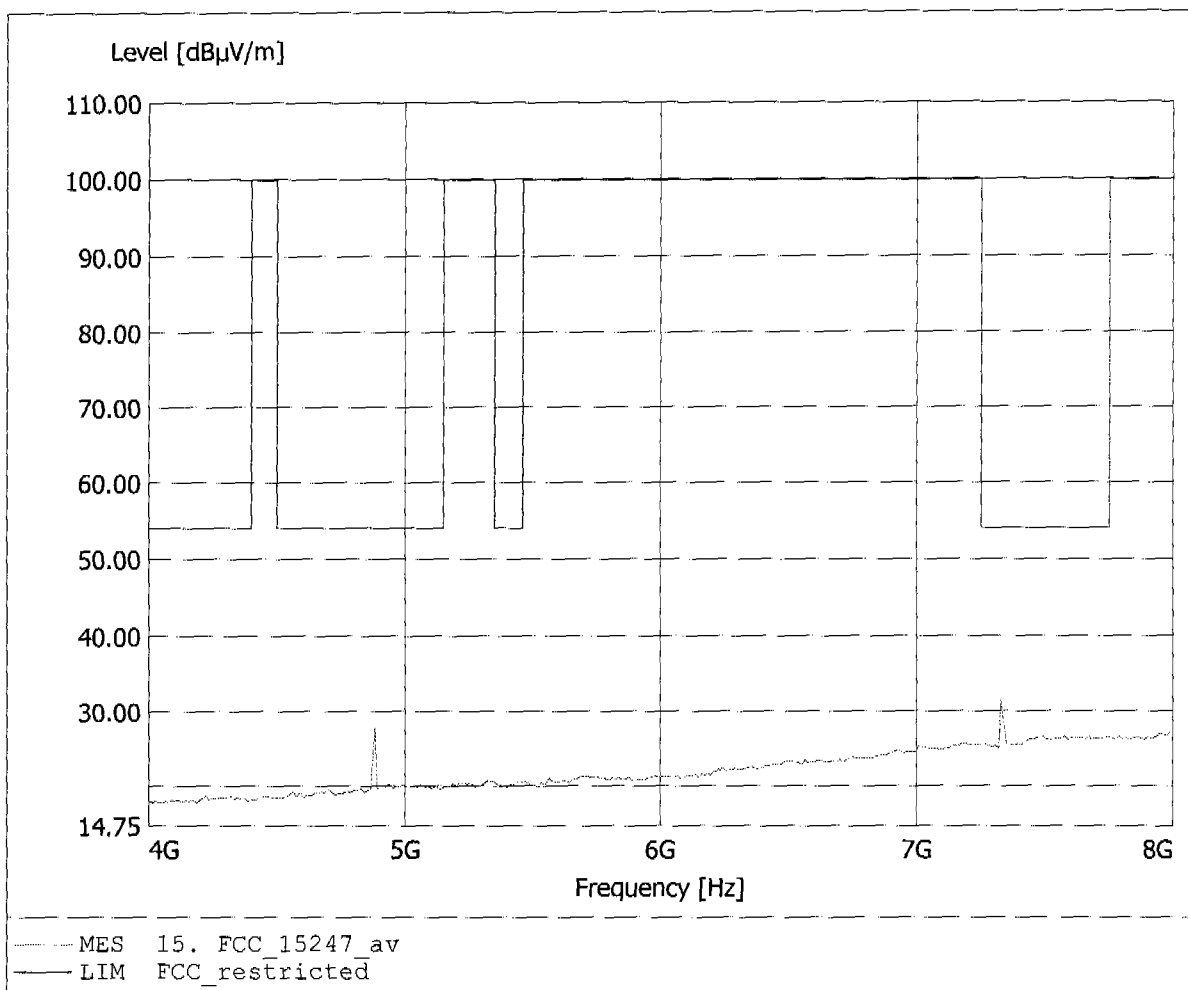


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 57.35dBμV/m, RBW: 1MHz

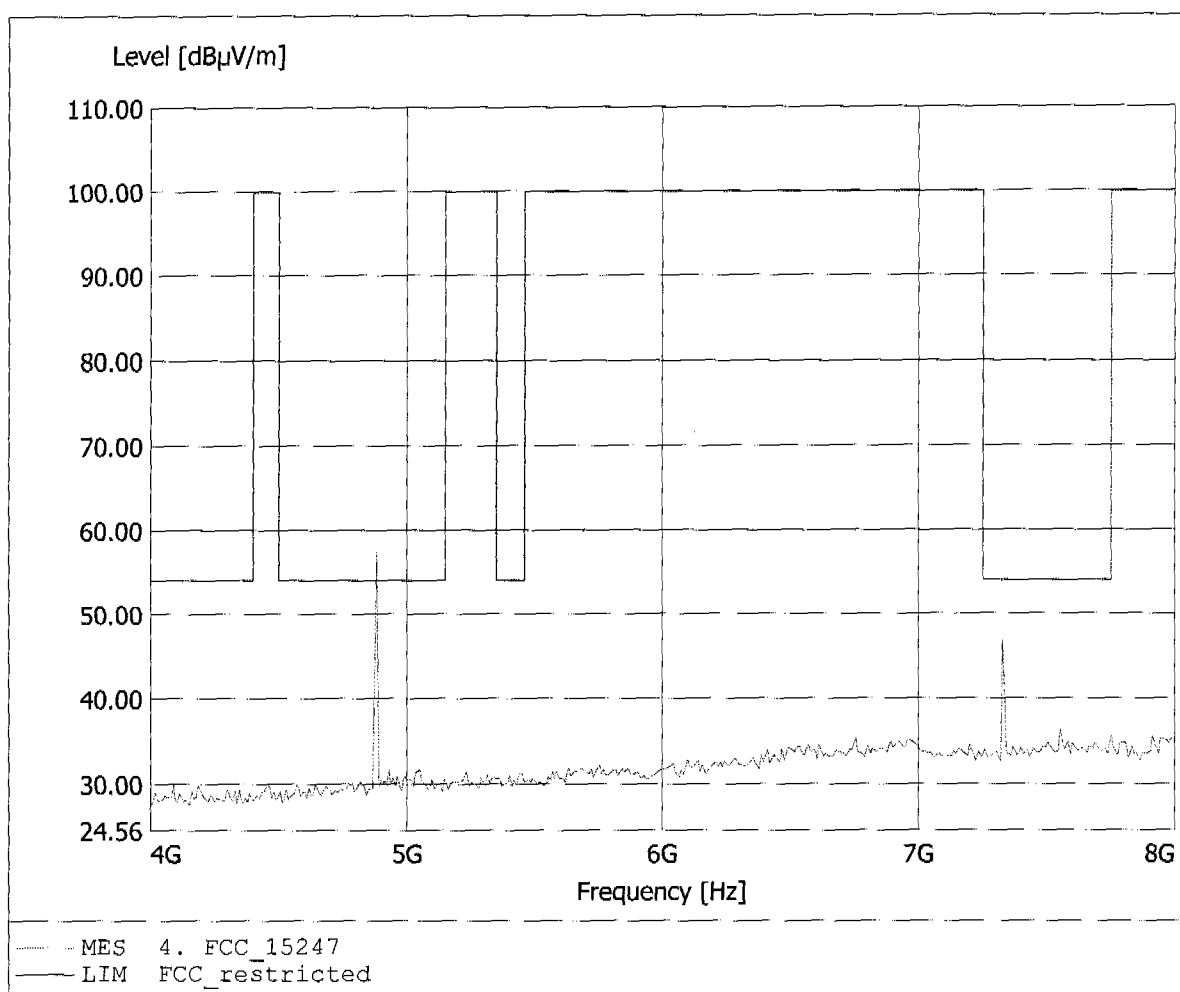


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.882GHz, Emax: 31.37dBµV/m, RBW: 1MHz

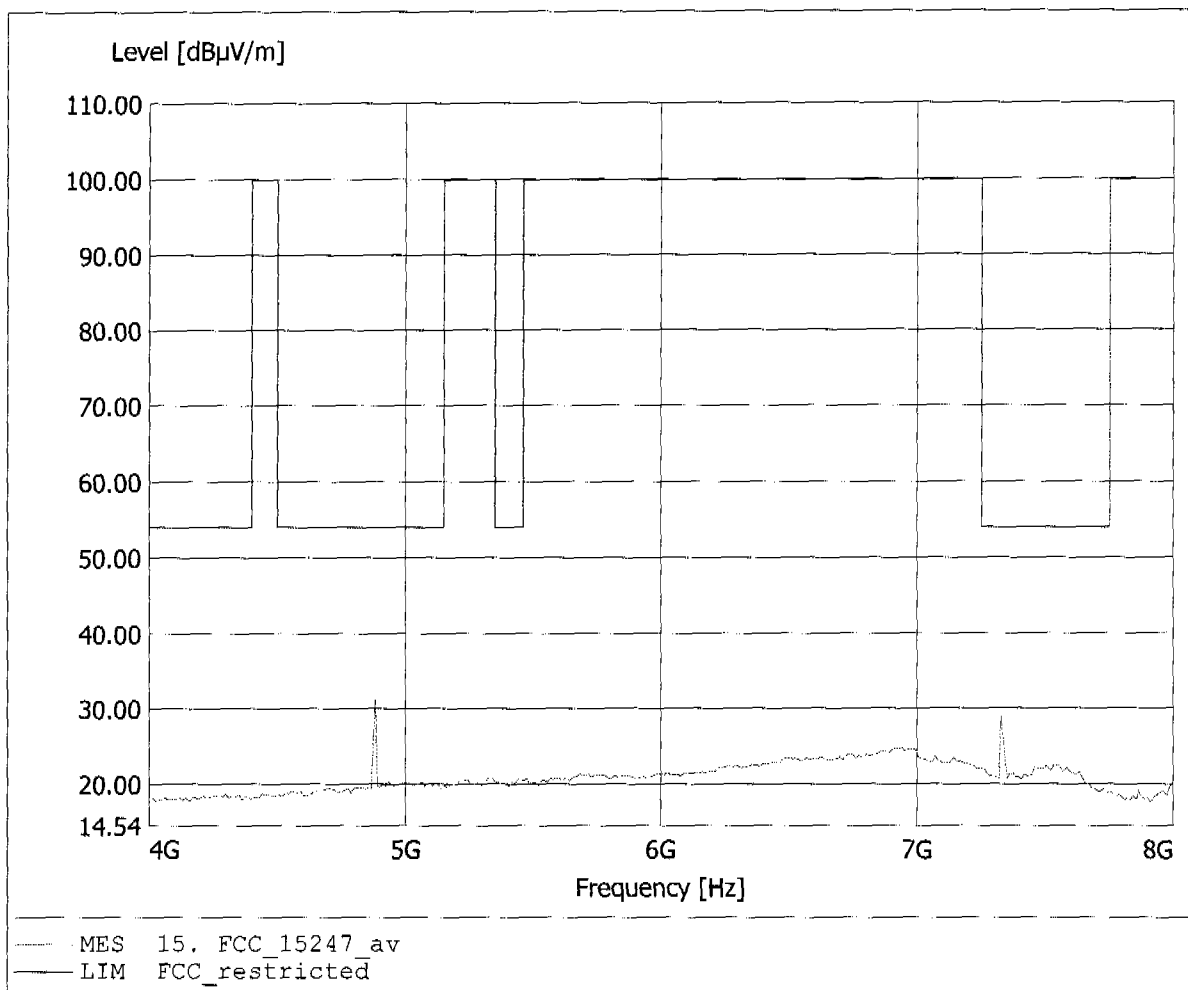


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.030GHz, Emax: 41.87dBμV/m, RBW: 1MHz

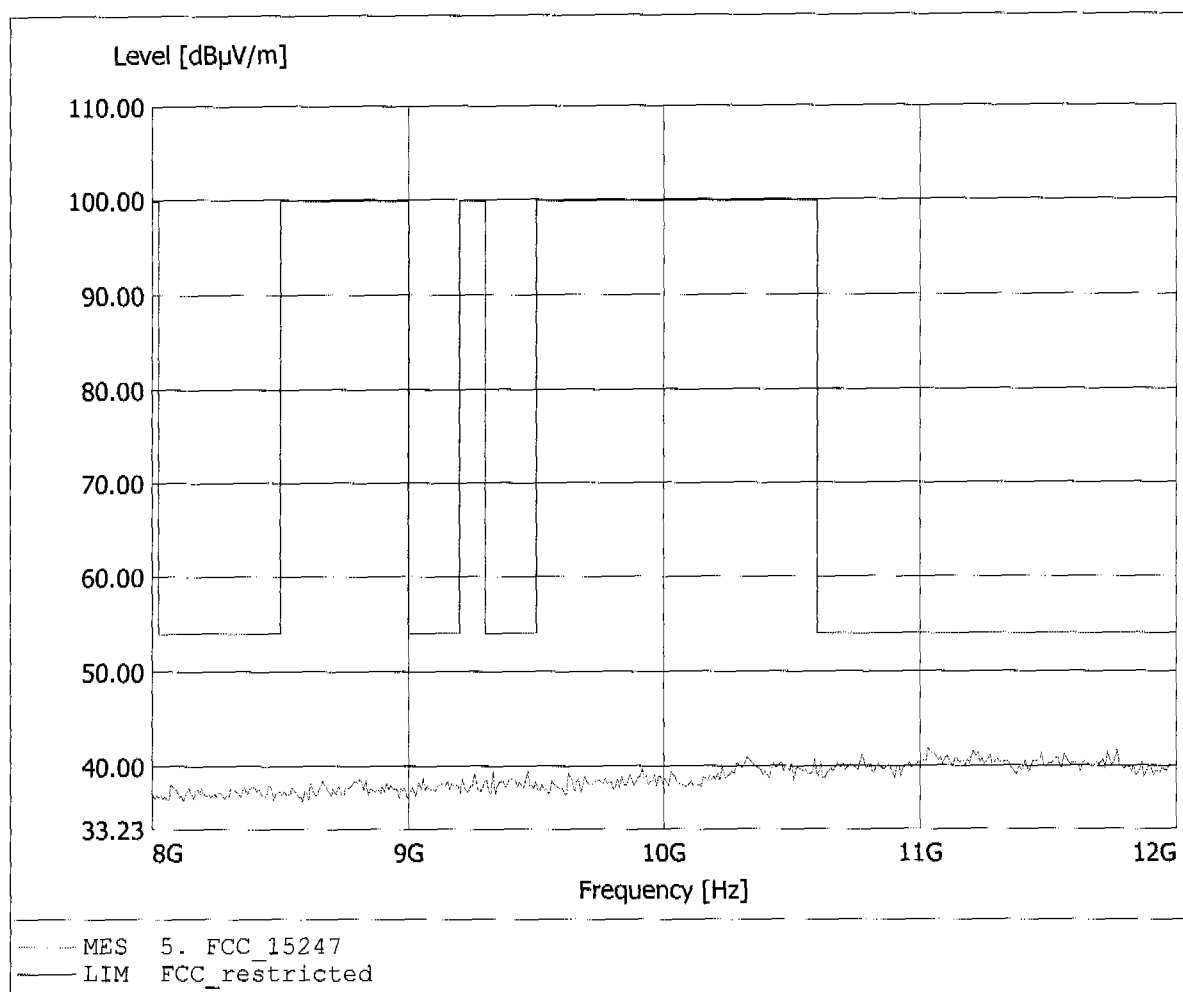


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.182GHz, Emax: 42.04dBµV/m, RBW: 1MHz

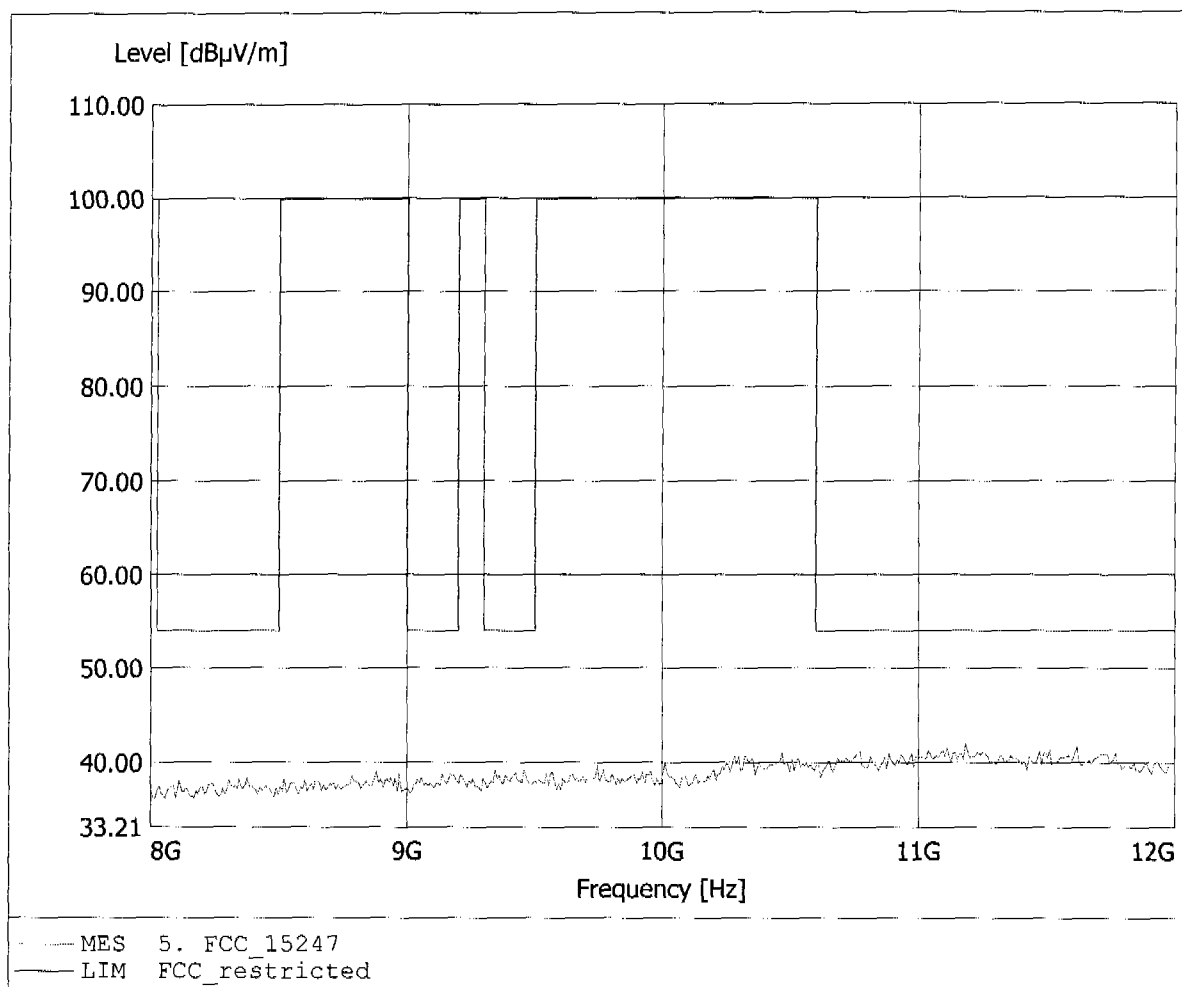


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.200GHz, Emax: 54.54dBµV/m, RBW: 1MHz

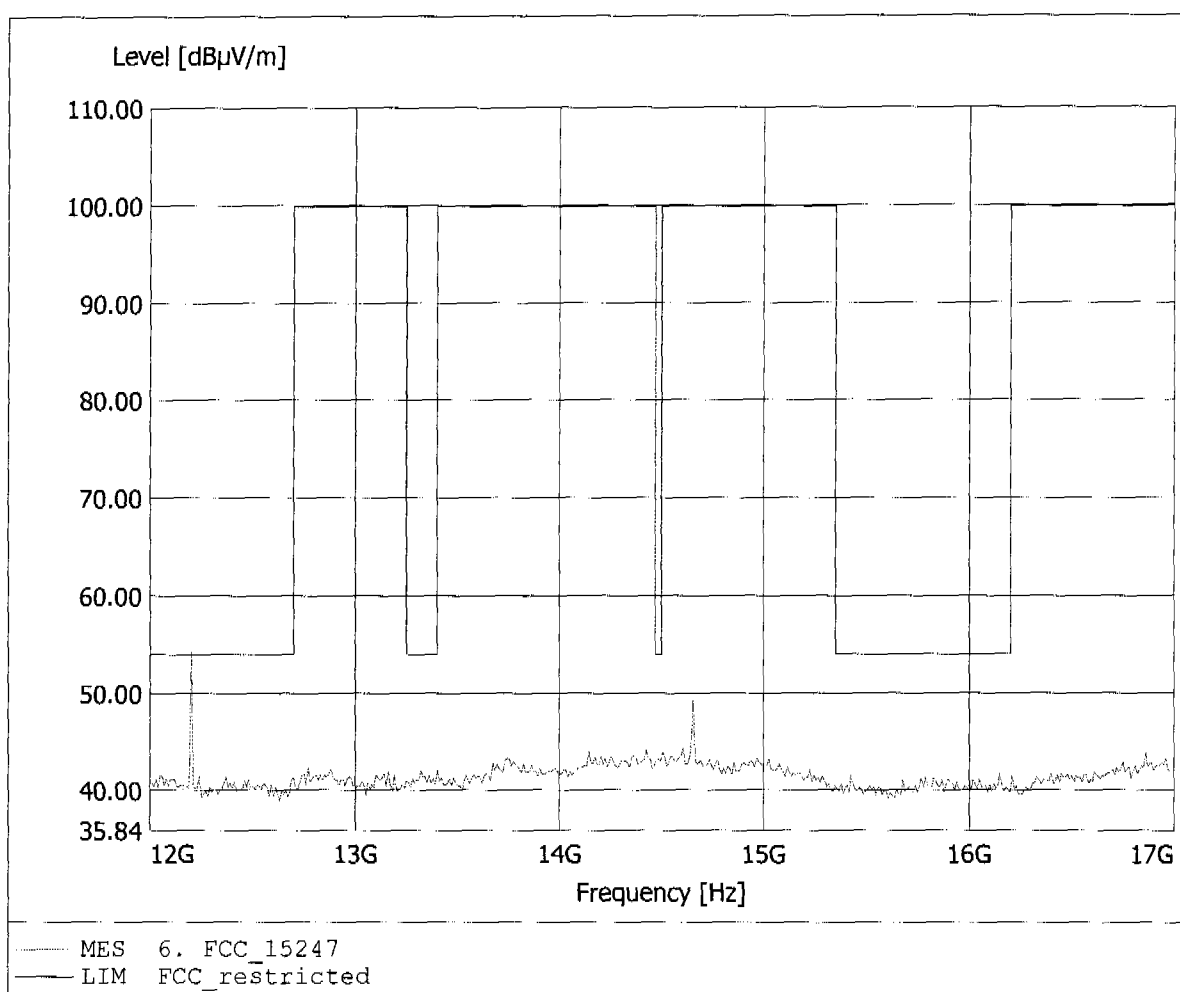


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / *Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.505GHz, Emax: 33.08dBµV/m, RBW: 1MHz

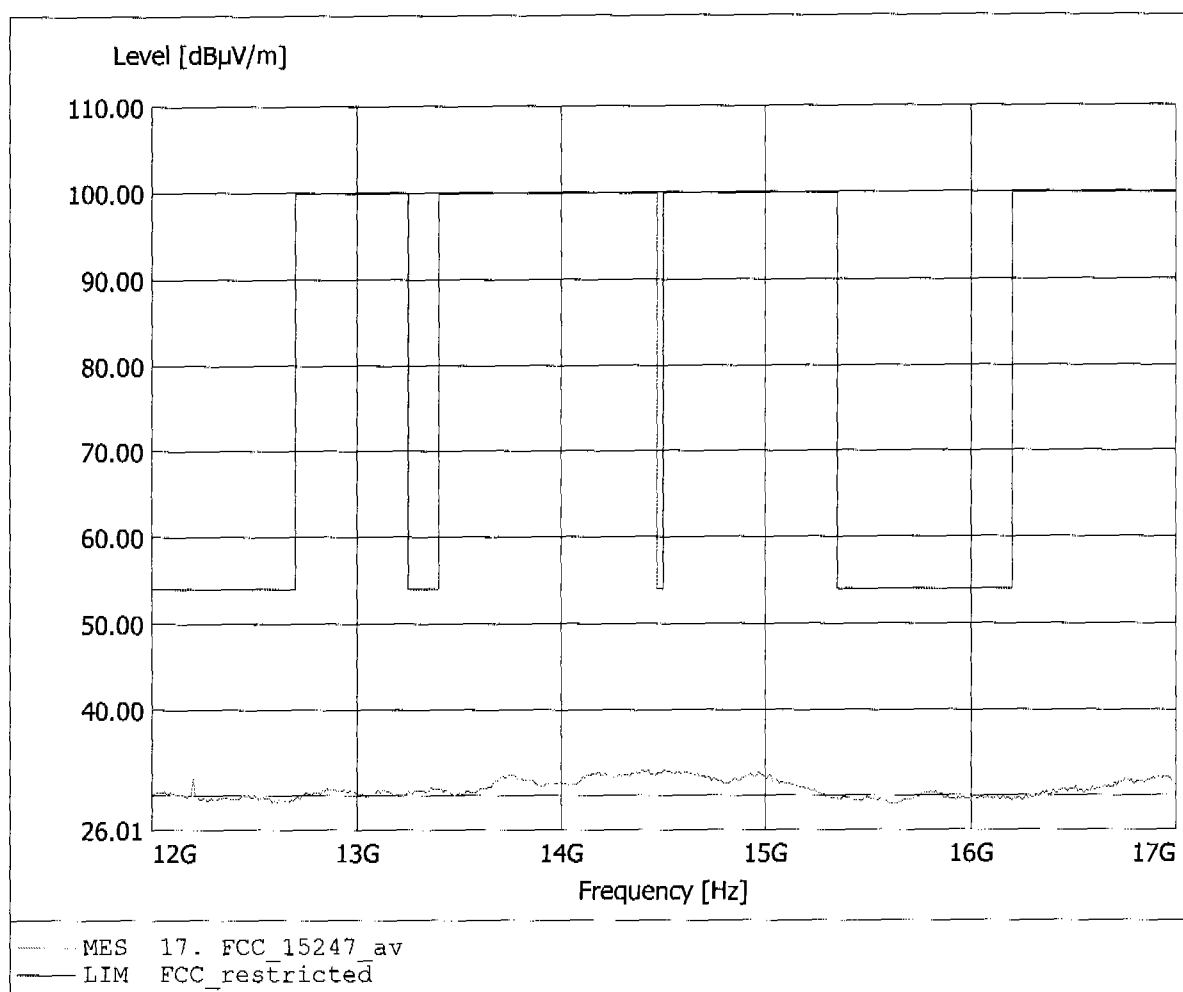


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.200GHz, Emax: 53.35dBuV/m, RBW: 1MHz

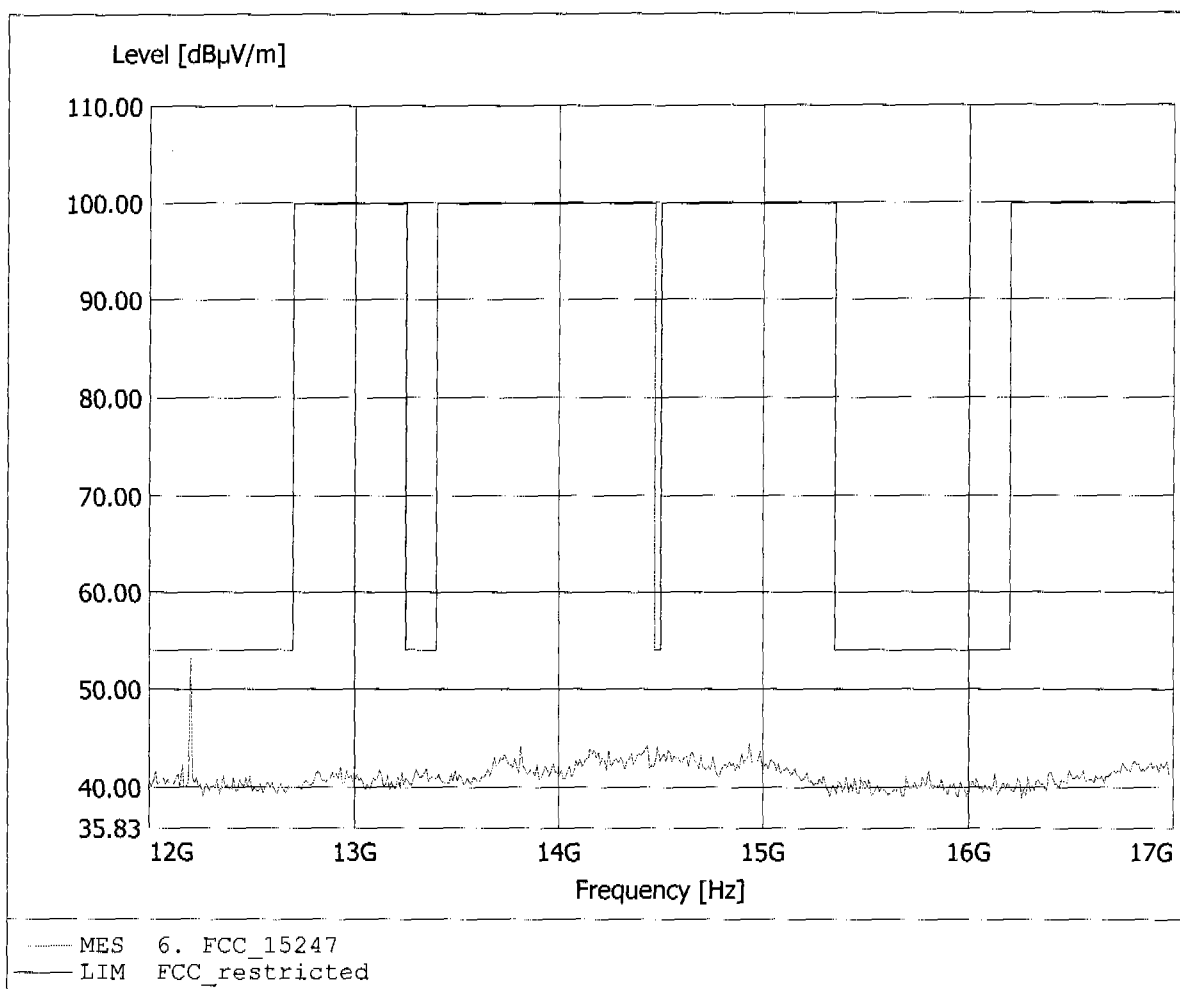


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 45.29dBµV/m, RBW: 1MHz

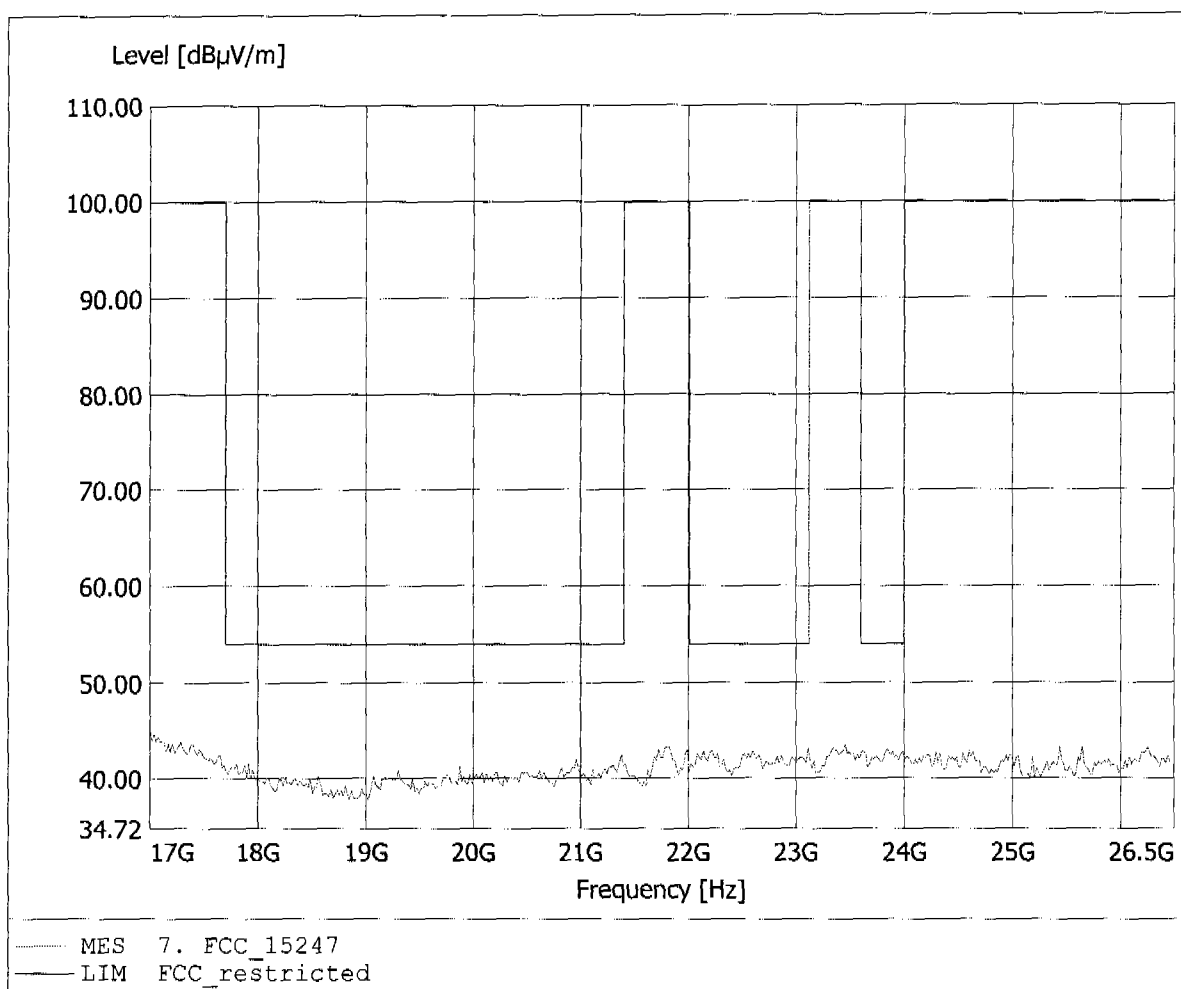


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:47
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.343GHz, Emax: 44.53dBμV/m, RBW: 1MHz

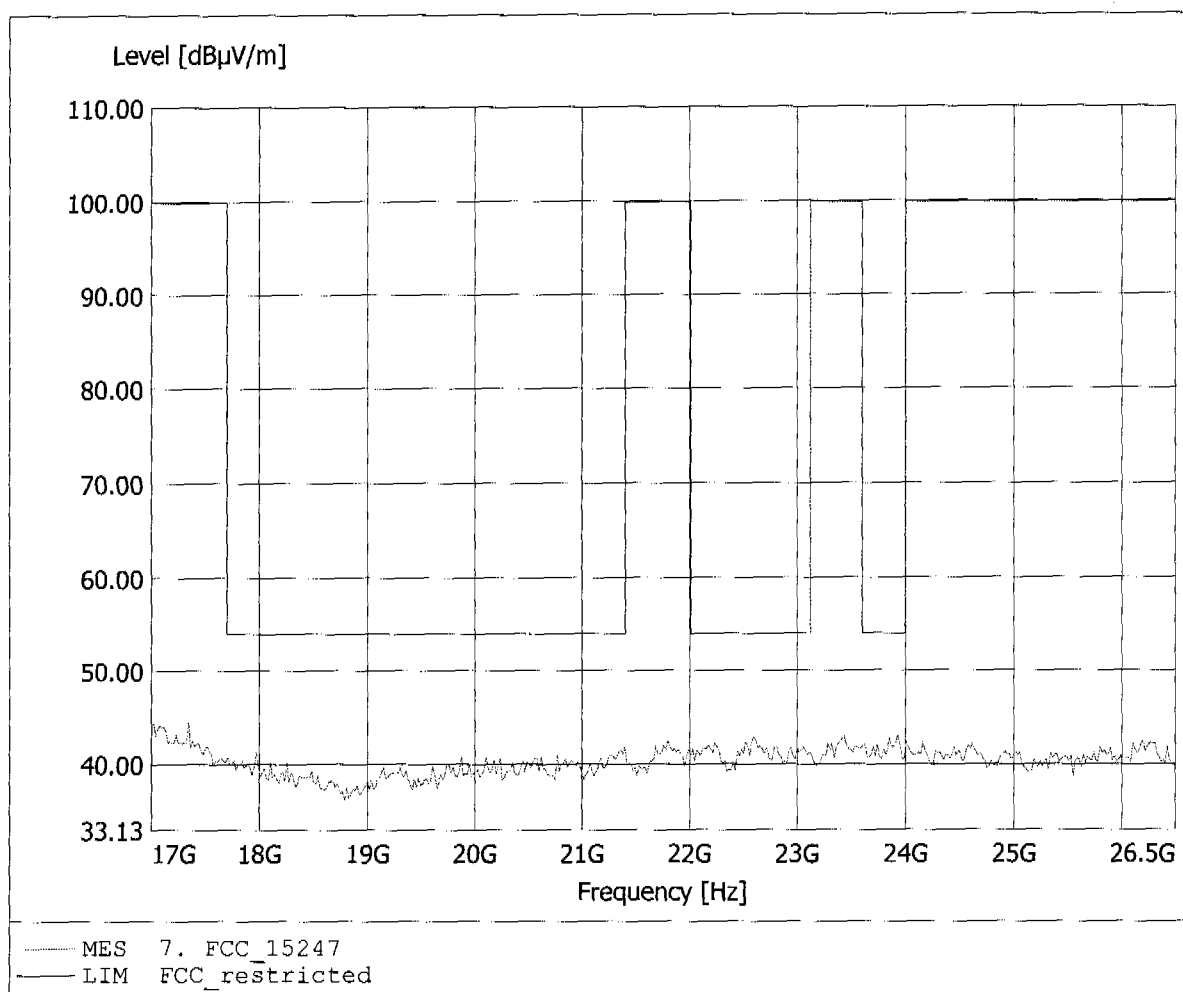


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 170.701MHz, Emax: 31.58dBµV/m, RBW: 100kHz

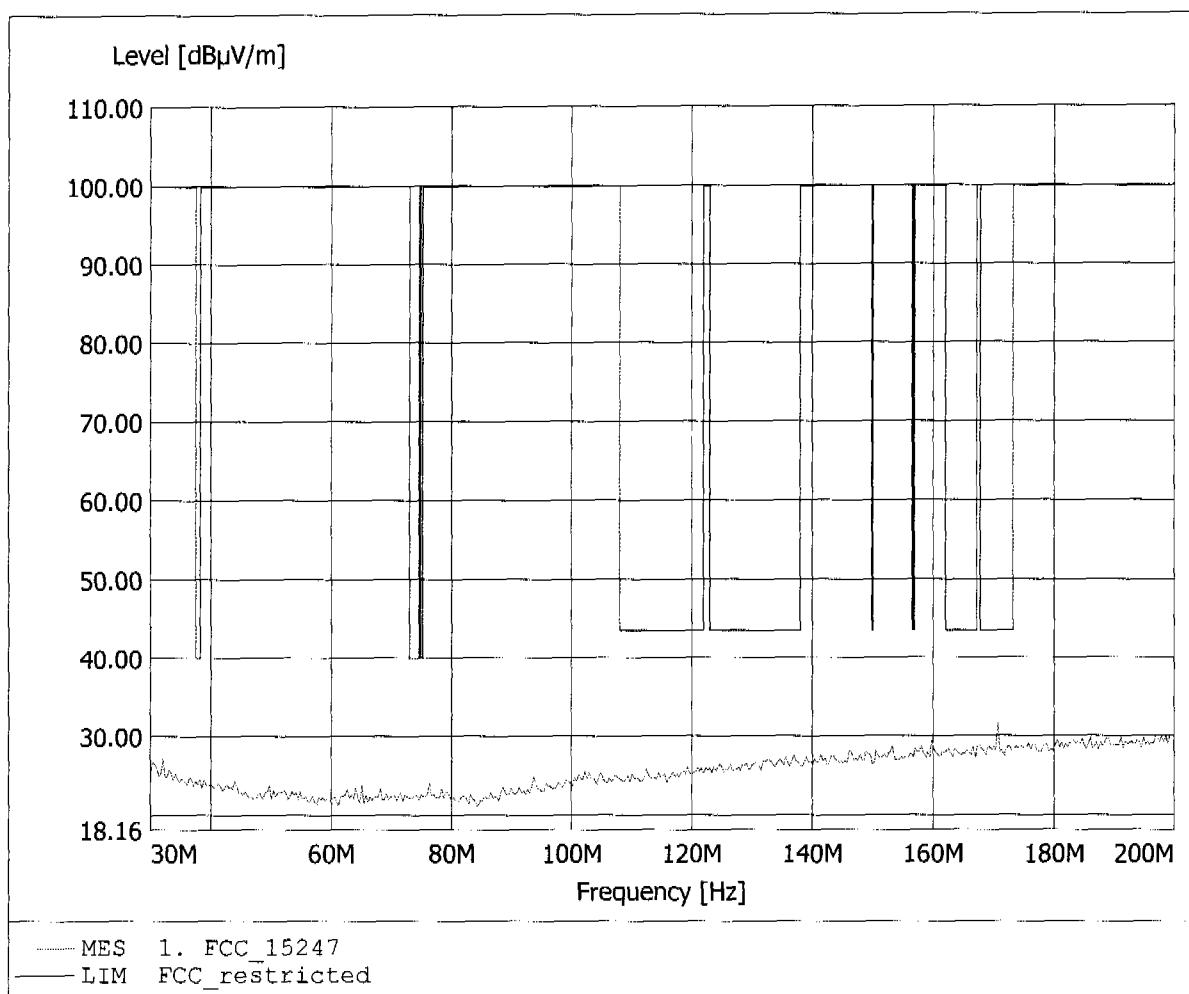


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 190.120MHz, Emax: 30.63dBµV/m, RBW: 100kHz

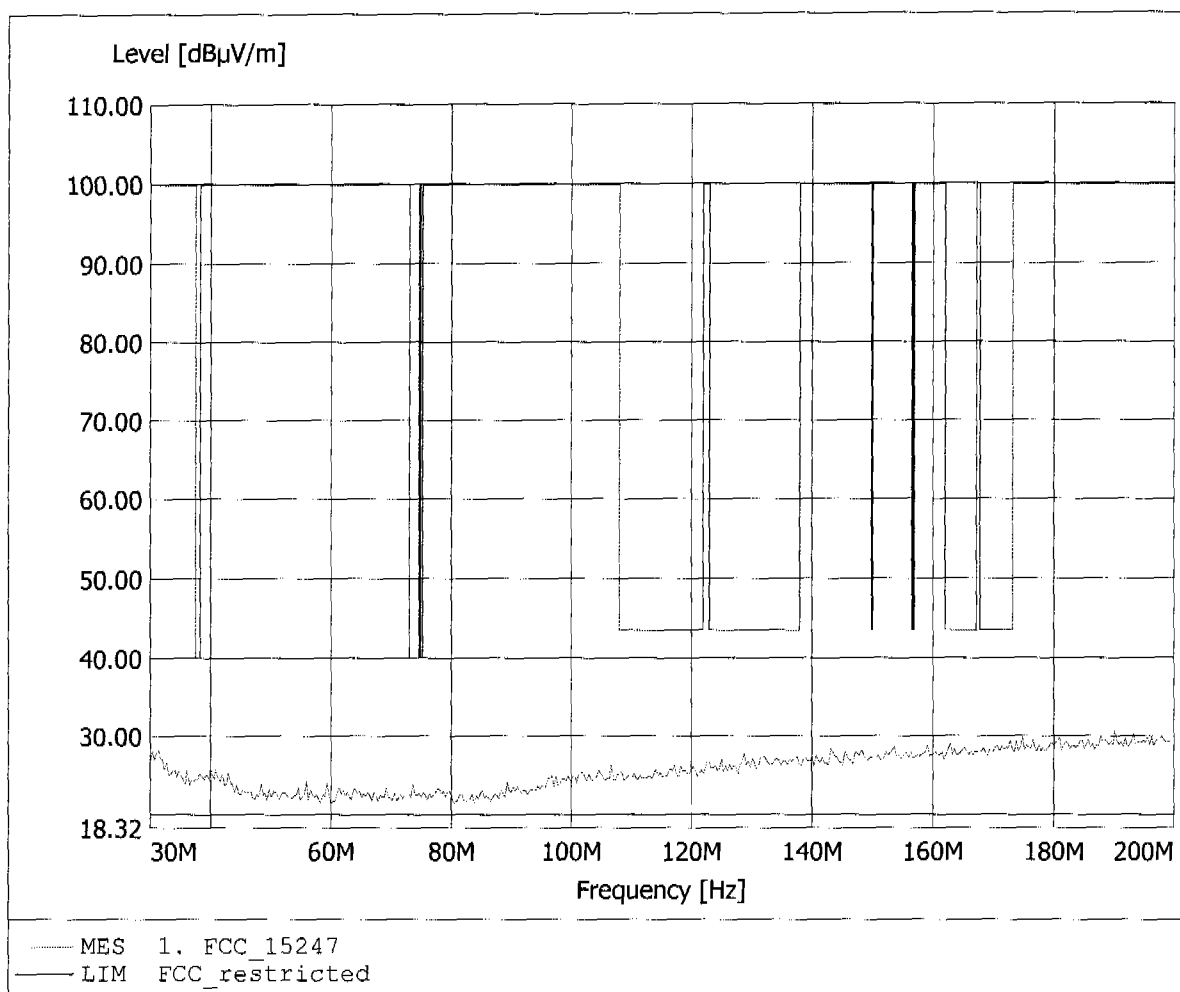


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 265.731MHz, Emax: 26.35dBµV/m, RBW: 100kHz

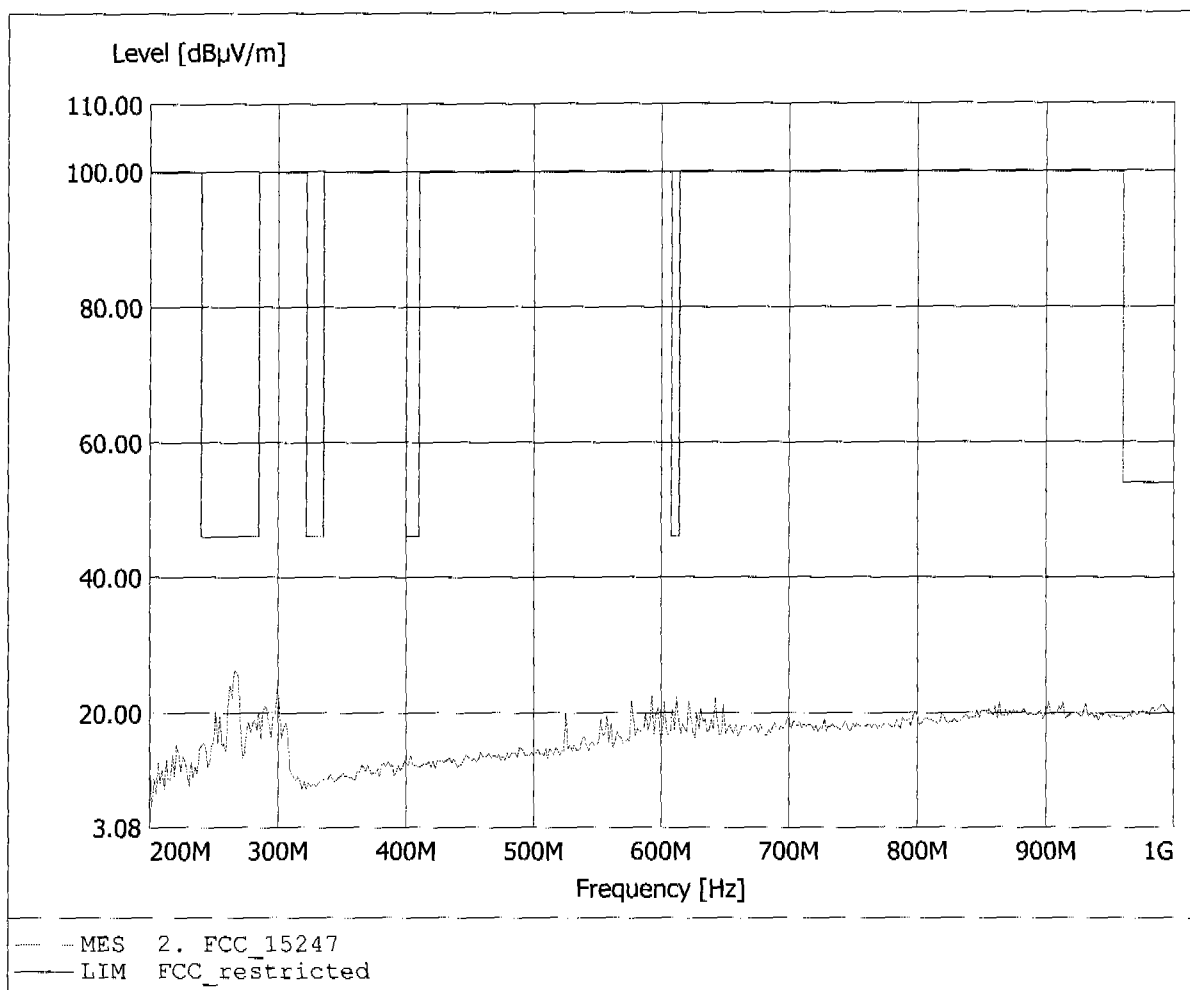


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 267.335MHz, Emax: 28.59dBµV/m, RBW: 100kHz

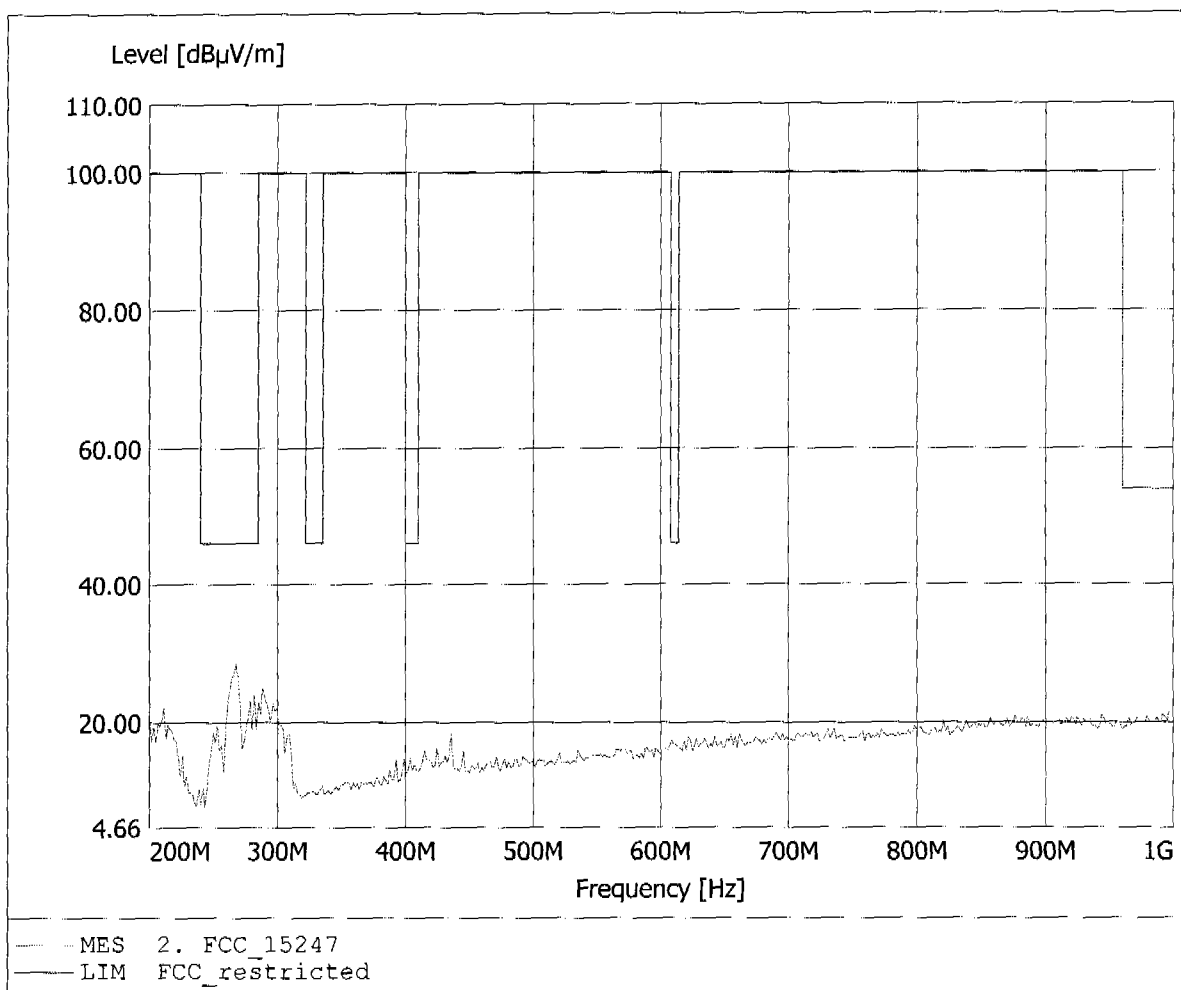

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 100.47dBµV/m, RBW: 1MHz

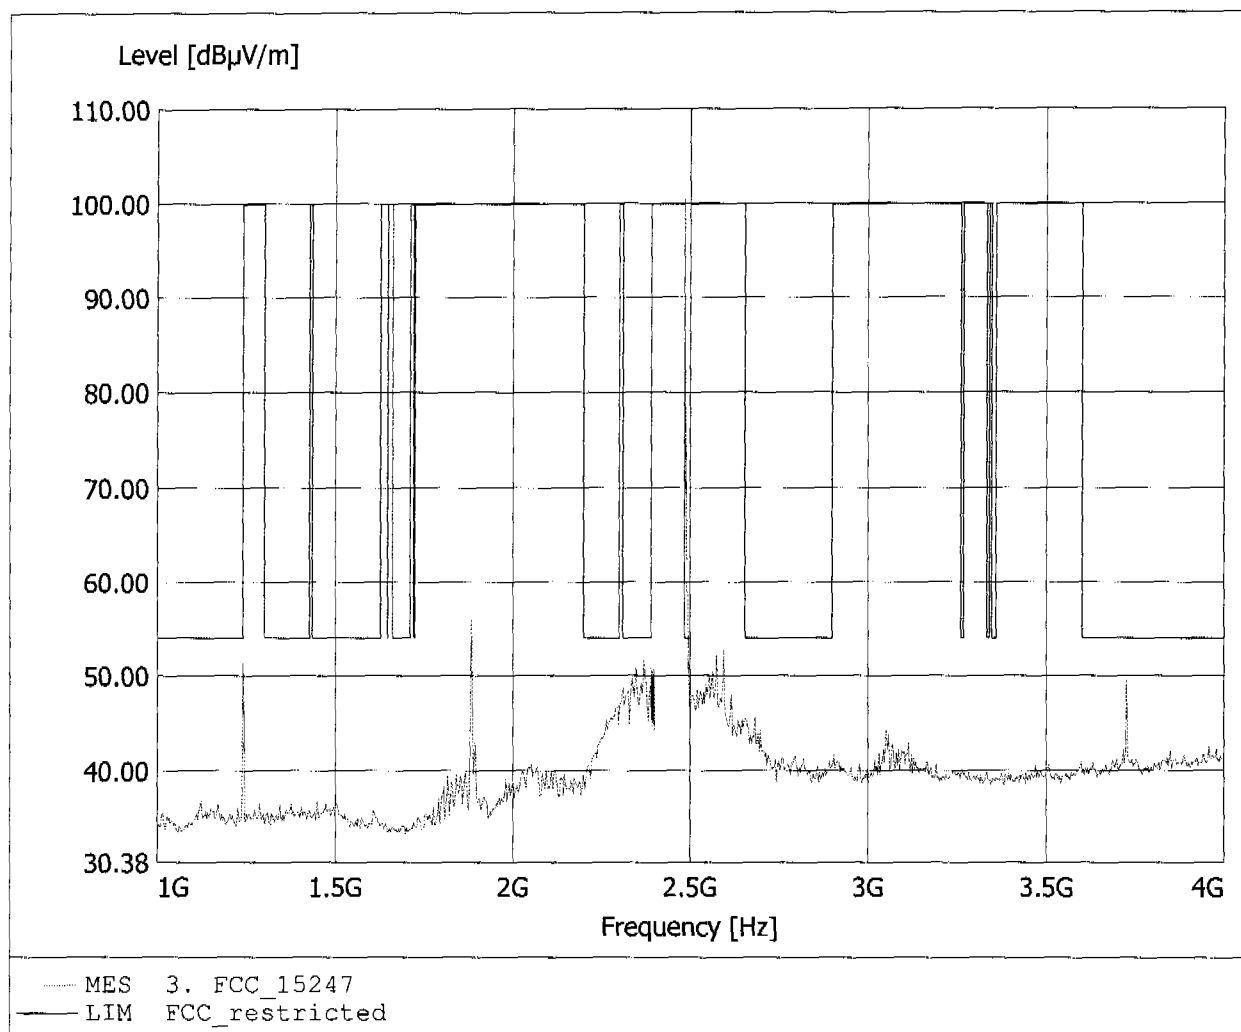


DA 00-705 / Marker Delta-Method:

The value measured with average detector may be reduced by the "delta" value according to Marker-Delta Method plot.

Please see pages 2 of appendix C and pages 20-23 of TestRpt_1.


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 100.47dBµV/m, RBW: 1MHz

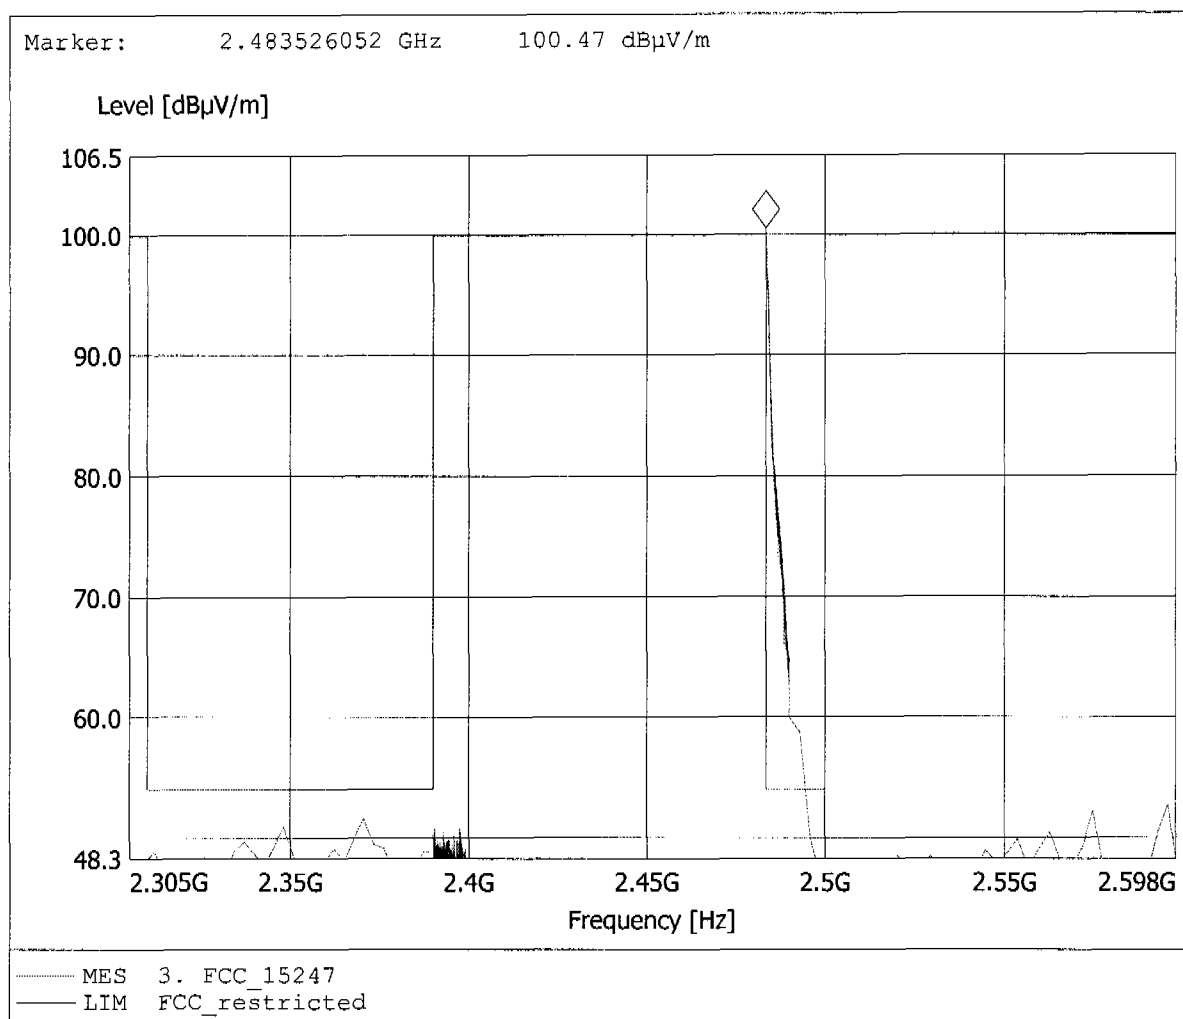

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 74.29dBµV/m, RBW: 1MHz

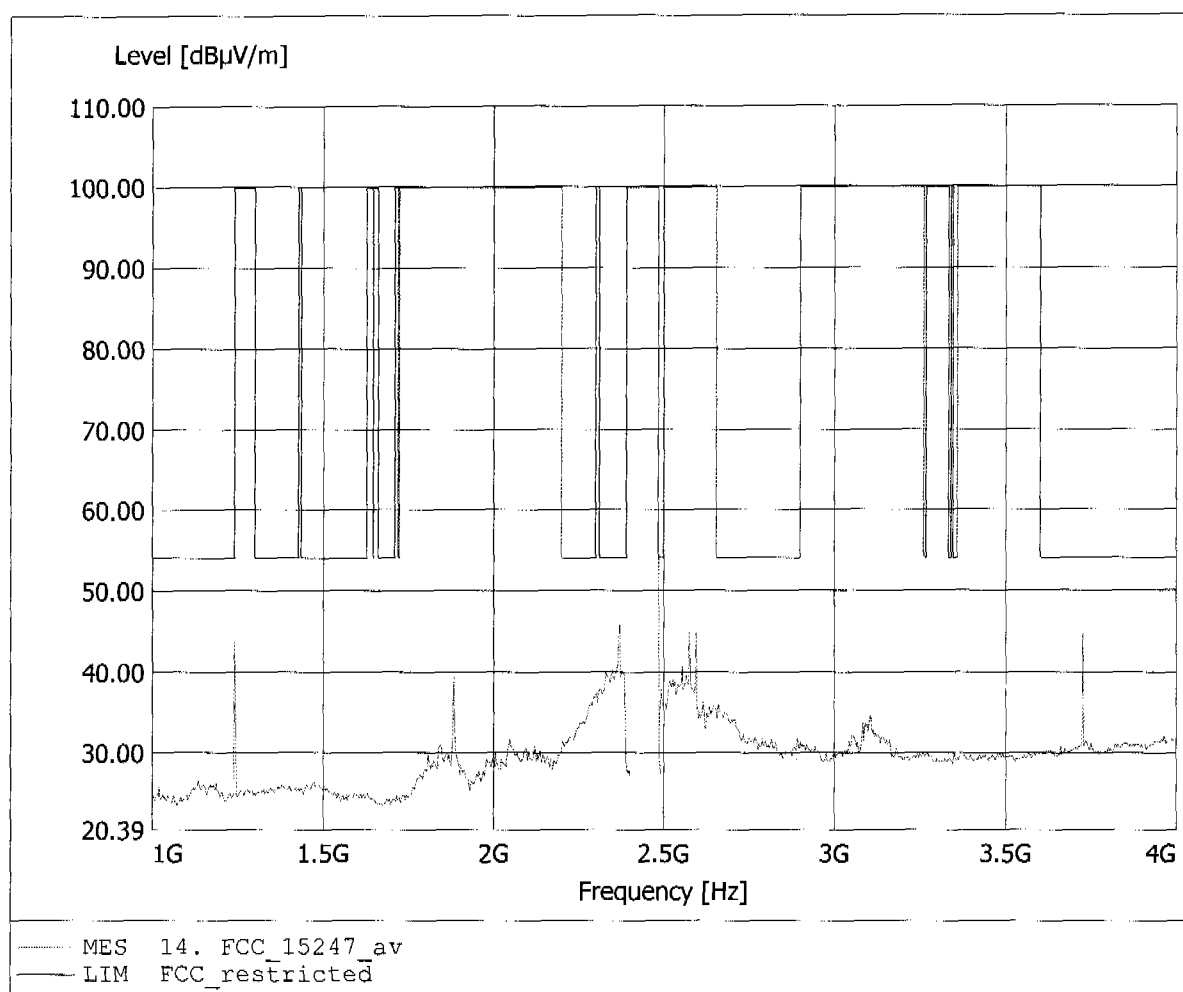


DA 00-705 / Marker Delta-Method:

The value measured with average detector may be reduced by the "delta" value according to Marker-Delta Method plot.

Please see pages 2 of appendix C and pages 20-23 of TestRpt_1.


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 74.29dBuV/m, RBW: 1MHz

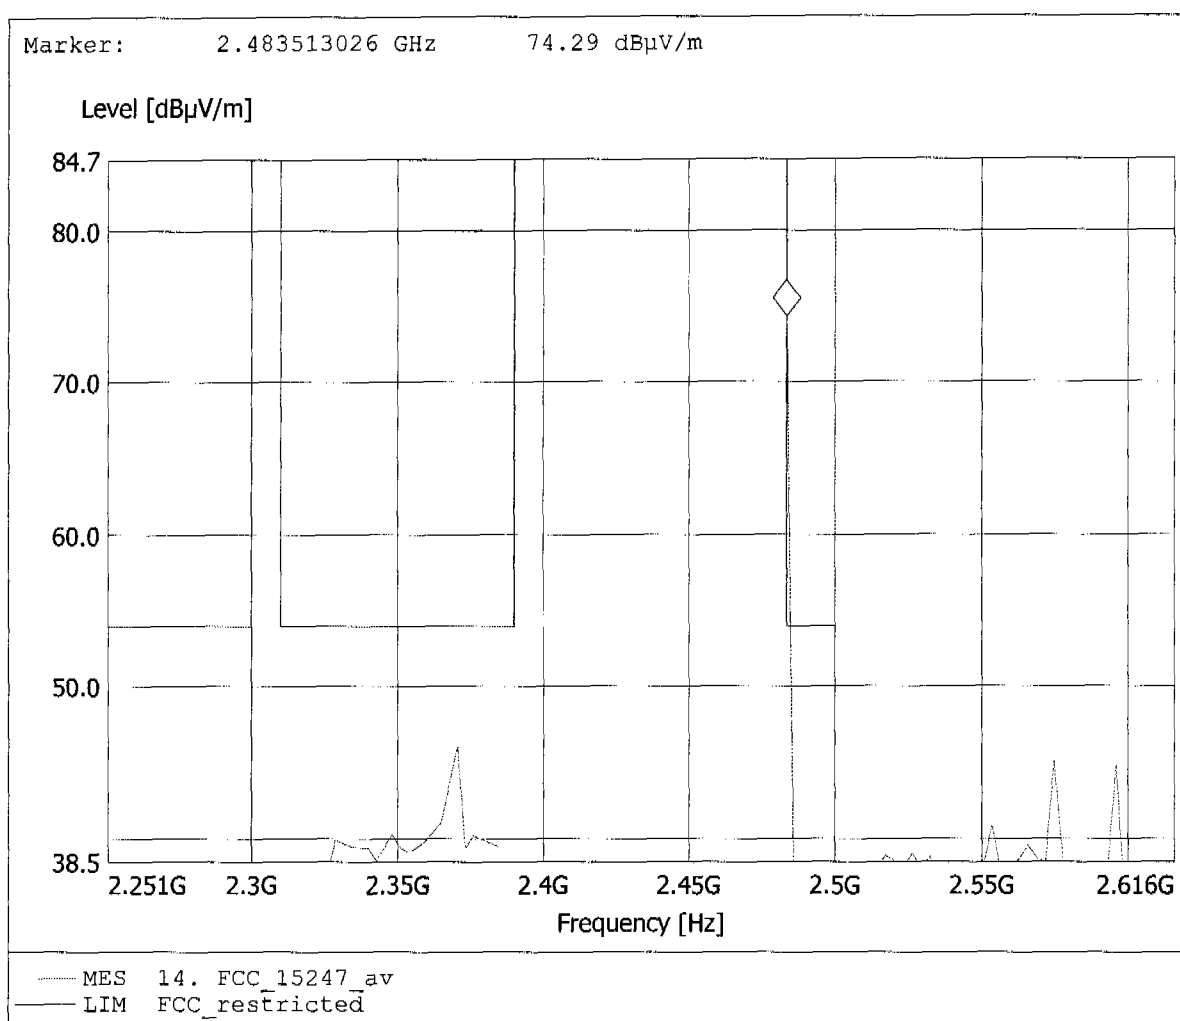

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 101.04dBμV/m, RBW: 1MHz

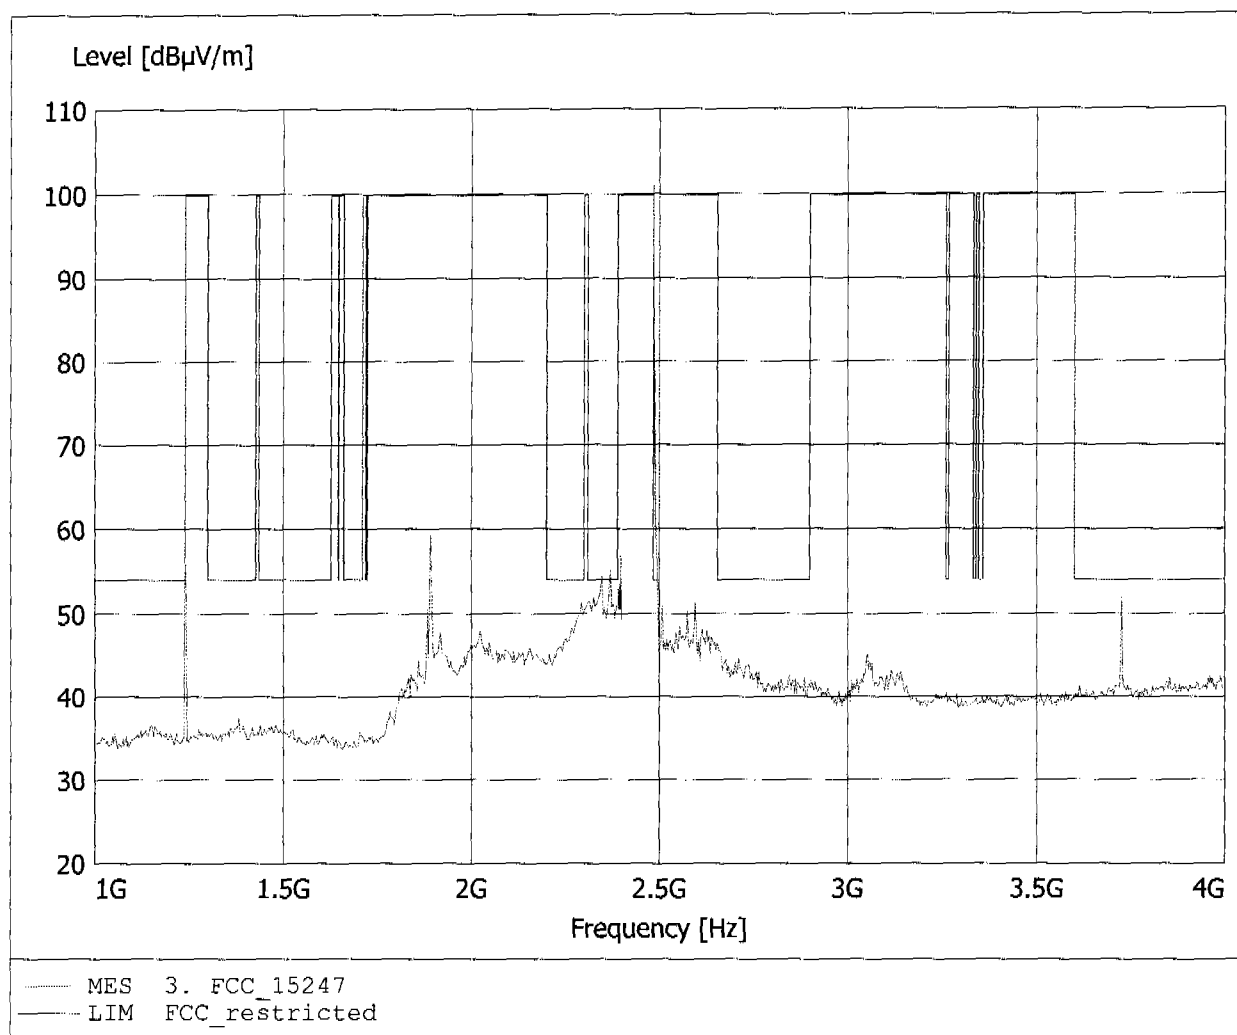


A 00-705 / Marker Delta-Method:

The value measured with average detector may be reduced by the "delta" value according to Marker-Delta Method plot.

Please see pages 2 of appendix C and pages 20-23 of TestRpt_1.


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Thom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 101.04dBµV/m, RBW: 1MHz

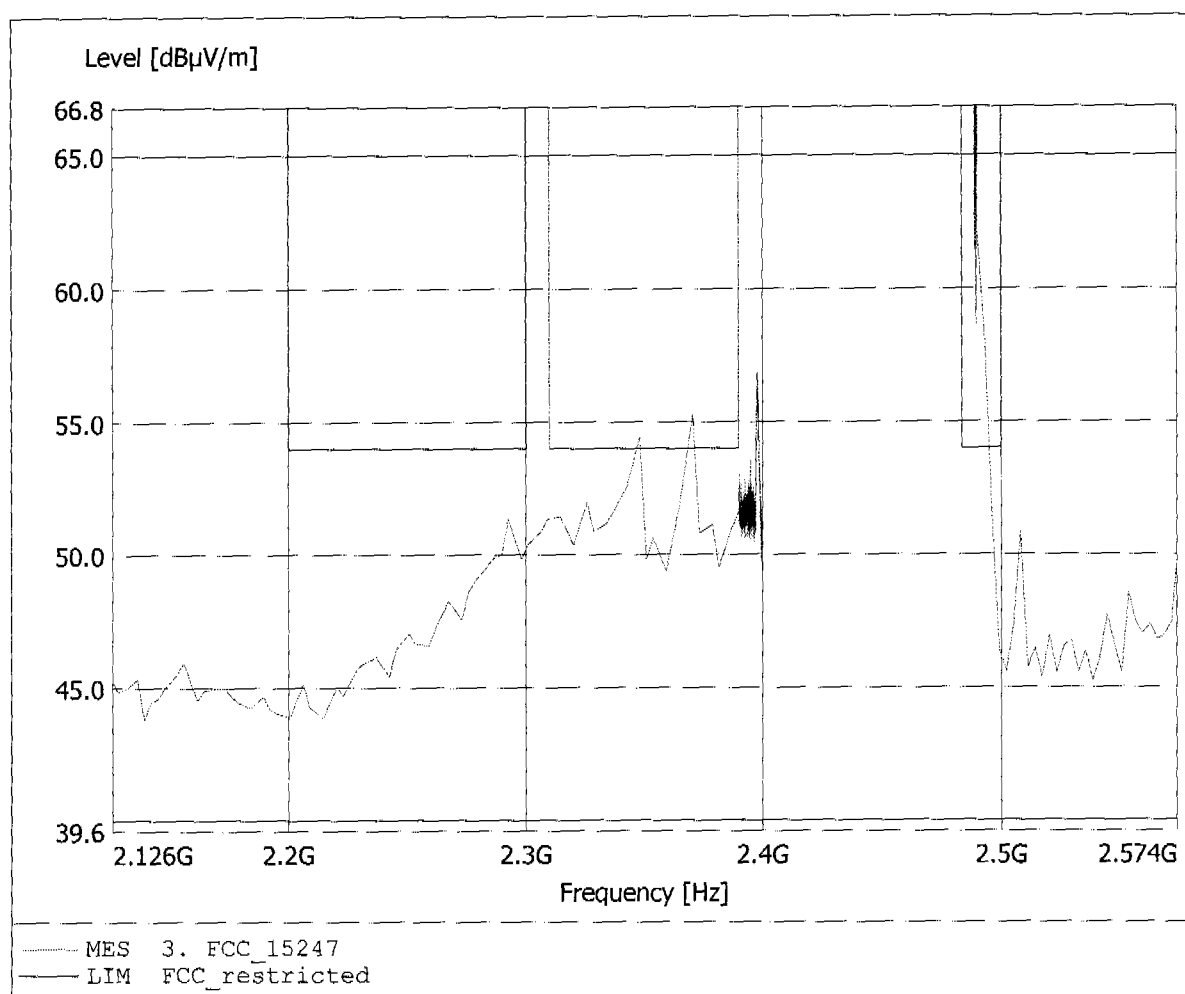


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 101.04dBµV/m, RBW: 1MHz

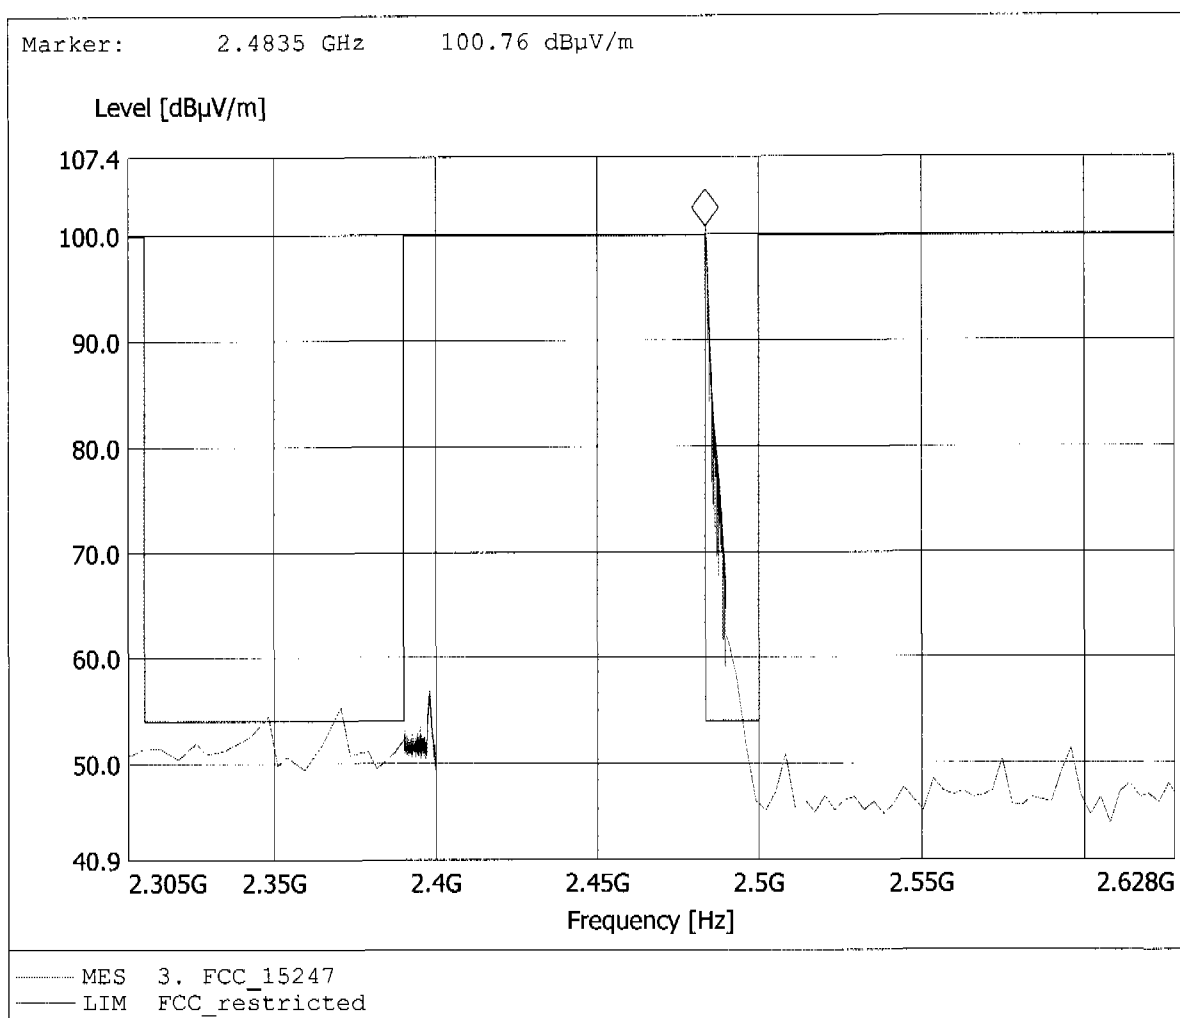

**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**


EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 74.62dBμV/m, RBW: 1MHz

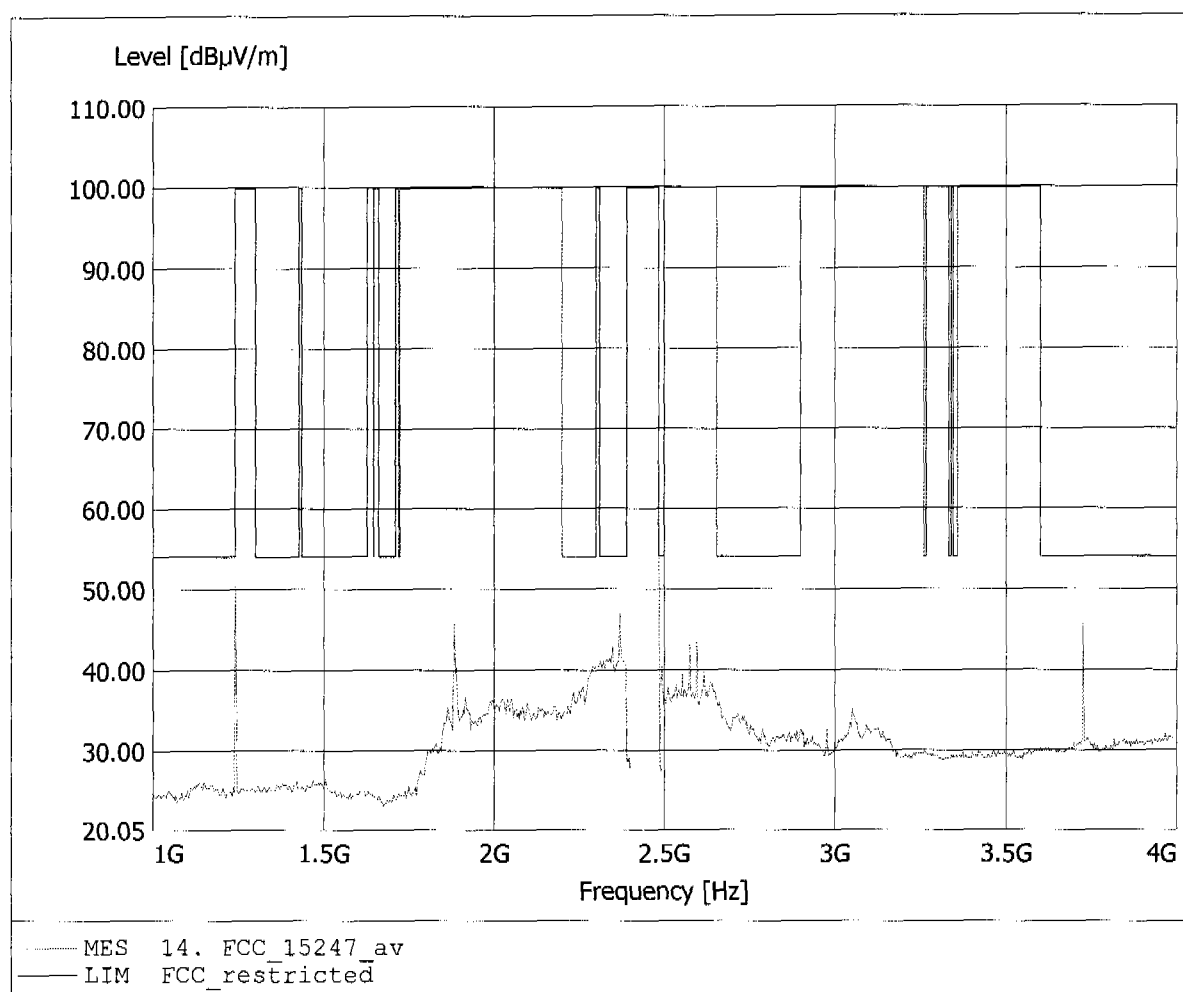

DA 00-705 / Marker Delta-Method:
The value measured with average detector may be reduced by
the "delta" value according to Marker-Delta Method plot.
Please see pages 2 of appendix C and pages 20-23 of TestRpt_1.


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 74.62dBμV/m, RBW: 1MHz

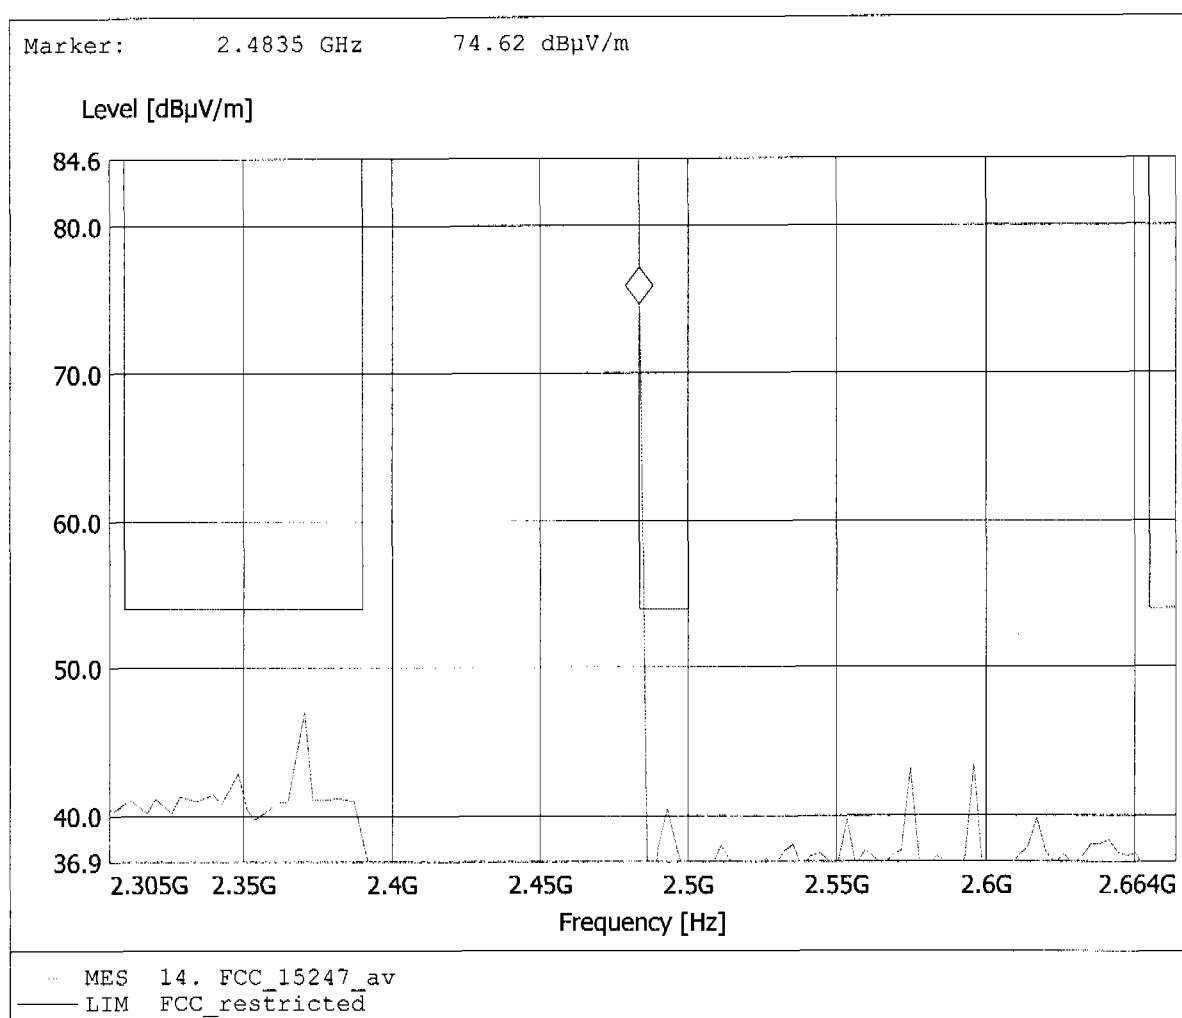


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 52.88dBµV/m, RBW: 1MHz

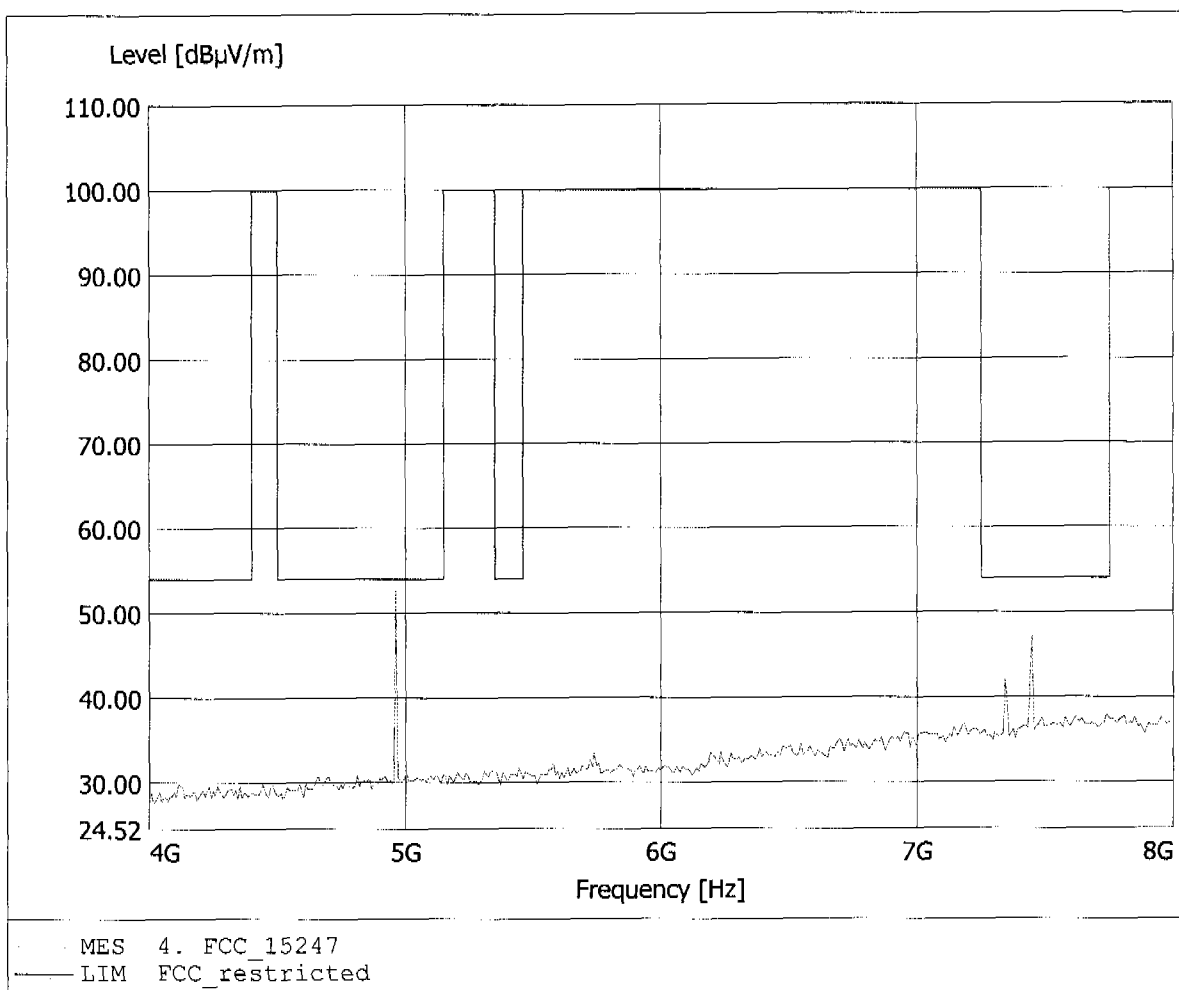


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.962GHz, Emax: 52.88dBµV/m, RBW: 1MHz

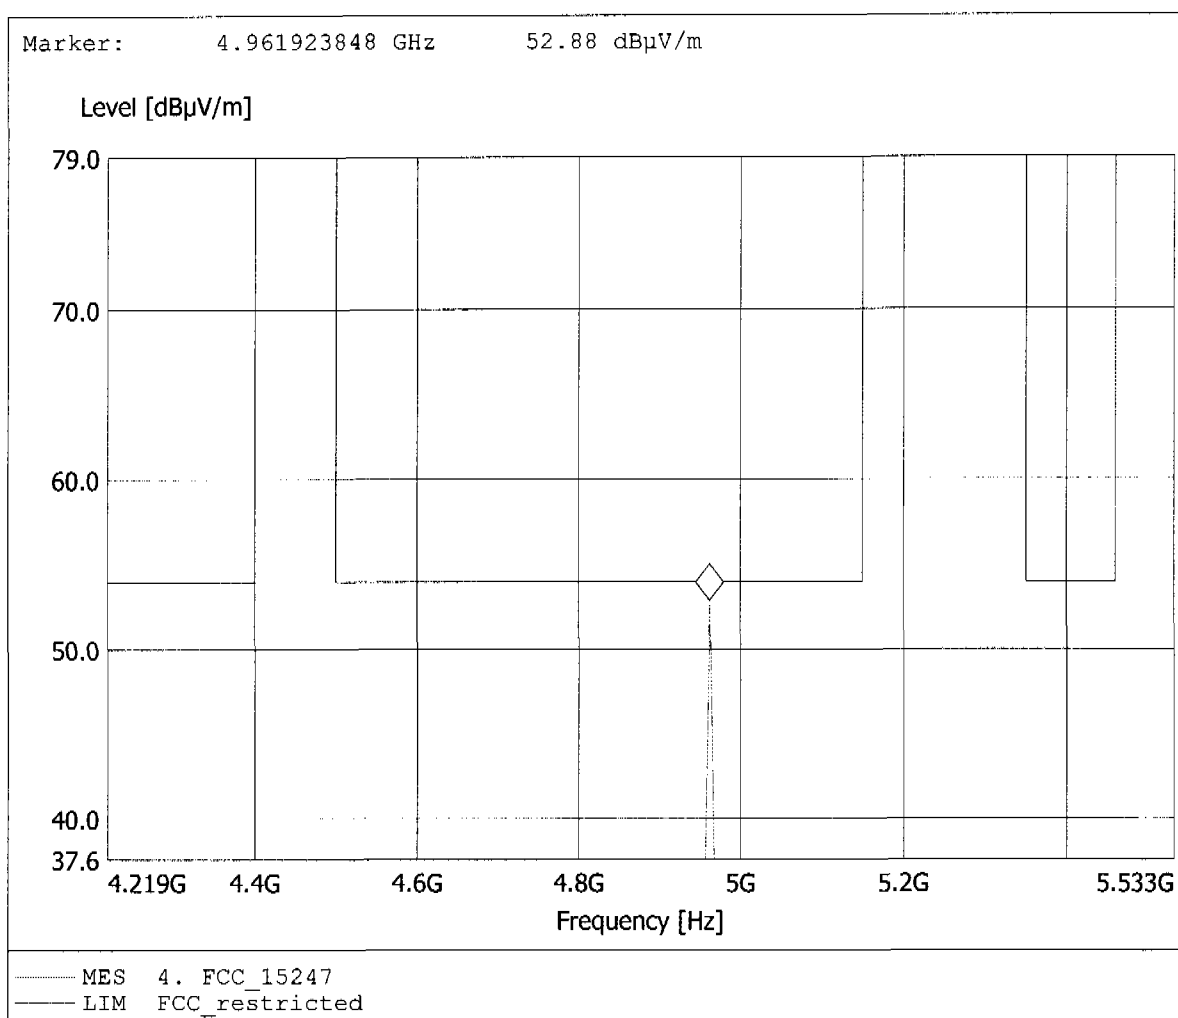


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.447GHz, Emax: 51.30dBμV/m, RBW: 1MHz

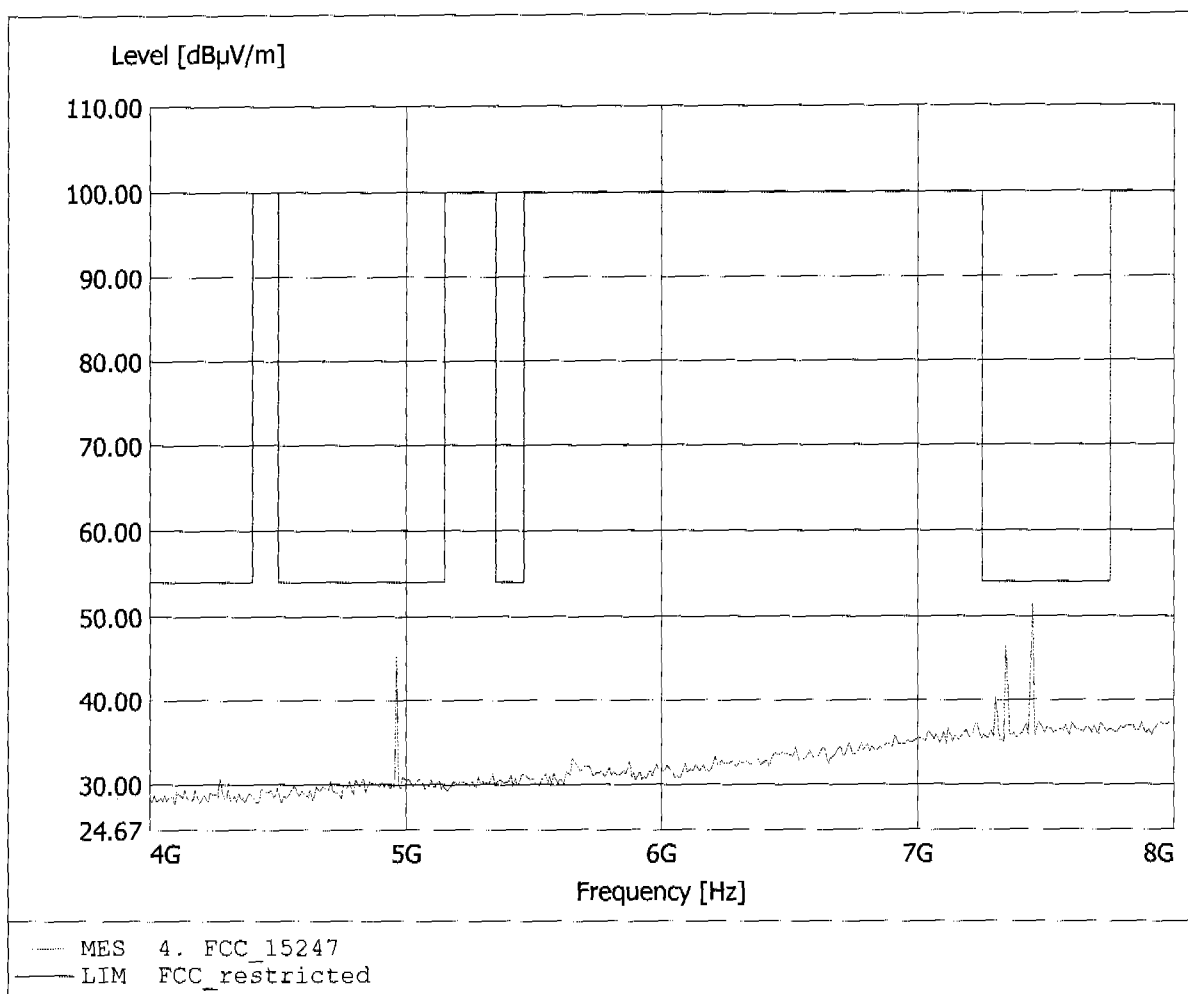


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.006GHz, Emax: 42.01dBµV/m, RBW: 1MHz

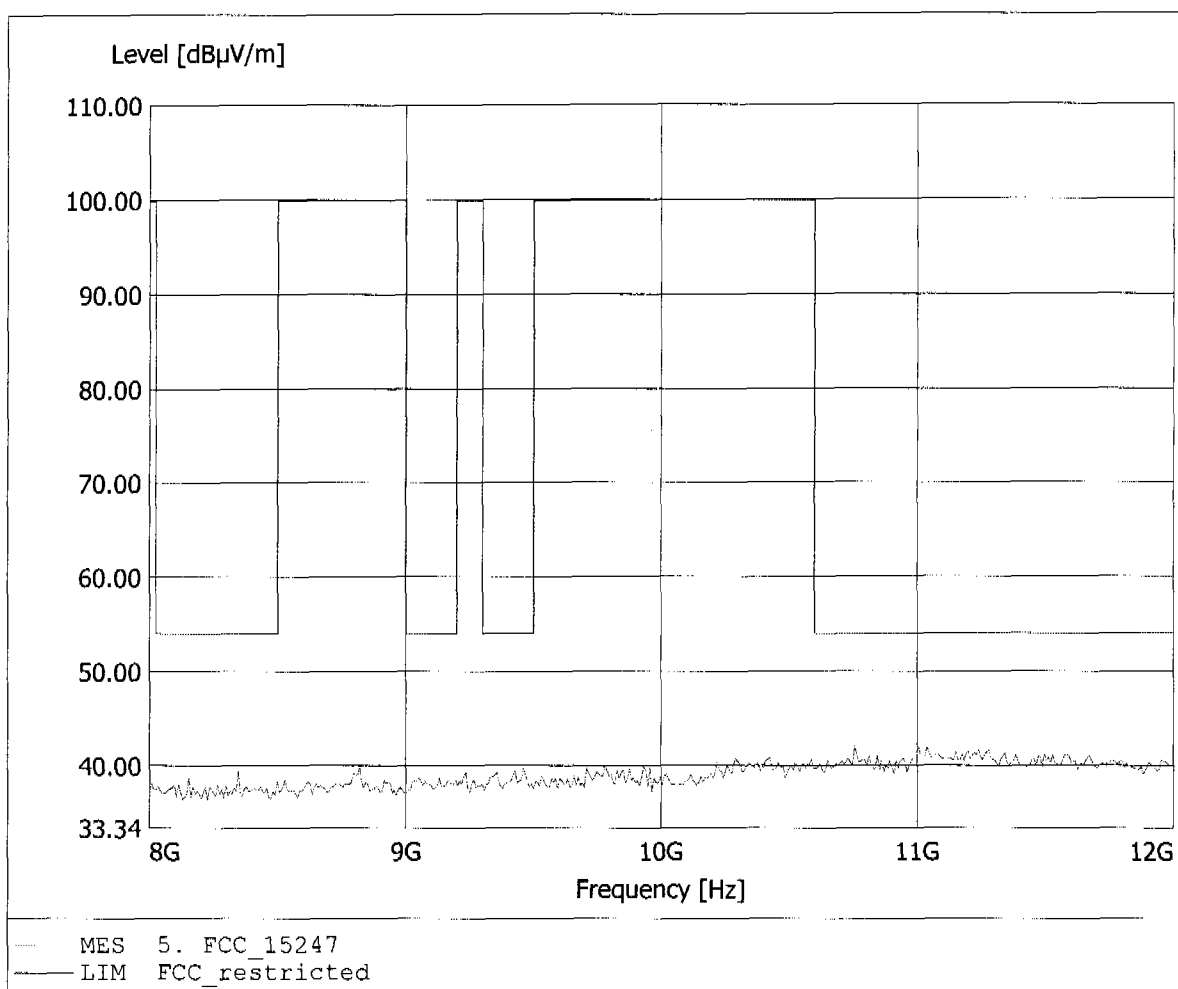


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.295GHz, Emax: 42.23dBµV/m, RBW: 1MHz

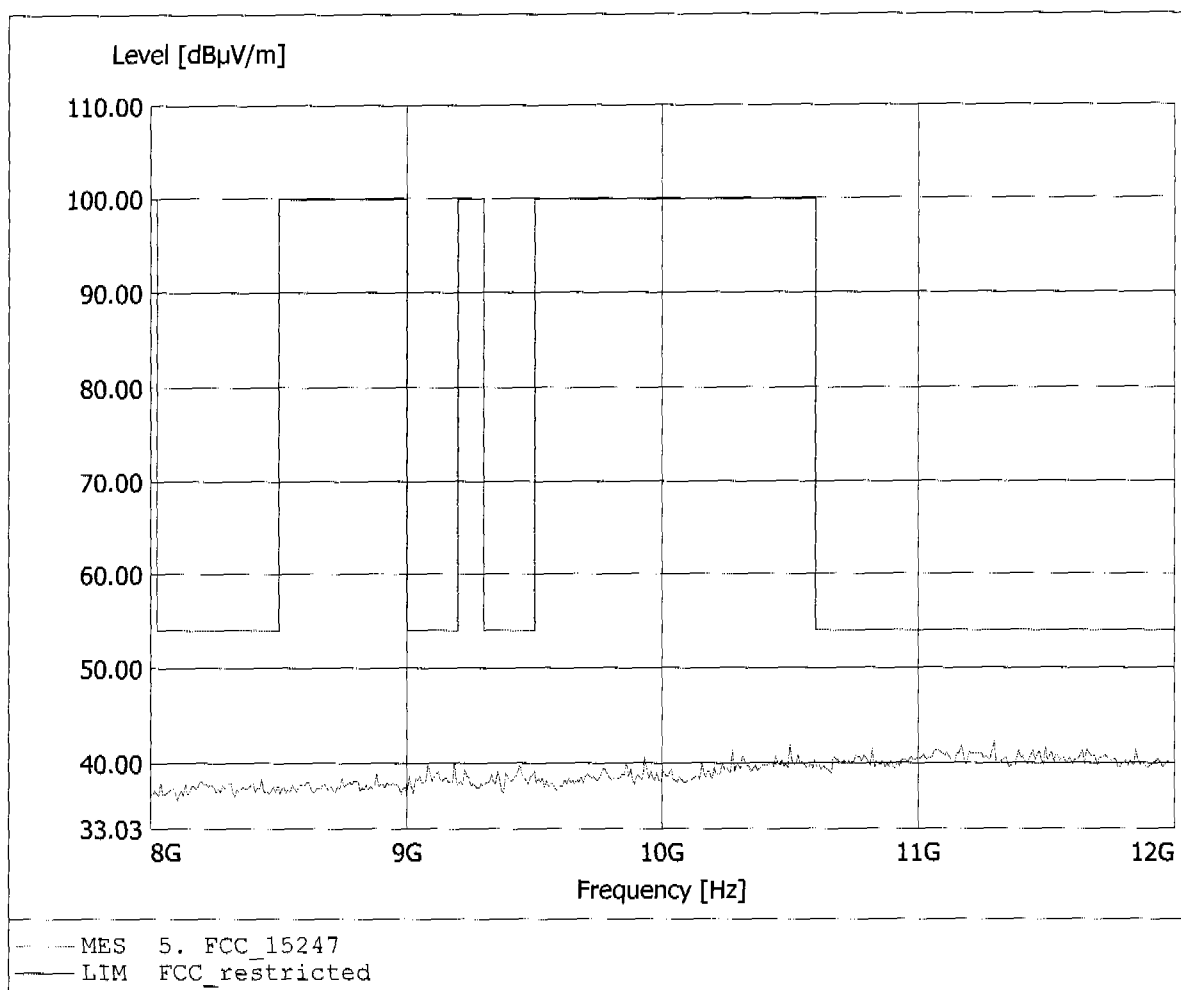


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.411GHz, Emax: 61.98dBμV/m, RBW: 1MHz

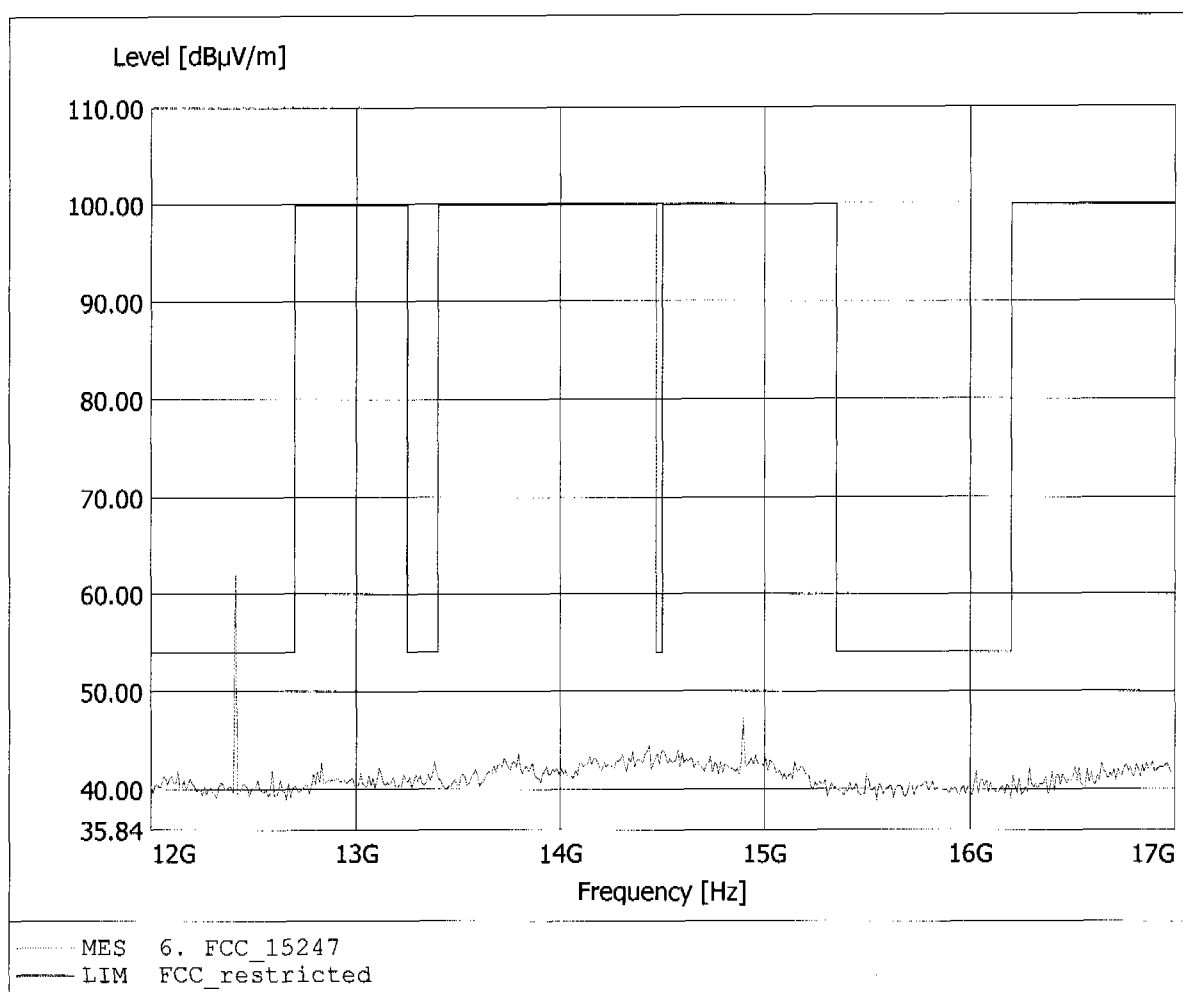


**Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C**

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.896GHz, Emax: 34.18dBµV/m, RBW: 1MHz

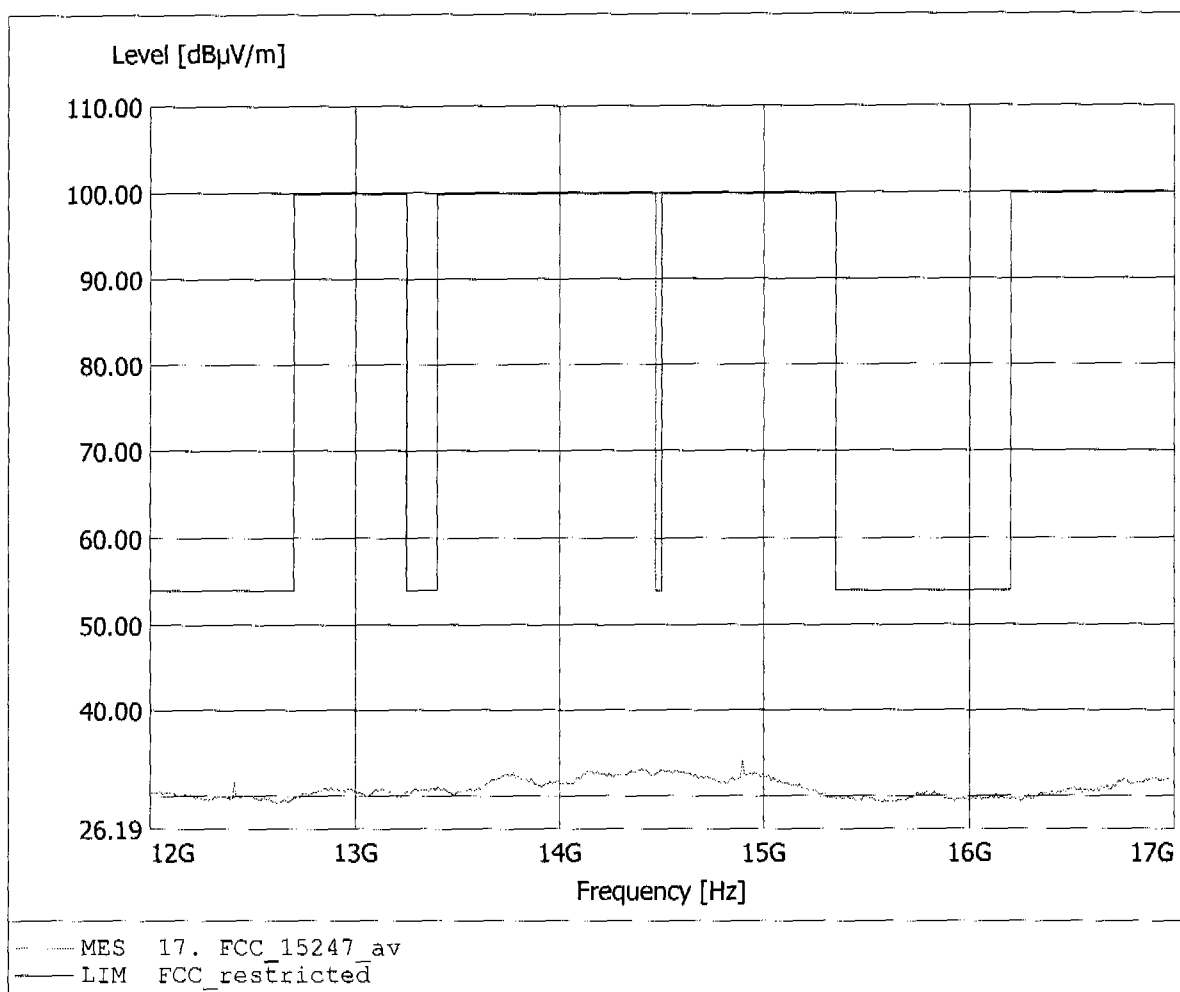


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.411GHz, Emax: 54.58dBµV/m, RBW: 1MHz

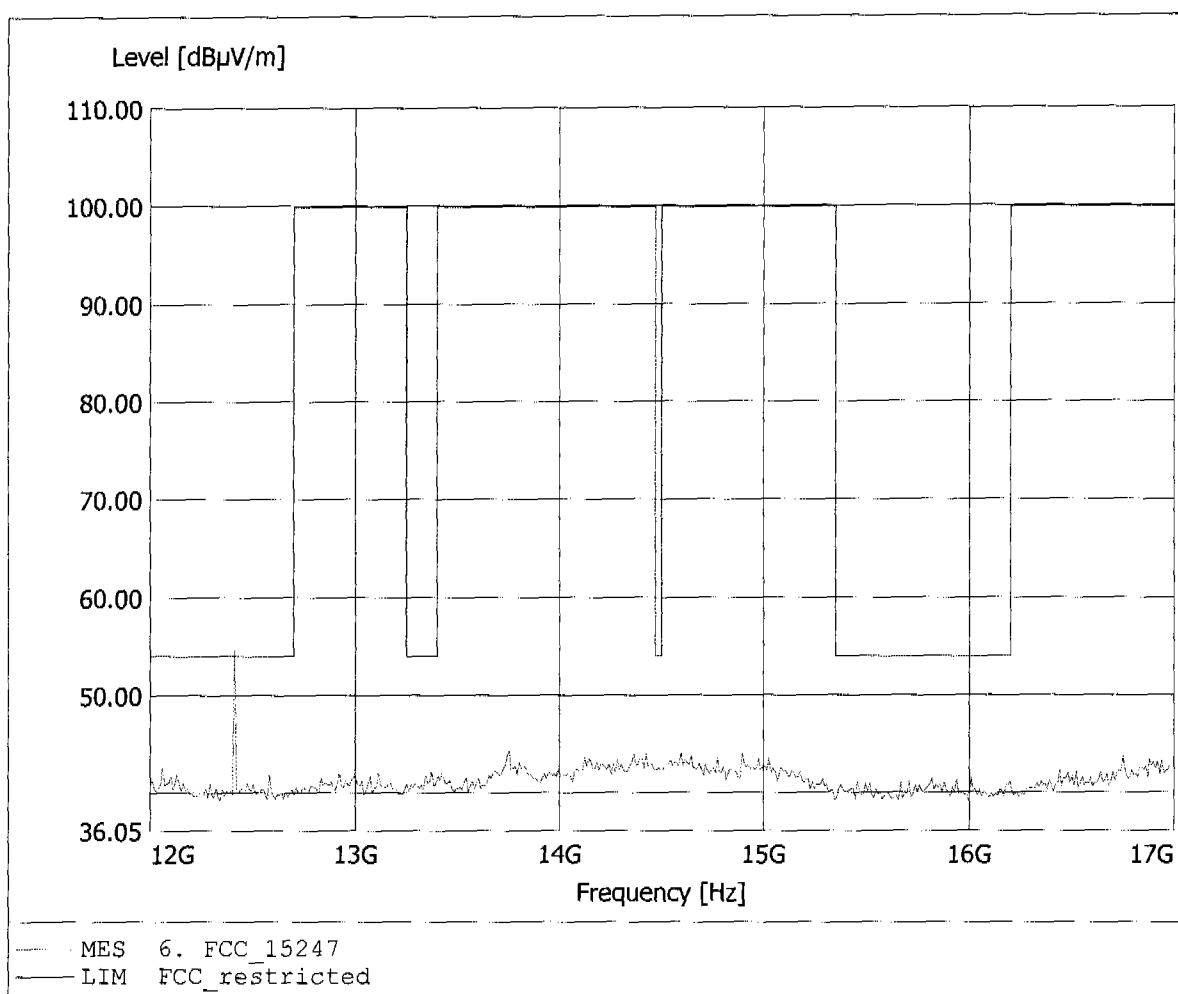


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.525GHz, Emax: 33.20dBµV/m, RBW: 1MHz

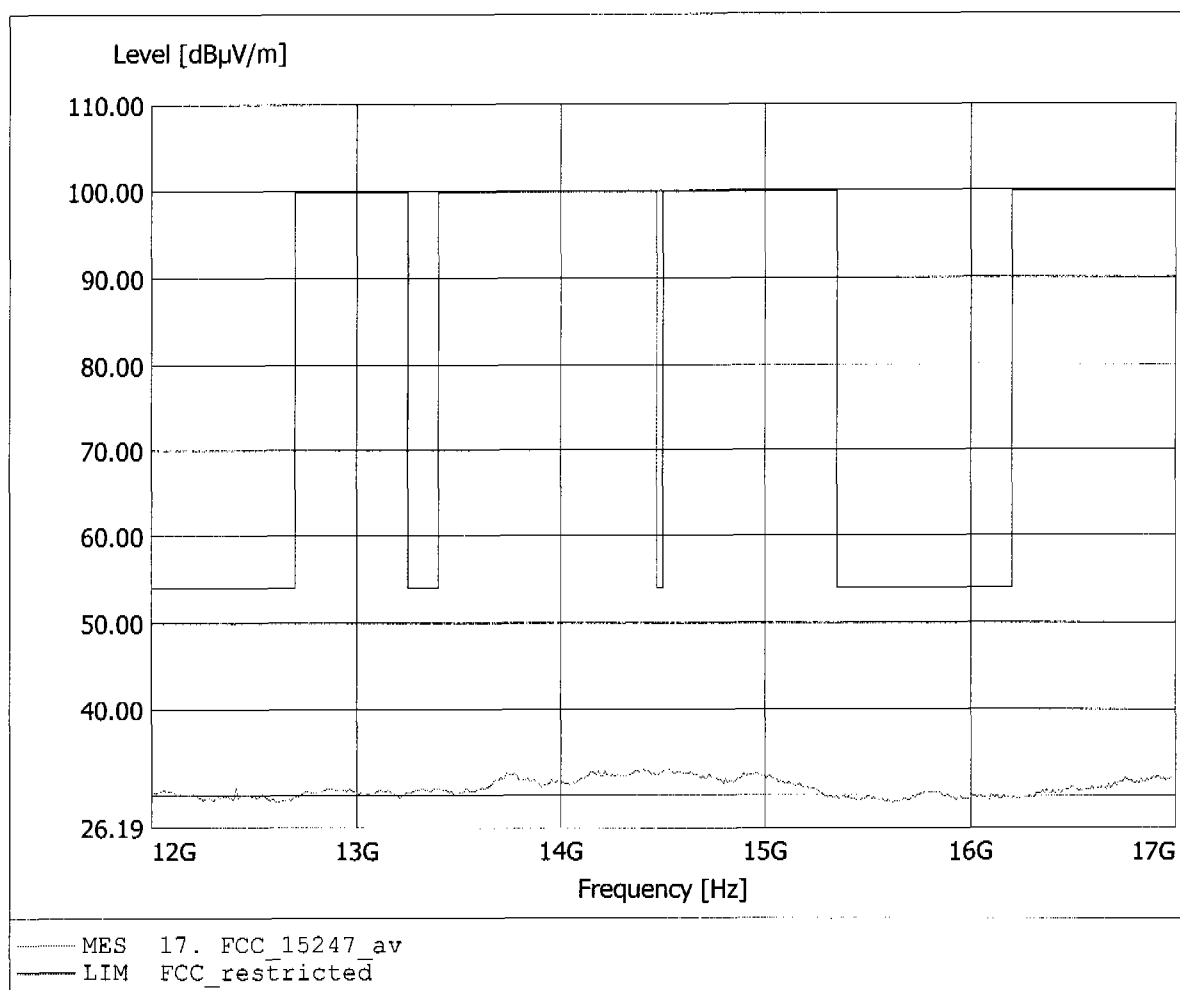

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.019GHz, Emax: 44.84dBµV/m, RBW: 1MHz

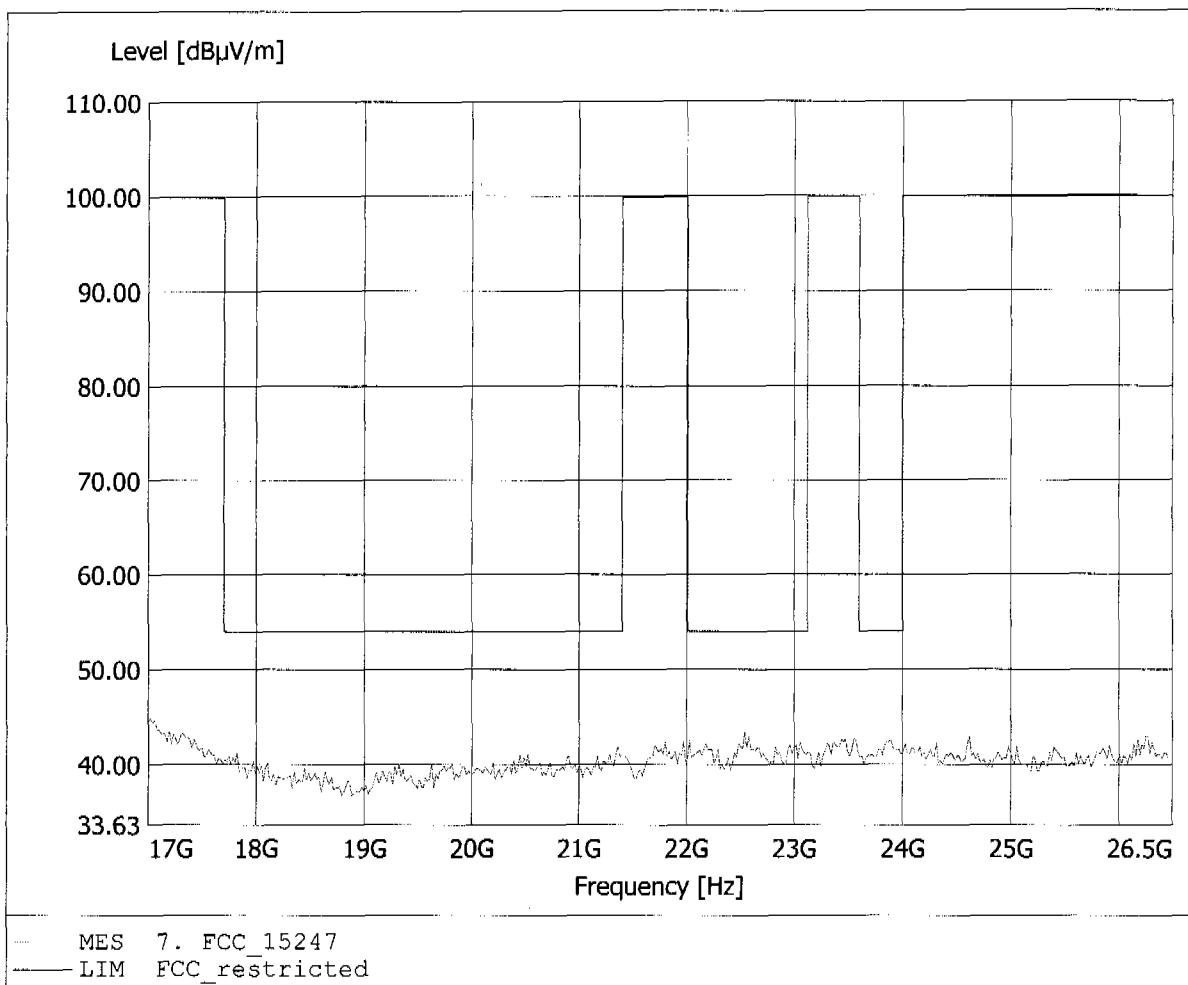

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT: Wireless Headset 2G4 / Ant.: 1 / Ch:94
Model: DW800 wireless system / Base
Approval Holder: Sennheiser Communications
Operating Condition: Tnom: 23°C / Unom: 3.6 V DC (120V AC/DC adaptor)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.038GHz, Emax: 44.42dBµV/m, RBW: 1MHz

