


FCC Test Report

FCC ID : R3USCBT19
Equipment : Bluetooth speakerphone
Model No. : SCBT19
Brand Name : EPOS
Applicant : Sennheiser Communications
Address : Industriparken 27, Ballerup 2750 , Denmark
Standard : 47 CFR FCC Part 15.247
Received Date : Nov. 13, 2019
Tested Date : May 16 ~ Jun. 26, 2020

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any agency of government.

Reviewed by:



Along Chen / Assistant Manager

Approved by:



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	9
1.3	Test Setup Chart	9
1.4	The Equipment List	10
1.5	Test Standards	11
1.6	Reference Guidance	11
1.7	Deviation from Test Standard and Measurement Procedure.....	11
1.8	Measurement Uncertainty	11
2	TEST CONFIGURATION.....	12
2.1	Testing Condition	12
2.2	Testing Facility	12
2.3	The Worst Test Modes and Channel Details	12
3	TRANSMITTER TEST RESULTS	13
3.1	Conducted Emissions.....	13
3.2	Unwanted Emissions into Restricted Frequency Bands	16
3.3	Unwanted Emissions into Non-Restricted Frequency Bands	33
3.4	Conducted Output Power.....	37
3.5	Number of Hopping Frequency	40
3.6	20dB and Occupied Bandwidth.....	43
3.7	Channel Separation.....	47
3.8	Number of Dwell Time.....	51
4	TEST LABORATORY INFORMATION	57

Release Record

Report No.	Version	Description	Issued Date
FR9N1302AD	Rev. 01	Initial issue	Jul. 13, 2020

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.159MHz 45.47(Margin -20.05dB) - QP	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 2483.50MHz 43.55 (Margin -10.45dB) - AV	Pass
15.247(d)	Band Edge	Meet the requirement of limit	Pass
15.247(b)(1)	Conducted Output Power	Power [dBm]: 8.01	Pass
15.247(a)(1)(iii)	Number of Hopping Channels	Meet the requirement of limit	Pass
15.247(a)(1)	Hopping Channel Separation	Meet the requirement of limit	Pass
15.247(a)(1)(iii)	Dwell Time	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Information

1.1.1 Product Details

The following models are provided to this EUT.

Brand Name	Model Name	Product name	Product description	Description
EPOS	SCBT19	EXPAND 80	Bluetooth speakerphone	-
EPOS	SCBT19	EXPAND 80T	Bluetooth speakerphone	SW for MS Teams. Buttons have different icons
→ The EXPAND 80 was selected as a representative for the final test and only its data was recorded in this report.				

1.1.2 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number	Data Rate
2400-2483.5	BR	2402-2480	0-78 [79]	1 Mbps
2400-2483.5	EDR	2402-2480	0-78 [79]	2 Mbps

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.
 Note 2: Bluetooth BR uses a GFSK.
 Note 3: Bluetooth EDR uses π/4-DQPSK.

1.1.3 Antenna Details

Ant. No.	Type	Connector	Gain (dBi)	Remarks
1	PIFA	N/A	3.7	---

1.1.4 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	5Vdc from adapter
-------------------	-------------------

1.1.5 Accessories

Accessories		
No.	Equipment	Description
1	Adapter	Brand: EPOS Model: GS5V-2.4C-DC I/P: 100-240Vac, 50/60Hz, 0.5A Max O/P: 5Vdc, 2.4A Power Line: 1.3m shielded without core
2	USB-C cable	Brand: EPOS Model: EP-UC-L150-1 Power Line: 1.5m shielded without core
3	USB-C to -A adapter	Brand: EPOS Model: SCUCL01
4	USB dongle	Brand: EPOS Model: BTD 800 USB

1.1.6 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	---	---

1.1.7 Test Tool and Duty Cycle

Test Tool	CBT Test	
Duty Cycle and Duty Factor	Duty Cycle (%)	Duty Factor (dB)
DH5	78.61	1.05
2DH5	78.61	1.05

1.1.8 Power Index of Test Tool


Modulation Mode	Test Frequency (MHz)		
	2402	2441	2480
GFSK/1Mbps	8	8	8
$\pi/4$ -DQPSK /2Mbps	8	8	8

1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Notebook	DELL	Latitude E5470	DoC	---
2	Extension microphones (x2)	EPOS	EPWD1	---	Provided by applicant.

1.3 Test Setup Chart

Test Setup Diagram	
No.	Signal cable / Length (m)
1	USB-C cable, 1.5m shielded.
2-3	Extension microphones, 2.89m non-shielded without core

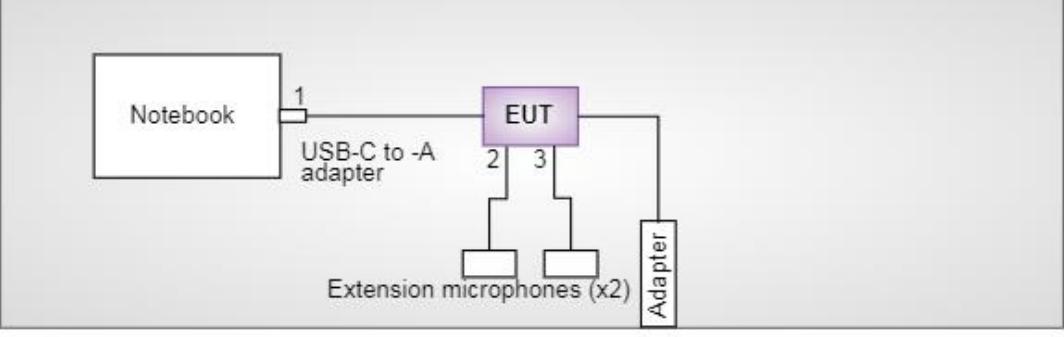

The diagram illustrates the test setup. A 'Notebook' is connected to a purple box labeled 'EUT' (Equipment Under Test) via a 'USB-C to -A adapter'. The 'EUT' is connected to two small white boxes labeled 'Extension microphones (x2)'. A vertical line labeled 'Adapter' connects the 'EUT' to the 'Extension microphones (x2)'. The connections are numbered 1, 2, and 3.

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Tested Date	Jun. 26, 2020				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Dec. 12, 2019	Dec. 11, 2020
LISN	R&S	ENV216	101579	Mar. 12, 2020	Mar. 11, 2021
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 22, 2019	Oct. 21, 2020
Measurement Software	AUDIX	e3	6.120210k	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emission				
Test Site	966 chamber 1 / (03CH01-WS)				
Tested Date	Jun. 22, 2020				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 17, 2019	Dec. 16, 2020
Receiver	R&S	ESR3	101657	Feb. 14, 2020	Feb. 13, 2021
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jul. 12, 2019	Jul. 11, 2020
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 12, 2019	Dec. 11, 2020
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2019	Nov. 14, 2020
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 13, 2019	Nov. 12, 2020
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 07, 2019	Oct. 06, 2020
Preamplifier	EMC	EMC02325	980225	Jul. 09, 2019	Jul. 08, 2020
Preamplifier	Agilent	83017A	MY39501308	Oct. 08, 2019	Oct. 07, 2020
Preamplifier	EMC	EMC184045B	980192	Aug. 01, 2019	Jul. 31, 2020
RF Cable	EMC	EMC104-SM-SM-80 00	181106	Oct. 07, 2019	Oct. 06, 2020
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Oct. 07, 2019	Oct. 06, 2020
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Oct. 07, 2019	Oct. 06, 2020
LF cable 1M	EMC	EMCCFD400-NM-N M-1000	160502	Oct. 07, 2019	Oct. 06, 2020
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Oct. 07, 2019	Oct. 06, 2020
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Oct. 07, 2019	Oct. 06, 2020
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	May 16, 2020				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Apr. 30, 2020	Apr. 29, 2021
Power Meter	Anritsu	ML2495A	1241002	Oct. 23, 2019	Oct. 22, 2020
Power Sensor	Anritsu	MA2411B	1207366	Oct. 23, 2019	Oct. 22, 2020
DC POWER SOURCE	GW INSTEK	GPC-6030D	GES855395	Oct. 29, 2019	Oct. 28, 2020
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA

Note: Calibration Interval of instruments listed above is one year.

1.5 Test Standards

47 CFR FCC Part 15.247

ANSI C63.10-2013

1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

1.7 Deviation from Test Standard and Measurement Procedure

None

1.8 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.130 Hz
Conducted power	±0.808 dB
Power density	±0.583 dB
Conducted emission	±2.715 dB
AC conducted emission	±2.92 dB
Radiated emission ≤ 1GHz	±3.41 dB
Radiated emission > 1GHz	±4.90 dB
Time	±0.1%

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	21°C / 69%	Akun Chung
Radiated Emissions	03CH01-WS	23-24°C / 66-68%	Akun Chung
RF Conducted	TH01-WS	24°C / 67%	Aska Huang

- FCC Designation No.: TW2732
- FCC site registration No.: 181692
- ISED#: 10807A
- CAB identifier: TW2732

2.2 Testing Facility

Test Laboratory	International Certification Corp.
Test Site	CO01-WS, 03CH01-WS, TH01-WS
Address of Test Site	No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

2.3 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate (Mbps)	Test Configuration
Conducted Emissions	$\pi/4$ -DQPSK	2441	2Mbps	---
Radiated Emissions \leq 1GHz	$\pi/4$ -DQPSK	2441	2Mbps	---
Radiated Emissions $>$ 1GHz	GFSK $\pi/4$ -DQPSK	2402, 2441, 2480 2402, 2441, 2480	1Mbps 2Mbps	---
Conducted Output Power	GFSK $\pi/4$ DQPSK	2402, 2441, 2480 2402, 2441, 2480	1Mbps 2Mbps	---
Number of Hopping Channels	GFSK $\pi/4$ DQPSK	2402~2480 2402~2480	1Mbps 2Mbps	---
Hopping Channel Separation 20dB and Occupied bandwidth	GFSK $\pi/4$ DQPSK	2402, 2441, 2480 2402, 2441, 2480	1Mbps 2Mbps	---
Dwell Time	GFSK $\pi/4$ DQPSK	2402 2402	1Mbps 2Mbps	---

NOTE:

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **X-plane** results were found as the worst case and were shown in this report.

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures


1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz


3.1.3 Test Setup

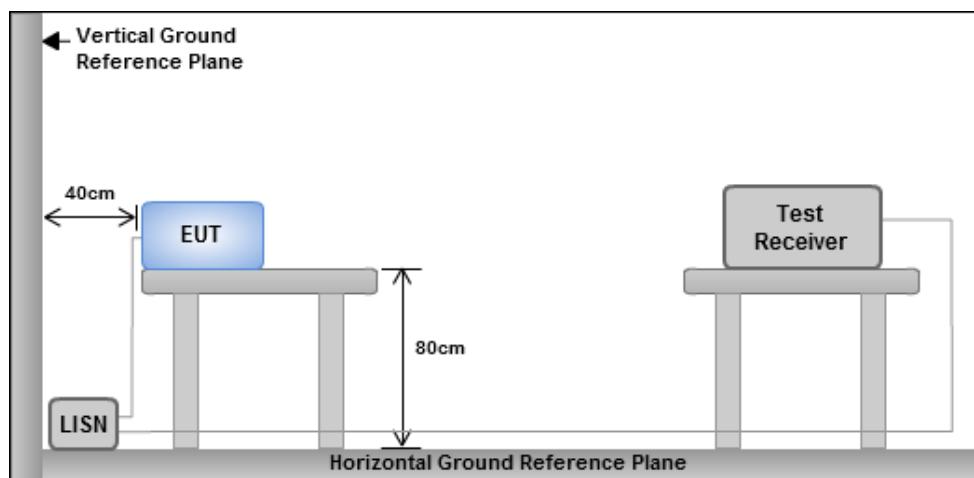

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions

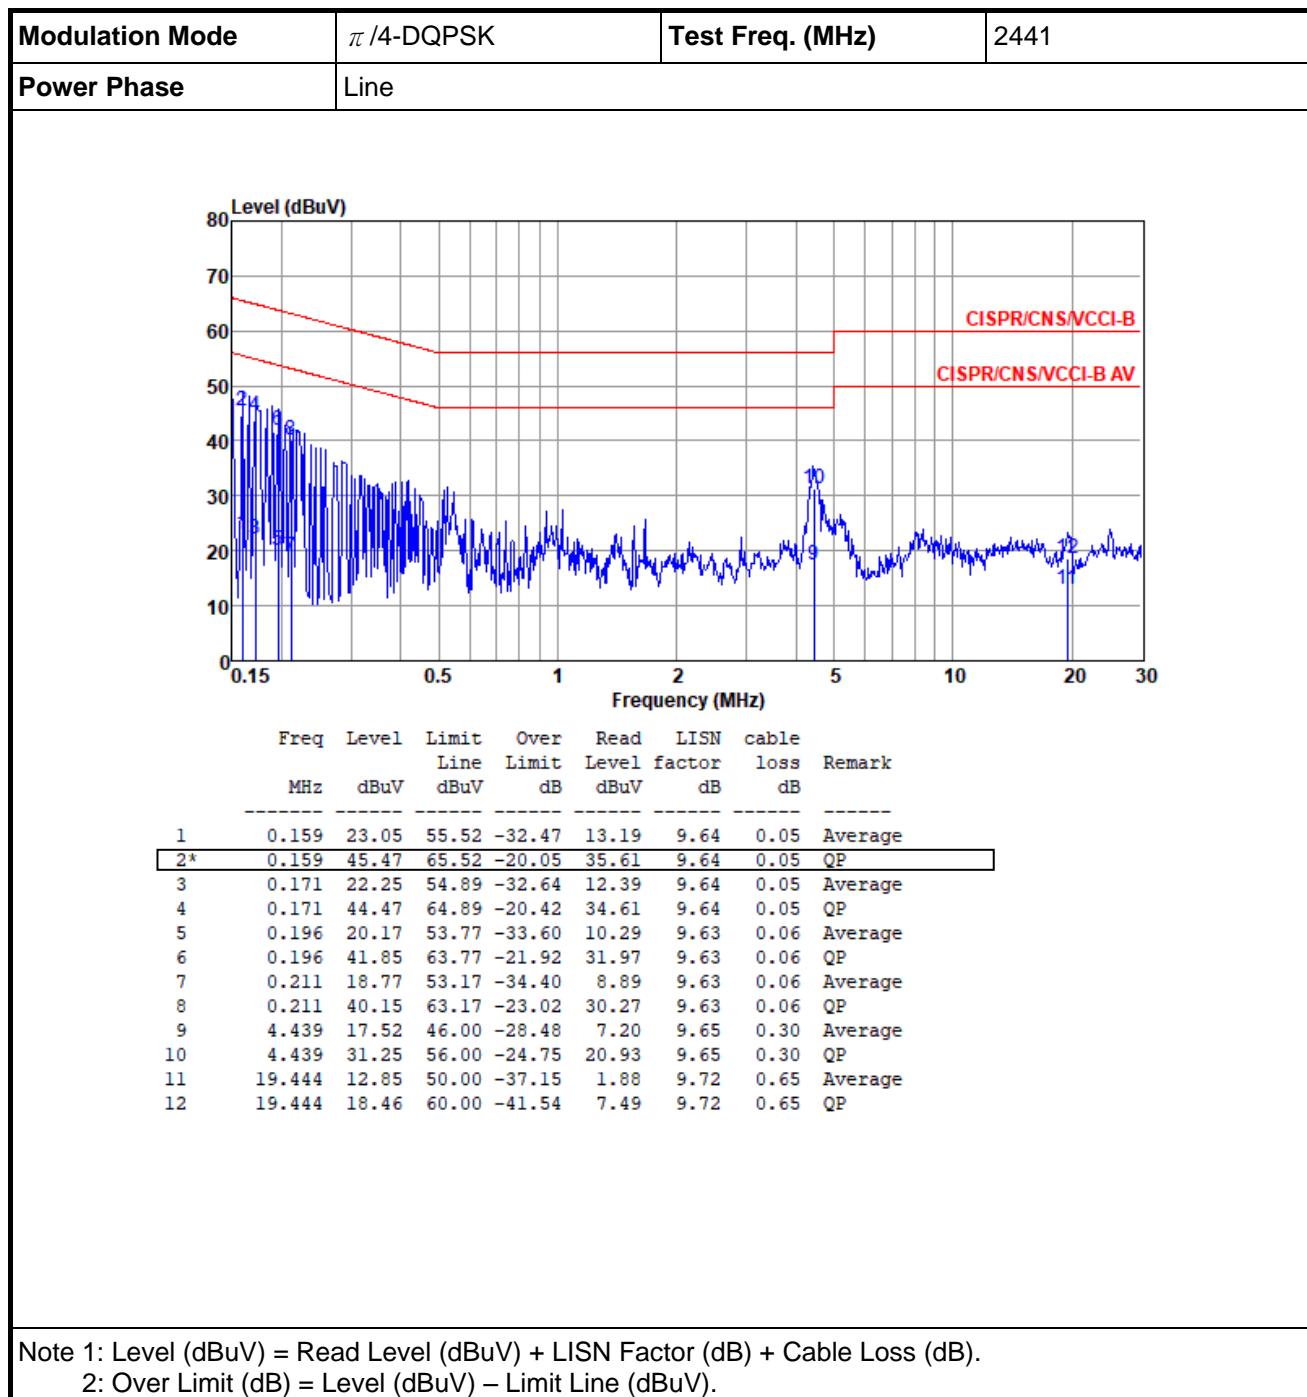

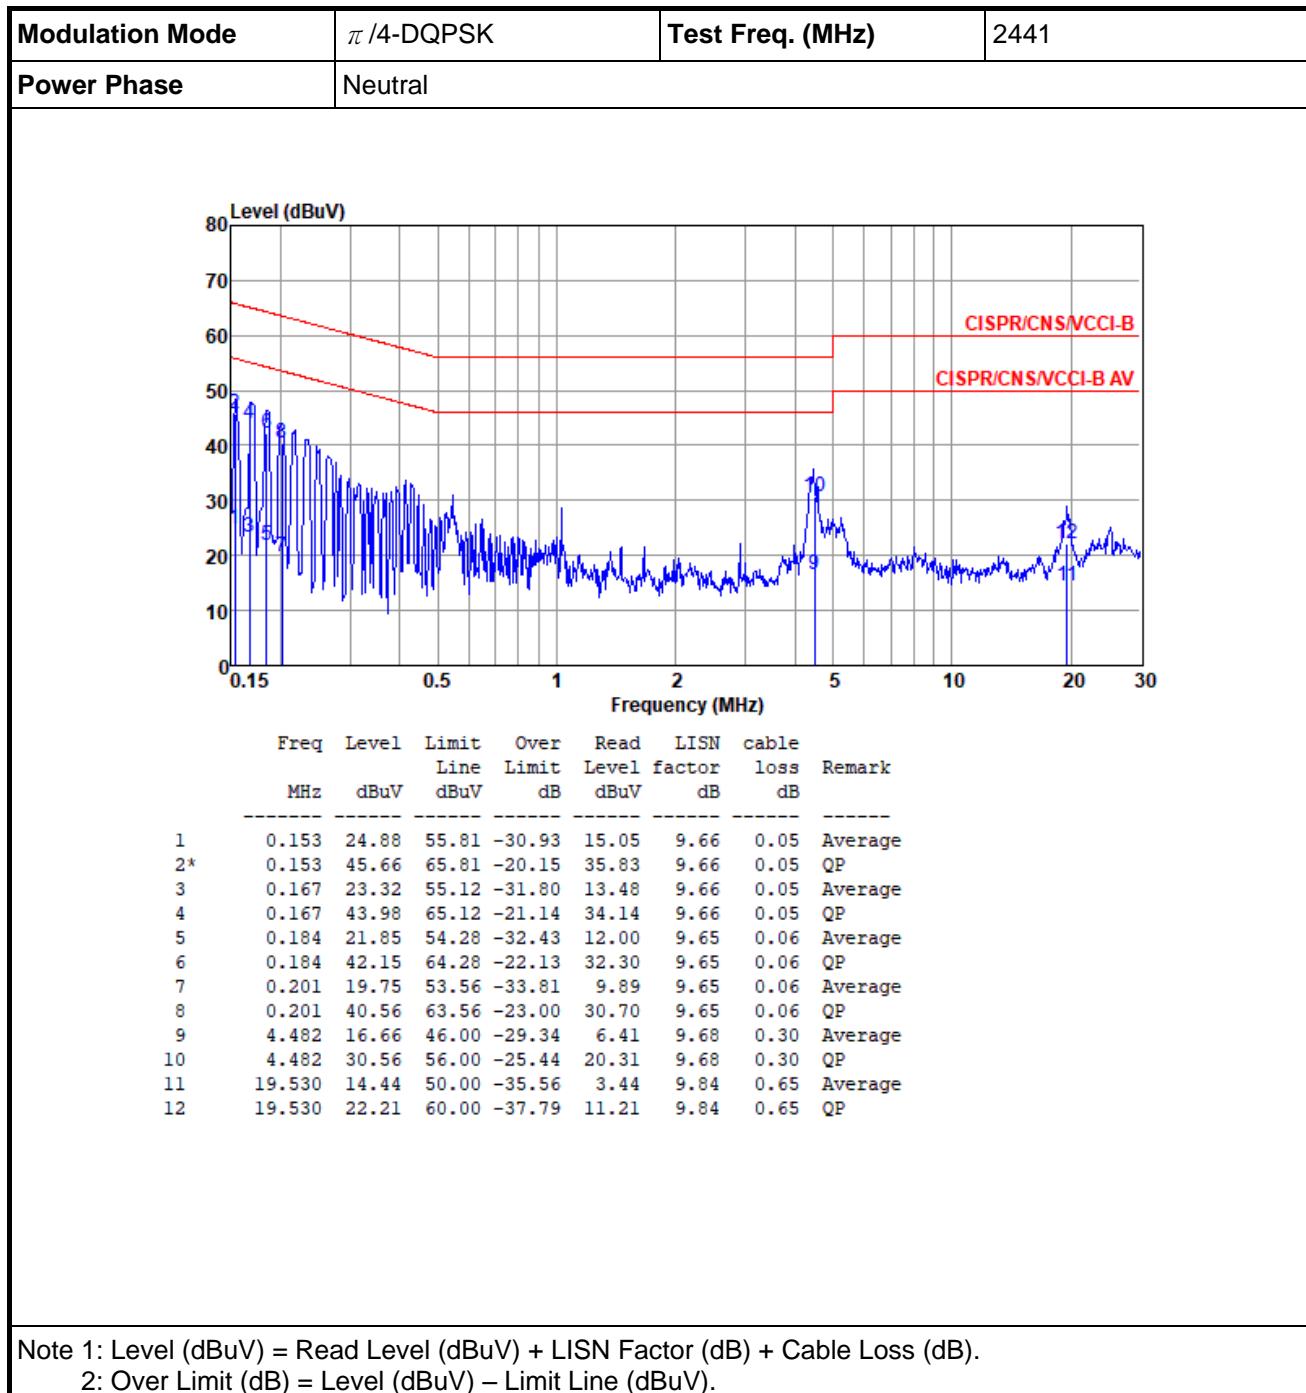

3.2 Unwanted Emissions into Restricted Frequency Bands

3.2.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.2.2 Test Procedures

1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:

1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. Radiated emission above 1GHz / Peak value
RBW=1MHz, VBW=3MHz and Peak detector

Radiated emission above 1GHz / Average value for harmonics


The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula for DH5 packet type which has worst duty factor:

3.
$$20\log(\text{Duty cycle}) = 20\log \frac{1s / 1600 * 5}{100 \text{ ms}} = -30.1 \text{ dB}$$


4. Radiated emission above 1GHz / Average value for other emissions
RBW=1MHz, VBW=1/T and Peak detector

3.2.3 Test Setup


Radiated Emissions below 1 GHz

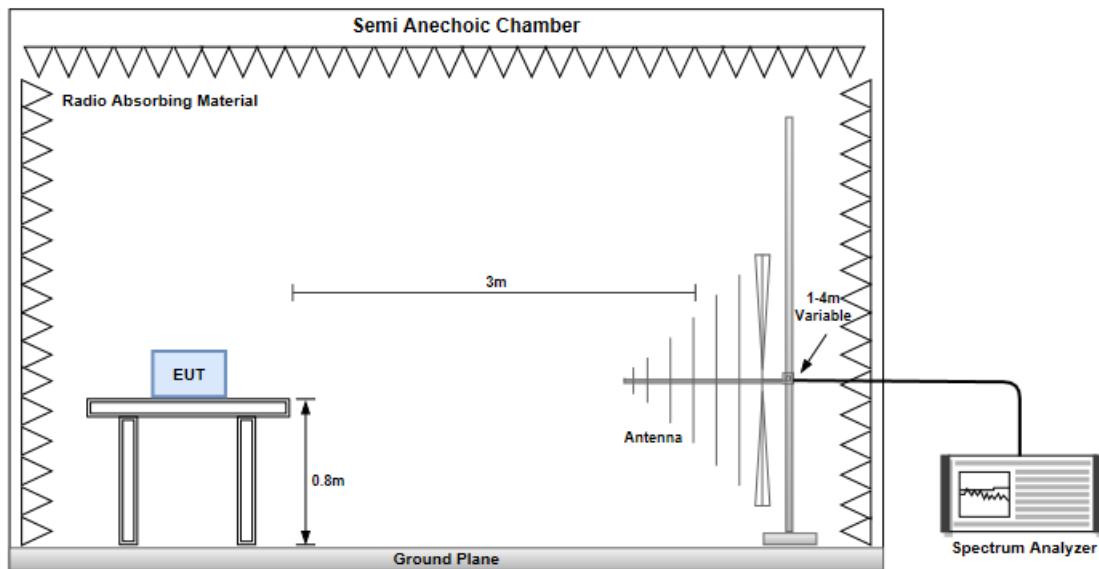


Radiated Emissions above 1 GHz

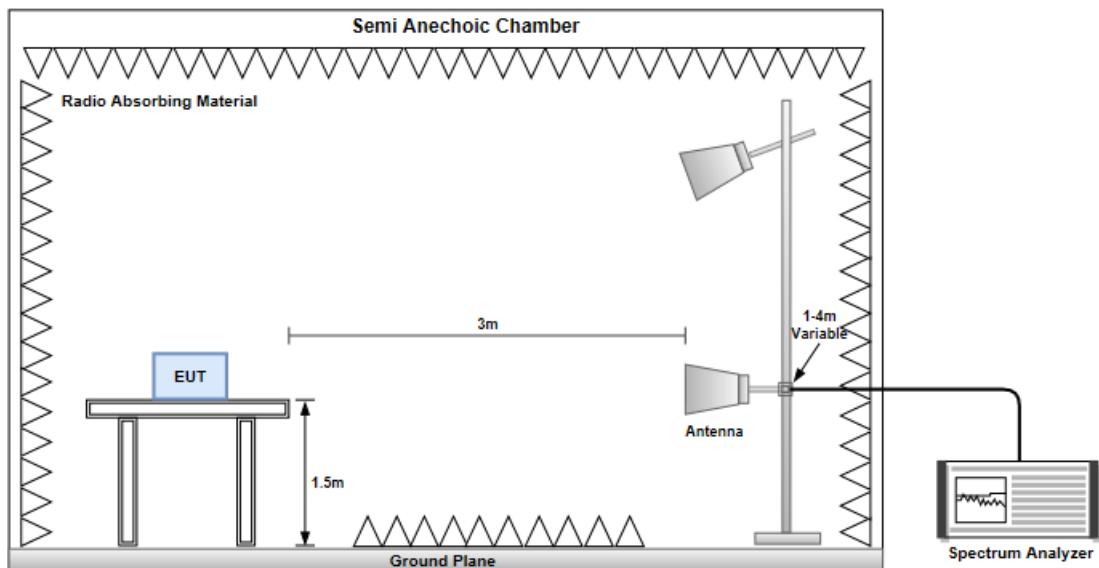


3.2.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

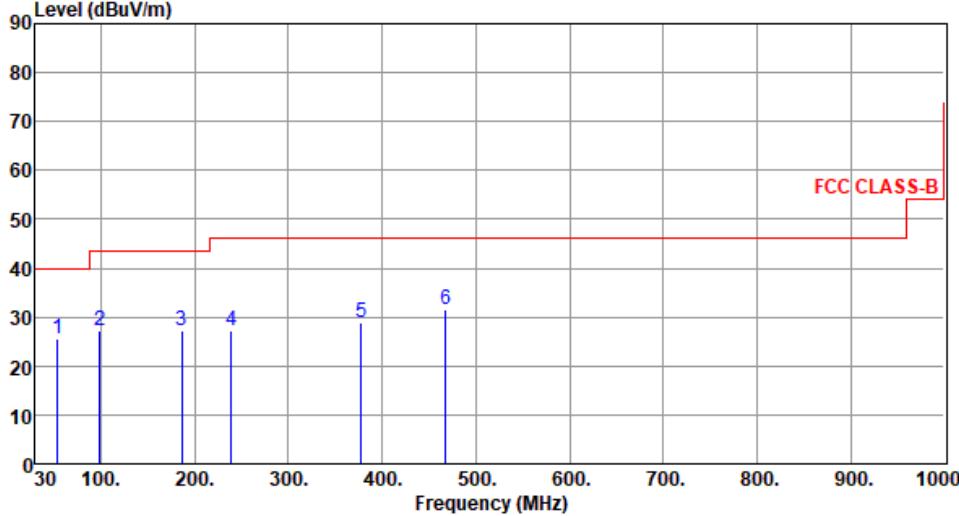Modulation Mode	$\pi/4$ -DQPSK	Test Freq. (MHz)	2441																																																																								
Polarization	Horizontal																																																																										
																																																																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left; padding-bottom: 2px;">Freq.</th> <th style="text-align: left; padding-bottom: 2px;">Emission</th> <th style="text-align: left; padding-bottom: 2px;">Limit</th> <th style="text-align: left; padding-bottom: 2px;">Margin</th> <th style="text-align: left; padding-bottom: 2px;">SA</th> <th style="text-align: left; padding-bottom: 2px;">Factor</th> <th style="text-align: left; padding-bottom: 2px;">Remark</th> <th style="text-align: left; padding-bottom: 2px;">ANT</th> <th style="text-align: left; padding-bottom: 2px;">Turn</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">level</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">reading</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td style="text-align: left;">1</td> <td style="text-align: left;">53.30</td> <td style="text-align: left;">25.46</td> <td style="text-align: left;">40.00</td> <td style="text-align: left;">-14.54</td> <td style="text-align: left;">33.89</td> <td style="text-align: left;">-8.43</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">---</td> </tr> <tr> <td style="text-align: left;">2</td> <td style="text-align: left;">98.79</td> <td style="text-align: left;">27.25</td> <td style="text-align: left;">43.50</td> <td style="text-align: left;">-16.25</td> <td style="text-align: left;">40.48</td> <td style="text-align: left;">-13.23</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">---</td> </tr> <tr> <td style="text-align: left;">3</td> <td style="text-align: left;">186.26</td> <td style="text-align: left;">27.31</td> <td style="text-align: left;">43.50</td> <td style="text-align: left;">-16.19</td> <td style="text-align: left;">38.12</td> <td style="text-align: left;">-10.81</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">---</td> </tr> <tr> <td style="text-align: left;">4</td> <td style="text-align: left;">239.49</td> <td style="text-align: left;">27.39</td> <td style="text-align: left;">46.00</td> <td style="text-align: left;">-18.61</td> <td style="text-align: left;">37.64</td> <td style="text-align: left;">-10.25</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">---</td> </tr> <tr> <td style="text-align: left;">5</td> <td style="text-align: left;">377.33</td> <td style="text-align: left;">28.84</td> <td style="text-align: left;">46.00</td> <td style="text-align: left;">-17.16</td> <td style="text-align: left;">34.84</td> <td style="text-align: left;">-6.00</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">---</td> </tr> <tr> <td style="text-align: left;">6</td> <td style="text-align: left;">467.55</td> <td style="text-align: left;">31.56</td> <td style="text-align: left;">46.00</td> <td style="text-align: left;">-14.44</td> <td style="text-align: left;">35.25</td> <td style="text-align: left;">-3.69</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">---</td> </tr> </tbody> </table>				Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dBuV/m	dB	reading				1	53.30	25.46	40.00	-14.54	33.89	-8.43	Peak	---	2	98.79	27.25	43.50	-16.25	40.48	-13.23	Peak	---	3	186.26	27.31	43.50	-16.19	38.12	-10.81	Peak	---	4	239.49	27.39	46.00	-18.61	37.64	-10.25	Peak	---	5	377.33	28.84	46.00	-17.16	34.84	-6.00	Peak	---	6	467.55	31.56	46.00	-14.44	35.25	-3.69	Peak	---
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																			
MHz	level	dBuV/m	dBuV/m	dB	reading																																																																						
1	53.30	25.46	40.00	-14.54	33.89	-8.43	Peak	---																																																																			
2	98.79	27.25	43.50	-16.25	40.48	-13.23	Peak	---																																																																			
3	186.26	27.31	43.50	-16.19	38.12	-10.81	Peak	---																																																																			
4	239.49	27.39	46.00	-18.61	37.64	-10.25	Peak	---																																																																			
5	377.33	28.84	46.00	-17.16	34.84	-6.00	Peak	---																																																																			
6	467.55	31.56	46.00	-14.44	35.25	-3.69	Peak	---																																																																			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																											

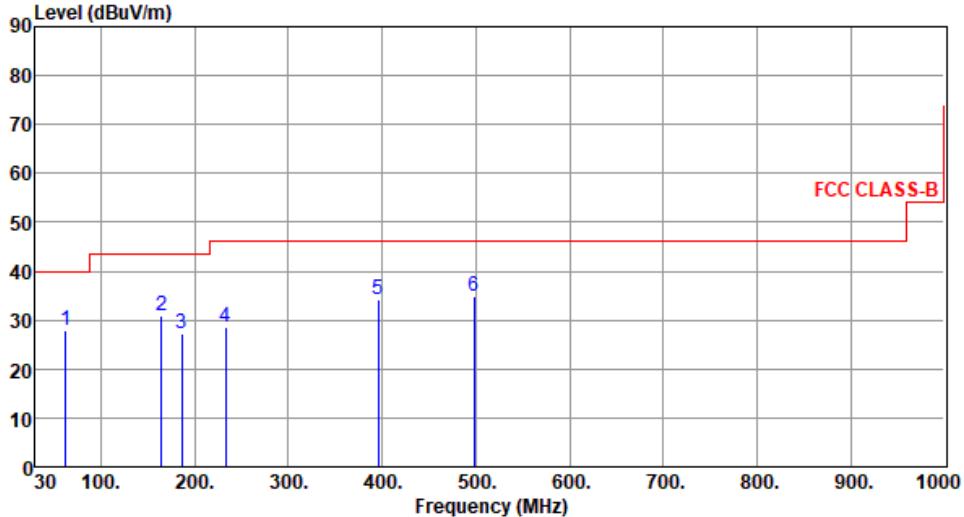Modulation Mode	$\pi/4$ -DQPSK	Test Freq. (MHz)	2441																																																																								
Polarization	Vertical																																																																										
																																																																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left; padding-bottom: 2px;">Freq.</th> <th style="text-align: left; padding-bottom: 2px;">Emission</th> <th style="text-align: left; padding-bottom: 2px;">Limit</th> <th style="text-align: left; padding-bottom: 2px;">Margin</th> <th style="text-align: left; padding-bottom: 2px;">SA</th> <th style="text-align: left; padding-bottom: 2px;">Factor</th> <th style="text-align: left; padding-bottom: 2px;">Remark</th> <th style="text-align: left; padding-bottom: 2px;">ANT</th> <th style="text-align: left; padding-bottom: 2px;">Turn</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">level</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">High</th> <th style="text-align: left;">Table</th> </tr> </thead> <tbody> <tr> <td style="text-align: left;">1</td> <td style="text-align: left;">62.26</td> <td style="text-align: left;">27.79</td> <td style="text-align: left;">40.00</td> <td style="text-align: left;">-12.21</td> <td style="text-align: left;">37.02</td> <td style="text-align: left;">-9.23</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">---</td> </tr> <tr> <td style="text-align: left;">2</td> <td style="text-align: left;">164.75</td> <td style="text-align: left;">30.85</td> <td style="text-align: left;">43.50</td> <td style="text-align: left;">-12.65</td> <td style="text-align: left;">39.46</td> <td style="text-align: left;">-8.61</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">---</td> </tr> <tr> <td style="text-align: left;">3</td> <td style="text-align: left;">186.26</td> <td style="text-align: left;">27.35</td> <td style="text-align: left;">43.50</td> <td style="text-align: left;">-16.15</td> <td style="text-align: left;">38.16</td> <td style="text-align: left;">-10.81</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">---</td> </tr> <tr> <td style="text-align: left;">4</td> <td style="text-align: left;">232.66</td> <td style="text-align: left;">28.49</td> <td style="text-align: left;">46.00</td> <td style="text-align: left;">-17.51</td> <td style="text-align: left;">39.66</td> <td style="text-align: left;">-11.17</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">---</td> </tr> <tr> <td style="text-align: left;">5</td> <td style="text-align: left;">395.54</td> <td style="text-align: left;">34.31</td> <td style="text-align: left;">46.00</td> <td style="text-align: left;">-11.69</td> <td style="text-align: left;">39.89</td> <td style="text-align: left;">-5.58</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">---</td> </tr> <tr> <td style="text-align: left;">6</td> <td style="text-align: left;">498.49</td> <td style="text-align: left;">34.85</td> <td style="text-align: left;">46.00</td> <td style="text-align: left;">-11.15</td> <td style="text-align: left;">37.99</td> <td style="text-align: left;">-3.14</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">---</td> </tr> </tbody> </table>				Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dBuV/m	dB	reading	dB	High	Table	1	62.26	27.79	40.00	-12.21	37.02	-9.23	Peak	---	2	164.75	30.85	43.50	-12.65	39.46	-8.61	Peak	---	3	186.26	27.35	43.50	-16.15	38.16	-10.81	Peak	---	4	232.66	28.49	46.00	-17.51	39.66	-11.17	Peak	---	5	395.54	34.31	46.00	-11.69	39.89	-5.58	Peak	---	6	498.49	34.85	46.00	-11.15	37.99	-3.14	Peak	---
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																			
MHz	level	dBuV/m	dBuV/m	dB	reading	dB	High	Table																																																																			
1	62.26	27.79	40.00	-12.21	37.02	-9.23	Peak	---																																																																			
2	164.75	30.85	43.50	-12.65	39.46	-8.61	Peak	---																																																																			
3	186.26	27.35	43.50	-16.15	38.16	-10.81	Peak	---																																																																			
4	232.66	28.49	46.00	-17.51	39.66	-11.17	Peak	---																																																																			
5	395.54	34.31	46.00	-11.69	39.89	-5.58	Peak	---																																																																			
6	498.49	34.85	46.00	-11.15	37.99	-3.14	Peak	---																																																																			
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.																																																																											

3.2.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK


Modulation	GFSK	Test Freq. (MHz)	2402																																																																												
Polarization	Horizontal																																																																														
<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission Limit</th> <th>Margin</th> <th>SA</th> <th>Factor</th> <th>Remark</th> <th>ANT</th> <th>Turn</th> </tr> <tr> <th>MHz</th> <th>level</th> <th>level</th> <th>reading</th> <th>reading</th> <th></th> <th>High</th> <th>Table</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2390.00</td> <td>39.42</td> <td>54.00</td> <td>-14.58</td> <td>42.24</td> <td>-2.82</td> <td>Average</td> <td>100</td> <td>288</td> </tr> <tr> <td>2</td> <td>2390.00</td> <td>49.50</td> <td>74.00</td> <td>-24.50</td> <td>52.32</td> <td>-2.82</td> <td>Peak</td> <td>100</td> <td>288</td> </tr> <tr> <td>3</td> <td>4804.00</td> <td>22.23</td> <td>54.00</td> <td>-31.77</td> <td>18.71</td> <td>3.52</td> <td>Average</td> <td>102</td> <td>147</td> </tr> <tr> <td>4</td> <td>4804.00</td> <td>52.33</td> <td>74.00</td> <td>-21.67</td> <td>48.81</td> <td>3.52</td> <td>Peak</td> <td>102</td> <td>147</td> </tr> <tr> <td>5</td> <td>12010.00</td> <td>27.21</td> <td>54.00</td> <td>-26.79</td> <td>13.41</td> <td>13.80</td> <td>Average</td> <td>100</td> <td>289</td> </tr> <tr> <td>6</td> <td>12010.00</td> <td>57.31</td> <td>74.00</td> <td>-16.69</td> <td>43.51</td> <td>13.80</td> <td>Peak</td> <td>100</td> <td>289</td> </tr> </tbody> </table>				Freq.	Emission Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	level	reading	reading		High	Table	1	2390.00	39.42	54.00	-14.58	42.24	-2.82	Average	100	288	2	2390.00	49.50	74.00	-24.50	52.32	-2.82	Peak	100	288	3	4804.00	22.23	54.00	-31.77	18.71	3.52	Average	102	147	4	4804.00	52.33	74.00	-21.67	48.81	3.52	Peak	102	147	5	12010.00	27.21	54.00	-26.79	13.41	13.80	Average	100	289	6	12010.00	57.31	74.00	-16.69	43.51	13.80	Peak	100	289
Freq.	Emission Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																								
MHz	level	level	reading	reading		High	Table																																																																								
1	2390.00	39.42	54.00	-14.58	42.24	-2.82	Average	100	288																																																																						
2	2390.00	49.50	74.00	-24.50	52.32	-2.82	Peak	100	288																																																																						
3	4804.00	22.23	54.00	-31.77	18.71	3.52	Average	102	147																																																																						
4	4804.00	52.33	74.00	-21.67	48.81	3.52	Peak	102	147																																																																						
5	12010.00	27.21	54.00	-26.79	13.41	13.80	Average	100	289																																																																						
6	12010.00	57.31	74.00	-16.69	43.51	13.80	Peak	100	289																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																															

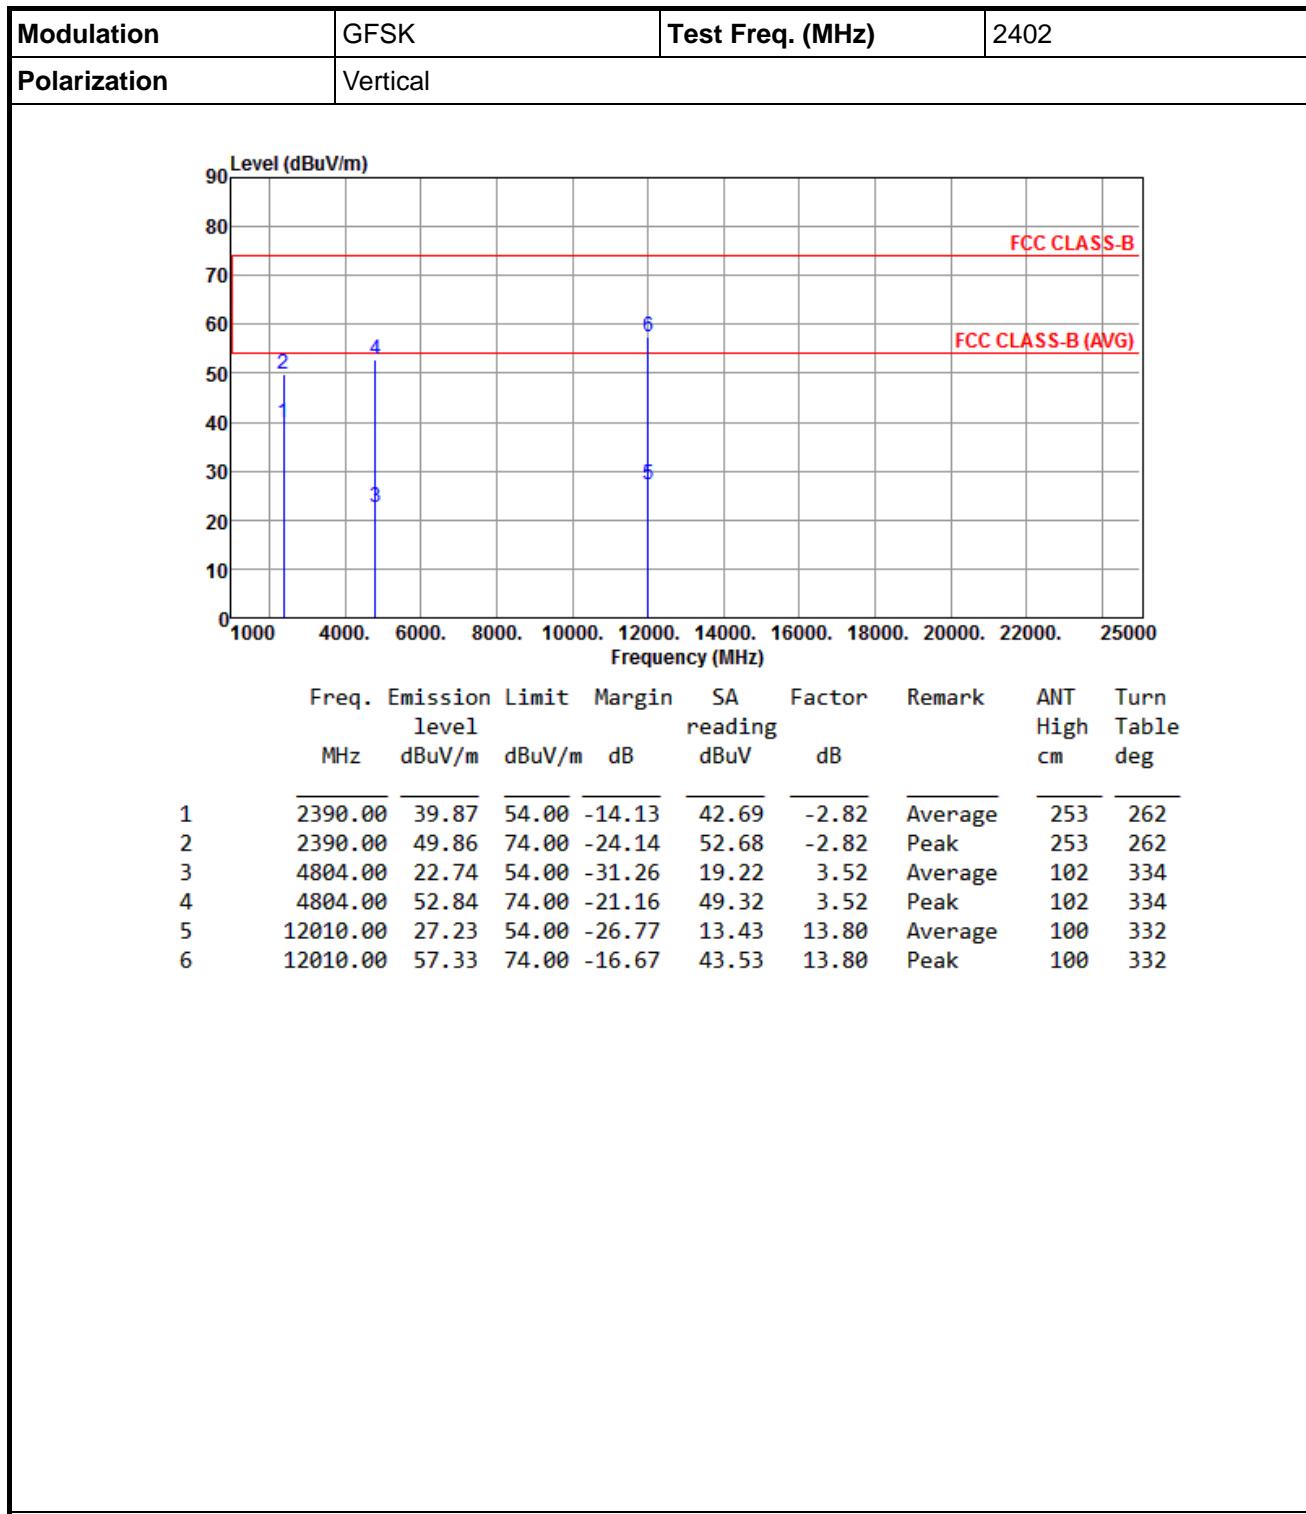

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

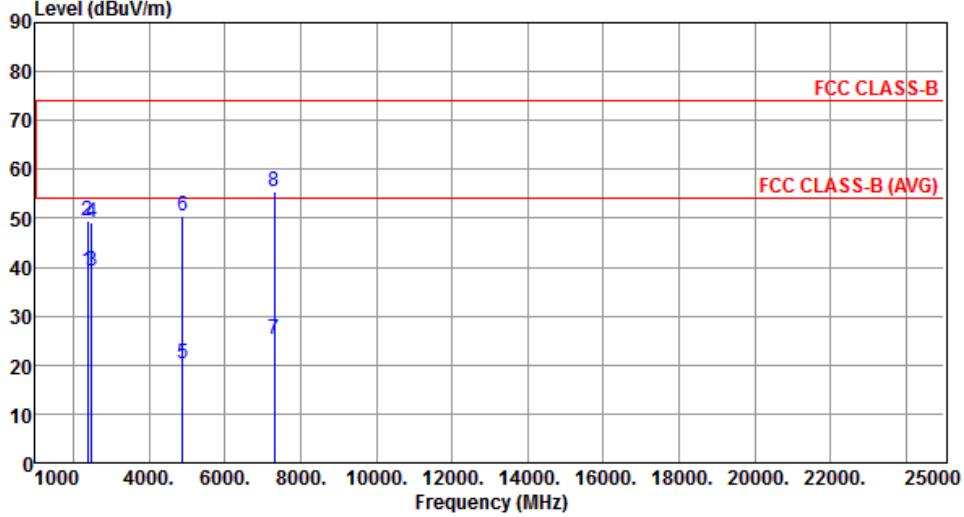Modulation	GFSK	Test Freq. (MHz)	2441																																																																																																		
Polarization	Horizontal																																																																																																				
																																																																																																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">Freq.</th> <th style="text-align: left;">Emission</th> <th style="text-align: left;">Limit</th> <th style="text-align: left;">Margin</th> <th style="text-align: left;">SA</th> <th style="text-align: left;">Factor</th> <th style="text-align: left;">Remark</th> <th style="text-align: left;">ANT</th> <th style="text-align: left;">Turn</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">level</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">dB</th> <th></th> <th style="text-align: left;">High</th> <th style="text-align: left;">Table</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2390.00</td> <td>39.32</td> <td>54.00</td> <td>-14.68</td> <td>42.14</td> <td>-2.82</td> <td>Average</td> <td>100</td> <td>282</td> </tr> <tr> <td>2</td> <td>2390.00</td> <td>49.40</td> <td>74.00</td> <td>-24.60</td> <td>52.22</td> <td>-2.82</td> <td>Peak</td> <td>100</td> <td>282</td> </tr> <tr> <td>3</td> <td>2483.50</td> <td>39.24</td> <td>54.00</td> <td>-14.76</td> <td>42.20</td> <td>-2.96</td> <td>Average</td> <td>100</td> <td>282</td> </tr> <tr> <td>4</td> <td>2483.50</td> <td>49.29</td> <td>74.00</td> <td>-24.71</td> <td>52.25</td> <td>-2.96</td> <td>Peak</td> <td>100</td> <td>282</td> </tr> <tr> <td>5</td> <td>4880.00</td> <td>20.35</td> <td>54.00</td> <td>-33.65</td> <td>16.76</td> <td>3.59</td> <td>Average</td> <td>100</td> <td>146</td> </tr> <tr> <td>6</td> <td>4880.00</td> <td>50.45</td> <td>74.00</td> <td>-23.55</td> <td>46.86</td> <td>3.59</td> <td>Peak</td> <td>100</td> <td>146</td> </tr> <tr> <td>7</td> <td>7320.00</td> <td>25.38</td> <td>54.00</td> <td>-28.62</td> <td>16.22</td> <td>9.16</td> <td>Average</td> <td>100</td> <td>289</td> </tr> <tr> <td>8</td> <td>7320.00</td> <td>55.48</td> <td>74.00</td> <td>-18.52</td> <td>46.32</td> <td>9.16</td> <td>Peak</td> <td>100</td> <td>289</td> </tr> </tbody> </table>				Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dB	reading	dB		High	Table	1	2390.00	39.32	54.00	-14.68	42.14	-2.82	Average	100	282	2	2390.00	49.40	74.00	-24.60	52.22	-2.82	Peak	100	282	3	2483.50	39.24	54.00	-14.76	42.20	-2.96	Average	100	282	4	2483.50	49.29	74.00	-24.71	52.25	-2.96	Peak	100	282	5	4880.00	20.35	54.00	-33.65	16.76	3.59	Average	100	146	6	4880.00	50.45	74.00	-23.55	46.86	3.59	Peak	100	146	7	7320.00	25.38	54.00	-28.62	16.22	9.16	Average	100	289	8	7320.00	55.48	74.00	-18.52	46.32	9.16	Peak	100	289
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																													
MHz	level	dBuV/m	dB	reading	dB		High	Table																																																																																													
1	2390.00	39.32	54.00	-14.68	42.14	-2.82	Average	100	282																																																																																												
2	2390.00	49.40	74.00	-24.60	52.22	-2.82	Peak	100	282																																																																																												
3	2483.50	39.24	54.00	-14.76	42.20	-2.96	Average	100	282																																																																																												
4	2483.50	49.29	74.00	-24.71	52.25	-2.96	Peak	100	282																																																																																												
5	4880.00	20.35	54.00	-33.65	16.76	3.59	Average	100	146																																																																																												
6	4880.00	50.45	74.00	-23.55	46.86	3.59	Peak	100	146																																																																																												
7	7320.00	25.38	54.00	-28.62	16.22	9.16	Average	100	289																																																																																												
8	7320.00	55.48	74.00	-18.52	46.32	9.16	Peak	100	289																																																																																												

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

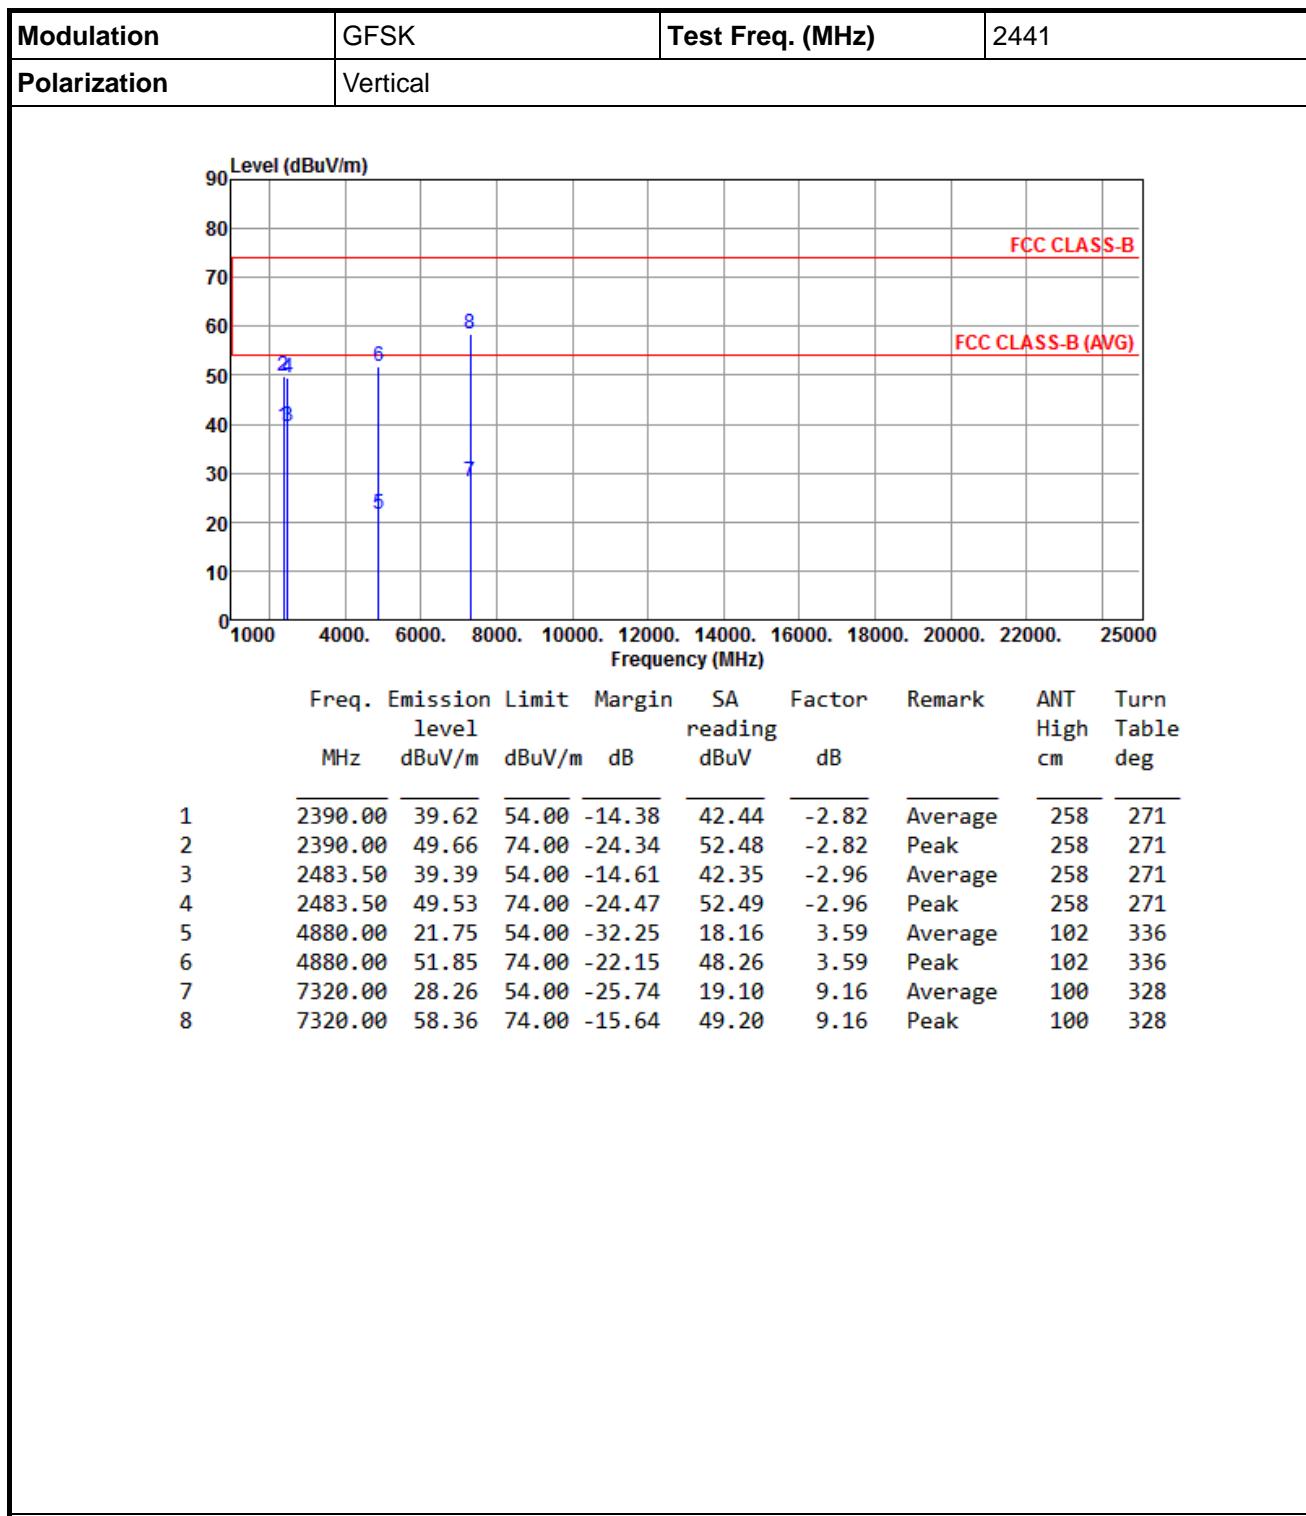

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

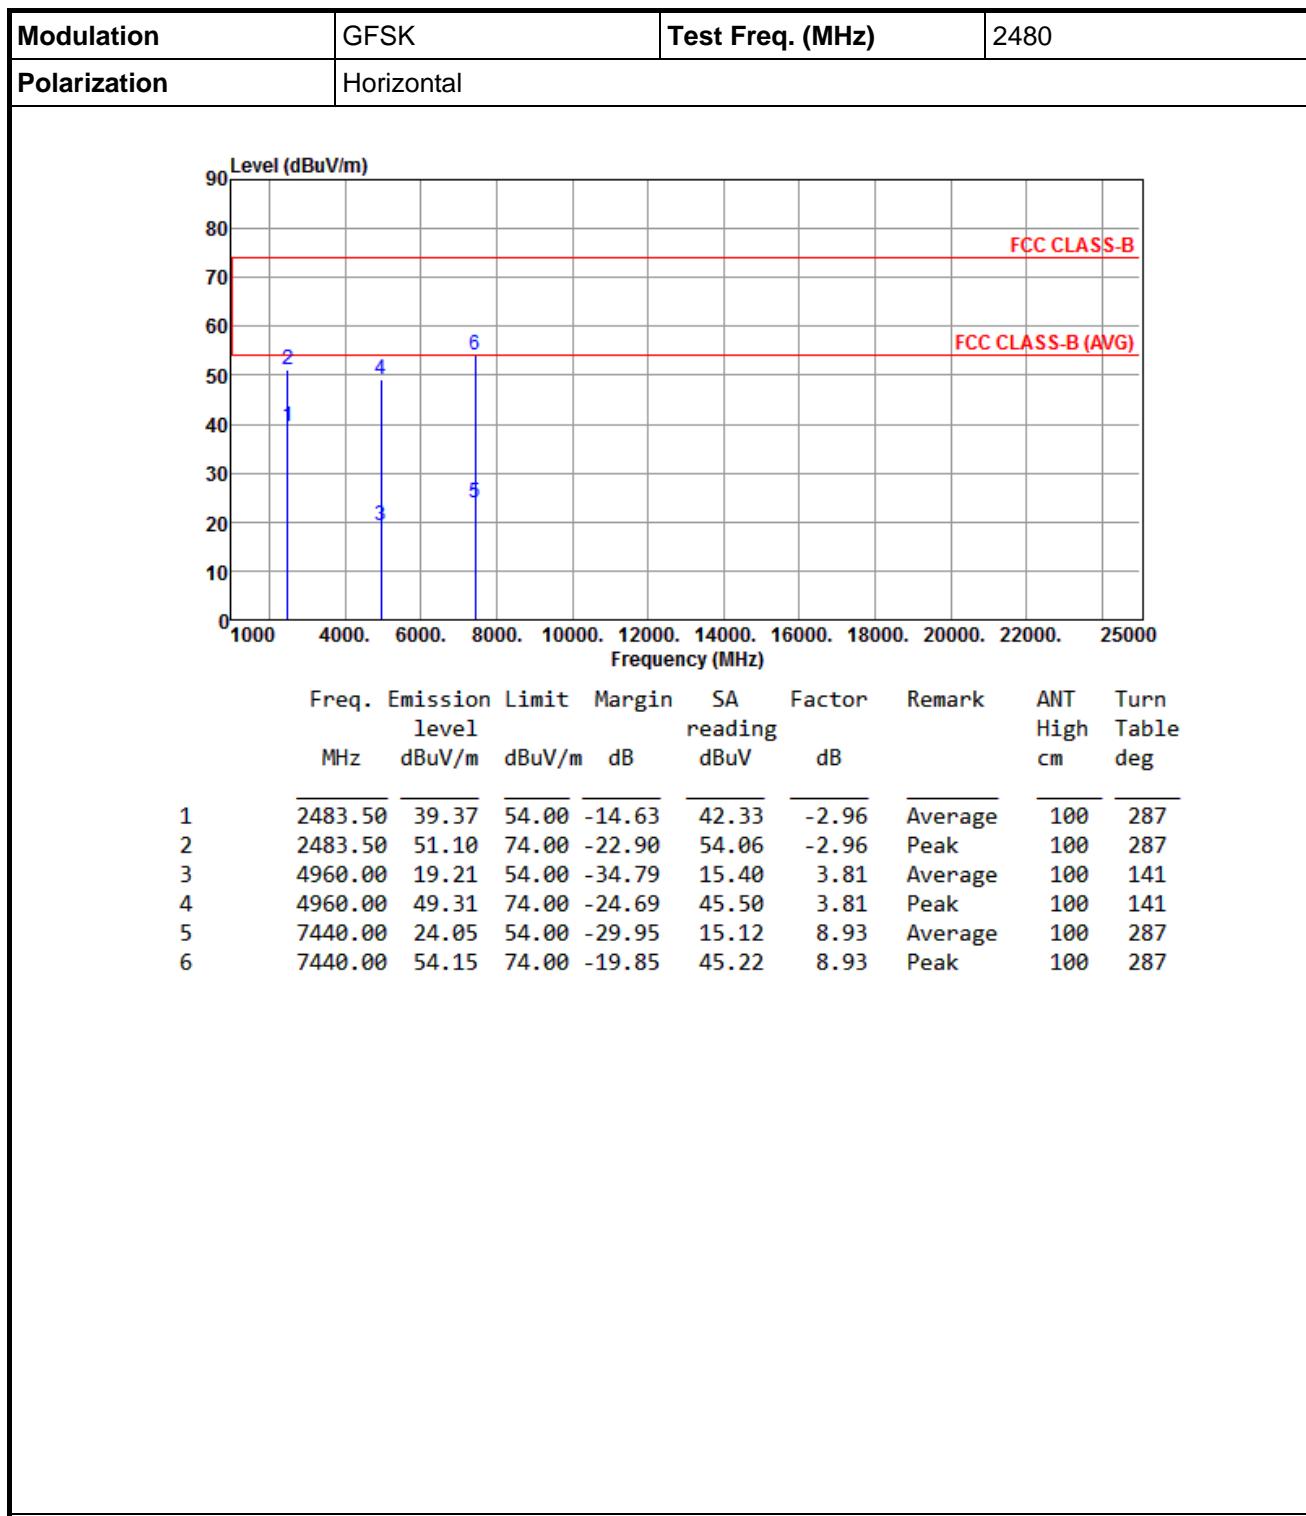

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

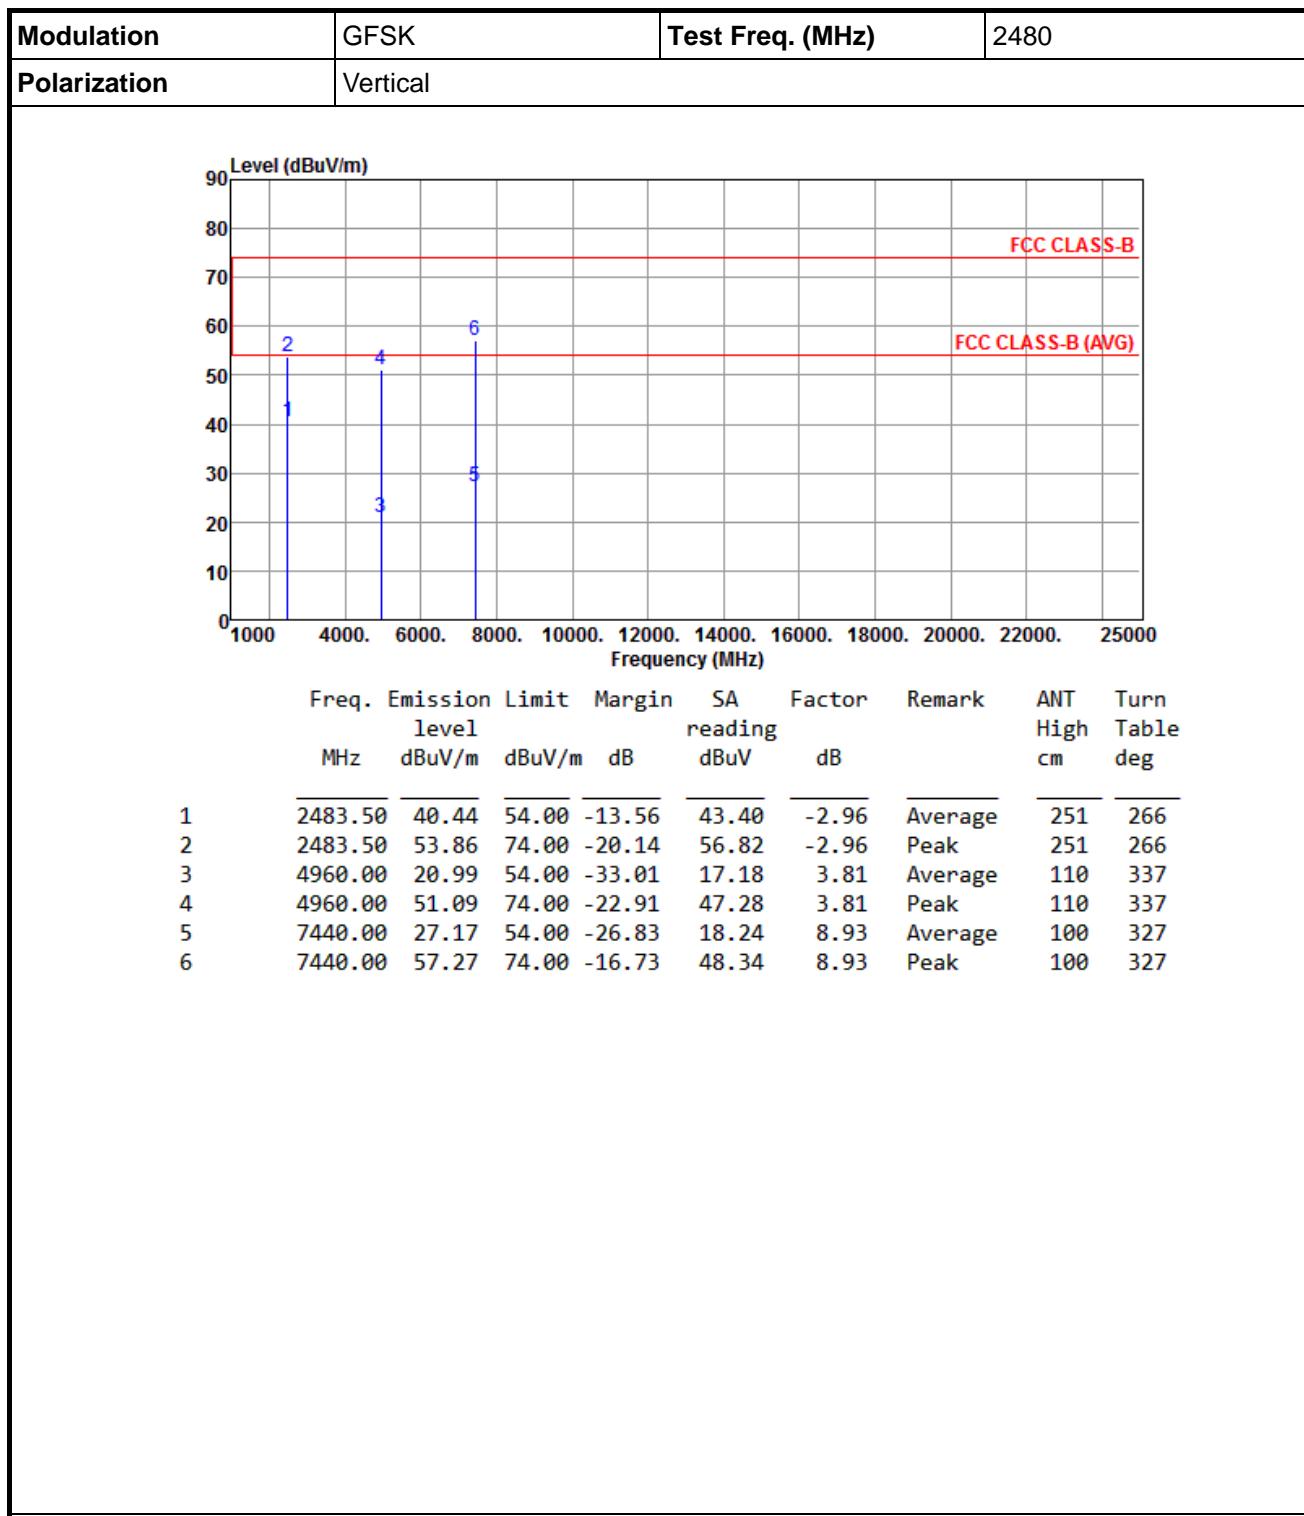


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.2.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for $\pi/4$ -DQPSK


Modulation	$\pi/4$ -DQPSK	Test Freq. (MHz)	2402																																																																										
Polarization	Horizontal																																																																												
<p>Graph showing Emission Level (dBuV/m) vs Frequency (MHz). The Y-axis ranges from 0 to 90 dBuV/m, and the X-axis ranges from 1000 to 25000 MHz. Six data points are plotted: 1 (2390.00 MHz, 39.56 dBuV/m), 2 (2390.00 MHz, 49.66 dBuV/m), 3 (4804.00 MHz, 19.04 dBuV/m), 4 (4804.00 MHz, 49.14 dBuV/m), 5 (12010.00 MHz, 27.25 dBuV/m), and 6 (12010.00 MHz, 57.35 dBuV/m). Two horizontal lines are shown: FCC CLASS-B (70 dBuV/m) and FCC CLASS-B (AVG) (54 dBuV/m).</p>																																																																													
<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission Limit</th> <th>Margin</th> <th>SA Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>level</th> <th>level</th> <th>reading</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2390.00</td> <td>39.56</td> <td>54.00</td> <td>-14.44</td> <td>42.36</td> <td>-2.80</td> <td>Average</td> <td>100</td> <td>265</td> </tr> <tr> <td>2</td> <td>2390.00</td> <td>49.66</td> <td>74.00</td> <td>-24.34</td> <td>52.46</td> <td>-2.80</td> <td>Peak</td> <td>100</td> <td>265</td> </tr> <tr> <td>3</td> <td>4804.00</td> <td>19.04</td> <td>54.00</td> <td>-34.96</td> <td>15.51</td> <td>3.53</td> <td>Average</td> <td>110</td> <td>151</td> </tr> <tr> <td>4</td> <td>4804.00</td> <td>49.14</td> <td>74.00</td> <td>-24.86</td> <td>45.61</td> <td>3.53</td> <td>Peak</td> <td>110</td> <td>151</td> </tr> <tr> <td>5</td> <td>12010.00</td> <td>27.25</td> <td>54.00</td> <td>-26.75</td> <td>13.53</td> <td>13.72</td> <td>Average</td> <td>100</td> <td>279</td> </tr> <tr> <td>6</td> <td>12010.00</td> <td>57.35</td> <td>74.00</td> <td>-16.65</td> <td>43.63</td> <td>13.72</td> <td>Peak</td> <td>100</td> <td>279</td> </tr> </tbody> </table>				Freq.	Emission Limit	Margin	SA Factor	Remark	ANT High	Turn Table	MHz	level	level	reading		cm	deg	1	2390.00	39.56	54.00	-14.44	42.36	-2.80	Average	100	265	2	2390.00	49.66	74.00	-24.34	52.46	-2.80	Peak	100	265	3	4804.00	19.04	54.00	-34.96	15.51	3.53	Average	110	151	4	4804.00	49.14	74.00	-24.86	45.61	3.53	Peak	110	151	5	12010.00	27.25	54.00	-26.75	13.53	13.72	Average	100	279	6	12010.00	57.35	74.00	-16.65	43.63	13.72	Peak	100	279
Freq.	Emission Limit	Margin	SA Factor	Remark	ANT High	Turn Table																																																																							
MHz	level	level	reading		cm	deg																																																																							
1	2390.00	39.56	54.00	-14.44	42.36	-2.80	Average	100	265																																																																				
2	2390.00	49.66	74.00	-24.34	52.46	-2.80	Peak	100	265																																																																				
3	4804.00	19.04	54.00	-34.96	15.51	3.53	Average	110	151																																																																				
4	4804.00	49.14	74.00	-24.86	45.61	3.53	Peak	110	151																																																																				
5	12010.00	27.25	54.00	-26.75	13.53	13.72	Average	100	279																																																																				
6	12010.00	57.35	74.00	-16.65	43.63	13.72	Peak	100	279																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor, cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																													

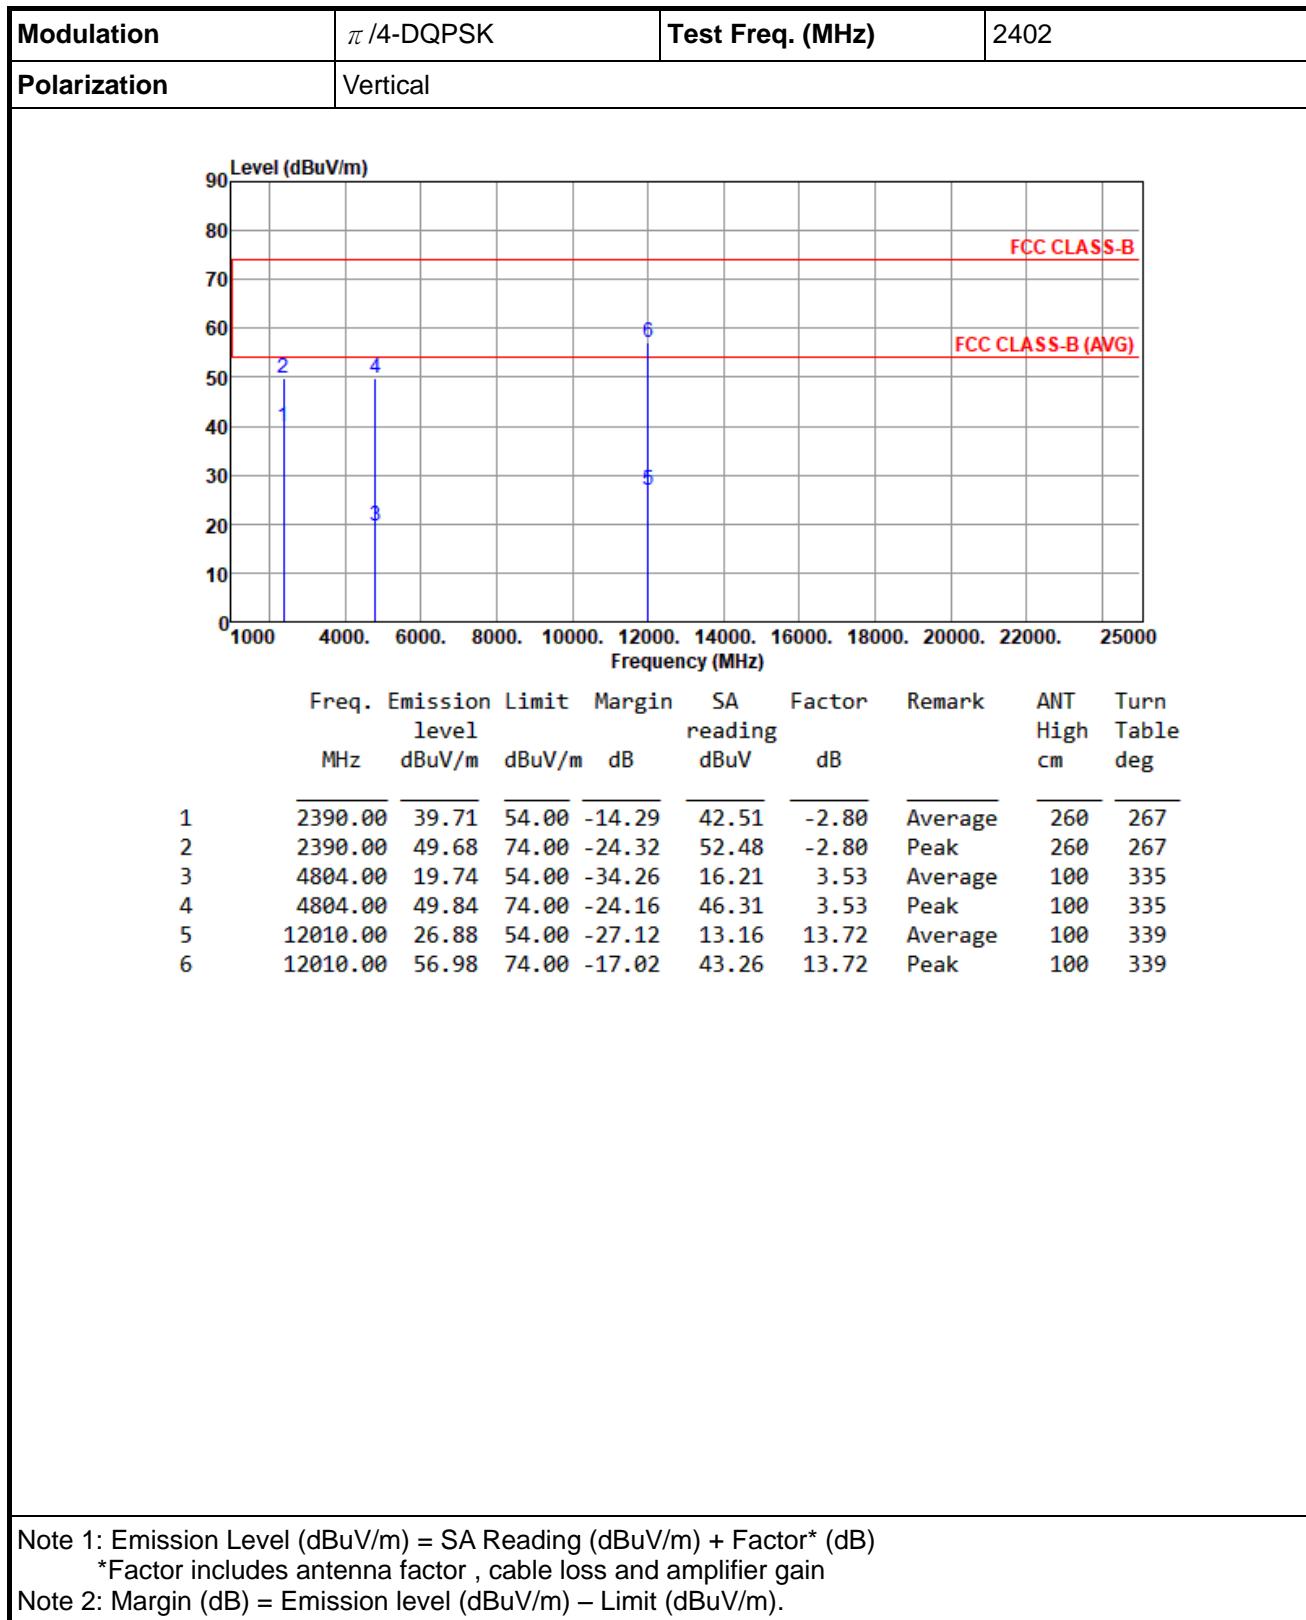

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

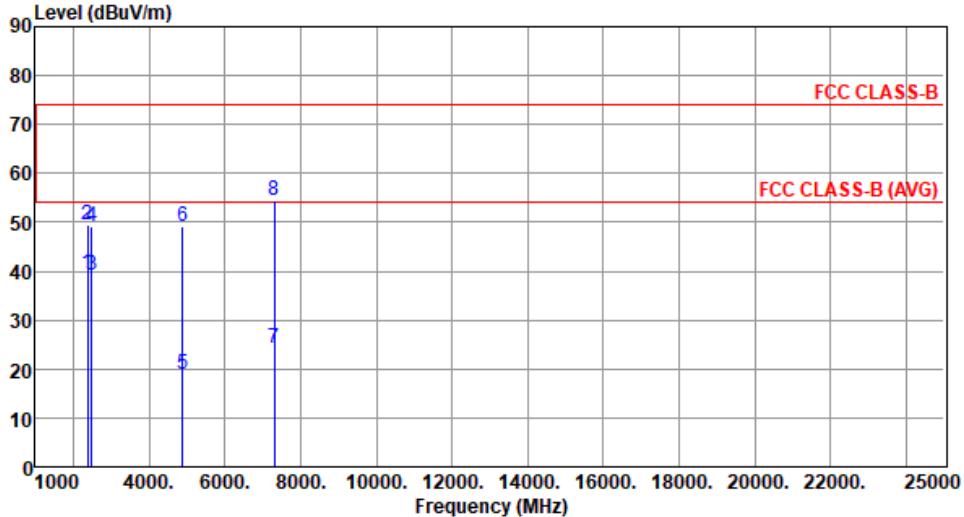
Modulation	$\pi/4$ -DQPSK	Test Freq. (MHz)	2441																																																																																																			
Polarization	Horizontal																																																																																																					
																																																																																																						
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">Freq.</th> <th style="text-align: left;">Emission</th> <th style="text-align: left;">Limit</th> <th style="text-align: left;">Margin</th> <th style="text-align: left;">SA</th> <th style="text-align: left;">Factor</th> <th style="text-align: left;">Remark</th> <th style="text-align: left;">ANT</th> <th style="text-align: left;">Turn</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">level</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">dBiV</th> <th style="text-align: left;">dBi</th> <th style="text-align: left;">High</th> <th style="text-align: left;">Table</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2390.00</td> <td>39.51</td> <td>54.00</td> <td>-14.49</td> <td>42.31</td> <td>-2.80</td> <td>Average</td> <td>100</td> <td>277</td> </tr> <tr> <td>2</td> <td>2390.00</td> <td>49.51</td> <td>74.00</td> <td>-24.49</td> <td>52.31</td> <td>-2.80</td> <td>Peak</td> <td>100</td> <td>277</td> </tr> <tr> <td>3</td> <td>2483.50</td> <td>39.23</td> <td>54.00</td> <td>-14.77</td> <td>42.26</td> <td>-3.03</td> <td>Average</td> <td>100</td> <td>277</td> </tr> <tr> <td>4</td> <td>2483.50</td> <td>49.29</td> <td>74.00</td> <td>-24.71</td> <td>52.32</td> <td>-3.03</td> <td>Peak</td> <td>100</td> <td>277</td> </tr> <tr> <td>5</td> <td>4880.00</td> <td>19.00</td> <td>54.00</td> <td>-35.00</td> <td>15.37</td> <td>3.63</td> <td>Average</td> <td>100</td> <td>151</td> </tr> <tr> <td>6</td> <td>4880.00</td> <td>49.10</td> <td>74.00</td> <td>-24.90</td> <td>45.47</td> <td>3.63</td> <td>Peak</td> <td>100</td> <td>151</td> </tr> <tr> <td>7</td> <td>7320.00</td> <td>24.33</td> <td>54.00</td> <td>-29.67</td> <td>15.11</td> <td>9.22</td> <td>Average</td> <td>100</td> <td>295</td> </tr> <tr> <td>8</td> <td>7320.00</td> <td>54.43</td> <td>74.00</td> <td>-19.57</td> <td>45.21</td> <td>9.22</td> <td>Peak</td> <td>100</td> <td>295</td> </tr> </tbody> </table>				Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dBuV/m	dB	reading	dBiV	dBi	High	Table	1	2390.00	39.51	54.00	-14.49	42.31	-2.80	Average	100	277	2	2390.00	49.51	74.00	-24.49	52.31	-2.80	Peak	100	277	3	2483.50	39.23	54.00	-14.77	42.26	-3.03	Average	100	277	4	2483.50	49.29	74.00	-24.71	52.32	-3.03	Peak	100	277	5	4880.00	19.00	54.00	-35.00	15.37	3.63	Average	100	151	6	4880.00	49.10	74.00	-24.90	45.47	3.63	Peak	100	151	7	7320.00	24.33	54.00	-29.67	15.11	9.22	Average	100	295	8	7320.00	54.43	74.00	-19.57	45.21	9.22	Peak	100	295
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																														
MHz	level	dBuV/m	dBuV/m	dB	reading	dBiV	dBi	High	Table																																																																																													
1	2390.00	39.51	54.00	-14.49	42.31	-2.80	Average	100	277																																																																																													
2	2390.00	49.51	74.00	-24.49	52.31	-2.80	Peak	100	277																																																																																													
3	2483.50	39.23	54.00	-14.77	42.26	-3.03	Average	100	277																																																																																													
4	2483.50	49.29	74.00	-24.71	52.32	-3.03	Peak	100	277																																																																																													
5	4880.00	19.00	54.00	-35.00	15.37	3.63	Average	100	151																																																																																													
6	4880.00	49.10	74.00	-24.90	45.47	3.63	Peak	100	151																																																																																													
7	7320.00	24.33	54.00	-29.67	15.11	9.22	Average	100	295																																																																																													
8	7320.00	54.43	74.00	-19.57	45.21	9.22	Peak	100	295																																																																																													


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

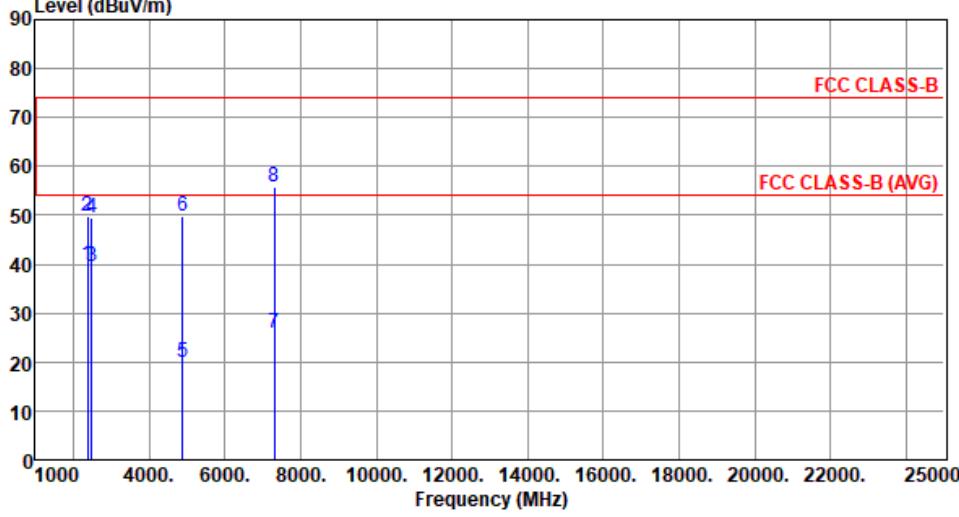Modulation	$\pi/4$ -DQPSK		Test Freq. (MHz)	2441																																																																																																											
Polarization	Vertical																																																																																																														
																																																																																																															
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">Freq.</th> <th style="text-align: left;">Emission</th> <th style="text-align: left;">Limit</th> <th style="text-align: left;">Margin</th> <th style="text-align: left;">SA</th> <th style="text-align: left;">Factor</th> <th style="text-align: left;">Remark</th> <th style="text-align: left;">ANT</th> <th style="text-align: left;">Turn</th> </tr> <tr> <th style="text-align: left;">level</th> <th style="text-align: left;">level</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">ANT</th> <th style="text-align: left;">High</th> <th style="text-align: left;">Table</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">dBuV</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">High</th> <th style="text-align: left;">cm</th> <th style="text-align: left;">deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2390.00</td> <td>39.81</td> <td>54.00</td> <td>-14.19</td> <td>42.61</td> <td>-2.80</td> <td>Average</td> <td>265</td> <td>278</td> </tr> <tr> <td>2</td> <td>2390.00</td> <td>49.66</td> <td>74.00</td> <td>-24.34</td> <td>52.46</td> <td>-2.80</td> <td>Peak</td> <td>265</td> <td>278</td> </tr> <tr> <td>3</td> <td>2483.50</td> <td>39.58</td> <td>54.00</td> <td>-14.42</td> <td>42.61</td> <td>-3.03</td> <td>Average</td> <td>265</td> <td>278</td> </tr> <tr> <td>4</td> <td>2483.50</td> <td>49.43</td> <td>74.00</td> <td>-24.57</td> <td>52.46</td> <td>-3.03</td> <td>Peak</td> <td>265</td> <td>278</td> </tr> <tr> <td>5</td> <td>4880.00</td> <td>19.85</td> <td>54.00</td> <td>-34.15</td> <td>16.22</td> <td>3.63</td> <td>Average</td> <td>105</td> <td>333</td> </tr> <tr> <td>6</td> <td>4880.00</td> <td>49.95</td> <td>74.00</td> <td>-24.05</td> <td>46.32</td> <td>3.63</td> <td>Peak</td> <td>105</td> <td>333</td> </tr> <tr> <td>7</td> <td>7320.00</td> <td>25.84</td> <td>54.00</td> <td>-28.16</td> <td>16.62</td> <td>9.22</td> <td>Average</td> <td>100</td> <td>325</td> </tr> <tr> <td>8</td> <td>7320.00</td> <td>55.94</td> <td>74.00</td> <td>-18.06</td> <td>46.72</td> <td>9.22</td> <td>Peak</td> <td>100</td> <td>325</td> </tr> </tbody> </table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	level	level	dBuV/m	dBuV/m	reading	reading	ANT	High	Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	High	cm	deg	1	2390.00	39.81	54.00	-14.19	42.61	-2.80	Average	265	278	2	2390.00	49.66	74.00	-24.34	52.46	-2.80	Peak	265	278	3	2483.50	39.58	54.00	-14.42	42.61	-3.03	Average	265	278	4	2483.50	49.43	74.00	-24.57	52.46	-3.03	Peak	265	278	5	4880.00	19.85	54.00	-34.15	16.22	3.63	Average	105	333	6	4880.00	49.95	74.00	-24.05	46.32	3.63	Peak	105	333	7	7320.00	25.84	54.00	-28.16	16.62	9.22	Average	100	325	8	7320.00	55.94	74.00	-18.06	46.72	9.22	Peak	100	325
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																							
level	level	dBuV/m	dBuV/m	reading	reading	ANT	High	Table																																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	High	cm	deg																																																																																																							
1	2390.00	39.81	54.00	-14.19	42.61	-2.80	Average	265	278																																																																																																						
2	2390.00	49.66	74.00	-24.34	52.46	-2.80	Peak	265	278																																																																																																						
3	2483.50	39.58	54.00	-14.42	42.61	-3.03	Average	265	278																																																																																																						
4	2483.50	49.43	74.00	-24.57	52.46	-3.03	Peak	265	278																																																																																																						
5	4880.00	19.85	54.00	-34.15	16.22	3.63	Average	105	333																																																																																																						
6	4880.00	49.95	74.00	-24.05	46.32	3.63	Peak	105	333																																																																																																						
7	7320.00	25.84	54.00	-28.16	16.62	9.22	Average	100	325																																																																																																						
8	7320.00	55.94	74.00	-18.06	46.72	9.22	Peak	100	325																																																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																																															

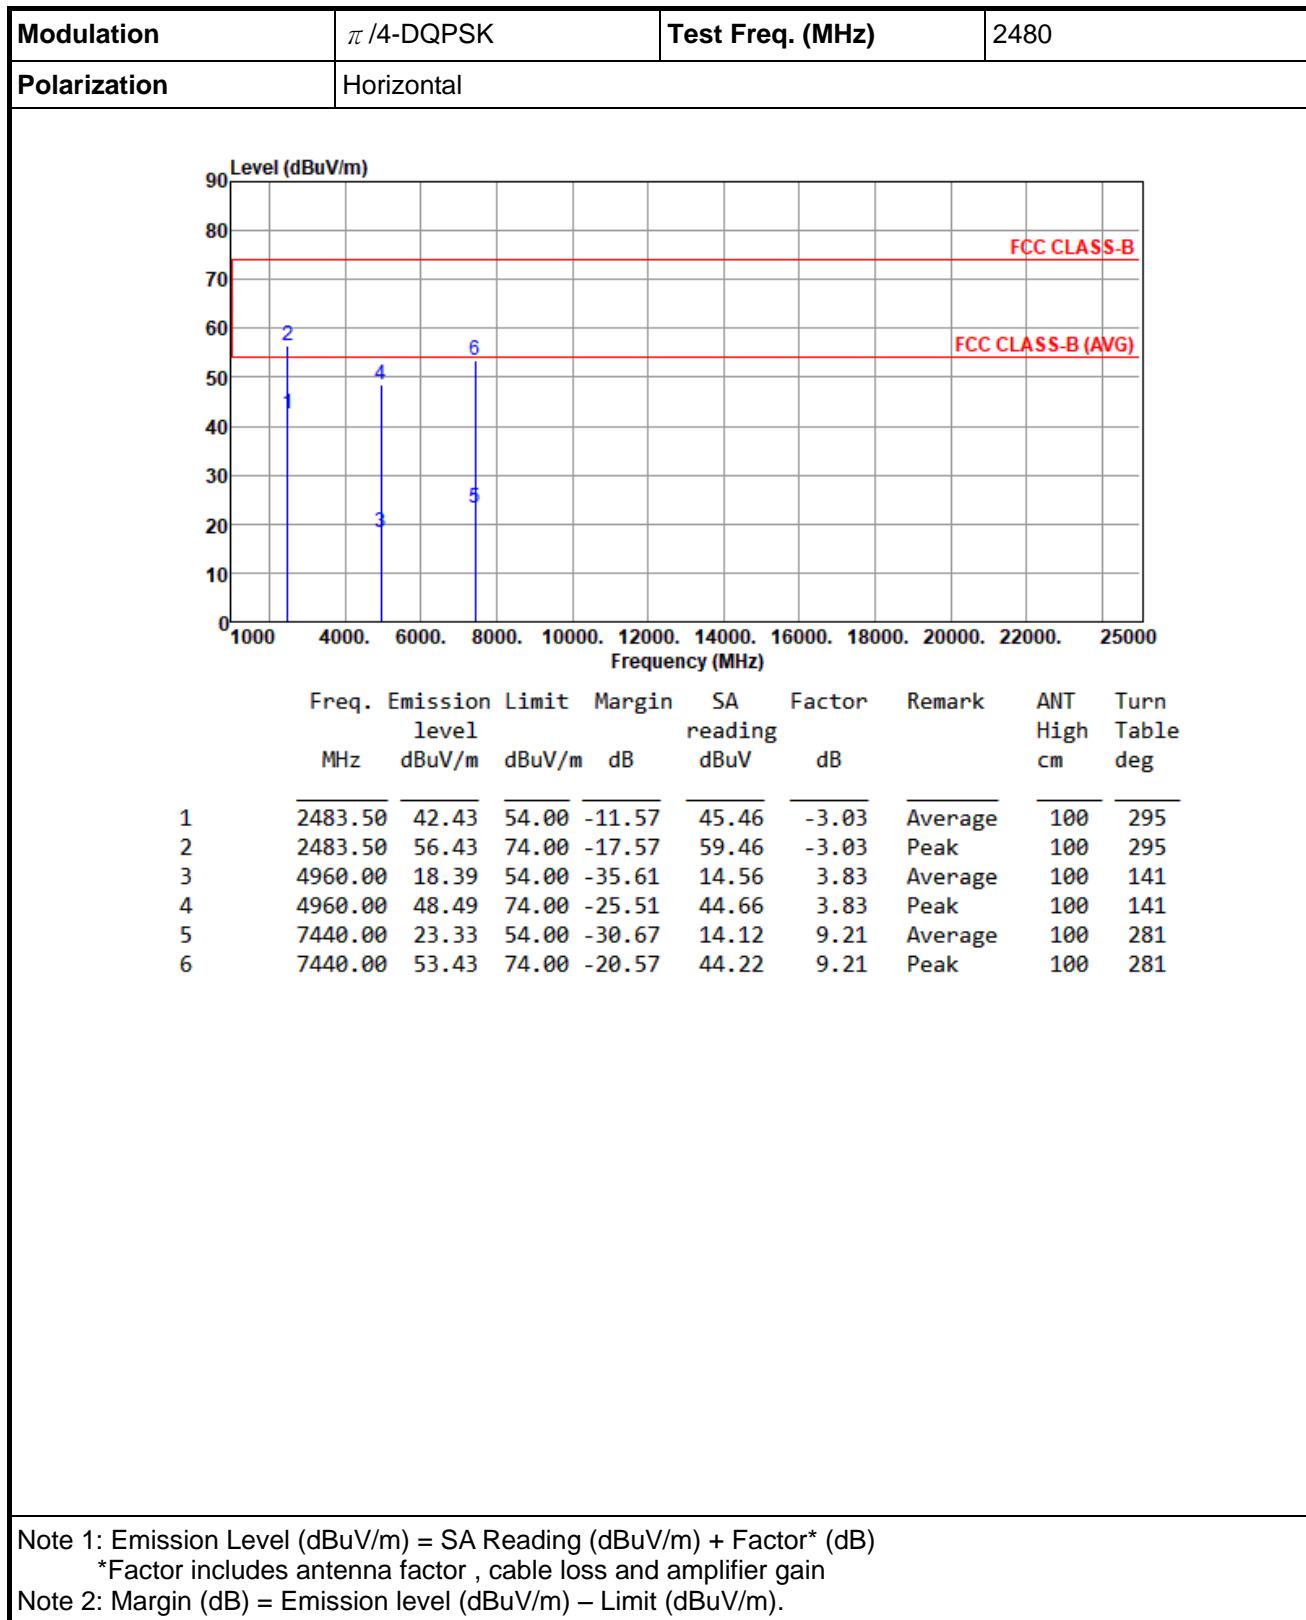

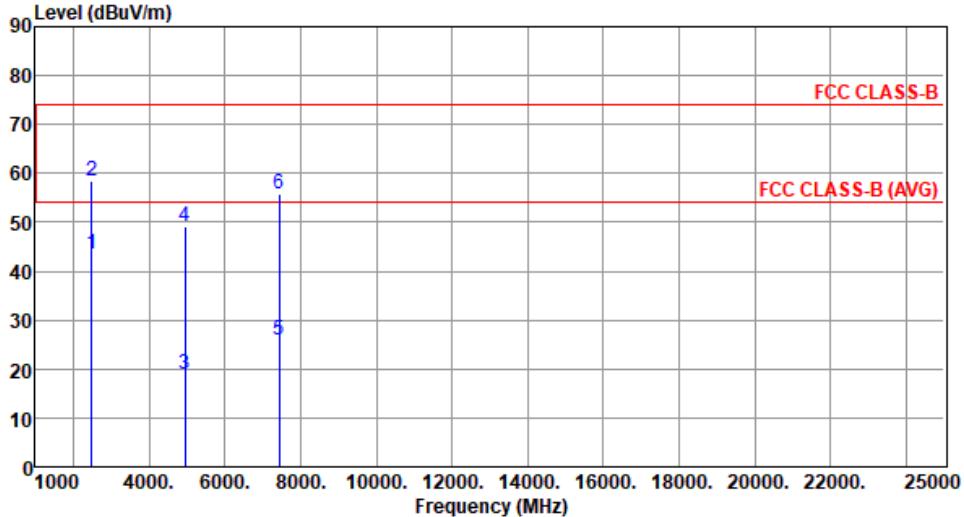Modulation	$\pi/4$ -DQPSK	Test Freq. (MHz)	2480																																																																																							
Polarization	Vertical																																																																																									
																																																																																										
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">Freq.</th> <th style="text-align: left;">Emission</th> <th style="text-align: left;">Limit</th> <th style="text-align: left;">Margin</th> <th style="text-align: left;">SA</th> <th style="text-align: left;">Factor</th> <th style="text-align: left;">Remark</th> <th style="text-align: left;">ANT</th> <th style="text-align: left;">Turn</th> </tr> <tr> <th style="text-align: left;">level</th> <th style="text-align: left;">level</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">dBuV</th> <th style="text-align: left;">dB</th> <th></th> <th style="text-align: left;">High</th> <th style="text-align: left;">Table</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">dBuV</th> <th style="text-align: left;">dB</th> <th></th> <th style="text-align: left;">cm</th> <th style="text-align: left;">deg</th> </tr> </thead> <tbody> <tr> <td style="text-align: left;">1</td> <td style="text-align: left;">2483.50</td> <td style="text-align: left;">43.55</td> <td style="text-align: left;">54.00</td> <td style="text-align: left;">-10.45</td> <td style="text-align: left;">46.58</td> <td style="text-align: left;">-3.03</td> <td style="text-align: left;">Average</td> <td style="text-align: left;">255</td> <td style="text-align: left;">261</td> </tr> <tr> <td style="text-align: left;">2</td> <td style="text-align: left;">2483.50</td> <td style="text-align: left;">58.61</td> <td style="text-align: left;">74.00</td> <td style="text-align: left;">-15.39</td> <td style="text-align: left;">61.64</td> <td style="text-align: left;">-3.03</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">255</td> <td style="text-align: left;">261</td> </tr> <tr> <td style="text-align: left;">3</td> <td style="text-align: left;">4960.00</td> <td style="text-align: left;">19.04</td> <td style="text-align: left;">54.00</td> <td style="text-align: left;">-34.96</td> <td style="text-align: left;">15.21</td> <td style="text-align: left;">3.83</td> <td style="text-align: left;">Average</td> <td style="text-align: left;">105</td> <td style="text-align: left;">333</td> </tr> <tr> <td style="text-align: left;">4</td> <td style="text-align: left;">4960.00</td> <td style="text-align: left;">49.14</td> <td style="text-align: left;">74.00</td> <td style="text-align: left;">-24.86</td> <td style="text-align: left;">45.31</td> <td style="text-align: left;">3.83</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">102</td> <td style="text-align: left;">333</td> </tr> <tr> <td style="text-align: left;">5</td> <td style="text-align: left;">7440.00</td> <td style="text-align: left;">25.76</td> <td style="text-align: left;">54.00</td> <td style="text-align: left;">-28.24</td> <td style="text-align: left;">16.55</td> <td style="text-align: left;">9.21</td> <td style="text-align: left;">Average</td> <td style="text-align: left;">100</td> <td style="text-align: left;">330</td> </tr> <tr> <td style="text-align: left;">6</td> <td style="text-align: left;">7440.00</td> <td style="text-align: left;">55.86</td> <td style="text-align: left;">74.00</td> <td style="text-align: left;">-18.14</td> <td style="text-align: left;">46.65</td> <td style="text-align: left;">9.21</td> <td style="text-align: left;">Peak</td> <td style="text-align: left;">100</td> <td style="text-align: left;">330</td> </tr> </tbody> </table>				Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	level	level	reading	reading	dBuV	dB		High	Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	2483.50	43.55	54.00	-10.45	46.58	-3.03	Average	255	261	2	2483.50	58.61	74.00	-15.39	61.64	-3.03	Peak	255	261	3	4960.00	19.04	54.00	-34.96	15.21	3.83	Average	105	333	4	4960.00	49.14	74.00	-24.86	45.31	3.83	Peak	102	333	5	7440.00	25.76	54.00	-28.24	16.55	9.21	Average	100	330	6	7440.00	55.86	74.00	-18.14	46.65	9.21	Peak	100	330
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																		
level	level	reading	reading	dBuV	dB		High	Table																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																																																		
1	2483.50	43.55	54.00	-10.45	46.58	-3.03	Average	255	261																																																																																	
2	2483.50	58.61	74.00	-15.39	61.64	-3.03	Peak	255	261																																																																																	
3	4960.00	19.04	54.00	-34.96	15.21	3.83	Average	105	333																																																																																	
4	4960.00	49.14	74.00	-24.86	45.31	3.83	Peak	102	333																																																																																	
5	7440.00	25.76	54.00	-28.24	16.55	9.21	Average	100	330																																																																																	
6	7440.00	55.86	74.00	-18.14	46.65	9.21	Peak	100	330																																																																																	

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.3 Unwanted Emissions into Non-Restricted Frequency Bands

3.3.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.3.2 Test Procedures


Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level


Emission level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

3.3.3 Test Setup

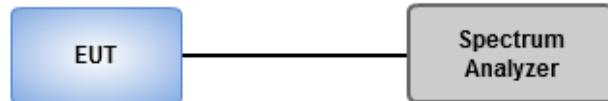


3.3.4 Unwanted Emissions into Non-Restricted Frequency Bands

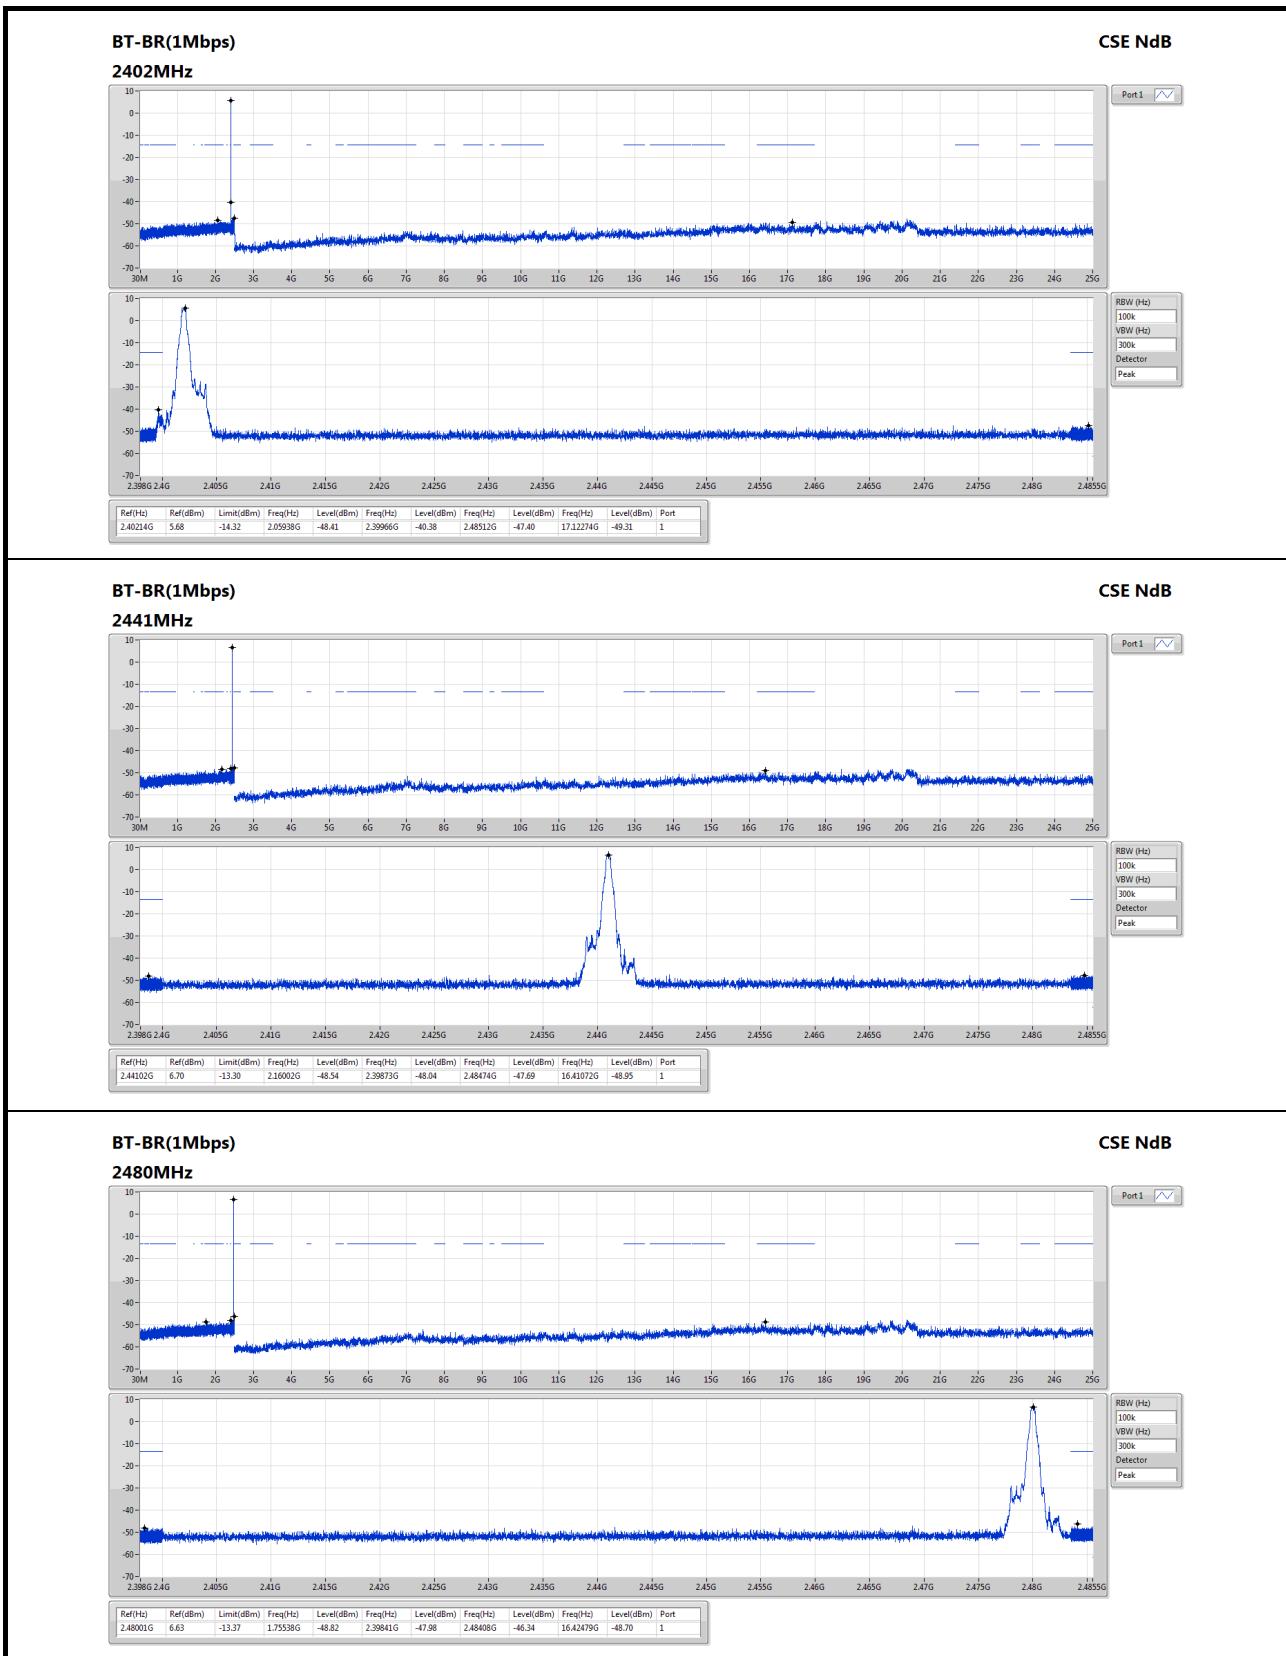

BT-EDR(2Mbps)

2402MHz


CSE NdB

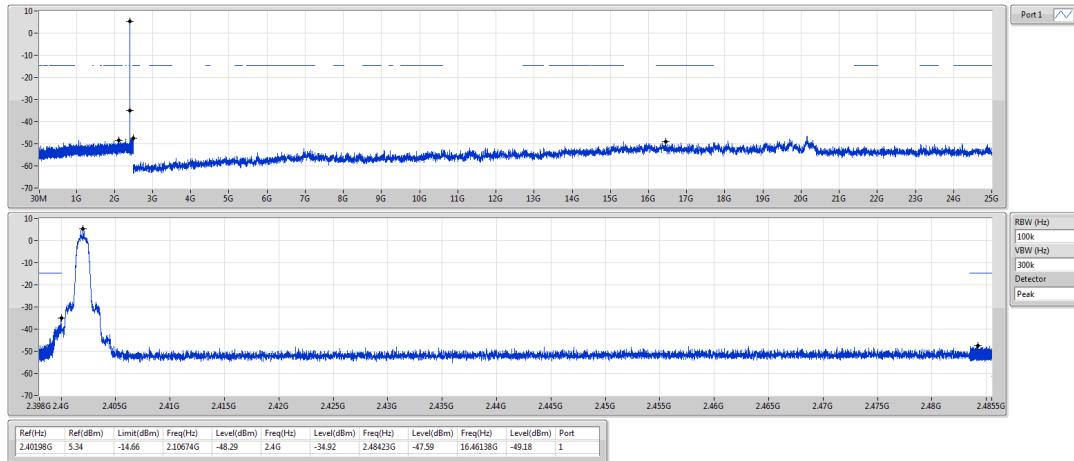

BT-EDR(2Mbps)

2441MHz


CSE NdB

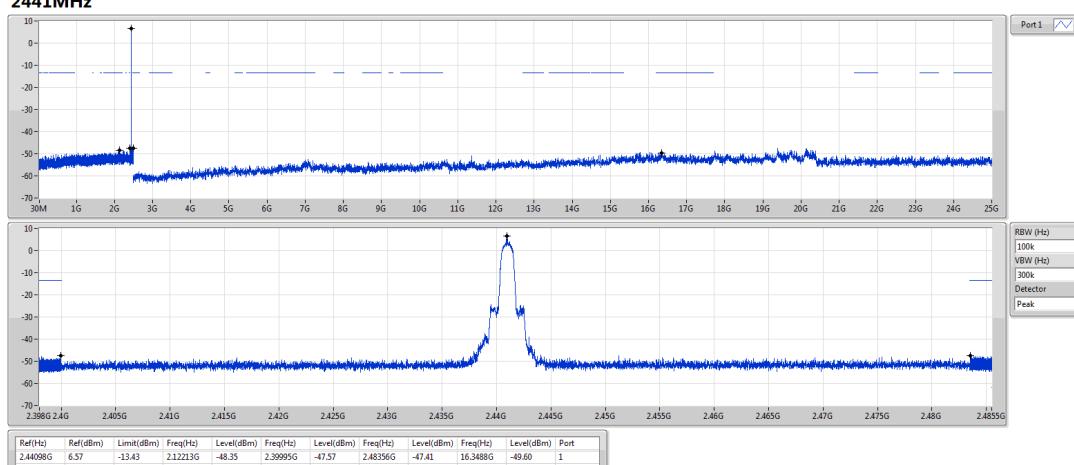

BT-EDR(2Mbps)

2480MHz


CSE NdB

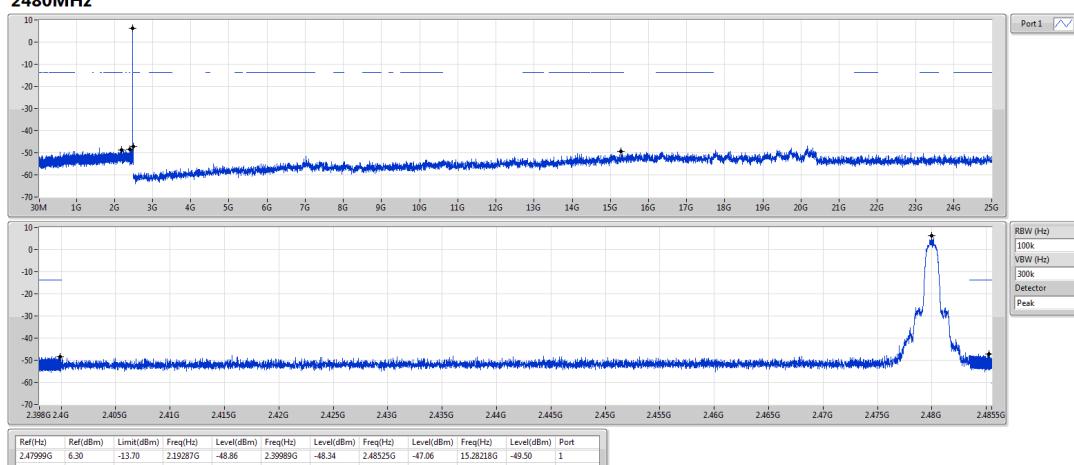

BT-BR(1Mbps)

2441MHz


Hopping Ch Bandedge (Non-restricted Band)

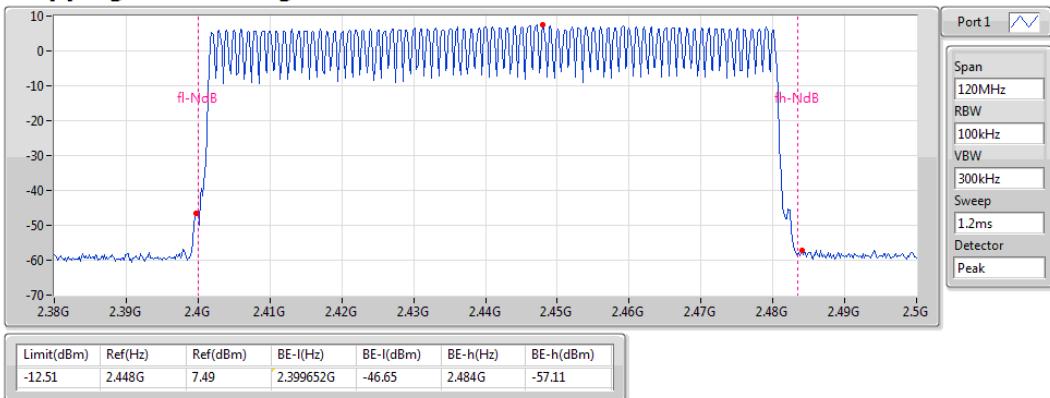

BT-EDR(2Mbps)

2441MHz

Hopping Ch Bandedge (Non-restricted Band)

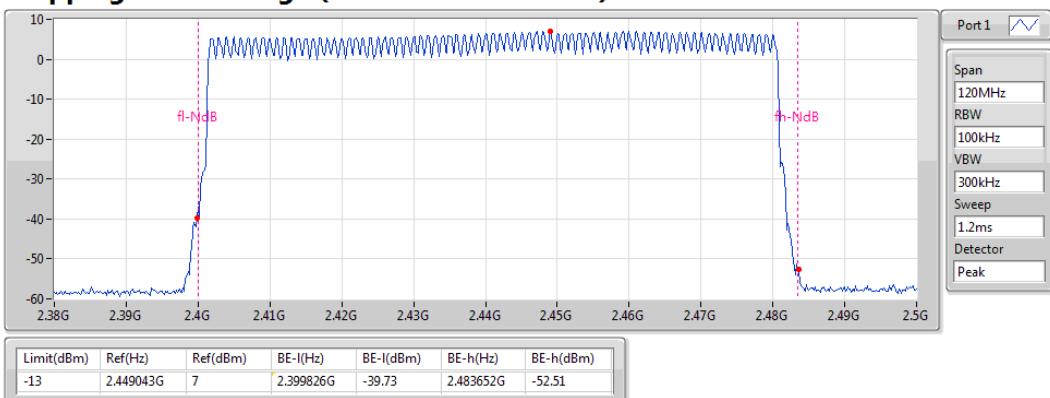

3.4 Conducted Output Power

3.4.1 Limit of Conducted Output Power

- 1 Watt
For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band.
- 0.125 Watt
For all other frequency hopping systems in the 2400–2483.5 MHz band.
- 0.125 Watt
For Frequency hopping systems operating in the 2400–2483.5 MHz band have hopping channel carrier frequencies that are separated by two-thirds of the 20 dB bandwidth of the hopping channel.

3.4.2 Test Procedures

1. A wideband power meter is used for power measurement. Bandwidth of power sensor and meter is 50MHz
2. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power

3.4.3 Test Setup



3.4.4 Test Result of Conducted Output Power

Summary of Peak Conducted Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	7.96	0.00625
BT-EDR(2Mbps)	8.01	0.00632

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	3.70	6.18	21.00
2441MHz	Pass	3.70	7.96	21.00
2480MHz	Pass	3.70	7.57	21.00
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	3.70	6.51	21.00
2441MHz	Pass	3.70	8.01	21.00
2480MHz	Pass	3.70	7.75	21.00

Summary of Conducted (Average) Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	7.69	0.00587
BT-EDR(2Mbps)	6.12	0.00409

Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	3.70	5.80	-
2441MHz	Pass	3.70	7.69	-
2480MHz	Pass	3.70	7.24	-
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	3.70	4.31	-
2441MHz	Pass	3.70	6.12	-
2480MHz	Pass	3.70	5.65	-

Note: Average power is for reference only.

3.5 Number of Hopping Frequency


3.5.1 Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

3.5.2 Test Procedures

1. Set RBW = 100kHz, VBW = 300kHz, Sweep time = Auto, Detector = Peak Trace max hold.
2. Allow trace to stabilize.

3.5.3 Test Setup

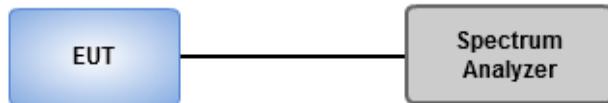



3.5.4 Test Result of Number of Hopping Frequency

Summary

Mode	Max-Hop No
2.4-2.4835GHz	-
BT-BR(1Mbps)	79
BT-EDR(2Mbps)	79

Result

Mode	Result	Hopping No	Limit
BT-BR(1Mbps)	-	-	-
2441MHz	Pass	79	15
BT-EDR(2Mbps)	-	-	-
2441MHz	Pass	79	15

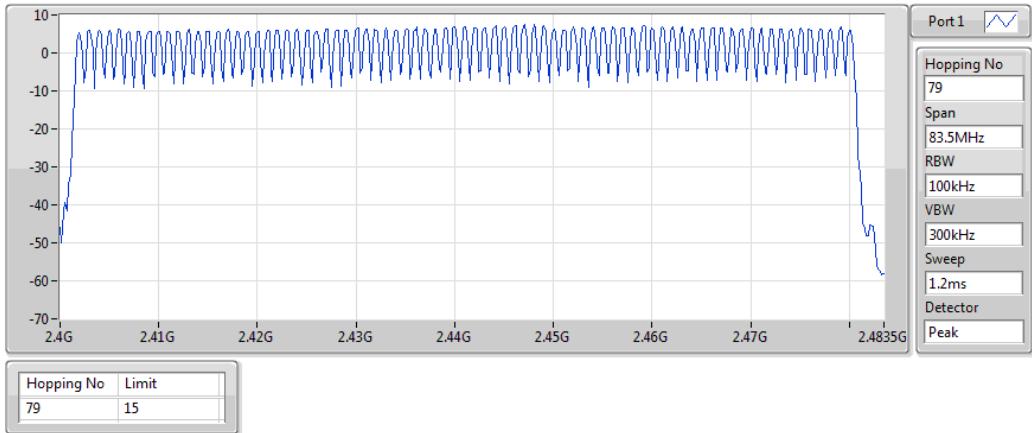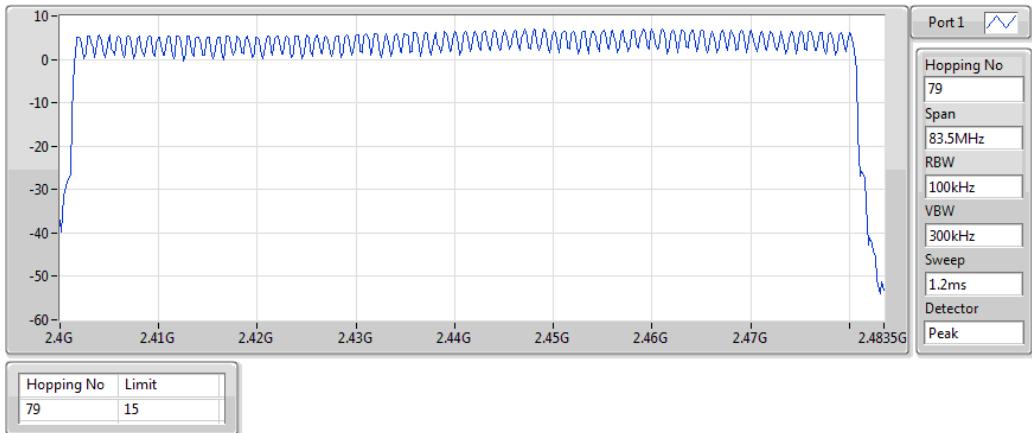BT-BR(1Mbps)**2441MHz****BT-EDR(2Mbps)****2441MHz**

3.6 20dB and Occupied Bandwidth

3.6.1 Test Procedures


20dB Bandwidth

1. Set RBW=10kHz VBW= 30kHz for BT BR mode, RBW=20kHz, VBW=100kHz for other modes, Sweep time = Auto, Detector=Peak , Trace max hold
2. Allow trace to stabilize
3. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

Occupied Bandwidth

1. Set RBW=10kHz VBW= 30kHz for BT BR mode, RBW=20kHz, VBW=100kHz for other modes, Sweep time = Auto, Detector=Sample , Trace max hold
2. Allow trace to stabilize
3. Use Occupied bandwidth function of spectrum analyzer to measuring 99% occupied bandwidth

3.6.2 Test Setup

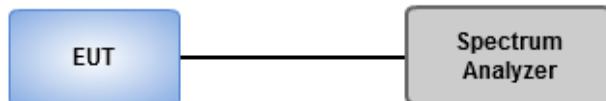

3.6.3 Test result of 20dB and Occupied Bandwidth

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-BR(1Mbps)	920.29k	868.307k	868KF1D	920.29k	864.689k
BT-EDR(2Mbps)	1.373M	1.216M	1M22G1D	1.268M	1.19M

Max-N dB = Maximum20dB downbandwidth; **Max-OBW** = Maximum99% occupied bandwidth;

Min-N dB = Minimum20dB downbandwidth; **Min-OBW** = Minimum99% occupied bandwidth;


Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-BR(1Mbps)	-	-	-	-
2402MHz	Pass	Inf	920.29k	864.689k
2441MHz	Pass	Inf	920.29k	868.307k
2480MHz	Pass	Inf	920.29k	868.307k
BT-EDR(2Mbps)	-	-	-	-
2402MHz	Pass	Inf	1.268M	1.198M
2441MHz	Pass	Inf	1.373M	1.19M
2480MHz	Pass	Inf	1.344M	1.216M

Port X-N dB = Port X20dB downbandwidth; **Port X-OBW** = Port X99% occupied bandwidth;

BT-BR(1Mbps)


2402MHz

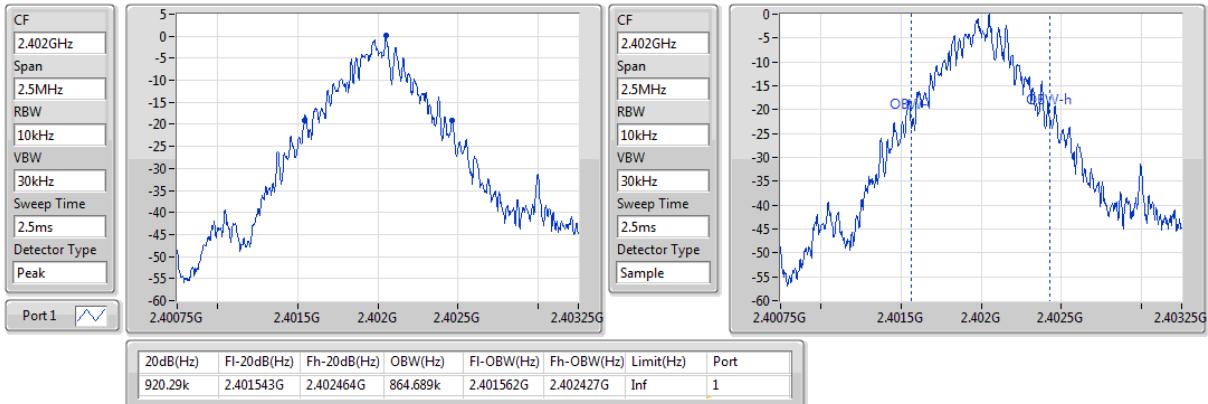

EBW

BT-BR(1Mbps)


2441MHz

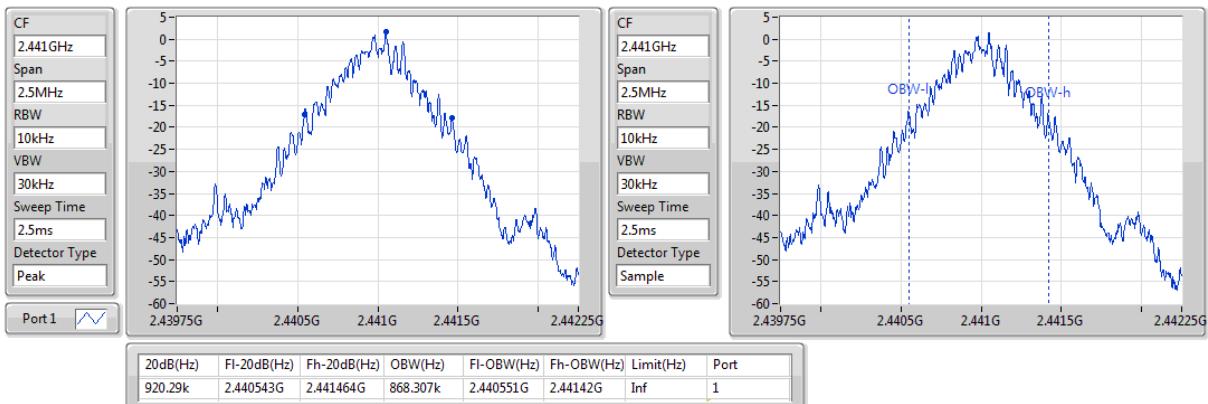

EBW

BT-BR(1Mbps)

2480MHz

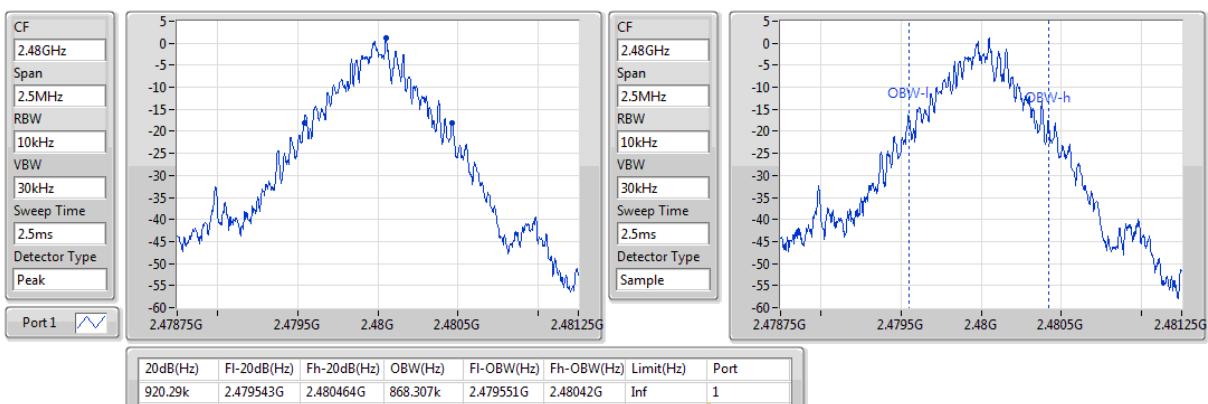


EBW

BT-EDR(2Mbps)

EBW


2402MHz

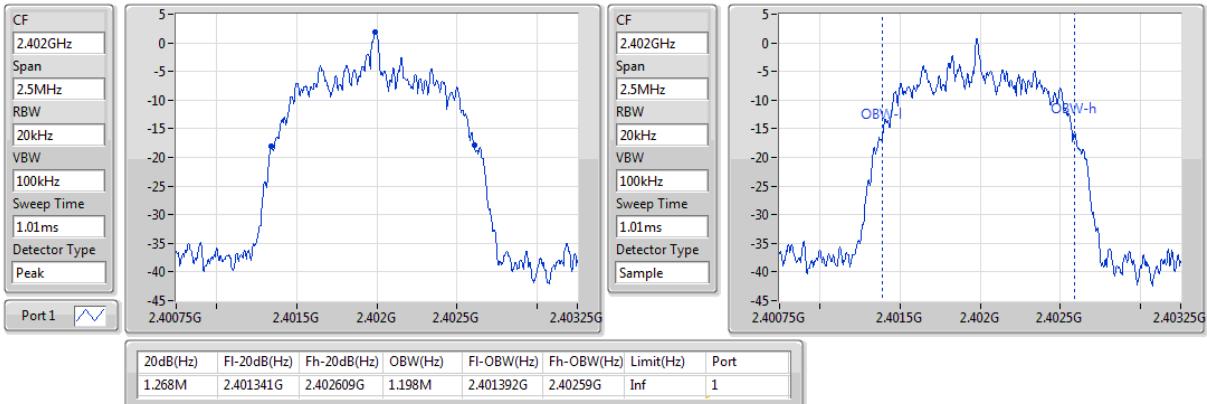

BT-EDR(2Mbps)

EBW


2441MHz

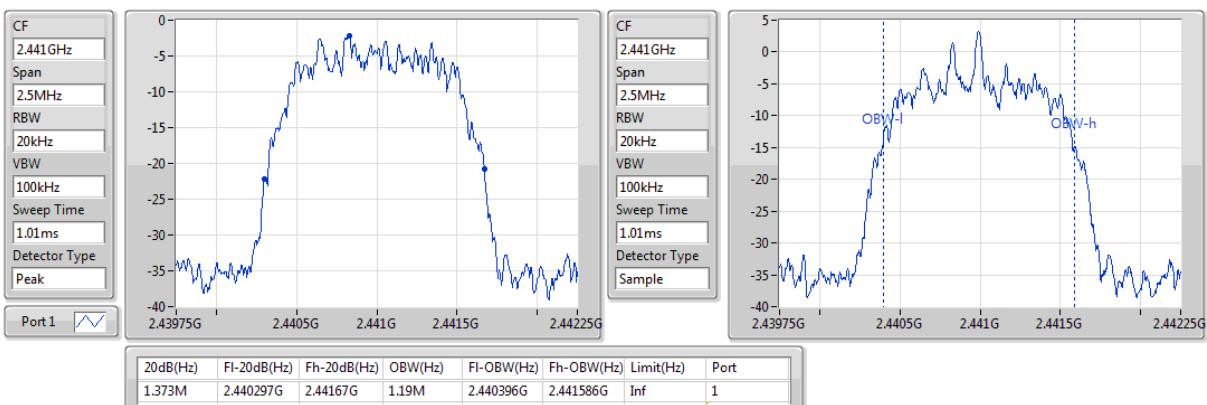

BT-EDR(2Mbps)

EBW

2480MHz

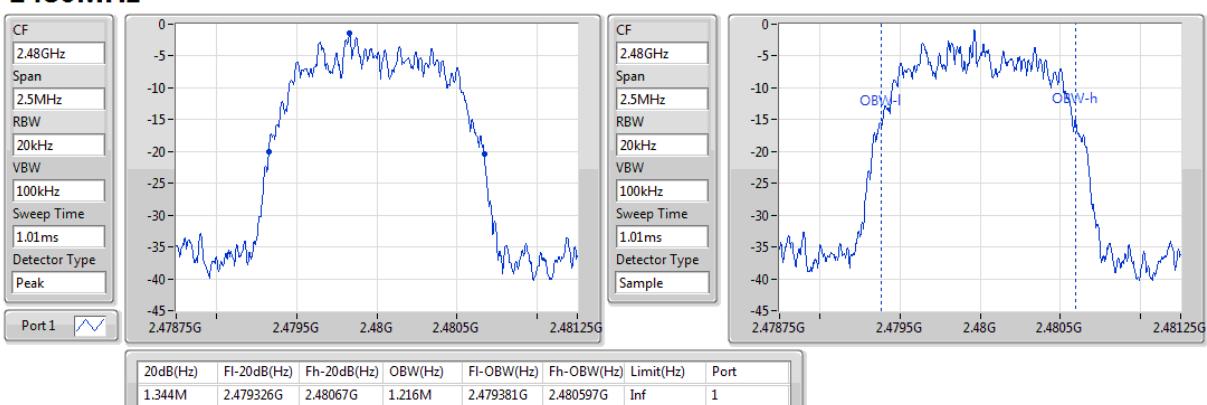

3.7 Channel Separation


3.7.1 Limit of Channel Separation

- Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

3.7.2 Test Procedures

1. Set RBW=30kHz, VBW=100kHz, Sweep time = Auto, Detector=Peak Trace max hold
2. Allow trace to stabilize
3. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.
The EUT shall show compliance with the appropriate regulatory limit

3.7.3 Test Setup

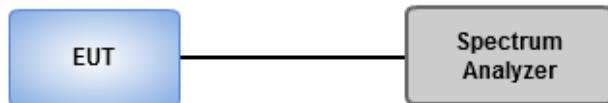

3.7.4 Test result of Channel Separation

Summary


Mode	Max-Space (Hz)	Min-Space (Hz)
2.4-2.4835GHz	-	-
BT-BR(1Mbps)	1M	995.652174k
BT-EDR(2Mbps)	1.004348M	1M

Result

Mode	Result	Fl (Hz)	Fh (Hz)	Ch.Space (Hz)	Limit (Hz)
BT-BR(1Mbps)	-	-	-	-	-
2402MHz	Pass	2.401991G	2.402991G	1M	612.91314k
2441MHz	Pass	2.440991G	2.441991G	1M	612.91314k
2480MHz	Pass	2.478996G	2.479991G	995.652174k	612.91314k
BT-EDR(2Mbps)	-	-	-	-	-
2402MHz	Pass	2.401991G	2.402996G	1.004348M	844.488k
2441MHz	Pass	2.440991G	2.441996G	1.004348M	914.418k
2480MHz	Pass	2.478996G	2.479996G	1M	895.104k

BT-BR(1Mbps)

2.402G/2.403GHz

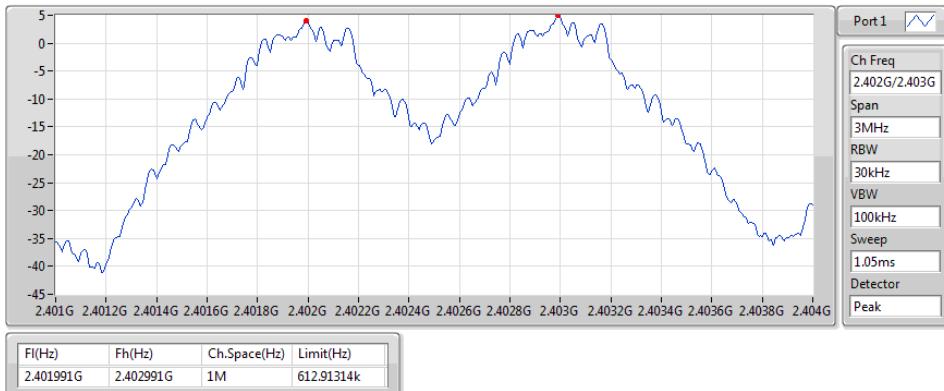

BT-BR(1Mbps)

2.441G/2.442GHz



BT-BR(1Mbps)


2.48G/2.479GHz



BT-EDR(2Mbps)

2.402G/2.403GHz


Channel Separation

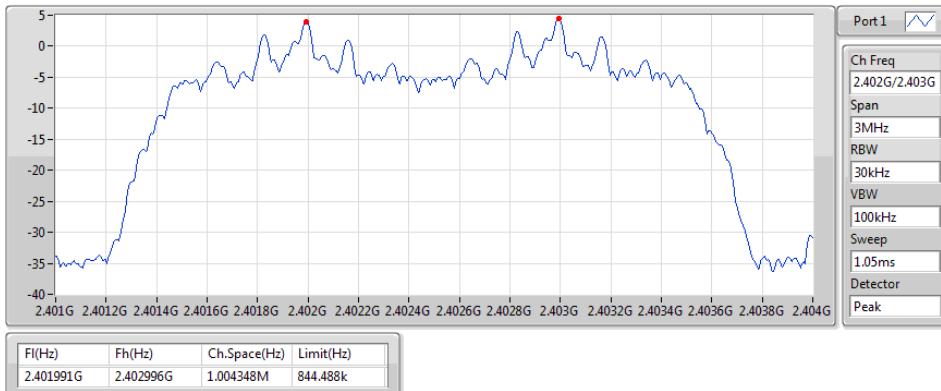

BT-EDR(2Mbps)

2.441G/2.442GHz


Channel Separation

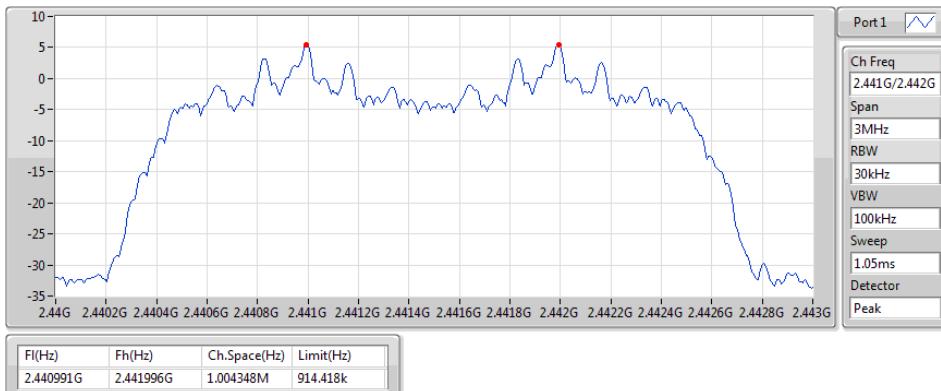

BT-EDR(2Mbps)

2.48G/2.479GHz

Channel Separation

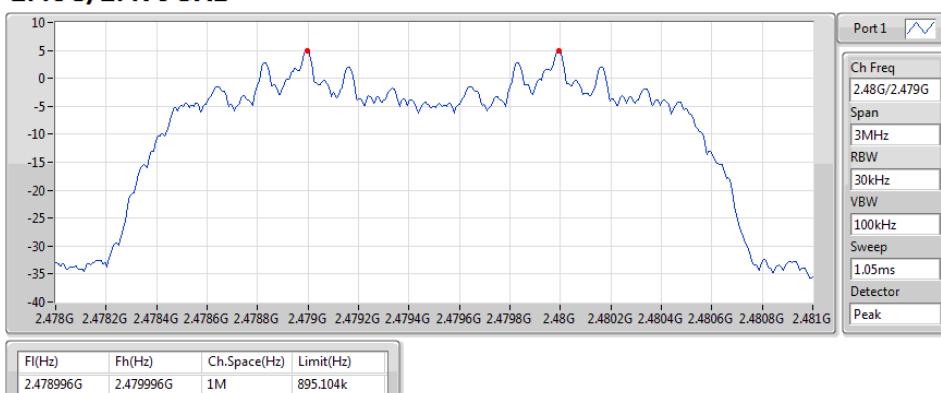

3.8 Number of Dwell Time


3.8.1 Limit of Dwell time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.8.2 Test Procedures

1. Set RBW=100 kHz, VBW=300 kHz, Sweep time=5 ms, Detector=Peak, Span=0 Hz, Trace max hold.
2. Enable gating and trigger function of spectrum analyzer to measure burst on time.
3. Set RBW=100 kHz, VBW=300 kHz, Sweep time=5 s / 2 s, Detector=Peak, Span=0 Hz, Trace max hold.
4. Enable gating and trigger function of spectrum analyzer to measure burst on number of transmission.
5. Set RBW=100 kHz, VBW=300 kHz, Sweep time=31.6 s / 8 s, Detector=Peak, Span=0 Hz, Trace max hold.
6. Enable gating and trigger function of spectrum analyzer to measure burst on number of transmission of entire time cycle.

3.8.3 Test Setup

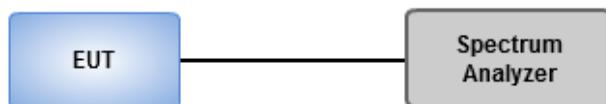

3.8.4 Test Result of Dwell Time

Result/ Non AFH mode

Mode	Result	Period (s)	Dwell (s)	Limit (s)	Tx On (ms)	Number of transmission in a 5 s
BT-BR(1Mbps)	-	-	-	-	-	-
2402MHz-1DH5	PASS	31.6	0.3548364	0.4	2.95500	19
BT-EDR(2Mbps)	-	-	-	-	-	-
2402MHz-2DH5	PASS	31.6	0.3584388	0.4	2.98500	19

Note 1: Dwell time =Number of transmission in a 5 second x Tx On Time x 6.32

Note 2: DH5 was the worst mode.

Result/ AFH mode


Mode	Result	Period (s)	Dwell (s)	Limit (s)	Tx On (ms)	Number of transmission in a 2 s
BT-BR(1Mbps)	-	-	-	-	-	-
2402MHz-1DH5	PASS	8	0.2832	0.4	2.95000	24
BT-EDR(2Mbps)	-	-	-	-	-	-
2402MHz-2DH5	PASS	8	0.30836	0.4	2.96500	26


Note 1: Dwell time =Number of transmission in a 2 second x Tx On Time x 4

Note 2: DH5 was the worst mode.


Result/ Non AFH mode


DH5-1Mbps

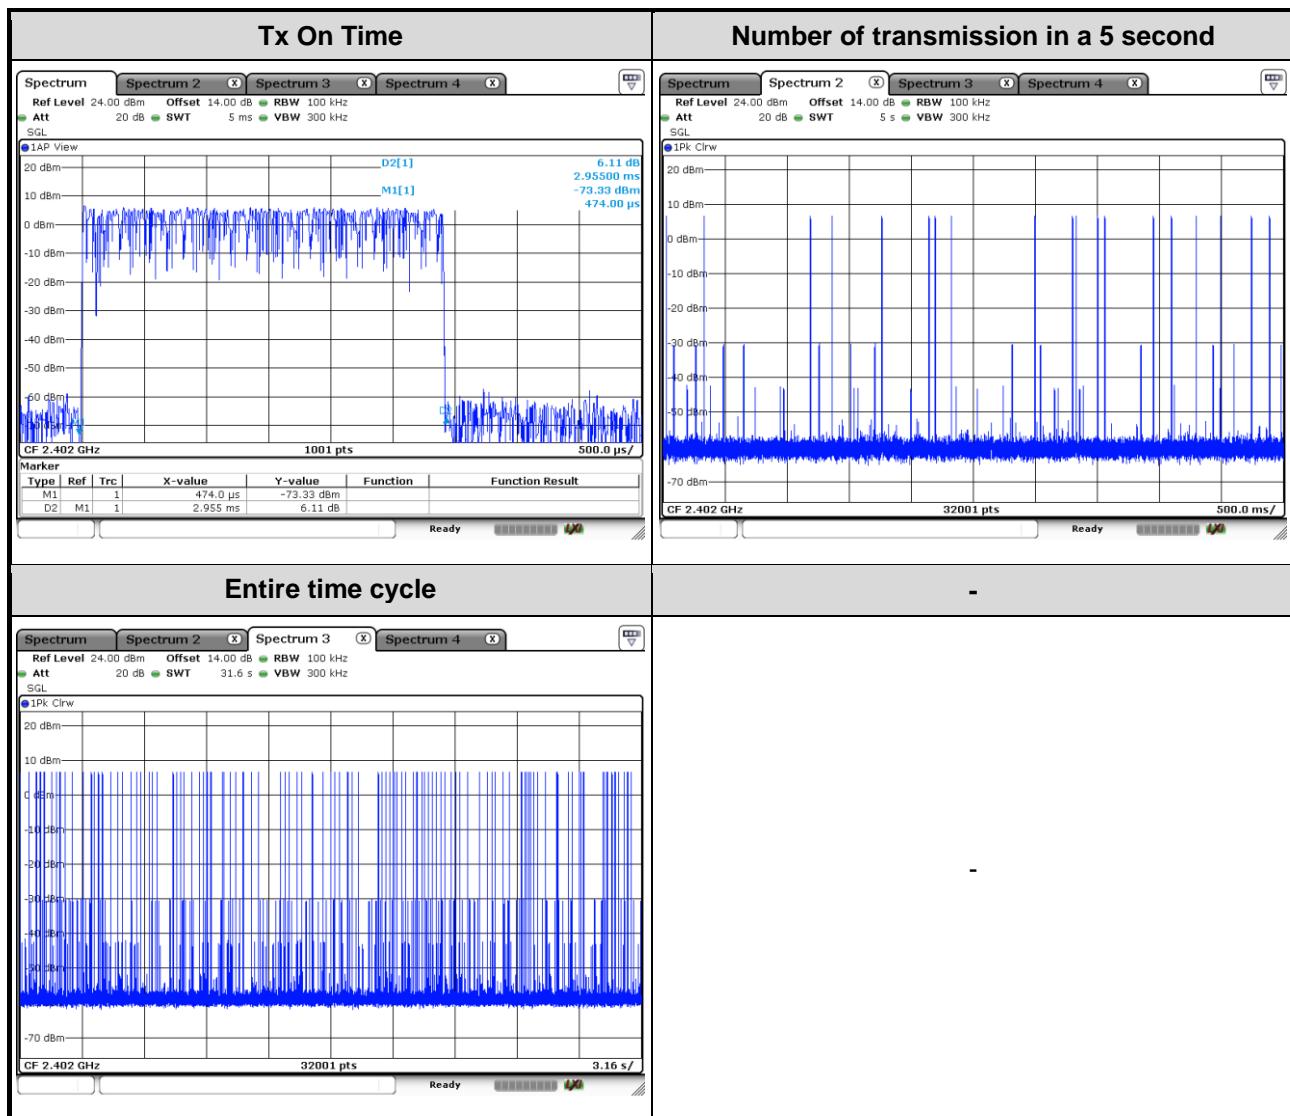

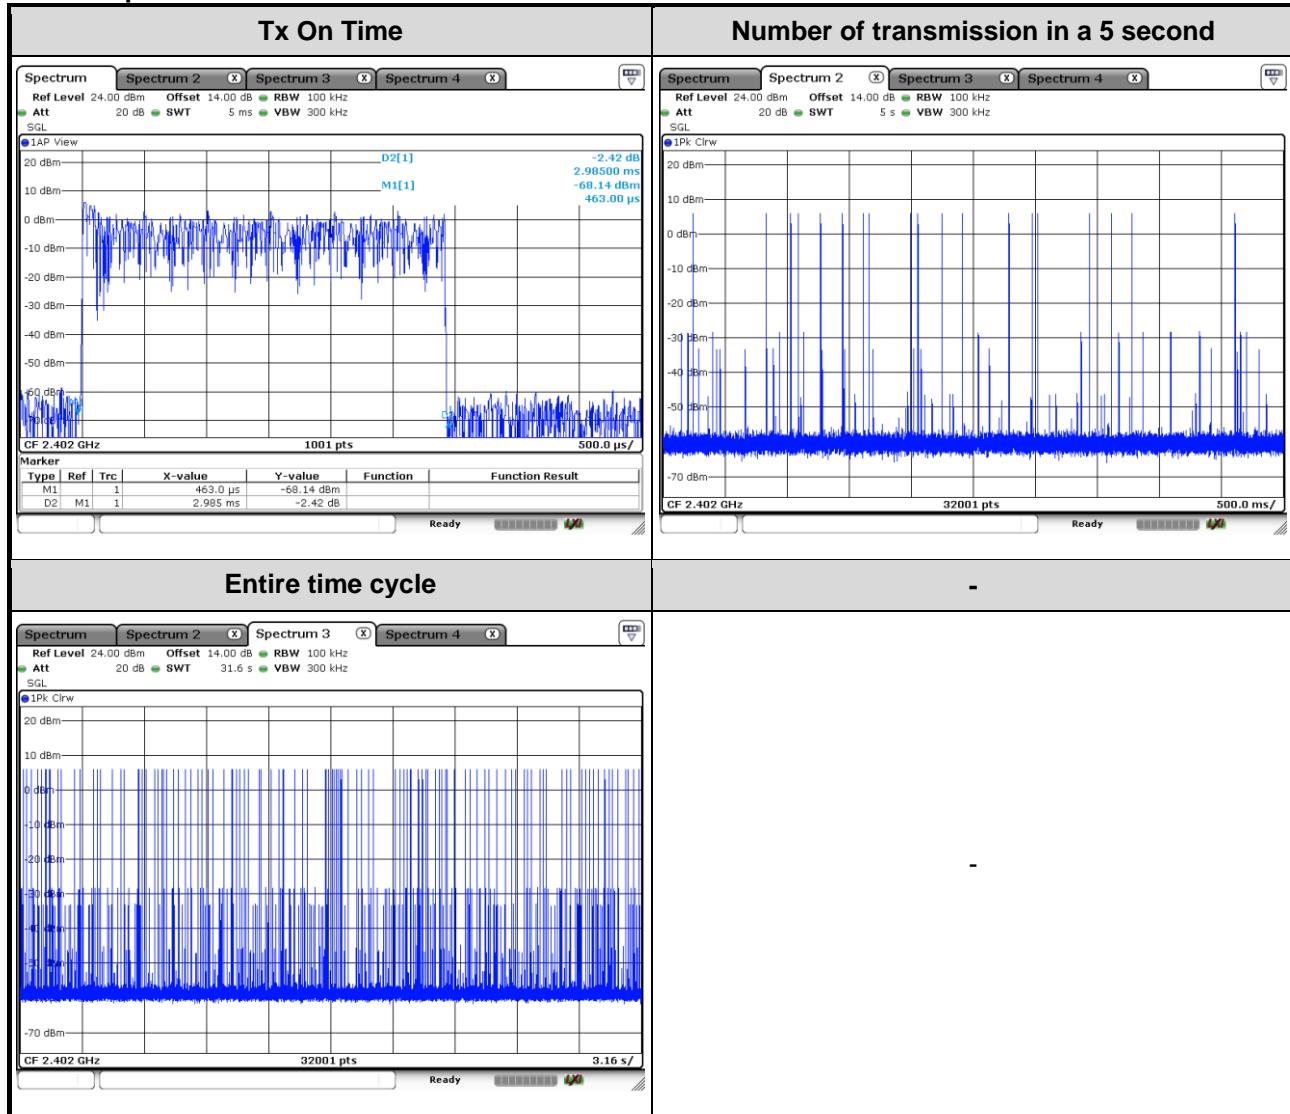DH5-2Mbps


**Result/ AFH mode
DH5-1Mbps**

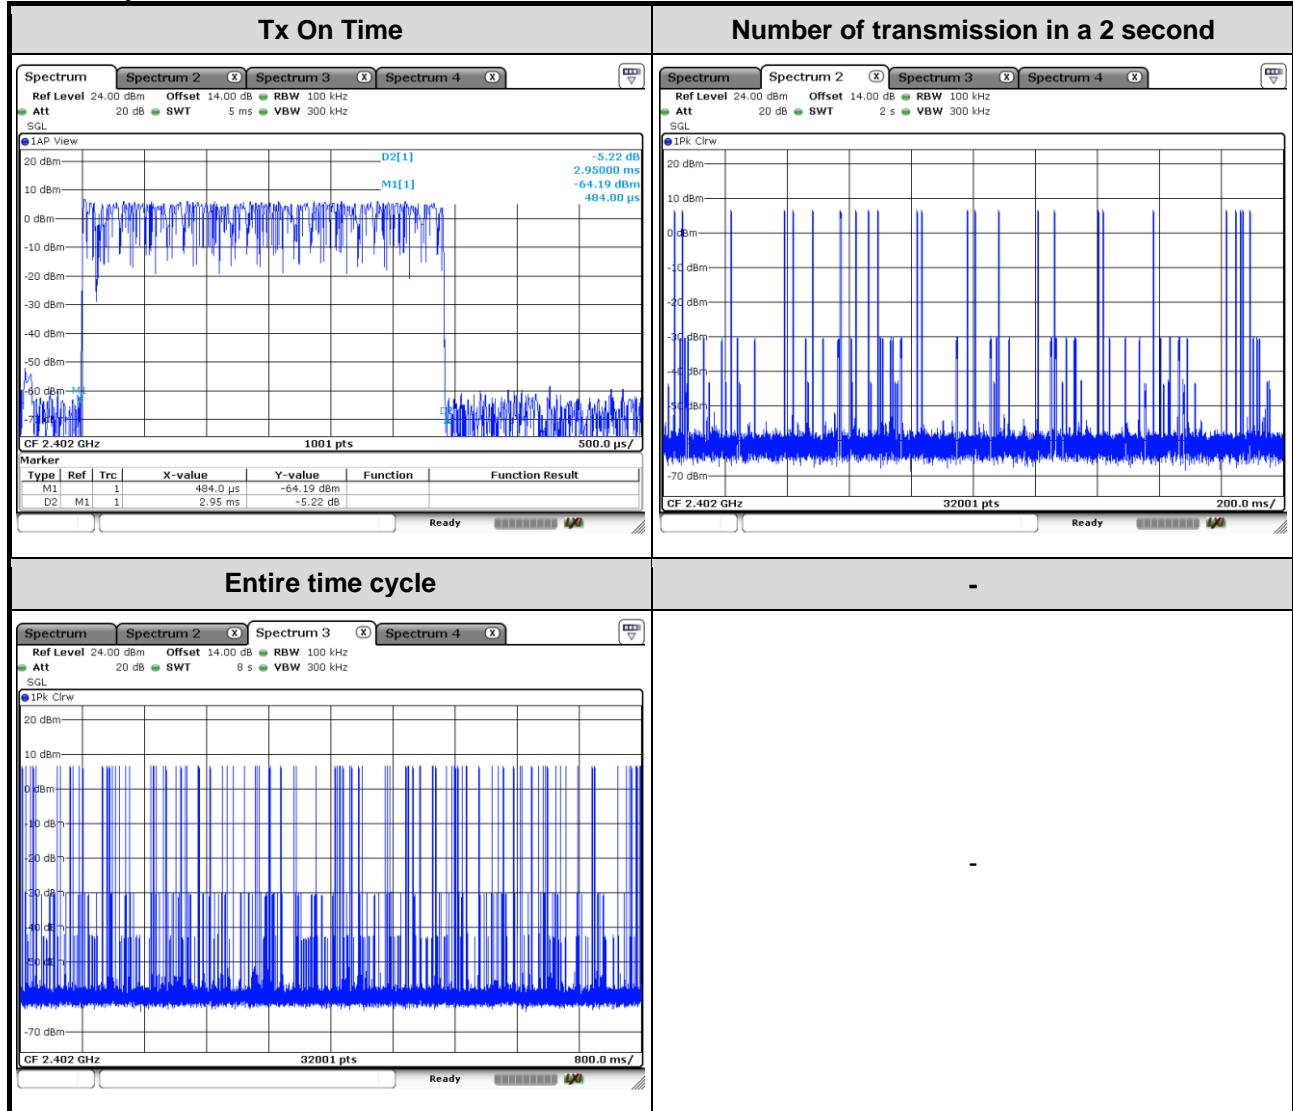

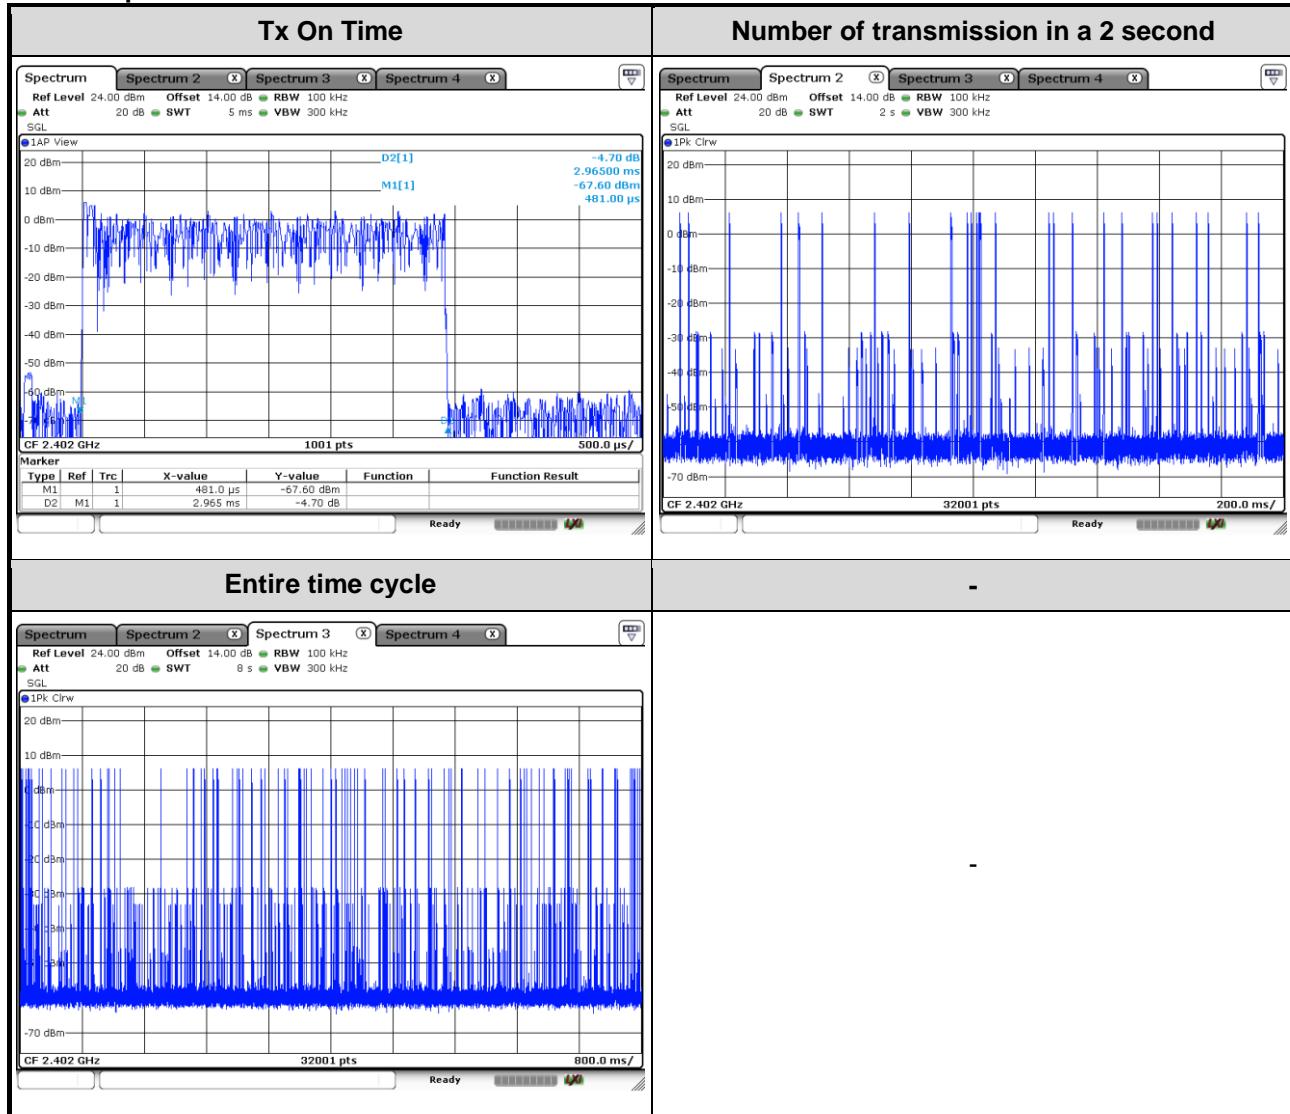DH5-2Mbps


4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640
No. 30-2, Ding Fwu Tsuen, Lin
Kou District, New Taipei City,
Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666
No. 3-1, Lane 6, Wen San 3rd St.,
Kwei Shan District, Tao Yuan City
333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640
No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan District, Tao Yuan
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666
Fax: 886-3-318-0155
Email: ICC_Service@icertifi.com.tw

==END==