


# FCC Test Report

**FCC ID** : R3USCBT26  
**Product Description** : Wireless Gaming Headset with Bluetooth  
**Model No.** : SCBT26  
**Brand Name** : EPOS  
**Applicant** : DSEA A/S  
**Address** : Kongebakken 9, DK-2765 Smoerum,  
Denmark  
**Factory** : Charter Media (Dongguan) Co., Ltd.  
**Address** : Dabandi Industrial Zone, Daning District,  
Humen Town. Dongguan City, Guangdong  
523930, P.R.C  
**Standard** : 47 CFR FCC Part 15.247  
**Received Date** : Jan. 26, 2021  
**Tested Date** : Feb. 04 ~ Feb. 22, 2021

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:



Along Chen / Assistant Manager

Approved by:



Gary Chang / Manager



## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Local Support Equipment List .....	7
1.3	Test Setup Chart .....	7
1.4	Test Equipment List and Calibration Data.....	8
1.5	Test Standards .....	9
1.6	Reference Guidance .....	9
1.7	Deviation from Test Standard and Measurement Procedure.....	9
1.8	Measurement Uncertainty .....	9
<b>2</b>	<b>TEST CONFIGURATION.....</b>	<b>10</b>
2.1	Testing Facility .....	10
2.2	The Worst Test Modes and Channel Details .....	10
<b>3</b>	<b>TRANSMITTER TEST RESULTS .....</b>	<b>11</b>
3.1	Conducted Emissions.....	11
3.2	6dB and Occupied Bandwidth .....	14
3.3	RF Output Power.....	19
3.4	Power Spectral Density .....	21
3.5	Emissions in Restricted Frequency Bands.....	26
3.6	Emissions in non-restricted Frequency Bands.....	42
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>46</b>

## Release Record

Report No.	Version	Description	Issued Date
FR112602AE	Rev. 01	Initial issue	Apr. 20, 2021
FR112602AE	Rev. 02	Adding FCC ID of USB dongle (Page 5)	May 07, 2021

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.727MHz 29.45 (Margin -16.55dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 12010.00MHz 43.89 (Margin -10.11dB) - AV	Pass
15.247(b)(3)	Maximum Output Power	Power [dBm]: 4.35	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

### Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

## 1 General Description

### 1.1 Information

#### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Freq. (MHz)	Channel Number	Data Rate
2400-2483.5	V5.2 LE	2402-2480	0-39 [40]	1 Mbps
2400-2483.5	V5.2 LE	2402-2480	0-39 [40]	2 Mbps
Note: Bluetooth LE (Low energy) uses GFSK modulation.				

#### 1.1.2 Antenna Details

Ant. No.	Type	Connector	Gain (dBi)	Remarks
1	IFA	No	3	---

#### 1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	5Vdc from host 3.7dc from battery
-------------------	--------------------------------------

#### 1.1.4 Accessories

Accessories		
No.	Equipment	Description
1	Battery	Brand: Sennheiser Model: AHB732038TPCT Power Rating: 3.7Vdc, 530mA
2	USB cable	Brand: EPOS Model: EPUL2001 Line: 2m shielded without core
3	Audio Cable	Brand: EPOS Model: EPAL2001 Line: 1.5m non-shielded without core
4	USB dongle	Brand: EPOS Model: BTD 800 USB Product name : GSA H3PRO FCC ID: R3UBTD800

### 1.1.5 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

### 1.1.6 Test Tool and Duty Cycle

<b>Test Tool</b>	BlueTest3(Qualcomm Host Tools), Version: 3.2.2.144	
<b>Modulation Mode</b>	<b>Duty Cycle Of Test Signal (%)</b>	<b>Duty Factor (dB)</b>
GFSK-1Mbps	67.89%	1.68
GFSK-2Mbps	38.43%	4.15

### 1.1.7 Power Index of Test Tool

<b>Modulation Mode</b>	<b>Test Frequency (MHz)</b>		
	<b>2402</b>	<b>2440</b>	<b>2480</b>
GFSK/1Mbps	default	default	default
GFSK/2Mbps	default	default	default

## 1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Adapter	Samsung	ETA-U90JWS	---	---
2	Notebook	DELL	Latitude E5470	DoC	---

## 1.3 Test Setup Chart

Test Setup Diagram	
No.	Signal cable / Length (m)
1	USB, 2m shielded.

Diagram illustrating the test setup. A large grey rectangle represents the test table. Inside, a purple rectangle labeled "EUT" is connected to a white rectangle labeled "Adapter" via a line labeled "1".

Note: The support notebook was disconnected from EUT and removed from test table when EUT is set to transmit/receive continuously.

## 1.4 Test Equipment List and Calibration Data

<b>Test Item</b>	Conducted Emission				
<b>Test Site</b>	Conduction room 1 / (CO01-WS)				
<b>Tested Date</b>	Feb. 22, 2021				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101658	Feb. 08, 2021	Feb. 07, 2022
LISN	R&S	ENV216	101579	Mar. 12, 2020	Mar. 11, 2021
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 21, 2020	Oct. 20, 2021
Measurement Software	AUDIX	e3	6.120210k	NA	NA

Note: Calibration Interval of instruments listed above is one year.

<b>Test Item</b>	Radiated Emission				
<b>Test Site</b>	966 chamber3 / (03CH03-WS)				
<b>Tested Date</b>	Feb. 04 ~ Feb. 09, 2021				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 04, 2020	Dec. 03, 2021
Receiver	R&S	ESR3	101657	Feb. 14, 2020	Feb. 13, 2021
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 29, 2020	Apr. 28, 2021
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Dec. 22, 2020	Dec. 21, 2021
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 06, 2020	Nov. 05, 2021
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 17, 2020	Nov. 16, 2021
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 06, 2020	Oct. 05, 2021
Preamplifier	EMC	EMC02325	980187	Aug. 05, 2020	Aug. 04, 2021
Preamplifier	Agilent	83017A	MY39501309	Sep. 02, 2020	Sep. 01, 2021
Preamplifier	EMC	EMC184045B	980192	Jul. 21, 2020	Jul. 20, 2021
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Sep. 26, 2020	Sep. 25, 2021
RF cable-8M	EMC	EMC104-SM-SM-800	181107	Sep. 26, 2020	Sep. 25, 2021
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Sep. 26, 2020	Sep. 25, 2021
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Sep. 26, 2020	Sep. 25, 2021
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Sep. 26, 2020	Sep. 25, 2021
LF cable-13M	EMC	EMC8D-NM-NM-1300	131104	Sep. 26, 2020	Sep. 25, 2021
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

<b>Test Item</b>	RF Conducted				
<b>Test Site</b>	(TH01-WS)				
<b>Tested Date</b>	Feb. 17, 2021				
<b>Instrument</b>	<b>Brand</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101063	Apr. 30, 2020	Apr. 29, 2021
Power Meter	Anritsu	ML2495A	1241002	Nov. 04, 2020	Nov. 03, 2021
Power Sensor	Anritsu	MA2411B	1207366	Nov. 04, 2020	Nov. 03, 2021
DC POWER SOURCE	GW INSTEK	GPC-6030D	GES855395	Nov. 09, 2020	Nov. 08, 2021
AC POWER SOURCE	APC	AFC-500W	F312060012	Dec. 04, 2020	Dec. 03, 2021
Measurement Software	--	SENSE-15247_DTS	V5.10.7	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

## 1.5 Test Standards

47 CFR FCC Part 15.247

ANSI C63.10-2013

## 1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

## 1.7 Deviation from Test Standard and Measurement Procedure

None

## 1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	±34.130 Hz
Conducted power	±0.808 dB
Power density	±0.583 dB
Conducted emission	±2.715 dB
AC conducted emission	±2.92 dB
Radiated emission ≤ 1GHz	±4.32 dB
Radiated emission > 1GHz	±4.9 dB

## 2 Test Configuration

### 2.1 Testing Facility

Test Laboratory	International Certification Corp.
Test Site	CO01-WS, TH01-WS
Address of Test Site	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)
Test Site	03CH03-WS
Address of Test Site	No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 333, Taiwan (R.O.C.)

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- ISED#: 10807A
- CAB identifier: TW2732

### 2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions Radiated Emissions ≤ 1GHz	BT LE	2402	1Mbps	---
Maximum Output Power 6dB bandwidth Power spectral density	BT LE	2402, 2440, 2480	1Mbps 2Mbps	---
Radiated Emissions > 1GHz	BT LE	2402, 2440, 2480	1Mbps	---
<b>NOTE:</b> The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The <b>Z-plane</b> result was found as the worst case and was shown in this report.				

## 3 Transmitter Test Results

### 3.1 Conducted Emissions

#### 3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

#### 3.1.2 Test Procedures


1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

#### 3.1.3 Test Setup

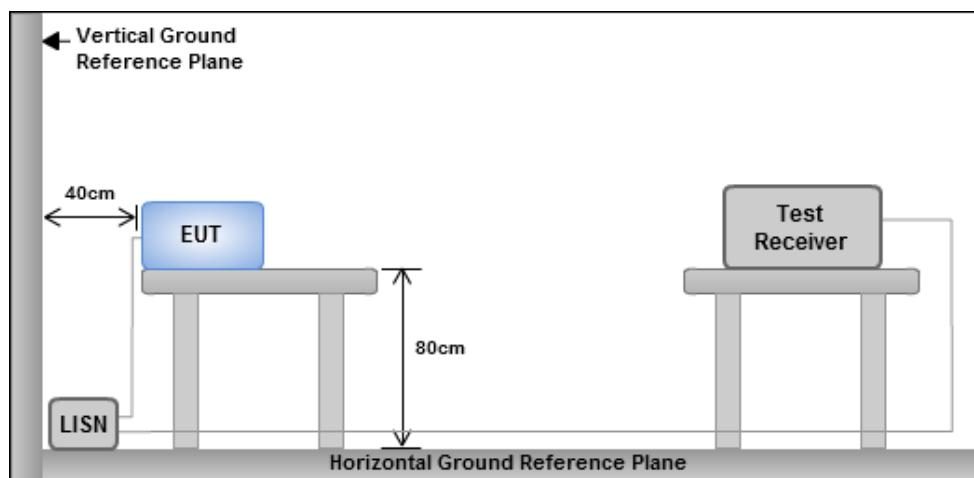


Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.4 Test Result of Conducted Emissions

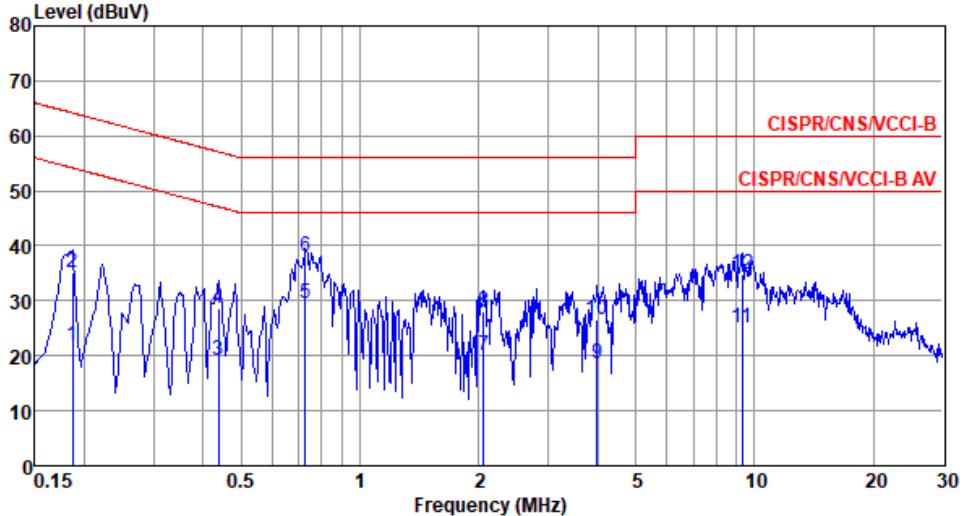Modulation Mode	BT LE-1Mbps	Test Freq. (MHz)	2402				
Power Phase	Line						
Test by : Alex Tsai      Temperature: 18°C      Humidity: 60%							
							
Freq	Level	Limit	Over	Read	Factor	Cable	
MHz	dBuV	Line	Limit	Level	dB	loss	Remark
1	0.186	21.98	54.20	-32.22	12.10	9.82	0.06 Average
2	0.186	35.26	64.20	-28.94	25.38	9.82	0.06 QP
3	0.437	19.13	47.11	-27.98	9.16	9.89	0.08 Average
4	0.437	28.54	57.11	-28.57	18.57	9.89	0.08 QP
5*	0.727	29.45	46.00	-16.55	19.40	9.94	0.11 Average
6	0.727	37.95	56.00	-18.05	27.90	9.94	0.11 QP
7	2.055	20.13	46.00	-25.87	9.97	9.98	0.18 Average
8	2.055	28.13	56.00	-27.87	17.97	9.98	0.18 QP
9	3.985	18.47	46.00	-27.53	8.16	10.02	0.29 Average
10	3.985	26.58	56.00	-29.42	16.27	10.02	0.29 QP
11	9.302	25.02	50.00	-24.98	14.55	10.08	0.39 Average
12	9.302	34.73	60.00	-25.27	24.26	10.08	0.39 QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

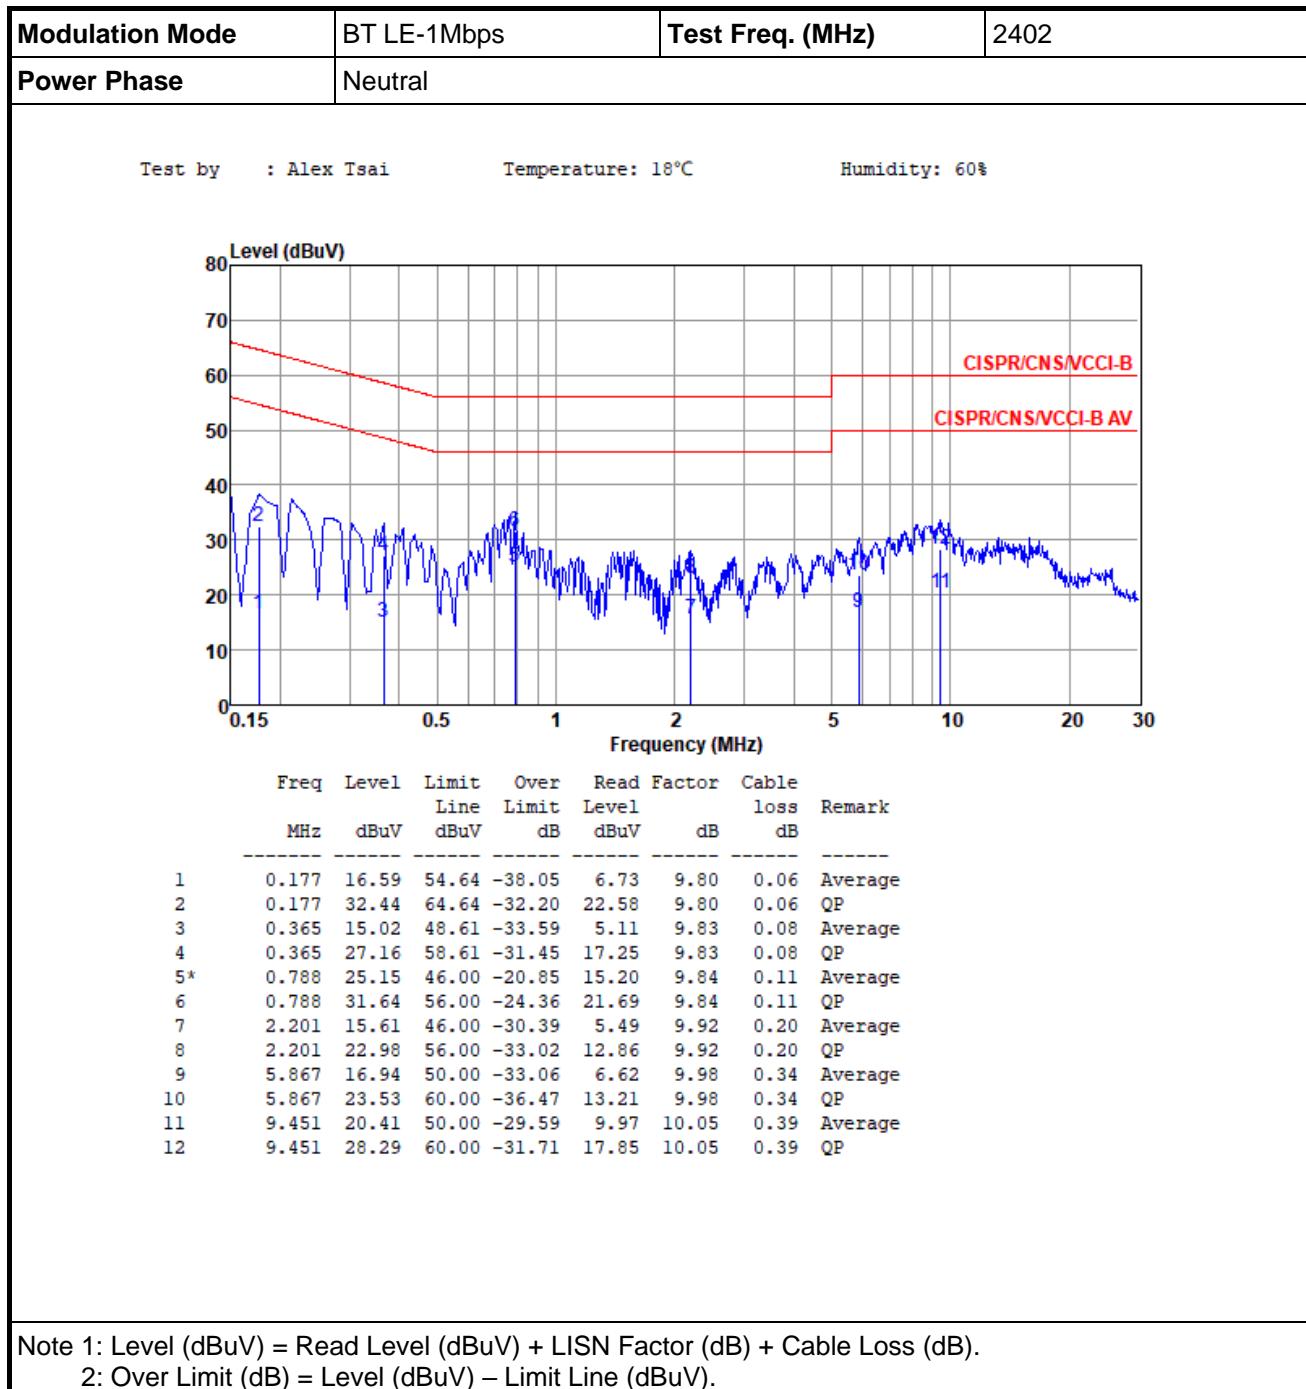

## 3.2 6dB and Occupied Bandwidth

### 3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

### 3.2.2 Test Procedures


#### 6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

#### Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW.
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

### 3.2.3 Test Setup



### 3.2.4 Test Result of 6dB and Occupied Bandwidth

Ambient Condition	22°C / 64%	Tested By	Brad Wu
-------------------	------------	-----------	---------

#### Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	710.145k	1.031M	1M03F1D	706.522k	1.027M
BT-LE(2Mbps)	1.254M	2.041M	2M04F1D	1.246M	2.041M

Max-N dB = Maximum 6dB down bandwidth; Max-OBW = Maximum 99% occupied bandwidth;

Min-N dB = Minimum 6dB down bandwidth; Min-OBW = Minimum 99% occupied bandwidth

#### Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	706.522k	1.031M
2440MHz	Pass	500k	710.145k	1.027M
2480MHz	Pass	500k	710.145k	1.027M
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	500k	1.246M	2.041M
2440MHz	Pass	500k	1.254M	2.041M
2480MHz	Pass	500k	1.246M	2.041M

Port X-N dB = Port X 6dB down bandwidth;

Port X-OBW = Port X 99% occupied bandwidth

### BT-LE(1Mbps)


2402MHz

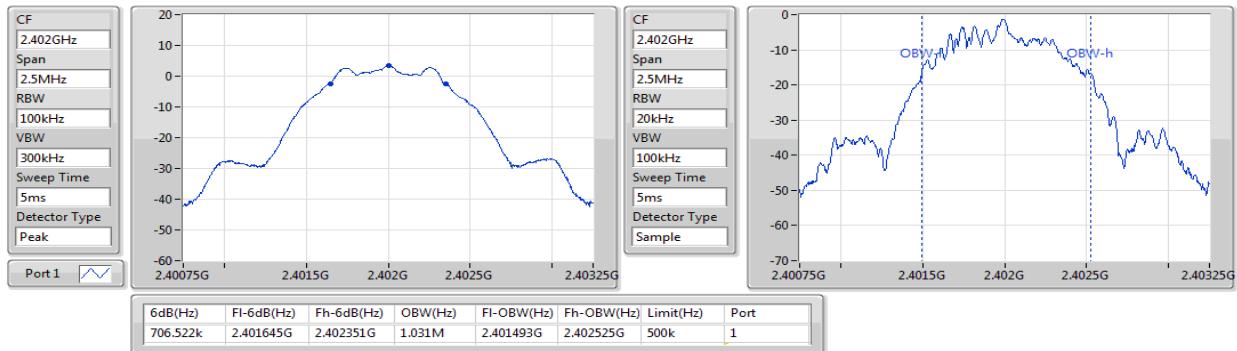

### EBW-DTS

### BT-LE(1Mbps)


2440MHz

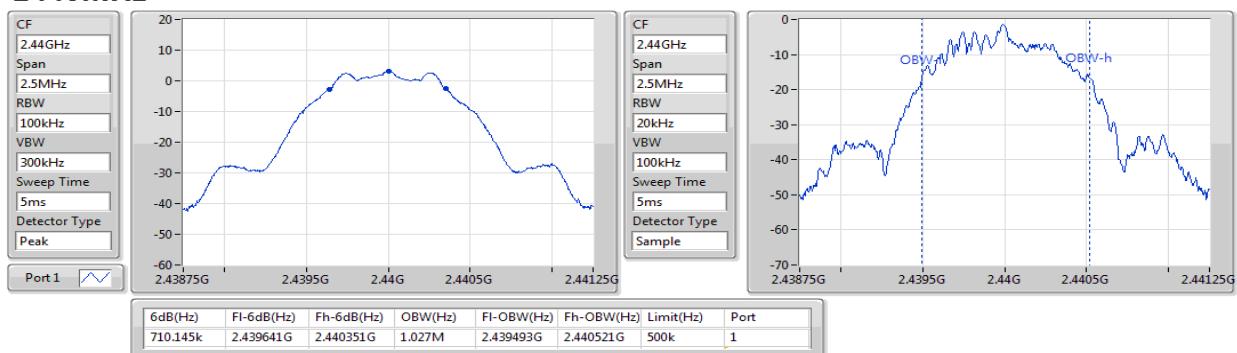


### EBW-DTS

### BT-LE(1Mbps)

2480MHz

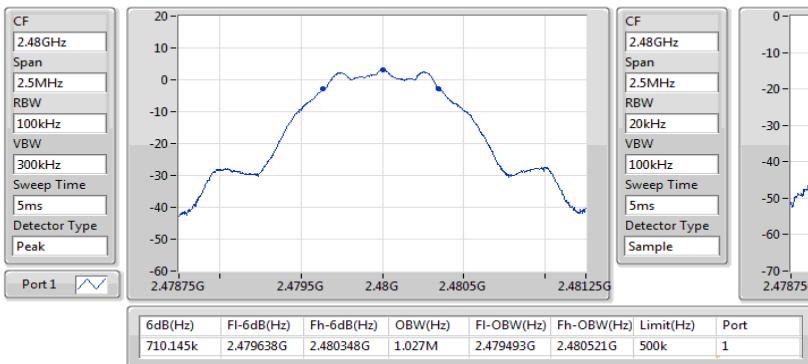

### EBW-DTS

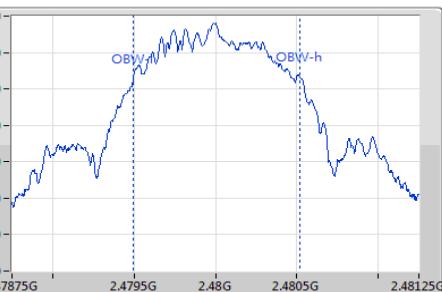


### BT-LE(2Mbps)

2402MHz



### EBW-DTS

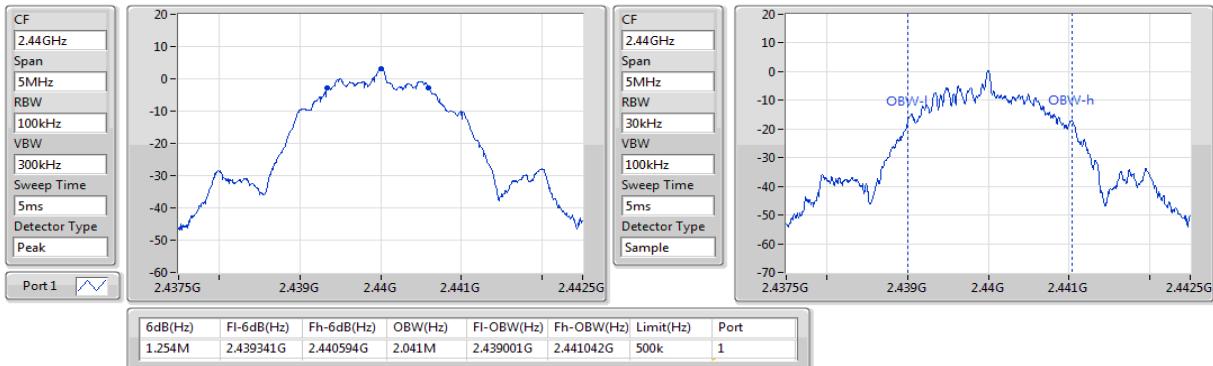

**BT-LE(2Mbps)**
**2440MHz**

**EBW-DTS**
**BT-LE(2Mbps)**
**2480MHz**

**EBW-DTS**

### 3.3 RF Output Power

#### 3.3.1 Limit of RF Output Power

Conducted power shall not exceed 1 Watt.

Antenna gain <= 6dBi, no any corresponding reduction is in output power limit.

#### 3.3.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

#### 3.3.3 Test Setup



### 3.3.4 Test Result of Maximum Output Power

Ambient Condition	22°C / 64%	Tested By	Brad Wu
-------------------	------------	-----------	---------

#### Summary of Peak Conducted Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	4.35	0.00272
BT-LE(2Mbps)	4.34	0.00272

#### Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	3.00	4.35	30.00
2440MHz	Pass	3.00	4.25	30.00
2480MHz	Pass	3.00	4.12	30.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	3.00	4.34	30.00
2440MHz	Pass	3.00	4.23	30.00
2480MHz	Pass	3.00	4.10	30.00

DG = Directional Gain; Port X = Port X output power

#### Summary of Conducted (Average) Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	4.26	0.00267
BT-LE(2Mbps)	4.25	0.00266

#### Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	3.00	4.26	-
2440MHz	Pass	3.00	4.15	-
2480MHz	Pass	3.00	4.01	-
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	3.00	4.25	-
2440MHz	Pass	3.00	4.14	-
2480MHz	Pass	3.00	4.00	-

Note: Average power is for reference only.

## 3.4 Power Spectral Density


### 3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

### 3.4.2 Test Procedures

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

### 3.4.3 Test Setup



### 3.4.4 Test Result of Power Spectral Density

Ambient Condition	22°C / 64%	Tested By	Brad Wu
-------------------	------------	-----------	---------

#### Summary



Mode	PD (dBm/3kHz)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-11.43
BT-LE(2Mbps)	-14.34

#### Result

Mode	Result	Gain (dBi)	PD (dBm/3kHz)	PD Limit (dBm/3kHz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	3.00	-11.43	8.00
2440MHz	Pass	3.00	-11.72	8.00
2480MHz	Pass	3.00	-11.86	8.00
BT-LE(2Mbps)	-	-	-	-
2402MHz	Pass	3.00	-14.34	8.00
2440MHz	Pass	3.00	-14.47	8.00
2480MHz	Pass	3.00	-14.62	8.00

DG = Directional Gain;


PD = Maximum power density; Port X = Port X Power Density;

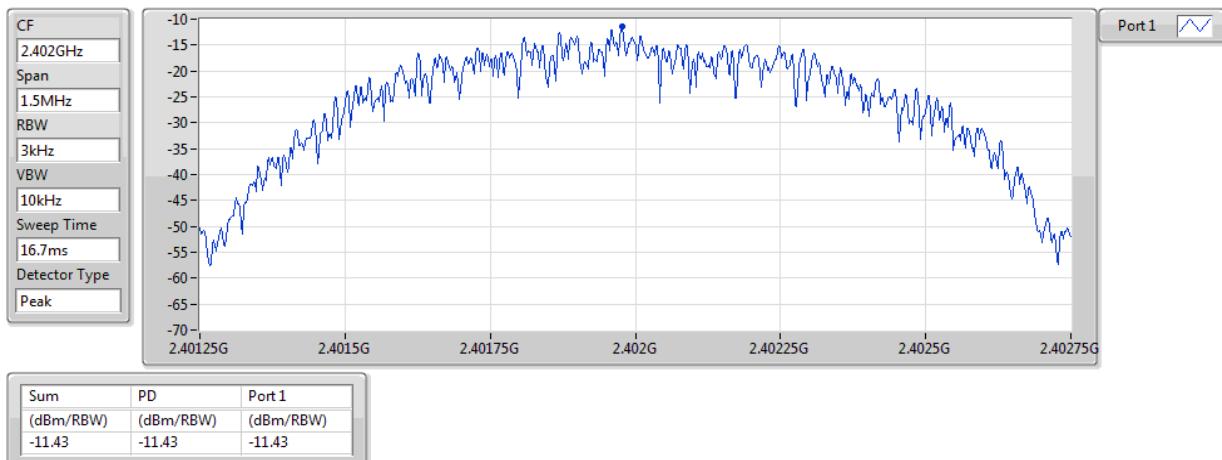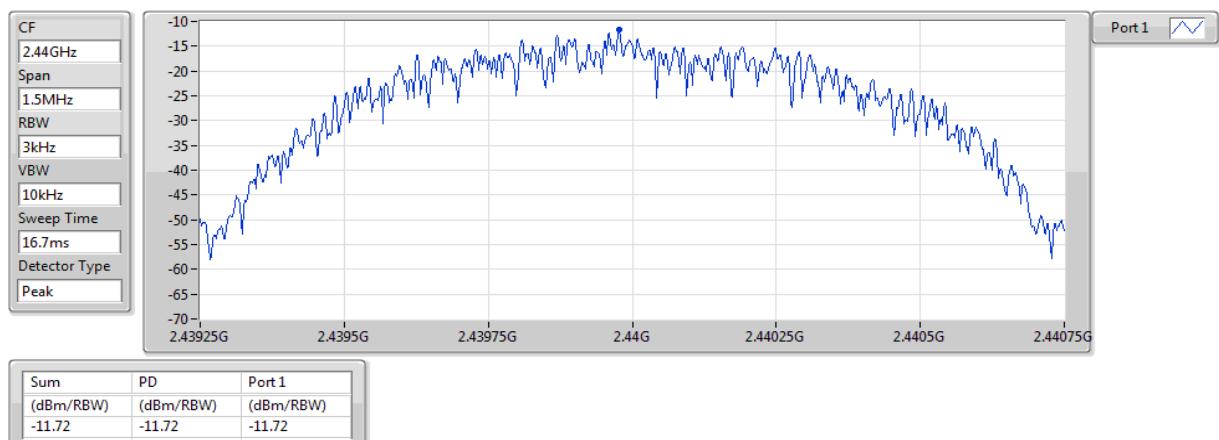**BT-LE(1Mbps)**
**PSD**
**2402MHz**

**BT-LE(1Mbps)**
**PSD**
**2440MHz**


### BT-LE(1Mbps)

PSD

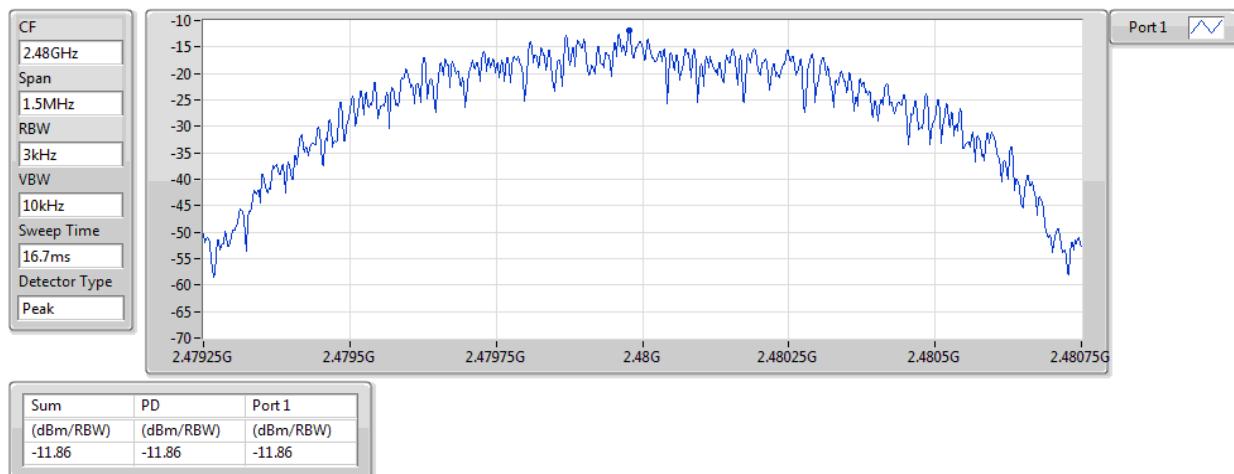
2480MHz



### BT-LE(2Mbps)

PSD


2402MHz

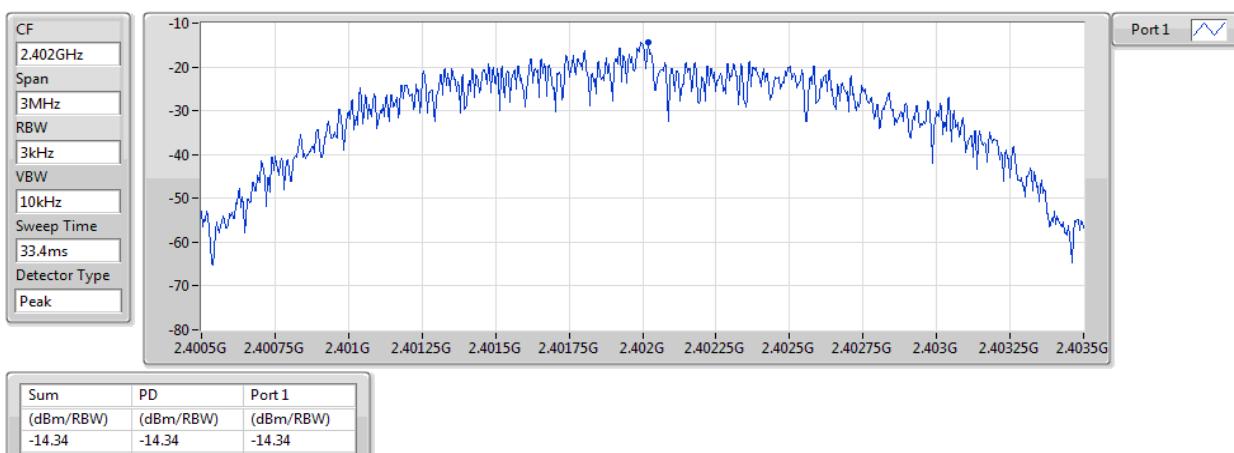

**BT-LE(2Mbps)**

**2440MHz**


**PSD**

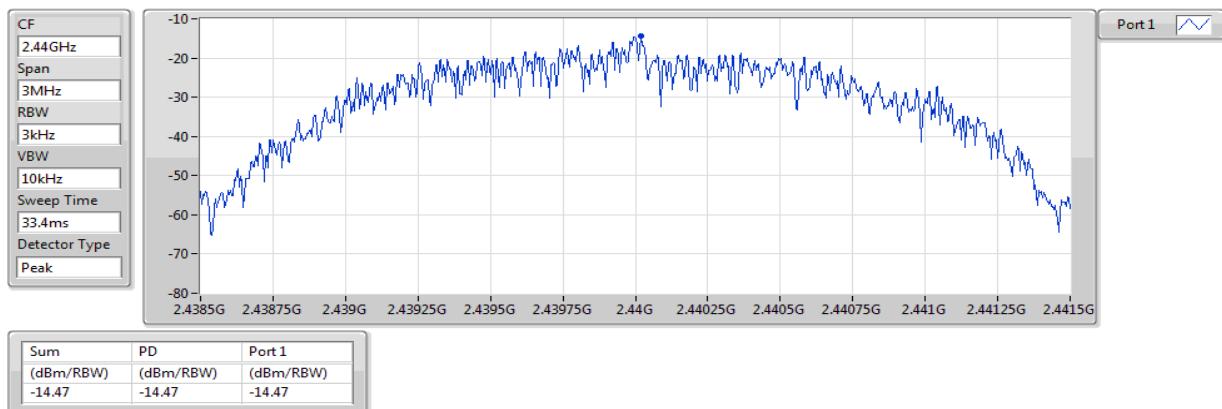

**BT-LE(2Mbps)**

**2480MHz**

**PSD**

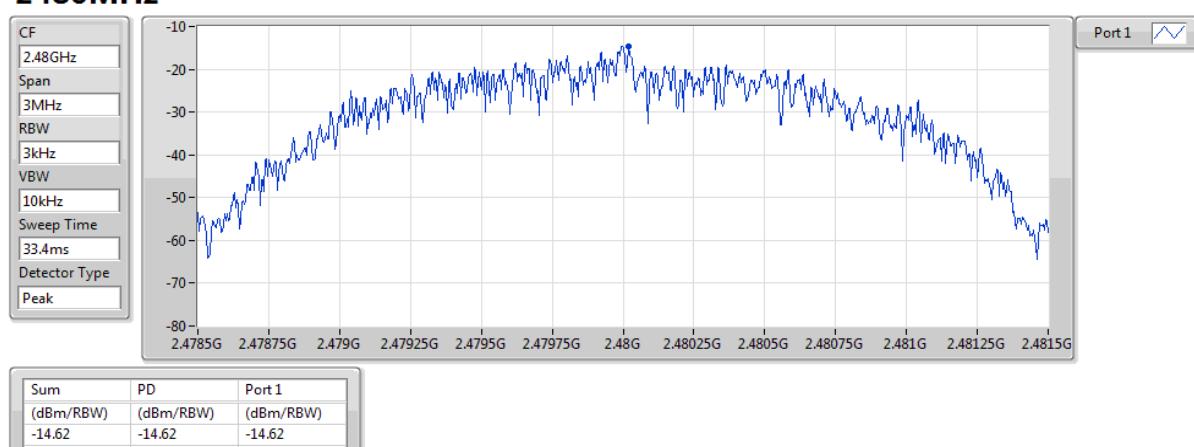

## 3.5 Emissions in Restricted Frequency Bands

### 3.5.1 Limit of Emissions in Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Quasi-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

### 3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.5.3 Test Setup


#### Radiated Emissions below 1 GHz

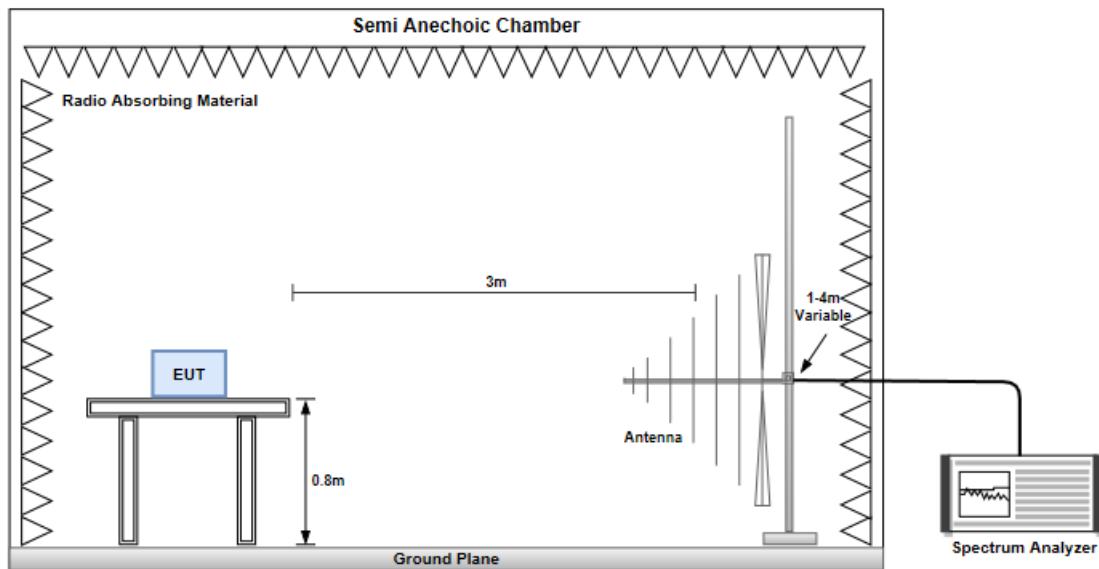


#### Radiated Emissions above 1 GHz

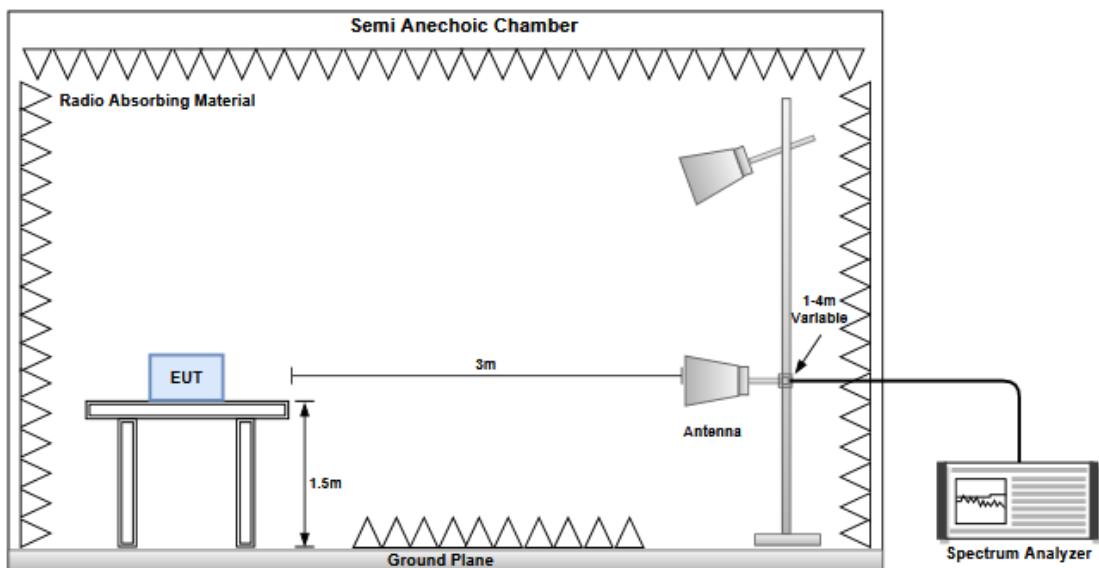

### 3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

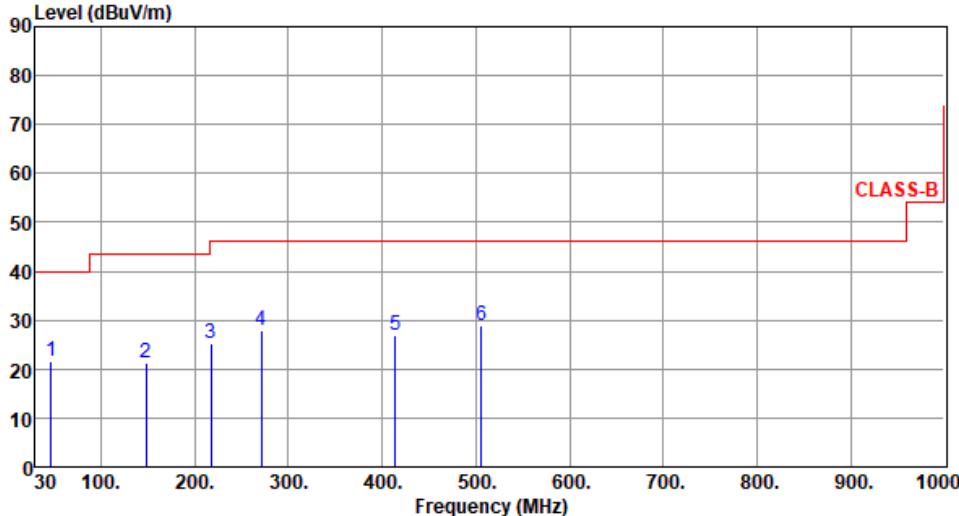Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402																																																																												
Polarization	Horizontal																																																																														
Test By	:Roger Lu	Temperature(°C):22	Humidity(%):61																																																																												
																																																																															
<table> <thead> <tr> <th>Freq.</th> <th>Emission Limit</th> <th>Margin</th> <th>SA</th> <th>Factor</th> <th>Remark</th> <th>ANT</th> <th>Turn</th> </tr> <tr> <th>MHz</th> <th>level</th> <th>dBuV/m</th> <th>dB</th> <th>reading</th> <th></th> <th>High</th> <th>Table</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>46.49</td> <td>21.67</td> <td>40.00</td> <td>-18.33</td> <td>30.42</td> <td>-8.75</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>2</td> <td>148.34</td> <td>21.28</td> <td>43.50</td> <td>-22.22</td> <td>30.21</td> <td>-8.93</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>3</td> <td>217.21</td> <td>25.34</td> <td>46.00</td> <td>-20.66</td> <td>37.60</td> <td>-12.26</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>4</td> <td>271.53</td> <td>28.03</td> <td>46.00</td> <td>-17.97</td> <td>37.48</td> <td>-9.45</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>5</td> <td>414.12</td> <td>26.74</td> <td>46.00</td> <td>-19.26</td> <td>32.19</td> <td>-5.45</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>6</td> <td>506.27</td> <td>29.01</td> <td>46.00</td> <td>-16.99</td> <td>32.12</td> <td>-3.11</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> </tbody> </table>				Freq.	Emission Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dB	reading		High	Table	1	46.49	21.67	40.00	-18.33	30.42	-8.75	Peak	---	---	2	148.34	21.28	43.50	-22.22	30.21	-8.93	Peak	---	---	3	217.21	25.34	46.00	-20.66	37.60	-12.26	Peak	---	---	4	271.53	28.03	46.00	-17.97	37.48	-9.45	Peak	---	---	5	414.12	26.74	46.00	-19.26	32.19	-5.45	Peak	---	---	6	506.27	29.01	46.00	-16.99	32.12	-3.11	Peak	---	---
Freq.	Emission Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																								
MHz	level	dBuV/m	dB	reading		High	Table																																																																								
1	46.49	21.67	40.00	-18.33	30.42	-8.75	Peak	---	---																																																																						
2	148.34	21.28	43.50	-22.22	30.21	-8.93	Peak	---	---																																																																						
3	217.21	25.34	46.00	-20.66	37.60	-12.26	Peak	---	---																																																																						
4	271.53	28.03	46.00	-17.97	37.48	-9.45	Peak	---	---																																																																						
5	414.12	26.74	46.00	-19.26	32.19	-5.45	Peak	---	---																																																																						
6	506.27	29.01	46.00	-16.99	32.12	-3.11	Peak	---	---																																																																						
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).            Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>																																																																															
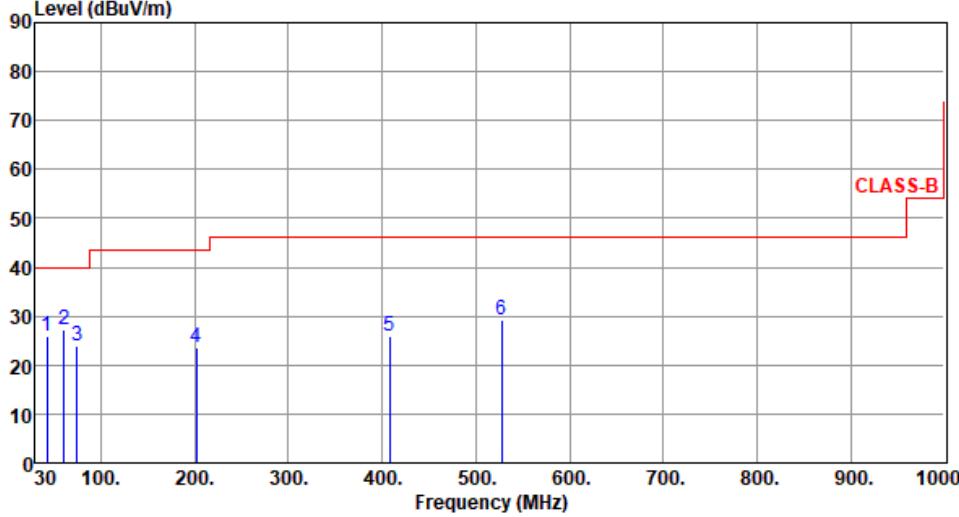
<b>Modulation</b>	BT-LE (1Mbps)	<b>Test Freq. (MHz)</b>	2402																																																																												
<b>Polarization</b>	Vertical																																																																														
Test By	:Roger Lu	Temperature(°C):22	Humidity(%):61																																																																												
 <b>CLASS-B</b>																																																																															
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">Freq.</th> <th style="text-align: left;">Emission Limit</th> <th style="text-align: left;">Margin</th> <th style="text-align: left;">SA</th> <th style="text-align: left;">Factor</th> <th style="text-align: left;">Remark</th> <th style="text-align: left;">ANT</th> <th style="text-align: left;">Turn</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">level</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">dB</th> <th></th> <th style="text-align: left;">High</th> <th style="text-align: left;">Table</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>42.61</td> <td>25.89</td> <td>40.00</td> <td>-14.11</td> <td>34.69</td> <td>-8.80</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>2</td> <td>61.04</td> <td>27.29</td> <td>40.00</td> <td>-12.71</td> <td>36.78</td> <td>-9.49</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>3</td> <td>74.62</td> <td>23.79</td> <td>40.00</td> <td>-16.21</td> <td>35.85</td> <td>-12.06</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>4</td> <td>201.69</td> <td>23.47</td> <td>43.50</td> <td>-20.03</td> <td>35.62</td> <td>-12.15</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>5</td> <td>408.30</td> <td>25.94</td> <td>46.00</td> <td>-20.06</td> <td>31.54</td> <td>-5.60</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>6</td> <td>527.61</td> <td>29.10</td> <td>46.00</td> <td>-16.90</td> <td>31.83</td> <td>-2.73</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> </tbody> </table>				Freq.	Emission Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	reading	reading	dB		High	Table	1	42.61	25.89	40.00	-14.11	34.69	-8.80	Peak	---	---	2	61.04	27.29	40.00	-12.71	36.78	-9.49	Peak	---	---	3	74.62	23.79	40.00	-16.21	35.85	-12.06	Peak	---	---	4	201.69	23.47	43.50	-20.03	35.62	-12.15	Peak	---	---	5	408.30	25.94	46.00	-20.06	31.54	-5.60	Peak	---	---	6	527.61	29.10	46.00	-16.90	31.83	-2.73	Peak	---	---
Freq.	Emission Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																								
MHz	level	reading	reading	dB		High	Table																																																																								
1	42.61	25.89	40.00	-14.11	34.69	-8.80	Peak	---	---																																																																						
2	61.04	27.29	40.00	-12.71	36.78	-9.49	Peak	---	---																																																																						
3	74.62	23.79	40.00	-16.21	35.85	-12.06	Peak	---	---																																																																						
4	201.69	23.47	43.50	-20.03	35.62	-12.15	Peak	---	---																																																																						
5	408.30	25.94	46.00	-20.06	31.54	-5.60	Peak	---	---																																																																						
6	527.61	29.10	46.00	-16.90	31.83	-2.73	Peak	---	---																																																																						


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

### 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)

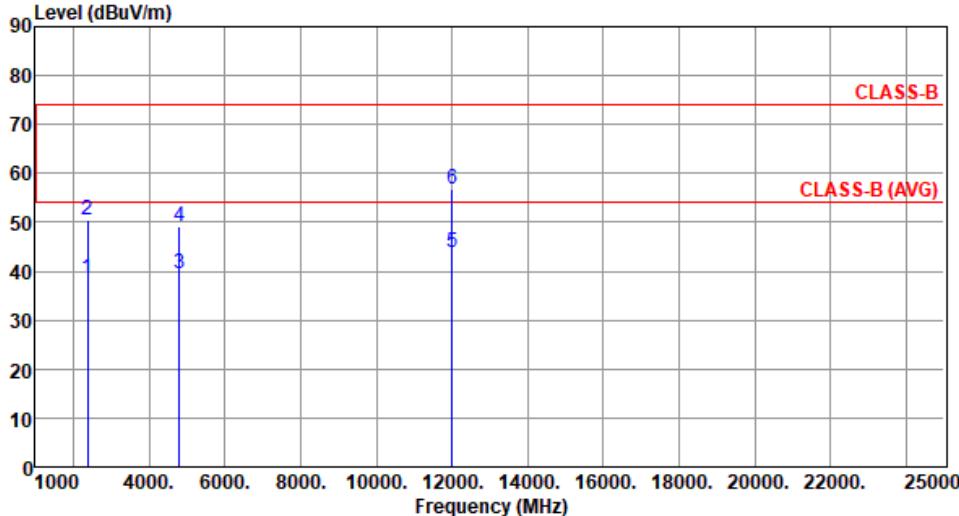
Modulation	BT-LE (1Mbps)	Test Freq. (MHz)	2402																																																																														
Polarization	Horizontal																																																																																
Test By	:BRAD WU	Temperature(°C):23	Humidity(%):61																																																																														
																																																																																	
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">Freq.</th> <th style="text-align: left;">Emission</th> <th style="text-align: left;">Limit</th> <th style="text-align: left;">Margin</th> <th style="text-align: left;">SA</th> <th style="text-align: left;">Factor</th> <th style="text-align: left;">Remark</th> <th style="text-align: left;">ANT</th> <th style="text-align: left;">Turn</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">level</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2390.00</td> <td>38.45</td> <td>54.00</td> <td>-15.55</td> <td>40.11</td> <td>-1.66</td> <td>Average</td> <td>205</td> <td>316</td> </tr> <tr> <td>2</td> <td>2390.00</td> <td>50.52</td> <td>74.00</td> <td>-23.48</td> <td>52.18</td> <td>-1.66</td> <td>Peak</td> <td>205</td> <td>316</td> </tr> <tr> <td>3</td> <td>4804.00</td> <td>39.46</td> <td>54.00</td> <td>-14.54</td> <td>34.46</td> <td>5.00</td> <td>Average</td> <td>199</td> <td>202</td> </tr> <tr> <td>4</td> <td>4804.00</td> <td>49.06</td> <td>74.00</td> <td>-24.94</td> <td>44.06</td> <td>5.00</td> <td>Peak</td> <td>199</td> <td>202</td> </tr> <tr> <td>5</td> <td>12010.00</td> <td>43.89</td> <td>54.00</td> <td>-10.11</td> <td>29.21</td> <td>14.68</td> <td>Average</td> <td>100</td> <td>44</td> </tr> <tr> <td>6</td> <td>12010.00</td> <td>56.92</td> <td>74.00</td> <td>-17.08</td> <td>42.24</td> <td>14.68</td> <td>Peak</td> <td>100</td> <td>44</td> </tr> </tbody> </table>				Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dB	reading	dB				1	2390.00	38.45	54.00	-15.55	40.11	-1.66	Average	205	316	2	2390.00	50.52	74.00	-23.48	52.18	-1.66	Peak	205	316	3	4804.00	39.46	54.00	-14.54	34.46	5.00	Average	199	202	4	4804.00	49.06	74.00	-24.94	44.06	5.00	Peak	199	202	5	12010.00	43.89	54.00	-10.11	29.21	14.68	Average	100	44	6	12010.00	56.92	74.00	-17.08	42.24	14.68	Peak	100	44
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																									
MHz	level	dBuV/m	dB	reading	dB																																																																												
1	2390.00	38.45	54.00	-15.55	40.11	-1.66	Average	205	316																																																																								
2	2390.00	50.52	74.00	-23.48	52.18	-1.66	Peak	205	316																																																																								
3	4804.00	39.46	54.00	-14.54	34.46	5.00	Average	199	202																																																																								
4	4804.00	49.06	74.00	-24.94	44.06	5.00	Peak	199	202																																																																								
5	12010.00	43.89	54.00	-10.11	29.21	14.68	Average	100	44																																																																								
6	12010.00	56.92	74.00	-17.08	42.24	14.68	Peak	100	44																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).																																																																																	

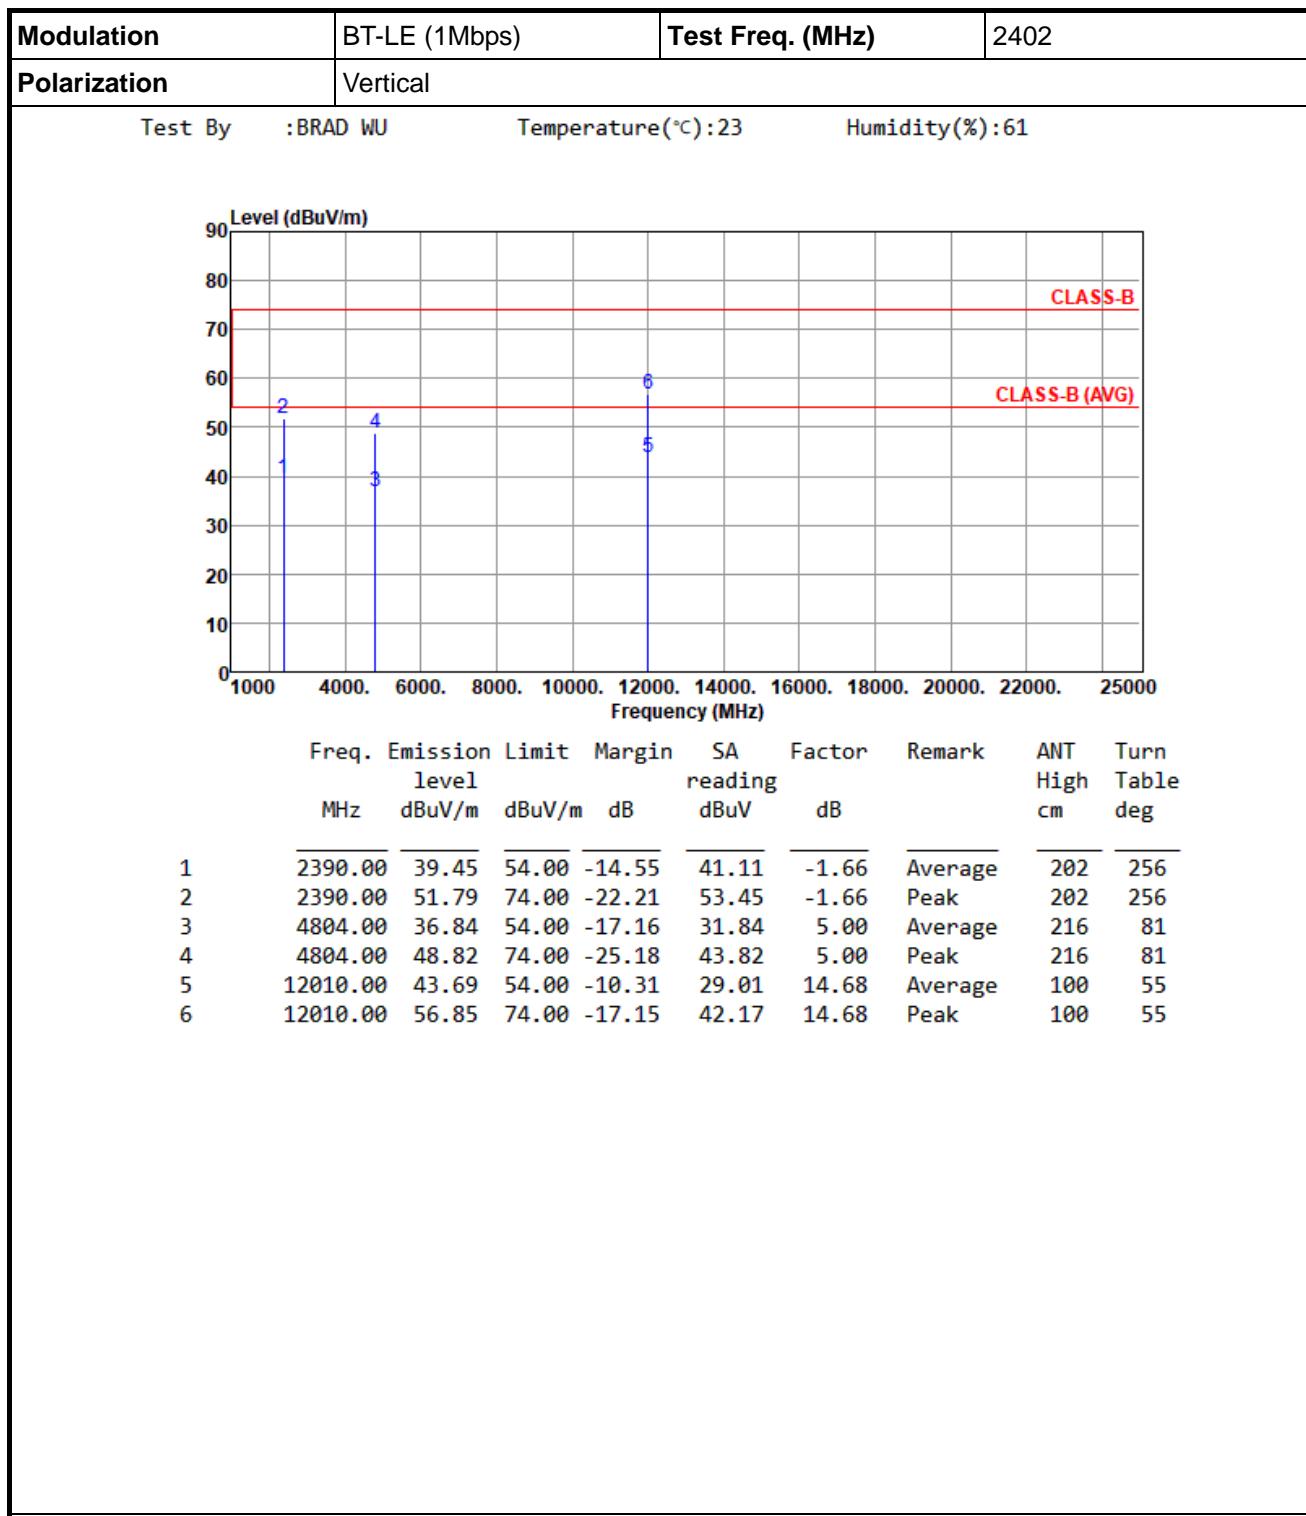

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
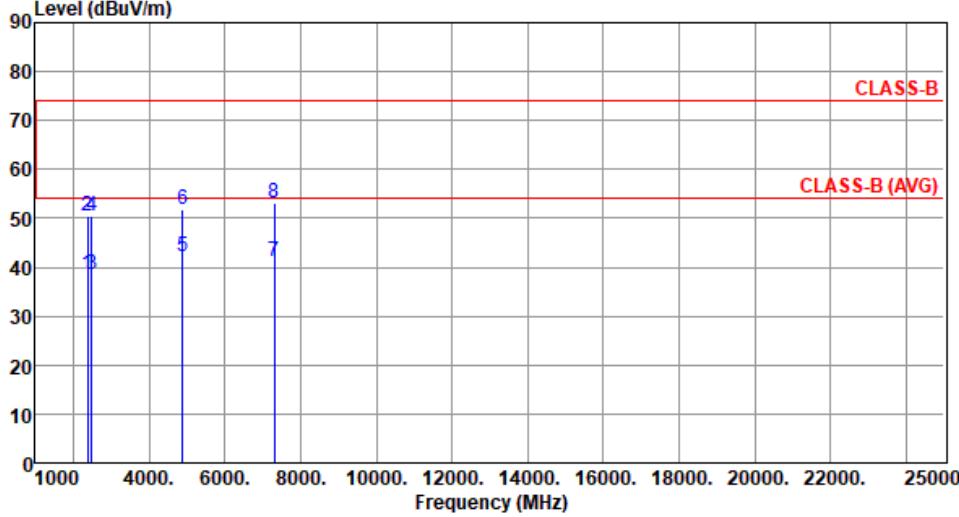
<b>Modulation</b>	BT-LE (1Mbps)	<b>Test Freq. (MHz)</b>	2440																																																																																																
<b>Polarization</b>	Horizontal																																																																																																		
Test By	:BRAD WU	Temperature(°C):23	Humidity(%):61																																																																																																
																																																																																																			
<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2390.00</td> <td>38.42</td> <td>54.00</td> <td>-15.58</td> <td>40.08</td> <td>-1.66</td> <td>Average</td> <td>204</td> <td>318</td> </tr> <tr> <td>2</td> <td>2390.00</td> <td>50.41</td> <td>74.00</td> <td>-23.59</td> <td>52.07</td> <td>-1.66</td> <td>Peak</td> <td>204</td> <td>318</td> </tr> <tr> <td>3</td> <td>2483.50</td> <td>38.42</td> <td>54.00</td> <td>-15.58</td> <td>40.28</td> <td>-1.86</td> <td>Average</td> <td>204</td> <td>318</td> </tr> <tr> <td>4</td> <td>2483.50</td> <td>50.61</td> <td>74.00</td> <td>-23.39</td> <td>52.47</td> <td>-1.86</td> <td>Peak</td> <td>204</td> <td>318</td> </tr> <tr> <td>5</td> <td>4880.00</td> <td>42.16</td> <td>54.00</td> <td>-11.84</td> <td>37.09</td> <td>5.07</td> <td>Average</td> <td>179</td> <td>189</td> </tr> <tr> <td>6</td> <td>4880.00</td> <td>51.97</td> <td>74.00</td> <td>-22.03</td> <td>46.90</td> <td>5.07</td> <td>Peak</td> <td>179</td> <td>189</td> </tr> <tr> <td>7</td> <td>7320.00</td> <td>41.06</td> <td>54.00</td> <td>-12.94</td> <td>30.66</td> <td>10.40</td> <td>Average</td> <td>318</td> <td>199</td> </tr> <tr> <td>8</td> <td>7320.00</td> <td>53.17</td> <td>74.00</td> <td>-20.83</td> <td>42.77</td> <td>10.40</td> <td>Peak</td> <td>318</td> <td>199</td> </tr> </tbody> </table>				Freq.	Emission Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	cm	deg	1	2390.00	38.42	54.00	-15.58	40.08	-1.66	Average	204	318	2	2390.00	50.41	74.00	-23.59	52.07	-1.66	Peak	204	318	3	2483.50	38.42	54.00	-15.58	40.28	-1.86	Average	204	318	4	2483.50	50.61	74.00	-23.39	52.47	-1.86	Peak	204	318	5	4880.00	42.16	54.00	-11.84	37.09	5.07	Average	179	189	6	4880.00	51.97	74.00	-22.03	46.90	5.07	Peak	179	189	7	7320.00	41.06	54.00	-12.94	30.66	10.40	Average	318	199	8	7320.00	53.17	74.00	-20.83	42.77	10.40	Peak	318	199
Freq.	Emission Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	cm	deg																																																																																												
1	2390.00	38.42	54.00	-15.58	40.08	-1.66	Average	204	318																																																																																										
2	2390.00	50.41	74.00	-23.59	52.07	-1.66	Peak	204	318																																																																																										
3	2483.50	38.42	54.00	-15.58	40.28	-1.86	Average	204	318																																																																																										
4	2483.50	50.61	74.00	-23.39	52.47	-1.86	Peak	204	318																																																																																										
5	4880.00	42.16	54.00	-11.84	37.09	5.07	Average	179	189																																																																																										
6	4880.00	51.97	74.00	-22.03	46.90	5.07	Peak	179	189																																																																																										
7	7320.00	41.06	54.00	-12.94	30.66	10.40	Average	318	199																																																																																										
8	7320.00	53.17	74.00	-20.83	42.77	10.40	Peak	318	199																																																																																										

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
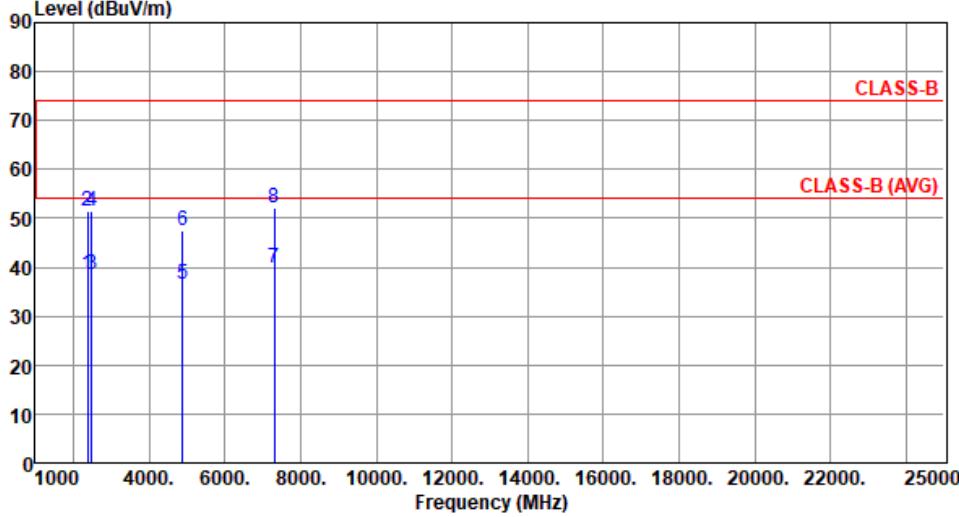
<b>Modulation</b>	BT-LE (1Mbps)	<b>Test Freq. (MHz)</b>	2440																																																																																																
<b>Polarization</b>	Vertical																																																																																																		
Test By	:BRAD WU	Temperature(°C):23	Humidity(%):61																																																																																																
																																																																																																			
<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission Limit</th> <th>Margin</th> <th>SA</th> <th>Factor</th> <th>Remark</th> <th>ANT</th> <th>Turn</th> </tr> <tr> <th>MHz</th> <th>level</th> <th>dB</th> <th>reading</th> <th>dB</th> <th></th> <th>High</th> <th>Table</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2390.00</td> <td>38.69</td> <td>54.00</td> <td>-15.31</td> <td>40.35</td> <td>-1.66</td> <td>Average</td> <td>211</td> <td>272</td> </tr> <tr> <td>2</td> <td>2390.00</td> <td>51.57</td> <td>74.00</td> <td>-22.43</td> <td>53.23</td> <td>-1.66</td> <td>Peak</td> <td>211</td> <td>272</td> </tr> <tr> <td>3</td> <td>2483.50</td> <td>38.62</td> <td>54.00</td> <td>-15.38</td> <td>40.48</td> <td>-1.86</td> <td>Average</td> <td>211</td> <td>272</td> </tr> <tr> <td>4</td> <td>2483.50</td> <td>51.55</td> <td>74.00</td> <td>-22.45</td> <td>53.41</td> <td>-1.86</td> <td>Peak</td> <td>211</td> <td>272</td> </tr> <tr> <td>5</td> <td>4880.00</td> <td>36.57</td> <td>54.00</td> <td>-17.43</td> <td>31.50</td> <td>5.07</td> <td>Average</td> <td>215</td> <td>77</td> </tr> <tr> <td>6</td> <td>4880.00</td> <td>47.54</td> <td>74.00</td> <td>-26.46</td> <td>42.47</td> <td>5.07</td> <td>Peak</td> <td>215</td> <td>77</td> </tr> <tr> <td>7</td> <td>7320.00</td> <td>40.00</td> <td>54.00</td> <td>-14.00</td> <td>29.60</td> <td>10.40</td> <td>Average</td> <td>186</td> <td>174</td> </tr> <tr> <td>8</td> <td>7320.00</td> <td>52.30</td> <td>74.00</td> <td>-21.70</td> <td>41.90</td> <td>10.40</td> <td>Peak</td> <td>186</td> <td>174</td> </tr> </tbody> </table>				Freq.	Emission Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dB	reading	dB		High	Table	1	2390.00	38.69	54.00	-15.31	40.35	-1.66	Average	211	272	2	2390.00	51.57	74.00	-22.43	53.23	-1.66	Peak	211	272	3	2483.50	38.62	54.00	-15.38	40.48	-1.86	Average	211	272	4	2483.50	51.55	74.00	-22.45	53.41	-1.86	Peak	211	272	5	4880.00	36.57	54.00	-17.43	31.50	5.07	Average	215	77	6	4880.00	47.54	74.00	-26.46	42.47	5.07	Peak	215	77	7	7320.00	40.00	54.00	-14.00	29.60	10.40	Average	186	174	8	7320.00	52.30	74.00	-21.70	41.90	10.40	Peak	186	174
Freq.	Emission Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																												
MHz	level	dB	reading	dB		High	Table																																																																																												
1	2390.00	38.69	54.00	-15.31	40.35	-1.66	Average	211	272																																																																																										
2	2390.00	51.57	74.00	-22.43	53.23	-1.66	Peak	211	272																																																																																										
3	2483.50	38.62	54.00	-15.38	40.48	-1.86	Average	211	272																																																																																										
4	2483.50	51.55	74.00	-22.45	53.41	-1.86	Peak	211	272																																																																																										
5	4880.00	36.57	54.00	-17.43	31.50	5.07	Average	215	77																																																																																										
6	4880.00	47.54	74.00	-26.46	42.47	5.07	Peak	215	77																																																																																										
7	7320.00	40.00	54.00	-14.00	29.60	10.40	Average	186	174																																																																																										
8	7320.00	52.30	74.00	-21.70	41.90	10.40	Peak	186	174																																																																																										

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

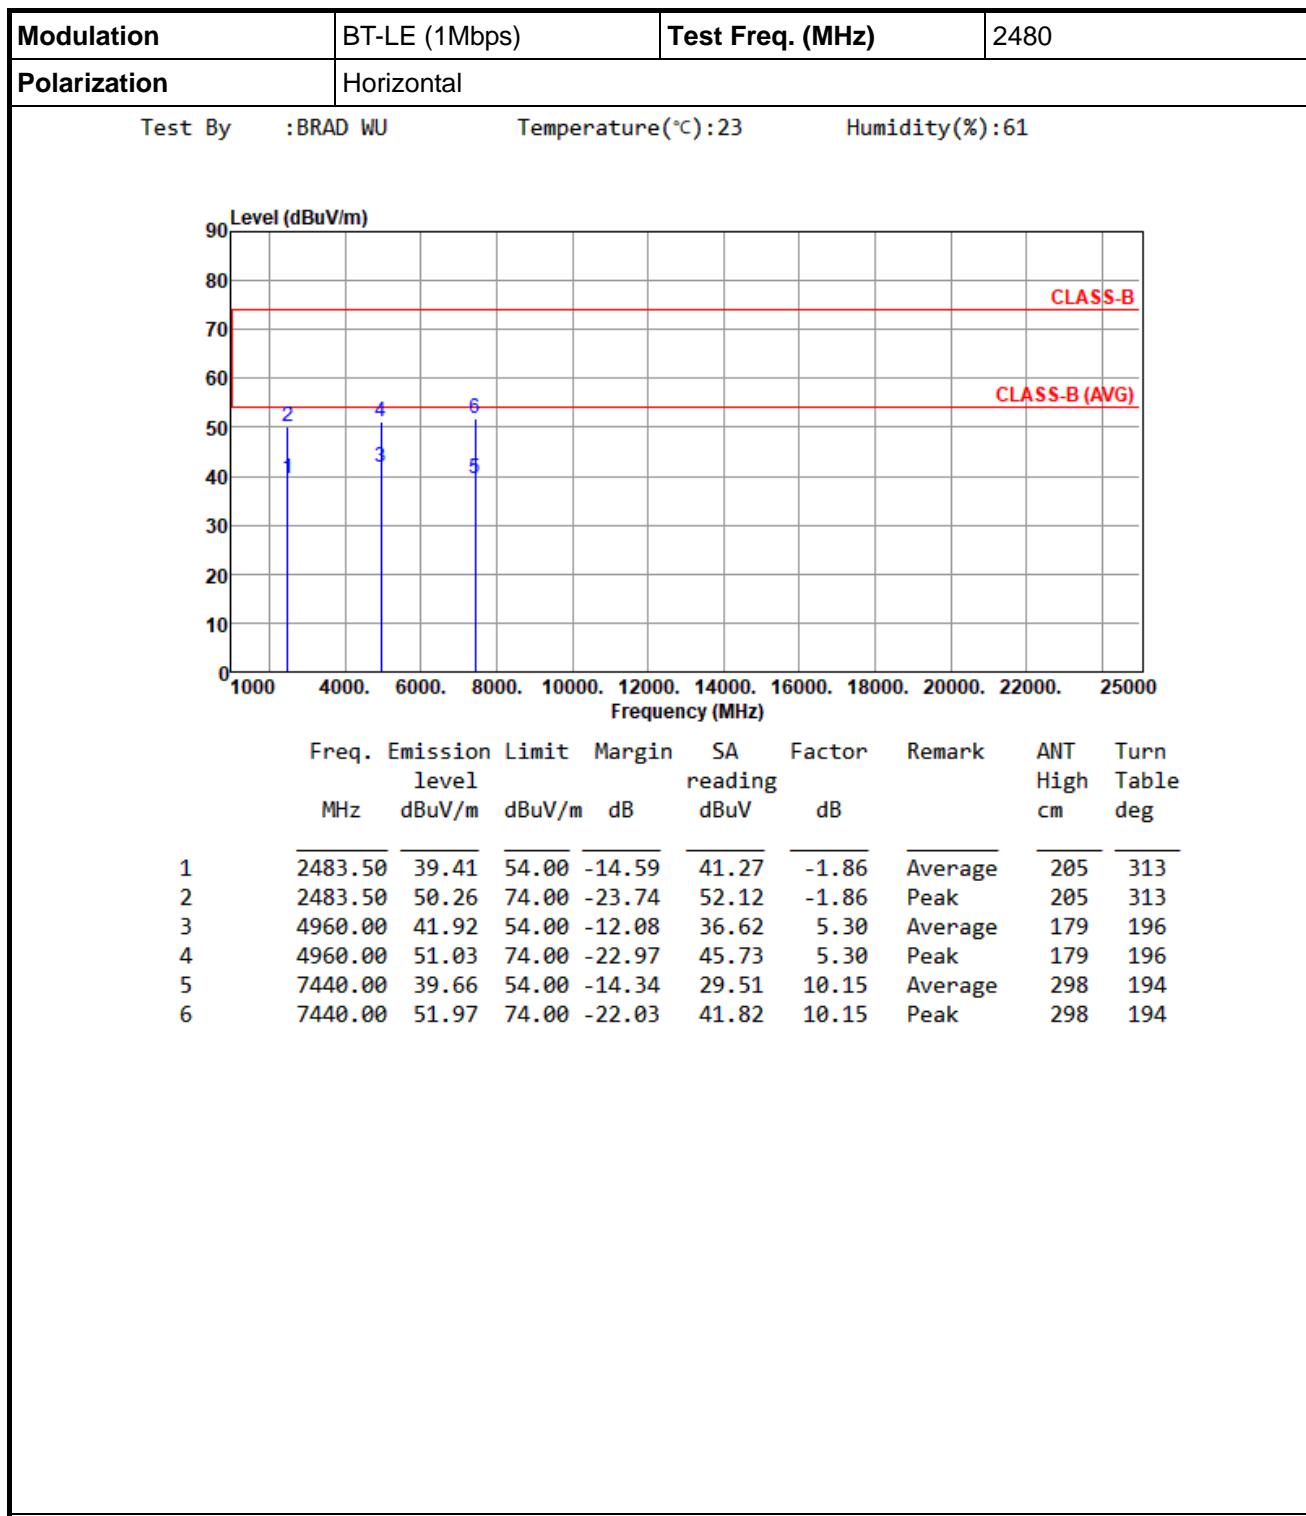

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
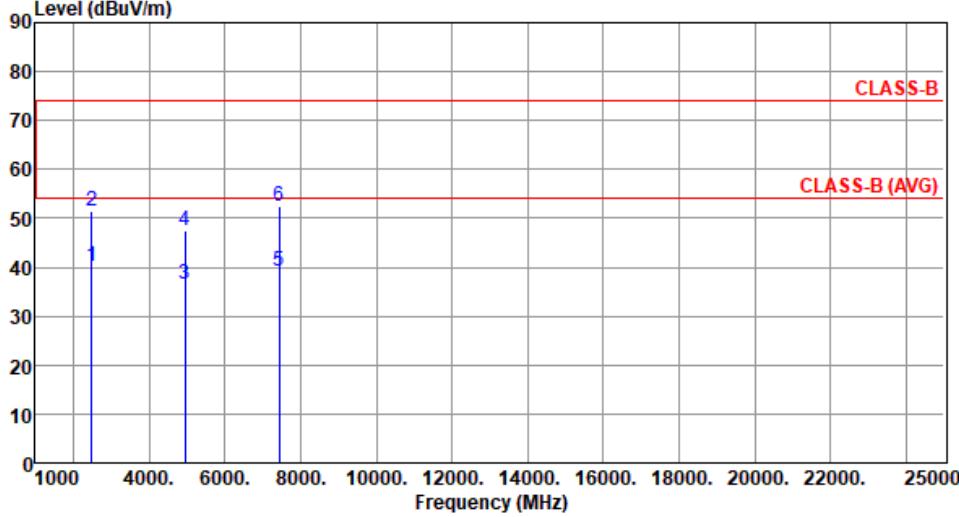
<b>Modulation</b>	BT-LE (1Mbps)	<b>Test Freq. (MHz)</b>	2480																																																																												
<b>Polarization</b>	Vertical																																																																														
Test By	:BRAD WU	Temperature(°C):23	Humidity(%):61																																																																												
																																																																															
<table> <thead> <tr> <th>Freq.</th> <th>Emission Limit</th> <th>Margin</th> <th>SA</th> <th>Factor</th> <th>Remark</th> <th>ANT</th> <th>Turn</th> </tr> <tr> <th>MHz</th> <th>level</th> <th>level</th> <th>reading</th> <th>dB</th> <th></th> <th>High</th> <th>Table</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>40.15</td> <td>54.00</td> <td>-13.85</td> <td>42.01</td> <td>-1.86</td> <td>Average</td> <td>208</td> <td>259</td> </tr> <tr> <td>2</td> <td>2483.50</td> <td>51.35</td> <td>74.00</td> <td>-22.65</td> <td>53.21</td> <td>-1.86</td> <td>Peak</td> <td>208</td> <td>259</td> </tr> <tr> <td>3</td> <td>4960.00</td> <td>36.52</td> <td>54.00</td> <td>-17.48</td> <td>31.22</td> <td>5.30</td> <td>Average</td> <td>211</td> <td>76</td> </tr> <tr> <td>4</td> <td>4960.00</td> <td>47.45</td> <td>74.00</td> <td>-26.55</td> <td>42.15</td> <td>5.30</td> <td>Peak</td> <td>211</td> <td>76</td> </tr> <tr> <td>5</td> <td>7440.00</td> <td>39.26</td> <td>54.00</td> <td>-14.74</td> <td>29.11</td> <td>10.15</td> <td>Average</td> <td>185</td> <td>176</td> </tr> <tr> <td>6</td> <td>7440.00</td> <td>52.48</td> <td>74.00</td> <td>-21.52</td> <td>42.33</td> <td>10.15</td> <td>Peak</td> <td>185</td> <td>176</td> </tr> </tbody> </table>				Freq.	Emission Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	level	reading	dB		High	Table	1	2483.50	40.15	54.00	-13.85	42.01	-1.86	Average	208	259	2	2483.50	51.35	74.00	-22.65	53.21	-1.86	Peak	208	259	3	4960.00	36.52	54.00	-17.48	31.22	5.30	Average	211	76	4	4960.00	47.45	74.00	-26.55	42.15	5.30	Peak	211	76	5	7440.00	39.26	54.00	-14.74	29.11	10.15	Average	185	176	6	7440.00	52.48	74.00	-21.52	42.33	10.15	Peak	185	176
Freq.	Emission Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																								
MHz	level	level	reading	dB		High	Table																																																																								
1	2483.50	40.15	54.00	-13.85	42.01	-1.86	Average	208	259																																																																						
2	2483.50	51.35	74.00	-22.65	53.21	-1.86	Peak	208	259																																																																						
3	4960.00	36.52	54.00	-17.48	31.22	5.30	Average	211	76																																																																						
4	4960.00	47.45	74.00	-26.55	42.15	5.30	Peak	211	76																																																																						
5	7440.00	39.26	54.00	-14.74	29.11	10.15	Average	185	176																																																																						
6	7440.00	52.48	74.00	-21.52	42.33	10.15	Peak	185	176																																																																						

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
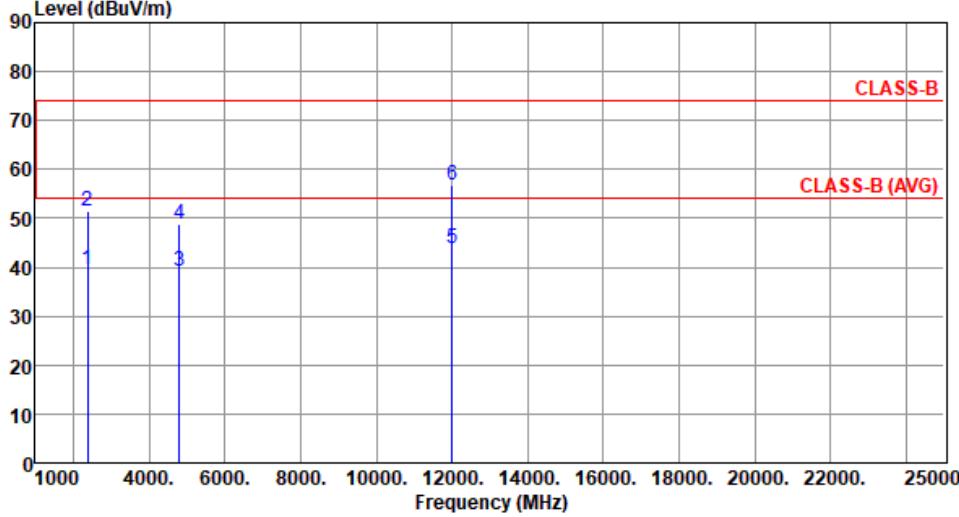
<b>Modulation</b>	BT-LE (2Mbps)	<b>Test Freq. (MHz)</b>	2402						
<b>Polarization</b>	Horizontal								
Test By	:BRAD WU	Temperature (°C):23	Humidity(%):61						
Test By :BRAD WU      Temperature (°C):23      Humidity(%):61									
									
Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	
1	2390.00	39.62	54.00	-14.38	41.28	-1.66	Average	208	319
2	2390.00	51.64	74.00	-22.36	53.30	-1.66	Peak	208	319
3	4804.00	39.35	54.00	-14.65	34.35	5.00	Average	185	211
4	4804.00	48.87	74.00	-25.13	43.87	5.00	Peak	185	211
5	12010.00	43.84	54.00	-10.16	29.16	14.68	Average	100	51
6	12010.00	56.85	74.00	-17.15	42.17	14.68	Peak	100	51

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

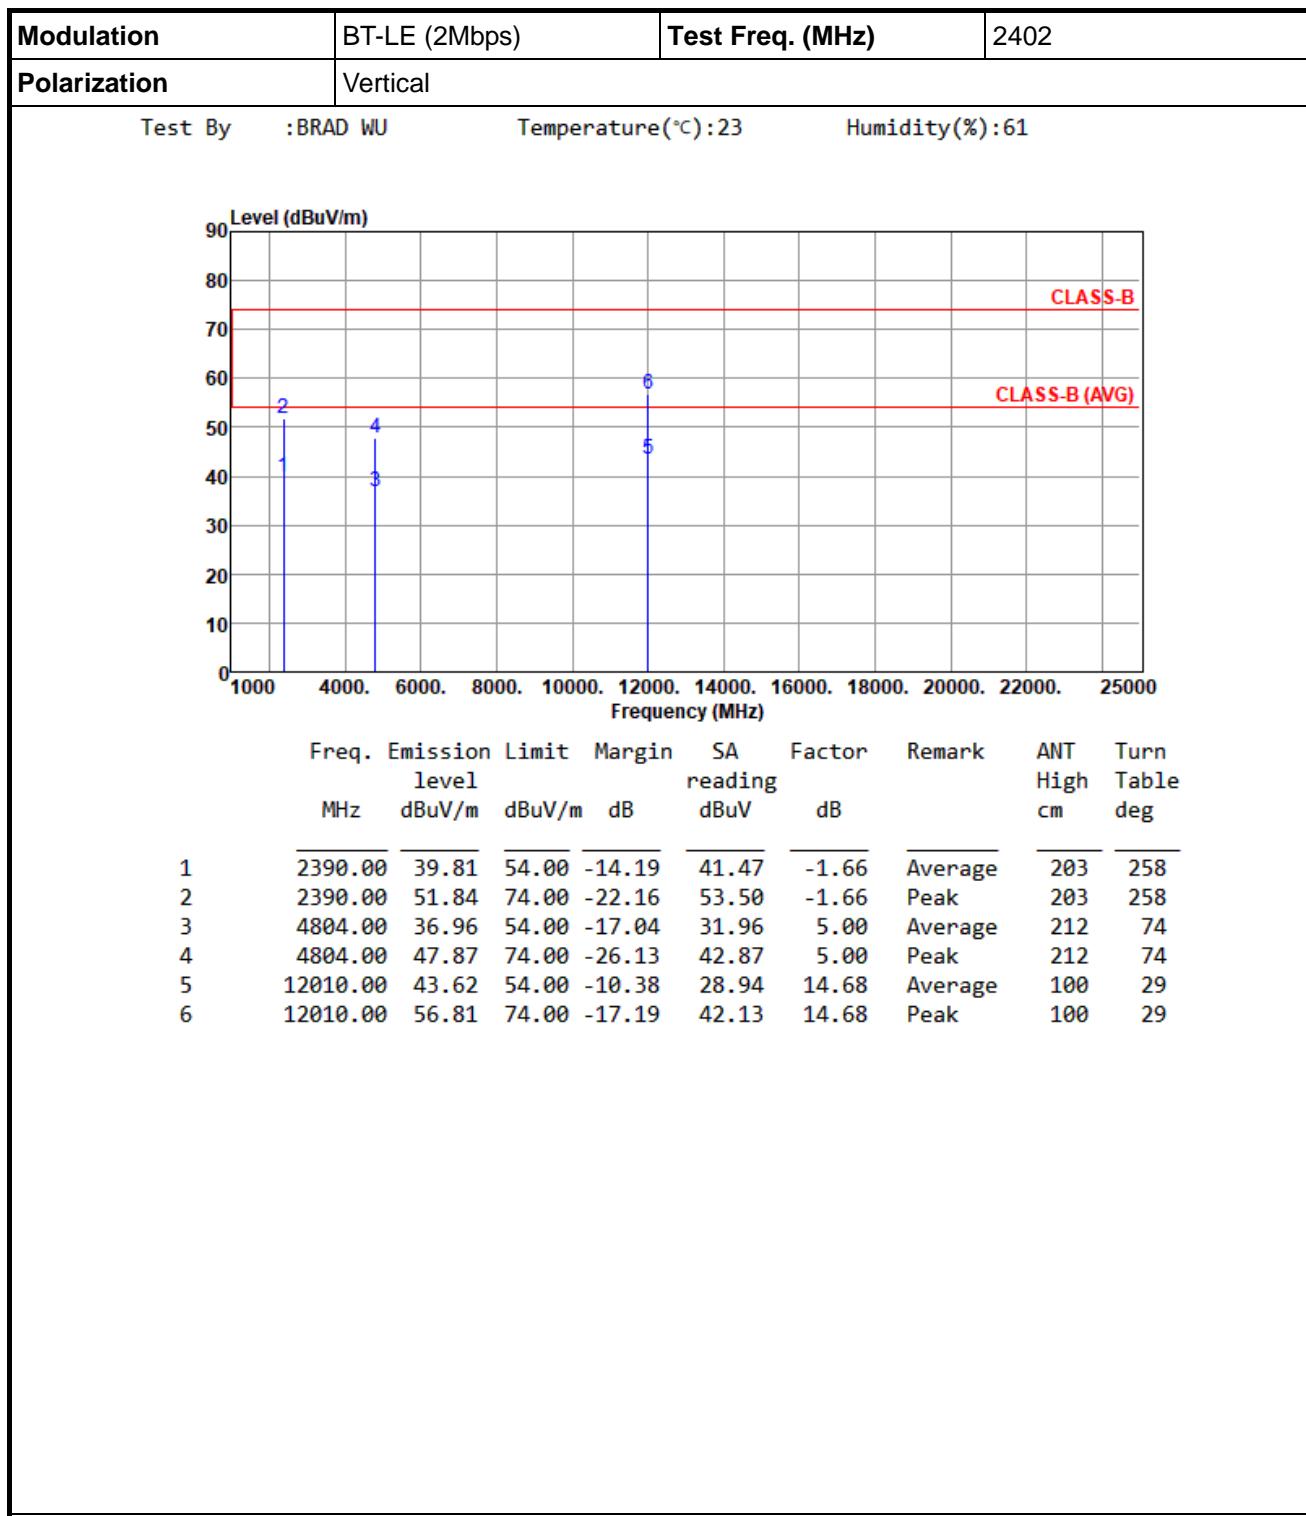

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
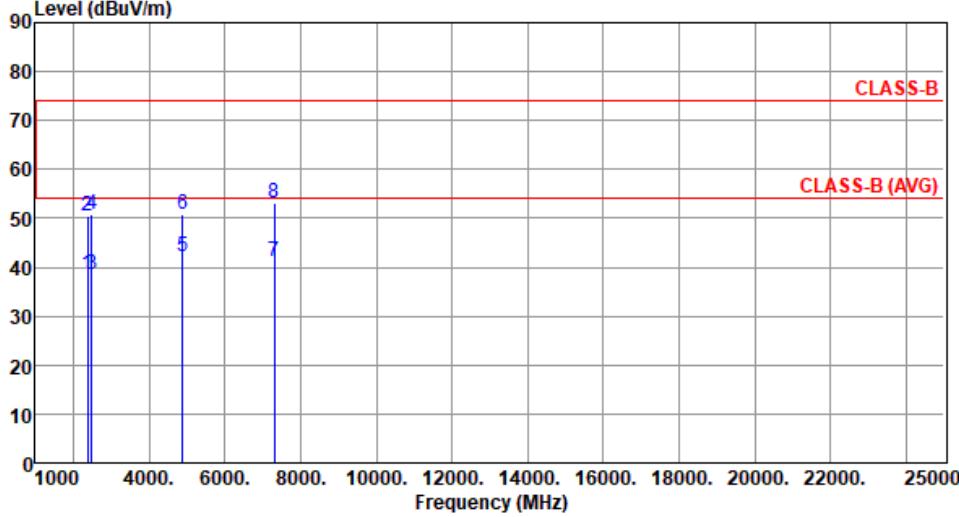
<b>Modulation</b>	BT-LE (2Mbps)	<b>Test Freq. (MHz)</b>	2440																																																																																										
<b>Polarization</b>	Horizontal																																																																																												
Test By	:BRAD WU	Temperature (°C):23	Humidity(%):61																																																																																										
																																																																																													
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left; padding-bottom: 2px;">Freq.</th><th style="text-align: left; padding-bottom: 2px;">Emission</th><th style="text-align: left; padding-bottom: 2px;">Limit</th><th style="text-align: left; padding-bottom: 2px;">Margin</th><th style="text-align: left; padding-bottom: 2px;">SA</th><th style="text-align: left; padding-bottom: 2px;">Factor</th><th style="text-align: left; padding-bottom: 2px;">Remark</th><th style="text-align: left; padding-bottom: 2px;">ANT</th><th style="text-align: left; padding-bottom: 2px;">Turn</th></tr> <tr> <th style="text-align: left;">MHz</th><th style="text-align: left;">level</th><th style="text-align: left;">dBuV/m</th><th style="text-align: left;">dBuV/m</th><th style="text-align: left;">dB</th><th style="text-align: left;">reading</th><th style="text-align: left;">dBiV</th><th style="text-align: left;">dBi</th><th style="text-align: left;">High</th></tr> </thead> <tbody> <tr> <td style="text-align: left;">1</td><td style="text-align: left;">2390.00</td><td style="text-align: left;">38.51</td><td style="text-align: left;">54.00</td><td style="text-align: left;">-15.49</td><td style="text-align: left;">40.17</td><td style="text-align: left;">-1.66</td><td style="text-align: left;">Average</td><td style="text-align: left;">206</td></tr> <tr> <td style="text-align: left;">2</td><td style="text-align: left;">2390.00</td><td style="text-align: left;">50.46</td><td style="text-align: left;">74.00</td><td style="text-align: left;">-23.54</td><td style="text-align: left;">52.12</td><td style="text-align: left;">-1.66</td><td style="text-align: left;">Peak</td><td style="text-align: left;">206</td></tr> <tr> <td style="text-align: left;">3</td><td style="text-align: left;">2483.50</td><td style="text-align: left;">38.46</td><td style="text-align: left;">54.00</td><td style="text-align: left;">-15.54</td><td style="text-align: left;">40.32</td><td style="text-align: left;">-1.86</td><td style="text-align: left;">Average</td><td style="text-align: left;">206</td></tr> <tr> <td style="text-align: left;">4</td><td style="text-align: left;">2483.50</td><td style="text-align: left;">50.72</td><td style="text-align: left;">74.00</td><td style="text-align: left;">-23.28</td><td style="text-align: left;">52.58</td><td style="text-align: left;">-1.86</td><td style="text-align: left;">Peak</td><td style="text-align: left;">206</td></tr> <tr> <td style="text-align: left;">5</td><td style="text-align: left;">4880.00</td><td style="text-align: left;">42.02</td><td style="text-align: left;">54.00</td><td style="text-align: left;">-11.98</td><td style="text-align: left;">36.95</td><td style="text-align: left;">5.07</td><td style="text-align: left;">Average</td><td style="text-align: left;">176</td></tr> <tr> <td style="text-align: left;">6</td><td style="text-align: left;">4880.00</td><td style="text-align: left;">50.81</td><td style="text-align: left;">74.00</td><td style="text-align: left;">-23.19</td><td style="text-align: left;">45.74</td><td style="text-align: left;">5.07</td><td style="text-align: left;">Peak</td><td style="text-align: left;">176</td></tr> <tr> <td style="text-align: left;">7</td><td style="text-align: left;">7320.00</td><td style="text-align: left;">41.17</td><td style="text-align: left;">54.00</td><td style="text-align: left;">-12.83</td><td style="text-align: left;">30.77</td><td style="text-align: left;">10.40</td><td style="text-align: left;">Average</td><td style="text-align: left;">311</td></tr> <tr> <td style="text-align: left;">8</td><td style="text-align: left;">7320.00</td><td style="text-align: left;">53.24</td><td style="text-align: left;">74.00</td><td style="text-align: left;">-20.76</td><td style="text-align: left;">42.84</td><td style="text-align: left;">10.40</td><td style="text-align: left;">Peak</td><td style="text-align: left;">311</td></tr> </tbody> </table>				Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dBuV/m	dB	reading	dBiV	dBi	High	1	2390.00	38.51	54.00	-15.49	40.17	-1.66	Average	206	2	2390.00	50.46	74.00	-23.54	52.12	-1.66	Peak	206	3	2483.50	38.46	54.00	-15.54	40.32	-1.86	Average	206	4	2483.50	50.72	74.00	-23.28	52.58	-1.86	Peak	206	5	4880.00	42.02	54.00	-11.98	36.95	5.07	Average	176	6	4880.00	50.81	74.00	-23.19	45.74	5.07	Peak	176	7	7320.00	41.17	54.00	-12.83	30.77	10.40	Average	311	8	7320.00	53.24	74.00	-20.76	42.84	10.40	Peak	311
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																					
MHz	level	dBuV/m	dBuV/m	dB	reading	dBiV	dBi	High																																																																																					
1	2390.00	38.51	54.00	-15.49	40.17	-1.66	Average	206																																																																																					
2	2390.00	50.46	74.00	-23.54	52.12	-1.66	Peak	206																																																																																					
3	2483.50	38.46	54.00	-15.54	40.32	-1.86	Average	206																																																																																					
4	2483.50	50.72	74.00	-23.28	52.58	-1.86	Peak	206																																																																																					
5	4880.00	42.02	54.00	-11.98	36.95	5.07	Average	176																																																																																					
6	4880.00	50.81	74.00	-23.19	45.74	5.07	Peak	176																																																																																					
7	7320.00	41.17	54.00	-12.83	30.77	10.40	Average	311																																																																																					
8	7320.00	53.24	74.00	-20.76	42.84	10.40	Peak	311																																																																																					

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
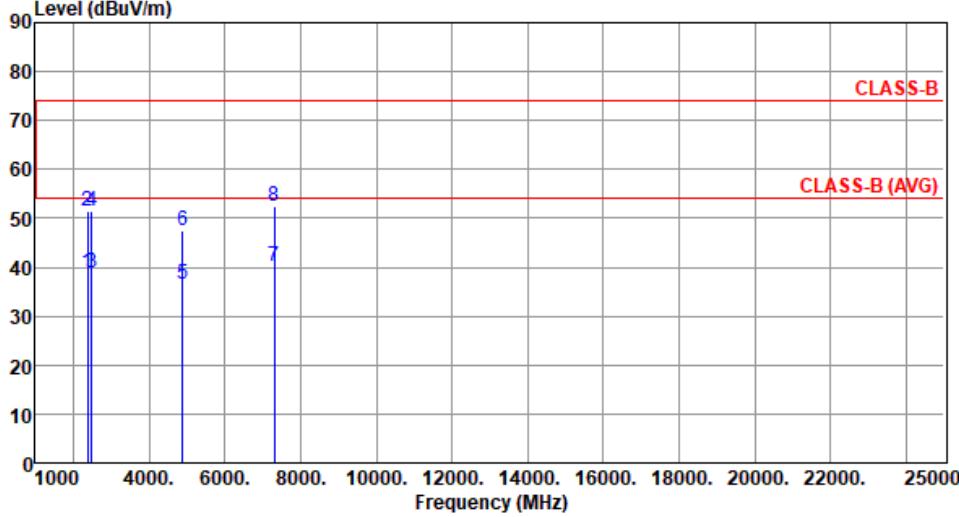
<b>Modulation</b>	BT-LE (2Mbps)	<b>Test Freq. (MHz)</b>	2440																																																																																								
<b>Polarization</b>	Vertical																																																																																										
Test By	:BRAD WU	Temperature (°C):23	Humidity(%):61																																																																																								
																																																																																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="text-align: left;">Freq.</th> <th style="text-align: left;">Emission Limit</th> <th style="text-align: left;">Margin</th> <th style="text-align: left;">SA</th> <th style="text-align: left;">Factor</th> <th style="text-align: left;">Remark</th> <th style="text-align: left;">ANT</th> <th style="text-align: left;">Turn</th> </tr> <tr> <th style="text-align: left;">MHz</th> <th style="text-align: left;">level</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dBuV/m</th> <th style="text-align: left;">dB</th> <th style="text-align: left;">reading</th> <th style="text-align: left;">High</th> <th style="text-align: left;">Table</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th>dBuV</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2390.00</td> <td>38.75</td> <td>54.00</td> <td>-15.25</td> <td>40.41</td> <td>-1.66</td> <td>Average</td> </tr> <tr> <td>2</td> <td>2390.00</td> <td>51.64</td> <td>74.00</td> <td>-22.36</td> <td>53.30</td> <td>-1.66</td> <td>Peak</td> </tr> <tr> <td>3</td> <td>2483.50</td> <td>38.83</td> <td>54.00</td> <td>-15.17</td> <td>40.69</td> <td>-1.86</td> <td>Average</td> </tr> <tr> <td>4</td> <td>2483.50</td> <td>51.62</td> <td>74.00</td> <td>-22.38</td> <td>53.48</td> <td>-1.86</td> <td>Peak</td> </tr> <tr> <td>5</td> <td>4880.00</td> <td>36.46</td> <td>54.00</td> <td>-17.54</td> <td>31.39</td> <td>5.07</td> <td>Average</td> </tr> <tr> <td>6</td> <td>4880.00</td> <td>47.33</td> <td>74.00</td> <td>-26.67</td> <td>42.26</td> <td>5.07</td> <td>Peak</td> </tr> <tr> <td>7</td> <td>7320.00</td> <td>40.12</td> <td>54.00</td> <td>-13.88</td> <td>29.72</td> <td>10.40</td> <td>Average</td> </tr> <tr> <td>8</td> <td>7320.00</td> <td>52.43</td> <td>74.00</td> <td>-21.57</td> <td>42.03</td> <td>10.40</td> <td>Peak</td> </tr> </tbody> </table>				Freq.	Emission Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dBuV/m	dB	reading	High	Table						dBuV	cm	deg	1	2390.00	38.75	54.00	-15.25	40.41	-1.66	Average	2	2390.00	51.64	74.00	-22.36	53.30	-1.66	Peak	3	2483.50	38.83	54.00	-15.17	40.69	-1.86	Average	4	2483.50	51.62	74.00	-22.38	53.48	-1.86	Peak	5	4880.00	36.46	54.00	-17.54	31.39	5.07	Average	6	4880.00	47.33	74.00	-26.67	42.26	5.07	Peak	7	7320.00	40.12	54.00	-13.88	29.72	10.40	Average	8	7320.00	52.43	74.00	-21.57	42.03	10.40	Peak
Freq.	Emission Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
MHz	level	dBuV/m	dBuV/m	dB	reading	High	Table																																																																																				
					dBuV	cm	deg																																																																																				
1	2390.00	38.75	54.00	-15.25	40.41	-1.66	Average																																																																																				
2	2390.00	51.64	74.00	-22.36	53.30	-1.66	Peak																																																																																				
3	2483.50	38.83	54.00	-15.17	40.69	-1.86	Average																																																																																				
4	2483.50	51.62	74.00	-22.38	53.48	-1.86	Peak																																																																																				
5	4880.00	36.46	54.00	-17.54	31.39	5.07	Average																																																																																				
6	4880.00	47.33	74.00	-26.67	42.26	5.07	Peak																																																																																				
7	7320.00	40.12	54.00	-13.88	29.72	10.40	Average																																																																																				
8	7320.00	52.43	74.00	-21.57	42.03	10.40	Peak																																																																																				

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
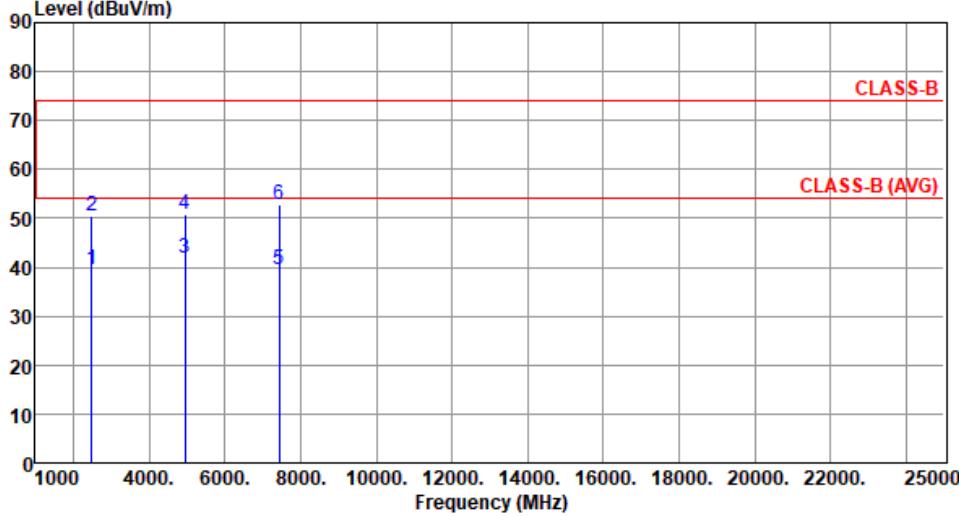
<b>Modulation</b>	BT-LE (2Mbps)	<b>Test Freq. (MHz)</b>	2480						
<b>Polarization</b>	Horizontal								
Test By	:BRAD WU	Temperature(°C):23	Humidity(%):61						
Test By :BRAD WU      Temperature(°C):23      Humidity(%):61									
									
Freq. MHz	Emission level dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg		
1	2483.50	39.39	54.00	-14.61	41.25	-1.86	Average	202	316
2	2483.50	50.44	74.00	-23.56	52.30	-1.86	Peak	202	316
3	4960.00	41.81	54.00	-12.19	36.51	5.30	Average	177	191
4	4960.00	50.94	74.00	-23.06	45.64	5.30	Peak	177	191
5	7440.00	39.55	54.00	-14.45	29.40	10.15	Average	294	196
6	7440.00	52.89	74.00	-21.11	42.74	10.15	Peak	294	196

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

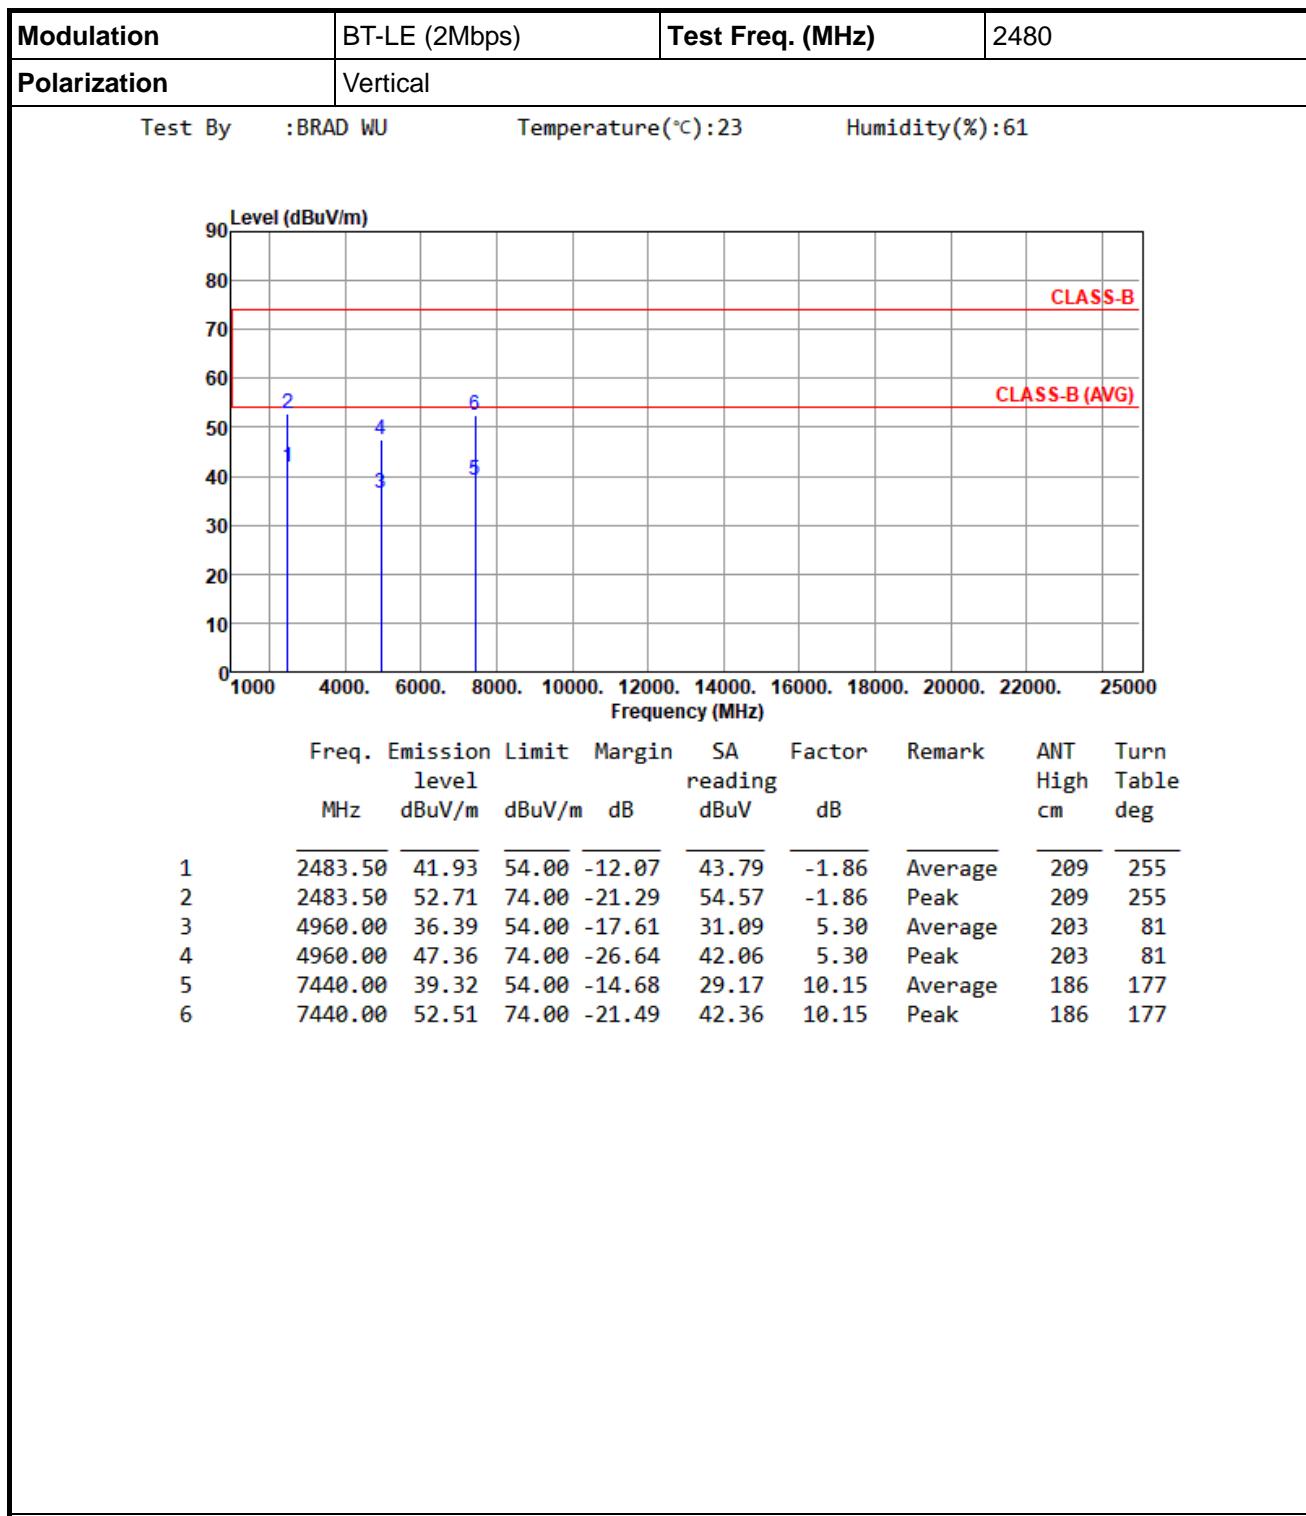

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

## 3.6 Emissions in non-restricted Frequency Bands

### 3.6.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz

### 3.6.2 Test Procedures


#### Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

#### Emission level measurement


1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level



### 3.6.3 Test Setup





### 3.6.4 Test Result of Emissions in non-restricted Frequency Bands

Ambient Condition	22°C / 64%	Tested By	Brad Wu
-------------------	------------	-----------	---------

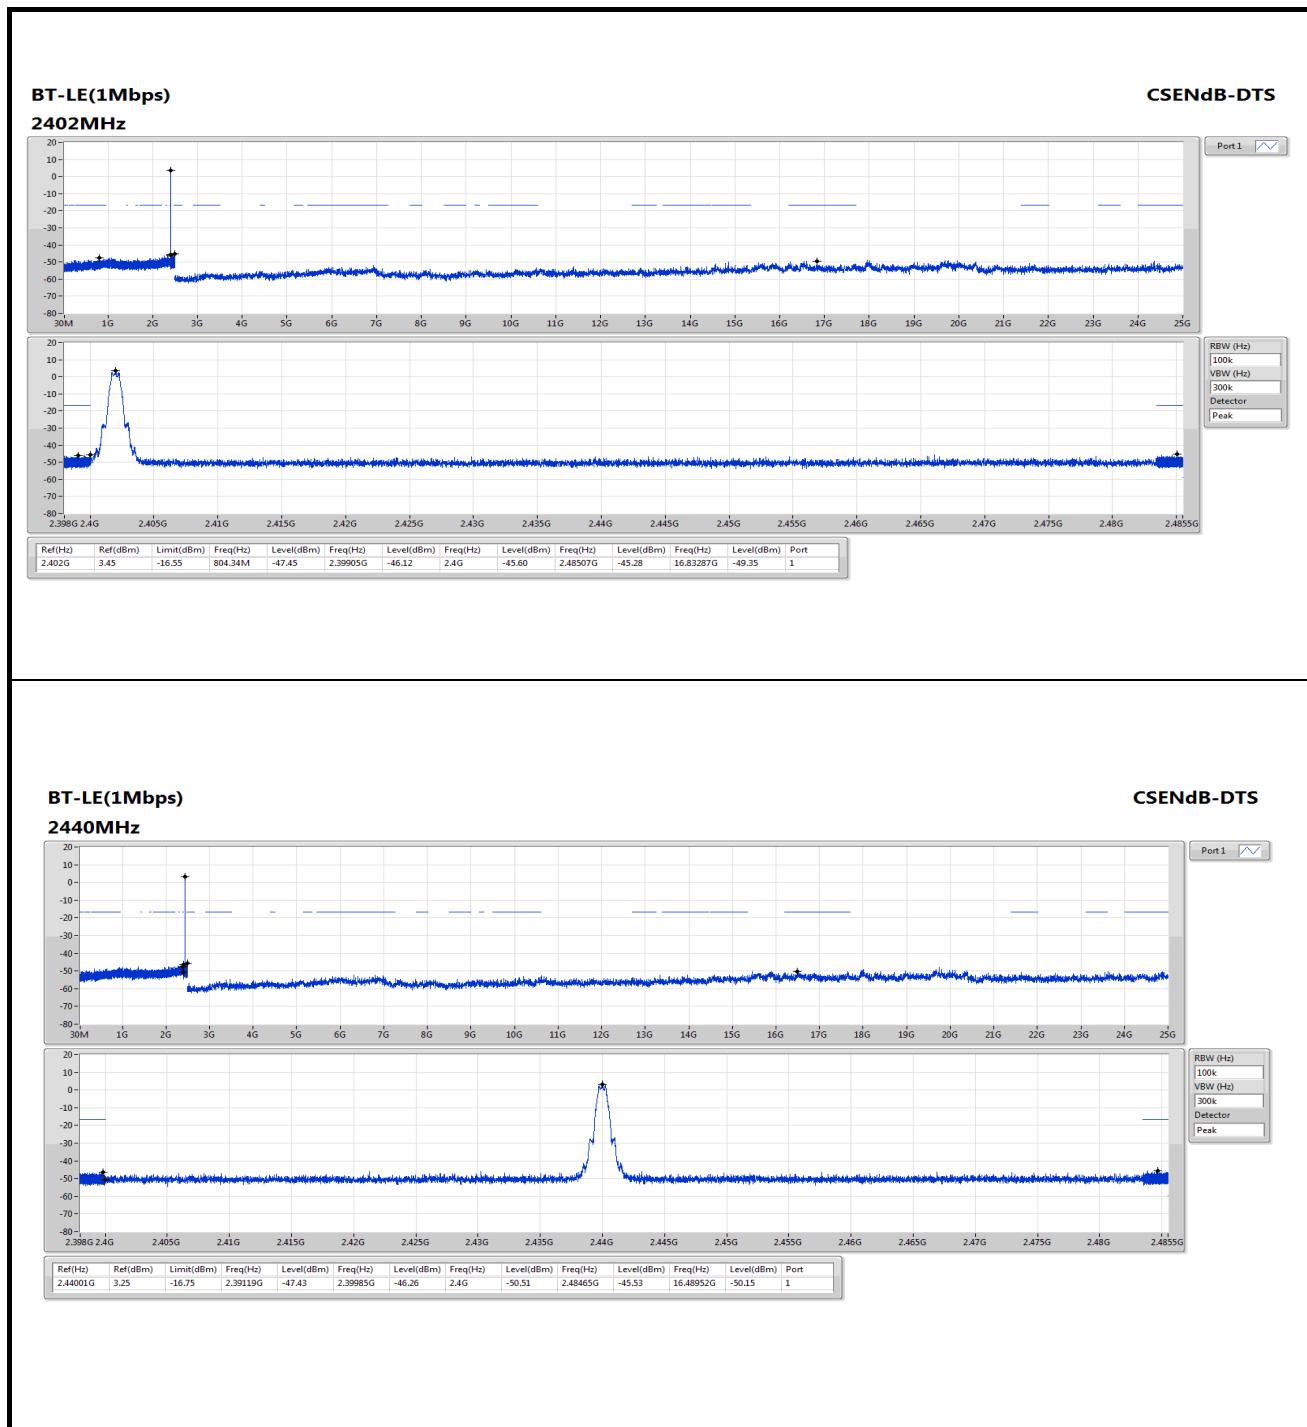

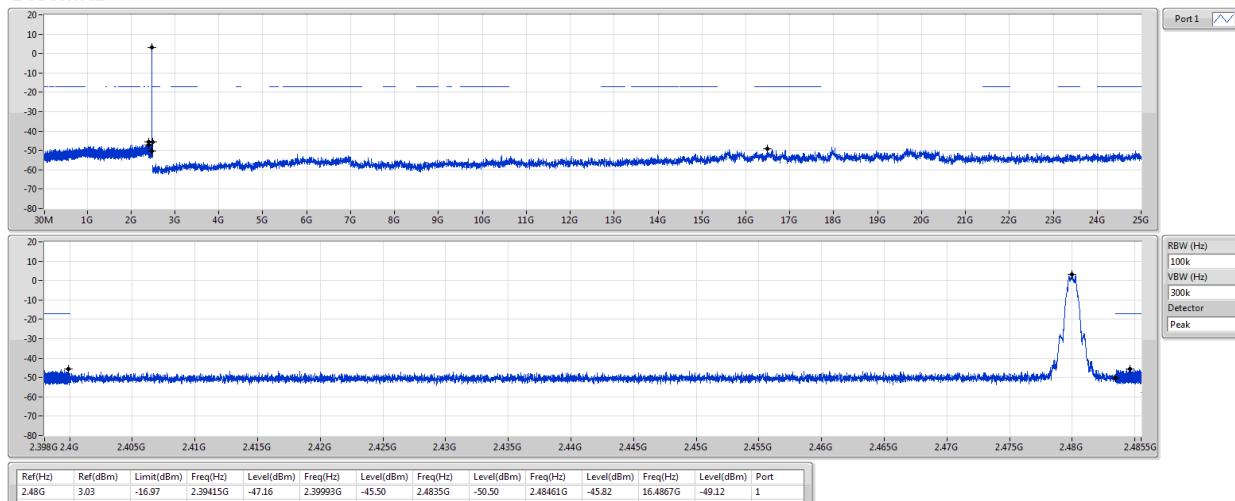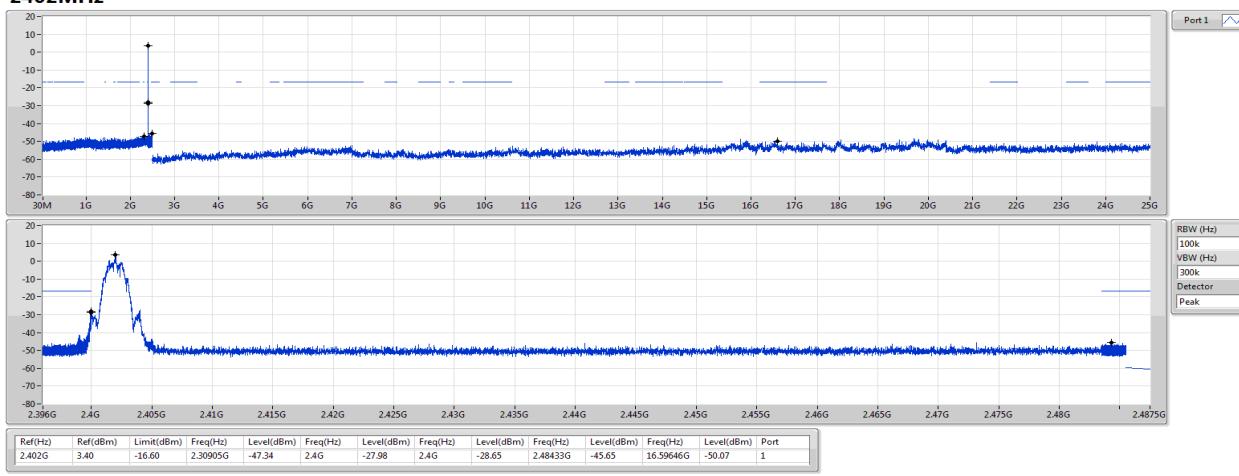**BT-LE(1Mbps)**
**2480MHz**
**CSEndB-DTS**

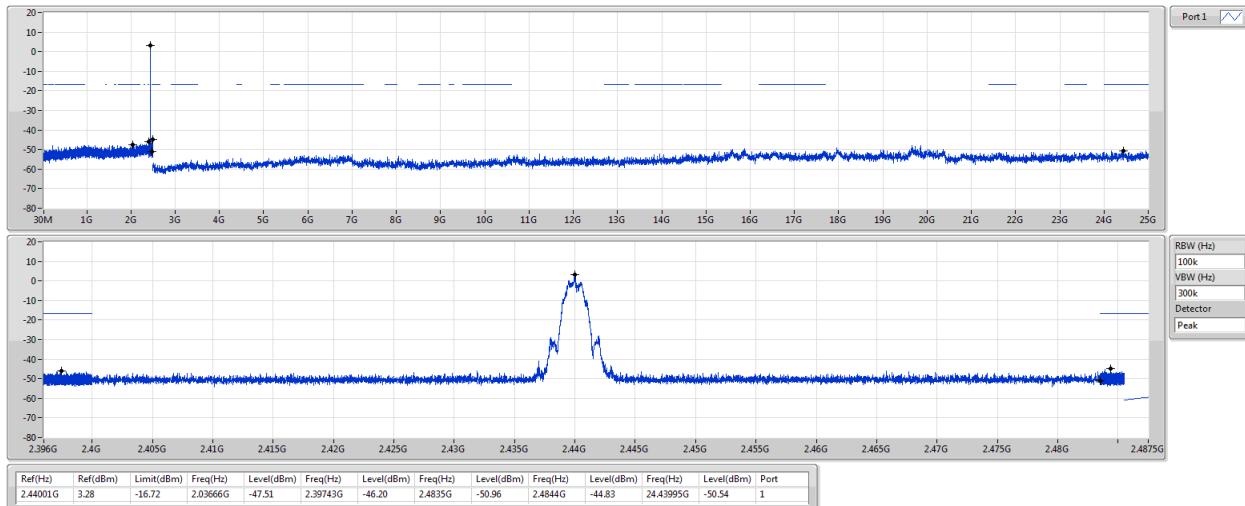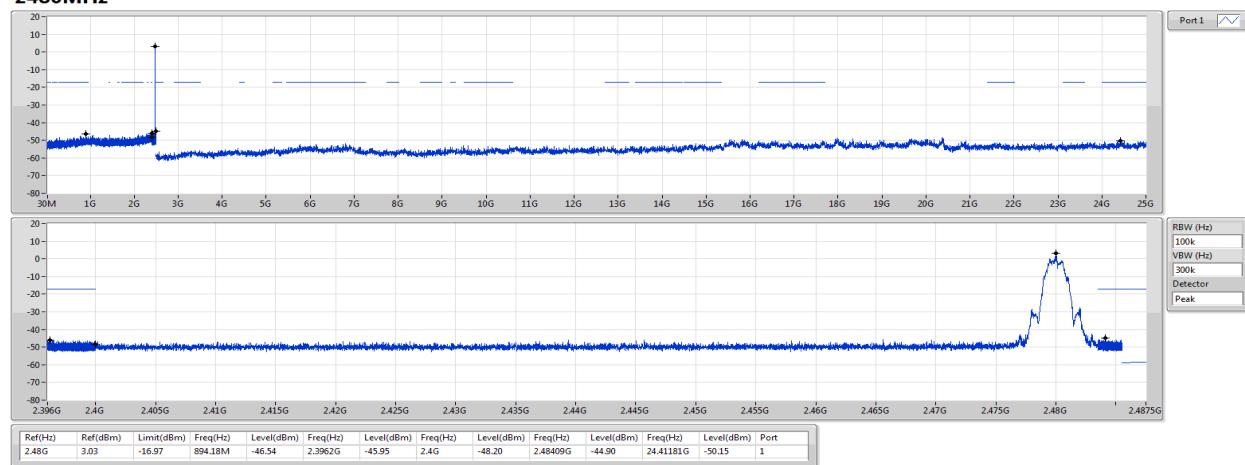**BT-LE(2Mbps)**
**2402MHz**
**CSEndB-DTS**


**BT-LE(2Mbps)**
**2440MHz**
**CSENdB-DTS**

**BT-LE(2Mbps)**
**2480MHz**
**CSENdB-DTS**


## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

### Linkou

Tel: 886-2-2601-1640  
No.30-2, Ding Fwu Tsuen, Lin Kou  
District, New Taipei City, Taiwan  
(R.O.C.)

### Kwei Shan

Tel: 886-3-271-8666  
No.3-1, Lane 6, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)

### Kwei Shan Site II

Tel: 886-3-271-8640  
No.14-1, Lane 19, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 333, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666  
Fax: 886-3-318-0155  
Email: ICC\_Service@icertifi.com.tw

—END—