


Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Free2move AB
EUT: Low Power Bluetooth module with Antenna
Model: F2M03GLA / Channel: 2480
Test Site / Operator: ETS / Mr. Meng
Test Condition: 25°C / Unom: 3.3 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 144.128MHz, Emax: 35.88dBμV/m, RBW: 100kHz

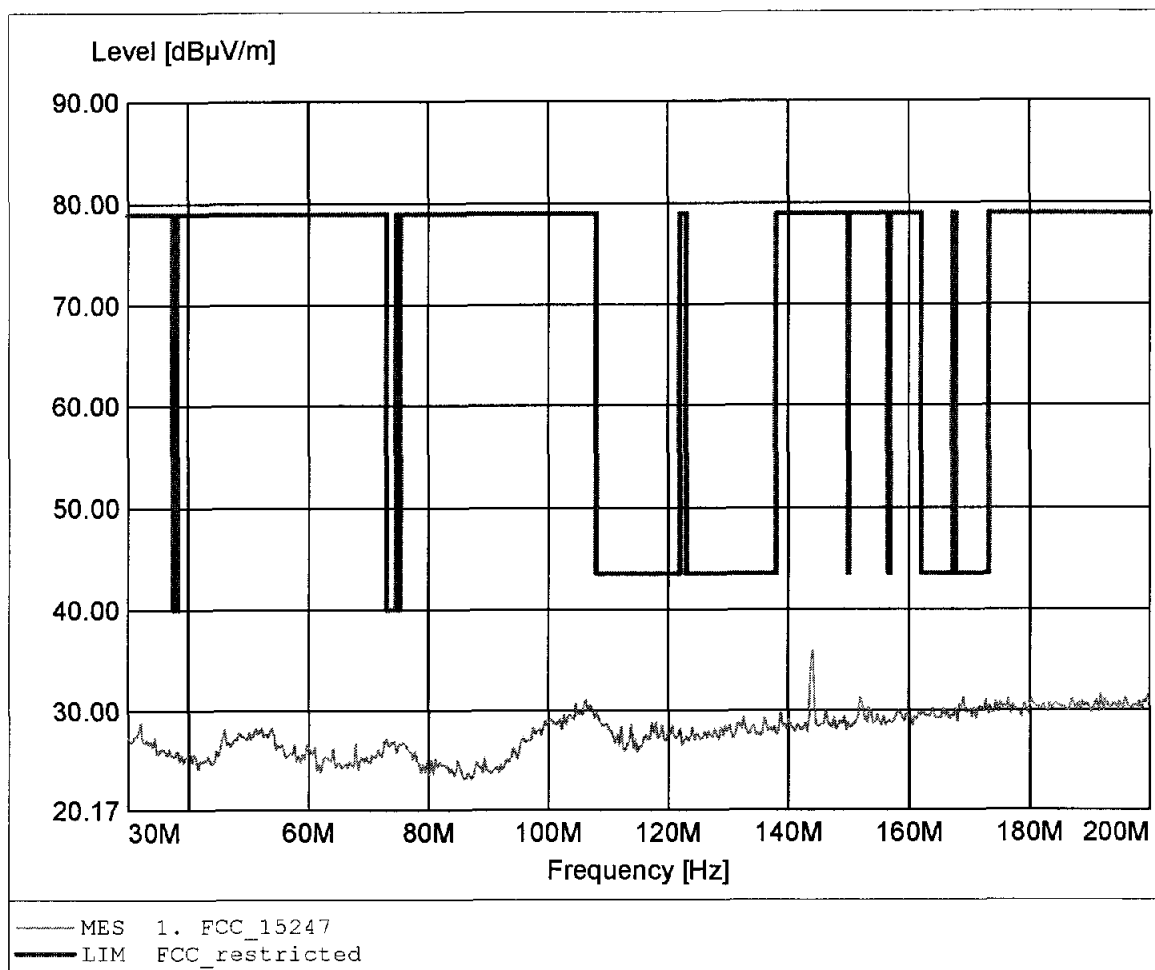

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Free2move AB
EUT: Low Power Bluetooth module with Antenna
Model: F2M03GLA / Channel: 2480
Test Site / Operator: ETS / Mr. Meng
Test Condition: 25°C / Unom: 3.3 V DC
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 198.297MHz, Emax: 32.37dBμV/m, RBW: 100kHz

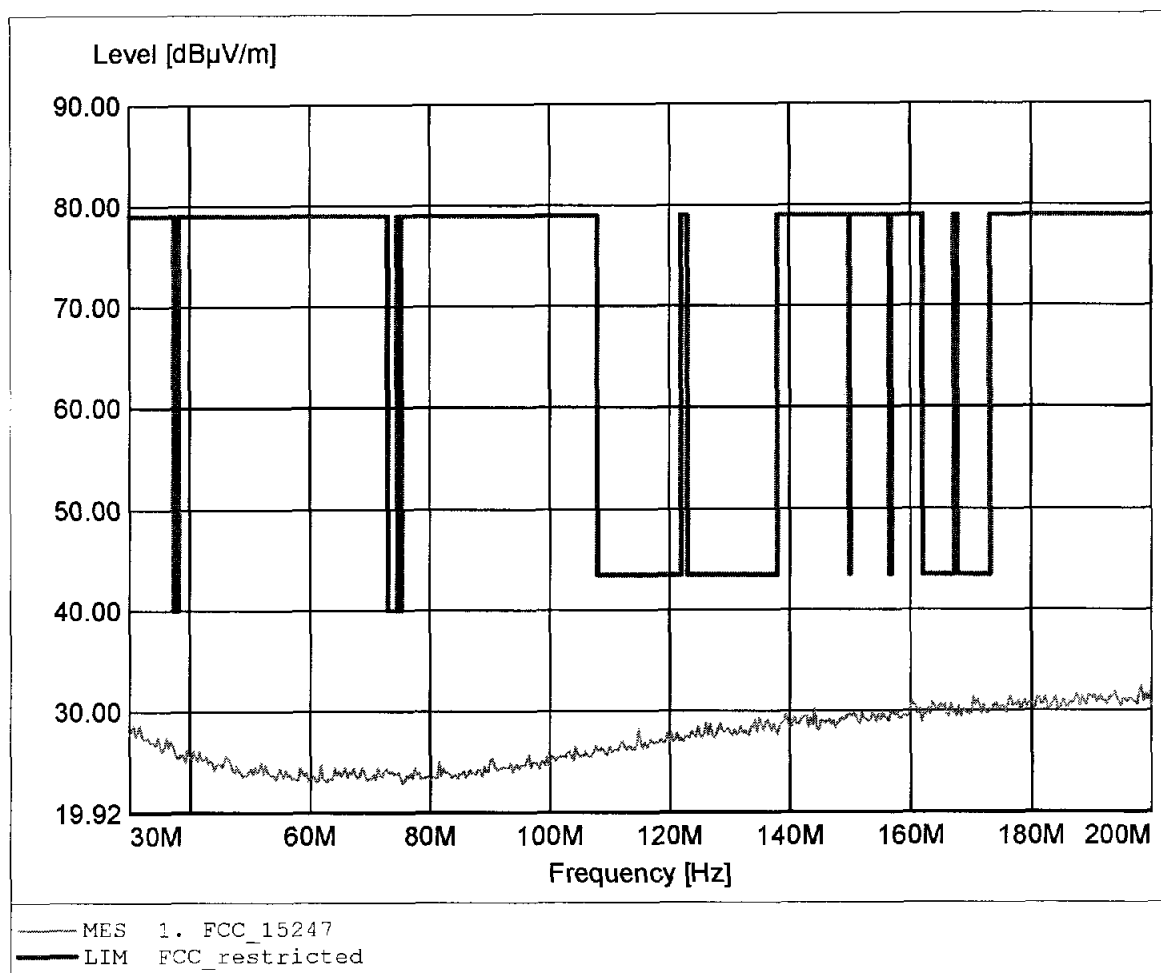

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Free2move AB
EUT: Low Power Bluetooth module with Antenna
Model: F2M03GLA / Channel: 2480
Test Site / Operator: ETS / Mr. Meng
Test Condition: 25°C / Unom: 3.3 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 996.794MHz, Emax: 22.60dBμV/m, RBW: 100kHz

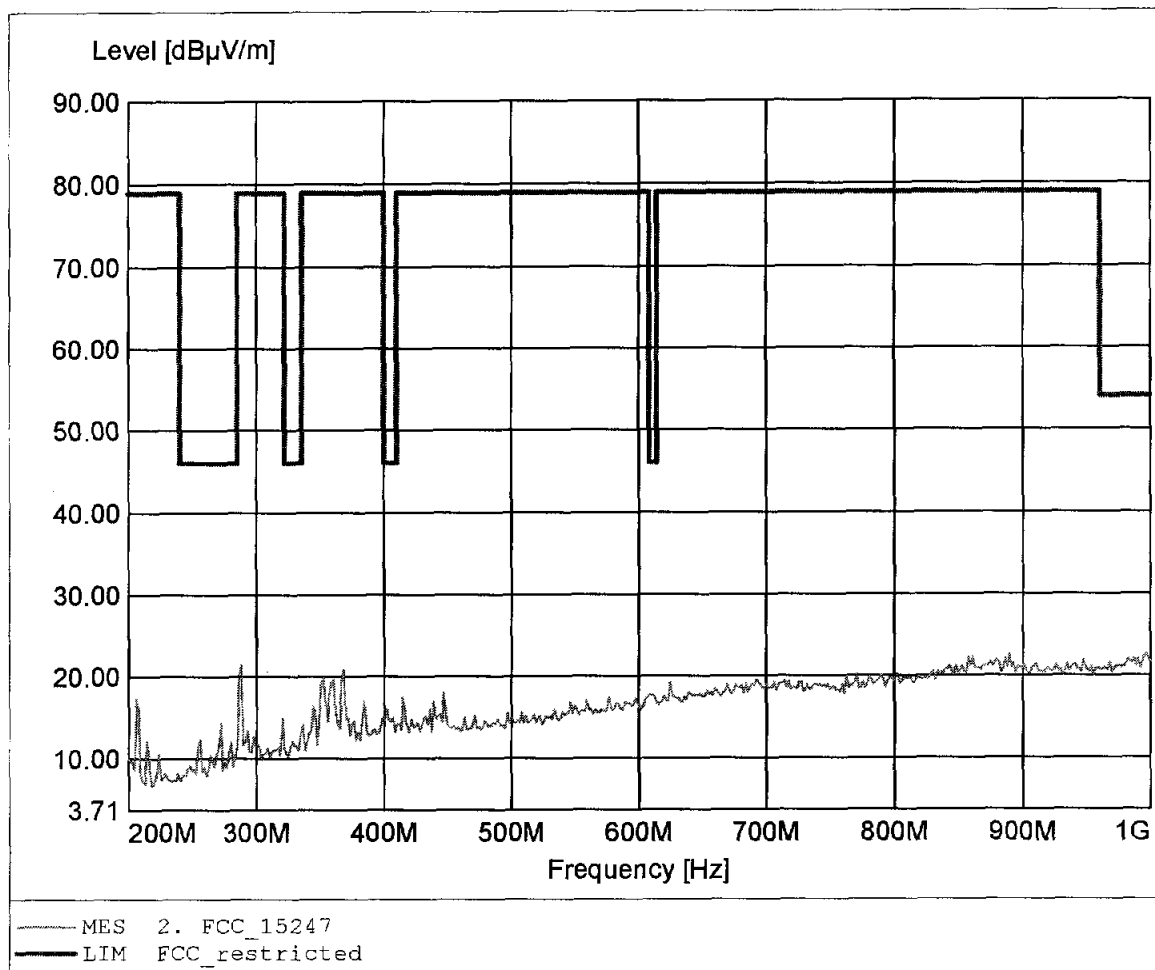

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Free2move AB
EUT: Low Power Bluetooth module with Antenna
Model: F2M03GLA / Channel: 2480
Test Site / Operator: ETS / Mr. Meng
Test Condition: 25°C / Unom: 3.3 V DC
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 828.457MHz, Emax: 23.99dBμV/m, RBW: 100kHz

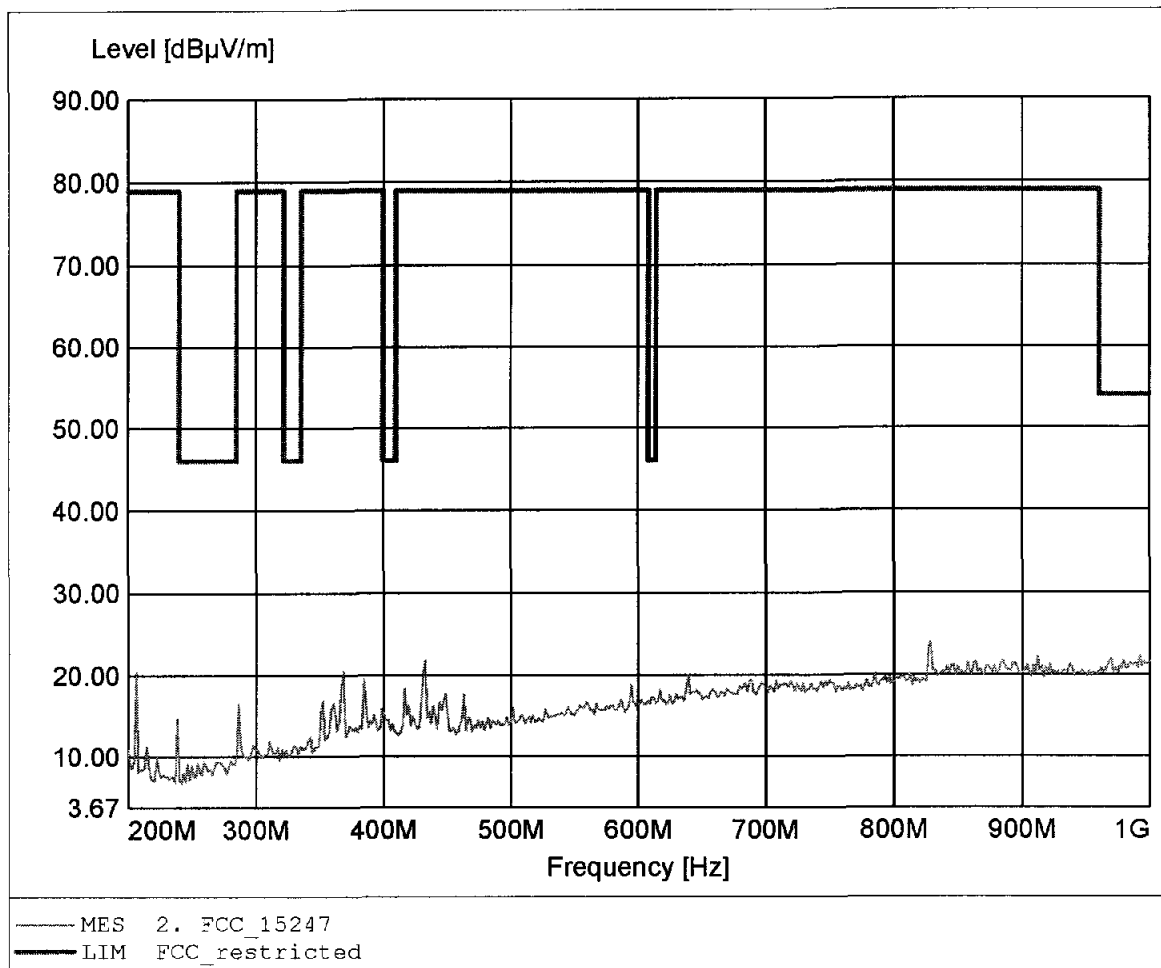

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Free2move AB
EUT: Low Power Bluetooth module with Antenna
Model: F2M03GLA / Channel: 2480
Test Site / Operator: ETS / Mr. Meng
Test Condition: 25°C / Unom: 3.3 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 53.37dB μ V/m, RBW: 1MHz

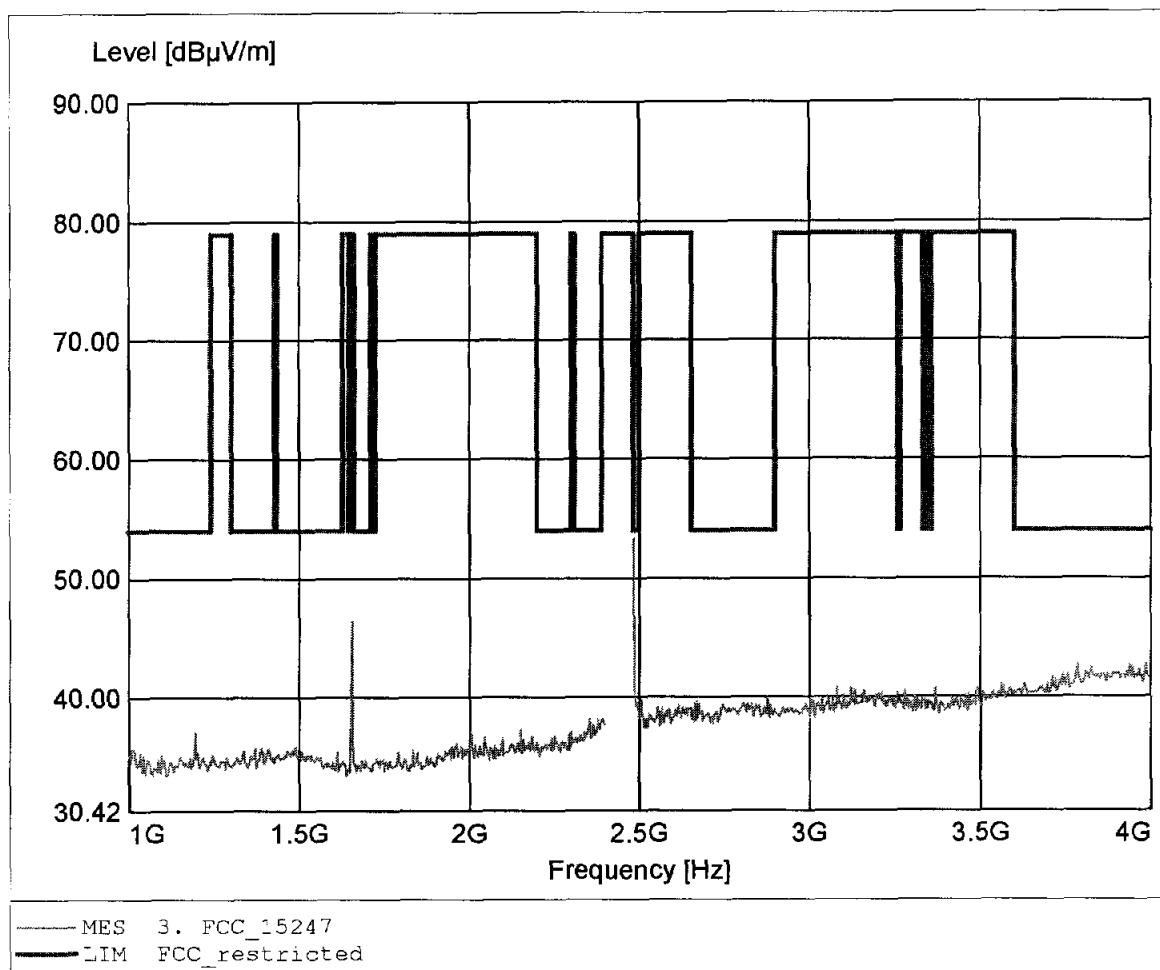

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Free2move AB
EUT: Low Power Bluetooth module with Antenna
Model: F2M03GLA / Channel: 2480
Test Site / Operator: ETS / Mr. Meng
Test Condition: 25°C / Unom: 3.3 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 56.47dBuV/m, RBW: 1MHz

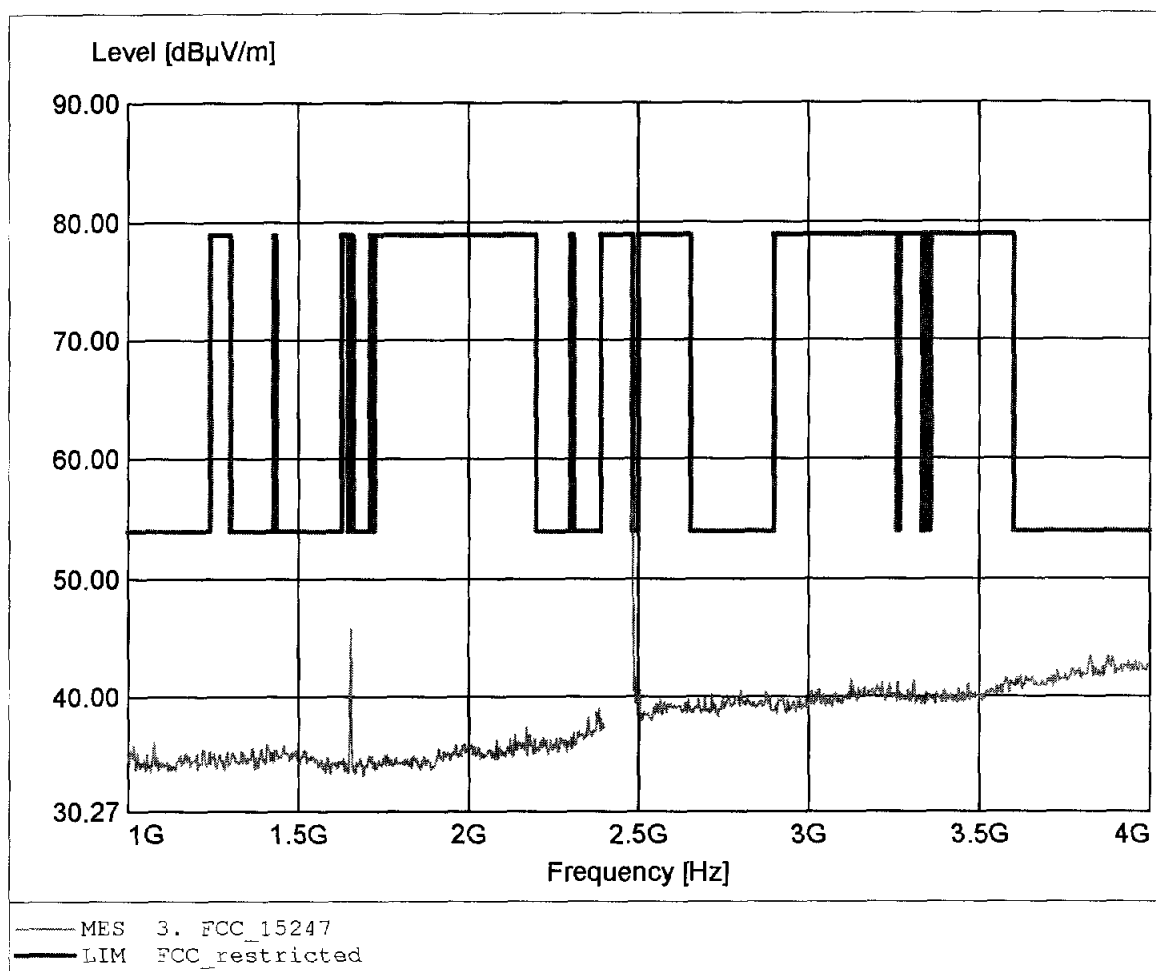

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Free2move AB
EUT: Low Power Bluetooth module with Antenna
Model: F2M03GLA / Channel: 2480
Test Site / Operator: ETS / Mr. Meng
Test Condition: 25°C / Unom: 3.3 V DC
Test Specification: according to S15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 44.88dB μ V/m, RBW: 1MHz

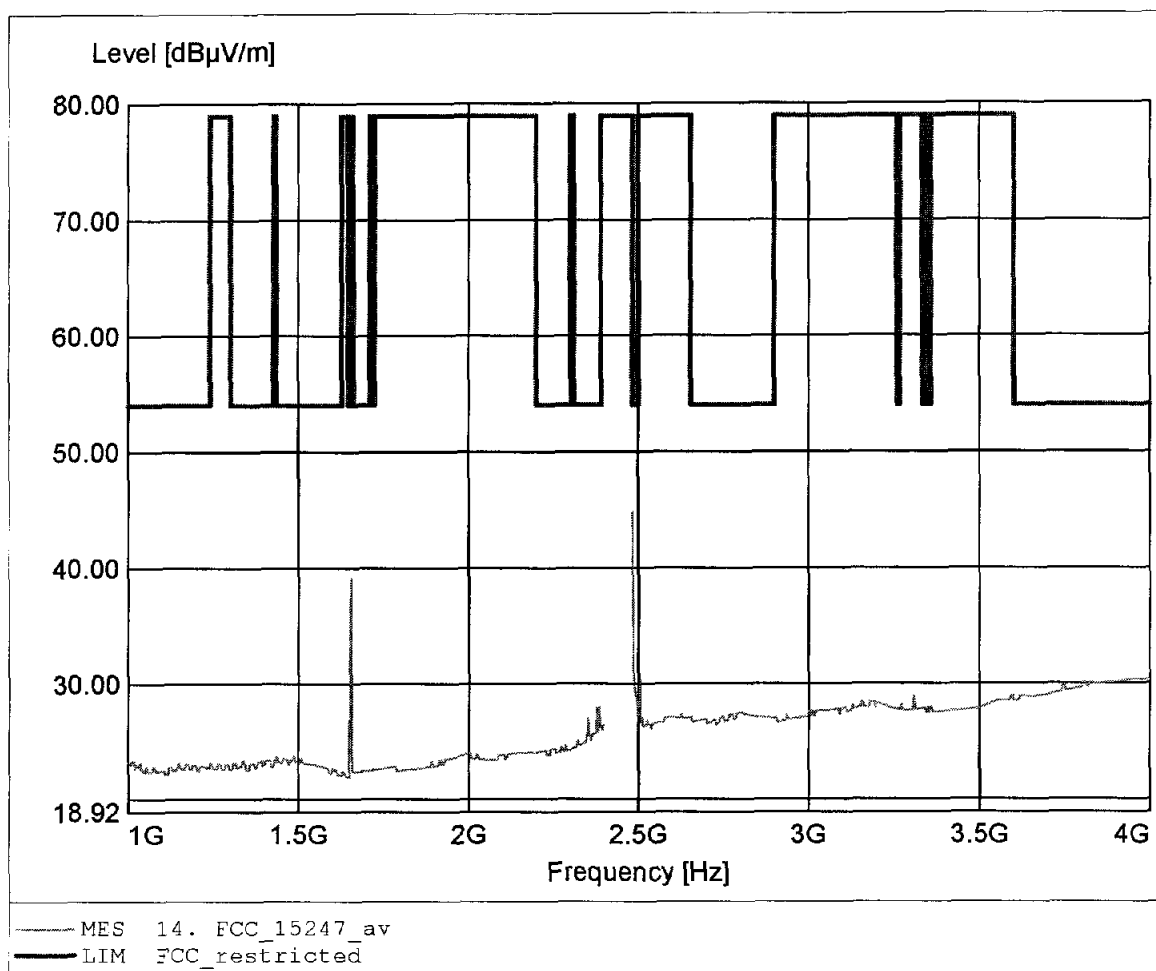

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Free2move AB
EUT: Low Power Bluetooth module with Antenna
Model: F2M03GLA / Channel: 2480
Test Site / Operator: ETS / Mr. Meng
Test Condition: 25°C / Unom: 3.3 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 6.782GHz, Emax: 45.95dB μ V/m, RBW: 1MHz

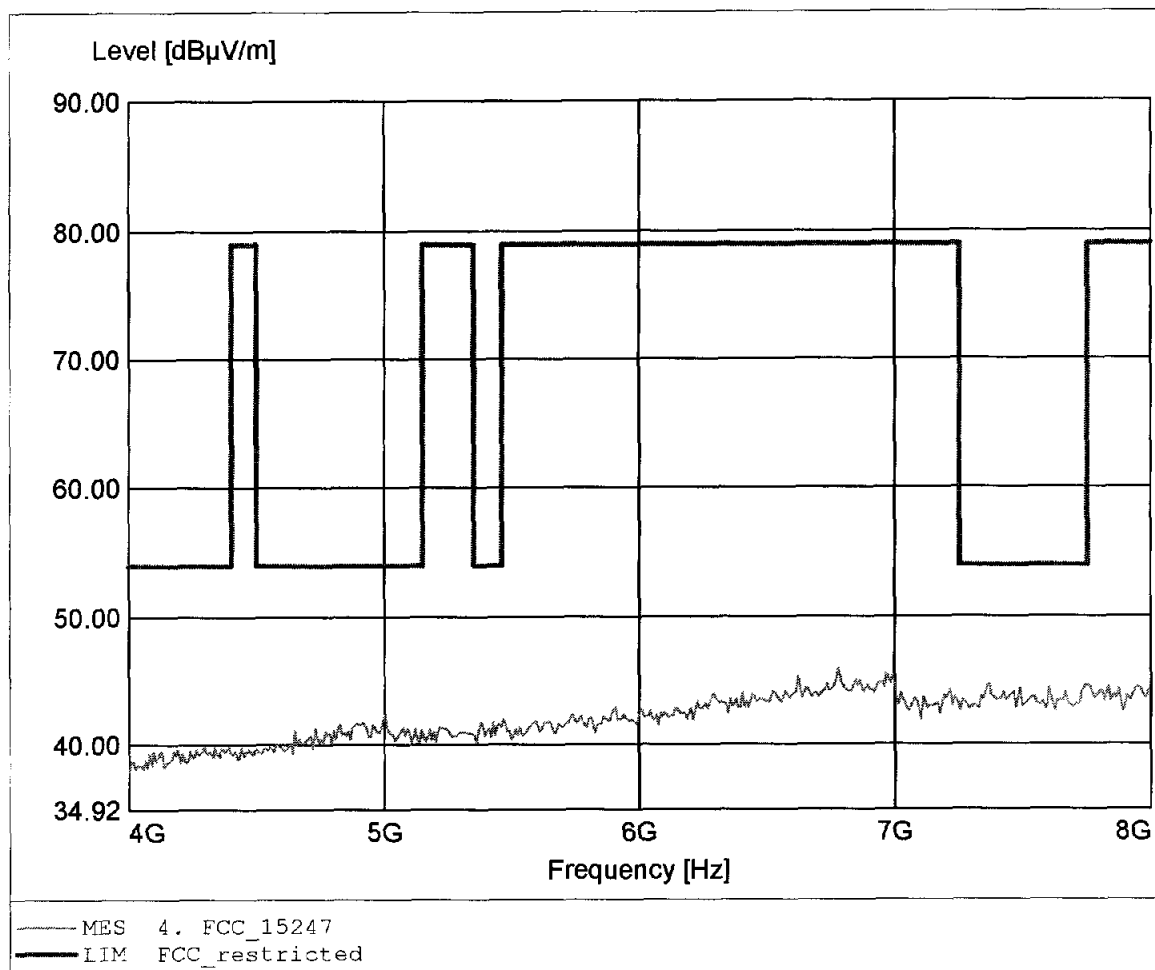

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Free2move AB
EUT: Low Power Bluetooth module with Antenna
Model: F2M03GLA / Channel: 2480
Test Site / Operator: ETS / Mr. Meng
Test Condition: 25°C / Unom: 3.3 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 6.990GHz, Emax: 45.47dBµV/m, RBW: 1MHz

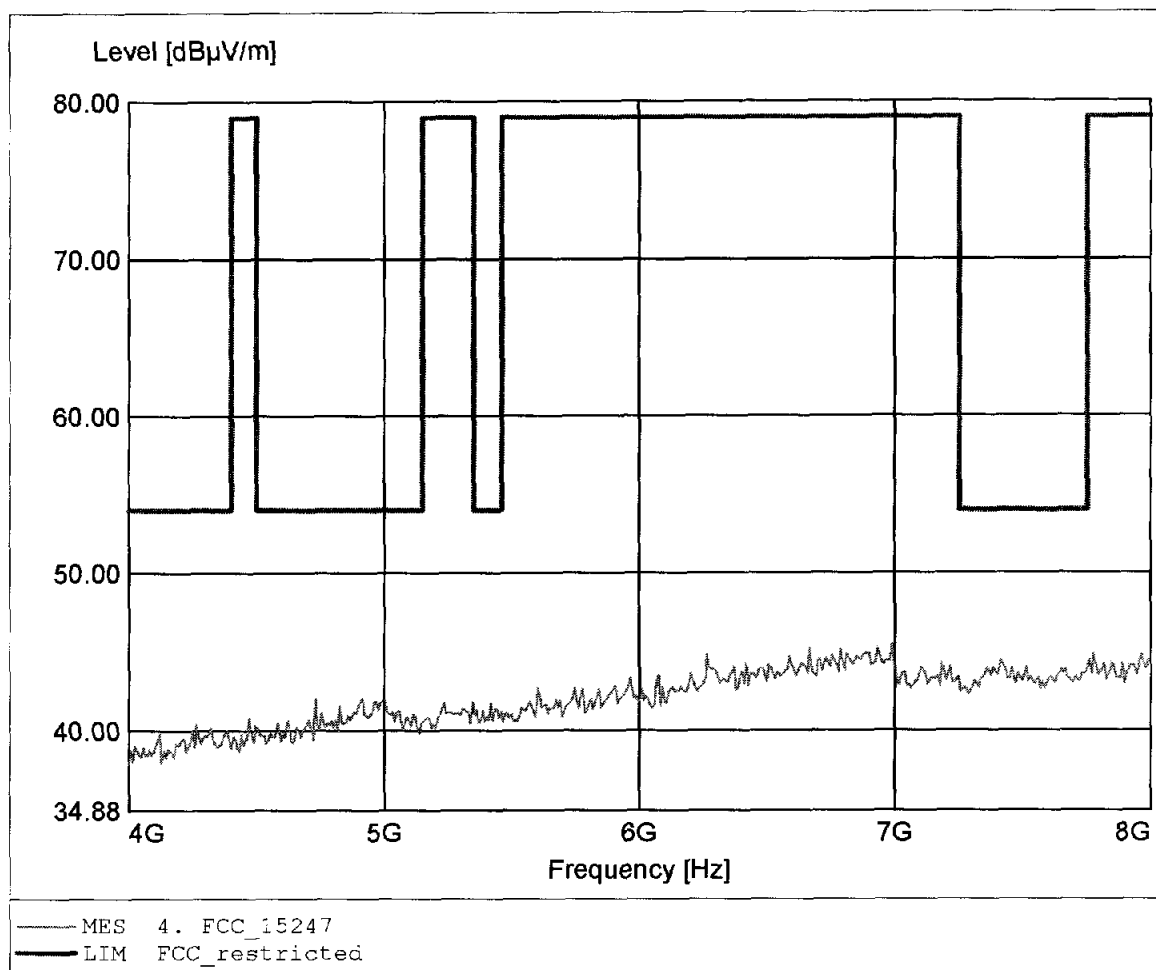

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Free2move AB
EUT: Low Power Bluetooth module with Antenna
Model: F2M03GLA / Channel: 2480
Test Site / Operator: ETS / Mr. Meng
Test Condition: 25°C / Unom: 3.3 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.551GHz, Emax: 39.42dBμV/m, RBW: 1MHz

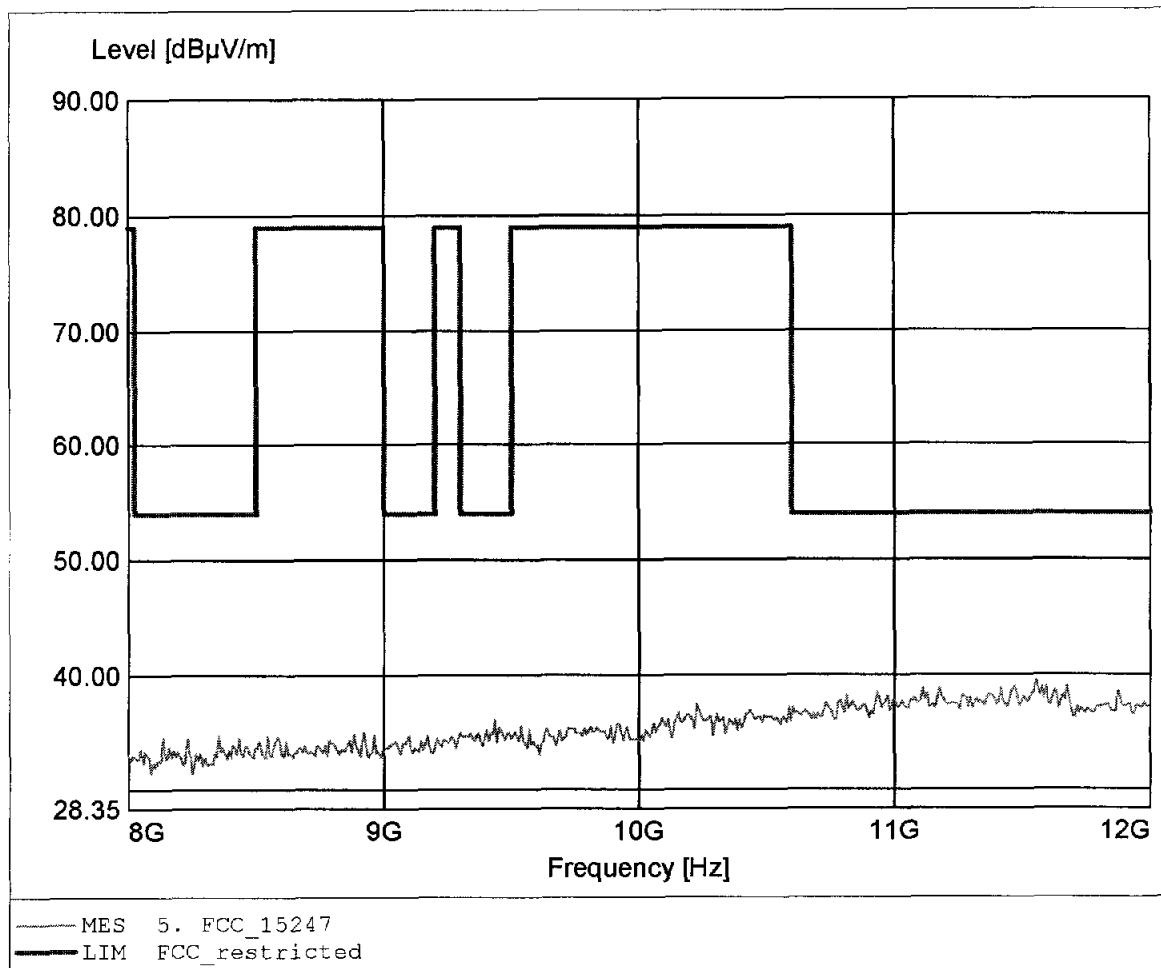

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Free2move AB
EUT: Low Power Bluetooth module with Antenna
Model: F2M03GLA / Channel: 2480
Test Site / Operator: ETS / Mr. Meng
Test Condition: 25°C / Unom: 3.3 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.327GHz, Emax: 39.49dBµV/m, RBW: 1MHz

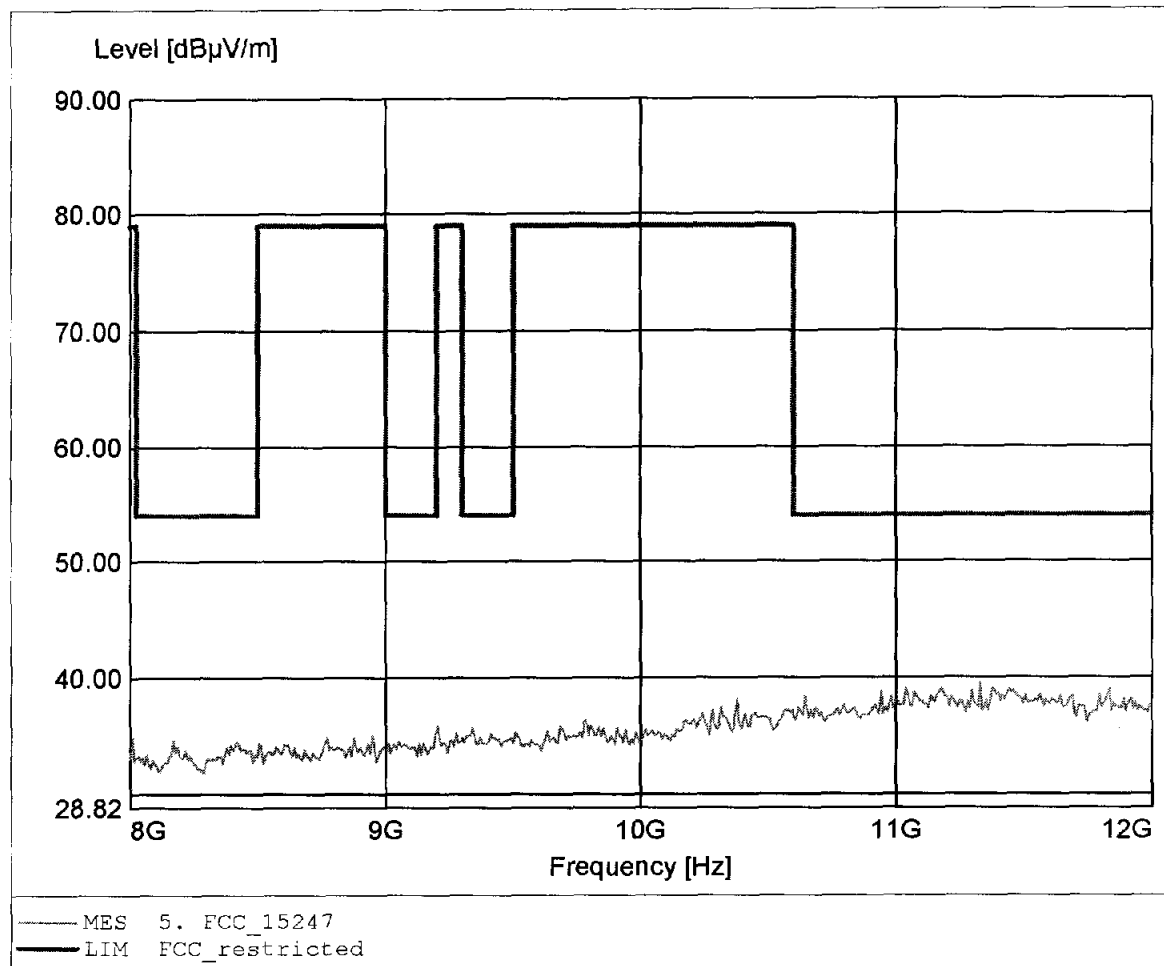

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Free2move AB
EUT: Low Power Bluetooth module with Antenna
Model: F2M03GLA / Channel: 2480
Test Site / Operator: ETS / Mr. Meng
Test Condition: 25°C / Unom: 3.3 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.335GHz, Emax: 40.70dBμV/m, RBW: 1MHz

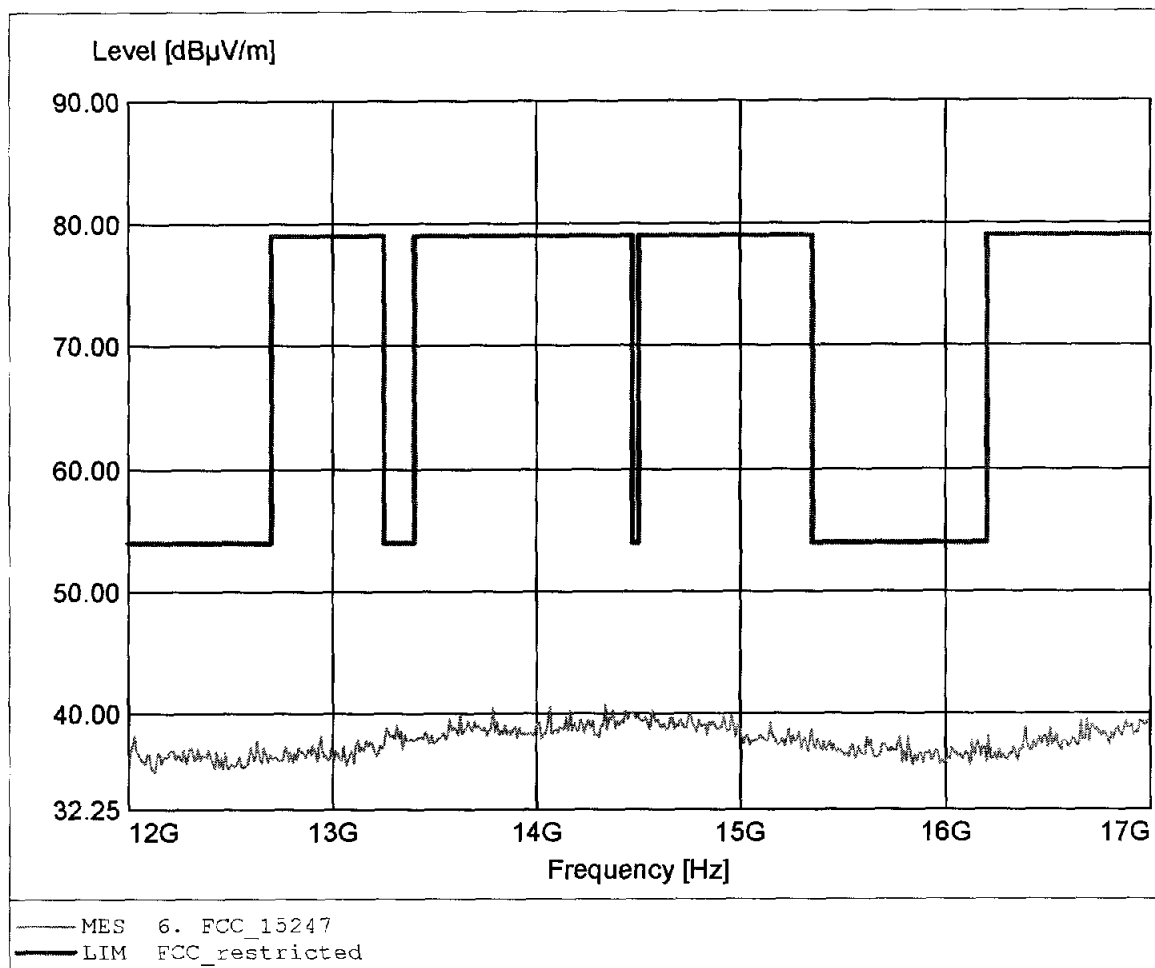

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Free2move AB
EUT: Low Power Bluetooth module with Antenna
Model: F2M03GLA / Channel: 2480
Test Site / Operator: ETS / Mr. Meng
Test Condition: 25°C / Unom: 3.3 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.936GHz, Emax: 41.70dBμV/m, RBW: 1MHz

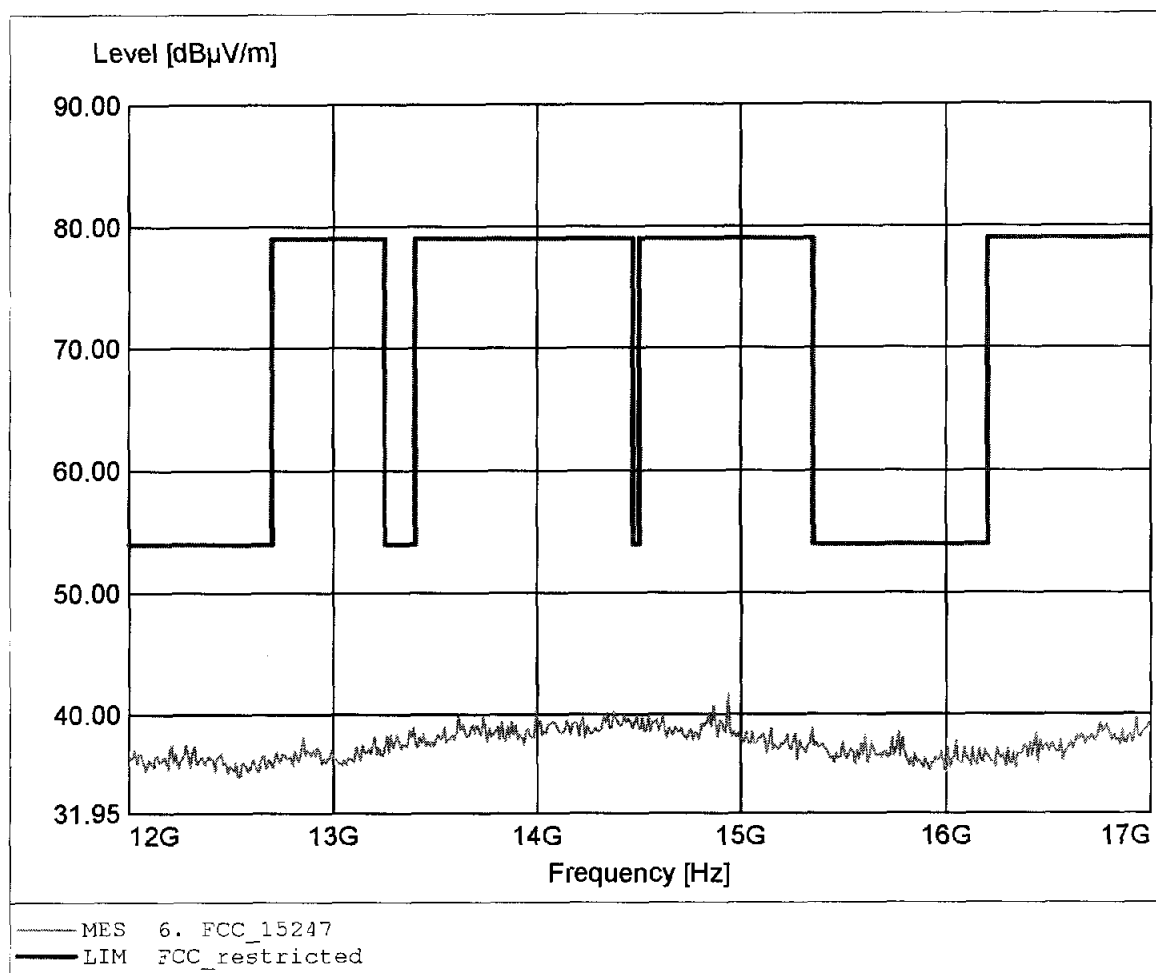

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Free2move AB
EUT: Low Power Bluetooth module with Antenna
Model: F2M03GLA / Channel: 2480
Test Site / Operator: ETS / Mr. Meng
Test Condition: 25°C / Unom: 3.3 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 24.558GHz, Emax: 47.53dBµV/m, RBW: 1MHz

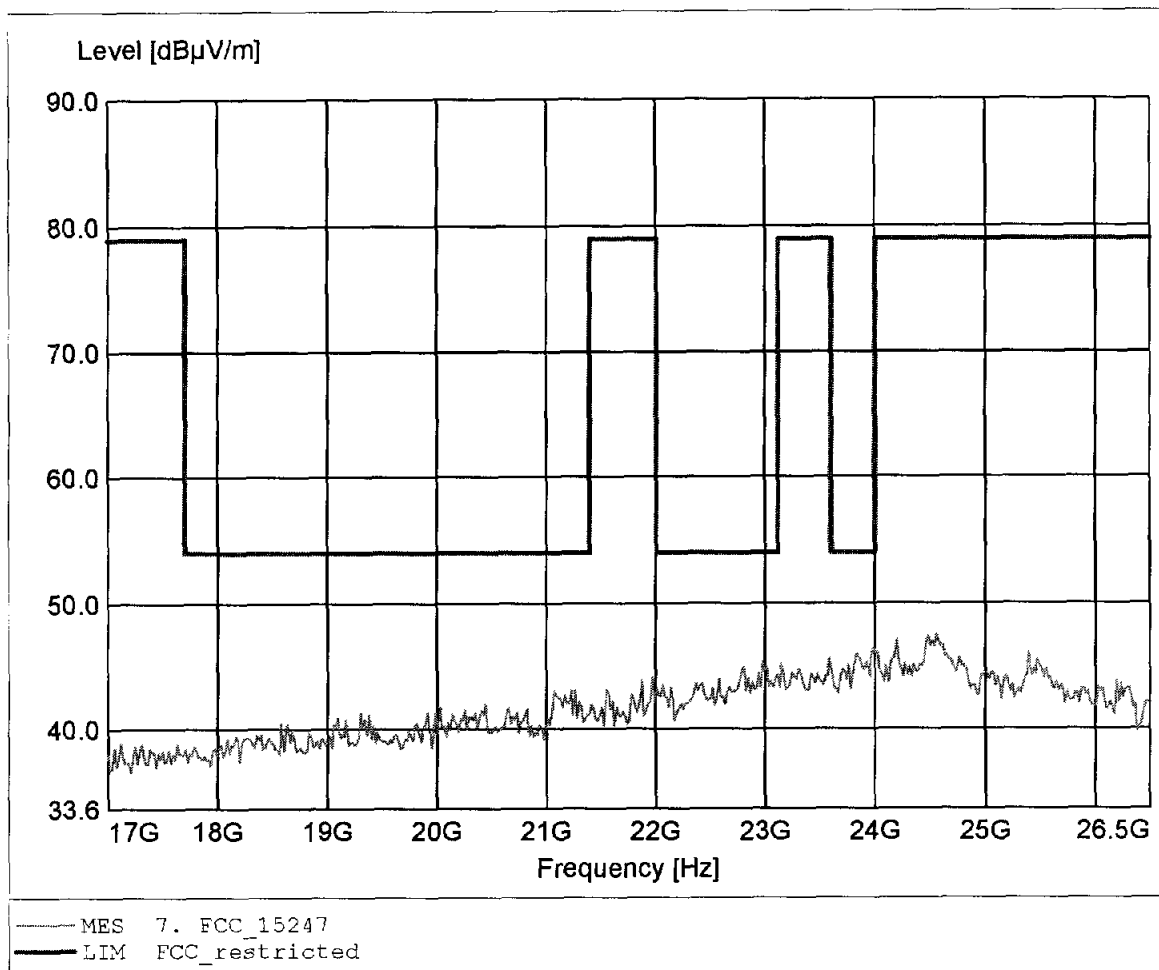

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: Free2move AB
EUT: Low Power Bluetooth module with Antenna
Model: F2M03GLA / Channel: 2480
Test Site / Operator: ETS / Mr. Meng
Test Condition: 25°C / Unom: 3.3 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 24.539GHz, Emax: 49.63dBµV/m, RBW: 1MHz

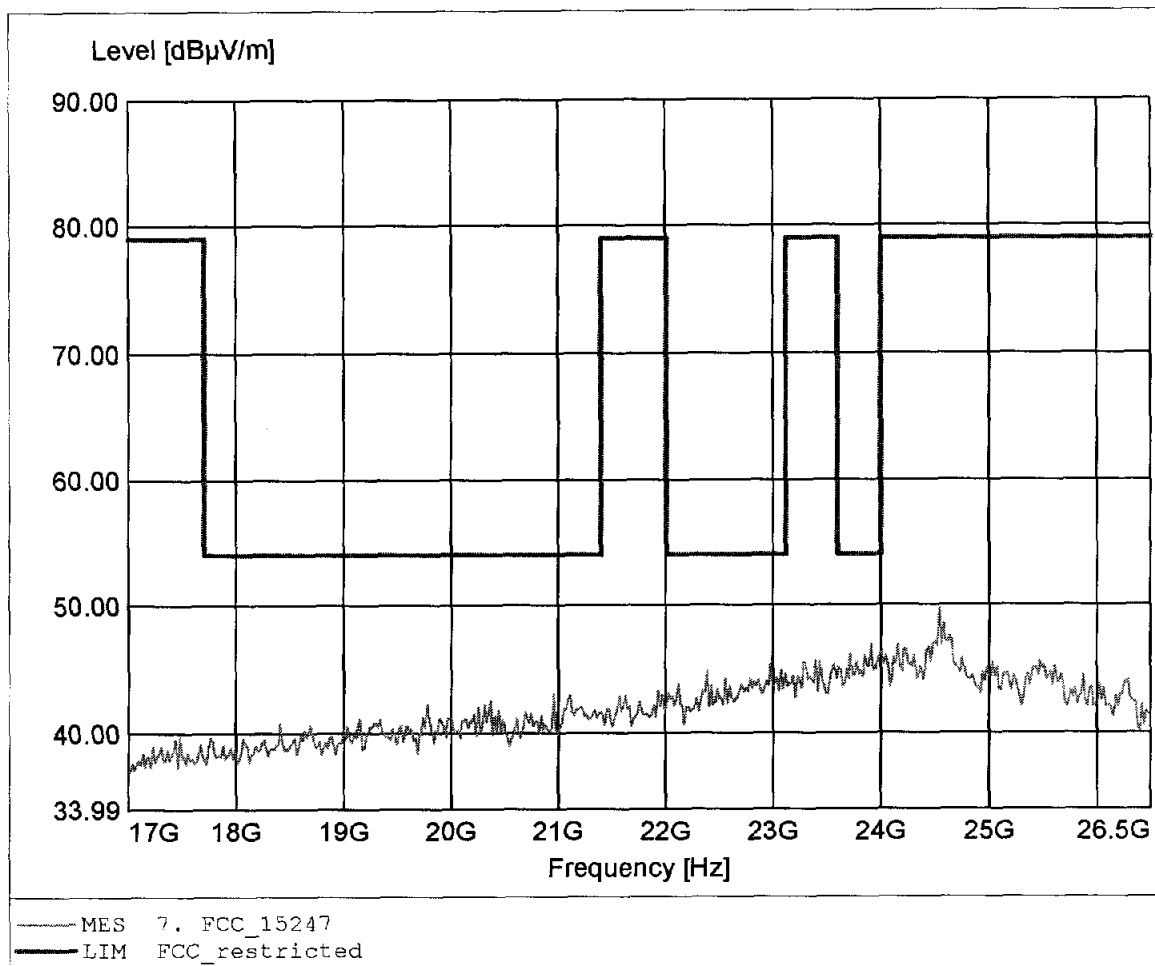

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2402 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Emax: 95.17dBµV/m, RBW: 100kHz

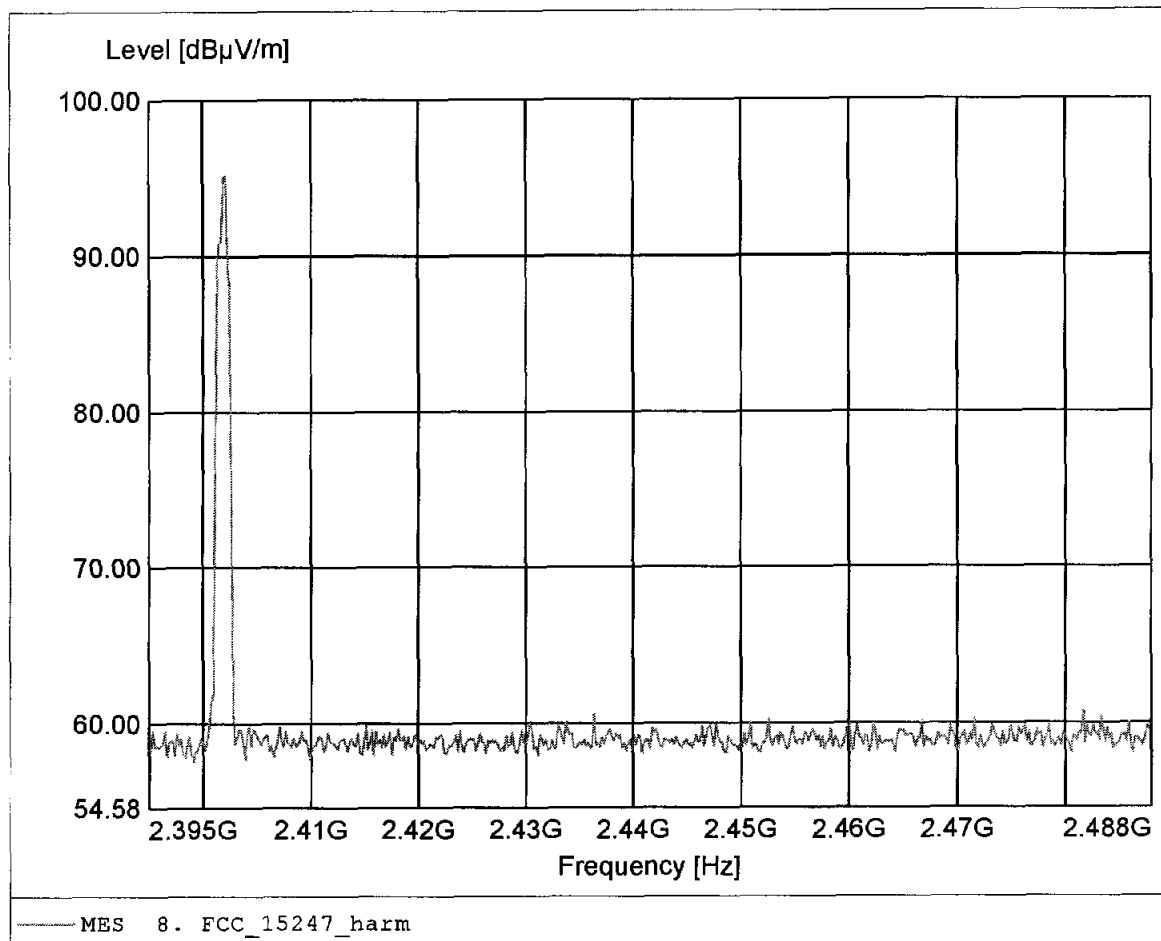

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2402 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 144.128MHz, Emax: 36.87dBµV/m, RBW: 100kHz

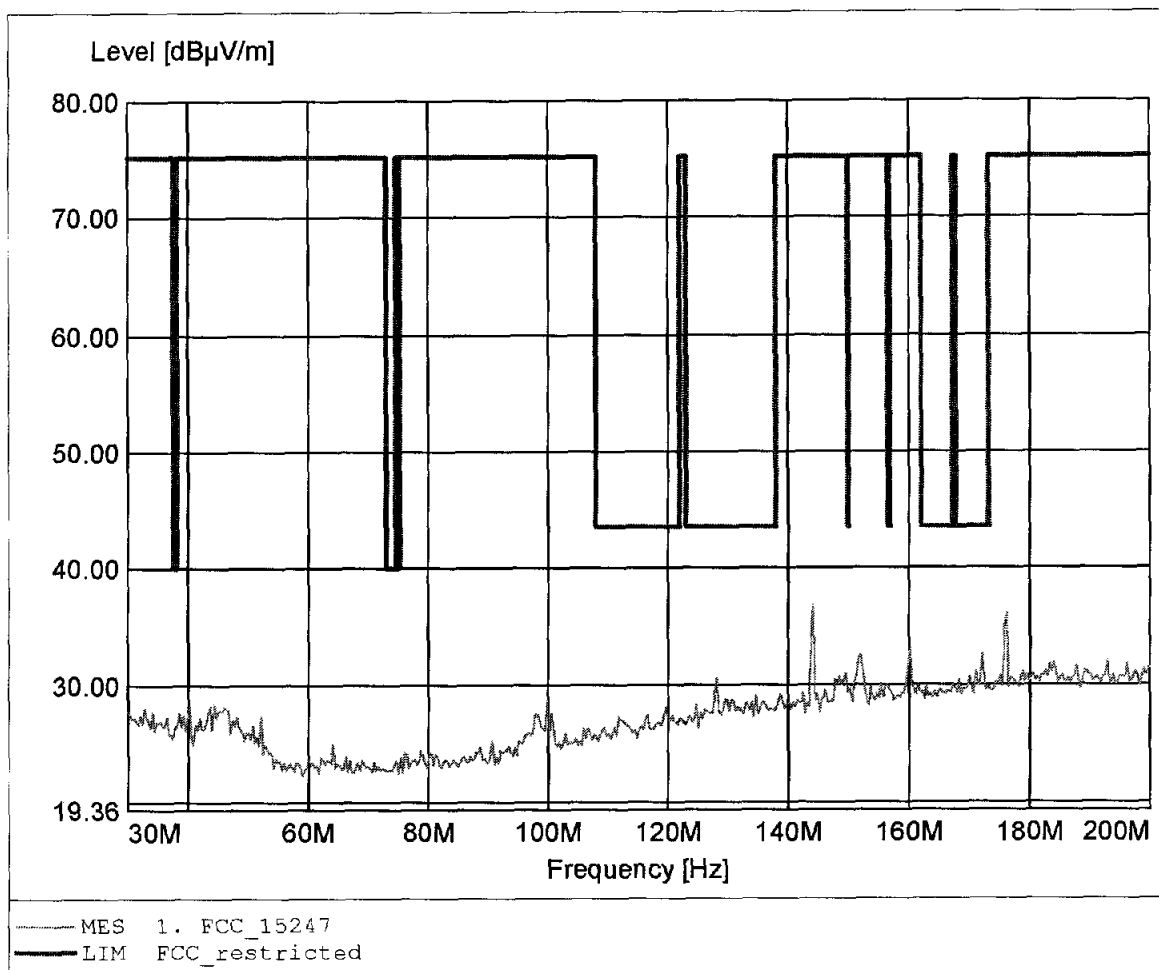

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2402 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 196.934MHz, Emax: 31.21dBμV/m, RBW: 100kHz

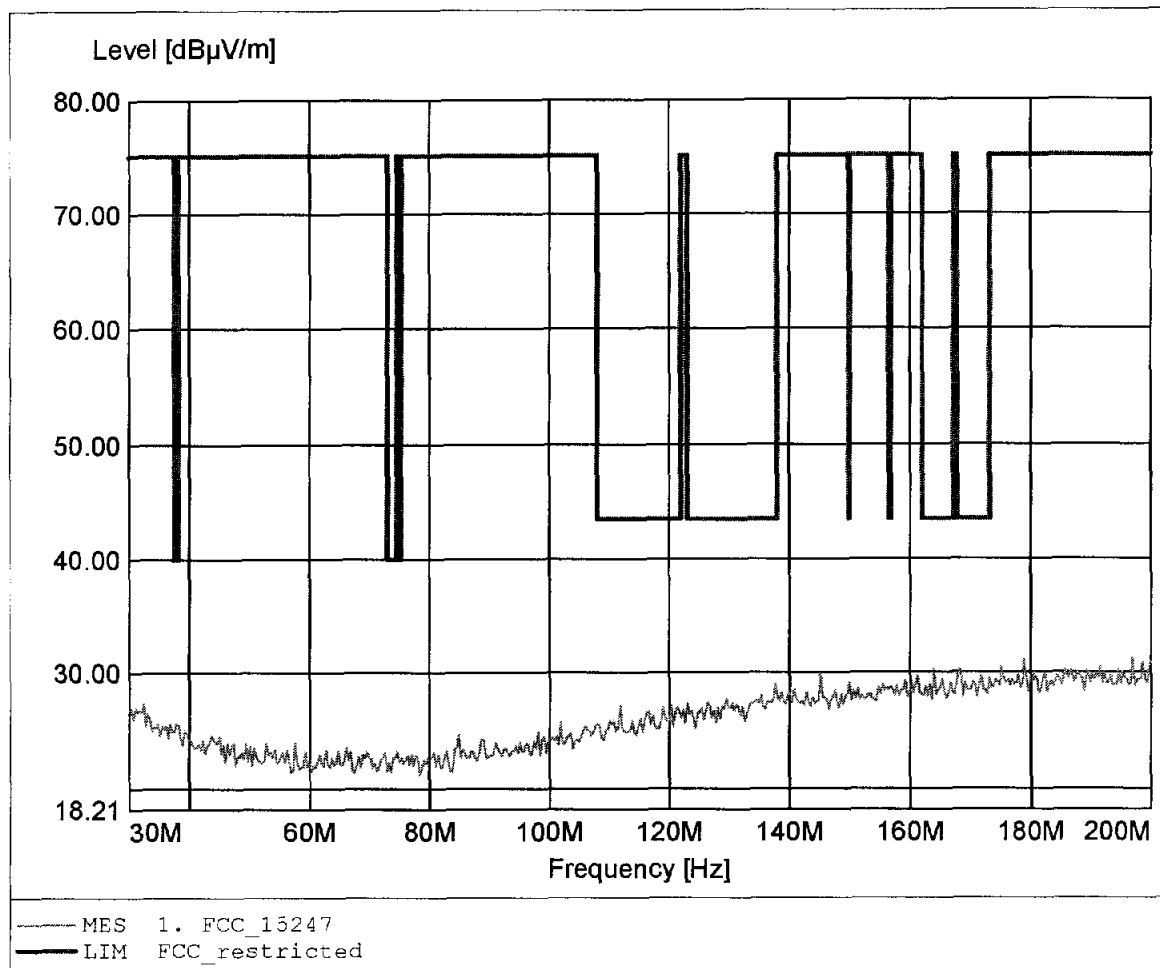

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2402 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 206.413MHz, Emax: 25.21dBµV/m, RBW: 100kHz

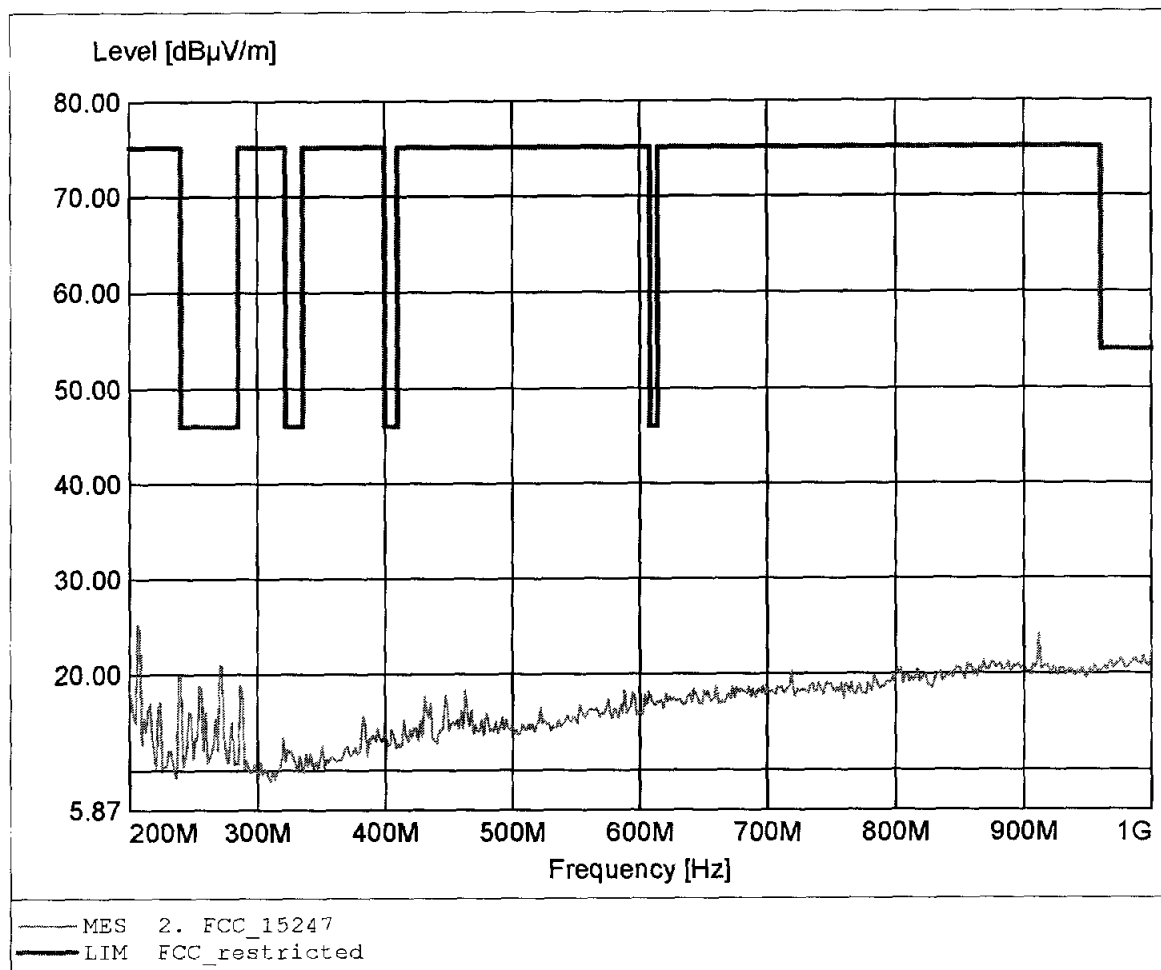

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2402 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 887.776MHz, Emax: 22.80dBµV/m, RBW: 100kHz

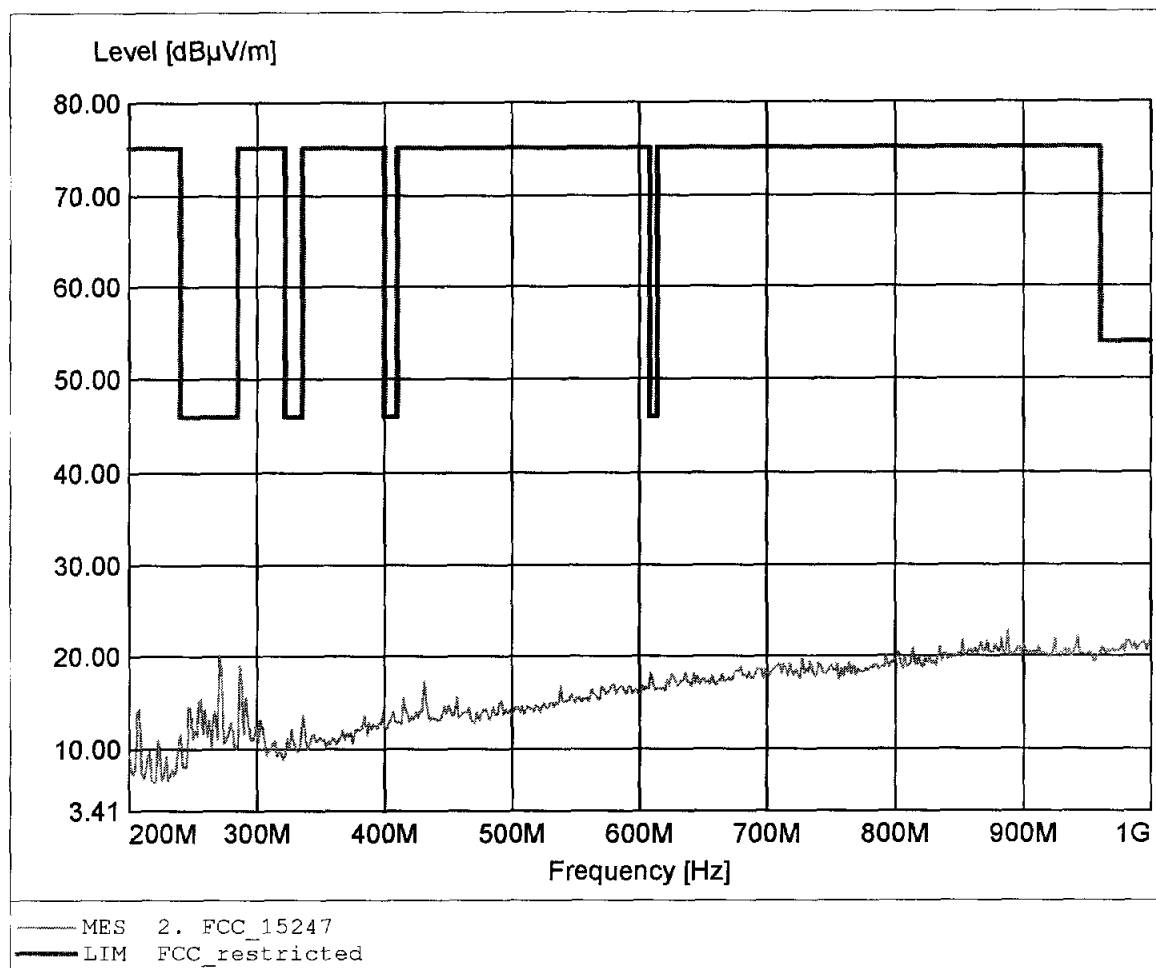

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2402 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.603GHz, Emax: 46.34dBµV/m, RBW: 1MHz

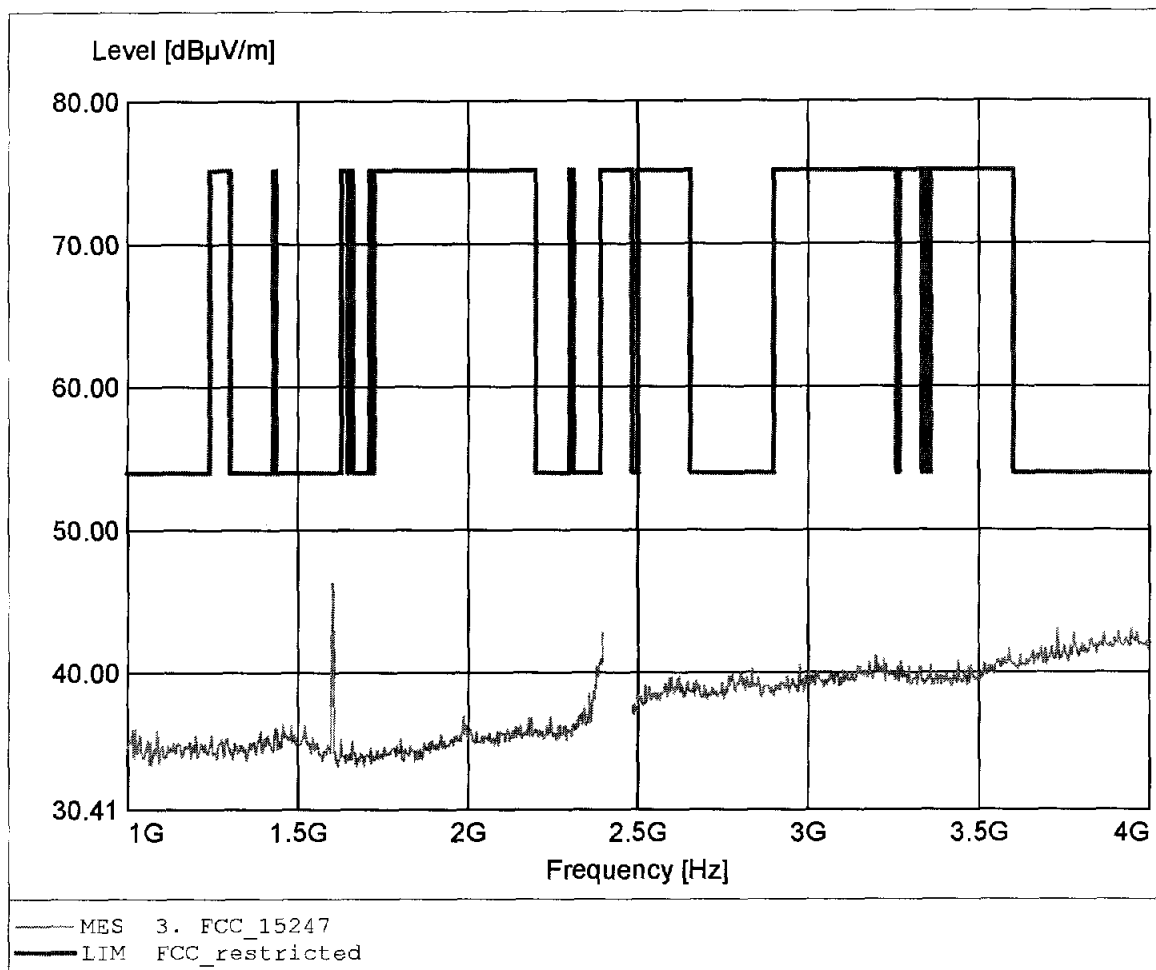

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2402 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.397GHz, Emax: 47.77dBµV/m, RBW: 1MHz

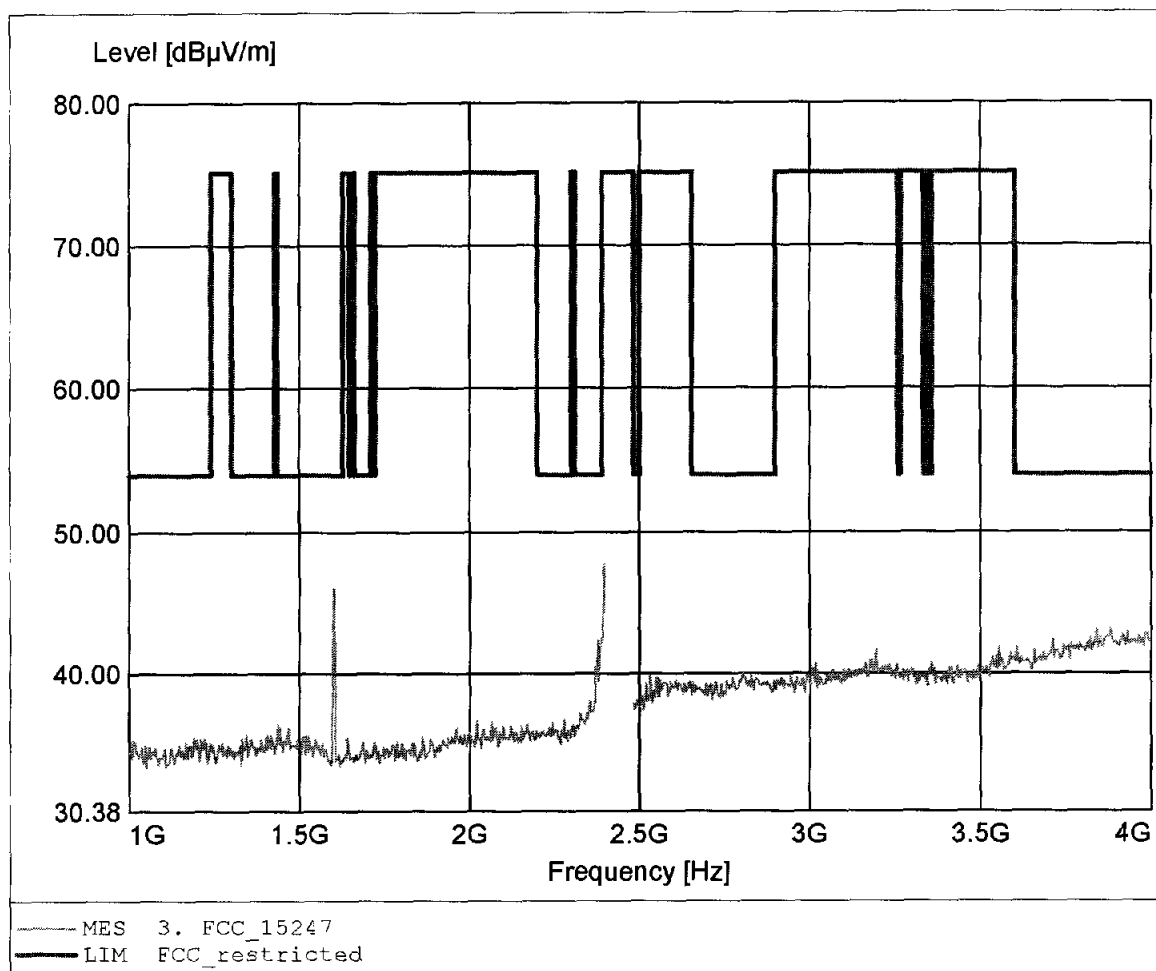

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2402 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 6.974GHz, Emax: 45.12dBμV/m, RBW: 1MHz

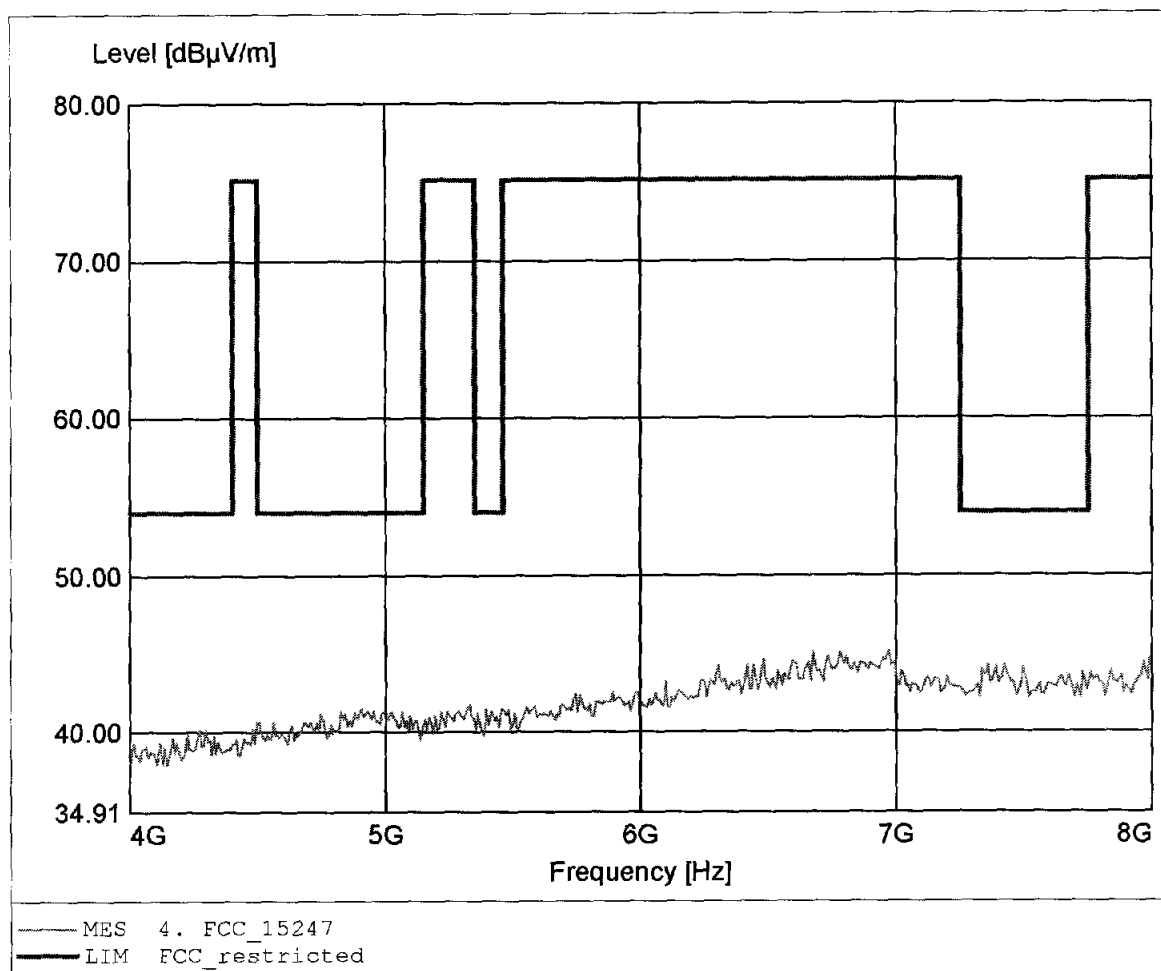

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2402 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.992GHz, Emax: 45.97dBµV/m, RBW: 1MHz

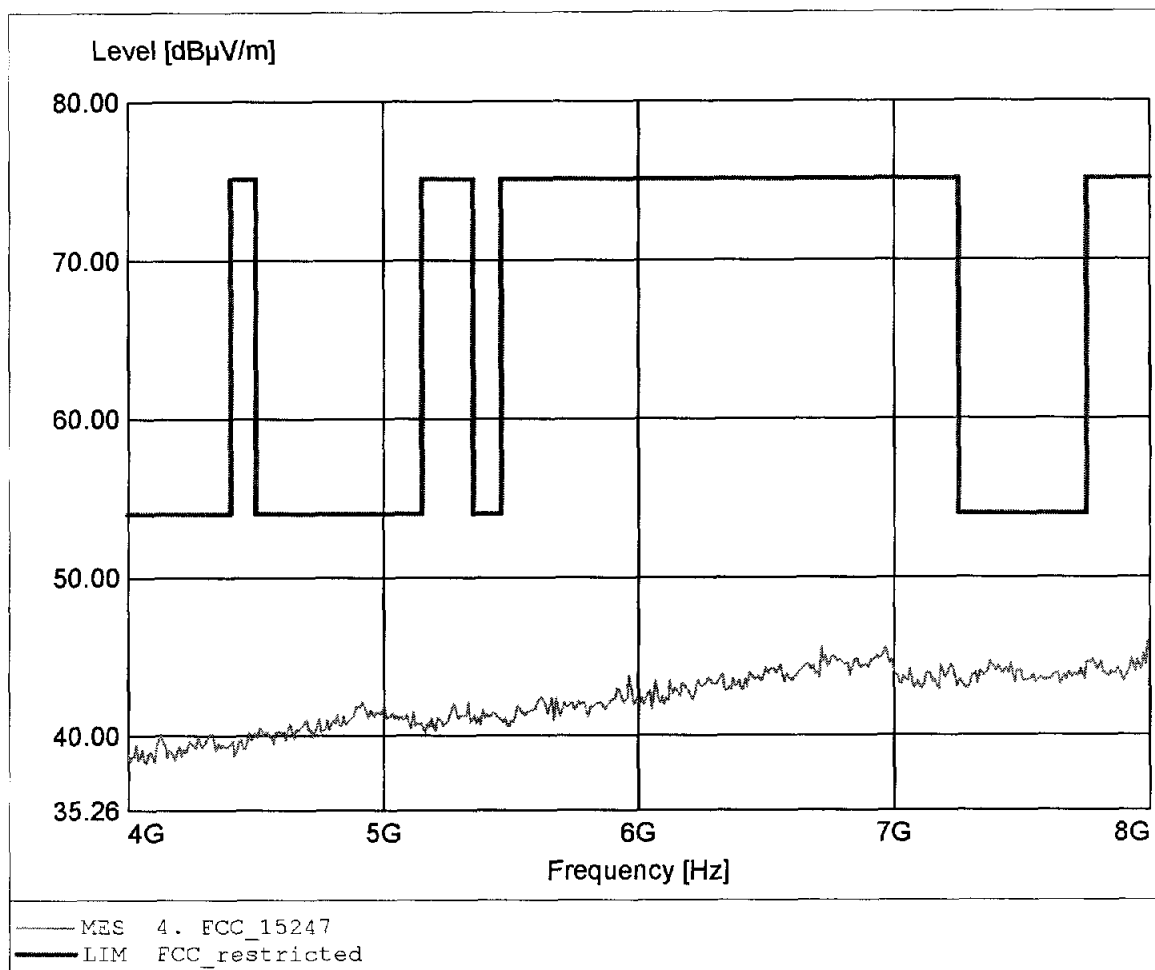

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2402 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.471GHz, Emax: 37.83dBµV/m, RBW: 1MHz

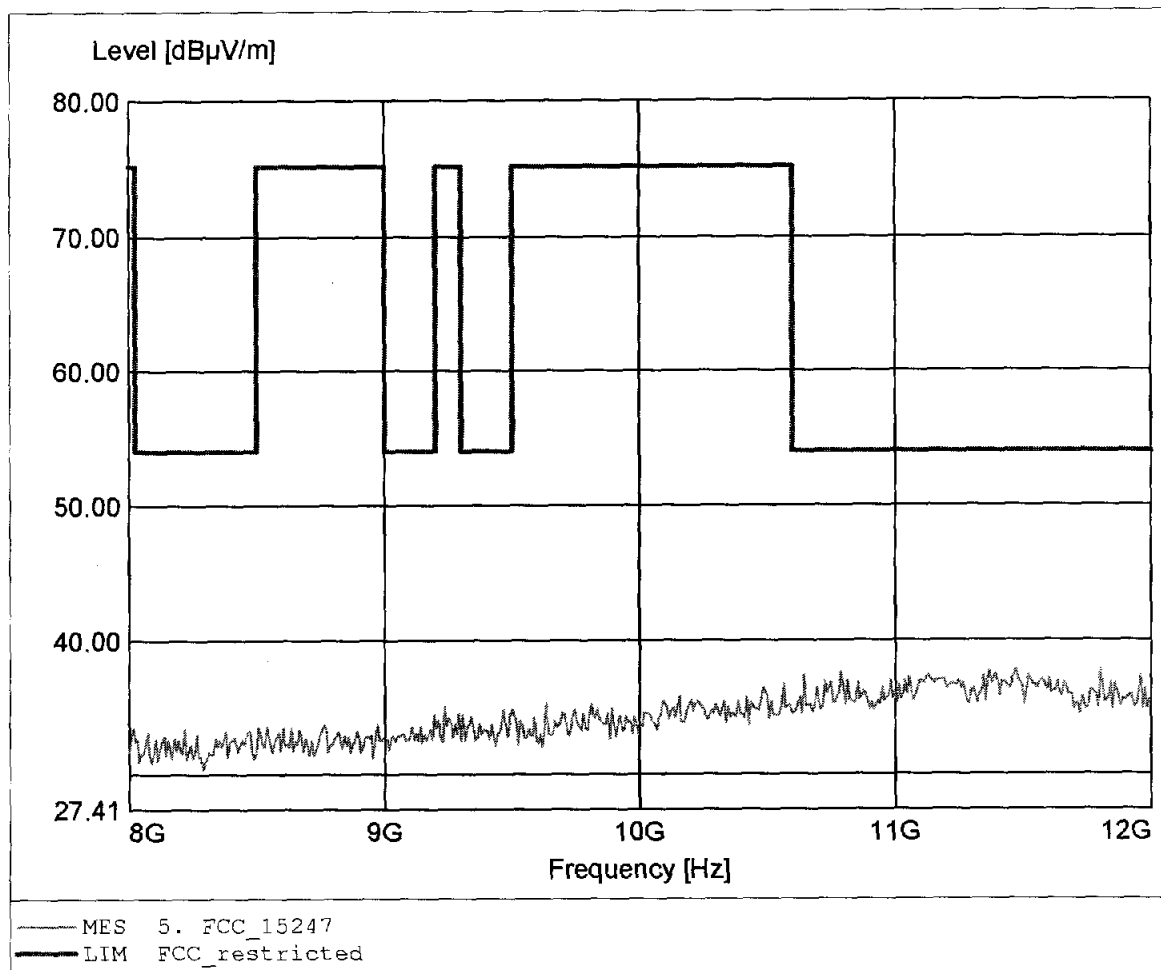

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2402 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.479GHz, Emax: 39.54dBµV/m, RBW: 1MHz

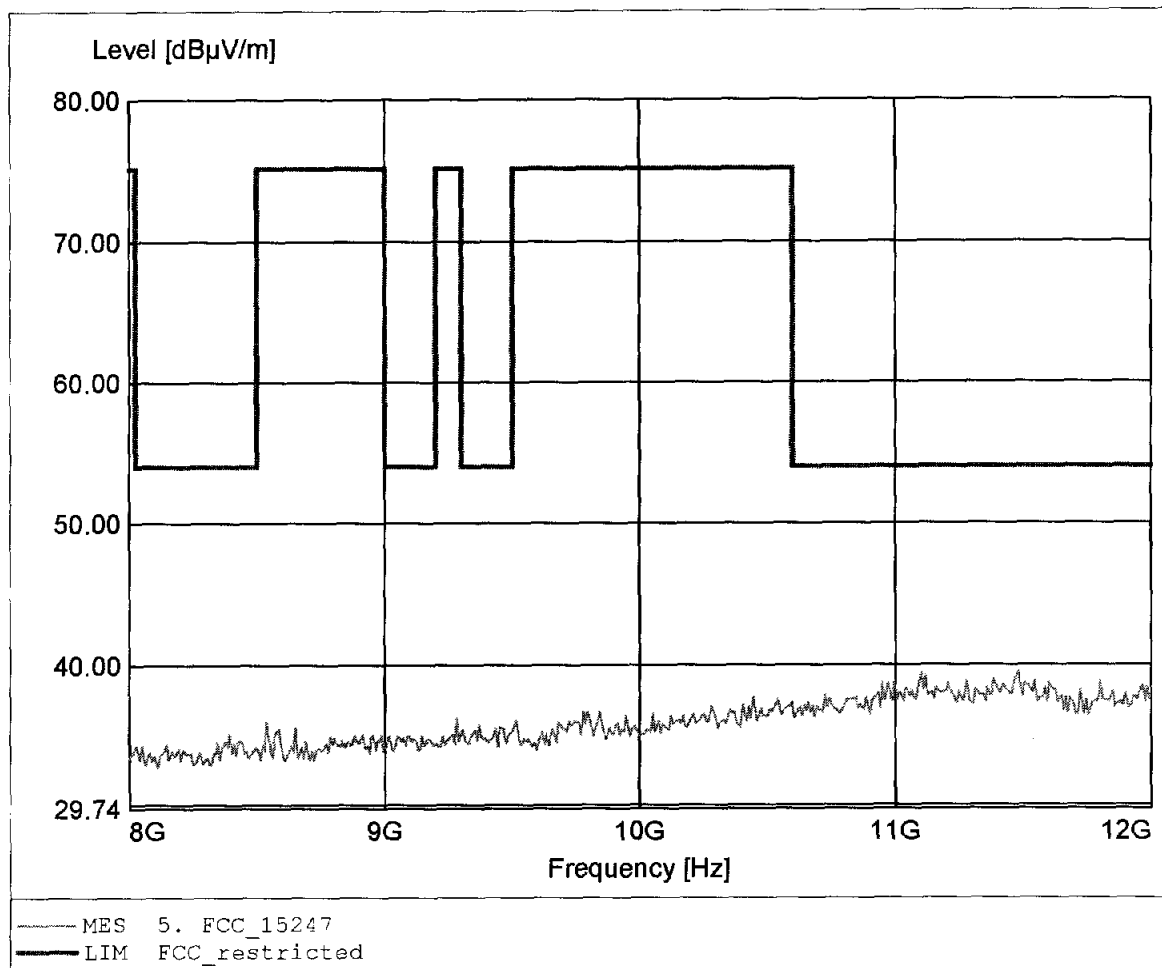

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2402 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.615GHz, Emax: 40.10dBµV/m, RBW: 1MHz

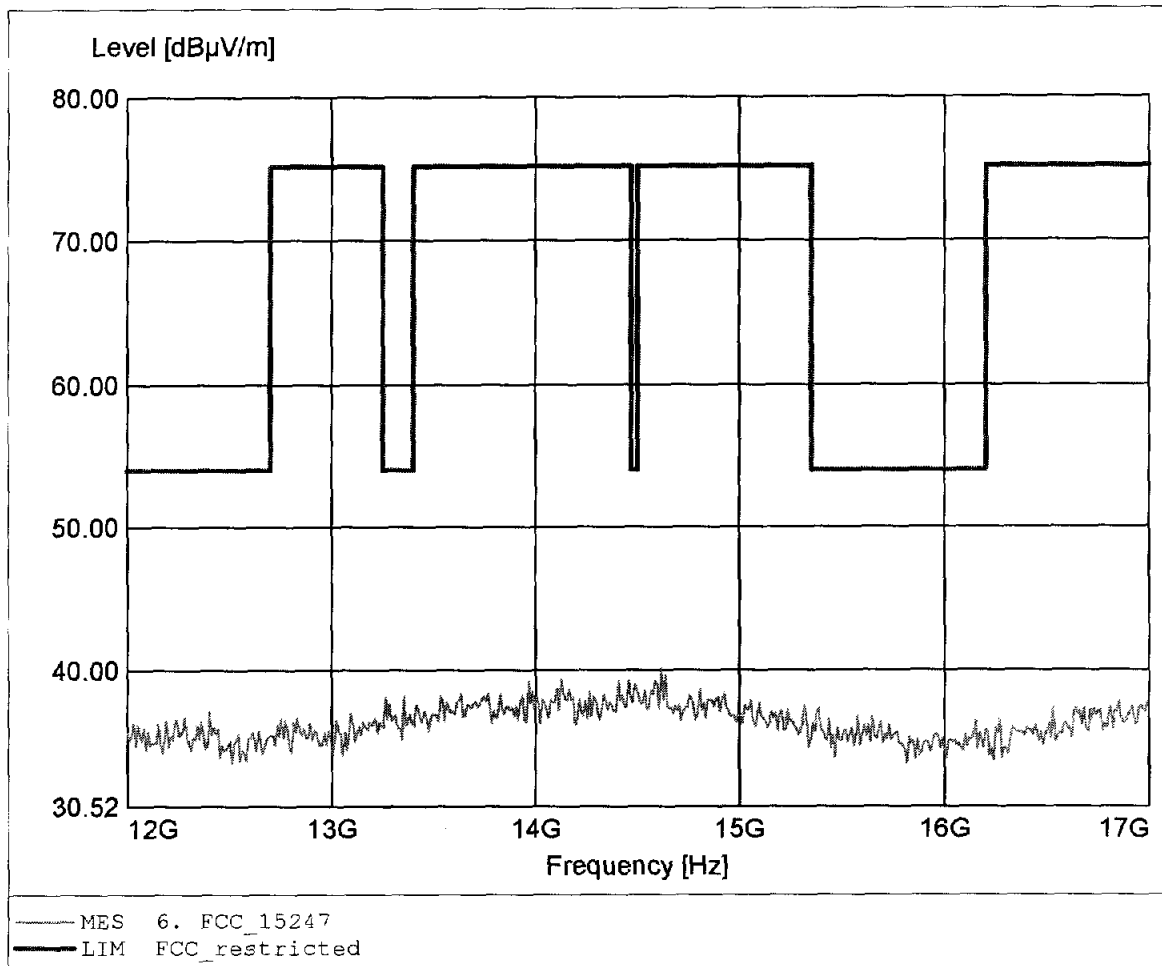

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2402 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.565GHz, Emax: 39.32dBµV/m, RBW: 1MHz

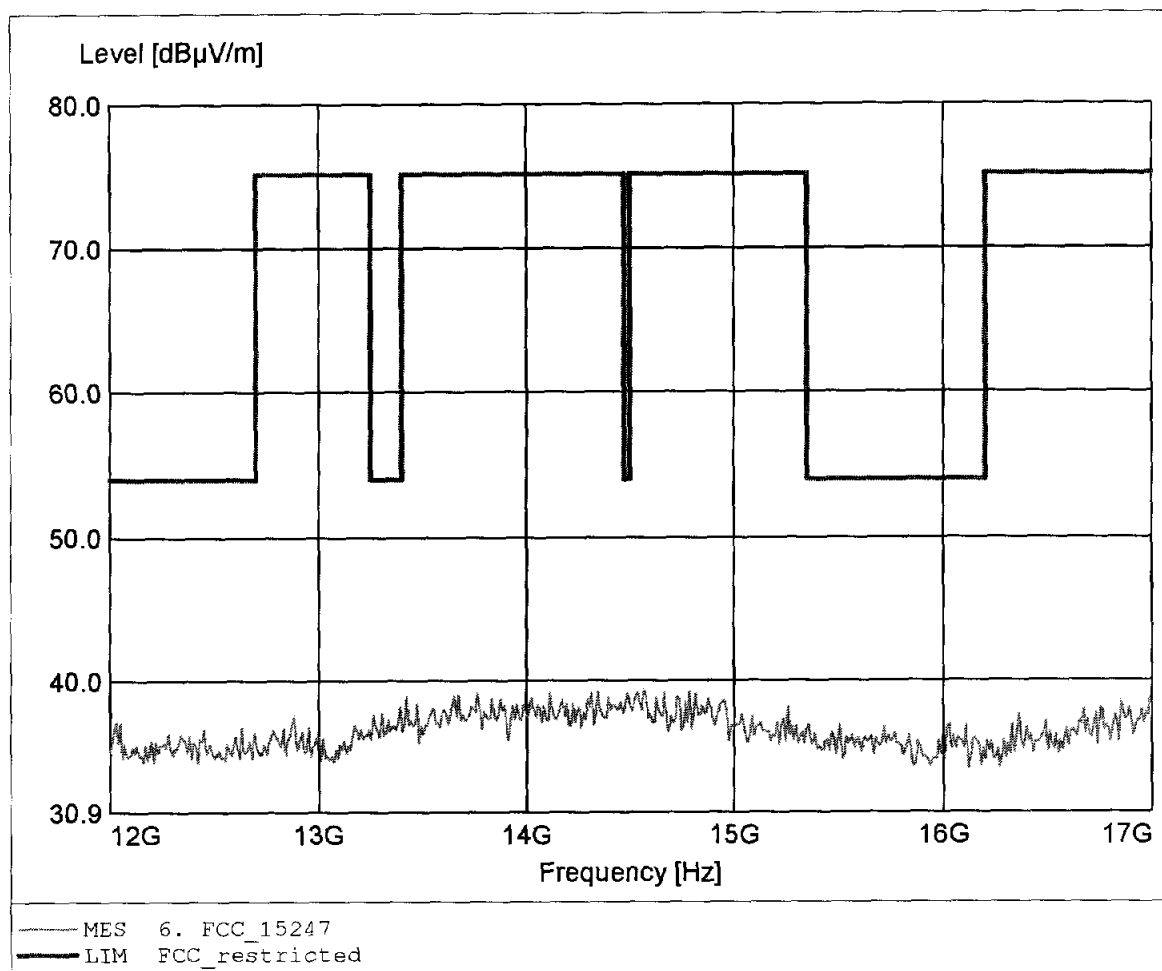

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2402 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 24.539GHz, Emax: 46.08dBµV/m, RBW: 1MHz

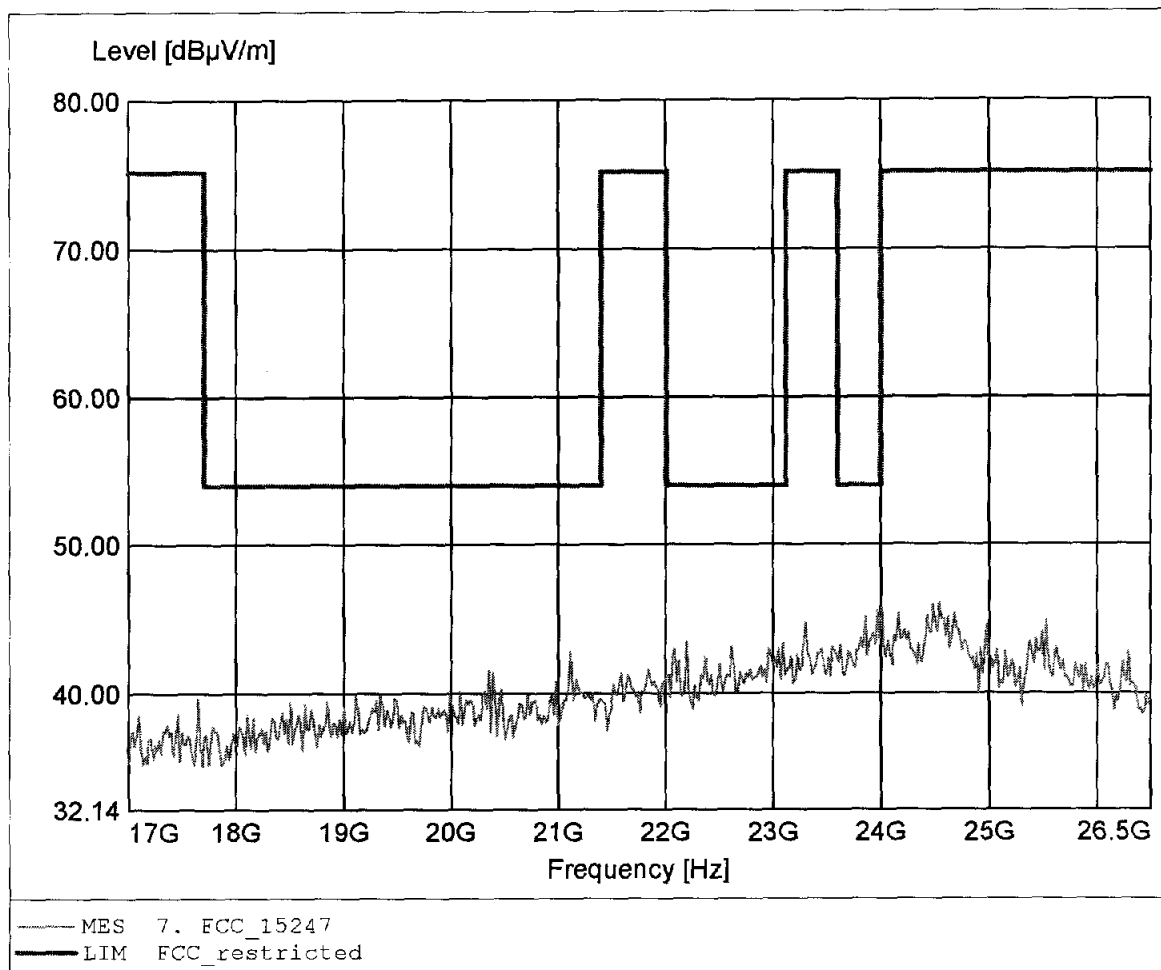

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2402 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 24.520GHz, Emax: 45.81dBµV/m, RBW: 1MHz

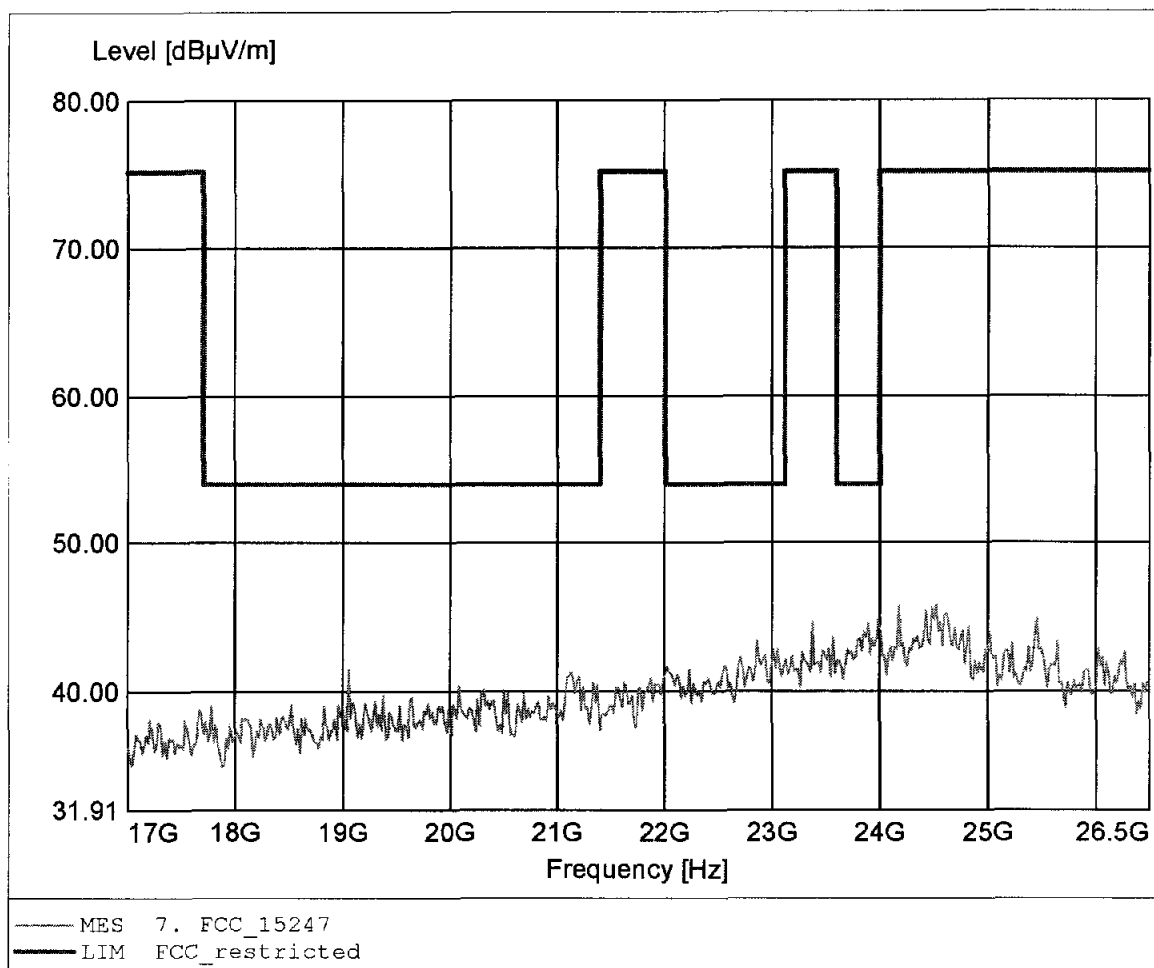

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2441 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 176.152MHz, Emax: 36.07dB μ V/m, RBW: 100kHz

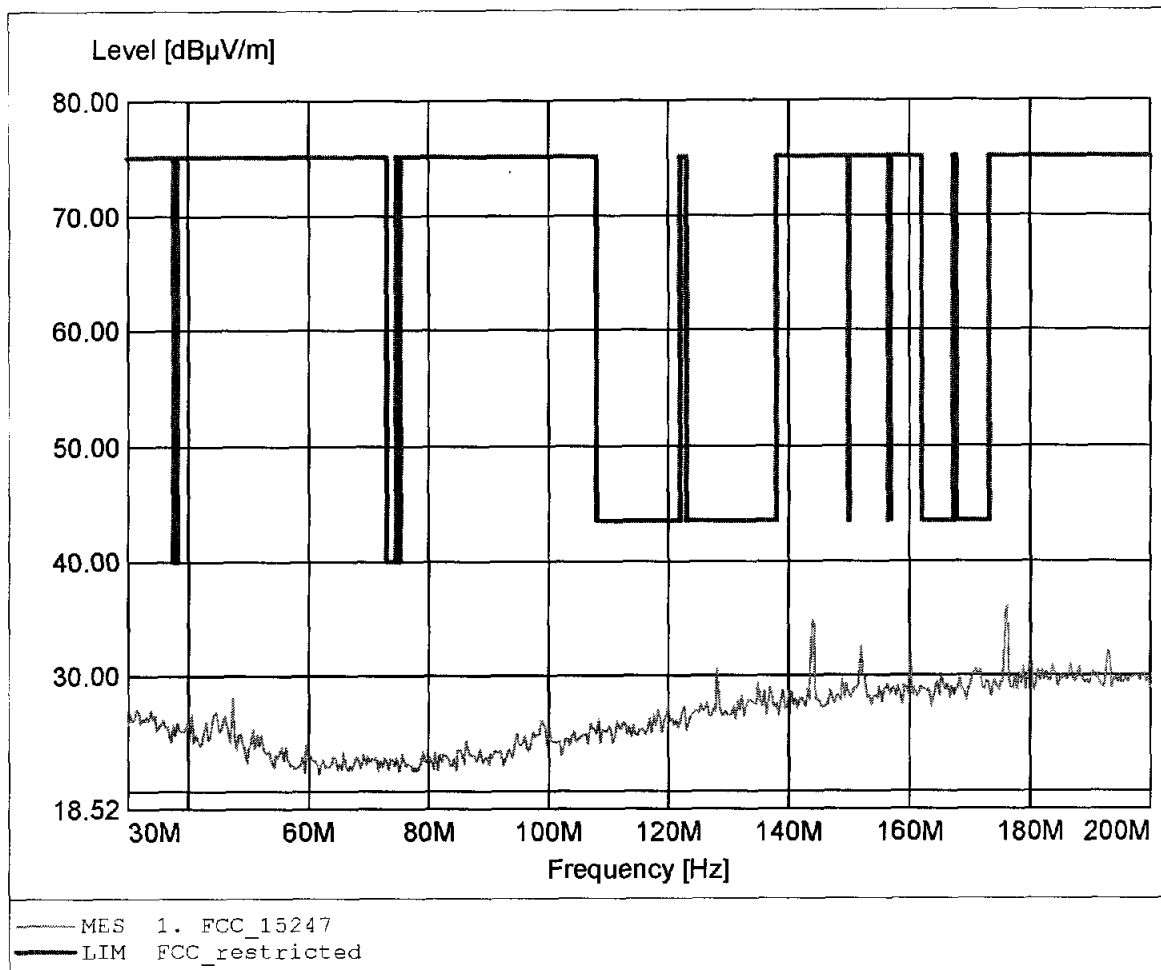

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2441 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 190.802MHz, Emax: 31.66dBμV/m, RBW: 100kHz

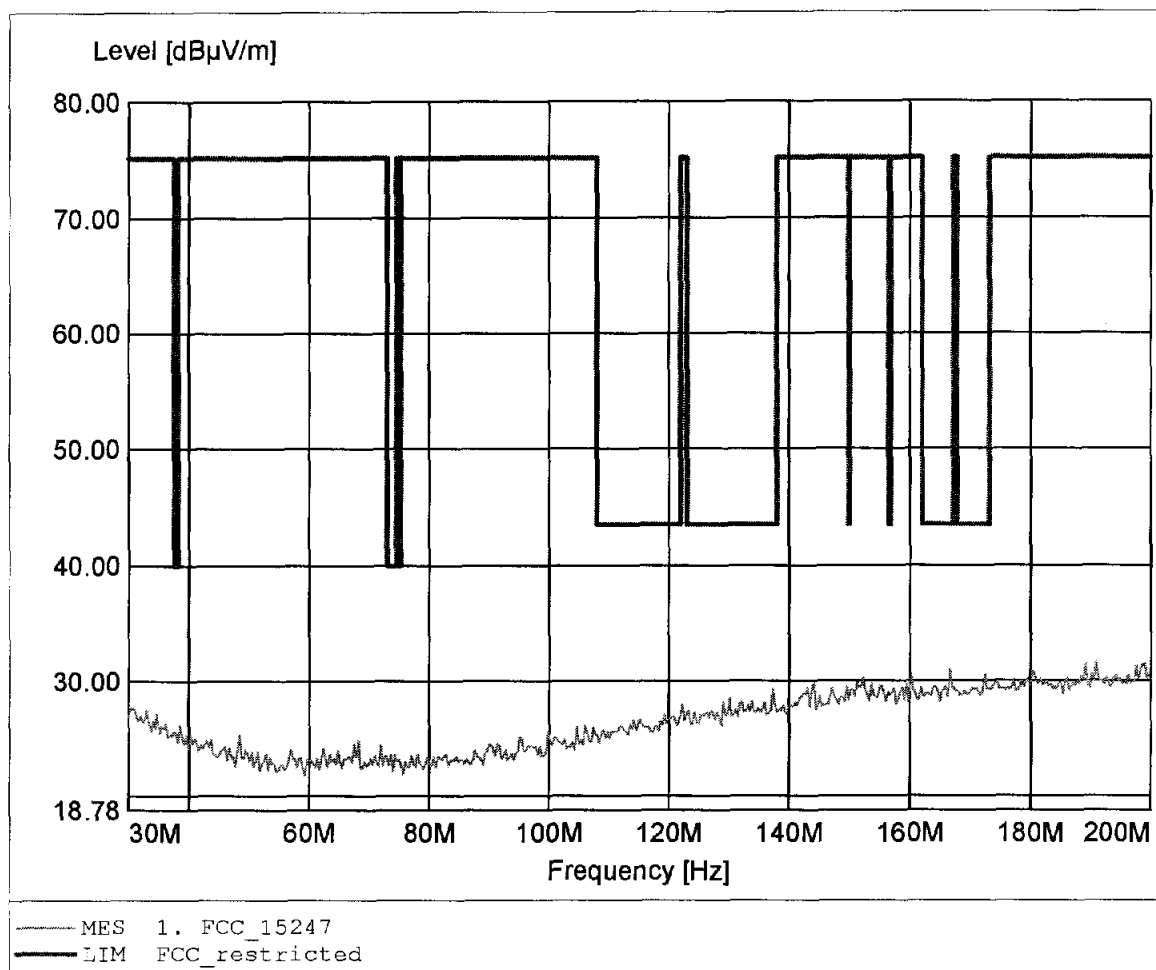

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2441 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 206.413MHz, Emax: 24.82dBµV/m, RBW: 100kHz

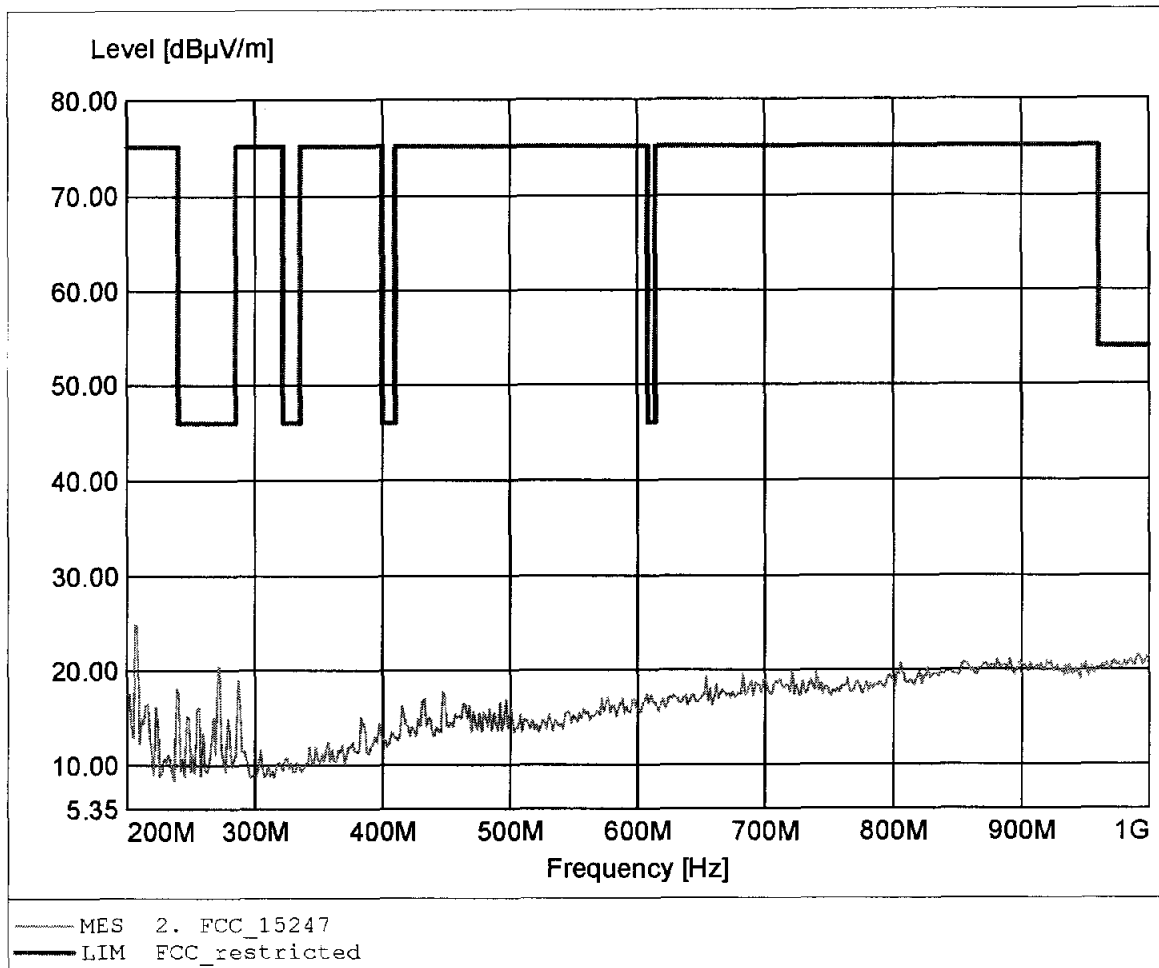

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2441 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 995.190MHz, Emax: 21.39dBµV/m, RBW: 100kHz

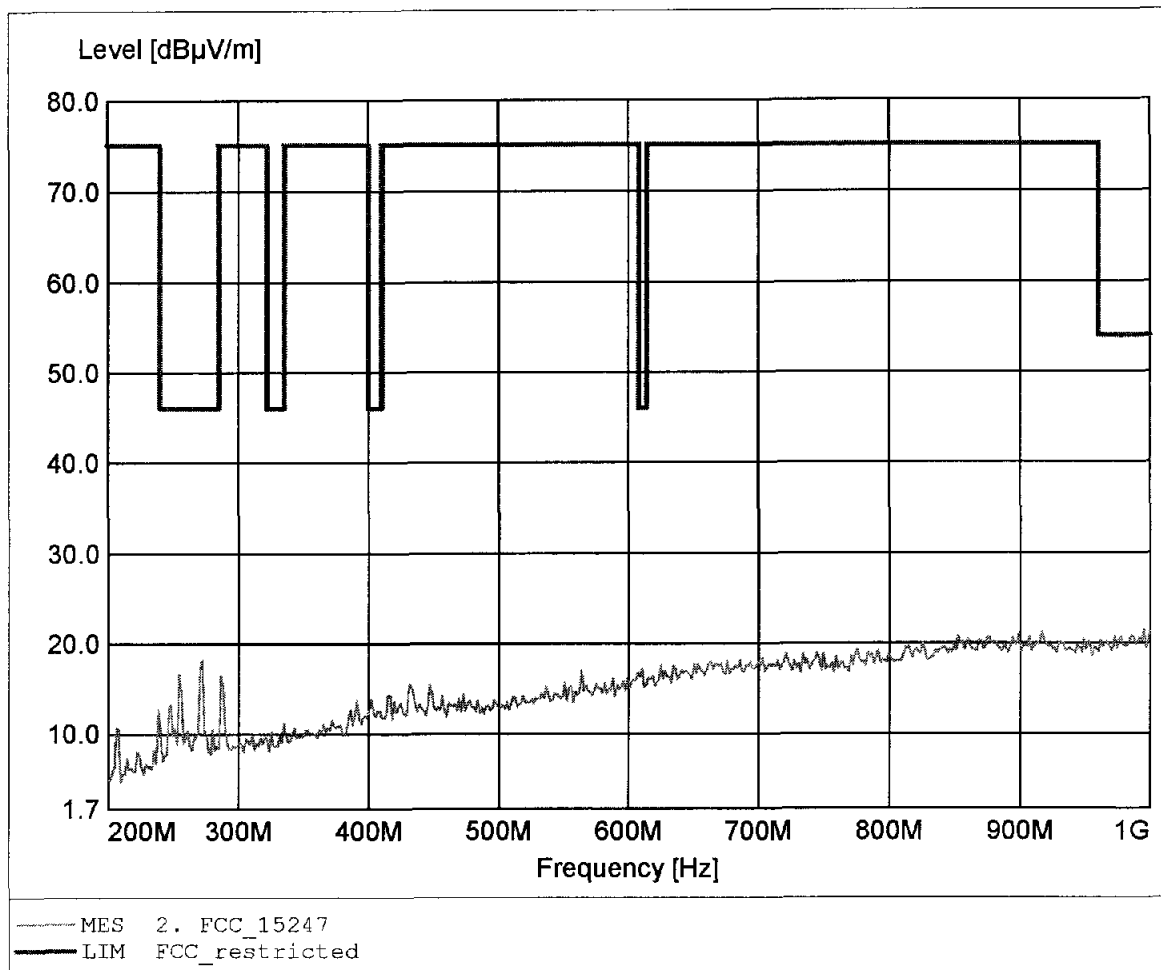

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2441 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.628GHz, Emax: 45.94dB μ V/m, RBW: 1MHz

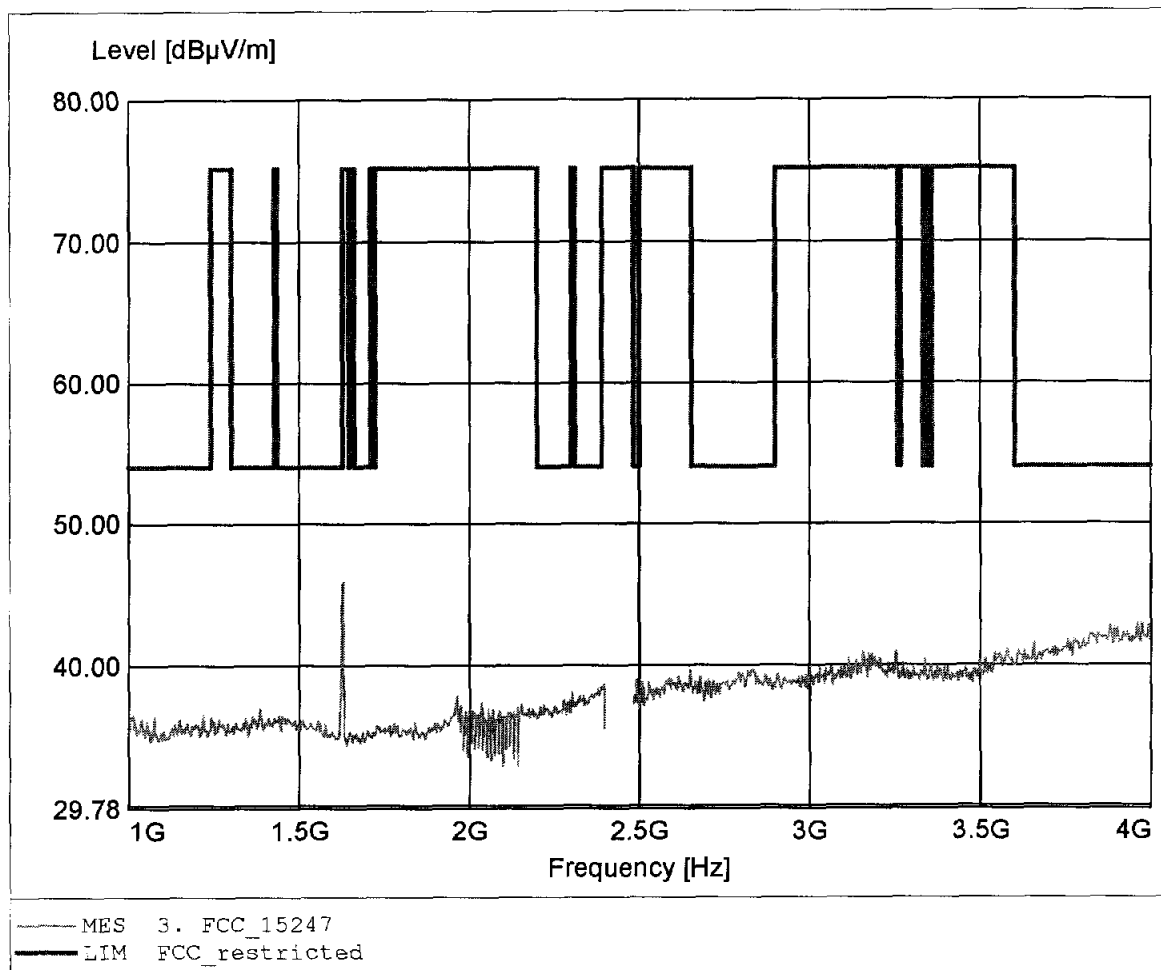

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2441 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.626GHz, Emax: 46.52dBµV/m, RBW: 1MHz

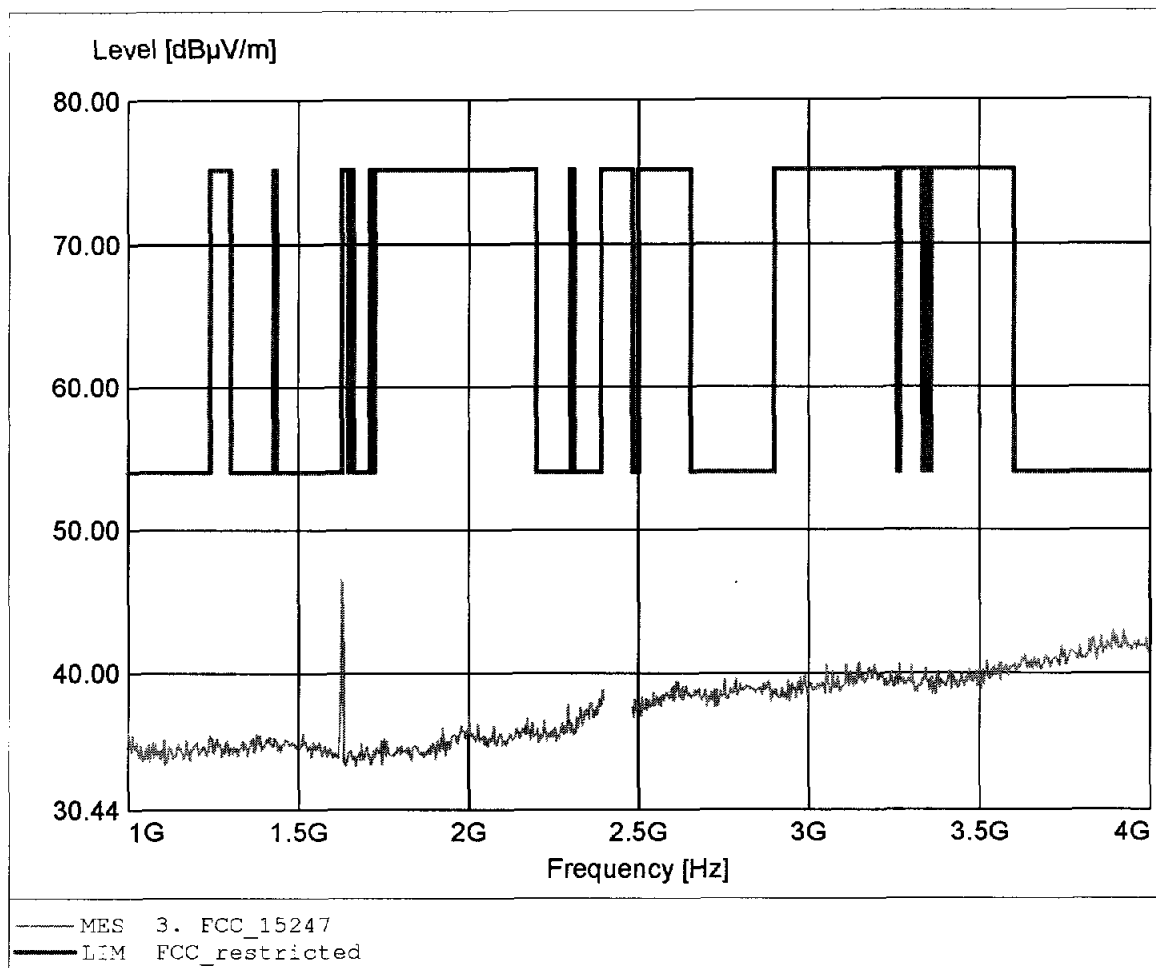

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2441 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 6.990GHz, Emax: 45.27dBμV/m, RBW: 1MHz

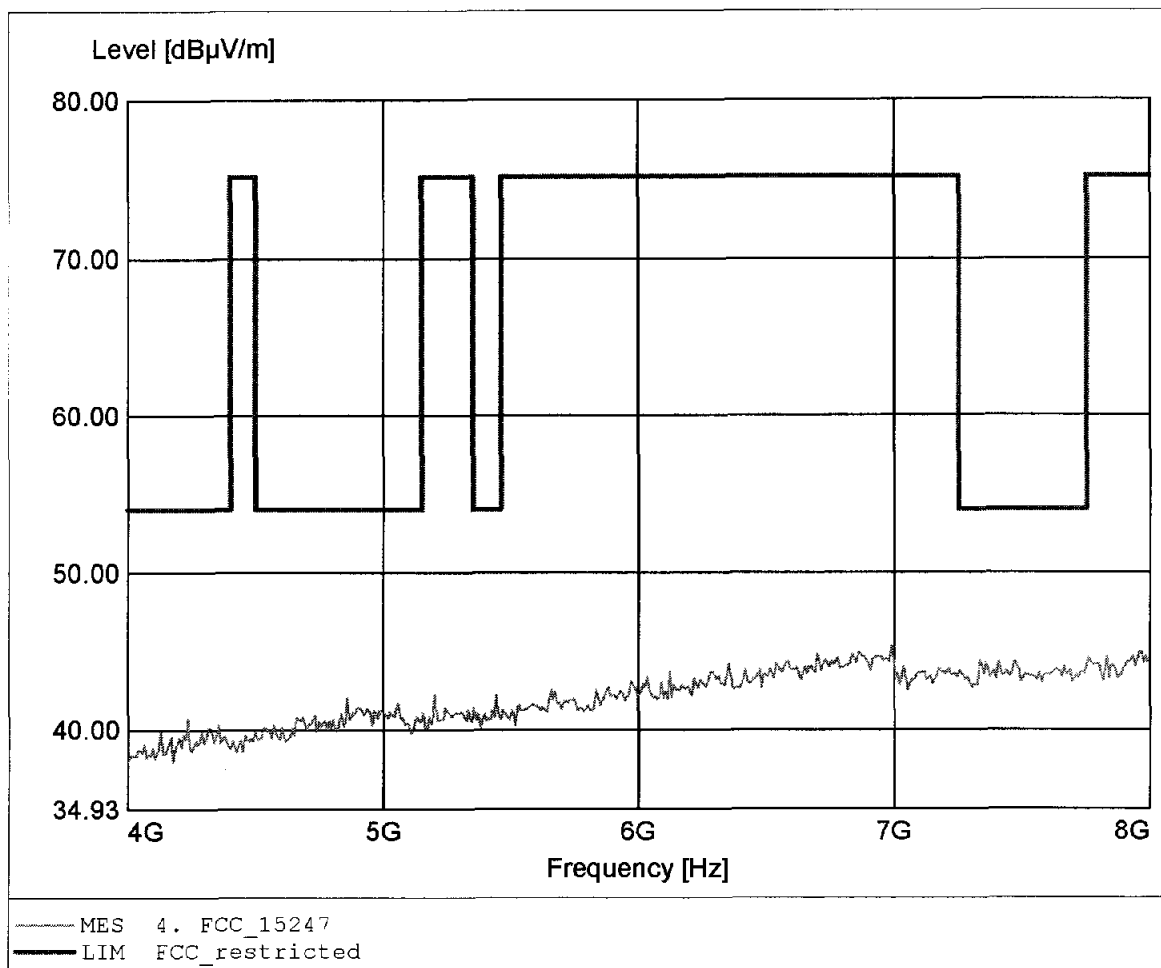

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2441 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.968GHz, Emax: 45.66dB μ V/m, RBW: 1MHz

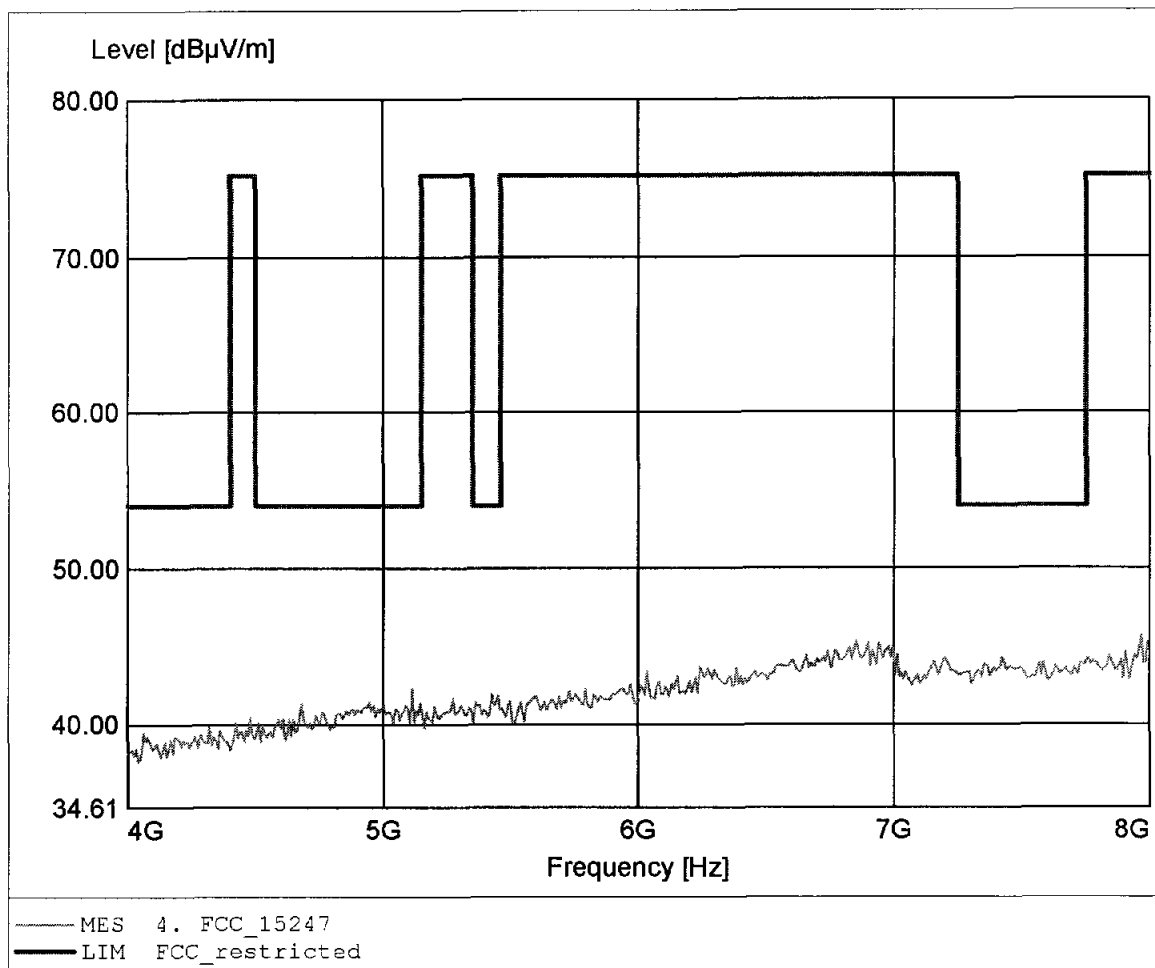

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2441 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.014GHz, Emax: 38.21dBµV/m, RBW: 1MHz

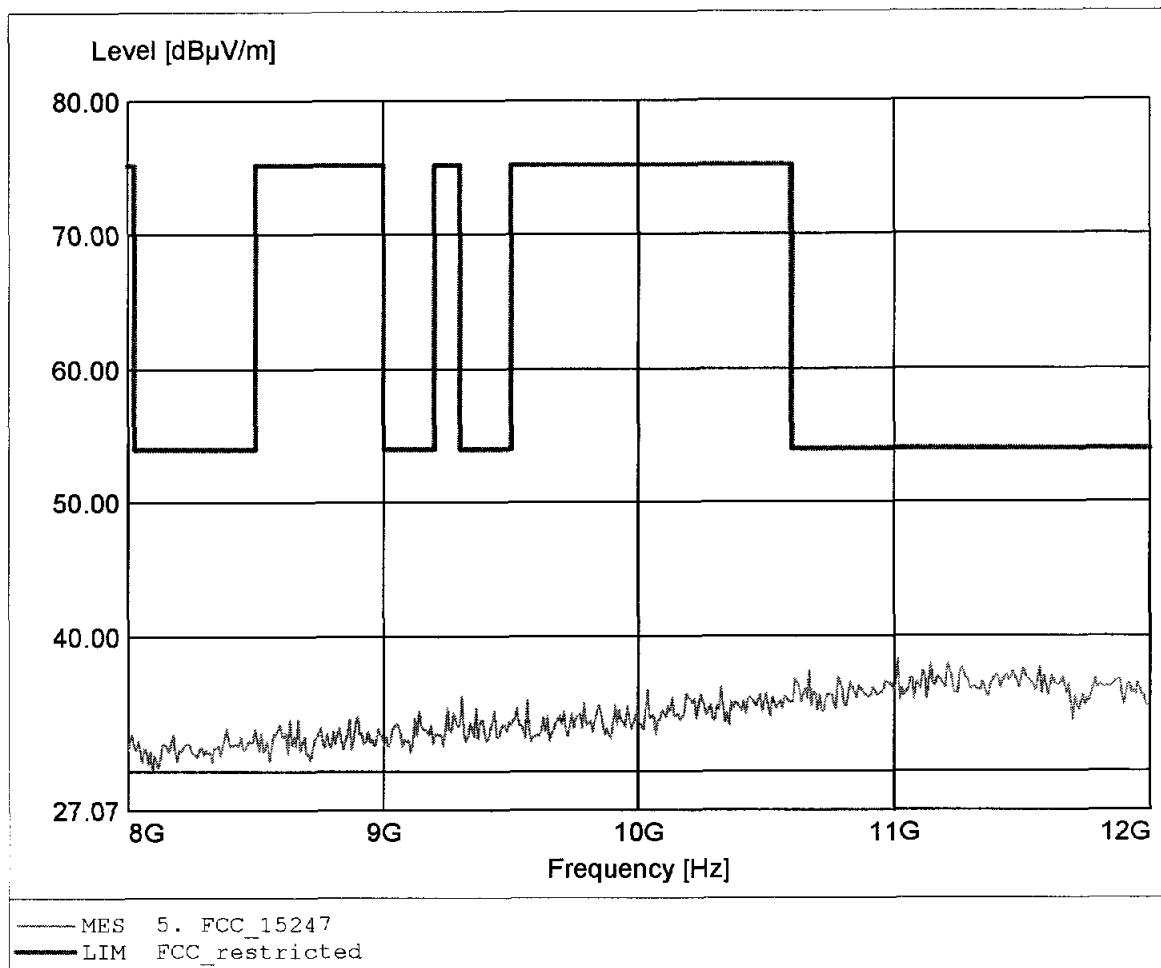

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2441 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.150GHz, Emax: 38.53dBµV/m, RBW: 1MHz

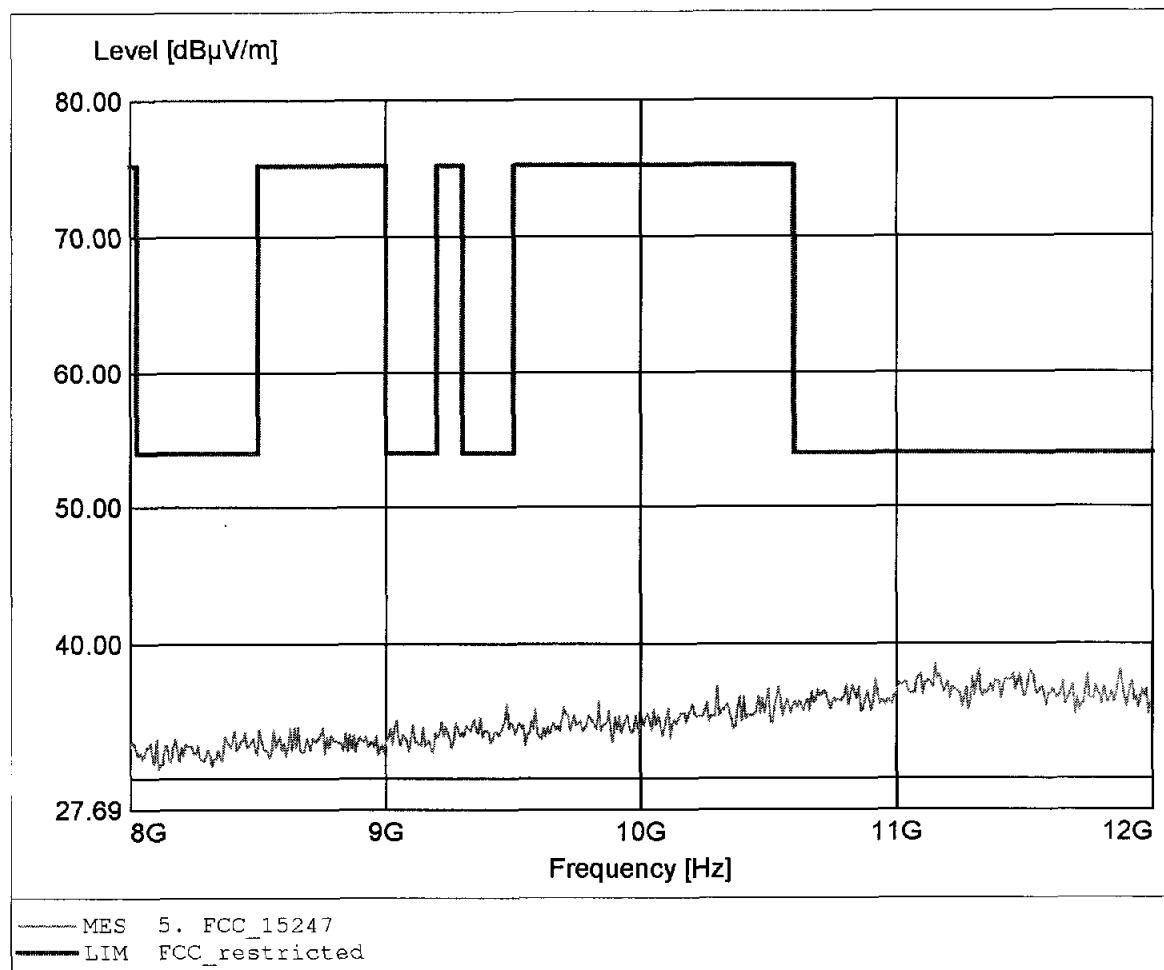

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2441 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.375GHz, Emax: 41.01dBμV/m, RBW: 1MHz

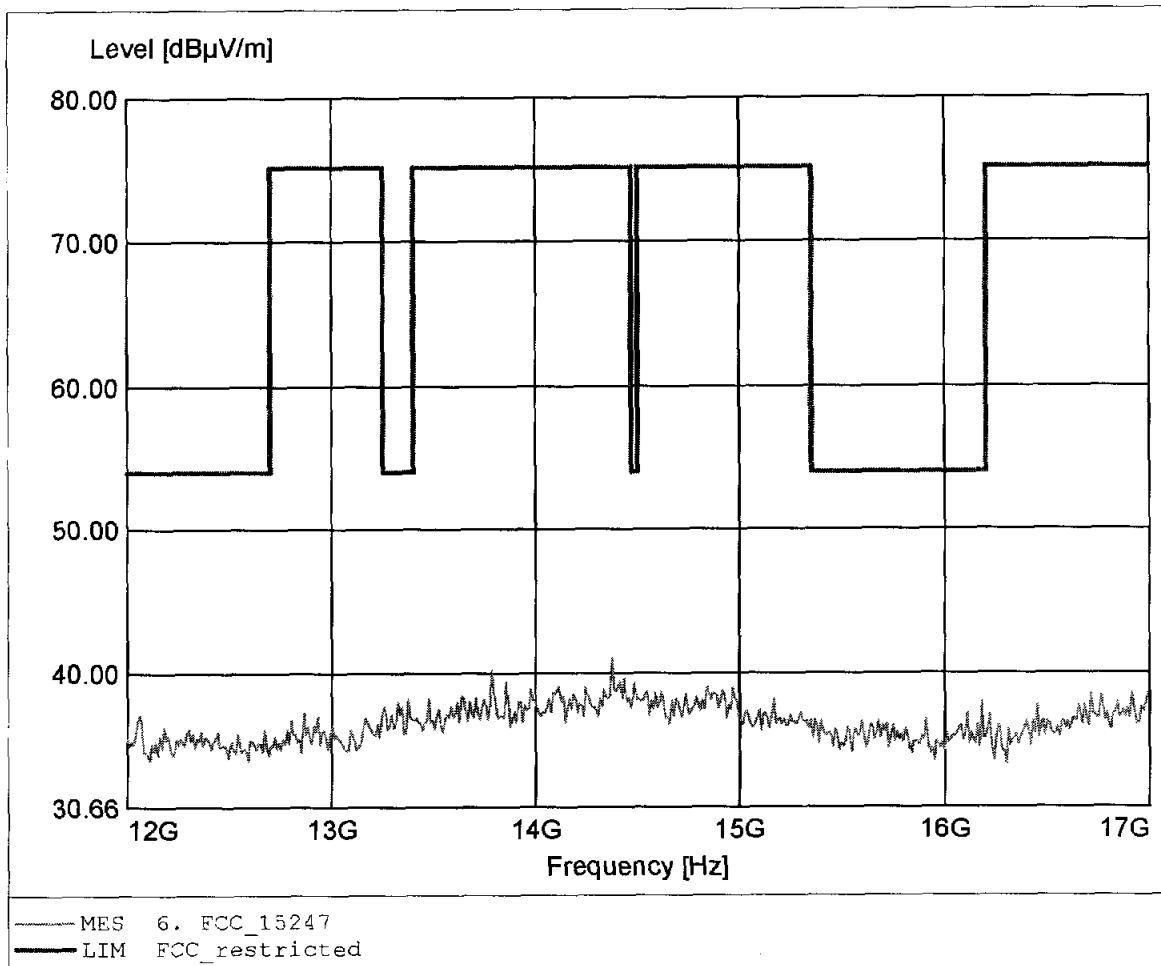

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2441 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.164GHz, Emax: 39.90dBµV/m, RBW: 1MHz

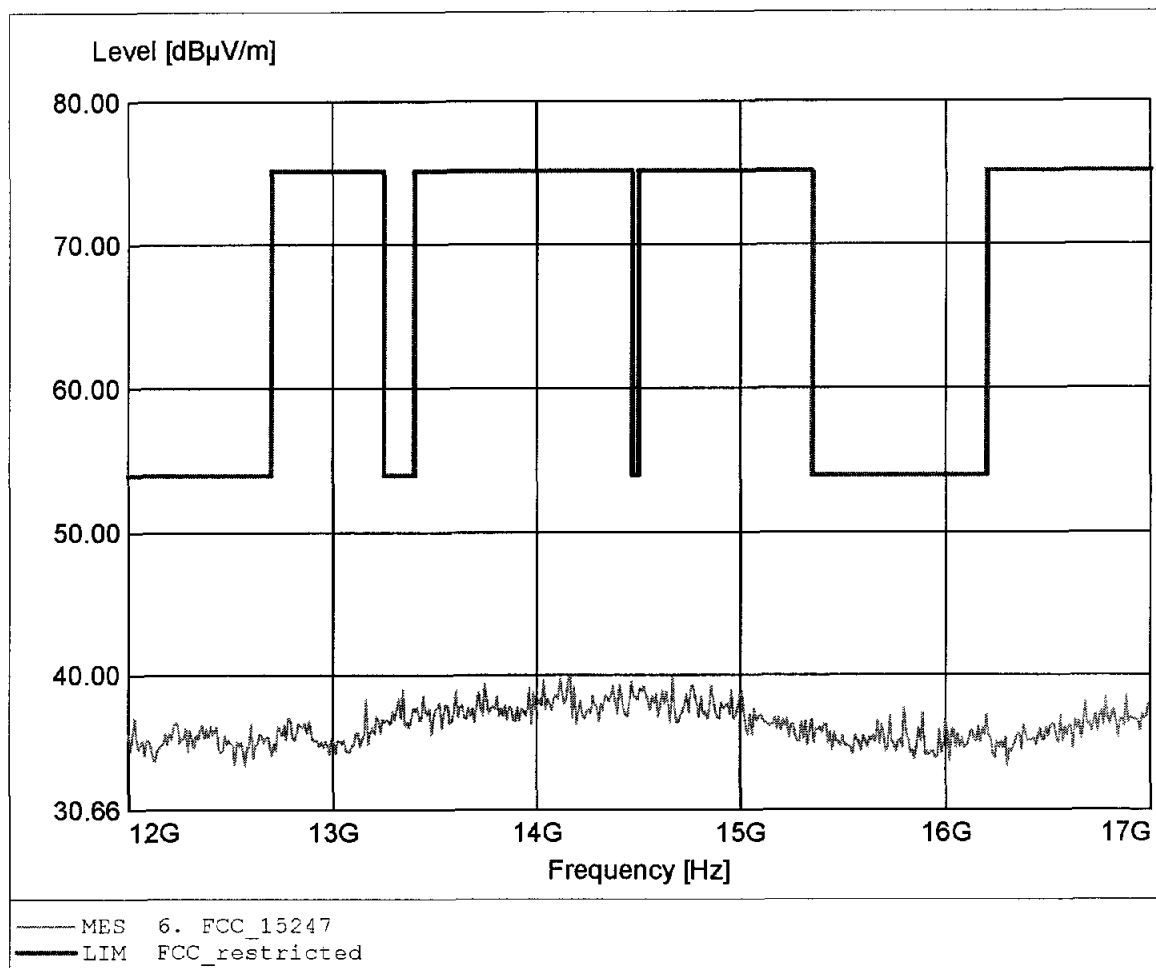

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2441 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 24.501GHz, Emax: 47.09dBμV/m, RBW: 1MHz

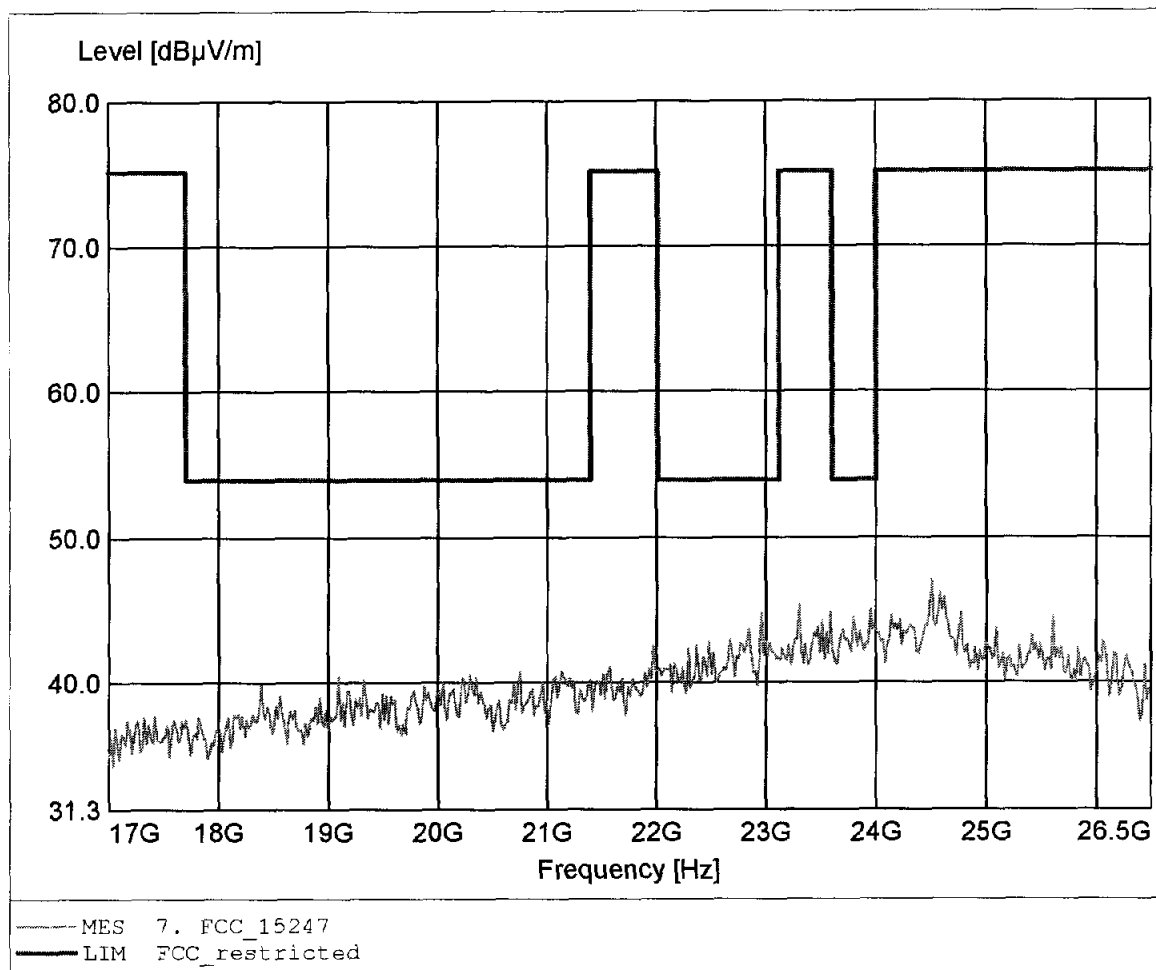

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2441 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 23.987GHz, Emax: 45.53dBµV/m, RBW: 1MHz

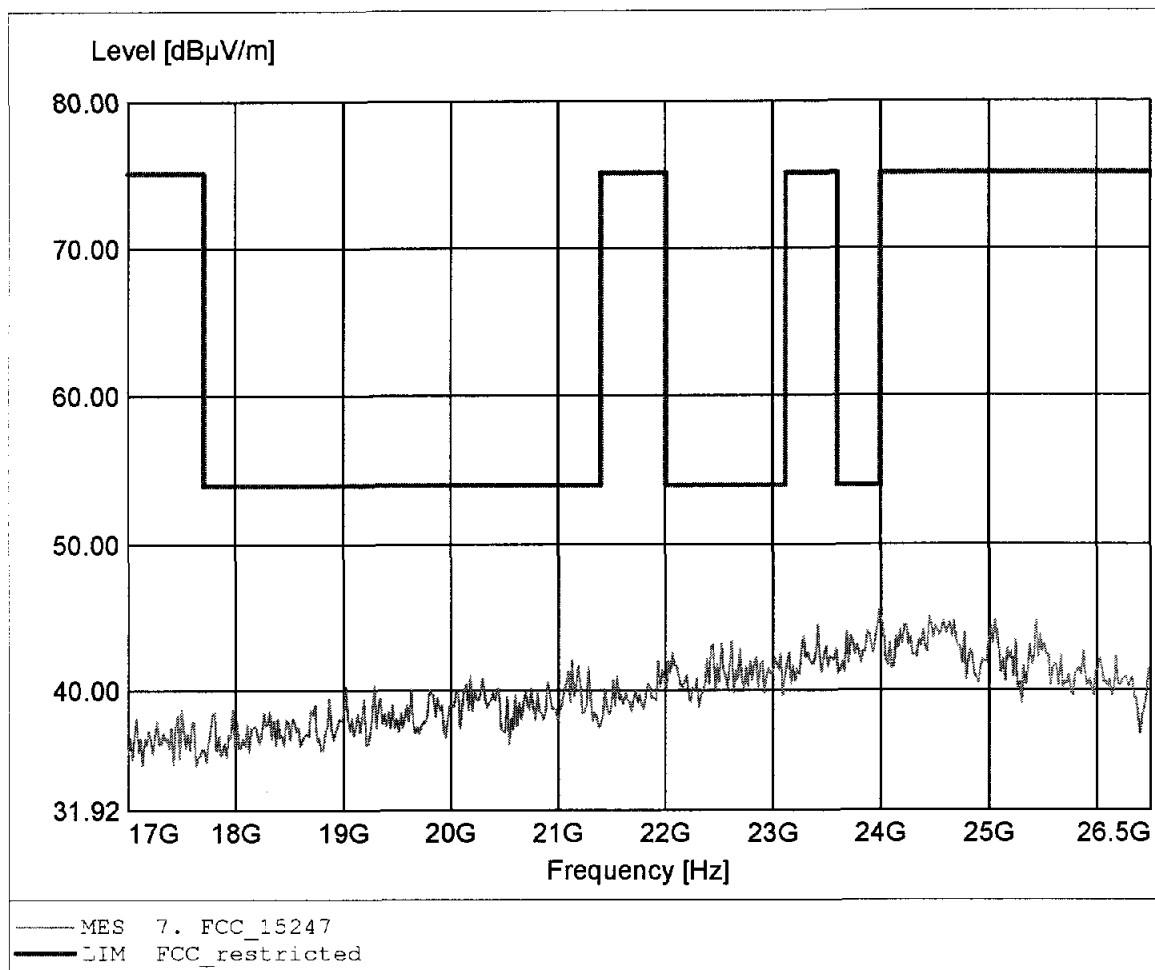

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2480 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 144.128MHz, Emax: 36.34dB μ V/m, RBW: 100kHz

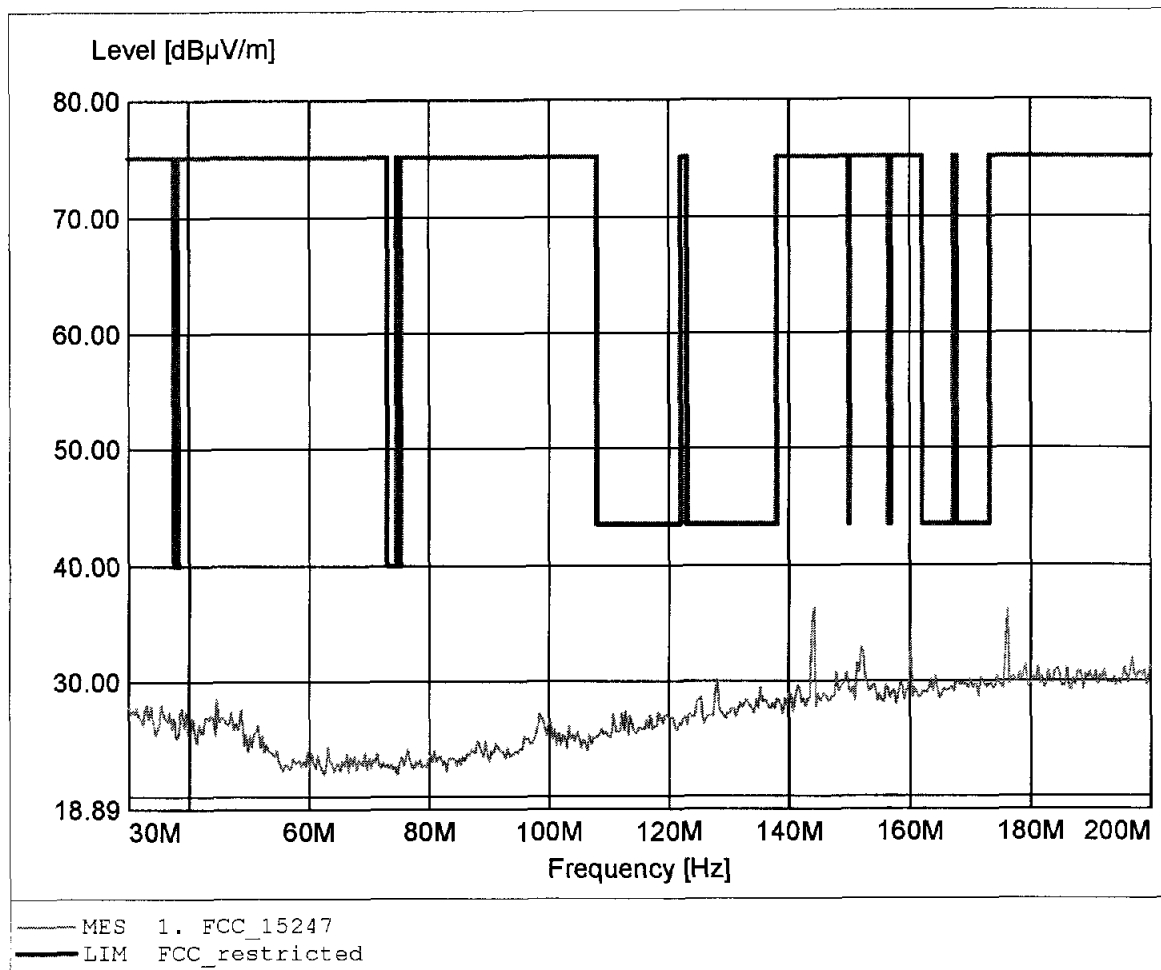

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2480 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 185.010MHz, Emax: 31.76dBμV/m, RBW: 100kHz

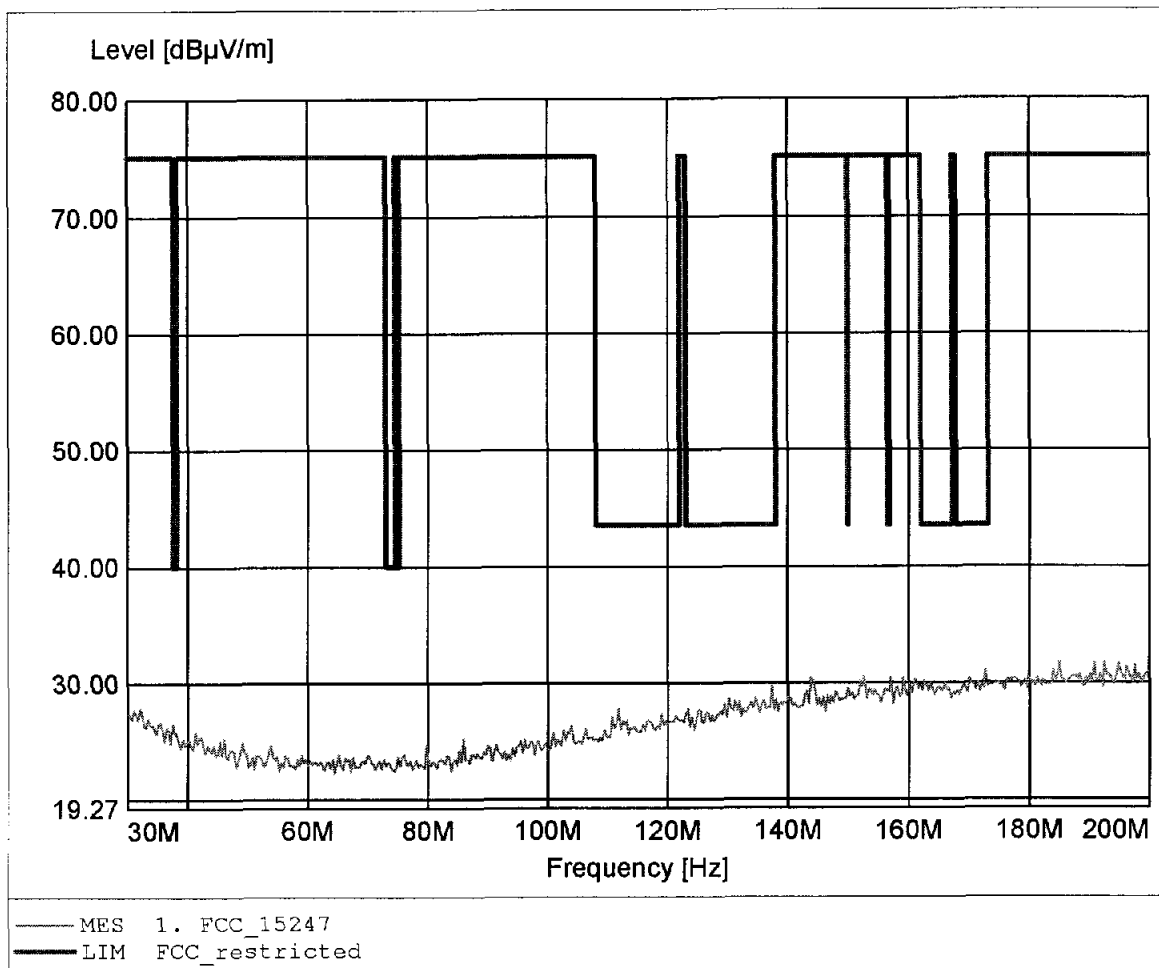

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2480 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 206.413MHz, Emax: 25.12dBµV/m, RBW: 100kHz

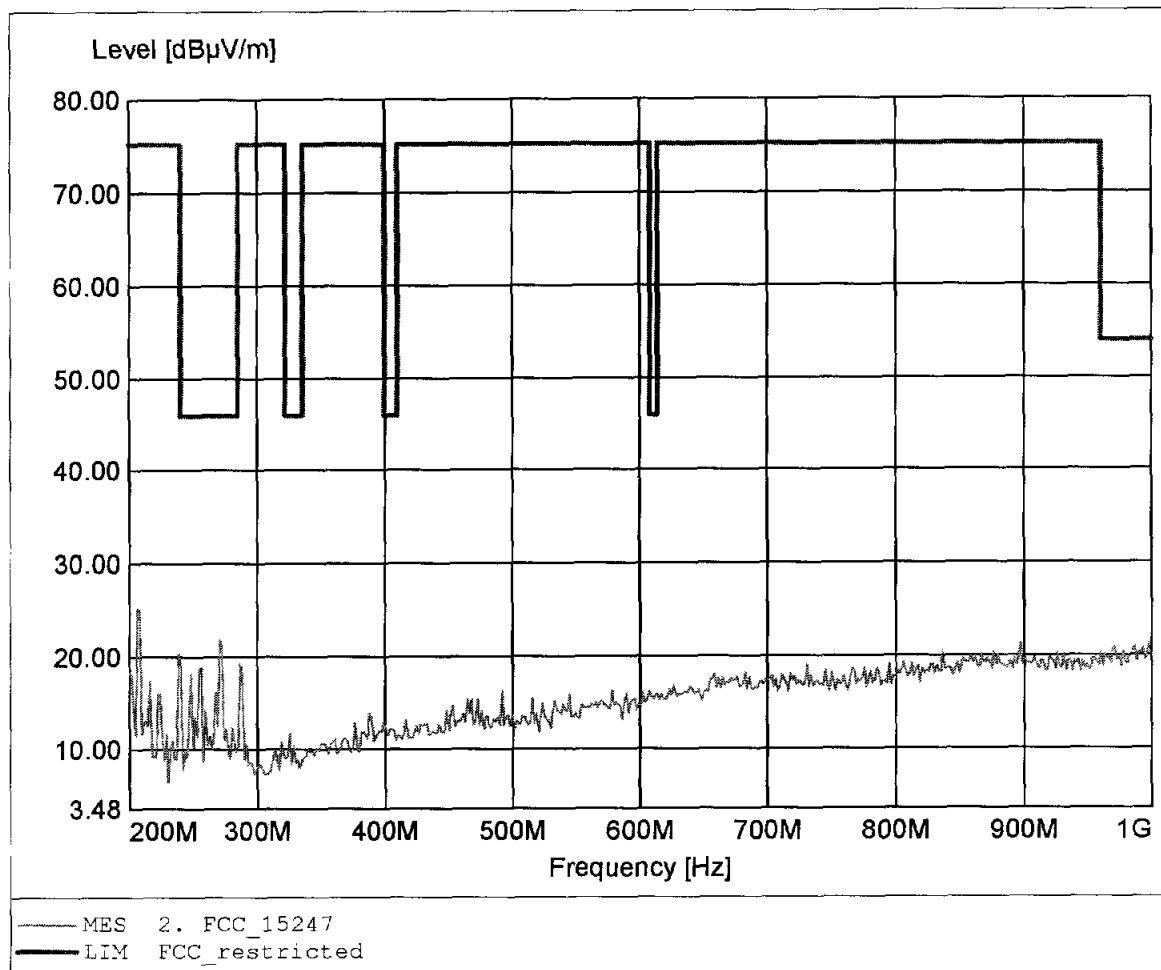

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2480 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 987.174MHz, Emax: 22.47dB μ V/m, RBW: 100kHz

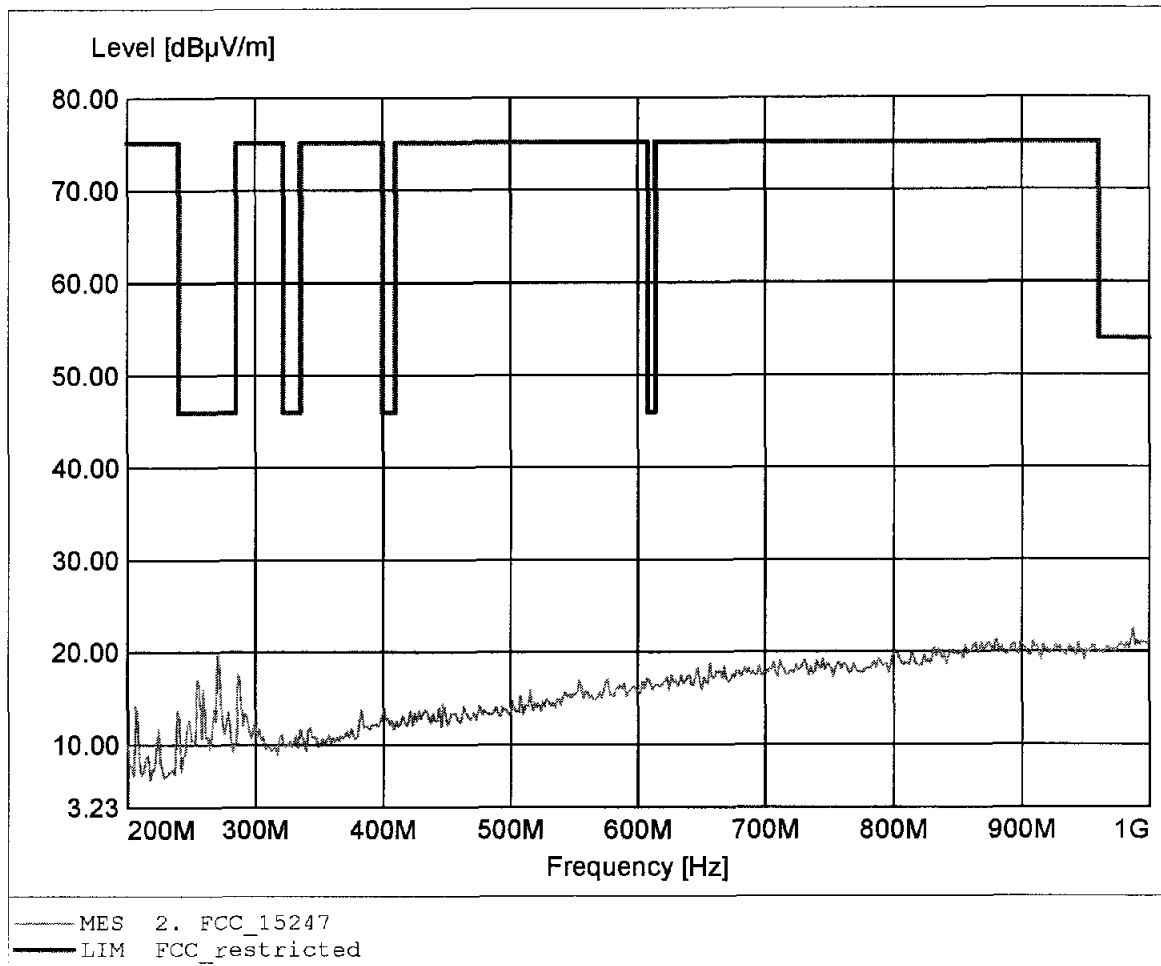

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2480 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 53.60dBuV/m, RBW: 1MHz

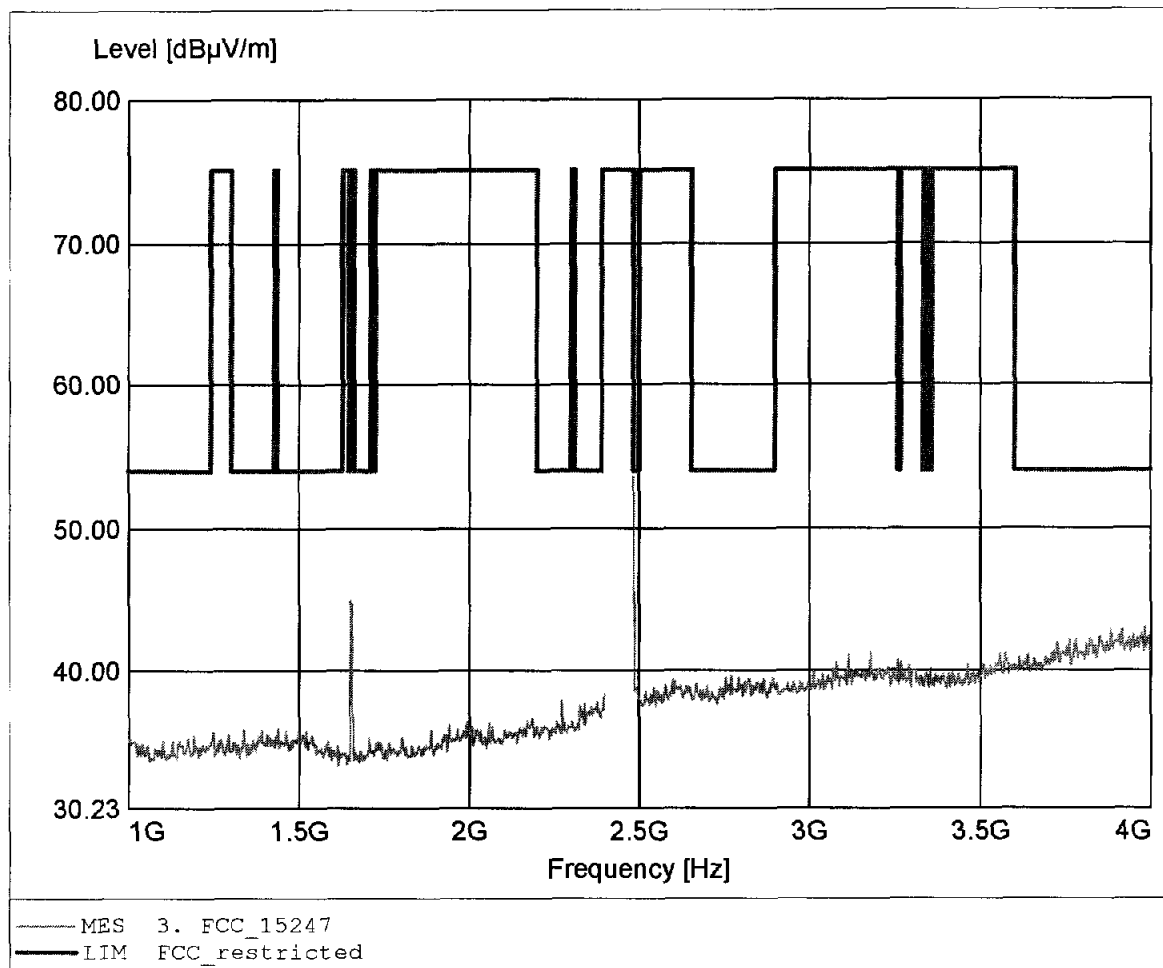

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2480 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 55.67dBμV/m, RBW: 1MHz

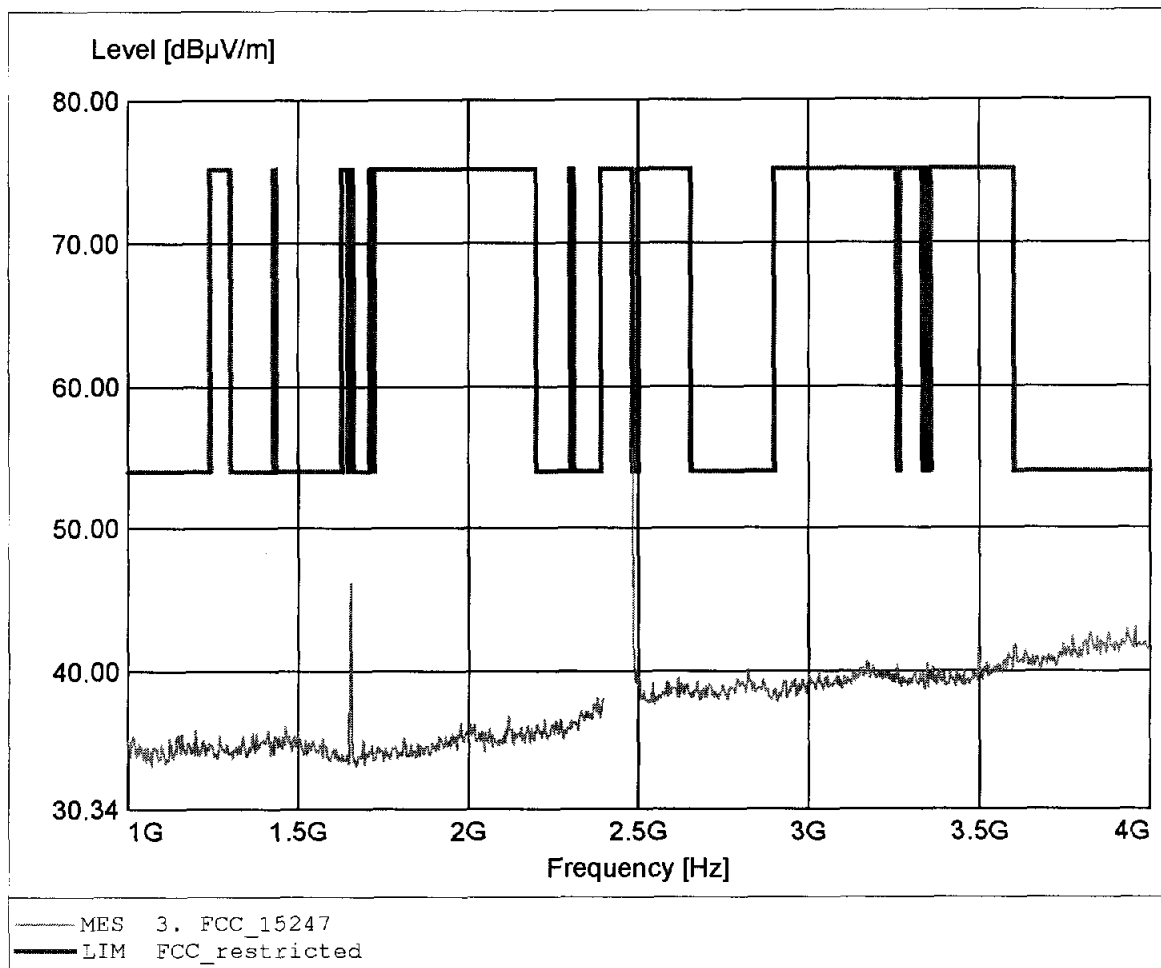

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2480 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 55.67dBuV/m, RBW: 1MHz

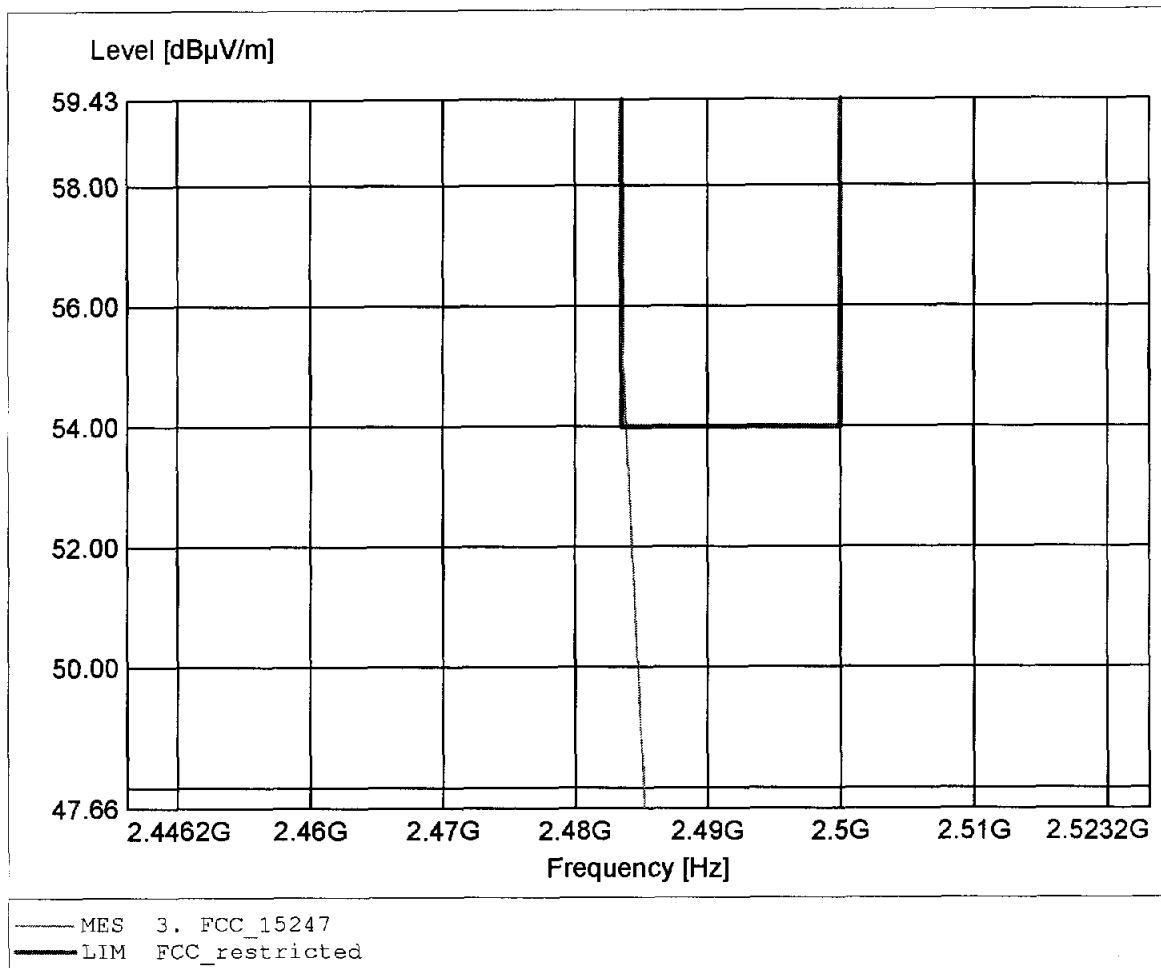

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2480 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.654GHz, Emax: 41.01dBμV/m, RBW: 1MHz

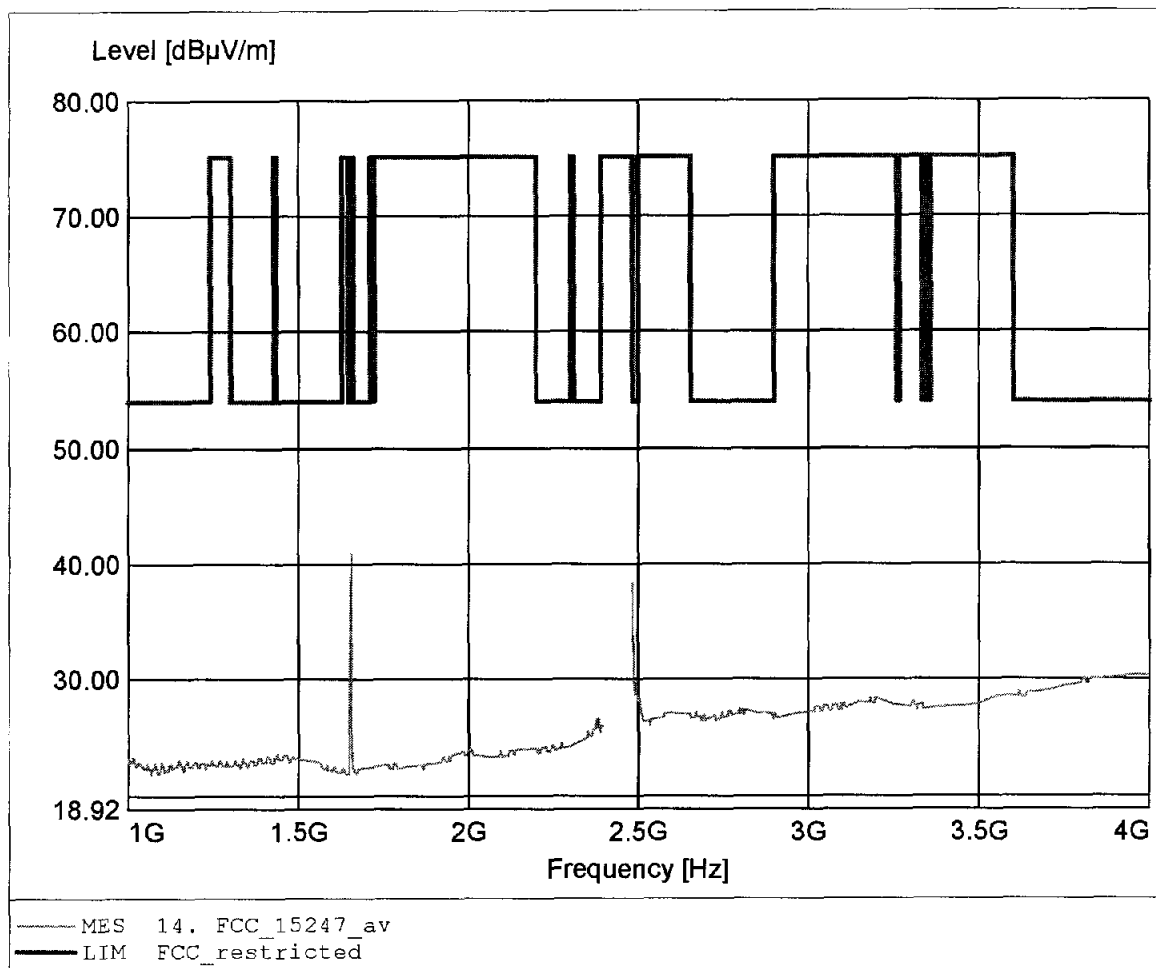

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2480 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 6.974GHz, Emax: 45.61dBµV/m, RBW: 1MHz

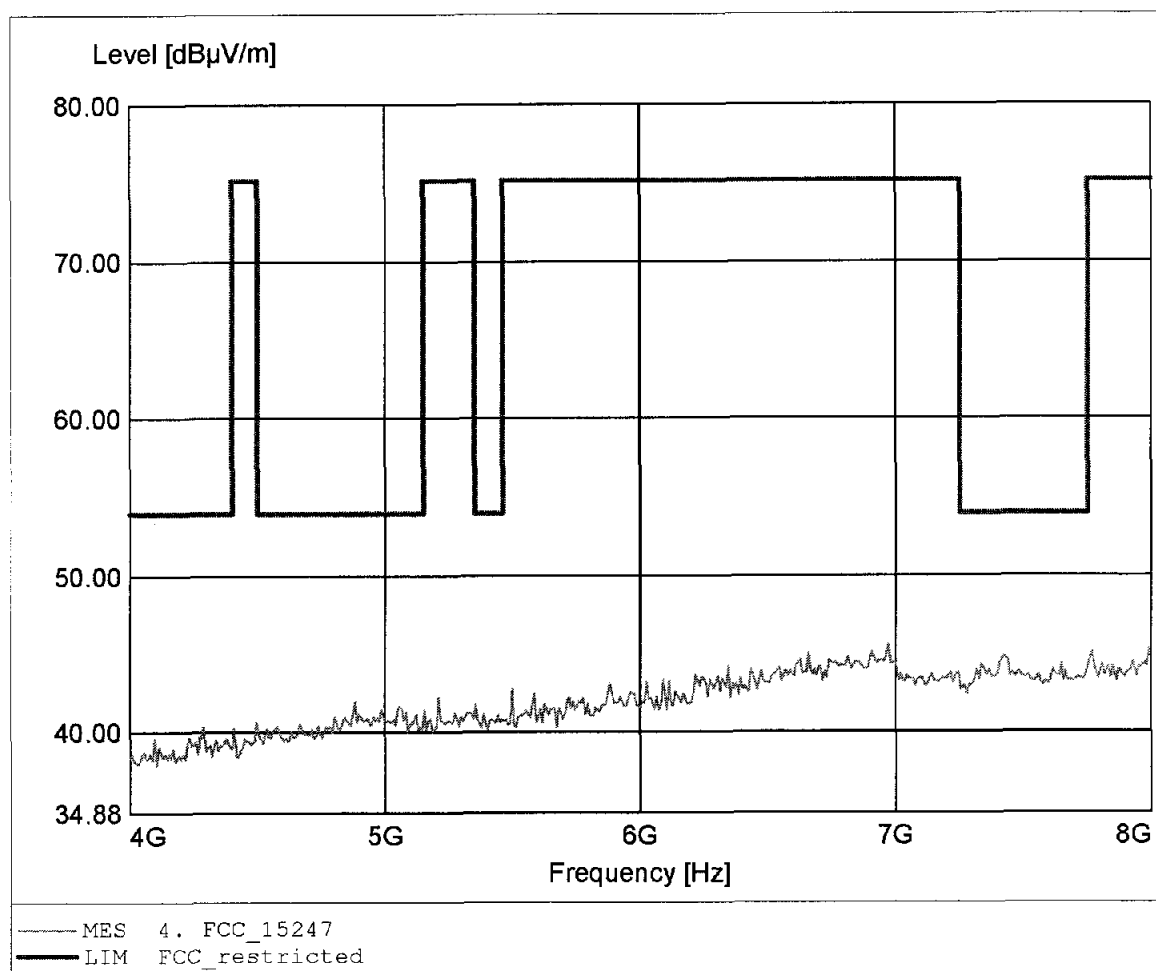

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2480 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 6.998GHz, Emax: 44.92dB μ V/m, RBW: 1MHz

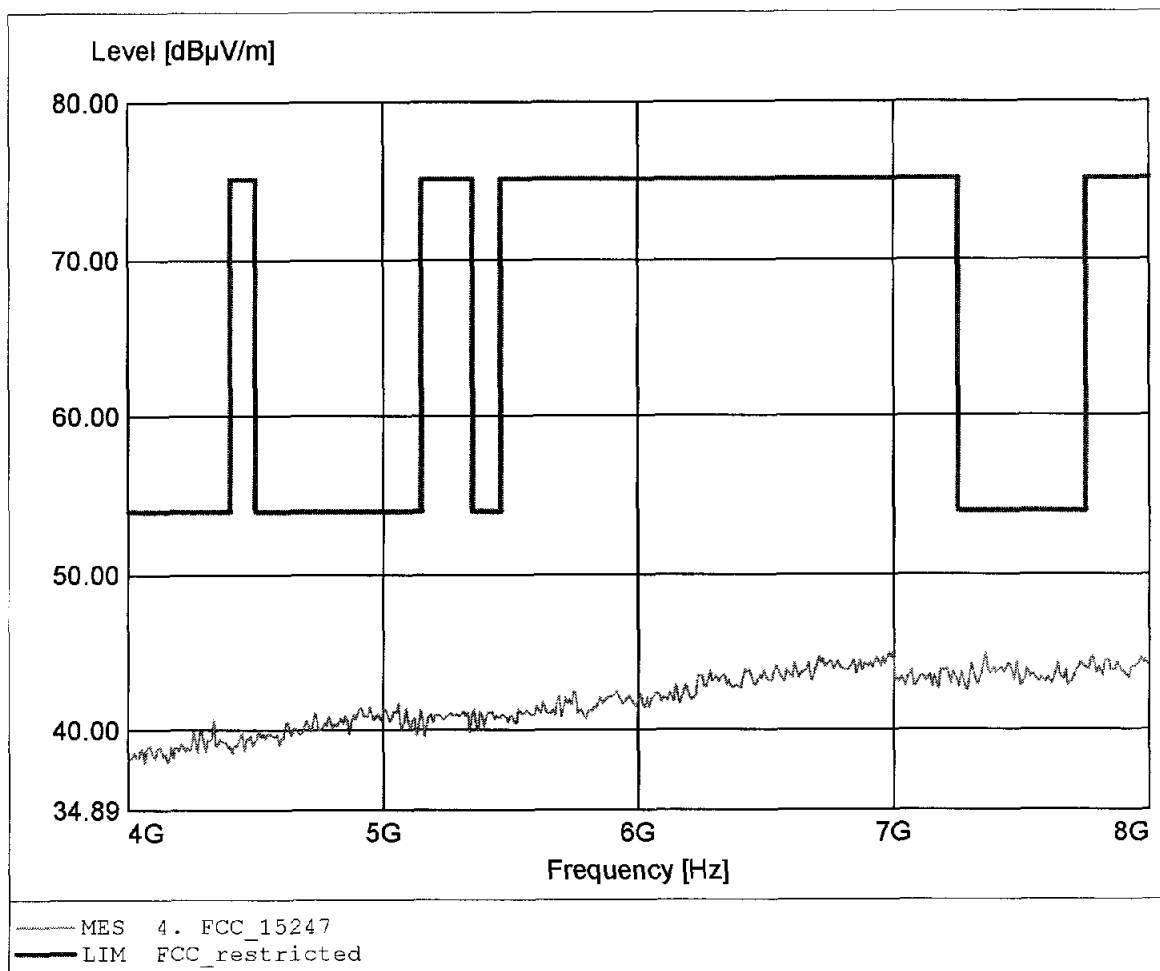

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2480 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.118GHz, Emax: 38.61dB μ V/m, RBW: 1MHz

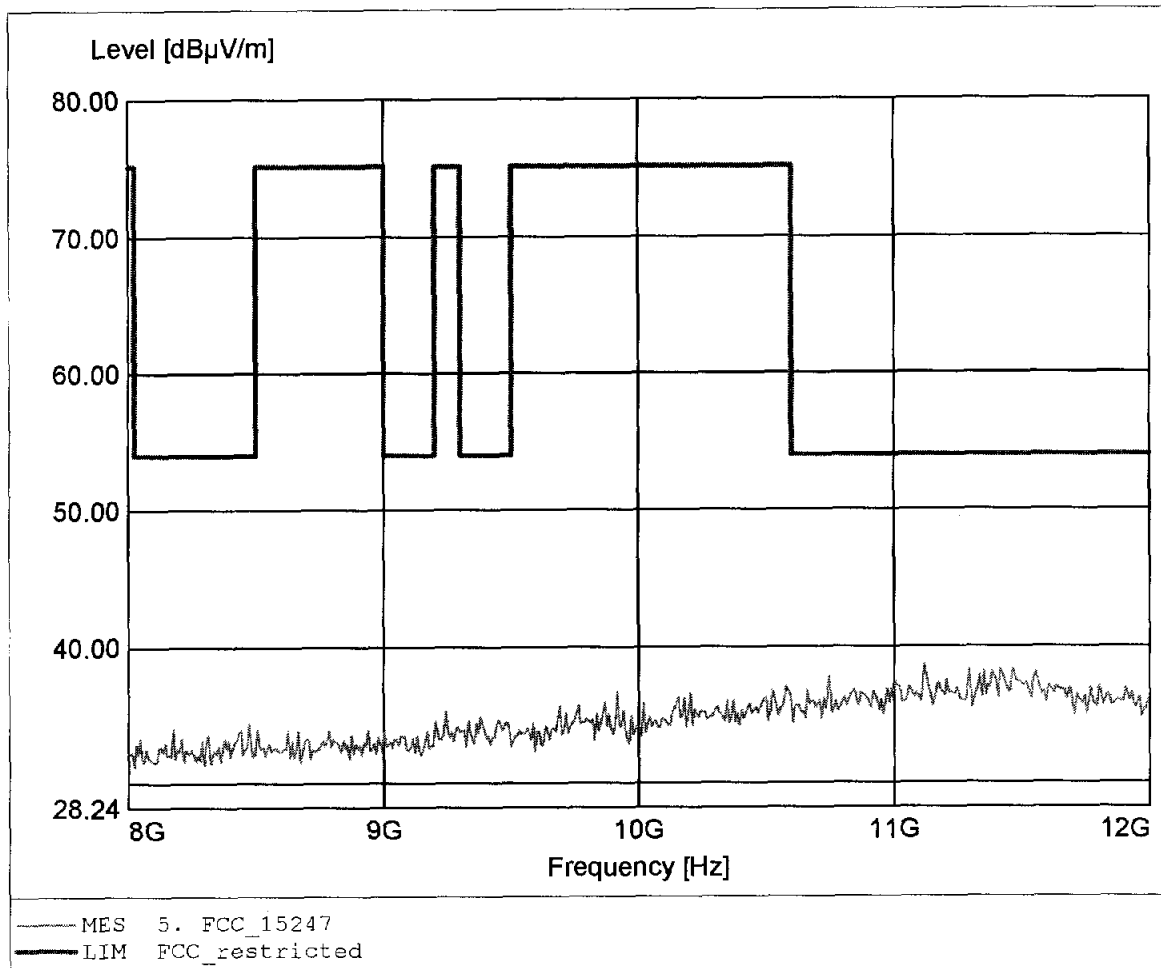

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2480 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 11.431GHz, Emax: 39.33dBμV/m, RBW: 1MHz

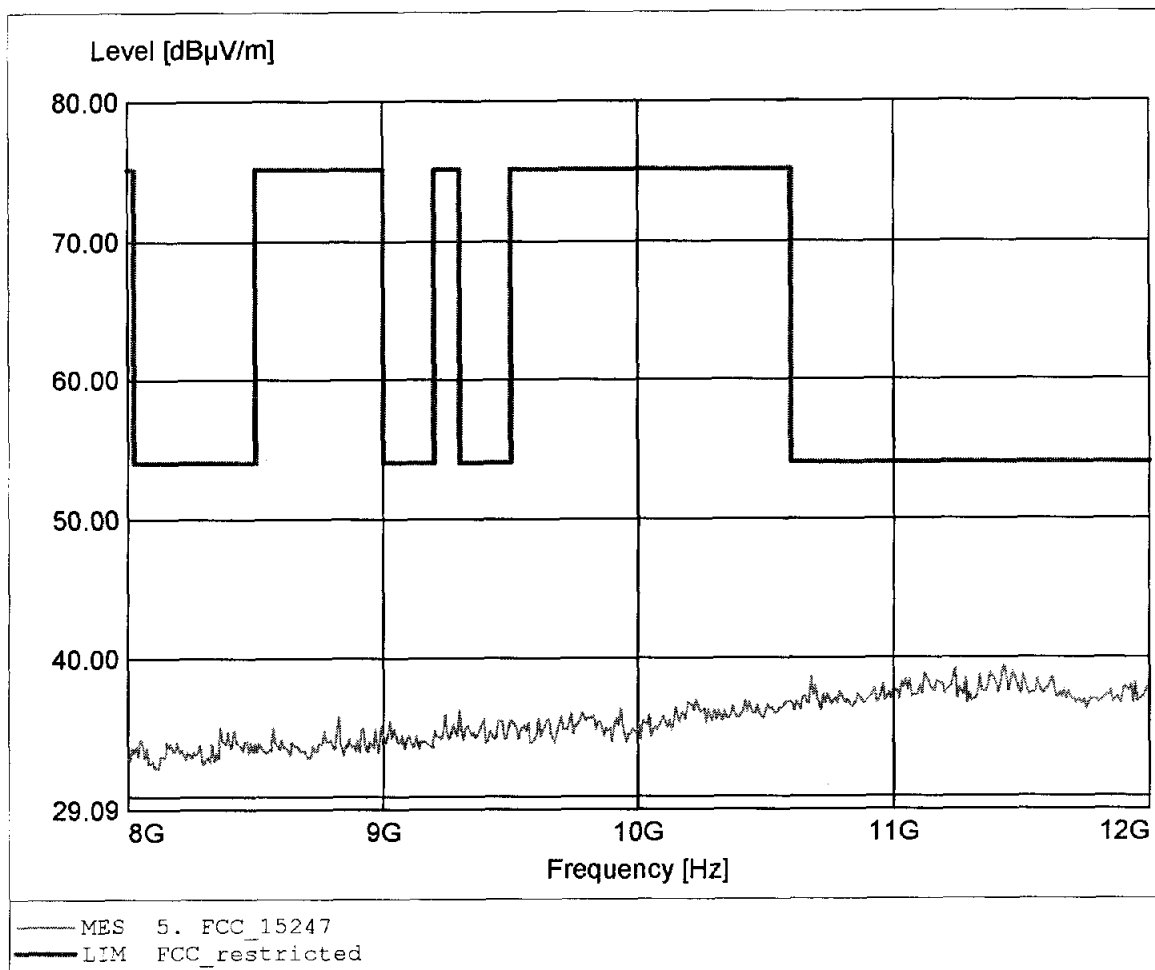

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2480 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.595GHz, Emax: 40.35dBμV/m, RBW: 1MHz

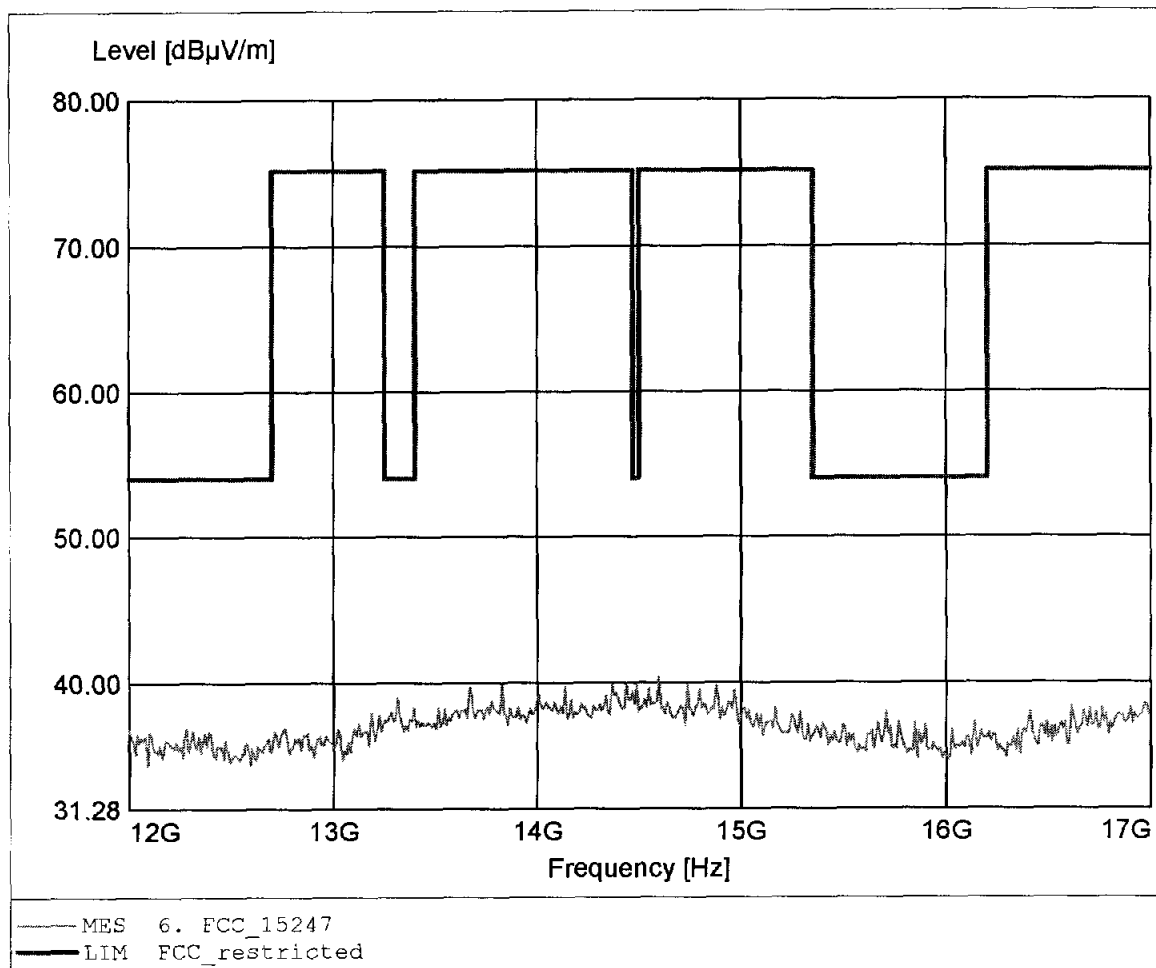

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2480 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.756GHz, Emax: 41.23dBµV/m, RBW: 1MHz

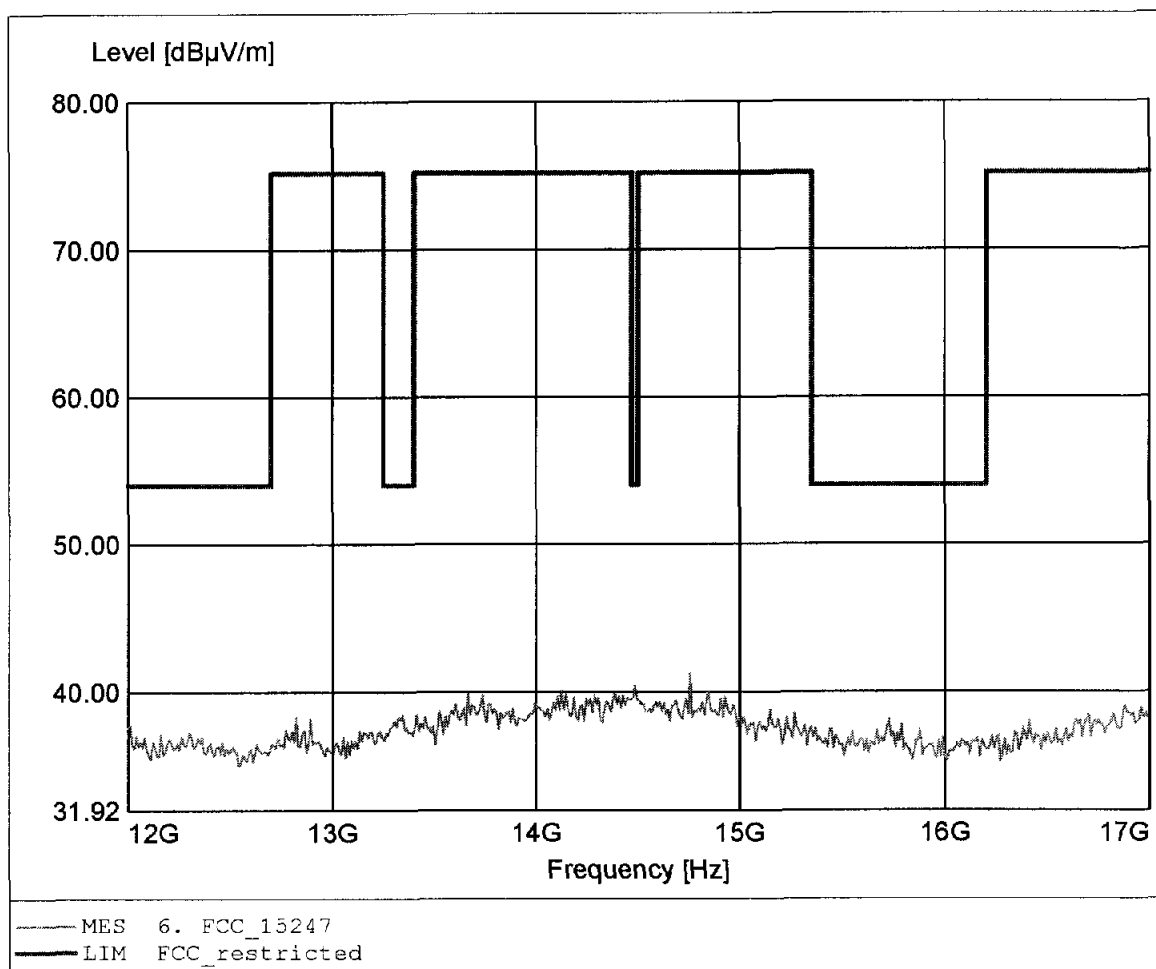

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2480 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 24.558GHz, Emax: 46.76dBuV/m, RBW: 1MHz

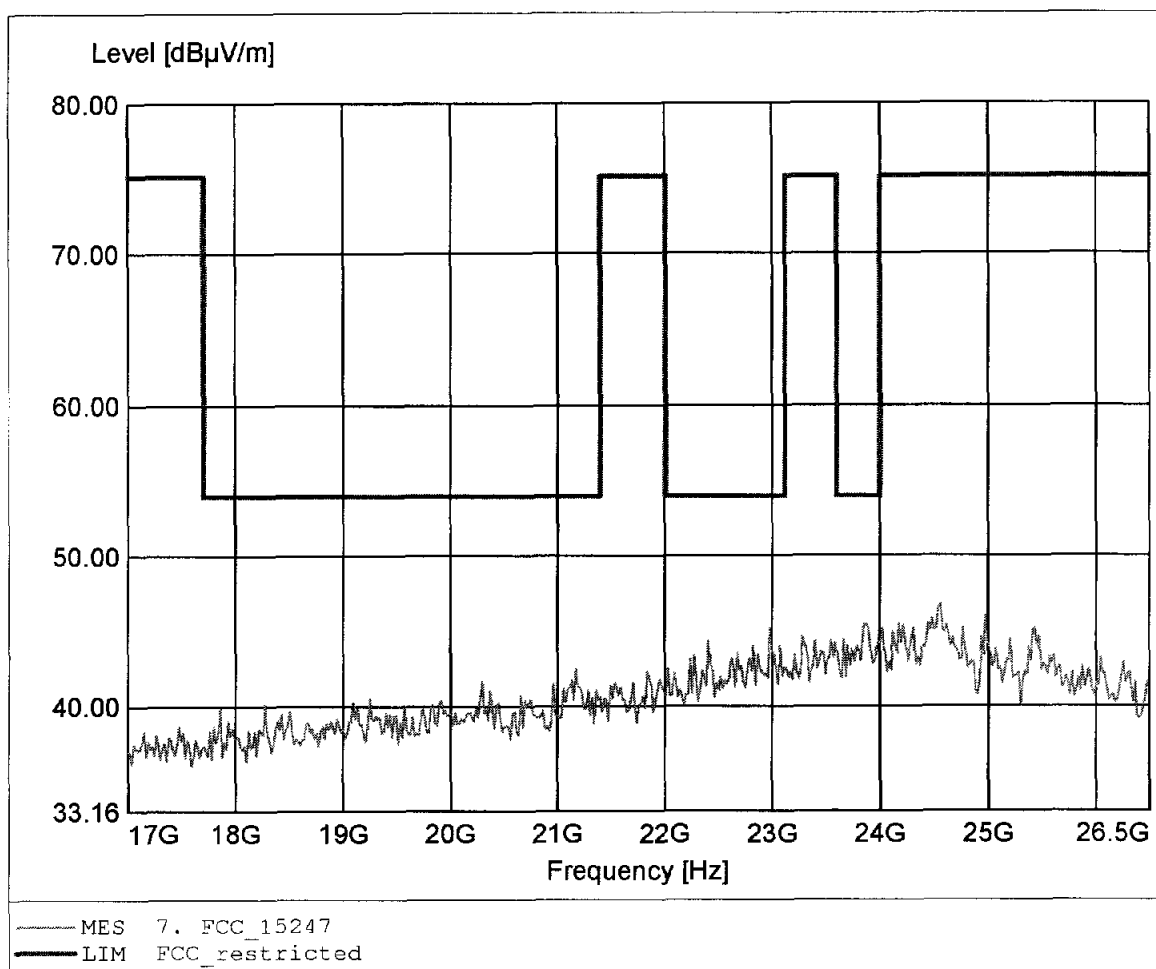

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

Approval Holder: FREE2MOVE AB
EUT / Model: LOW POWER BLUETOOTH MODULE WITH ANTENNA / F2M03GLA
Mode: 3-DH5 / Frequency: 2480 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 24.615GHz, Emax: 46.57dBμV/m, RBW: 1MHz

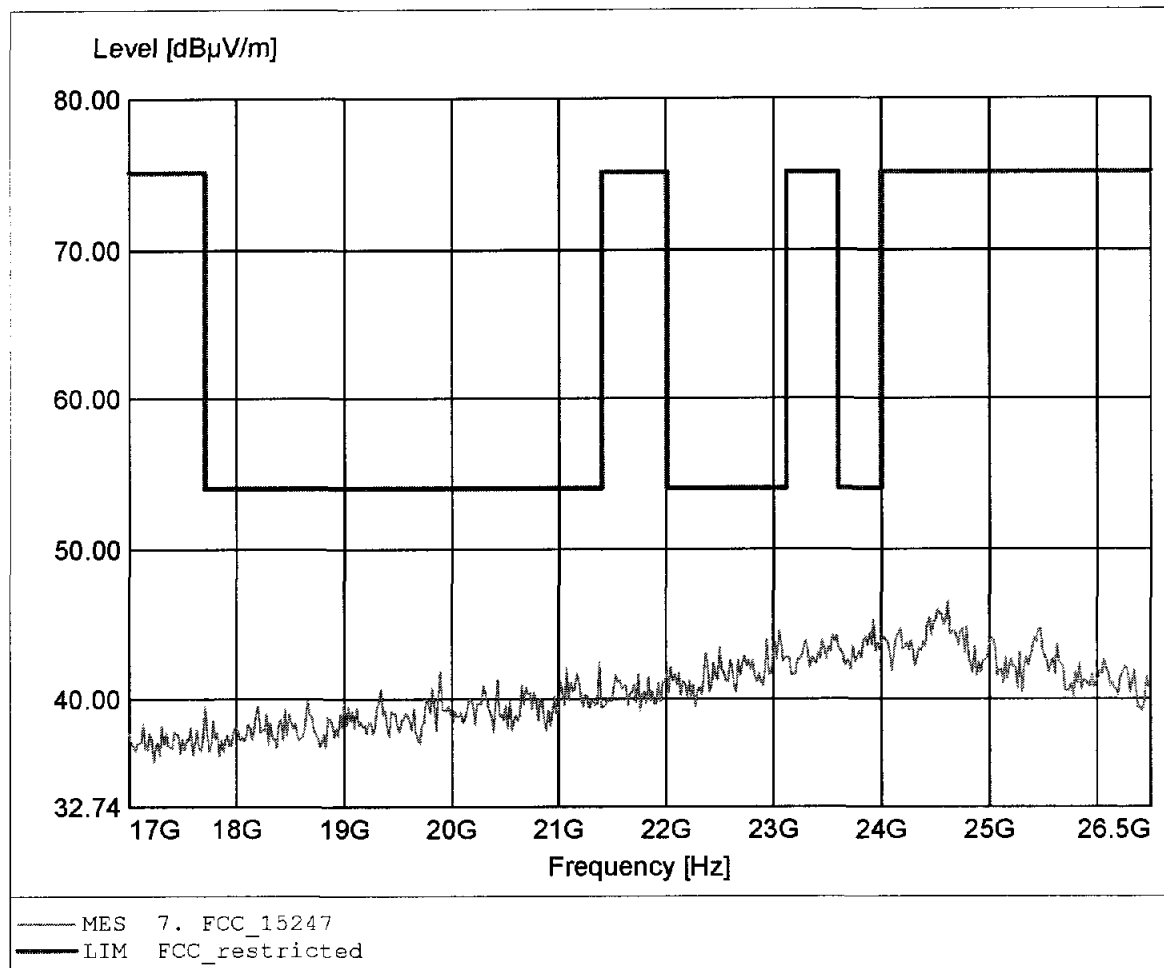


Appendix J

Band-edge compliance

FCC part 15.247

Band-edge compliance of RF conducted emissions

EUT	Low Power Bluetooth module with Antenna
Model	F2M03GLA
Approval Holder	Free2move AB
Temperature / Voltage	25°C / Vnom
Test Site / Operator	ETS Product Service AG / Mr. Treffke
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 0 / 2402 MHz
Comment 3	Hopping mode

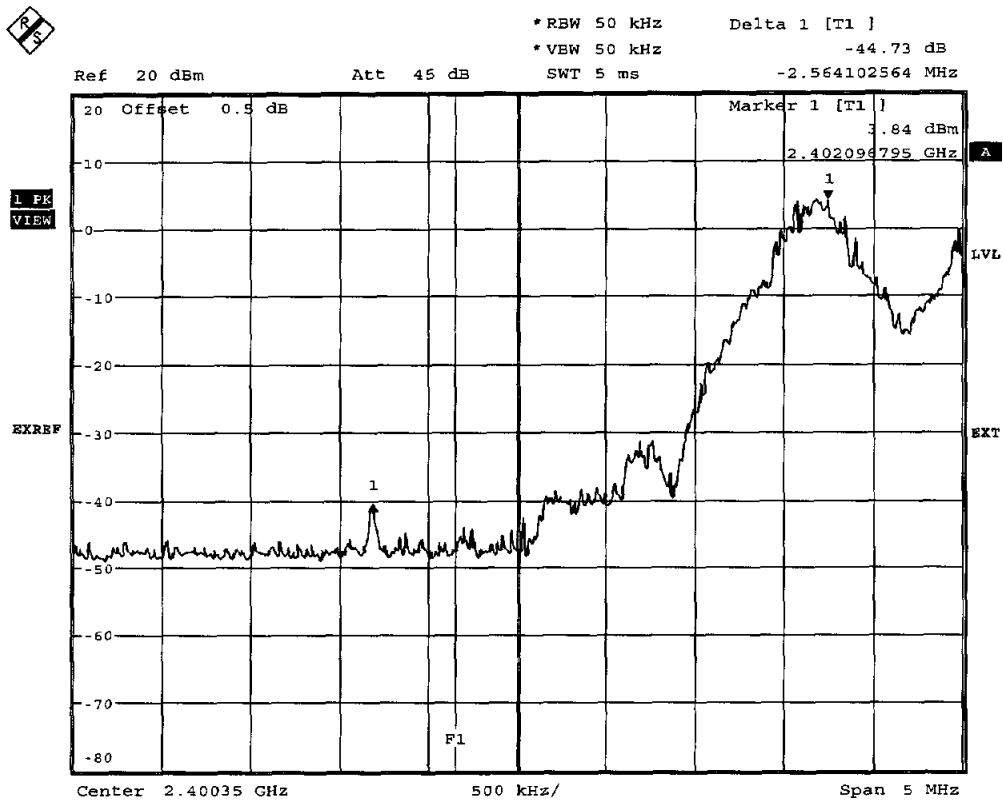

Limit: Marker Delta value >20 dB; Result: PASS

Date: 22.MAY.2007 13:36:03


Measurement diagram

ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

FCC part 15.247**Band-edge compliance of RF conducted emissions**

EUT	Low Power Bluetooth module with Antenna
Model	F2M03GLA
Approval Holder	Free2move AB
Temperature / Voltage	25°C / Vnom
Test Site / Operator	ETS Product Service AG / Mr. Treffke
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 78 / 2480 MHz
Comment 3	Hopping mode

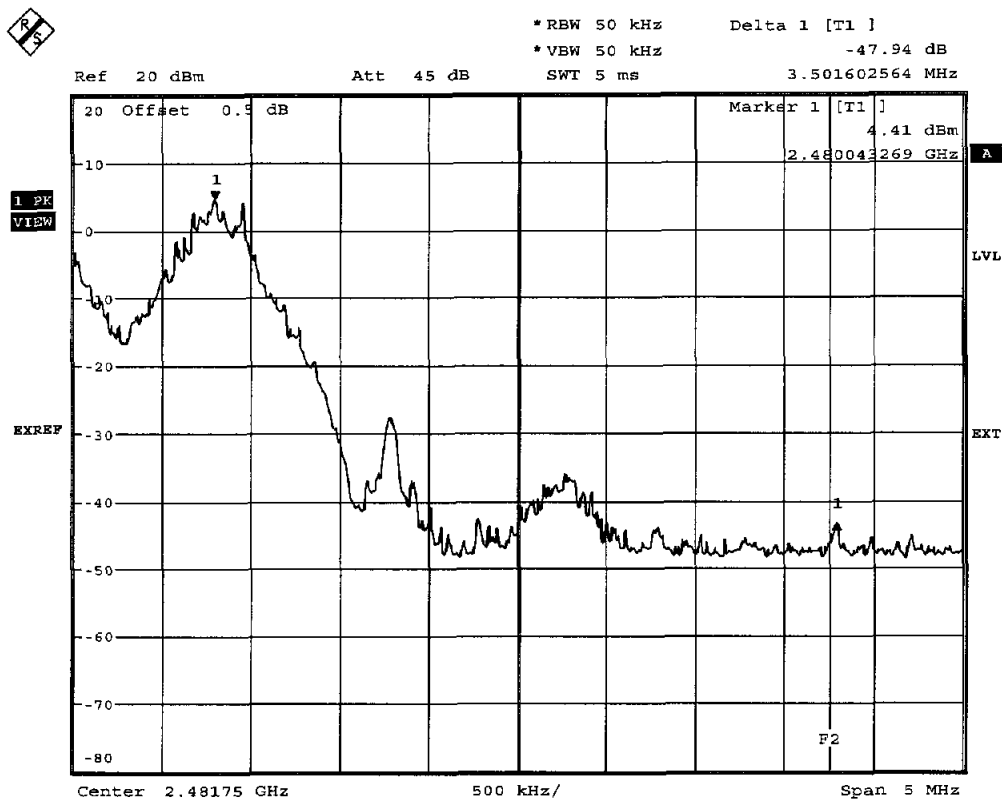

Limit: Marker Delta value >20 dB; Result: PASS

Date: 22.MAY.2007 13:38:49


Measurement diagram

ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

FCC part 15.247**Band-edge compliance of RF conducted emissions**

EUT	Low Power Bluetooth module with Antenna
Model	F2M03GLA
Approval Holder	Free2move AB
Temperature / Voltage	25°C / Vnom
Test Site / Operator	ETS Product Service AG / Mr. Treffke
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 0 / 2402 MHz
Comment 3	Single frequency mode

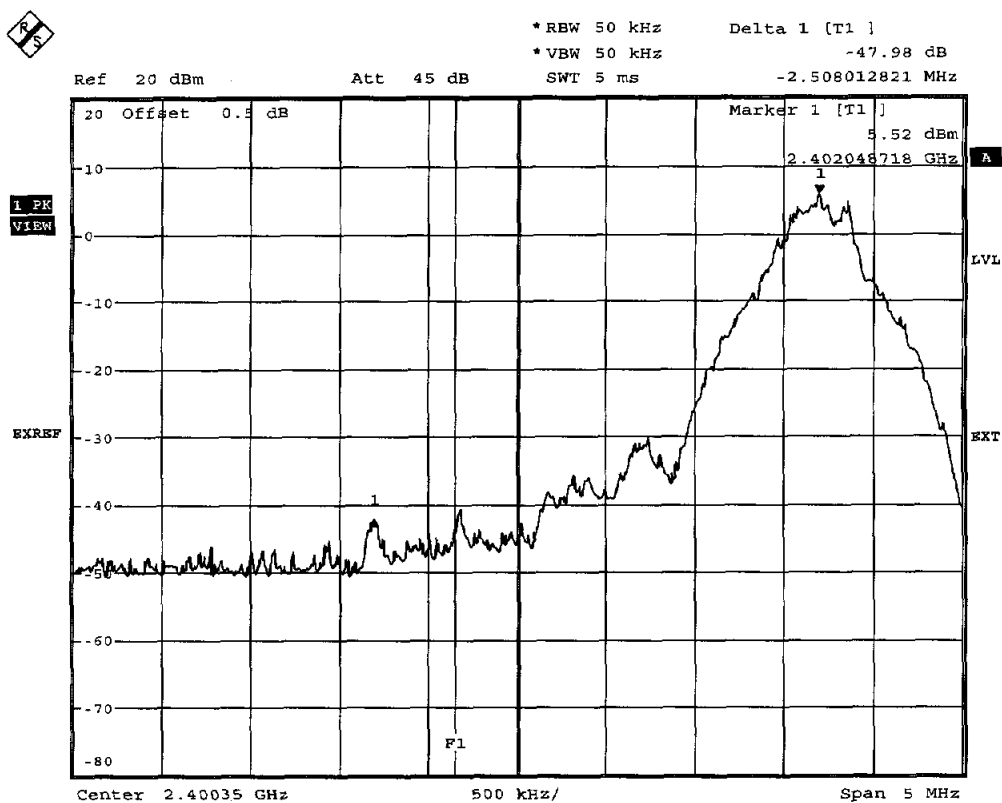

Limit: Marker Delta value >20 dB; Result: PASS

Date: 22.MAY.2007 13:30:53

Measurement diagram


ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

FCC part 15.247

Band-edge compliance of RF conducted emissions

EUT	Low Power Bluetooth module with Antenna
Model	F2M03GLA
Approval Holder	Free2move AB
Temperature / Voltage	25°C / Vnom
Test Site / Operator	ETS Product Service AG / Mr. Treffke
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 78 / 2480 MHz
Comment 3	Single frequency mode

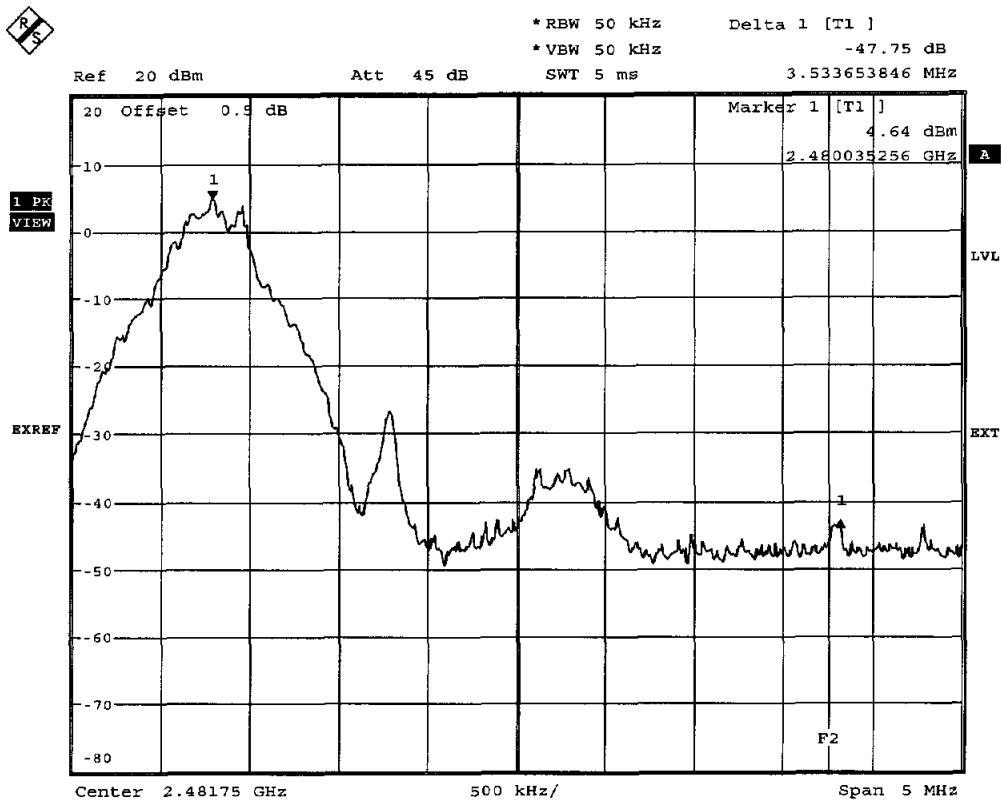

Limit: Marker Delta value >20 dB; Result: PASS

Date: 22.MAY.2007 13:33:38

Measurement diagram


ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

FCC part 15.247

Band-edge compliance of RF conducted emissions

EUT	Low Power Bluetooth module with antenna
Model	F2M03GLA
Approval Holder	Free2move AB
Temperature / Voltage	23°C / Vnom / modulation: 3-DH5
Test Site / Operator	ETS Product Service AG / Mr. Treffke
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 0 / 2402 MHz
Comment 3	Single frequency mode

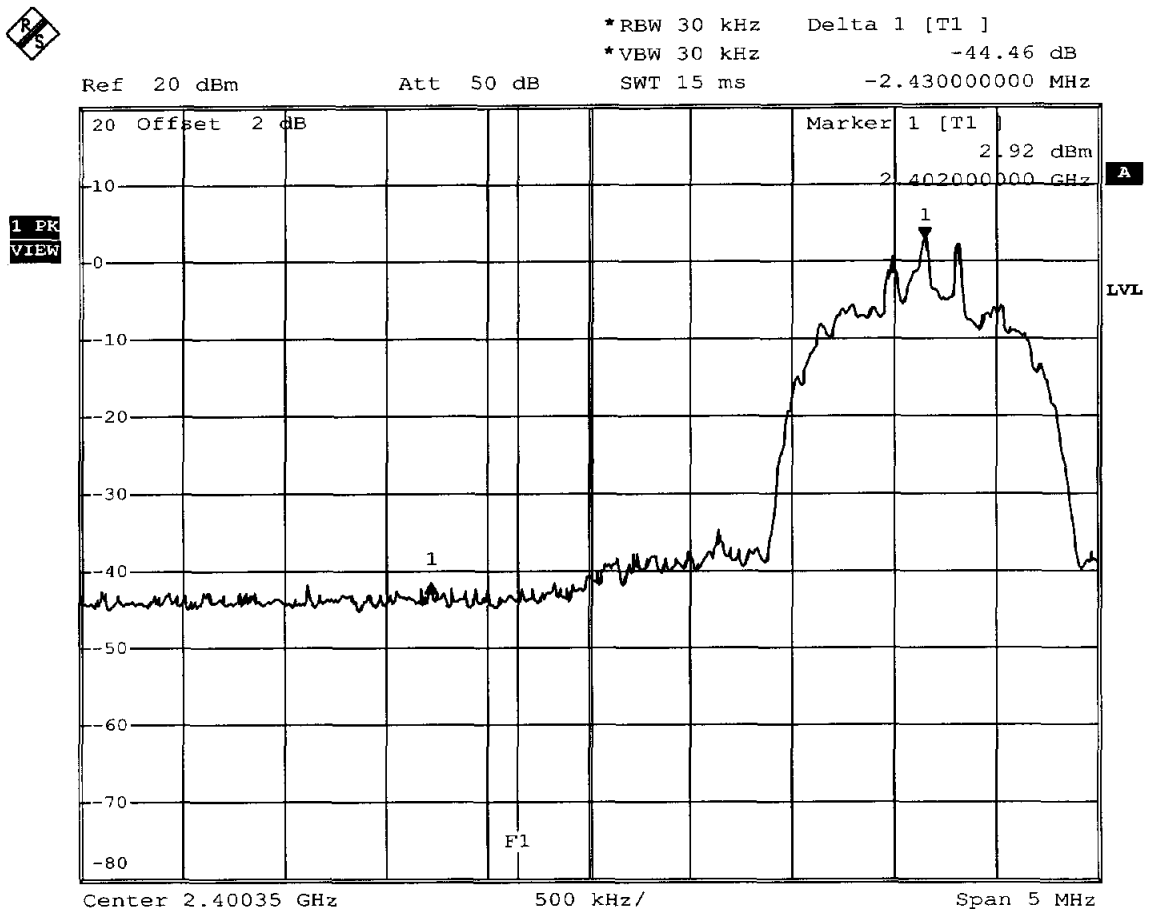

Date: 27.JUN.2007 11:14:26


Measurement diagram

ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

FCC part 15.247**Band-edge compliance of RF conducted emissions**

EUT	Low Power Bluetooth module with antenna
Model	F2M03GLA
Approval Holder	Free2move AB
Temperature / Voltage	23°C / Vnom / modulation: 3-DH5
Test Site / Operator	ETS Product Service AG / Mr. Treffke
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 78 / 2480 MHz
Comment 3	Single frequency mode

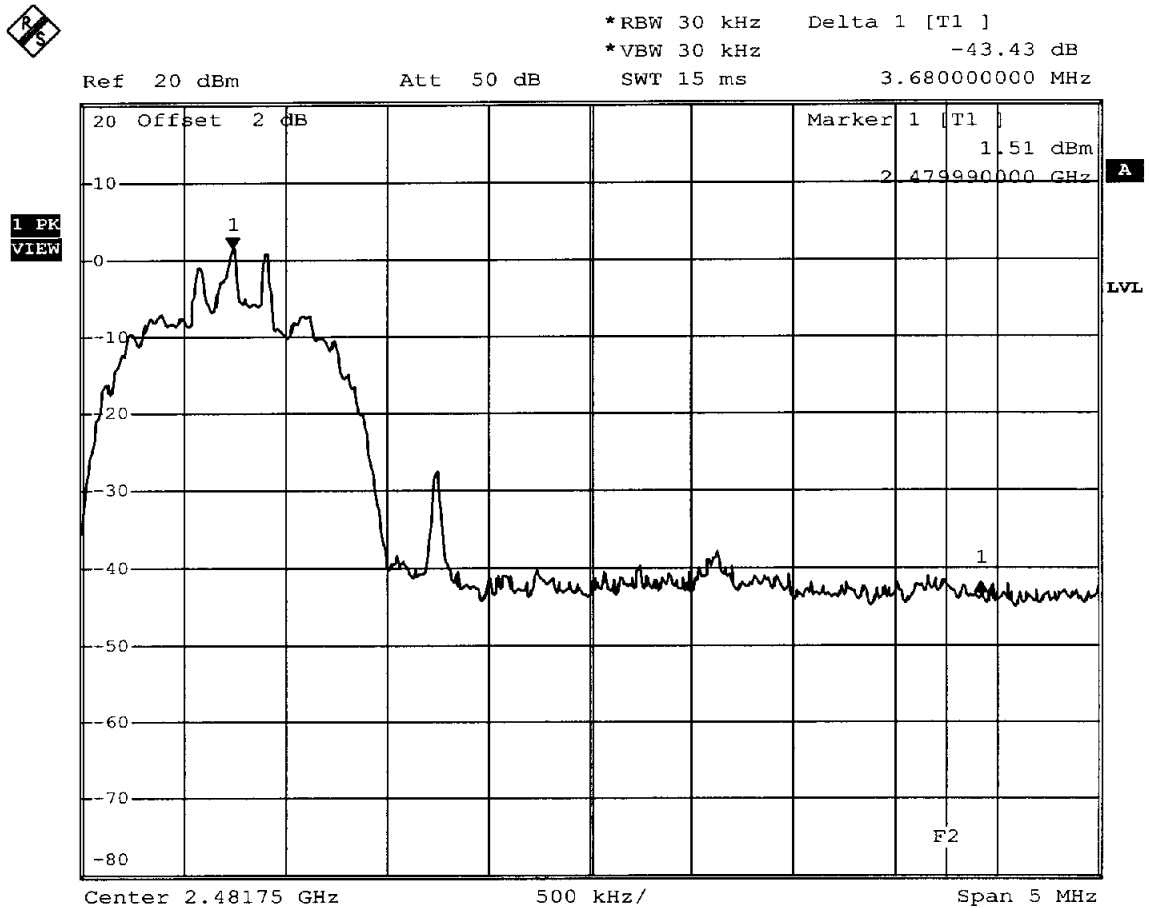

Comment: Limit: Marker Delta value >20 dB; Result: PASS
Date: 27.JUN.2007 11:18:26


Measurement diagram

ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

FCC part 15.247**Band-edge compliance of RF conducted emissions**

EUT	Low Power Bluetooth module with antenna
Model	F2M03GLA
Approval Holder	Free2move AB
Temperature / Voltage	23°C / Vnom / modulation: 3-DH5
Test Site / Operator	ETS Product Service AG / Mr. Treffke
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 0 / 2402 MHz
Comment 3	Hopping mode

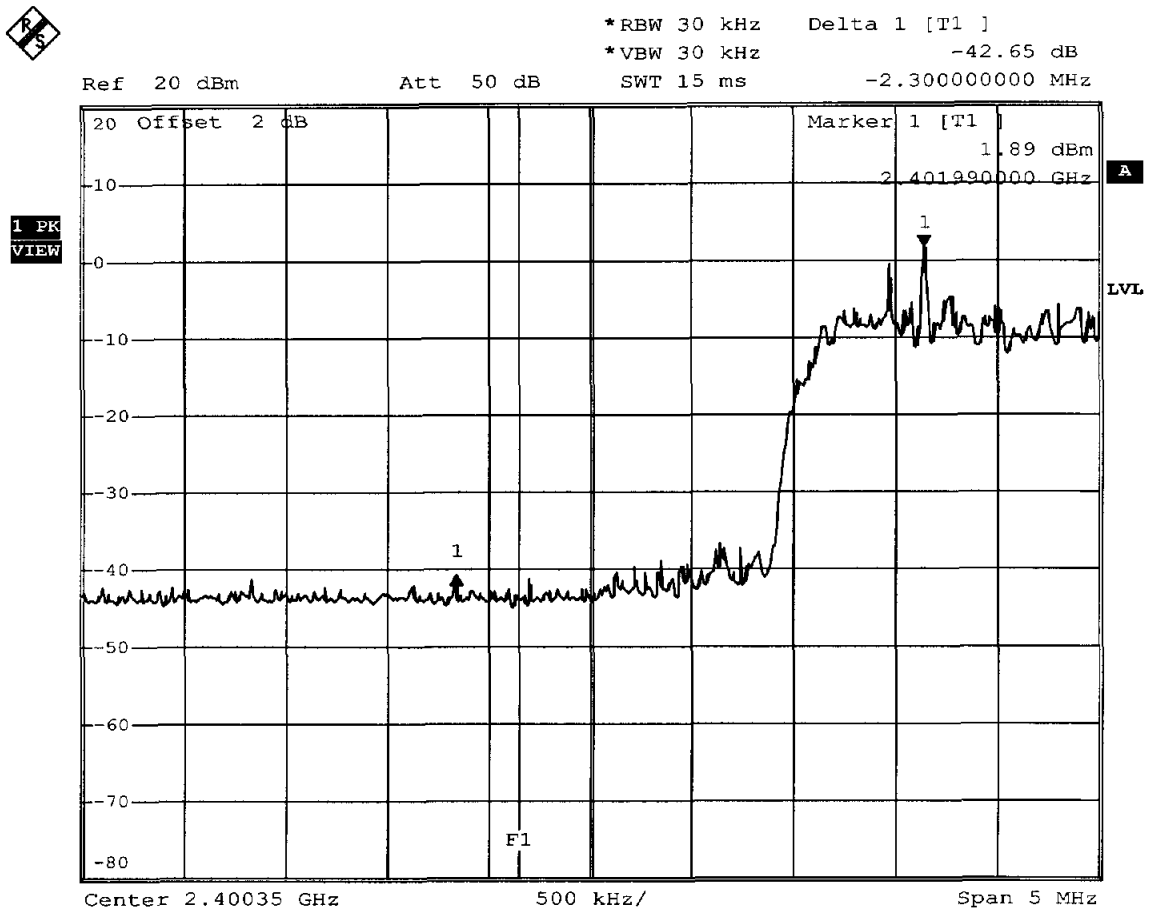

Comment: Limit: Marker Delta value >20 dB; Result: PASS
Date: 27.JUN.2007 11:21:35

Measurement diagram


ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN

Page 1 of 1

FCC part 15.247

Band-edge compliance of RF conducted emissions

EUT	Low Power Bluetooth module with antenna
Model	F2M03GLA
Approval Holder	Free2move AB
Temperature / Voltage	23°C / Vnom / modulation: 3-DH5
Test Site / Operator	ETS Product Service AG / Mr. Treffke
Test Specification	FCC part 15 section 247(c)
Comment 1	Band-edge compliance
Comment 2	Channel.: 78 / 2480 MHz
Comment 3	Hopping mode

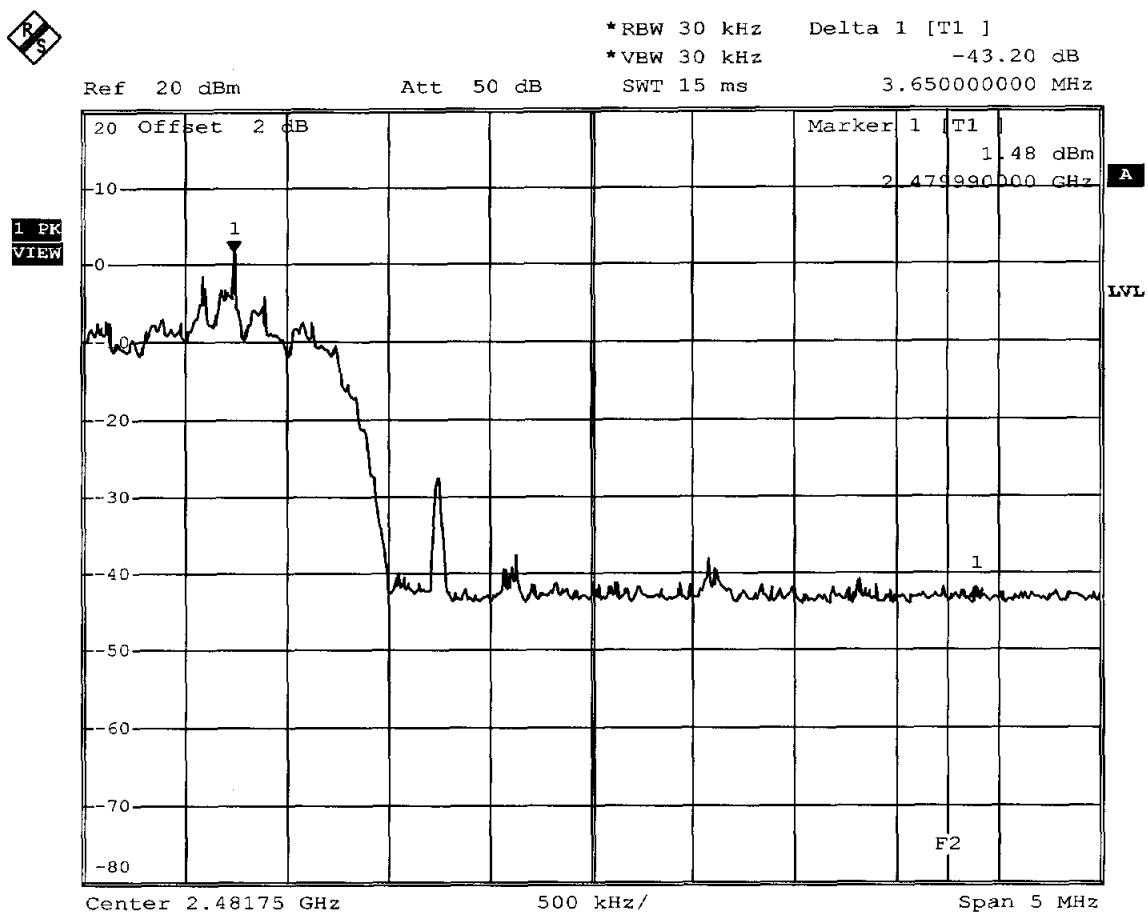

Comment: Limit: Marker Delta value >20 dB; Result: PASS
Date: 27.JUN.2007 11:24:56

Measurement diagram

ETS Product Service AG
Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN


Page 1 of 1

Appendix K

AC power line conducted emissions


**EMI voltage test in the ac-mains according
to FCC part 15**

EUT: Low Power Bluetooth module with Antenna
 Manufacturer: Free2Move AB
 Operating Condition: Unom: 120VAC (AC/DC-adaptor), Tnom: 23°C
 Test Site: ETS
 Operator: Mr. Pflug
 Test Specification: V-Network: ESH2-Z5 (L1)
 Comment: model: F2M03GLA
 mode: bluetooth-link

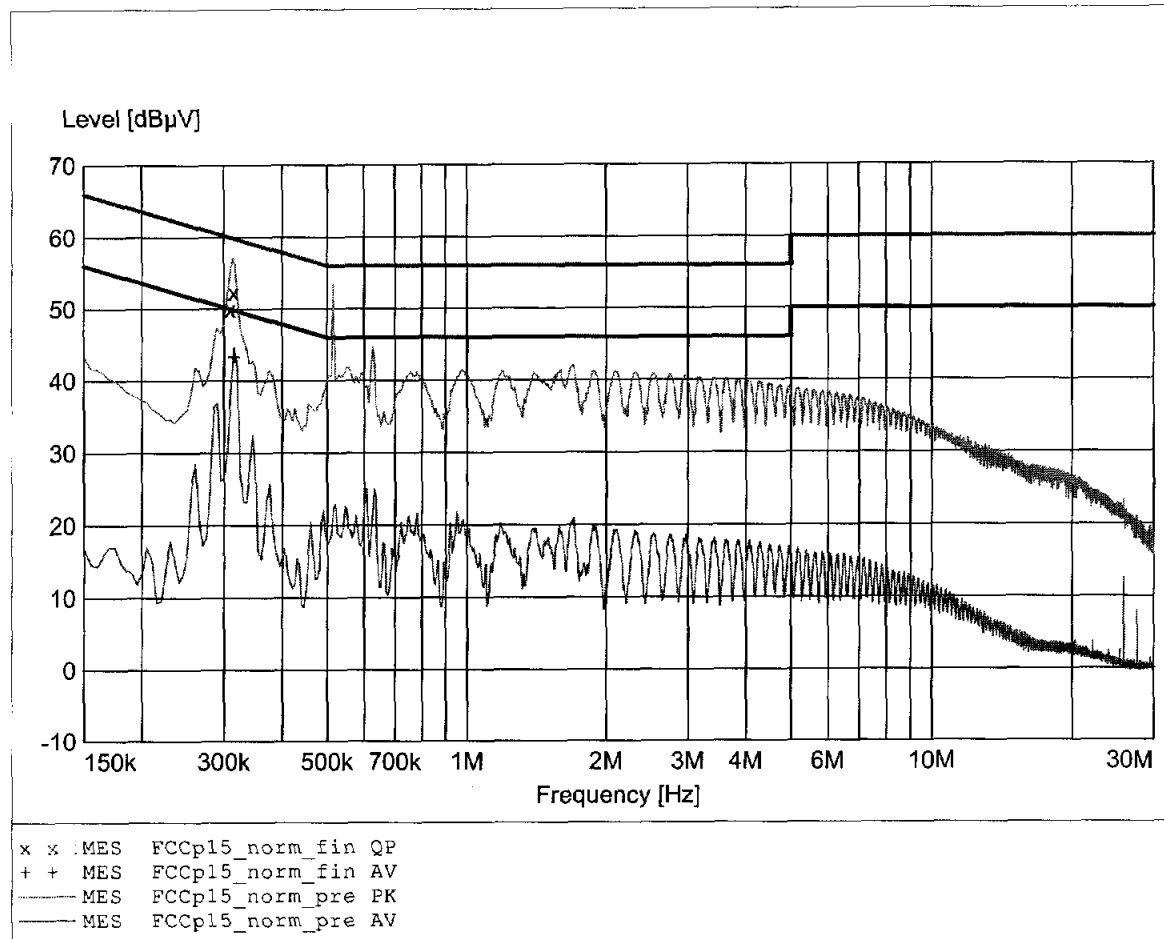

**EMI voltage test in the ac-mains according
to FCC part 15**

EUT: Low Power Bluetooth module with Antenna
Manufacturer: Free2Move AB
Operating Condition: Unom: 120VAC (AC/DC-adaptor), Tnom: 23°C
Test Site: ETS
Operator: Mr. Pflug
Test Specification: V-Network: ESH2-Z5 (N)
Comment: model: F2M03GLA
mode: bluetooth-link

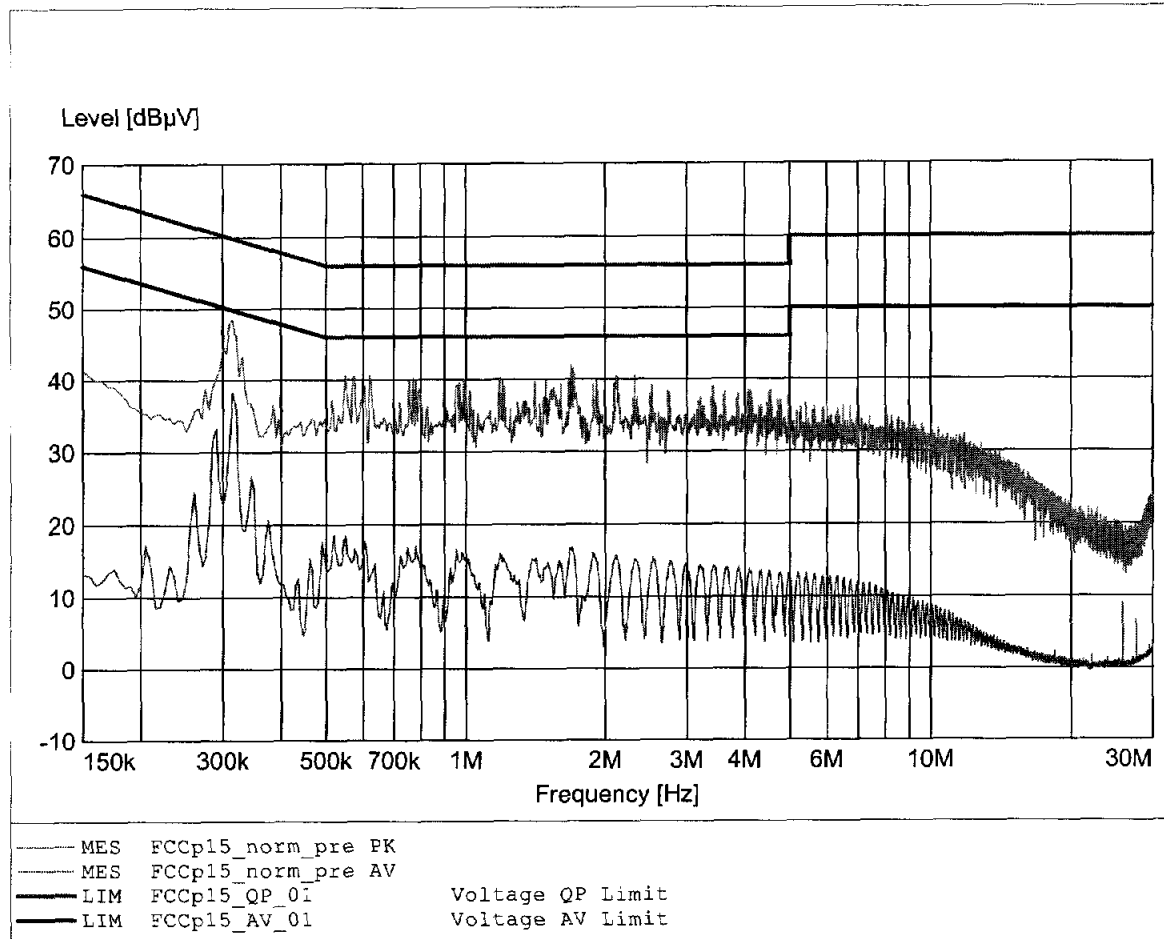


Appendix L

Receiver radiated emissions

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: FREE2MOVE AB
EUT: LOW POWER BLUETOOTH MODULE WITH ANTENNA
Model: F2M03GLA / Frequency: 2441 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:144.128MHz Emax:39.01dBµV/m RBW: 100 kHz

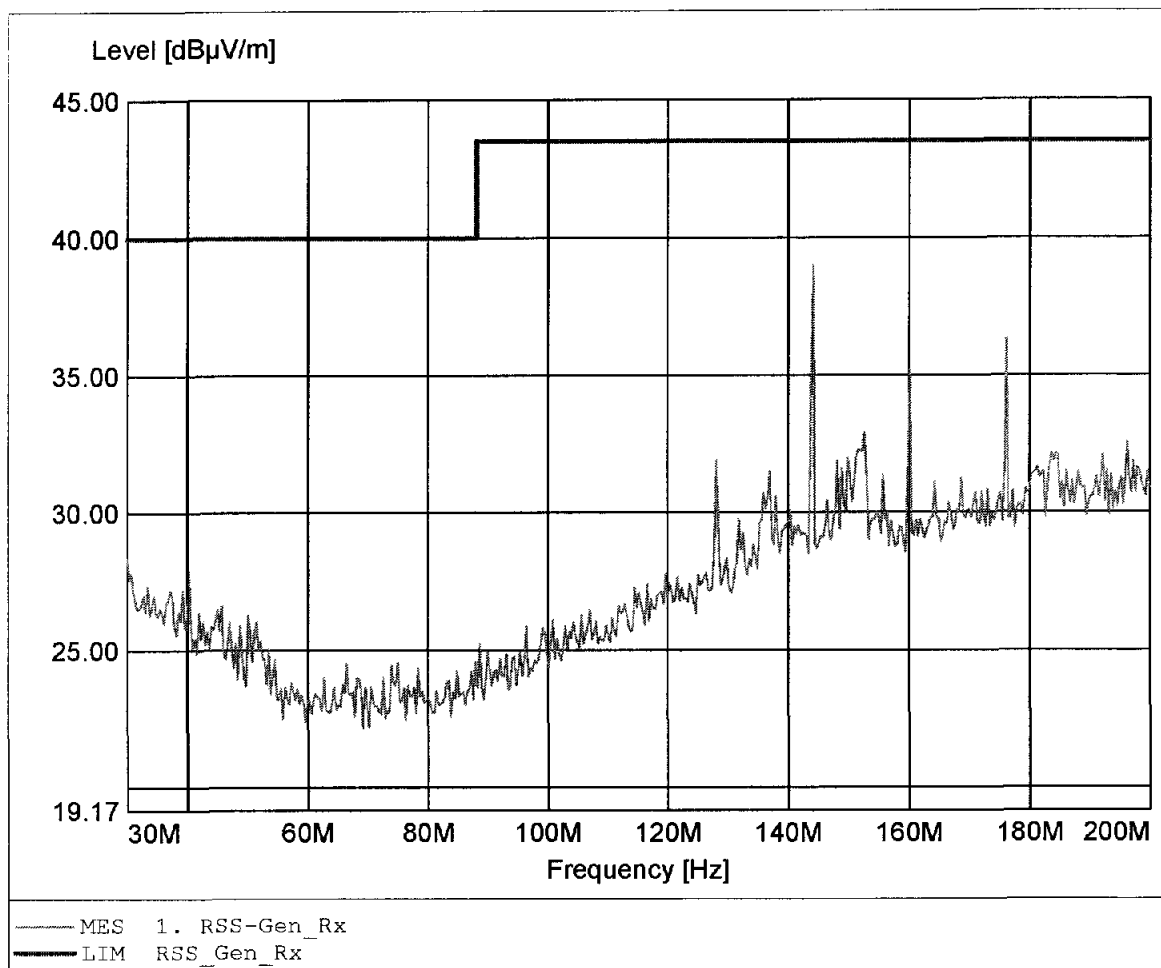

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: FREE2MOVE AB
EUT: LOW POWER BLUETOOTH MODULE WITH ANTENNA
Model: F2M03GLA / Frequency: 2441 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq:144.128MHz Emax:34.59dBuV/m RBW: 100 kHz

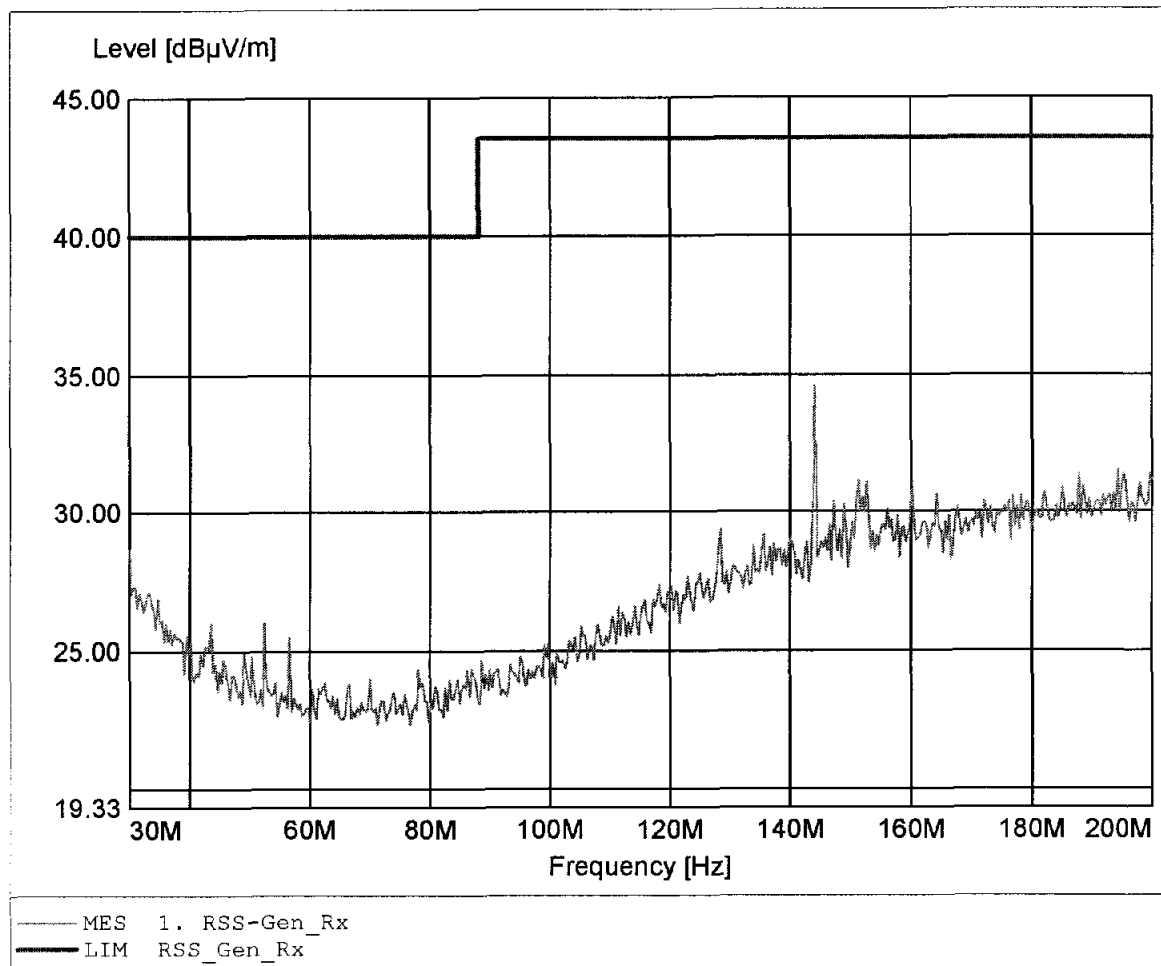

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: FREE2MOVE AB
EUT: LOW POWER BLUETOOTH MODULE WITH ANTENNA
Model: F2M03GLA / Frequency: 2441 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq:206.413MHz Emax:30.49dBµV/m RBW: 100 kHz

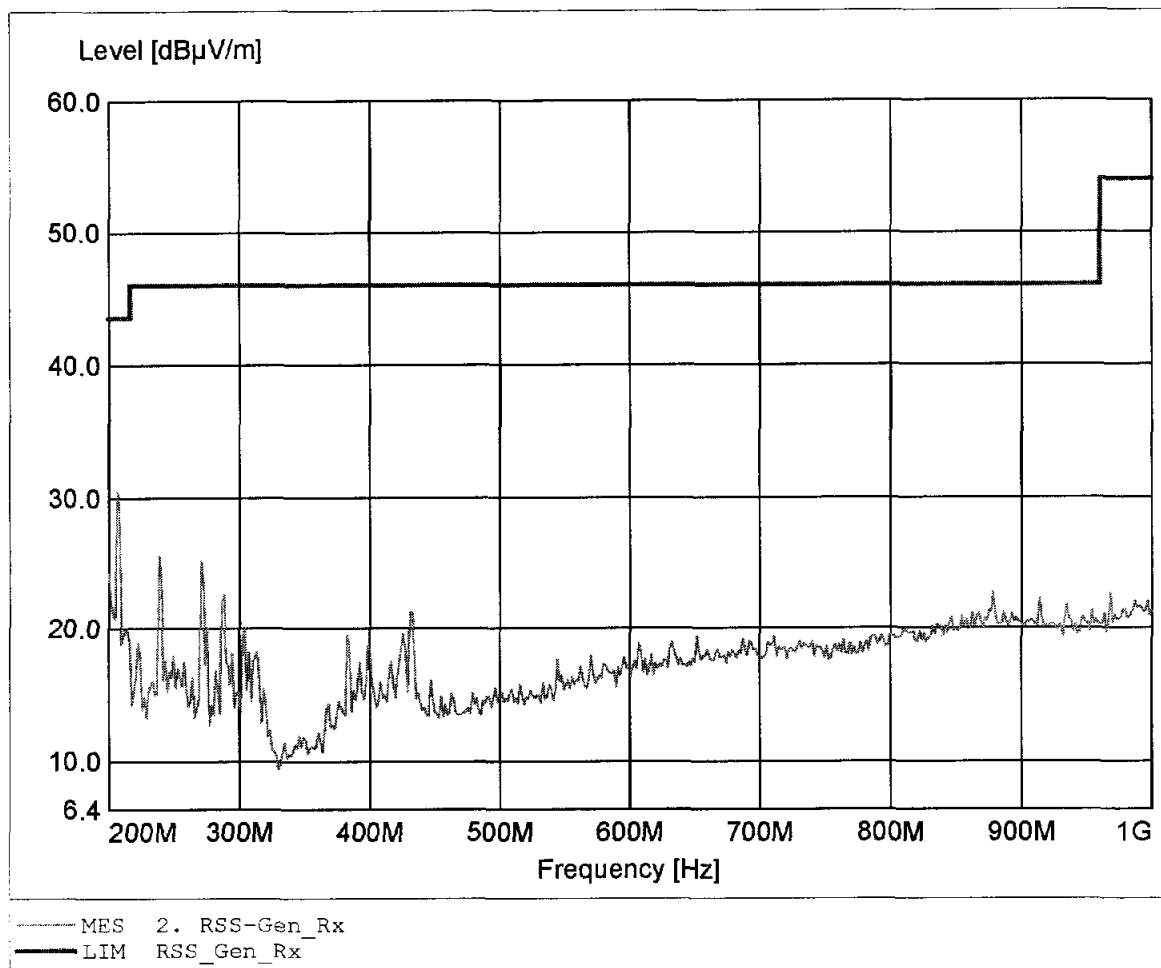

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: FREE2MOVE AB
EUT: LOW POWER BLUETOOTH MODULE WITH ANTENNA
Model: F2M03GLA / Frequency: 2441 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 434.068MHz Emax: 28.70dBµV/m RBW: 100 kHz

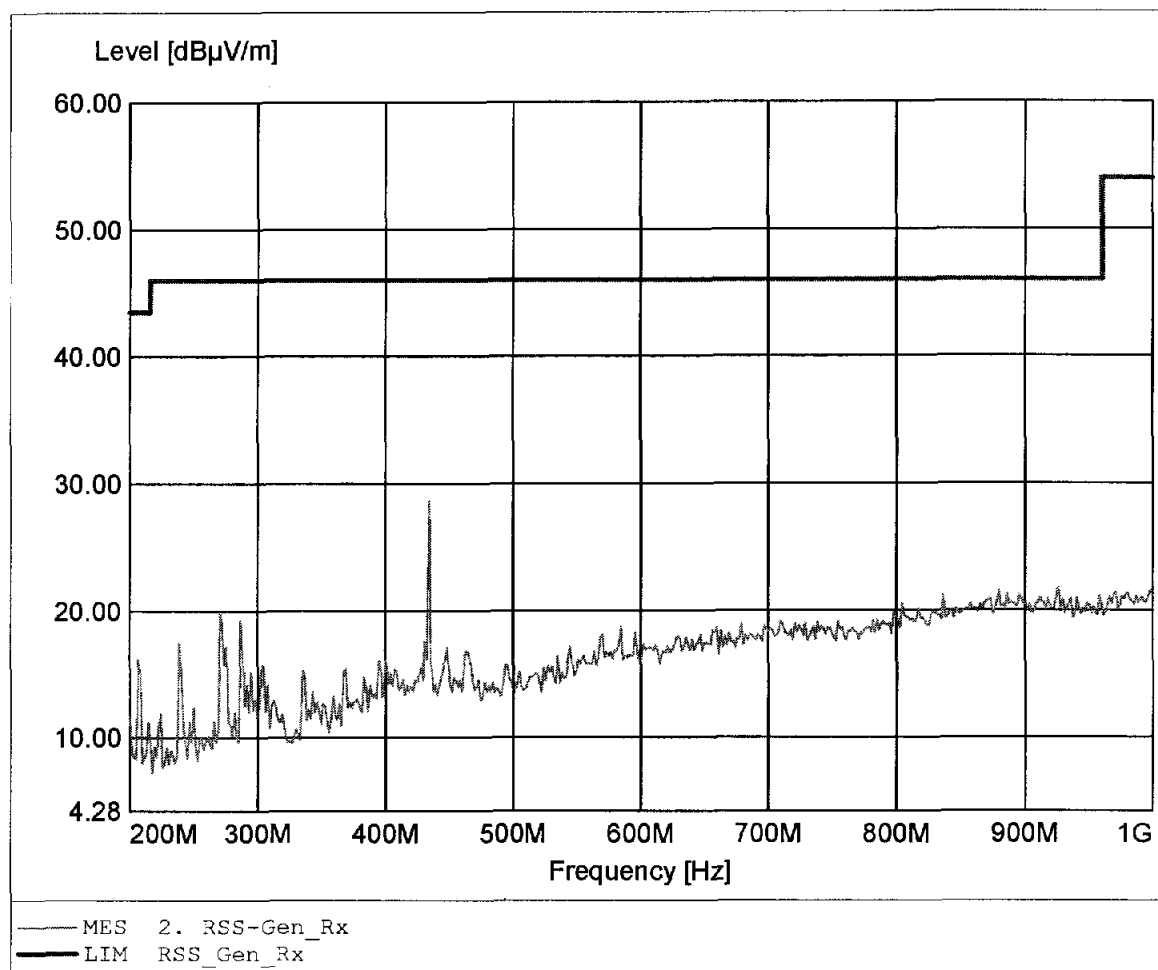

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: FREE2MOVE AB
EUT: LOW POWER BLUETOOTH MODULE WITH ANTENNA
Model: F2M03GLA / Frequency: 2441 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.
Comment 2: Freq:1.625GHz Emax:45.82dBμV/m RBW: 1 MHz

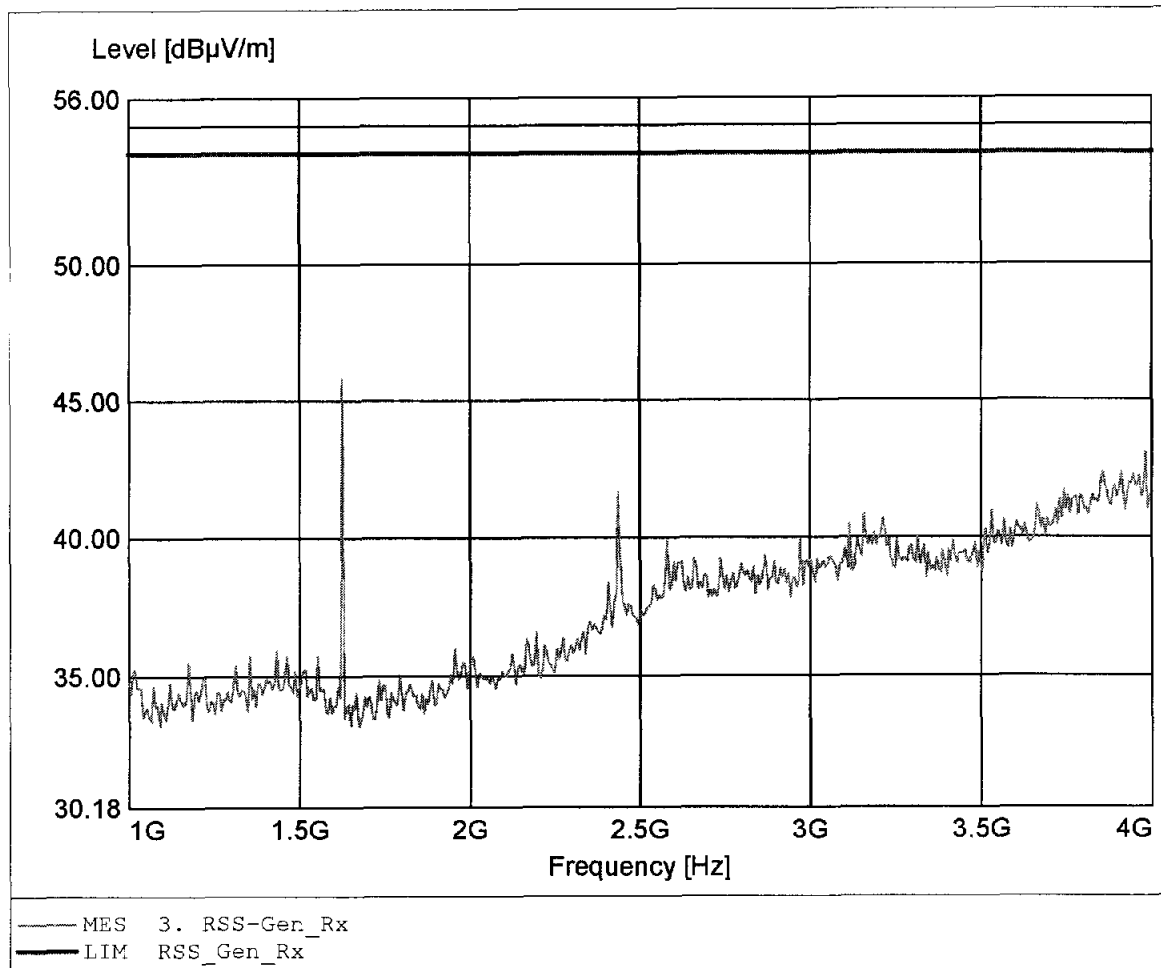

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: FREE2MOVE AB
EUT: LOW POWER BLUETOOTH MODULE WITH ANTENNA
Model: F2M03GLA / Frequency: 2441 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.
Comment 2: Freq:2.437GHz Emax:46.11dBuV/m RBW: 1 MHz

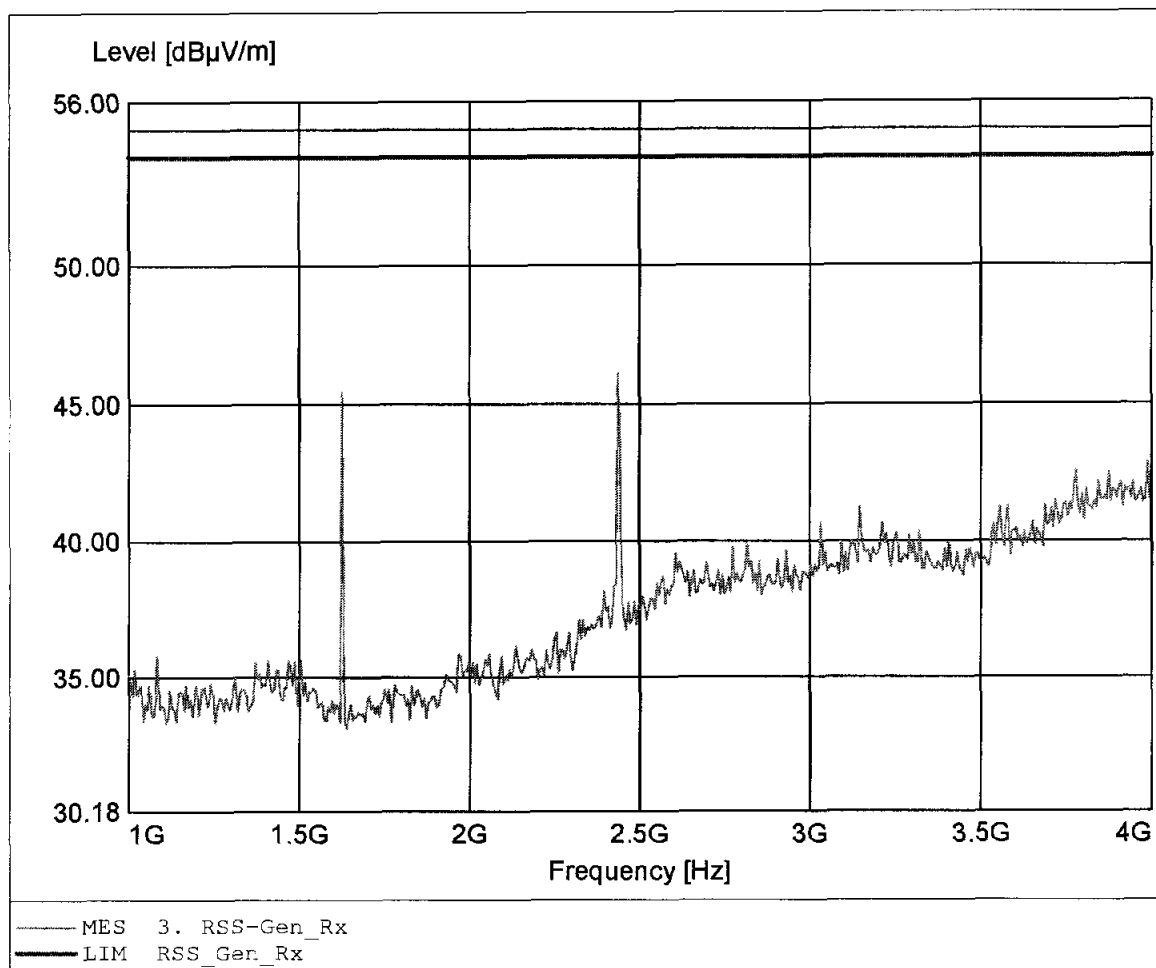

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: FREE2MOVE AB
EUT: LOW POWER BLUETOOTH MODULE WITH ANTENNA
Model: F2M03GLA / Frequency: 2441 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.
Comment 2: Freq: 6.806GHz Emax: 44.75dB μ V/m REW: 1 MHz

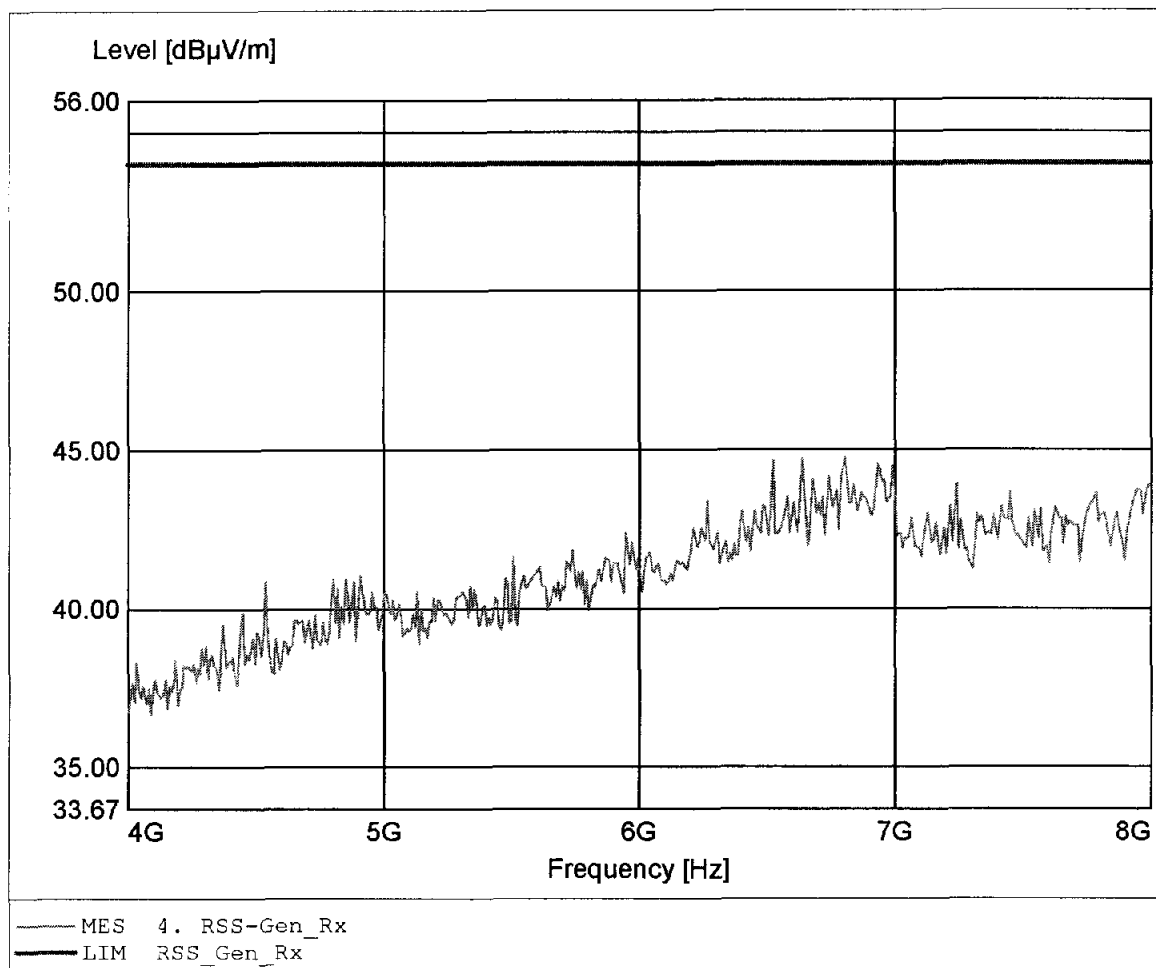

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN


Approval Holder: FREE2MOVE AB
EUT: LOW POWER BLUETOOTH MODULE WITH ANTENNA
Model: F2M03GLA / Frequency: 2441 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.
Comment 2: Freq:6.581GHz Emax:44.80dBμV/m RBW: 1 MHz

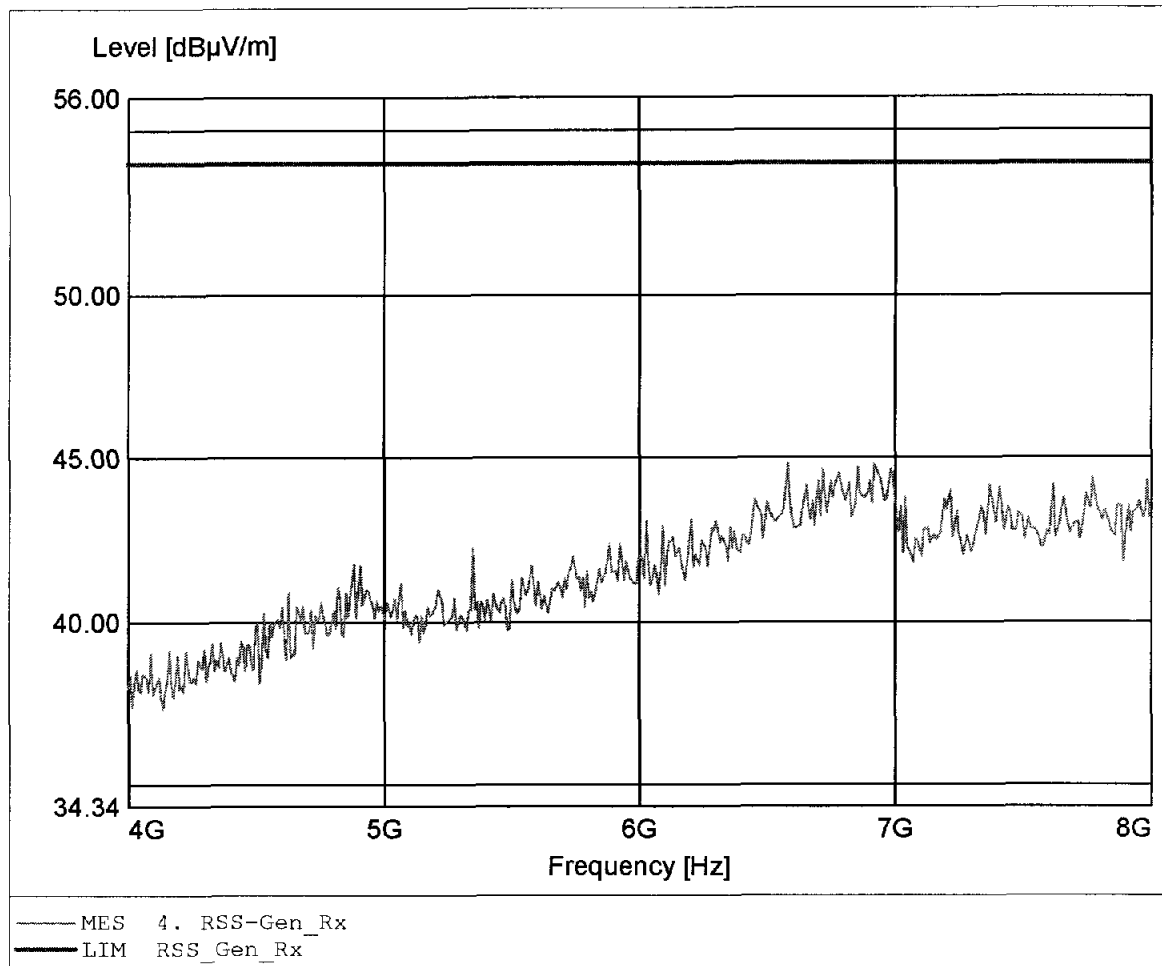

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN

Approval Holder: FREE2MOVE AB
EUT: LOW POWER BLUETOOTH MODULE WITH ANTENNA
Model: F2M03GLA / Frequency: 2441 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.
Comment 2: Freq:11.222GHz Emax:40.49dBμV/m RBW: 1 MHz

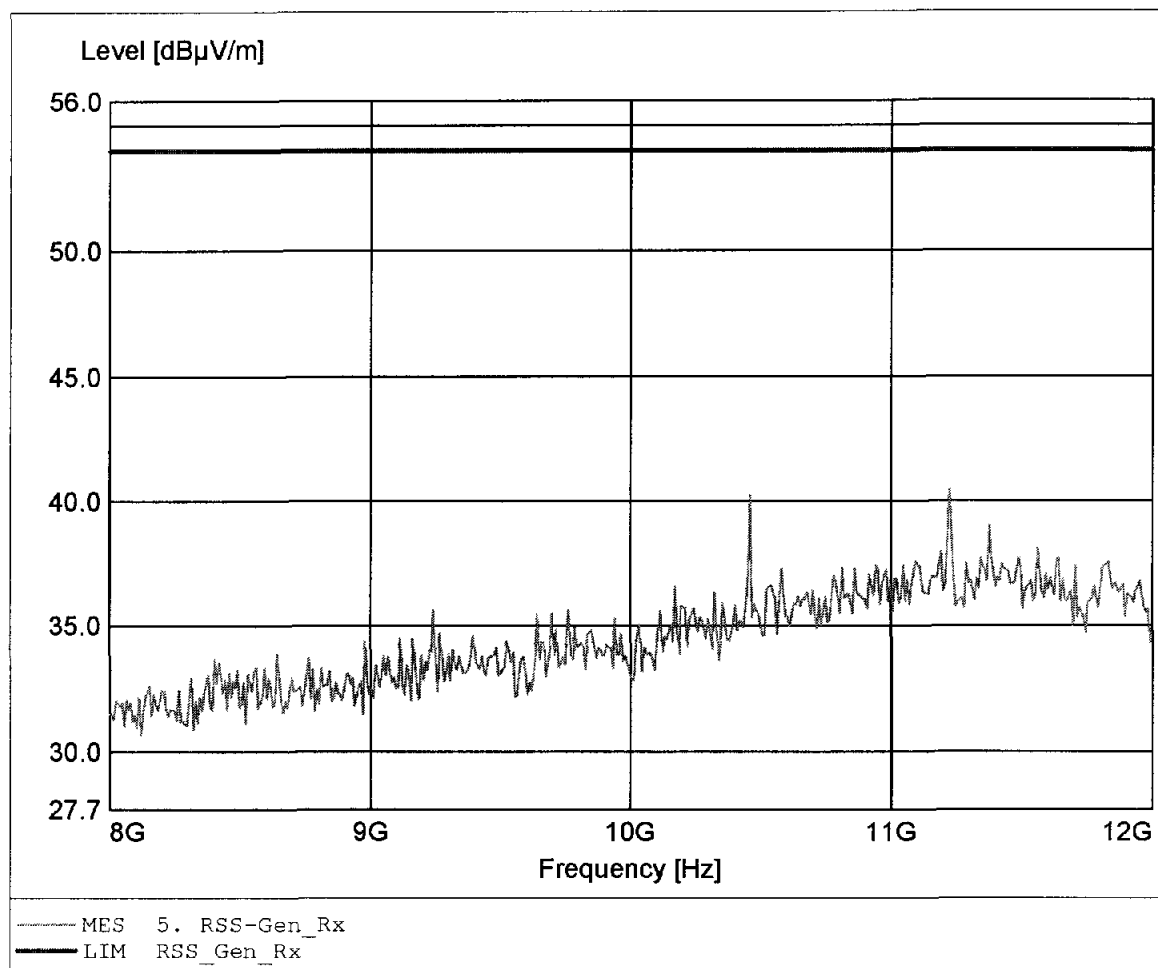

Field Strength under normal conditions

Standards Industry Canada, RSS-GEN

Approval Holder: FREE2MOVE AB
EUT: LOW POWER BLUETOOTH MODULE WITH ANTENNA
Model: F2M03GLA / Frequency: 2441 MHz
Test Site / Operator: ETS / Mr. Schlaps
Test Condition: 25°C / Unom.: 3.30 V DC
Test Specification: according to RSS-Gen Issue 1
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.
Comment 2: Freq:11.591GHz Emax:38.64dBμV/m RBW: 1 MHz

