

**FCC PART 15 SUBPART C TEST REPORT**

**for**

**Wireless Speaker Amplifier**

**Model No.: CPS 8Wi**

**FCC ID: R48CPS**

**of**

**Applicant: MEILOON INDUSTRIAL CO., LTD.**

**Address: No.77, Lane 1775, Chuen-Ryh Road,  
Taoyuan City, Taiwan**

**Tested and Prepared**

**by**

**Worldwide Testing Services (Taiwan) Co., Ltd.**

**FCC Registration No.: 930600**

**Industry Canada filed test laboratory Reg. No. IC 5679A-1**

**A2LA Accredited No.: 2732.01**



**Report No.: W6M20908-9965-P-15**

6F, NO. 58, LANE 188, RUEY-KUANG RD., NEIHU TAIPEI 114, TAIWAN, R.O.C.  
TEL: 886-2-66068877 FAX: 886-2-66068879 E-mail: [wtls@wtls-lab.com](mailto:wtls@wtls-lab.com)



## **TABLE OF CONTENTS**

|       |                                                               |    |
|-------|---------------------------------------------------------------|----|
| 1     | GENERAL INFORMATION .....                                     | 2  |
| 1.1   | Notes .....                                                   | 2  |
| 1.2   | Testing laboratory .....                                      | 3  |
| 1.2.1 | Location .....                                                | 3  |
| 1.2.2 | Details of accreditation status .....                         | 3  |
| 1.3   | Details of approval holder .....                              | 3  |
| 1.4   | Application details .....                                     | 3  |
| 1.5   | General information of Test item .....                        | 4  |
| 1.6   | Test standards .....                                          | 5  |
| 2     | TECHNICAL TEST .....                                          | 6  |
| 2.1   | Summary of test results .....                                 | 6  |
| 2.2   | Test environment .....                                        | 6  |
| 2.3   | Test Equipment List .....                                     | 7  |
| 2.4   | General Test Procedure .....                                  | 9  |
| 3     | TEST RESULTS (ENCLOSURE) .....                                | 11 |
| 3.1   | Peak Output Power (transmitter) .....                         | 12 |
| 3.2   | RF Exposure Compliance Requirements .....                     | 14 |
| 3.3   | Out of Band Radiated Emissions .....                          | 14 |
| 3.4   | Transmitter Radiated Emissions in restricted Bands .....      | 15 |
| 3.5   | Spurious emissions (tx) .....                                 | 16 |
| 3.6   | Carrier Frequency Separation .....                            | 20 |
| 3.7   | Number of Hopping Frequencies .....                           | 21 |
| 3.7.1 | Pseudorandom Frequency Hopping Sequence .....                 | 22 |
| 3.7.2 | Coordination of hopping sequences to other transmitters ..... | 22 |
| 3.7.3 | System Receiver Hopping Capability .....                      | 22 |
| 3.7.4 | Equal Hopping Frequency Use .....                             | 22 |
| 3.8   | Time of Occupancy (Dwell Time) .....                          | 23 |
| 3.9   | 20dB Bandwidth .....                                          | 24 |
| 3.10  | Band-edge Compliance of RF Emissions .....                    | 25 |
| 3.11  | Radiated Emissions from Receiver Section of Transceiver ..... | 26 |
| 3.12  | Power Line Conducted Emission .....                           | 29 |



# **Worldwide Testing Services(Taiwan) Co., Ltd.**

Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

## **1 General Information**

### **1.1 Notes**

The purpose of conformity testing is to increase the probability of adherence to the essential requirements or conformity specifications, as appropriate.

The complexity of the technical specifications, however, means that full and thorough testing is impractical for both technical and economic reasons.

Furthermore, there is no guarantee that a test sample which has passed all the relevant tests conforms to a specification.

Neither is there any guarantee that such a test sample will interwork with other genuinely open systems.

The existence of the tests nevertheless provides the confidence that the test sample possesses the qualities as maintained and that its performance generally conforms to representative cases of communications equipment.

The test results of this test report relate exclusively to the item tested as specified in 1.5.

The test report may only be reproduced or published in full.

Reproduction or publication of extracts from the report requires the prior written approval of the Worldwide Testing Services(Taiwan) Co., Ltd.

### **Tester:**

September 18, 2009

Kevin Wang

Date

WTS-Lab.

Name

Signature

### **Technical responsibility for area of testing:**

September 18, 2009

Chang Tse-Ming

Date

WTS

Name

Signature



# **Worldwide Testing Services(Taiwan) Co., Ltd.**

Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

## **1.2 Testing laboratory**

### **1.2.1 Location**

OATS

No.5-1, Shuang Sing Village,  
LiShuei Rd., Wanli Township,  
Taipei County 207, Taiwan (R.O.C.)

Company

Worldwide Testing Services(Taiwan) Co., Ltd.  
6F, NO. 58, LANE 188, RUEY-KUANG RD.  
NEIHU, TAIPEI 114, TAIWAN R.O.C.

Tel : 886-2-66068877

Fax : 886-2-66068879

### **1.2.2 Details of accreditation status**

Accredited testing laboratory

A2LA accredited number: 2732.01

FCC filed test laboratory Reg. No. 930600

Industry Canada filed test laboratory Reg. No. IC 5679A-1



**Test location, where different from Worldwide Testing Services (Taiwan) Co., Ltd. :**

Name: ./.  
Accredited number: ./.  
Street: ./.  
Town: ./.  
Country: ./.  
Telephone: ./.  
Fax: ./.

## **1.3 Details of approval holder**

Name : MEILOON INDUSTRIAL CO., LTD.  
Street : No.77, Lane 1775, Chuen-Ryh Road  
Town : Taoyuan City  
Country : Taiwan  
Telephone : +886-3-326-1611  
Fax : +886-3-326-3884



Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

## **1.4 Application details**

Date of receipt of test item : August 06, 2009

Date of test : from August 07, 2009 to September 18, 2009

## **1.5 General information of Test item**

Type of test item : Wireless Speaker Amplifier

Model Number : CPS 8Wi

Multi-listing model number : ./.

Photos : see Appendix

### **Technical data**

Frequency band : 2403.3-2479.1 MHz

Frequency (ch A or ch L) : 2403.3 MHz

Frequency (ch B or ch M) : 2442.2 MHz

Frequency (ch C or ch H) : 2479.1 MHz

### **Transmitter**

### **Unom**

Power ( ch A or ch L) : Conducted: 12.11 dBm

Power ( ch B or ch M) : Conducted: 12.74 dBm

Power ( ch C or ch H) : Conducted: 13.02 dBm

Power supply : 12 VDC (from testing board)

Operation modes : duplex

Modulation Type : FSK

Antenna Type :  $1/2 \lambda$  Dipole antenna

Antenna gain : 1.53 dBi



# **Worldwide Testing Services(Taiwan) Co., Ltd.**

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

Host device : none

Classification :

|                                              |                                     |
|----------------------------------------------|-------------------------------------|
| Fixed Device                                 | <input type="checkbox"/>            |
| Mobile Device (Human Body distance > 20cm)   | <input type="checkbox"/>            |
| Portable Device (Human Body distance < 20cm) | <input type="checkbox"/>            |
| Modular radio device                         | <input checked="" type="checkbox"/> |

**Manufacturer:**

(if applicable)

Name : ./.  
Street : ./.  
Town : ./.  
Country : ./.

## **1.6 Test standards**

Technical standard : FCC RULES PART 15 Subpart B / SUBPART C § 15.247 (2008-10)



Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

## **2 Technical test**

### **2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests performed.



**or**

The deviations as specified in 3 were ascertained in the course of the tests performed.



### **2.2 Test environment**

Temperature : 23 °C

Relative humidity content : 20 ... 75 %

Air pressure : 86 ... 103 kPa

Details of power supply : 12 VDC (from testing board)

Extreme conditions parameters : test voltage : -- extreme  
min :-- V  
max :-- V



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

## 2.3 Test Equipment List

| No.          | Test equipment                                                      | Type             | Serial No.     | Manufacturer | Cal. Date     | Next Cal. Date |
|--------------|---------------------------------------------------------------------|------------------|----------------|--------------|---------------|----------------|
| ETSTW-CE 001 | EMI TEST RECEIVER                                                   | ESHS10           | 842121/013     | R&S          | 2009/9/10     | 2010/9/9       |
| ETSTW-CE 003 | AC POWER SOURCE                                                     | APS-9102         | D161137        | GW           | Function Test |                |
| ETSTW-CE 004 | ZWEILEITER-V-NETZNACHBILDUNG TWO-LINE V-NETWORK                     | ESH3-Z5          | 840731/011     | R&S          | 2009/3/27     | 2010/3/26      |
| ETSTW-CE 005 | Line-Impedance Stabilisation Network                                | NNBM 8126D       | 137            | Schwarzbeck  | 2009/9/9      | 2010/9/8       |
| ETSTW-CE 006 | IMPULSBEGRENZER PULSE LIMITER                                       | ESH3-Z2          | 100226         | R&S          | 2009/5/9      | 2010/5/8       |
| ETSTW-CE 009 | TEMP.&HUMIDITY CHAMBER                                              | GTH-225-40-1P-U  | MAA0305-009    | GIANT FORCE  | 2009/7/21     | 2010/7/20      |
| ETSTW-CE 015 | CISPR 22 TWO BALANCED TELECOM PAIRS IMPEDANCE STABILIZATION NETWORK | FCC-TLISN-T8-02  | 20307          | FCC          | 2009/9/12     | 2010/9/11      |
| ETSTW-CE 016 | TWO-LINE V-NETWORK                                                  | ENV216           | 100050         | R&S          | 2009/9/9      | 2010/9/8       |
| ETSTW-RE 002 | Function Generator                                                  | 33220A           | MY43004982     | Agilent      | Function Test |                |
| ETSTW-RE 003 | EMI TEST RECEIVER                                                   | ESI 26           | 831438/001     | R&S          | 2008/10/8     | 2009/10/7      |
| ETSTW-RE 004 | EMI TEST RECEIVER                                                   | ESI 40           | 832427/004     | R&S          | 2008/9/22     | 2009/9/21      |
| ETSTW-RE 005 | EMI TEST RECEIVER                                                   | ESVS10           | 843207/020     | R&S          | 2009/9/11     | 2010/9/10      |
| ETSTW-RE 010 | ABSORBING CLAMP                                                     | MDS 21           | 3469           | Schwarzbeck  | 2009/9/11     | 2010/9/10      |
| ETSTW-RE 011 | PROGRAMMABLE LINEAR POWER SUPPLY                                    | LPS-305          | 30503070165    | MOTECH       | Function Test |                |
| ETSTW-RE 017 | Log-Periodic Antenna                                                | HL025            | 352886/001     | R&S          | 2009/5/4      | 2010/5/3       |
| ETSTW-RE 018 | MICROWAVE HORN ANTENNA                                              | AT4560           | 27212          | AR           | 2008/10/27    | 2009/10/26     |
| ETSTW-RE 020 | MICROWAVE HORN ANTENNA                                              | AT4002A          | 306915         | AR           | Function Test |                |
| ETSTW-RE 021 | SWEEP GENERATOR                                                     | SWM05            | 835130/010     | R&S          | 2009/8/19     | 2010/8/18      |
| ETSTW-RE 027 | Passive Loop Antenna                                                | 6512             | 00034563       | EMCO         | 2009/8/14     | 2011/8/13      |
| ETSTW-RE 028 | Log-Periodic Dipole Array Antenna                                   | 3148             | 34429          | EMCO         | 2009/4/15     | 2010/4/14      |
| ETSTW-RE 029 | Biconical Antenna                                                   | 3109             | 33524          | EMCO         | 2009/4/15     | 2010/4/14      |
| ETSTW-RE 030 | Double-Ridged Guide Horn Antenna                                    | 3117             | 00035224       | EMCO         | 2009/3/23     | 2010/3/22      |
| ETSTW-RE 032 | Millivoltmeter                                                      | URV 55           | 849086/013     | R&S          | 2009/8/23     | 2010/8/22      |
| ETSTW-RE 033 | WaveRunner 6000A Serise Oscilloscope                                | WAVERUNNER 6100A | LCRY0604P14508 | LeCroy       | 2009/6/15     | 2010/6/14      |
| ETSTW-RE 034 | Power Sensor                                                        | URV5-Z4          | 839313/006     | R&S          | 2009/8/23     | 2010/8/22      |
| ETSTW-RE 042 | Biconical Antenna                                                   | HK116            | 100172         | R&S          | 2009/1/8      | 2010/1/7       |
| ETSTW-RE 043 | Log-Periodic Dipole Antenna                                         | HL223            | 100166         | R&S          | 2009/5/5      | 2010/5/4       |
| ETSTW-RE 044 | Log-Periodic Antenna                                                | HL050            | 100094         | R&S          | 2009/5/21     | 2010/5/20      |
| ETSTW-RE 047 | PSA SERIES SPECTRUM ANALYZER                                        | E4445A           | MY46181369     | Agilent      | 2009/6/15     | 2010/6/14      |
| ETSTW-RE 048 | Triple Loop Antenna                                                 | HXYZ 9170        | HXYZ 9170-134  | Schwarzbeck  | 2009/8/31     | 2010/8/30      |
| ETSTW-RE 049 | TRILOG Super Broadband test Antenna                                 | VULB 9160        | 9160-3185      | Schwarzbeck  | 2009/4/14     | 2010/4/13      |
| ETSTW-RE 055 | SPECTRUM ANALYZER                                                   | FSU 26           | 200074         | R&S          | 2009/6/10     | 2010/6/09      |



# ***Worldwide Testing Services(Taiwan) Co., Ltd.***

Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

|                 |                                      |                           |              |                  |               |            |
|-----------------|--------------------------------------|---------------------------|--------------|------------------|---------------|------------|
| ETSTW-RE 064    | Bluetooth Test Set                   | MT8852B-042               | 6K00005709   | Anritsu          | Function Test |            |
| ETSTW-RE 065    | Amplifier                            | AMF-6F-18002650-25-10P    | 941608       | MITEQ            | 2009/4/21     | 2010/4/20  |
| ETSTW-RE 072    | CELL SITE TEST SET                   | 8921A                     | 3339A00375   | HP               | 2008/10/28    | 2009/10/27 |
| ETSTW-RE 073    | Power Meter                          | N1911A                    | MY45100769   | Agilent          | 2009/1/13     | 2010/1/12  |
| ETSTW-RE 074    | Power Sensor                         | N1921A                    | MY45241198   | Agilent          | 2009/1/13     | 2010/1/12  |
| ETSTW-RE 091    | Match Pad                            | MDCS1500                  | None         | WOKEN            | 2008/10/9     | 2009/10/8  |
| ETSTW-RE 092    | Match Pad                            | MDCS1510                  | None         | WOKEN            | 2008/10/9     | 2009/10/8  |
| ETSTW-RE 093    | LUMPED ELEMENT POWER DIVIDER         | PL2-10                    | 146          | MCLI             | 2009/3/6      | 2010/3/5   |
| ETSTW-RE 094    | Precision Coaxial Termination        | HP 909F                   | 03941        | Agilent          | 2008/12/19    | 2009/12/18 |
| ETSTW-RE 095    | Digital Thermo-Hygro Meter           | 0410                      | 01           | WISEWIND         | 2009/3/24     | 2010/3/23  |
| ETSTW-RE 096    | SIGNAL GENERATOR                     | SMIQ 03B                  | 102274       | R&S              | 2009/6/5      | 2010/6/4   |
| ETSTW-RE 097    | GPS SIGNAL GENERATOR                 | GSG-L1                    | 06-0507-0311 | Naviva           | Function Test |            |
| ETSTW-GSM 002   | Universal Radio Communication Tester | CMU 200                   | 109439       | R&S              | 2008/9/23     | 2009/9/22  |
| ETSTW-GSM 023   | Power Divider                        | 4901.19.A                 | None         | SUHNER           | 2008/9/22     | 2009/9/21  |
| ETSTW-Cable 001 | Microwave Cable                      | SUCOFLEX 104 (S Cable 1)  | 238094       | HUBER+SUHNER     | 2008/9/22     | 2009/9/21  |
| ETSTW-Cable 002 | Microwave Cable                      | SUCOFLEX 104 (S Cable 7)  | 238093       | HUBER+SUHNER     | 2008/9/22     | 2009/9/21  |
| ETSTW-Cable 003 | Microwave Cable                      | SUCOFLEX 104 (S Cable 11) | 209953       | HUBER+SUHNER     | 2008/9/22     | 2009/9/21  |
| ETSTW-Cable 006 | Microwave Cable                      | SUCOFLEX 104 (S Cable 8)  | 238095       | HUBER+SUHNER     | 2009/3/6      | 2010/3/5   |
| ETSTW-Cable 010 | BNC Cable                            | 5 M BNC Cable             | None         | JYE BAO CO.,LTD. | 2009/3/6      | 2010/3/5   |
| ETSTW-Cable 011 | BNC Cable                            | BNC Cable 1               | None         | JYE BAO CO.,LTD. | 2009/8/20     | 2010/8/19  |
| ETSTW-Cable 012 | BNC Cable                            | BNC Cable 2               | None         | JYE BAO CO.,LTD. | 2009/8/20     | 2010/8/19  |
| ETSTW-Cable 013 | Microwave Cable                      | SUCOFLEX 104 (S Cable 5)  | 232345       | HUBER+SUHNER     | 2009/3/6      | 2010/3/5   |
| ETSTW-Cable 022 | N TYPE Cable                         | OATS Cable 3              | 0002         | JYE BAO CO.,LTD. | 2009/3/6      | 2010/3/5   |



Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

## **2.4 General Test Procedure**

**POWER LINE CONDUCTED INTERFERENCE:** The procedure used was ANSI STANDARD C63.4-2003 using a 50 $\mu$ H LISN (if necessary). Both lines were observed. The bandwidth of the spectrum analyzer was 10 kHz with an appropriate sweep speed.

**RADIATION INTERFERENCE:** The test procedure used was according to ANSI STANDARD C63.4-2003 employing a spectrum analyzer. For investigated frequency is equal to or below 1GHz, the RBW and VBW of the spectrum analyzer was 100 kHz and 100kHz respectively with an appropriate sweep speed. For investigated frequency is above 1GHz, both of RBW and VBW of the spectrum analyzer were 1 MHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna.

**FORMULA OF CONVERSION FACTORS:** The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dB $\mu$ V) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB.

Example:

|            |                                                          |
|------------|----------------------------------------------------------|
| Freq (MHz) | METER READING + ACF + CABLE LOSS (to the receiver) = FS  |
| 33         | 20 dB $\mu$ V + 10.36 dB + 6 dB = 36.36 dB $\mu$ V/m @3m |

The UUT was placed on a table 80 cm high and with dimensions of 1m by 1.5m (non metallic table) and arranged according to ANSI C63.4-2003 Section 13.1.2. The table used for radiated measurements is capable of continuous rotation. The spectrum was scanned from 30 MHz to the frequency specified as follows:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1)-(a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this Section, whichever is the higher frequency range of investigation.

For hand-held devices, a exploratory test was performed with three (3) orthogonal planes to determine the highest emissions.

Measurements were made by Worldwide Testing Services(Taiwan) Co., Ltd. at the registered open field test site located No.5-1, Shuang Sing Village, LiShuei Rd., Wanli Township, Taipei County 207, Taiwan (R.O.C.). The Registration Number: **930600**.



## **Worldwide Testing Services(Taiwan) Co., Ltd.**

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

When the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

The formula is as follows:

Average = Peak + Duty Factor

Duty Factor =  $20 \log (\text{dwell time}/T)$

$T = 100\text{ms}$  when the pulse train period is over 100 ms or the period of the pulse train.

Modified Limits for peak according to 15.35 (b) = Max Permitted average Limits + 20dB



Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

**3 Test results (enclosure)**

| TEST CASE                                            | Para. Number     | Required                            | Test passed                         | Test failed              |
|------------------------------------------------------|------------------|-------------------------------------|-------------------------------------|--------------------------|
| Peak Output Power                                    | 15.247(b)        | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Equivalent radiated Power                            | 15.247(b)        | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Spurious Emissions radiated – Transmitter operating  | 15.247(c)        | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Spurious Emissions conducted – Transmitter operating | 15.247           | <input type="checkbox"/>            | <input type="checkbox"/>            | <input type="checkbox"/> |
| Carrier Frequency Separation                         | 15.247(a) (1)    | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Number of Hopping Frequencies                        | 15.247(a) (1)(i) | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Time of Occupancy (Dwell Time)                       | 15.247(a) (1)(i) | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| 20 dB Bandwidth                                      | 15.247(a) (1)(i) | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Band-edge Compliance of RF Emission                  | 15.247(c)        | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Radiated Emission from Receiver part                 | 15.109           | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Power Line Conducted Emission                        | 15.207(a)        | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input type="checkbox"/> |

The follows is intended to leave blank.



Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

### 3.1 Peak Output Power (transmitter)

FCC Rule: 15.247

This measurement applies to equipment with an integral antenna and to equipment with an antenna connector and equipped with an antenna as declared by the applicant.

The power was measured with modulation (declared by the applicant).

| Test conditions                |                         | Conducted Power    |                    |                    |
|--------------------------------|-------------------------|--------------------|--------------------|--------------------|
|                                |                         | Channel A<br>[dBm] | Channel B<br>[dBm] | Channel C<br>[dBm] |
| $T_{nom} = 23^{\circ}\text{C}$ | $V_{nom} = 12\text{ V}$ | 12.11              | 12.74              | 13.02              |

| Test conditions                       |                         | Radiated Power     |                    |                    |
|---------------------------------------|-------------------------|--------------------|--------------------|--------------------|
|                                       |                         | Channel A<br>[dBm] | Channel B<br>[dBm] | Channel C<br>[dBm] |
| $T_{nom} = \text{--}^{\circ}\text{C}$ | $V_{nom} = \text{-- V}$ | --                 | --                 | --                 |

| Test conditions                                                 | Signal Field strength TX highest power mode |
|-----------------------------------------------------------------|---------------------------------------------|
| $T_{nom} = \text{--}^{\circ}\text{C}$ , $V_{nom} = \text{-- V}$ | dB $\mu\text{V/m}$                          |
| Frequency[MHz]                                                  |                                             |
| --                                                              | --                                          |
| Measurement uncertainty                                         | < 3 dB                                      |

Note: The diagrams for the peak output power measurements are included in Appendix.



Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

## **Maximum Peak Output Power**

Limits:

| Frequency<br>MHz | Number of hopping channels |           |              |              |
|------------------|----------------------------|-----------|--------------|--------------|
|                  | $\geq 75$                  | $\geq 50$ | $49 \geq 25$ | $74 \geq 15$ |
| 902-928          |                            | 30 dBm    | 24 dBm       |              |
| 2400-2483.5 MHz  | 30 dBm                     | -         |              | 21 dbm       |
| 5725-5850 MHz    | 30 dBm                     | -         |              |              |

In case of employing transmitter antennas having antenna gain >dBi and using fixed poin-to point operation consider §15.247 (b)(4).

Test equipment used: ETSTW-RE 055, ETSTW-RE 064



Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

### **3.2 RF Exposure Compliance Requirements**

According to Supplement C, Edition 01-01 to OET Bulletin 65, Edition 97-01 this spread spectrum transmitter is categorically excluded from routine environmental evaluation because of the low power level, where there is a high likelihood of compliance with RF exposure standards.

### **3.3 Out of Band Radiated Emissions**

FCC Rule: 15.247(c) , 15.35

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

Limits:

For frequencies below 1GHz :

Max. reading – 20 dB

Guidance on Measurement of FHSS Systems:

“If the emission is pulsed, modify the unit for continuous operation , use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.” Here the correction was added to the limit instead subtracted from the reading.

Duty Cycle correction =  $20 \log (\text{dwell time}/100\text{ms})$

For frequencies above 1GHz (Peak measurements).

Limit = max. aver. reading-20dB +20dB(because Peak detector is used)

For frequencies above 1GHz (Average measurements).

Max. reading – 20 dB - duty cycle correction:

No duty cycle correction was added to the reading

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 017, ETSTW-RE 018,  
ETSTW-RE 021, ETSTW-RE 028, ETSTW-RE 030, ETSTW-RE 043,  
ETSTW-RE 064



Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

### **3.4 Transmitter Radiated Emissions in restricted Bands**

FCC Rules: 15.247 (c), 15.205, 15.209, 15.35

Radiated emission measurements were performed from 30 MHz to 26000 MHz.

For radiated emission tests, the analyzer setting was as followings:

RES BW VID BW

Frequency <1 GHz 100 kHz 100 kHz (Peak measurements)

Frequency >1 GHz 1 MHz 1 MHz (Peak measurements)

1 MHz 1 MHz (Average measurements)

Limits:

For frequencies below 1GHz :

| Frequency of Emission<br>(MHz) | Field strength<br>(microvolts/meter) | Field Strength<br>(dB microvolts/meter) |
|--------------------------------|--------------------------------------|-----------------------------------------|
| 30 – 88                        | 100                                  | 40.0                                    |
| 88 – 216                       | 150                                  | 43.5                                    |
| 216 – 960                      | 200                                  | 46.0                                    |
| Above 960                      | 500                                  | 54.0                                    |

For frequencies above 1GHz (Average measurements).

Guidance on Measurement of FHSS Systems:

“If the emission is pulsed, modify the unit for continues operation , use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation.” Here the correction was added to the limit instead subtracted from the reading.

Duty cycle correction =  $20 \log (\text{dwell time}/100\text{ms})$

For frequencies above 1GHz (Average measurements).

Limit – duty cycle correction

No duty cycle correction was added to the reading.

54.0dB $\mu$ V/m

For frequencies above 1GHz (Peak measurements).

Limit + 20dB

54.0dB $\mu$ V/m + 20 dB= 74 dB $\mu$ V/m

Note: See attached diagrams.

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 017, ETSTW-RE 028,  
ETSTW-RE 029, ETSTW-RE 030, ETSTW-RE 042, ETSTW-RE 043,  
ETSTW-RE 064



Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

### 3.5 Spurious emissions (tx)

Spurious emission was measured with modulation (declared by manufacturer).

In any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c))

SAMPLE CALCULATION OF LIMIT. All results will be updated by an automatic measuring system in accordance to point 2.3.

Calculation of test results:

Such factors like antenna correction, cable loss, external attenuation etc. are already included in the provided measurement results. This is done by using validated test software and calibrated test system according the accreditation requirements.

The peak and average spurious emission plots was measured with the average limits.

In the Table being listed the critical peak and average value an exhibit the compliance with the above calculated Limits.

If in the column's correction factor states a value then the max. Field strength in the same row is corrected by a value gained from the "Marker-Delta-Method" or the „Duty-Cycle Correction Factor“.

Model: CPS 8Wi Date: 2009/9/15  
Mode: 2403.3 MHz Temperature: 24 °C Engineer: Kevin  
Polarization: Horizontal Humidity: 51 %

| Frequency (MHz) | Reading (dBuV) | Detector | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Table Degree (Deg.) | Ant. High (cm) |
|-----------------|----------------|----------|-------------|-----------------|----------------|-------------|---------------------|----------------|
| 270.300         | 13.87          | peak     | 14.47       | 28.34           | 46.00          | -17.66      | 120                 | 150            |
| 998.597         | 5.96           | peak     | 27.39       | 33.35           | 54.00          | -20.65      | 130                 | 150            |

| Frequency (MHz) | Reading (dBuV) |       | Factor (dB) Corr. | Result @3m (dBuV/m) |       | Limit @3m (dBuV/m) |       | Margin (dB) | Table Degree (Deg.) | Ant. High (cm) |
|-----------------|----------------|-------|-------------------|---------------------|-------|--------------------|-------|-------------|---------------------|----------------|
|                 | Peak           | Ave.  |                   | Peak                | Ave.  | Peak               | Ave.  |             |                     |                |
| 4801.603        | 52.21          | ---   | -5.95             | 46.26               | ---   | 74.00              | 54.00 | -27.74      | 120                 | 150            |
| 7214.429        | 55.12          | 46.05 | -0.73             | 54.39               | 45.32 | 74.00              | 54.00 | -8.68       | 270                 | 150            |
| 9613.200        | 30.09          | ---   | 20.92             | 45.01               | ---   | 74.00              | 54.00 | -28.99      | 120                 | 150            |
| 12016.500       | 30.46          | ---   | 22.61             | 47.07               | ---   | 74.00              | 54.00 | -26.93      | 220                 | 150            |



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

Polarization: Vertical

| Frequency (MHz) | Reading (dBuV) | Detector | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Table Degree (Deg.) | Ant. High (cm) |
|-----------------|----------------|----------|-------------|-----------------|----------------|-------------|---------------------|----------------|
| 113.700         | 23.51          | peak     | 12.75       | 36.26           | 43.50          | -7.24       | 250                 | 150            |
| 995.792         | 8.33           | peak     | 27.37       | 35.70           | 54.00          | -18.30      | 110                 | 150            |

| Frequency (MHz) | Reading (dBuV) |       | Factor (dB) Corr. | Result @3m (dBuV/m) |       | Limit @3m (dBuV/m) |       | Margin (dB) | Table Degree (Deg.) | Ant. High (cm) |
|-----------------|----------------|-------|-------------------|---------------------|-------|--------------------|-------|-------------|---------------------|----------------|
|                 | Peak           | Ave.  |                   | Peak                | Ave.  | Peak               | Ave.  |             |                     |                |
| 4801.603        | 54.23          | ---   | -5.95             | 48.28               | ---   | 74.00              | 54.00 | -25.72      | 210                 | 150            |
| 7214.429        | 55.03          | 46.07 | -0.73             | 54.30               | 45.34 | 74.00              | 54.00 | -8.66       | 280                 | 150            |
| 9613.000        | 30.38          | ---   | 20.92             | 45.30               | ---   | 74.00              | 54.00 | -28.70      | 110                 | 150            |
| 12016.500       | 30.2           | ---   | 22.61             | 46.81               | ---   | 74.00              | 54.00 | -27.19      | 230                 | 150            |

Mode: 2442.2MHz

Temperature: 24 °C

Engineer: Kevin

Polarization: Horizontal

Humidity: 51 %

| Frequency (MHz) | Reading (dBuV) | Detector | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Table Degree (Deg.) | Ant. High (cm) |
|-----------------|----------------|----------|-------------|-----------------|----------------|-------------|---------------------|----------------|
| 270.300         | 13.60          | peak     | 14.47       | 28.07           | 46.00          | -17.93      | 120                 | 150            |
| 405.210         | 19.04          | peak     | 17.90       | 36.94           | 46.00          | -9.06       | 140                 | 110            |

| Frequency (MHz) | Reading (dBuV) |      | Factor (dB) Corr. | Result @3m (dBuV/m) |      | Limit @3m (dBuV/m) |       | Margin (dB) | Table Degree (Deg.) | Ant. High (cm) |
|-----------------|----------------|------|-------------------|---------------------|------|--------------------|-------|-------------|---------------------|----------------|
|                 | Peak           | Ave. |                   | Peak                | Ave. | Peak               | Ave.  |             |                     |                |
| 4884.400        | 46.92          | ---  | -5.55             | 41.37               | ---  | 74.00              | 54.00 | -32.63      | 120                 | 150            |
| 7326.653        | 51.10          | ---  | -1.01             | 50.09               | ---  | 74.00              | 54.00 | -23.91      | 230                 | 150            |
| 9768.800        | 30.56          | ---  | 21.36             | 45.92               | ---  | 74.00              | 54.00 | -28.08      | 210                 | 150            |
| 12211.000       | 31.50          | ---  | 23.18             | 48.68               | ---  | 74.00              | 54.00 | -25.32      | 230                 | 150            |

Polarization: Vertical

| Frequency (MHz) | Reading (dBuV) | Detector | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Table Degree (Deg.) | Ant. High (cm) |
|-----------------|----------------|----------|-------------|-----------------|----------------|-------------|---------------------|----------------|
| 110.325         | 23.68          | peak     | 12.39       | 36.07           | 43.50          | -7.43       | 120                 | 150            |
| 971.944         | 6.87           | peak     | 27.23       | 34.10           | 54.00          | -19.90      | 100                 | 150            |



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

| Frequency<br>(MHz) | Reading<br>(dBuV) |      | Factor<br>(dB)<br>Corr. | Result @3m<br>(dBuV/m) |      | Limit @3m<br>(dBuV/m) |       | Margin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
|--------------------|-------------------|------|-------------------------|------------------------|------|-----------------------|-------|----------------|---------------------------|----------------------|
|                    | Peak              | Ave. |                         | Peak                   | Ave. | Peak                  | Ave.  |                |                           |                      |
| 4884.400           | 46.12             | ---  | -5.55                   | 40.57                  | ---  | 74.00                 | 54.00 | -33.43         | 240                       | 150                  |
| 7326.600           | 48.39             | ---  | -1.01                   | 47.38                  | ---  | 74.00                 | 54.00 | -26.62         | 170                       | 150                  |
| 9768.800           | 29.70             | ---  | 21.36                   | 45.06                  | ---  | 74.00                 | 54.00 | -28.94         | 210                       | 150                  |
| 12211.000          | 30.32             | ---  | 23.18                   | 47.50                  | ---  | 74.00                 | 54.00 | -26.50         | 330                       | 150                  |

Mode: 2479.1MHz

Temperature: 24 °C

Engineer: Kevin

Polarization: Horizontal

Humidity: 51 %

| Frequency<br>(MHz) | Reading<br>(dBuV) | Detector | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
|--------------------|-------------------|----------|----------------|--------------------|-------------------|----------------|---------------------------|----------------------|
| 123.150            | 13.57             | peak     | 13.63          | 27.20              | 43.50             | -16.30         | 220                       | 150                  |
| 405.210            | 18.98             | peak     | 17.90          | 36.88              | 46.00             | -9.12          | 180                       | 150                  |

| Frequency<br>(MHz) | Reading<br>(dBuV) |      | Factor<br>(dB)<br>Corr. | Result @3m<br>(dBuV/m) |      | Limit @3m<br>(dBuV/m) |       | Margin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
|--------------------|-------------------|------|-------------------------|------------------------|------|-----------------------|-------|----------------|---------------------------|----------------------|
|                    | Peak              | Ave. |                         | Peak                   | Ave. | Peak                  | Ave.  |                |                           |                      |
| 4958.000           | 46.84             | ---  | -5.40                   | 41.44                  | ---  | 74.00                 | 54.00 | -32.56         | 110                       | 150                  |
| 7437.000           | 50.16             | ---  | -1.02                   | 49.14                  | ---  | 74.00                 | 54.00 | -24.86         | 170                       | 150                  |
| 9916.000           | 30.26             | ---  | 21.63                   | 45.89                  | ---  | 74.00                 | 54.00 | -28.11         | 120                       | 150                  |
| 12395.000          | 30.54             | ---  | 23.41                   | 47.95                  | ---  | 74.00                 | 54.00 | -26.05         | 270                       | 150                  |

Polarization: Vertical

| Frequency<br>(MHz) | Reading<br>(dBuV) | Detector | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
|--------------------|-------------------|----------|----------------|--------------------|-------------------|----------------|---------------------------|----------------------|
| 114.375            | 23.81             | peak     | 12.82          | 36.63              | 43.50             | -6.87          | 120                       | 150                  |
| 405.210            | 15.36             | peak     | 17.90          | 33.26              | 46.00             | -12.74         | 210                       | 150                  |

| Frequency<br>(MHz) | Reading<br>(dBuV) |      | Factor<br>(dB)<br>Corr. | Result @3m<br>(dBuV/m) |      | Limit @3m<br>(dBuV/m) |       | Margin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
|--------------------|-------------------|------|-------------------------|------------------------|------|-----------------------|-------|----------------|---------------------------|----------------------|
|                    | Peak              | Ave. |                         | Peak                   | Ave. | Peak                  | Ave.  |                |                           |                      |
| 4958.000           | 46.87             | ---  | -5.40                   | 41.47                  | ---  | 74.00                 | 54.00 | -32.53         | 310                       | 150                  |
| 7437.000           | 49.72             | ---  | -1.02                   | 48.70                  | ---  | 74.00                 | 54.00 | -25.30         | 240                       | 150                  |
| 9916.000           | 30.74             | ---  | 21.63                   | 46.37                  | ---  | 74.00                 | 54.00 | -27.63         | 210                       | 150                  |
| 12395.000          | 31.10             | ---  | 23.41                   | 48.51                  | ---  | 74.00                 | 54.00 | -25.49         | 220                       | 150                  |



## ***Worldwide Testing Services(Taiwan) Co., Ltd.***

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

- Note**
- 1. Correction Factor = Antenna factor + Cable loss - Preamplifier**
  - 2. The formula of measured value as: Test Result = Reading + Correction Factor**
  - 3. All not in the table noted test results are more than 20 dB below the relevant limits.**
  - 4. See attached diagrams in Appendix.**
  - 5. See the attached diagram as appendix.**

All other not noted test plots do not contain significant test results in relation to the limits.

**TEST RESULT (Transmitter):** The unit DOES meet the FCC requirements.

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 017, ETSTW-RE 018,  
ETSTW-RE 021, ETSTW-RE 028, ETSTW-RE 030, ETSTW-RE 043,  
ETSTW-RE 064



Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

### 3.6 Carrier Frequency Separation

Carrier Frequency Separation was measured with modulation (declared by manufacturer).

According to FCC rules part 15 subpart C §15.247 frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or 20 dB bandwidth of the hopping channel, whichever is greater.

| Test conditions                |                         | Channel Separation |             |
|--------------------------------|-------------------------|--------------------|-------------|
|                                |                         | Channel A          | Channel A+1 |
| $T_{nom} = 23^{\circ}\text{C}$ | $V_{nom} = 12\text{ V}$ | 4.102564103 MHz    |             |

| Test conditions                |                         | Channel Separation |             |
|--------------------------------|-------------------------|--------------------|-------------|
|                                |                         | Channel B          | Channel B+1 |
| $T_{nom} = 23^{\circ}\text{C}$ | $V_{nom} = 12\text{ V}$ | 6.185897436 MHz    |             |

| Test conditions                |                         | Channel Separation |             |
|--------------------------------|-------------------------|--------------------|-------------|
|                                |                         | Channel C          | Channel C+1 |
| $T_{nom} = 23^{\circ}\text{C}$ | $V_{nom} = 12\text{ V}$ | 4.102564103 MHz    |             |

#### Limits:

| Frequency Range<br>MHz     | Limits                   |                          |
|----------------------------|--------------------------|--------------------------|
|                            | 20 dB bandwidth < 25 kHz | 20 dB bandwidth > 25 kHz |
| 902-928                    | 25 kHz                   | 20 dB bandwidth          |
| 2400-2483.5<br>5725-5850.0 | 25 kHz                   | 20 dB bandwidth          |

Test equipment used: ETSTW-RE 055, ETSTW-RE 064

Note: See attached diagram as appendix.



Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

### 3.7 Number of Hopping Frequencies

According to FCC rules part 15 subpart C §15.247 frequency hopping systems operating in the 2400-2483.5 MHz band shall use at least 15 hopping frequencies. Frequency hopping systems in 5725-5850 MHz bands shall use least 75 hopping frequencies.

For frequency hopping systems operating in the 902-928 MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies; if the 20dB bandwidth of the hopping channel 250 kHz or greater, the system shall use at least 25 hopping frequencies.

| Test conditions                |                         | Operating Mode      | Number of Channels |
|--------------------------------|-------------------------|---------------------|--------------------|
| $T_{nom} = 23^{\circ}\text{C}$ | $V_{nom} = 12\text{ V}$ | normal transmitting | 20                 |

#### Limits:

| Frequency Range<br>MHz | Limit                           |                    |
|------------------------|---------------------------------|--------------------|
|                        | 20dB Bandwidth                  | Number of Channels |
| 902-928 MHz            | Bandwidth < 250 kHz             | $\geq 50$          |
|                        | Bandwidth $\geq 250\text{ kHz}$ | $\geq 25$          |
| 2400-2483.5            | not defined                     | 15                 |
| 5725-5850.0 MHz        | 1 MHz                           | 75                 |

Test equipment used: ETSTW-RE 055, ETSTW-RE 064

Note: See attached diagrams as appendix.



Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

### **3.7.1 Pseudorandom Frequency Hopping Sequence**

The RF module can synthesize a total of 38 channels. At any given point in time, it only hops on a subset of 20 of these channels. If one of the 20 channels it is using is deemed to be bad, it stops using it and replaces it with one of the other 18 unused channels.

| Channel | Frequency<br>GHz | Channel | Frequency<br>GHz | Channel | Frequency<br>GHz | Channel | Frequency<br>GHz |
|---------|------------------|---------|------------------|---------|------------------|---------|------------------|
| 0       | 2.403328         | 11      | 2.425856         | 22      | 2.448384         | 33      | 2.470912         |
| 1       | 2.405376         | 12      | 2.427904         | 23      | 2.450432         | 34      | 2.472960         |
| 2       | 2.407424         | 13      | 2.429952         | 24      | 2.452480         | 35      | 2.475008         |
| 3       | 2.409472         | 14      | 2.432000         | 25      | 2.454528         | 36      | 2.477056         |
| 4       | 2.411520         | 15      | 2.434048         | 26      | 2.456576         | 37      | 2.479104         |
| 5       | 2.413568         | 16      | 2.436096         | 27      | 2.458624         |         |                  |
| 6       | 2.415616         | 17      | 2.438144         | 28      | 2.460672         |         |                  |
| 7       | 2.417664         | 18      | 2.440192         | 29      | 2.462720         |         |                  |
| 8       | 2.419712         | 19      | 2.442240         | 30      | 2.464768         |         |                  |
| 9       | 2.421760         | 20      | 2.444288         | 31      | 2.466816         |         |                  |
| 10      | 2.423808         | 21      | 2.446336         | 32      | 2.468864         |         |                  |

### **3.7.2 Coordination of hopping sequences to other transmitters**

This transmitter does not have the ability of being coordinated with other FHSS system for as soon as the transmitter is in operation, the hopping frequency will follow the selected hopping sequence to transmit independently and no coordination is possible. Especially, this transmitter is used as a duplex Wireless speaker system, so no coordination of hopping frequency is required.

### **3.7.3 System Receiver Hopping Capability**

There are two steps to make the receiver to shift the frequencies in synchronization with the transmitted signals:

First, the Transmitter will emit a preamble signal of 5 ms and the receiver will scan this signal by 0.2 ms sweeping until the preamble signal is caught. Second, the preamble signal is coded with the information of hopping sequence and the next transmitting frequency, so the receiver will be able to shift the receiving frequencies in synchronization with the transmitted signals.

### **3.7.4 Equal Hopping Frequency Use**

Due to each hopping frequency will be transmitted in accordance to the frequency tables described above, there is no any frequency will be able to hop more times than others. Therefore each frequency will be used equally.



Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

### 3.8 Time of Occupancy (Dwell Time)

Frequency hopping systems operating in the 5725-5850 MHz band shall use an average time of occupancy on any frequency not greater than 0.4 seconds within a 30 second period.

In 2400-2483.5 MHz band the average time of occupancy on any channel shall not be greater than 0.4 seconds multiplied by the number of hopping channels employed.

For frequency hopping systems operating in the 902-928 MHz band: if the 20dB bandwidth of the hopping channel is less than 250 kHz, the average time of occupancy on any frequency shall not greater than 0.4 seconds within a 20 second period; if the 20dB bandwidth of the hopping channel is 250 kHz or greater, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

| Test conditions                                           | Operating mode | Measurement period | Time of Occupancy |
|-----------------------------------------------------------|----------------|--------------------|-------------------|
| $T_{nom} = 23^{\circ}\text{C}$<br>$V_{nom} = 12\text{ V}$ | Channel A      | 8                  | 382.24 ms         |
|                                                           | Channel B      | 8                  | 382.24 ms         |
|                                                           | Channel C      | 8                  | 382.24 ms         |

#### Limits and measurement periods:

| Frequency MHz | Number of channels | Measurement Period              | Limit |
|---------------|--------------------|---------------------------------|-------|
| 902 – 928     | $\geq 50$          | 20 s                            | 0.4 s |
|               | $49 \geq 25$       | 10 s                            | 0.4 s |
| 2400 – 2483.5 | $\geq 15$          | 0.4 s * number of used channels | 0.4 s |
| 5725- 5850    | $\geq 75$          | 30 s                            | 0.4s  |

Test equipment used: ETSTW-RE 055, ETSTW-RE 064

Note: See attached diagrams as appendix, which show the On-time and the number of counted events during the measurement period



Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

### **3.9 20dB Bandwidth**

Frequency hopping systems operating in the 5725-5850 MHz bands shall use a maximum 20dB bandwidth of 1 MHz.

The 20dB bandwidth is measured on the lowest, middle and highest hopping channel.

For frequency hopping systems operating in the 902-928 MHz band the maximum 20dB bandwidth of the hopping channel is 500 kHz.

| Test conditions                |                         | 20 dB Bandwidth |                 |                 |
|--------------------------------|-------------------------|-----------------|-----------------|-----------------|
|                                |                         | Channel A       | Channel B       | Channel C       |
| $T_{nom} = 23^{\circ}\text{C}$ | $V_{nom} = 12\text{ V}$ | 1.846153846 MHz | 1.852564103 MHz | 1.852564103 MHz |

#### **Limits:**

| Frequency Range / MHz | Limit                 |
|-----------------------|-----------------------|
| 902-928               | $\leq 500\text{ kHz}$ |
| 2400-2483.5           | not defined           |
| 5725-5850             | $\leq 1\text{ MHz}$   |

Test equipment used: ETSTW-RE 055, ETSTW-RE 064

Note: See attached diagram as appendix.



Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

## **3.10 Band-edge Compliance of RF Emissions**

According to FCC rules part 15 subpart C §15.247(c) in any 100 kHz bandwidth outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in § 15.209(a) is not required.

In addition radiated emission which fall in the restricted bands, as defined in section 15.205(a), must also with the radiated emission limits.

| Test conditions                |                         | Attenuation at or outside band-edges<br>Single Frequency |                 |
|--------------------------------|-------------------------|----------------------------------------------------------|-----------------|
|                                |                         | Lower Band-edge                                          | Upper Band-edge |
| $T_{nom} = 23^{\circ}\text{C}$ | $V_{nom} = 12\text{ V}$ | 48.25 dB                                                 | 54.94 dB        |

| Test conditions                |                         | Attenuation at or outside band-edges<br>Hopping Frequency |                 |
|--------------------------------|-------------------------|-----------------------------------------------------------|-----------------|
|                                |                         | Lower Band-edge                                           | Upper Band-edge |
| $T_{nom} = 23^{\circ}\text{C}$ | $V_{nom} = 12\text{ V}$ | 42.92 dB                                                  | 50.27 dB        |

### **Limits:**

| Frequency Range / MHz | Limit   |
|-----------------------|---------|
| 902 – 928             | - 20 dB |
| 2400 – 2483.5         |         |
| 5725 - 5850           |         |

Test equipment used: ETSTW-RE 055, ETSTW-RE 064

Note: See attached diagrams as appendix.



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

## 3.11 Radiated Emissions from Receiver Section of Transceiver

FCC Rule: 15.109

### Receiver part

Model: CPS 8Wi Date: 2009/9/15  
Mode: 2403.3MHz Temperature: 24 °C Engineer: Kevin  
Polarization: Horizontal Humidity: 51 %

| Frequency (MHz) | Reading (dBuV) | Detector | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Table Degree (Deg.) | Ant. High (cm) |
|-----------------|----------------|----------|-------------|-----------------|----------------|-------------|---------------------|----------------|
| 61.725          | 12.28          | peak     | 13.61       | 25.89           | 40.00          | -14.11      | 110                 | 150            |
| 116.400         | 12.93          | peak     | 13.04       | 25.97           | 43.50          | -17.53      | 350                 | 150            |
| 233.175         | 16.94          | peak     | 13.22       | 30.16           | 46.00          | -15.84      | 280                 | 150            |
| 417.836         | 23.91          | peak     | 18.16       | 42.07           | 46.00          | -3.93       | 310                 | 150            |
| 661.924         | 15.77          | peak     | 22.86       | 38.63           | 46.00          | -7.37       | 120                 | 150            |

| Frequency (MHz) | Reading (dBuV) |      | Factor (dB) Corr. | Result @3m (dBuV/m) |      | Limit @3m (dBuV/m) |       | Margin (dB) | Table Degree (Deg.) | Ant. High (cm) |
|-----------------|----------------|------|-------------------|---------------------|------|--------------------|-------|-------------|---------------------|----------------|
|                 | Peak           | Ave. |                   | Peak                | Ave. | Peak               | Ave.  |             |                     |                |
| 3206.413        | 46.41          | ---  | -4.91             | 41.50               | ---  | 74.00              | 54.00 | -32.50      | 120                 | 150            |

Polarization: Vertical

| Frequency (MHz) | Reading (dBuV) | Detector | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Table Degree (Deg.) | Ant. High (cm) |
|-----------------|----------------|----------|-------------|-----------------|----------------|-------------|---------------------|----------------|
| 48.900          | 24.42          | peak     | 13.57       | 37.99           | 40.00          | -2.01       | 125                 | 150            |
| 75.900          | 25.43          | peak     | 10.82       | 36.25           | 40.00          | -3.75       | 170                 | 150            |
| 113.700         | 23.01          | peak     | 12.75       | 35.76           | 43.50          | -7.74       | 220                 | 150            |
| 368.738         | 21.30          | peak     | 16.94       | 38.24           | 46.00          | -7.76       | 110                 | 150            |
| 417.836         | 22.87          | peak     | 18.16       | 41.03           | 46.00          | -4.97       | 250                 | 150            |

| Frequency (MHz) | Reading (dBuV) |      | Factor (dB) Corr. | Result @3m (dBuV/m) |      | Limit @3m (dBuV/m) |       | Margin (dB) | Table Degree (Deg.) | Ant. High (cm) |
|-----------------|----------------|------|-------------------|---------------------|------|--------------------|-------|-------------|---------------------|----------------|
|                 | Peak           | Ave. |                   | Peak                | Ave. | Peak               | Ave.  |             |                     |                |
| 3693.387        | 45.09          | ---  | -2.53             | 42.56               | ---  | 74.00              | 54.00 | -31.44      | 110                 | 150            |



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

Mode: 2442.2MHz Temperature: 24 °C Engineer: Kevin  
Polarization: Horizontal Humidity: 51 %

| Frequency (MHz) | Reading (dBuV) | Detector | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Table Degree (Deg.) | Ant. High (cm) |
|-----------------|----------------|----------|-------------|-----------------|----------------|-------------|---------------------|----------------|
| 61.050          | 11.73          | peak     | 13.65       | 25.38           | 40.00          | -14.62      | 170                 | 150            |
| 117.075         | 12.97          | peak     | 13.11       | 26.08           | 43.50          | -17.42      | 130                 | 150            |
| 233.175         | 17.28          | peak     | 13.22       | 30.50           | 46.00          | -15.50      | 220                 | 150            |
| 417.836         | 23.60          | peak     | 18.16       | 41.76           | 46.00          | -4.24       | 320                 | 150            |
| 671.744         | 14.35          | peak     | 22.93       | 37.28           | 46.00          | -8.72       | 80                  | 150            |

| Frequency (MHz) | Reading (dBuV)<br>Peak Ave. |     | Factor (dB)<br>Corr. | Result @3m (dBuV/m)<br>Peak Ave. |     | Limit @3m (dBuV/m)<br>Peak Ave. |       | Margin (dB) | Table Degree (Deg.) | Ant. High (cm) |
|-----------------|-----------------------------|-----|----------------------|----------------------------------|-----|---------------------------------|-------|-------------|---------------------|----------------|
| 3591.182        | 45.39                       | --- | -2.85                | 42.54                            | --- | 74.00                           | 54.00 | -31.46      | 140                 | 150            |

Polarization: Vertical

| Frequency (MHz) | Reading (dBuV) | Detector | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Table Degree (Deg.) | Ant. High (cm) |
|-----------------|----------------|----------|-------------|-----------------|----------------|-------------|---------------------|----------------|
| 48.900          | 25.05          | peak     | 13.57       | 38.62           | 40.00          | -1.38       | 130                 | 150            |
| 75.900          | 25.93          | peak     | 10.82       | 36.75           | 40.00          | -3.25       | 220                 | 150            |
| 113.700         | 22.70          | peak     | 12.75       | 35.45           | 43.50          | -8.05       | 190                 | 150            |
| 417.836         | 22.54          | peak     | 18.16       | 40.70           | 46.00          | -5.30       | 170                 | 150            |
| 701.202         | 12.69          | peak     | 23.46       | 36.15           | 46.00          | -9.85       | 250                 | 150            |

| Frequency (MHz) | Reading (dBuV)<br>Peak Ave. |     | Factor (dB)<br>Corr. | Result @3m (dBuV/m)<br>Peak Ave. |     | Limit @3m (dBuV/m)<br>Peak Ave. |       | Margin (dB) | Table Degree (Deg.) | Ant. High (cm) |
|-----------------|-----------------------------|-----|----------------------|----------------------------------|-----|---------------------------------|-------|-------------|---------------------|----------------|
| 3819.639        | 44.37                       | --- | -2.21                | 42.16                            | --- | 74.00                           | 54.00 | -31.84      | 250                 | 150            |

Mode: 2479.1MHz Temperature: 24 °C Engineer: Kevin  
Polarization: Horizontal Humidity: 51 %

| Frequency (MHz) | Reading (dBuV) | Detector | Factor (dB) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Table Degree (Deg.) | Ant. High (cm) |
|-----------------|----------------|----------|-------------|-----------------|----------------|-------------|---------------------|----------------|
| 61.725          | 12.59          | peak     | 13.61       | 26.20           | 40.00          | -13.80      | 280                 | 150            |
| 123.150         | 13.57          | peak     | 13.63       | 27.20           | 43.50          | -16.30      | 110                 | 150            |
| 233.175         | 17.16          | peak     | 13.22       | 30.38           | 46.00          | -15.62      | 240                 | 150            |
| 417.836         | 23.78          | peak     | 18.16       | 41.94           | 46.00          | -4.06       | 150                 | 150            |
| 671.744         | 13.93          | peak     | 22.93       | 36.86           | 46.00          | -9.14       | 280                 | 150            |



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

| Frequency<br>(MHz) | Reading<br>(dBuV) |      | Factor<br>(dB)<br>Corr. | Result @3m<br>(dBuV/m) |      | Limit @3m<br>(dBuV/m) |       | Margin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
|--------------------|-------------------|------|-------------------------|------------------------|------|-----------------------|-------|----------------|---------------------------|----------------------|
|                    | Peak              | Ave. |                         | Peak                   | Ave. | Peak                  | Ave.  |                |                           |                      |
| 3717.435           | 45.37             | ---  | -2.47                   | 42.90                  | ---  | 74.00                 | 54.00 | -31.10         | 205                       | 150                  |

Polarization: Vertical

| Frequency<br>(MHz) | Reading<br>(dBuV) | Detector | Factor<br>(dB) | Result<br>(dBuV/m) | Limit<br>(dBuV/m) | Margin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
|--------------------|-------------------|----------|----------------|--------------------|-------------------|----------------|---------------------------|----------------------|
| 48.900             | 24.67             | peak     | 13.57          | 38.24              | 40.00             | -1.76          | 125                       | 150                  |
| 75.900             | 25.37             | peak     | 10.82          | 36.19              | 40.00             | -3.81          | 240                       | 150                  |
| 114.375            | 23.81             | peak     | 12.82          | 36.63              | 43.50             | -6.87          | 130                       | 150                  |
| 368.738            | 22.88             | peak     | 16.94          | 39.82              | 46.00             | -6.18          | 310                       | 150                  |
| 725.050            | 14.64             | peak     | 24.12          | 38.76              | 46.00             | -7.24          | 220                       | 150                  |

| Frequency<br>(MHz) | Reading<br>(dBuV) |      | Factor<br>(dB)<br>Corr. | Result @3m<br>(dBuV/m) |      | Limit @3m<br>(dBuV/m) |       | Margin<br>(dB) | Table<br>Degree<br>(Deg.) | Ant.<br>High<br>(cm) |
|--------------------|-------------------|------|-------------------------|------------------------|------|-----------------------|-------|----------------|---------------------------|----------------------|
|                    | Peak              | Ave. |                         | Peak                   | Ave. | Peak                  | Ave.  |                |                           |                      |
| 3585.170           | 45.19             | ---  | -2.87                   | 42.32                  | ---  | 74.00                 | 54.00 | -31.68         | 110                       | 150                  |

- Note**
1. Correction Factor = Antenna factor + Cable loss - Preamplifier
  2. The formula of measured value as: Test Result = Reading + Correction Factor
  3. Detector function in the form : PK = Peak, QP = Quasi Peak, AV = Average
  4. All not in the table noted test results are more than 20 dB below the relevant limits.
  5. See the attached diagram as appendix.

Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

| Frequency of Emission<br>(MHz) | Field Strength<br>(microvolts/meter) | Field Strength<br>(dBmicrovolts/meter) |
|--------------------------------|--------------------------------------|----------------------------------------|
| 30 – 88                        | 100                                  | 40.0                                   |
| 88 – 216                       | 150                                  | 43.5                                   |
| 216 – 960                      | 200                                  | 46.0                                   |
| Above 960                      | 500                                  | 54.0                                   |

Test equipment used: ETSTW-RE 003, ETSTW-RE 004, ETSTW-RE 017, ETSTW-RE 028,  
ETSTW-RE 029, ETSTW-RE 030, ETSTW-RE 042, ETSTW-RE 043,  
ETSTW-RE 064

Explanation: The test results of digital part are listed in the separated test report no. W6M20908-9965-P-15B.



Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

## 3.12 Power Line Conducted Emission

For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the table bellows with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

This measurement was transact first with instrumentation using an average and peak detector and a 10 kHz bandwidth. If the peak detector achieves a calculated level, the measurement is repeated by an instrumentation using a quasi-peak detector.

| Frequency | Level (dBμV)     |                  |
|-----------|------------------|------------------|
|           | quasi-peak       | average          |
| 150 kHz   | lower limit line | Lower limit line |

Model: CPS 8Wi Date: 2009/9/18  
Mode: Temperature: 24 °C Engineer: Kevin  
Polarization: N Humidity: 51 %

| Frequency<br>(MHz) | Reading<br>(dBμV) |       | Factor<br>(dB)<br>Corr. | Result<br>(dBμV) |       | Limit<br>(dBμV) |       | Margin<br>(dB) |
|--------------------|-------------------|-------|-------------------------|------------------|-------|-----------------|-------|----------------|
|                    | QP                | Ave.  |                         | QP               | Ave.  | QP              | Ave.  |                |
| 0.1747             | 32.06             | 24.05 | 10.13                   | 42.19            | 34.18 | 64.73           | 54.73 | -20.55         |
| 0.4098             | 29.57             | 19.07 | 10.07                   | 39.64            | 29.14 | 57.65           | 47.65 | -18.01         |
| 1.0850             | 26.24             | 17.86 | 10.10                   | 36.34            | 27.96 | 56.00           | 46.00 | -18.04         |
| 3.2430             | 24.49             | 18.02 | 10.08                   | 34.57            | 28.10 | 56.00           | 46.00 | -17.90         |
| 7.2825             | 21.40             | 12.92 | 10.35                   | 31.75            | 23.27 | 60.00           | 50.00 | -26.73         |
| 26.1865            | 21.36             | 15.39 | 10.61                   | 31.97            | 26.00 | 60.00           | 50.00 | -24.00         |

Polarization: L1

| Frequency<br>(MHz) | Reading<br>(dBμV) |       | Factor<br>(dB)<br>Corr. | Result<br>(dBμV) |       | Limit<br>(dBμV) |       | Margin<br>(dB) |
|--------------------|-------------------|-------|-------------------------|------------------|-------|-----------------|-------|----------------|
|                    | QP                | Ave.  |                         | QP               | Ave.  | QP              | Ave.  |                |
| 0.1787             | 35.73             | 24.79 | 10.20                   | 45.93            | 34.99 | 64.55           | 54.55 | -18.62         |
| 0.4452             | 27.77             | 19.75 | 10.25                   | 38.02            | 30.00 | 56.96           | 46.96 | -16.96         |
| 0.6152             | 26.71             | 17.10 | 10.25                   | 36.96            | 27.35 | 56.00           | 46.00 | -18.65         |
| 1.4923             | 25.42             | 16.46 | 10.21                   | 35.63            | 26.67 | 56.00           | 46.00 | -19.33         |
| 3.6767             | 23.07             | 16.89 | 10.32                   | 33.39            | 27.21 | 56.00           | 46.00 | -18.79         |
| 22.6422            | 19.91             | 13.71 | 11.63                   | 31.54            | 25.34 | 60.00           | 50.00 | -24.66         |



## ***Worldwide Testing Services(Taiwan) Co., Ltd.***

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

- Note:**
1. The formula of measured value as:  $\text{Test Result} = \text{Reading} + \text{Correction Factor}$
  2. The Correction Factor = Cable Loss + LISN Insertion Loss + Pulse Limit Loss
  3. Detector function in the form : PK = Peak, QP = Quasi Peak, AVG = Average
  4. All not in the table noted test results are more than 20 dB below the relevant limits.
  5. See attached diagrams in Appendix.

### **Limits:**

| Frequency of Emission (MHz) | Conducted Limit (dBuV) |          |
|-----------------------------|------------------------|----------|
|                             | Quasi Peak             | Average  |
| 0.15-0.5                    | 66 to 56               | 56 to 46 |
| 0.5-5                       | 56                     | 46       |
| 5-30                        | 60                     | 50       |

Test equipment used: ETSTW-CE 001, ETSTW-CE 003, ETSTW-CE 004, ETSTW-CE 006,  
ETSTW-RE 064



## **Appendix**

### **A Measurement diagrams**

1. Peak Output Power
2. Spurious Emissions radiated
3. Carrier Frequency Separation
4. Number of Hopping Frequencies
5. Time of Occupancy (Dwell Time)
6. 20dB Bandwidth
7. Band-edge Compliance of RF Conducted Emissions
8. Radiated Emissions from Receiver Section of Transceiver
9. Conducted Emission


### **B Photos**

1. EUT Photos
2. Set Up Photo of Radiated Emission
3. Set Up Photo of Conducted Emission



Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS


## Peak Output Power

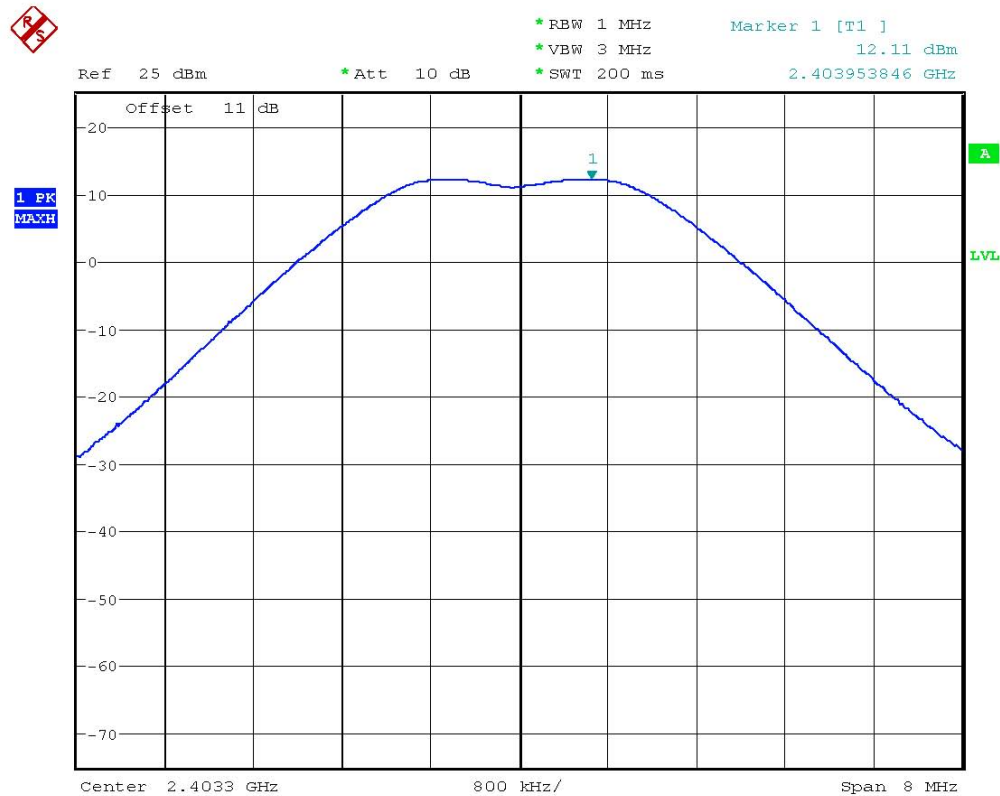

MAX OUTPUT POWER 2403.3MHz  
Date: 10.SEP.2009 14:17:47




Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

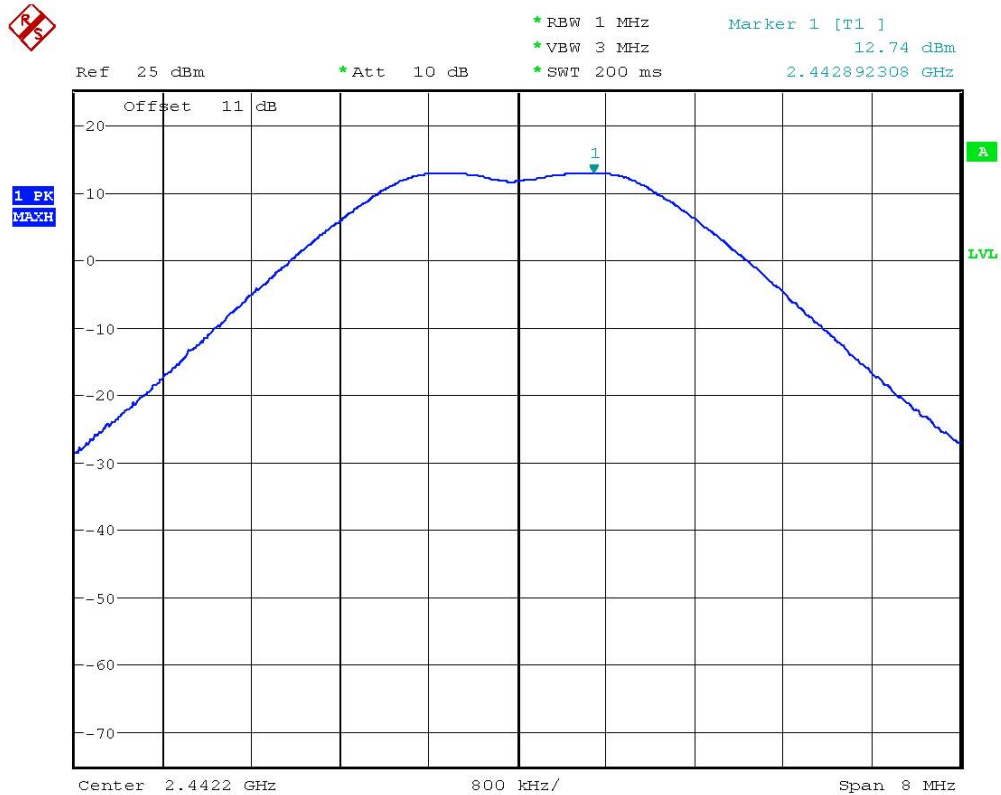

MAX OUTPUT POWER 2442.2MHz  
Date: 10.SEP.2009 14:19:13



Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

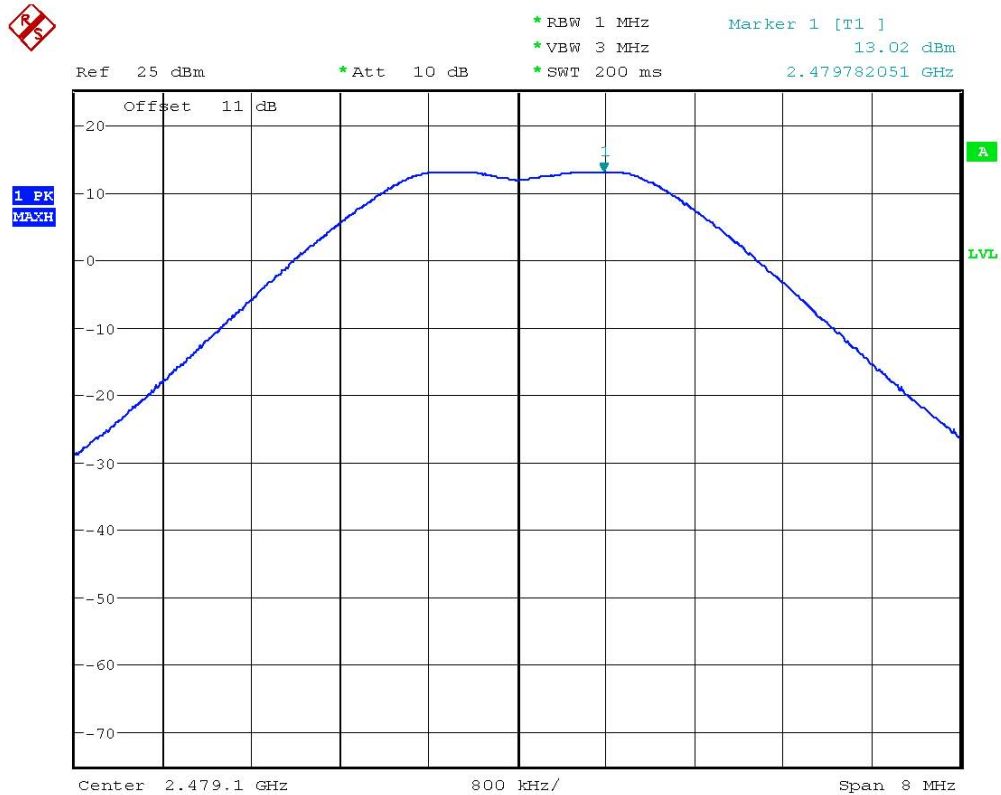

MAX OUTPUT POWER 2479.1MHz  
Date: 10.SEP.2009 14:20:16



# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

Spurious Emissions radiated

Transmitter\_ 2403.3 MHz

Antenna Polarization H

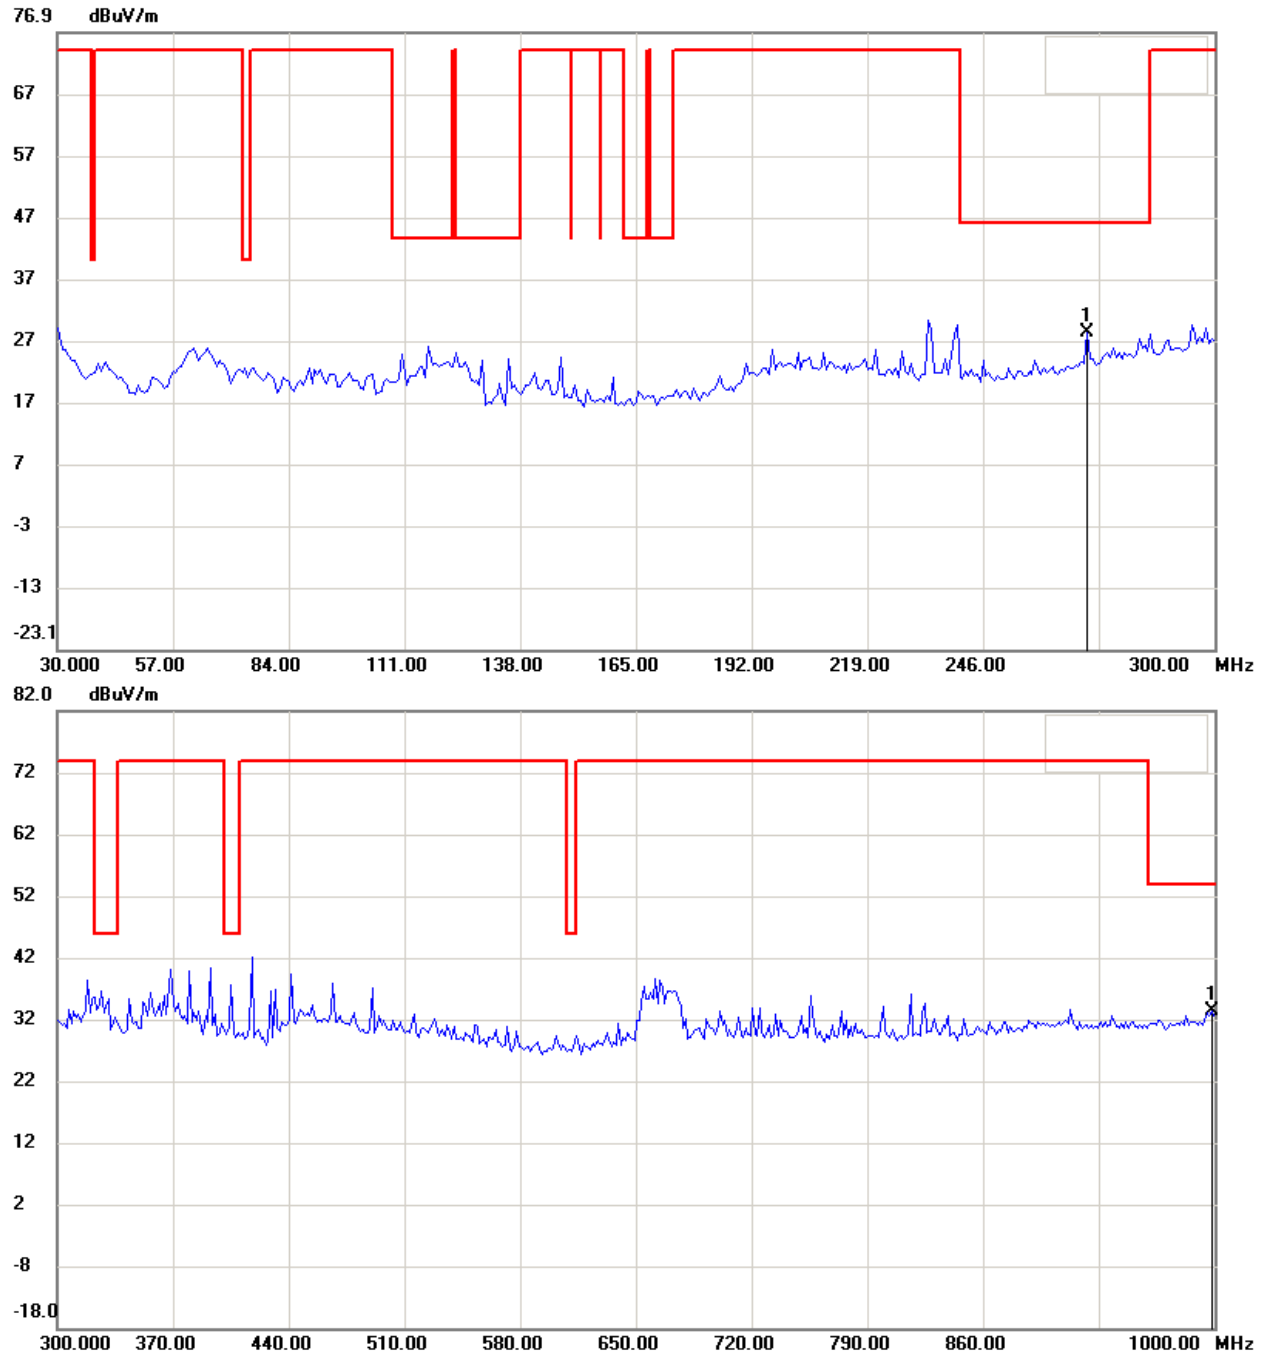

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

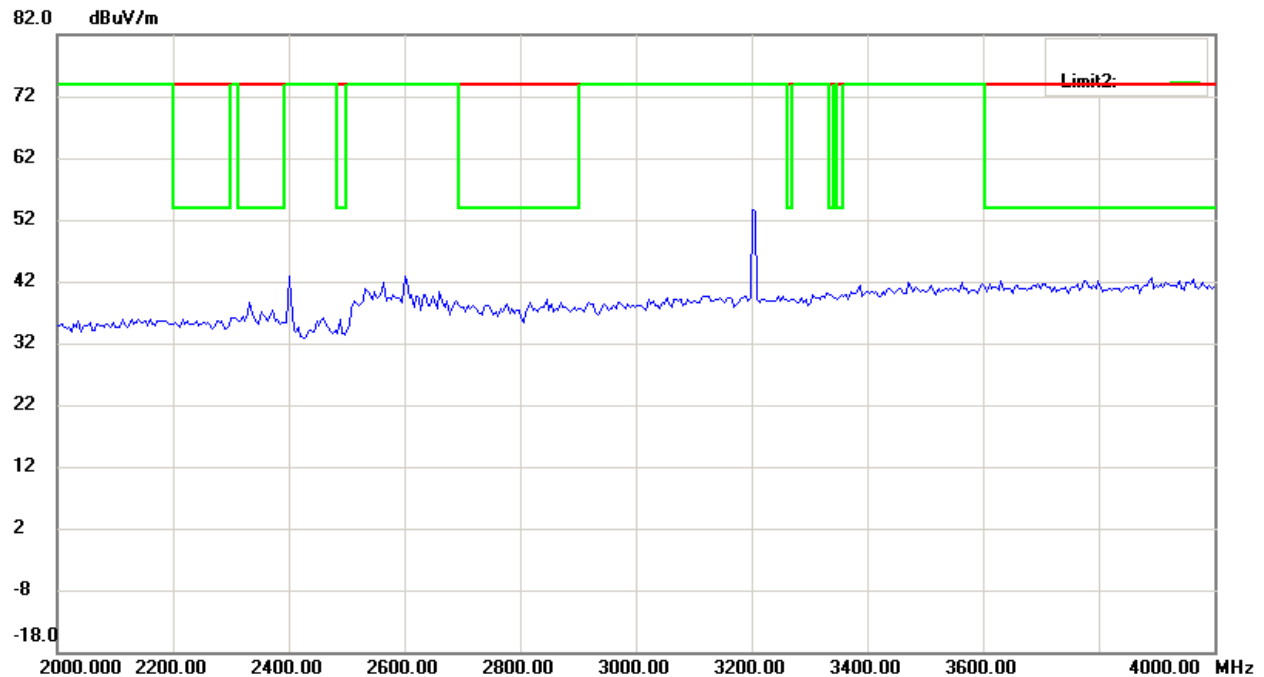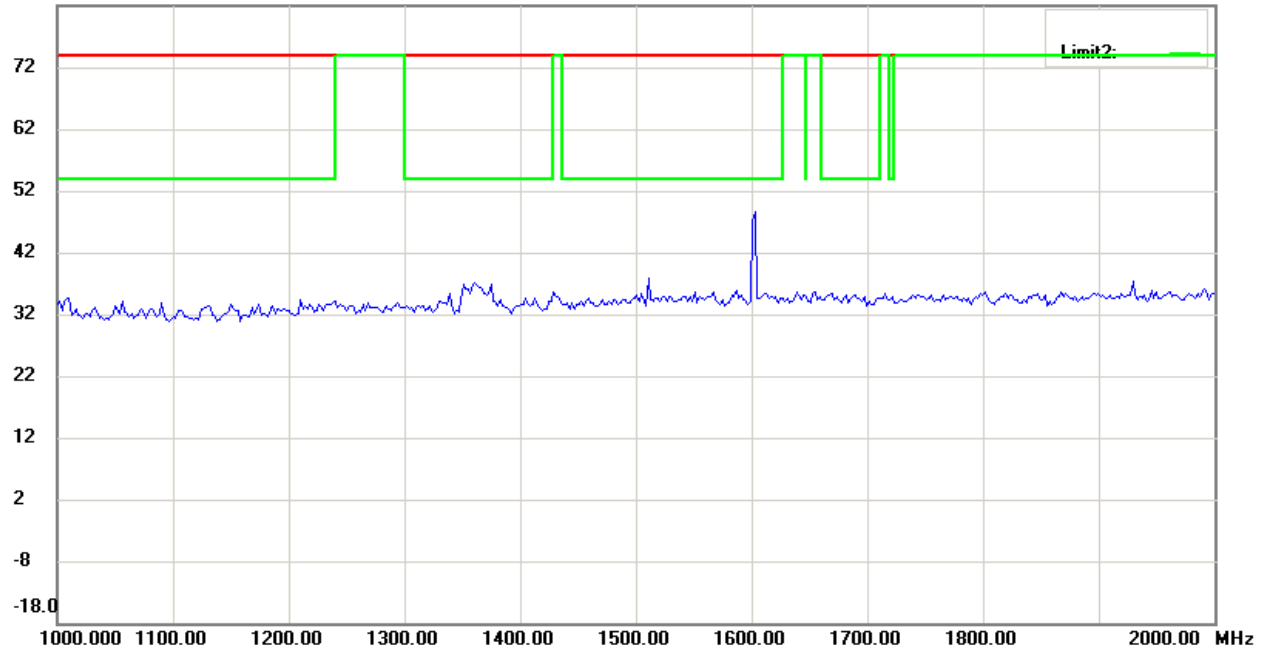

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

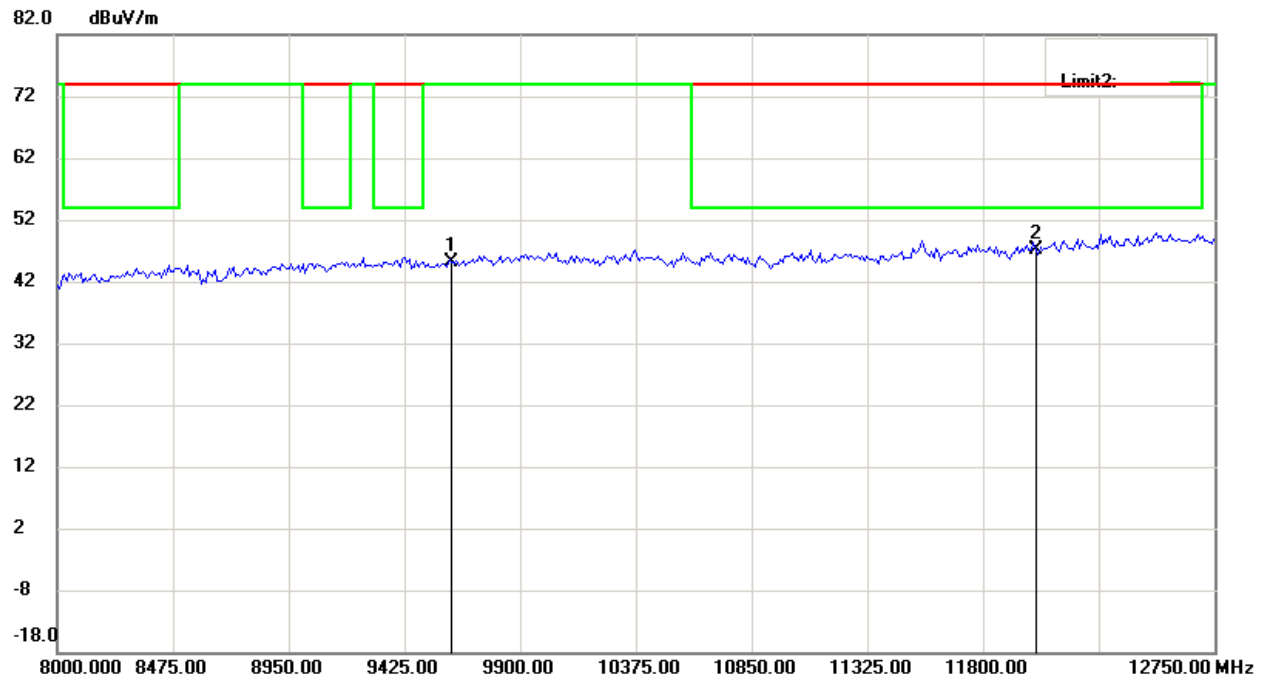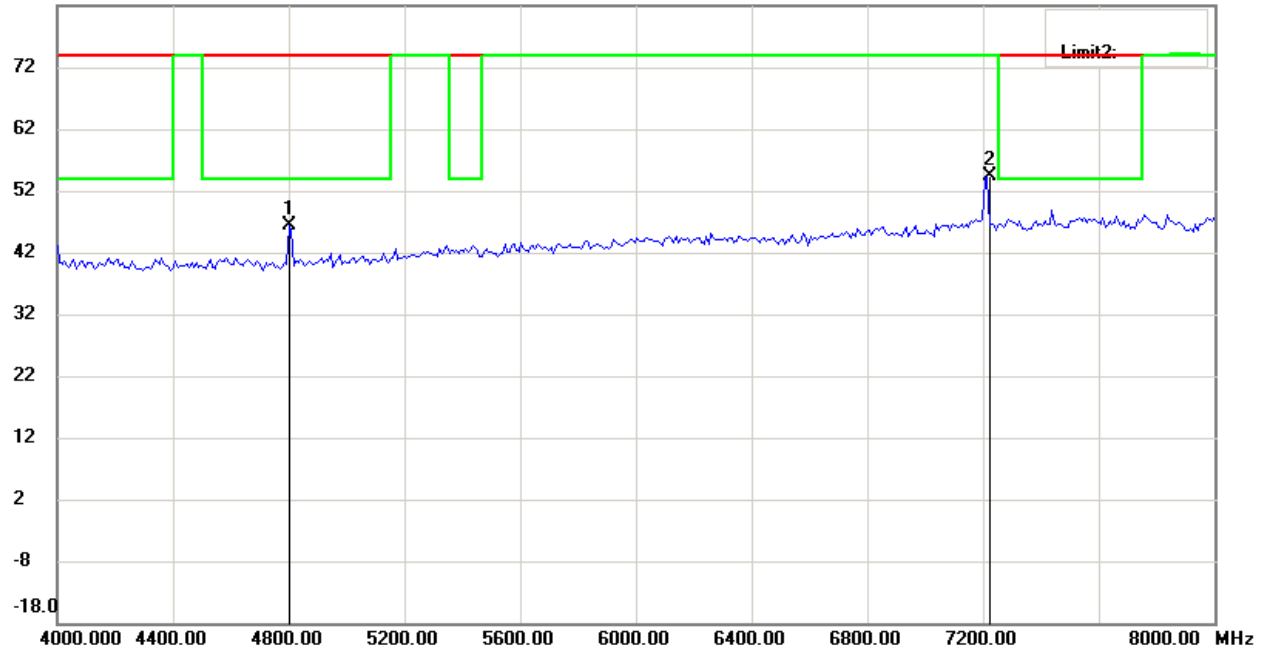

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

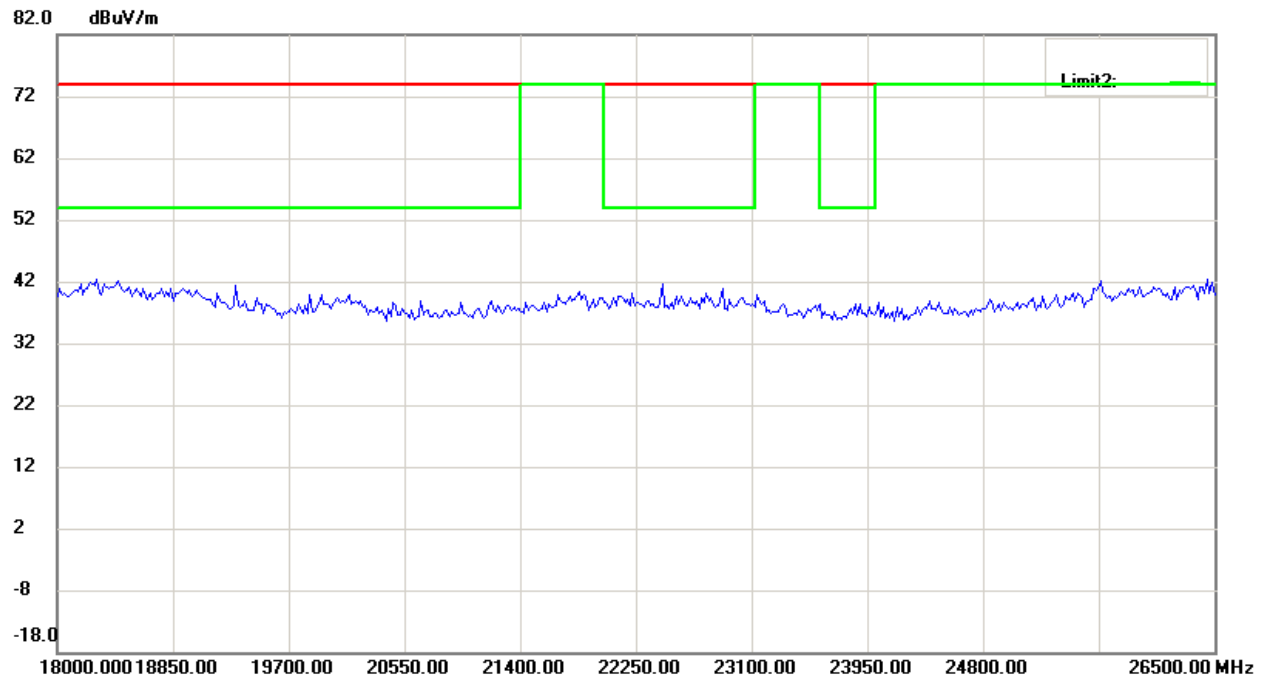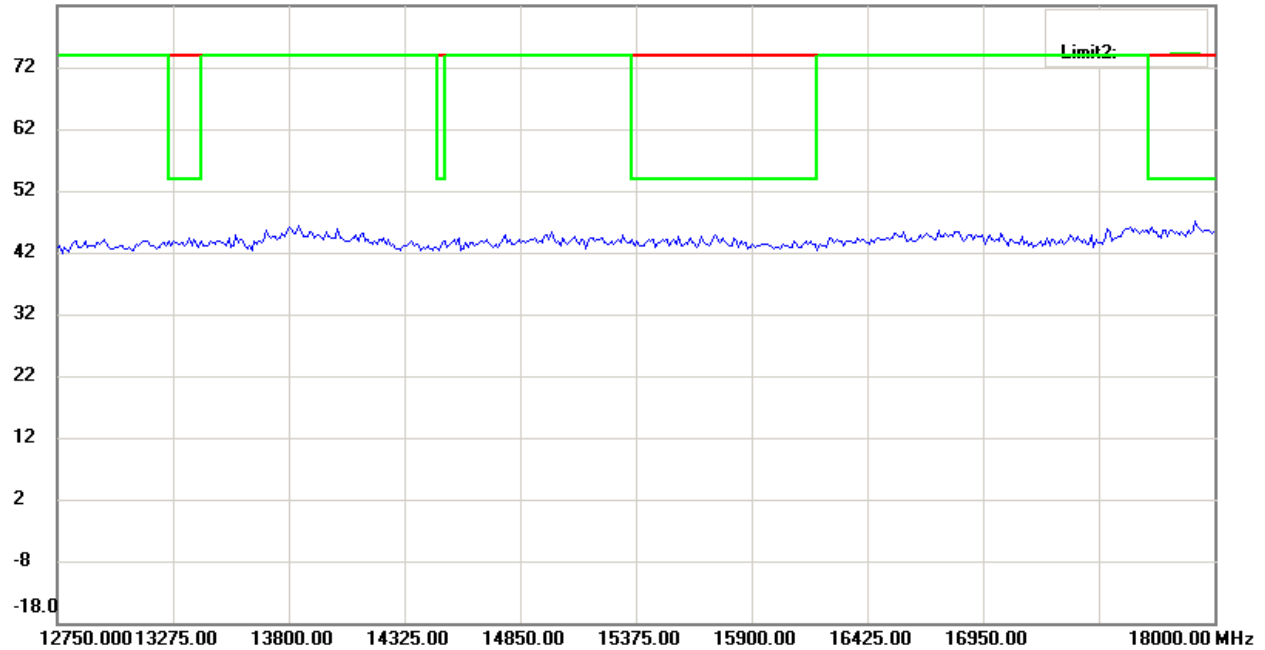

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

## Antenna Polarization V

76.9 dBuV/m

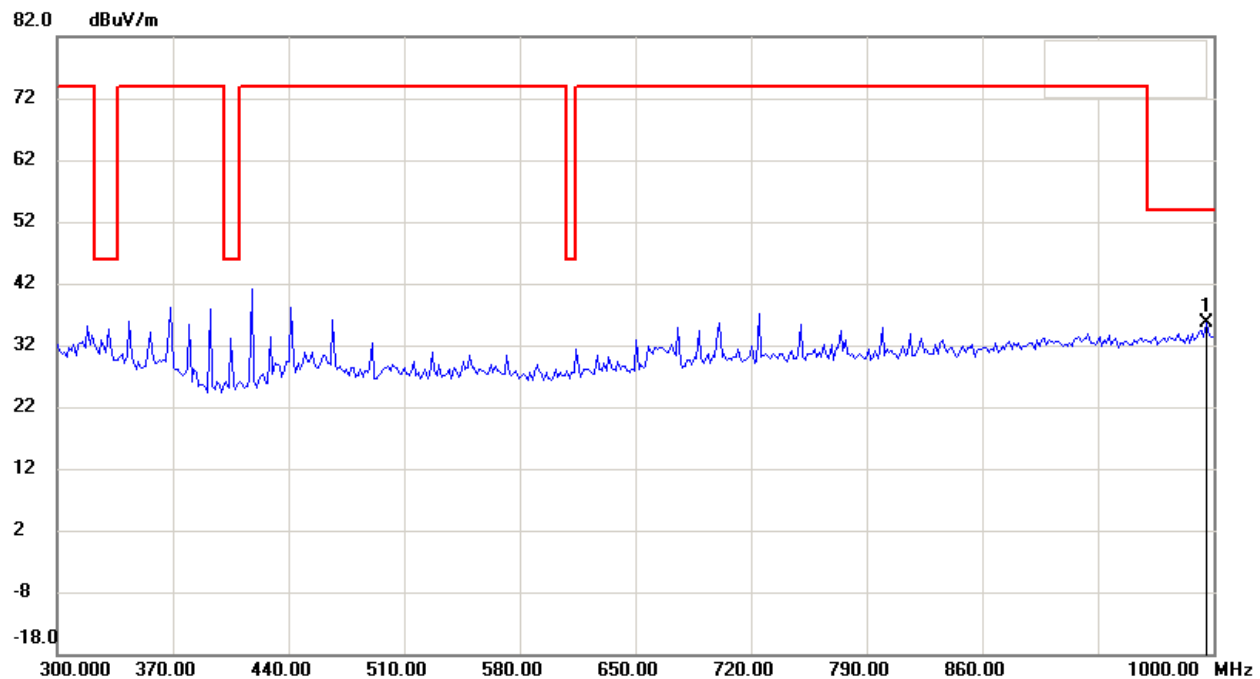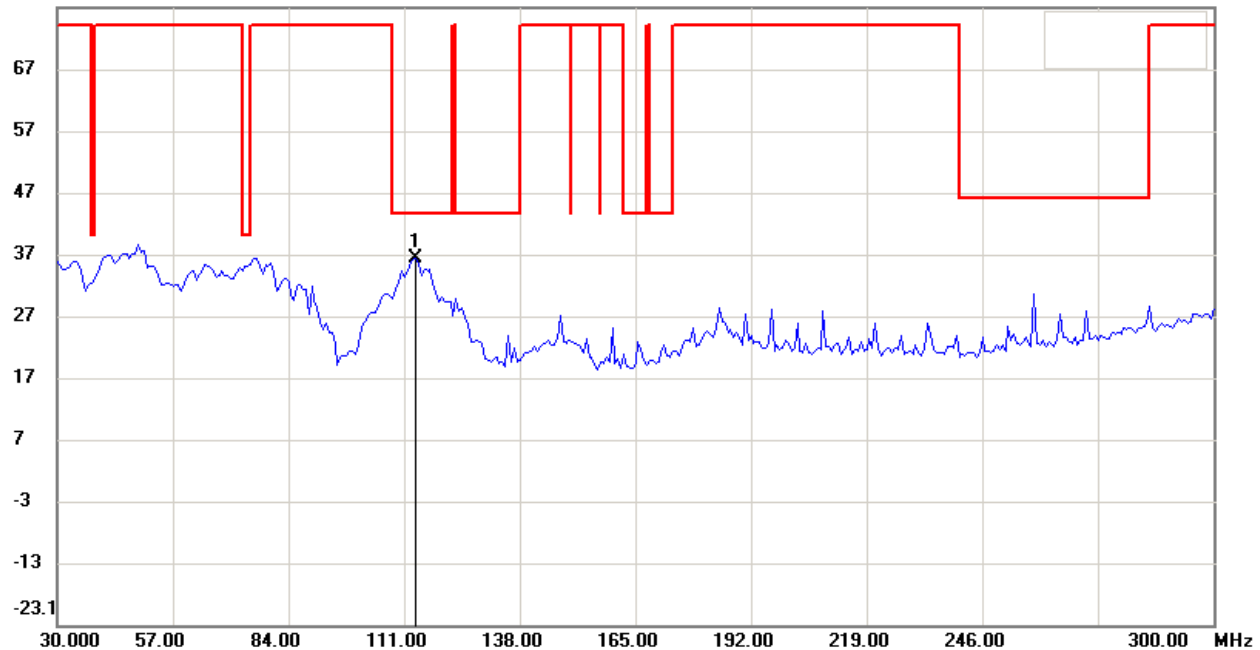

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

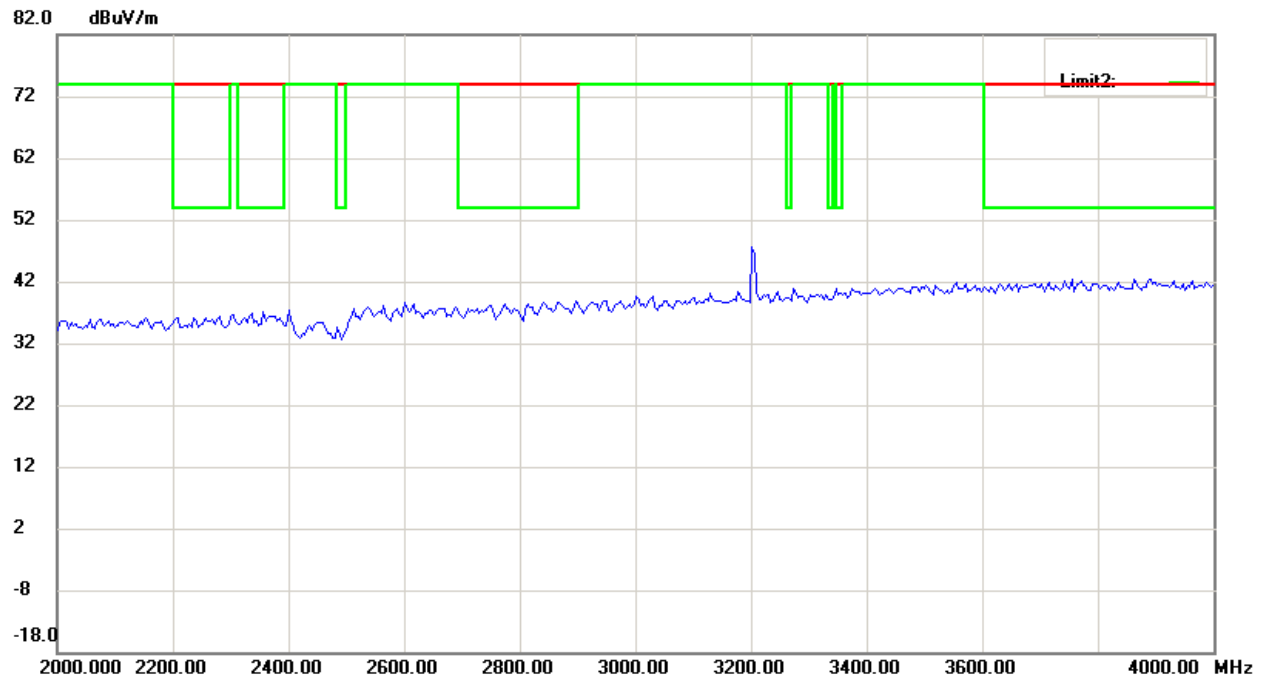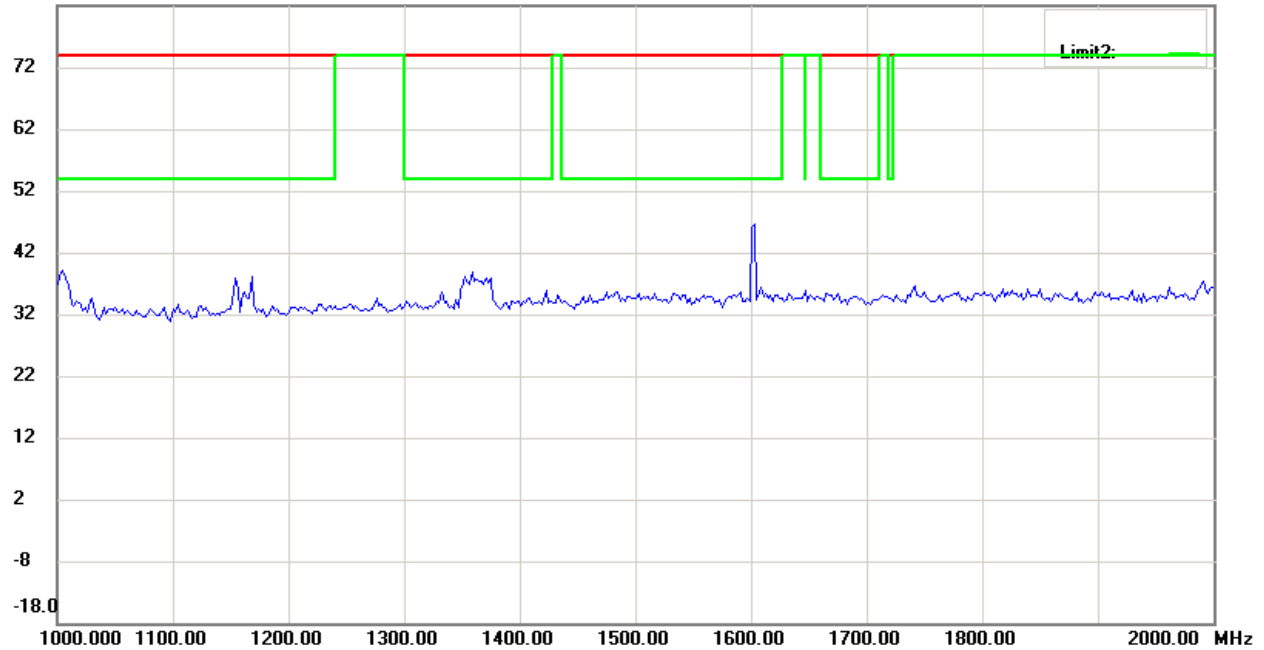

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

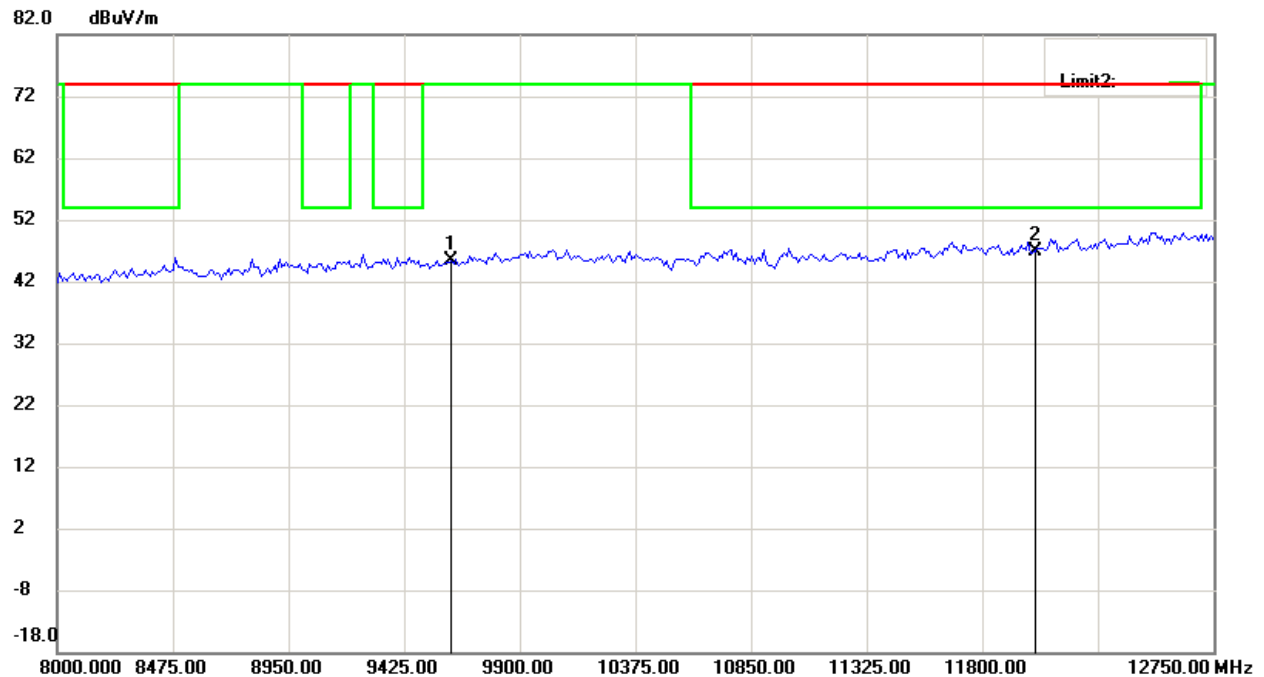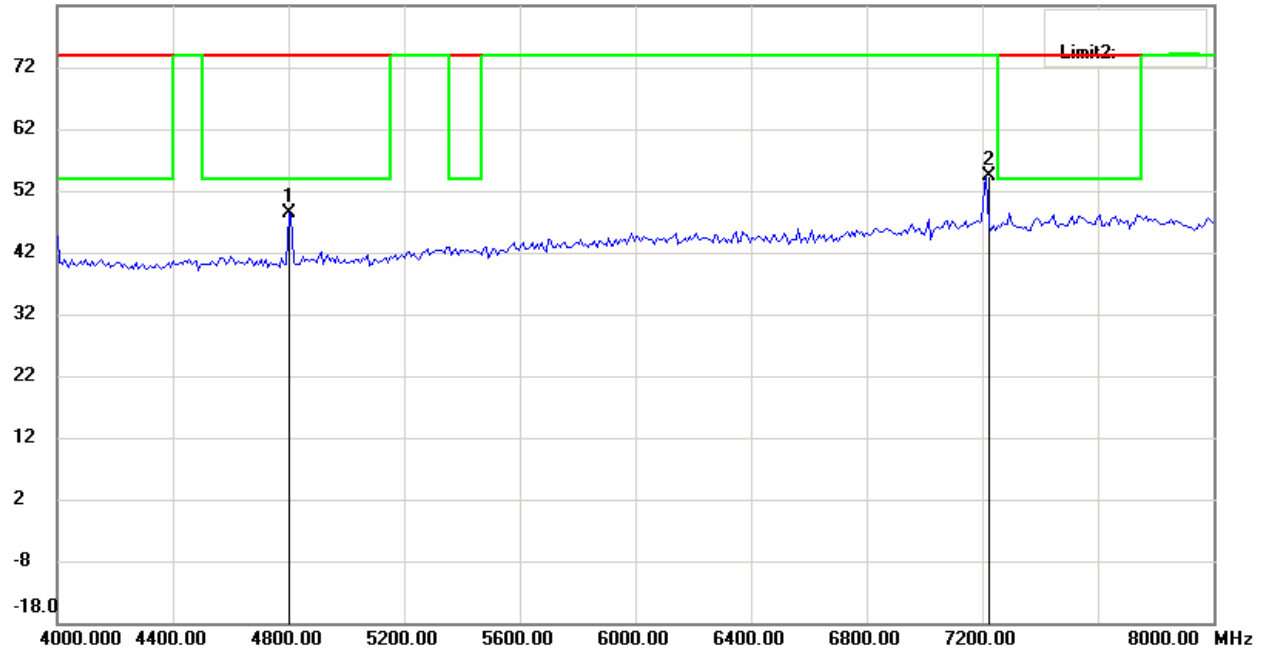

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

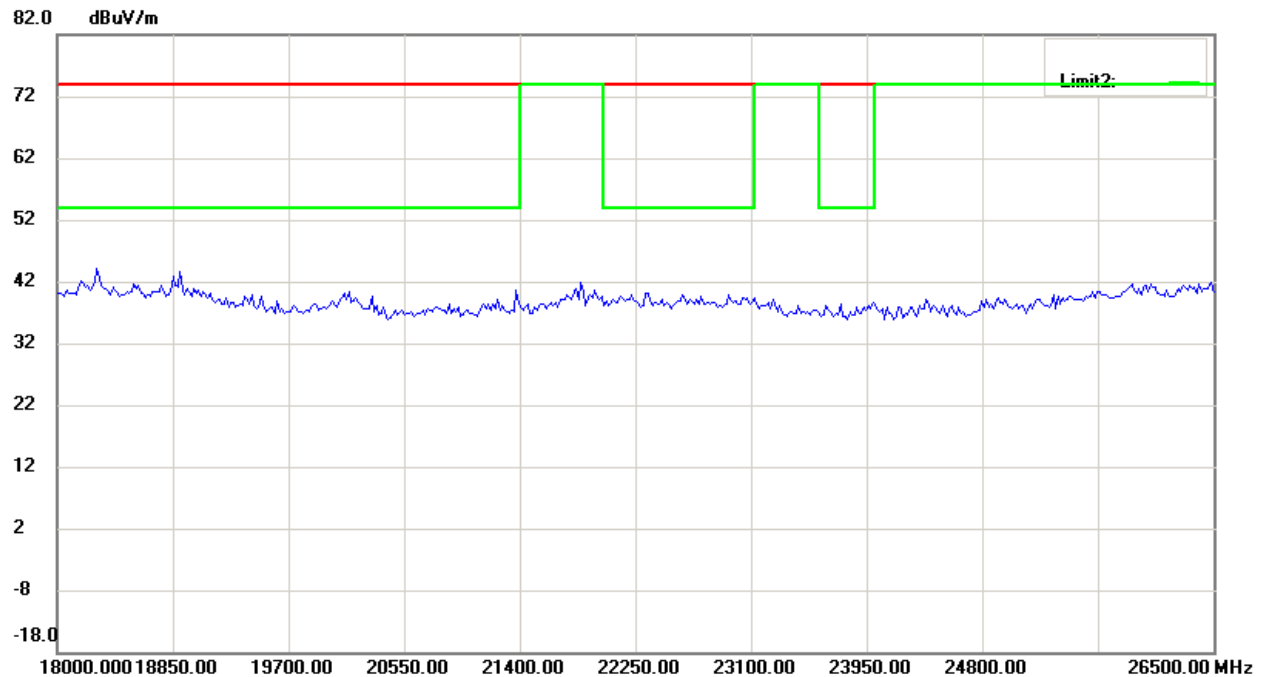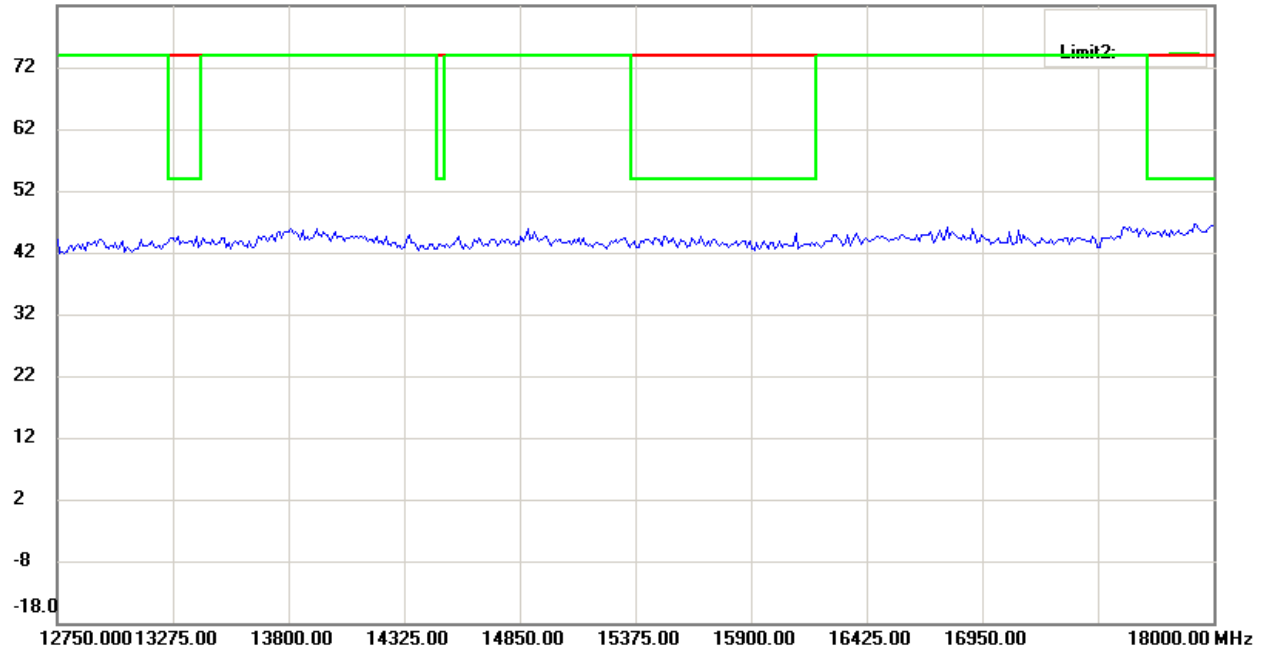

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

Transmitter\_ 2442.2 MHz

Antenna Polarization H

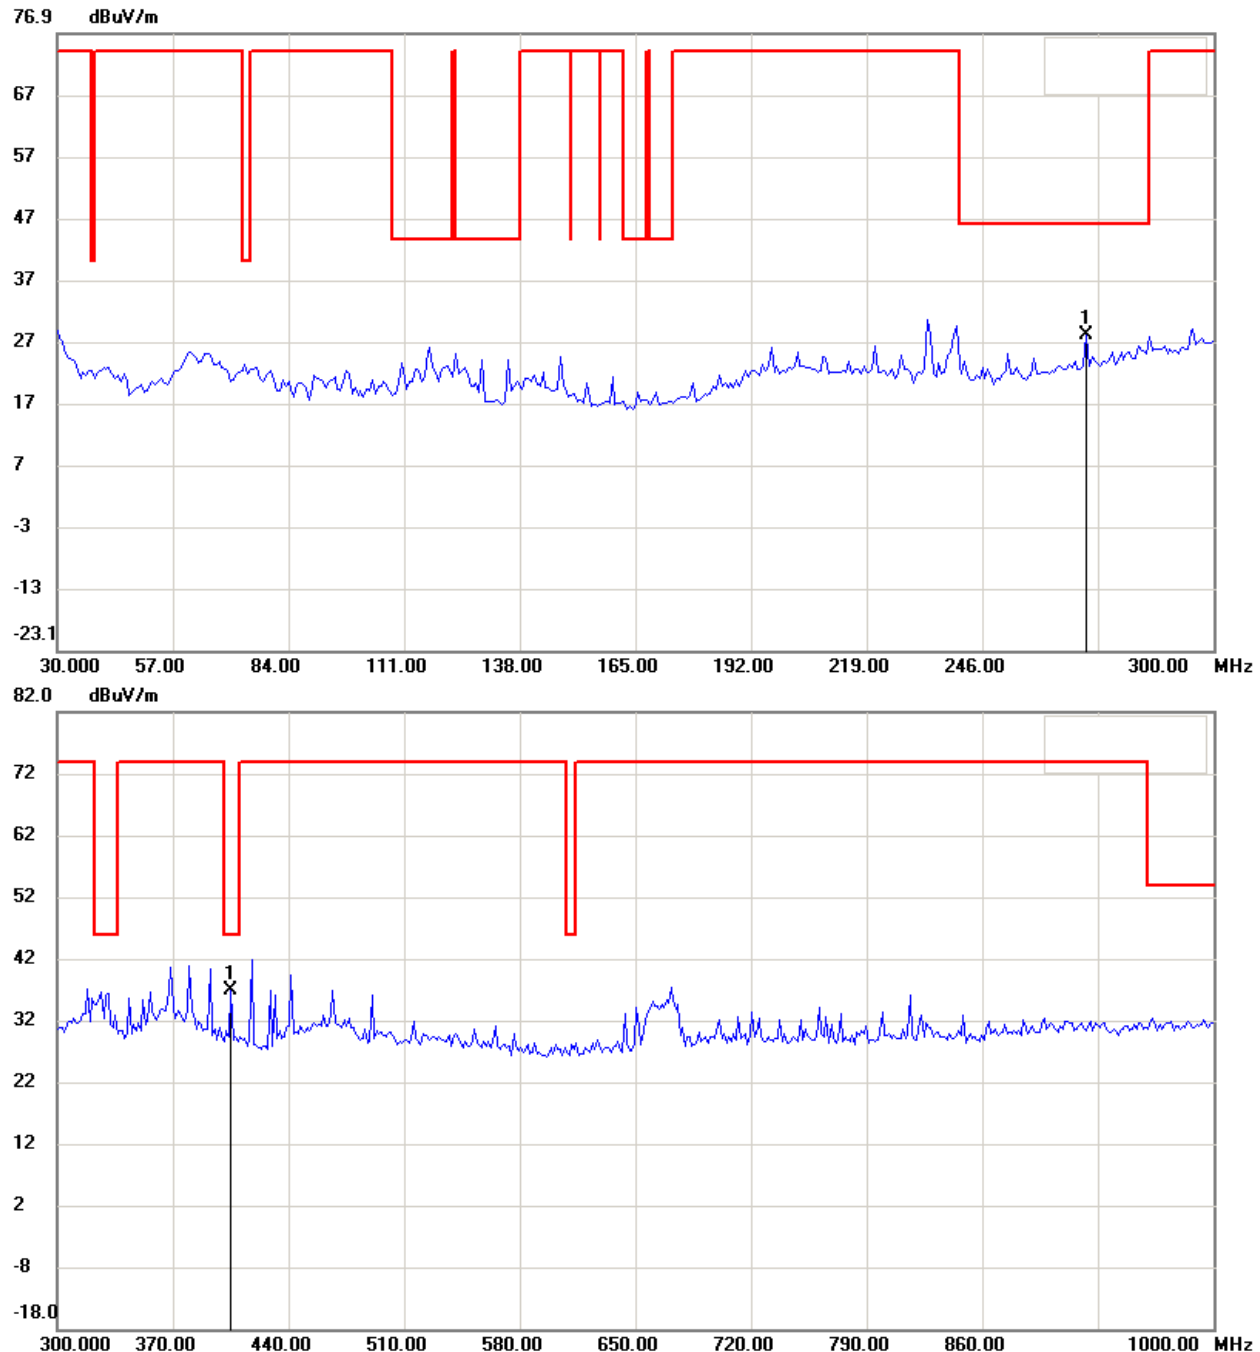

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

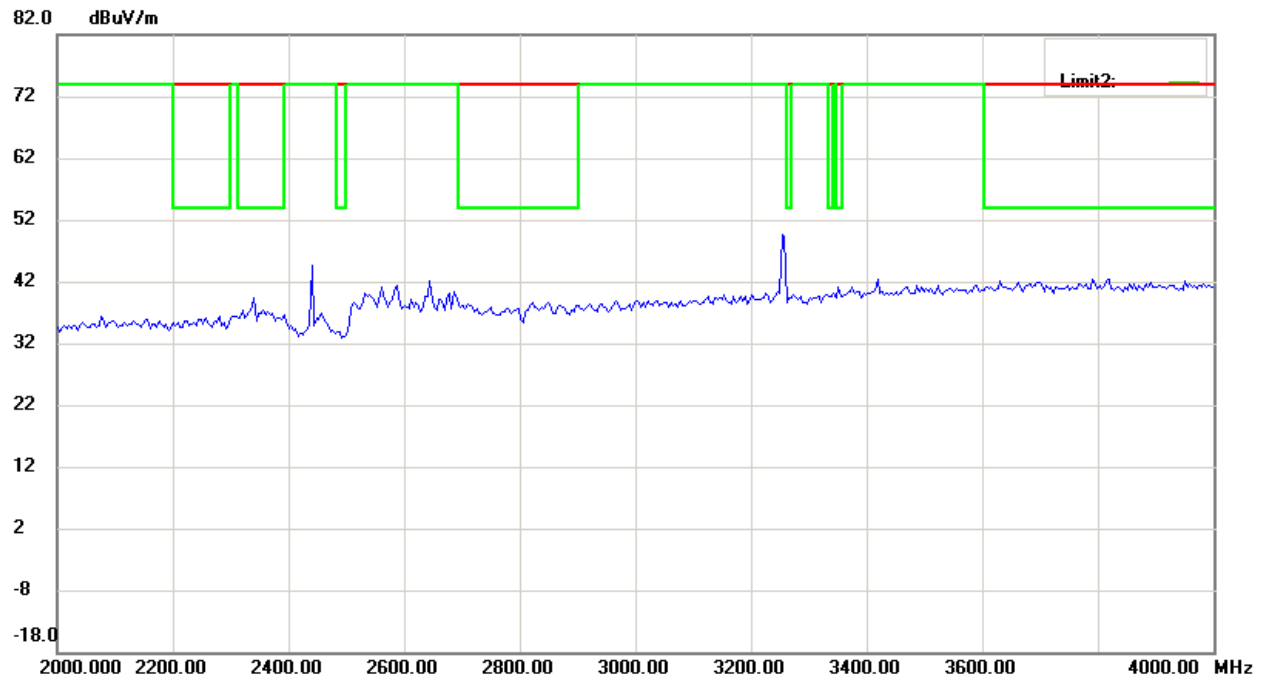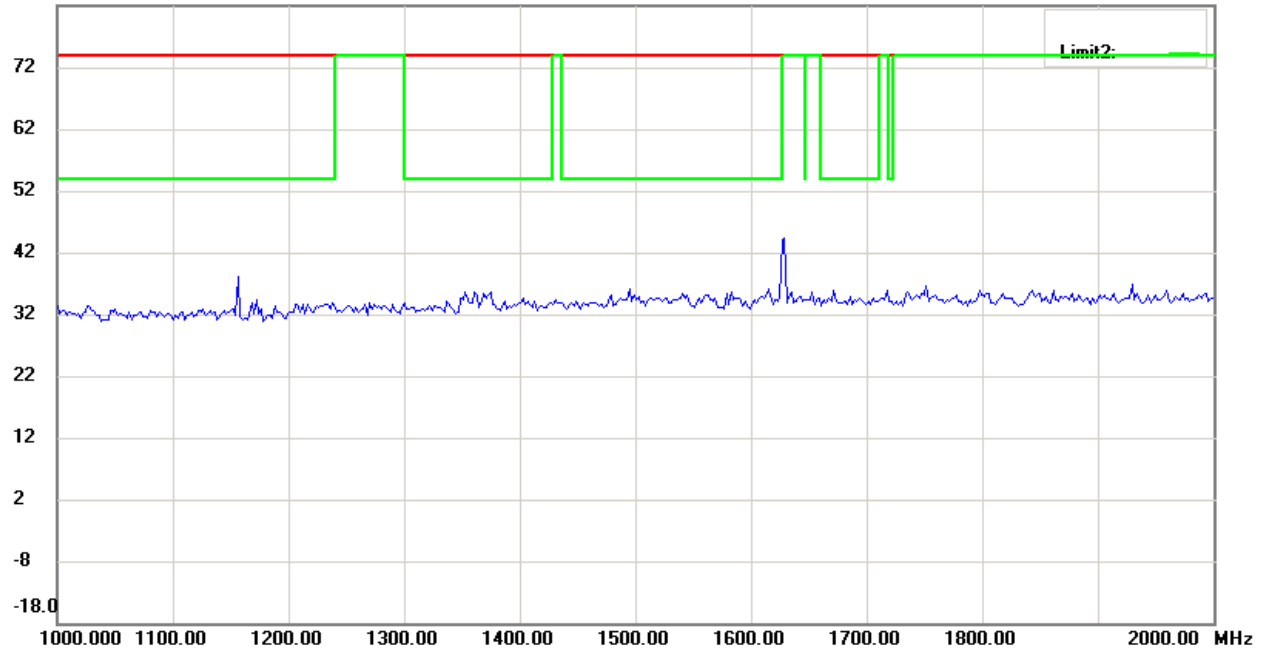

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

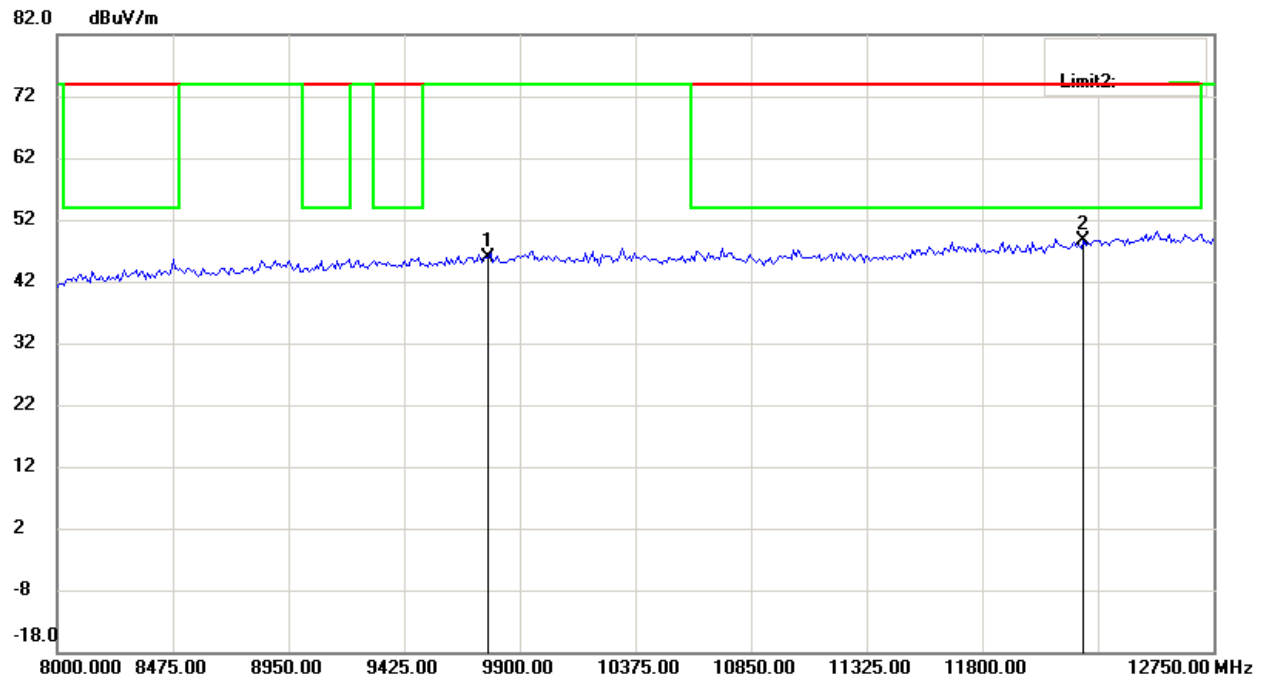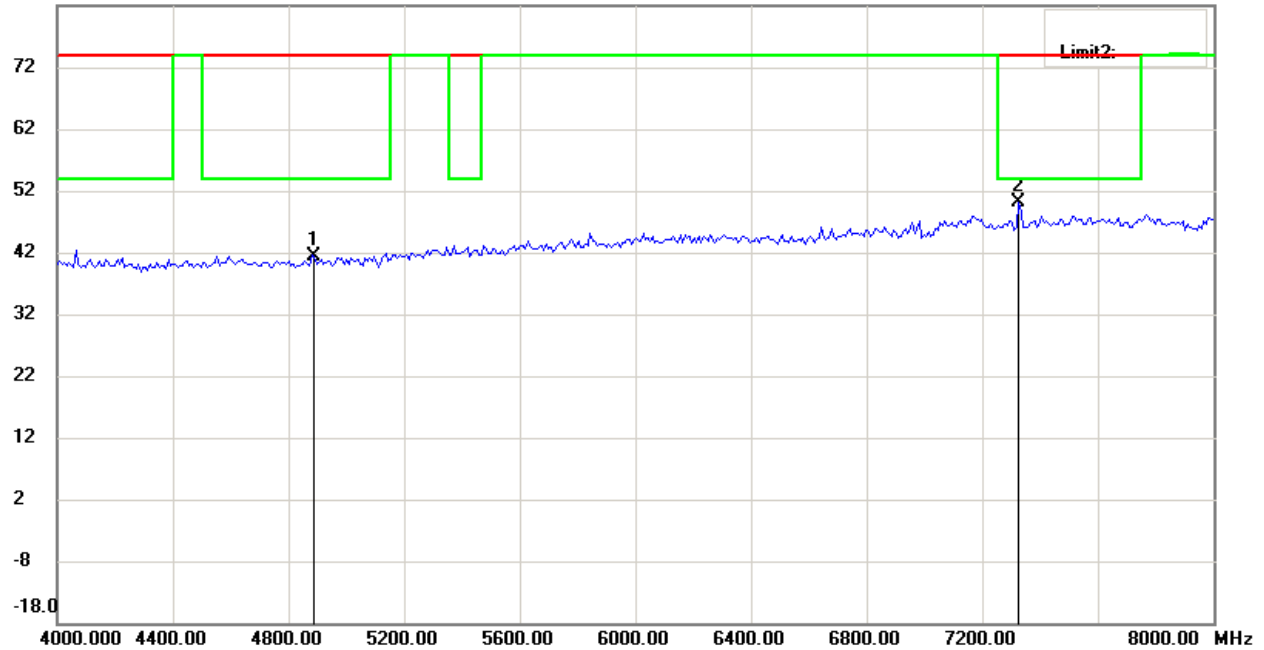

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

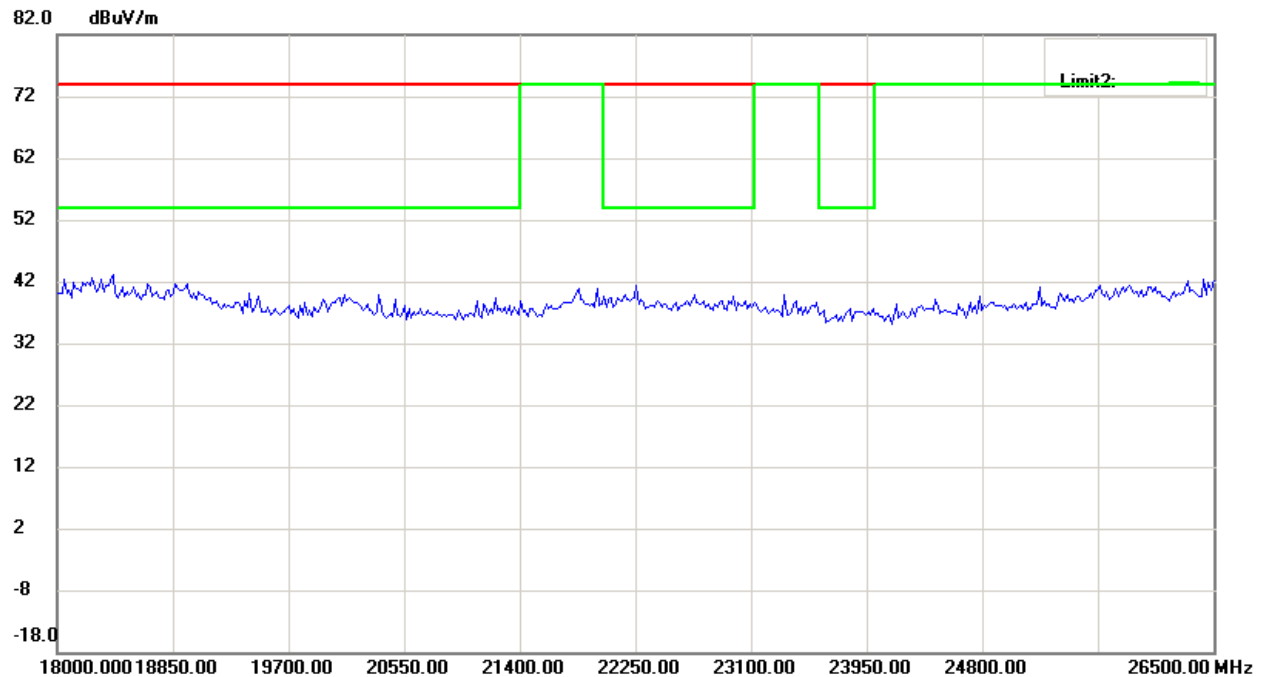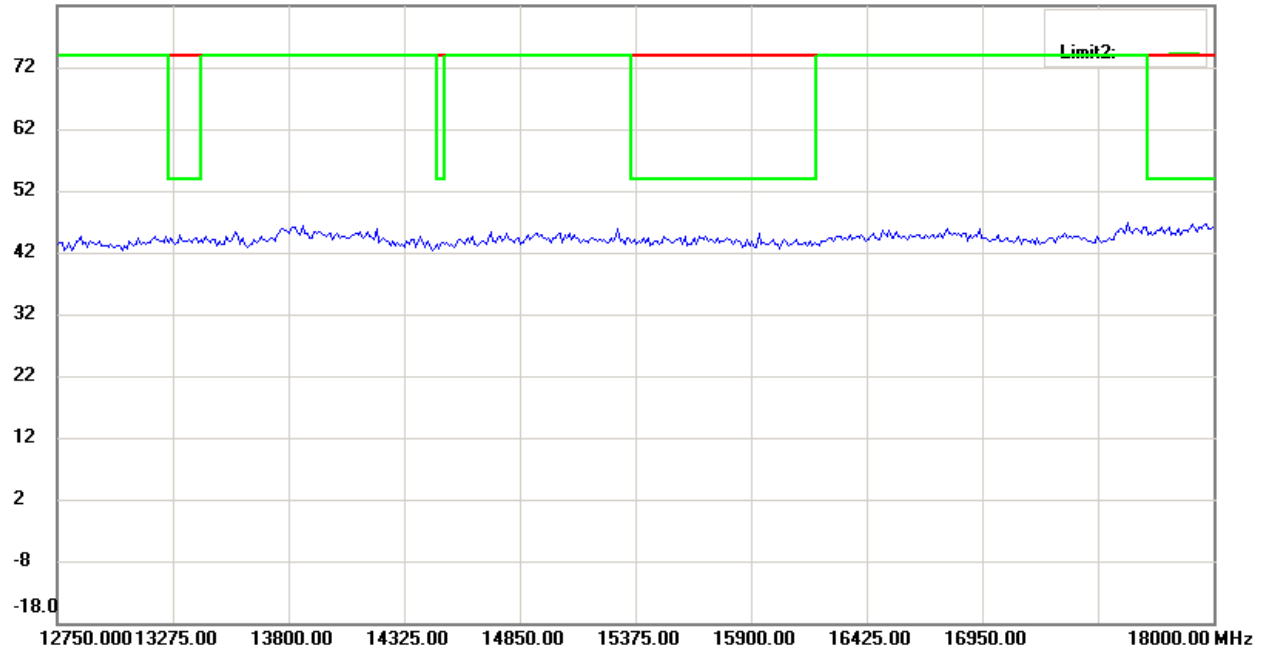

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

## Antenna Polarization V

76.9 dBuV/m

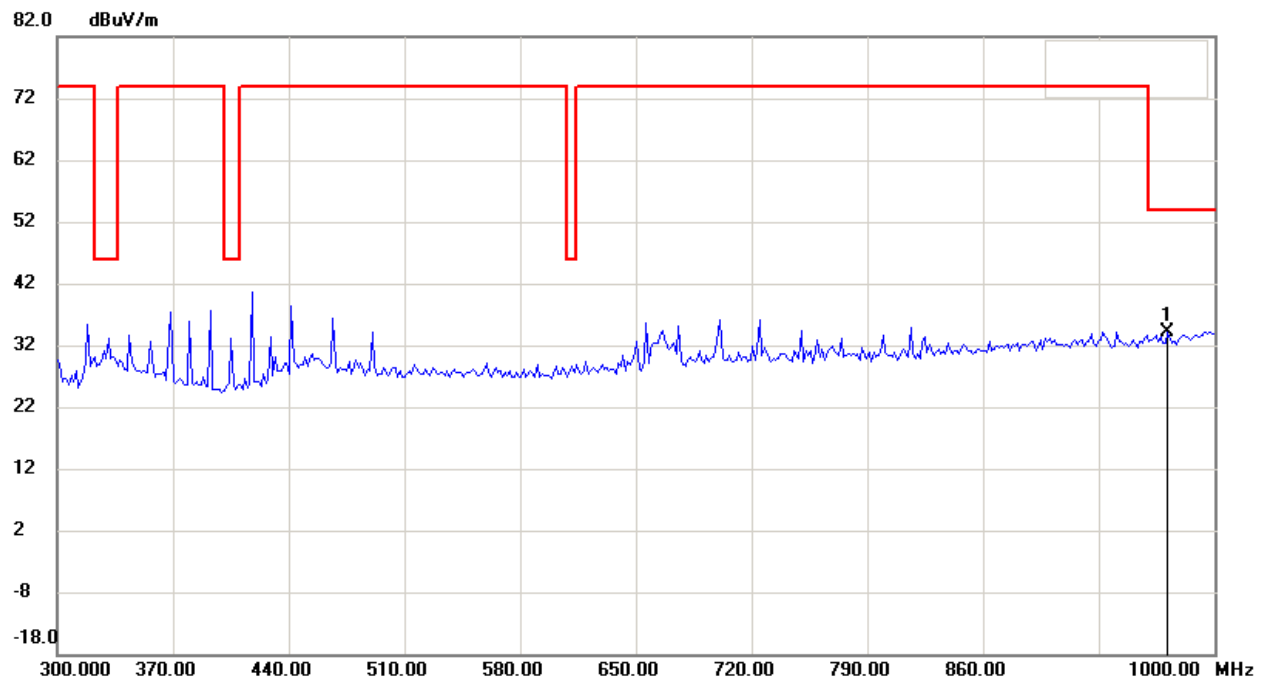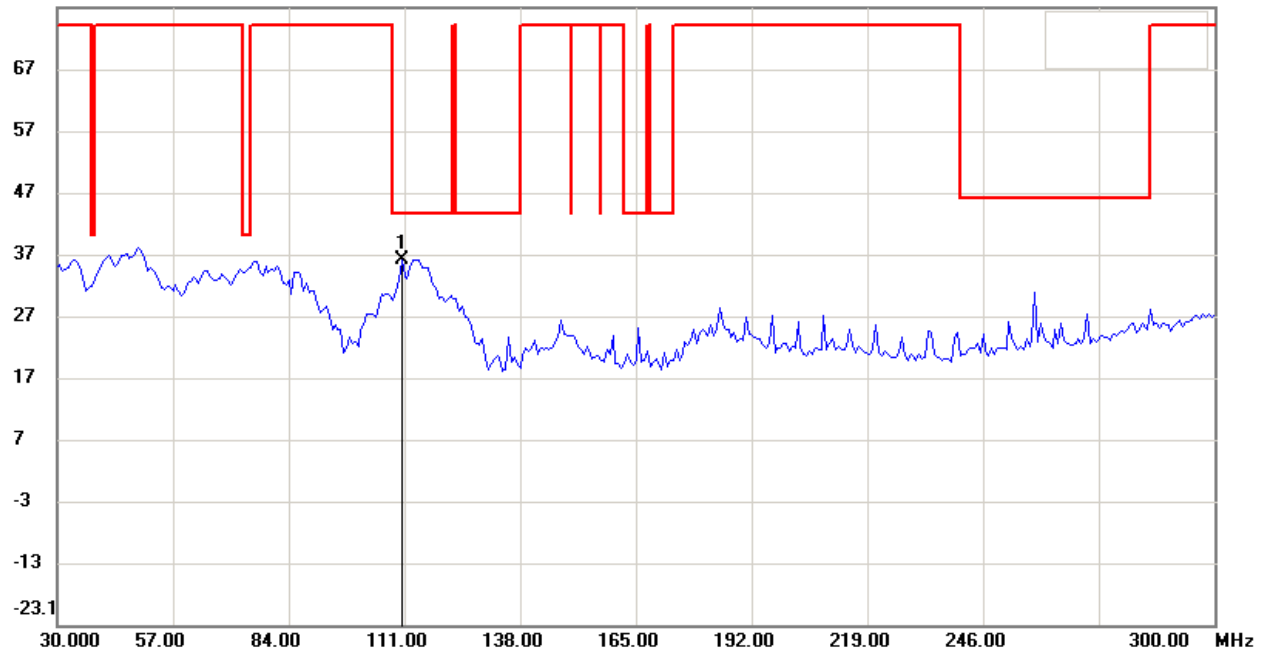

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

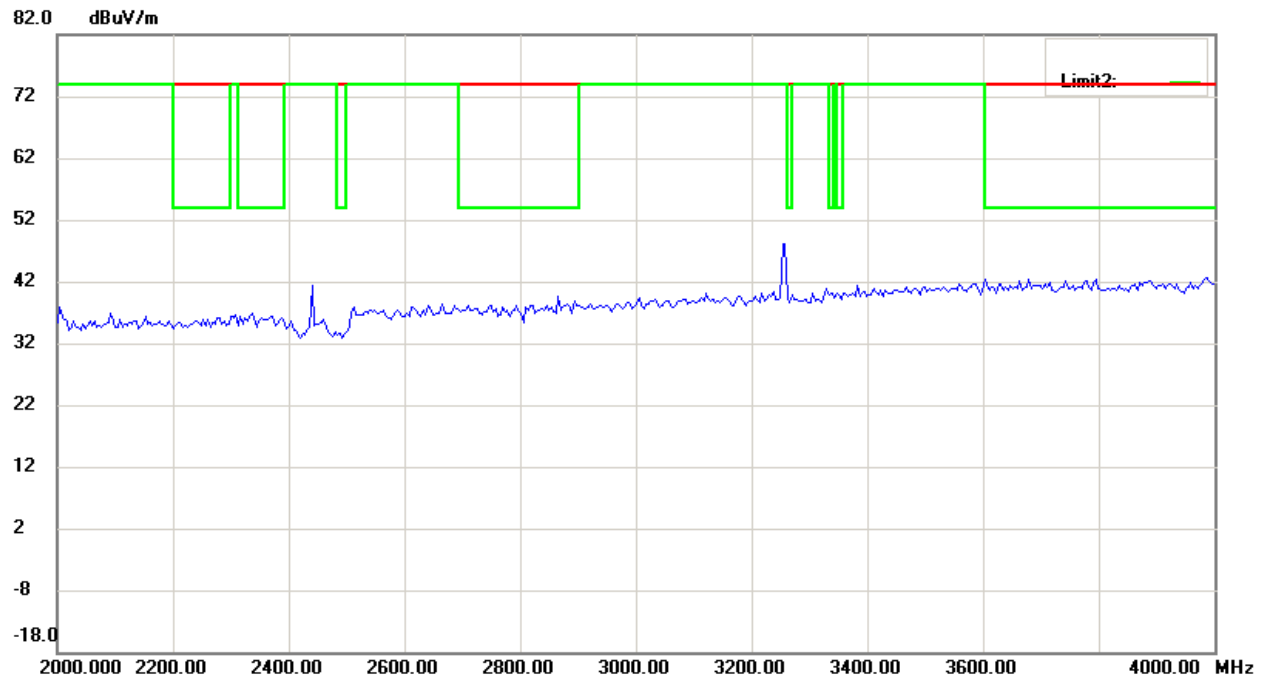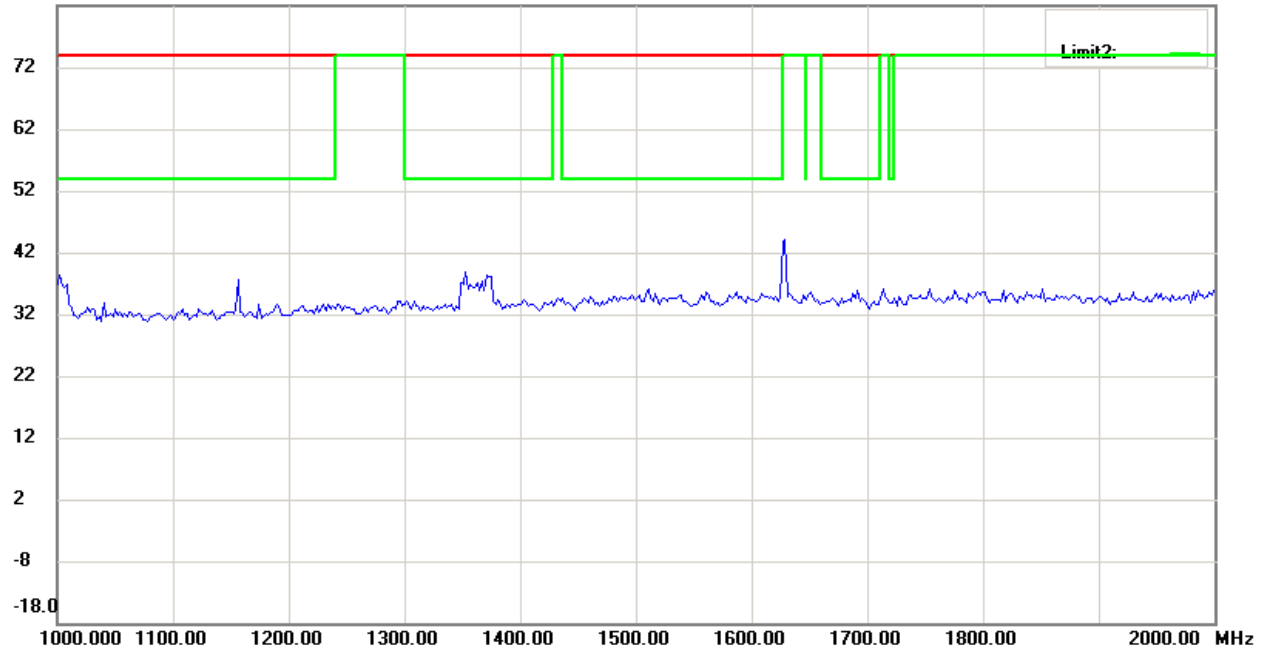

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

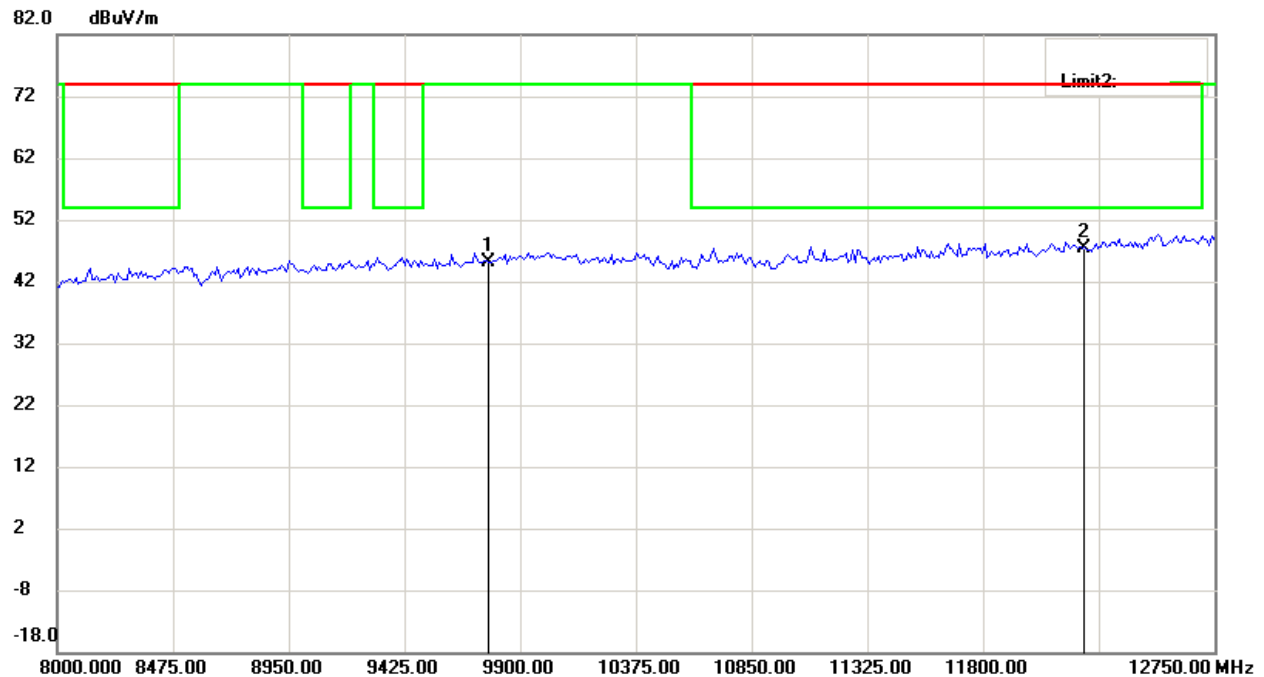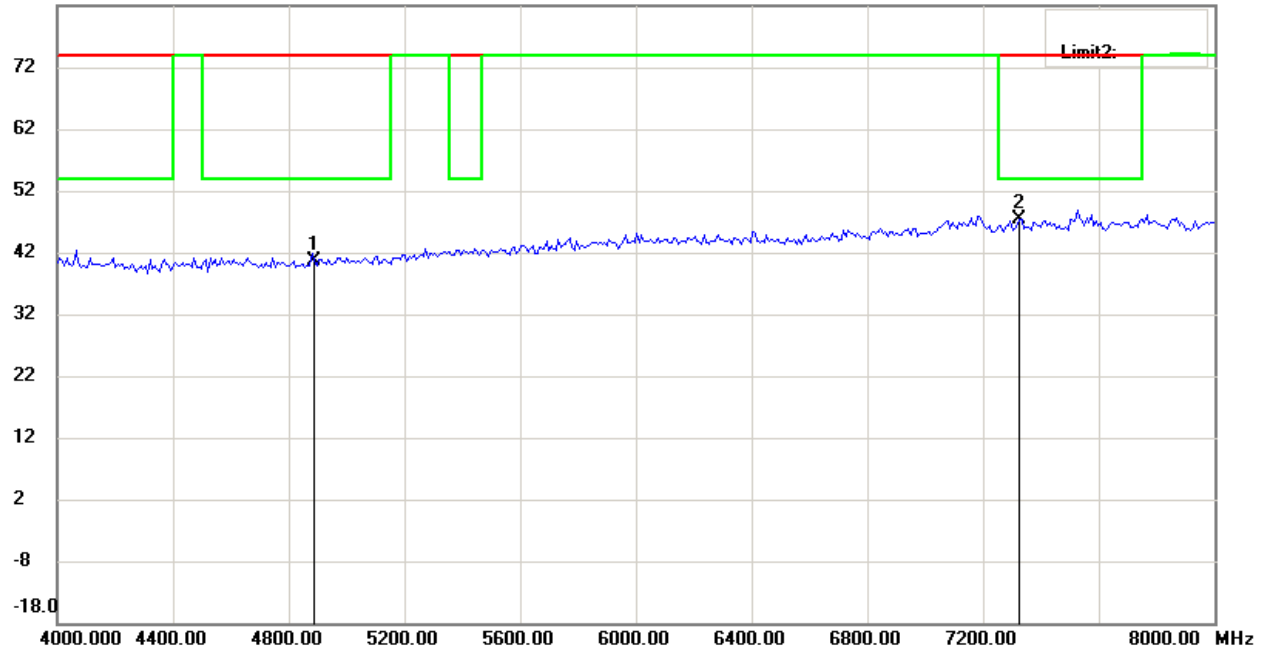

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

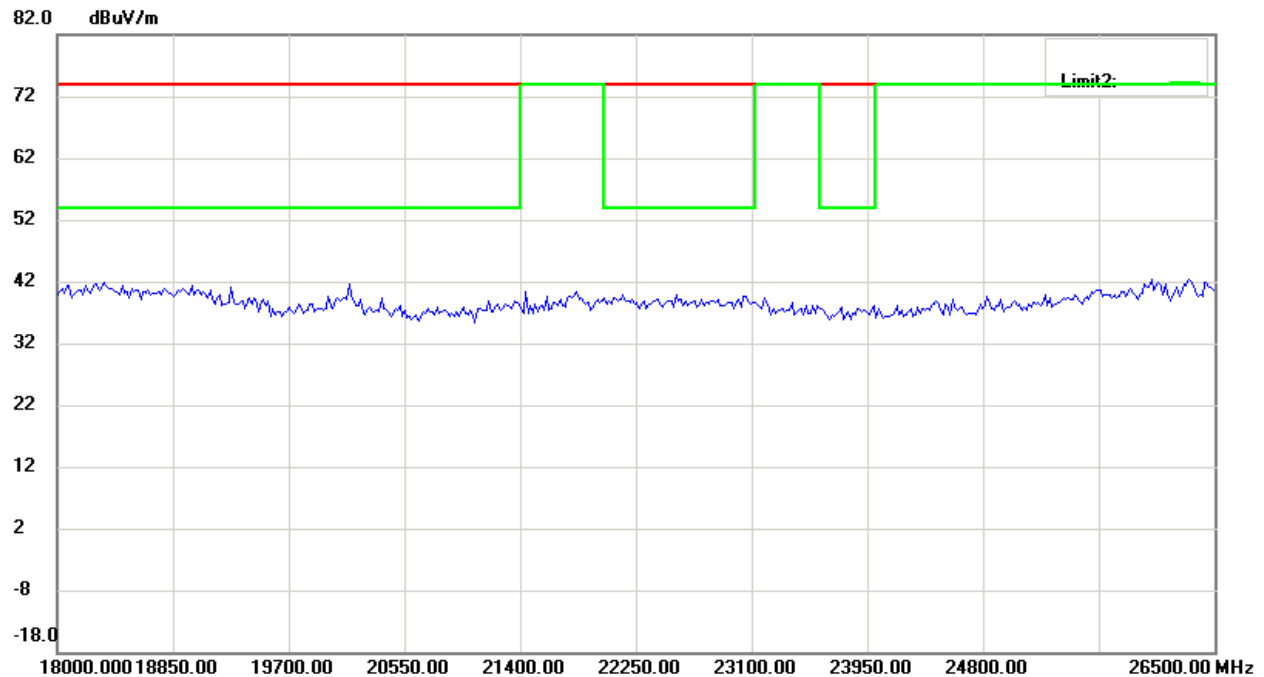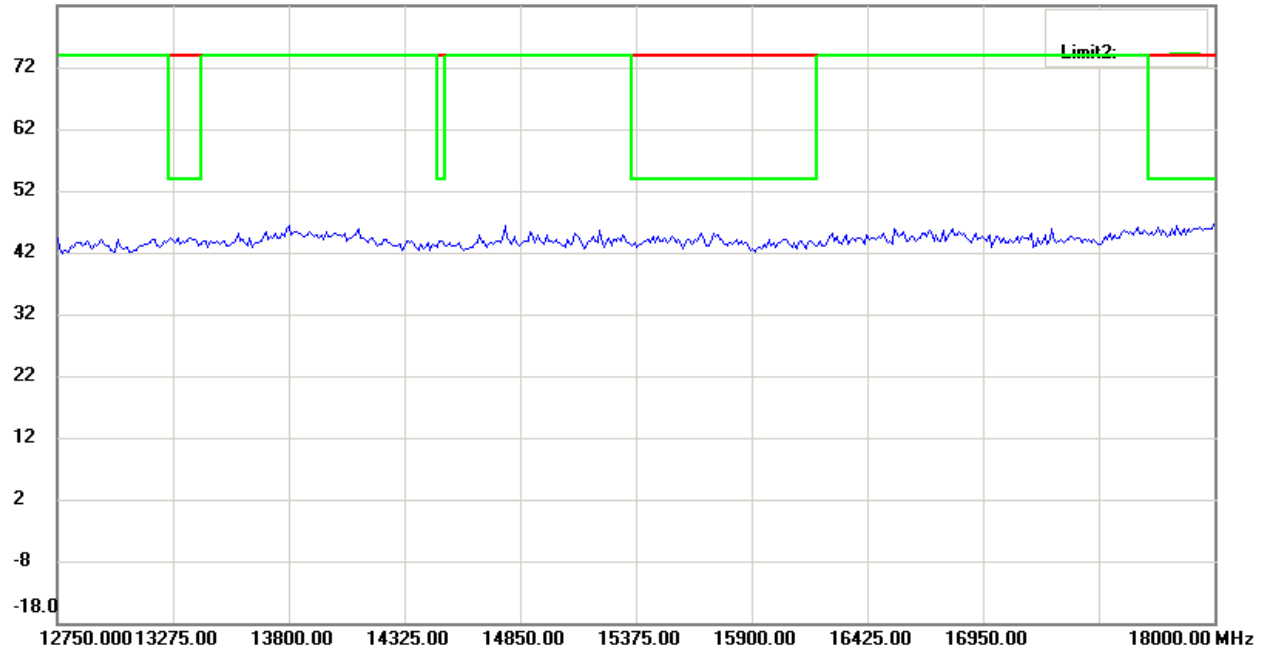

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.



# Worldwide Testing Services(Taiwan) Co., Ltd.


Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

Transmitter\_ 2479.1 MHz

Antenna Polarization H

76.9 dBuV/m

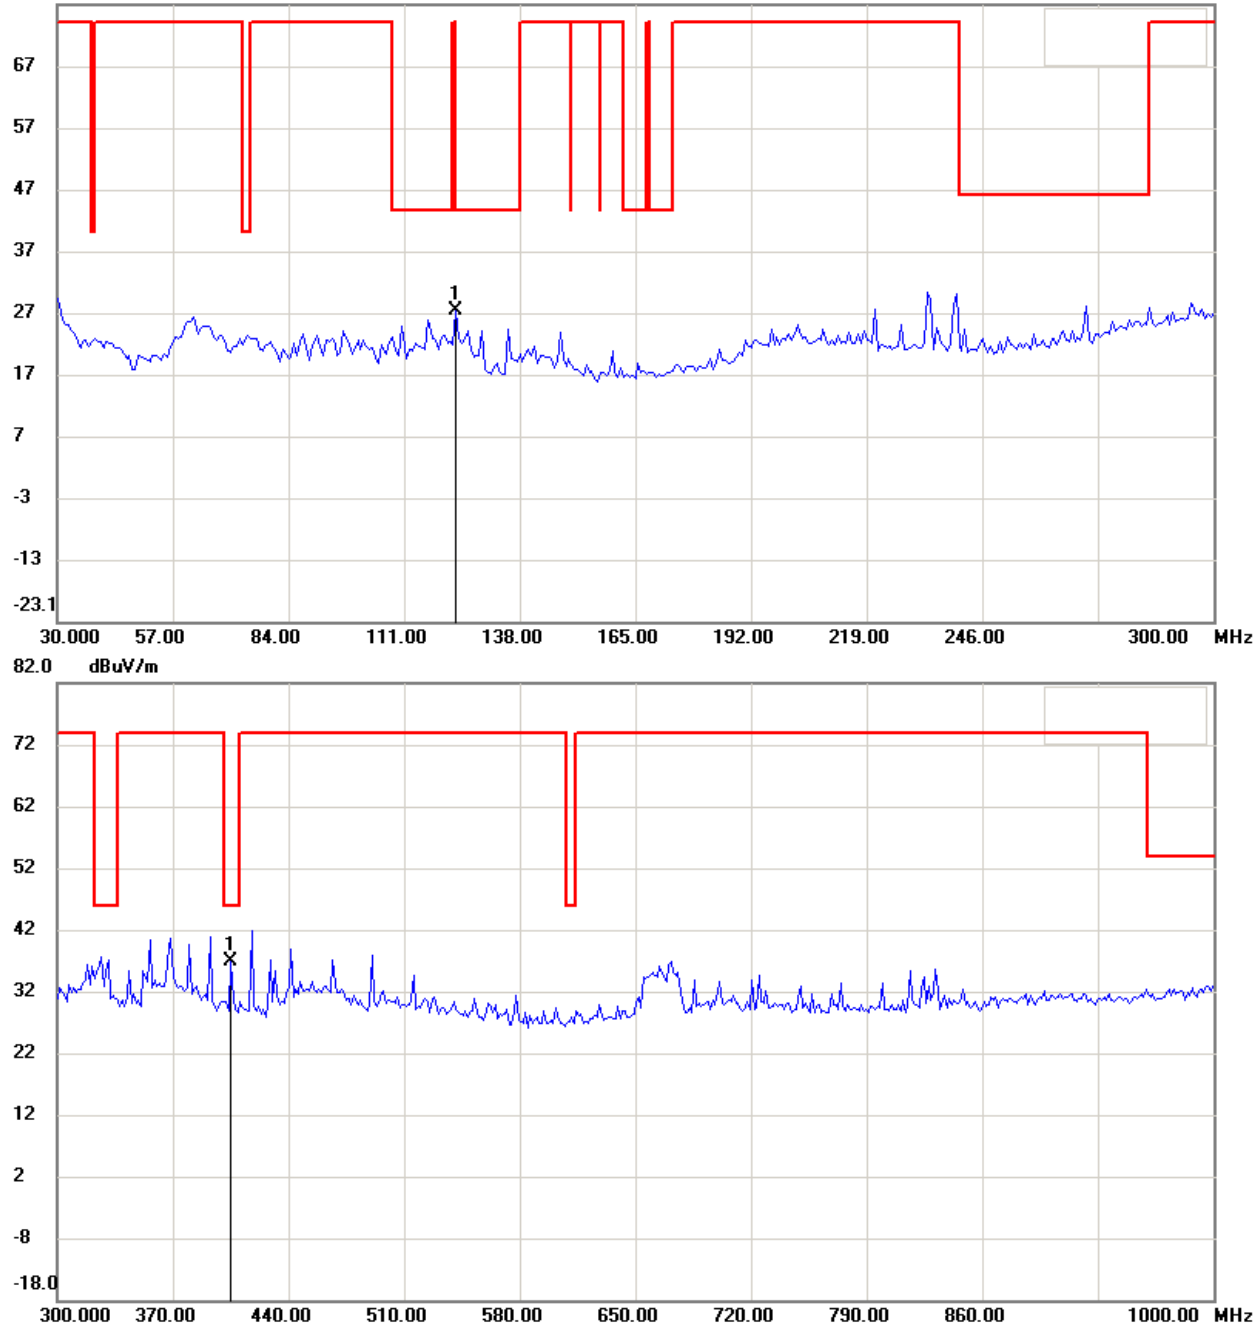

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

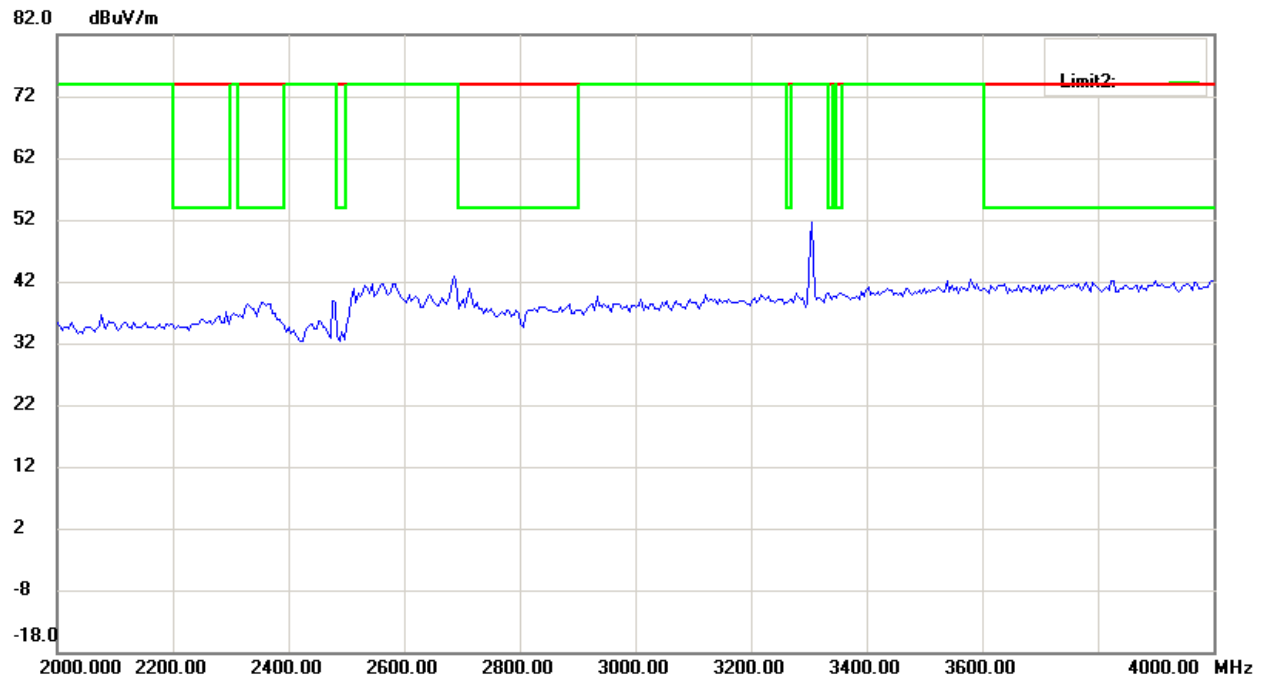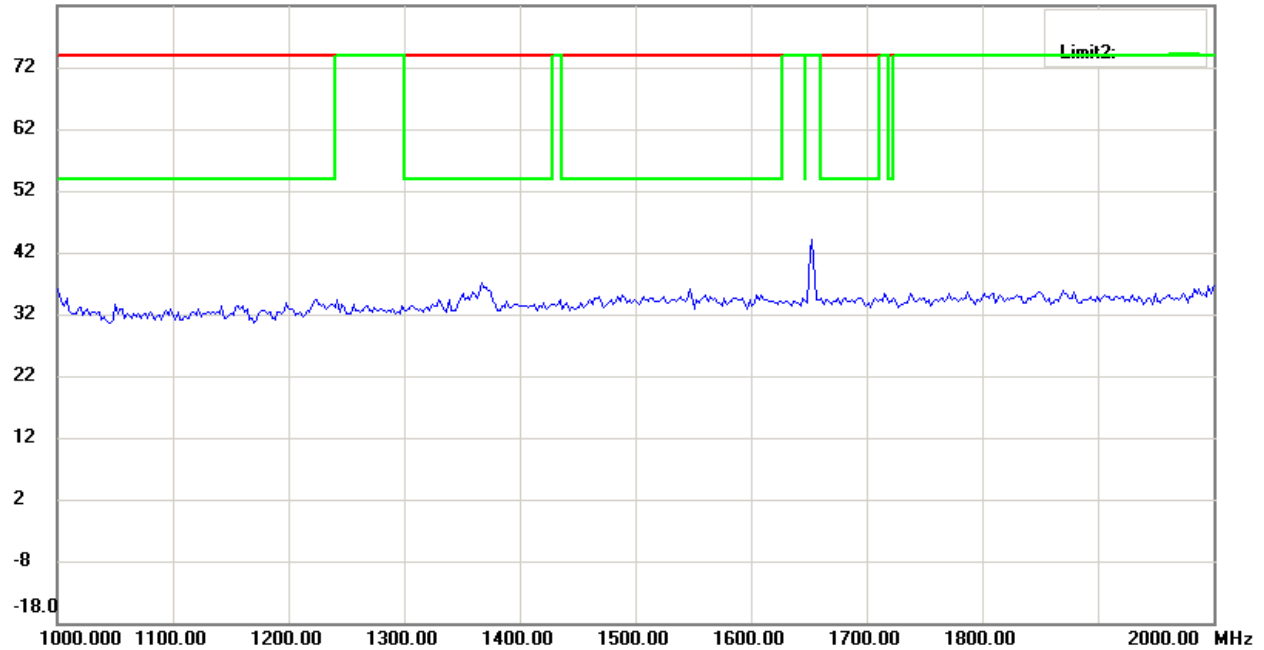

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

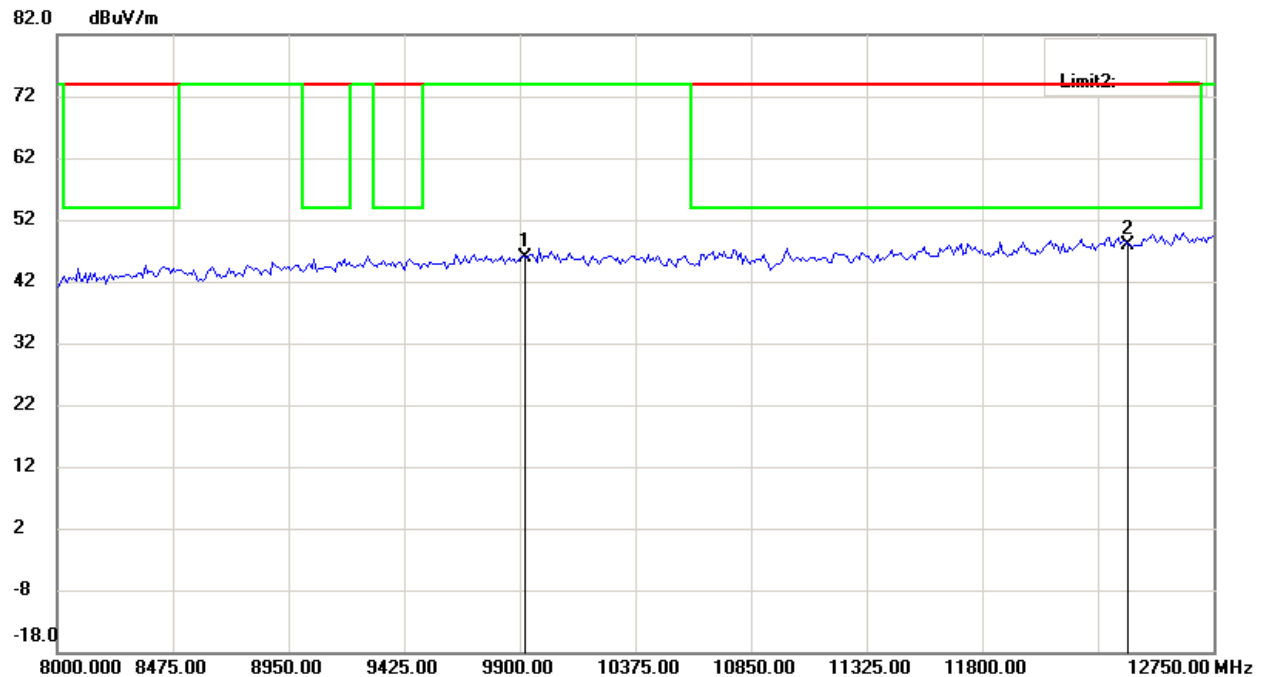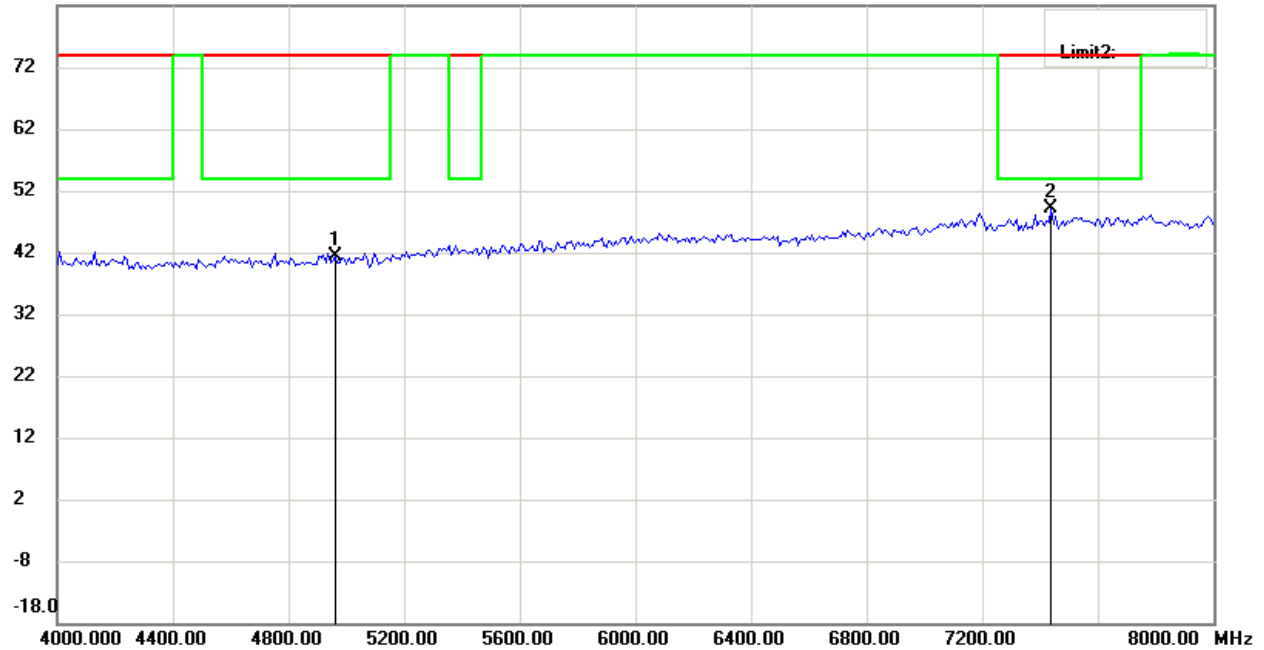

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

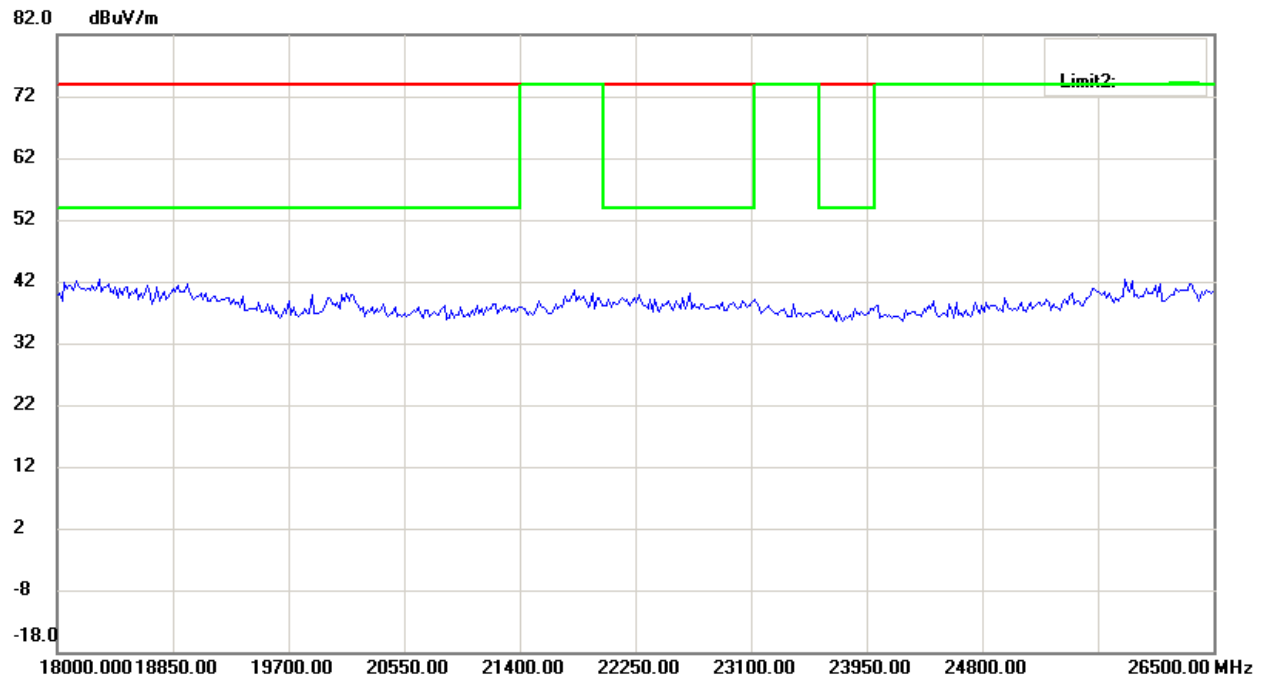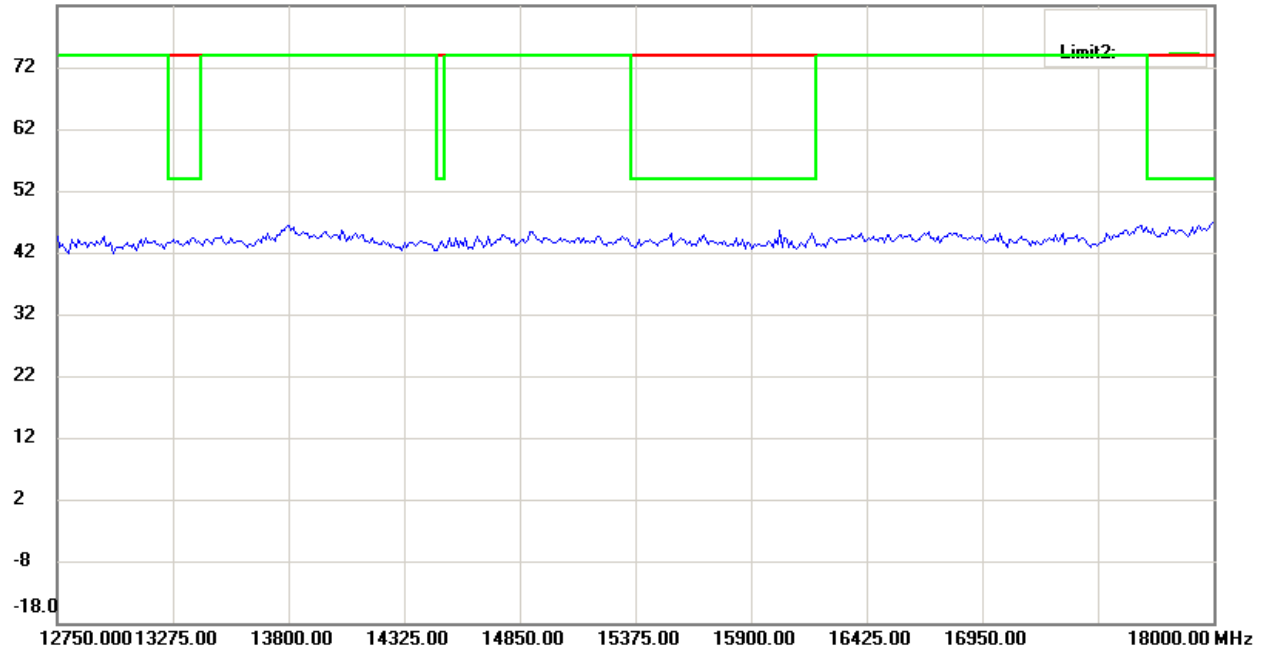

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

## Antenna Polarization V

76.9 dBuV/m

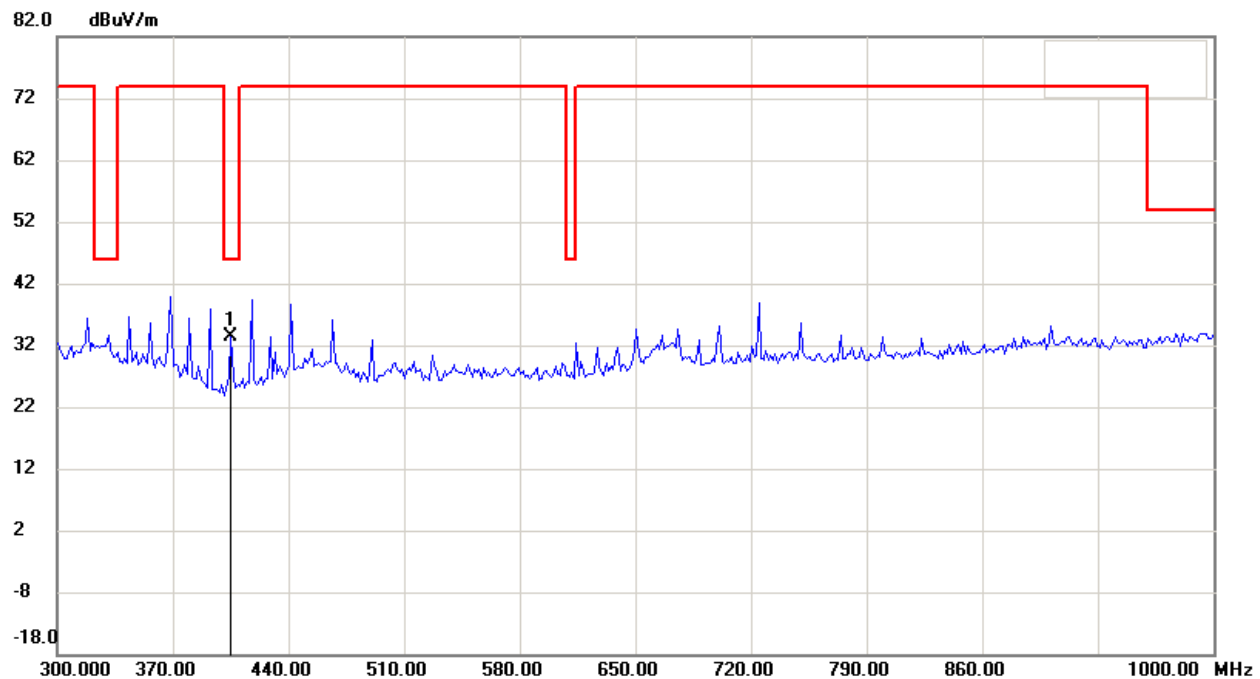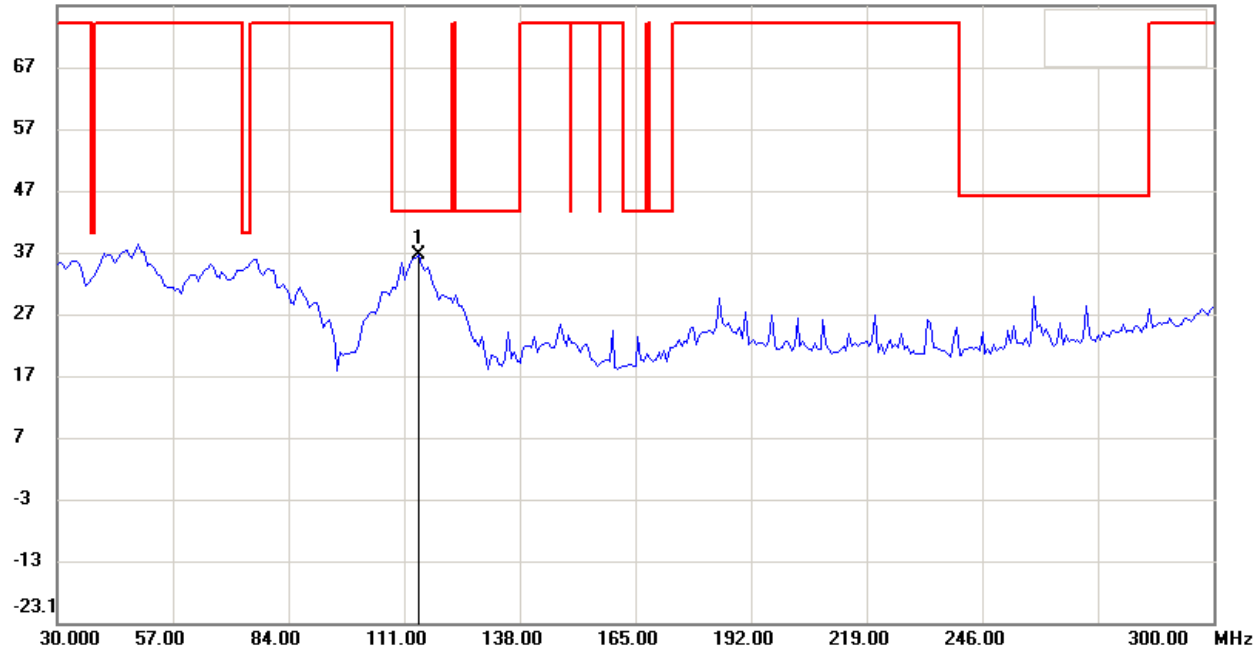

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

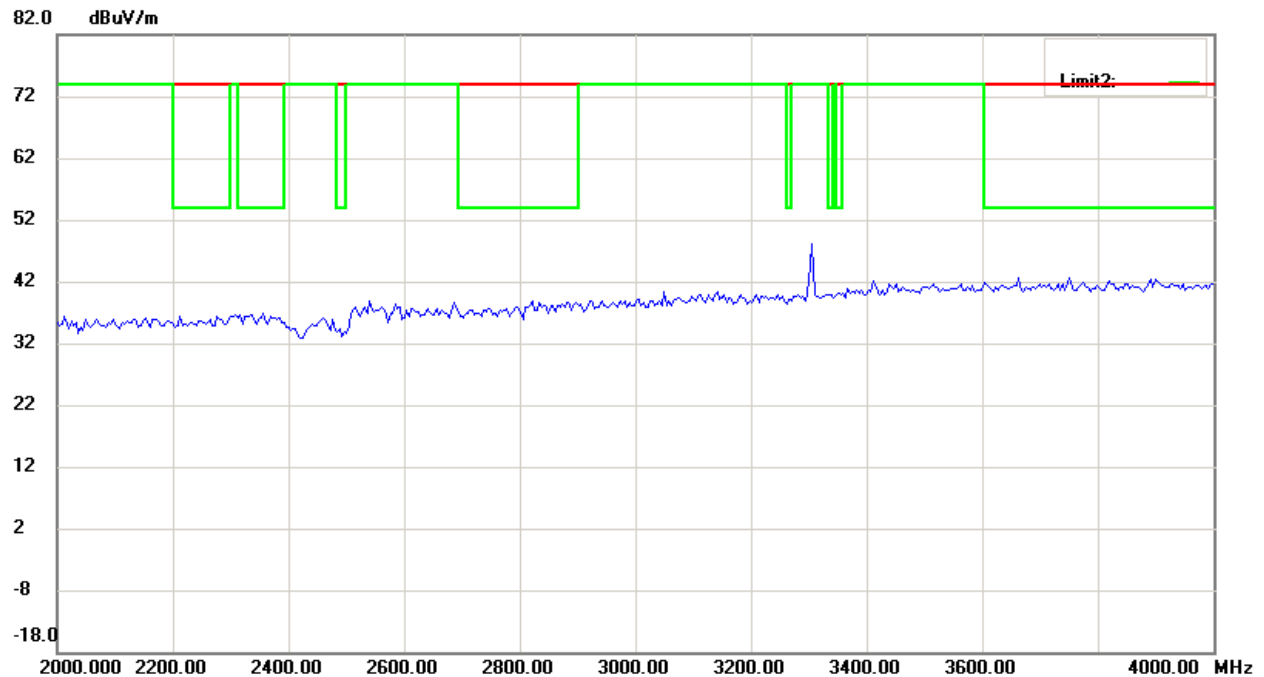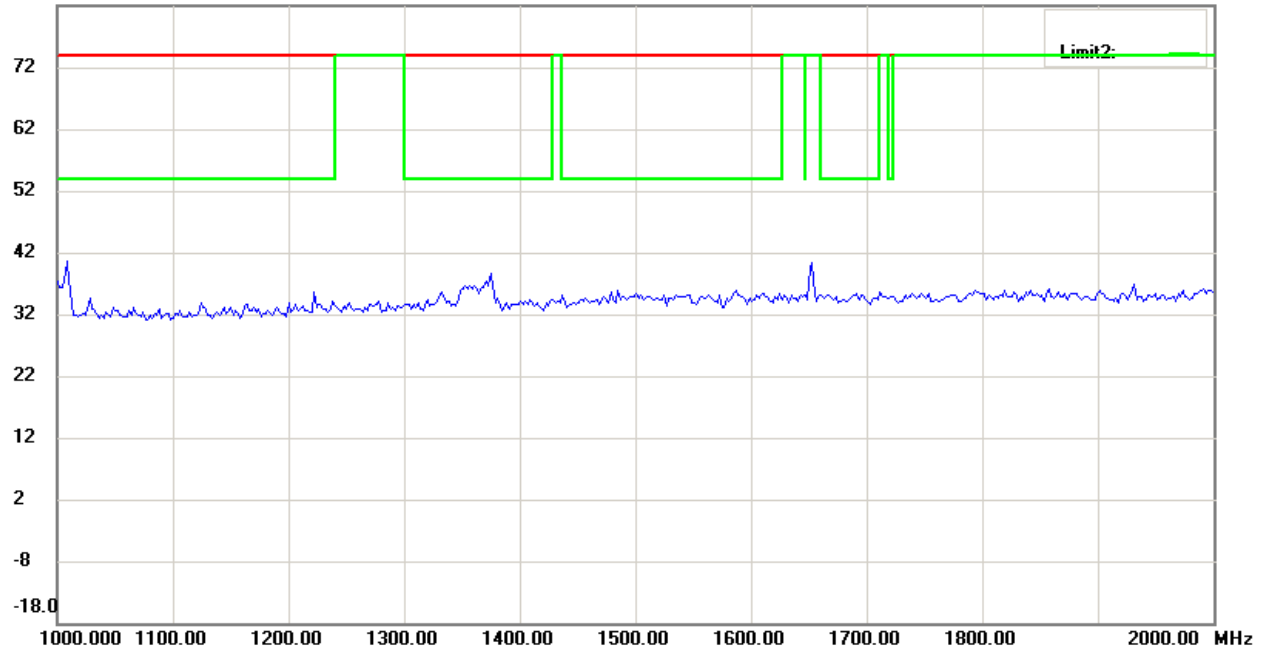

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

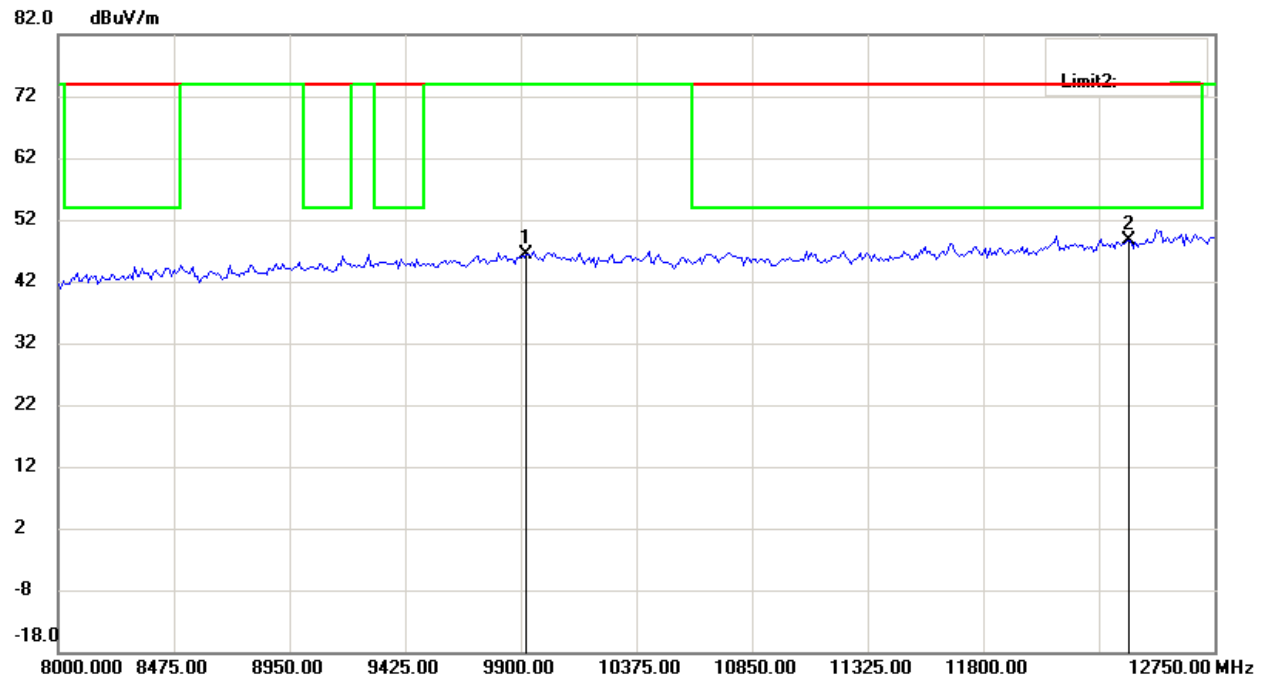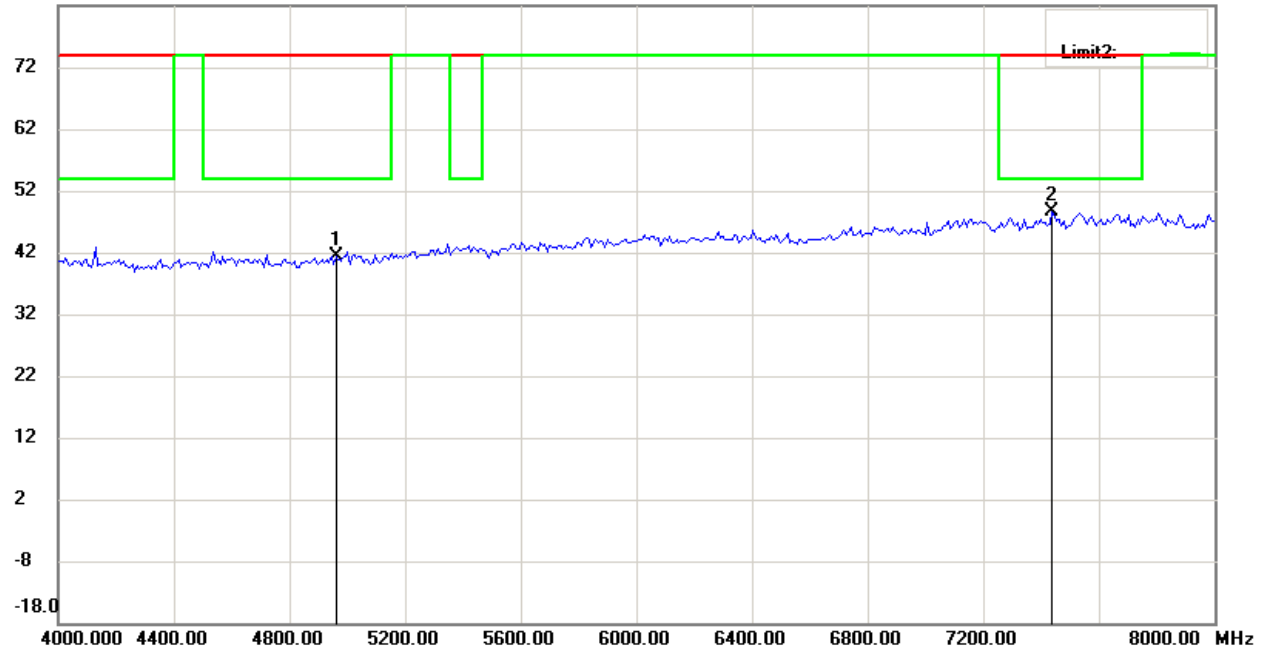

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

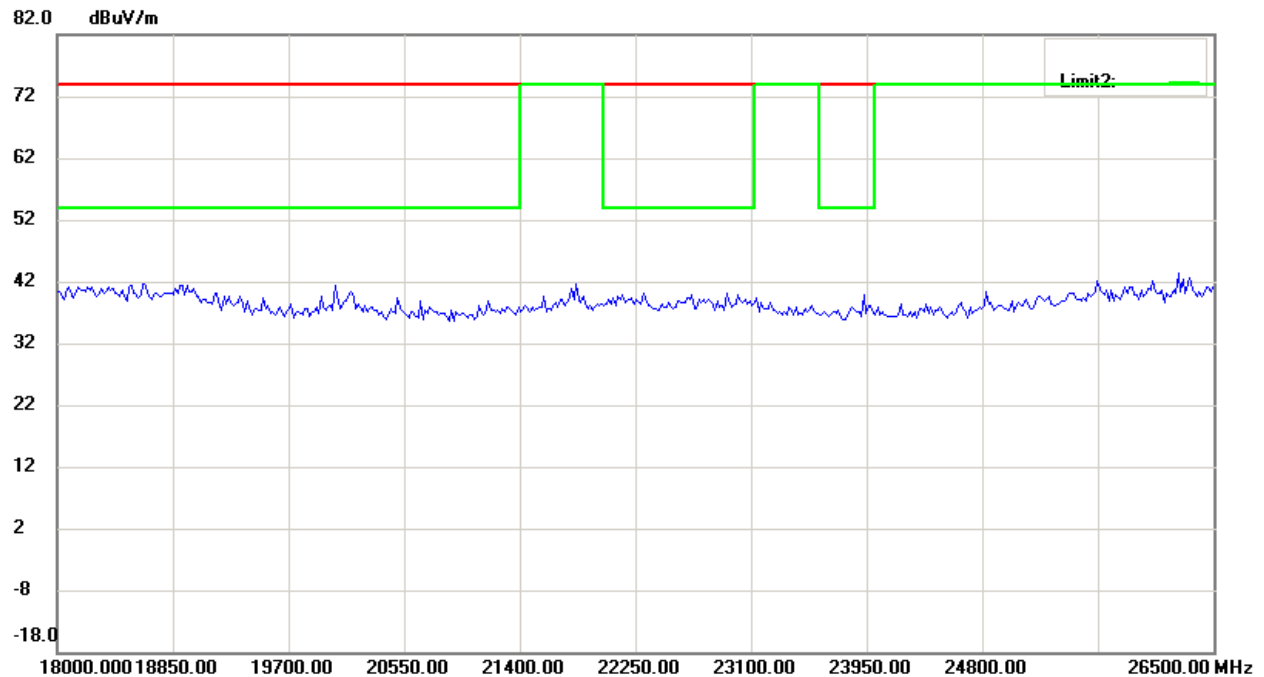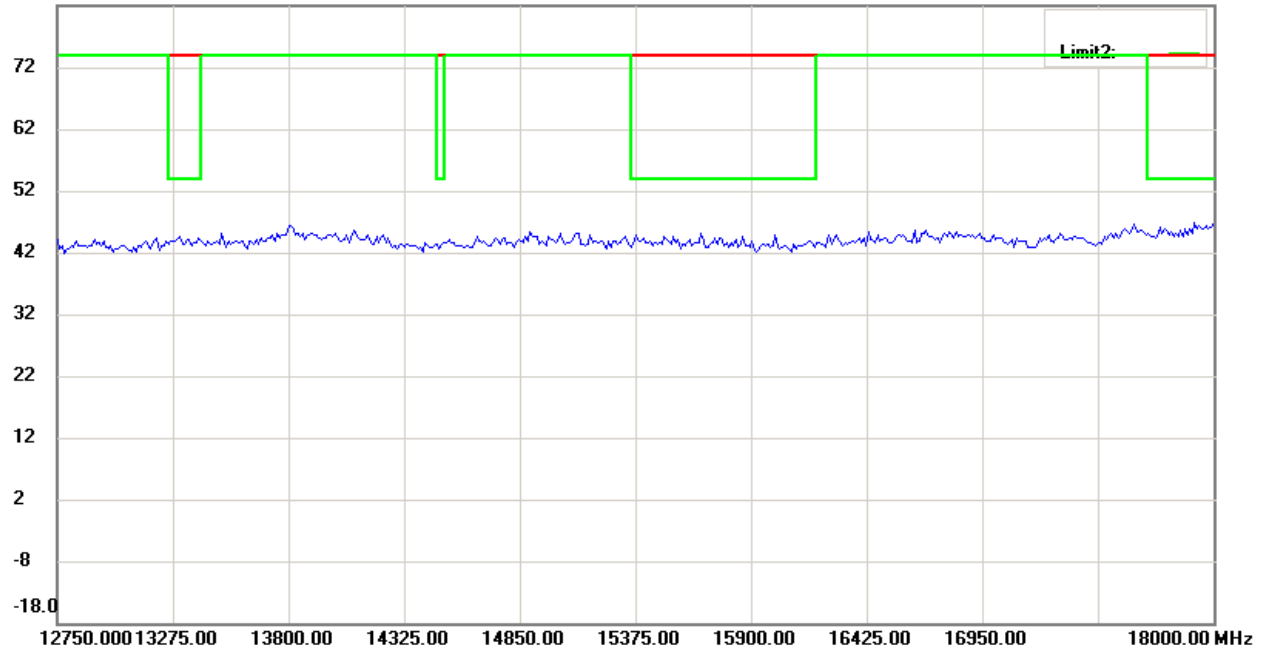

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:


1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.



Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

### Carrier Frequency Separation

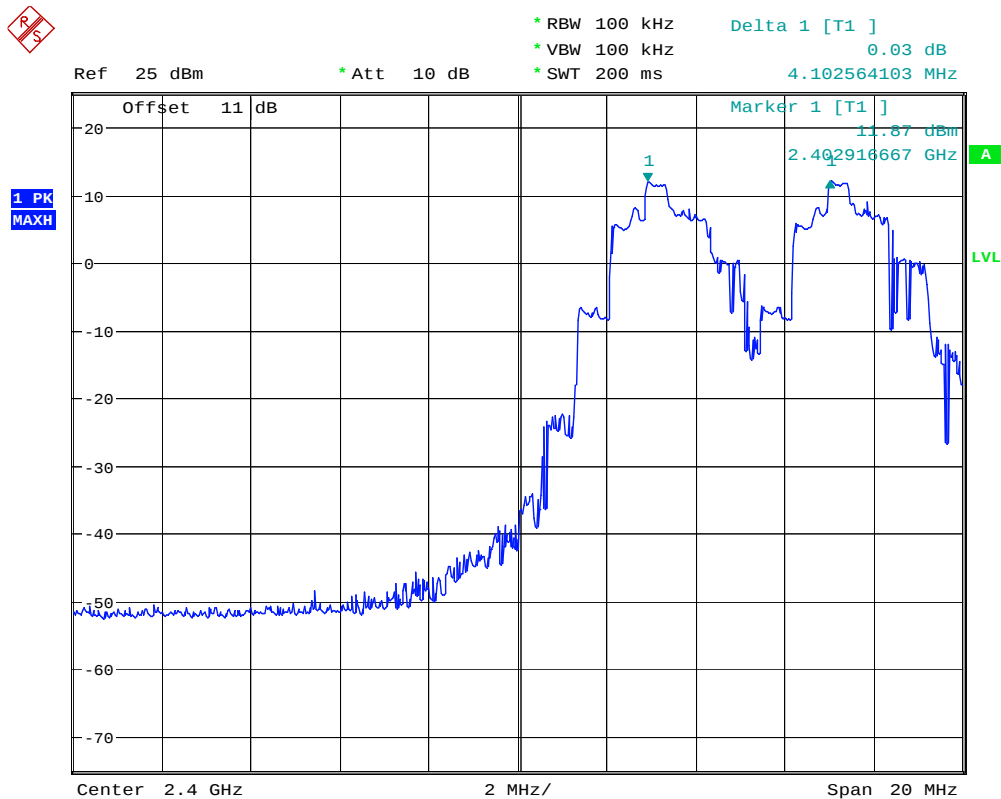

FREQUENCY SEPARATION LOW CHANNEL

Date: 10.SEP.2009 14:58:45



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS



FREQUENCY SEPARATION MIDDLE CHANNEL

Date: 10.SEP.2009 15:01:07



Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS



FREQUENCY SEPARATION HIGH CHANNEL


Date: 10.SEP.2009 15:03:38



Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

## Number of Hopping Frequencies

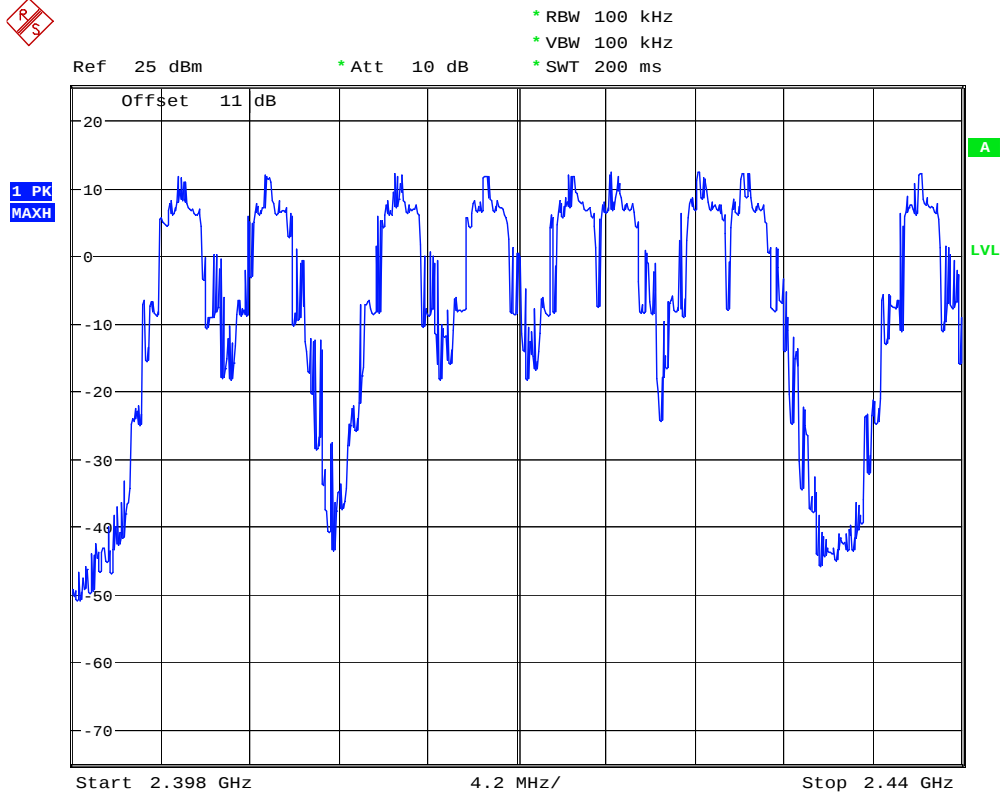


NUMBER OF HOPPING

Date: 10.SEP.2009 14:45:10



Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

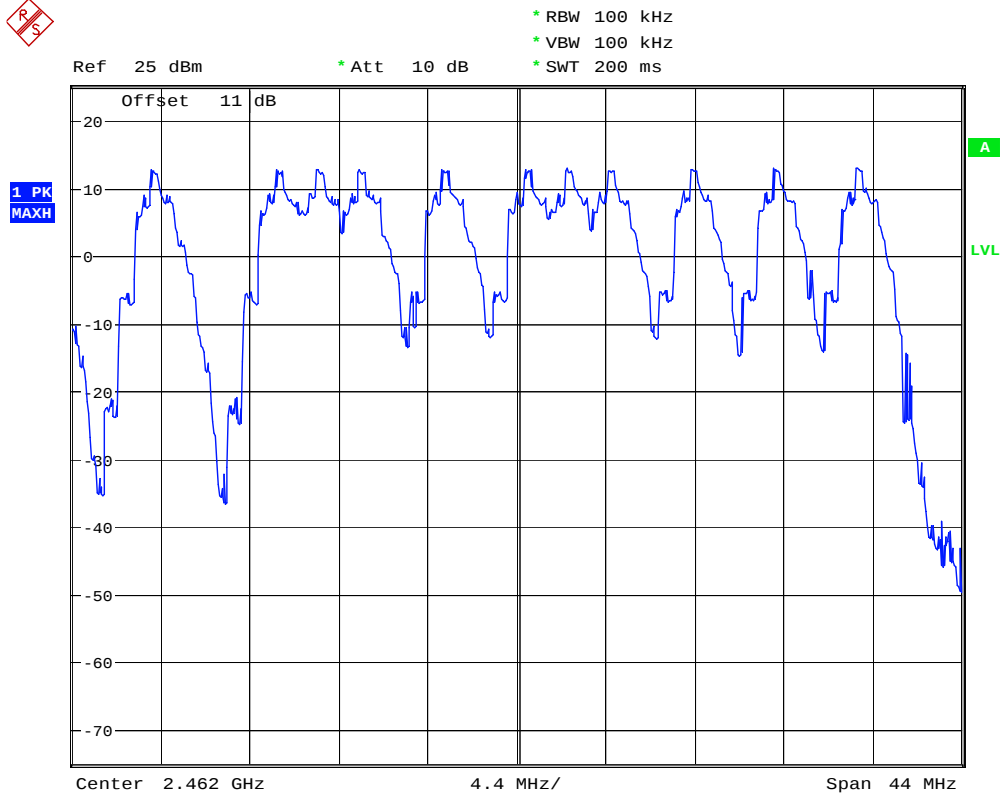

NUMBER OF HOPPING

Date: 10.SEP.2009 14:51:33




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

Time of Occupancy (Dwell Time)

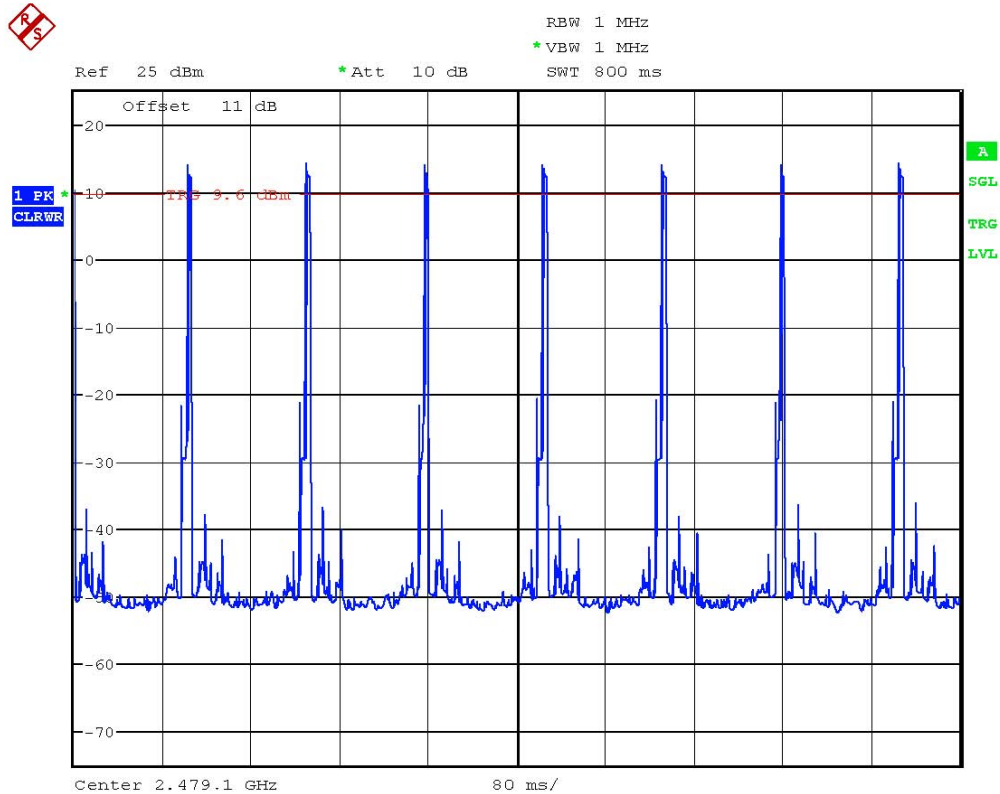


DWELL TIME

Date: 10.SEP.2009 15:12:29



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

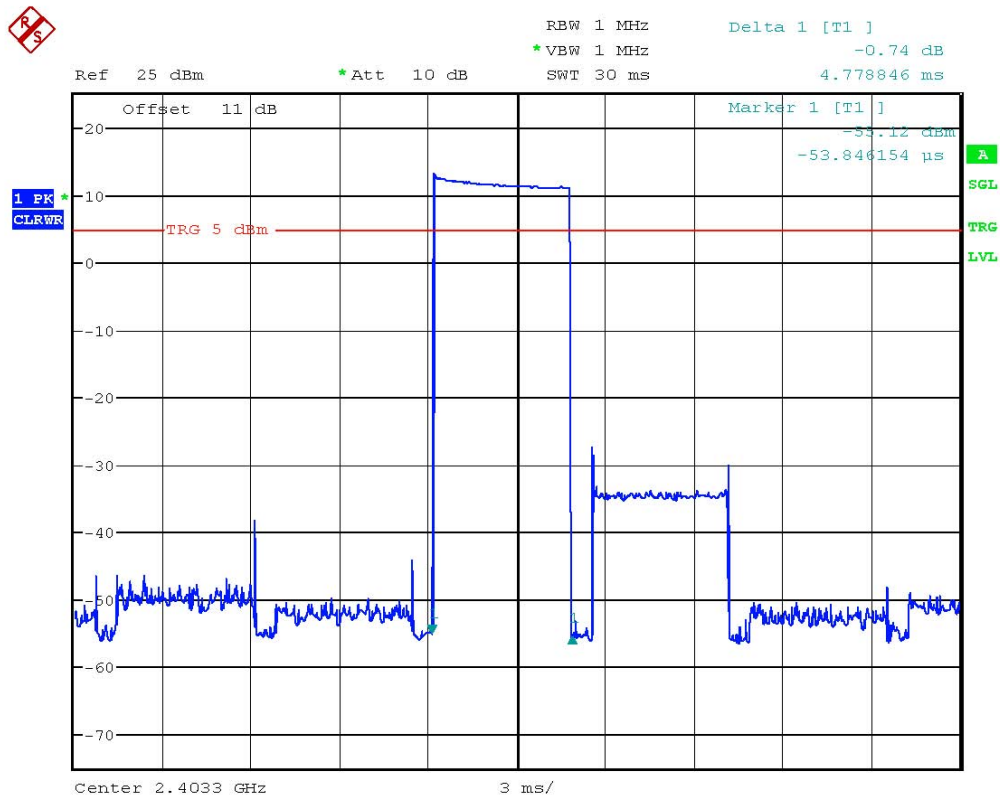


DWELL TIME LOW CHANNEL (4.778ms \* 80events = 382.24ms)

Date: 10.SEP.2009 15:22:54



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

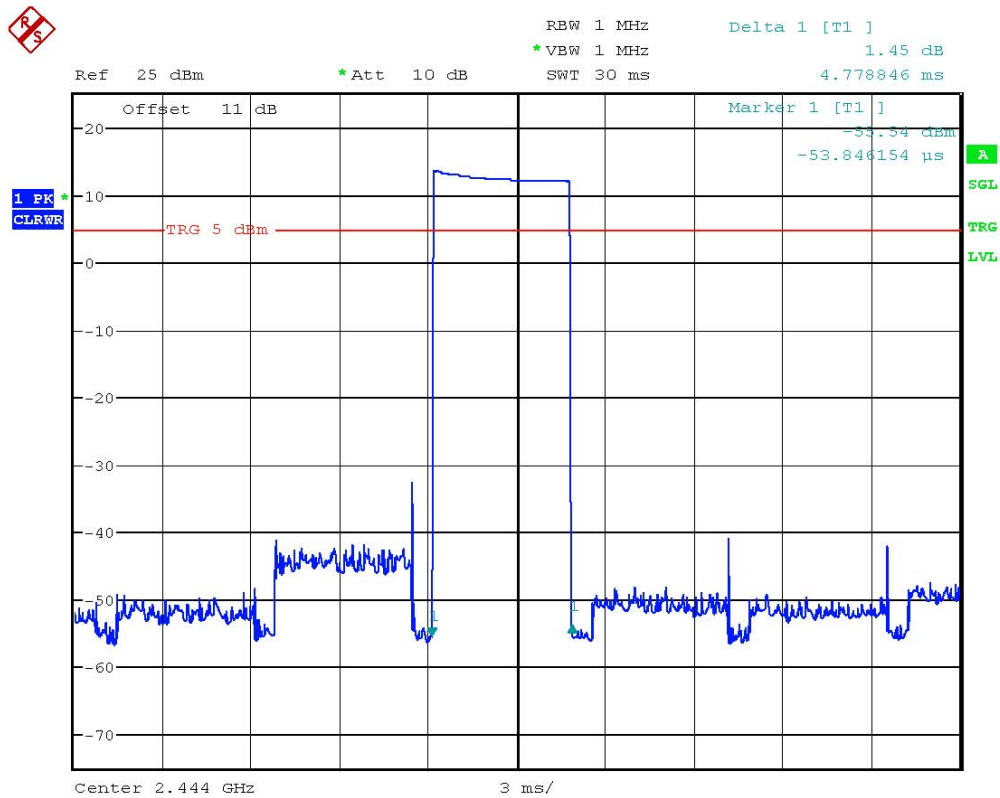


DWELL TIME MIDDLE CHANNEL (4.778ms \* 80events = 382.24ms)  
Date: 10.SEP.2009 15:25:54



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

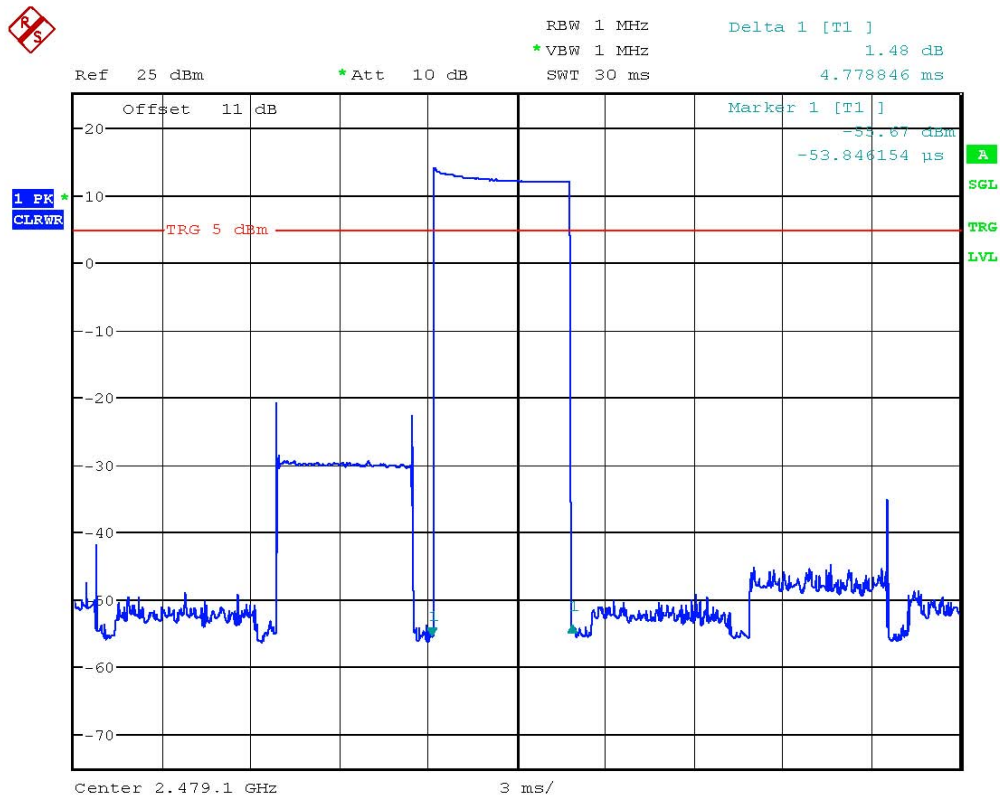

DWELL TIME HIGH CHANNEL (4.778ms \* 80events = 382.24ms)

Date: 10.SEP.2009 15:27:03




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

20dB Bandwidth

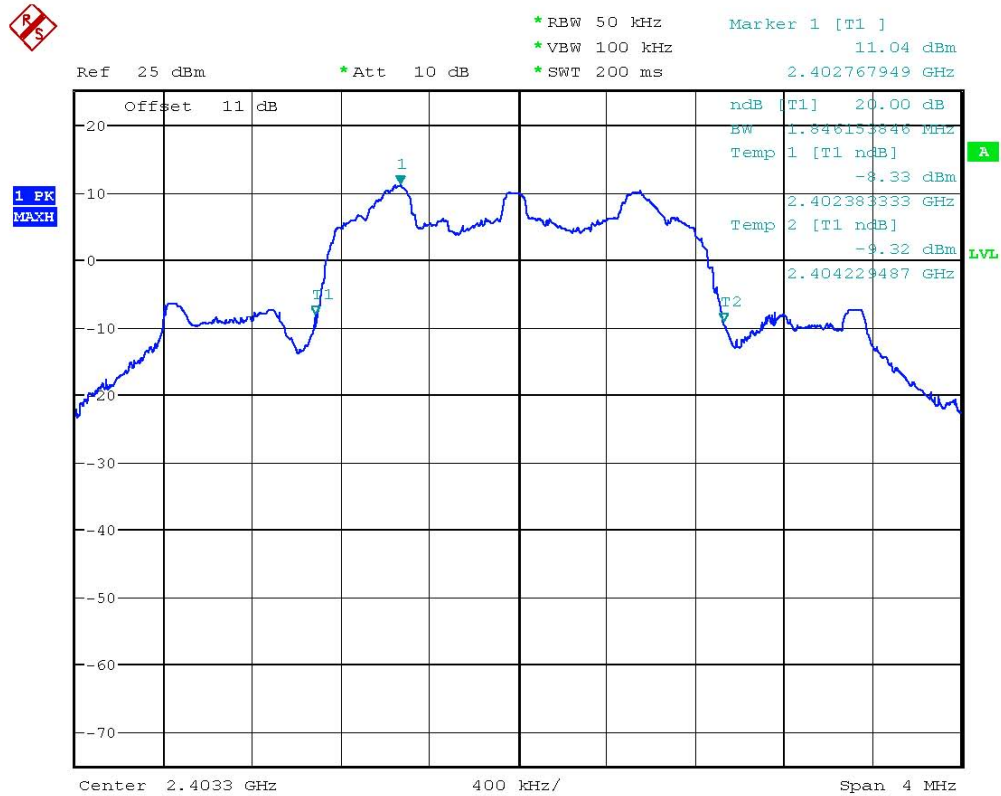


20db BANDWIDTH 2403.3MHz

Date: 10.SEP.2009 14:29:32



Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

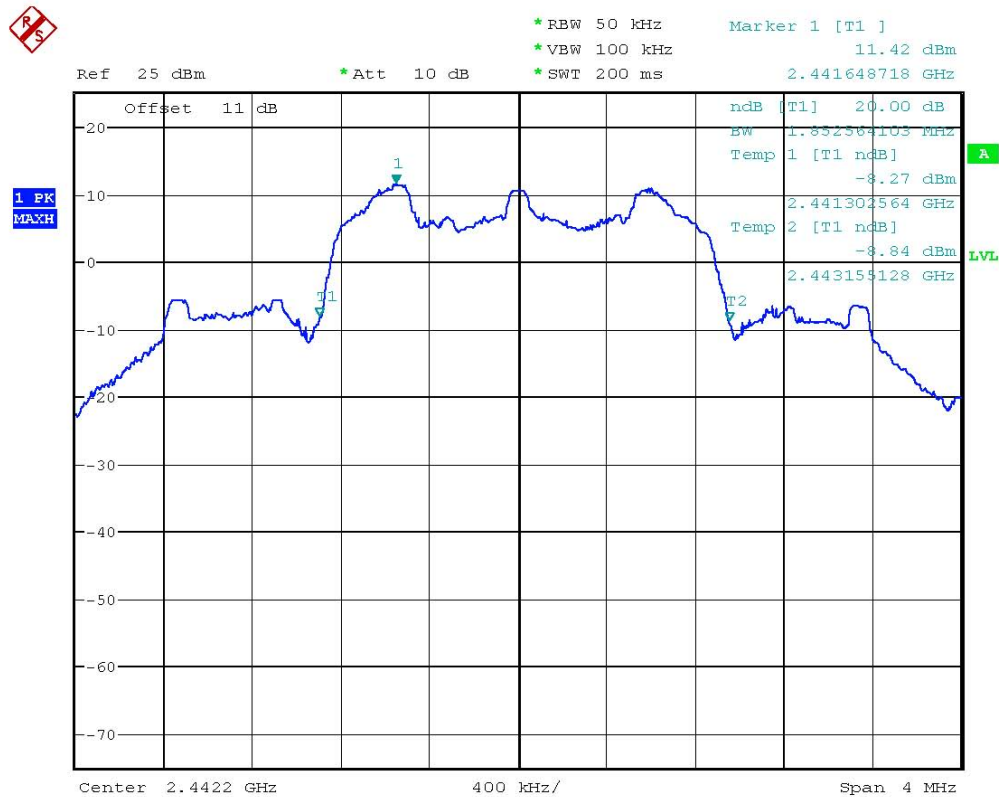


20db BANDWIDTH 2442.2MHz  
Date: 10.SEP.2009 14:26:42



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

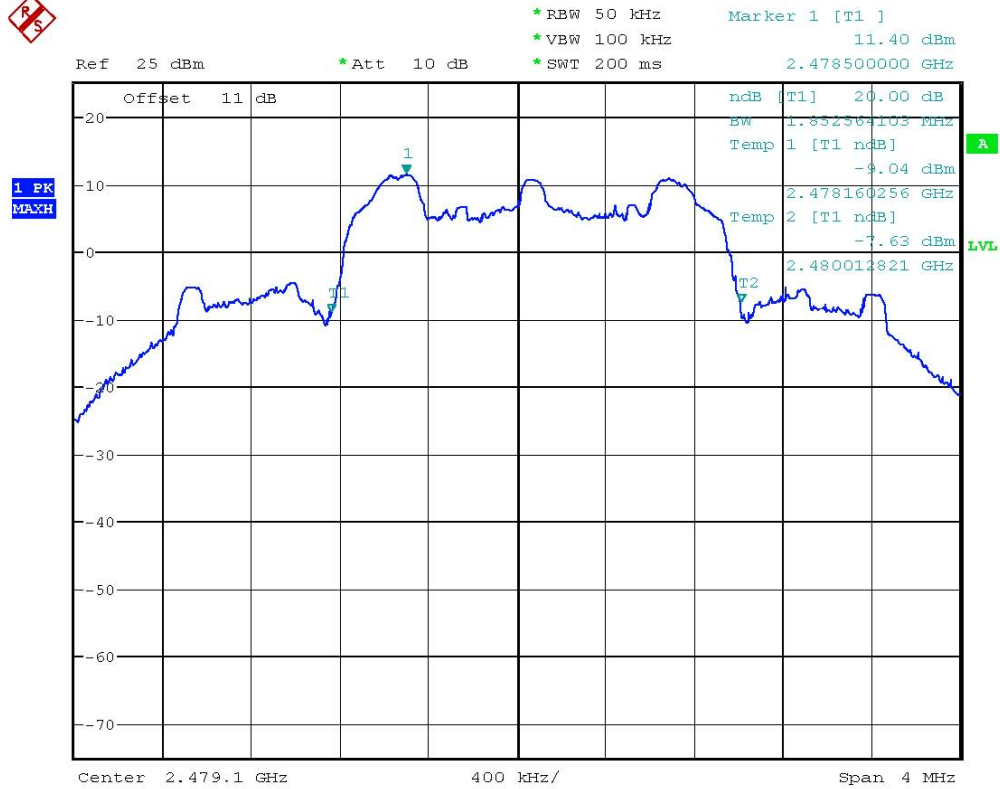

20db BANDWIDTH 2479.1MHz

Date: 10.SEP.2009 14:24:52




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

## Band-edge Compliance of RF Conducted Emissions

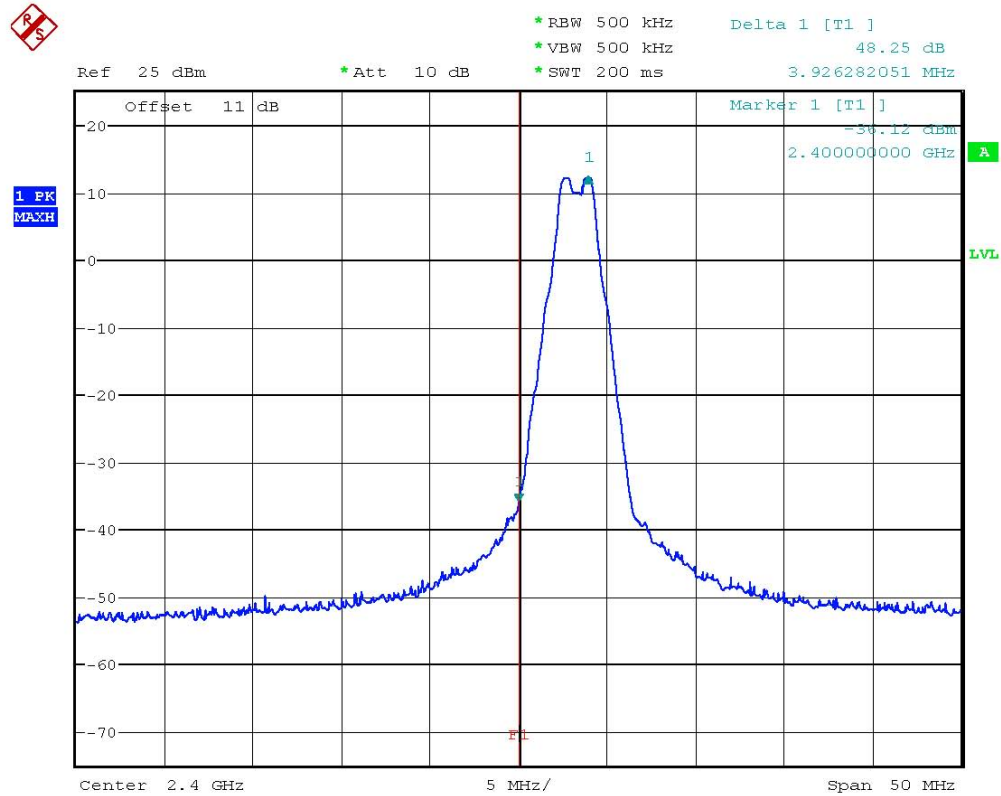


BANDEDGE 2403.3MHz

Date: 10.SEP.2009 14:07:02



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

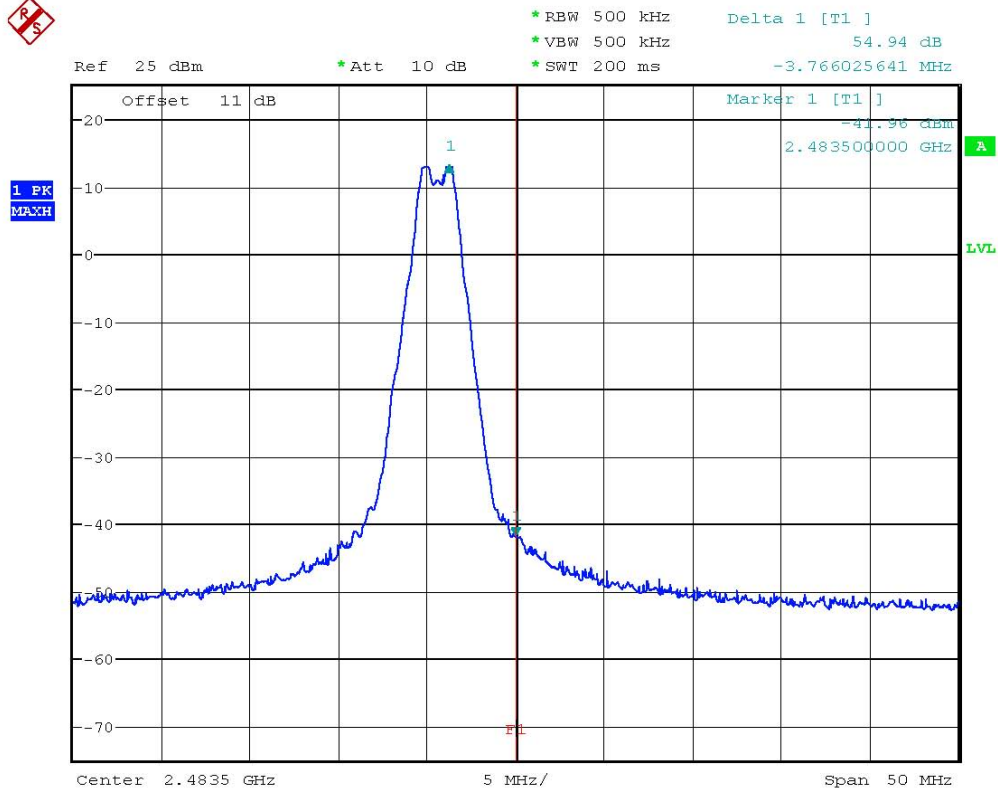


BANDEDGE 2479.1MHz

Date: 10.SEP.2009 14:13:40



Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

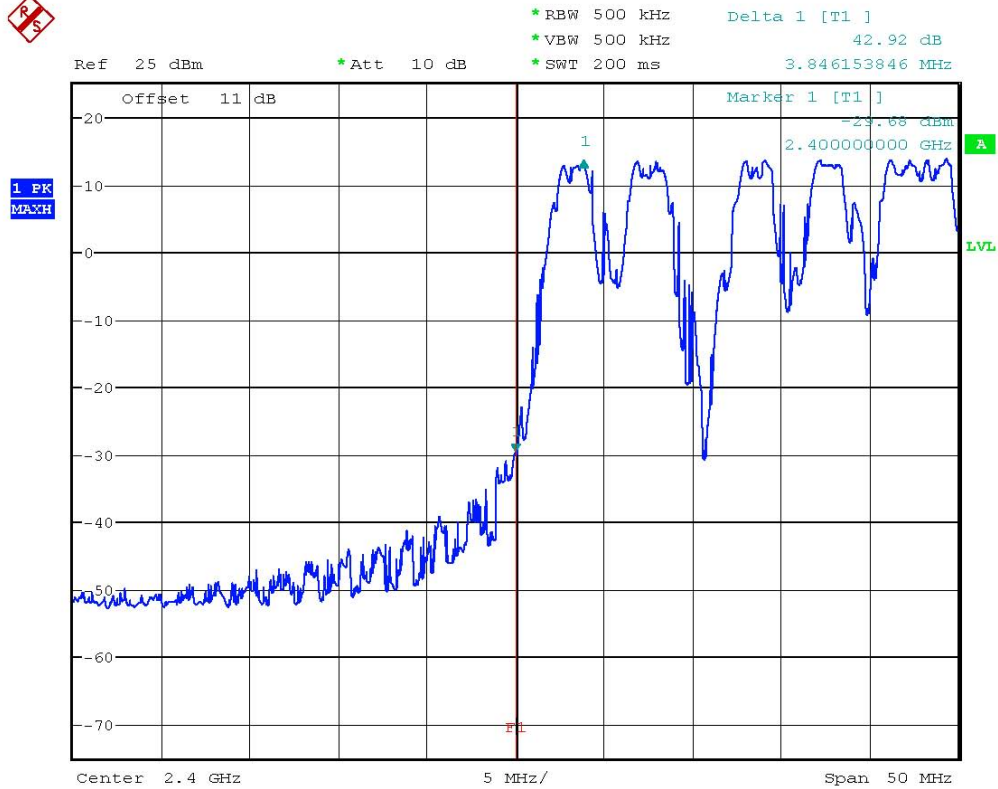


BANDEDGE 2403.3MHz HOPPING MODE

Date: 10.SEP.2009 14:11:22



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

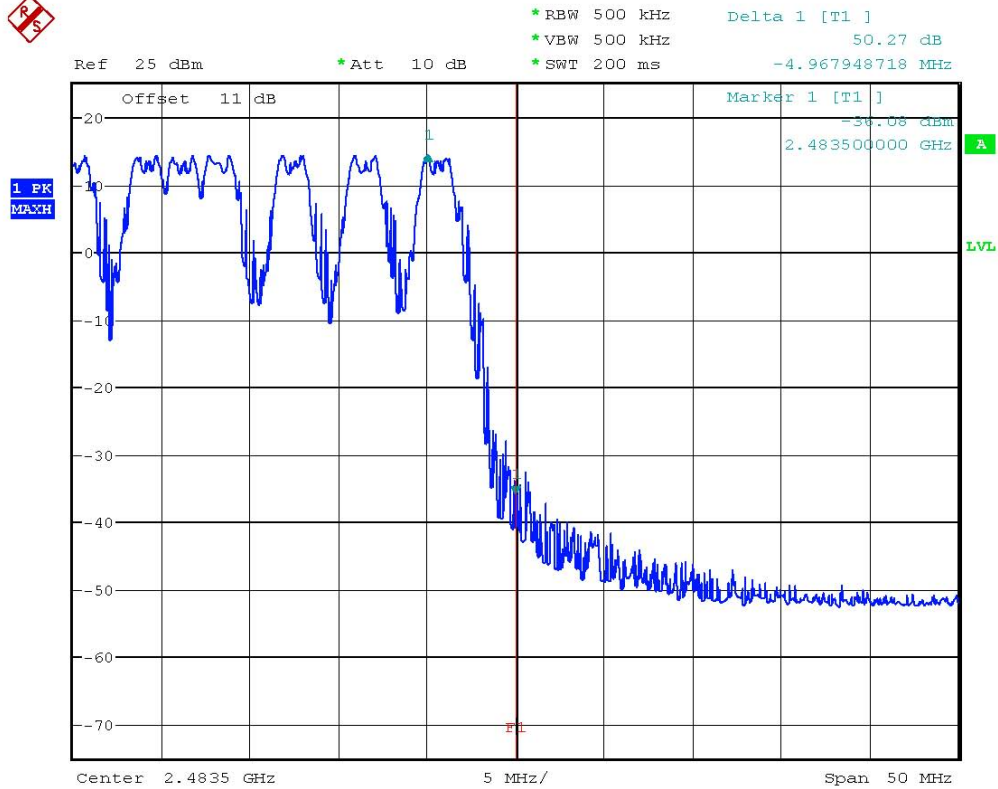

BANDEDGE 2479.1MHz HOPPING MODE

Date: 10.SEP.2009 14:12:50



# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15



FCC ID: R48CPS

Radiated Emissions from Receiver part

Receiver \_ 2403.3 MHz

Antenna Polarization H

66.9 dBuV/m

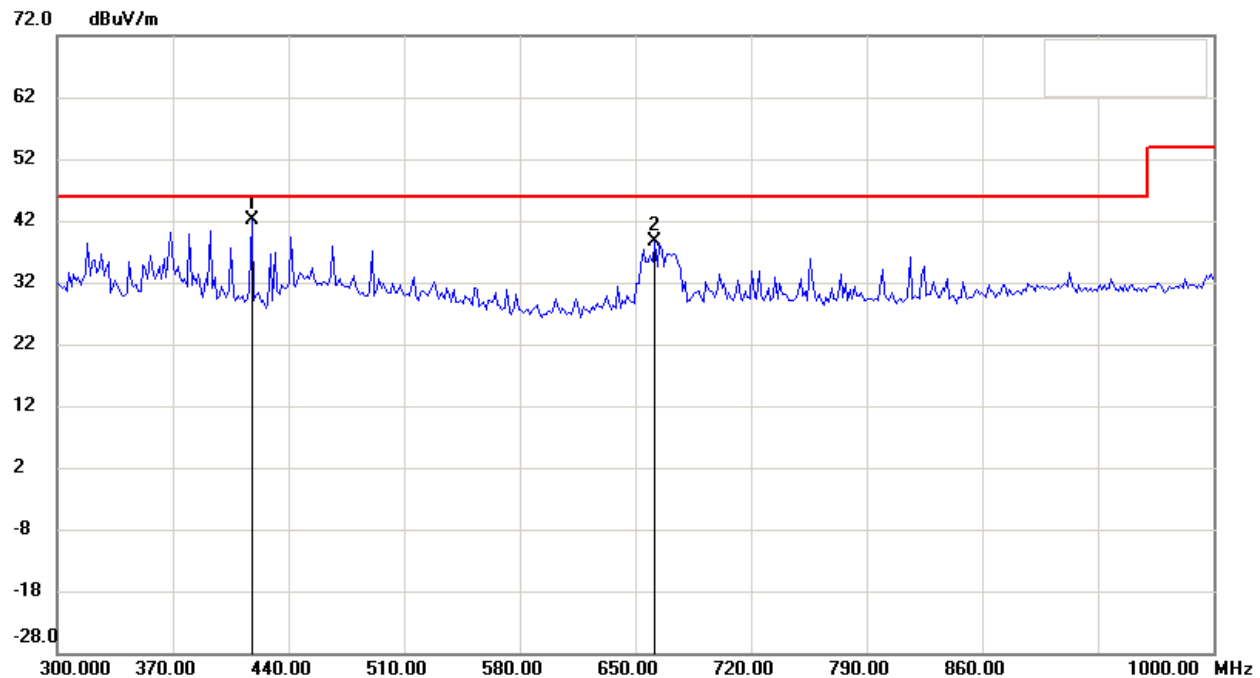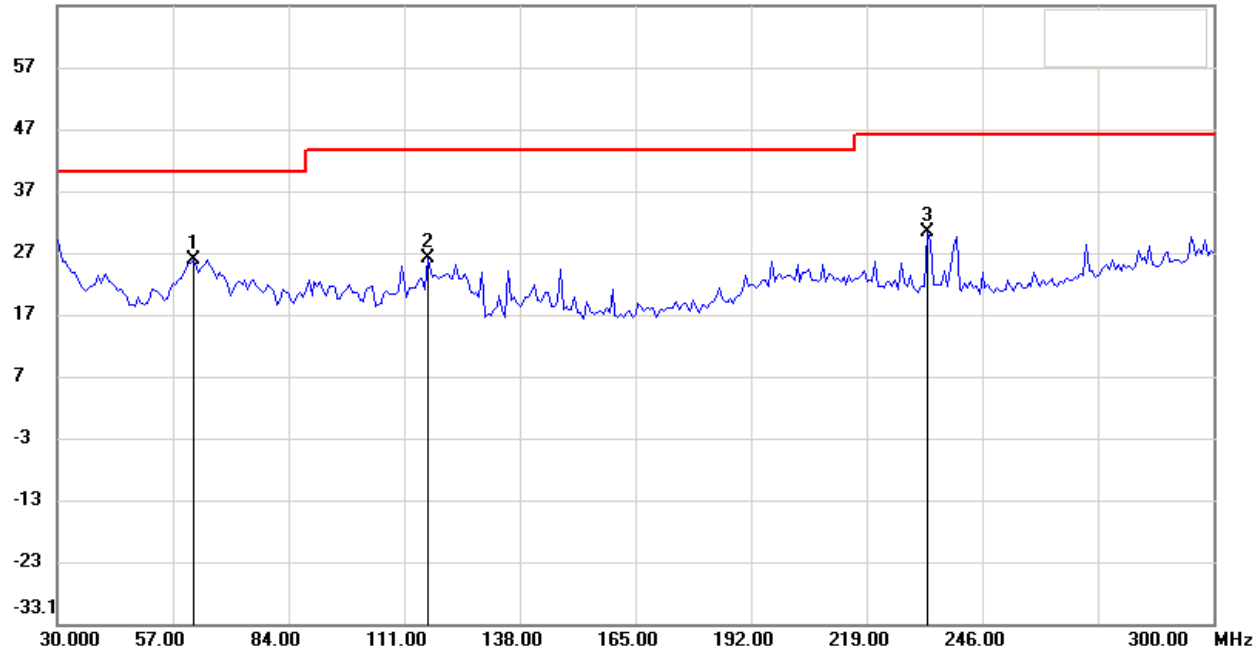

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

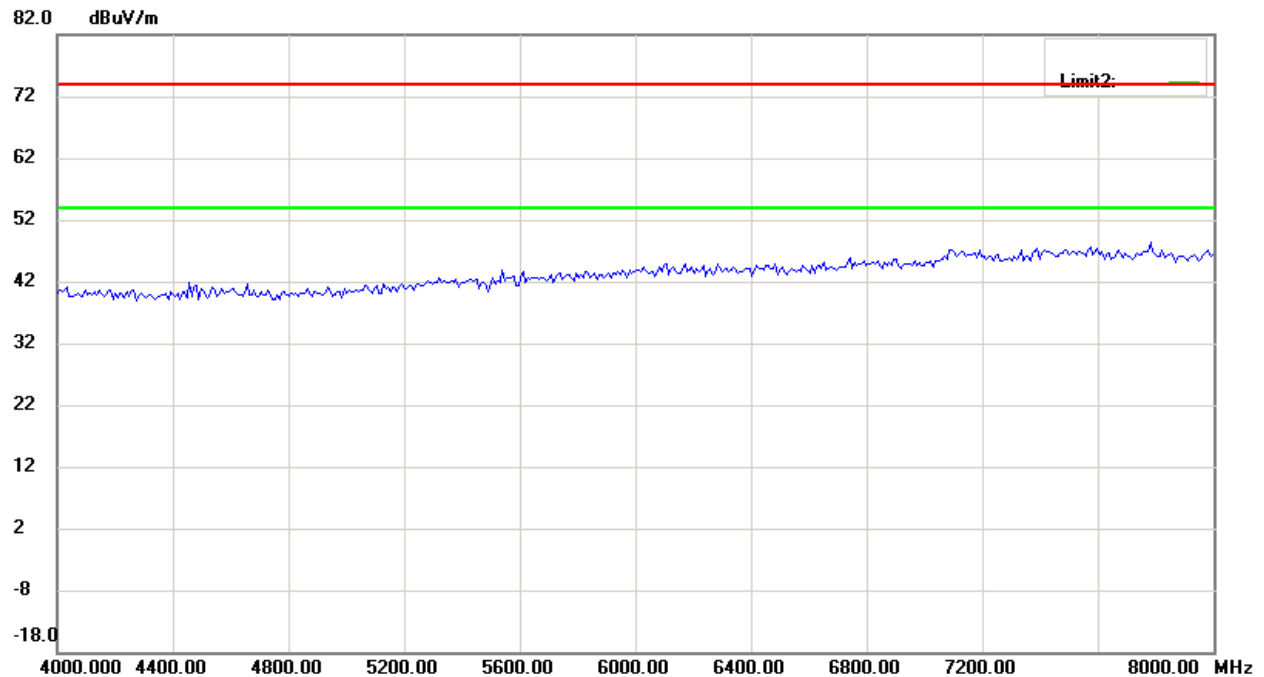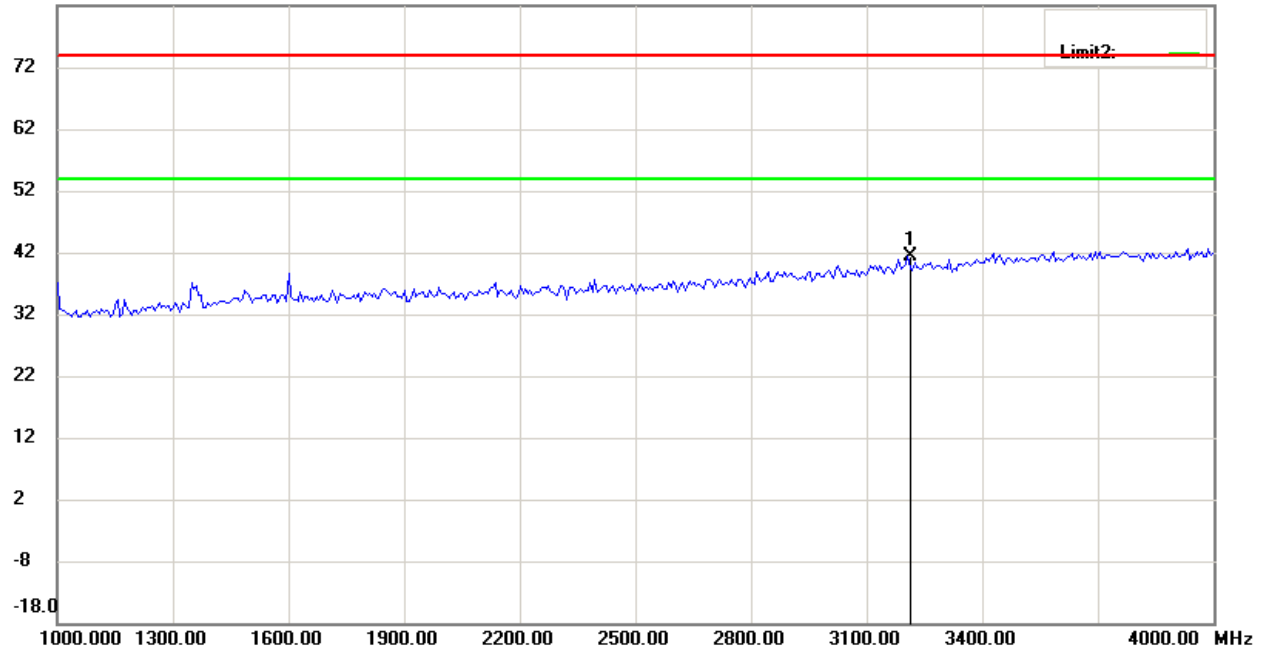

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

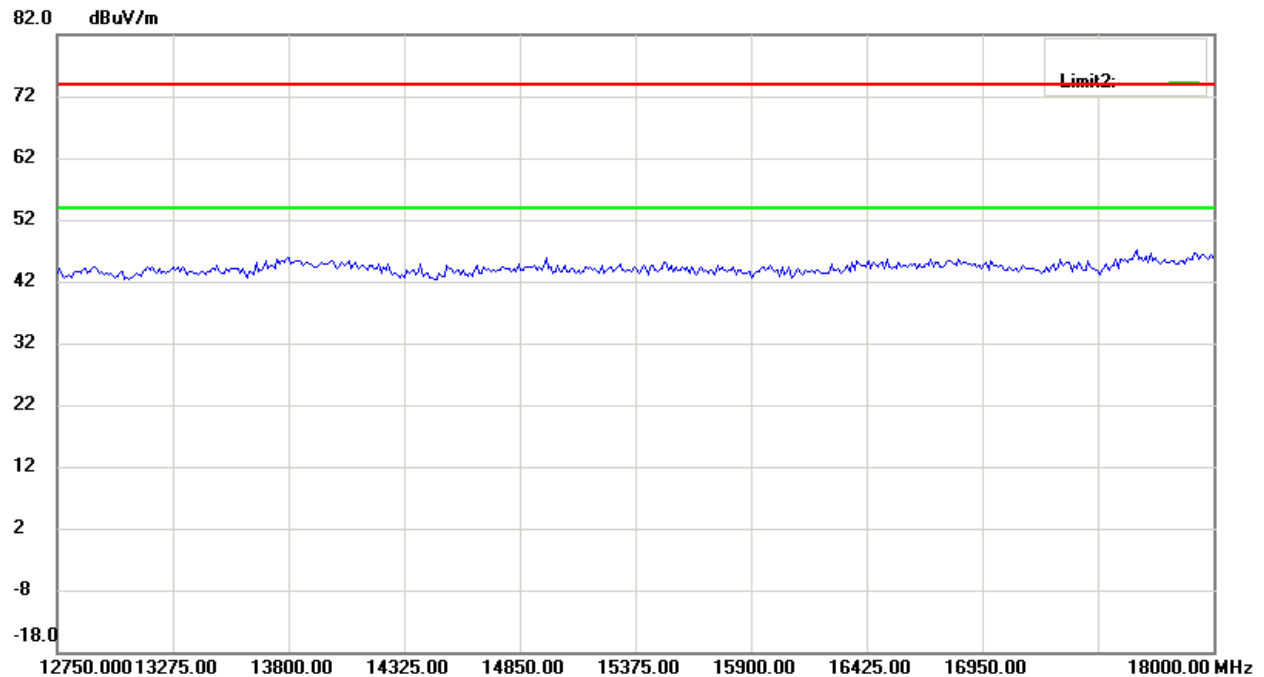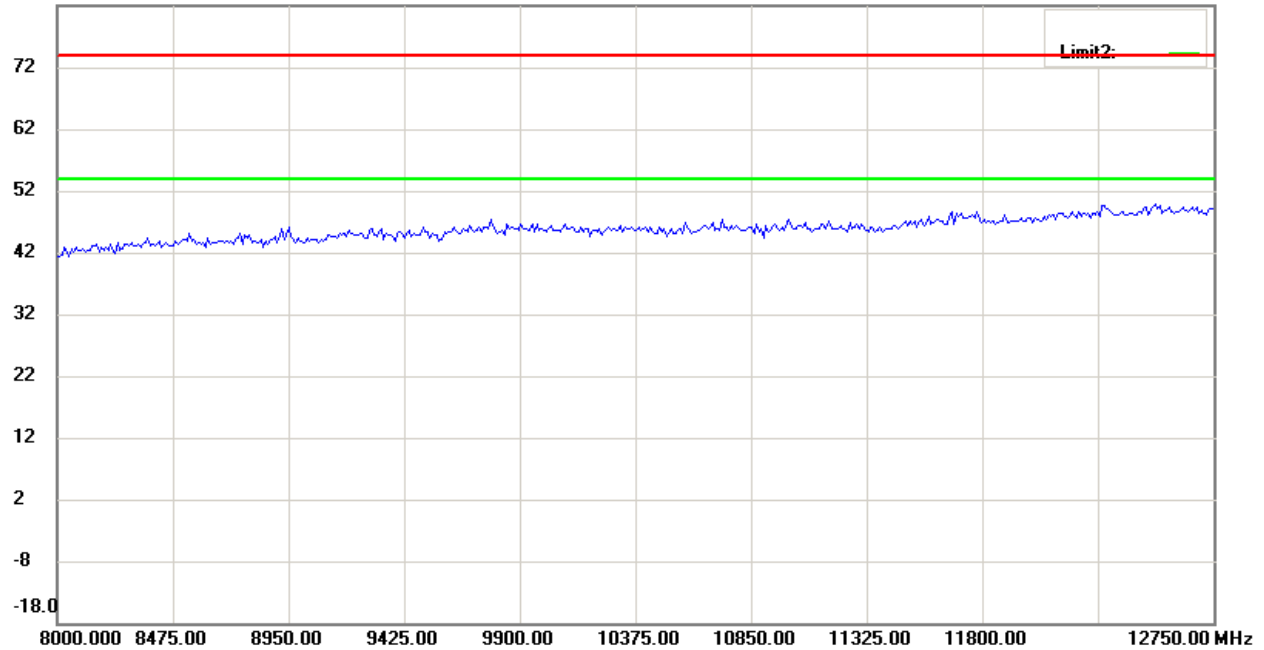

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15


FCC ID: R48CPS

82.0 dBuV/m

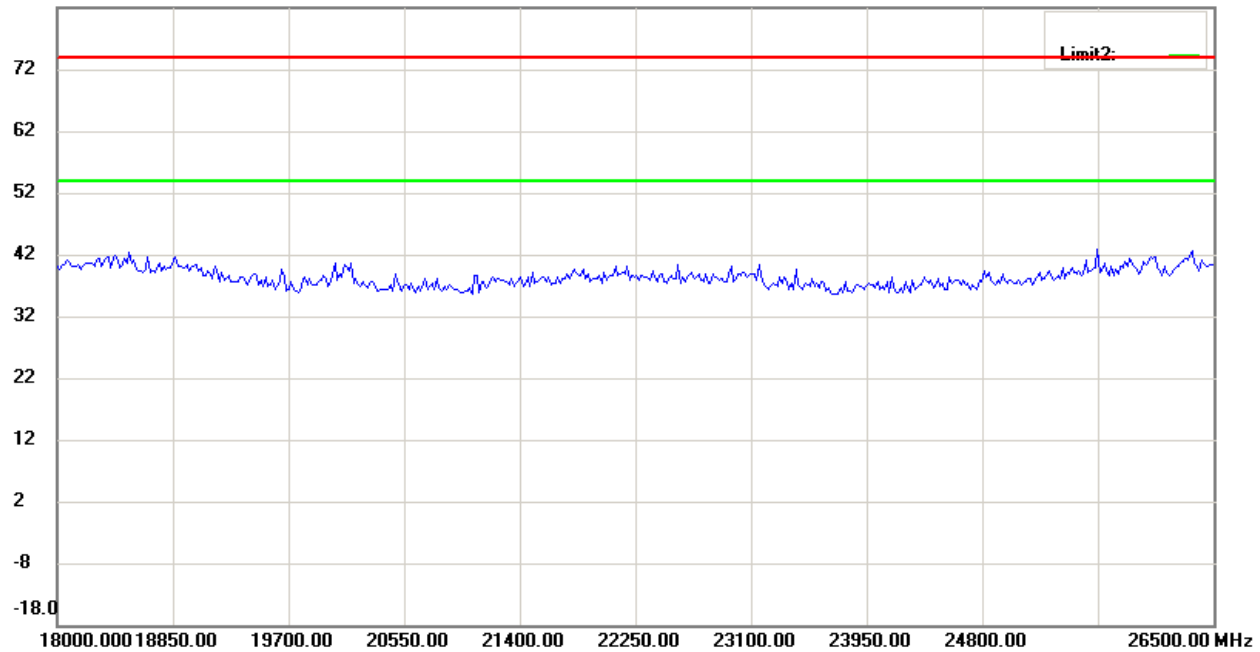

## Antenna Polarization V

66.9 dBuV/m

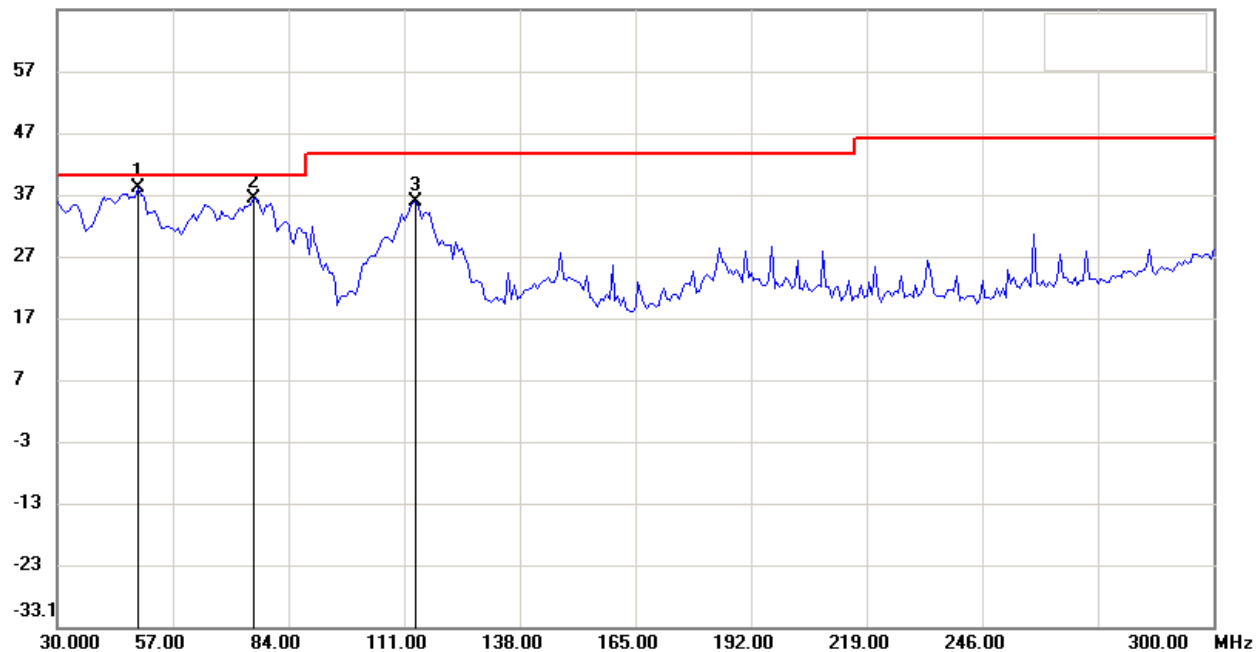

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

72.0 dBuV/m

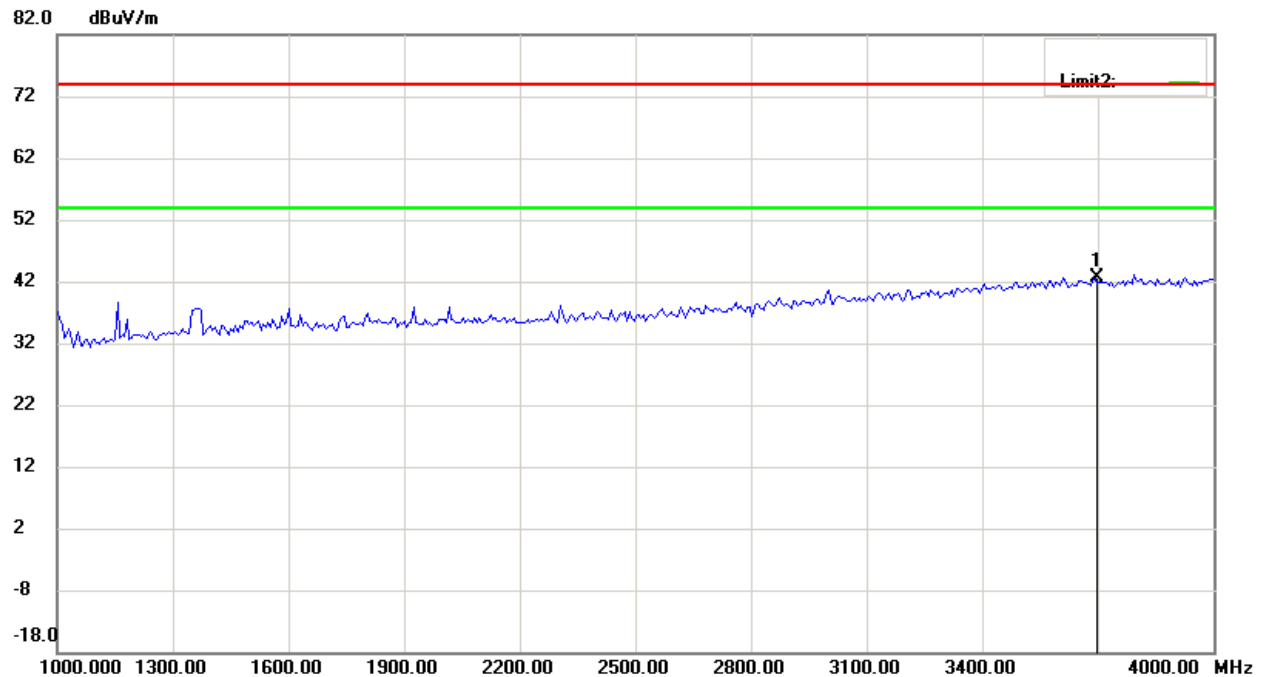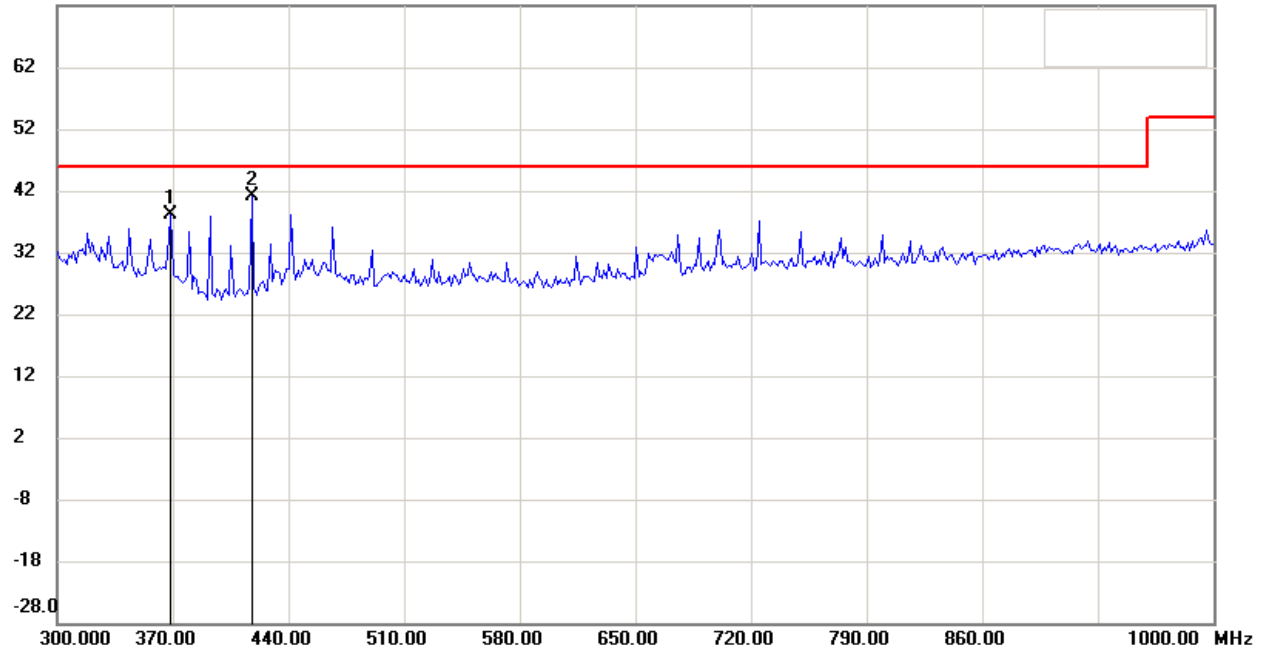

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

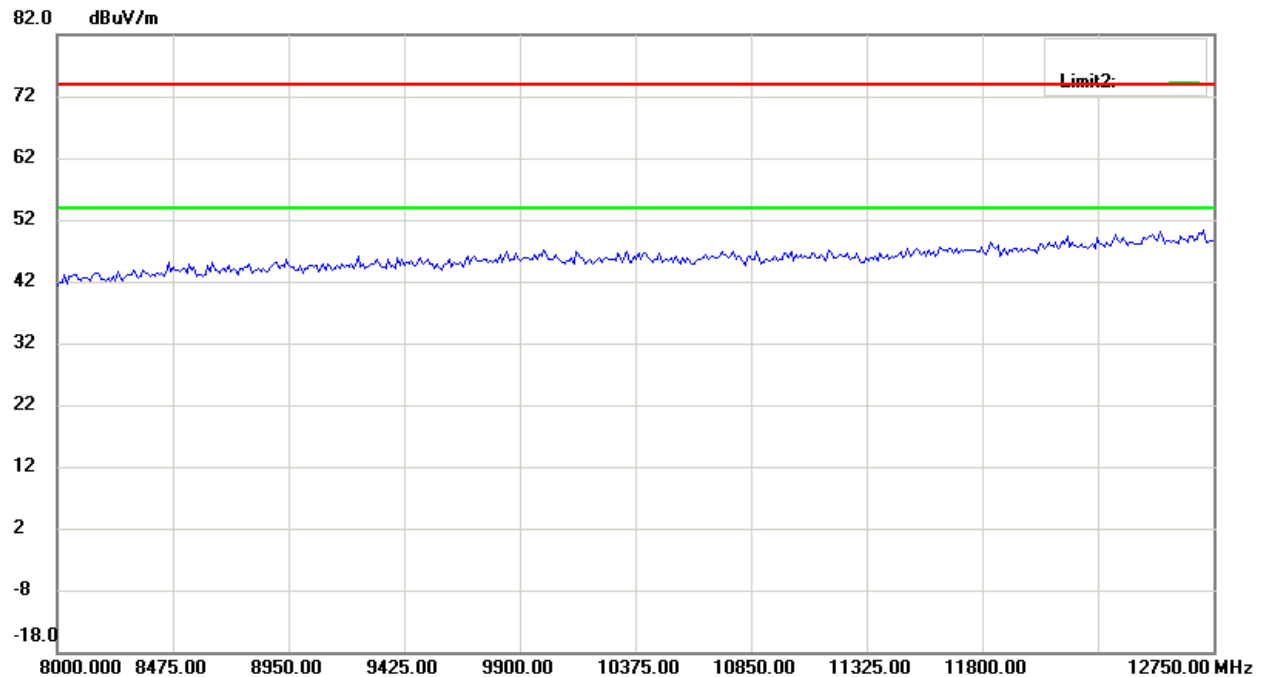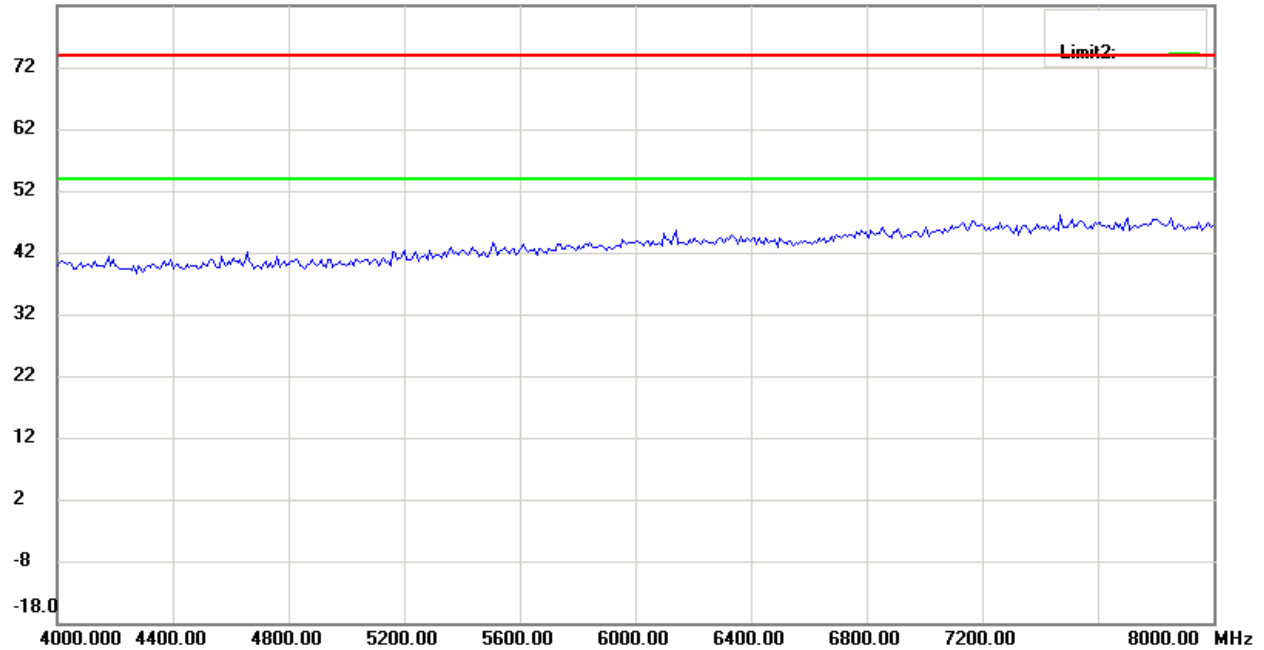

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

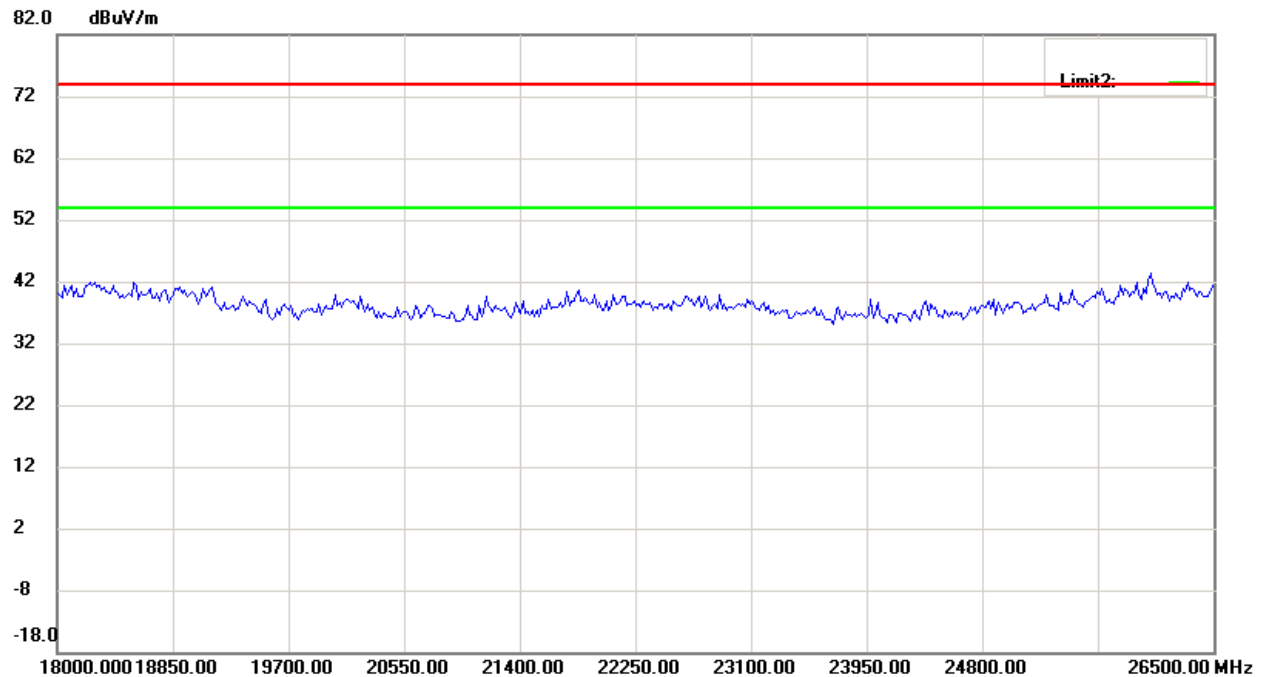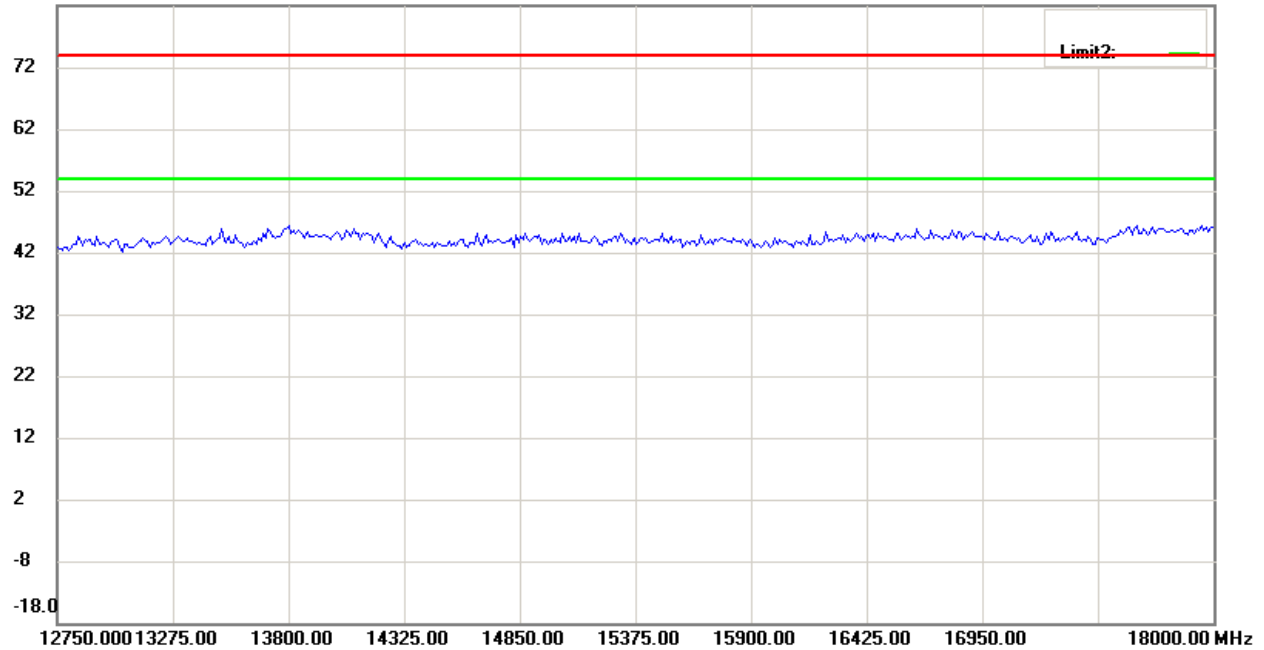

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.



# Worldwide Testing Services(Taiwan) Co., Ltd.



Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

Receiver \_ 2442.2 MHz

Antenna Polarization H

66.9 dBuV/m

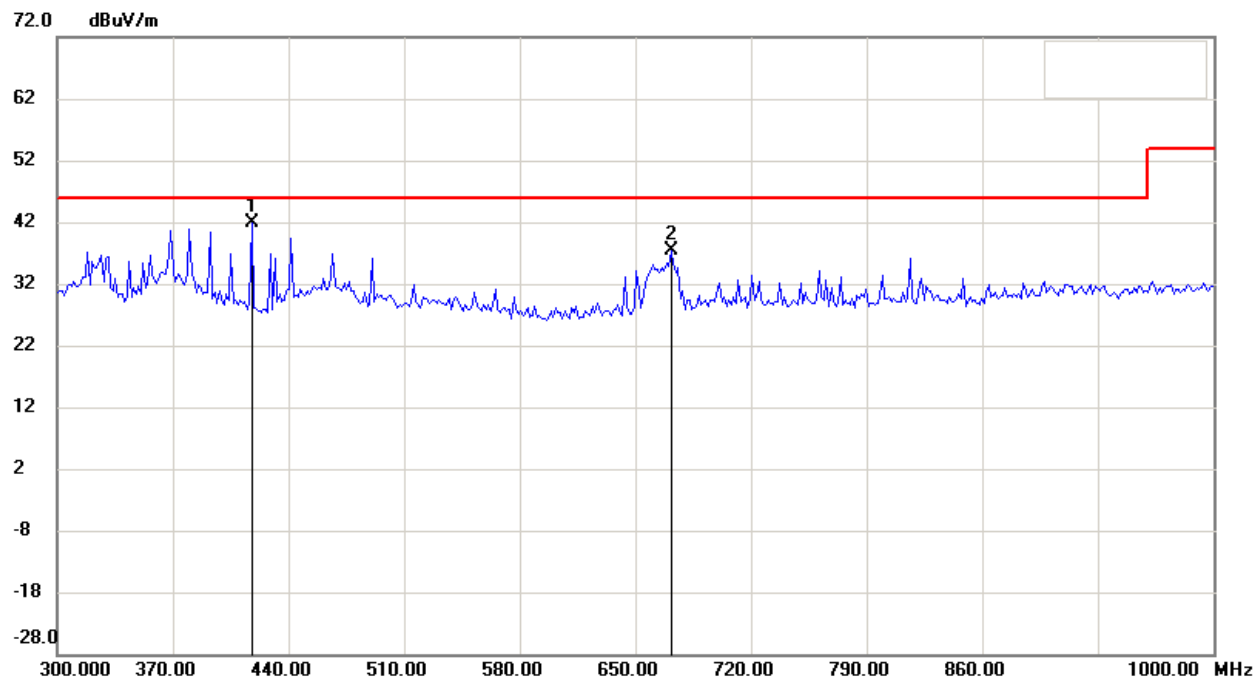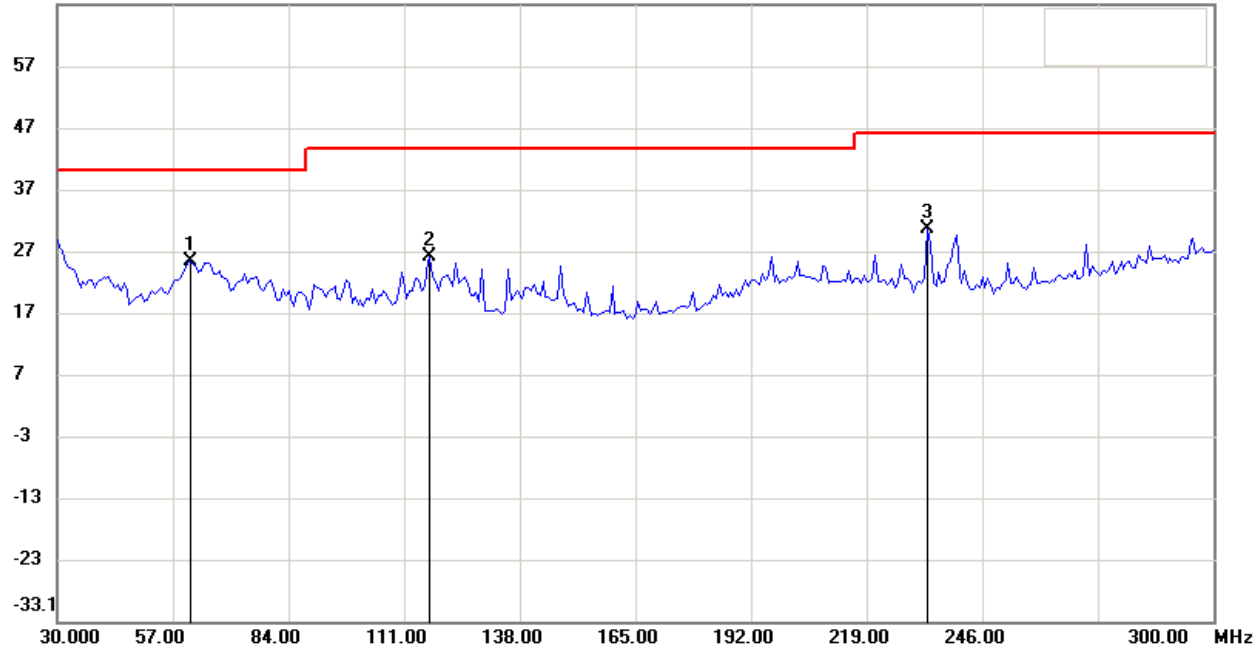

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

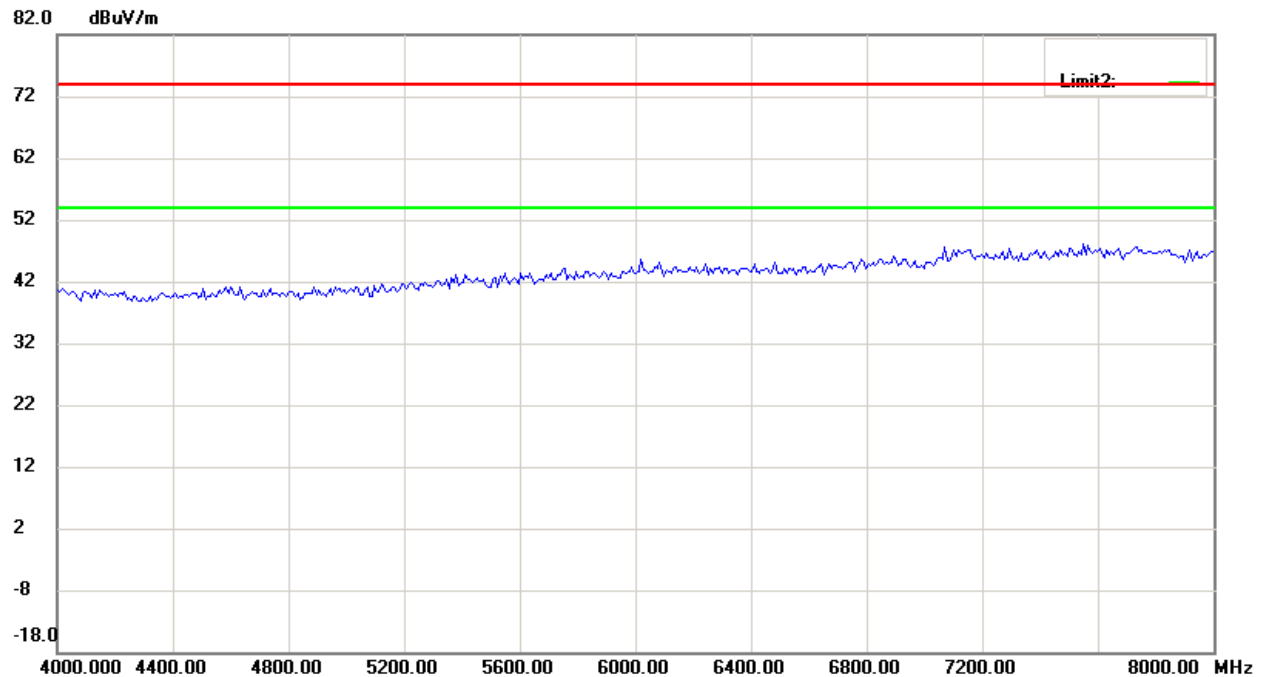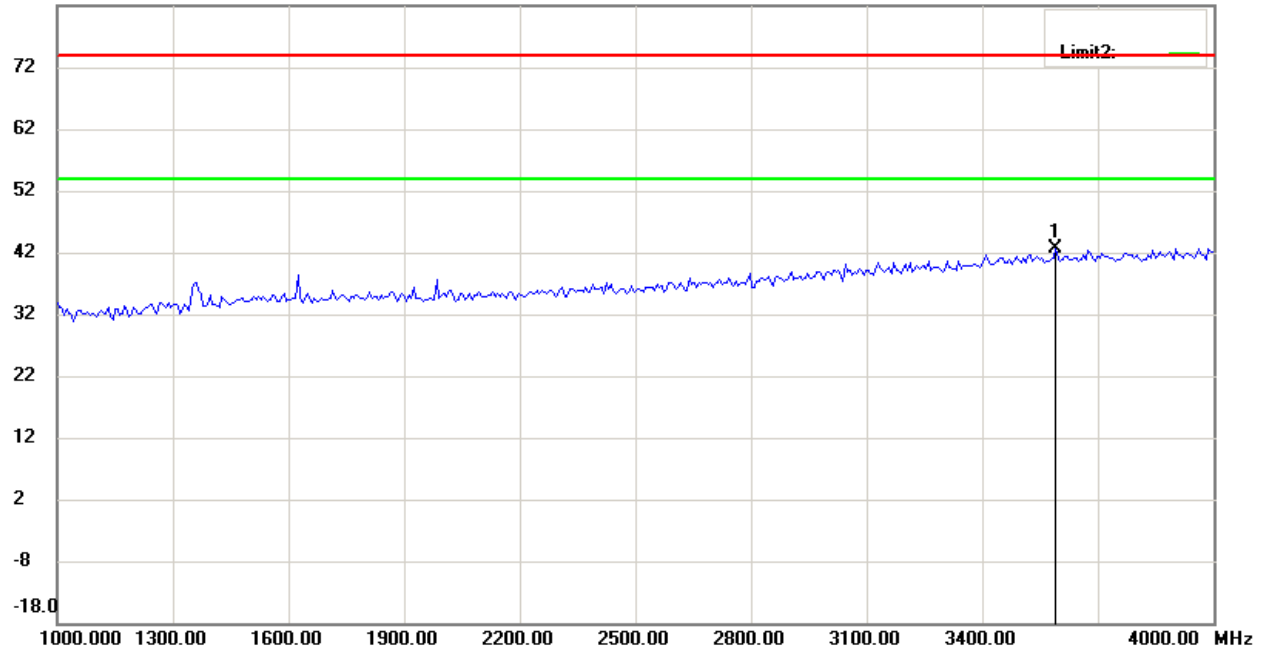

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

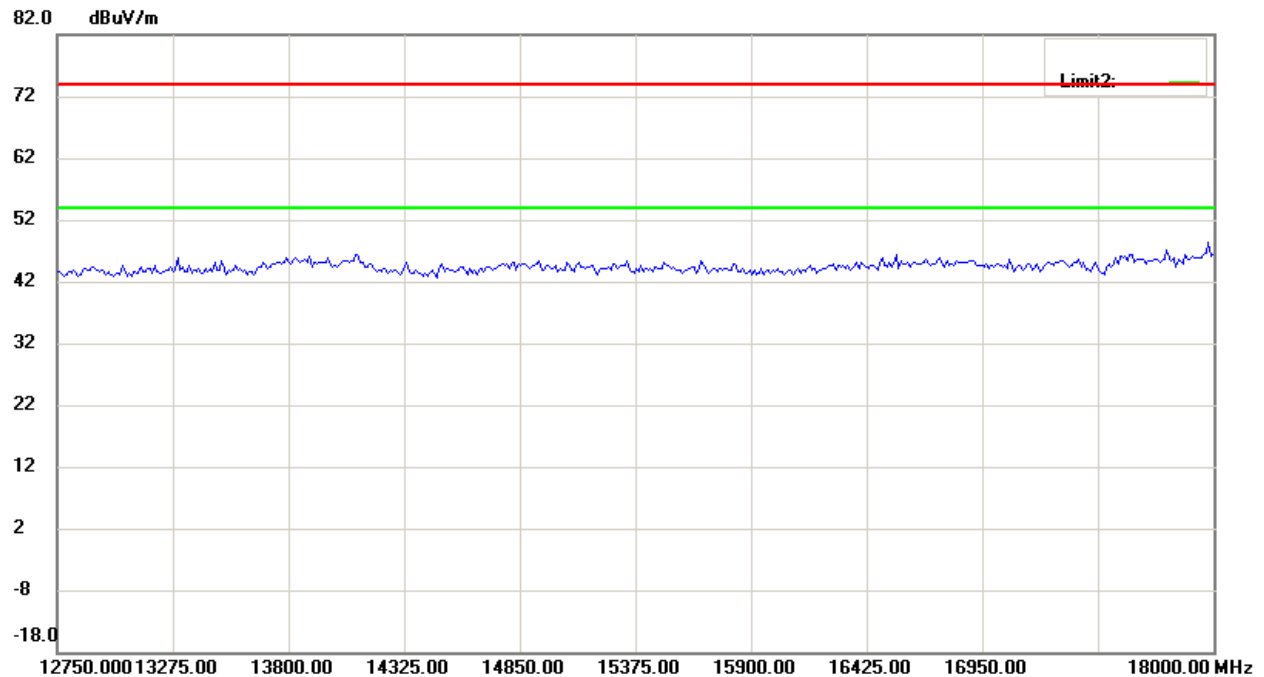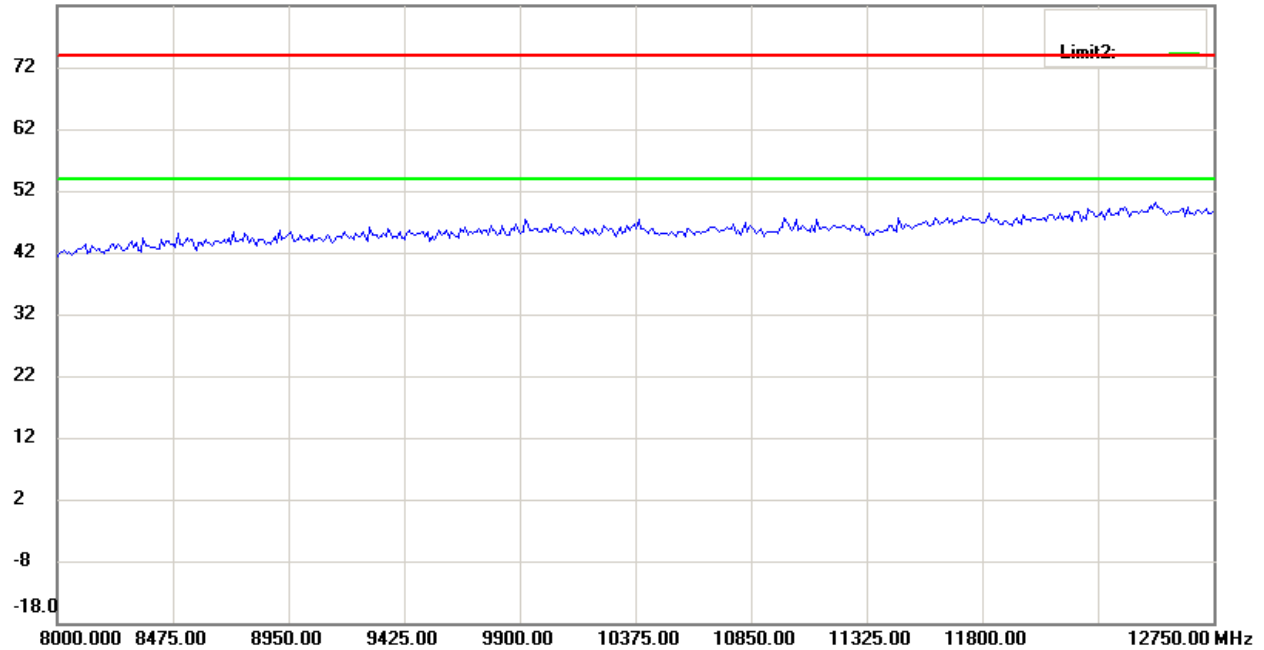

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15


FCC ID: R48CPS

82.0 dBuV/m

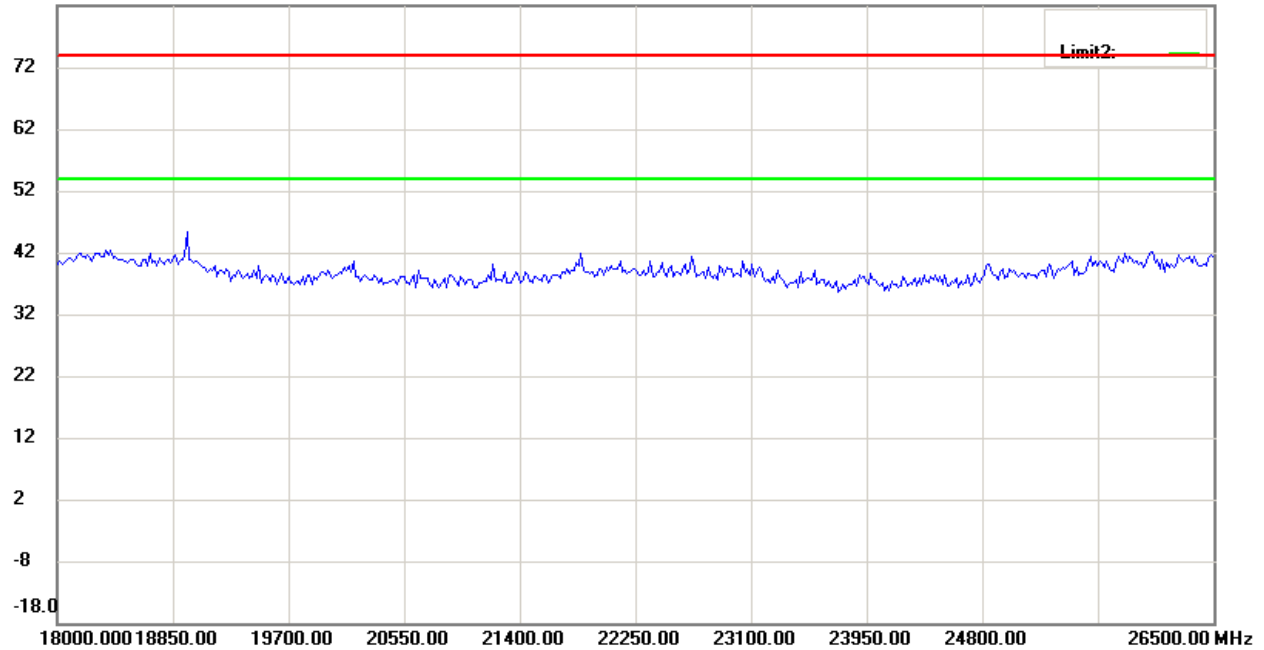

## Antenna Polarization V

66.9 dBuV/m

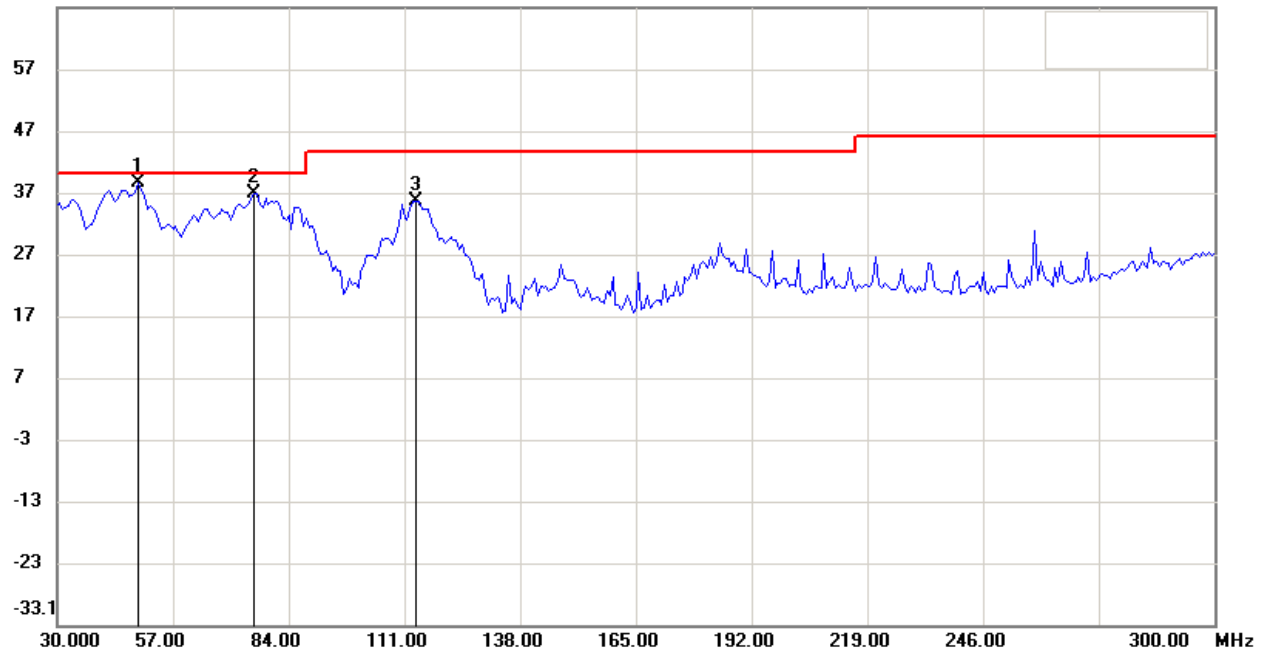

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

72.0 dBuV/m

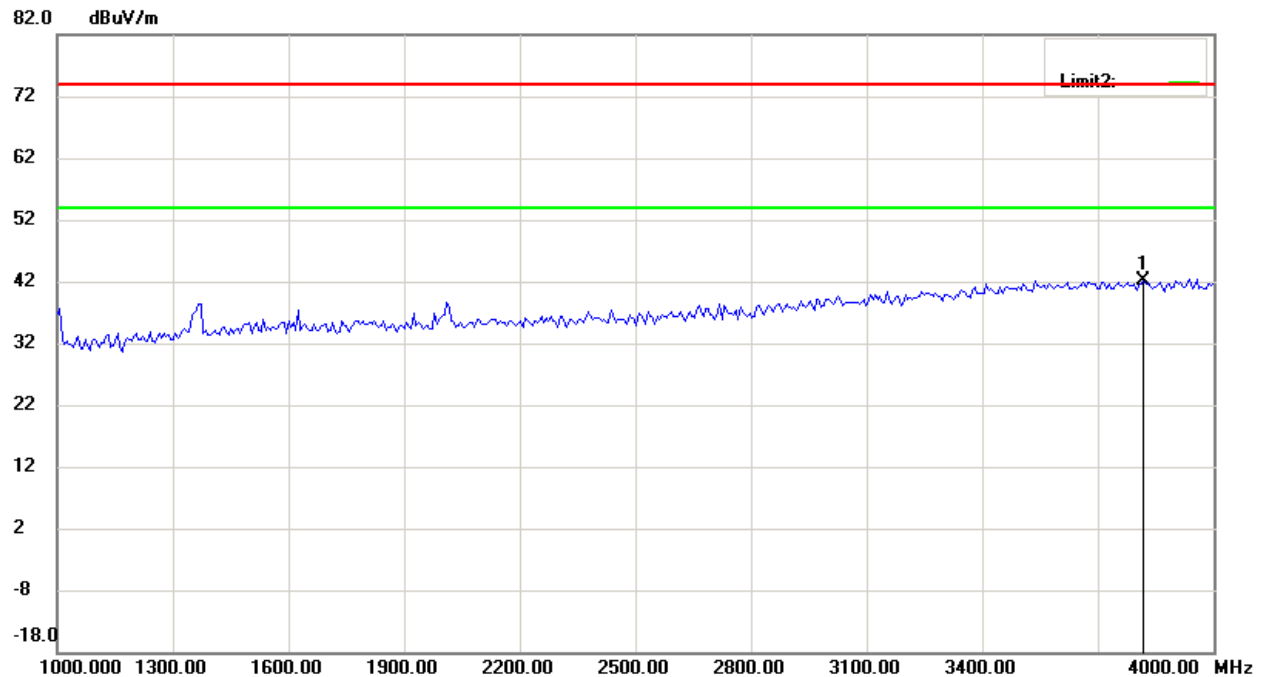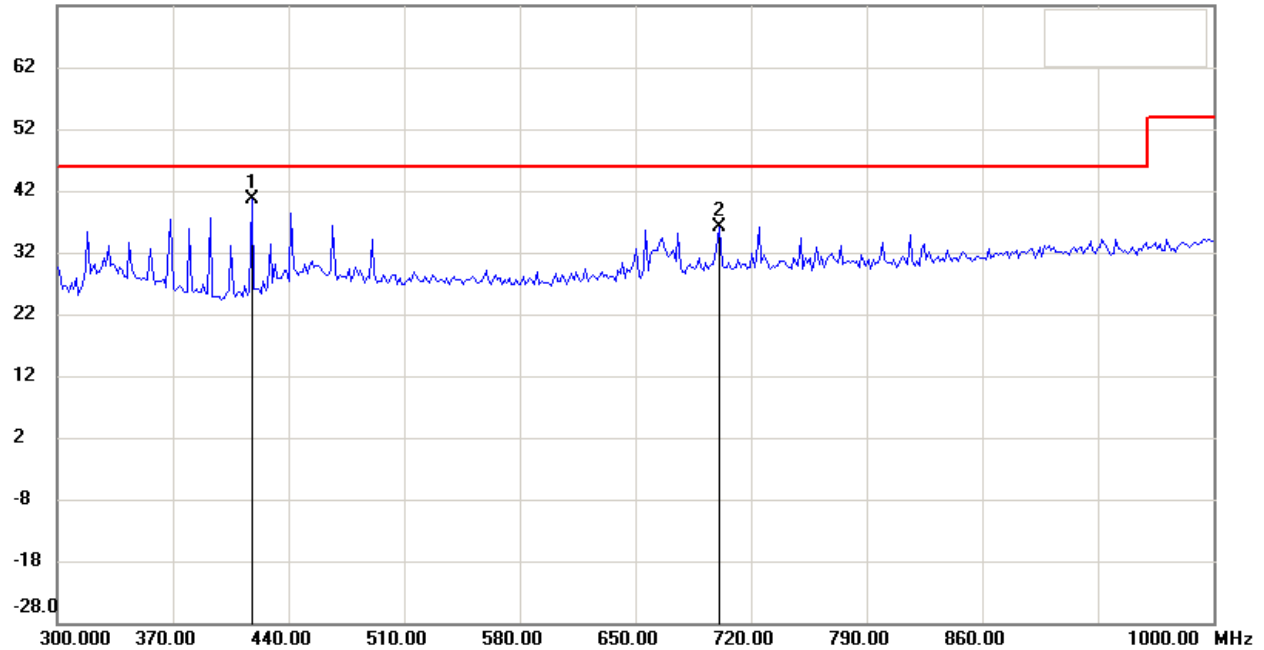

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

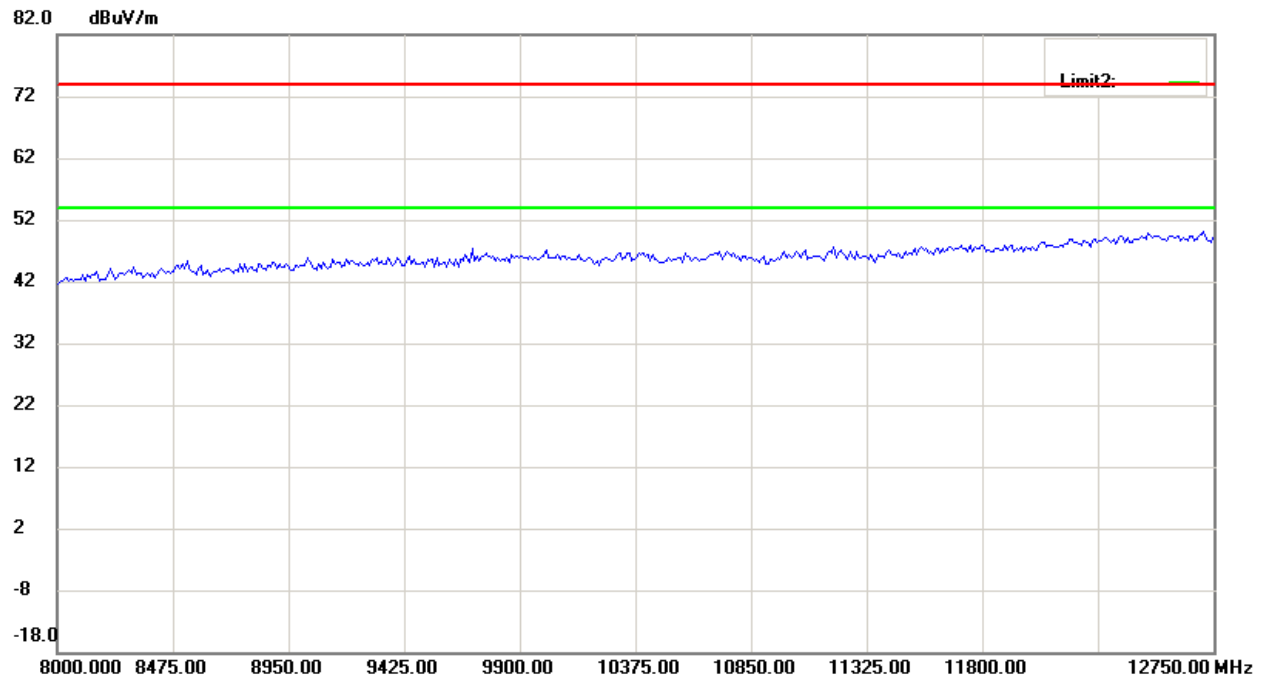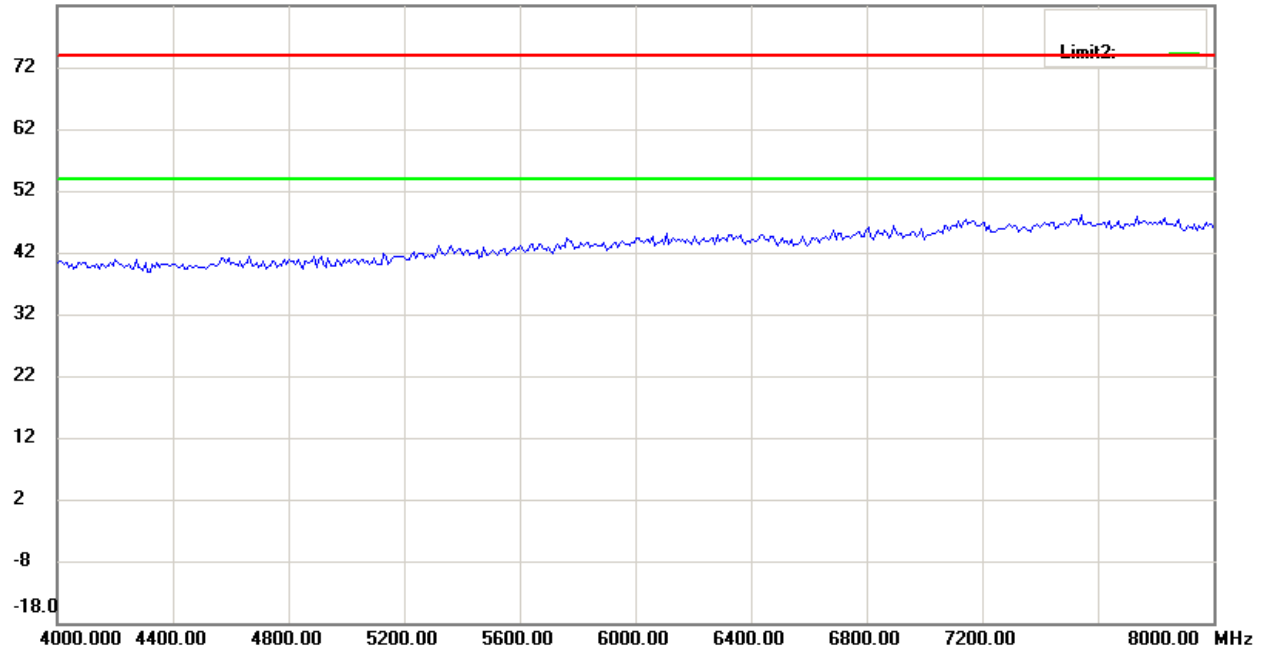

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

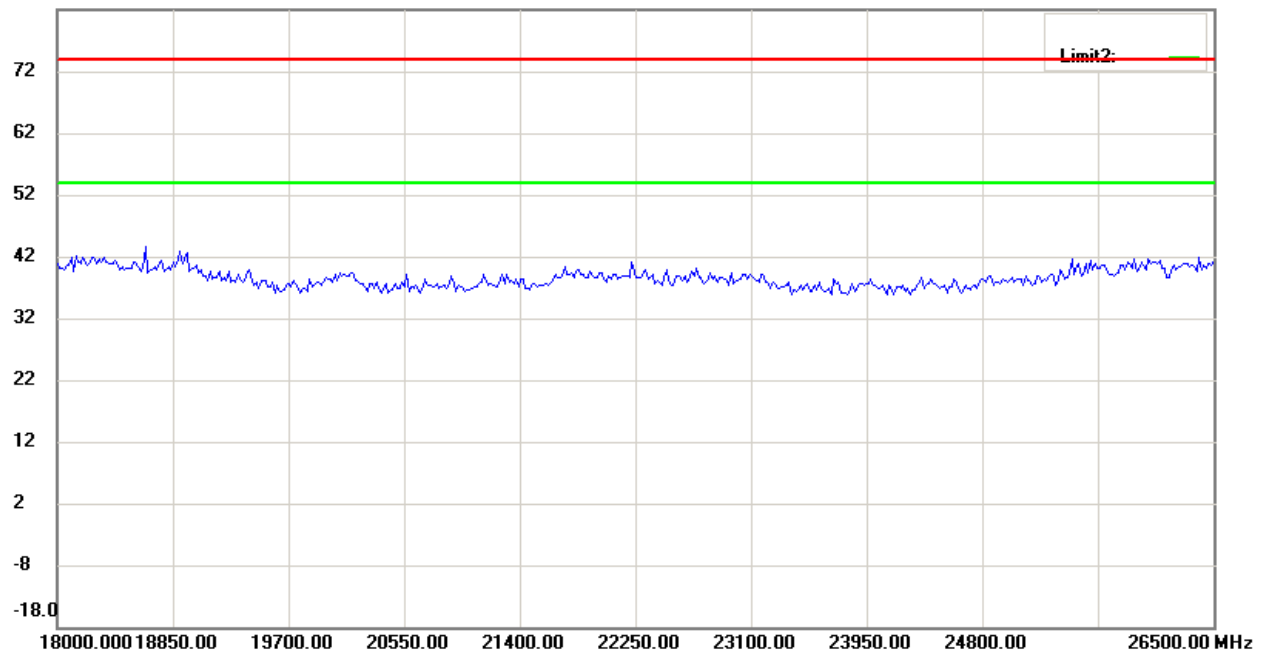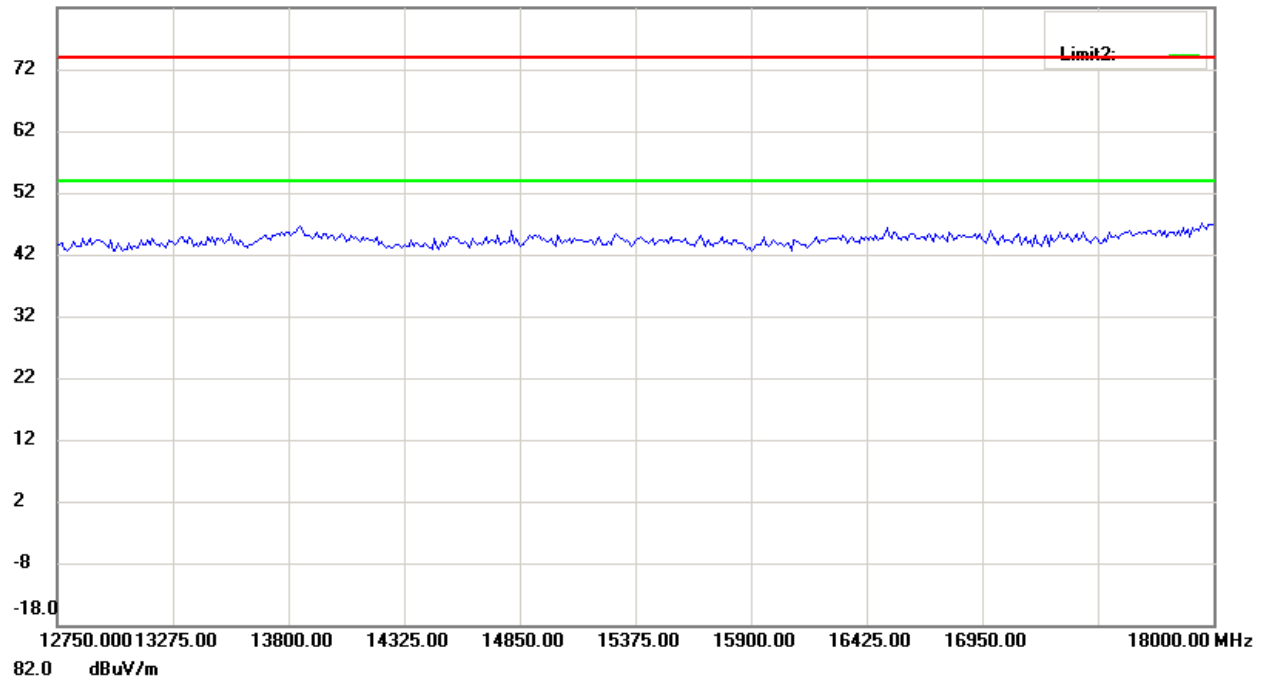

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.



# Worldwide Testing Services(Taiwan) Co., Ltd.



Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

Receiver \_ 2479.1 MHz

Antenna Polarization H

66.9 dBuV/m

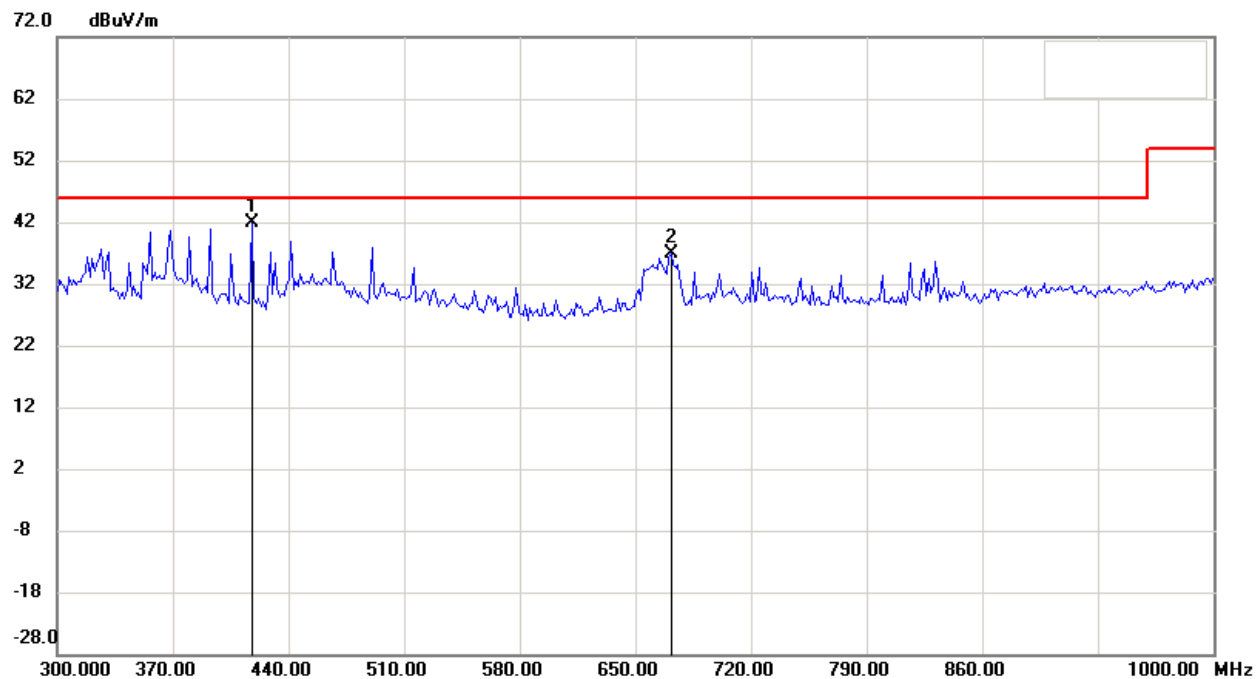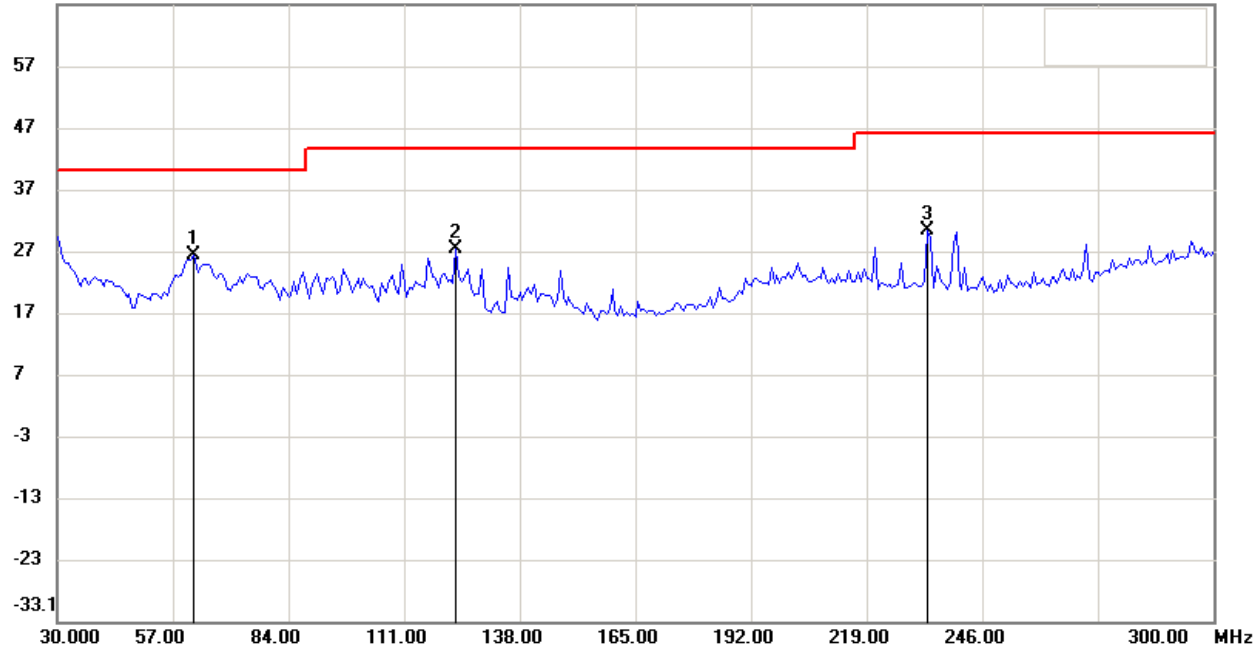

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

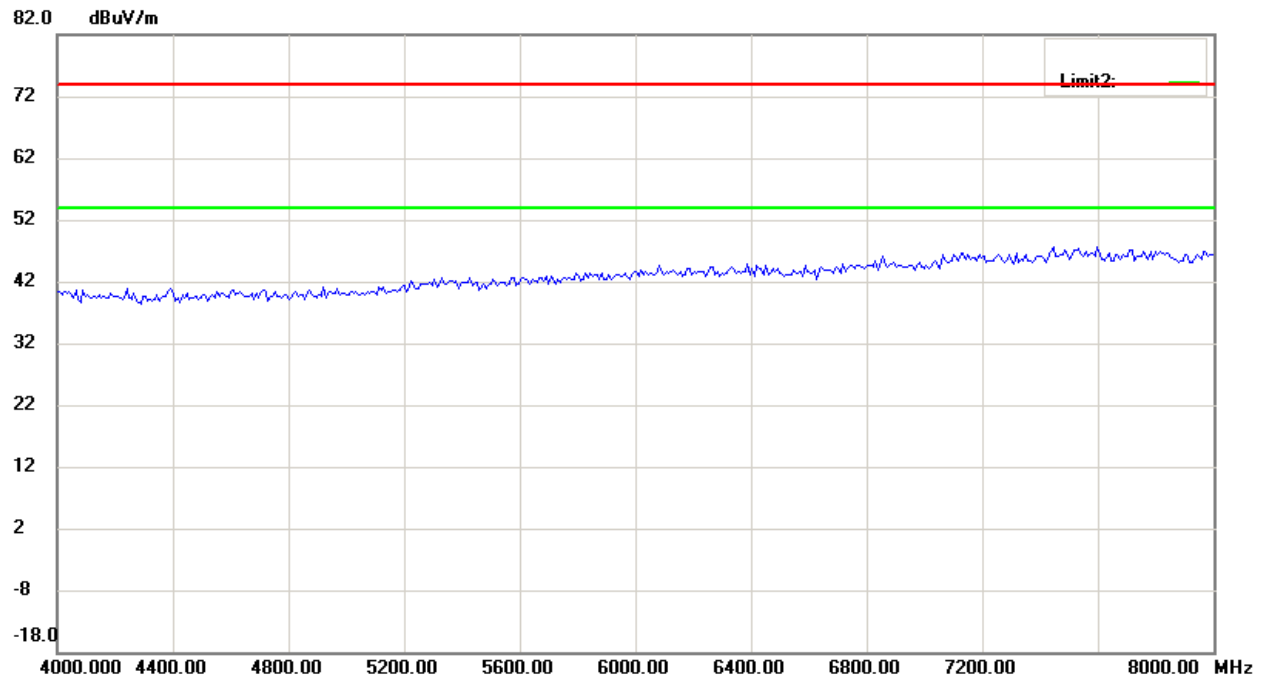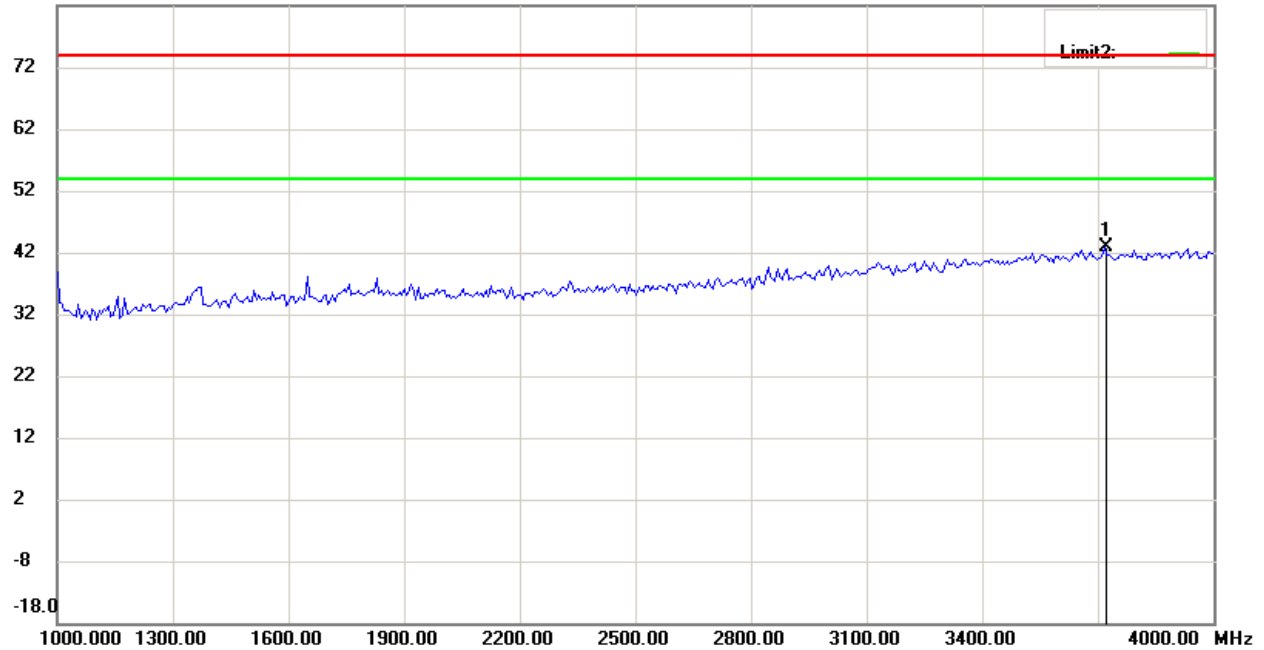

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

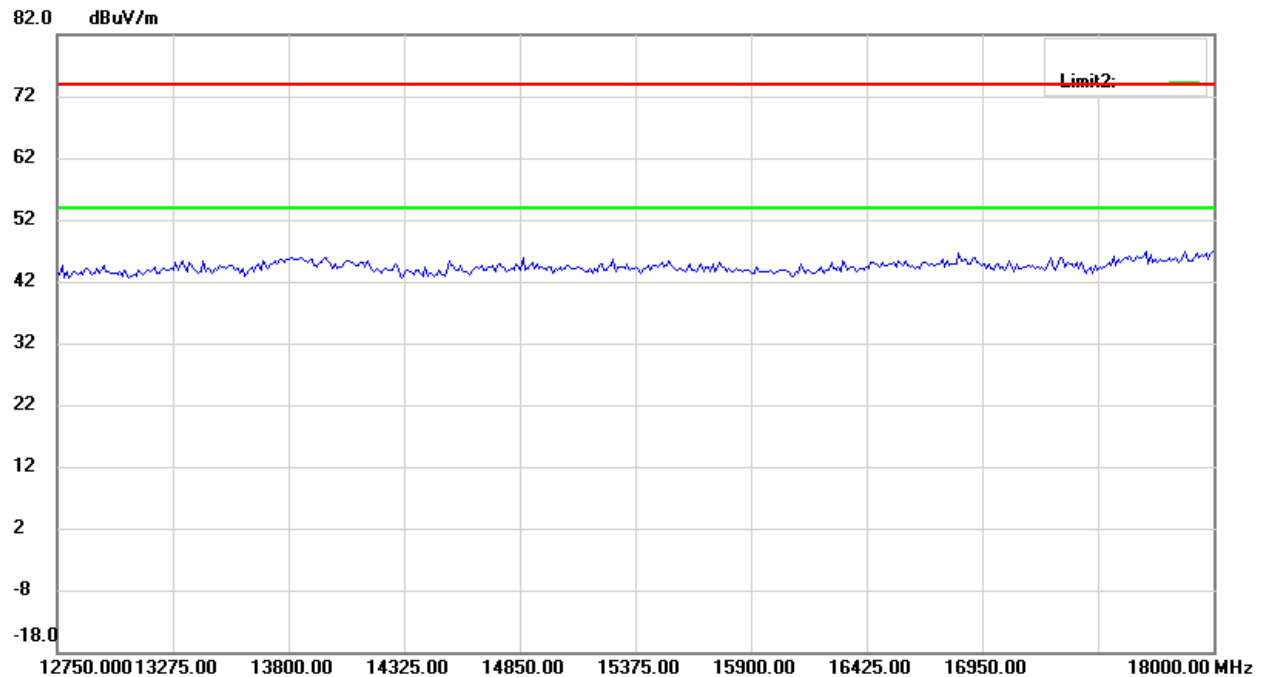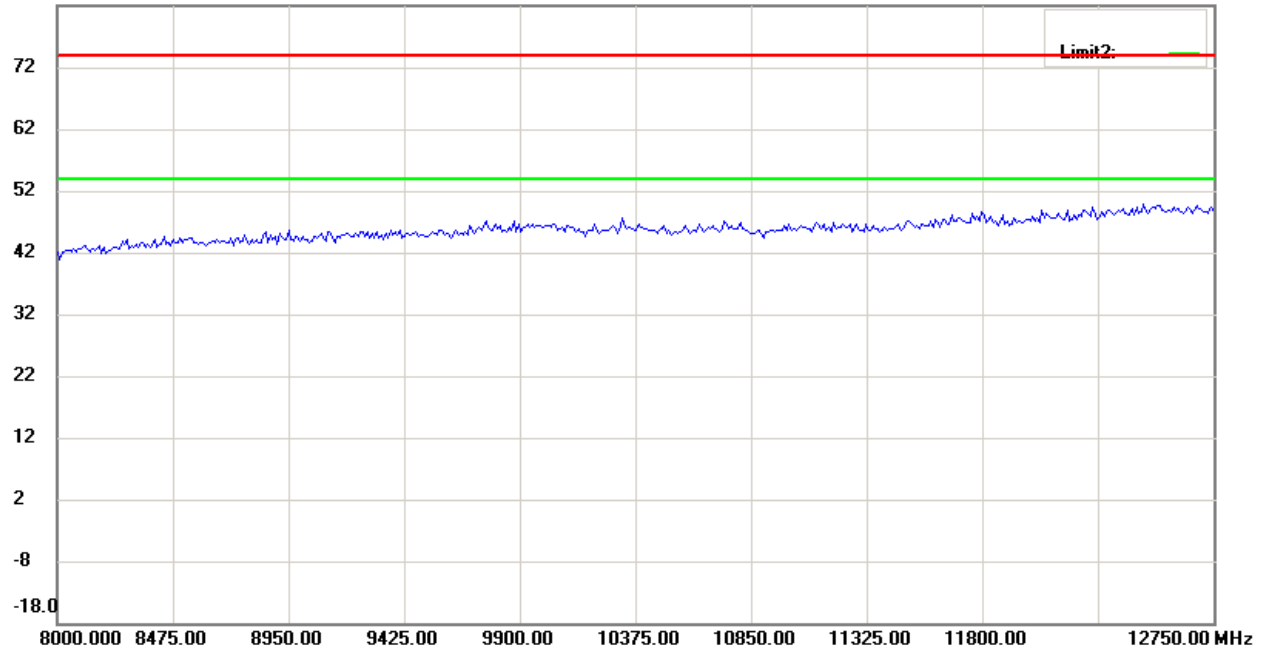

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15


FCC ID: R48CPS

82.0 dBuV/m

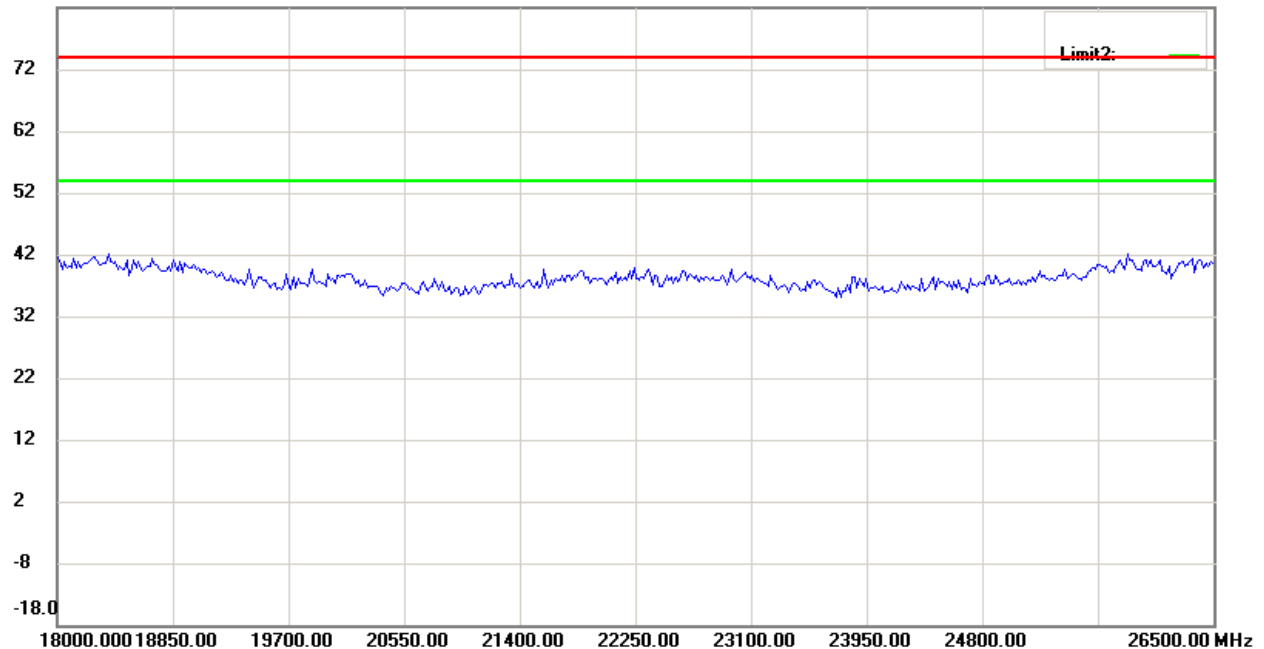

## Antenna Polarization V

66.9 dBuV/m

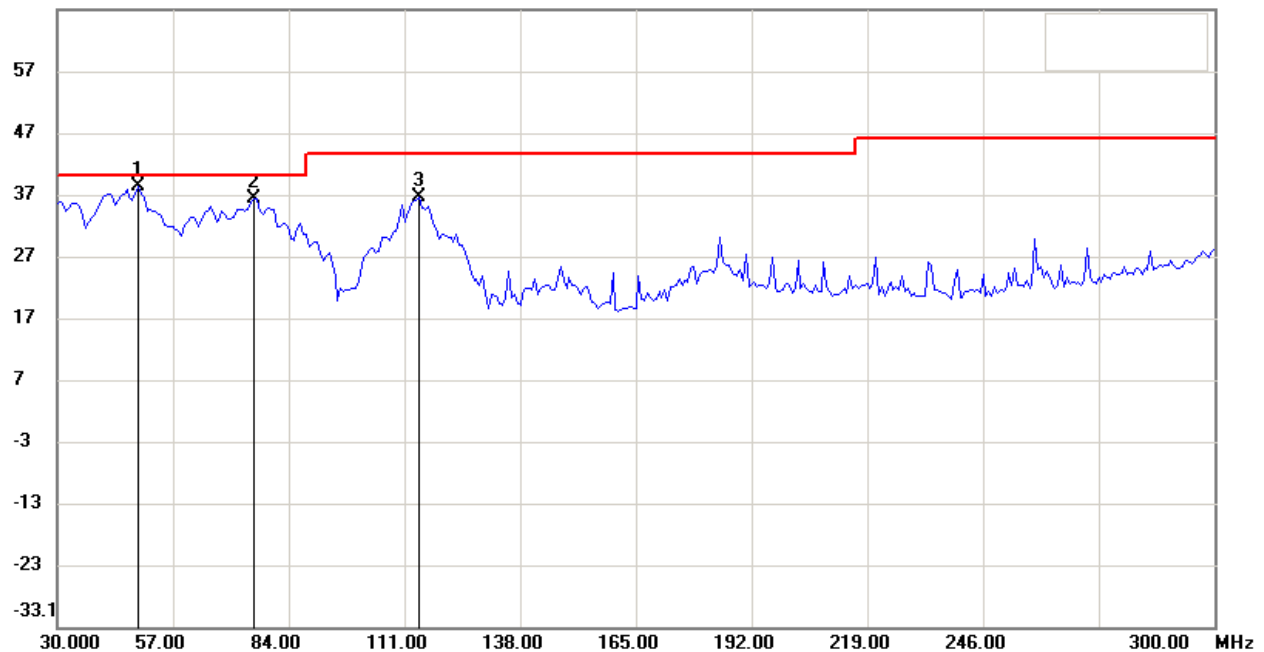

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

72.0 dBuV/m

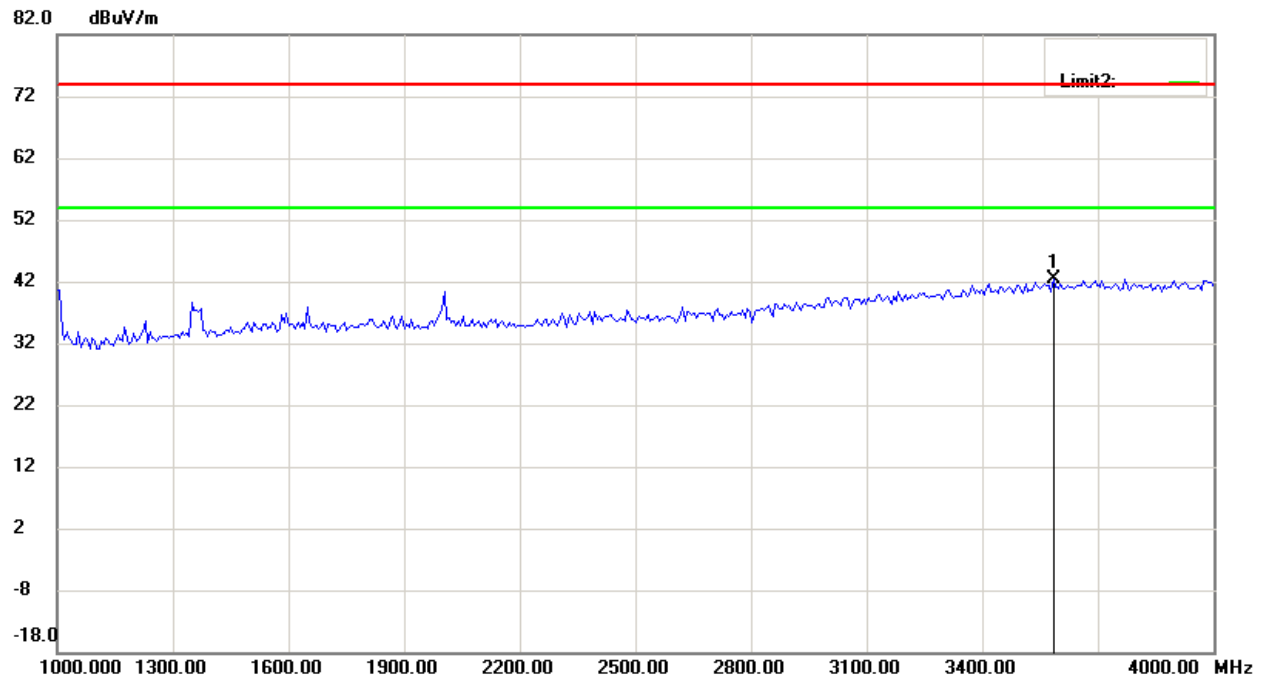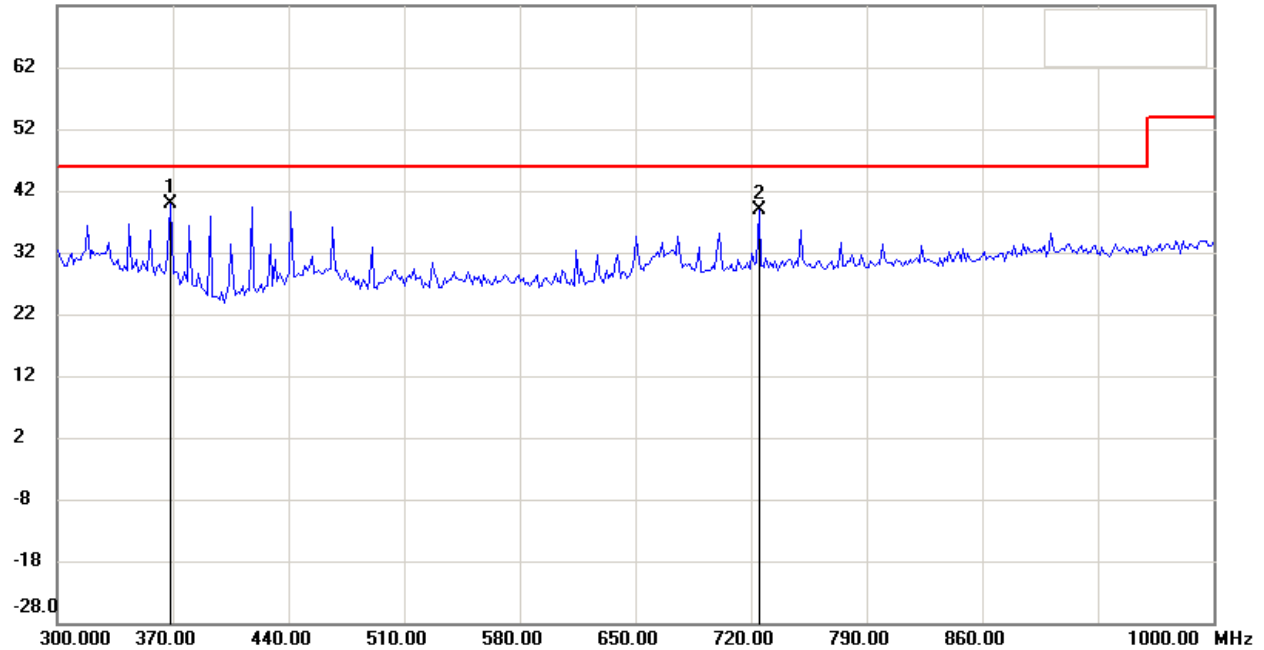

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

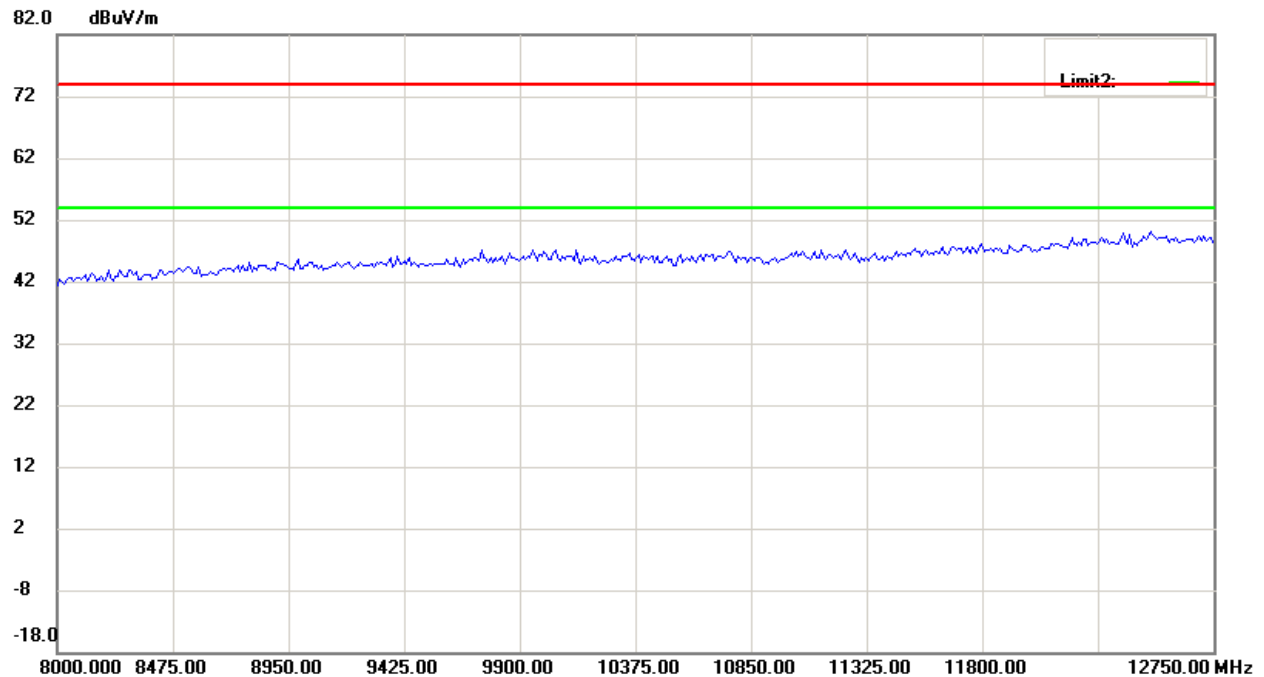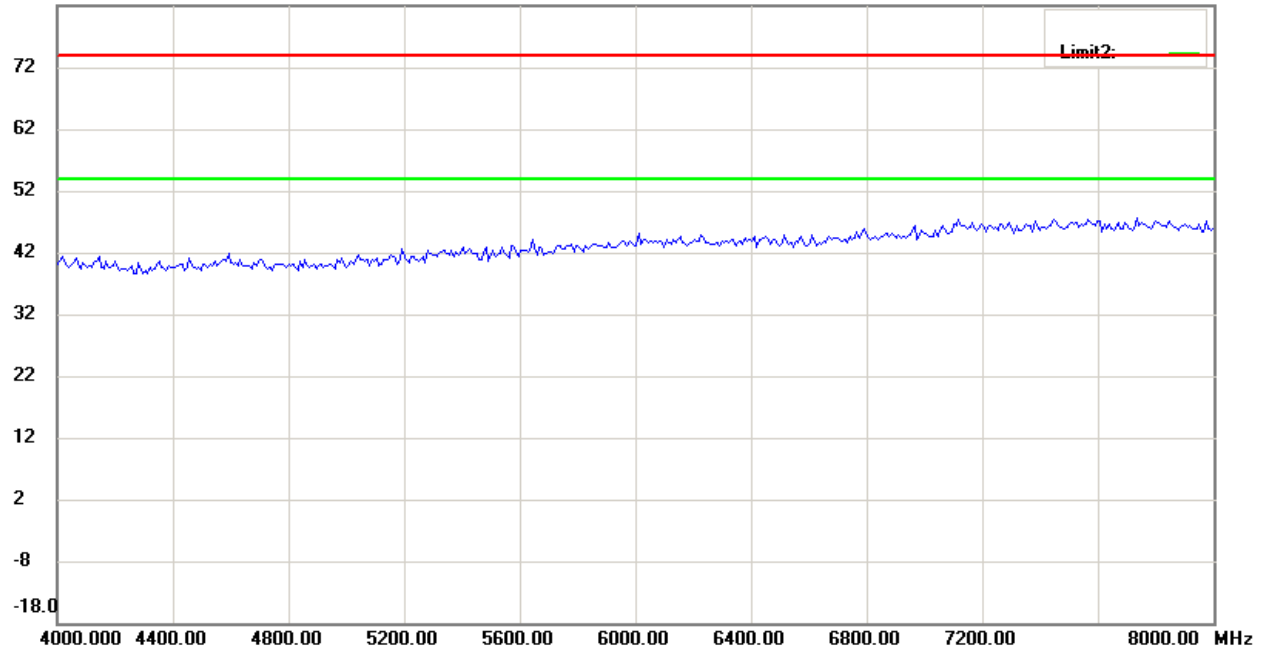

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.





# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

82.0 dBuV/m

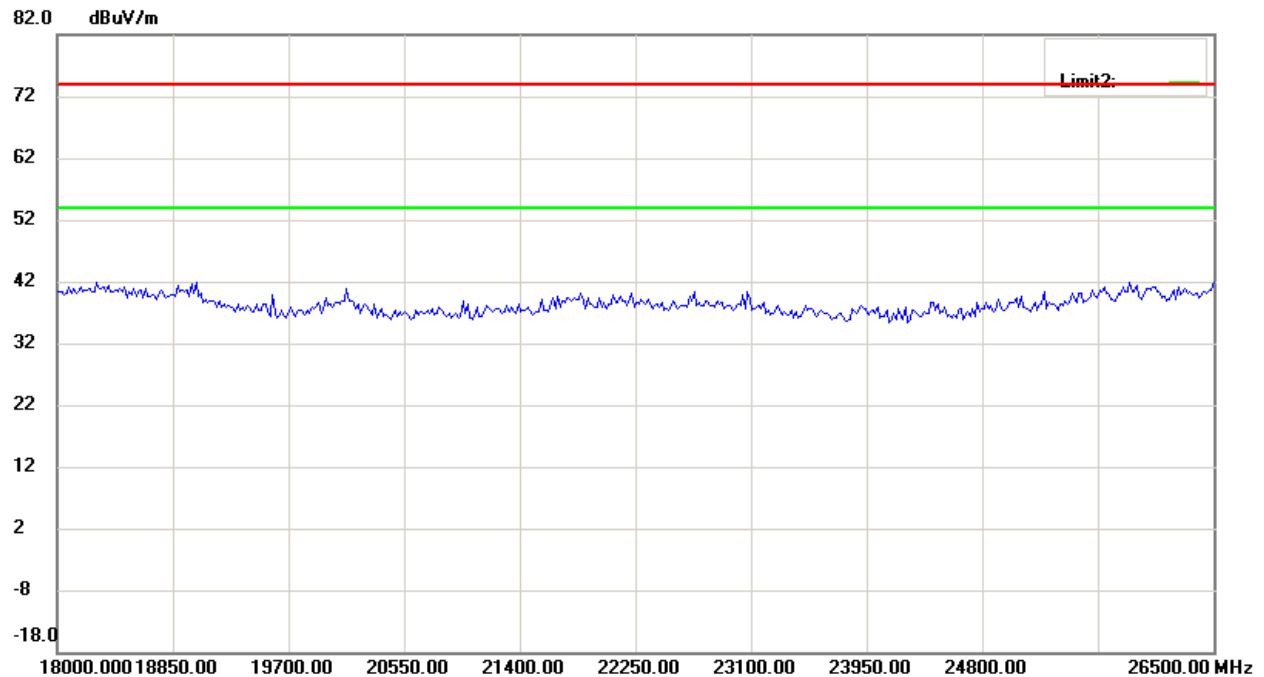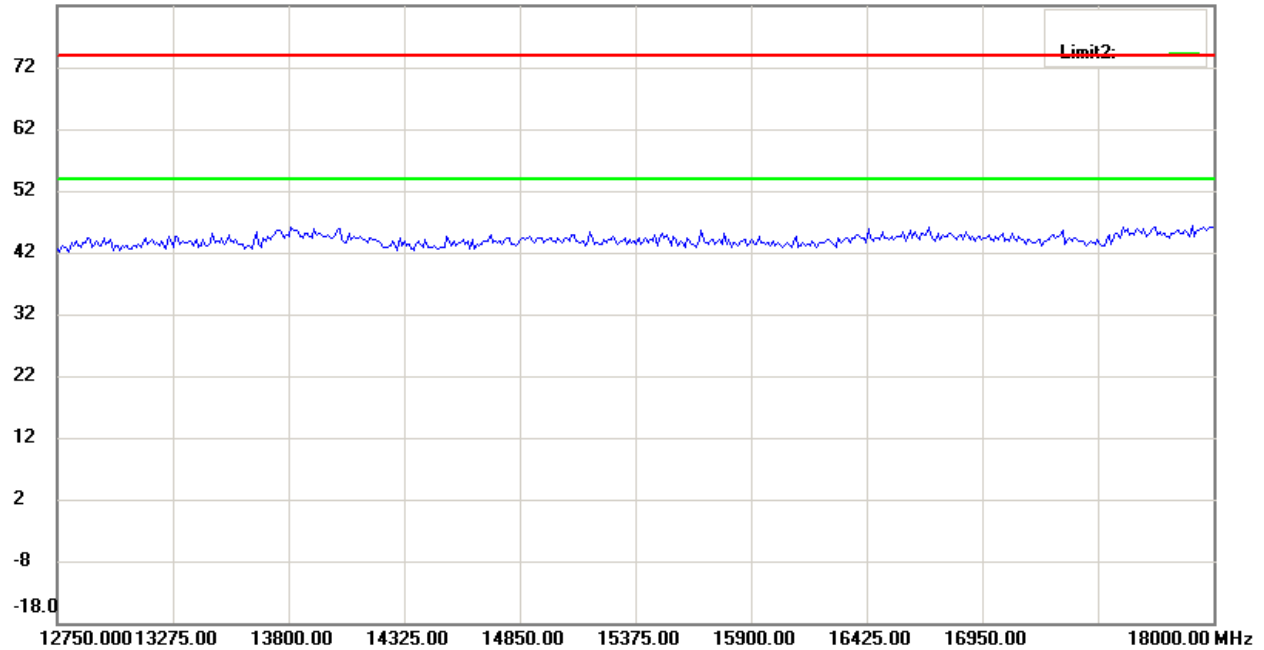

Up Line: Peak Limit Line Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of radiated test data of this test report.




# Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15


FCC ID: R48CPS

## Conducted Emission

### LISN N

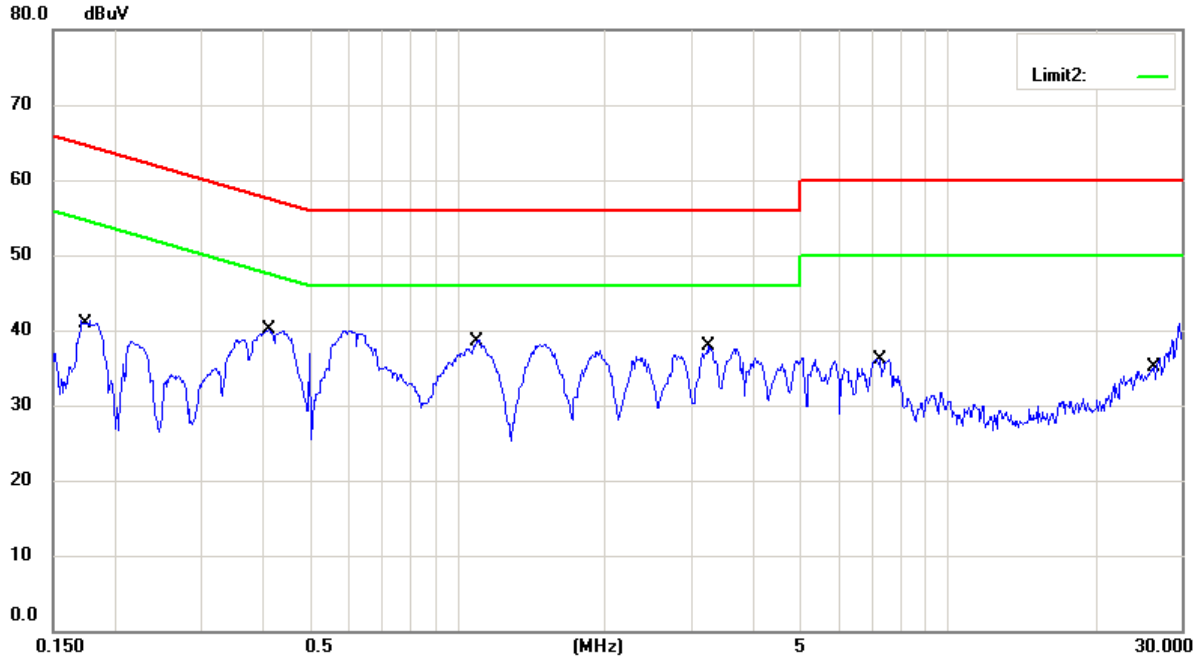

### LISN L1

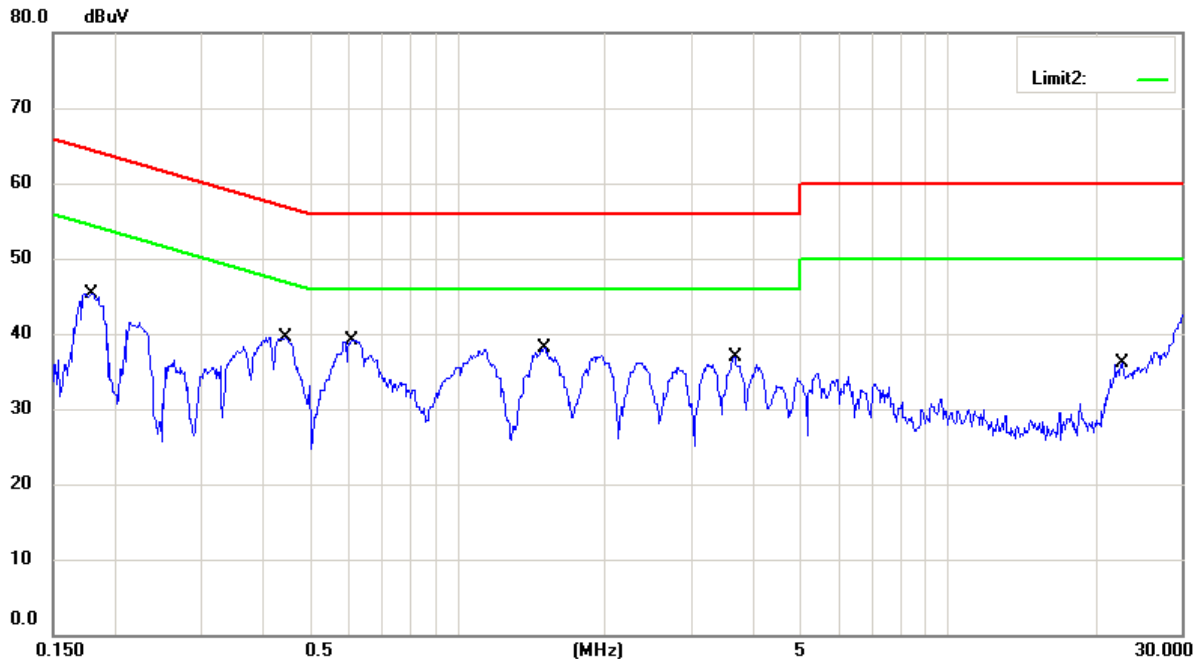

Up Line: QP Limit Line

Down Line: Ave Limit Line

Note:

1. The attached measurement plots are preliminarily pre-scanned with peak detector for determining the final checking frequencies and are for reference only.
2. The some frequencies may exceed the limit line without the specified detectors, but that cannot present the results are failed to the specification of test standard.
3. For corrected test results are listed in the relevant table of AC conducted test data of this test report.




## ***Worldwide Testing Services(Taiwan) Co., Ltd.***

Registration number: W6M20908-9965-P-15


FCC ID: R48CPS

EUT photos

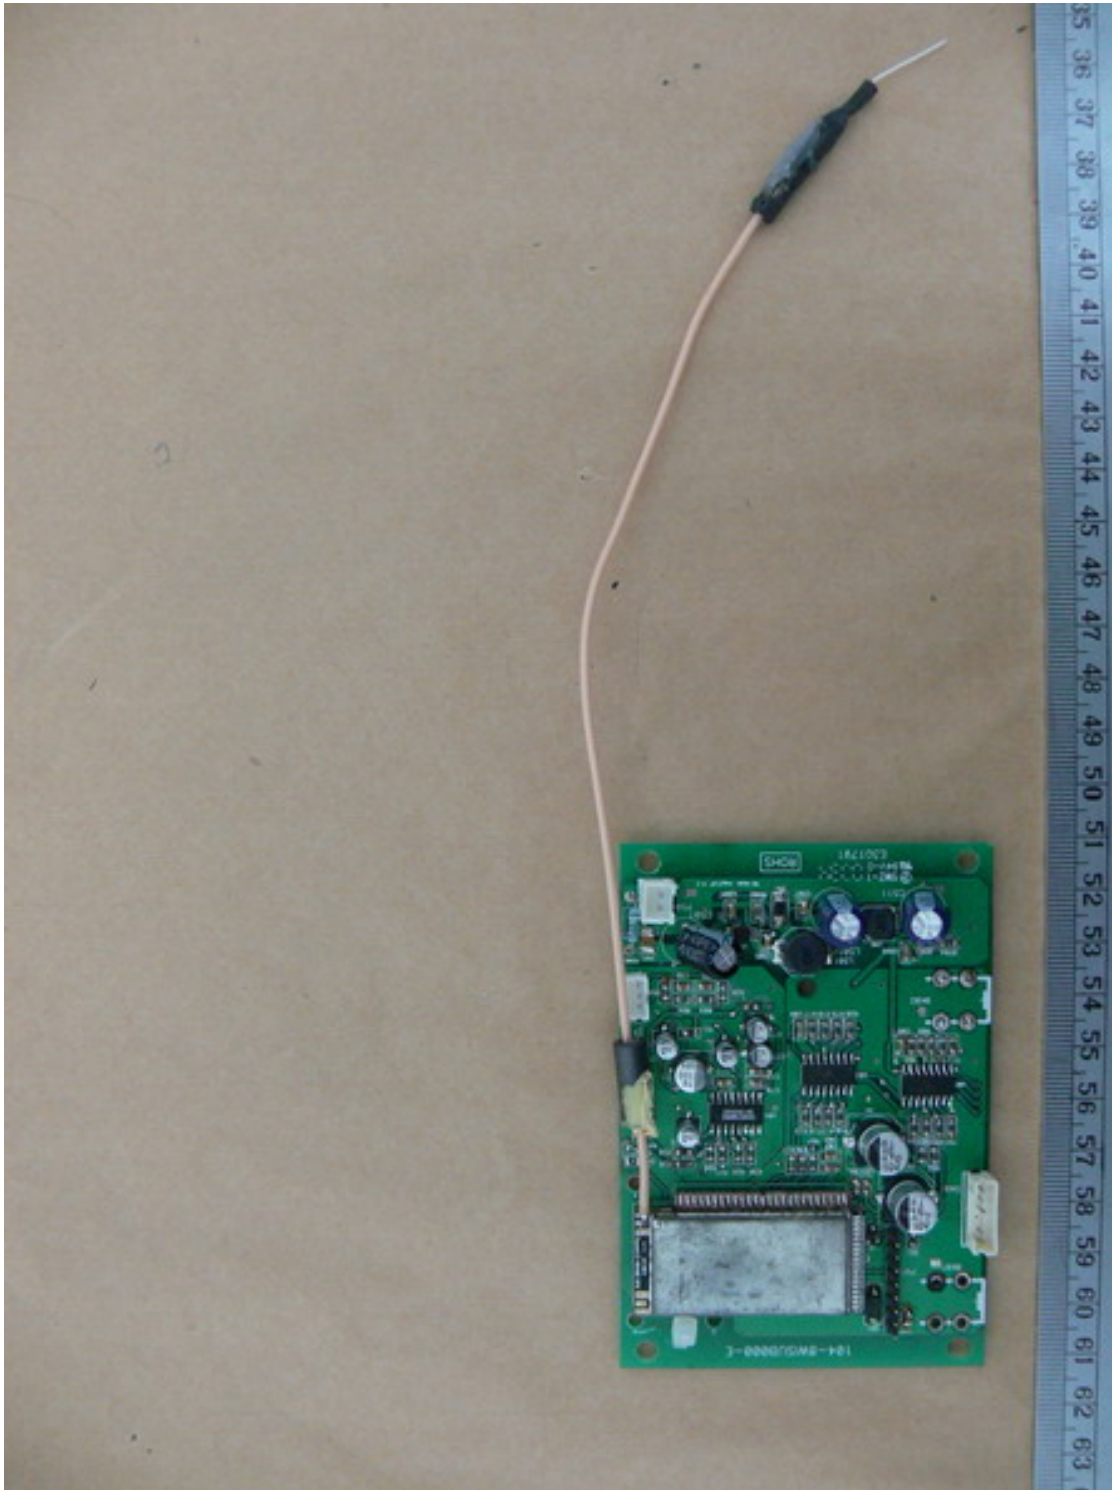




Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

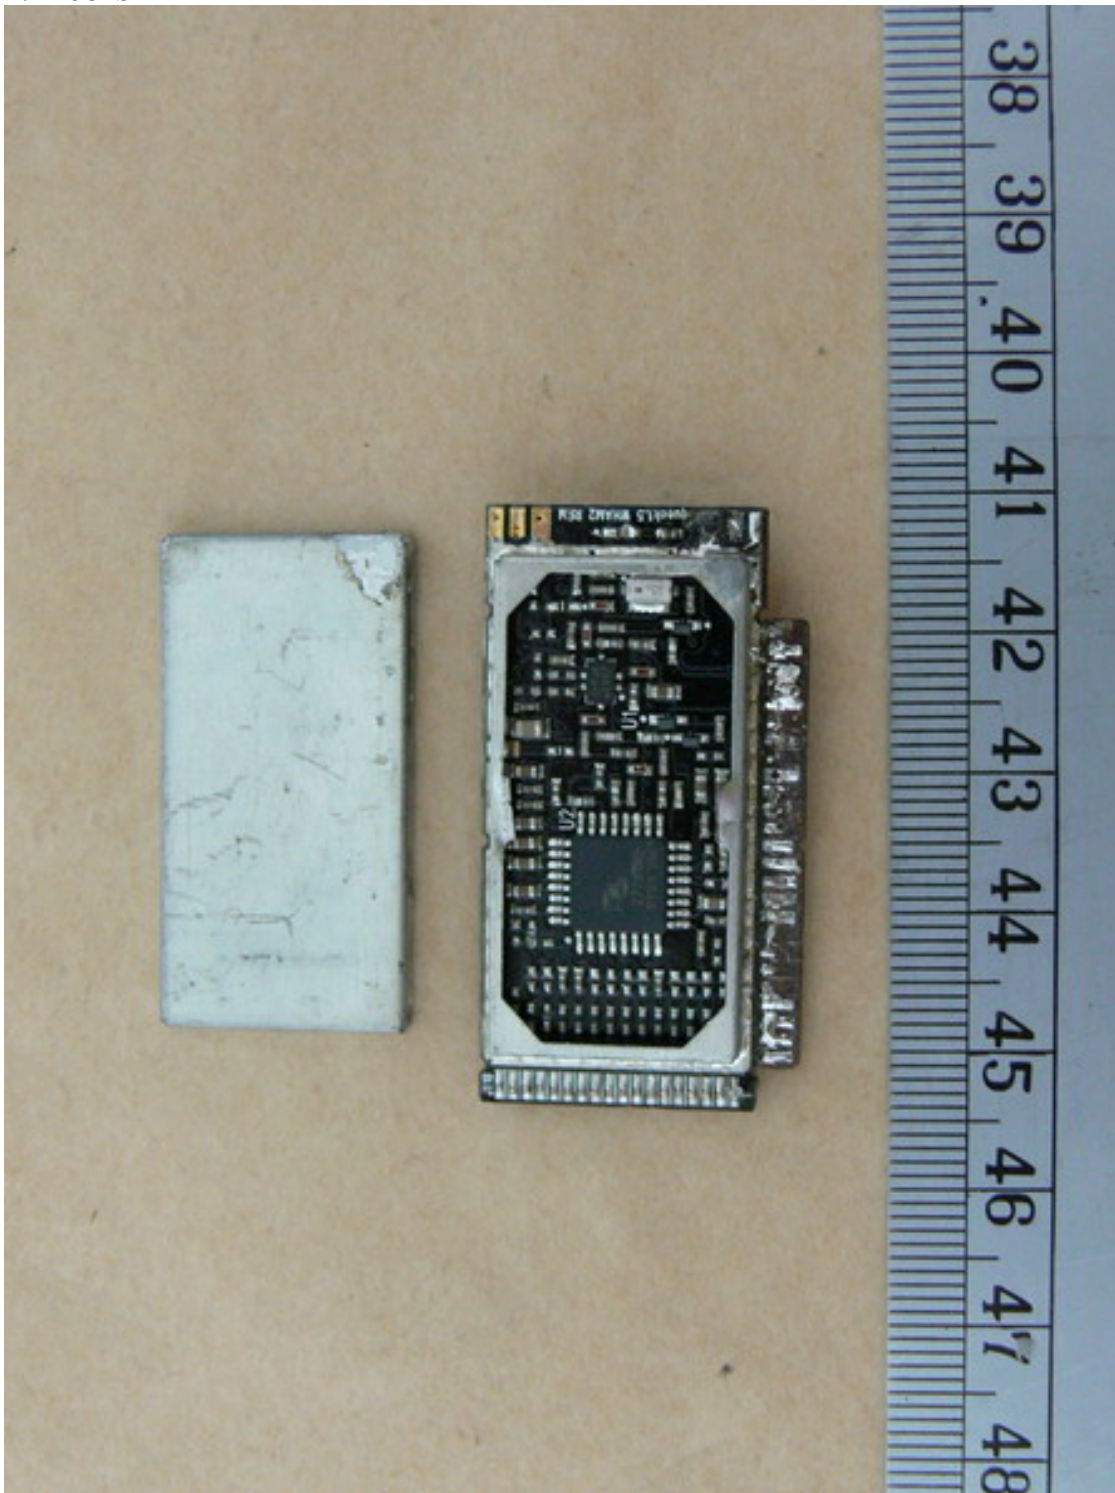



## Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15  
FCC ID: R48CPS

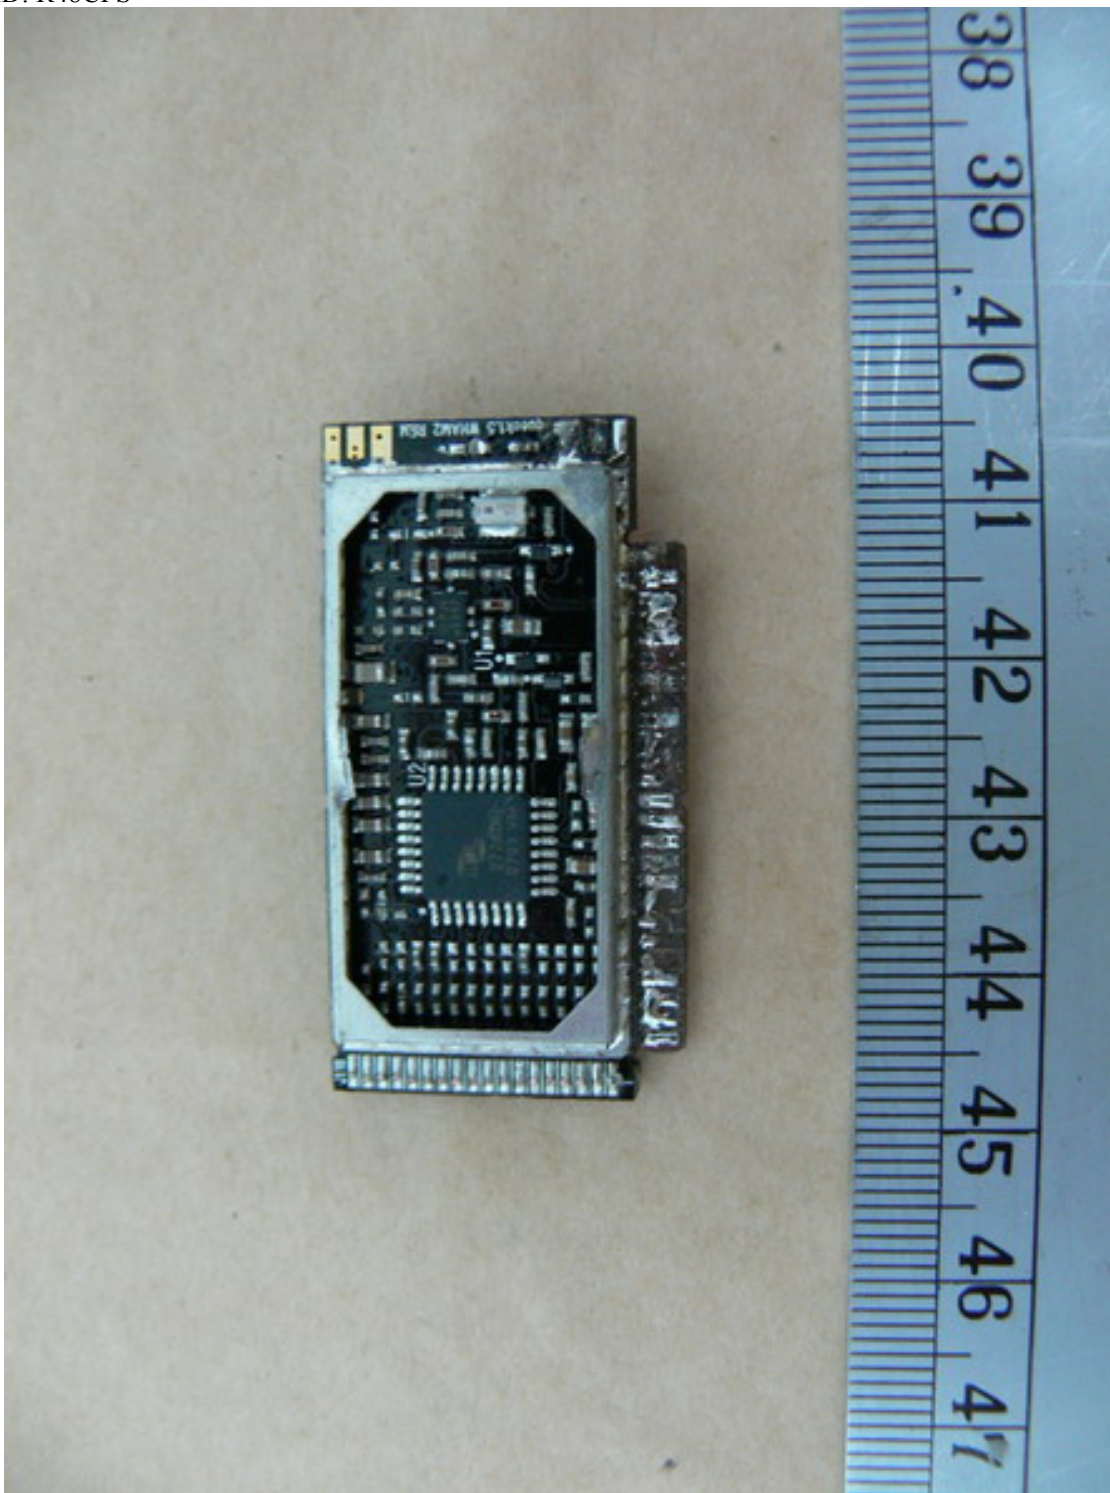




## Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

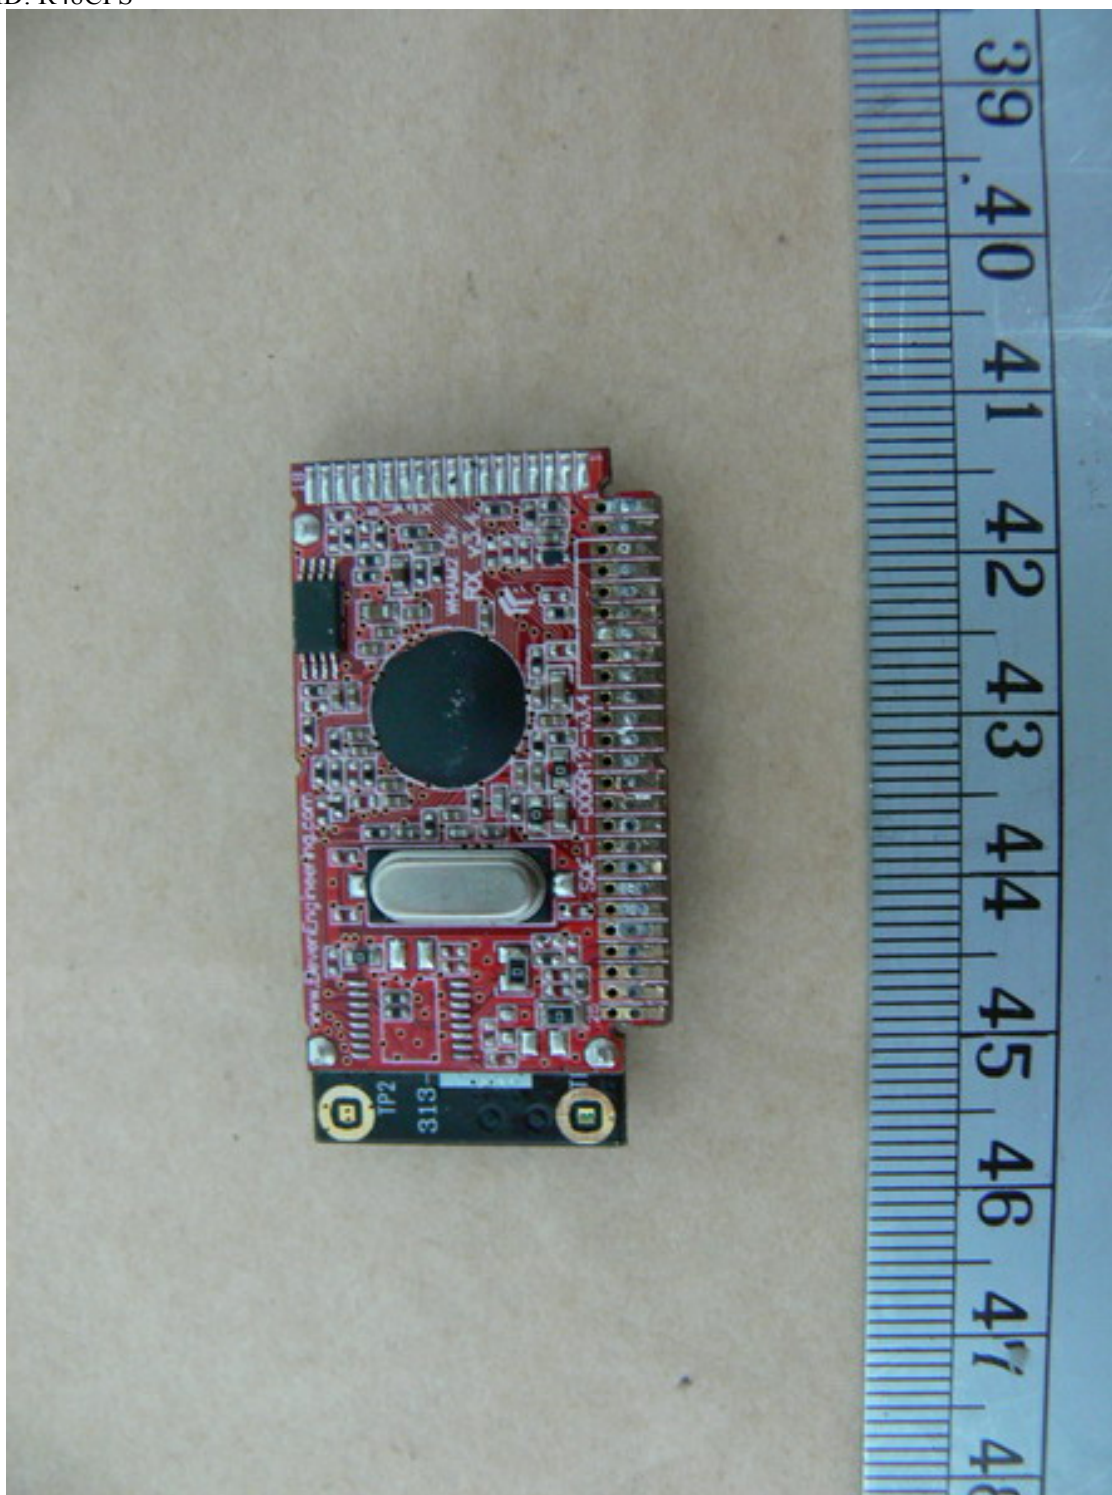



## Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

Set Up Photo of Radiated Emission





## Worldwide Testing Services(Taiwan) Co., Ltd.

Registration number: W6M20908-9965-P-15

FCC ID: R48CPS

Set Up Photo of Conducted Emission

