

# FCC Test Report

Product Name	Active Bluetooth Speakers
Model No.	MR1
FCC ID.	R48RKBTMR1

Applicant	Meiloon Industrial Co., Ltd.
Address	No.77, Lane 1775, Chuen-Ryh Road, Taoyuan City, Taiwan

Date of Receipt	Sep. 16, 2014
Issued Date	Dec. 29, 2014
Report No.	1490385R-RFUSP01V00-A
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of Quietek Corporation.

## Test Report

Issued Date: Dec. 29, 2014

Report No.: 1490385R-RFUSP01V00-A

**QuiTek**

Product Name	Active Bluetooth Speakers
Applicant	Meiloon Industrial Co., Ltd.
Address	No.77, Lane 1775, Chuen-Ryh Road, Taoyuan City, Taiwan
Manufacturer	Meiloon Industrial Co., Ltd.
Model No.	MR1
FCC ID.	R48RKBTMR1
EUT Rated Voltage	AC 100-240V, 50/60Hz
EUT Test Voltage	AC 120V/60Hz
Trade Name	ruarkaudio
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2013 ANSI C63.10: 2009, KDB 558074 D01 DTS Meas Guidance v03r02
Test Result	Complied

Documented By :



( Senior Adm. Specialist / Joanne Lin )

Tested By :



( Engineer / Eason Chen )

Approved By :



( Director / Vincent Lin )

## TABLE OF CONTENTS

Description	Page
<b>1. GENERAL INFORMATION .....</b>	<b>4</b>
1.1. EUT Description .....	4
1.2. Operational Description .....	6
1.3. Tested System Details .....	7
1.4. Configuration of Tested System .....	7
1.5. EUT Exercise Software .....	7
1.6. Test Facility .....	8
<b>2. CONDUCTED EMISSION .....</b>	<b>9</b>
2.1. Test Equipment .....	9
2.2. Test Setup .....	9
2.3. Limits .....	10
2.4. Test Procedure .....	10
2.5. Uncertainty .....	10
2.6. Test Result of Conducted Emission .....	11
<b>3. PEAK POWER OUTPUT .....</b>	<b>13</b>
3.1. Test Equipment .....	13
3.2. Test Setup .....	13
3.3. Limit .....	13
3.4. Test Procedure .....	13
3.5. Uncertainty .....	13
3.6. Test Result of Peak Power Output .....	14
<b>4. RADIATED EMISSION .....</b>	<b>15</b>
4.1. Test Equipment .....	15
4.2. Test Setup .....	15
4.3. Limits .....	16
4.4. Test Procedure .....	17
4.5. Uncertainty .....	17
4.6. Test Result of Radiated Emission .....	18
<b>5. RF ANTENNA CONDUCTED TEST .....</b>	<b>22</b>
5.1. Test Equipment .....	22
5.2. Test Setup .....	22
5.3. Limits .....	22
5.4. Test Procedure .....	22
5.5. Uncertainty .....	22
5.6. Test Result of RF Antenna Conducted Test .....	23
<b>6. BAND EDGE .....</b>	<b>24</b>
6.1. Test Equipment .....	24
6.2. Test Setup .....	25
6.3. Limit .....	26
6.4. Test Procedure .....	26
6.5. Uncertainty .....	26
6.6. Test Result of Band Edge .....	27
<b>7. OCCUPIED BANDWIDTH (6DB BW) .....</b>	<b>33</b>
7.1. Test Equipment .....	33
7.2. Test Setup .....	33
7.3. Limits .....	33
7.4. Test Procedure .....	33
7.5. Uncertainty .....	33
7.6. Test Result of Occupied Bandwidth .....	34
<b>8. POWER DENSITY .....</b>	<b>37</b>
8.1. Test Equipment .....	37
8.2. Test Setup .....	37
8.3. Limits .....	37
8.4. Test Procedure .....	37
8.5. Uncertainty .....	37
8.6. Test Result of Power Density .....	38
<b>9. EMI REDUCTION METHOD DURING COMPLIANCE TESTING .....</b>	<b>41</b>

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs

## 1. GENERAL INFORMATION

### 1.1. EUT Description

Product Name	Active Bluetooth Speakers
Trade Name	ruarkaudio
Model No.	MR1
FCC ID.	R48RKBTMR1
Frequency Range	2402 – 2480MHz
Channel Number	V4.0: 40CH
Type of Modulation	V4.0: GFSK(1Mbps)
Antenna Type	Print on PCB
Channel Control	Auto
Antenna Gain	Refer to the table “Antenna List”
Audio Cable	Non-Shielded, 2m
Power Cable	Non-Shielded, 0.6m
Power Adapter	MFR: ruarkaudio , M/N: GPE402-140200D Input: AC 100-240V, 50/60Hz, 1.0A Output: 14V---2.0A Cable Out: Non-Shielded, 1.8m
Power Adapter	MFR: ruarkaudio , M/N: DYS40-140200W-K Input: AC 100-240V, 50/60Hz, 1.0A Output: 14V---2.0A Cable Out: Non-Shielded, 1.8m
Contain Module	BTM-645

#### Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	meiloon	QTKOTAPR00541	Print on PCB	-0.46dBi for 2.4 GHz

Note: The antenna of EUT is conforming to FCC 15.203.

**Center Frequency of Each Channel: (For V4.0)**

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 00:	2402 MHz	Channel 01:	2404 MHz	Channel 02:	2406 MHz	Channel 03:	2408 MHz
Channel 04:	2410 MHz	Channel 05:	2412 MHz	Channel 06:	2414 MHz	Channel 07:	2416 MHz
Channel 08:	2418 MHz	Channel 09:	2420 MHz	Channel 10:	2422 MHz	Channel 11:	2424 MHz
Channel 12:	2426 MHz	Channel 13:	2428 MHz	Channel 14:	2430 MHz	Channel 15:	2432 MHz
Channel 16:	2434 MHz	Channel 17:	2436 MHz	Channel 18:	2438 MHz	Channel 19:	2440 MHz
Channel 20:	2442 MHz	Channel 21:	2444 MHz	Channel 22:	2446 MHz	Channel 23:	2448 MHz
Channel 24:	2450 MHz	Channel 25:	2452 MHz	Channel 26:	2454 MHz	Channel 27:	2456 MHz
Channel 28:	2458 MHz	Channel 29:	2460 MHz	Channel 30:	2462 MHz	Channel 31:	2464 MHz
Channel 32:	2466 MHz	Channel 33:	2468 MHz	Channel 34:	2470 MHz	Channel 35:	2472 MHz
Channel 36:	2474 MHz	Channel 37:	2476 MHz	Channel 38:	2478 MHz	Channel 39:	2480 MHz

**Note:**

1. The EUT is a Active Bluetooth Speakers with a built-in Bluetooth transceiver, this report for Bluetooth V4.0.
2. These tests were conducted on a sample for the purpose of demonstrating compliance of Bluetooth transmitter with Part 15 Subpart C Paragraph 15.247 for spread spectrum devices.
3. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.

Test Mode	Mode 1: Transmit - BLE (GFSK)
-----------	-------------------------------


### 1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	Power Cord
1 Notebook PC	DELL	PP18L	36119001664	Non-Shielded, 0.8m
2 iPod nano	Apple	A1199	5U7047U8VQ5	N/A
3 Speaker	PHILIPS	SBP1100	HS1A0825057519	N/A
4 Test Fixture	Meiloon	MI94U-O	N/A	N/A

Signal Cable Type	Signal cable Description
A LPT Cable	Shielded, 1.4m
B Audio Cable	Non-Shielded, 1.8m
C Audio Cable	Non-Shielded, 1.2m
D Audio Cable	Non-Shielded, 2m
E Signal Cable	Non-Shielded, 0.1m

### 1.4. Configuration of Tested System

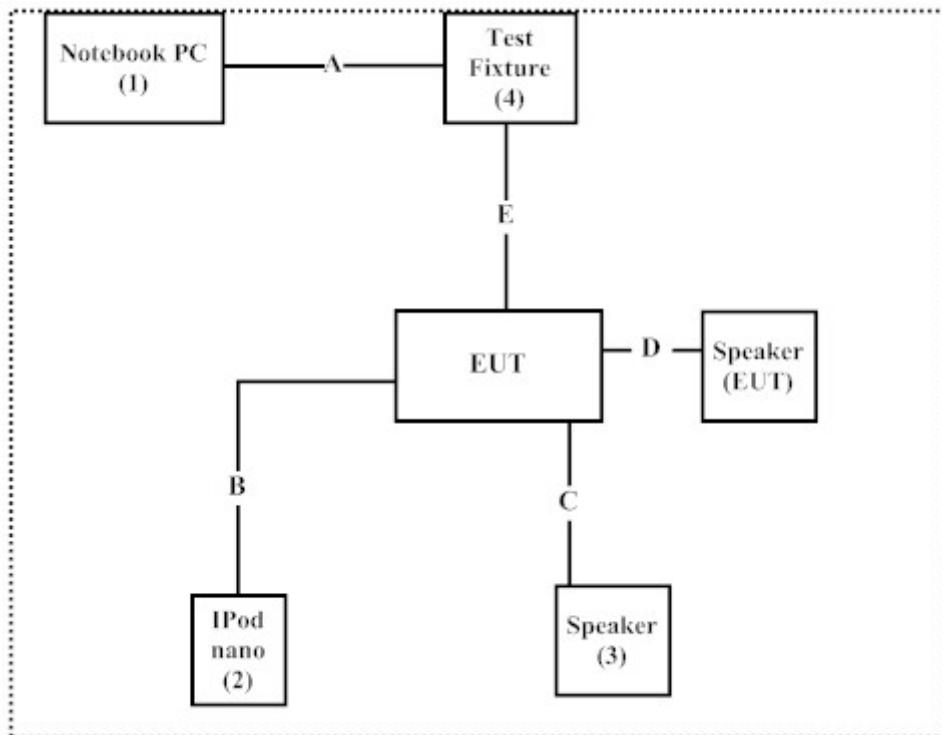

### 1.5. EUT Exercise Software

1. Setup the EUT as shown in Section 1.4.
2. Execute software “BlueTest 3 v2.5.0” on the EUT
3. Configure the test mode, the test channel, and the data rate.
4. Press “OK” to start the continuous Transmit.
5. Verify that the EUT works properly.

## 1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	30-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from

QuiTek Corporation's Web Site: <http://www.quietek.com/tw/ctg/cts/accreditations.htm>

The address and introduction of QuiTek Corporation's laboratories can be founded in our Web site:  
<http://www.quietek.com/>

Site Description: File on  
Federal Communications Commission  
FCC Engineering Laboratory  
7435 Oakland Mills Road  
Columbia, MD 21046  
Registration Number: 92195

Site Name: Quietek Corporation  
Site Address: No.5-22, Ruishukeng,  
Linkou Dist. New Taipei City 24451,  
Taiwan, R.O.C.  
TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789  
E-Mail : [service@quietek.com](mailto:service@quietek.com)

FCC Accreditation Number: TW1014

## 2. Conducted Emission


### 2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2014	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2014	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2014	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar., 2014	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2014	
	No.1 Shielded Room				

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by “X” are used to measure the final test results.

### 2.2. Test Setup

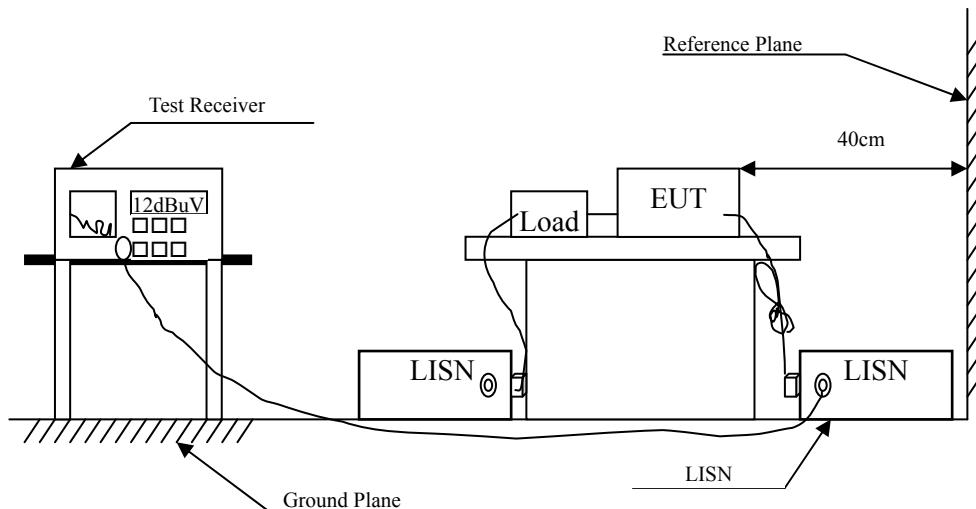

### 2.3. Limits

<b>FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit</b>		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

### 2.4. Test Procedure

The EUT and Peripherals are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all the interface cables must be changed according to ANSI C63.10: 2009 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

The EUT was setup to ANSI C63.10, 2009; tested to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

### 2.5. Uncertainty

± 2.26 dB

**2.6. Test Result of Conducted Emission**

Product : Active Bluetooth Speakers  
Test Item : Conducted Emission Test  
Power Line : Line 1  
Test Mode : Mode 1: Transmit - BLE (GFSK) (2440MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
<b>LINE 1</b>					
<b>Quasi-Peak</b>					
0.150	9.661	35.430	45.091	-20.909	66.000
0.181	9.652	31.930	41.582	-23.532	65.114
0.279	9.655	27.260	36.915	-25.399	62.314
0.306	9.656	28.010	37.666	-23.877	61.543
0.568	9.670	35.610	45.280	-10.720	56.000
0.740	9.680	28.850	38.530	-17.470	56.000
<b>Average</b>					
0.150	9.661	25.340	35.001	-20.999	56.000
0.181	9.652	23.090	32.742	-22.372	55.114
0.279	9.655	21.320	30.975	-21.339	52.314
0.306	9.656	21.650	31.306	-20.237	51.543
0.568	9.670	29.090	38.760	-7.240	46.000
0.740	9.680	22.300	31.980	-14.020	46.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "  " means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Active Bluetooth Speakers  
Test Item : Conducted Emission Test  
Power Line : Line 2  
Test Mode : Mode 1: Transmit - BLE (GFSK) (2440MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
<b>LINE 2</b>					
<b>Quasi-Peak</b>					
0.162	9.658	36.840	46.498	-19.159	65.657
0.220	9.662	30.310	39.972	-24.028	64.000
0.306	9.657	30.060	39.717	-21.826	61.543
0.322	9.657	30.270	39.927	-21.159	61.086
0.400	9.661	20.210	29.871	-28.986	58.857
0.576	9.671	35.210	44.881	-11.119	56.000
<b>Average</b>					
0.162	9.658	24.700	34.358	-21.299	55.657
0.220	9.662	20.250	29.912	-24.088	54.000
0.306	9.657	23.890	33.547	-17.996	51.543
0.322	9.657	24.580	34.237	-16.849	51.086
0.400	9.661	12.980	22.641	-26.216	48.857
0.576	9.671	29.500	39.171	-6.829	46.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "   " means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor


### 3. Peak Power Output

#### 3.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
X Power Meter	Anritsu	ML2495A/6K00003357	May, 2014
X Power Sensor	Anritsu	MA2411B/0738448	Jun., 2014

Note: 1. All equipments are calibrated every one year.  
2. The test instruments marked by "X" are used to measure the final test results.

#### 3.2. Test Setup

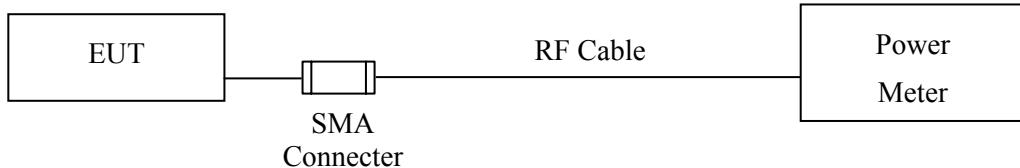

#### 3.3. Limit

The maximum peak power shall be less 1Watt.

#### 3.4. Test Procedure

Tested according to DTS test procedure of KDB 558074 for compliance to FCC 47CFR 15.247 requirements. The maximum peak conducted output power using KDB 558074 section 9.1.2 PKPM1 Peak power meter method.

#### 3.5. Uncertainty

± 1.27 dB

**3.6. Test Result of Peak Power Output**

Product : Active Bluetooth Speakers  
Test Item : Peak Power Output  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit - BLE (GFSK)

Channel No.	Frequency (MHz)	Measurement (dBm)	Required Limit	Result
Channel 00	2402.00	-4.16	1 Watt= 30 dBm	Pass
Channel 19	2440.00	-1.84	1 Watt= 30 dBm	Pass
Channel 39	2480.00	-0.04	1 Watt= 30 dBm	Pass

## 4. Radiated Emission

### 4.1. Test Equipment

The following test equipments are used during the radiated emission test:


Test Site	Equipment		Manufacturer	Model No./Serial No.	Last Cal.
☒ Site # 3	X Loop Antenna		Teseq	HLA6120 / 26739	Jul., 2014
	X Bilog Antenna		Schaffner Chase	CBL6112B/2673	Sep., 2014
	X Horn Antenna		Schwarzbeck	BBHA9120D/D305	Sep., 2014
	X Horn Antenna		Schwarzbeck	BBHA9170/208	Jul., 2014
	X Pre-Amplifier		Agilent	8447D/2944A09549	Sep., 2014
	X Spectrum Analyzer		Agilent	E4407B / US39440758	May, 2014
	X Test Receiver		R & S	ESCS 30/ 825442/018	Sep., 2014
	X Coaxial Cable		QuieTek	QTK-CABLE/ CAB5	Feb., 2014
	X Controller		QuieTek	QTK-CONTROLLER/ CTRL3	N/A
	X Coaxial Switch		Anritsu	MP59B/6200265729	N/A

Note: 1. All equipments are calibrated every one year.


2. The test instruments marked by “X” are used to measure the final test results.

### 4.2. Test Setup

Below 1GHz

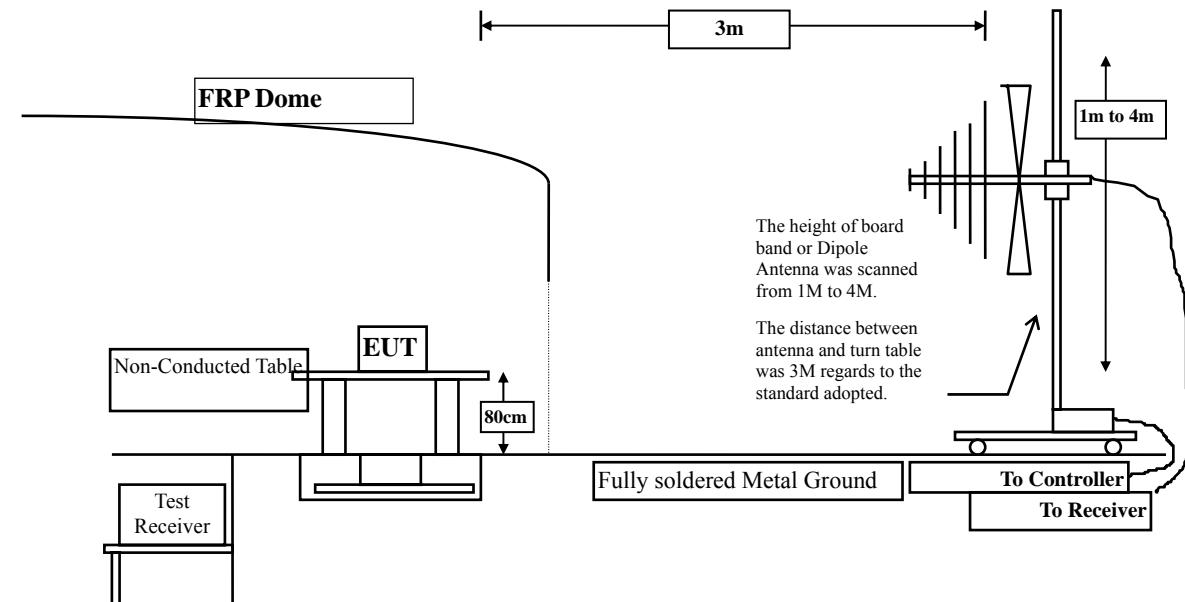

Above 1GHz

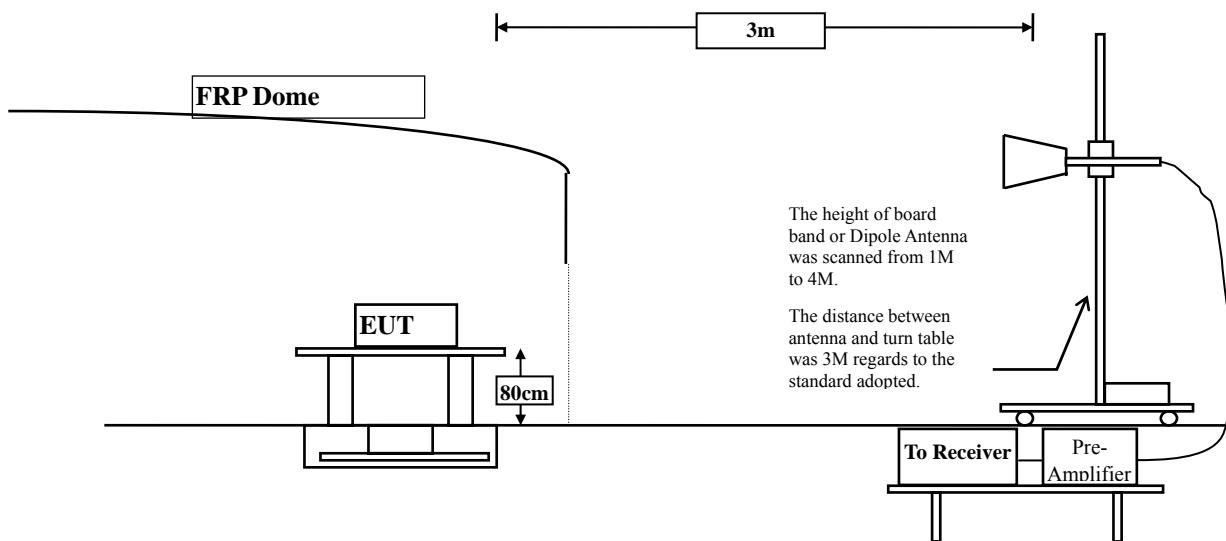

#### 4.3. Limits

##### ➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks:

1. RF Voltage (dBuV) =  $20 \log \text{RF Voltage (uV)}$
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

#### **4.4. Test Procedure**

The EUT was setup according to ANSI C63.10, 2009 and tested according to FHSS test procedure of FCC Public Notice DA 00-705 for compliance to FCC 47CFR 15.247 requirements.

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2009 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

#### **4.5. Uncertainty**

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

**4.6. Test Result of Radiated Emission**

Product : Active Bluetooth Speakers  
Test Item : Harmonic Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit - BLE (GFSK)(2402MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
<b>Horizontal</b>					
<b>Peak Detector:</b>					
4804.000	3.327	44.230	47.557	-26.443	74.000
7206.000	10.136	37.230	47.366	-26.634	74.000
9608.000	13.706	38.100	51.806	-22.194	74.000
<b>Average</b>					
<b>Detector:</b>					
--					
<b>Vertical</b>					
<b>Peak Detector:</b>					
4804.000	6.638	42.660	49.297	-24.703	74.000
7206.000	11.005	37.560	48.565	-25.435	74.000
9608.000	14.103	37.470	51.573	-22.427	74.000
<b>Average</b>					
<b>Detector:</b>					
--					

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Active Bluetooth Speakers  
Test Item : Harmonic Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit - BLE (GFSK) (2440MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
------------------	-------------------------	--------------------------	--------------------------------	--------------	-----------------

**Horizontal****Peak Detector:**

4880.000	3.010	45.340	48.350	-25.650	74.000
7320.000	11.833	36.190	48.024	-25.976	74.000
9760.000	12.580	37.230	49.811	-24.189	74.000

**Average****Detector:**

--

**Vertical****Peak Detector:**

4880.000	5.738	44.130	49.868	-24.132	74.000
7320.000	12.703	36.510	49.213	-24.787	74.000
9760.000	13.052	37.170	50.222	-23.778	74.000

**Average****Detector:**

--

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Active Bluetooth Speakers  
Test Item : Harmonic Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit - BLE (GFSK) (2480MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
------------------	-------------------------	--------------------------	--------------------------------	--------------	-----------------

**Horizontal****Peak Detector:**

4960.000	2.760	43.350	46.110	-27.890	74.000
7440.000	12.567	36.970	49.536	-24.464	74.000
9920.000	13.456	36.340	49.796	-24.204	74.000

**Average****Detector:**

--

**Vertical****Peak Detector:**

4960.000	5.557	45.330	50.887	-23.113	74.000
7440.000	13.426	36.200	49.625	-24.375	74.000
9920.000	13.958	36.750	50.708	-23.292	74.000

**Average****Detector:**

--

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Active Bluetooth Speakers  
Test Item : General Radiated Emission  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit - BLE (GFSK) (2440MHz)

Frequency	Correct Factor	Reading Level	Measurement Level	Margin	Limit
MHz	dB	dBuV	dBuV/m	dB	dBuV/m
<b>Horizontal</b>					
313.240	-4.111	40.508	36.397	-9.603	46.000
431.580	-2.099	45.068	42.969	-3.031	46.000
528.580	1.848	36.895	38.743	-7.257	46.000
672.140	2.291	35.203	37.494	-8.506	46.000
852.560	6.342	30.051	36.393	-9.607	46.000
978.660	6.754	34.951	41.705	-12.295	54.000
<b>Vertical</b>					
134.760	-4.648	42.633	37.985	-5.515	43.500
220.120	-8.840	44.346	35.506	-10.494	46.000
330.700	-4.912	44.074	39.162	-6.838	46.000
528.580	-0.462	37.978	37.516	-8.484	46.000
716.760	-0.653	38.891	38.238	-7.762	46.000
978.660	2.554	34.766	37.320	-16.680	54.000

**Note:**

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss -Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.
8. No emission found between lowest internal used/generated frequency to 30MHz.


## 5. RF Antenna Conducted Test

### 5.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2014
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2014
X      Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014

Note: 1. All equipments are calibrated every one year.  
2. The test instruments Marked "X" are used to measure the final test results.

### 5.2. Test Setup

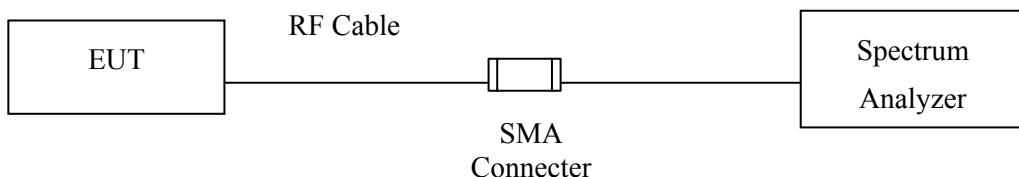

### 5.3. Limits

According to FCC Section 15.247(d). In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

### 5.4. Test Procedure

The EUT was tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.


### 5.5. Uncertainty

± 150Hz


## 5.6. Test Result of RF Antenna Conducted Test

Product : Active Bluetooth Speakers  
Test Item : RF Antenna Conducted Test  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit - BLE (GFSK)


**Figure Channel 00:**

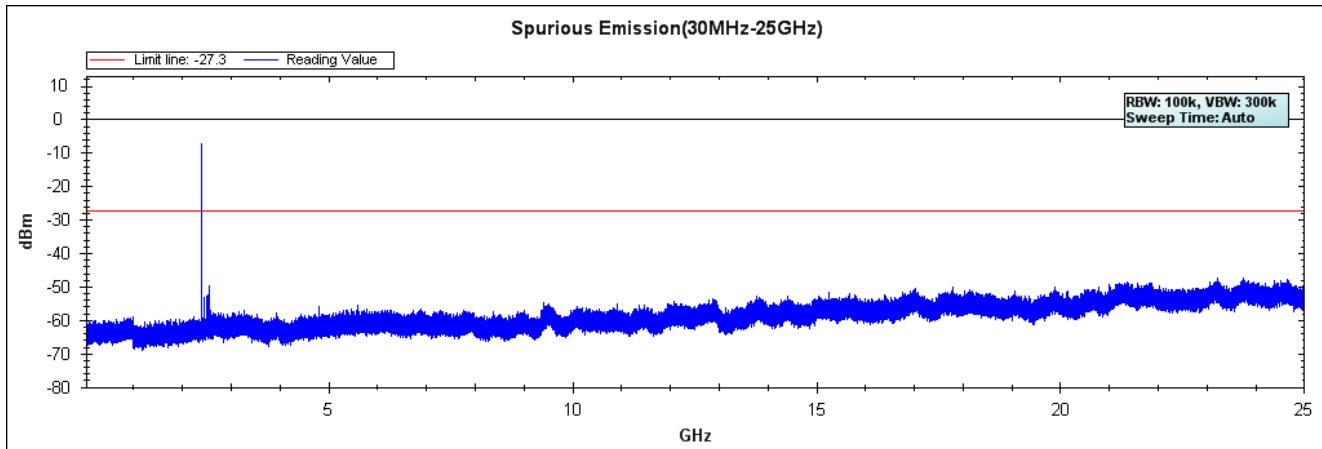

**Figure Channel 19:**

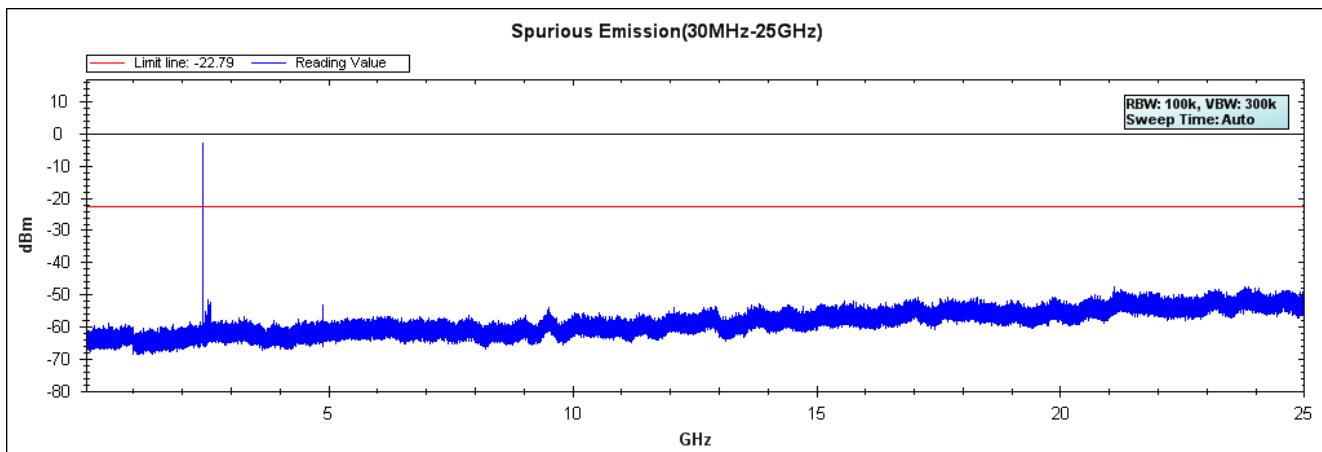

**Figure Channel 39:**

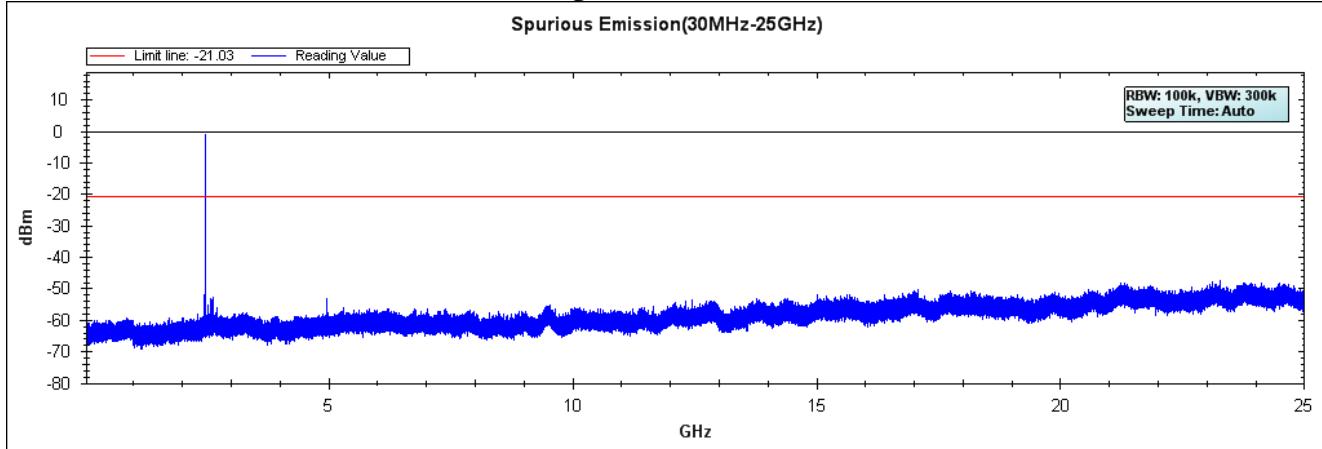

## 6. Band Edge

### 6.1. Test Equipment

#### RF Conducted Measurement

The following test equipments are used during the band edge tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2014
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2014
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014

#### RF Radiated Measurement:


The following test equipments are used during the band edge tests:

Test Site	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒Site # 3	Bilog Antenna	Schaffner Chase	CBL6112B/2673	Sep., 2014
	X Horn Antenna	Schwarzbeck	BBHA9120D/D305	Sep., 2014
	Horn Antenna	Schwarzbeck	BBHA9170/208	Jul., 2014
	X Pre-Amplifier	Agilent	8447D/2944A09549	Sep., 2014
	X Spectrum Analyzer	Agilent	E4407B / US39440758	Jul., 2014
	Test Receiver	R & S	ESCS 30/ 825442/018	Sep., 2014
	X Coaxial Cable	QuieTek	QTK-CABLE/ CAB5	Feb., 2014
	X Controller	QuieTek	QTK-CONTROLLER/ CTRL3	N/A
	X Coaxial Switch	Anritsu	MP59B/6200265729	N/A

Note: 1. All equipments are calibrated every one year.  
2. The test instruments marked by "X" are used to measure the final test results.


## 6.2. Test Setup

### RF Conducted Measurement

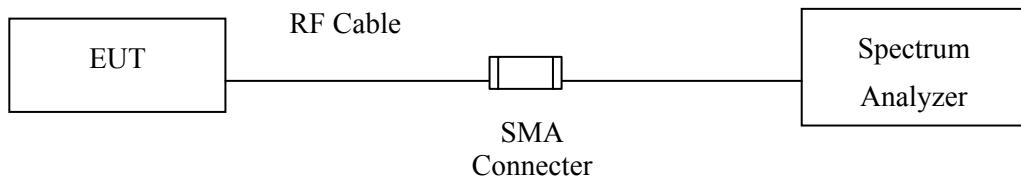

### RF Radiated Measurement:

Above 1GHz

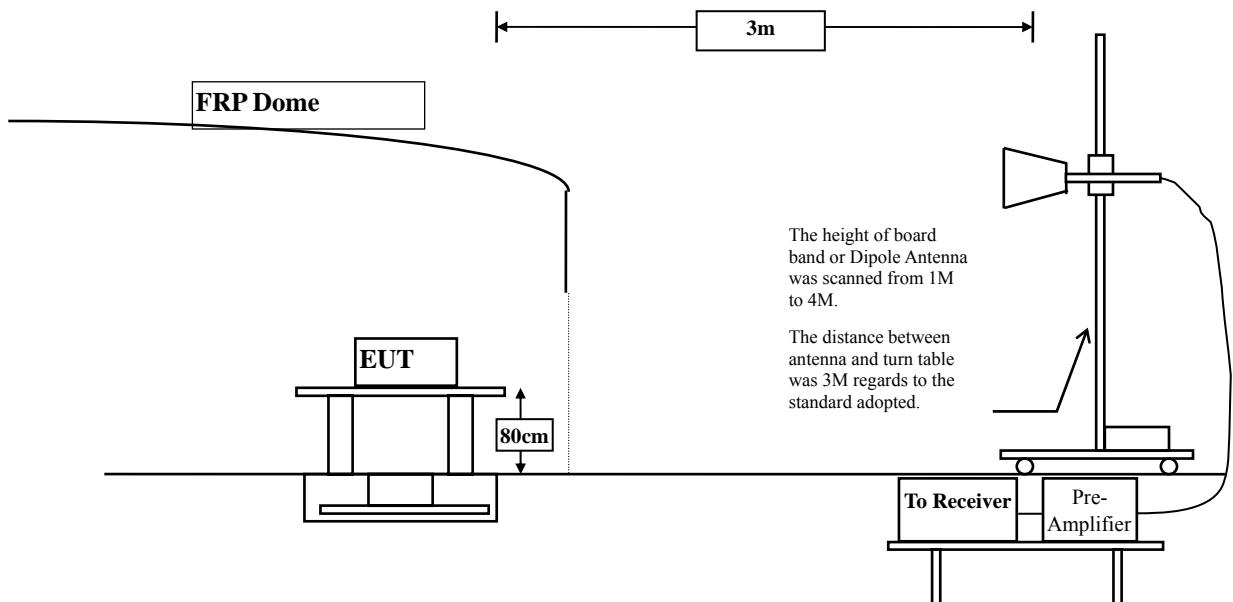

### **6.3. Limit**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### **6.4. Test Procedure**

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10:2009 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz. The EUT was setup to ANSI C63.10, 2009.

### **6.5. Uncertainty**

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

## 6.6. Test Result of Band Edge

Product : Active Bluetooth Speakers  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2402MHz)

### RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2389.800	-1.132	42.992	41.860	74.00	54.00	Pass
00 (Peak)	2390.000	-1.131	41.801	40.670	74.00	54.00	Pass
00 (Peak)	2402.200	-1.072	87.308	86.237	--	--	--
00 (Average)	2390.000	-1.131	25.994	24.863	74.00	54.00	Pass
00 (Average)	2402.000	-1.073	65.406	64.334	--	--	--

Figure Channel 00:

Horizontal (Peak)


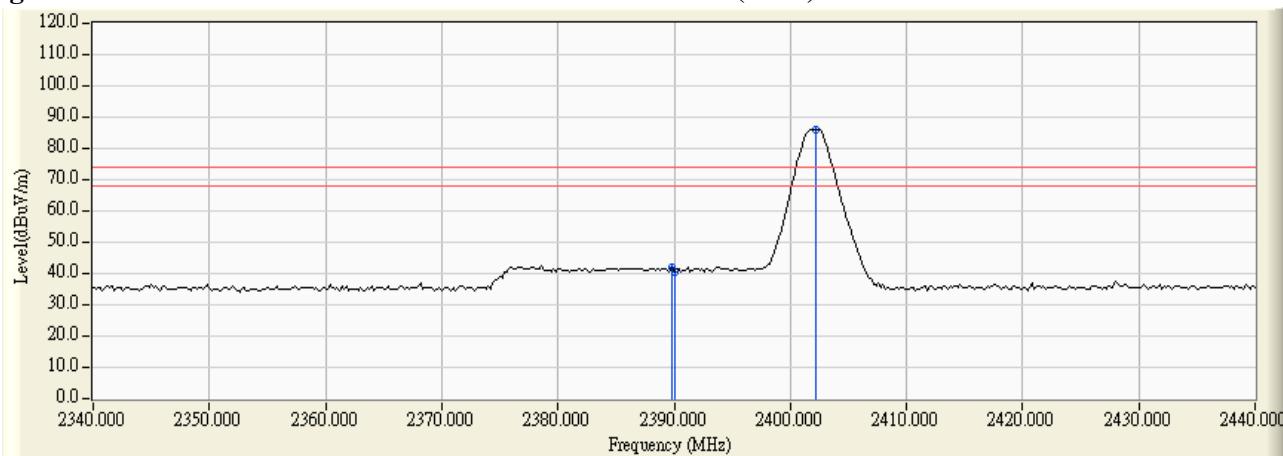


Figure Channel 00:

Horizontal (Average)

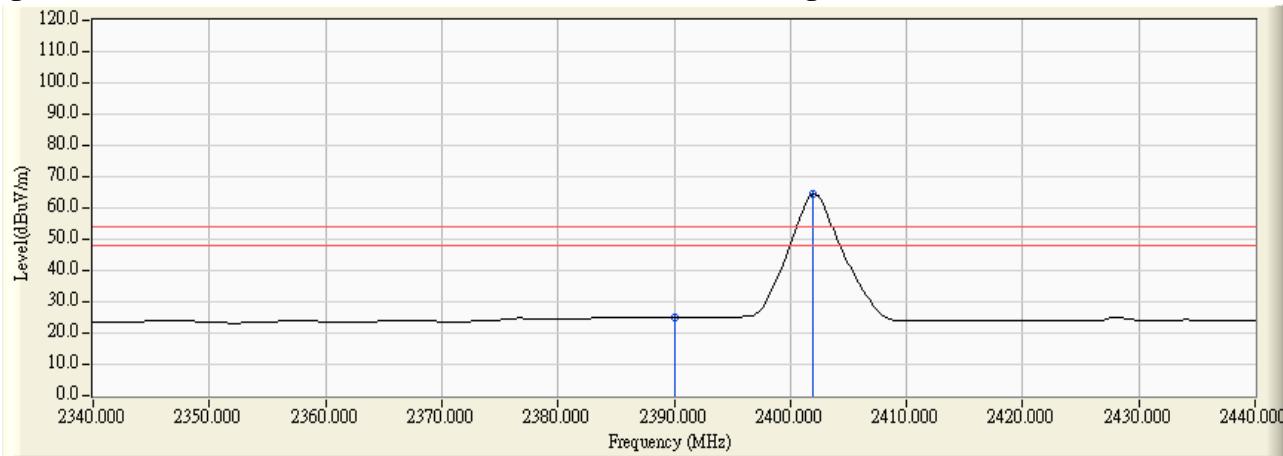

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Active Bluetooth Speakers  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2402MHz)

#### RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
00 (Peak)	2384.200	-1.698	42.105	40.407	74.00	54.00	Pass
00 (Peak)	2390.000	-1.725	41.291	39.566	74.00	54.00	Pass
00 (Peak)	2402.400	-1.728	87.213	85.485	--	--	--
00 (Average)	2345.200	-1.517	26.396	24.879	74.00	54.00	Pass
00 (Average)	2390.000	-1.725	25.837	24.112	74.00	54.00	Pass
00 (Average)	2402.200	-1.729	65.353	63.625	--	--	--

Figure Channel 00:

Vertical (Peak)


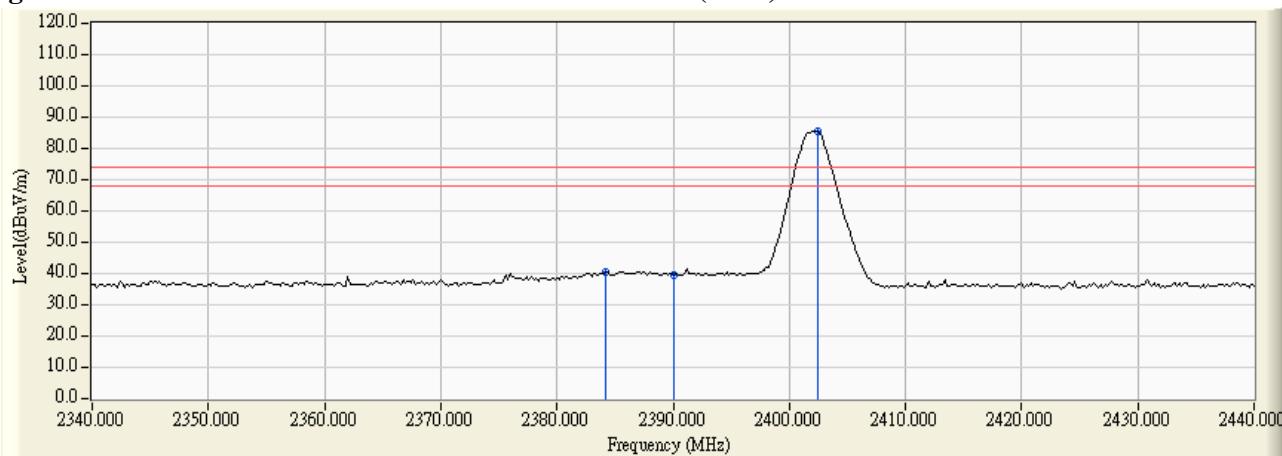


Figure Channel 00:

Vertical (Average)

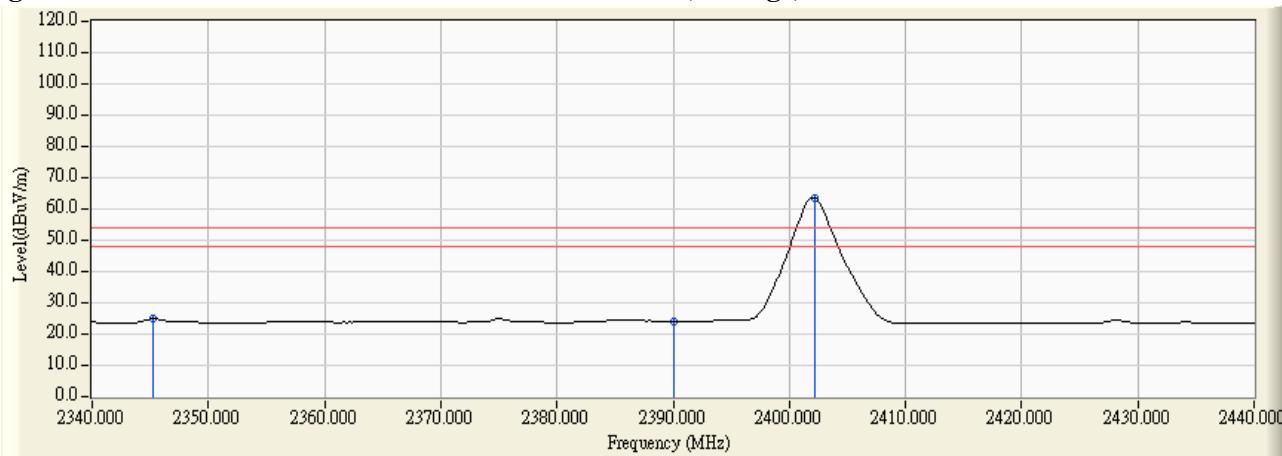


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Active Bluetooth Speakers  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2402MHz)

Test Frequency (MHz)	Measurement Level Δ (dB)	Limit Δ (dB)	Result
2400	45.942	>20	PASS

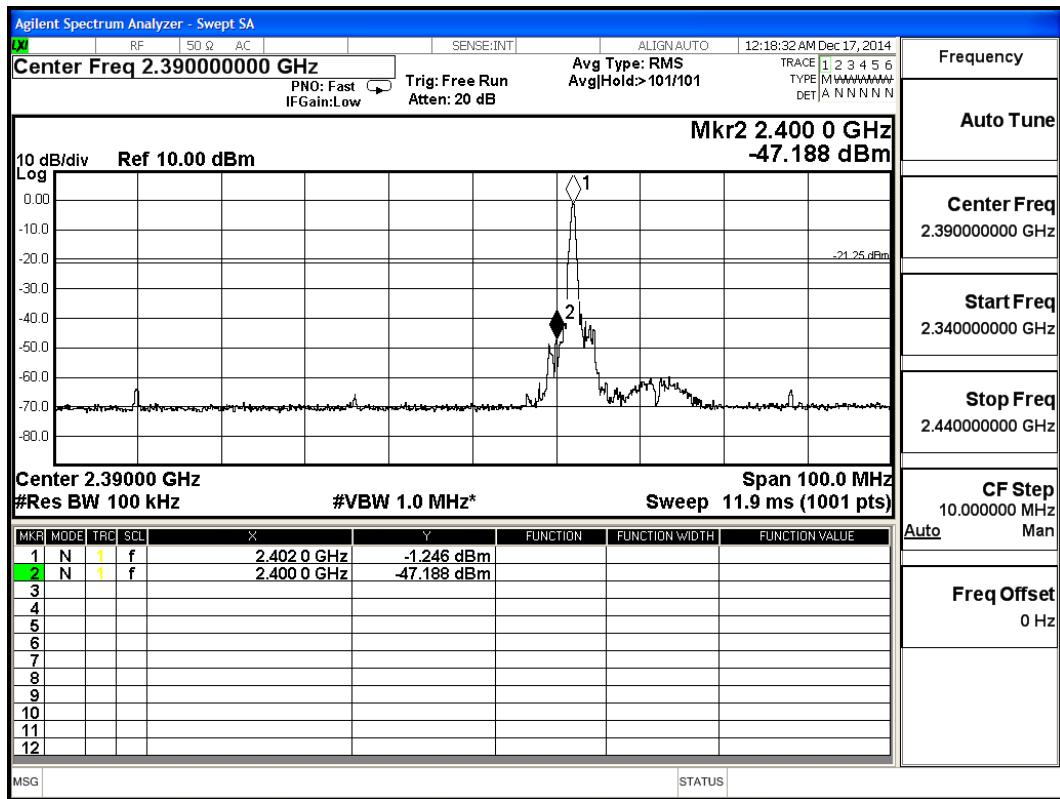


Product : Active Bluetooth Speakers  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2480MHz)

**RF Radiated Measurement (Horizontal):**

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
39 (Peak)	2479.700	-0.581	94.732	94.150	--	--	--
39 (Peak)	2483.500	-0.558	57.939	57.381	74.00	54.00	Pass
39 (Average)	2480.100	-0.580	70.161	69.581	--	--	--
39 (Average)	2483.500	-0.558	44.233	43.675	74.00	54.00	Pass


**Figure Channel 39:**

**Horizontal (Peak)**

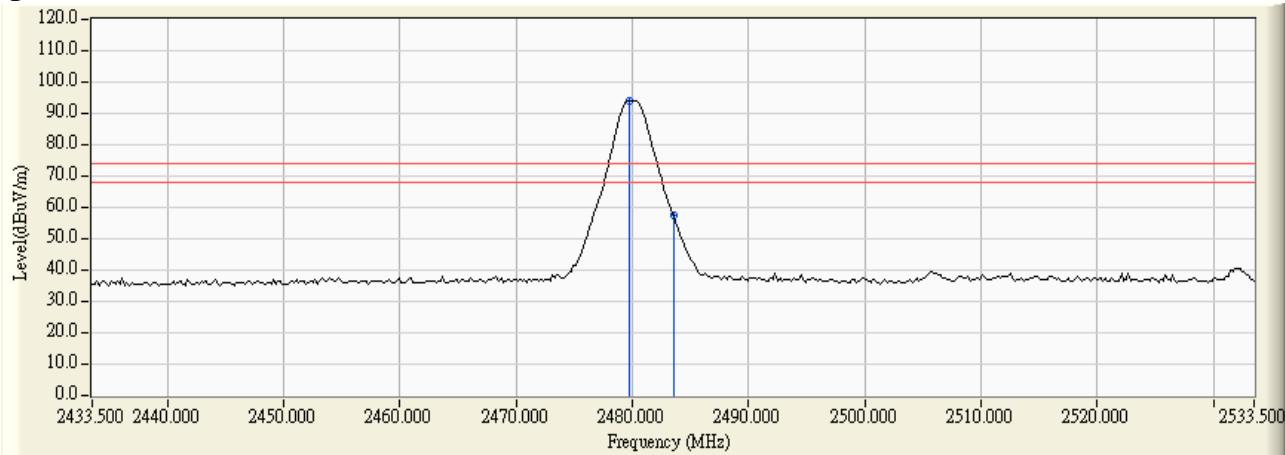

**Figure Channel 39:**

**Horizontal (Average)**

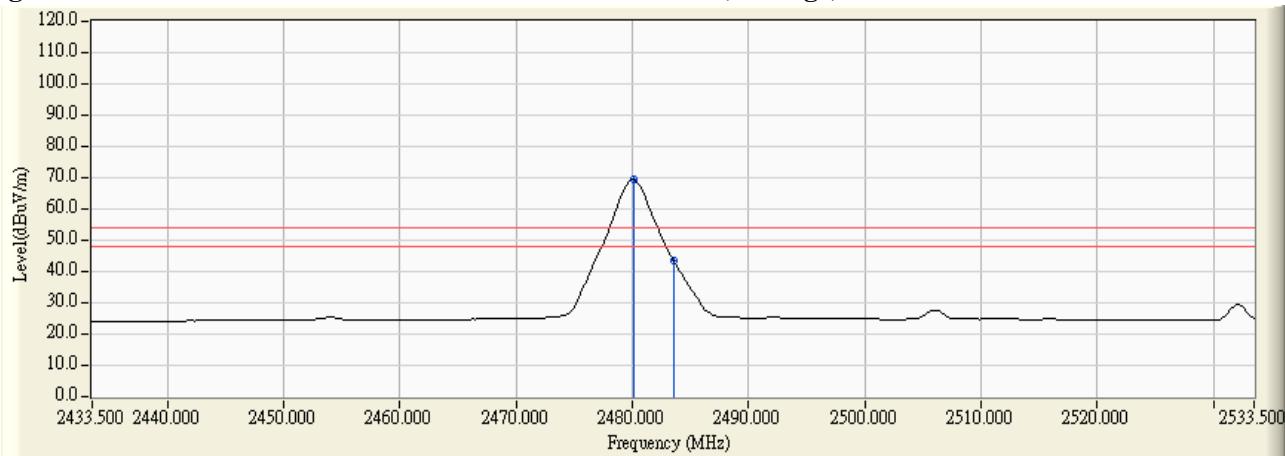

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Active Bluetooth Speakers  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2480MHz)

#### RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
39 (Peak)	2479.700	-1.325	95.355	94.029	--	--	--
39 (Peak)	2483.500	-1.305	58.526	57.221	74.00	54.00	Pass
39 (Average)	2480.100	-1.324	70.573	69.249	--	--	--
39 (Average)	2483.500	-1.305	44.702	43.397	74.00	54.00	Pass

Figure Channel 39:

Vertical (Peak)


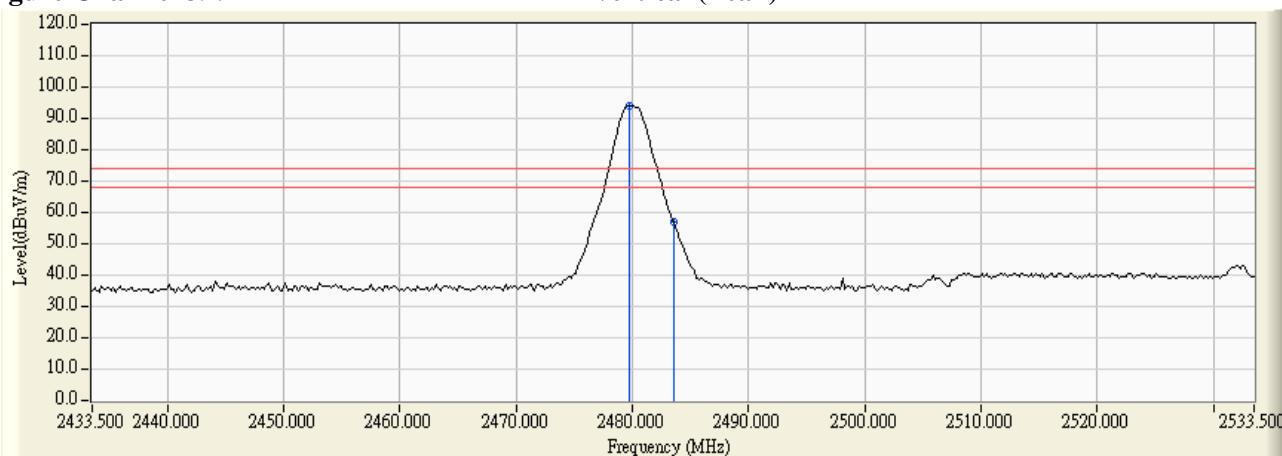


Figure Channel 39:

Vertical (Average)

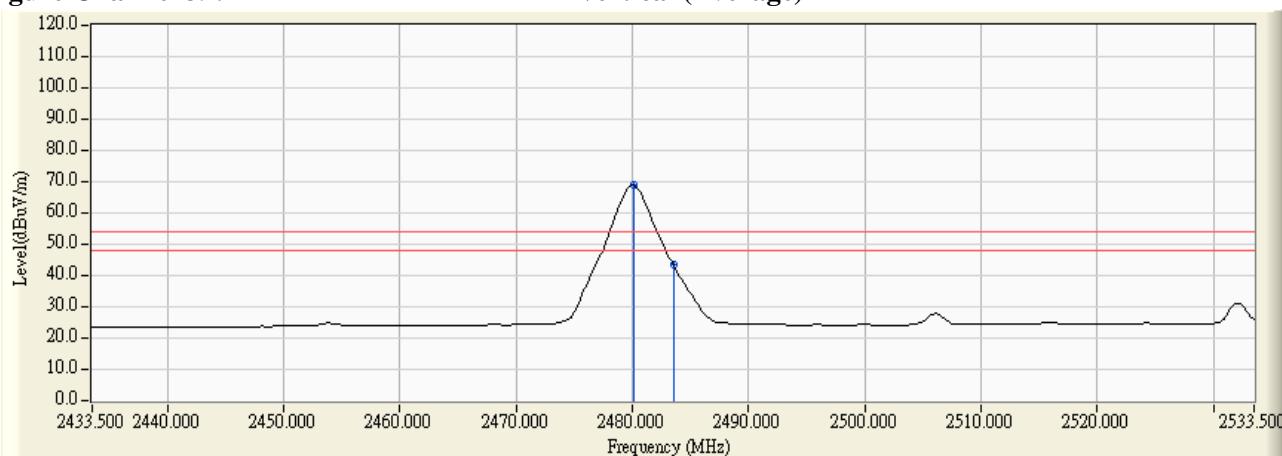


Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “\*”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Active Bluetooth Speakers  
 Test Item : Band Edge  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2480MHz)

Test Frequency (MHz)	Measurement Level Δ (dB)	Limit Δ (dB)	Result
2483.5	61.32	>20	PASS

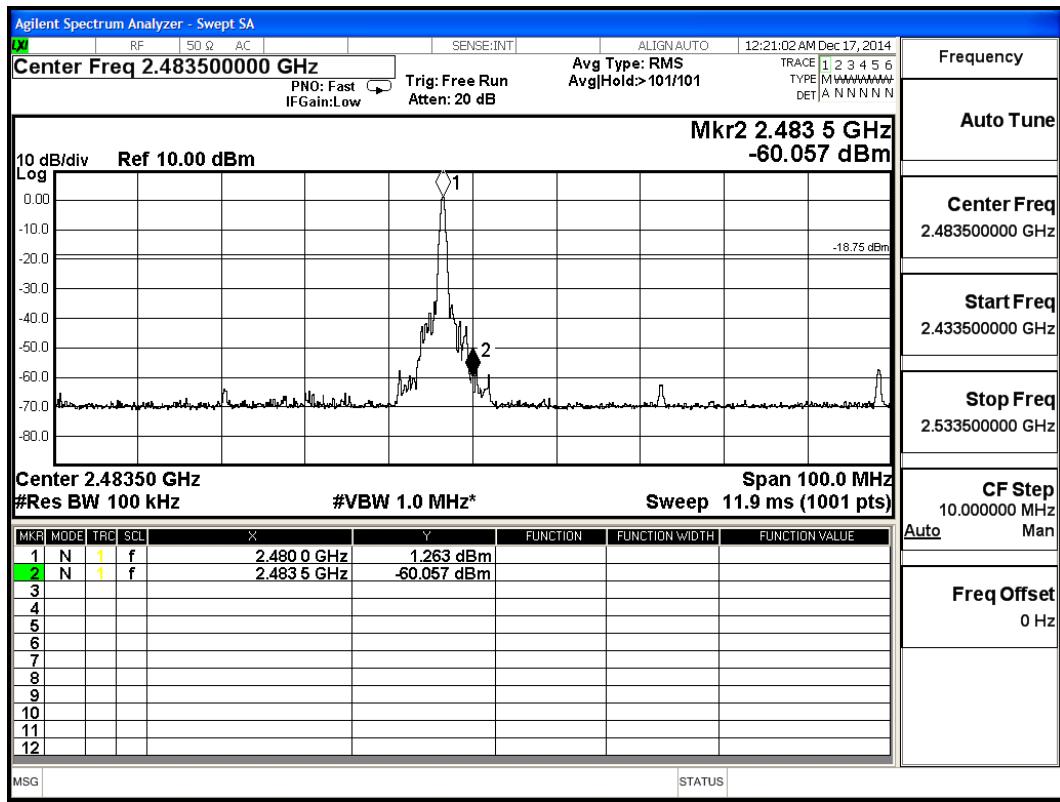

## 7. Occupied Bandwidth (6dB BW)


### 7.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2014
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2014
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

### 7.2. Test Setup

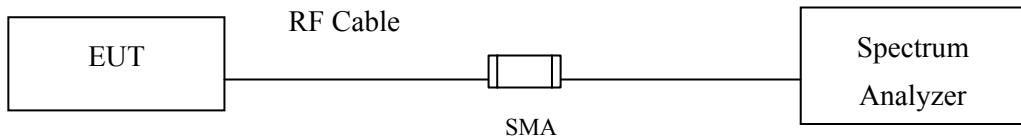

### 7.3. Limits

The minimum bandwidth shall be at least 500 kHz.

### 7.4. Test Procedure

The EUT was setup according to ANSI C63.10 2009; tested according to DTS test procedure of KDB558074 for compliance to FCC 47CFR 15.247 requirements.

Set RBW = 1-5% of the emission bandwidth,  $VBW \geq 3 * RBW$

### 7.5. Uncertainty


$\pm 150\text{Hz}$

## 7.6. Test Result of Occupied Bandwidth

Product : Active Bluetooth Speakers  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2402MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
00	2402	600	>500	Pass


Figure Channel 00:

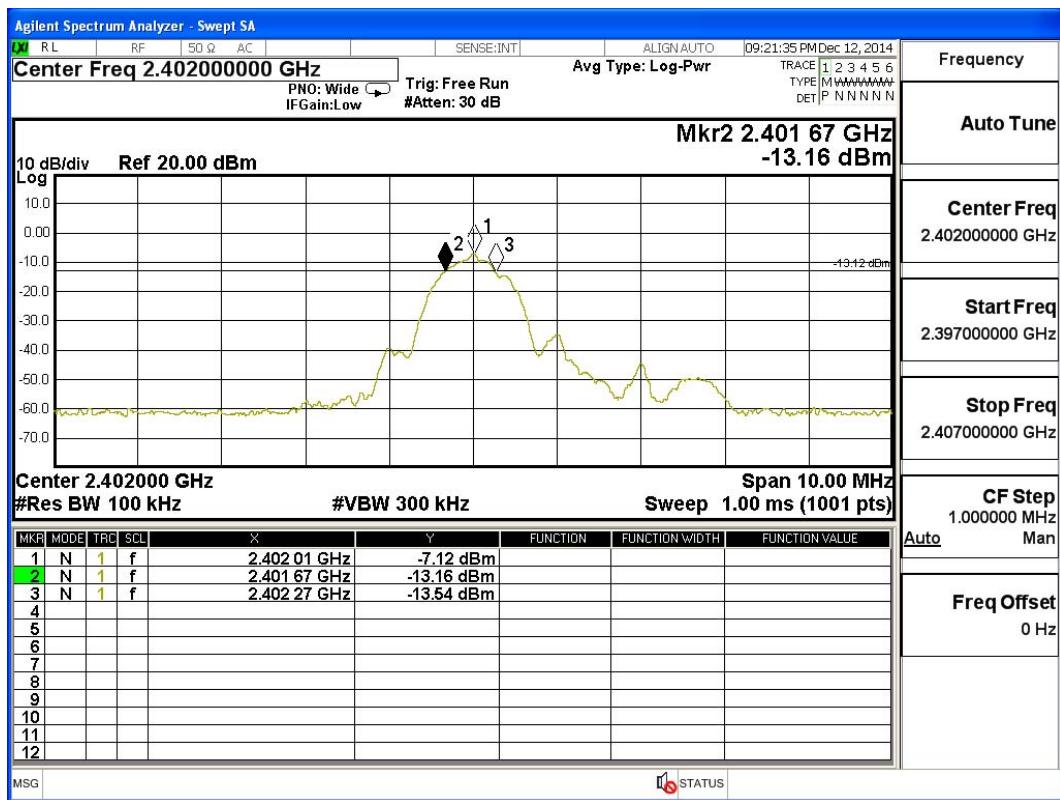

Product : Active Bluetooth Speakers  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2440MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
19	2440	620	>500	Pass


Figure Channel 19:

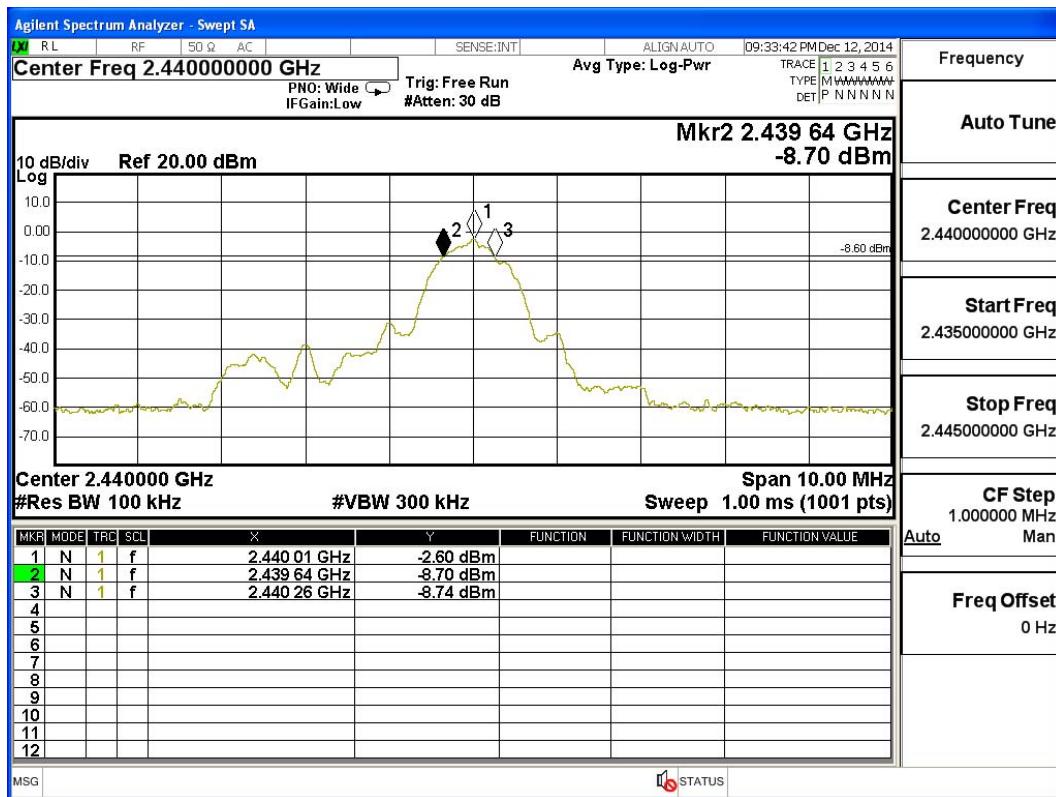

Product : Active Bluetooth Speakers  
 Test Item : Occupied Bandwidth Data  
 Test Site : No.3 OATS  
 Test Mode : Mode 1: Transmit - BLE (GFSK) (2480MHz)

Channel No.	Frequency (MHz)	Measurement Level (kHz)	Required Limit (kHz)	Result
39	2480	620	>500	Pass

Figure Channel 39:

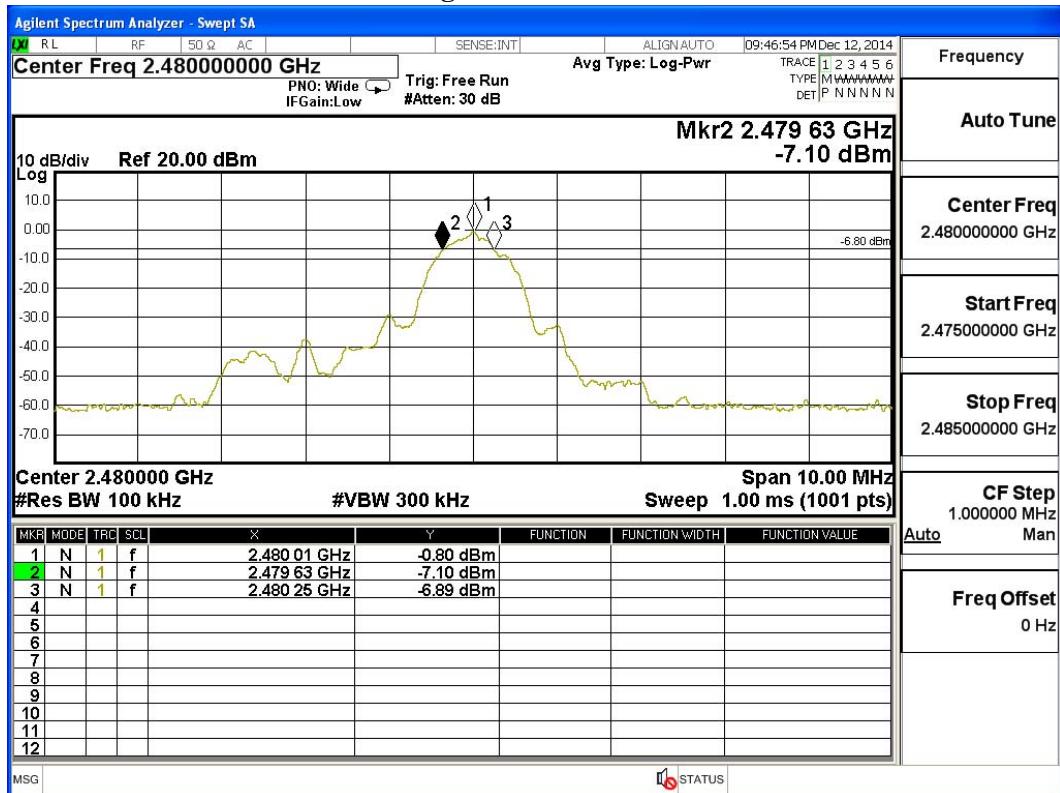

## 8. Power Density


### 8.1. Test Equipment

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun., 2014
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun., 2014
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2014

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

### 8.2. Test Setup

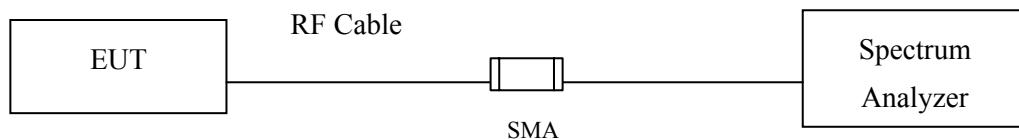

### 8.3. Limits

The transmitted power density averaged over any 1 second interval shall not be greater +8dBm in any 3kHz bandwidth.

### 8.4. Test Procedure

The EUT was setup according to ANSI C63.10: 2009, the maximum power spectral density using KDB 558074 section 10.2 PKPSD (peak PSD) method.

### 8.5. Uncertainty


± 1.27 dB

## 8.6. Test Result of Power Density

Product : Active Bluetooth Speakers  
Test Item : Power Density Data  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit - BLE (GFSK) (2402MHz)


Channel No.	Frequency (MHz)	Measure Level (dBm)	Limit (dBm)	Result
00	2402	-7.290	< 8dBm	Pass

**Figure Channel 00:**

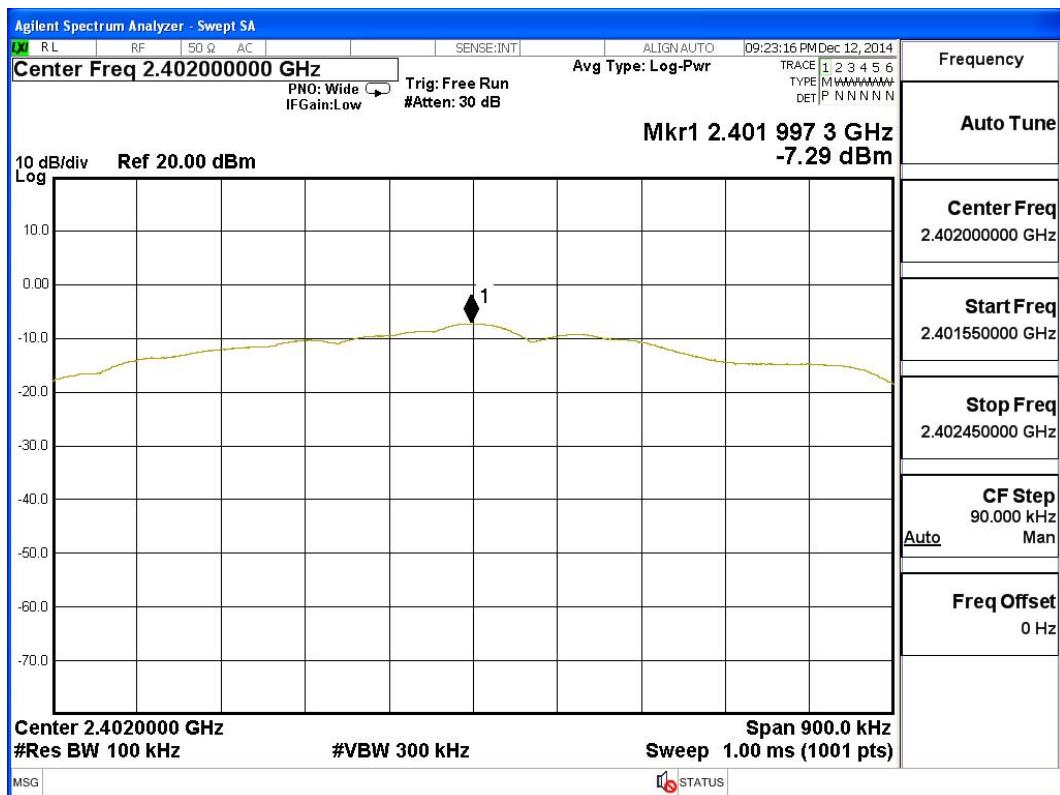

Product : Active Bluetooth Speakers  
Test Item : Power Density Data  
Test Site : No.3OATS  
Test Mode : Mode 1: Transmit - BLE (GFSK) (2440MHz)


Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
19	2440	-2.790	< 8dBm	Pass

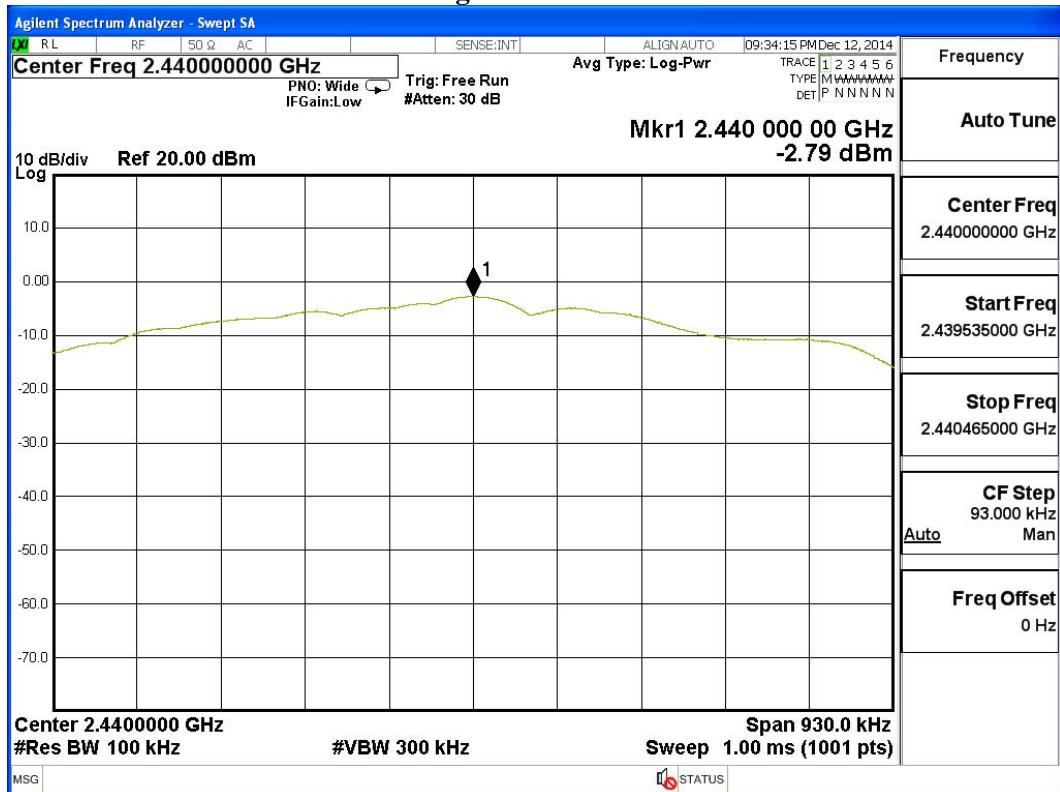**Figure Channel 19:**

Product : Active Bluetooth Speakers  
Test Item : Power Density Data  
Test Site : No.3 OATS  
Test Mode : Mode 1: Transmit - BLE (GFSK) (2480MHz)

Channel No.	Frequency (MHz)	Measurement Level (dBm)	Required Limit (dBm)	Result
39	2480	-1.030	< 8dBm	Pass

**Figure Channel 39:**

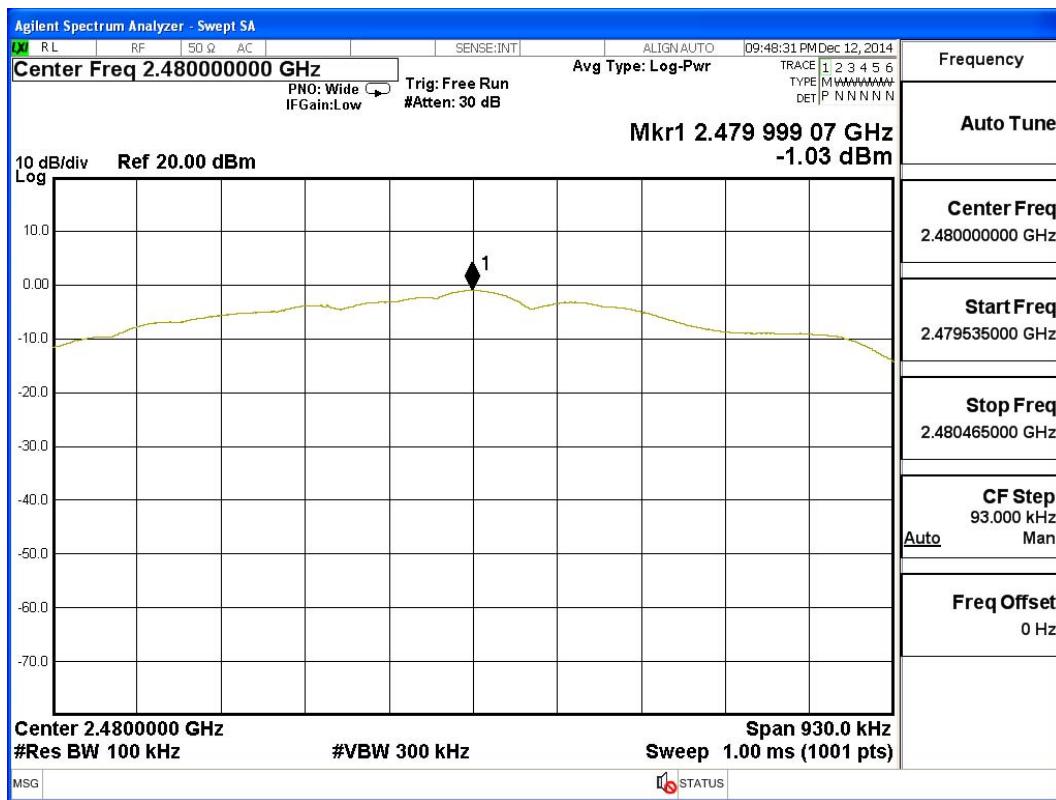

**9. EMI Reduction Method During Compliance Testing**

No modification was made during testing.

Attachment 1: EUT Test Photographs

Attachment 2: EUT Detailed Photographs