



FCC TEST REPORT

According to

FCC Rules and Regulations

Part 15 Subpart C

Applicant	: MEILOON INDUSTRIAL CO., LTD.
Address	: No 77, Lane 1775, Chuen-Ryh RD, Taoyuan City, Taiwan
Manufacturer	: MEDIA TECHNOLOGY (SUZHOU) CO., LTD.
Address	: No.5, Chun-Shen-Hu East Road, Xiang-Cheng District. Suzhou, Jiang Su Province, China
Equipment	: Wireless 2.1 Speaker System
Model No.	: TVee Model 20
FCC ID	: R48TVEE20
Trade Name	: Boston

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of **Cerpass Technology Corp.** the test report shall not be reproduced except in full.
- The test report must not be used by the clients to claim product certification approval by **NVLAP** or any agency of the Government.



Contents

1. Report of Measurements and Examinations.....	6
1.1 List of Measurements and Examinations	6
2. Test Configuration of Equipment under Test.....	7
2.1 Feature of Equipment under Test.....	7
2.2 Test Manner	8
2.3 Description of Test System.....	8
2.4 Connection Diagram of Test System.....	9
2.5 General Information of Test.....	10
2.6 Measurement Uncertainty	10
3. Test of Conducted Emission.....	11
3.1 Test Limit	11
3.2 Test Procedures	11
3.3 Typical Test Setup	12
3.4 Measurement Equipment.....	12
3.5 Test Result and Data.....	13
4. Test of Radiated Emission	16
4.1 Test Limit	16
4.2 Test Procedures	17
4.3 Typical Test Setup	18
4.4 Measurement Equipment.....	18
4.5 Test Result and Data.....	19
5. 20dB Bandwidth Measurement Data.....	37
5.1 Test Limit	37
5.2 Test Procedures	37
5.3 Test Setup Layout	37
5.4 Measurement Equipment.....	37
5.5 Test Result and Data.....	37
6. Frequencies Separation	40
6.1 Test Limit	40
6.2 Test Procedures	40
6.3 Test Setup Layout	40
6.4 Measurement Equipment.....	40
6.5 Test Result and Data.....	40
7. Dwell Time on each channel.....	43
7.1 Test Limit	43
7.2 Test Procedures	43
7.3 Test Setup Layout	43
7.4 Measurement Equipment.....	43
7.5 Test Result and Data.....	43
8. Number of Hopping Channels	47
8.1 Test Limit	47
8.2 Test Procedures	47
8.3 Test Setup Layout	47



8.4	Measurement Equipment	47
8.5	Test Result and Data	47
9.	Maximum Peak Output Power	48
9.1	Test Limit	48
9.2	Test Procedures	48
9.3	Test Setup Layout	48
9.4	Measurement Equipment	48
9.5	Test Result and Data	48
10.	Power Spectral Density	51
10.1	Test Limit	51
10.2	Test Procedures	51
10.3	Test Setup Layout	51
10.4	List of Measuring Equipment Used	51
10.5	Test Result and Data	51
11.	Band Edges Measurement	54
11.1	Test Limit	54
11.2	Test Procedures	54
11.3	Test Setup Layout	54
11.4	List of Measuring Equipment Used	54
11.5	Test Result and Data	54
11.6	Restrict band emission Measurement Data	57
12.	Restricted Bands of Operation	58
12.1	Labeling Requirement	58

Document history

[illegible]



CERTIFICATE OF COMPLIANCE

According to

FCC Rules and Regulations

Part 15 Subpart C

Applicant : MEILOON INDUSTRIAL CO., LTD.

Address : No 77, Lane 1775, Chuen-Ryh RD, Taoyuan
City, Taiwan

Equipment : Wireless 2.1 Speaker System

Model No. : TVee Model 20

FCC ID : R48TVEE20

Trade Name : Boston

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4** The equipment was ***passed*** the test performed according to **FCC Rules and Regulations Part 15 Subpart C.**

The test was carried out on Dec 25, 2009 at CerpPASS Technology Corp.

Documented By:

Approved By:

Cathy Chen/ Administration

John Wang/ Technical director



1. Report of Measurements and Examinations

1.1 List of Measurements and Examinations

FCC Rule	Description of Test	Result
15.203	Antenna Requirement	Pass
15.207	Conducted Emission	Pass
15.209	Radiated Emission	Pass
15.247(a)(1)	Channel Carrier Frequencies Separation	Pass
15.247(a)(1)	20dB Bandwidth Measurement	Pass
15.247(a)(1)	Dwell Time	Pass
15.247(b)	Number of Hopping Channels	Pass
15.247(b)	Peak Output Power Measurement Data	Pass
15.247(d)	Band Edges Measurement Data	Pass
15.247(e)	Power Spectral Density Measurement Data	Pass



2. Test Configuration of Equipment under Test

2.1 Feature of Equipment under Test

Wireless 2.1 Speaker System	Model No:	TVee Model 20
	FCC ID:	R48TVEE20
SWITCH MODE POWER SUPPLY	Manufacturer:	Ktec
	Model No.:	KSAH2000250T1M2
	Input:	100-240V~50/60Hz 1.2A
	Output:	20V $\overline{\text{---}}$ 2.5A
Audio Cable	Non-Shielded, 0.8m	
Power supply cable 1#	Non-Shielded, 1.8m	
Power supply cable 2#	Non-Shielded, 1.8m	

Wireless	
Type of Modulation	FHSS
Number of Channels	1 ~ 16 (16 Channels)
Frequency Band (s)	2.404-2.479 GHz
Operating Frequency	2.404-2.479 GHz
Data Rate	2 Mbps
Output Power	10dBm
Carrier Frequency of each channel	CH 01: 2404.0MHz; CH 09: 2442.2MHz; CH 16: 2479.0MHz
Antenna Type and Gain	Omni Dipole Antenna / 2.4GHz/3.02dB, 2.44GHz/3.0dB, 2.48GHz/3.14dB



2.2 Test Manner


Test Manner	
a	During testing, the interface cables and equipment positions were varied according to 47 CFR, Part 2, Part 15 and CISPR PUB. 22
b	Setup the EUT and turn on the power.
c	During the test, connect the EUT and AE.
d	The complete test system included Subwoofer Speaker Receiver and EUT for RF test.
e	Choose one hopping channel and adjust the equipment. Start test.
The test modes	
	Test Mode 1: Transmit by 2404MHz
	Test Mode 2: Transmit by 2444MHz
	Test Mode 3: Transmit by 2479MHz

2.3 Description of Test System

Device	Manufacturer	Model No.	Description
DVD Player	PIONEER	DV-600AV-S	N/A



2.4 Connection Diagram of Test System

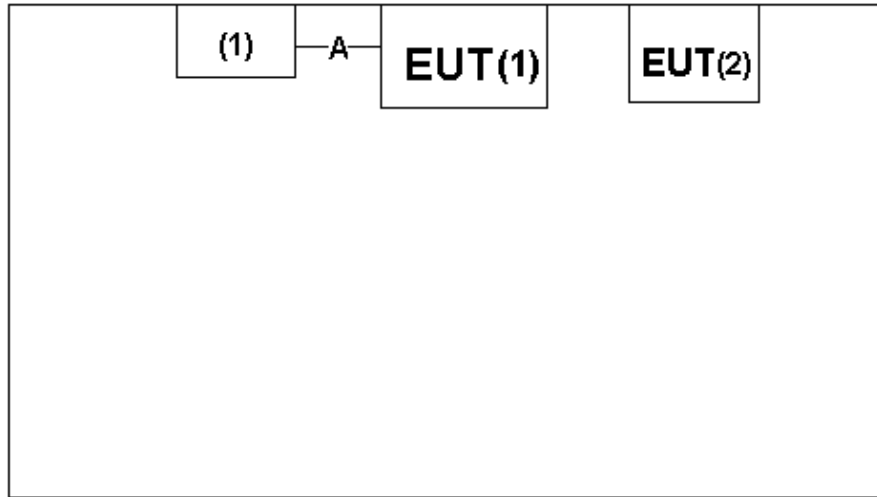

EMI use cable		
Cable	Quantity	Description
Audio Cable	1	Non-Shielded, 0.8m



2.5 General Information of Test

Test Site:	CerpPASS Technology Corp.
Performand Location :	No.66,Tangzhuang Road, Suzhou Industrial Park, Jiangsu 215006, China
NVLAP LAB Code :	200814-0
FCC Registration Number :	916572
IC Registration Number :	7290A-1
VCCI Registration Number :	T-343 for Telecommunication Test C-2919 for Conducted emission test R-2670 for Radiated emission test
Frequency Range Investigated :	Conducted Emission Test: from 150kHz to 30 MHz Radiated Emission Test: from 30 MHz to 1,000 MHz Radiated Emission Test: from 1GHz to 26GHz
Test Distance :	The test distance of radiated emission from antenna to EUT is 3 M.

2.6 Measurement Uncertainty

Measurement Item	Measurement Frequency	Polarization	Uncertainty
Conducted Emission	9 kHz ~ 30 MHz	LINE/NEUTRAL	2.71 dB
Radiated Emission	30 MHz ~ 26GHz	Vertical	4.11 dB
		Horizontal	4.10 dB
20 dB Bandwidth	---	---	7500 Hz
Maximum Peak Output Power	---	---	1.4 dB
100kHz Bandwidth of Frequency Band Edges	---	---	2.2 dB
Power Spectral Density	---	---	2.2 dB



3. Test of Conducted Emission

3.1 Test Limit

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 120 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2003 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 2.2. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

Frequency (MHz)	Quasi Peak (dB μ V)	Average (dB μ V)
0.15 – 0.5	66-56*	56-46*
0.5 – 5.0	56	46
5.0 – 30.0	60	50


*Decreases with the logarithm of the frequency.

3.2 Test Procedures

- The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- Connect EUT to the power mains through a line impedance stabilization network (LISN).
- All the support units are connecting to the other LISN.
- The LISN provides 50 ohm coupling impedance for the measuring instrument.
- The FCC states that a 50 ohm, 50 micro-Henry LISN should be used.
- Both sides of AC line were checked for maximum conducted interference.
- The frequency range from 150 kHz to 30 MHz was searched.
- Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



3.3 Typical Test Setup

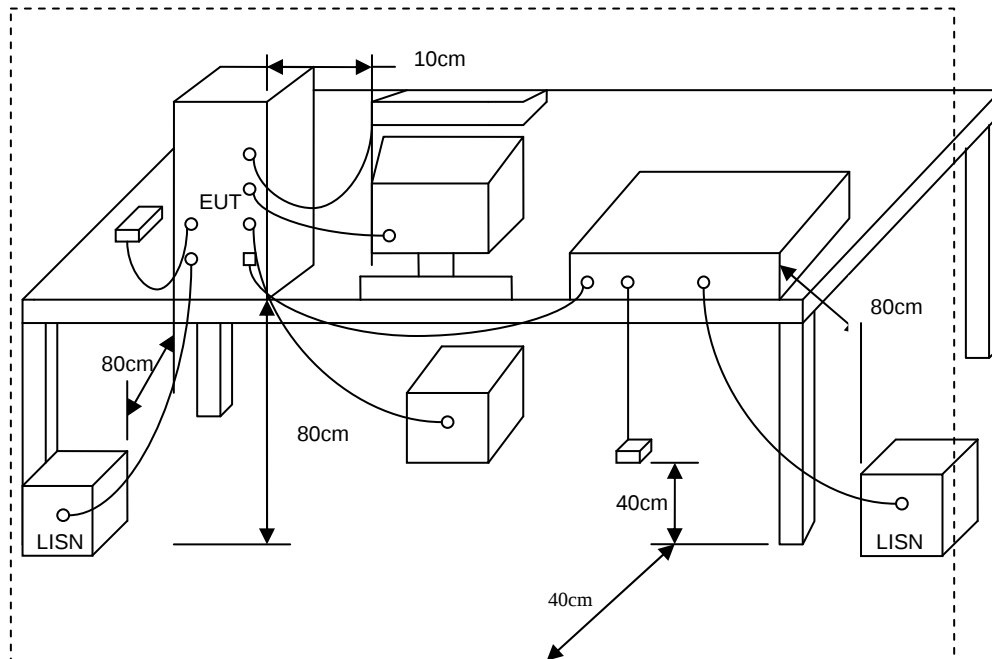


3.4 Measurement Equipment

Instrument	Manufacturer	Model No.	Serial No.	Calibration Date
EMC Emission Tester	EMCPARTNER	Harmonics-1000	159	2009.09.08
Test Receiver	R&S	ESCI	100565	2009.06.30
AMN	R&S	ESH2-Z5	100182	2009.06.23
Two-Line V-Network	R&S	ENV216	100325	2009.06.23
ISN	FCC	FCC-TLISN-T2-02	20379	2009.06.23
ISN	FCC	FCC-TLISN-T4-02	20380	2009.06.23
ISN	FCC	FCC-TLISN-T8-02	20381	2009.06.23
Attenuator	R&S	ESH3-Z2	100529	2009.01.12
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-004	2009.10.19



3.5 Test Result and Data

Test Mode :	Mode 1: Transmit by 2404MHz		
AC Power :	AC 120V/60Hz	Phase :	L&N
Temperature :	24°C	Humidity	51%
Pressur(mbar) :	1002	Date:	2009/11/25

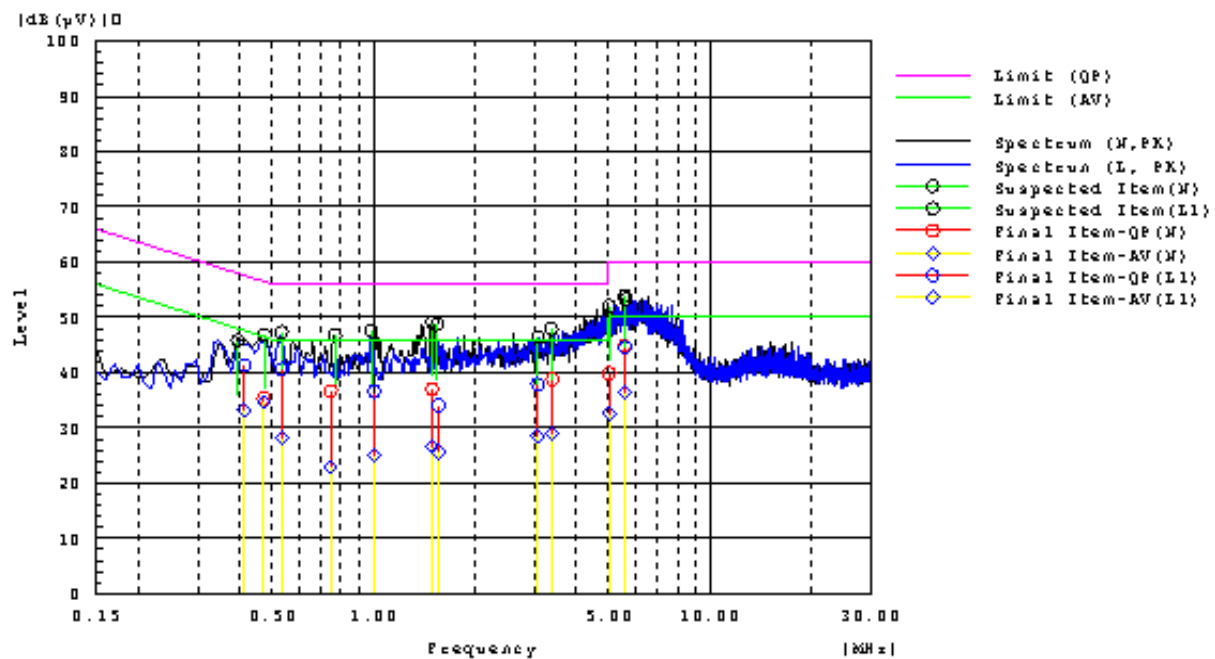


Frequency MHz	Line Phase	Reading dB(uV) QP	Reading dB(uV) AV	Factor dB	Level dB(uV) QP	Level dB(uV) AV	Limit dB(uV) QP	Limit dB(uV) AV	Margin dB QP	Margin dB AV	Pass/Fail
0.53237	L1	21.0	8.5	19.7	40.7	28.2	56.0	46.0	15.3	17.8	Pass
1.56057	L1	14.5	6.1	19.6	34.1	25.7	56.0	46.0	21.9	20.3	Pass
1.0035	L1	17.1	5.7	19.5	36.6	25.2	56.0	46.0	19.4	20.8	Pass
3.073	L1	18.2	8.8	19.7	37.9	28.5	56.0	46.0	18.1	17.5	Pass
0.41248	L1	21.8	13.7	19.6	41.4	33.3	57.6	47.6	16.2	14.3	Pass
5.5844	L1	24.9	16.6	19.8	44.7	36.4	60.0	50.0	15.3	13.6	Pass
5.5694	N	25.0	16.7	19.8	44.8	36.5	60.0	50.0	15.2	13.5	Pass
1.49219	N	17.5	7.2	19.5	37.0	26.7	56.0	46.0	19.0	19.3	Pass
0.74548	N	17.1	3.4	19.6	36.7	23.0	56.0	46.0	19.3	23.0	Pass
0.47126	N	15.7	15.1	19.6	35.3	34.7	56.5	46.5	21.2	11.8	Pass
5.00631	N	20.1	12.8	19.8	39.9	32.6	60.0	50.0	20.1	17.4	Pass
3.39504	N	19.1	9.3	19.7	38.8	29.0	56.0	46.0	17.2	17.0	Pass

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 2: Transmit by 2444MHz		
AC Power :	AC 120V/60Hz	Phase :	L&N
Temperature :	24 °C	Humidity	51%
Pressur(mbar) :	1002	Date:	2009/11/25

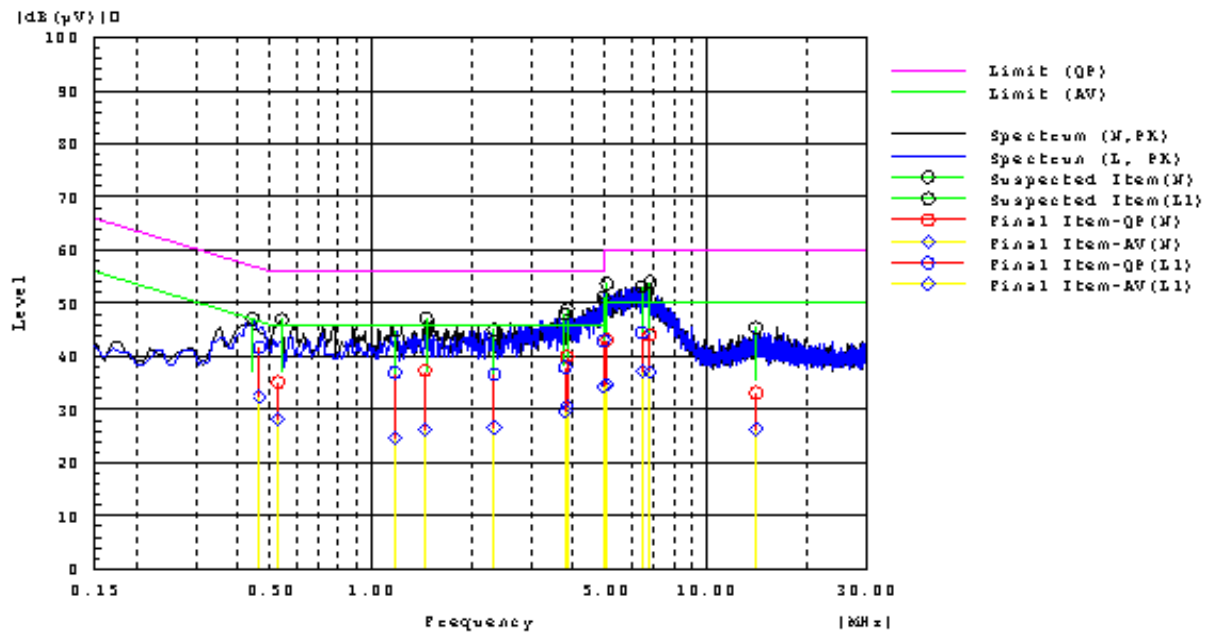


Frequency MHz	Line Phase	Reading dB(uV) QP	Reading dB(uV) AV	Factor dB	Level dB(uV) QP	Level dB(uV) AV	Limit dB(uV) QP	Limit dB(uV) AV	Margin dB QP	Margin dB AV	Pass/Fail
6.4292	L1	24.6	17.3	19.9	44.5	37.2	60.0	50.0	15.5	12.8	Pass
2.3292	L1	17.0	7.0	19.6	36.6	26.6	56.0	46.0	19.4	19.4	Pass
0.46428	L1	22.0	12.8	19.7	41.7	32.5	56.6	46.6	14.9	14.1	Pass
4.94316	L1	23.2	14.6	19.8	43.0	34.4	56.0	46.0	13.0	11.6	Pass
1.17791	L1	17.5	5.2	19.5	37.0	24.7	56.0	46.0	19.0	21.3	Pass
3.79051	L1	18.3	10.0	19.7	38.0	29.7	56.0	46.0	18.0	16.3	Pass
6.7776	N	24.1	17.2	19.9	44.0	37.1	60.0	50.0	16.0	12.9	Pass
5.0513	N	23.3	14.8	19.8	43.1	34.6	60.0	50.0	16.9	15.4	Pass
1.44679	N	17.8	6.9	19.5	37.3	26.4	56.0	46.0	18.7	19.6	Pass
0.5282	N	15.6	8.6	19.6	35.2	28.2	56.0	46.0	20.8	17.8	Pass
3.84425	N	20.3	11.0	19.7	40.0	30.7	56.0	46.0	16.0	15.3	Pass
14.0575	N	12.9	6.2	20.2	33.1	26.4	60.0	50.0	26.9	23.6	Pass

Note: Measurement Level = Reading Level + Correct Factor



Test Mode :	Mode 3: Transmit by 2479MHz		
AC Power :	AC 120V/60Hz	Phase :	L&N
Temperature :	24°C	Humidity	51%
Pressur(mbar) :	1002	Date:	2009/11/25

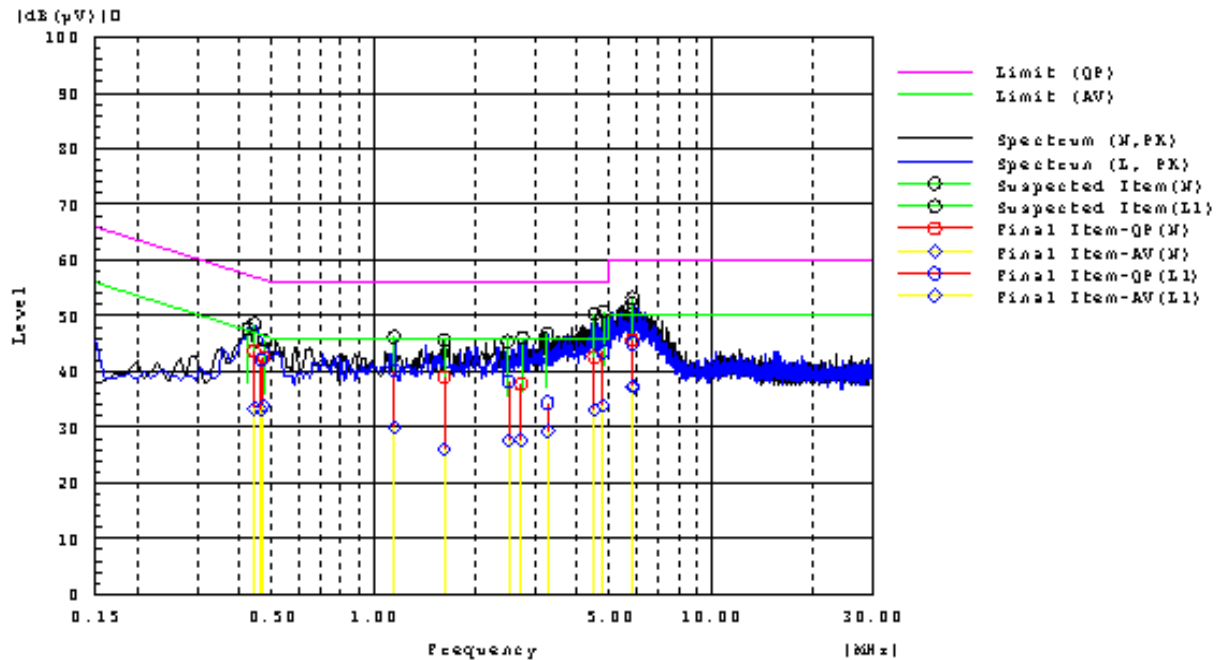

Frequency MHz	Line Phase	Reading dB(uV) QP	Reading dB(uV) AV	Factor dB	Level dB(uV) QP	Level dB(uV) AV	Limit dB(uV) QP	Limit dB(uV) AV	Margin dB QP	Margin dB AV	Pass/Fail
0.46399	L1	22.4	13.5	19.7	42.1	33.2	56.6	46.6	14.5	13.4	Pass
1.15317	L1	20.7	10.6	19.5	40.2	30.1	56.0	46.0	15.8	15.9	Pass
3.26855	L1	14.7	9.6	19.7	34.4	29.3	56.0	46.0	21.6	16.7	Pass
5.845	L1	25.1	17.6	19.9	45.0	37.5	60.0	50.0	15.0	12.5	Pass
4.78165	L1	23.8	14.0	19.8	43.6	33.8	56.0	46.0	12.4	12.2	Pass
2.51467	L1	18.6	8.0	19.6	38.2	27.6	56.0	46.0	17.8	18.4	Pass
0.44236	N	24.1	13.9	19.6	43.7	33.5	57.0	47.0	13.3	13.5	Pass
0.47155	N	22.9	14.3	19.6	42.5	33.9	56.5	46.5	14.0	12.6	Pass
2.7365	N	18.1	8.2	19.6	37.7	27.8	56.0	46.0	18.3	18.2	Pass
5.8329	N	25.9	17.3	19.8	45.7	37.1	60.0	50.0	14.3	12.9	Pass
4.49046	N	22.9	13.4	19.7	42.6	33.1	56.0	46.0	13.4	12.9	Pass
1.61945	N	19.5	6.6	19.5	39.0	26.1	56.0	46.0	17.0	19.9	Pass

Note: Measurement Level = Reading Level + Correct Factor

Test engineer: Fred Guo



4. Test of Radiated Emission

4.1 Test Limit

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2003. The EUT was placed, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance Meters	Radiated (μ V / M)	Radiated (dB μ V/ M)
30-88	3	100	40.0
88-216	3	150	43.5
216-960	3	200	46.0
Above 960	3	500	54.0

For unintentional device, according to CISPR PUB.22, for Class B digital devices, the general requirement of field strength of radiated emissions from intentional radiators at a distance of 10 meters shall not exceed the below table.

Frequency (MHz)	Distance Meters	Radiated (dB μ V/ M)
30-230	10	30
230-1000	10	37




4.2 Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
- h. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- i. "Cone of radiation" has been considered to be 3dB beam width of the measurement antenna.
- j. During testing, there was no emissions be detected in the third harmonics (4.5-5.15 GHz and 7.25-7.75 GHz).



4.3 Typical Test Setup

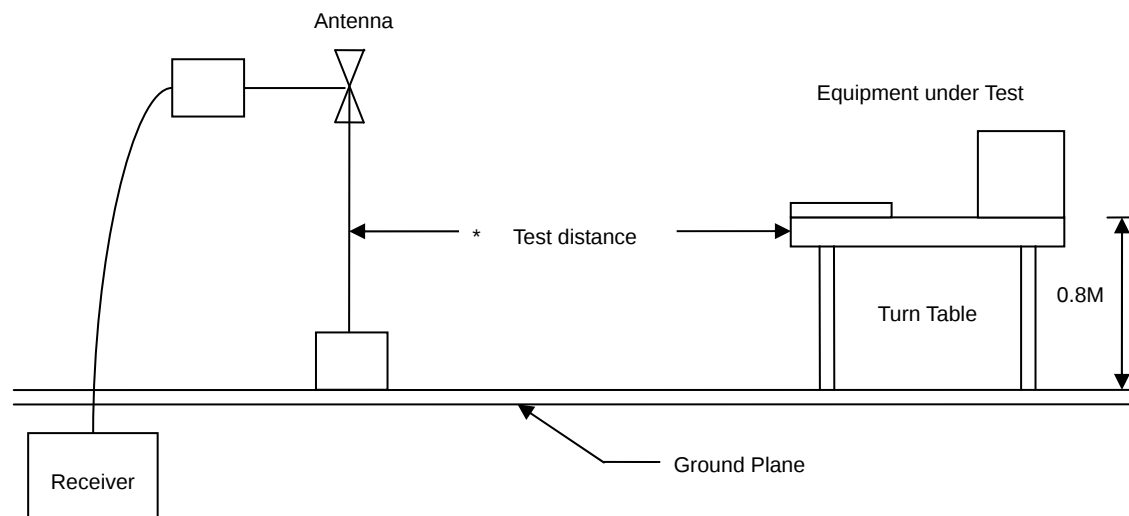

4.4 Measurement Equipment


Instrument	Model No.	Manufacturer	Serial No.	Calibration Date
EMI Test Receiver	R&S	ESCI	100564	2009.06.23
Preamplifier	Agilent	87405B	My39500554	2009.11.03
Preamplifier	Agilent	8449B	ED-HE-EMI-077	2009.02.18
Ultra Broadband Antenna	R&S	HL562	100362	2009.11.03
Broad-Band Horn Antenna	Schwarzbeck	BBHA9120D	9120D-619	2009.11.10
Spectrum Analyzer	R&S	FSP40	100324	2009.11.02
Temperature/ Humidity Meter	Zhicheng	ZC1-11	CEP-TH-001	2009.10.19



4.5 Test Result and Data

Under 1G:

Engineer : Tony	
Site : EMC Lab AC 102	Time : 2009/12/11 - 14:52
Limit : FCC_CLASS_B_03M_QP	Margin : 6
EUT : Wireless 2.1 Speaker System	Probe : HORIZONTAL
Power : AC 120V/60Hz	Note : Transmit by 2404MHz

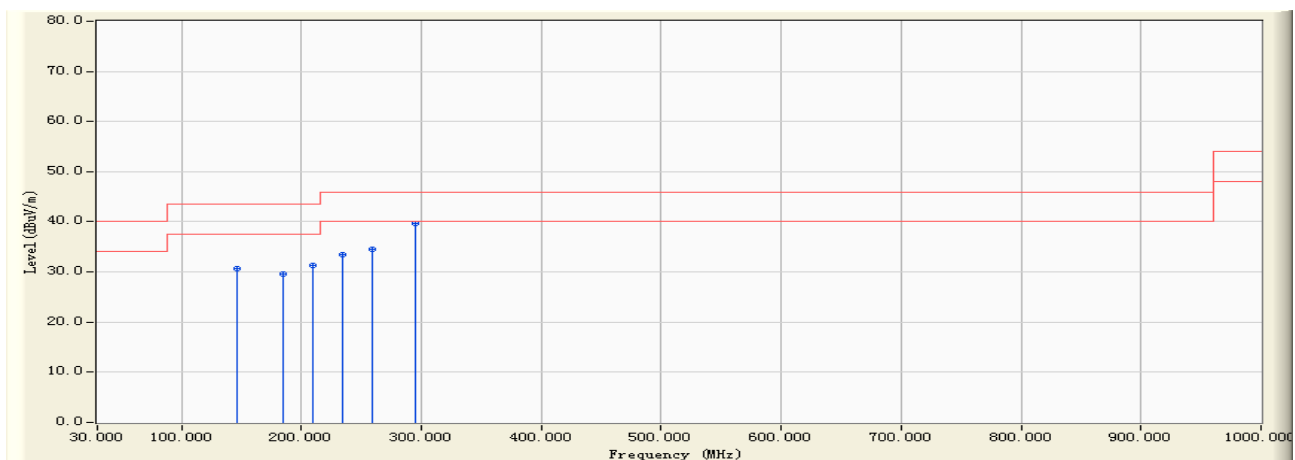


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type	Ant Pos (cm)	Table Pos (deg)
1		146.992	-9.641	40.338	30.697	-12.803	43.500	QUASIPeAK	200.000	315.400
2		185.132	-7.299	36.808	29.509	-13.991	43.500	QUASIPeAK	159.700	213.600
3		209.383	-7.708	39.085	31.377	-12.123	43.500	QUASIPeAK	211.200	351.700
4		234.174	-6.797	40.185	33.388	-12.612	46.000	QUASIPeAK	175.200	102.200
5		258.961	-5.970	40.607	34.636	-11.364	46.000	QUASIPeAK	149.800	360.000
6	*	295.611	-3.865	43.525	39.660	-6.340	46.000	QUASIPeAK	200.000	266.300

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Engineer : Tony	
Site : EMC Lab AC 102	Time : 2009/12/11 – 14:52
Limit : FCC_CLASS_B_03M_QP	Margin : 6
EUT : Wireless 2.1 Speaker System	Probe : VERTICAL
Power : AC 120V/60Hz	Note : Transmit by 2404MHz

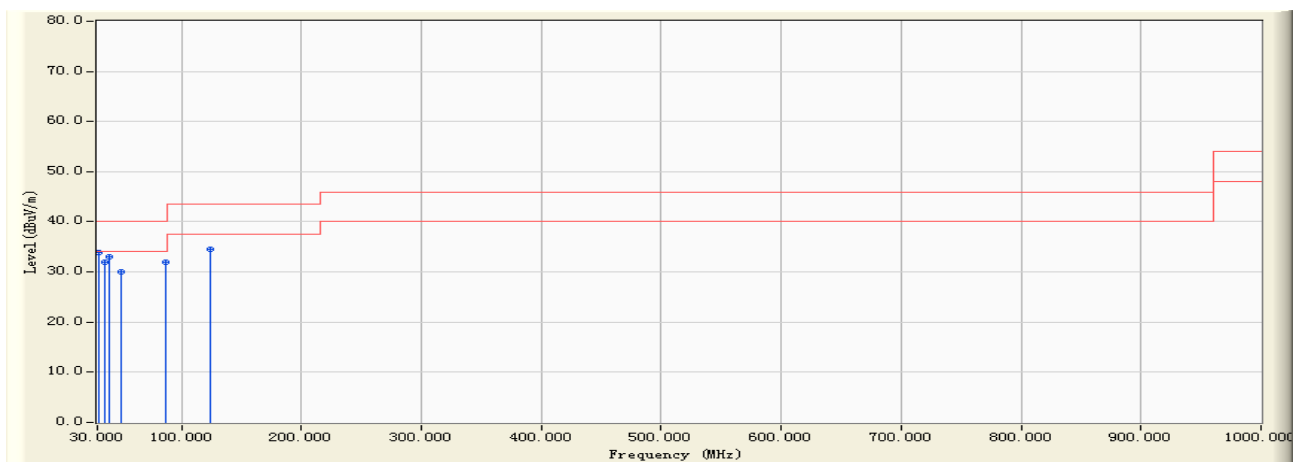


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type	Ant Pos (cm)	Table Pos (deg)
1	*	31.263	-0.095	34.021	33.926	-6.074	40.000	QUASIPeAK	100.000	263.800
2		35.840	-2.469	34.527	32.059	-7.941	40.000	QUASIPeAK	100.000	299.300
3		40.011	-6.920	39.998	33.079	-6.921	40.000	QUASIPeAK	100.000	123.600
4		49.862	-14.523	44.586	30.063	-9.937	40.000	QUASIPeAK	100.000	346.200
5		87.056	-15.134	47.123	31.989	-8.011	40.000	QUASIPeAK	112.800	222.800
6		123.610	-12.737	47.265	34.528	-8.972	43.500	QUASIPeAK	100.000	110.700

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Engineer : Tony	
Site : EMC Lab AC 102	Time : 2009/12/11 - 15:04
Limit : FCC_CLASS_B_03M_QP	Margin : 6
EUT : Wireless 2.1 Speaker System	Probe : HORIZONTAL
Power : AC 120V/60Hz	Note : Transmit by 2444MHz

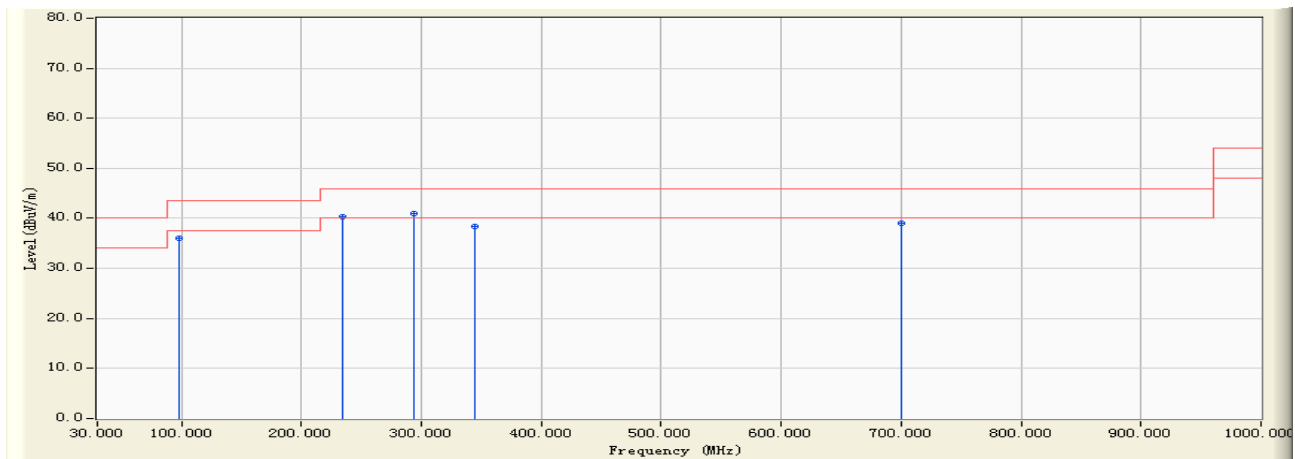


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type	Ant Pos (cm)	Table Pos (deg)
1	97.764	-17.239	53.260	36.021	-7.479	43.500	QUASIPeAK	200.600	312.500
2	234.623	-15.862	56.260	40.398	-5.602	46.000	QUASIPeAK	156.300	313.500
3	* 294.260	-13.417	54.320	40.904	-5.096	46.000	QUASIPeAK	163.200	126.500
4	344.260	-11.830	50.263	38.433	-7.567	46.000	QUASIPeAK	147.800	360.000
5	700.023	-5.223	44.288	39.065	-6.935	46.000	QUASIPeAK	100.000	325.600

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Engineer : Tony	
Site : EMC Lab AC 102	Time : 2009/12/11 - 15:05
Limit : FCC_CLASS_B_03M_QP	Margin : 6
EUT : Wireless 2.1 Speaker System	Probe : VERTICAL
Power : AC 120V/60Hz	Note : Transmit by 2444MHz

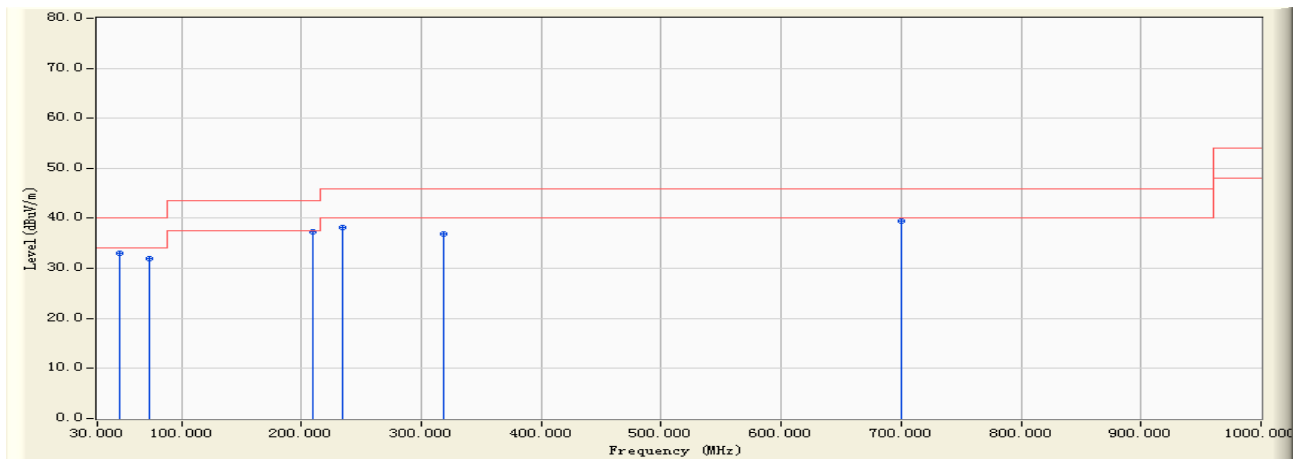


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type	Ant Pos (cm)	Table Pos (deg)
1		48.562	-18.233	51.365	33.133	-6.867	40.000	QUASIPeAK	100.000	253.600
2		73.265	-19.188	51.240	32.052	-7.948	40.000	QUASIPeAK	100.000	111.800
3	*	209.110	-17.095	54.362	37.267	-6.233	43.500	QUASIPeAK	152.100	325.200
4		234.516	-15.867	54.011	38.144	-7.856	46.000	QUASIPeAK	166.200	192.000
5		319.210	-12.459	49.310	36.850	-9.150	46.000	QUASIPeAK	100.000	228.100
6		700.120	-5.227	44.698	39.471	-6.529	46.000	QUASIPeAK	100.000	335.900

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Engineer : Tony	
Site : EMC Lab AC 102	Time : 2009/12/11 - 15:14
Limit : FCC_CLASS_B_03M_QP	Margin : 6
EUT : Wireless 2.1 Speaker System	Probe : HORIZONTAL
Power : AC 120V/60Hz	Note : Transmit by 2479MHz

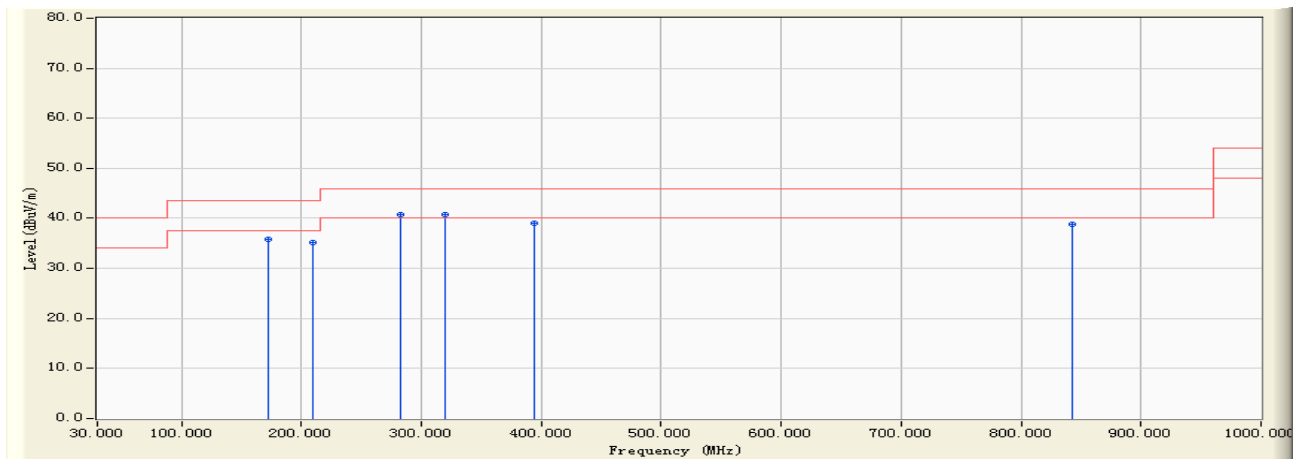


	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type	Ant Pos (cm)	Table Pos (deg)
1	172.316	-17.350	53.212	35.862	-7.638	43.500	QUASIPeAK	199.500	321.500
2	209.114	-17.094	52.346	35.252	-8.248	43.500	QUASIPeAK	200.000	360.000
3	282.650	-13.656	54.416	40.759	-5.241	46.000	QUASIPeAK	154.600	312.500
4	* 319.664	-12.427	53.261	40.834	-5.166	46.000	QUASIPeAK	191.500	321.500
5	393.620	-11.073	50.130	39.057	-6.943	46.000	QUASIPeAK	200.000	315.400
6	842.615	-2.397	41.265	38.868	-7.132	46.000	QUASIPeAK	200.000	178.400

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Engineer : Tony	
Site : EMC Lab AC 102	Time : 2009/12/11 - 15:14
Limit : FCC_CLASS_B_03M_QP	Margin : 6
EUT : Wireless 2.1 Speaker System	Probe : VERTICAL
Power : AC 120V/60Hz	Note : Transmit by 2479MHz

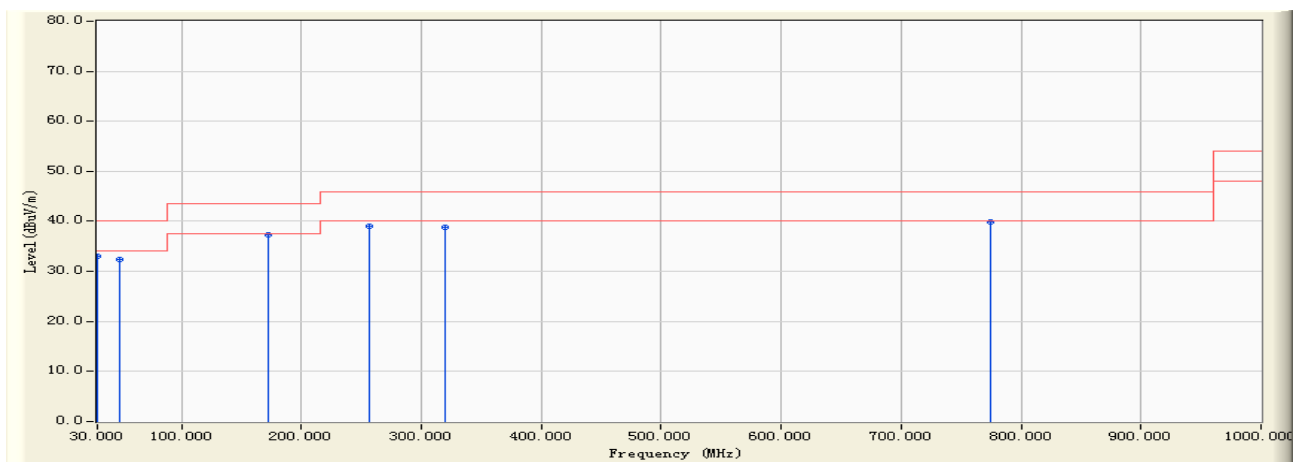

	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type	Ant Pos (cm)	Table Pos (deg)
1	30.120	-7.316	40.321	33.005	-6.995	40.000	QUASIPeAK	100.000	355.600
2	48.112	-17.932	50.213	32.281	-7.719	40.000	QUASIPeAK	100.200	255.900
3	172.316	-17.350	54.620	37.270	-6.230	43.500	QUASIPeAK	100.000	361.200
4	257.211	-14.770	53.810	39.040	-6.960	46.000	QUASIPeAK	122.600	331.200
5	319.665	-12.427	51.254	38.827	-7.173	46.000	QUASIPeAK	100.000	226.500
6	* 774.510	-3.510	43.411	39.901	-6.099	46.000	QUASIPeAK	106.900	315.200


Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Above 1G:

Engineer : Tony	
Site : EMC Lab AC102	Time : 2009/12/11 - 11:55
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
EUT : Wireless 2.1 Speaker System	Probe : HORIZONTAL
Power : AC 120V/60Hz	Note : Transmit by 2404MHz

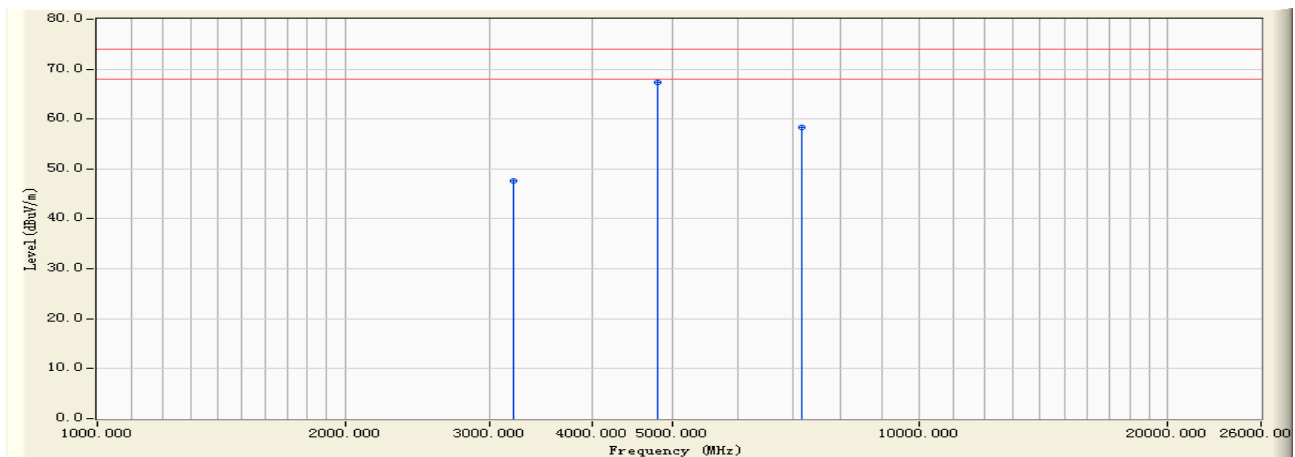


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		3200.000	-0.515	48.192	47.677	-26.323	74.000	PEAK
2	*	4800.000	6.381	61.009	67.390	-6.610	74.000	PEAK
3		7200.000	10.098	48.260	58.358	-15.642	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Engineer : Tony	
Site : EMC Lab AC102	Time : 2009/12/11 - 11:55
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
EUT : Wireless 2.1 Speaker System	Probe : HORIZONTAL
Power : AC 120V/60Hz	Note : Transmit by 2404MHz

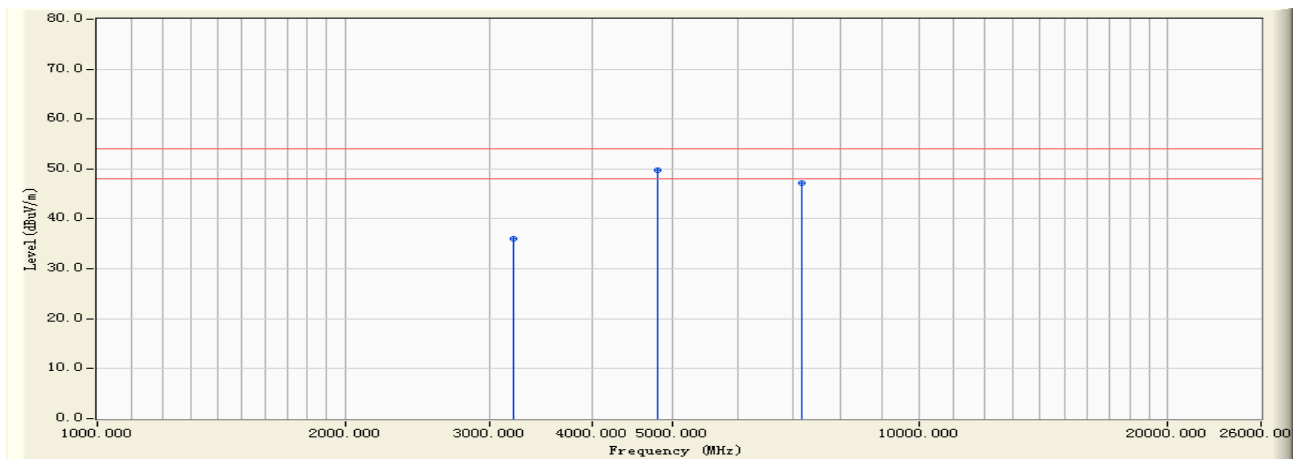


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		3200.000	-0.515	36.450	35.935	-18.065	54.000	AVERAGE
2	*	4800.000	6.381	43.400	49.781	-4.219	54.000	AVERAGE
3		7200.000	10.098	37.019	47.117	-6.883	54.000	AVERAGE

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Engineer : Tony	
Site : EMC Lab AC102	Time : 2009/12/11 - 11:55
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
EUT : Wireless 2.1 Speaker System	Probe : VERTICAL
Power : AC 120V/60Hz	Note : Transmit by 2404MHz

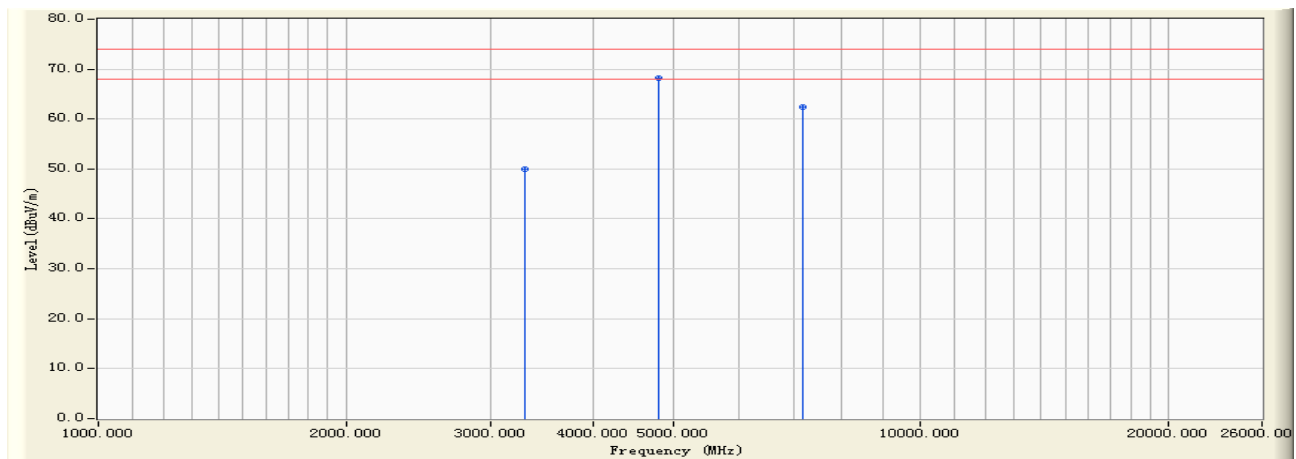


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		3300.000	-0.458	50.325	49.867	-24.133	74.000	PEAK
2	*	4800.000	6.381	61.851	68.232	-5.768	74.000	PEAK
3		7200.000	10.098	52.316	62.414	-11.586	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Engineer : Tony	
Site : EMC Lab AC102	Time : 2009/12/11 - 11:55
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
EUT : Wireless 2.1 Speaker System	Probe : VERTICAL
Power : AC 120V/60Hz	Note : Transmit by 2404MHz

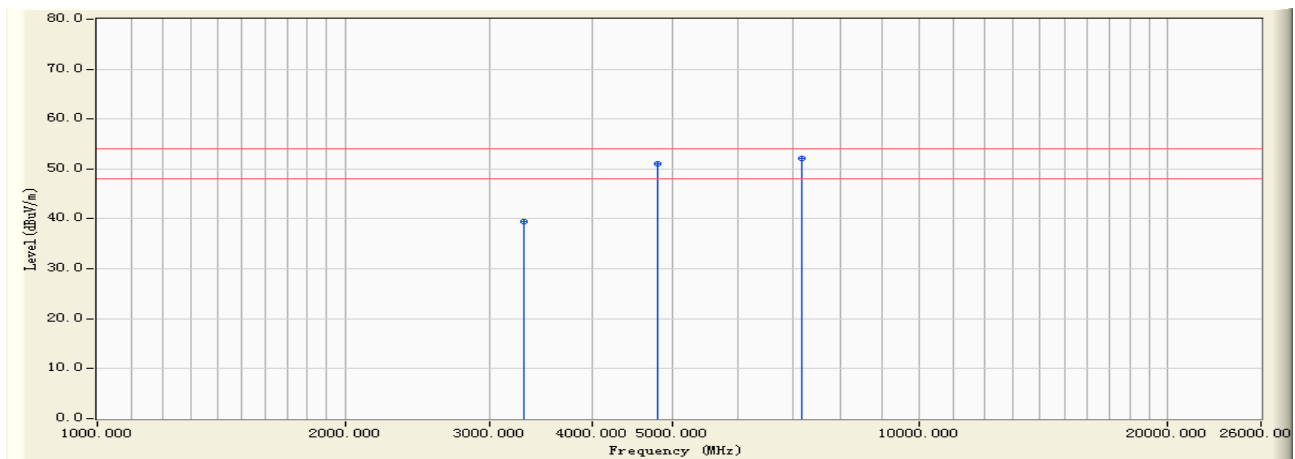


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		3300.000	-0.458	39.860	39.402	-14.598	54.000	AVERAGE
2		4800.000	6.381	44.600	50.981	-3.019	54.000	AVERAGE
3	*	7200.000	10.098	42.060	52.158	-1.842	54.000	AVERAGE

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Engineer : Tony	
Site : EMC Lab AC102	Time : 2009/12/11 - 11:55
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
EUT : Wireless 2.1 Speaker System	Probe : HORIZONTAL
Power : AC 120V/60Hz	Note : Transmit by 2444MHz

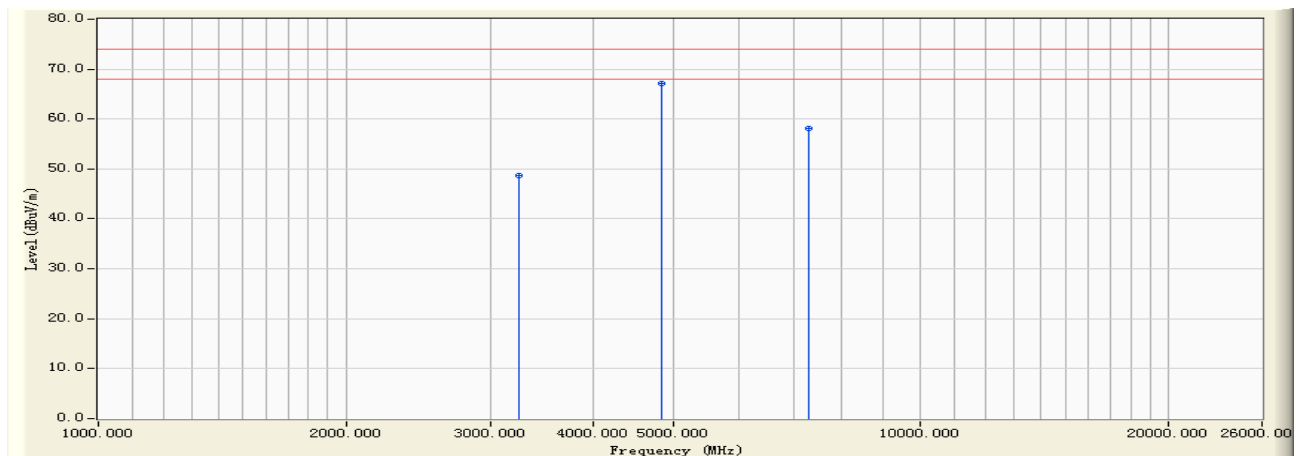


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		3250.000	-0.486	49.273	48.787	-25.213	74.000	PEAK
2	*	4850.000	6.401	60.776	67.177	-6.823	74.000	PEAK
3		7300.000	9.882	48.290	58.172	-15.828	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Engineer : Tony	
Site : EMC Lab AC102	Time : 2009/12/11 - 11:55
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
EUT : Wireless 2.1 Speaker System	Probe : HORIZONTAL
Power : AC 120V/60Hz	Note : Transmit by 2444MHz

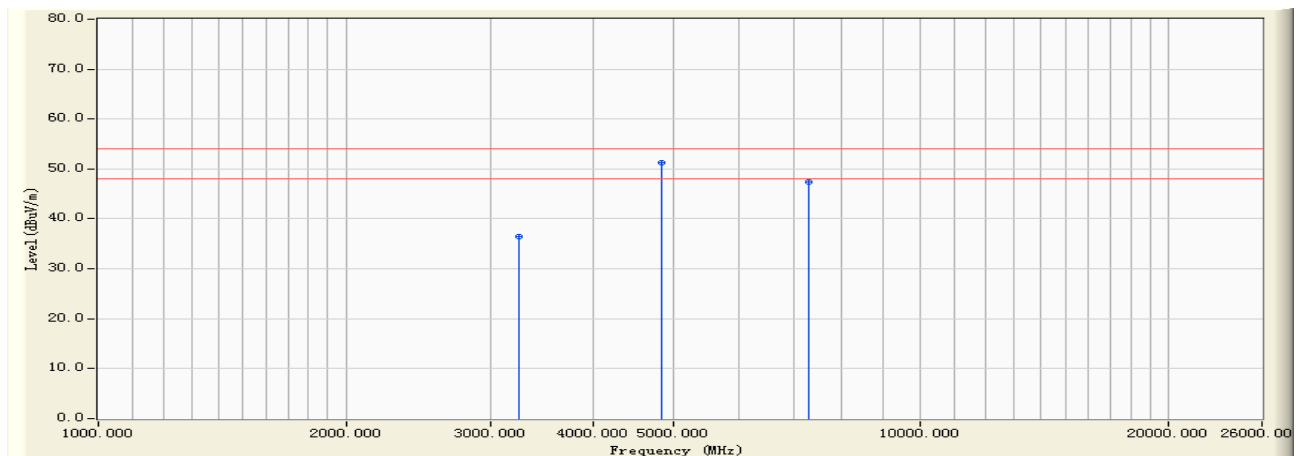


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		3250.000	-0.486	36.890	36.404	-17.596	54.000	AVERAGE
2	*	4850.000	6.401	44.800	51.201	-2.799	54.000	AVERAGE
3		7300.000	9.882	37.490	47.372	-6.628	54.000	AVERAGE

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Engineer : Tony	
Site : EMC Lab AC102	Time : 2009/12/11 - 11:55
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
EUT : Wireless 2.1 Speaker System	Probe : VERTICAL
Power : AC 120V/60Hz	Note : Transmit by 2444MHz

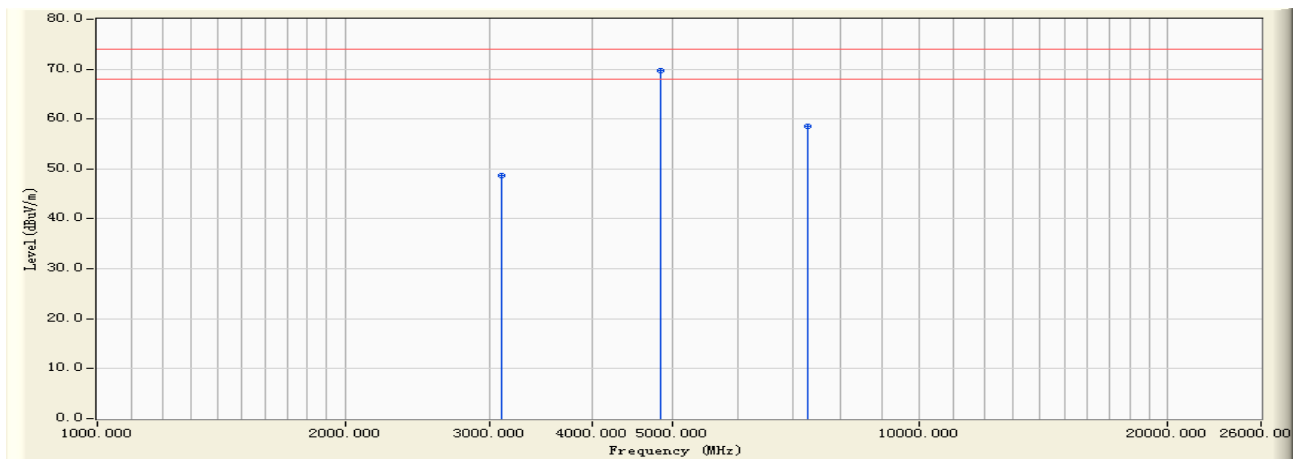


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		3100.000	-0.398	49.026	48.628	-25.372	74.000	PEAK
2	*	4850.000	6.401	63.373	69.774	-4.226	74.000	PEAK
3		7300.000	9.882	48.570	58.452	-15.548	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Engineer : Tony	
Site : EMC Lab AC102	Time : 2009/12/11 - 11:55
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
EUT : Wireless 2.1 Speaker System	Probe : VERTICAL
Power : AC 120V/60Hz	Note : Transmit by 2444MHz

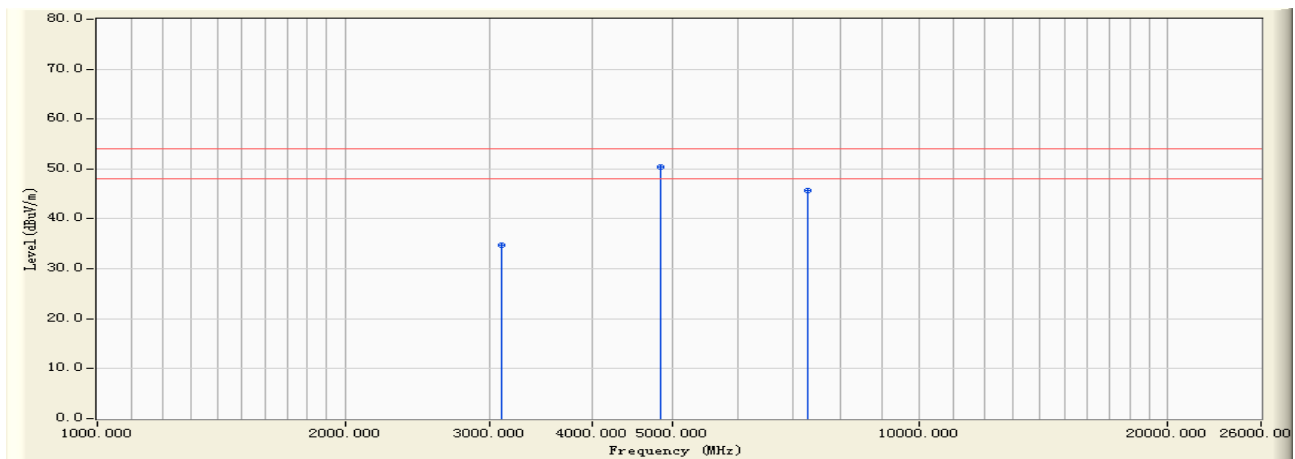


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		3100.000	-0.398	35.160	34.762	-19.238	54.000	AVERAGE
2	*	4850.000	6.401	43.980	50.381	-3.619	54.000	AVERAGE
3		7300.000	9.882	35.800	45.682	-8.318	54.000	AVERAGE

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Engineer : Tony	
Site : EMC Lab AC102	Time : 2009/12/11 - 11:55
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
EUT : Wireless 2.1 Speaker System	Probe : HORIZONTAL
Power : AC 120V/60Hz	Note : Transmit by 2479MHz

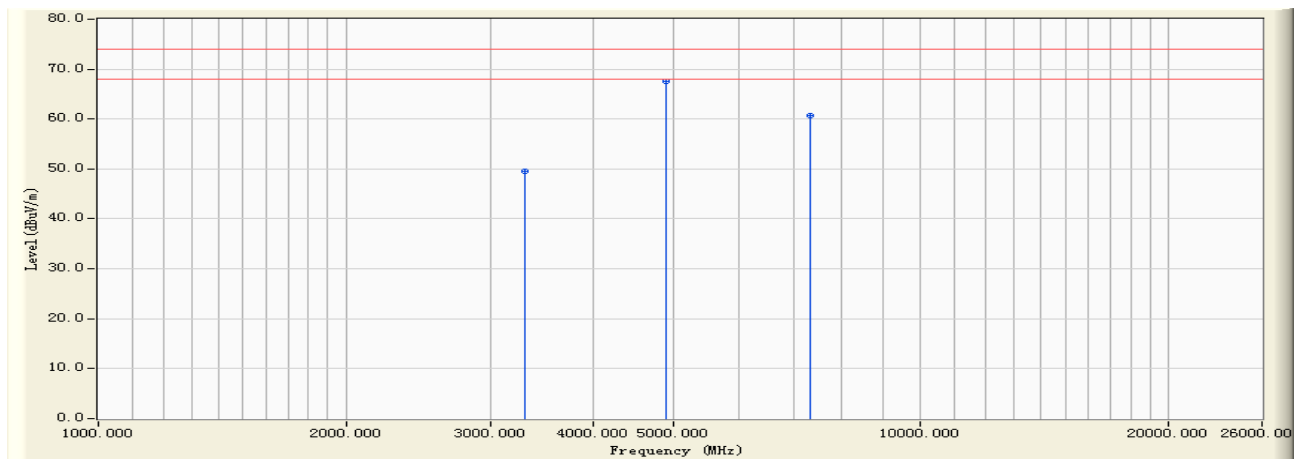


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		3300.000	-0.458	50.058	49.600	-24.400	74.000	PEAK
2	*	4900.000	6.432	61.225	67.657	-6.343	74.000	PEAK
3		7350.000	9.760	51.000	60.760	-13.240	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Engineer : Tony	
Site : EMC Lab AC102	Time : 2009/12/11 - 11:55
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
EUT : Wireless 2.1 Speaker System	Probe : HORIZONTAL
Power : AC 120V/60Hz	Note : Transmit by 2479MHz

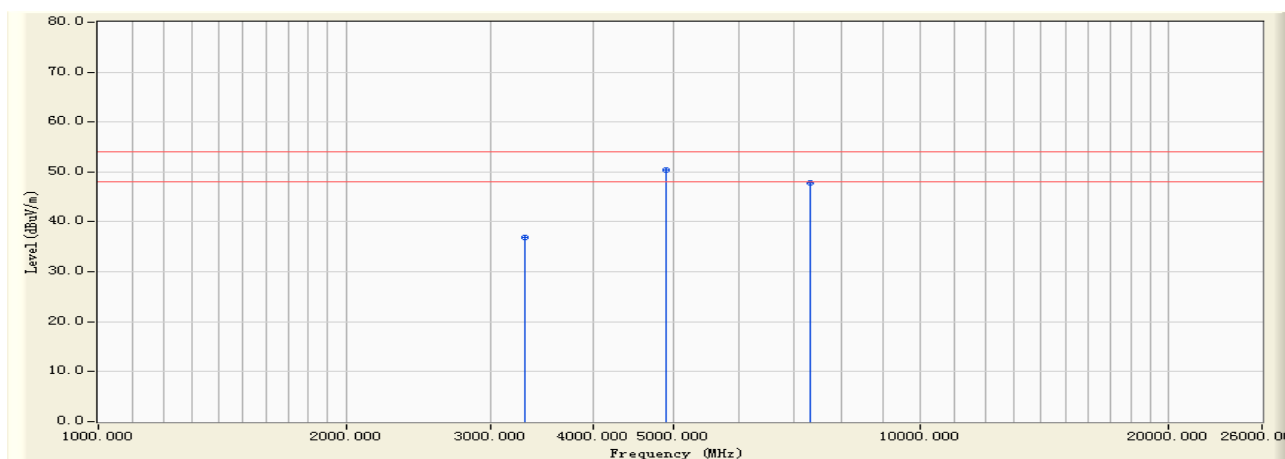


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		3300.000	-0.458	37.400	36.942	-17.058	54.000	AVERAGE
2	*	4900.000	6.432	43.960	50.392	-3.608	54.000	AVERAGE
3		7350.000	9.760	38.010	47.770	-6.230	54.000	AVERAGE

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Engineer : Tony	
Site : EMC Lab AC102	Time : 2009/12/11 - 11:55
Limit : FCC_SpartC_15.209_03M_PK	Margin : 6
EUT : Wireless 2.1 Speaker System	Probe : VERTICAL
Power : AC 120V/60Hz	Note : Transmit by 2479MHz

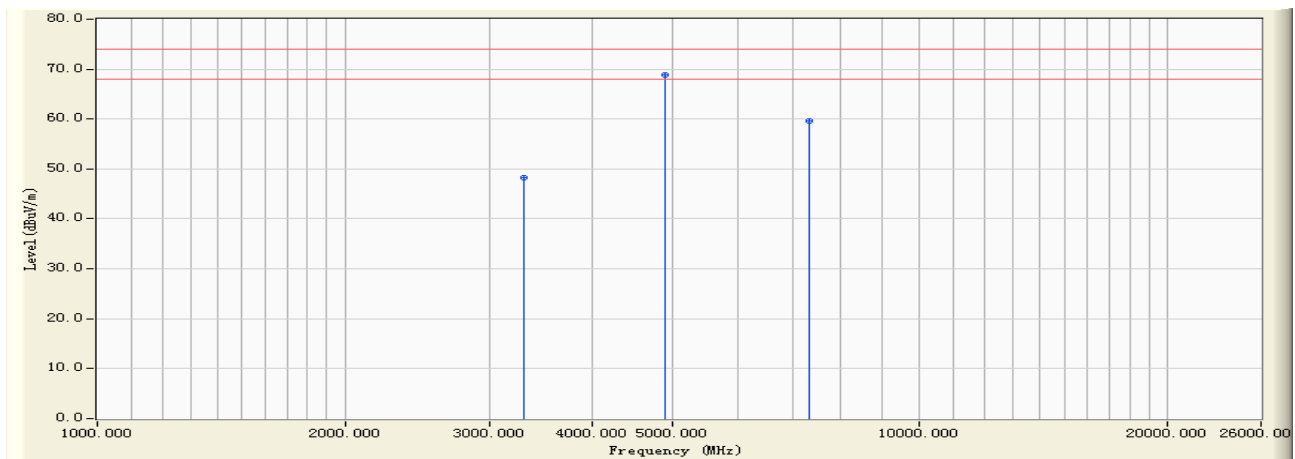


		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		3300.000	-0.458	48.628	48.170	-25.830	74.000	PEAK
2	*	4900.000	6.432	62.333	68.765	-5.235	74.000	PEAK
3		7350.000	9.760	49.955	59.715	-14.285	74.000	PEAK

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor



Engineer : Tony	
Site : EMC Lab AC102	Time : 2009/12/11 - 11:55
Limit : FCC_SpartC_15.209_03M_AV	Margin : 6
EUT : Wireless 2.1 Speaker System	Probe : VERTICAL
Power : AC 120V/60Hz	Note : Transmit by 2479MHz

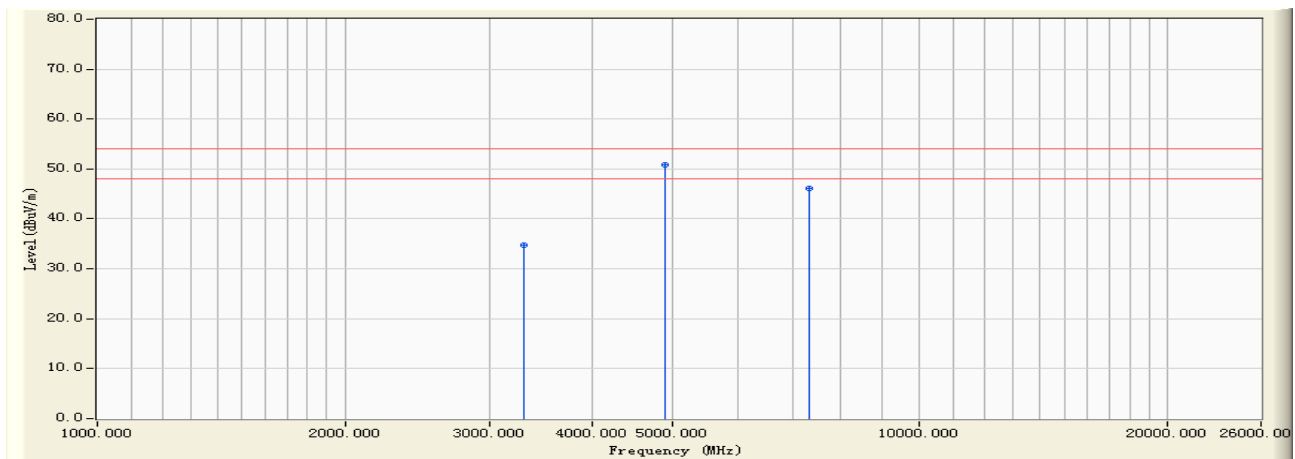

		Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Measure Level (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Detector Type
1		3300.000	-0.458	35.120	34.662	-19.338	54.000	AVERAGE
2	*	4900.000	6.432	44.340	50.772	-3.228	54.000	AVERAGE
3		7350.000	9.760	36.450	46.210	-7.790	54.000	AVERAGE

Note:

1. All Readings below 1GHz are Quasi-Peak, above are performed with peak and/or average measurements as necessary.
2. " * ", means this data is the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Test engineer: Tony



5. 20dB Bandwidth Measurement Data


5.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 30 KHz and VBW to 100 KHz.
- The 20 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20 dB.

5.3 Test Setup Layout



5.4 Measurement Equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date
Spectrum Analyzer	R&S	FSP40	100324	2009.11.02

5.5 Test Result and Data

Test Date: Dec 11, 2009

Temperature: 24°C


Atmospheric pressure: 1010 hPa

Humidity: 52%


Channel	Frequency (MHz)	20dB Bandwidth (MHz)
01	2404.0	1.680
09	2444.0	1.536
16	2479.0	1.496



Channel: 01

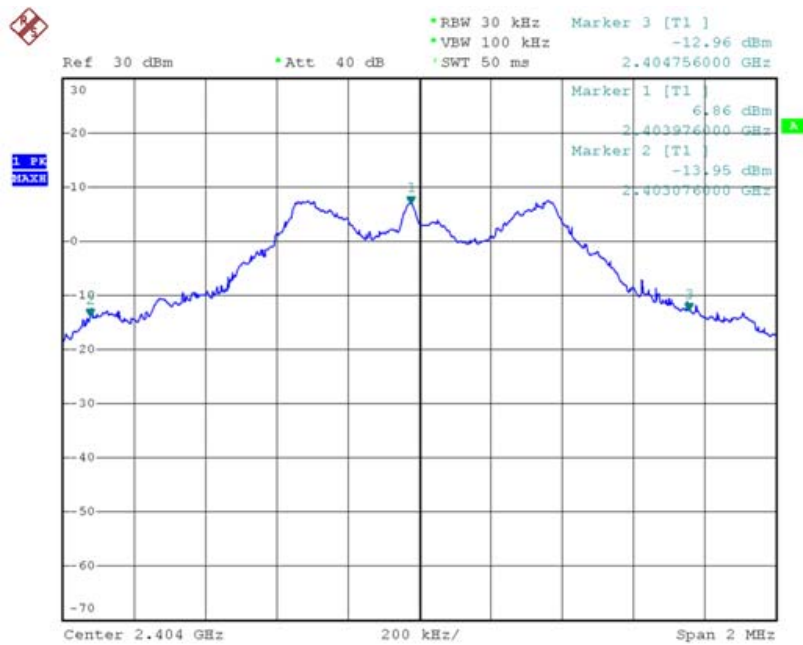


Channel: 09

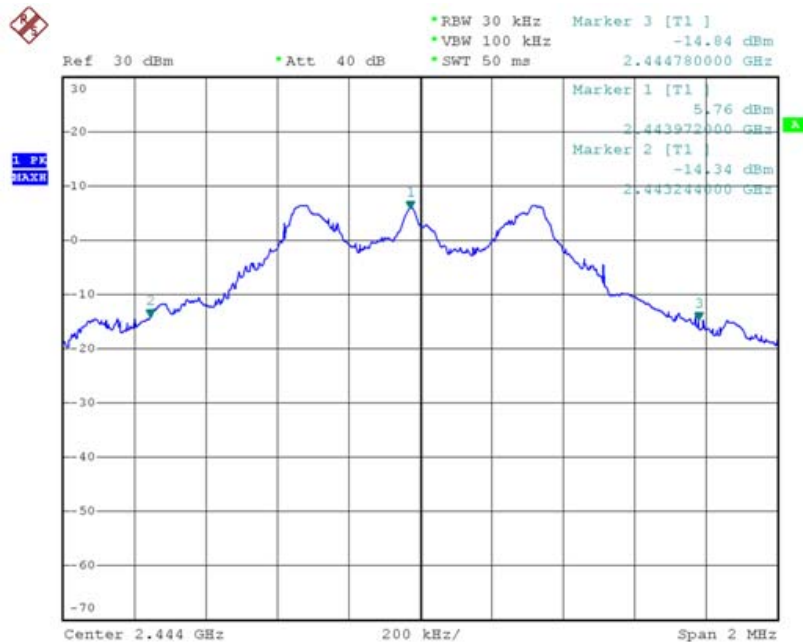



Channel: 16

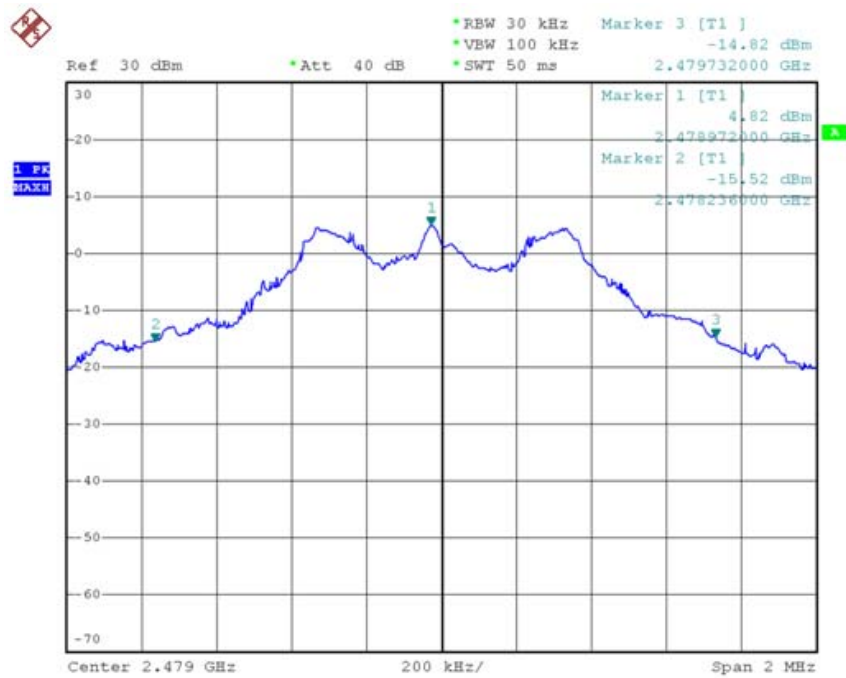



6. Frequencies Separation


6.1 Test Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

6.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 100 KHz and VBW to 100 KHz.
- By using the MaxHold function record the separation of two adjacent channels.
- Measure the frequency difference of these two adjacent channels.

6.3 Test Setup Layout



6.4 Measurement Equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date
Spectrum Analyzer	R&S	FSP40	100324	2009.11.02

6.5 Test Result and Data

Test Date: Dec 11, 2009

Temperature: 24°C


Atmospheric pressure: 1010 hPa

Humidity: 52%


Channel	Frequency (MHz)	Channel Separation (MHz)	Minimum Limit (MHz)
01	2404.0	5.00	1.187
09	2444.0	4.98	1.296
16	2479.0	5.02	1.650



Channel: 01

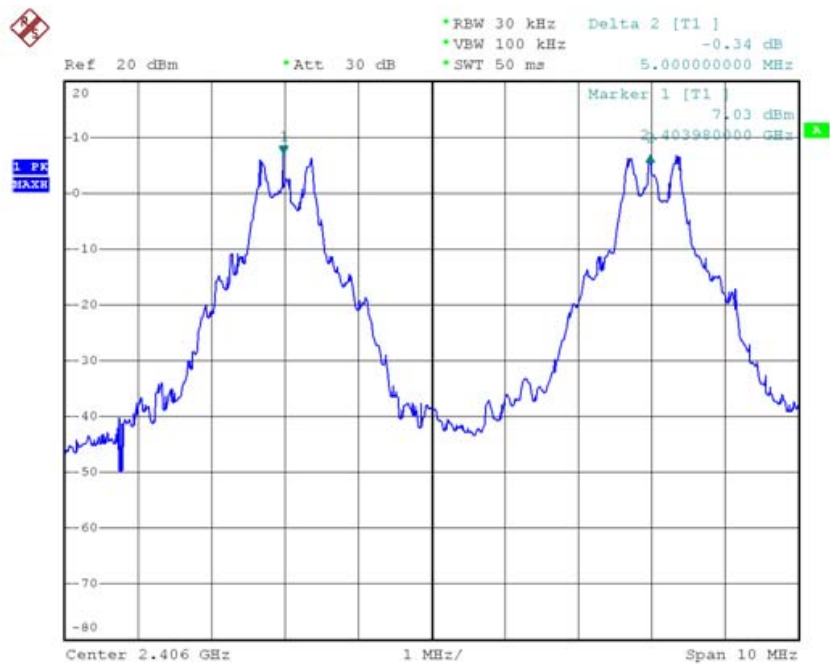


Channel: 09

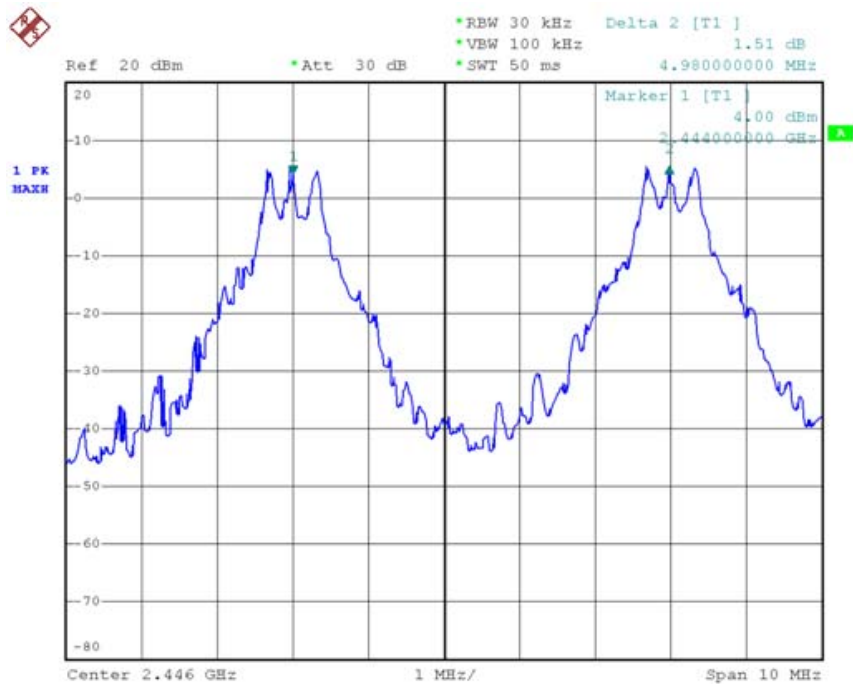



Channel: 16

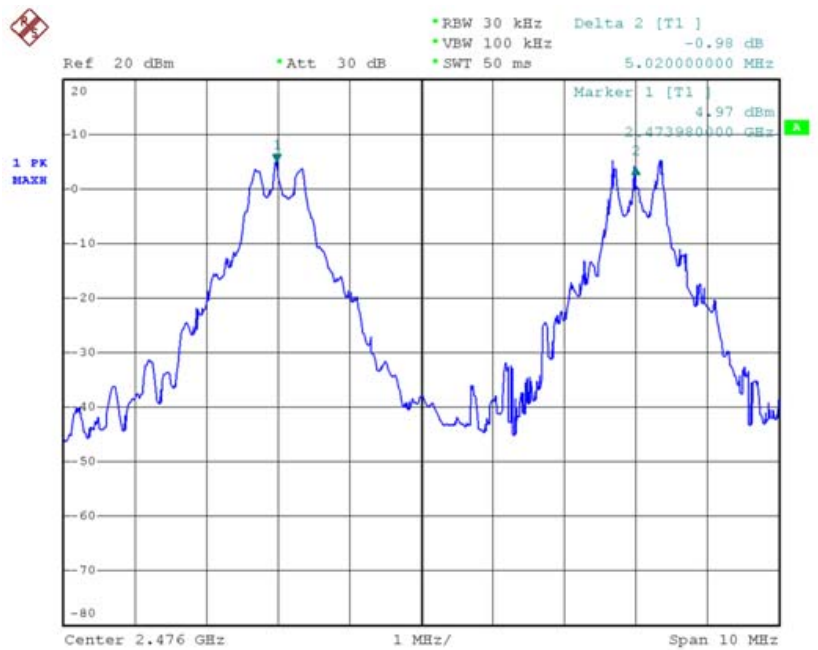



7. Dwell Time on each channel


7.1 Test Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

7.2 Test Procedures

1. The transmitter output was connected to the spectrum analyzer.
2. Adjust the center frequency to measure frequency, then set zero span mode.
3. Set RBW of spectrum analyzer to 100 KHz and VBW to 100 KHz.
4. Measure the time duration of one transmission on the measured frequency.

7.3 Test Setup Layout



7.4 Measurement Equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date
Spectrum Analyzer	R&S	FSP40	100324	2009.11.02

7.5 Test Result and Data

Test Date: Dec 11, 2009

Temperature: 24°C

Atmospheric pressure: 1010 hPa



Humidity: 52%

Test Period = 0.4 (second / channel) x 20 Channel = 8 sec

Channel	Frequency (MHz)	Dwell Time (ms)
01	2404.0	328.6
09	2444.0	329.4
16	2479.0	326.0





Channel: 01

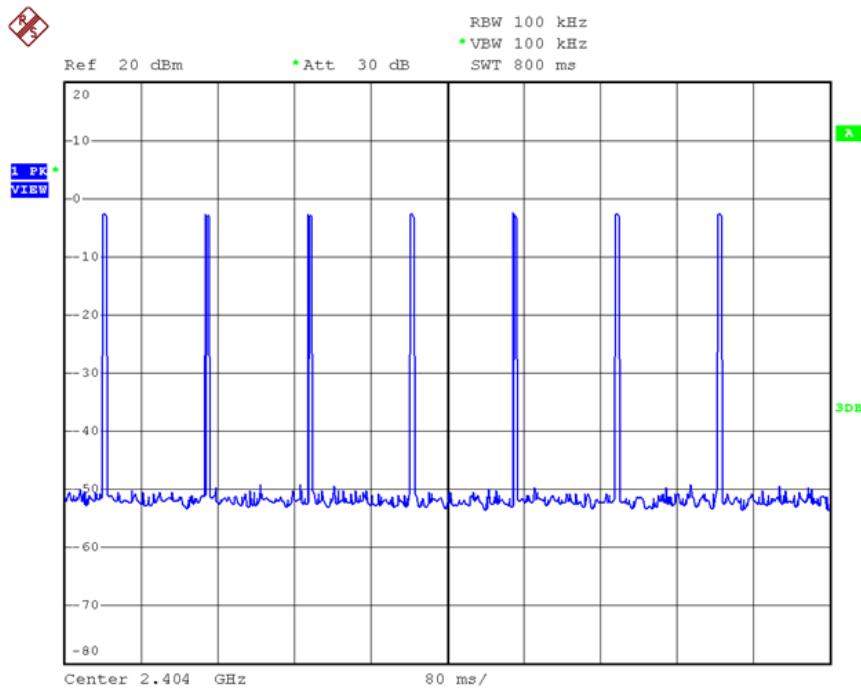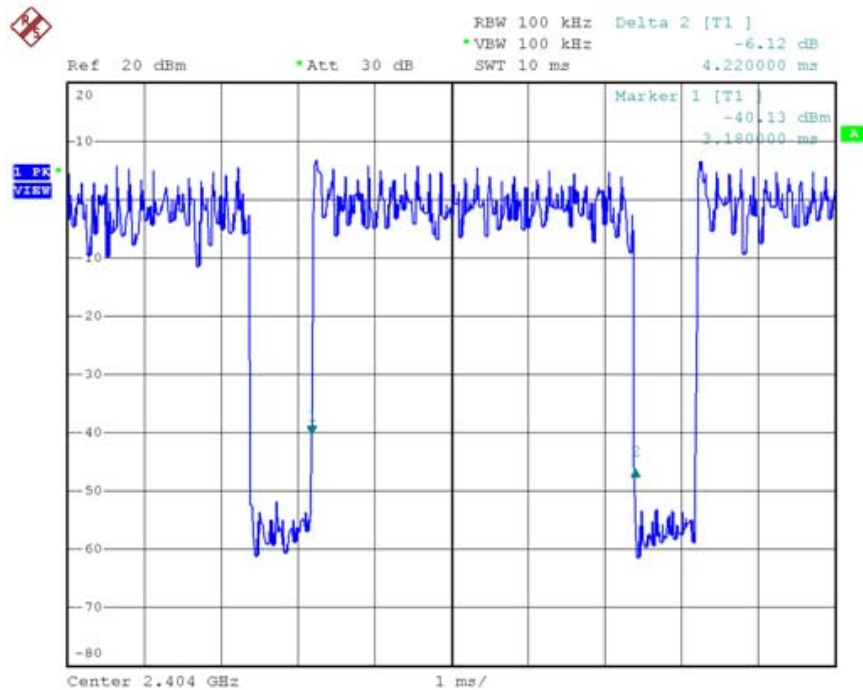





Channel: 09

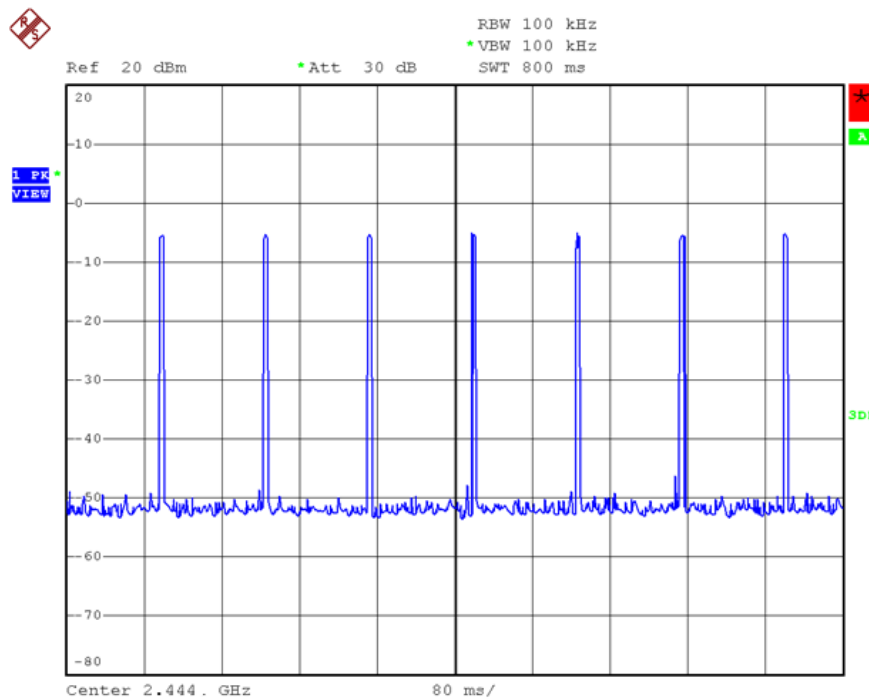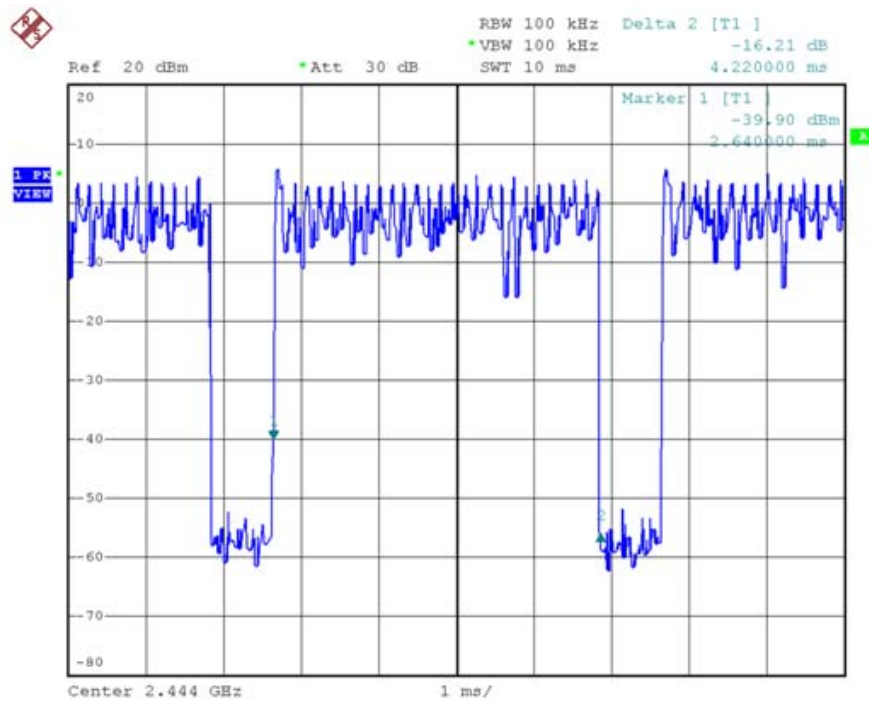



Channel: 16

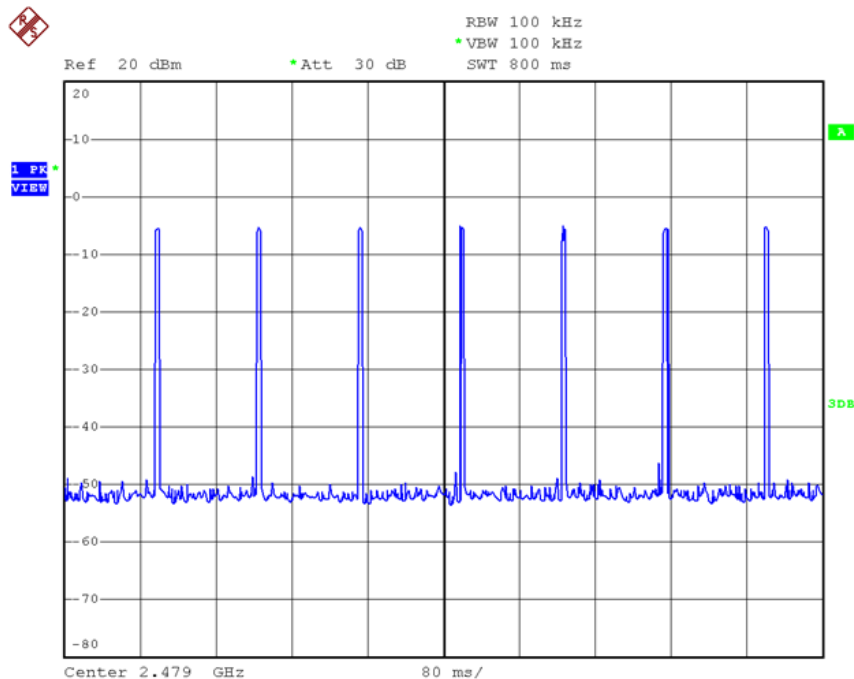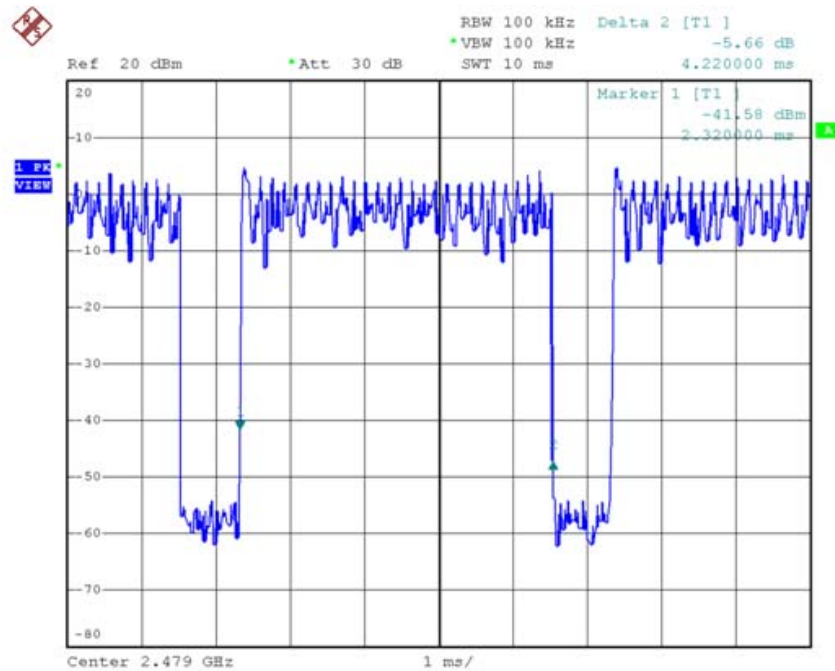



8. Number of Hopping Channels


8.1 Test Limit

Frequency hopping systems in the 2400 ~ 2483.5 MHz band shall use at least 15 channels.

8.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer.
- Set RBW of spectrum analyzer to 100 KHz and VBW to 100 KHz.
- Set the MaxHold function, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been record.

8.3 Test Setup Layout



8.4 Measurement Equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date
Spectrum Analyzer	R&S	FSP40	100324	2009.11.02

8.5 Test Result and Data


Test Date: Dec 11, 2009

Temperature: 24°C

Atmospheric pressure: 1010 hPa

Humidity: 52%

Number of hopping channels: 16 Channels

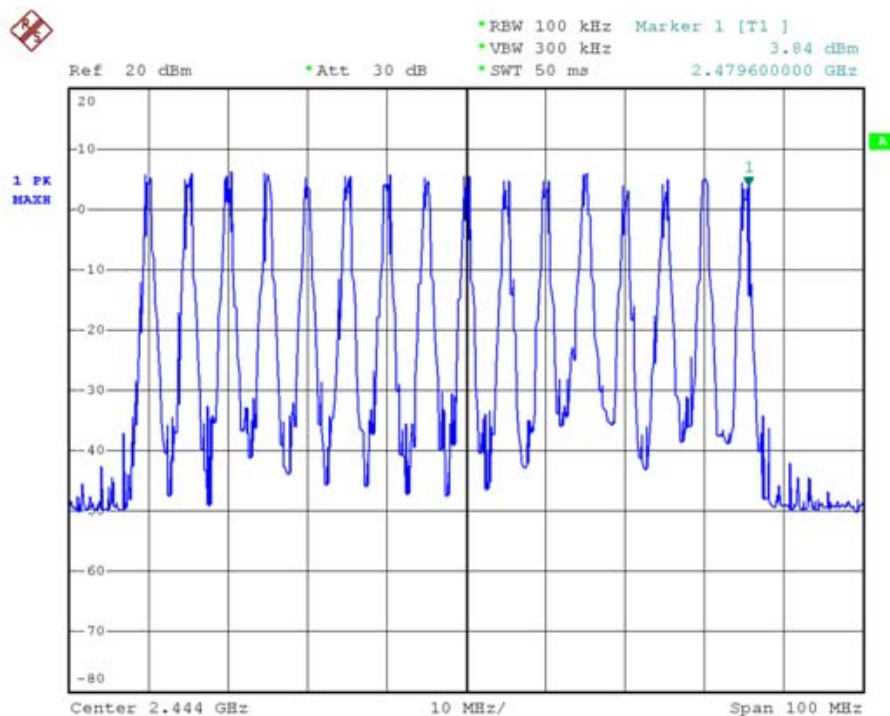



9. Maximum Peak Output Power


9.1 Test Limit

The Maximum Peak Output Power Measurement is 30dBm.

9.2 Test Procedures

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

9.3 Test Setup Layout



9.4 Measurement Equipment

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date
Spectrum Analyzer	R&S	FSP40	100324	2009.11.02

9.5 Test Result and Data

Test Date: Dec 11, 2009

Temperature: 24°C


Atmospheric pressure: 1010 hPa

Humidity: 52%


Channel	Frequency (MHz)	Peak Power Output (dBm)	Peak Power Output (mW)
01	2404.0	7.26	5.32
09	2444.0	6.53	4.50
16	2479.0	5.50	3.55



Channel: 01

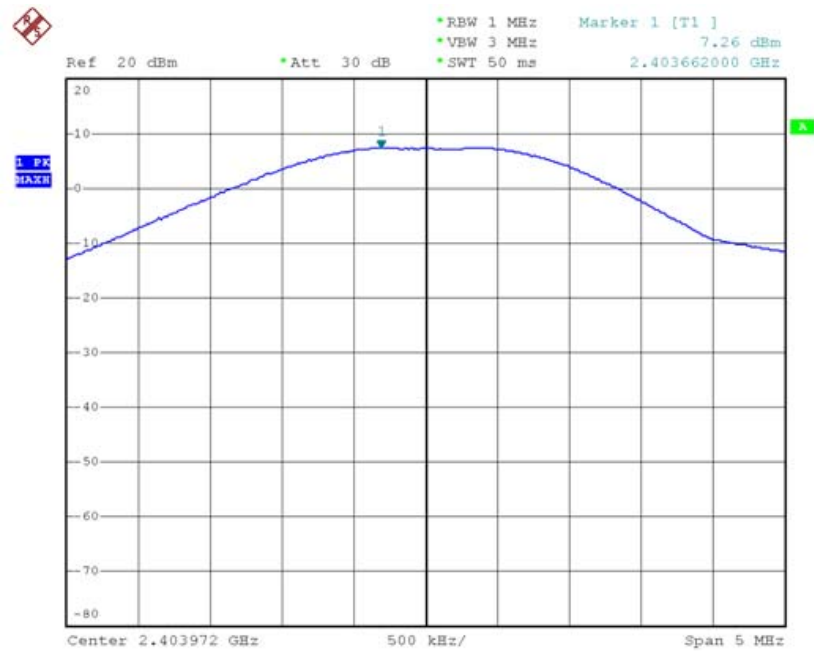


Channel: 09

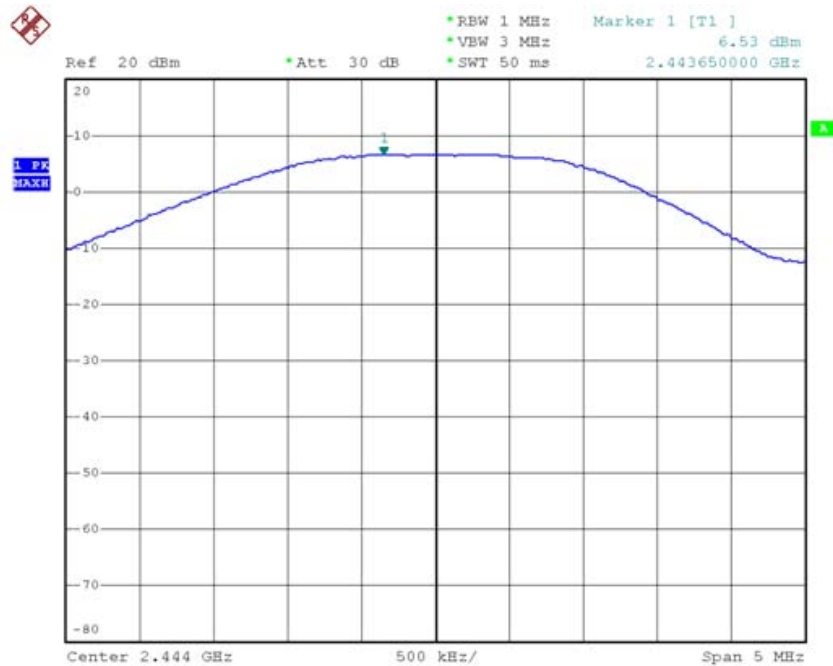



Channel: 16

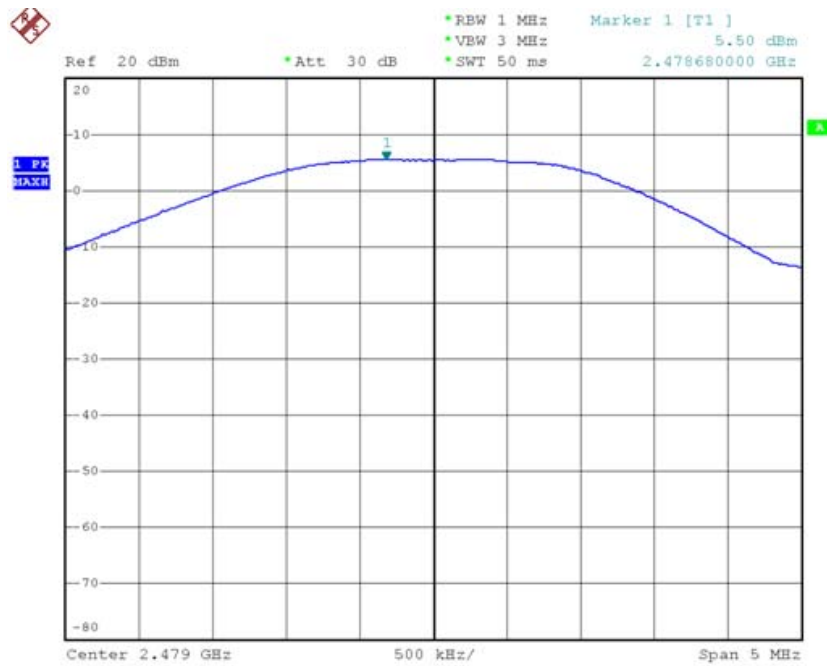



10. Power Spectral Density


10.1 Test Limit

The Maximum of Power Spectral Density Measurement is 8dBm.

10.2 Test Procedures

1. The transmitter output was connected to spectrum analyzer.
2. The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=span/3KHz.
3. The power spectral density was measured and recorded.
4. The Sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

10.3 Test Setup Layout



10.4 List of Measuring Equipment Used

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date
Spectrum Analyzer	R&S	FSP40	100324	2009.11.02

10.5 Test Result and Data

Test Date: Dec 18, 2009

Temperature: 24°C


Atmospheric pressure: 1010 hPa

Humidity: 52%


Channel	Frequency (MHz)	Maximum Power Density of 3 kHz Bandwidth (dBm)
01	2404.0	1.38
09	2444.0	-1.77
16	2479.0	-3.34



Channel: 01

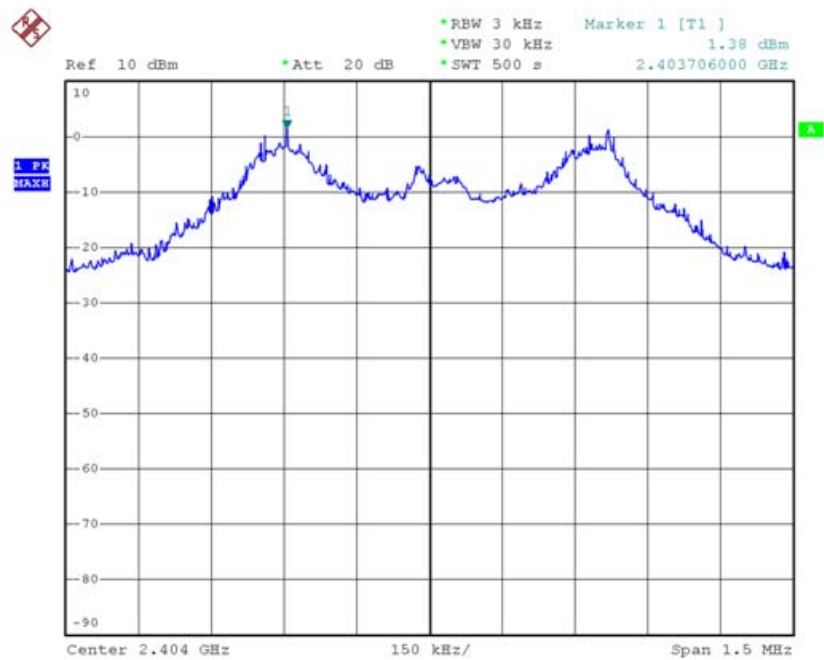


Channel: 09

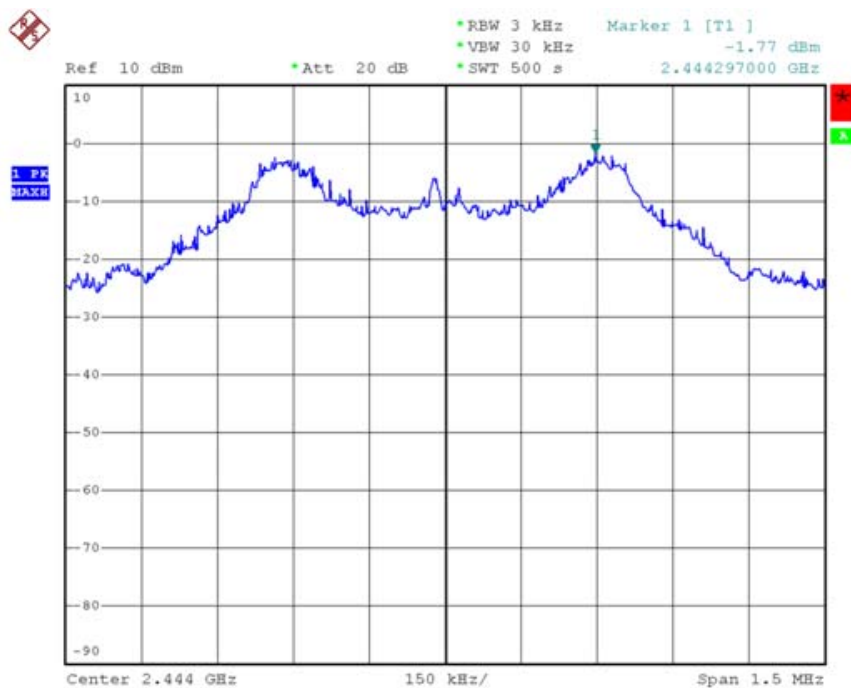



Channel: 16

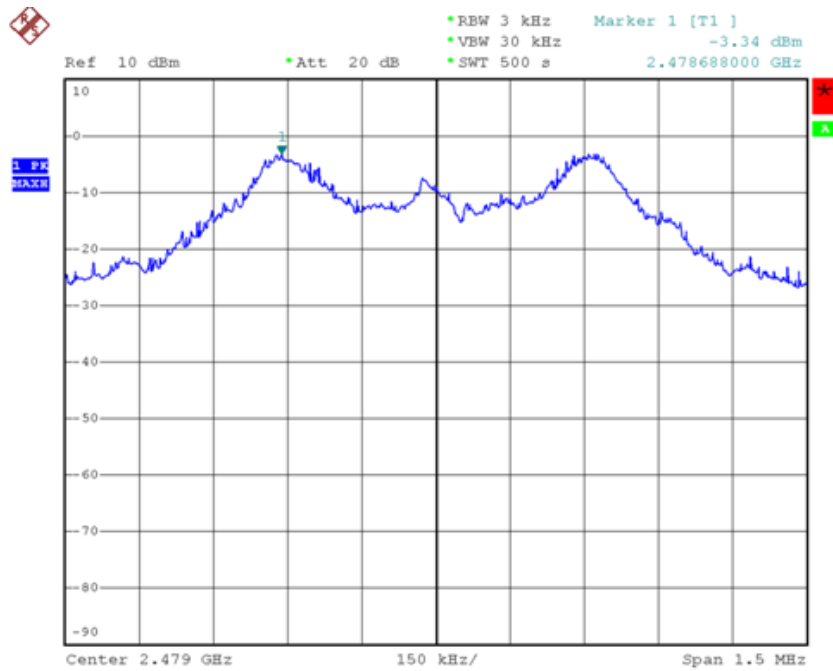



11. Band Edges Measurement

11.1 Test Limit

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

11.2 Test Procedures

- The transmitter output was connected to the spectrum analyzer via a low lose cable.
- Set both RBW and VBW of spectrum analyzer to 100 KHz with convenient frequency span including 100 KHz bandwidth from band edge.
- The band edges was measured and recorded.

11.3 Test Setup Layout



11.4 List of Measuring Equipment Used

Instrument/Ancillary	Model No.	Manufacturer	Serial No.	Calibration Date
Spectrum Analyzer	R&S	FSP40	100324	2009.11.02

11.5 Test Result and Data

Test Date: Dec 11, 2009

Temperature: 24°C



Atmospheric pressure: 1010 hPa

Humidity: 52%

Channel	Frequency (MHz)	maximum value in frequency (MHz)	maximum value (dBm)
01	2404.0	2387.04	-37.78
16	2479.0	2487.26	-37.60





Channel: 01

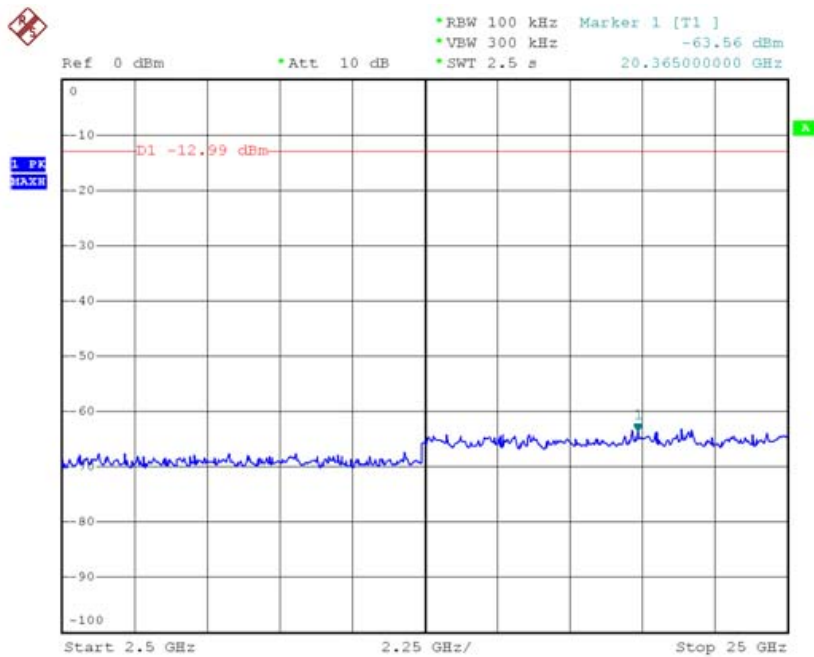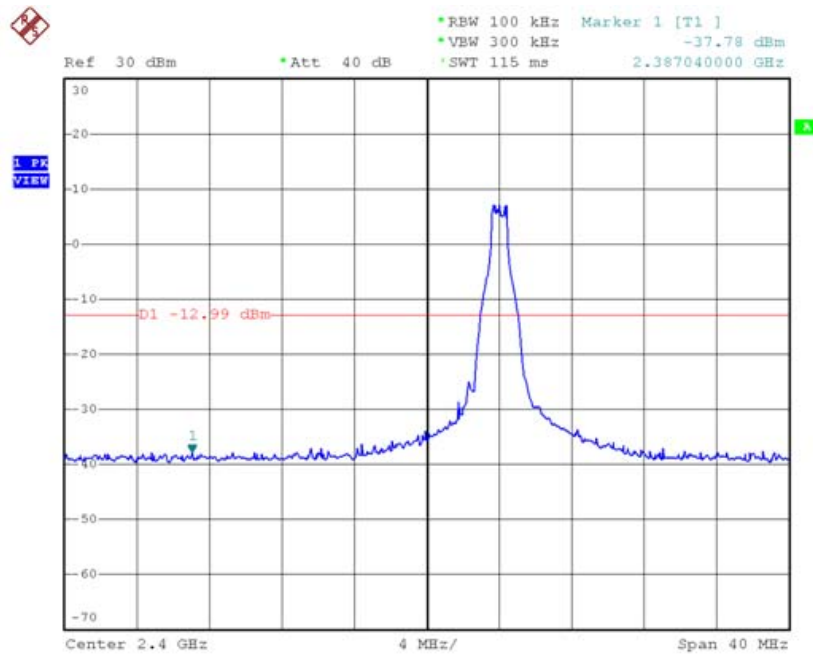



Channel: 16

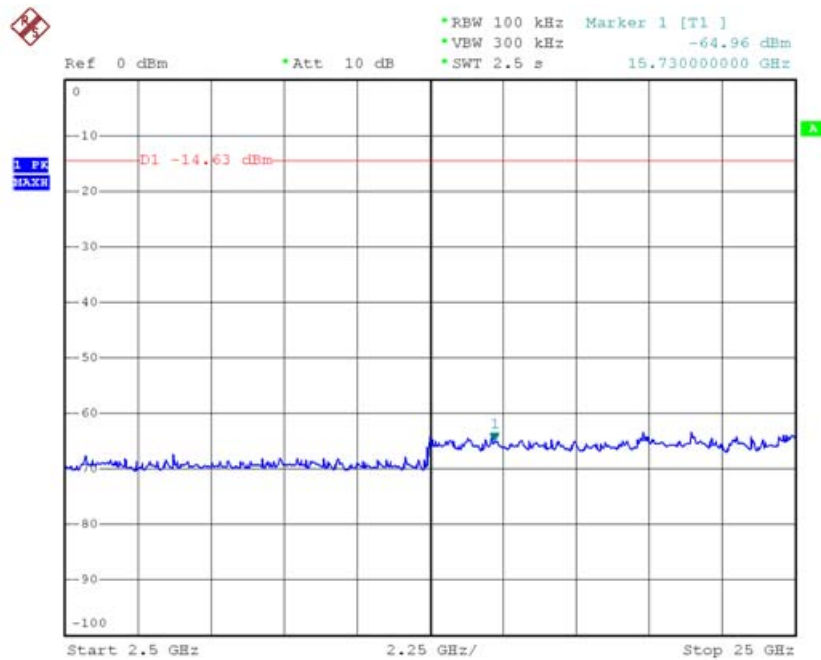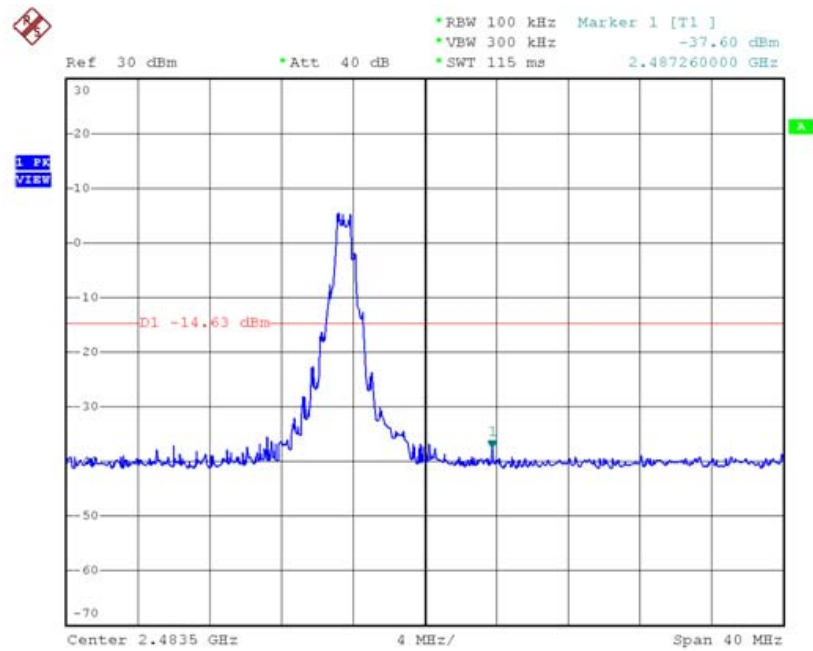



11.6 Restrict band emission Measurement Data

Test Date: Dec 12, 2009

Temperature: 25°C

Atmospheric pressure: 1007 hPa

Humidity: 51%

Channel 01						Fundamental Frequency: 2404.0 MHz				
Frequency (MHz)	Ant-Pol H/V	Meter Reading	Corrected Factor	Result (dBuV/m)	Remark	Limit@3m (dBuV/m)		Margin (dB)	Table (Deg.)	Ant High (m)
						Peak	Ave.			
2385.38	H	58.96	-0.81	59.15	Peak	74	54	-14.85	0	1.50
2387.72	H	45.90	-0.82	45.08	Ave	74	54	-8.92	0	1.50
2378.24	V	60.15	-0.78	59.37	Peak	74	54	-14.63	0	1.50
2385.38	V	46.08	-0.71	45.37	Ave	74	54	-8.63	0	1.50
Channel 16						Fundamental Frequency: 2479.0 MHz				
2483.51	H	64.74	-0.53	64.21	Peak	74	54	-9.79	0	1.50
2483.51	H	49.53	-0.51	49.02	Ave	74	54	-4.98	0	1.50
2492.55	V	57.37	-0.48	56.89	Peak	74	54	-17.11	150	1.50
2483.51	V	47.28	-0.50	46.78	Ave	74	54	-7.22	150	1.50

Notes:

1. Result = Meter Reading + Factor
2. Factor = Antenna Factor + Cable Loss – Amplifier
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection at frequency above 1GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average detection at frequency above 1GHz



12. Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.09000 – 0.11000	16.42000 – 16.42300	399.9 – 410.0	4.500 – 5.250
0.49500 – 0.505**	16.69475 – 16.69525	608.0 – 614.0	5.350 – 5.460
2.17350 – 2.19050	16.80425 – 16.80475	960.0 – 1240.0	7.250 – 7.750
4.12500 – 4.12800	25.50000 – 25.67000	1300.0 – 1427.0	8.025 – 8.500
4.17725 – 4.17775	37.50000 – 38.25000	1435.0 – 1626.5	9.000 – 9.200
4.20725 – 4.20775	73.00000 – 74.60000	1645.5 – 1646.5	9.300 – 9.500
6.21500 – 6.21800	74.80000 – 75.20000	1660.0 – 1710.0	10.600 – 12.700
6.26775 – 6.26825	108.00000 – 121.94000	1718.8 – 1722.2	13.250 – 13.400
6.31175 – 6.31225	123.00000 – 138.00000	2200.0 – 2300.0	14.470 – 14.500
8.29100 – 8.29400	149.90000 – 150.05000	2310.0 – 2390.0	15.350 – 16.200
8.36200 – 8.36600	156.52475 – 156.52525	2483.5 – 2500.0	17.700 – 21.400
8.37625 – 8.38675	156.70000 – 156.90000	2655.0 – 2900.0	22.010 – 23.120
8.41425 – 8.41475	162.01250 – 167.17000	3260.0 – 3267.0	23.600 – 24.000
12.29000 – 12.29300	167.72000 – 173.20000	3332.0 – 3339.0	31.200 – 31.800
12.51975 – 12.52025	240.00000 – 285.00000	3345.8 – 3358.0	36.430 – 36.500
12.57675 – 12.57725	322.00000 – 335.40000	3600.0 – 4400.0	Above 38.6
13.36000 – 13.41000			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

12.1 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.