



# Radio Test Report

**FCC ID: R4O-ML092-00-01**

This report concerns (check one) :  Original Grant  Class II Change

**Issued Date** : Dec. 12, 2012  
**Project No.** : 1210282  
**Equipment** : AEROBLUETOOTH  
**Model Name** : ML90200; ML90201; ML90202;  
ML90203

**Applicant** : Music Life Ltd.  
**Address** : 16/F., Kailey Tower, 16 Stanley Street,  
Central, Hong Kong

**Tested by:** Neutron Engineering Inc. EMC Laboratory

**Date of Receipt:** Oct. 30, 2012

**Date of Test:** Oct. 30, 2012 ~ Nov. 16, 2012

**Testing Engineer:** Josh Lin

(Josh Lin)

**Technical Manager:** Jeff Yang

(Jeff Yang)

**Authorized Signatory:** Andy Chiu

(Andy Chiu)

**Neutron Engineering Inc.**

B1, No. 37, Lane 365, YangGuang St.,  
NeiHu District 114, Taipei, Taiwan.

TEL: +886-2-2657-3299

FAX: +886-2-2657-3331





## Declaration

**Neutron** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C.**, or National Institute of Standards and Technology (**NIST**) of **U.S.A.**

**Neutron**'s reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **Neutron** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **Neutron** issued reports.

**Neutron**'s reports must not be used by the client to claim product endorsement by the authorities or any agency of the Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **Neutron-self**, extracts from the test report shall not be reproduced except in full with **Neutron**'s authorized written approval.

**Neutron**'s laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

## Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.



## Table of Contents

REPORT ISSUED HISTORY	6
1 CERTIFICATION	7
2 . SUMMARY OF TEST RESULTS	8
2.1 TEST FACILITY	9
2.2 MEASUREMENT UNCERTAINTY	10
3 GENERAL INFORMATION	11
3.1 GENERAL DESCRIPTION OF EUT	11
3.2 DESCRIPTION OF TEST MODES	13
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	14
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	15
3.5 DESCRIPTION OF SUPPORT UNITS	16
4 ANTENNA CONDUCTED SPURIOUS EMISSION	17
4.1 LIMIT	17
4.2 MEASUREMENT INSTRUMENTS LIST	17
4.3 TEST PROCEDURES	17
4.4 TEST SETUP LAYOUT	17
4.5 DEVIATION FROM TEST STANDARD	17
4.6 EUT OPERATING CONDITIONS	17
4.7 TEST RESULTS	18
5 HOPPING CHANNEL SEPARATION	26
5.1 LIMIT	26
5.2 MEASUREMENT INSTRUMENTS LIST	26
5.3 MEASURING INSTRUMENTS SETTING	26
5.4 TEST PROCEDURES	26
5.5 TEST SETUP LAYOUT	26
5.6 DEVIATION FROM TEST STANDARD	26
5.7 EUT OPERATING CONDITIONS	26
5.8 TEST RESULTS	27
6 MAXIMUM PEAK CONDUCTED OUTPUT POWER	35
6.1 LIMIT	35
6.2 MEASUREMENT INSTRUMENTS LIST	35
6.3 TEST PROCEDURES	35
6.4 TEST SETUP LAYOUT	35
6.5 DEVIATION FROM TEST STANDARD	35
6.6 EUT OPERATING CONDITIONS	35
6.7 TEST RESULTS	36
7 RADIATED SPURIOUS EMISSION (9 KHZ TO 1 GHZ)	40
7.1 LIMIT	40



## Table of Contents

7.2	MEASUREMENT INSTRUMENTS LIST	41
7.3	MEASURING INSTRUMENTS SETTING	41
7.4	TEST PROCEDURES	42
7.5	DEVIATION FROM TEST STANDARD	42
7.6	TEST SETUP LAYOUT	42
7.7	EUT OPERATING CONDITIONS	43
7.8	TEST RESULTS	44
8	RADIATED SPURIOUS EMISSION (ABOVE 1 GHZ)	46
8.1	LIMIT	46
8.2	MEASUREMENT INSTRUMENTS LIST	47
8.3	MEASURING INSTRUMENTS SETTING	47
8.4	TEST PROCEDURES	48
8.5	DEVIATION FROM TEST STANDARD	48
8.6	TEST SETUP LAYOUT	48
8.7	EUT OPERATING CONDITIONS	49
8.8	TEST RESULTS	50
8.9	TEST RESULTS (RESTRICTED BANDS)	74
9	NUMBER OF HOPPING FREQUENCY	82
9.1	LIMIT	82
9.2	MEASUREMENT INSTRUMENTS LIST	82
9.3	MEASURING INSTRUMENTS SETTING	82
9.4	TEST PROCEDURES	82
9.5	TEST SETUP LAYOUT	82
9.6	DEVIATION FROM TEST STANDARD	82
9.7	EUT OPERATING CONDITIONS	82
9.8	TEST RESULTS	83
10	AVERAGE TIME OF OCCUPANCY	85
10.1	LIMIT	85
10.2	MEASUREMENT INSTRUMENTS LIST	85
10.3	TEST PROCEDURES	85
10.4	TEST SETUP LAYOUT	85
10.5	DEVIATION FROM TEST STANDARD	85
10.6	EUT OPERATING CONDITIONS	86
10.7	TEST RESULTS	87
11	RF EXPOSURE COMPLIANCE	99
11.1	LIMIT	99
11.2	MEASUREMENT INSTRUMENTS LIST	99
11.3	MPE CALCULATION METHOD	99



## Table of Contents

11.4	TEST SETUP LAYOUT	100
11.5	DEVIATION FROM TEST STANDARD	100
11.6	EUT OPERATING CONDITIONS	100
11.7	TEST RESULTS	100
12	EUT TEST PHOTO	101



### REPORT ISSUED HISTORY

Revised Version No.	Description	Issued Date
-	Initial Issue.	Nov. 28, 2012
RV-1212006	Revised Brand Name.	Dec. 12, 2012

**1 CERTIFICATION**

Equipment : AEROBLUETOOTH

Brand Name : Jarre Technologies

Model Name : ML90200; ML90201; ML90202; ML90203

Applicant : Music Life Ltd.

Date of Test : Oct. 30, 2012 ~ Nov. 16, 2012

Standards : FCC Part 15, Subpart C: 2010

ANSI C63.4: 2009

The above equipment has been tested and found compliance with the requirement of the relative standards by Neutron Engineering Inc. EMC Laboratory.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. NEI-FCCP-1-1210282) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of NVLAP and TAF according to the ISO-17025 quality assessment standard and technical standard(s).

**2. SUMMARY OF TEST RESULTS**

<b>Standard Clause</b>	<b>Test Item</b>	<b>Result</b>
15.207	Conducted Emission	<b>N/A</b>
15.247 (c)	Antenna conducted Spurious Emission	<b>PASS</b>
15.247 (a)(1)	Hopping Channel Separation	<b>PASS</b>
15.247 (b)	Maximum Peak Conducted Output Power	<b>PASS</b>
15.247 (c)	Radiated Spurious Emission	<b>PASS</b>
15.247 (b)(1)	Number of Hopping Frequency	<b>PASS</b>
15.247 (a)(1)	Average time of occupancy	<b>PASS</b>
15.205	Restricted Bands	<b>PASS</b>
15.203	Antenna Requirement	<b>PASS</b>
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	<b>PASS</b>

## NOTE:

1. **N/A:** denotes test is not applicable in this Test Report
2. Portable device; SAR report is required.



## 2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

### Radiated emission Test (Below 1 GHz):

**CB08:** (FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428C-1)  
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)

### Radiated emission Test (Above 1 GHz):

**CB08:** (VCCI RN: G-91; FCC RN: 614388; FCC DN: TW1054; IC Assigned Code: 4428C-1)  
1F., No. 61, Ln. 77, Sing-ai Rd., Neihu Dist., Taipei City 114, Taiwan (R.O.C.)



## 2.2 MEASUREMENT UNCERTAINTY

**The measurement uncertainty is not specified by FCC/Industry Canada rules and for reference only.**

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95%**.

The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2.

B. Radiated emission test:

Test Site	Item	Measurement Frequency Range		Uncertainty	NOTE
CB08	Radiated emission at 3m	Horizontal Polarization	30 - 200MHz	3.35 dB	
			200 - 1000MHz	3.11 dB	
			1 - 18GHz	3.97 dB	
			18 - 40GHz	4.01 dB	
		Vertical Polarization	30 - 200MHz	3.22 dB	
			200 - 1000MHz	3.24 dB	
			1 - 18GHz	4.05 dB	
			18 - 40GHz	4.04 dB	

Our calculated Measurement Instrumentation Uncertainty is shown in the tables above. These are our  $U_{lab}$  values in CISPR 16-4-2 terminology.

Since Table 1 of CISPR 16-4-2 has values of measurement instrumentation uncertainty, called  $U_{CISPR}$ , as follows:

Conducted Disturbance (mains port) – 150 kHz – 30 MHz : 3.6 dB

Radiated Disturbance (electric field strength on an open area test site or alternative test site) – 30 MHz – 1000 MHz : 5.2 dB

It can be seen that our  $U_{lab}$  values are smaller than  $U_{CISPR}$ .



### 3 GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

Equipment	AEROBLUETOOTH																
Brand Name	Jarre Technologies																
Model Name	ML90200; ML90201; ML90202; ML90203																
OEM Brand/Model Name	N/A																
Model Difference	<p>All models are based on similar electrical circuit except the difference of list below:</p> <table border="1"><tr><td>Model Name</td><td>Color</td></tr><tr><td>ML90200</td><td>chrome silver</td></tr><tr><td>ML90201</td><td>matt black</td></tr><tr><td>ML90202</td><td>glossy white</td></tr><tr><td>ML90203</td><td>chrome black</td></tr></table> <p>All the above models were evaluated, and the model: ML90202 was found to be the worst case during the pre-scanning test. This model of the worst case was used for final testing and collecting test data included in this report.</p>	Model Name	Color	ML90200	chrome silver	ML90201	matt black	ML90202	glossy white	ML90203	chrome black						
Model Name	Color																
ML90200	chrome silver																
ML90201	matt black																
ML90202	glossy white																
ML90203	chrome black																
Product Description	<p>The EUT is a AEROBLUETOOTH.</p> <table border="1"><tr><td>Operation Frequency</td><td>2402 MHz ~ 2480 MHz</td></tr><tr><td>Modulation Type</td><td>FHSS(GFSK)</td></tr><tr><td>Bit Rate of Transmitter</td><td>1/3 Mbps</td></tr><tr><td>Number Of Channel</td><td>Please refer to the Note 2.</td></tr><tr><td>Antenna Designation</td><td>Please refer to the Note 3.</td></tr><tr><td>Antenna Gain(Peak)</td><td>Please refer to the Note 3.</td></tr><tr><td>Maximum Peak Conducted</td><td>1 Mbps: -12.62dBm</td></tr><tr><td>Output Power:</td><td>3 Mbps: -10.03dBm</td></tr></table> <p>Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.</p>	Operation Frequency	2402 MHz ~ 2480 MHz	Modulation Type	FHSS(GFSK)	Bit Rate of Transmitter	1/3 Mbps	Number Of Channel	Please refer to the Note 2.	Antenna Designation	Please refer to the Note 3.	Antenna Gain(Peak)	Please refer to the Note 3.	Maximum Peak Conducted	1 Mbps: -12.62dBm	Output Power:	3 Mbps: -10.03dBm
Operation Frequency	2402 MHz ~ 2480 MHz																
Modulation Type	FHSS(GFSK)																
Bit Rate of Transmitter	1/3 Mbps																
Number Of Channel	Please refer to the Note 2.																
Antenna Designation	Please refer to the Note 3.																
Antenna Gain(Peak)	Please refer to the Note 3.																
Maximum Peak Conducted	1 Mbps: -12.62dBm																
Output Power:	3 Mbps: -10.03dBm																
Power Source	Battery supplied.																
Power Rating	I/P: DC 6V (4*AA)																
Connecting I/O Port(s)	Please refer to the User's Manual																
Products Covered	N/A																
EUT Modification(s)	N/A																

**NOTE:**

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



## 2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		

## 3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	N/A	N/A	dipole	N/A	3.00



### 3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Test Items	Mode	Data Rate	Tested Channel/Mode
Antenna conducted Spurious Emission	FHSS(GFSK)	1 Mbps	2402 MHz, 2441 MHz, 2480 MHz
		3 Mbps	
Hopping Channel Separation	FHSS(GFSK)	1 Mbps	2402 MHz, 2441 MHz, 2480 MHz
		3 Mbps	
Maximum Peak Conducted Output Power	FHSS(GFSK)	1 Mbps	2402 MHz, 2441 MHz, 2480 MHz
		3 Mbps	
Radiated Spurious Emission (30 MHz to 1 GHz)	FHSS(GFSK)	1 Mbps	2441 MHz
Radiated Spurious Emission (above 1 GHz)	FHSS(GFSK)	1 Mbps	2402 MHz, 2441 MHz, 2480 MHz
		3 Mbps	
Number of Hopping Frequency	FHSS(GFSK)	1 Mbps	2402 MHz, 2441 MHz, 2480 MHz
		3 Mbps	
Average time of occupancy	FHSS(GFSK)	1 Mbps	2402 MHz, 2441 MHz, 2480 MHz
		3 Mbps	
Restricted Bands	FHSS(GFSK)	1 Mbps	2402 MHz, 2441 MHz, 2480 MHz
		3 Mbps	
Antenna Requirement	FHSS(GFSK)	---	---
RF Exposure Compliance	FHSS(GFSK)	---	---

NOTE: The measurements are performed at the highest, middle, lowest available channels.



### 3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

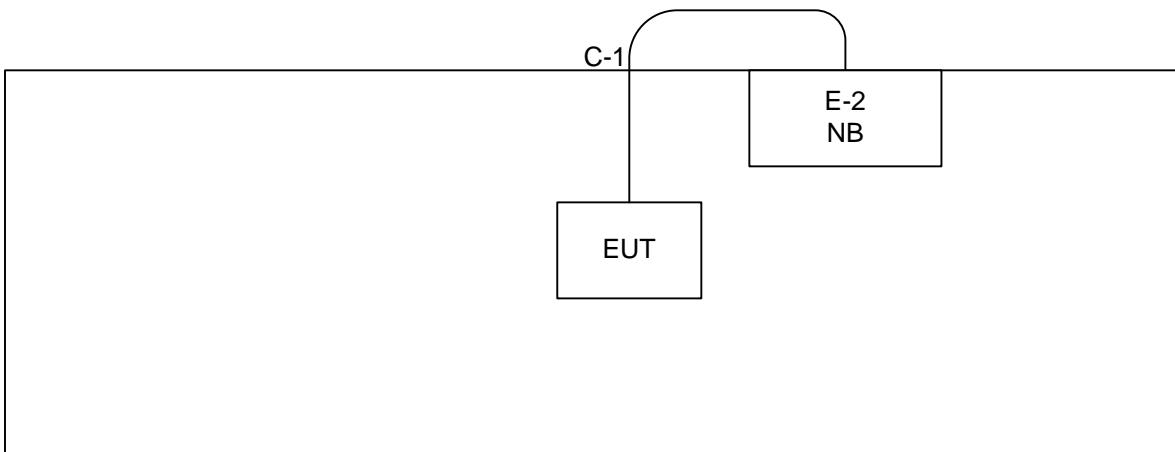
During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

Data Rate	1 Mbps		
Test software Version	Bluetest3		
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameter	20	20	20

Data Rate	3 Mbps		
Test software Version	Bluetest3		
Frequency	2402 MHz	2441 MHz	2480 MHz
Parameter	20	20	20



### 3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED





### 3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
E-1	AEROBLUETOOTH	Jarre Technologies	ML90202	R4O-ML092-00-01	N/A	EUT
E-2	Notebook PC	DELL	D600	DOC	7T390 A03	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	YES	NO	1.7M	RS232 Cable

NOTE: The support equipment was authorized by Declaration of Conformity (DOC).



## 4 ANTENNA CONDUCTED SPURIOUS EMISSION

### 4.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Antenna conducted Spurious Emission	30-25000	20 dB less than the peak value of fundamental frequency

### 4.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

### 4.3 TEST PROCEDURES

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=100KHz, Sweep time = Auto.

### 4.4 TEST SETUP LAYOUT



### 4.5 DEVIATION FROM TEST STANDARD

No deviation

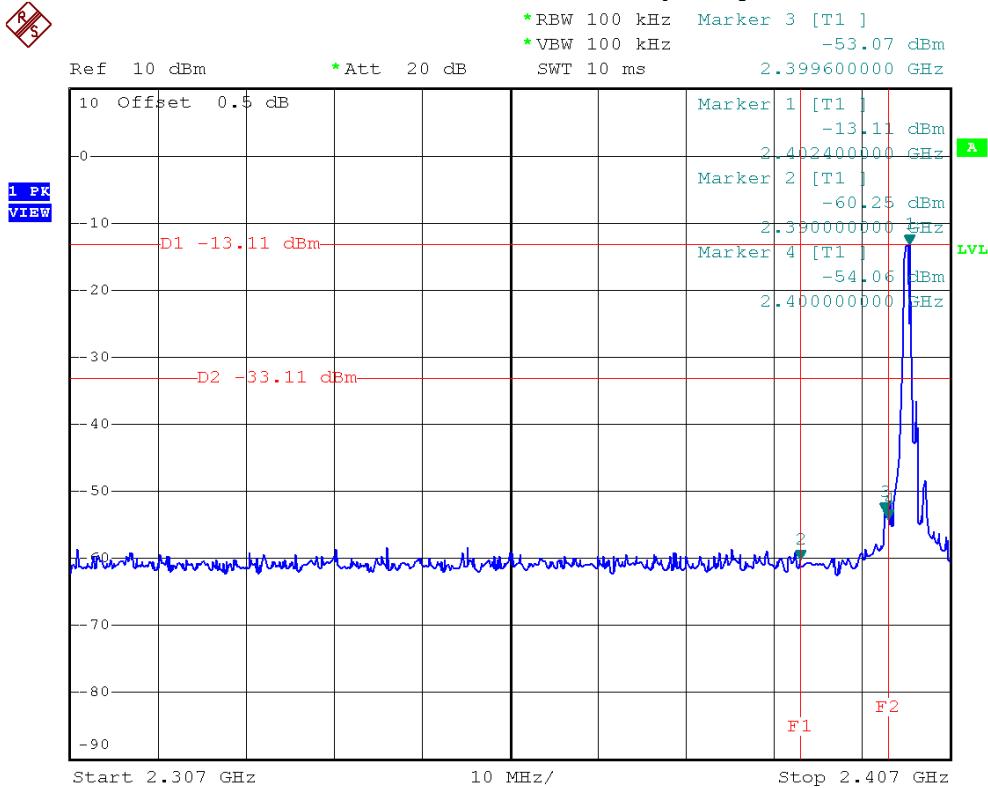
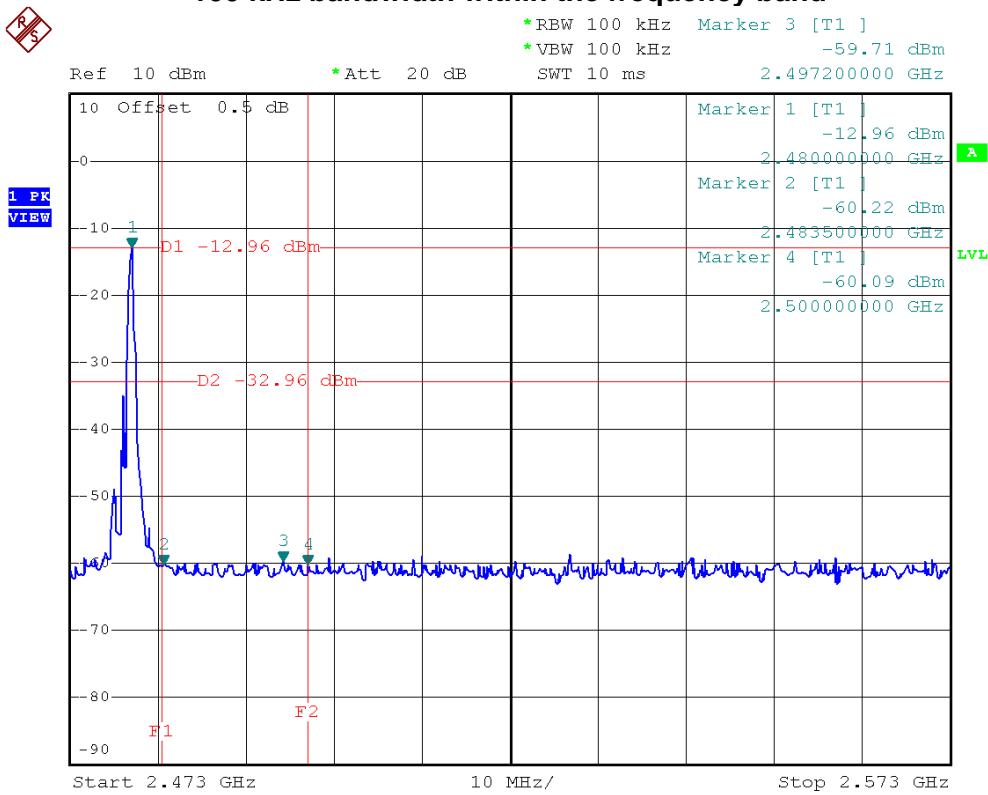
### 4.6 EUT OPERATING CONDITIONS

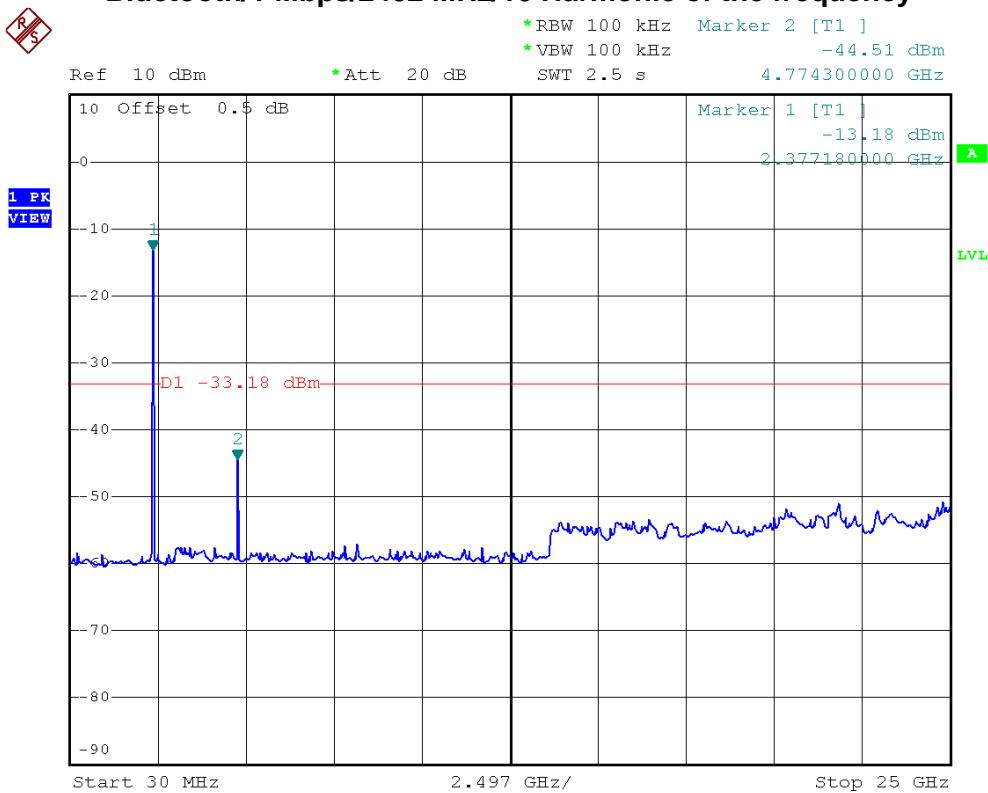
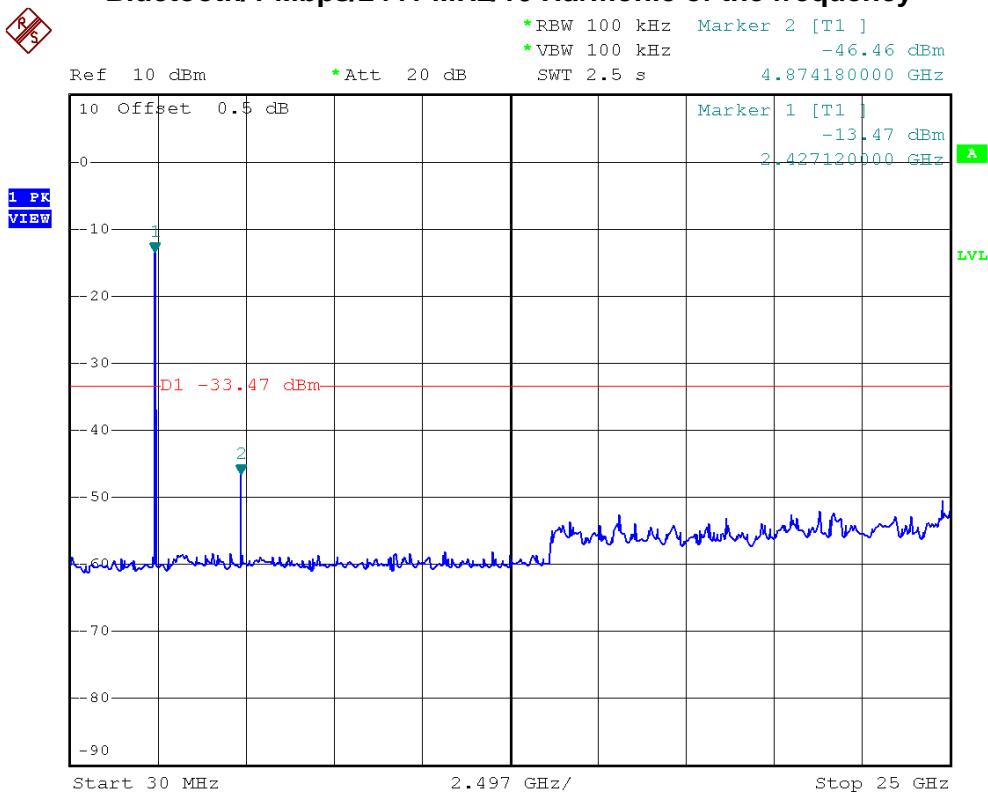
The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

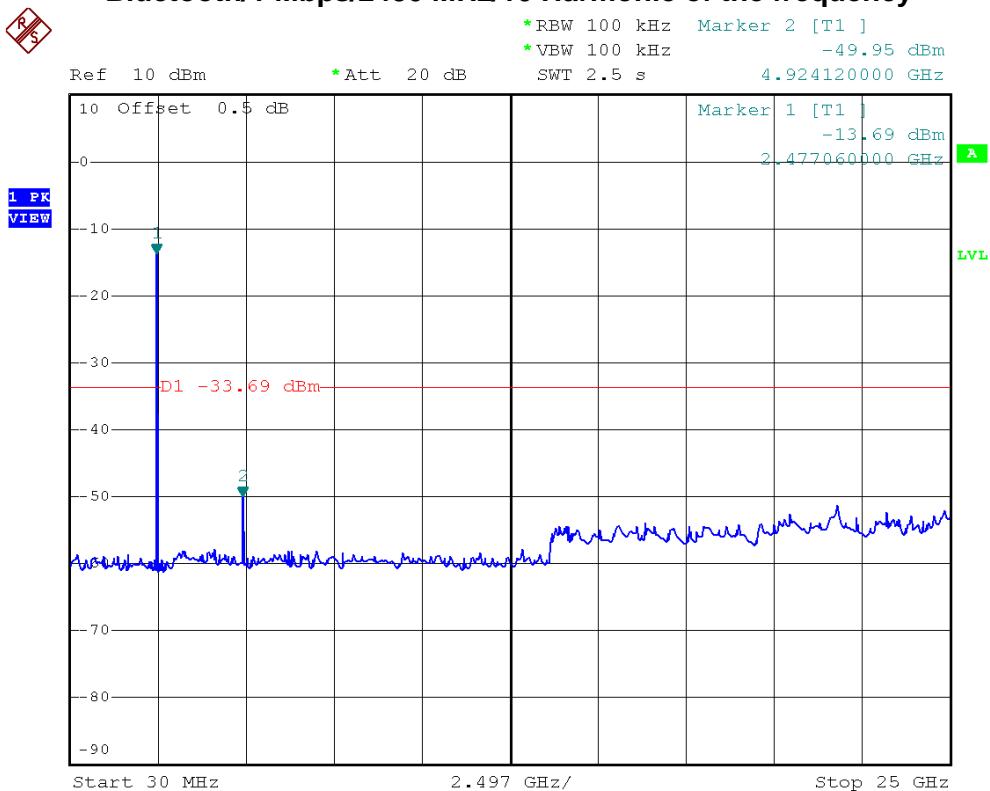
**4.7 TEST RESULTS**

E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 6V		
Test Mode	Bluetooth/1 Mbps		

Channel of Worst Data			
The max. radio frequency power in any 100kHz bandwidth outside the frequency band		The max. radio frequency power in any 100 kHz bandwidth within the frequency band.	
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2399.6	-53.07	2497.2	-59.71
Result			
In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest lever of the desired power.			

**Bluetooth/1 Mbps/The max. radio frequency power in any 100kHz bandwidth outside the frequency band**

**Bluetooth/1 Mbps/The max. radio frequency power in any 100 kHz bandwidth within the frequency band**


**Bluetooth/1 Mbps/2402 MHz/10 Harmonic of the frequency****Bluetooth/1 Mbps/2441 MHz/10 Harmonic of the frequency**

**Bluetooth/1 Mbps/2480 MHz/10 Harmonic of the frequency**



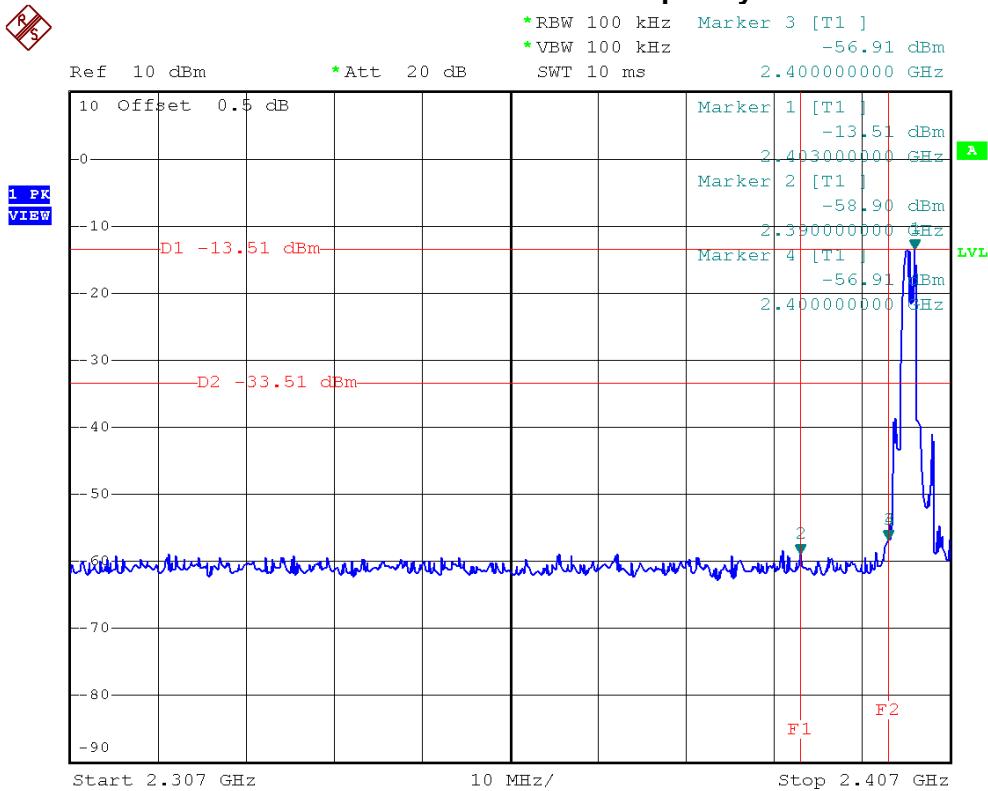
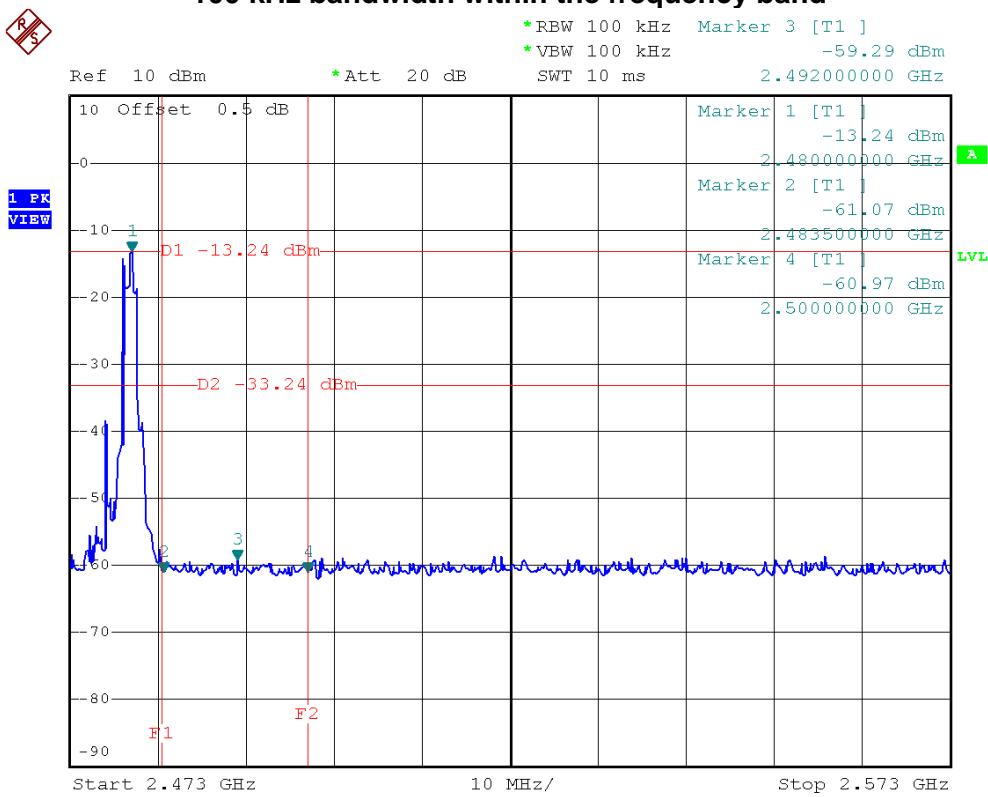
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 6V		
Test Mode	Bluetooth/3 Mbps		

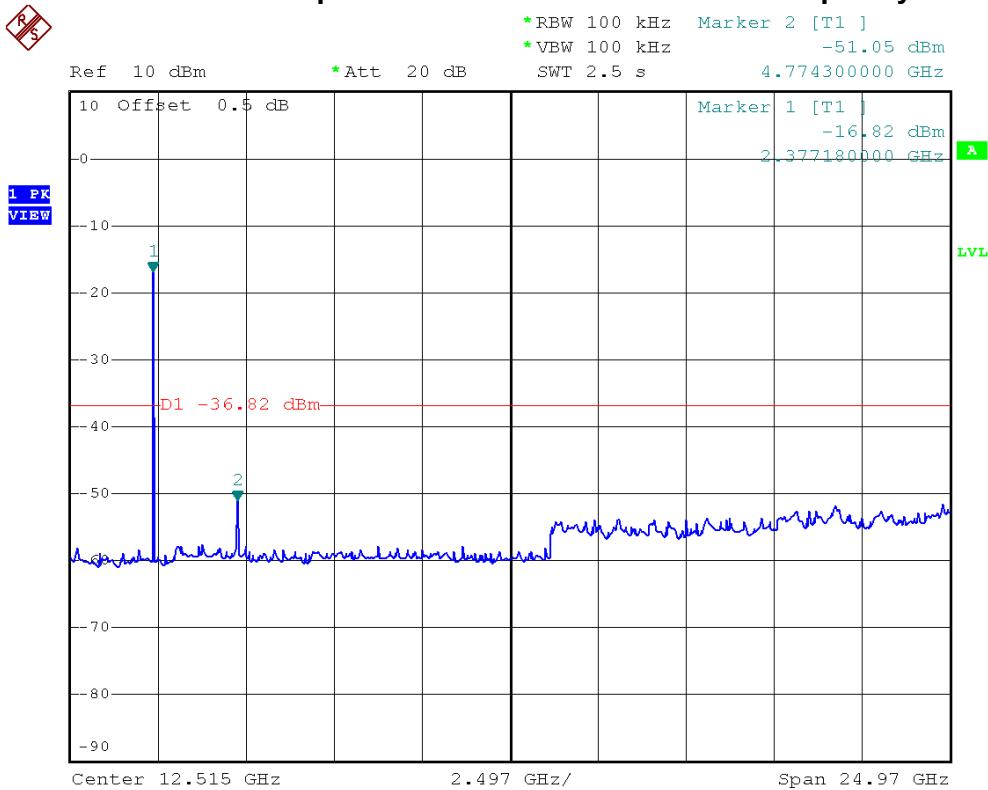
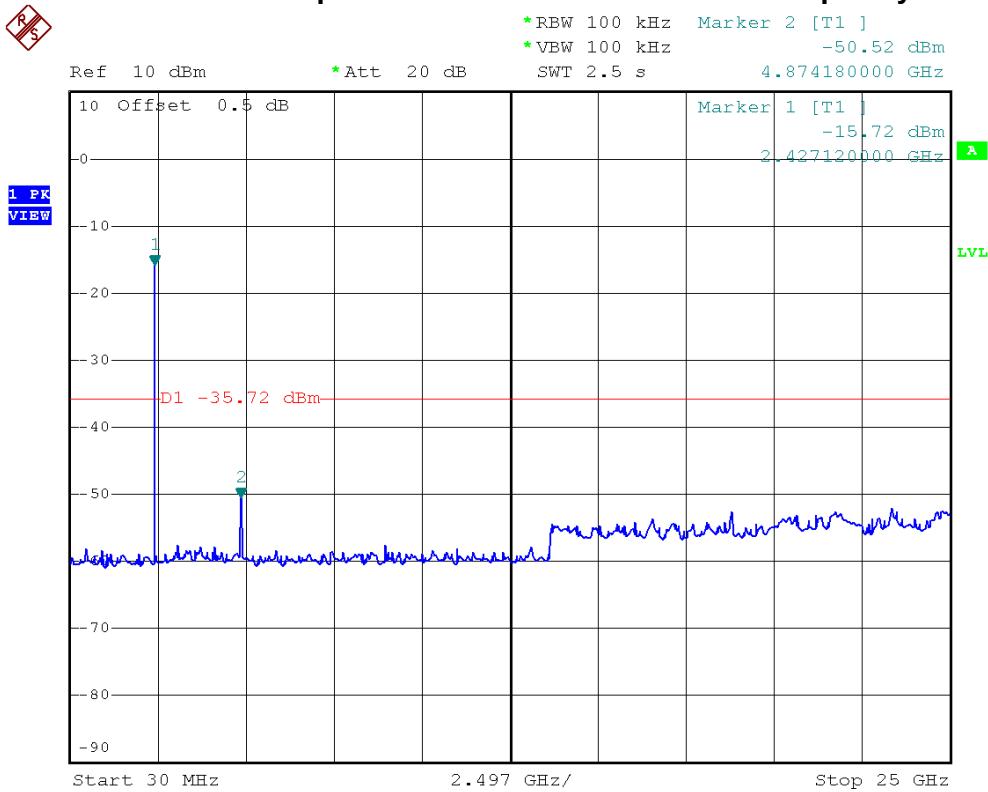
**Channel of Worst Data**

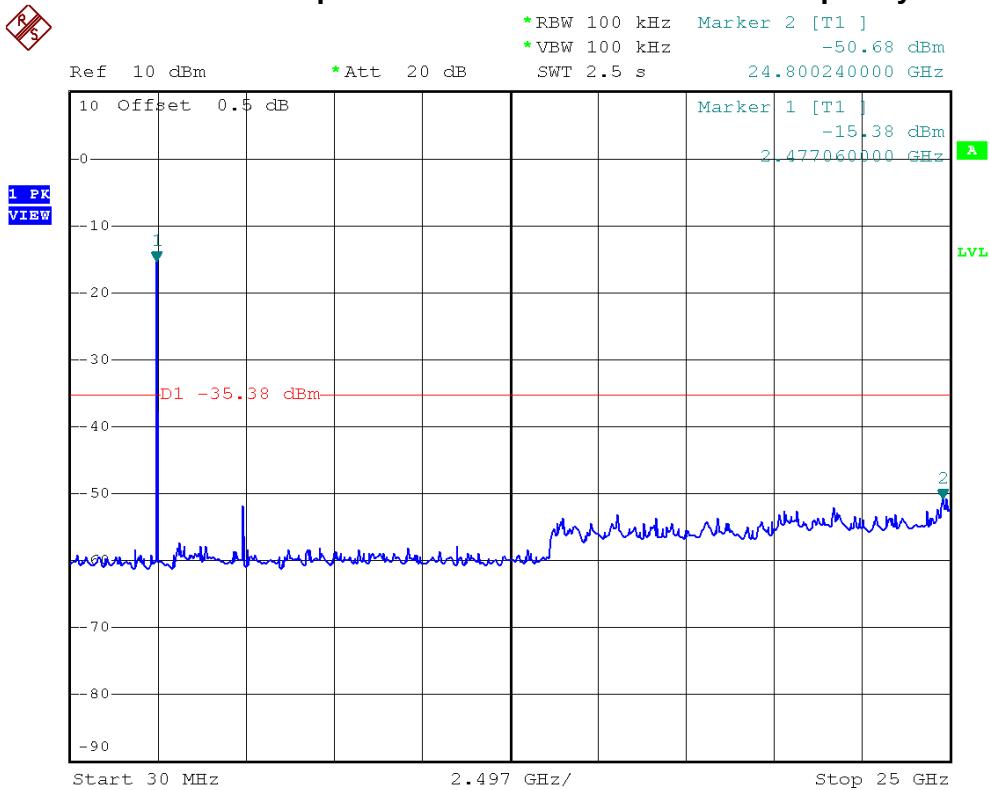
The max. radio frequency power in any 100kHz bandwidth outside the frequency band	The max. radio frequency power in any 100 kHz bandwidth within the frequency band.		
FREQUENCY(MHz)	POWER(dBm)	FREQUENCY(MHz)	POWER(dBm)
2400.0	-56.91	2492.0	-59.29

**Result**

In any 100kHz bandwidth outside the frequency band, the radio frequency power is at least 20dB below that in the 100kHz bandwidth within the band that contains the highest lever of the desired power.

**Bluetooth/3 Mbps/The max. radio frequency power in any 100kHz bandwidth outside the frequency band**

**Bluetooth/3 Mbps/The max. radio frequency power in any 100 kHz bandwidth within the frequency band**


**Bluetooth/3 Mbps/2402 MHz/10 Harmonic of the frequency****Bluetooth/3 Mbps/2441 MHz/10 Harmonic of the frequency**

**Bluetooth/3 Mbps/2480 MHz/10 Harmonic of the frequency**



## 5 HOPPING CHANNEL SEPARATION

### 5.1 LIMIT

Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

### 5.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

### 5.3 MEASURING INSTRUMENTS SETTING

EMI Test Receiver	Parameter Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 100 kHz (Channel Separation)
VB	100 kHz (20dB Bandwidth) / 300 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 5.4 TEST PROCEDURES

- The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- The resolution bandwidth of 30 kHz and the video bandwidth of 100 kHz were utilised for 20 dB bandwidth measurement.
- The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were utilised for channel separation measurement.

### 5.5 TEST SETUP LAYOUT



### 5.6 DEVIATION FROM TEST STANDARD

No deviation

### 5.7 EUT OPERATING CONDITIONS

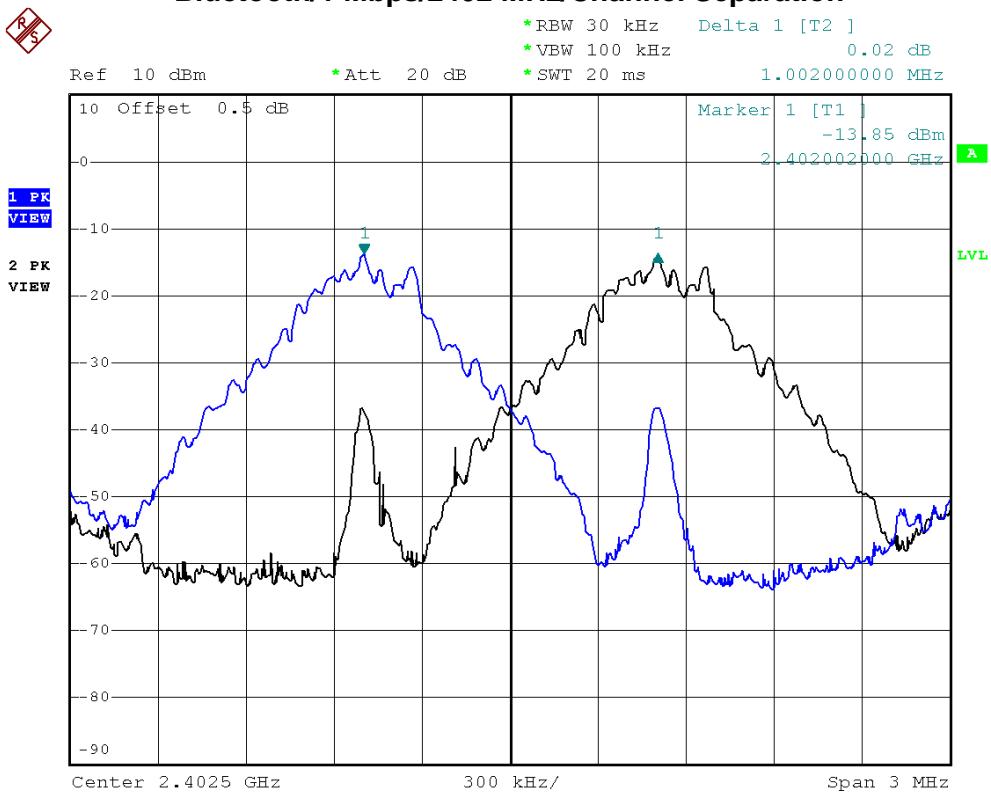
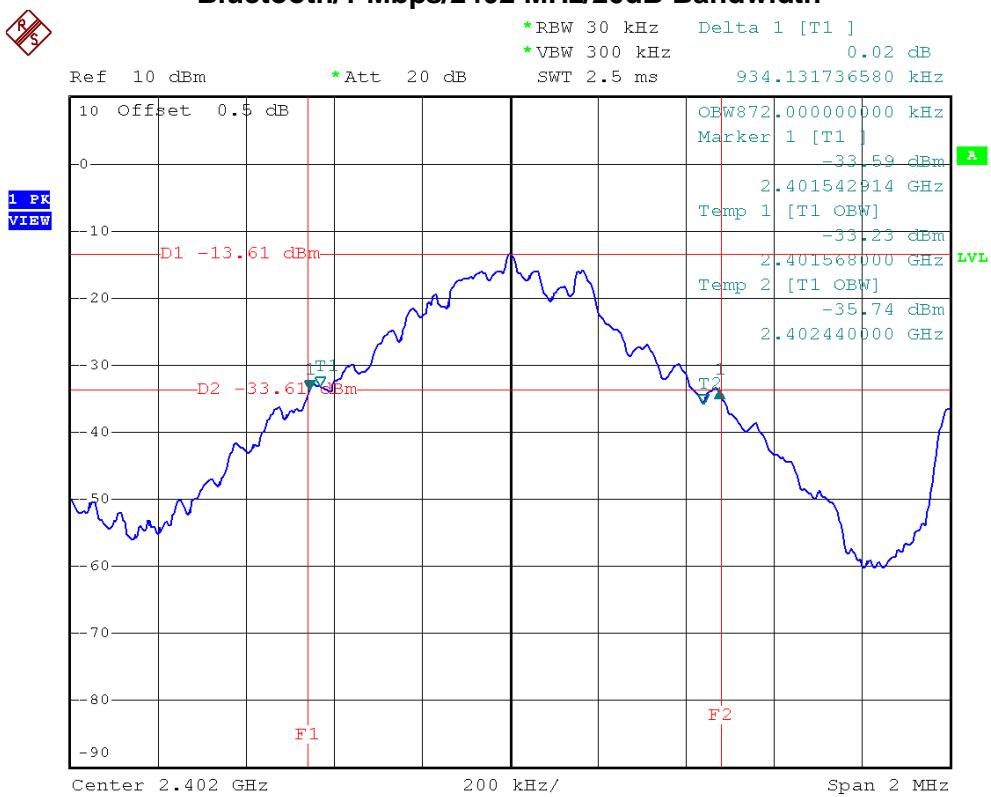
The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

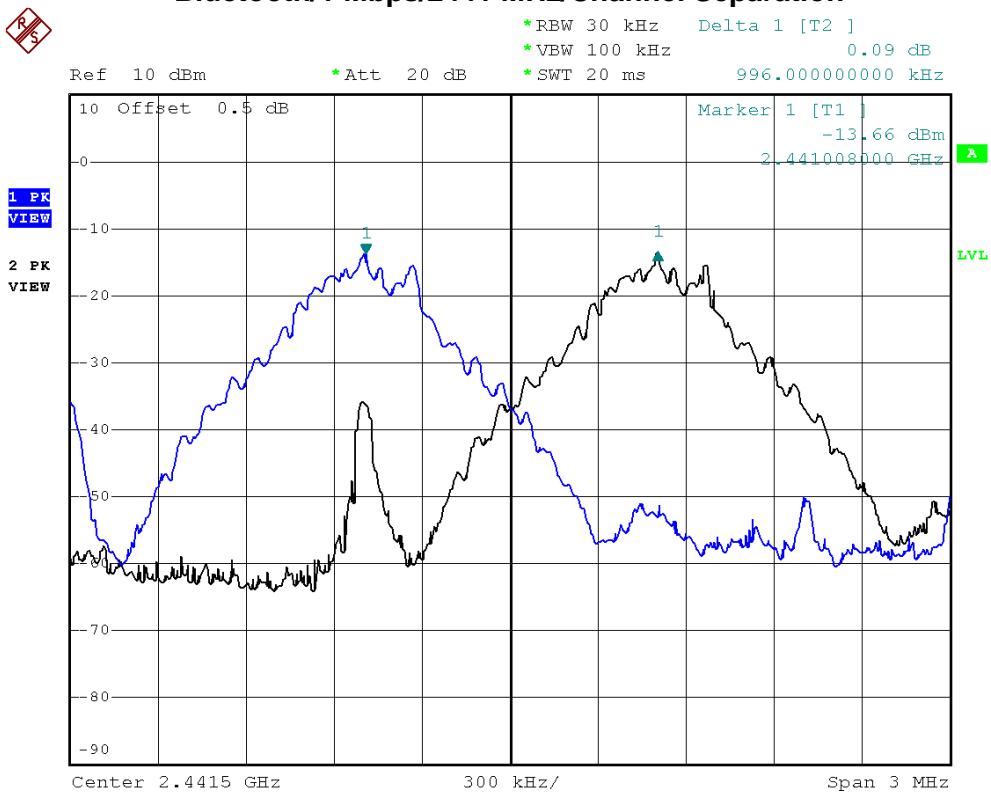
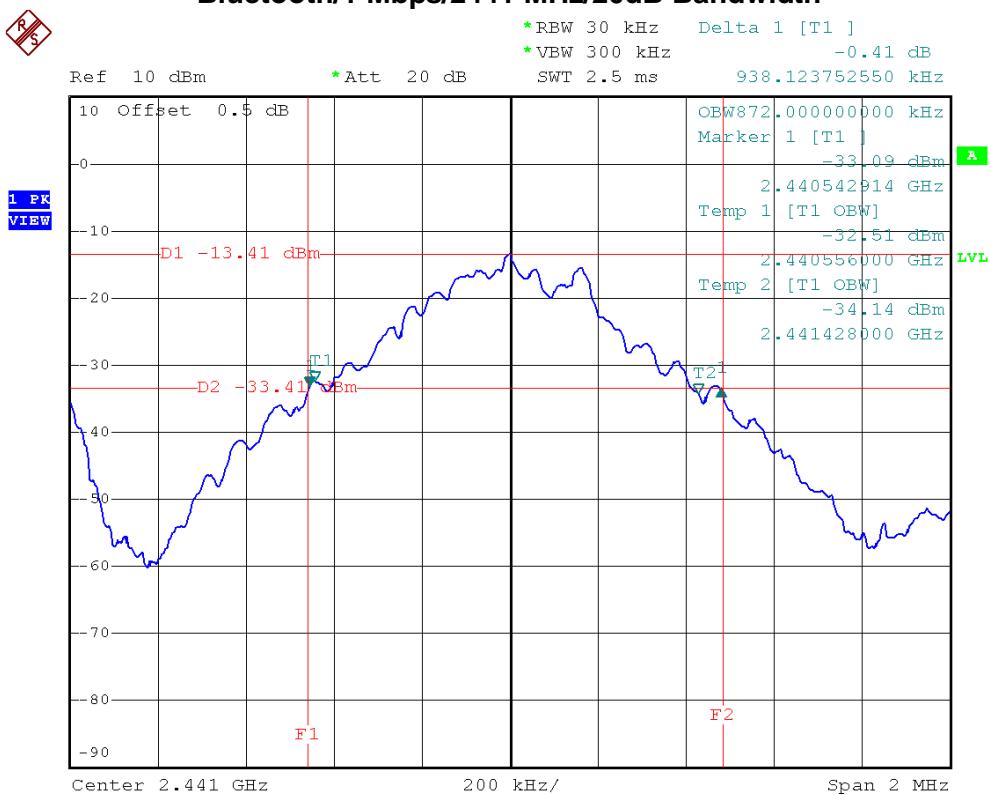
**5.8 TEST RESULTS**

E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 6V		
Test Mode	Bluetooth/1 Mbps/2402 MHz, 2441 MHz, 2480 MHz		

Frequency	Channel Separation (MHz)	20 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Two-thirds of the 20 dB Bandwidth	Result
2402 MHz	1.00	0.934	0.872	0.623	PASS
2441 MHz	1.00	0.938	0.872	0.625	PASS
2480 MHz	1.00	0.922	0.880	0.915	PASS

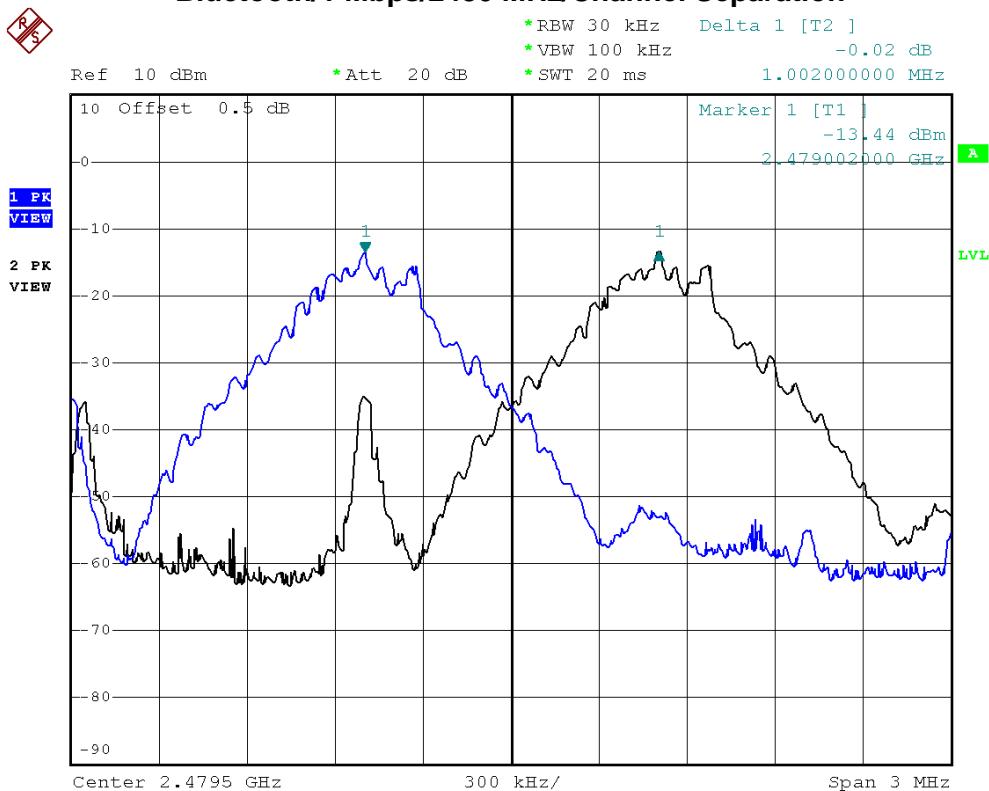
NOTE: Ch. Separation Limits: >25 KHz or >2/3 of 20dB bandwidth

**Bluetooth/1 Mbps/2402 MHz/Channel Separation**

**Bluetooth/1 Mbps/2402 MHz/20dB Bandwidth**


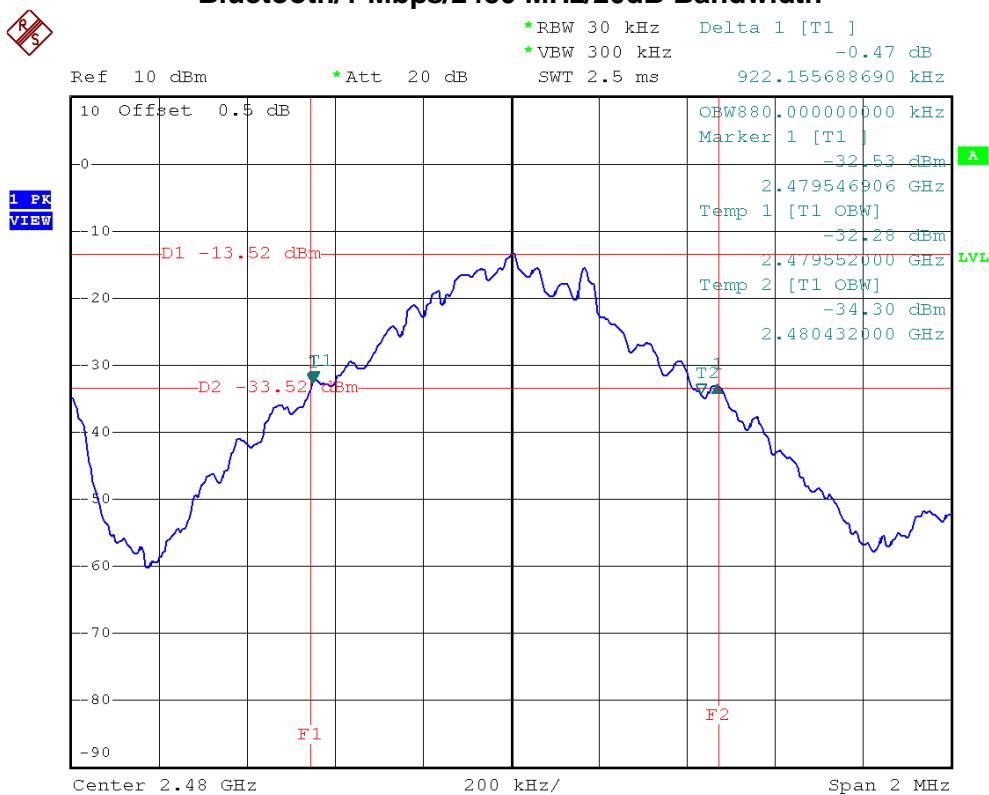
**Bluetooth/1 Mbps/2441 MHz/Channel Separation**

**Bluetooth/1 Mbps/2441 MHz/20dB Bandwidth**




## Bluetooth/1 Mbps/2480 MHz/Channel Separation



**Bluetooth/1 Mbps/2480 MHz/20dB Bandwidth**

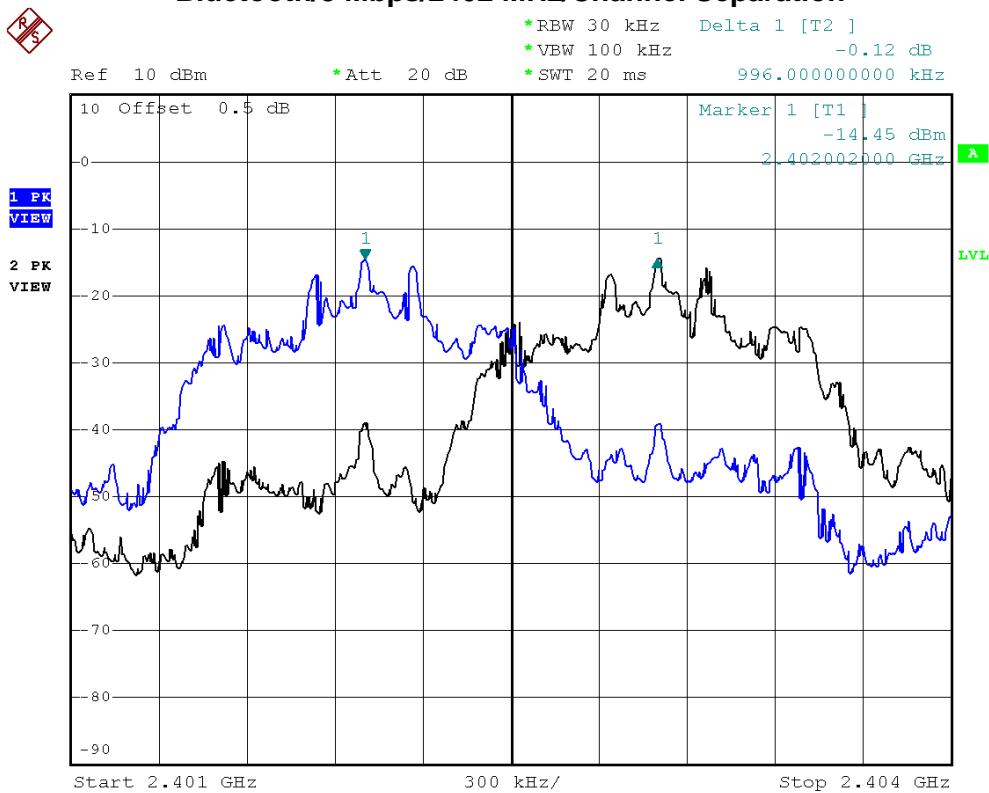
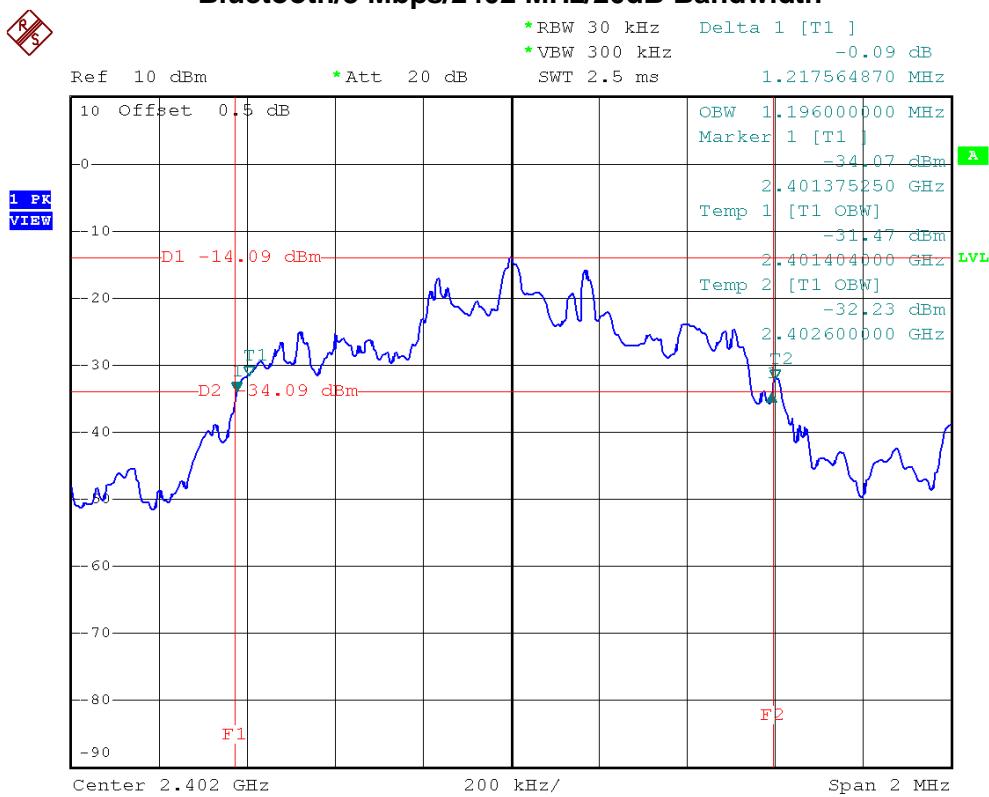


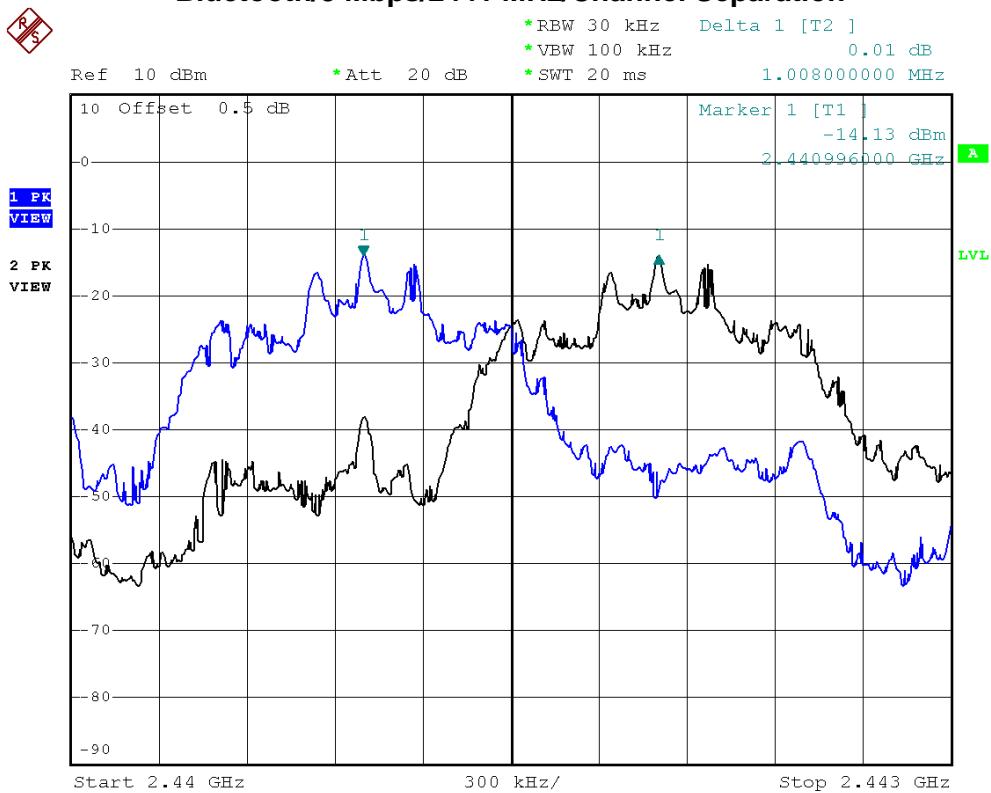
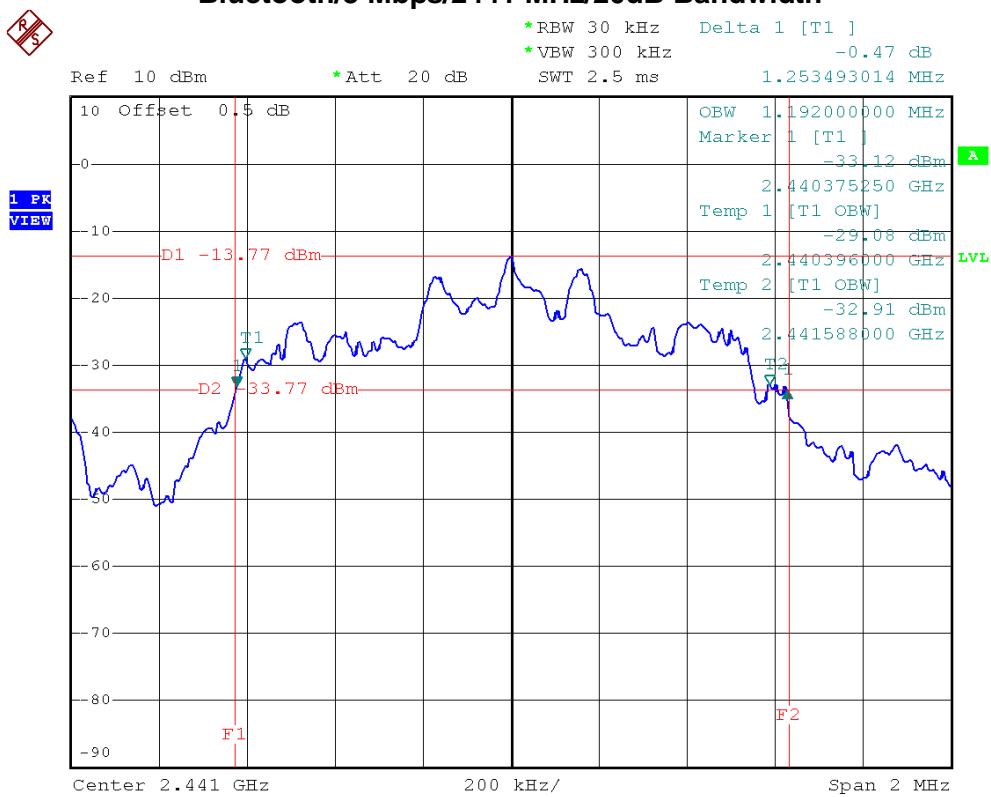


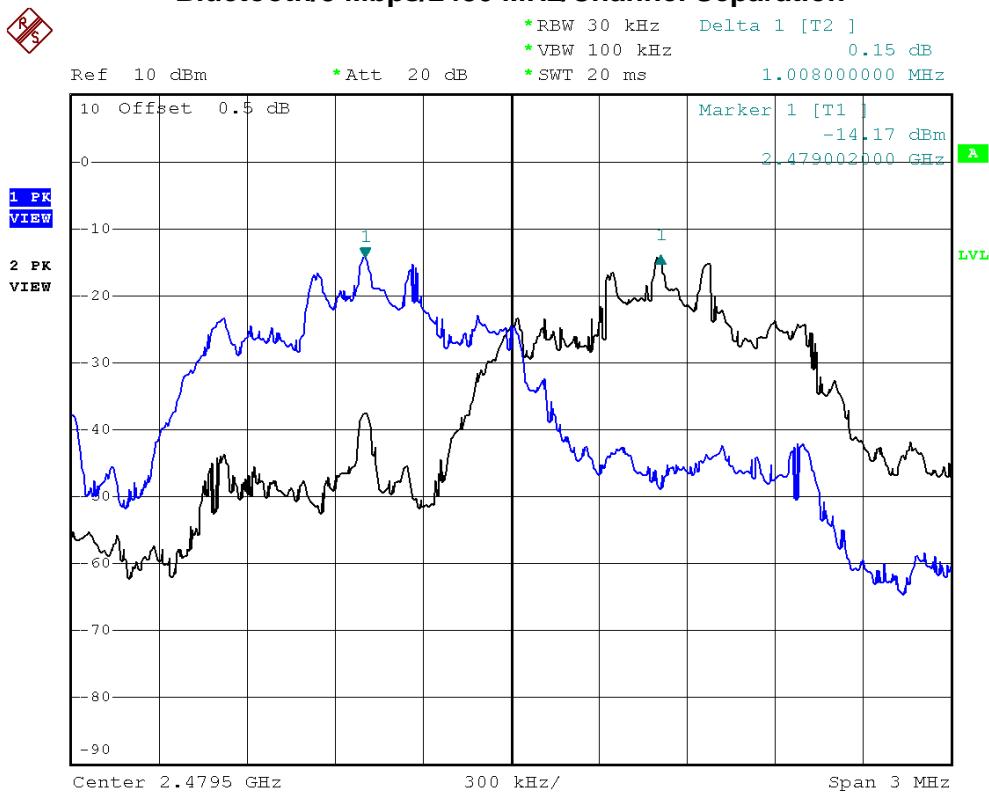
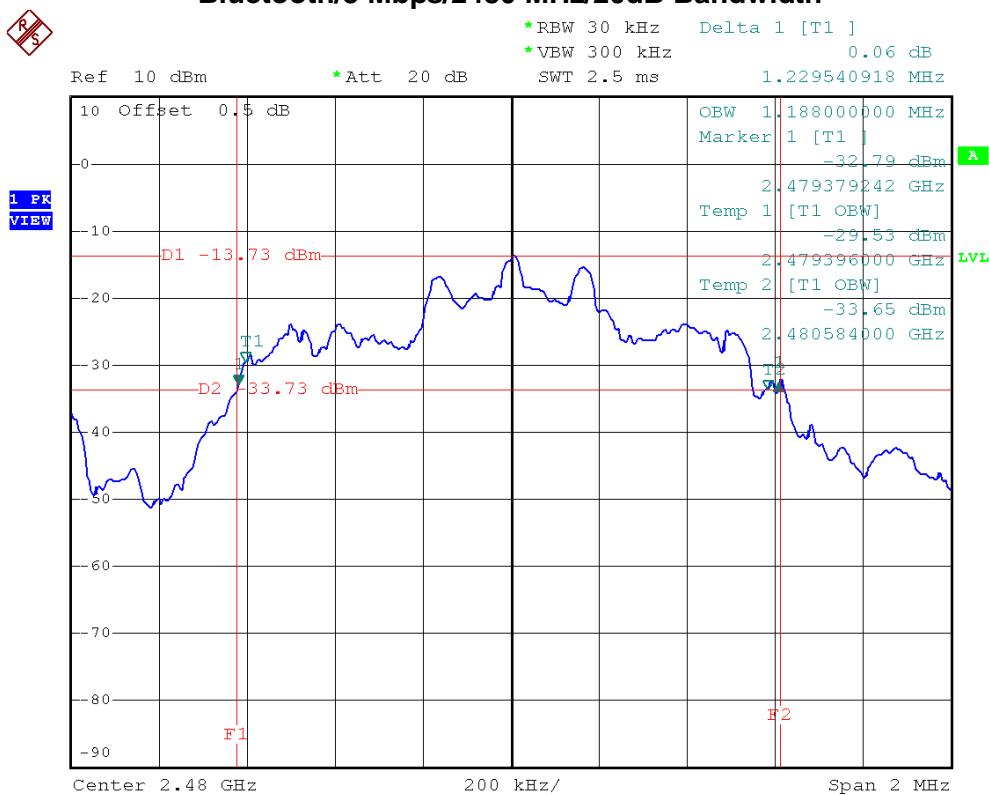
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 6V		
Test Mode	Bluetooth/3 Mbps/2402 MHz, 2441 MHz, 2480 MHz		

Frequency	Channel Separation (MHz)	20 dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Two-thirds of the 20 dB Bandwidth	Result
2402 MHz	1.00	1.218	1.196	0.812	PASS
2441 MHz	1.01	1.253	1.192	0.835	PASS
2480 MHz	1.01	1.229	1.188	0.819	PASS

NOTE: Ch. Separation Limits: >25 KHz or >2/3 of 20dB bandwidth

**Bluetooth/3 Mbps/2402 MHz/Channel Separation****Bluetooth/3 Mbps/2402 MHz/20dB Bandwidth**

**Bluetooth/3 Mbps/2441 MHz/Channel Separation**

**Bluetooth/3 Mbps/2441 MHz/20dB Bandwidth**


**Bluetooth/3 Mbps/2480 MHz/Channel Separation**

**Bluetooth/3 Mbps/2480 MHz/20dB Bandwidth**




## 6 MAXIMUM PEAK CONDUCTED OUTPUT POWER

### 6.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Maximum Peak Conducted Output Power	2400-2483.5	1 watt or 30 dBm

### 6.2 MEASUREMENT INSTRUMENTS LIST

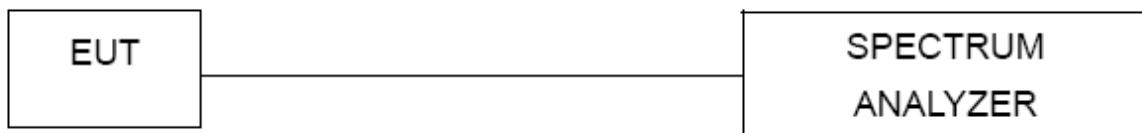
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

### 6.3 TEST PROCEDURES

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW= 3 MHz, VBW= 3 MHz, Sweep time = Auto.

### 6.4 TEST SETUP LAYOUT



### 6.5 DEVIATION FROM TEST STANDARD

No deviation

### 6.6 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

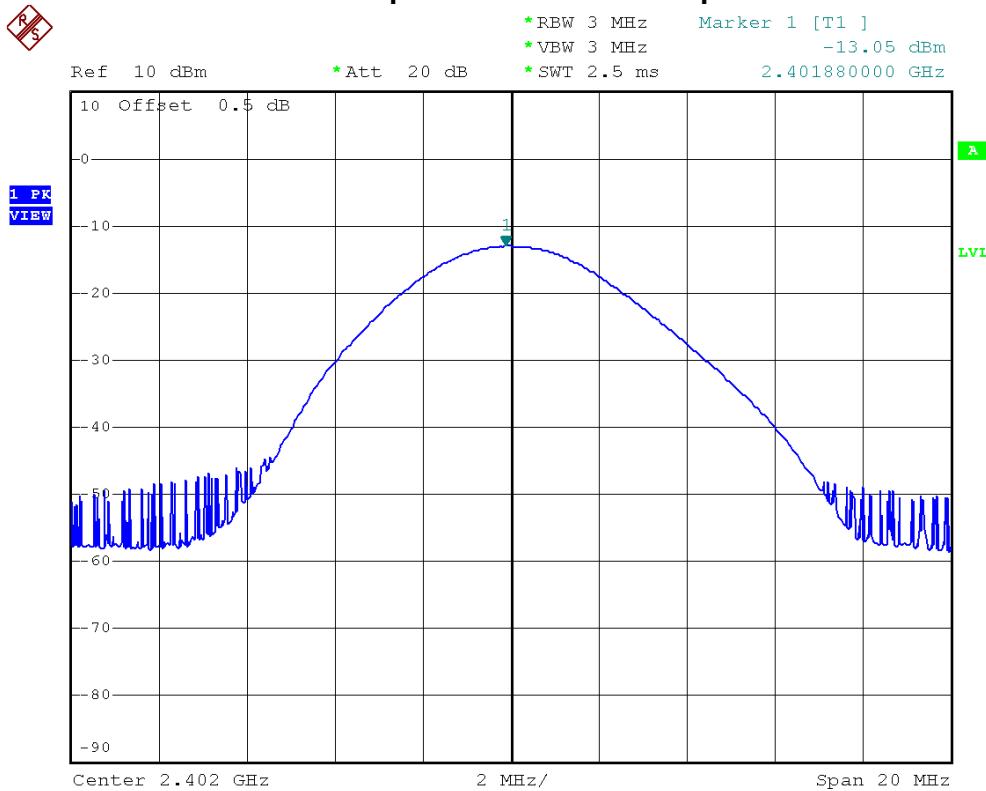


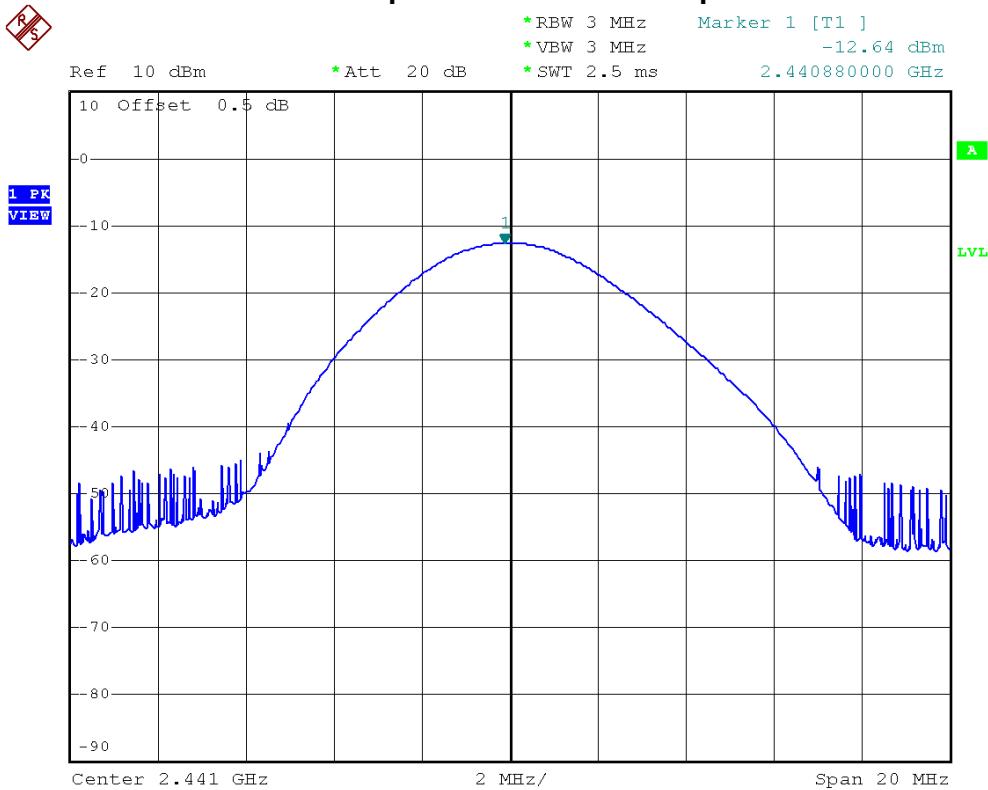
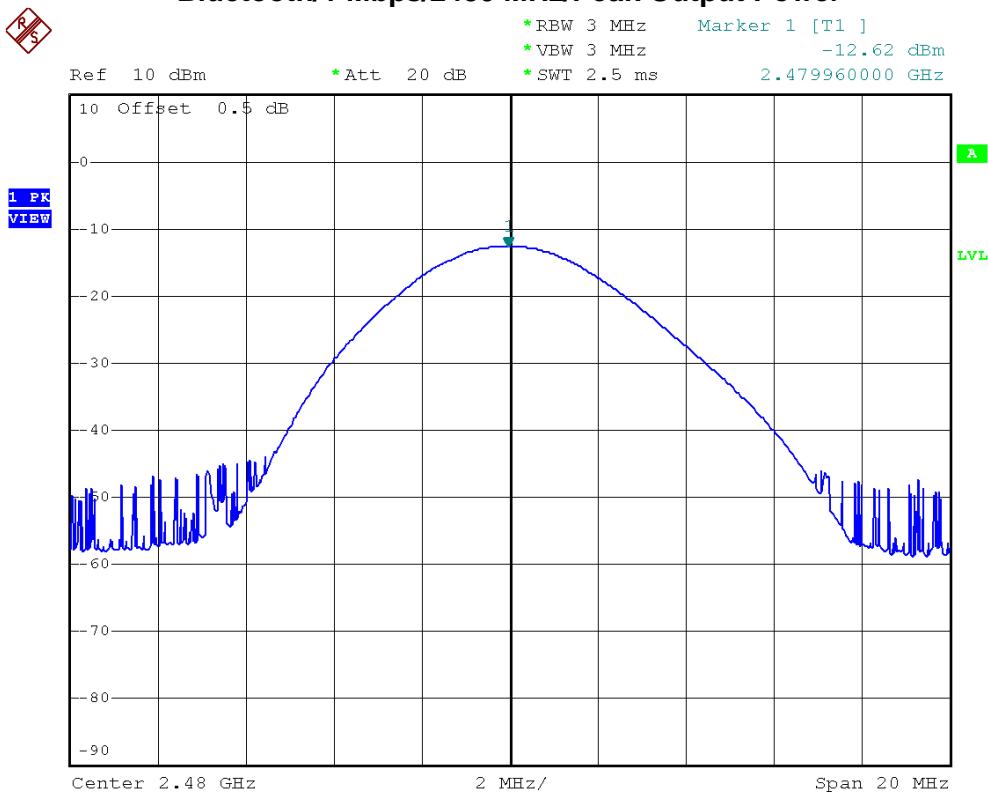
## 6.7 TEST RESULTS

E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 6V		
Test Mode	Bluetooth/1 Mbps/2402 MHz, 2441 MHz, 2480 MHz		

Frequency	Peak Output Power (dBm)	LIMIT (dBm)	Result
2402 MHz	-13.05	30	PASS
2441 MHz	-12.64	30	PASS
2480 MHz	-12.62	30	PASS

### Bluetooth/1 Mbps/2402 MHz/Peak Output Power

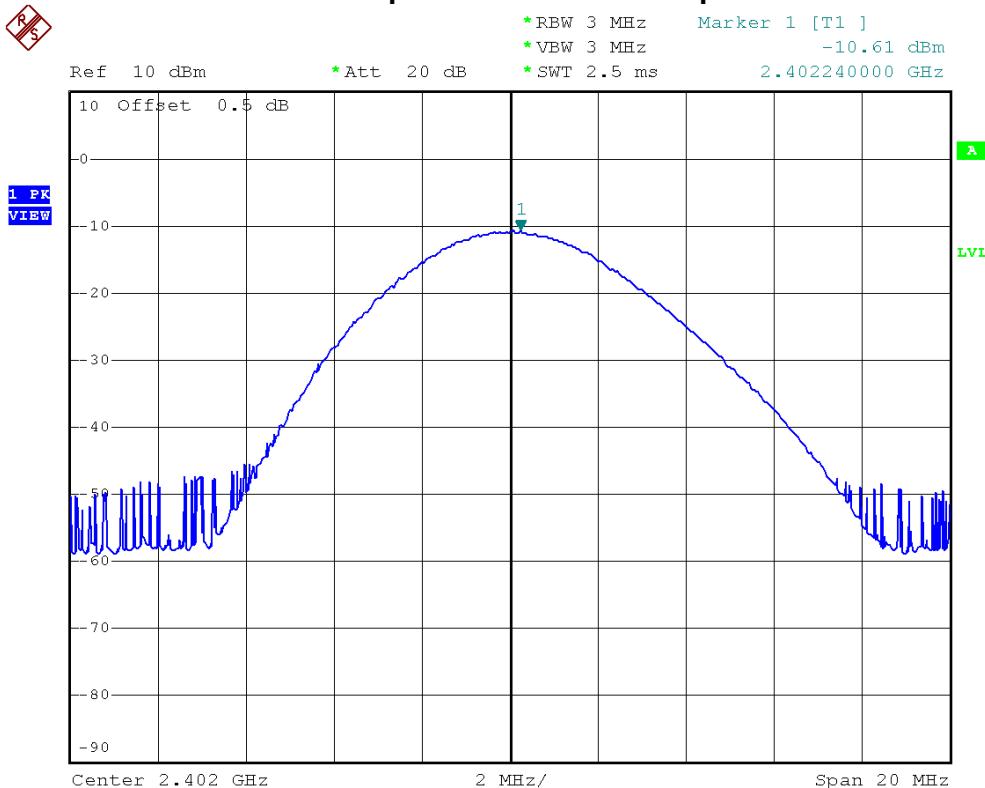


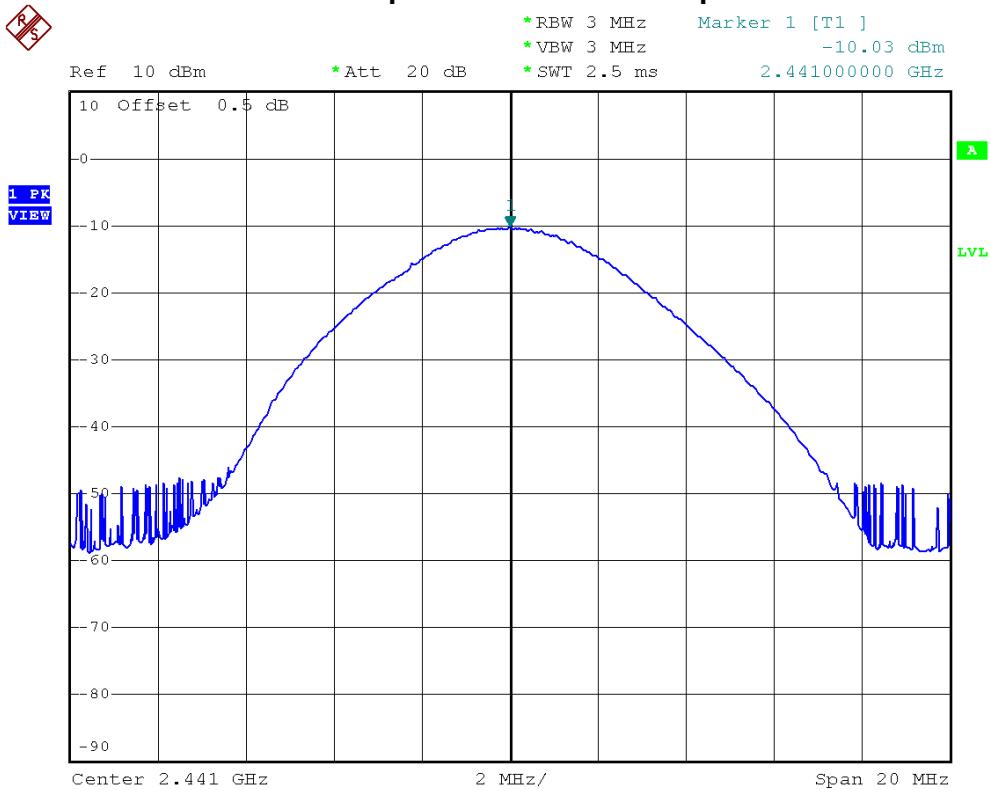
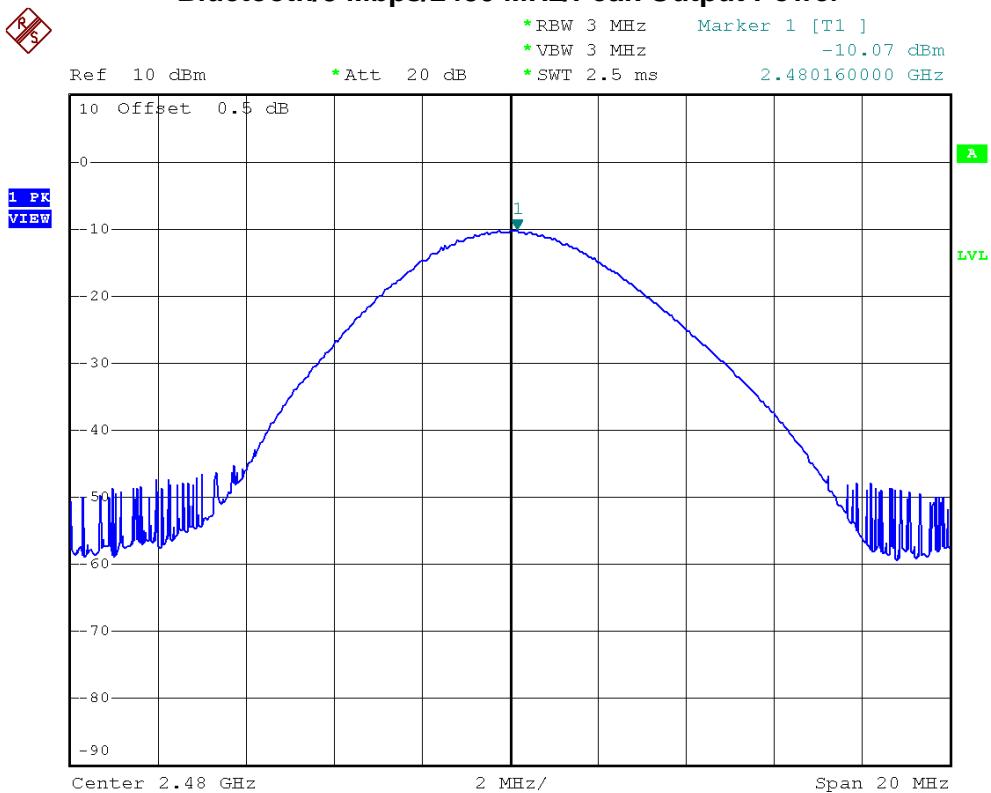
**Bluetooth/1 Mbps/2441 MHz/Peak Output Power****Bluetooth/1 Mbps/2480 MHz/Peak Output Power**



E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 6V		
Test Mode	Bluetooth/3 Mbps/2402 MHz, 2441 MHz, 2480 MHz		

Frequency	Peak Output Power (dBm)	LIMIT (dBm)	Result
2402 MHz	-10.61	30	PASS
2441 MHz	-10.03	30	PASS
2480 MHz	-10.07	30	PASS

**Bluetooth/3 Mbps/2402 MHz/Peak Output Power**

**Bluetooth/3 Mbps/2441 MHz/Peak Output Power****Bluetooth/3 Mbps/2480 MHz/Peak Output Power**

**7 RADIATED SPURIOUS EMISSION (9 KHZ TO 1 GHZ)****7.1 LIMIT**

20 dB in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency Range: 9 kHz to 1 GHz		
FREQUENCY (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequency Range: above 1 GHz				
FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
above 1 GHz	80	60	74	54

**NOTE:**

(1) The limit for radiated test was performed according to FCC PART 15B.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

(4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain(if use)

Margin Level = Measurement Value – Limit Value

**7.2 MEASUREMENT INSTRUMENTS LIST**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Apr. 16, 2013
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 17, 2013
4	Microflex Cable	N/A	N/A	1m	Apr. 14, 2013
5	Microflex Cable	AISI	S104-SMAP-1	10m	Apr. 14, 2013
6	Microflex Cable	N/A	N/A	3m	Apr. 14, 2013
7	Test Cable	N/A	LMR-400	966_12m	May. 15, 2013
8	Test Cable	N/A	LMR-400	966_3m	May. 15, 2013
9	Pre-Amplifier	EMC	EMC-330	980001	Jun. 07, 2013
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 12, 2013
11	Horn Antenna	Schwarzbeck	BBHA 9170	187	Dec. 18, 2012

Remark: "N/A" denotes No Model Name, No Serial No. or No Calibration specified.

**7.3 MEASURING INSTRUMENTS SETTING**

EMI Test Receiver	Parameter Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

## 7.4 TEST PROCEDURES

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1 GHz. For frequencies above 1 GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m Semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. The testing follows the guidelines in ANSI C63.4 and FCC Public Notice DA 00-705 Measurement Guidelines. In case the emission is fail due to the used RBW/VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.

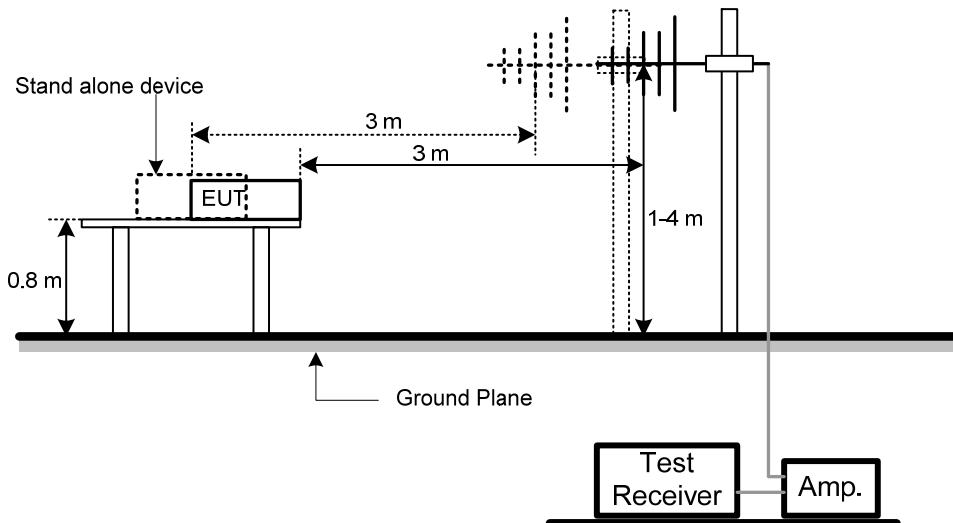
**NOTE:**

- a. Reading in which marked as QP or Peak means measurements by using are Quasi-Peak Mode with Detector BW=120 kHz; SPA setting in RBW=100 kHz, VBW =100 kHz, Swp. Time = 0.3 sec./ MHz.
- b. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.

## 7.5 DEVIATION FROM TEST STANDARD

No deviation

## 7.6 TEST SETUP LAYOUT



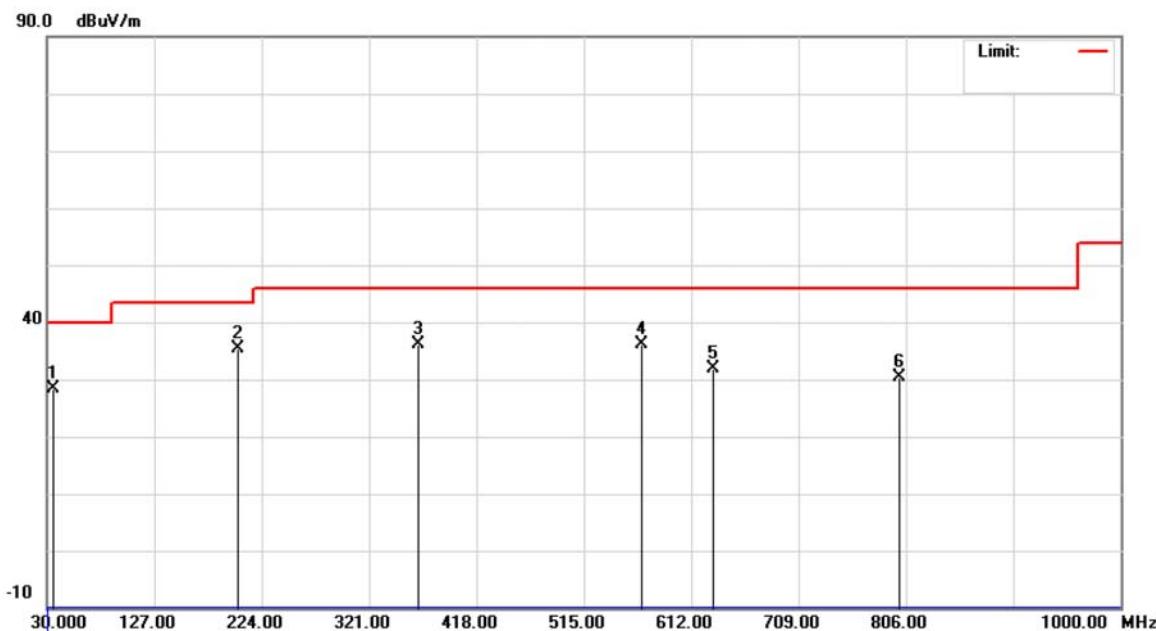


## **7.7 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

**7.8 TEST RESULTS**

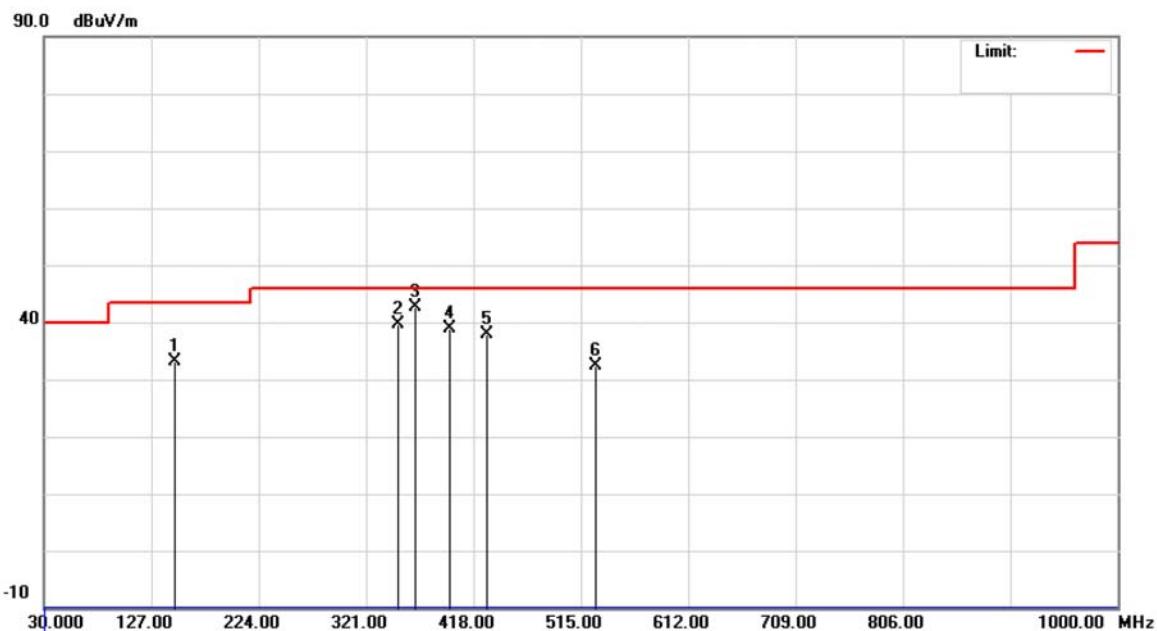
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/1 Mbps/2441 MHz		

**Polarization: Vertical**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		35.8199	47.51	-19.21	28.30	40.00	-11.70	peak	
2	*	202.6600	57.04	-21.64	35.40	43.50	-8.10	peak	
3		365.6199	52.59	-16.55	36.04	46.00	-9.96	peak	
4		567.3800	48.14	-12.12	36.02	46.00	-9.98	peak	
5		631.4000	42.25	-10.48	31.77	46.00	-14.23	peak	
6		800.1799	38.54	-8.05	30.49	46.00	-15.51	peak	



E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/1 Mbps/2441 MHz		

**Polarization: Horizontal**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		148.3399	52.05	-18.82	33.23	43.50	-10.27	peak	
2		350.1000	56.76	-17.02	39.74	46.00	-6.26	peak	
3	*	365.6199	59.09	-16.55	42.54	46.00	-3.46	peak	
4		396.6600	54.36	-15.60	38.76	46.00	-7.24	peak	
5		429.6400	52.52	-14.76	37.76	46.00	-8.24	peak	
6		528.5800	45.35	-12.98	32.37	46.00	-13.63	peak	

**8 RADIATED SPURIOUS EMISSION (ABOVE 1 GHZ)****8.1 LIMIT**

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency Range: 9 kHz to 1 GHz		
FREQUENCY (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Frequency Range: above 1 GHz				
FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
above 1 GHz	80	60	74	54

**NOTE:**

(1) The limit for radiated test was performed according to FCC PART 15B.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

(4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss – Amplifier Gain(if use)

Margin Level = Measurement Value – Limit Value

**8.2 MEASUREMENT INSTRUMENTS LIST**

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013
2	Horn Antenna	Schwarzbeck	BBHA 9120	D-325	Apr. 16, 2013
3	Microwave Pre_amplifier	Agilent	8449B	3008A01714	Apr. 17, 2013
4	Microflex Cable	N/A	N/A	1m	Apr. 14, 2013
5	Microflex Cable	AISI	S104-SMAP-1	10m	Apr. 14, 2013
6	Microflex Cable	N/A	N/A	3m	Apr. 14, 2013
7	Test Cable	N/A	LMR-400	966_12m	May. 15, 2013
8	Test Cable	N/A	LMR-400	966_3m	May. 15, 2013
9	Pre-Amplifier	EMC	EMC-330	980001	Jun. 07, 2013
10	Log-Bicon Antenna	Schwarzbeck	VULB9168-352	9168-352	Jun. 12, 2013
11	Horn Antenna	Schwarzbeck	BBHA 9170	187	Dec. 18, 2012

Remark: "N/A" denotes No Model Name, No Serial No. or No Calibration specified.

**8.3 MEASURING INSTRUMENTS SETTING**

Spectrum Analyzer	Parameter Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (other emission)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average

#### 8.4 TEST PROCEDURES

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1 GHz. For frequencies above 1 GHz, any suitable measuring distance may be used.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3m Semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.
- g. The testing follows the guidelines in ANSI C63.4 and FCC Public Notice DA 00-705 Measurement Guidelines. In case the emission is fail due to the used RBW/VBW is too wide, marker-delta method of FCC Public Notice DA 00-705 will be followed.

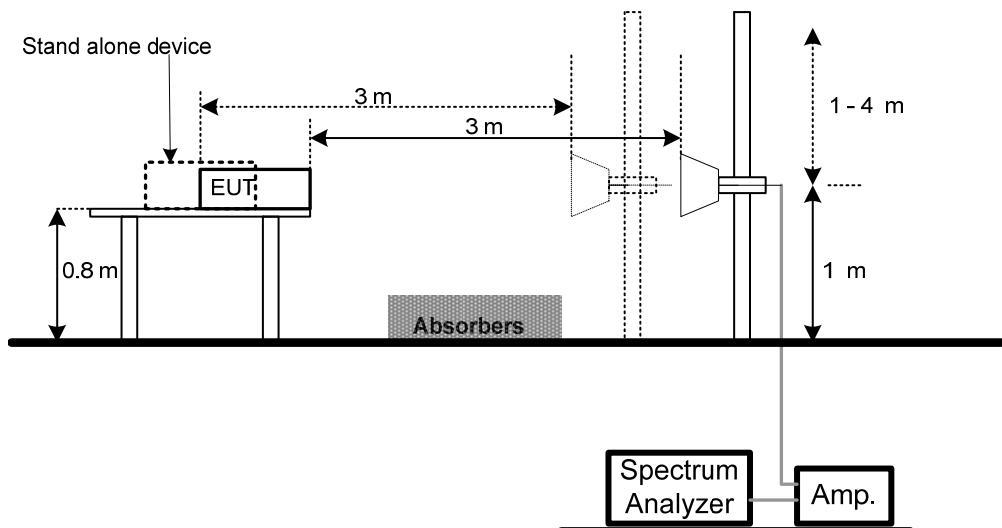
**NOTE:**

- a. Reading in which marked as Peak means measurements by using are Peak Mode with instrument setting in RBW= 1 MHz, VBW= 1 MHz, Swp. Time = Auto.  
Reading in which marked as AV means measurements by using are Average Mode with instrument setting in RBW= 1 MHz, VBW= 10 Hz, Swp. Time = Auto.
- b. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform.

#### 8.5 DEVIATION FROM TEST STANDARD

No deviation

#### 8.6 TEST SETUP LAYOUT



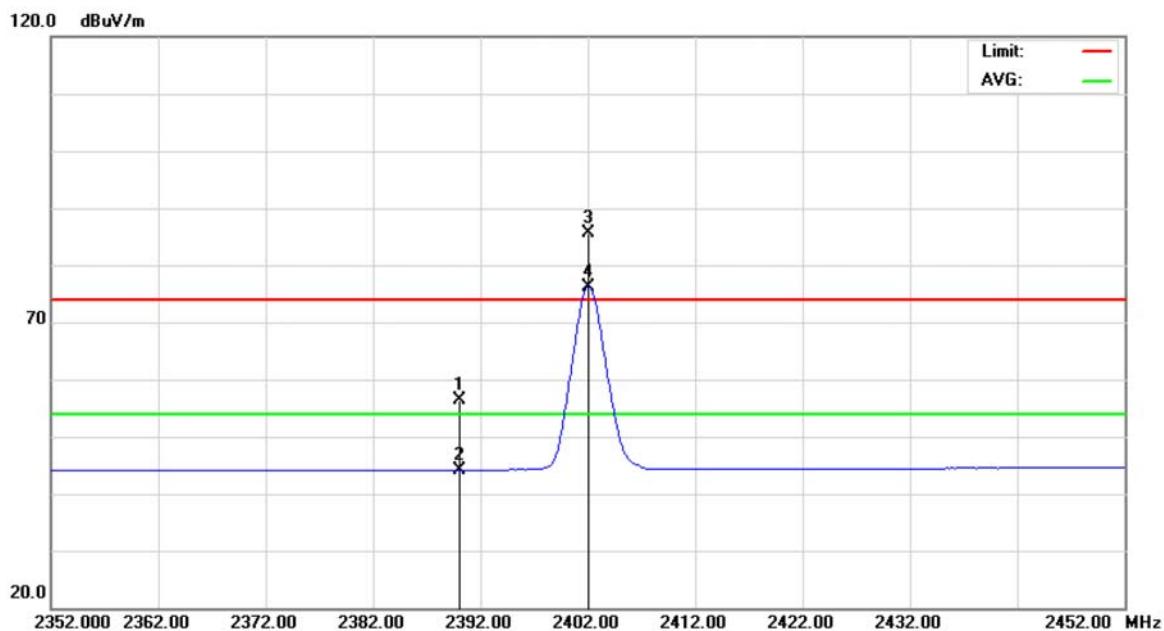


## **8.7 EUT OPERATING CONDITIONS**

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

**8.8 TEST RESULTS**

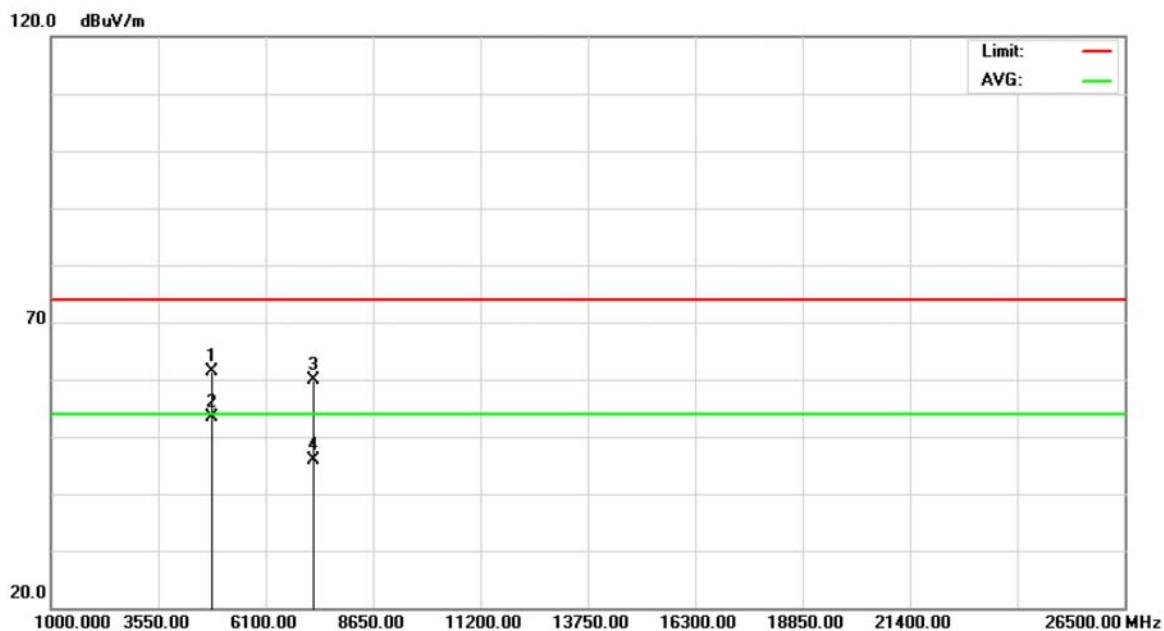
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/1 Mbps/2402 MHz		

**Polarization: Vertical**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		2390.000	23.40	32.99	56.39	74.00	-17.61	peak	
2		2390.000	11.19	32.99	44.18	54.00	-9.82	AVG	
3	X	2402.000	52.57	33.06	85.63	74.00	11.63	peak	
4	*	2402.000	43.12	33.06	76.18	54.00	22.18	AVG	



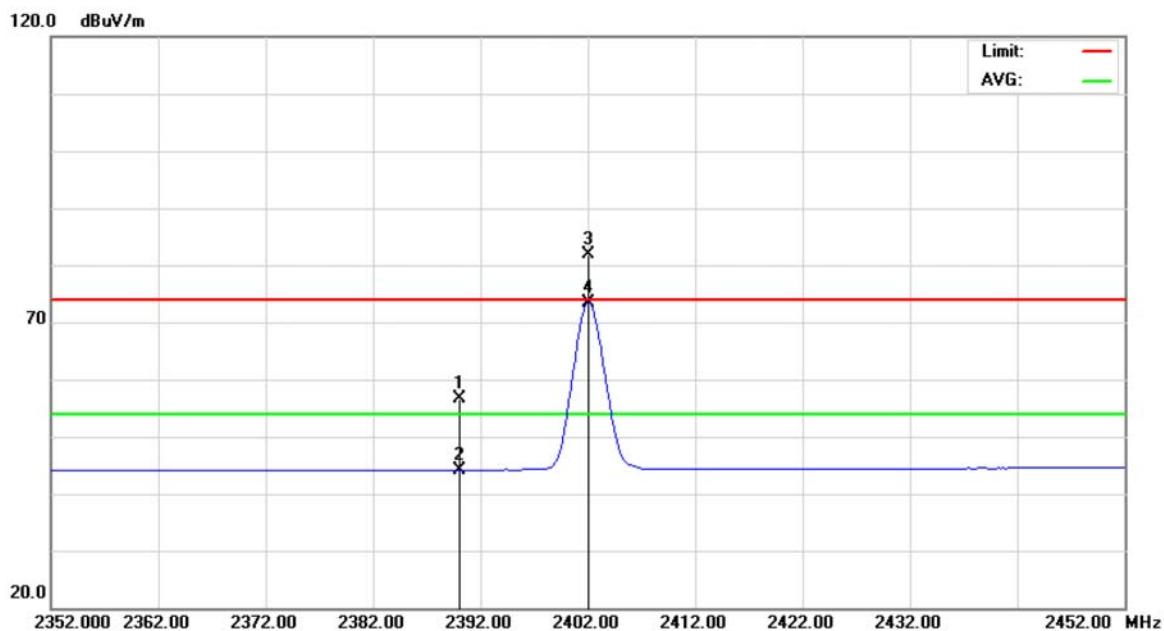
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/1 Mbps/2402 MHz		

**Polarization: Vertical**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		4803.990	54.04	7.41	61.45	74.00	-12.55	peak	
2	*	4803.990	46.07	7.41	53.48	54.00	-0.52	AVG	
3		7206.480	45.20	14.79	59.99	74.00	-14.01	peak	
4		7206.480	31.14	14.79	45.93	54.00	-8.07	AVG	



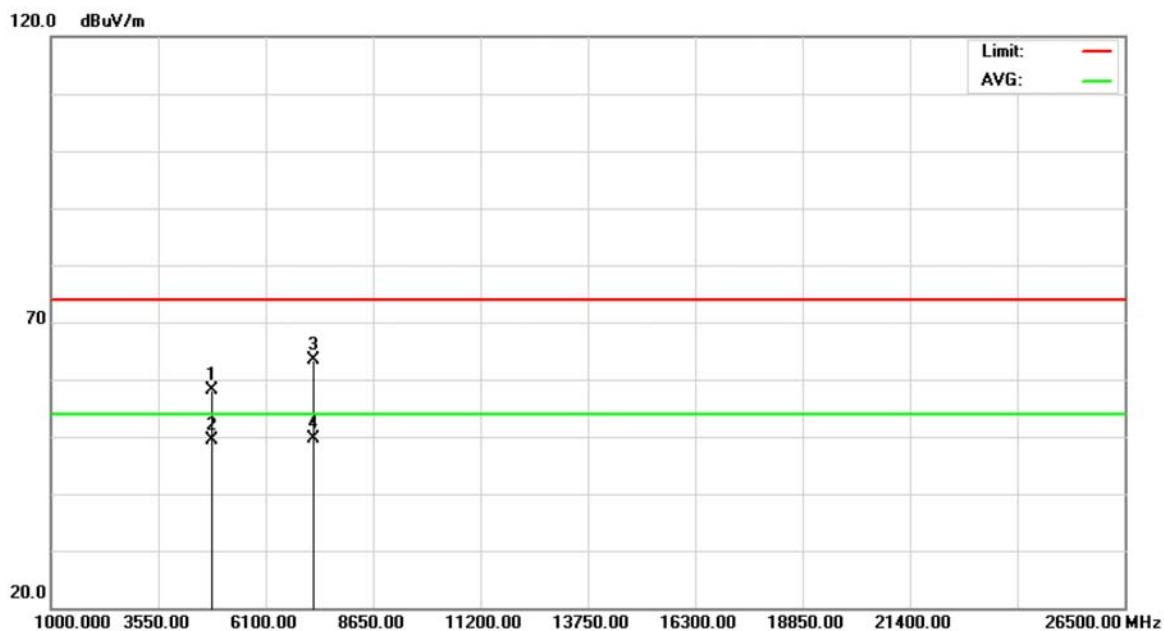
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/1 Mbps/2402 MHz		

**Polarization: Horizontal**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		2390.000	23.52	32.99	56.51	74.00	-17.49	peak	
2		2390.000	11.17	32.99	44.16	54.00	-9.84	AVG	
3	X	2402.000	48.80	33.06	81.86	74.00	7.86	peak	
4	*	2402.000	40.29	33.06	73.35	54.00	19.35	AVG	



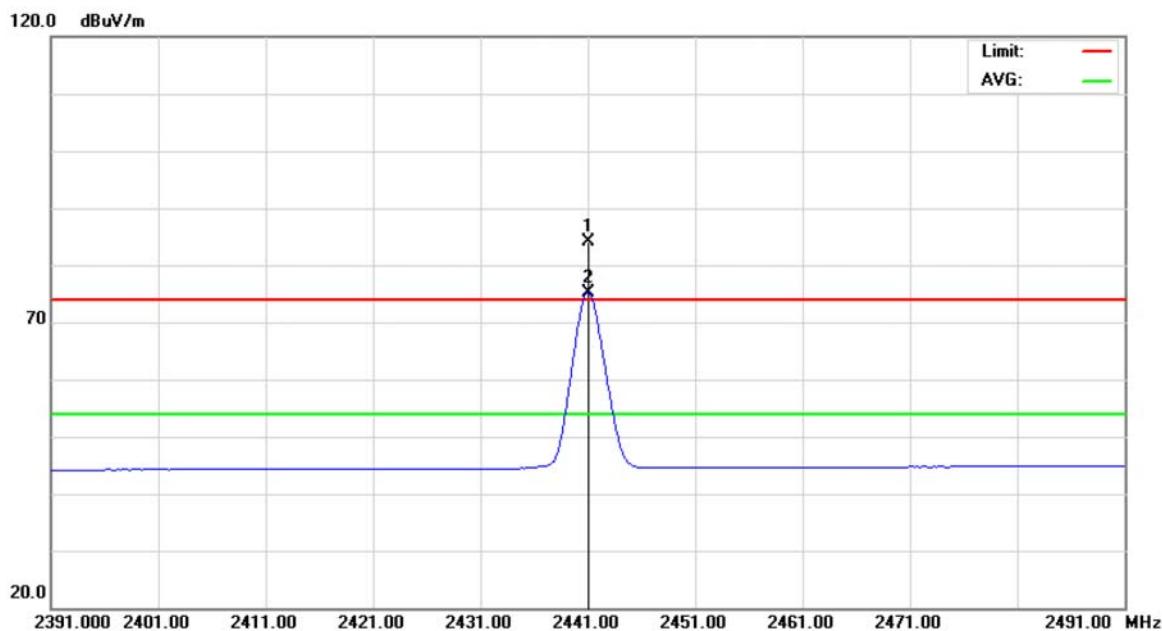
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/1 Mbps/2402 MHz		

**Polarization: Horizontal**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		4804.010	50.70	7.41	58.11	74.00	-15.89	peak	
2		4804.010	42.08	7.41	49.49	54.00	-4.51	AVG	
3		7208.030	48.67	14.79	63.46	74.00	-10.54	peak	
4	*	7208.030	34.95	14.79	49.74	54.00	-4.26	AVG	



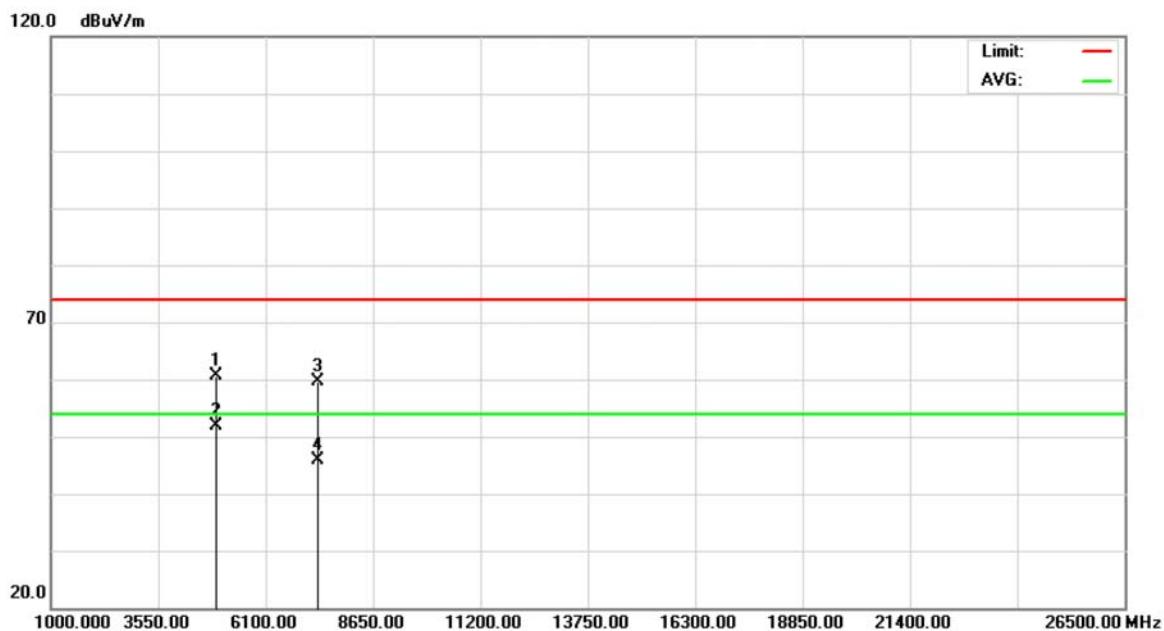
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/1 Mbps/2441 MHz		

**Polarization: Vertical**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1	X	2441.000	50.89	33.27	84.16	74.00	10.16
2	*	2441.000	41.93	33.27	75.20	54.00	21.20
							peak
							AVG



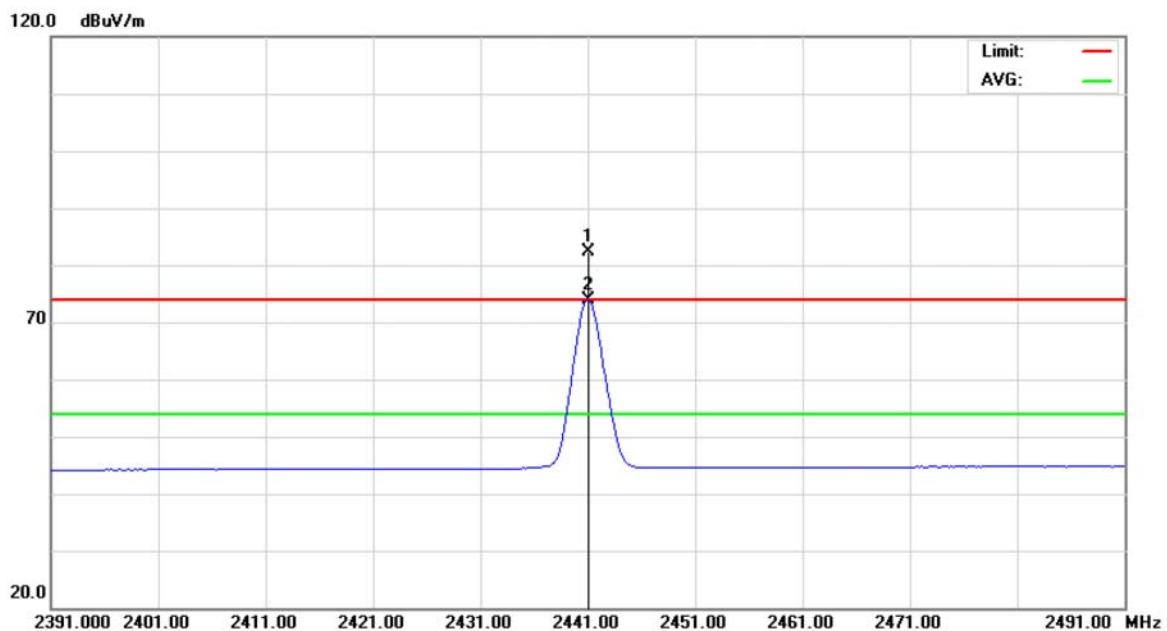
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/1 Mbps/2441 MHz		

**Polarization: Vertical**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		4882.030	52.89	7.70	60.59	74.00	-13.41	peak	
2	*	4882.030	44.24	7.70	51.94	54.00	-2.06	AVG	
3		7323.170	44.63	15.10	59.73	74.00	-14.27	peak	
4		7323.170	30.66	15.10	45.76	54.00	-8.24	AVG	



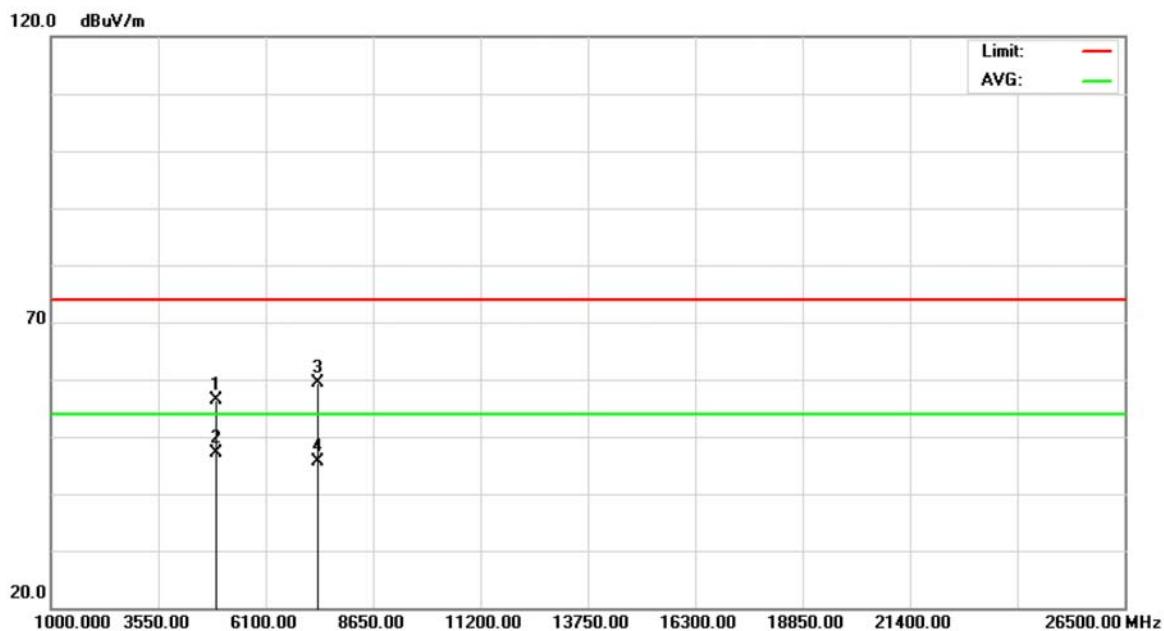
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/1 Mbps/2441 MHz		

**Polarization: Horizontal**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1	X	2441.000	49.16	33.27	82.43	74.00	8.43	peak	
2	*	2441.000	40.56	33.27	73.83	54.00	19.83	AVG	



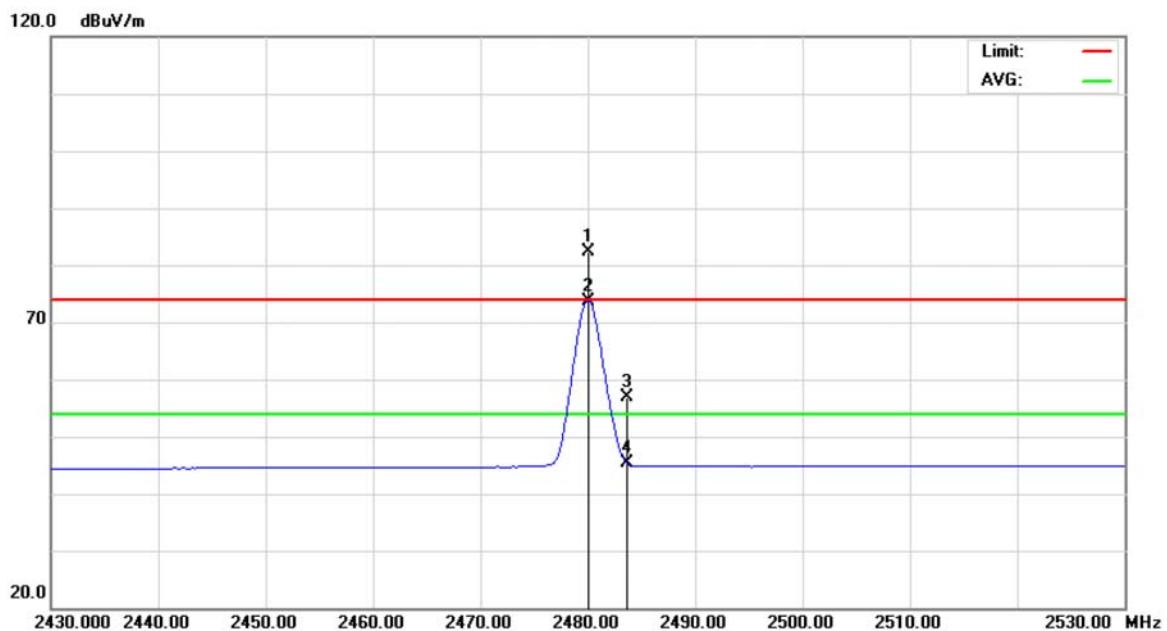
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/1 Mbps/2441 MHz		

**Polarization: Horizontal**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		4882.010	48.64	7.70	56.34	74.00	-17.66	peak	
2	*	4882.010	39.53	7.70	47.23	54.00	-6.77	AVG	
3		7323.110	44.36	15.10	59.46	74.00	-14.54	peak	
4		7323.110	30.62	15.10	45.72	54.00	-8.28	AVG	



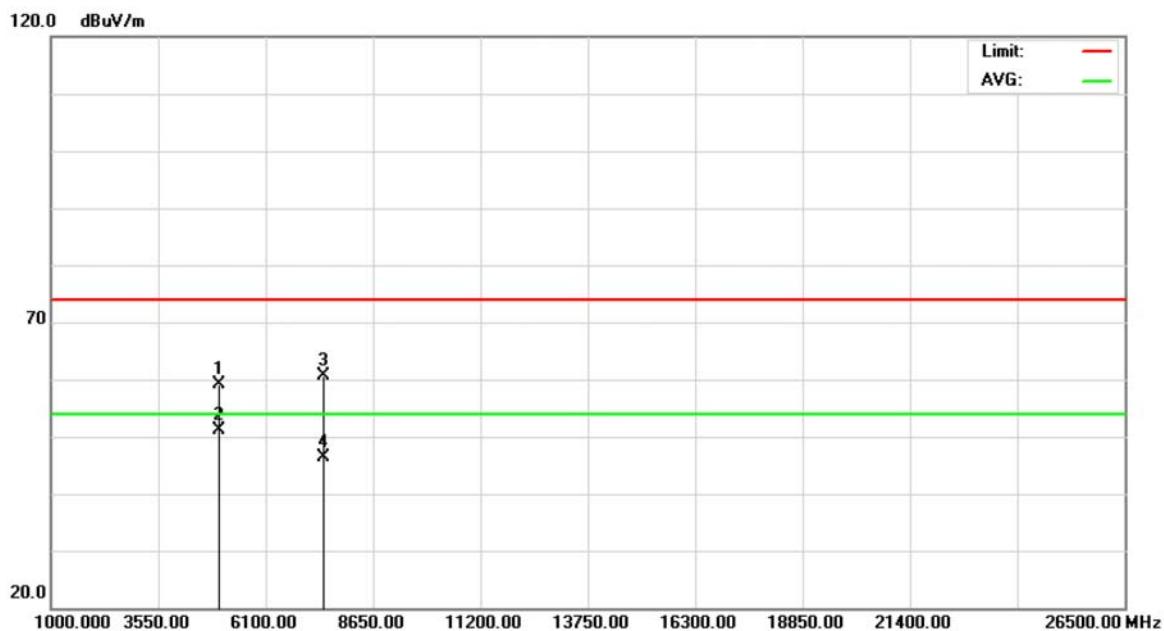
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/1 Mbps/2480 MHz		

**Polarization: Vertical**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1	X	2480.000	48.89	33.48	82.37	74.00	8.37	peak	
2	*	2480.000	40.22	33.48	73.70	54.00	19.70	AVG	
3		2483.500	23.33	33.50	56.83	74.00	-17.17	peak	
4		2483.500	12.00	33.50	45.50	54.00	-8.50	AVG	



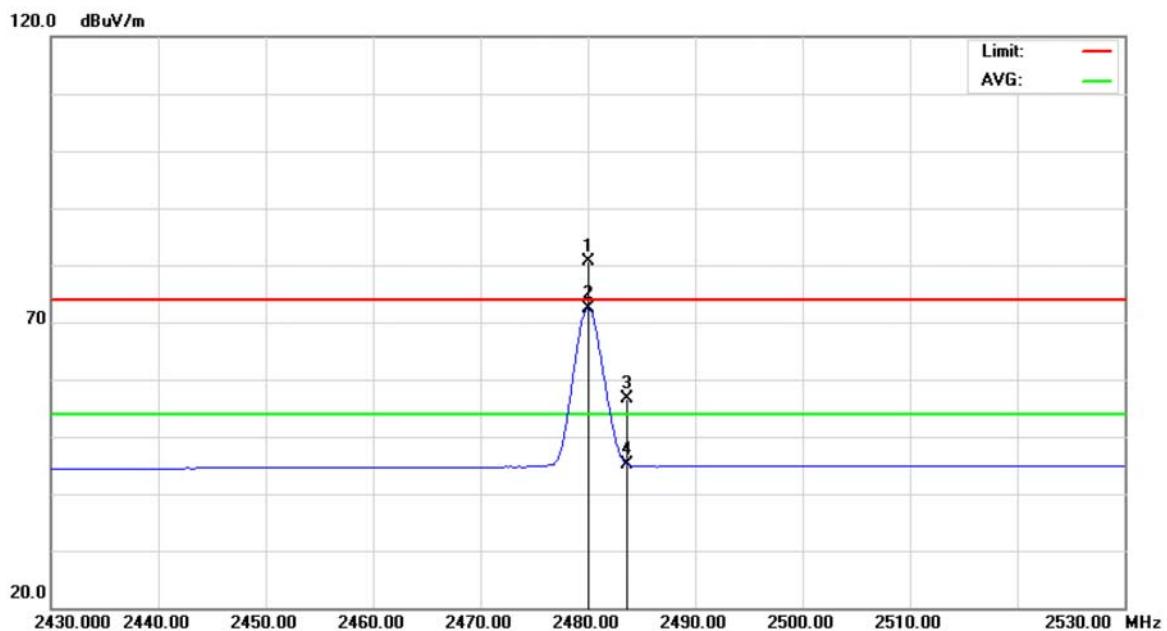
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/1 Mbps/2480 MHz		

**Polarization: Vertical**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		4960.030	51.23	7.98	59.21	74.00	-14.79	peak	
2	*	4960.030	43.19	7.98	51.17	54.00	-2.83	AVG	
3		7440.370	45.28	15.40	60.68	74.00	-13.32	peak	
4		7440.370	31.03	15.40	46.43	54.00	-7.57	AVG	



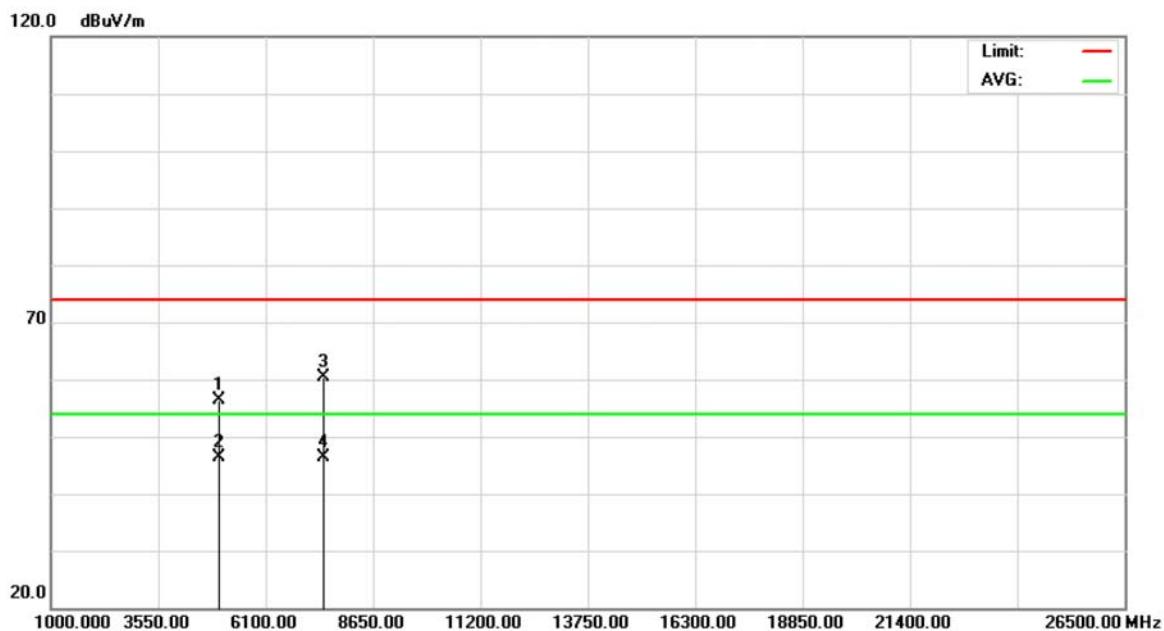
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/1 Mbps/2480 MHz		

**Polarization: Horizontal**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1	X	2480.000	47.18	33.48	80.66	74.00	6.66	peak	
2	*	2480.000	38.90	33.48	72.38	54.00	18.38	AVG	
3		2483.500	23.23	33.50	56.73	74.00	-17.27	peak	
4		2483.500	11.75	33.50	45.25	54.00	-8.75	AVG	



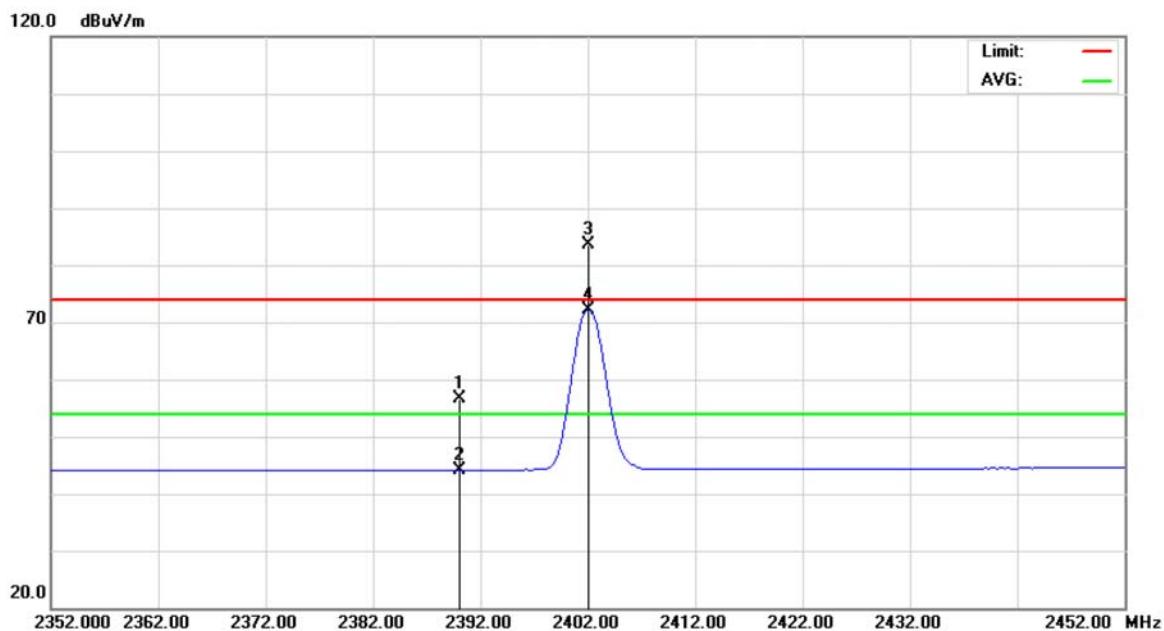
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/1 Mbps/2480 MHz		

**Polarization: Horizontal**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		4959.990	48.34	7.98	56.32	74.00	-17.68	peak	
2		4959.990	38.44	7.98	46.42	54.00	-7.58	AVG	
3		7440.270	44.94	15.40	60.34	74.00	-13.66	peak	
4	*	7440.270	31.03	15.40	46.43	54.00	-7.57	AVG	



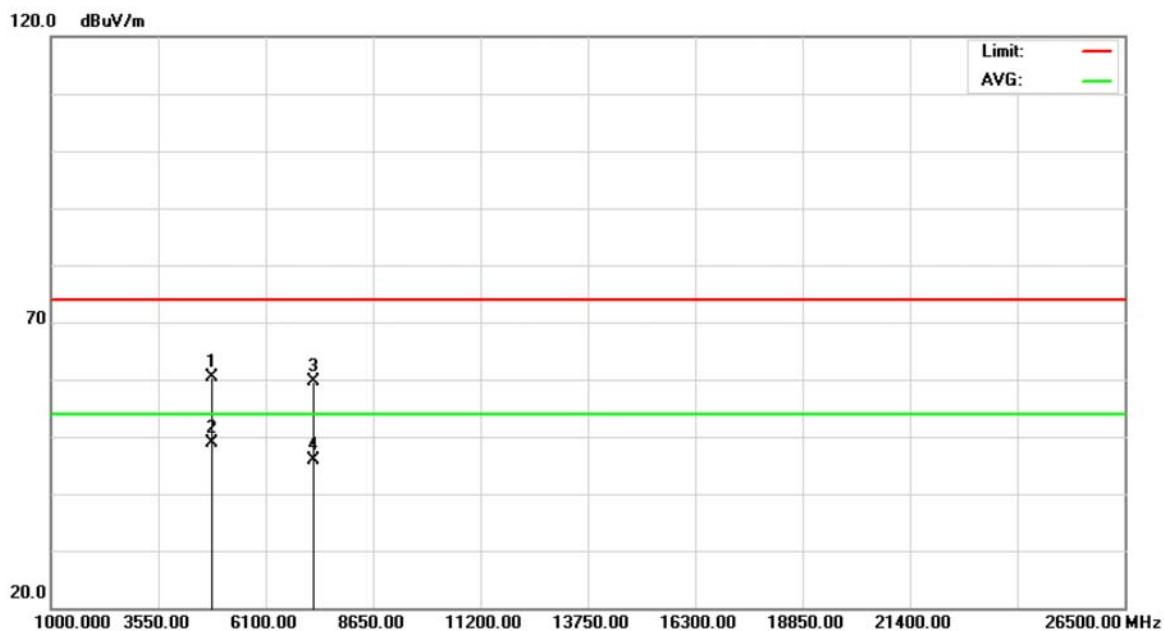
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/3 Mbps/2402 MHz		

**Polarization: Vertical**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		2390.000	23.58	32.99	56.57	74.00	-17.43	peak	
2		2390.000	11.16	32.99	44.15	54.00	-9.85	AVG	
3	X	2402.000	50.53	33.06	83.59	74.00	9.59	peak	
4	*	2402.000	39.08	33.06	72.14	54.00	18.14	AVG	



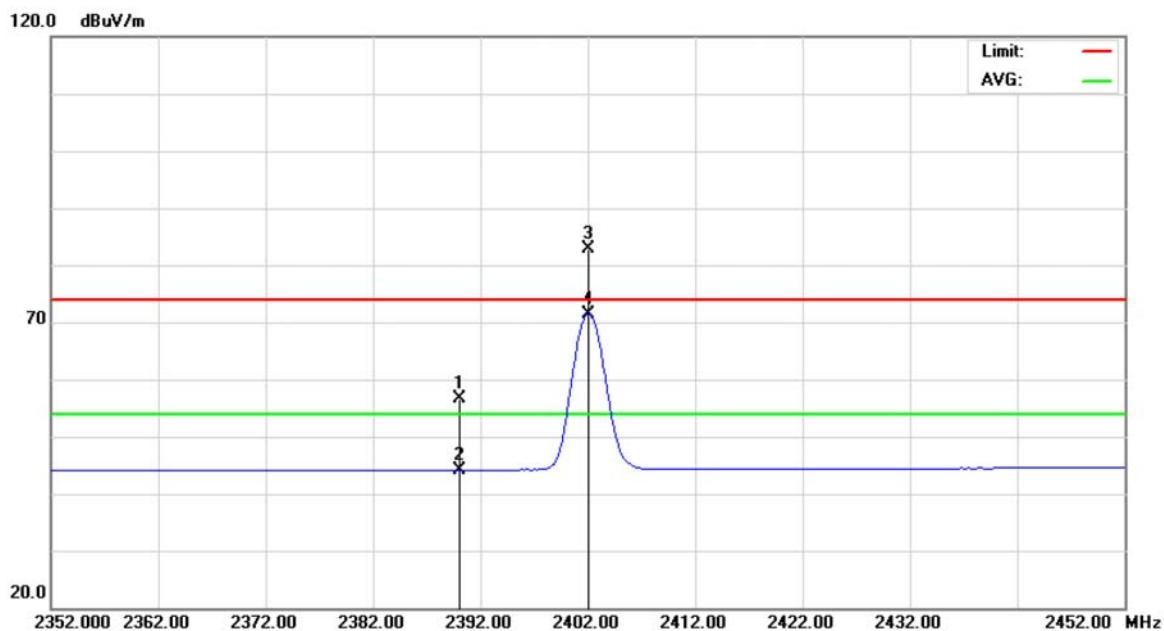
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/3 Mbps/2402 MHz		

**Polarization: Vertical**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		4804.010	53.00	7.41	60.41	74.00	-13.59	peak	
2	*	4804.010	41.55	7.41	48.96	54.00	-5.04	AVG	
3		7203.960	44.92	14.78	59.70	74.00	-14.30	peak	
4		7203.960	31.17	14.78	45.95	54.00	-8.05	AVG	



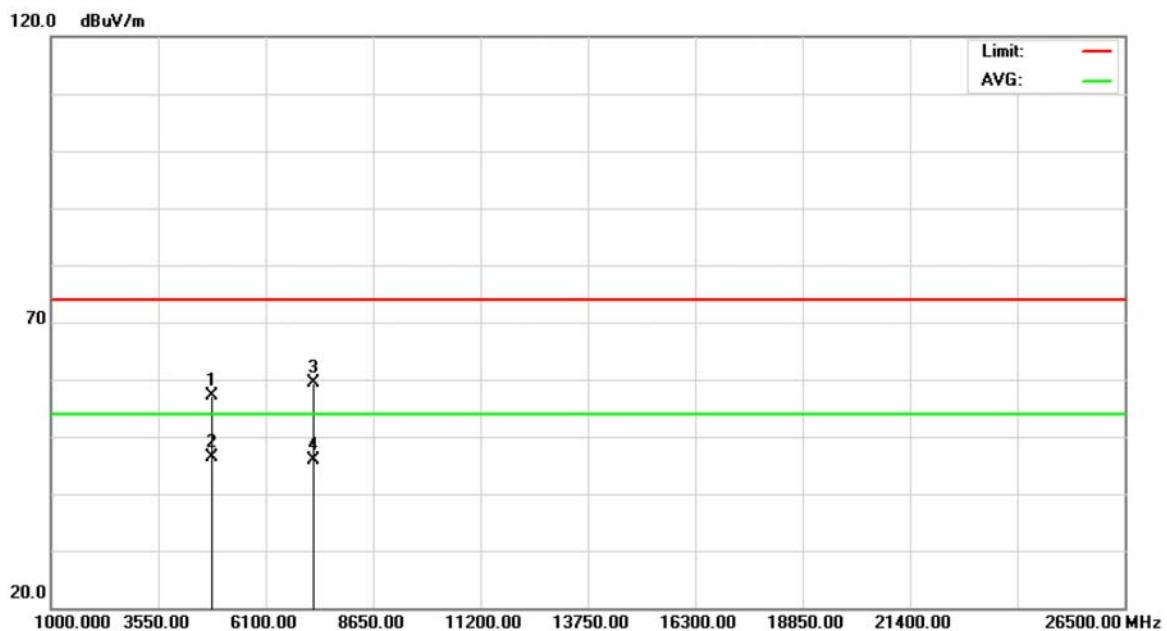
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/3 Mbps/2402 MHz		

**Polarization: Horizontal**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		2390.000	23.55	32.99	56.54	74.00	-17.46	peak	
2		2390.000	11.18	32.99	44.17	54.00	-9.83	AVG	
3	X	2402.000	49.85	33.06	82.91	74.00	8.91	peak	
4	*	2402.000	38.31	33.06	71.37	54.00	17.37	AVG	



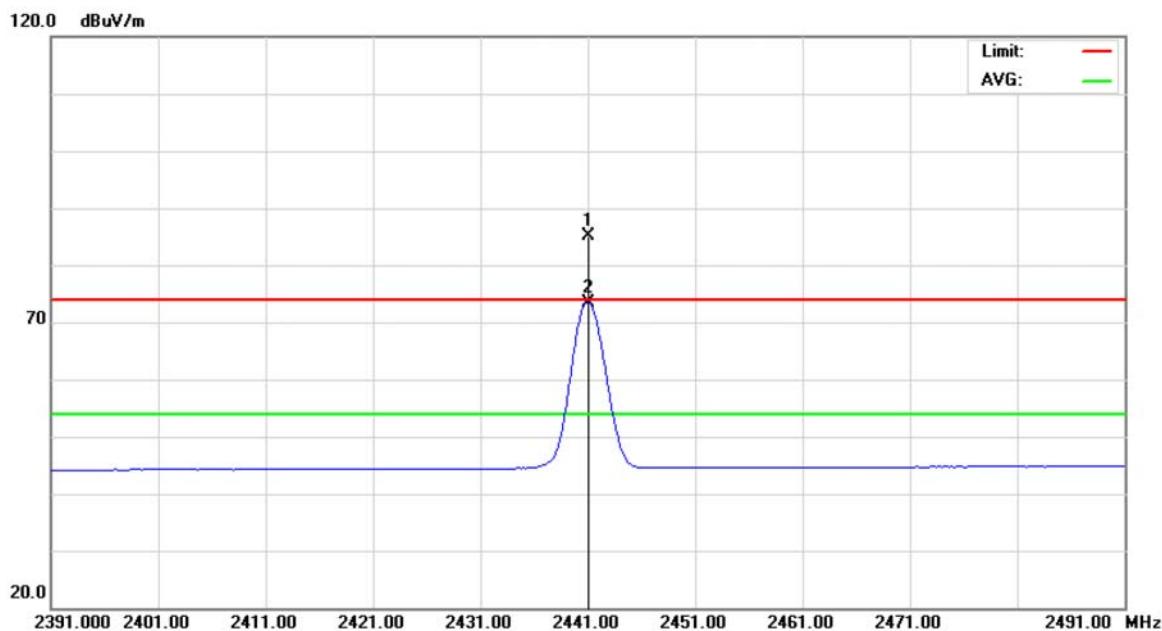
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/3 Mbps/2402 MHz		

**Polarization: Horizontal**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		4803.970	49.77	7.41	57.18	74.00	-16.82	peak	
2	*	4803.970	38.86	7.41	46.27	54.00	-7.73	AVG	
3		7205.680	44.57	14.79	59.36	74.00	-14.64	peak	
4		7205.680	31.07	14.79	45.86	54.00	-8.14	AVG	



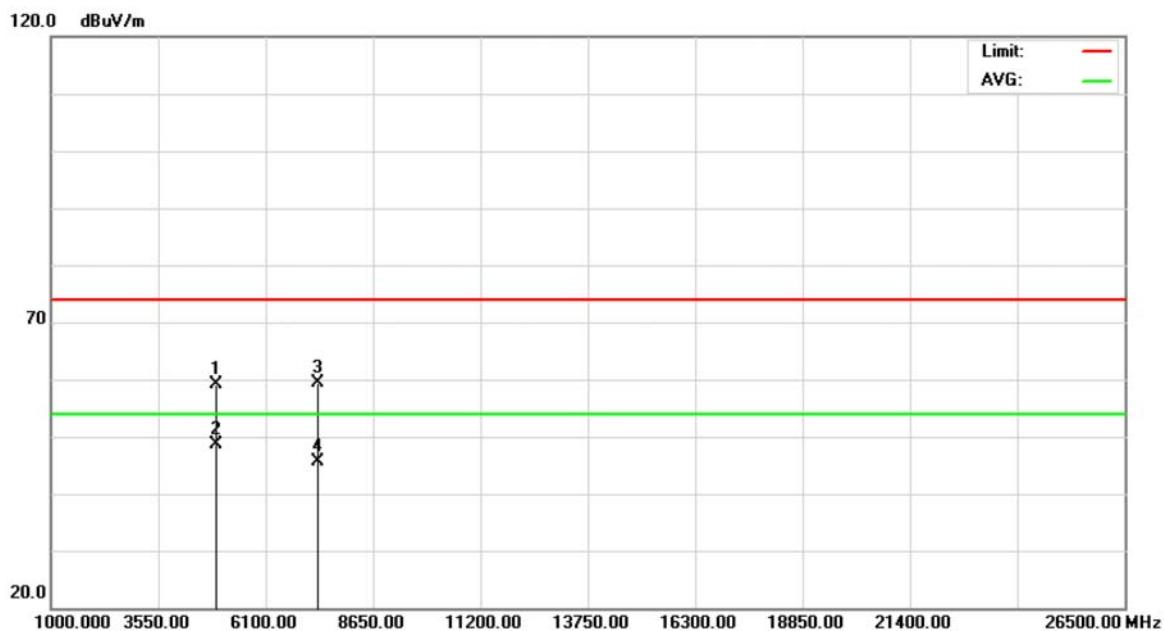
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/3 Mbps/2441 MHz		

**Polarization: Vertical**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1	X	2441.000	51.81	33.27	85.08	74.00	11.08
2	*	2441.000	40.15	33.27	73.42	54.00	19.42
							peak
							AVG



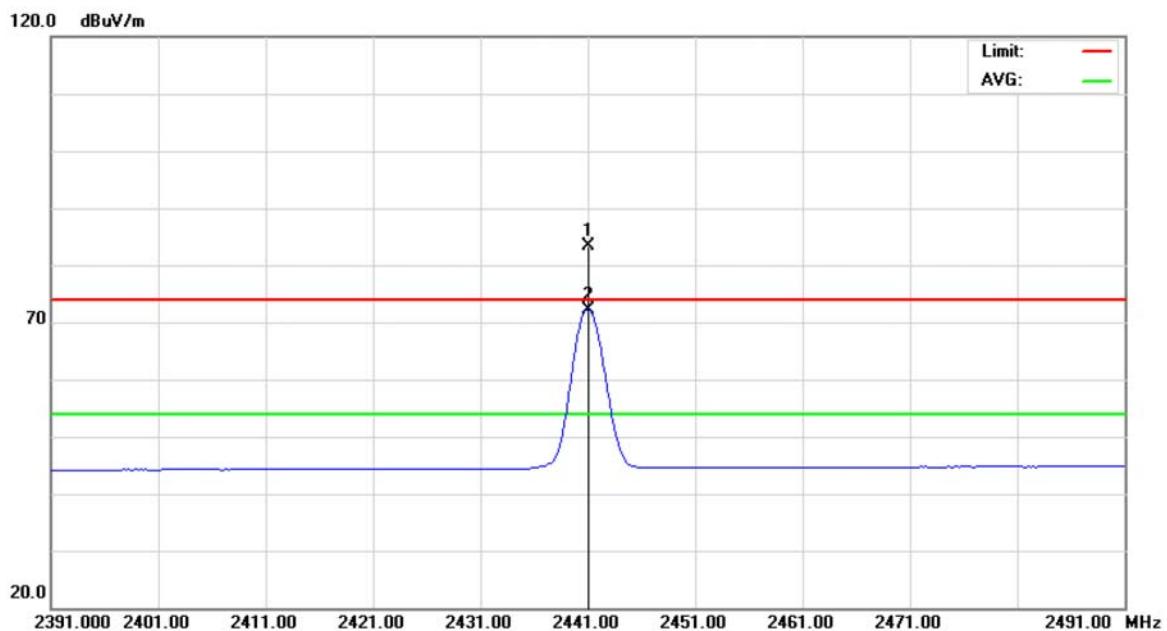
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/3 Mbps/2441 MHz		

**Polarization: Vertical**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		4882.010	51.52	7.70	59.22	74.00	-14.78	peak	
2	*	4882.010	40.85	7.70	48.55	54.00	-5.45	AVG	
3		7323.120	44.26	15.10	59.36	74.00	-14.64	peak	
4		7323.120	30.45	15.10	45.55	54.00	-8.45	AVG	



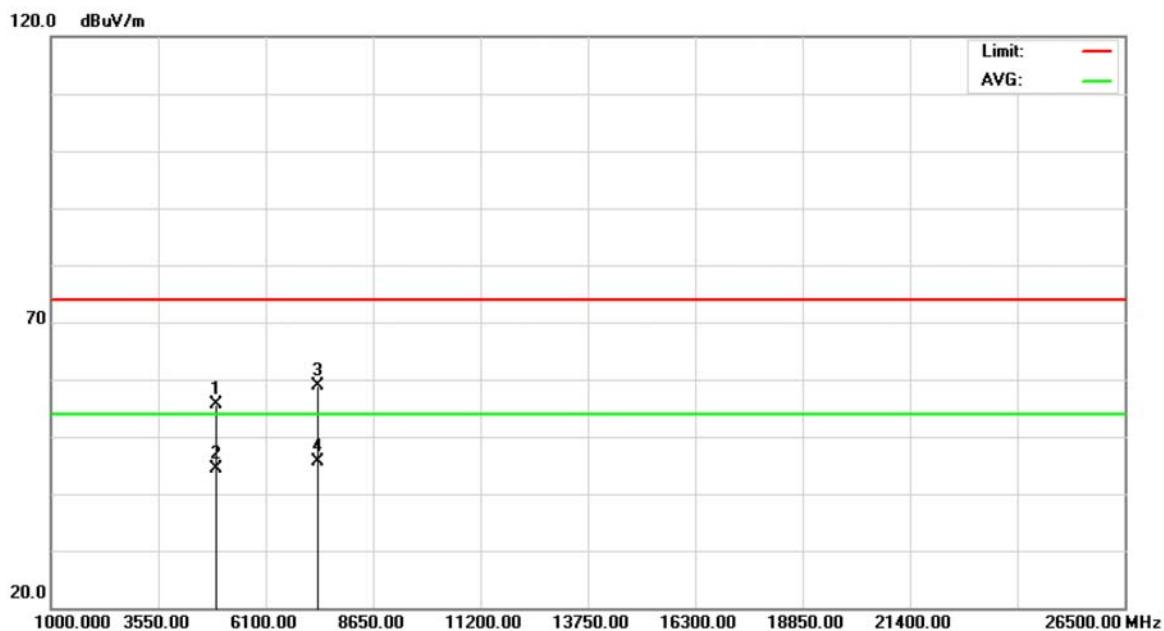
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/3 Mbps/2441 MHz		

**Polarization: Horizontal**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over
			Level	Factor	ment		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1	X	2441.000	50.19	33.27	83.46	74.00	9.46
2	*	2441.000	38.94	33.27	72.21	54.00	18.21
							AVG



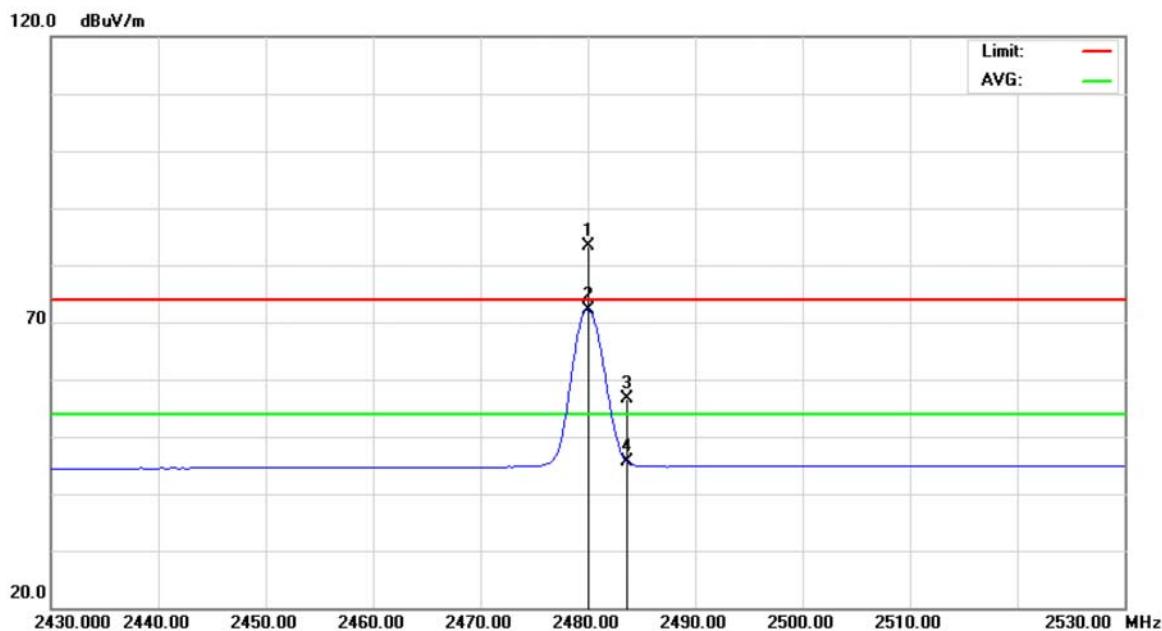
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/3 Mbps/2441 MHz		

**Polarization: Horizontal**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		4881.970	47.99	7.70	55.69	74.00	-18.31	peak	
2		4881.970	36.71	7.70	44.41	54.00	-9.59	AVG	
3		7322.350	43.85	15.09	58.94	74.00	-15.06	peak	
4	*	7322.350	30.56	15.09	45.65	54.00	-8.35	AVG	



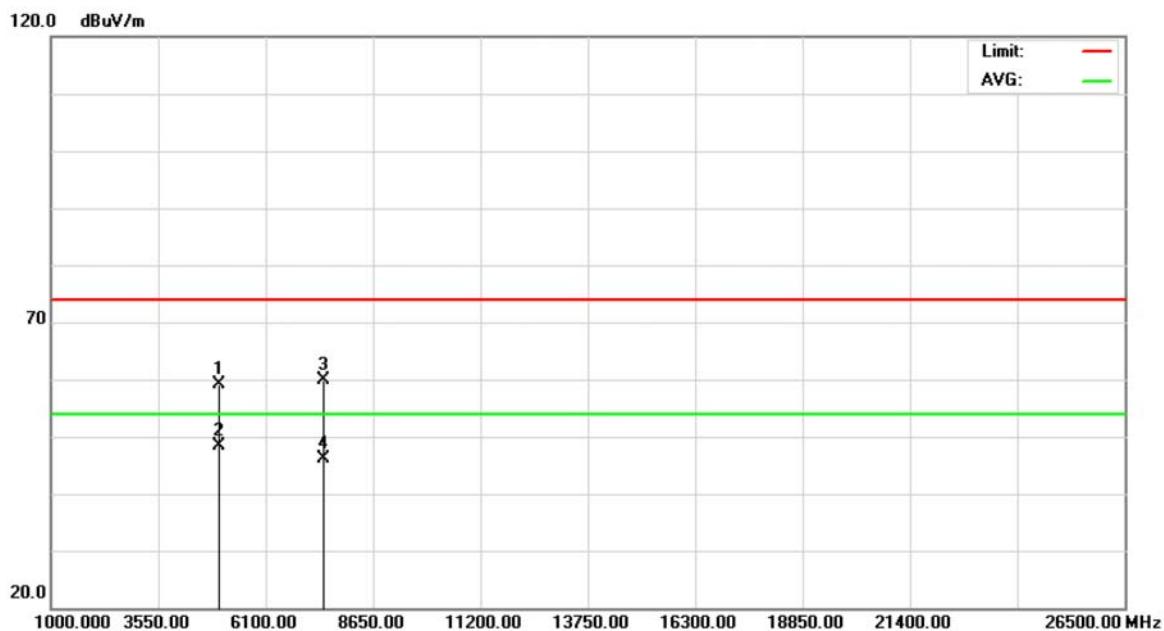
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/3 Mbps/2480 MHz		

**Polarization: Vertical**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1	X	2480.000	49.96	33.48	83.44	74.00	9.44	peak	
2	*	2480.000	38.58	33.48	72.06	54.00	18.06	AVG	
3		2483.500	23.25	33.50	56.75	74.00	-17.25	peak	
4		2483.500	12.11	33.50	45.61	54.00	-8.39	AVG	



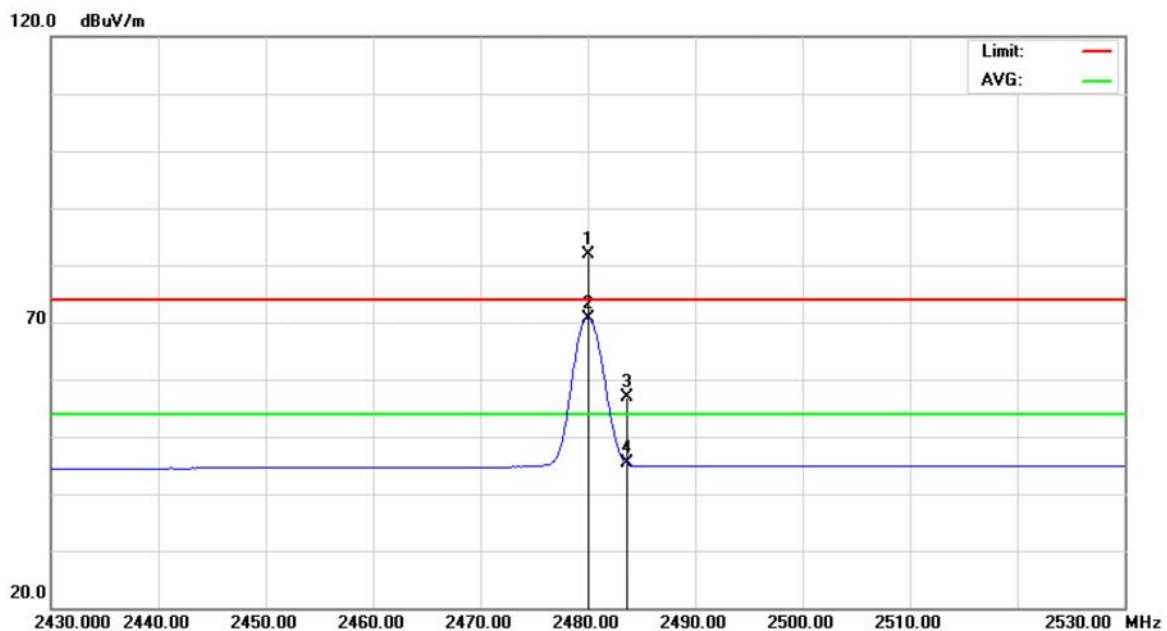
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/3 Mbps/2480 MHz		

**Polarization: Vertical**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		4960.030	51.25	7.98	59.23	74.00	-14.77	peak	
2	*	4960.030	40.30	7.98	48.28	54.00	-5.72	AVG	
3		7439.670	44.55	15.40	59.95	74.00	-14.05	peak	
4		7439.670	30.80	15.40	46.20	54.00	-7.80	AVG	



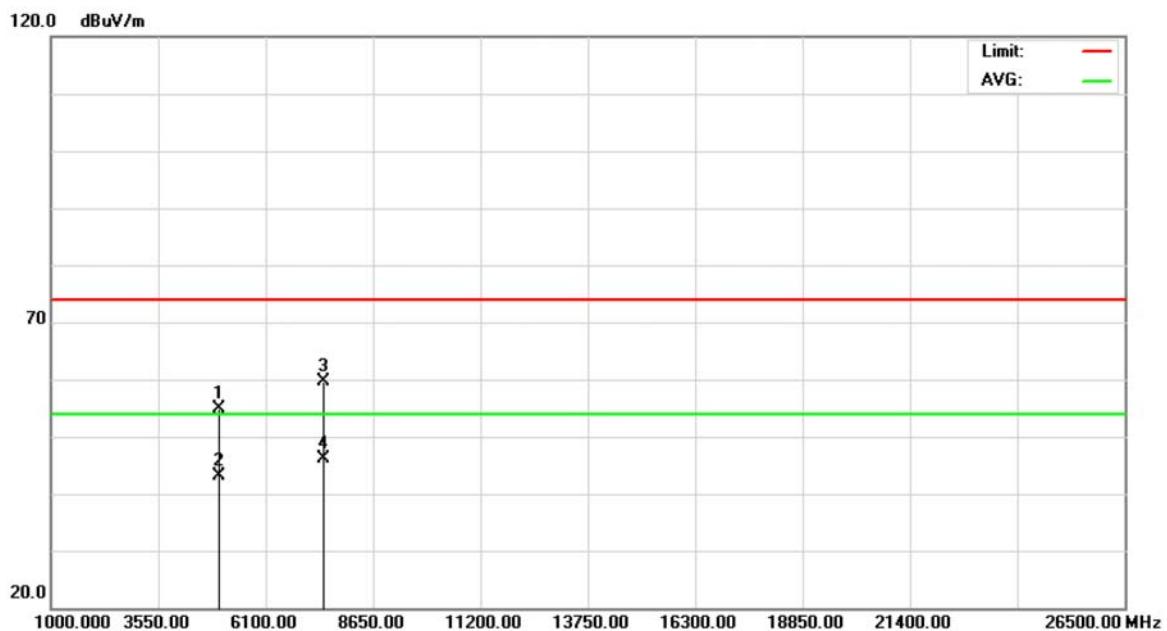
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/3 Mbps/2480 MHz		

**Polarization: Horizontal**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1	X	2480.000	48.32	33.48	81.80	74.00	7.80	peak	
2	*	2480.000	37.23	33.48	70.71	54.00	16.71	AVG	
3		2483.500	23.41	33.50	56.91	74.00	-17.09	peak	
4		2483.500	11.85	33.50	45.35	54.00	-8.65	AVG	



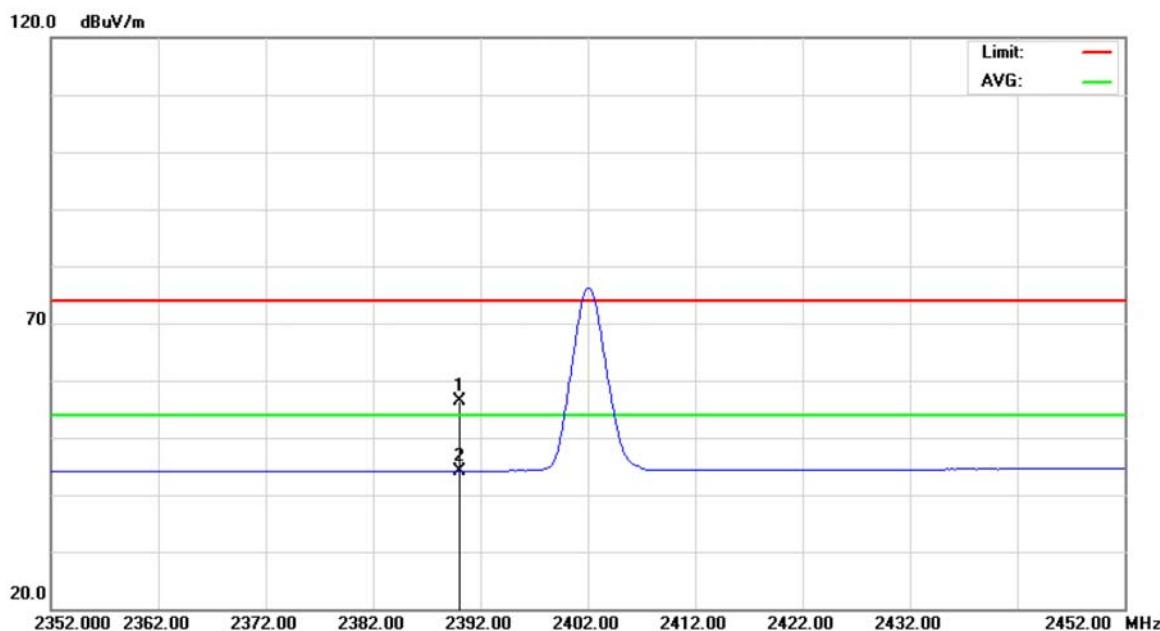
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/3 Mbps/2480 MHz		

**Polarization: Horizontal**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		4959.970	47.01	7.98	54.99	74.00	-19.01	peak	
2		4959.970	35.14	7.98	43.12	54.00	-10.88	AVG	
3		7439.250	44.26	15.40	59.66	74.00	-14.34	peak	
4	*	7439.250	30.80	15.40	46.20	54.00	-7.80	AVG	

**8.9 TEST RESULTS (RESTRICTED BANDS)**

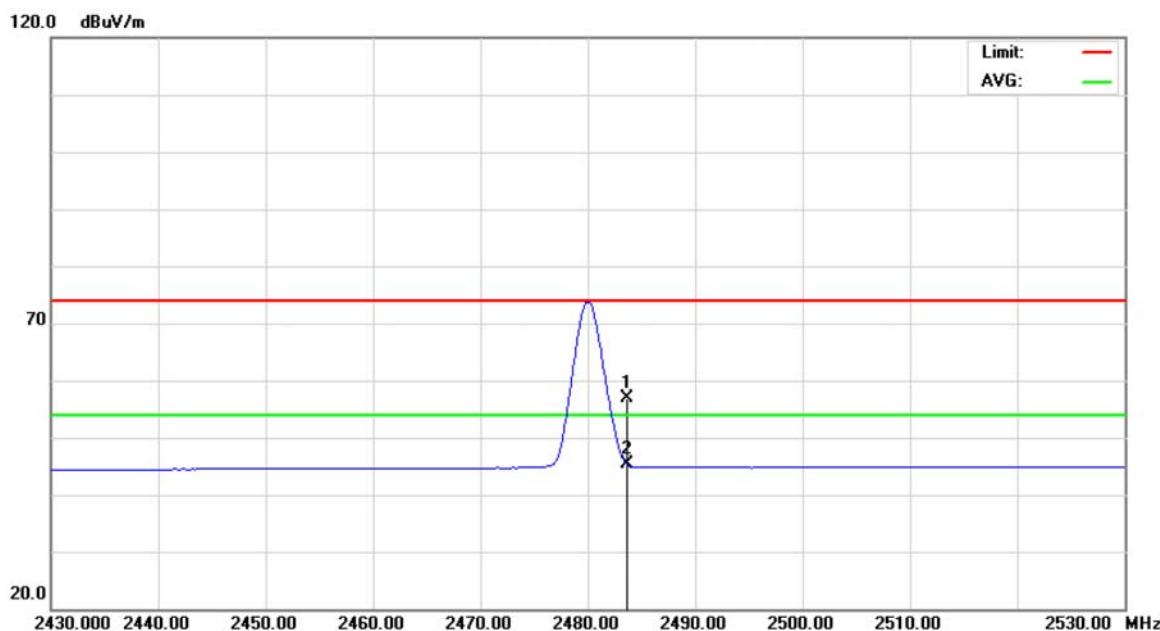
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	24°C	Relative Humidity	46%
Test Voltage	DC 6V		
Test Mode	Bluetooth/1 Mbps/2402 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.		

**Polarization: Vertical**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		2390.000	23.40	32.99	56.39	74.00	-17.61	peak	
2	*	2390.000	11.19	32.99	44.18	54.00	-9.82	AVG	



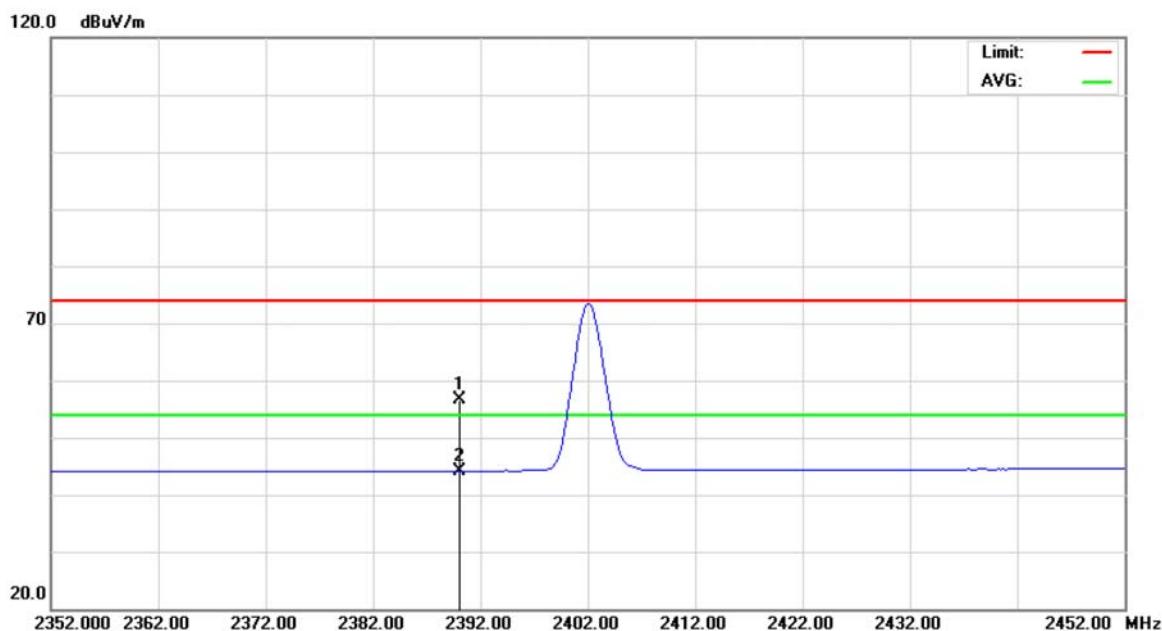
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	24°C	Relative Humidity	46%
Test Voltage	DC 6V		
Test Mode	Bluetooth/1 Mbps/2480 MHz		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.		

**Polarization: Vertical**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		2483.500	23.33	33.50	56.83	74.00	-17.17	peak	
2	*	2483.500	12.00	33.50	45.50	54.00	-8.50	Avg	



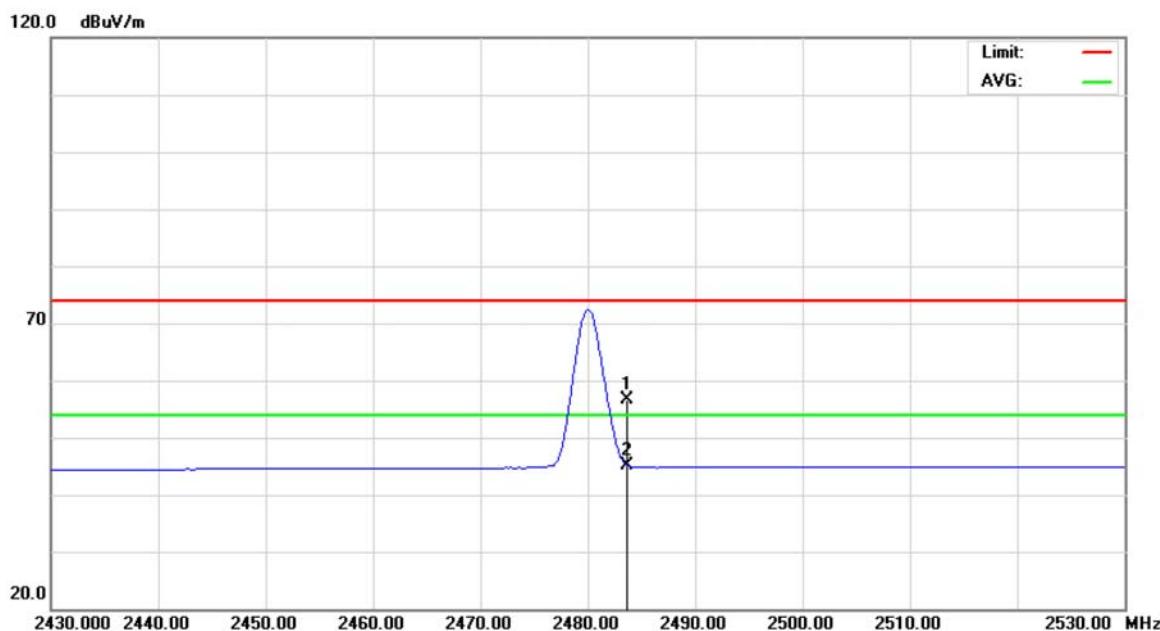
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	24°C	Relative Humidity	46%
Test Voltage	DC 6V		
Test Mode	Bluetooth/1 Mbps/2402 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.		

**Polarization: Horizontal**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		2390.000	23.52	32.99	56.51	74.00	-17.49	peak	
2	*	2390.000	11.17	32.99	44.16	54.00	-9.84	Avg	



E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	24°C	Relative Humidity	46%
Test Voltage	DC 6V		
Test Mode	Bluetooth/1 Mbps/2480 MHz		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.		

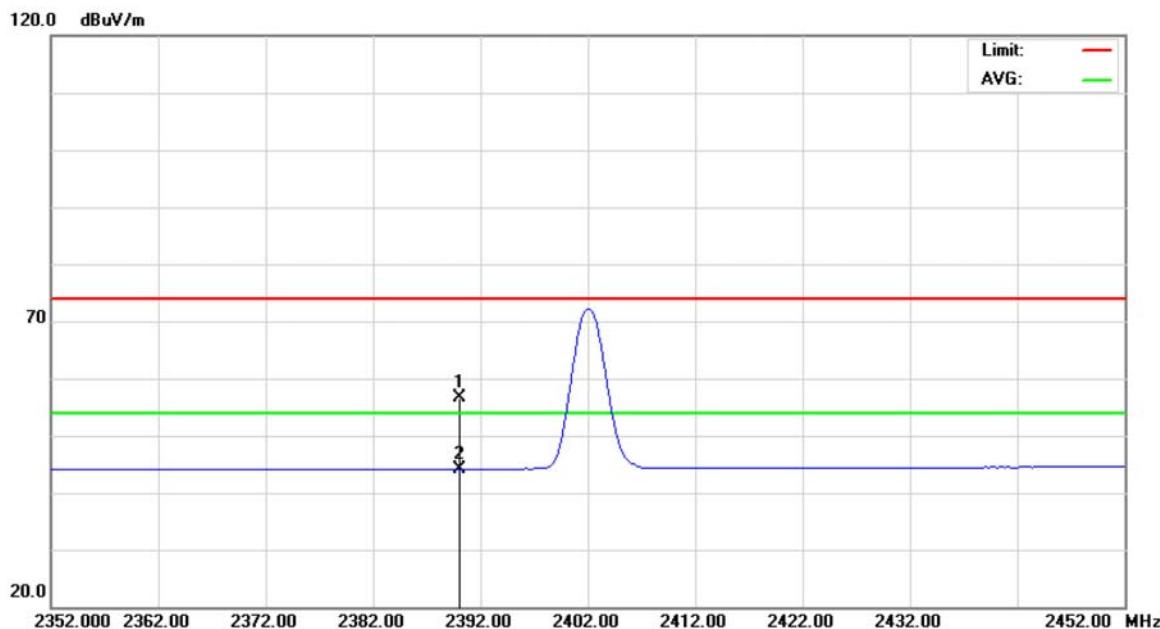
**Polarization: Horizontal**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		2483.500	23.23	33.50	56.73	74.00	-17.27	peak	
2	*	2483.500	11.75	33.50	45.25	54.00	-8.75	Avg	



E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	24°C	Relative Humidity	46%
Test Voltage	DC 6V		
Test Mode	Bluetooth/3 Mbps/2402 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.		

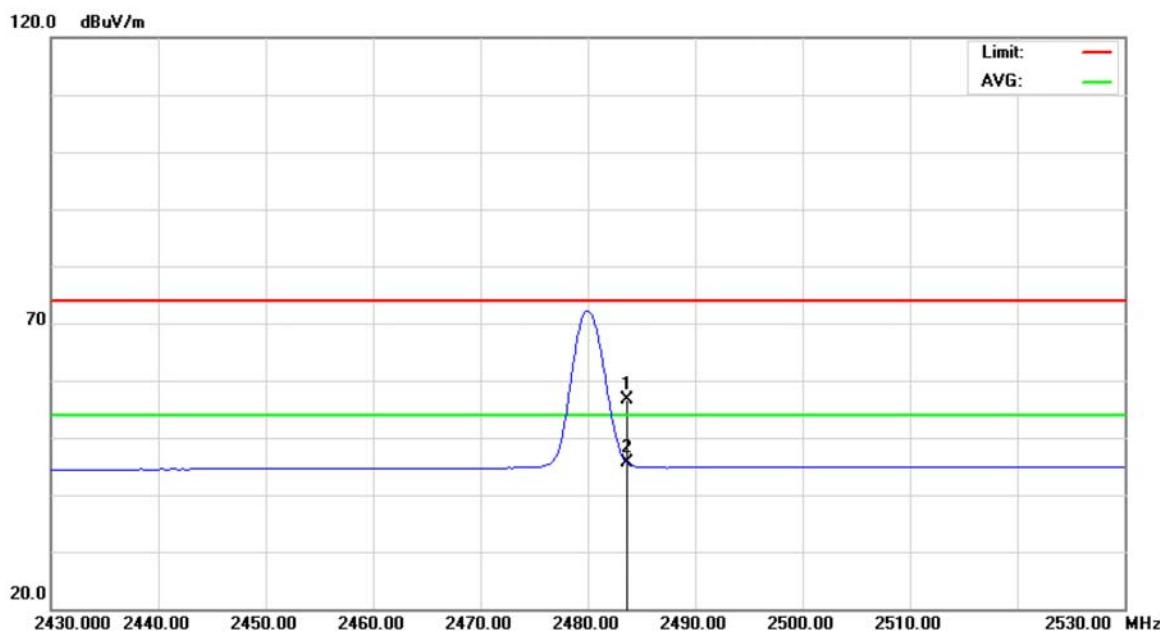
## Polarization: Vertical



No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over							
							MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2390.000	23.58	32.99	56.57	74.00	-17.43	peak						
2	*	2390.000	11.16	32.99	44.15	54.00	-9.85	AVG						



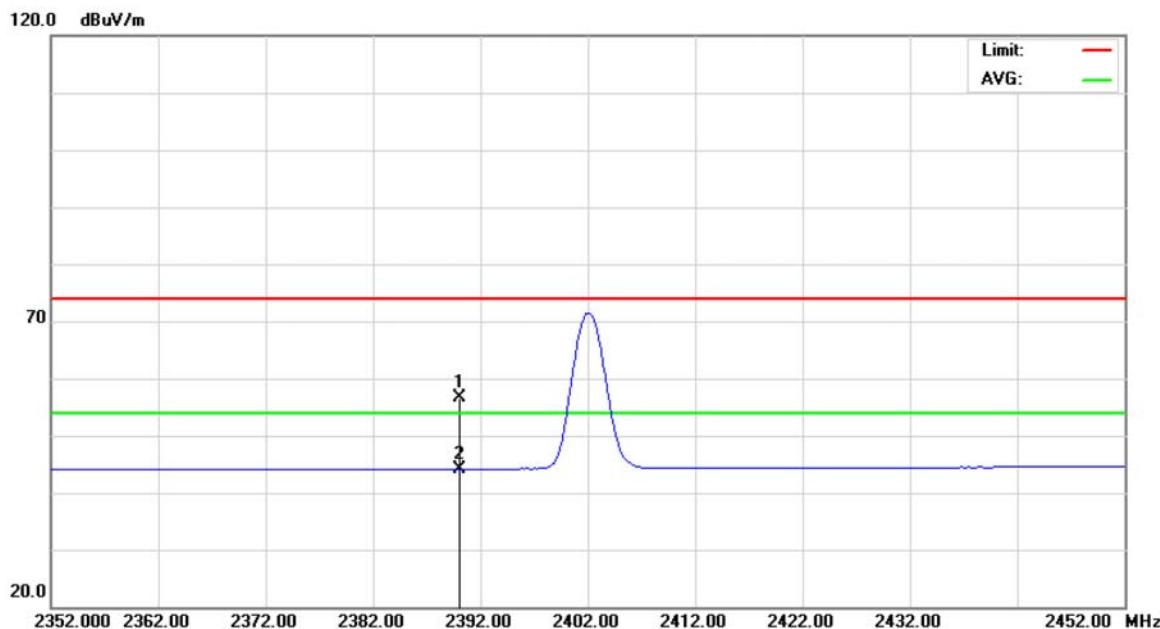
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	24°C	Relative Humidity	46%
Test Voltage	DC 6V		
Test Mode	Bluetooth/3 Mbps/2480 MHz		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.		

**Polarization: Vertical**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		2483.500	23.25	33.50	56.75	74.00	-17.25	peak	
2	*	2483.500	12.11	33.50	45.61	54.00	-8.39	Avg	



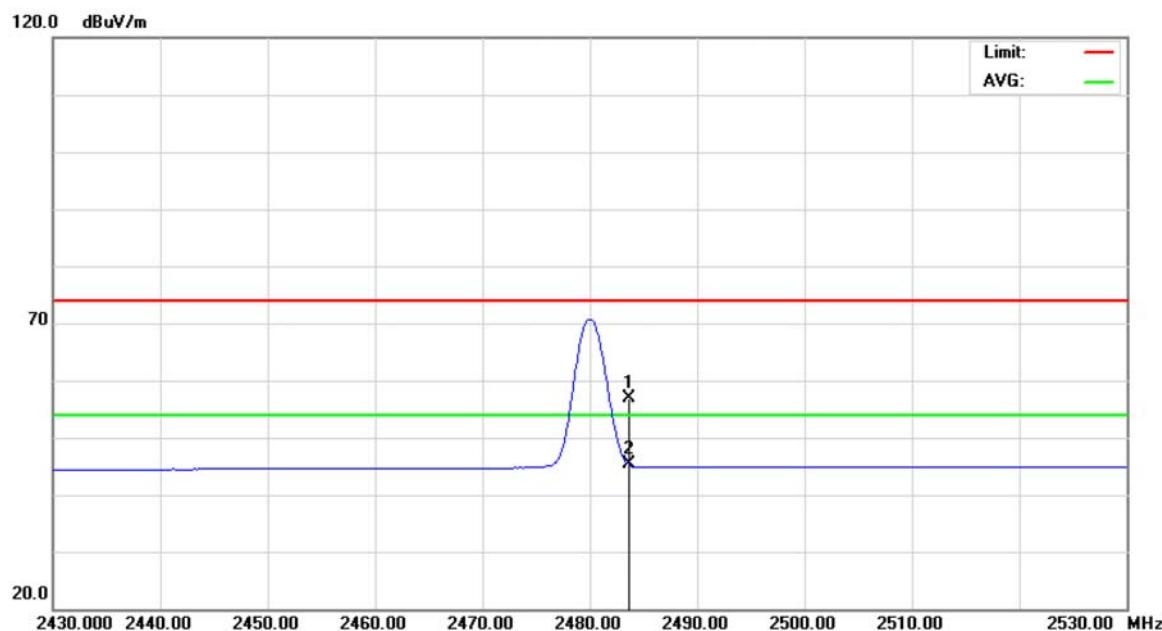
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	24°C	Relative Humidity	46%
Test Voltage	DC 6V		
Test Mode	Bluetooth/3 Mbps/2402 MHz		
NOTE	The transmitter was setup to transmit at the lowest channel and the field strength was measured at 2310-2390 MHz.		

**Polarization: Horizontal**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		2390.000	23.55	32.99	56.54	74.00	-17.46	peak	
2	*	2390.000	11.18	32.99	44.17	54.00	-9.83	Avg	



E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	24°C	Relative Humidity	46%
Test Voltage	DC 6V		
Test Mode	Bluetooth/3 Mbps/2480 MHz		
NOTE	The transmitter was setup to transmit at the highest channel and the field strength was measured at 2483.5-2500 MHz.		

**Polarization: Horizontal**

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Detector	Comment
			Level	Factor	ment				
1		2483.500	23.41	33.50	56.91	74.00	-17.09	peak	
2	*	2483.500	11.85	33.50	45.35	54.00	-8.65	Avg	



## 9 NUMBER OF HOPPING FREQUENCY

### 9.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Number of Hopping Channel	2400-2483.5	shall use at least 15 channels

### 9.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: **N/A:** denotes No Model Name, No Serial No. or No Calibration specified.

### 9.3 MEASURING INSTRUMENTS SETTING

Spectrum Analyzer	Parameter Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 9.4 TEST PROCEDURES

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 100 kHz, VBW=100 kHz, Sweep time = Auto.

### 9.5 TEST SETUP LAYOUT



### 9.6 DEVIATION FROM TEST STANDARD

No deviation

### 9.7 EUT OPERATING CONDITIONS

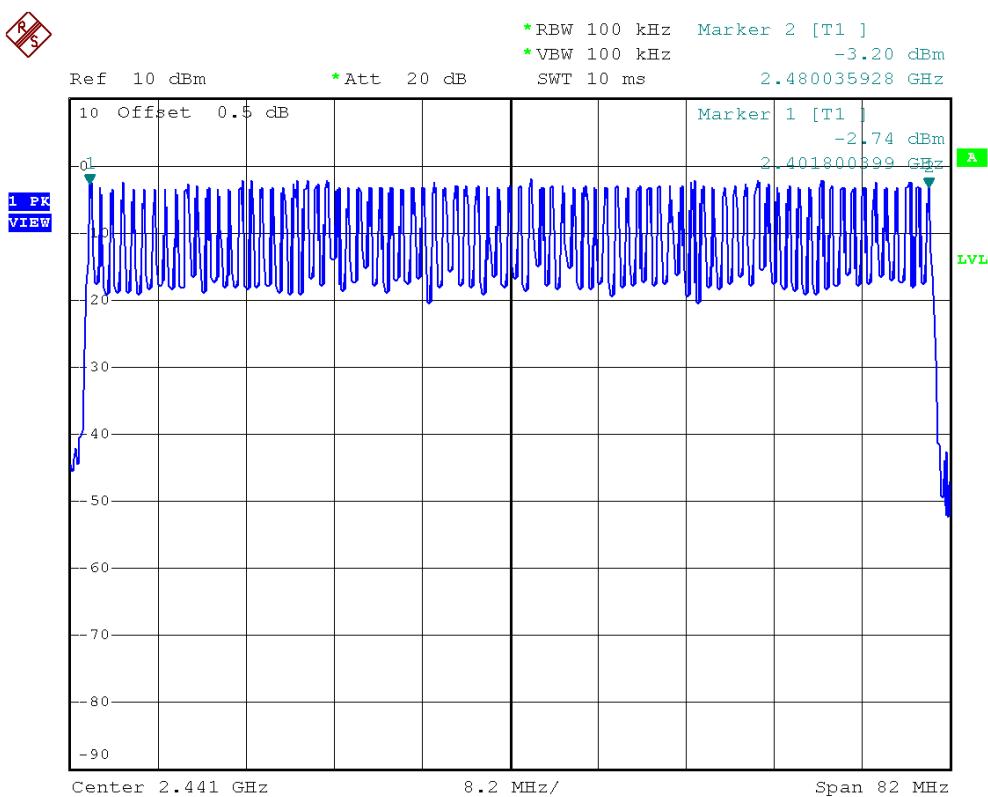
The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.



## 9.8 TEST RESULTS

E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/1 Mbps		

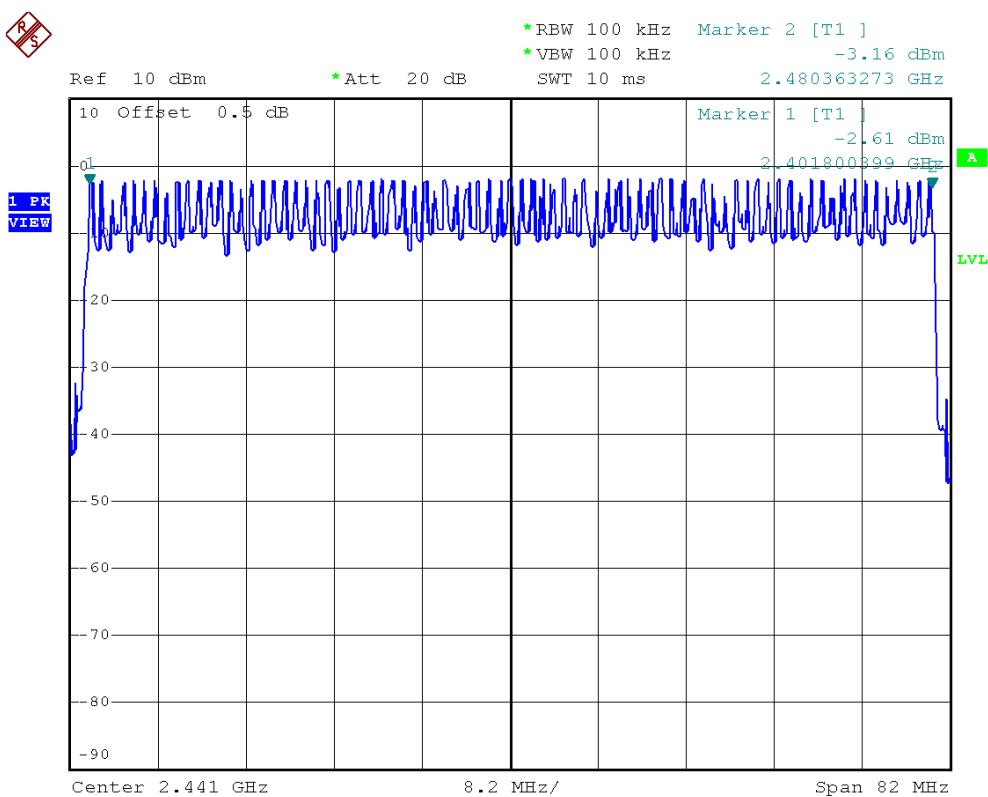
Number of Hopping Channel	Limit	Result
79	15	Pass





E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	60%
Test Voltage	DC 6V		
Test Mode	Bluetooth/3 Mbps		

Number of Hopping Channel	Limit	Result
79	15	Pass





## 10 AVERAGE TIME OF OCCUPANCY

### 10.1 LIMIT

Test Item	Frequency Range (MHz)	Limit
Average time of occupancy	2400-2483.5	shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 10.2 MEASUREMENT INSTRUMENTS LIST

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP-40	100129	Oct. 01, 2013

NOTE: **N/A**: denotes No Model Name, No Serial No. or No Calibration specified.

### 10.3 TEST PROCEDURES

- a. The transmitter output (antenna port) was connected to the spectrum analyzer
- b. Set RBW of spectrum analyzer to 100 kHz and VBW to 100 kHz.
- c. Use a video trigger with the trigger level set to enable triggering only on full pulses.
- d. Sweep Time is more than once pulse time.
- e. Set the center frequency on any frequency would be measure and set the frequency span to zero span.
- f. Measure the maximum time duration of one single pulse.
- g. Set the EUT for DH5, DH3 and DH1 packet transmitting.
- h. Measure the maximum time duration of one single pulse.
- i. DH5 Packet permit maximum  $1600 / 79 / 6 = 3.37$  hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $3.37 \times 31.6 = 106.6$  within 31.6 seconds.
- j. DH3 Packet permit maximum  $1600 / 79 / 4 = 5.06$  hops per second in each channel (3 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $5.06 \times 31.6 = 160$  within 31.6 seconds.
- k. DH1 Packet permit maximum  $1600 / 79 / 2 = 10.12$  hops per second in each channel (1 time slot RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times  $10.12 \times 31.6 = 320$  within 31.6 seconds.

### 10.4 TEST SETUP LAYOUT



### 10.5 DEVIATION FROM TEST STANDARD

No deviation



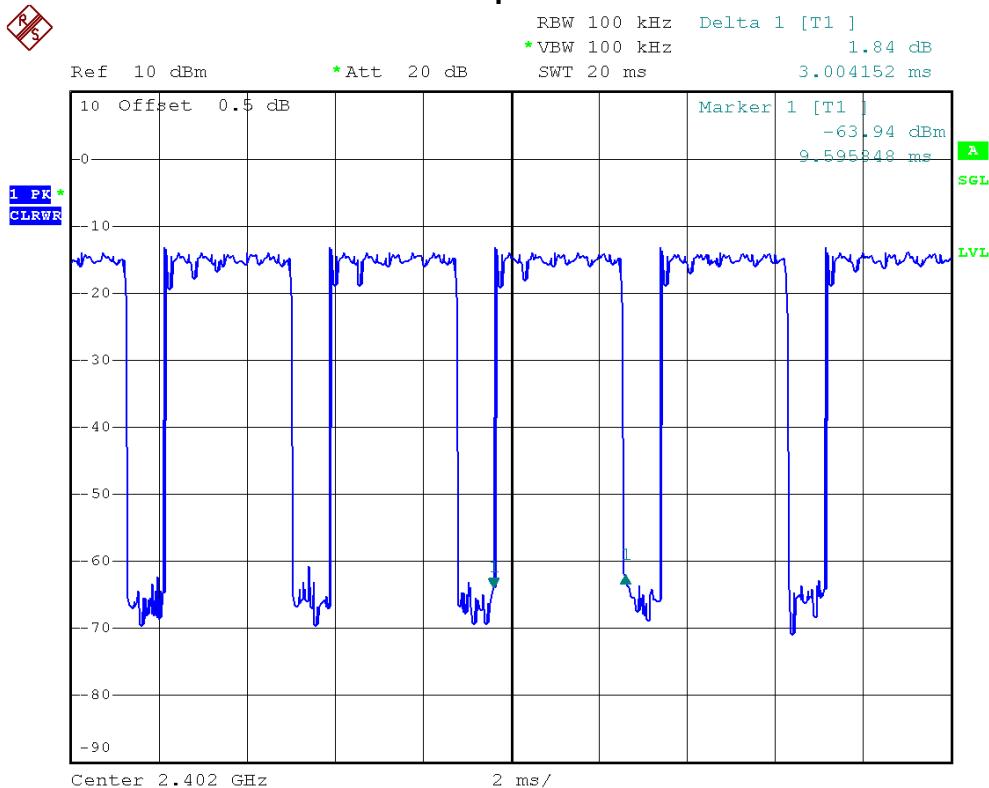
## **10.6 EUT OPERATING CONDITIONS**

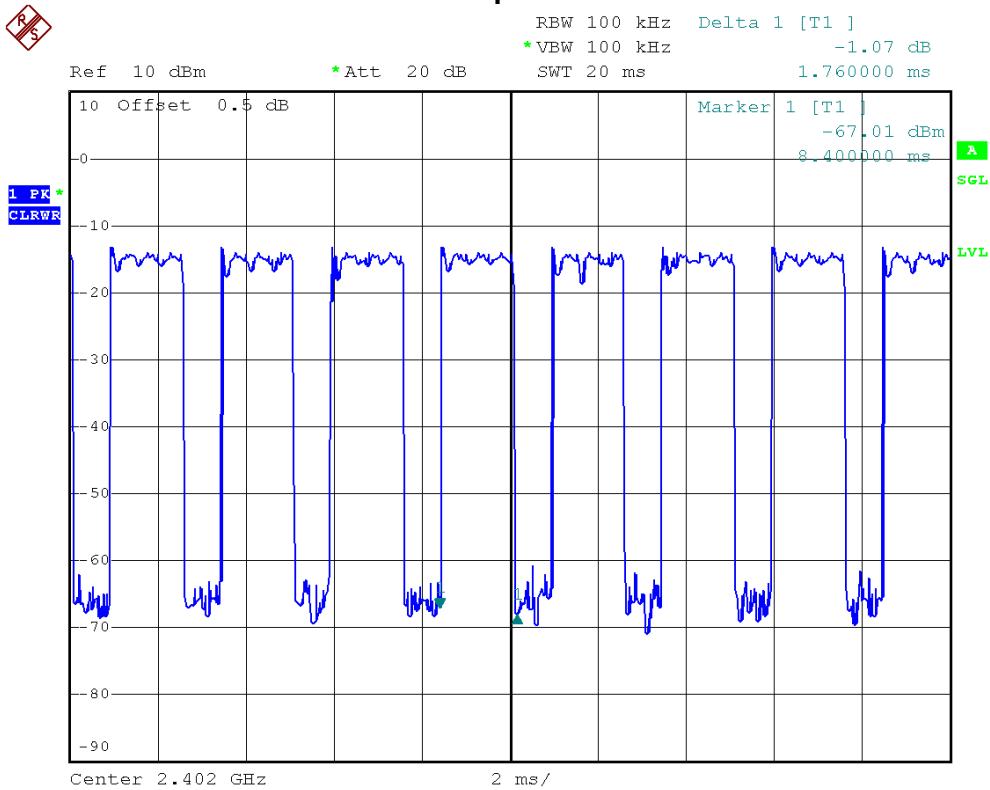
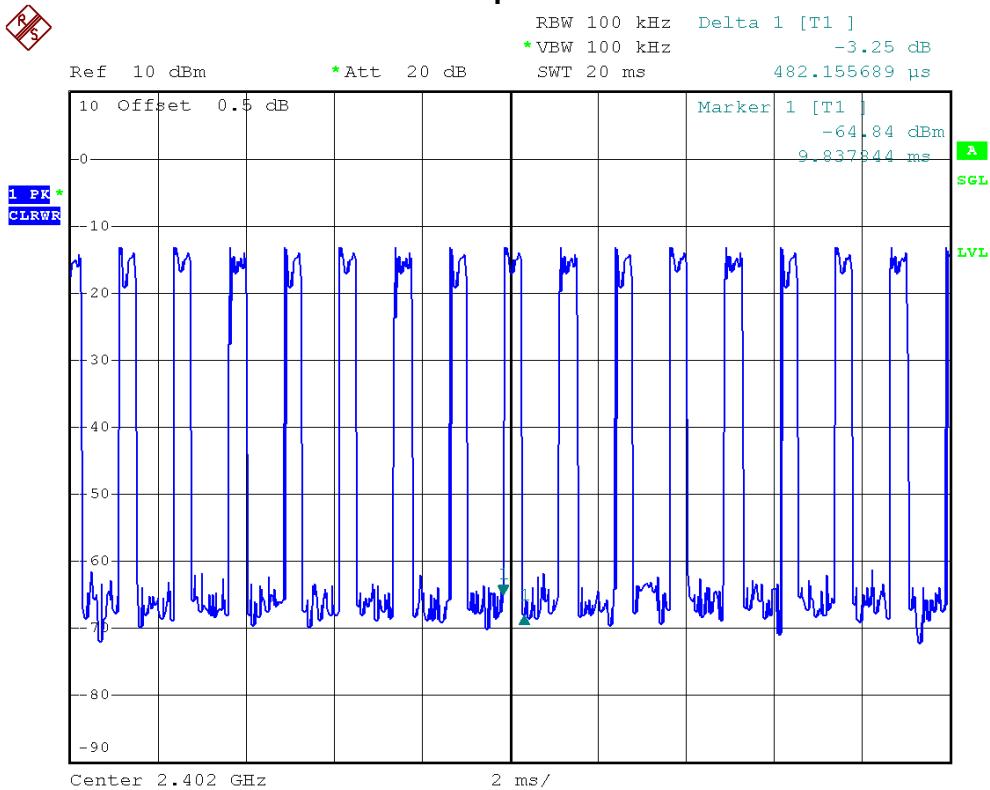
The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

**10.7 TEST RESULTS**

E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 6V		
Test Mode	Bluetooth/1 Mbps/2402 MHz		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limit (s)	Result
DH5	2402 MHz	3.0040	0.3204	0.4	PASS
DH3	2402 MHz	1.7600	0.2816	0.4	PASS
DH1	2402 MHz	0.4820	0.1542	0.4	PASS

**Bluetooth/1 Mbps/2402 MHz/DH5**

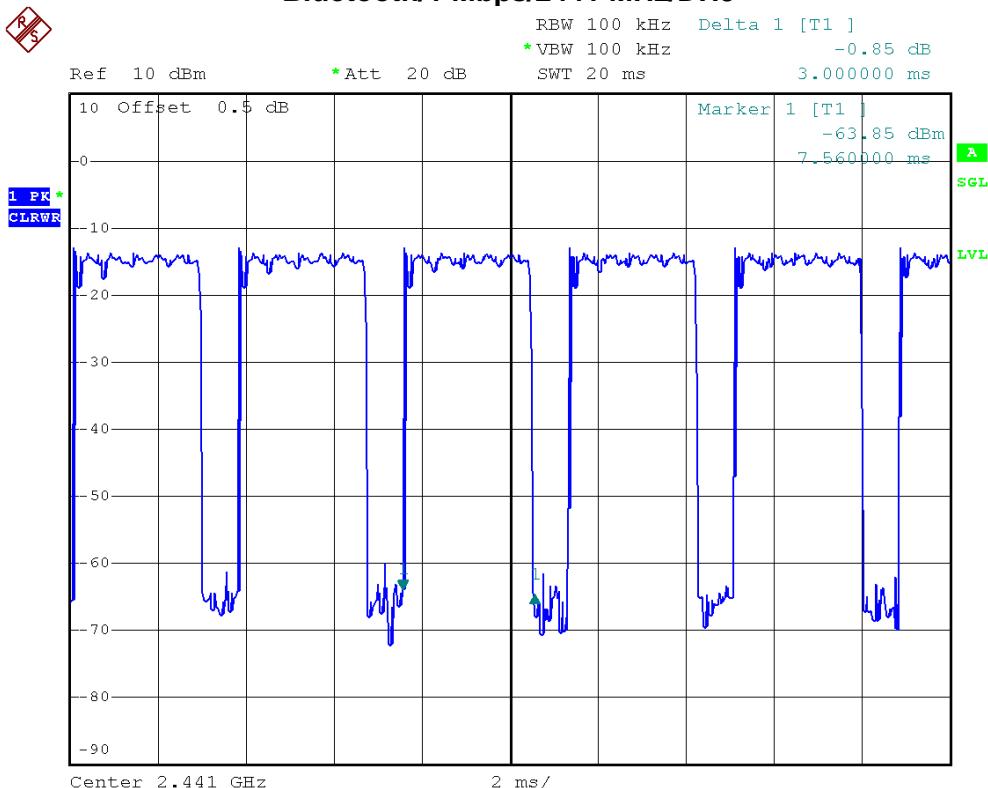
**Bluetooth/1 Mbps/2402 MHz/DH3****Bluetooth/1 Mbps/2402 MHz/DH1**

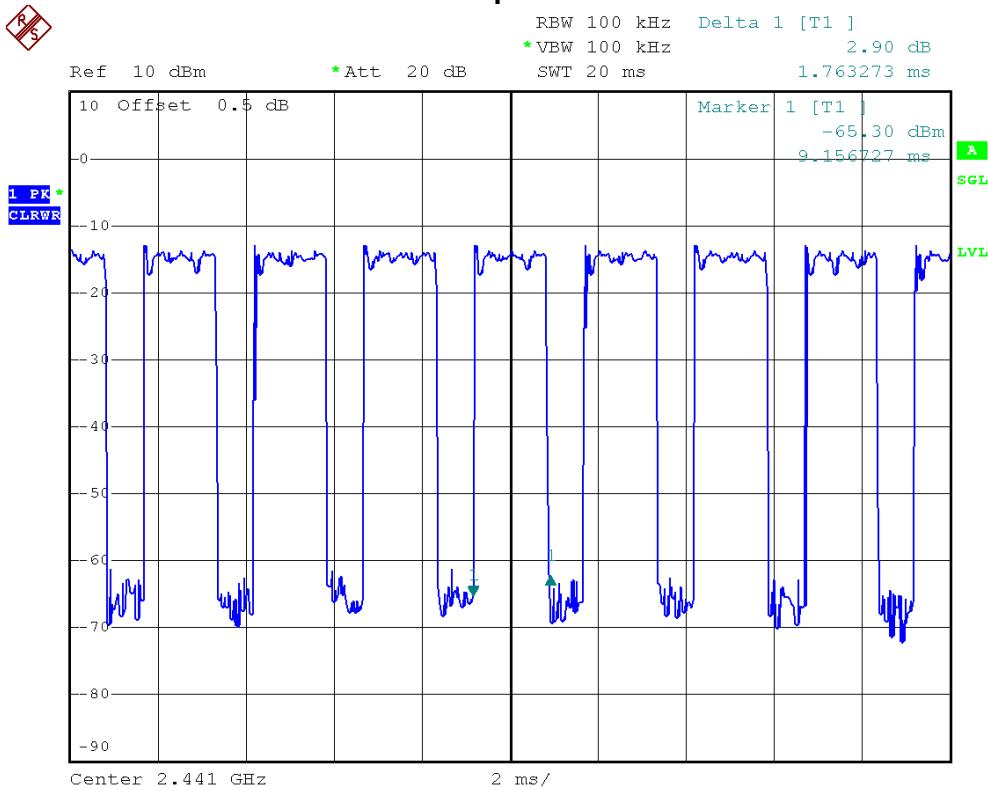
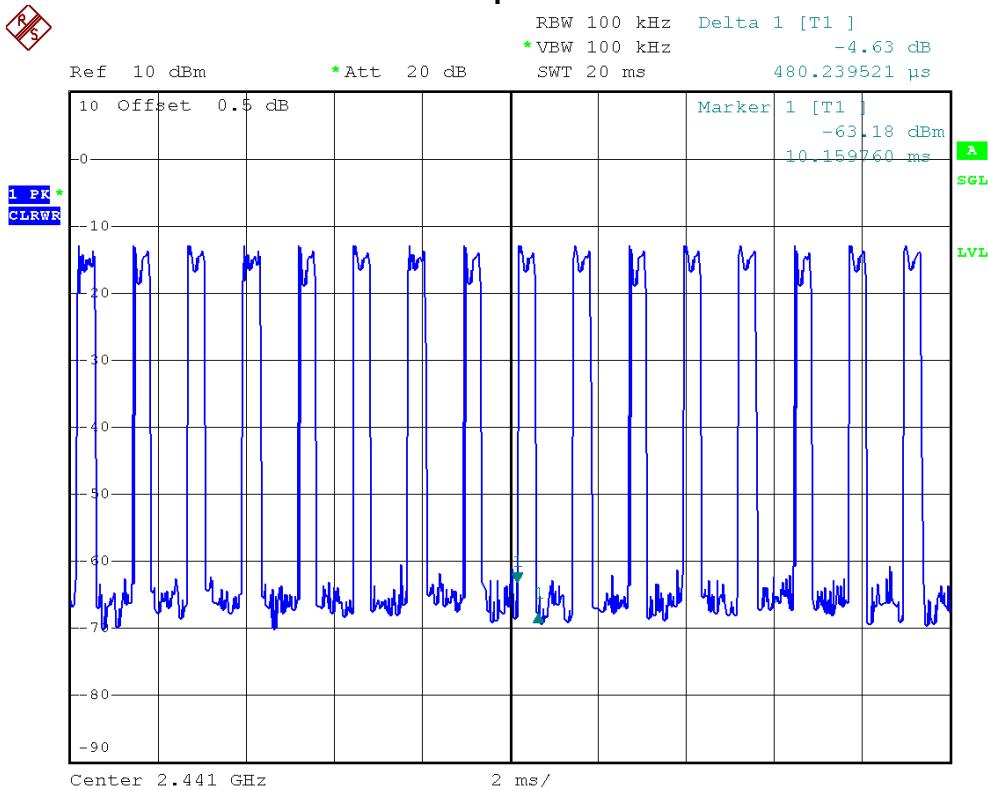


E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 6V		
Test Mode	Bluetooth/1 Mbps/2441 MHz		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limit (s)	Result
DH5	2441 MHz	3.0000	0.3200	0.4	PASS
DH3	2441 MHz	1.7630	0.2821	0.4	PASS
DH1	2441 MHz	0.4800	0.1536	0.4	PASS

**Bluetooth/1 Mbps/2441 MHz/DH5**

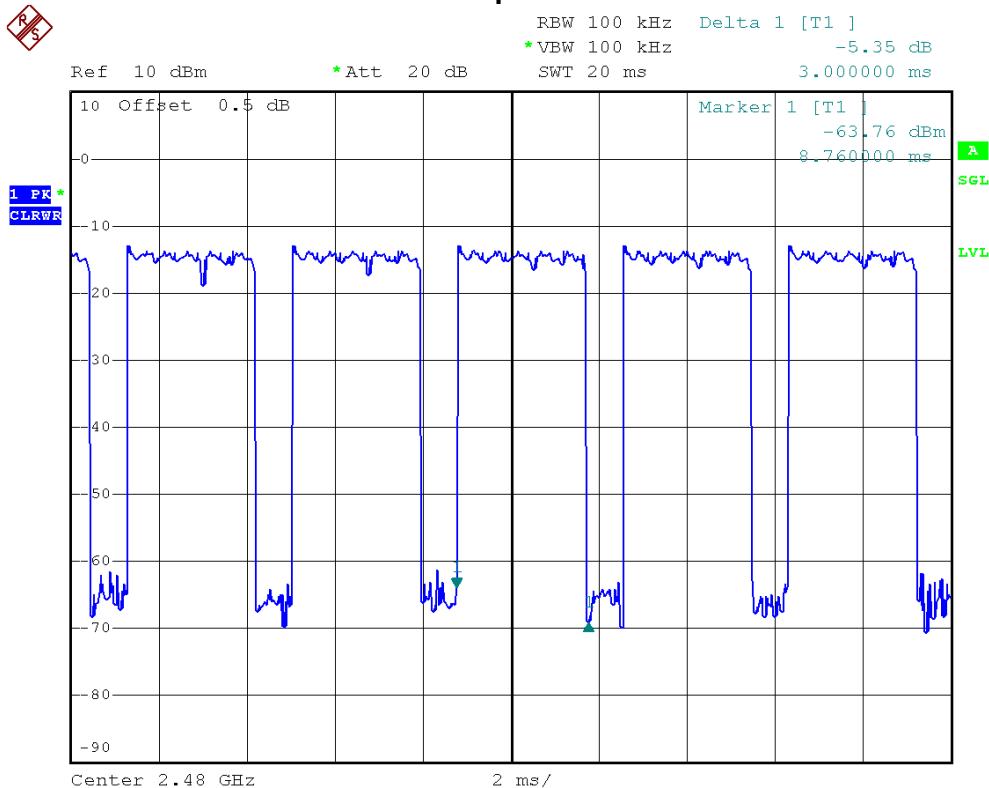


**Bluetooth/1 Mbps/2441 MHz/DH3****Bluetooth/1 Mbps/2441 MHz/DH1**



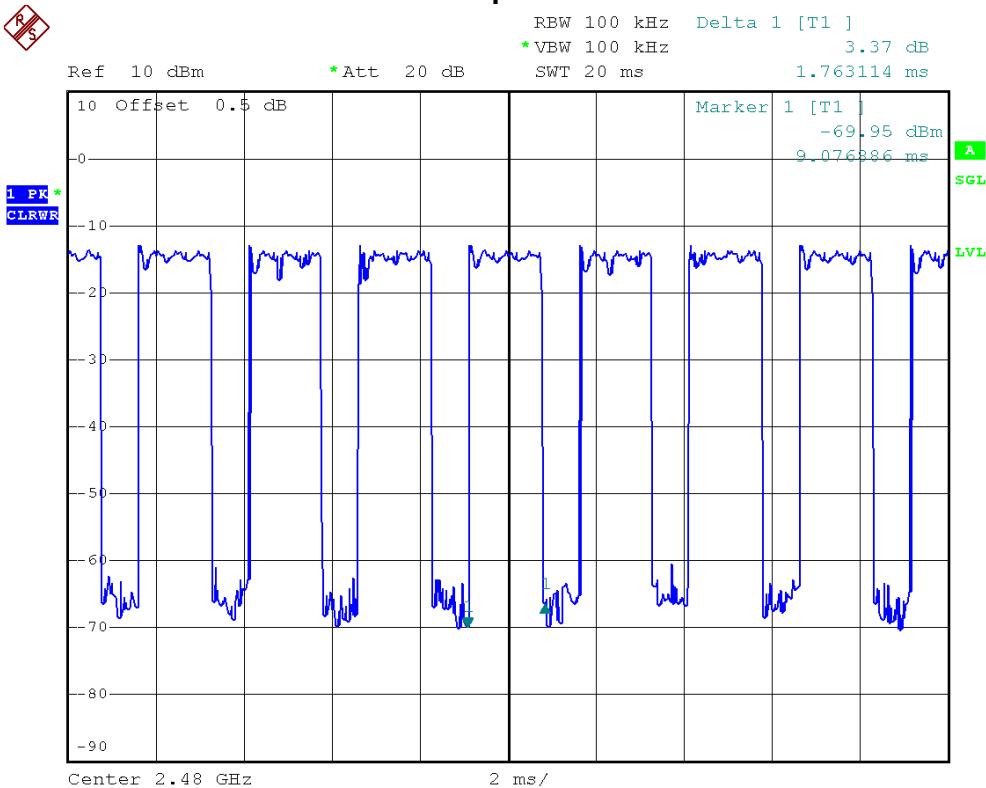
E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 6V		
Test Mode	Bluetooth/1 Mbps/2480 MHz		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limit (s)	Result
DH5	2480 MHz	3.0000	0.3200	0.4	PASS
DH3	2480 MHz	1.7630	0.2821	0.4	PASS
DH1	2480 MHz	0.4820	0.1542	0.4	PASS

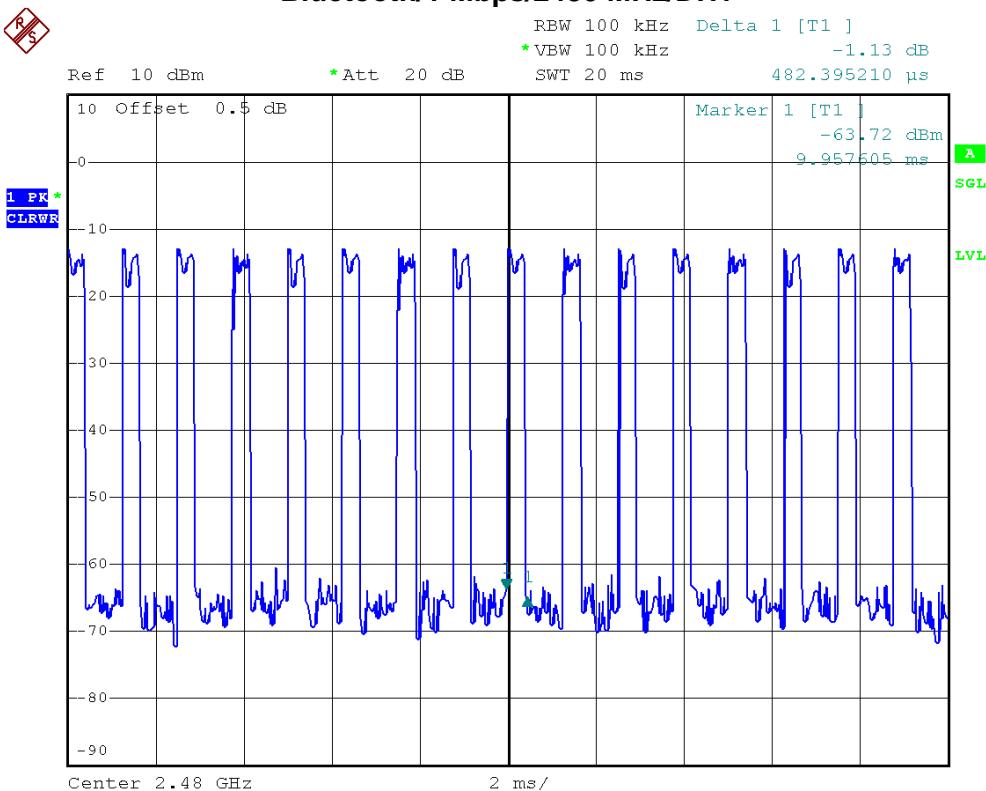
**Bluetooth/1 Mbps/2480 MHz/DH5**



**Bluetooth/1 Mbps/2480 MHz/DH3**



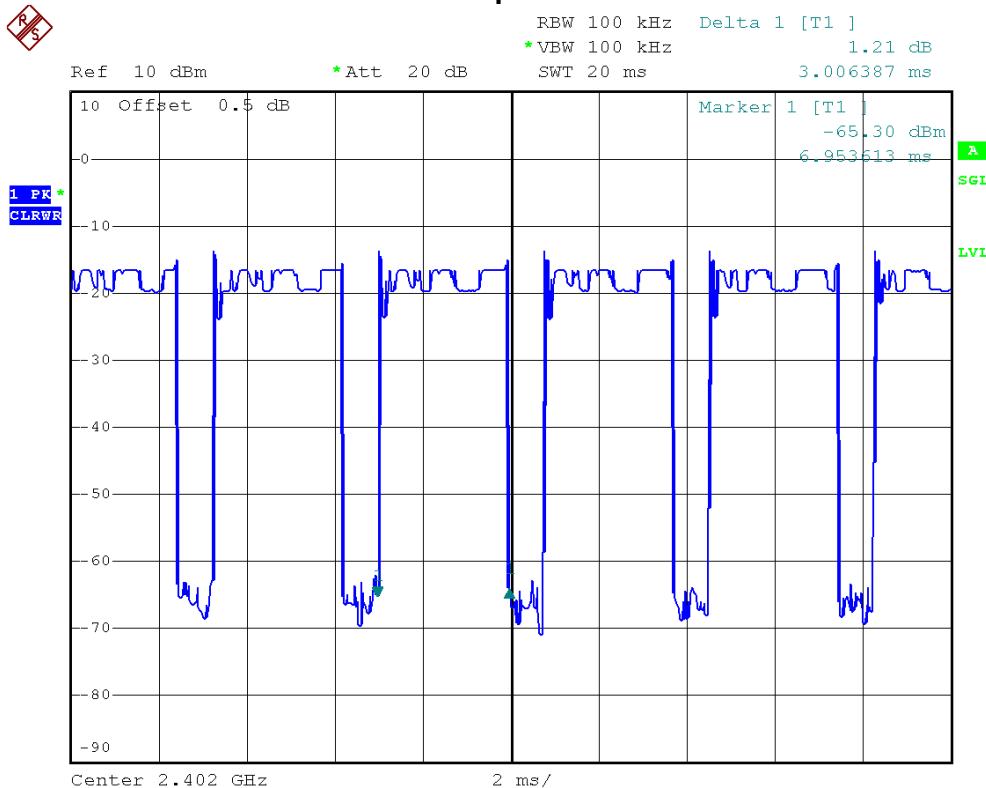
**Bluetooth/1 Mbps/2480 MHz/DH1**

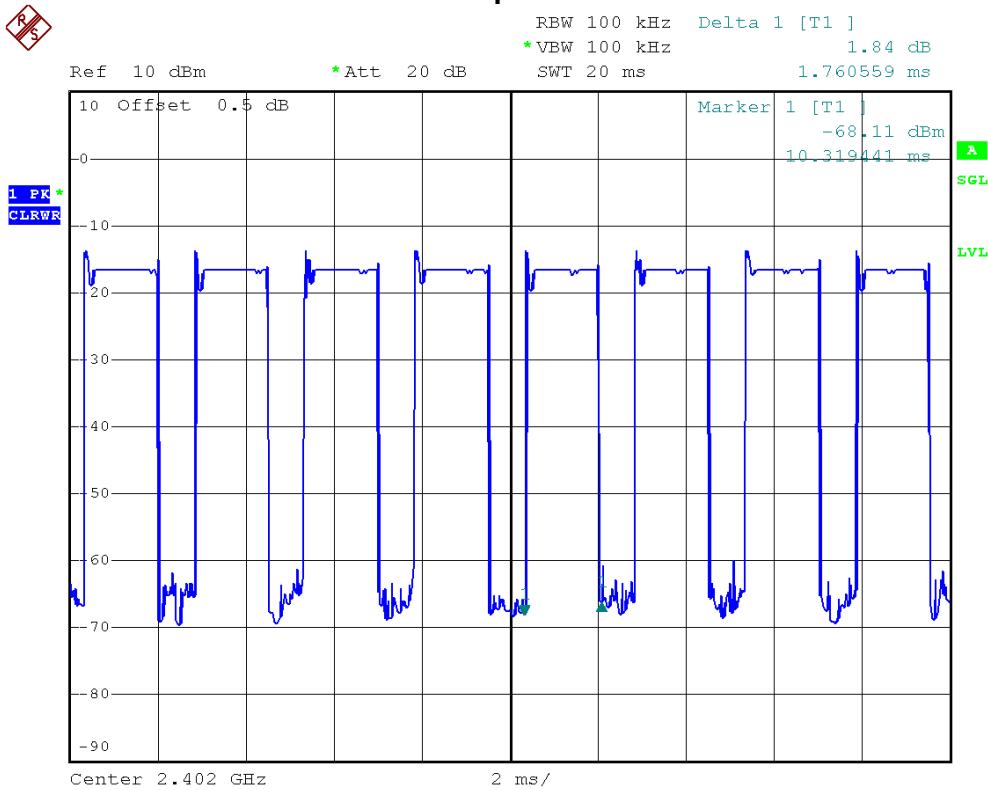
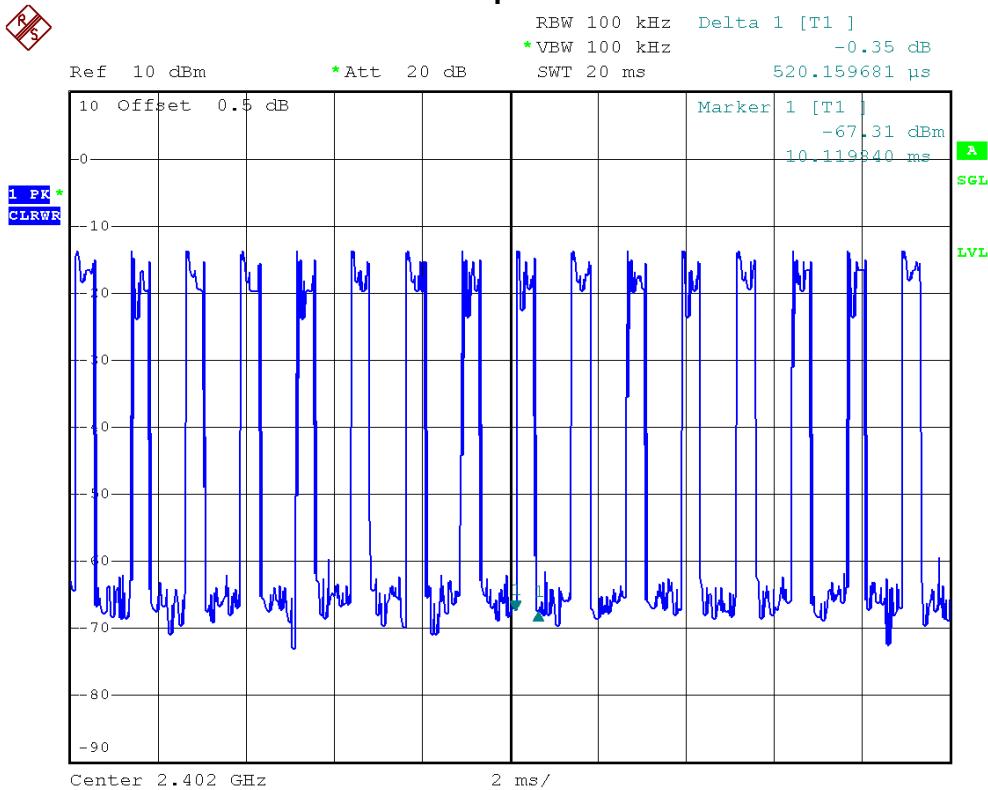




E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 6V		
Test Mode	Bluetooth/3 Mbps/2402 MHz		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limit (s)	Result
DH5	2402 MHz	3.0000	0.3200	0.4	PASS
DH3	2402 MHz	1.7600	0.2816	0.4	PASS
DH1	2402 MHz	0.5200	0.1664	0.4	PASS

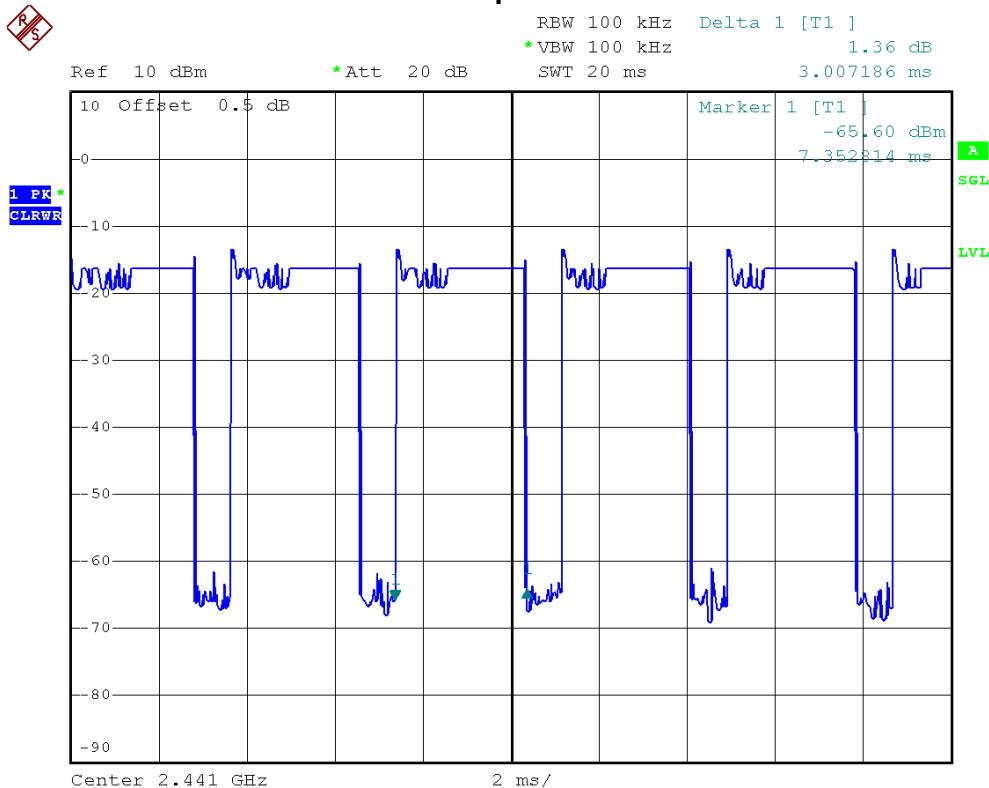
**Bluetooth/3 Mbps/2402 MHz/DH5**

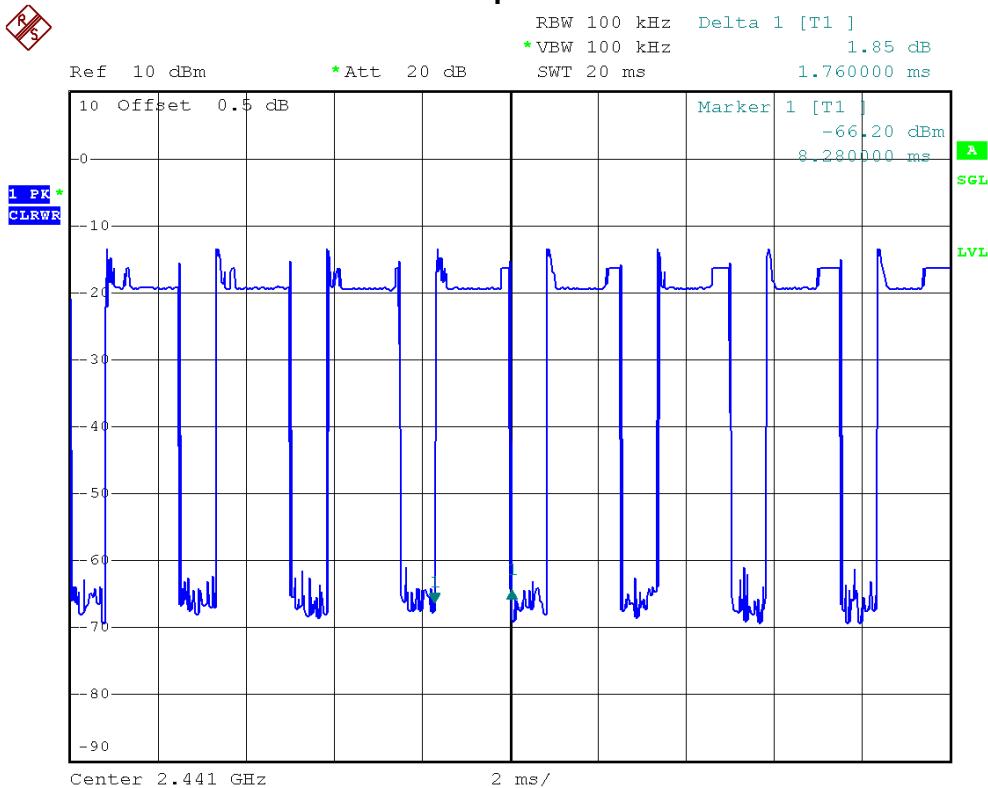
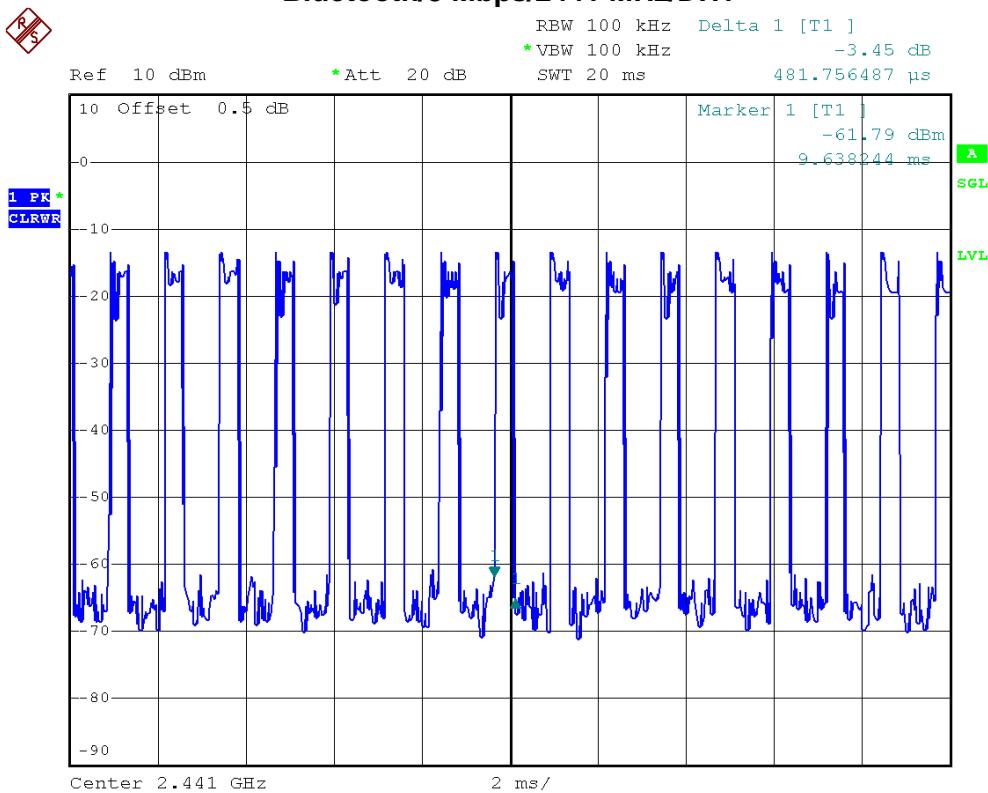
**Bluetooth/3 Mbps/2402 MHz/DH3****Bluetooth/3 Mbps/2402 MHz/DH1**



E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 6V		
Test Mode	Bluetooth/3 Mbps/2441 MHz		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limit (s)	Result
DH5	2441 MHz	3.0000	0.3200	0.4	PASS
DH3	2441 MHz	1.7600	0.2816	0.4	PASS
DH1	2441 MHz	0.4810	0.1539	0.4	PASS

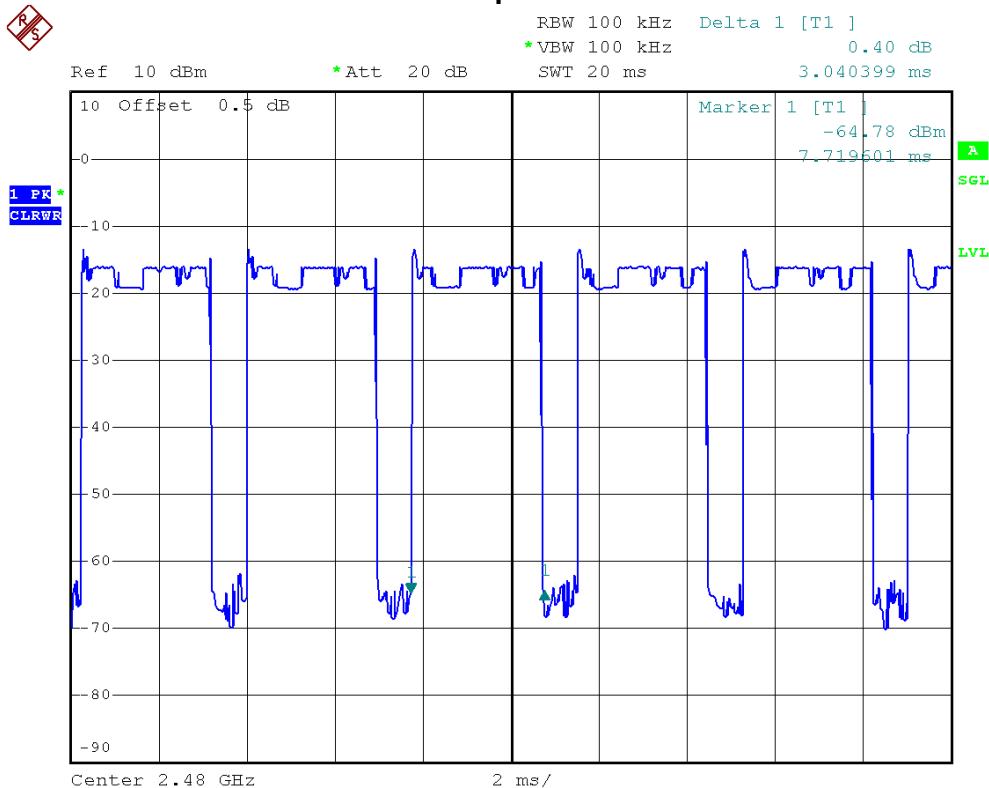
**Bluetooth/3 Mbps/2441 MHz/DH5**

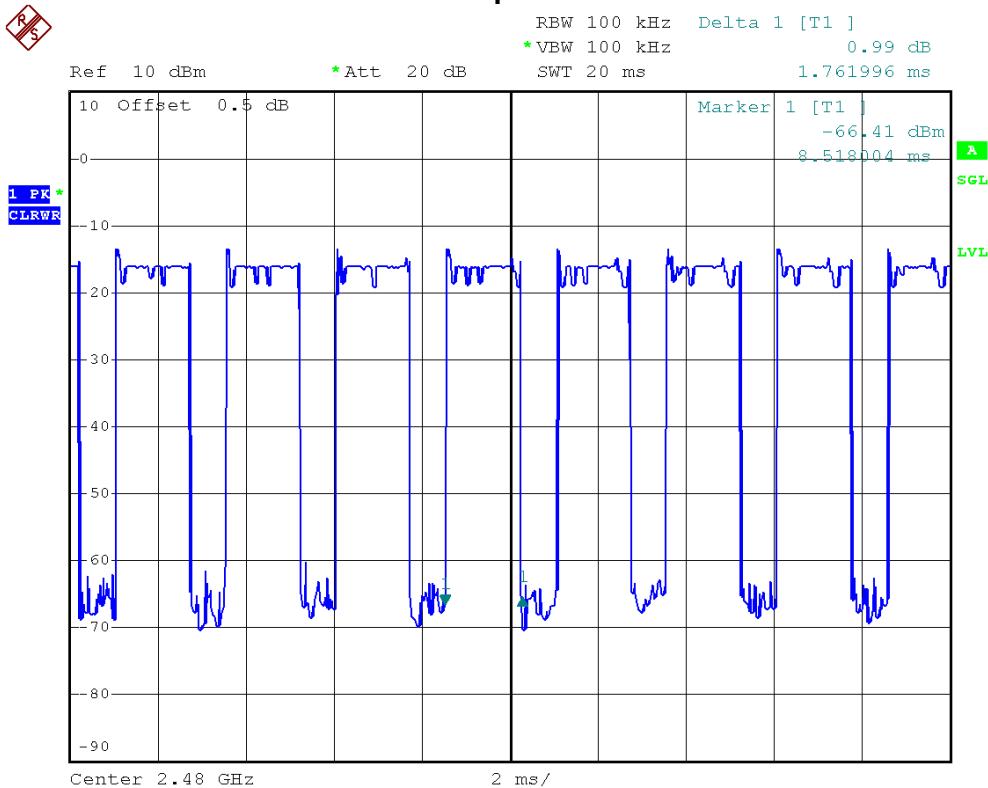
**Bluetooth/3 Mbps/2441 MHz/DH3****Bluetooth/3 Mbps/2441 MHz/DH1**



E.U.T	AEROBLUETOOTH	Model Name	ML90202
Temperature	26°C	Relative Humidity	46%
Test Voltage	DC 6V		
Test Mode	Bluetooth/3 Mbps/2480 MHz		

Data Packet	Frequency	Pulse Duration (ms)	Dwell Time (s)	Limit (s)	Result
DH5	2480 MHz	3.0400	0.3243	0.4	PASS
DH3	2480 MHz	1.7600	0.2816	0.4	PASS
DH1	2480 MHz	0.4800	0.1536	0.4	PASS

**Bluetooth/3 Mbps/2480 MHz/DH5**

**Bluetooth/3 Mbps/2480 MHz/DH3****Bluetooth/3 Mbps/2480 MHz/DH1**