

Test Laboratory: Compliance Certification Services Inc.

D2450V2 SN-728 Head

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:728

Communication System: CW2450; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.91$ mho/m; $\epsilon_r = 51.7$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.2 deg C; Liquid Temperature: 23.0 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.12, 6.12, 6.12);
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23.7; Postprocessing SW: SEMCAD, V1.8 Build 161

Pin=250mW,d=10mm/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 9.90 mW/g

Pin=250mW,d=10mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 88.1 V/m; Power Drift = -0.087 dB



Peak SAR (extrapolated) = 32.6 W/kg

SAR(1 g) = 13.9 mW/g; SAR(10 g) = 6.08 mW/g

Maximum value of SAR (measured) = 15.5 mW/g

Pin=250mW,d=10mm/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 15.6 mW/g

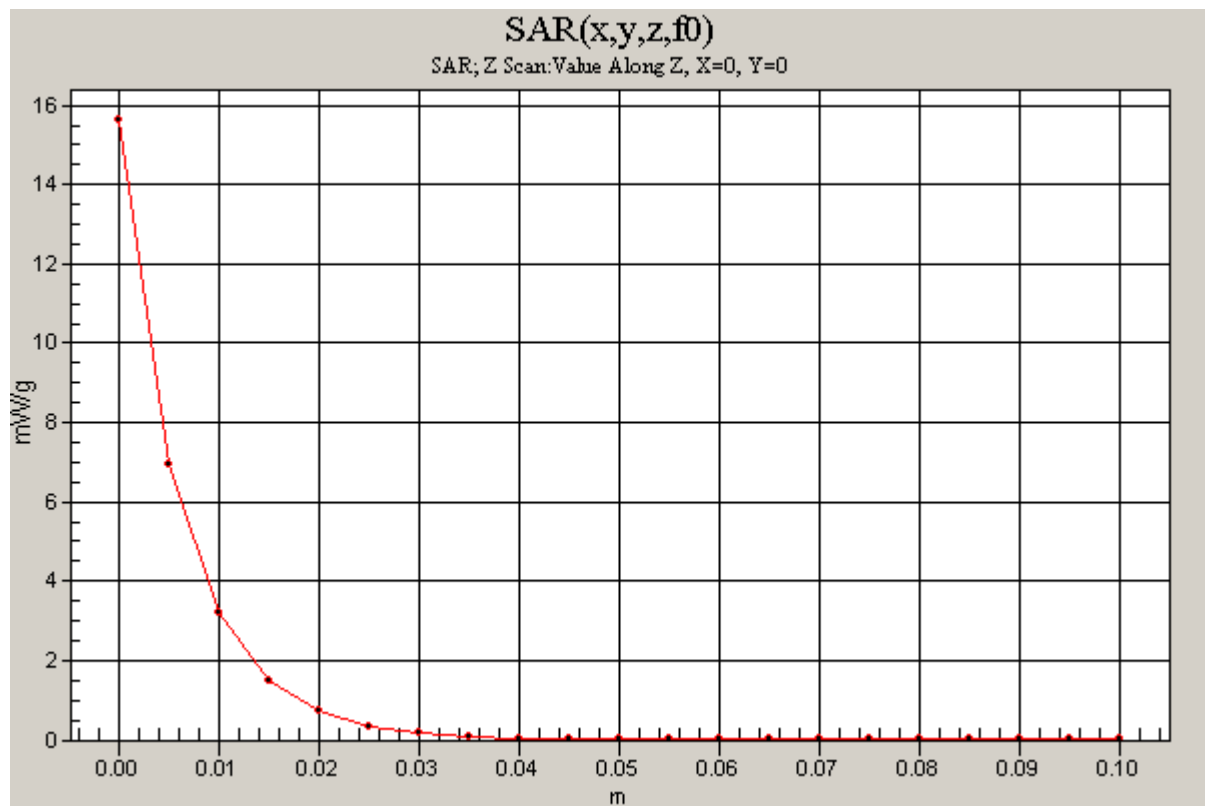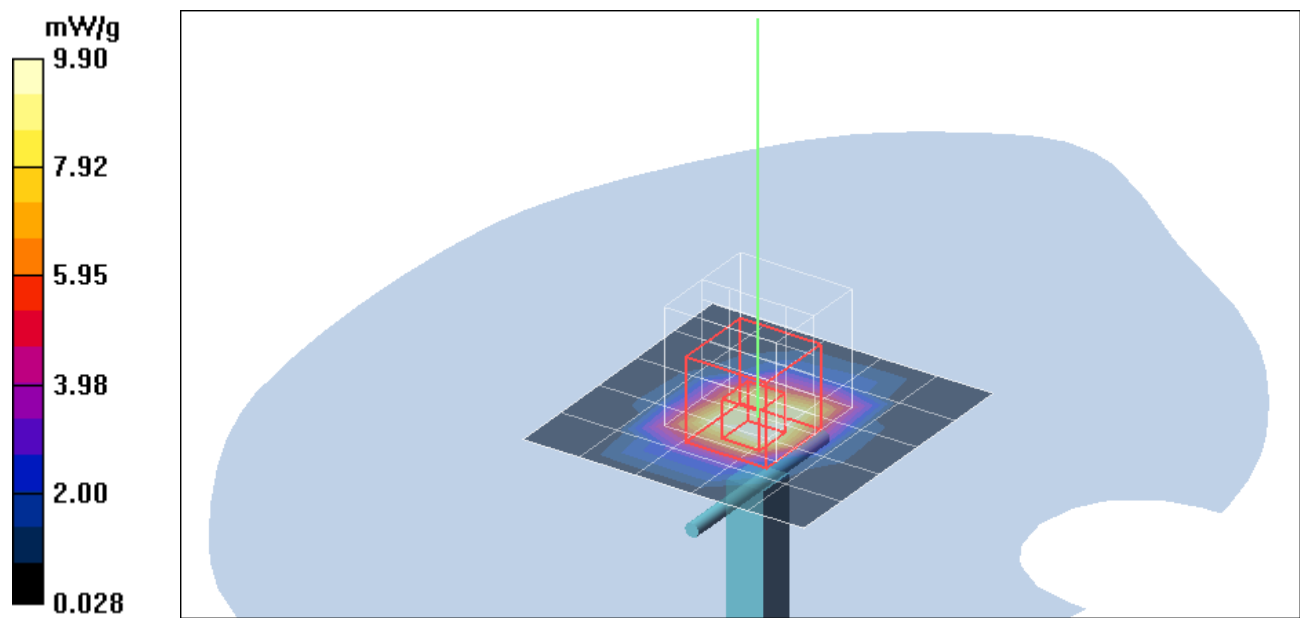

Test Laboratory: Compliance Certification Services Inc.

802.11b Back parallel Touch mode

DUT: T700; Type: Ultra mobile PC; Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.2 deg C; Liquid Temperature: 23.0 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.12, 6.12, 6.12);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Middle CH Rate=1M bit/Area Scan (11x18x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.247 mW/g

Middle CH Rate=1M bit/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = -0.013 dB



Peak SAR (extrapolated) = 0.420 W/kg

SAR(1 g) = 0.201 mW/g; SAR(10 g) = 0.107 mW/g

Maximum value of SAR (measured) = 0.277 mW/g

Middle CH Rate=1M bit/Z Scan (1x1x51): Measurement grid: dx=20mm, dy=20mm, dz=2mm

Maximum value of SAR (measured) = 0.280 mW/g

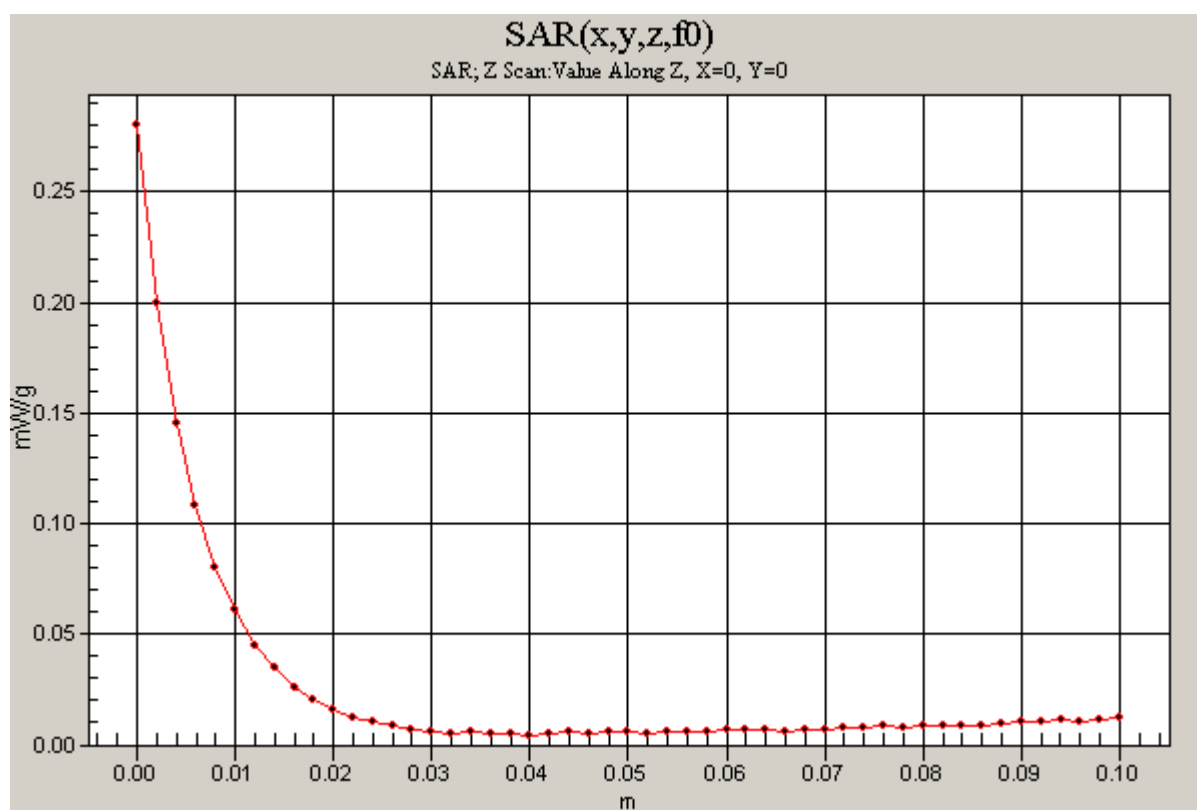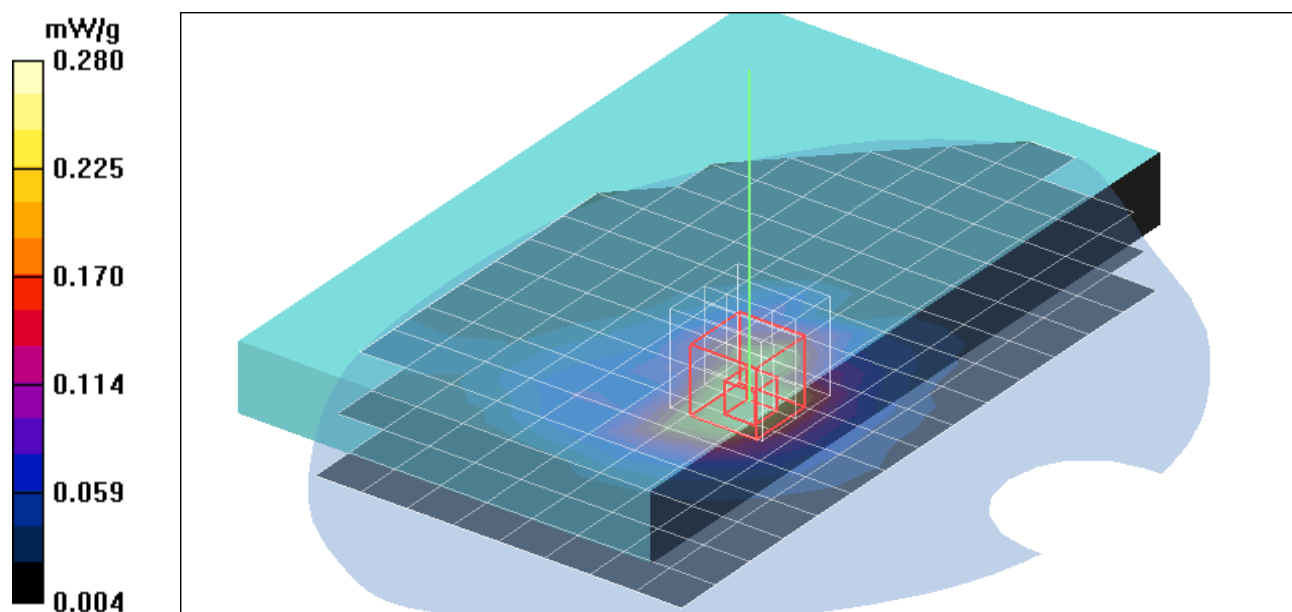

Test Laboratory: Compliance Certification Services Inc.

802.11g Back parallel Touch mode

DUT: T700; Type: Ultra mobile PC; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.2 deg C; Liquid Temperature: 23.0 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.12, 6.12, 6.12);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Middle CH Rate=6M bit/Area Scan (9x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.250 mW/g

Middle CH Rate=6M bit/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 0.397 W/kg

SAR(1 g) = 0.191 mW/g; SAR(10 g) = 0.102 mW/g

Maximum value of SAR (measured) = 0.258 mW/g

Middle CH Rate=6M bit/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 10.1 V/m; Power Drift = -0.001 dB



Peak SAR (extrapolated) = 0.383 W/kg

SAR(1 g) = 0.169 mW/g; SAR(10 g) = 0.091 mW/g

Maximum value of SAR (measured) = 0.248 mW/g

Middle CH Rate=6M bit/Z Scan (1x1x51): Measurement grid: dx=20mm, dy=20mm, dz=2mm

Maximum value of SAR (measured) = 0.262 mW/g

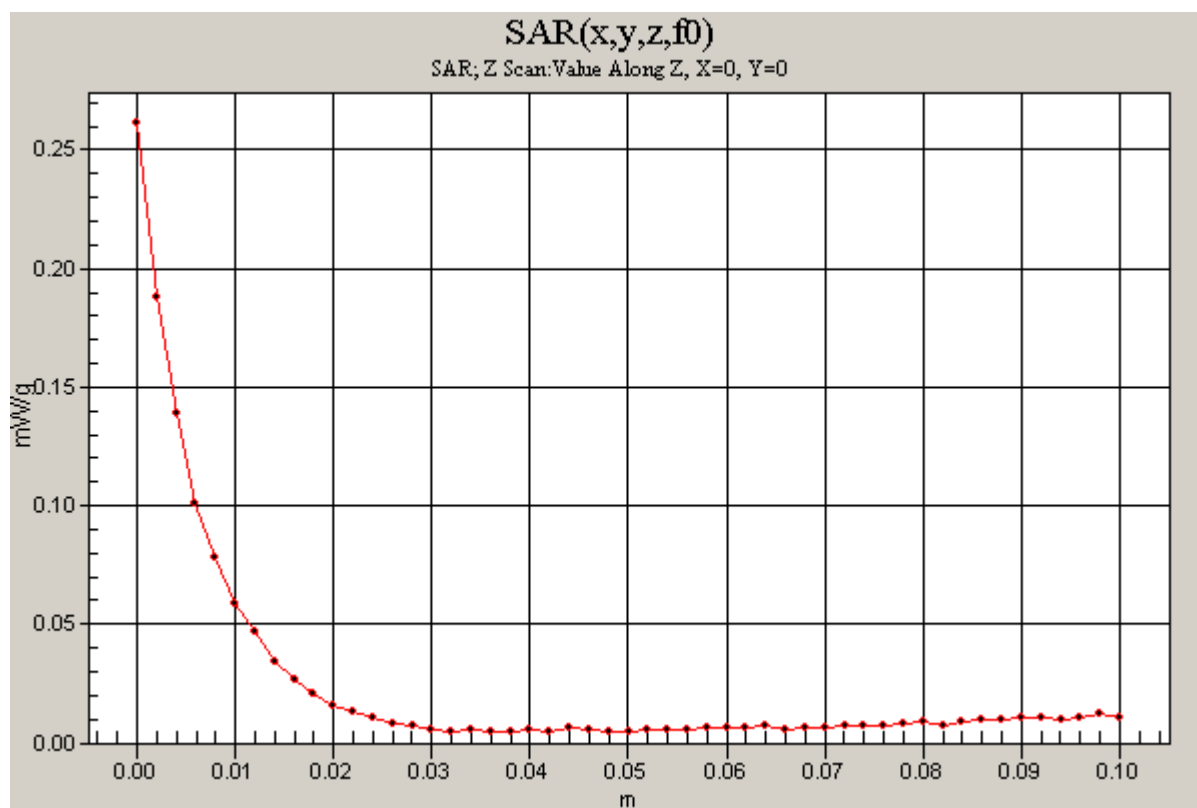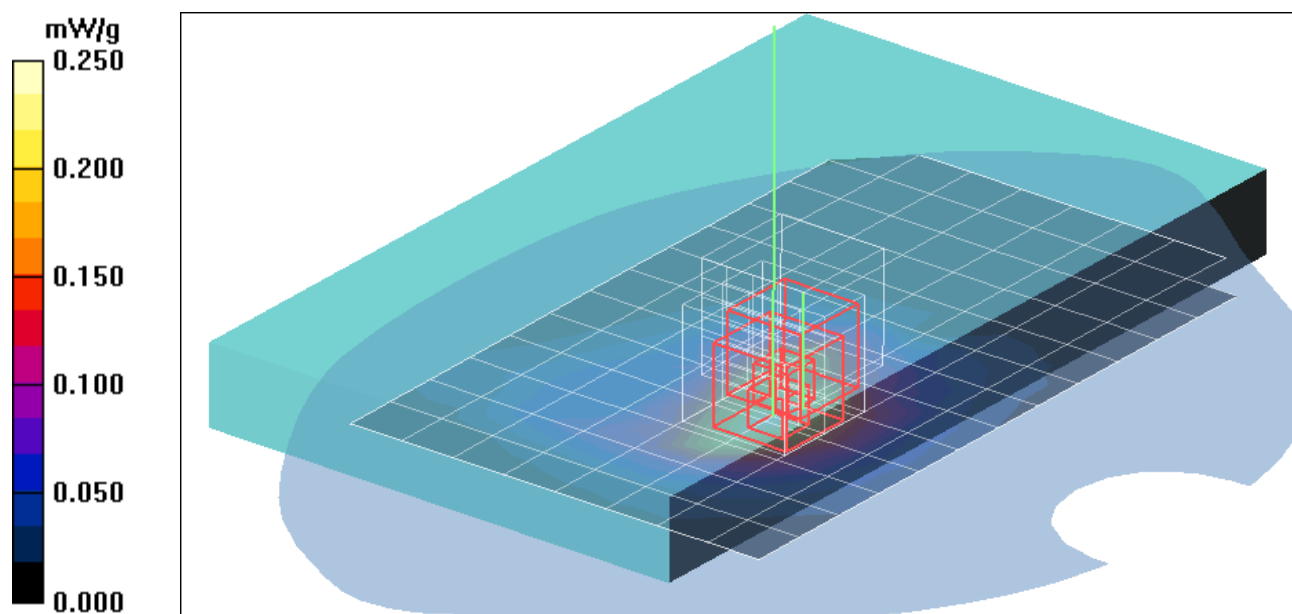

Test Laboratory: Compliance Certification Services Inc.

802.11b Bottom edge Touch mode

DUT: T700; Type: Ultra mobile PC; Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 52$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.2 deg C; Liquid Temperature: 23.0 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.12, 6.12, 6.12);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Low CH Rate=1M bit/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.08 mW/g


Low CH Rate=1M bit/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.8 V/m; Power Drift = -0.024 dB

Peak SAR (extrapolated) = 1.79 W/kg

SAR(1 g) = 0.870 mW/g; SAR(10 g) = 0.429 mW/g

Maximum value of SAR (measured) = 1.18 mW/g

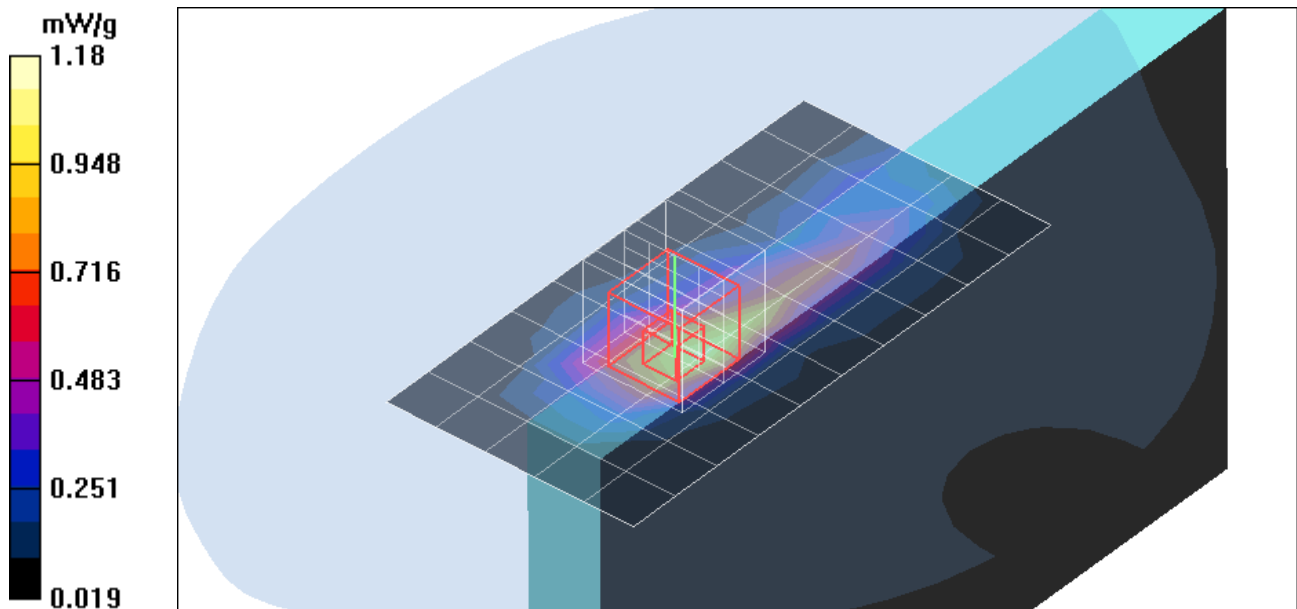

Test Laboratory: Compliance Certification Services Inc.

802.11b Bottom edge Touch mode

DUT: T700; Type: Ultra mobile PC; Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.2 deg C; Liquid Temperature: 23.0 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.12, 6.12, 6.12);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Middle CH Rate=1M bit/Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.20 mW/g

Middle CH Rate=1M bit/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.8 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 1.87 W/kg

SAR(1 g) = 0.894 mW/g; SAR(10 g) = 0.441 mW/g

Maximum value of SAR (measured) = 1.22 mW/g


Middle CH Rate=1M bit/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.8 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 1.91 W/kg

SAR(1 g) = 0.695 mW/g; SAR(10 g) = 0.318 mW/g

Maximum value of SAR (measured) = 1.13 mW/g

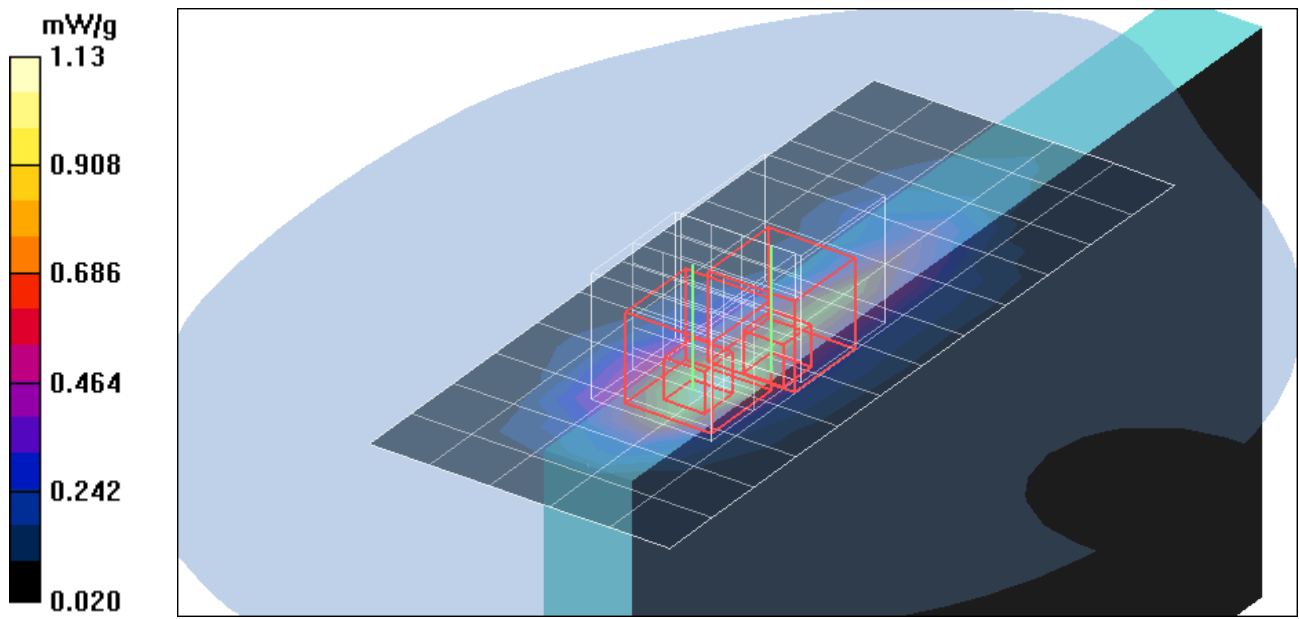

Test Laboratory: Compliance Certification Services Inc.

802.11b Bottom edge Touch mode

DUT: T700; Type: Ultra mobile PC; Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.93 \text{ mho/m}$; $\epsilon_r = 51.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Air Temperature: 24.2 deg C; Liquid Temperature: 23.0 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.12, 6.12, 6.12);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

High CH Rate=1M bit/Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.05 mW/g

High CH Rate=1M bit/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.7 V/m; Power Drift = -0.042 dB

Peak SAR (extrapolated) = 1.94 W/kg

SAR(1 g) = 0.924 mW/g; SAR(10 g) = 0.448 mW/g

Maximum value of SAR (measured) = 1.28 mW/g

High CH Rate=1M bit/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.7 V/m; Power Drift = -0.042 dB



Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.635 mW/g; SAR(10 g) = 0.301 mW/g

Maximum value of SAR (measured) = 0.902 mW/g

High CH Rate=1M bit/Z Scan (1x1x26): Measurement grid: dx=20mm, dy=20mm, dz=4mm

Maximum value of SAR (measured) = 1.30 mW/g

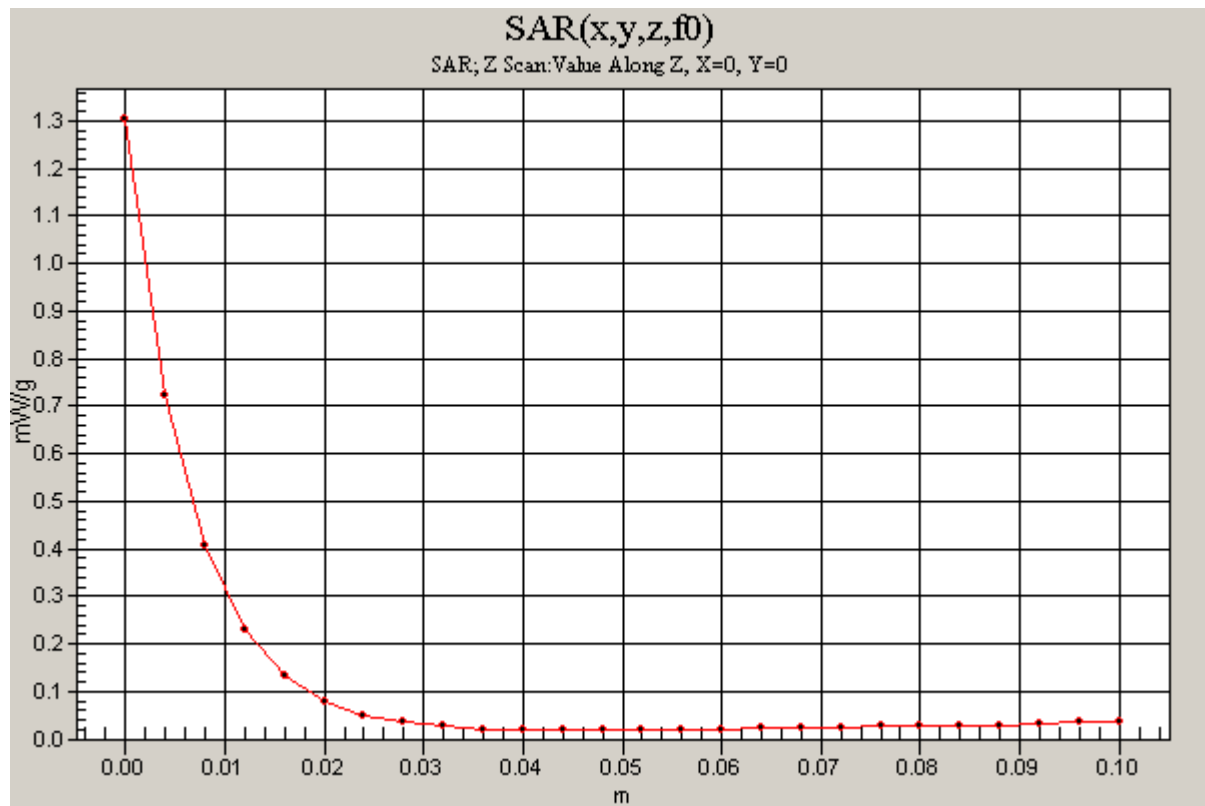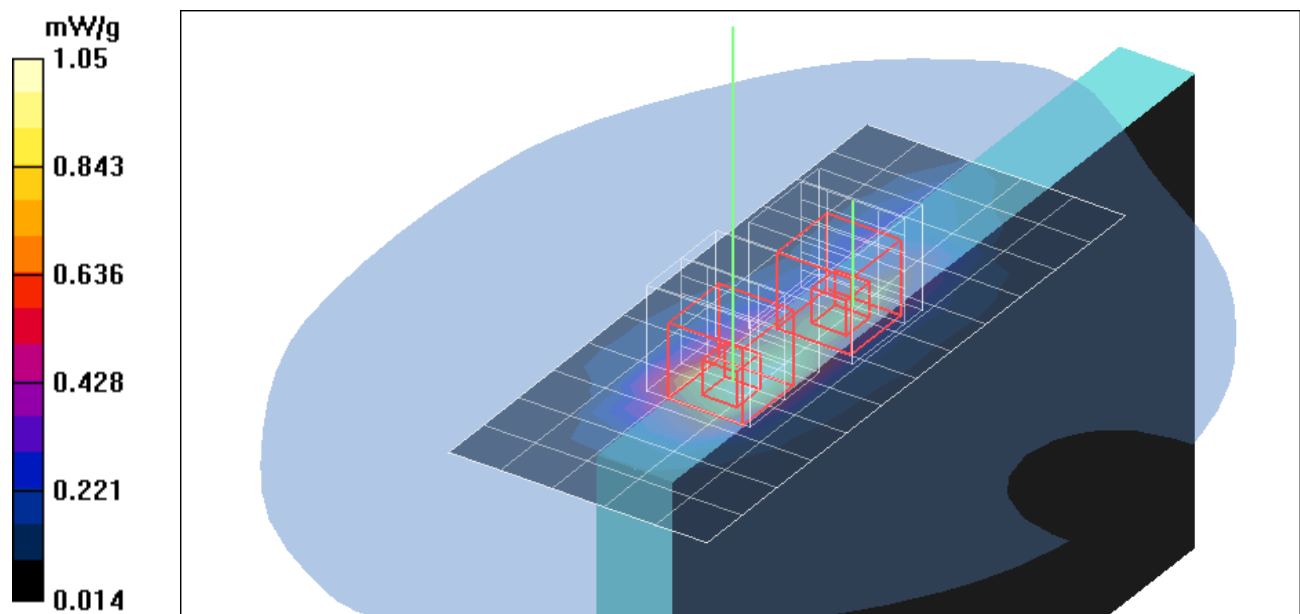

Test Laboratory: Compliance Certification Services Inc.

802.11g Bottom edge Touch mode

DUT: T700; Type: Ultra mobile PC; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.83 \text{ mho/m}$; $\epsilon_r = 52$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Air Temperature: 24.2 deg C; Liquid Temperature: 23.0 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.12, 6.12, 6.12);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Low CH Rate=6M bit/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.945 mW/g

Low CH Rate=6M bit/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.4 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 0.787 mW/g; SAR(10 g) = 0.383 mW/g

Maximum value of SAR (measured) = 1.09 mW/g


Low CH Rate=6M bit/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.4 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.530 mW/g; SAR(10 g) = 0.255 mW/g

Maximum value of SAR (measured) = 0.766 mW/g

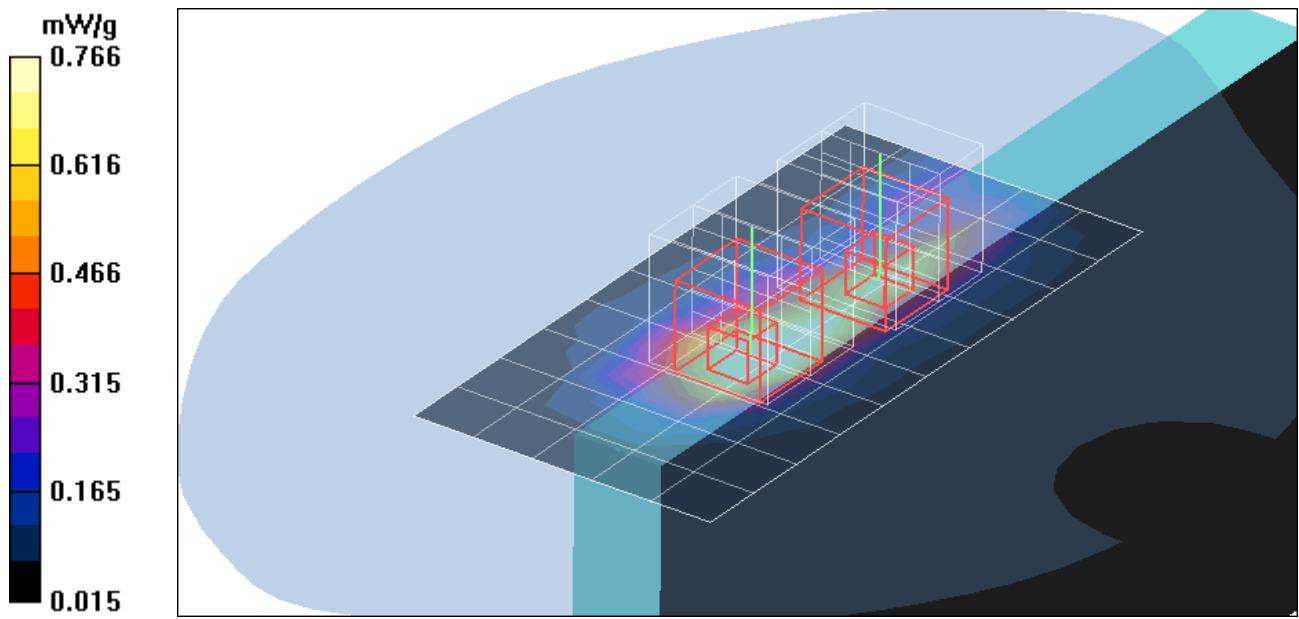

Test Laboratory: Compliance Certification Services Inc.

802.11g Bottom edge Touch mode

DUT: T700; Type: Ultra mobile PC; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.2 deg C; Liquid Temperature: 23.0 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.12, 6.12, 6.12);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Middle CH Rate=6M bit/Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.997 mW/g

Middle CH Rate=6M bit/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.6 V/m; Power Drift = -0.007 dB



Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 0.844 mW/g; SAR(10 g) = 0.410 mW/g

Maximum value of SAR (measured) = 1.15 mW/g

Middle CH Rate=6M bit/Z Scan (1x1x26): Measurement grid: dx=20mm, dy=20mm, dz=4mm

Maximum value of SAR (measured) = 1.16 mW/g

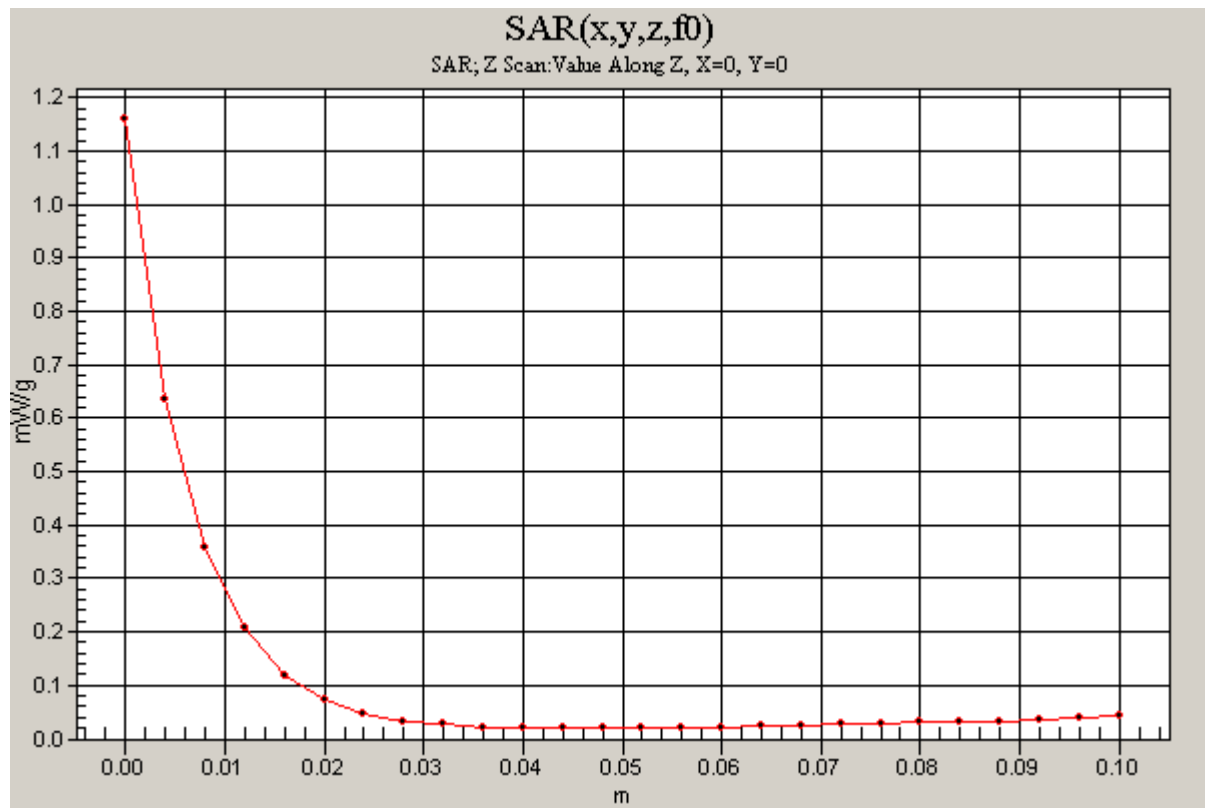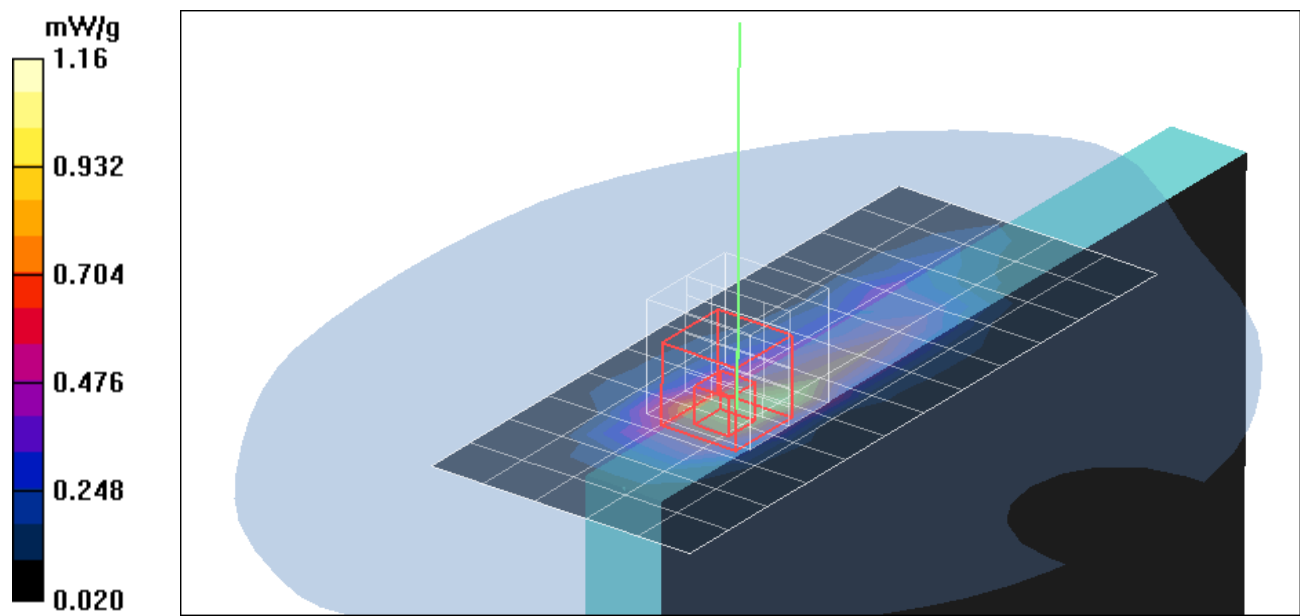

Test Laboratory: Compliance Certification Services Inc.

802.11g Bottom edge Touch mode

DUT: T700; Type: Ultra mobile PC; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.93 \text{ mho/m}$; $\epsilon_r = 51.6$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Air Temperature: 24.2 deg C; Liquid Temperature: 23.0 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.12, 6.12, 6.12);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

High CH Rate=6M bit/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.984 mW/g

High CH Rate=6M bit/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 19.1 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.822 mW/g; SAR(10 g) = 0.398 mW/g

Maximum value of SAR (measured) = 1.14 mW/g


High CH Rate=6M bit/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 19.1 V/m; Power Drift = -0.052 dB

Peak SAR (extrapolated) = 1.17 W/kg

SAR(1 g) = 0.548 mW/g; SAR(10 g) = 0.262 mW/g

Maximum value of SAR (measured) = 0.783 mW/g

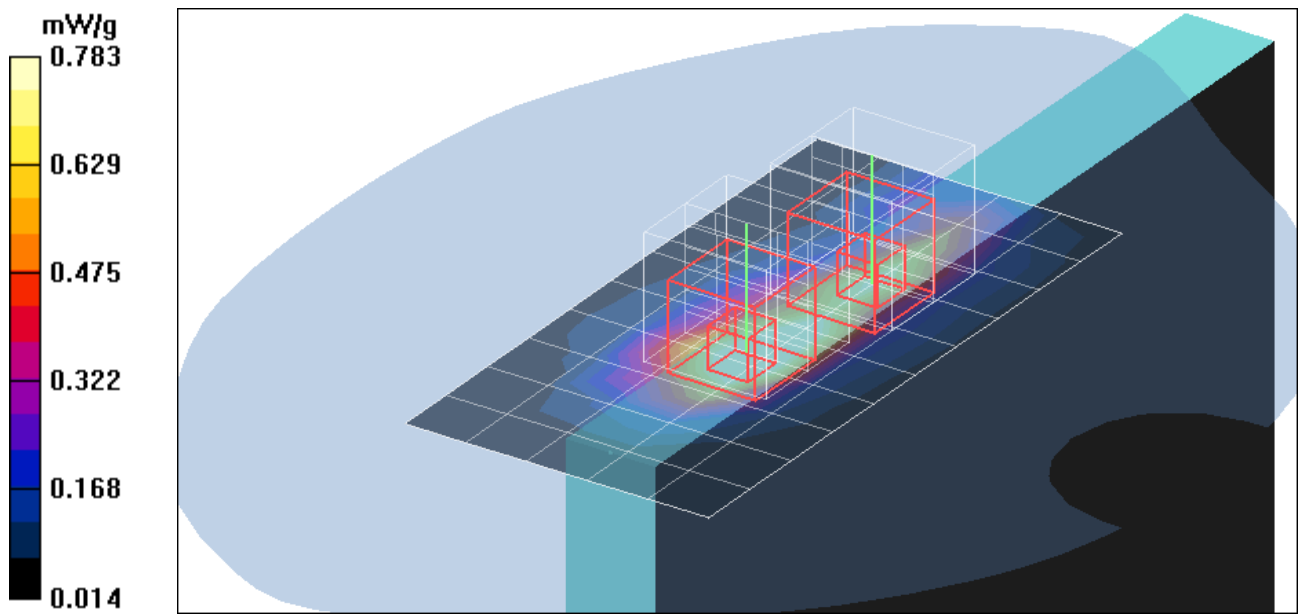

Test Laboratory: Compliance Certification Services Inc.

802.11b Bottom edge Touch mode

DUT: T700; Type: Ultra mobile PC; Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 1.93$ mho/m; $\epsilon_r = 51.6$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.2 deg C; Liquid Temperature: 23.0 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.12, 6.12, 6.12);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

co-Location High CH Rate=1M bit/Area Scan (6x11x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.27 mW/g

co-Location High CH Rate=1M bit/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.0 V/m; Power Drift = -0.068 dB

Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 0.955 mW/g; SAR(10 g) = 0.467 mW/g

Maximum value of SAR (measured) = 1.31 mW/g

co-Location High CH Rate=1M bit/Zoom Scan (5x5x7)/Cube 1: Measurement

grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.0 V/m; Power Drift = -0.068 dB

Peak SAR (extrapolated) = 1.43 W/kg



SAR(1 g) = 0.672 mW/g; SAR(10 g) = 0.319 mW/g

Maximum value of SAR (measured) = 0.947 mW/g

co-Location High CH Rate=1M bit/Z Scan (1x1x26): Measurement grid: dx=20mm,

dy=20mm, dz=4mm

Maximum value of SAR (measured) = 1.38 mW/g

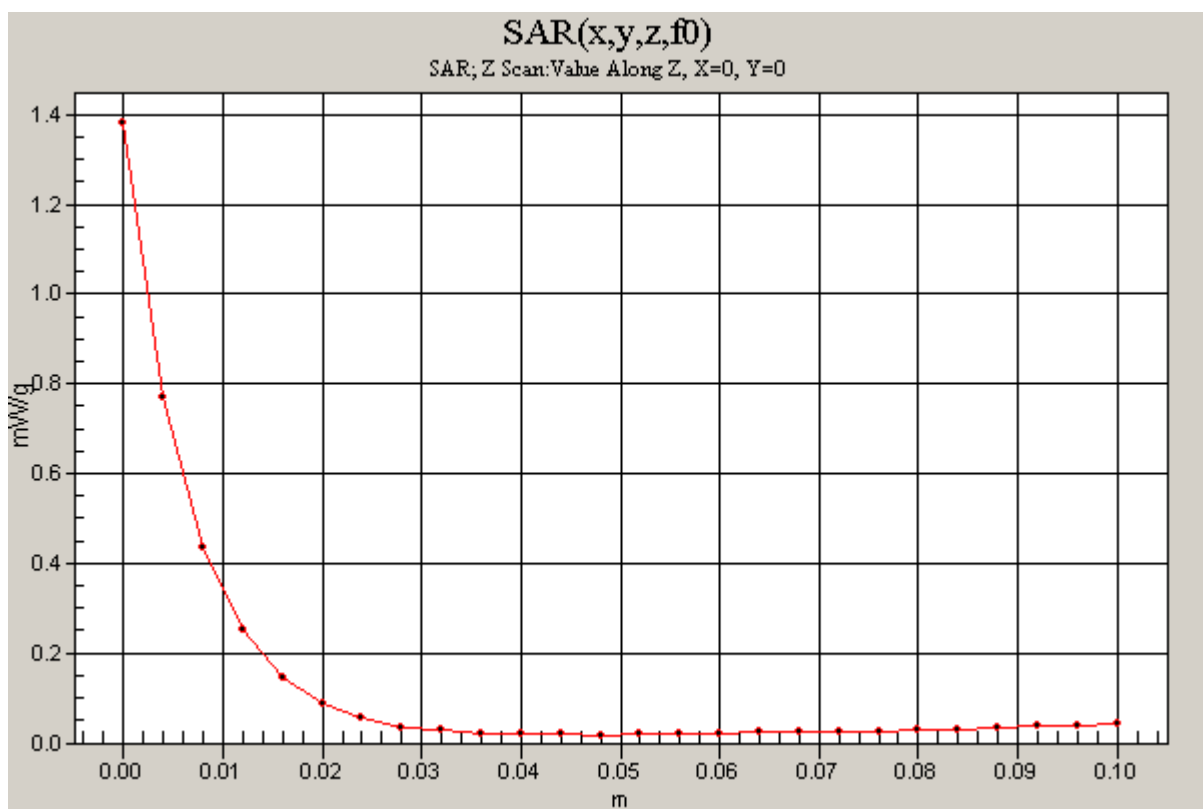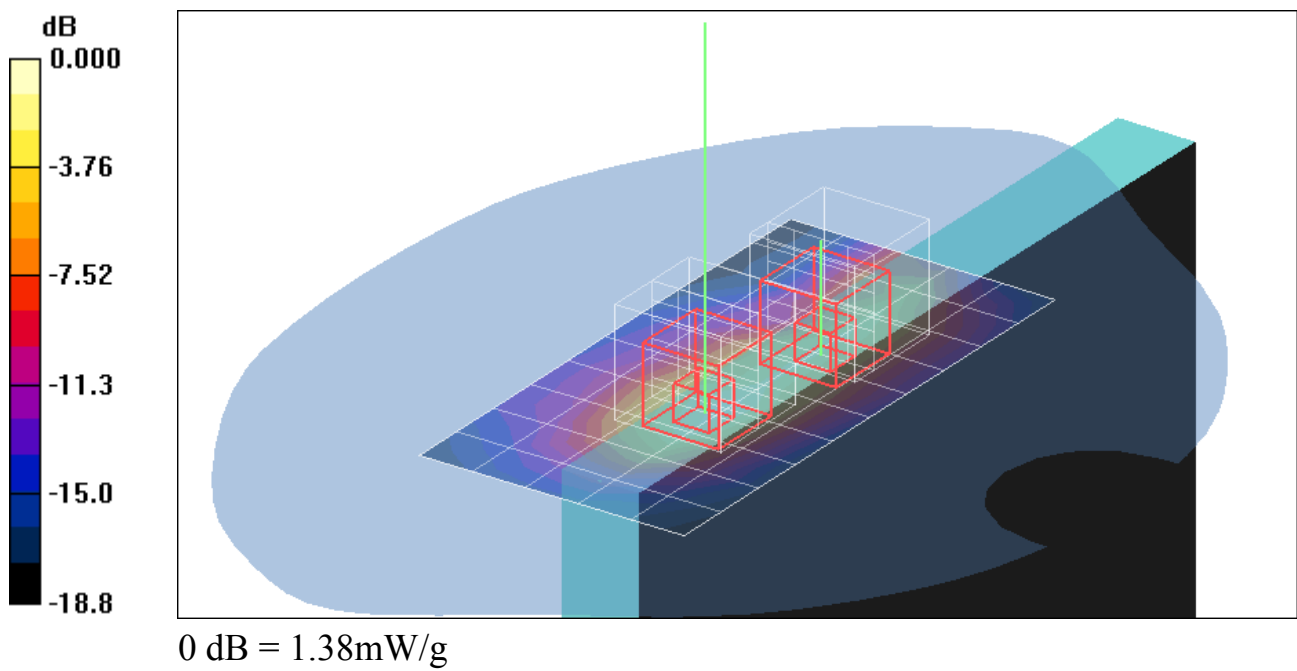

Test Laboratory: Compliance Certification Services Inc.

802.11g Bottom edge Touch mode

DUT: T700; Type: Ultra mobile PC; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 51.8$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 24.2 deg C; Liquid Temperature: 23.0 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.12, 6.12, 6.12);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

co-Location Middle CH Rate=6M bit/Area Scan (6x11x1): Measurement grid:

dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.01 mW/g

co-Location Middle CH Rate=6M bit/Zoom Scan (5x5x7)/Cube 0: Measurement

grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 17.8 V/m; Power Drift = -0.053 dB

Peak SAR (extrapolated) = 1.81 W/kg



SAR(1 g) = 0.867 mW/g; SAR(10 g) = 0.423 mW/g

Maximum value of SAR (measured) = 1.19 mW/g

co-Location Middle CH Rate=6M bit/Z Scan (1x1x26): Measurement grid: dx=20mm,

dy=20mm, dz=4mm

Maximum value of SAR (measured) = 1.20 mW/g

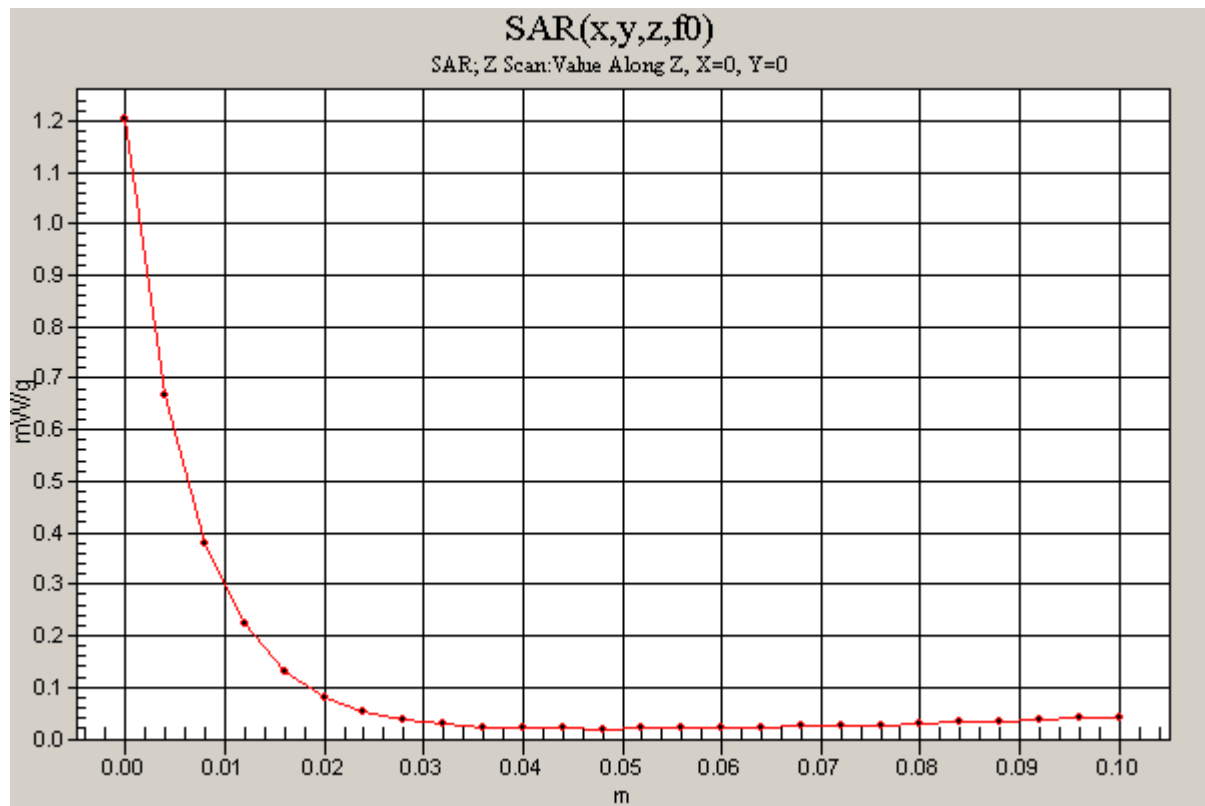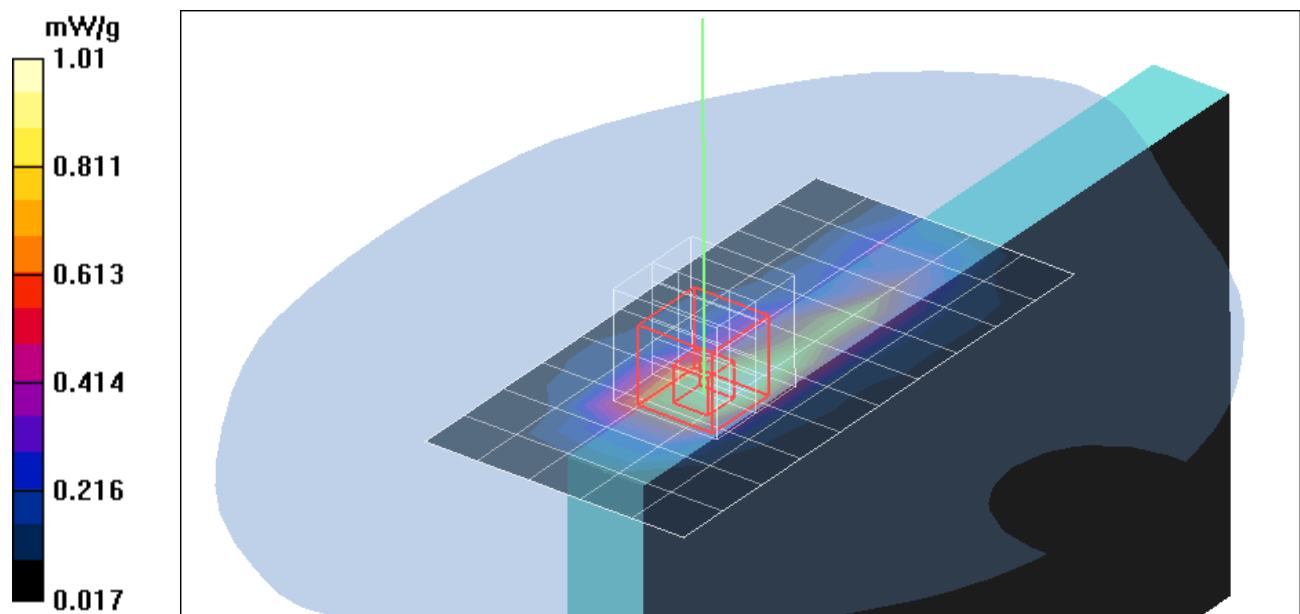



1. TEST RESULT CERTIFICATION

Applicant: AMTEK SYSTEM CO., LTD.
14F-11, No.79, Sec.1, Hsin Tai Wu rd., Hsi Chih City,
Taipei Hsien, Taiwan, R.O.C.

Equipment Under Test: Ultra Mobile PC

Trade Name / Model: AMTEK / T700
Smart Caddie / SCA001

Date of Test: March 10 ~ 18, 2006

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits of FCC Rules Part 15.207, 15.209 and 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Gavin Lim
Section Manager
Compliance Certification Services Inc.

Amanda Wu
Section Manager
Compliance Certification Services Inc.