



FCC 47 CFR PART 15 SUBPART C

TEST REPORT

For

UMPC

Model: U560

Trade Name: AMtek System Co.,Ltd.

Issued to

**AMTEK SYSTEM CO., LTD.
14F-11, No.79, Sec.1, Hsin Tai Wu rd.,
Hsi Chih City, Taipei Hsien, Taiwan**

Issued by



**Compliance Certification Services Inc.
No. 81-1, Lane 210, Bade Rd. 2, Luchu Hsiang,
Taoyuan Hsien, (338) Taiwan, R.O.C.
<http://www.ccsemc.com.tw>
service@tw.ccsemc.com**



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.



TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	3
2. EUT DESCRIPTION	4
3. TEST METHODOLOGY	5
3.1 EUT CONFIGURATION	5
3.2 EUT EXERCISE.....	5
3.3 GENERAL TEST PROCEDURES.....	5
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	6
3.5 DESCRIPTION OF TEST MODES	7
4. INSTRUMENT CALIBRATION.....	8
4.1 MEASURING INSTRUMENT CALIBRATION.....	8
4.2 MEASUREMENT EQUIPMENT USED.....	8
5. FACILITIES AND ACCREDITATIONS	9
5.1 FACILITIES.....	9
5.2 EQUIPMENT.....	9
5.3 TABLE OF ACCREDITATIONS AND LISTINGS.....	10
6. SETUP OF EQUIPMENT UNDER TEST	11
6.1 SETUP CONFIGURATION OF EUT.....	11
6.2 SUPPORT EQUIPMENT	11
7. FCC PART 15.247 REQUIREMENTS.....	12
7.1 6DB BANDWIDTH.....	12
7.2 PEAK POWER.....	17
7.3 AVERAGE POWER	21
7.4 BAND EDGES MEASUREMENT	25
7.5 PEAK POWER SPECTRAL DENSITY	34
7.6 SPURIOUS EMISSIONS	39
7.7 POWERLINE CONDUCTED EMISSIONS.....	53
APPENDIX I RADIO FREQUENCY EXPOSURE	56
APPENDIX II PHOTOGRAPHS OF TEST SETUP	57



1. TEST RESULT CERTIFICATION

Applicant: AMTEK SYSTEM CO., LTD.
14F-11, No.79, Sec.1, Hsin Tai Wu rd.,
Hsi Chih City, Taipei Hsien, Taiwan

Equipment Under Test: UMPC

Trade Name: AMtek System Co.,Ltd.

Model: U560

Date of Test: September 19 ~ 28, 2007

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.4: 2003 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Reviewed by:

Rex Lai
Section Manager
Compliance Certification Services Inc.

Amanda Wu
Section Manager
Compliance Certification Services Inc.



2. EUT DESCRIPTION

Product	UMPC
Trade Name	AMtek System Co.,Ltd.
Model Number	U560
Model Discrepancy	N/A
Power Supply	Power Adapter: 1. Model: 0335A1965 I/P: 100-240V, 50-60Hz, 1.7A O/P: 19V, 3.42A 2. Model: 0225C1965 I/P: 100-240V, 50-60Hz, 1.7A O/P: 19V, 3.42A Battery: New sun / 3.0V
Frequency Range	2412 ~ 2462 MHz
Transmit Power	IEEE 802.11b: 13.91dBm IEEE 802.11g: 21.02 dBm
Modulation Technique	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: DSSS (CCK, DQPSK, DBPSK) + OFDM (QPSK, BPSK, 16-QAM, 64-QAM)
Transmit Data Rate	IEEE 802.11b: 11, 5.5, 2, 1 Mbps IEEE 802.11g: 54, 48, 36, 24, 18, 12, 11, 9, 6, 5.5, 2, 1 Mbps
Number of Channels	11 Channels
Antenna Specification	Gain: 0.13 dBi
Antenna Designation	IFA Antenna

Remark:

1. The sample selected for test was production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for FCC ID: **R4R-AIRTU560UMPC** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4 and FCC CFR 47 2.1046, 2.1047, 2.1049, 2.1051, 2.1053, 2.1055, 2.1057, 15.207, 15.209 and 15.247.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4.



3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

- (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

- (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.



3.5 DESCRIPTION OF TEST MODES

The EUT (model: U560) comes with two types of power adapter and battery for sale. After the preliminary test, the EUT with power adapter (Model: 0335A1965) was found to emit the worst emissions and therefore had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting mode was programmed.

IEEE 802.11b mode:

Channel Low(2412MHz), Channel Mid(2437MHz) and Channel High(2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE 802.11g mode:

Channel Low(2412MHz), Channel Mid(2437MHz) and Channel High(2462MHz) with 6Mbps data rate were chosen for full testing.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.



4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	MY43360131	01/30/2008

3M Semi Anechoic Chamber				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	08/02/2008
Test Receiver	Rohde&Schwarz	ESCI	100064	11/13/2007
Switch Controller	TRC	Switch Controller	SC94050010	05/05/2008
4 Port Switch	TRC	4 Port Switch	SC94050020	05/05/2008
Horn-Antenna	TRC	HA-0502	06	06/06/2008
Horn-Antenna	TRC	HA-0801	04	06/20/2008
Horn-Antenna	TRC	HA-1201A	01	08/12/2008
Horn-Antenna	TRC	HA-1301A	01	08/12/2008
Bilog- Antenna	Sunol Sciences	JB3	A030205	03/29/2008
Turn Table	Max-Full	MFT-120S	T120S940302	N.C.R.
Antenna Tower	Max-Full	MFA-430	A440940302	N.C.R.
Controller	Max-Full	MF-CM886	CC-C-1F-13	N.C.R.
Site NSA	CCS	N/A	FCC: 965860 IC: IC 6106	09/25/2008
Test S/W	LABVIEW (V 6.1)			

Remark: The measurement uncertainty is less than +/-2.0065dB (30MHz ~ 1GHz), +/-3.0958dB (Above 1GHz) which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.

Powerline Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver 9kHz-30MHz	Rohde & Schwarz	ESHS30	828144/003	10/31/2007
Two-Line V-Network 9kHz-30MHz	Schaffner	NNB41	03/10013	06/12/2008
LISN 10kHz-100MHz	EMCO	3825/2	9106-1809	04/01/2008
ISN 9kHz-30MHz	FCC	FCC-TLISN-T4	20167	09/15/2008
Test S/W	LABVIEW (V 6.1)			

Remark: The measurement uncertainty is less than +/- 2.81dB, which is evaluated as per the NAMAS NIS 81 and CISPR/A/291/CDV.



5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

☐ No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.

Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029

☒ No.11, Wugong 6th Rd., Wugu Industrial Park, Taipei Hsien 248, Taiwan

Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045

☒ No.81-1, Lane 210, Bade 2nd Rd., Luchu Hsiang, Taoyuan Hsien 338, Taiwan

Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

5.2 EQUIPMENT


Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

**5.3 TABLE OF ACCREDITATIONS AND LISTINGS**

Country	Agency	Scope of Accreditation	Logo
USA	A2LA	EN 55011, EN 55014-1/2, CISPR 11, CISPR 14-1/2, EN 55022, EN 55015, CISPR 22, CISPR 15, AS/NZS 3548, VCCI V3 (2001), CFR 47, FCC Part 15/18, CNS 13783-1, CNS 13439, CNS 13438, CNS 13803, CNS 14115, EN 55024, IEC 801-2, IEC 801-3, IEC 801-4, IEC/EN 61000-3-2, IEC/EN 61000-3-3, IEC/EN 61000-4-2/3/4/5/6/8/11, EN 50081-1/ EN 61000-6-3, EN 50081-2/EN 61000-6-4, EN 50081-2/EN 61000-6-1: 2001	 ACCREDITED TESTING CERT #0824.01
USA	FCC	3/10 meter Open Area Test Sites (93105, 90471) / 3M Semi Anechoic Chamber (965860) to perform FCC Part 15/18 measurements	 93105, 90471 965860
Japan	VCCI	3/10 meter Open Area Test Sites to perform conducted/radiated measurements	VCCI R-393/1066/725/879 C-402/747/912
Norway	NEMKO	EN 50081-1/2, EN 50082-1/2, IEC 61000-6-1/2, EN 50091-2, EN 50130-4, EN 55011, EN 55013, EN 55014-1/2, EN 55015, EN 55022, EN 55024, EN 61000-3-2/3, EN 61326-1, IEC 61000-4-2/3/4/5/6/8/11, EN 60601-1-2, EN 300 328, EN 300 422-2, EN 301 419-1, EN 301 489-01/03/07/08/09/17, EN 301 419-2/3, EN 300 454-2, EN 301 357-2	 ELA 124a ELA 124b ELA 124c
Taiwan	TAF	EN 300 328, EN 300 220-1, EN 300 220-2, EN 300 220-3, 47 CFR FCC Part 15 Subpart C, EN 61000-3-2, EN 61000-3-3, CNS 13439, CNS 13783-1, CNS 14115, CNS 13438, AS/NZS CISPR 22, CNS 13022-1, IEC 61000-4-2/3/4/5/6/8/11, CNS 13022-2/3	 Testing Laboratory 0363
Taiwan	BSMI	CNS 13438, CNS 13783-1, CNS 13439, CNS 14115	 SL2-IS-E-0014 SL2-IN-E-0014 SL2-A1-E-0014 SL2-R1-E-0014 SL2-R2-E-0014 SL2-L1-E-0014
Canada	Industry Canada	3/10 meter Open Area Test Sites (IC 2324C-3, IC 2324C-5) / 3M Semi Anechoic Chamber (IC 6106)	 IC 2324C-3 IC 2324C-5 IC 6106

* No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.



6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix I for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No.	Device Type	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1.	USB Keyboard	Dell	Sk-8115	N/A	FCC DoC	Shielded, 1.8m	N/A
2.	USB Mouse	Dell	MO56UO	408031121	FCC DoC	Shielded, 1.8m	N/A
3.	Multimedia Earphone	Labtec	Axis-301	N/A	FCC DoC	N/A	Unshielded, 1.8m

Remark:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*




7. FCC PART 15.247 REQUIREMENTS

7.1 6DB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100 kHz, VBW = RBW, Span = 50 MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.



TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	11250	>500	PASS
Mid	2437	11330		PASS
High	2462	11250		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Result
Low	2412	16500	>500	PASS
Mid	2437	16500		PASS
High	2462	16500		PASS



Test Plot

IEEE 802.11b

6dB Bandwidth (CH Low)

Agilent 16:59:48 Sep 26, 2007

R T


6dB BW, b Mode Low Ch.

Δ Mkr1 11.25 MHz

Ref 20 dBm

Atten 20 dB

-1.73 dB

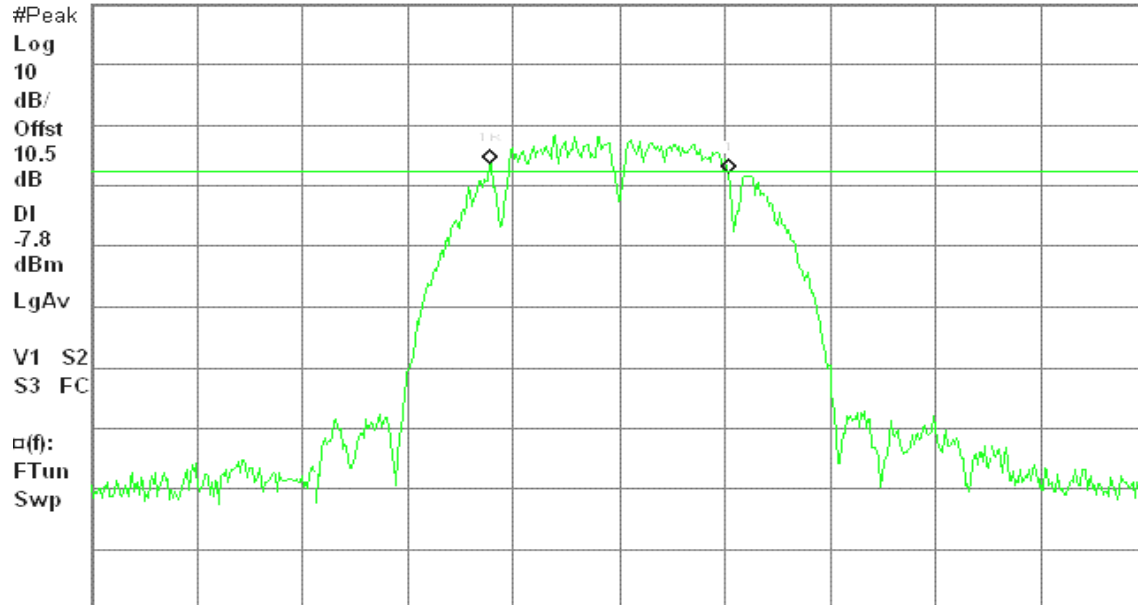

Center 2.412 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)

6dB Bandwidth (CH Mid)

Agilent 17:06:19 Sep 26, 2007

R T


6dB BW, b Mode Mid Ch.

Δ Mkr1 11.33 MHz

Ref 20 dBm

Atten 20 dB

-0.53 dB

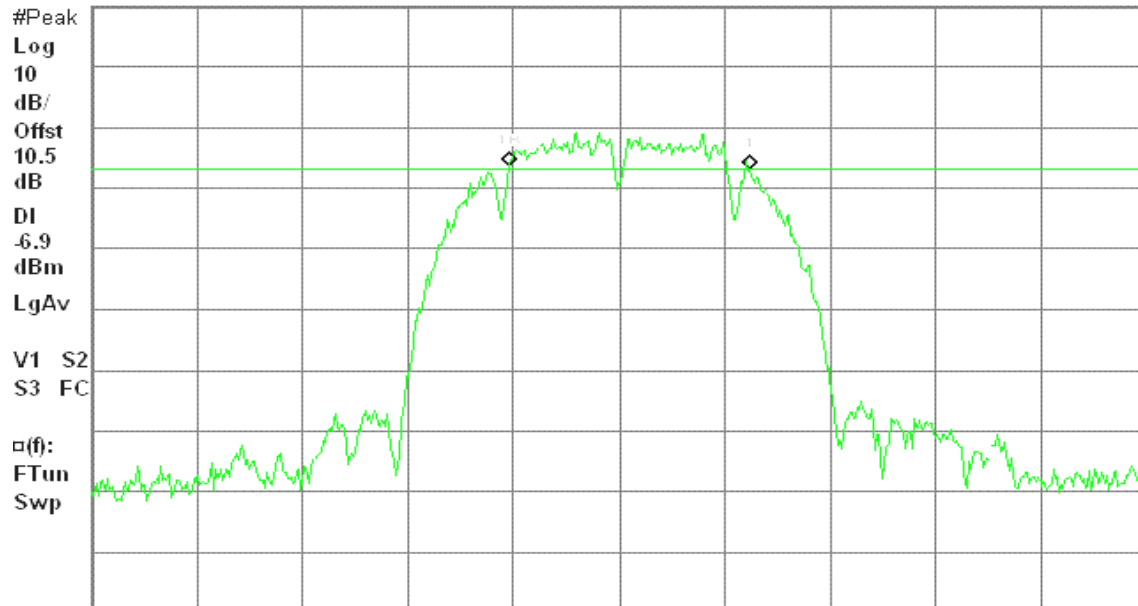

Center 2.437 00 GHz

Span 50 MHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 6.04 ms (601 pts)



6dB Bandwidth (CH High)

Agilent 17:12:41 Sep 26, 2007

R T


6dB BW, b Mode High Ch.

Δ Mkr1 11.25 MHz

Ref 20 dBm

Atten 20 dB

-0.26 dB

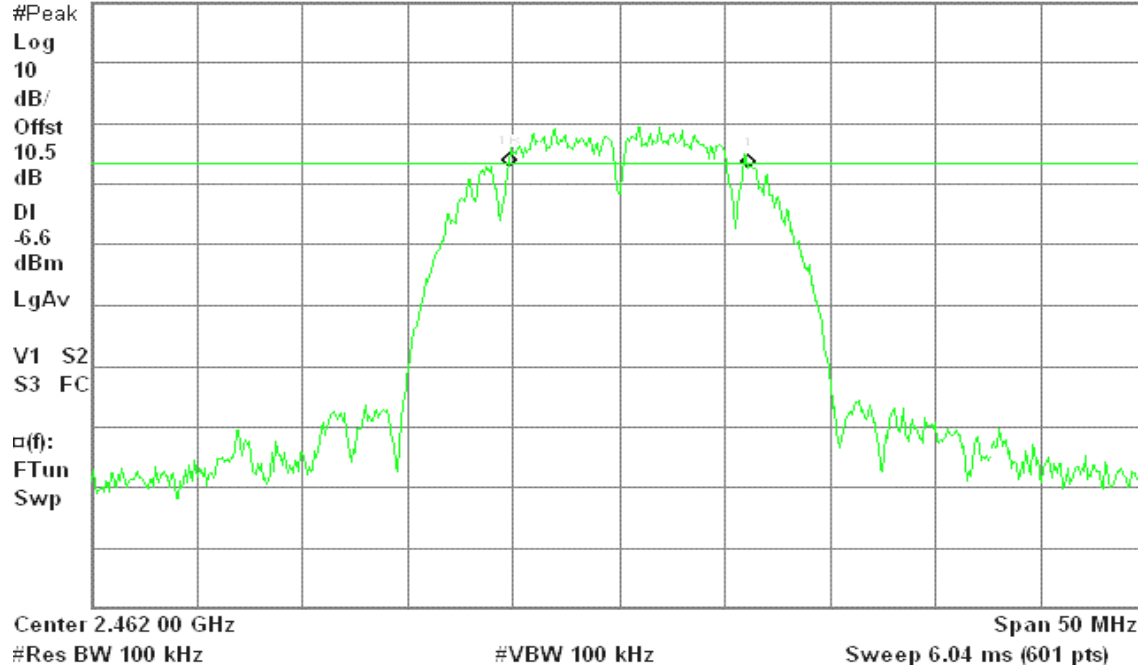

IEEE 802.11g

6dB Bandwidth (CH Low)

Agilent 17:28:09 Sep 26, 2007

R T


6dB BW, g Mode Low Ch.

Δ Mkr1 16.50 MHz

Ref 20 dBm


Atten 20 dB

-0.96 dB

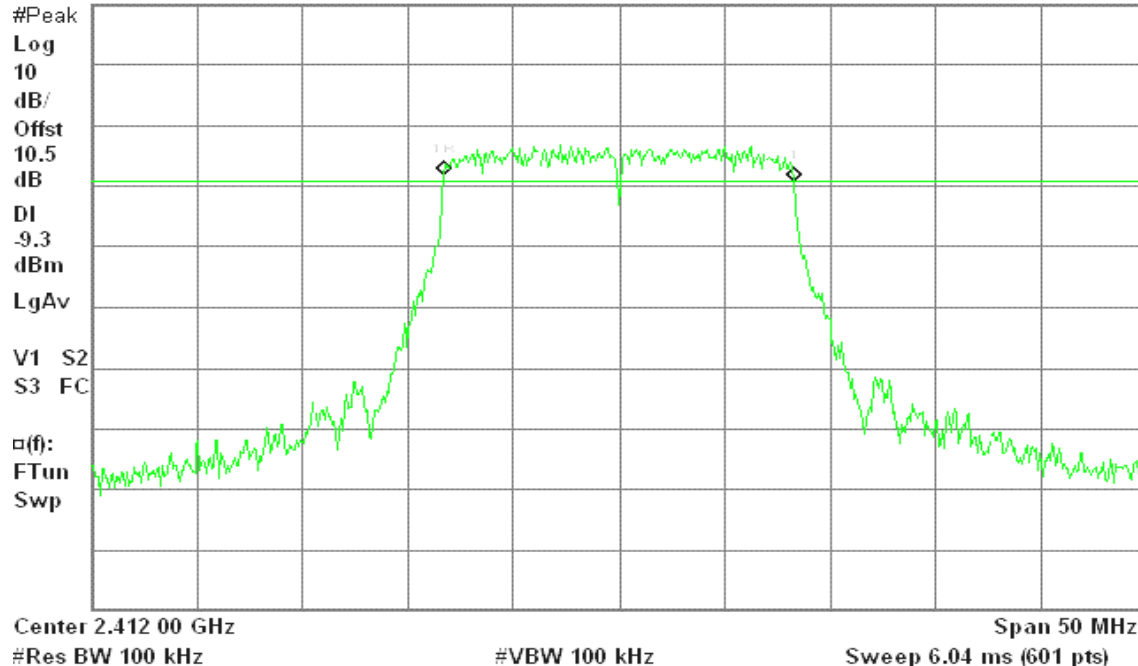




6dB Bandwidth (CH Mid)

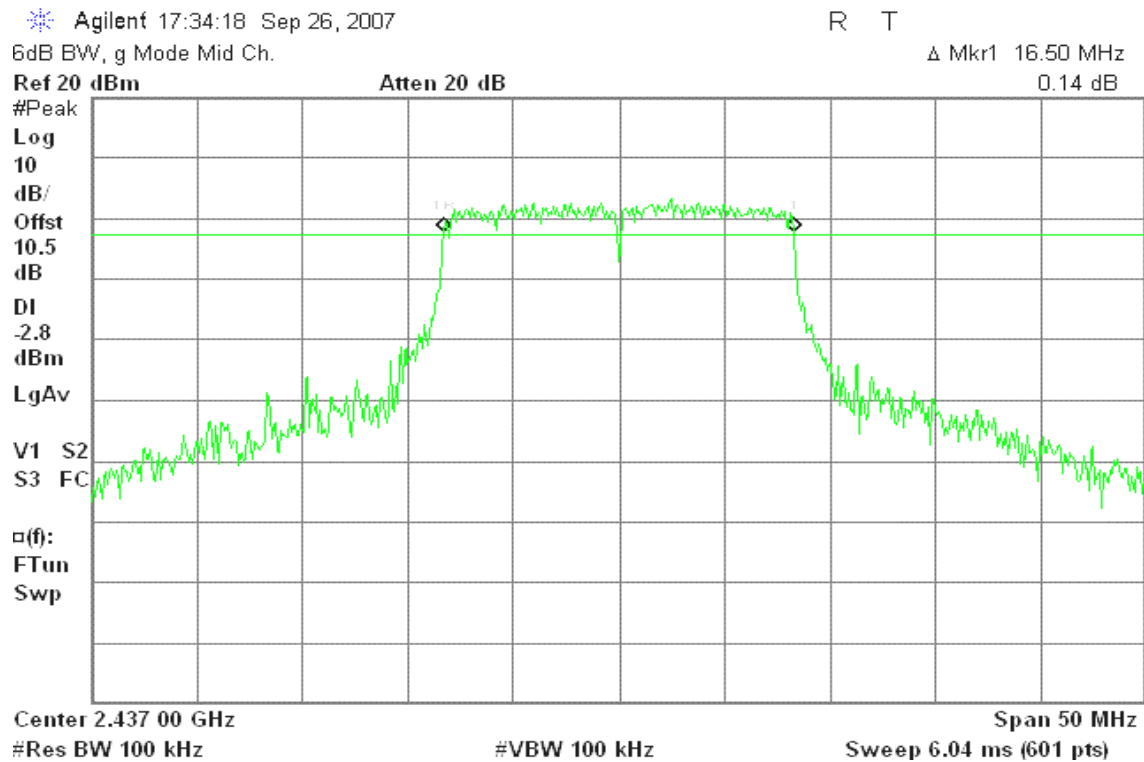

6dB Bandwidth (CH High)

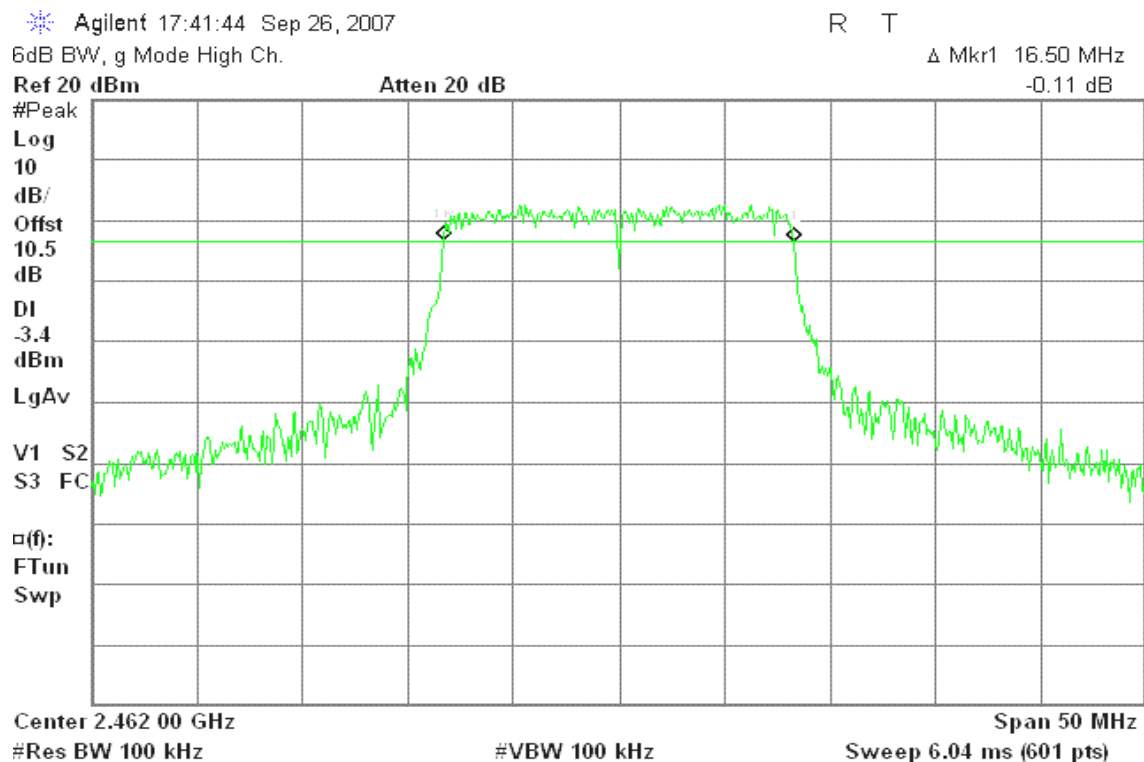




7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the peak power detection.

TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	12.89	0.01945	1.00	PASS
Mid	2437	13.81	0.02404		PASS
High	2462	13.91	0.02460		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	15.07	0.03214	1.00	PASS
Mid	2437	21.02	0.12647		PASS
High	2462	20.89	0.12274		PASS



Test Plot

IEEE 802.11b

Peak Power (CH Low)


Agilent 17:00:27 Sep 26, 2007

R T

Peak Output Power , b Mode Low Ch.

Ref 20 dBm

Atten 20 dB

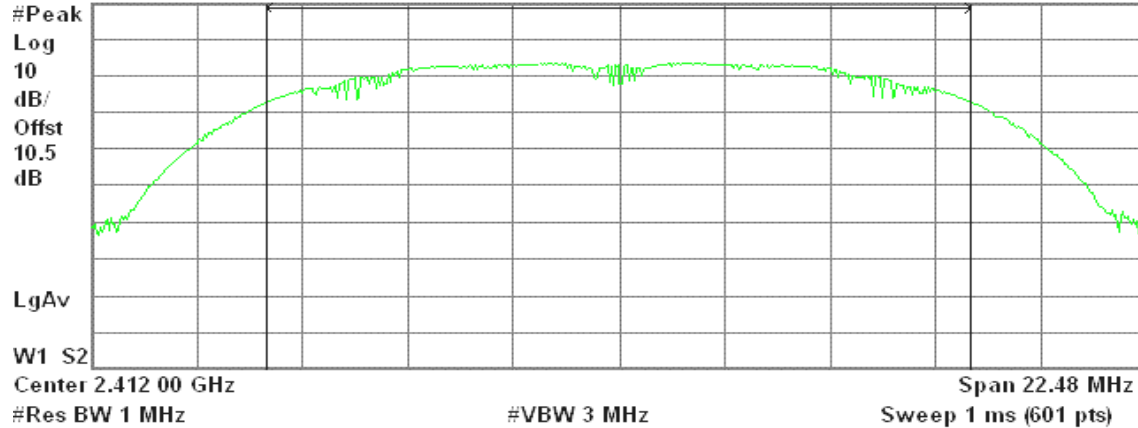

Channel Power

Power Spectral Density

12.89 dBm / 14.9880 MHz

-58.87 dBm/Hz

Peak Power (CH Mid)


Agilent 17:07:00 Sep 26, 2007

R T

Peak Output Power , b Mode Mid Ch.

Ref 20 dBm

Atten 20 dB

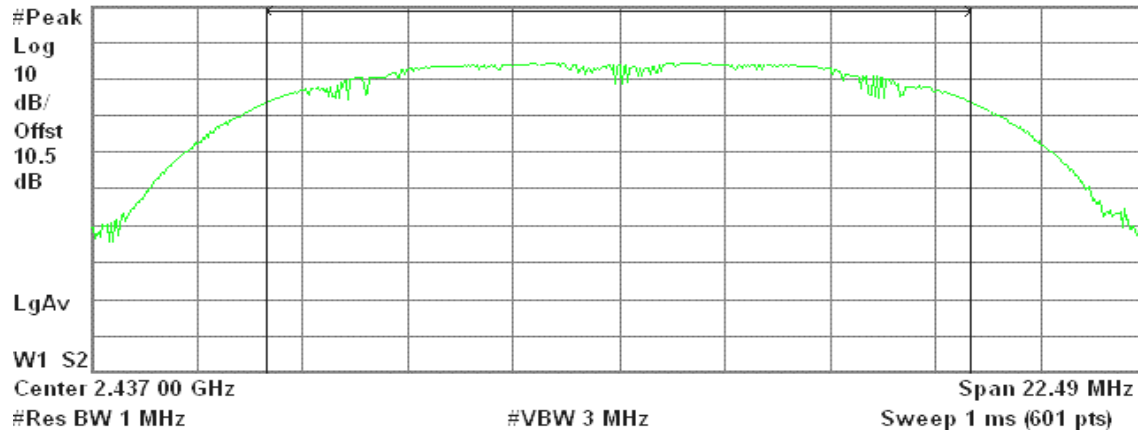

Channel Power

Power Spectral Density

13.81 dBm / 14.9920 MHz

-57.95 dBm/Hz



Peak Power (CH High)


Agilent 17:13:15 Sep 26, 2007

R T

Peak Output Power , b Mode High Ch.

Ref 20 dBm

Atten 20 dB

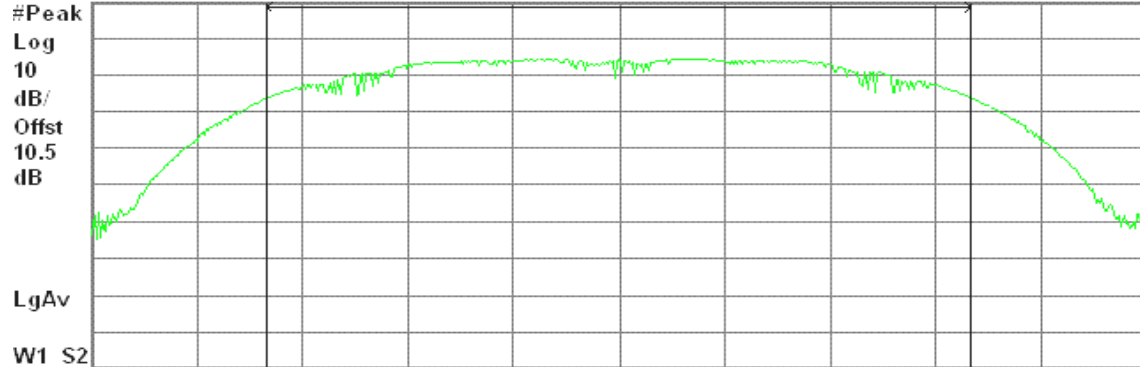

Center 2.462 00 GHz

Span 22.47 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

13.91 dBm / 14.9800 MHz

-57.85 dBm/Hz

IEEE 802.11g

Peak Power (CH Low)


Agilent 17:28:42 Sep 26, 2007

R T

Peak Output Power , g Mode Low Ch.

Ref 20 dBm

Atten 20 dB

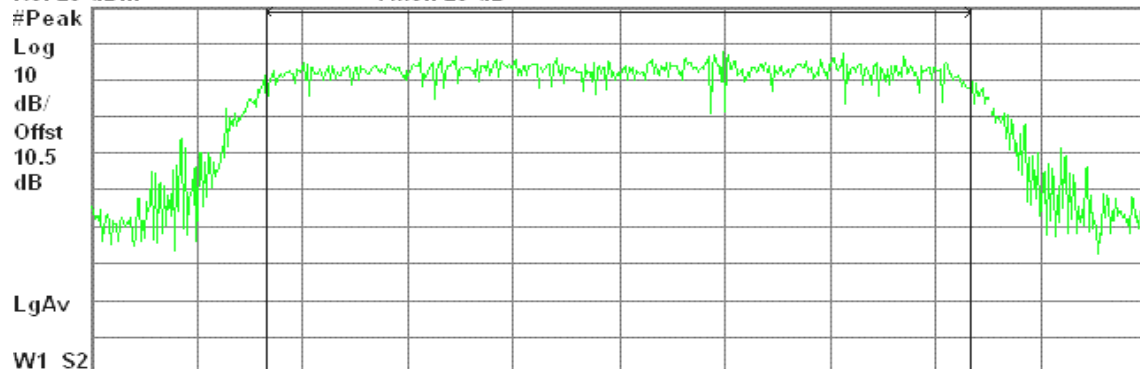

Center 2.412 00 GHz

Span 24.72 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

15.07 dBm / 16.4800 MHz

-57.10 dBm/Hz



Peak Power (CH Mid)


Agilent 17:34:53 Sep 26, 2007

R T

Peak Output Power , g Mode Mid Ch.

Ref 20 dBm

Atten 20 dB

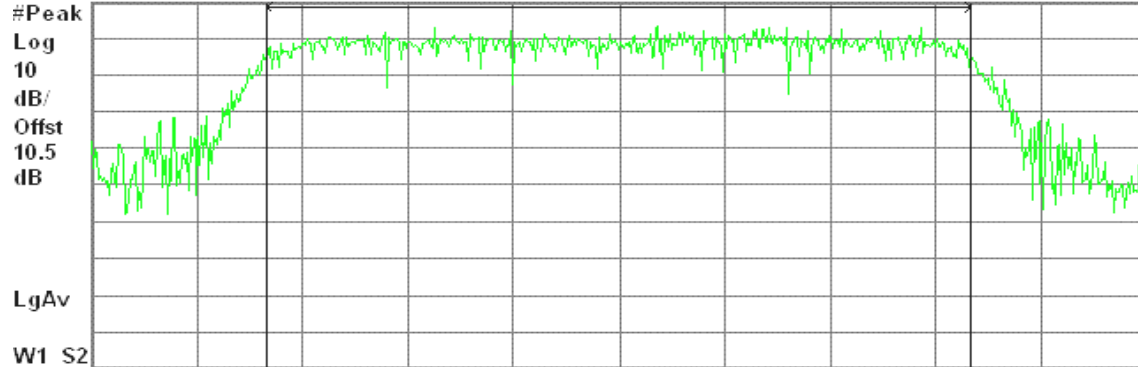

Center 2.437 00 GHz

Span 24.95 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

21.02 dBm / 16.6350 MHz

-51.19 dBm/Hz

Peak Power (CH High)


Agilent 17:42:16 Sep 26, 2007

R T

Peak Output Power , g Mode High Ch.

Ref 20 dBm

Atten 20 dB

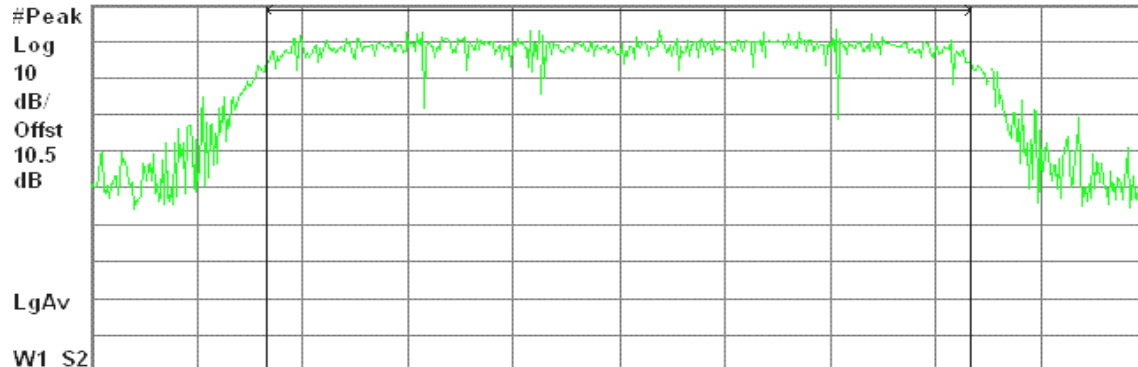

Center 2.462 00 GHz

Span 24.91 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

20.89 dBm / 16.6060 MHz

-51.31 dBm/Hz




7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Spectrum analyzer. The Spectrum analyzer is set to the average power detection.

TEST RESULTS

No non-compliance noted.

Test Data

Test mode: IEEE 802.11b mode

Channel	Frequency (MHz)	Average Power (dBm)
Low	2412	10.30
Mid	2437	11.23
High	2462	11.21

Test mode: IEEE 802.11g mode


Channel	Frequency (MHz)	Average Power (dBm)
Low	2412	11.74
Mid	2437	17.67
High	2462	17.33




Test Plot

IEEE 802.11b

CH Low

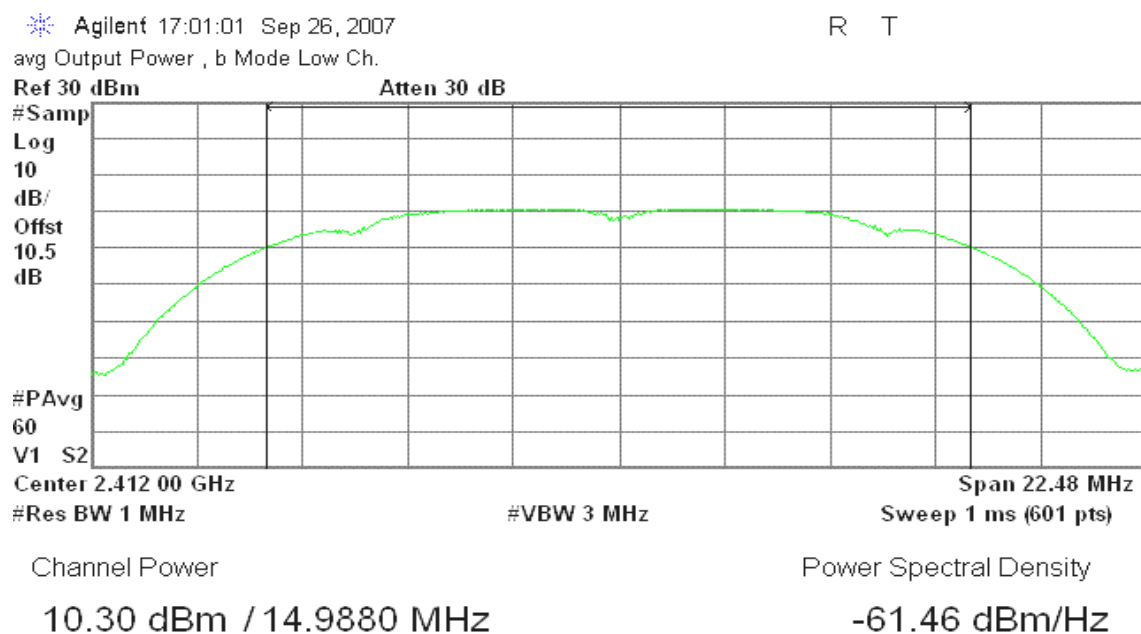

CH Mid

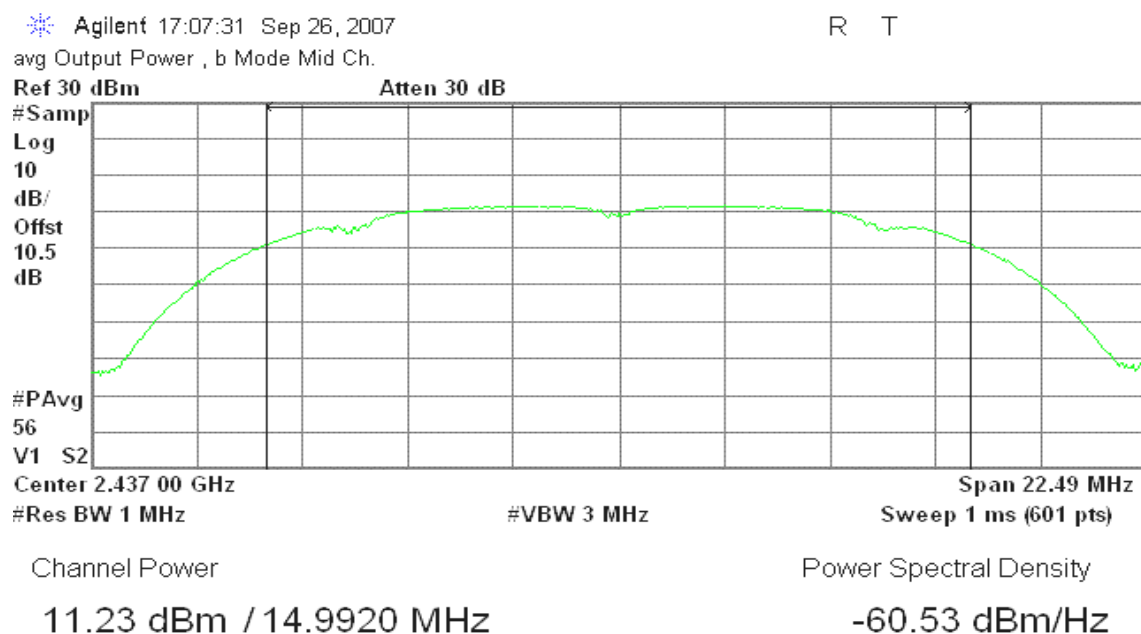



CH High

Agilent 17:13:55 Sep 26, 2007

R T

avg Output Power , b Mode High Ch.

Ref 30 dBm

Atten 30 dB

#Samp

Log

10

dB/

Offst

10.5

dB

#PAvg

100

V1 S2

Center 2.462 00 GHz

Span 22.47 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

11.21 dBm / 14.9800 MHz

-60.54 dBm/Hz

IEEE 802.11g

CH Low

Agilent 17:29:14 Sep 26, 2007

R T

avg Output Power , g Mode Low Ch.

Ref 30 dBm

Atten 30 dB

#Samp

Log

10

dB/

Offst

10.5

dB

#PAvg

51

V1 S2

Center 2.412 00 GHz

Span 24.72 MHz

#Res BW 1 MHz

#VBW 3 MHz

Sweep 1 ms (601 pts)

Channel Power

Power Spectral Density

11.74 dBm / 16.4800 MHz

-60.43 dBm/Hz



CH Mid


Agilent 17:35:25 Sep 26, 2007

R T

avg Output Power , g Mode Mid Ch.

Ref 30 dBm

Atten 30 dB

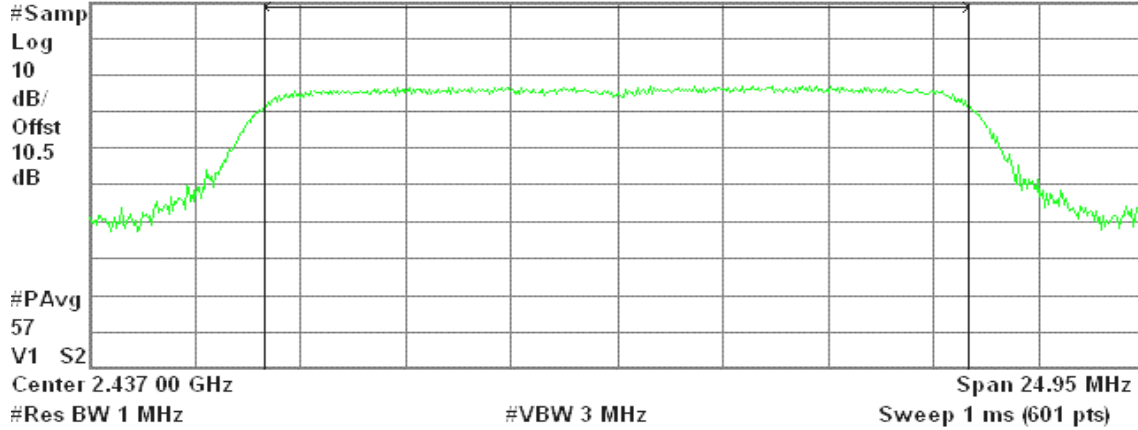

Channel Power

17.67 dBm / 16.6350 MHz

Power Spectral Density

-54.54 dBm/Hz

CH High


Agilent 17:42:47 Sep 26, 2007

R T

avg Output Power , g Mode High Ch.

Ref 30 dBm

Atten 30 dB

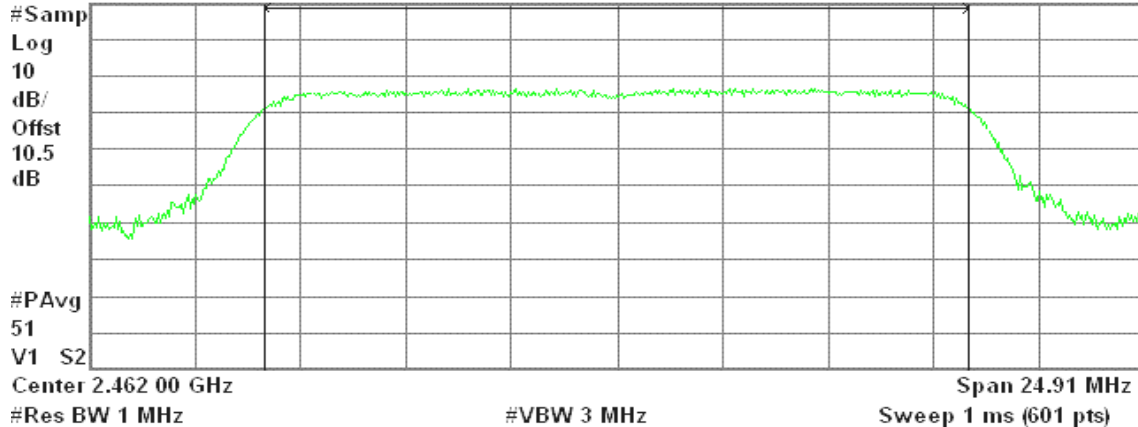

Channel Power

17.33 dBm / 16.6060 MHz

Power Spectral Density


-54.87 dBm/Hz

7.4 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

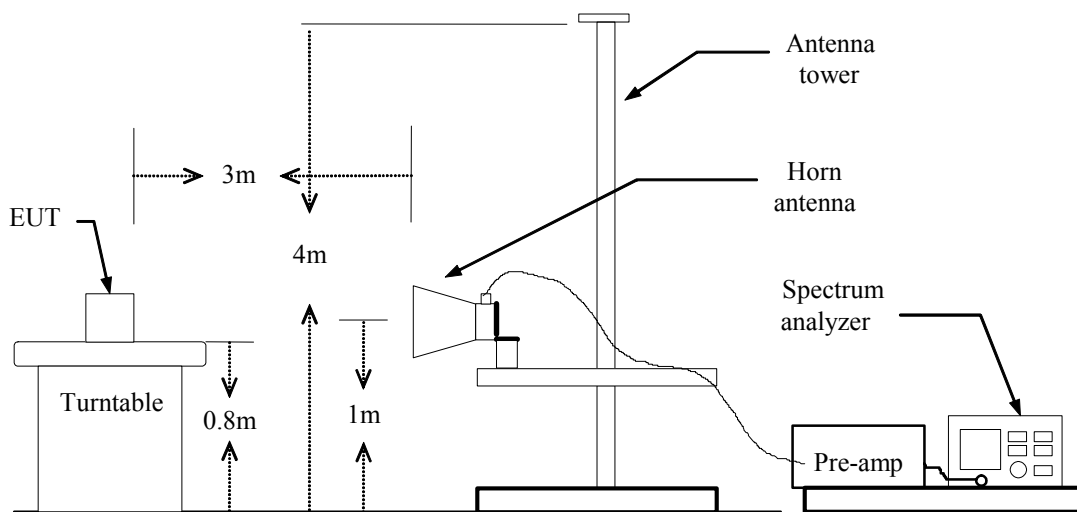

TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

TEST RESULTS

Refer to attach spectrum analyzer data chart.



Band Edges (IEEE 802.11b / CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 11:02:55 Sep 20, 2007

R T

Mkr1 2.386 3 GHz
59.33 dB μ V

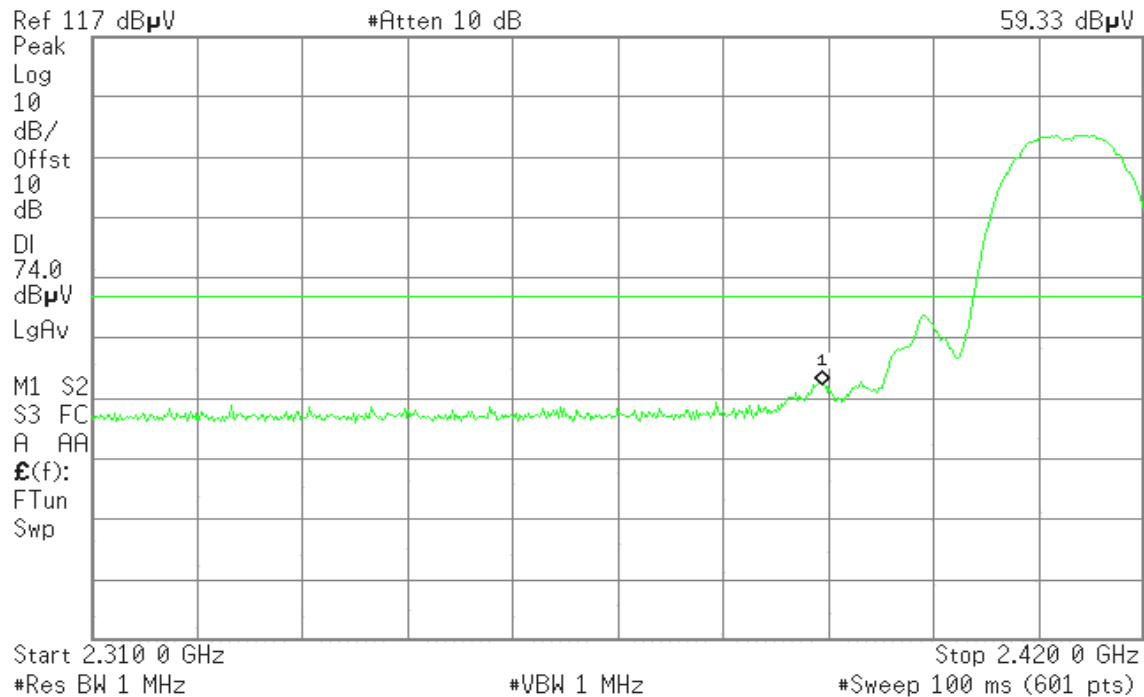

Detector mode: Average

Polarity: Vertical

Agilent 11:02:30 Sep 20, 2007

R T

Mkr1 2.386 3 GHz
51.49 dB μ V






Detector mode: Peak

Polarity: Horizontal

Agilent 10:53:31 Sep 20, 2007

R T

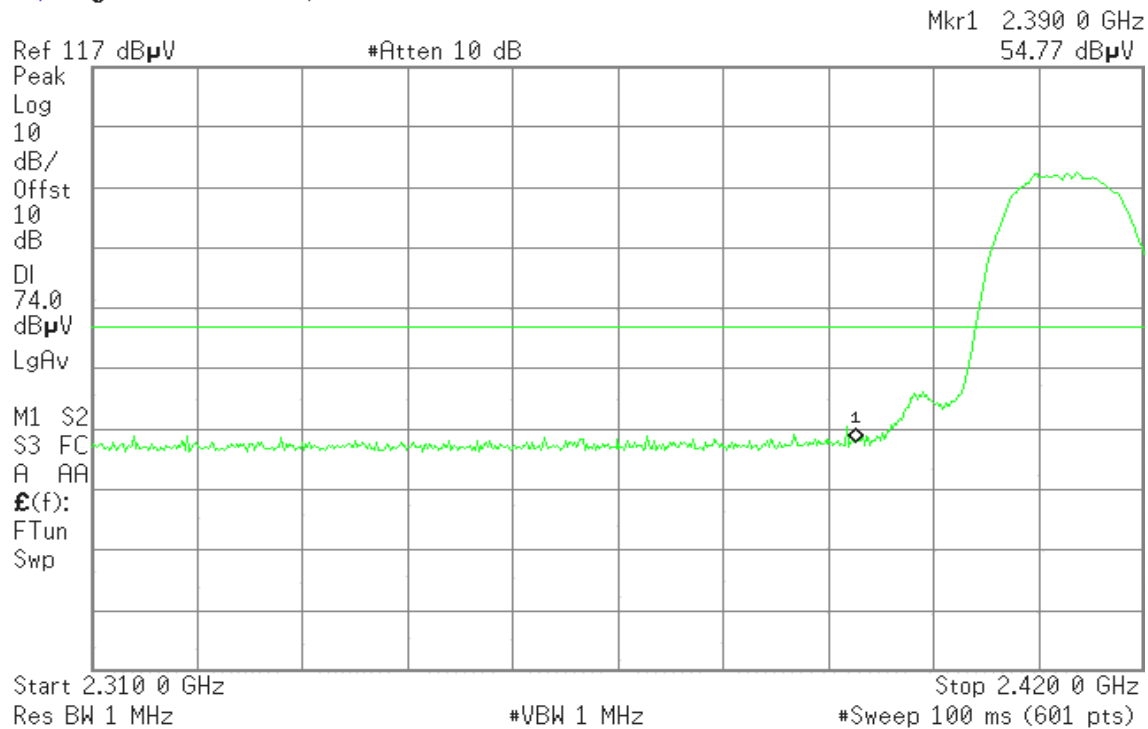

Detector mode: Average

Polarity: Horizontal

Agilent 10:53:02 Sep 20, 2007

R T





Band Edges (IEEE 802.11b / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 11:52:36 Sep 20, 2007

R T

Mkr1 2.487 93 GHz
60.35 dB μ V

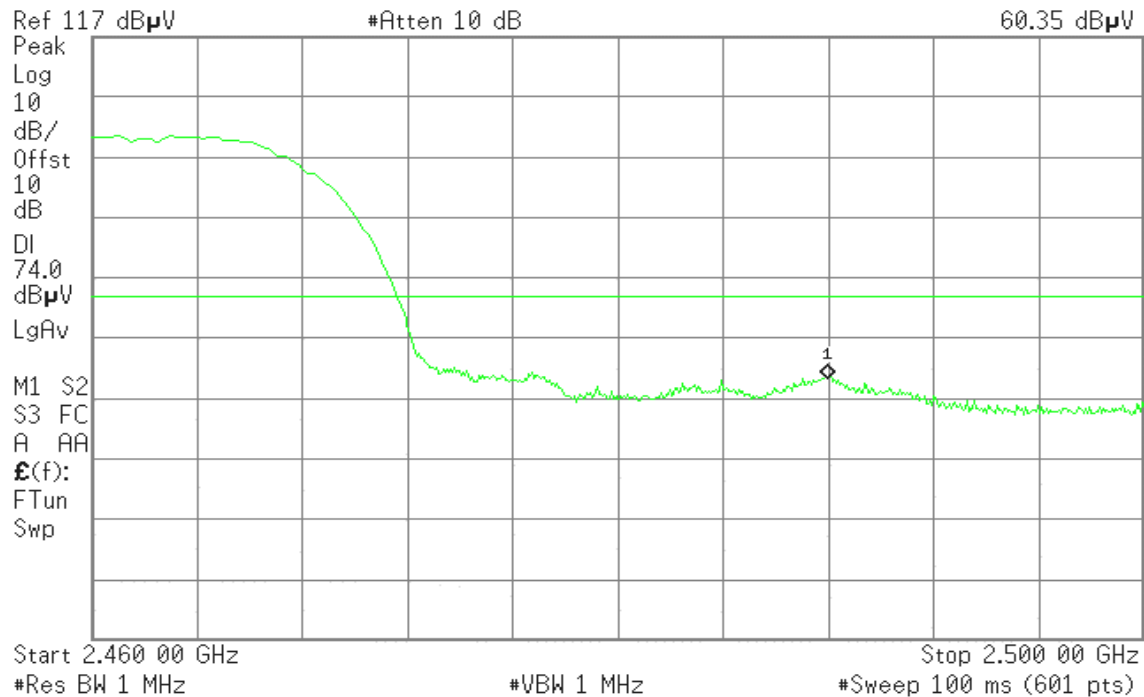


Detector mode: Average

Polarity: Vertical

Agilent 11:52:18 Sep 20, 2007

R T

Mkr1 2.487 93 GHz
52.63 dB μ V

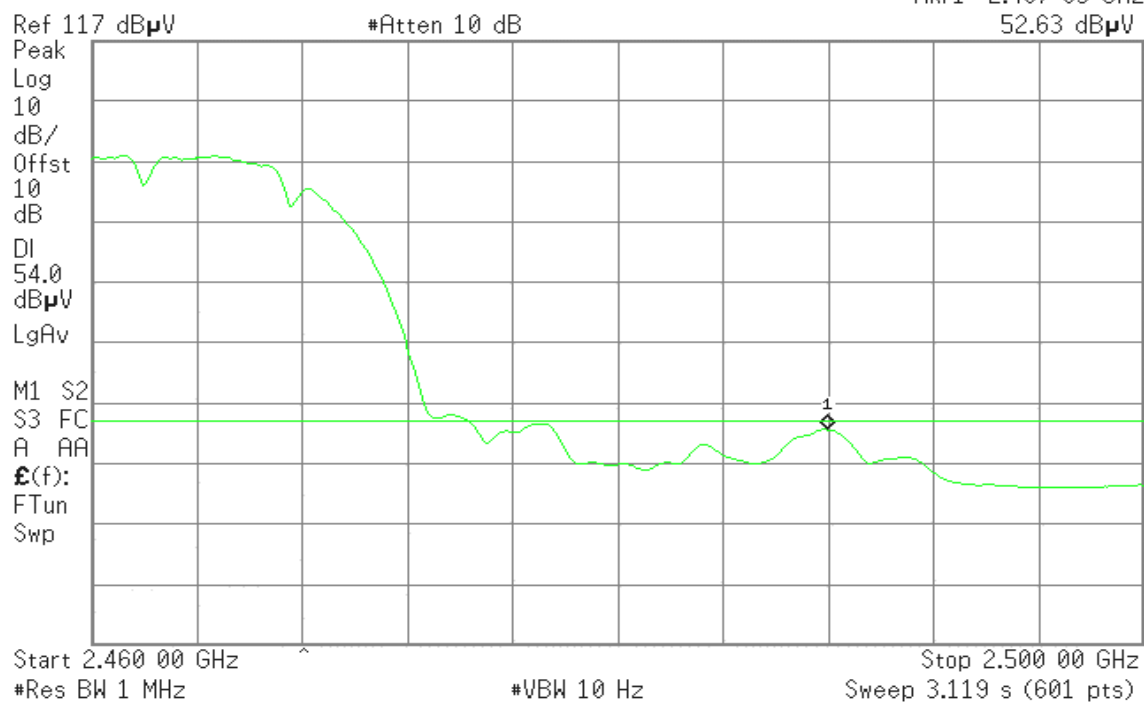




Detector mode: Peak

Polarity: Horizontal

Agilent 11:58:36 Sep 20, 2007

R T

Mkr1 2.483 50 GHz
55.80 dB μ V

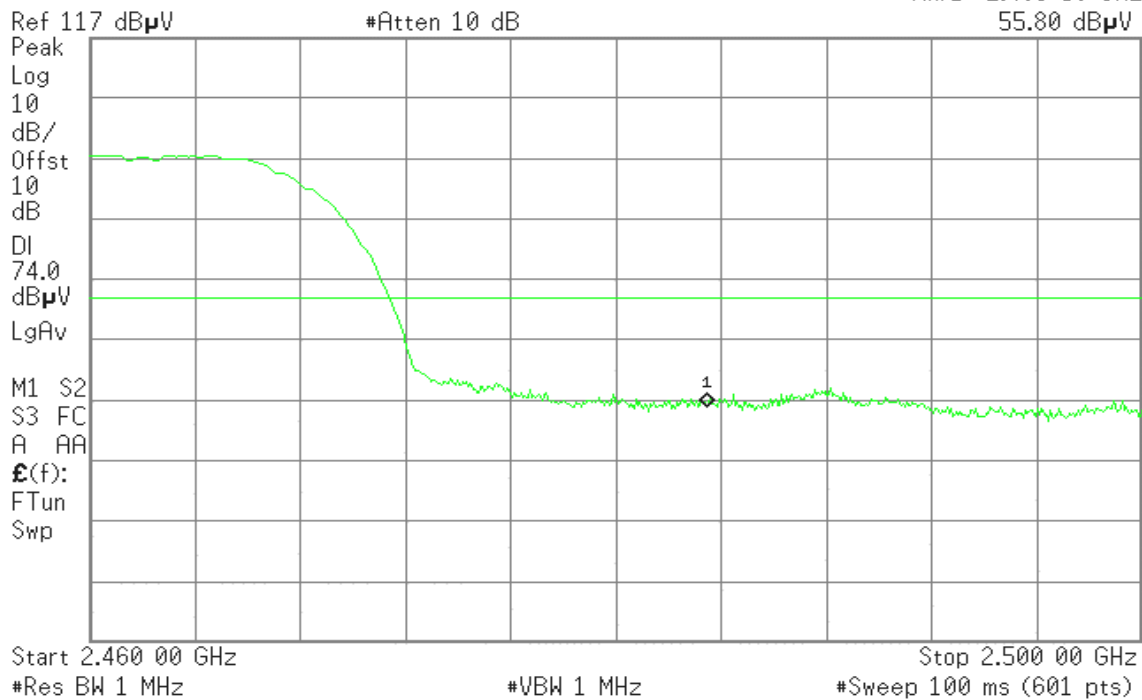

Detector mode: Average

Polarity: Horizontal

Agilent 11:59:06 Sep 20, 2007

R T

Mkr1 2.483 50 GHz
45.64 dB μ V






Band Edges (IEEE 802.11g / CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 11:12:48 Sep 20, 2007

R T

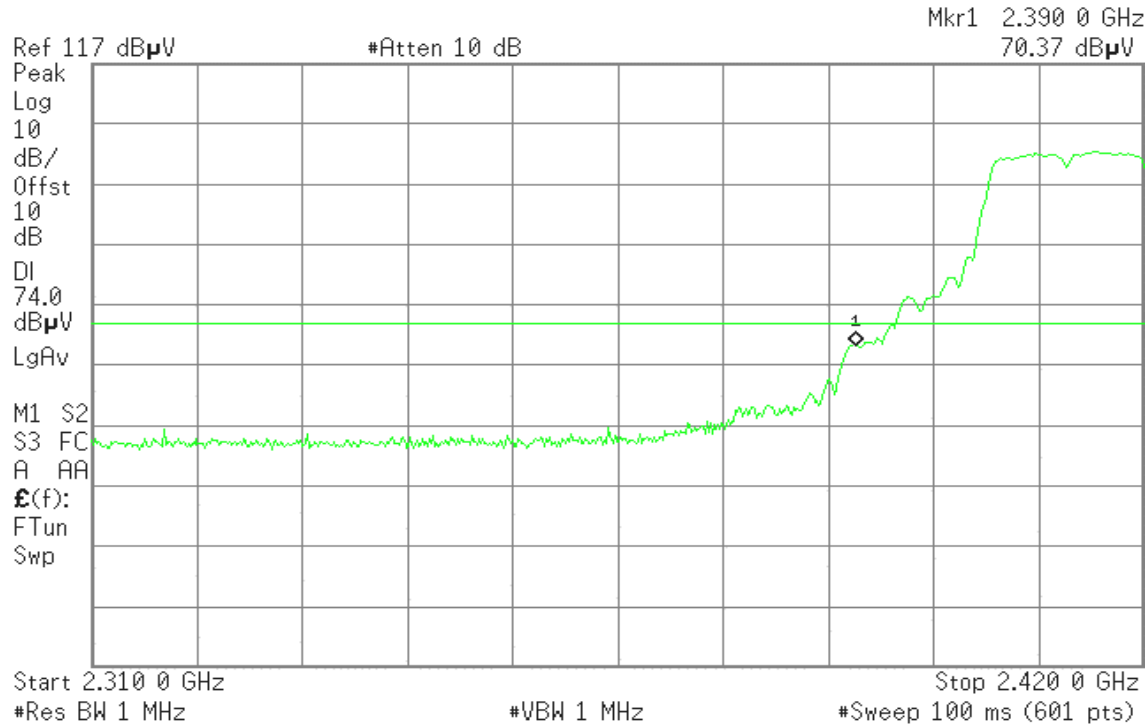


Detector mode: Average

Polarity: Vertical

Agilent 11:12:28 Sep 20, 2007

R T

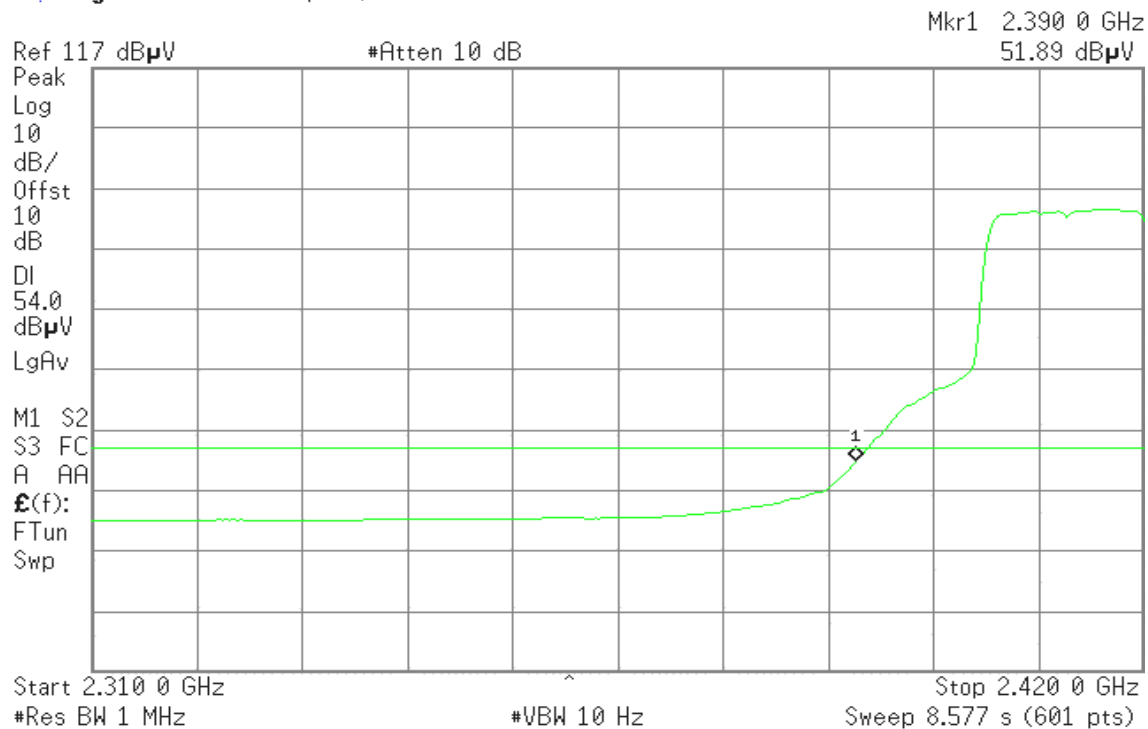




Detector mode: Peak

Polarity: Horizontal

Agilent 11:16:12 Sep 20, 2007

R T

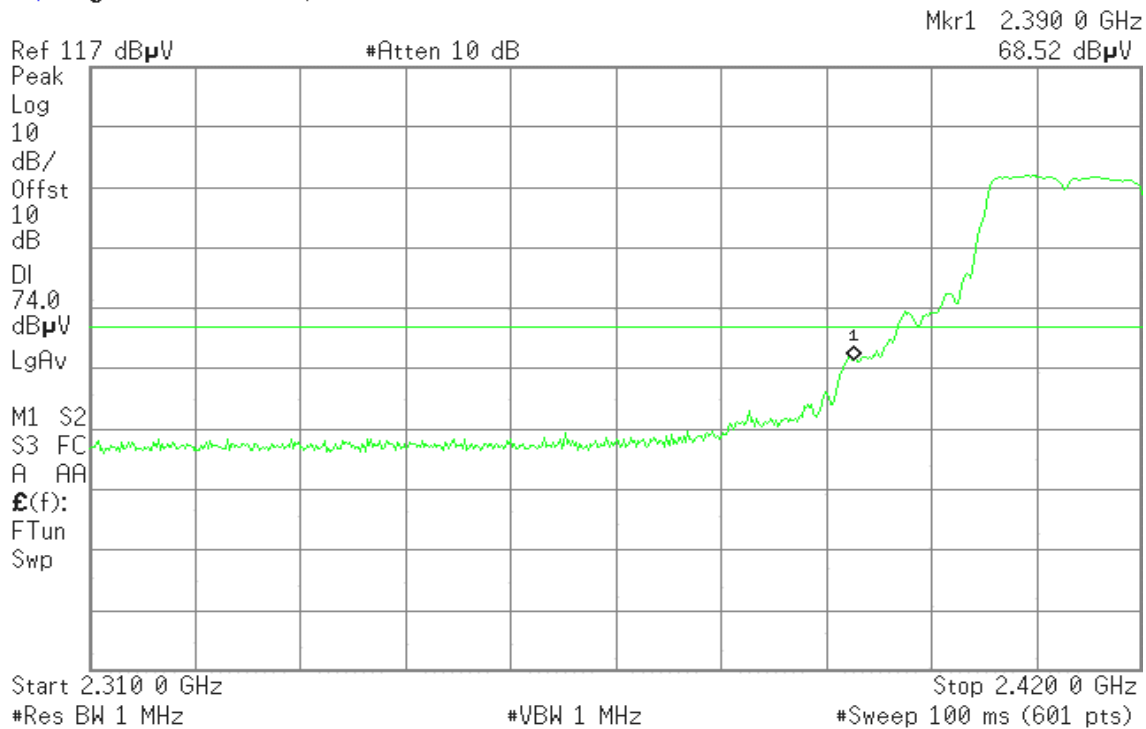


Detector mode: Average

Polarity: Horizontal

Agilent 11:15:54 Sep 20, 2007

R T

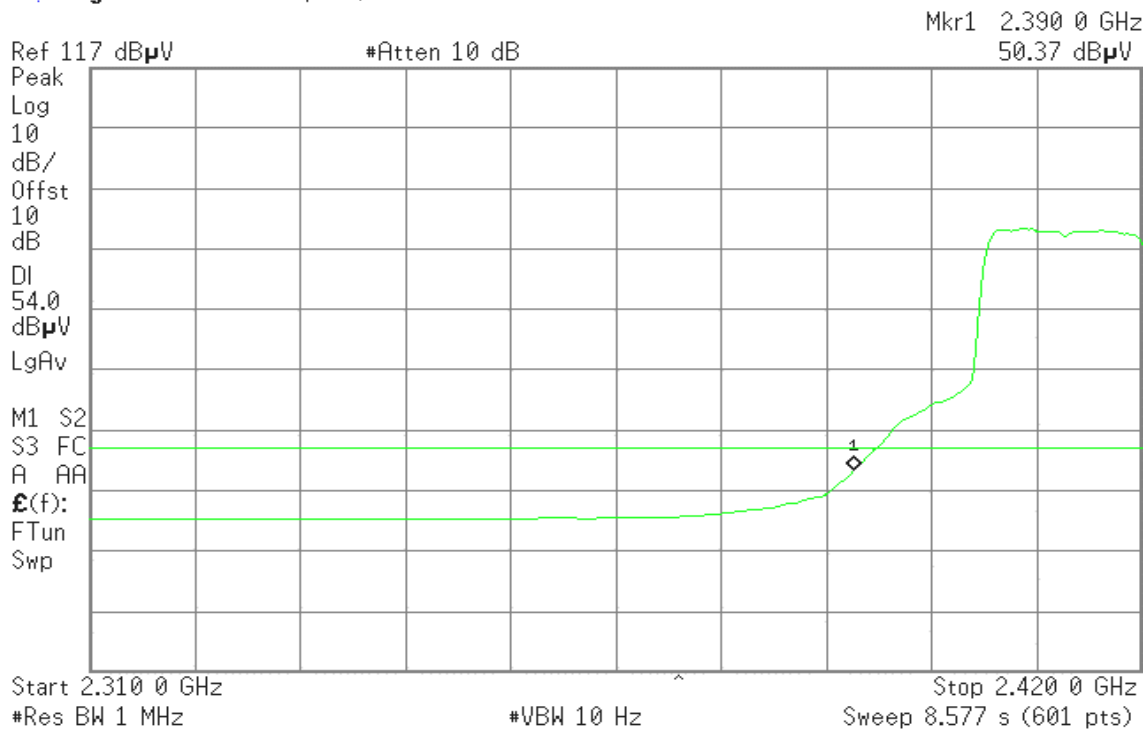



Band Edges (IEEE 802.11g / CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 11:54:49 Sep 20, 2007

R T

Mkr1 2.483 50 GHz
68.59 dB μ V

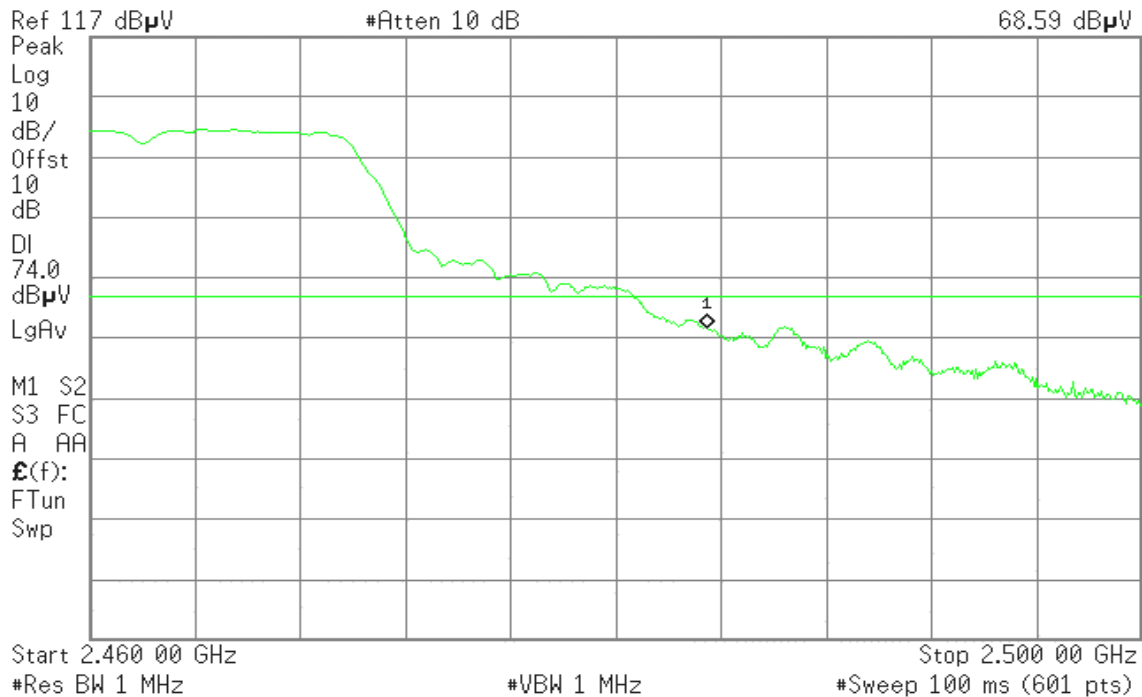


Detector mode: Average

Polarity: Vertical

Agilent 11:54:25 Sep 20, 2007

R T

Mkr1 2.483 50 GHz
53.15 dB μ V

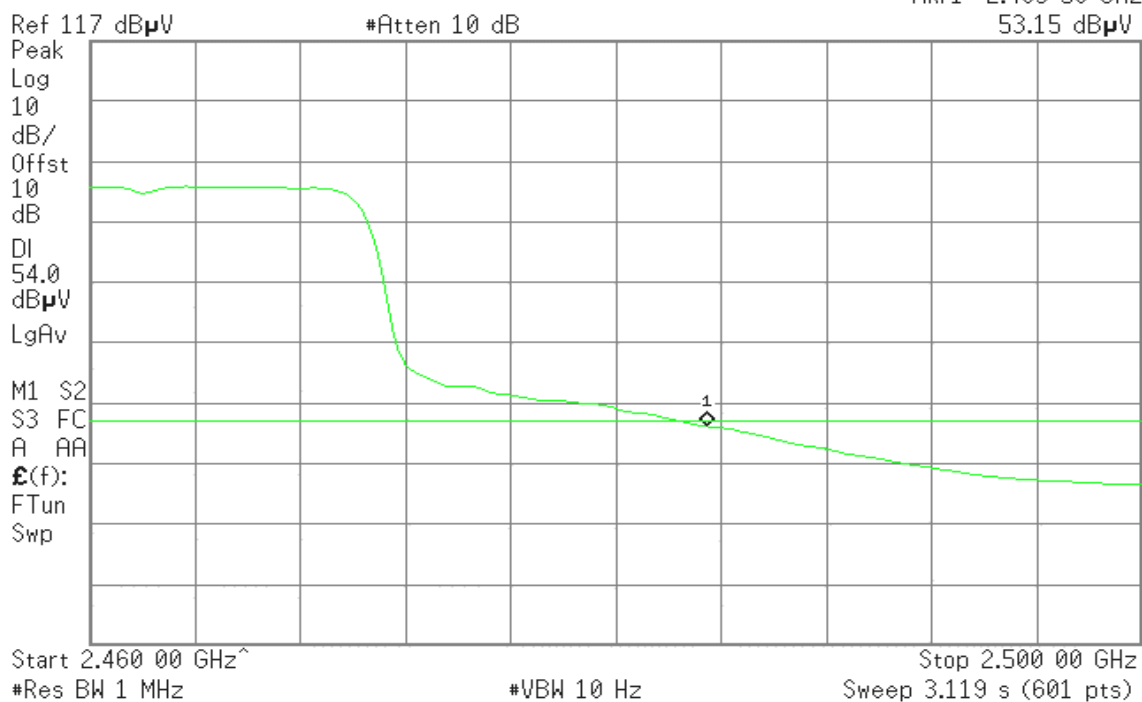




Detector mode: Peak

Polarity: Horizontal

Agilent 11:57:42 Sep 20, 2007

R T

Mkr1 2.483 50 GHz
66.35 dB μ V

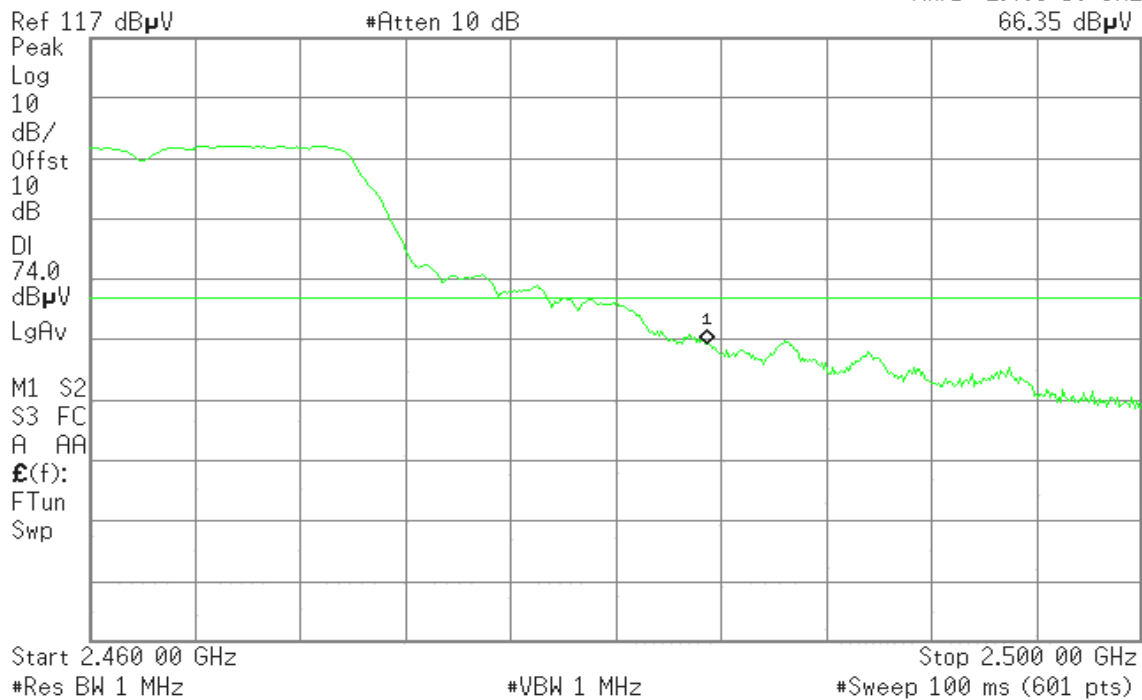


Detector mode: Average

Polarity: Horizontal

Agilent 11:57:24 Sep 20, 2007

R T

Mkr1 2.483 50 GHz
50.80 dB μ V

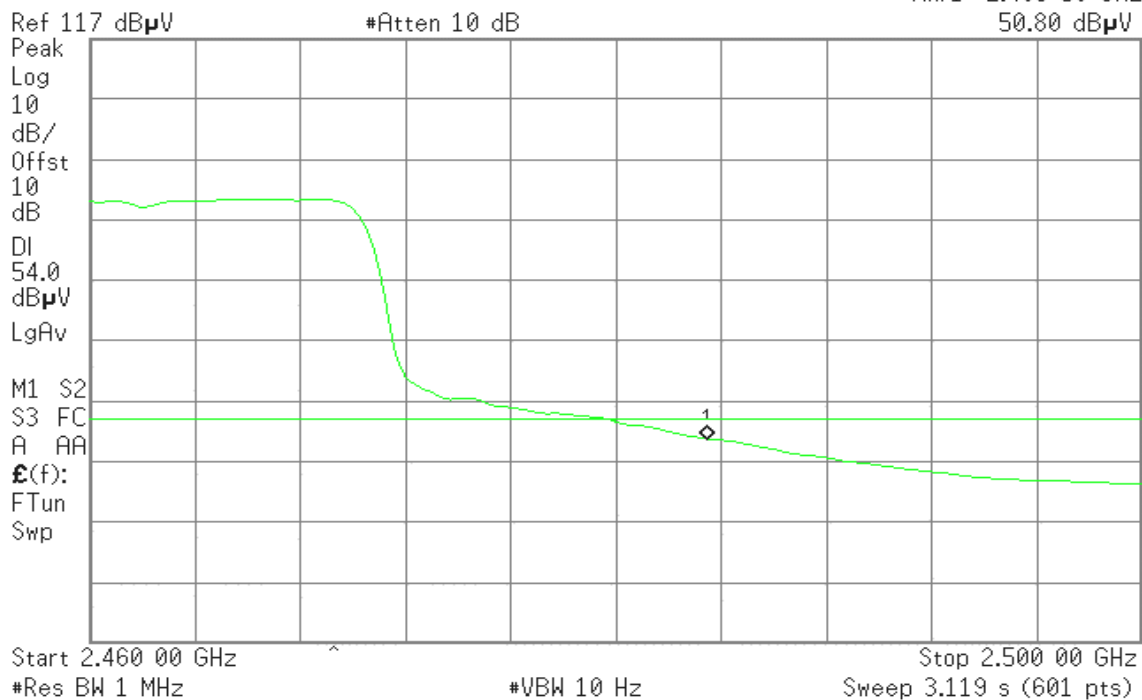




7.5 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 10 kHz, Span = 300 kHz, Sweep = 100 s
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.



TEST RESULTS

No non-compliance noted

Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-19.71	8.00	PASS
Mid	2437	-18.81		PASS
High	2462	-18.70		PASS

Test mode: IEEE 802.11g


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-17.32	8.00	PASS
Mid	2437	-12.16		PASS
High	2462	-14.18		PASS




Test Plot

IEEE 802.11b

PPSD (CH Low)

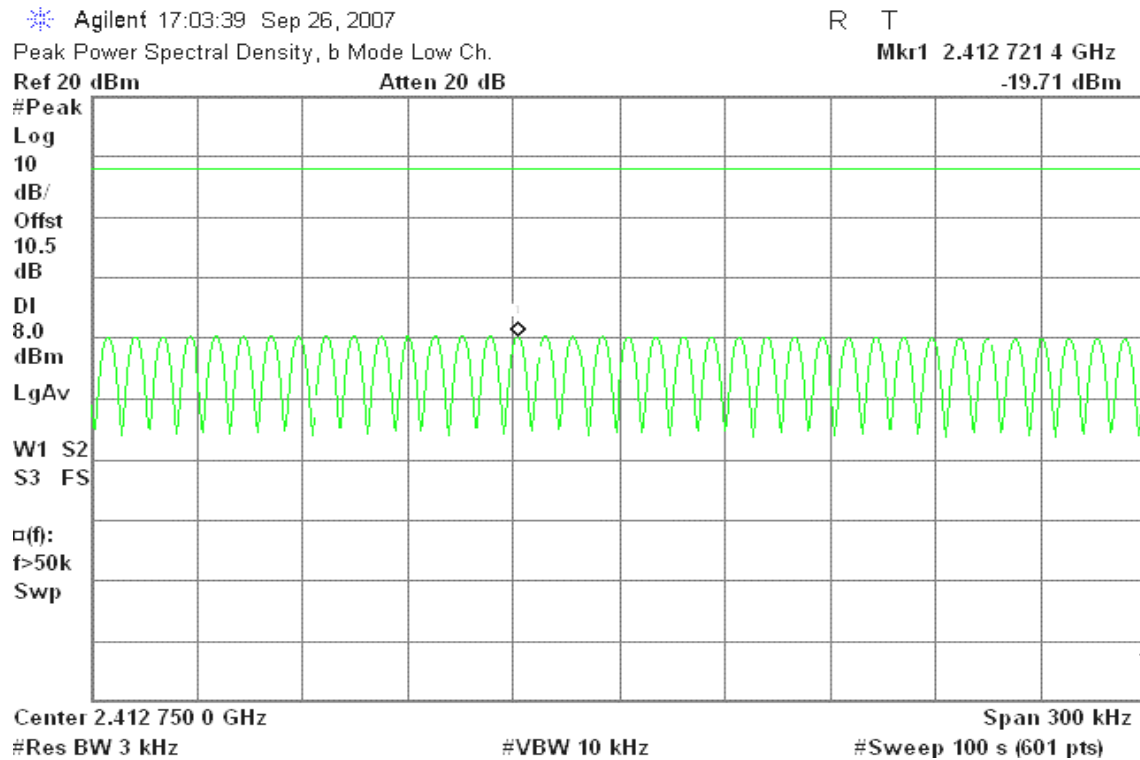


PPSD (CH Mid)

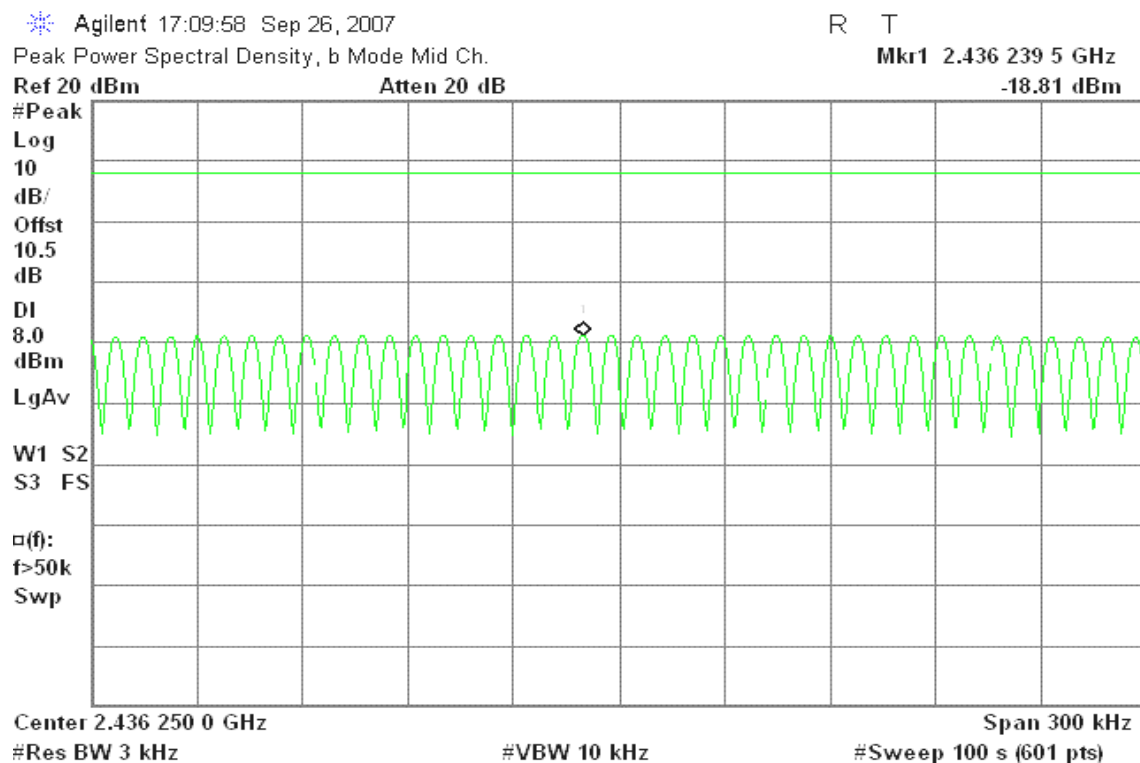




PPSD (CH High)

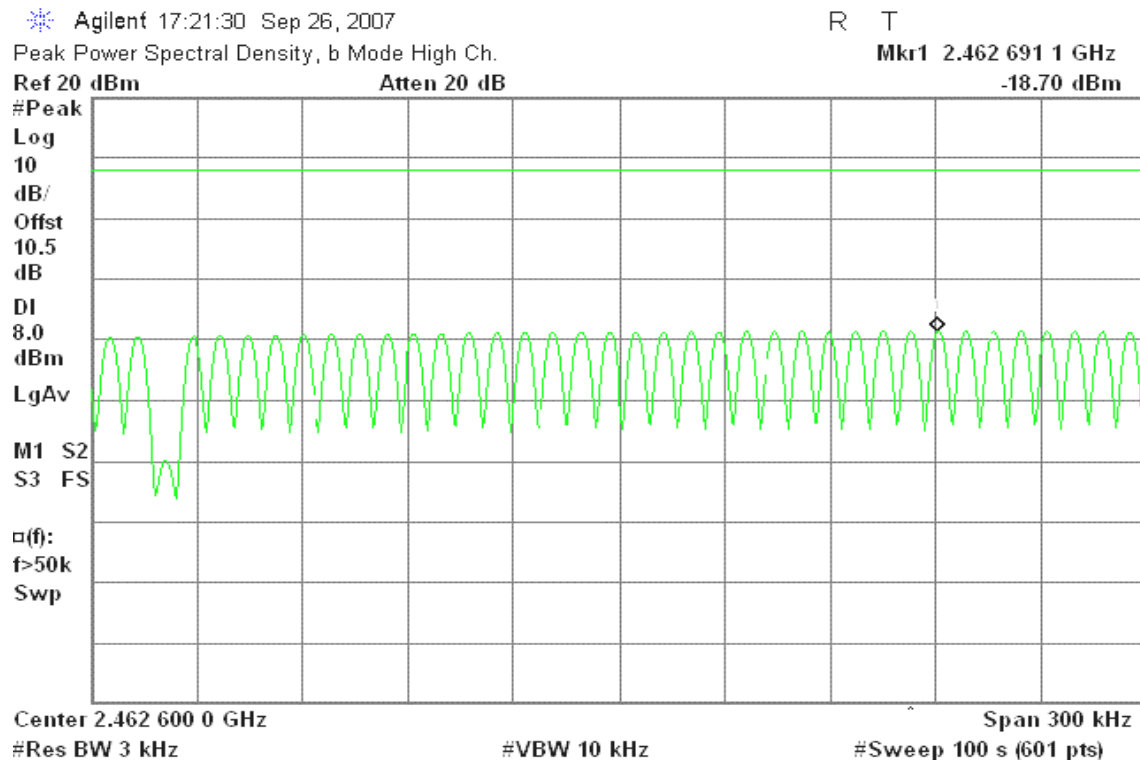

IEEE 802.11g

PPSD (CH Low)

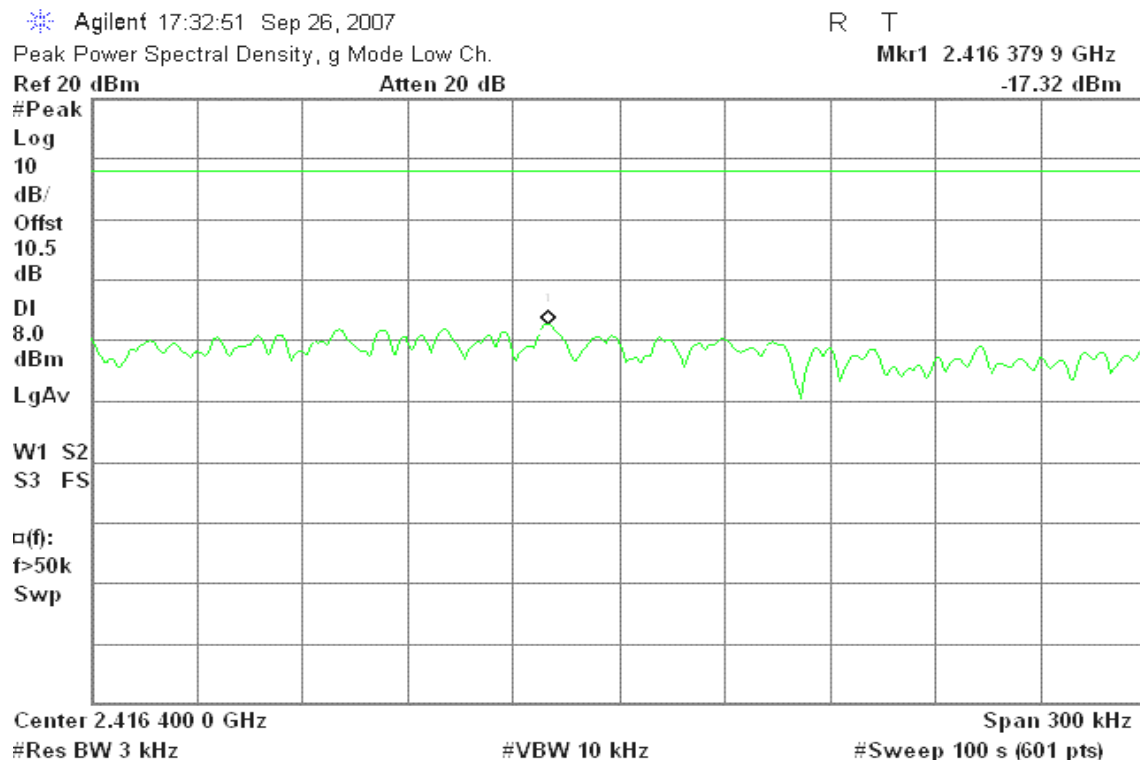



PPSD (CH Mid)

Agilent 17:40:11 Sep 26, 2007

R T


Peak Power Spectral Density, g Mode Mid Ch.

Mkr1 2.441 039 0 GHz

Ref 20 dBm

Atten 20 dB

-12.16 dBm

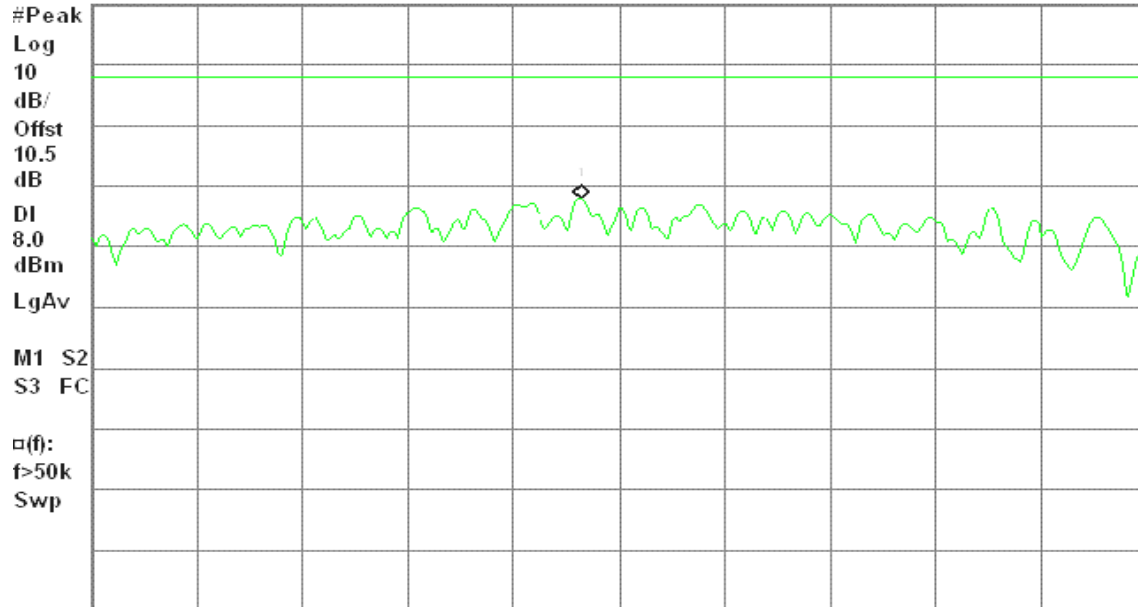

Center 2.441 050 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)

PPSD (CH High)

Agilent 17:53:19 Sep 26, 2007

R T


Peak Power Spectral Density, g Mode High Ch.

Mkr1 2.464 091 4 GHz

Ref 20 dBm

Atten 20 dB

-14.18 dBm

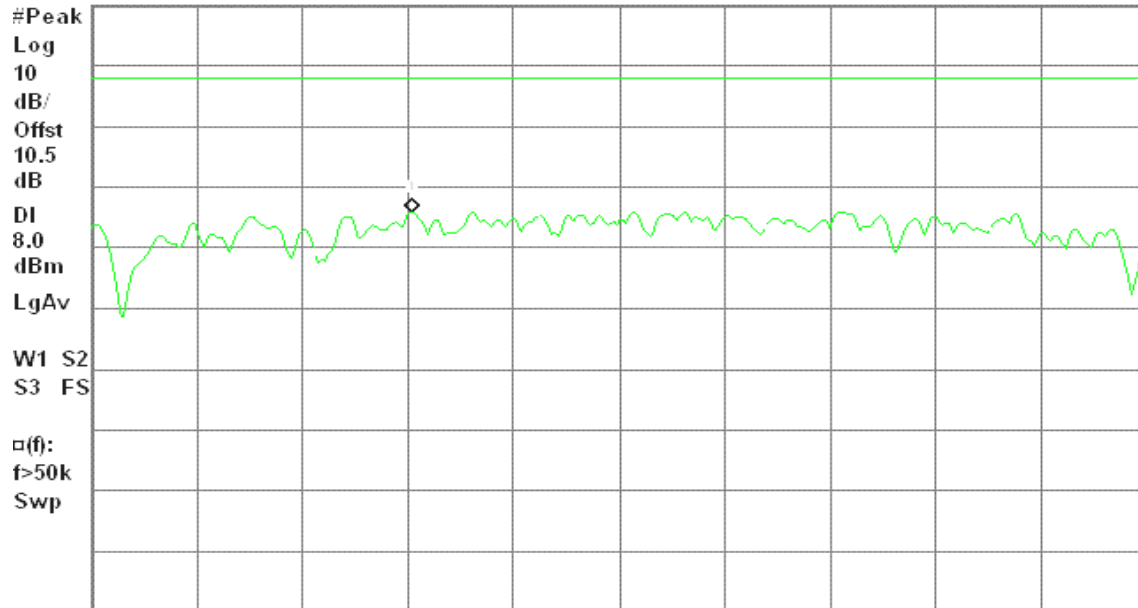

Center 2.464 150 0 GHz

Span 300 kHz

#Res BW 3 kHz

#VBW 10 kHz

#Sweep 100 s (601 pts)




7.6 SPURIOUS EMISSIONS

7.6.1 Conducted Measurement

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration



TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 13GHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

TEST RESULTS

No non-compliance noted



Test Plot

IEEE 802.11b

CH Low

Agilent 17:04:26 Sep 26, 2007

R T


Spurious, b Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 20 dB

-2.04 dBm

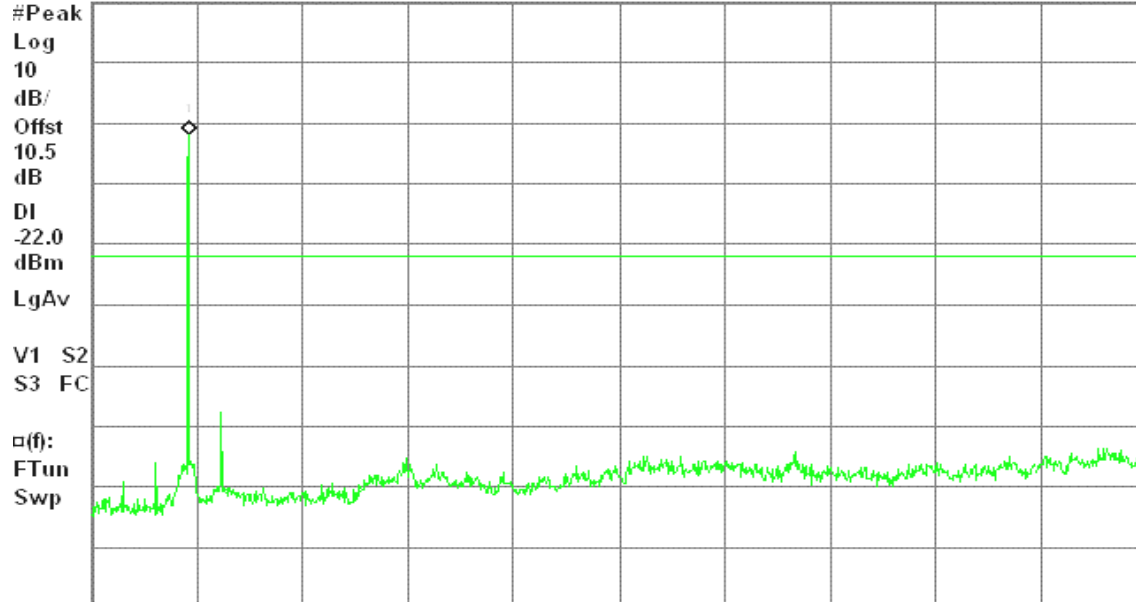

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH Mid

Agilent 17:11:57 Sep 26, 2007

R T


Spurious, b Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 20 dB

-0.57 dBm

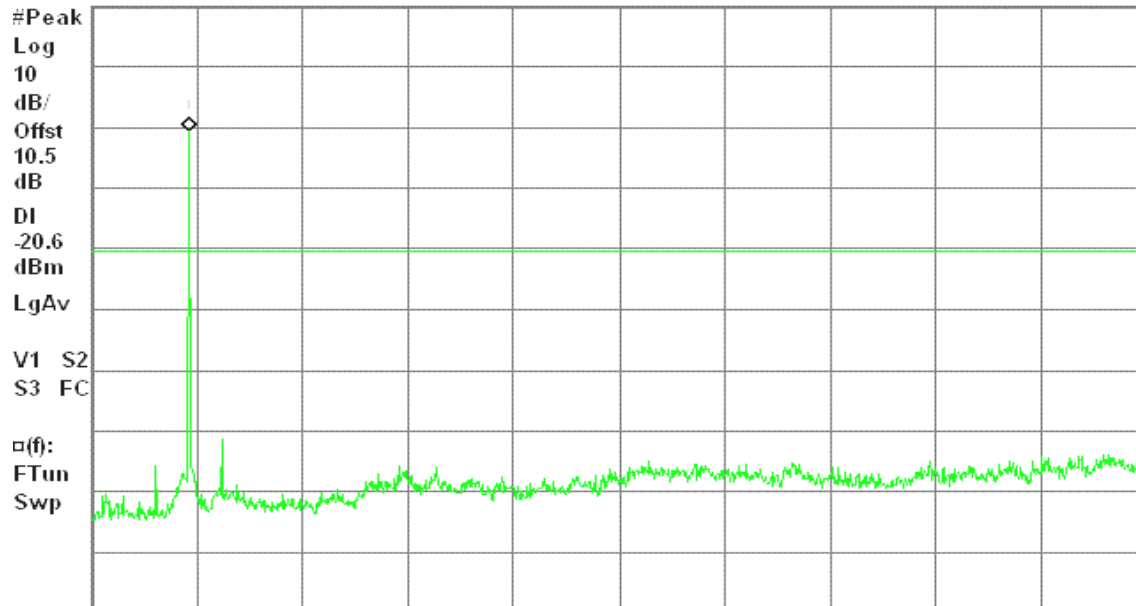

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH High

Agilent 17:23:40 Sep 26, 2007

R T


Spurious, b Mode High Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 20 dB

-1.32 dBm

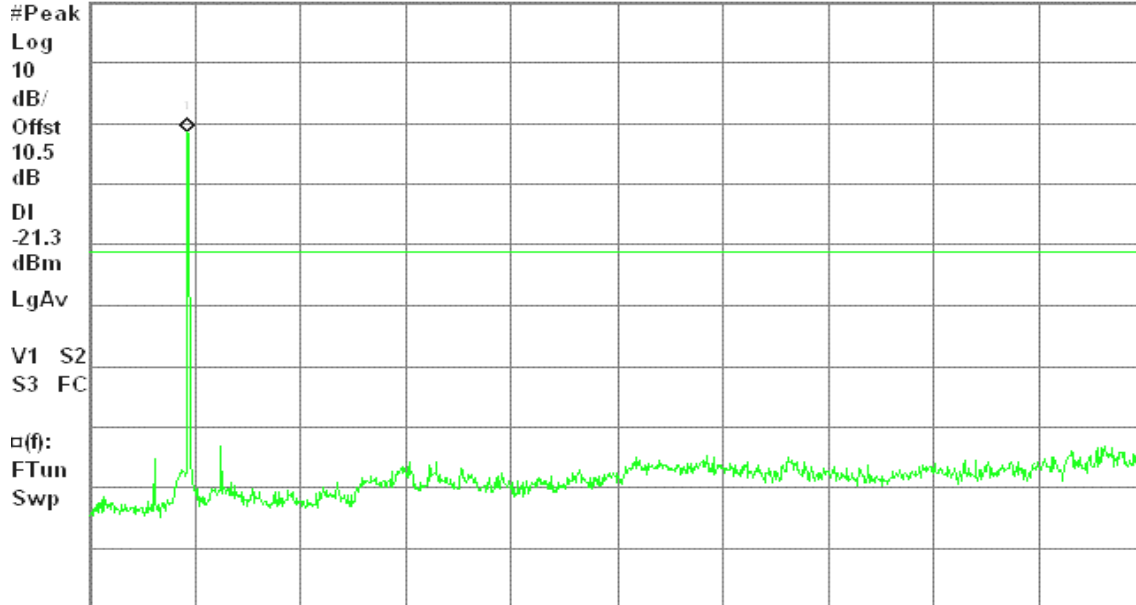

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

IEEE 802.11g

CH Low

Agilent 17:33:35 Sep 26, 2007

R T


Spurious, g Mode Low Ch.

Mkr1 2.42 GHz

Ref 20 dBm

Atten 20 dB

-3.66 dBm

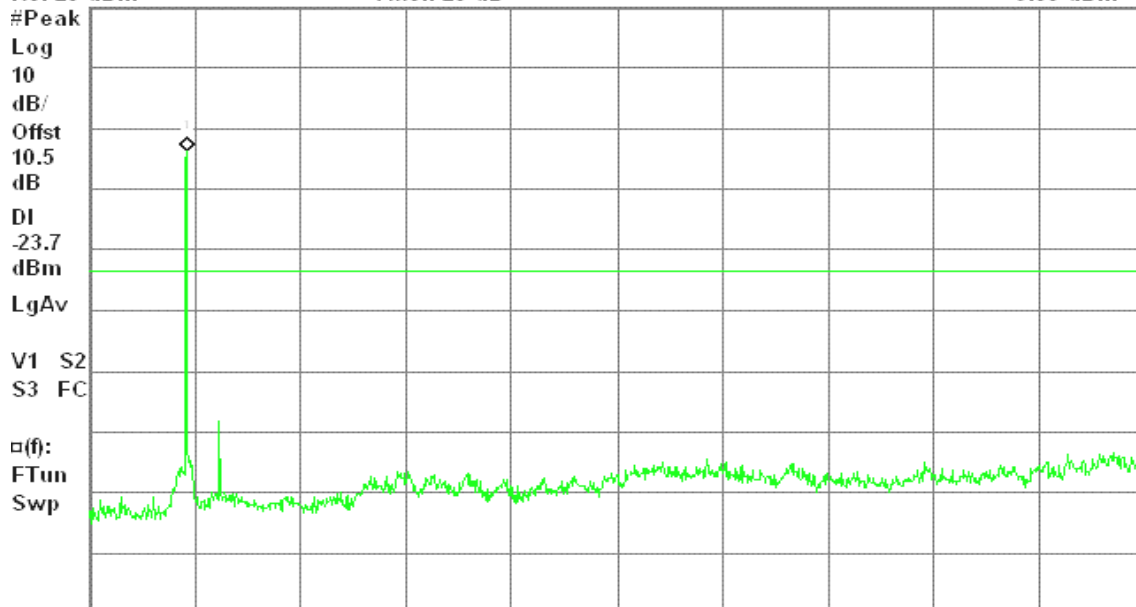

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



CH Mid

Agilent 17:40:55 Sep 26, 2007

R T


Spurious, g Mode Mid Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 20 dB

2.67 dBm

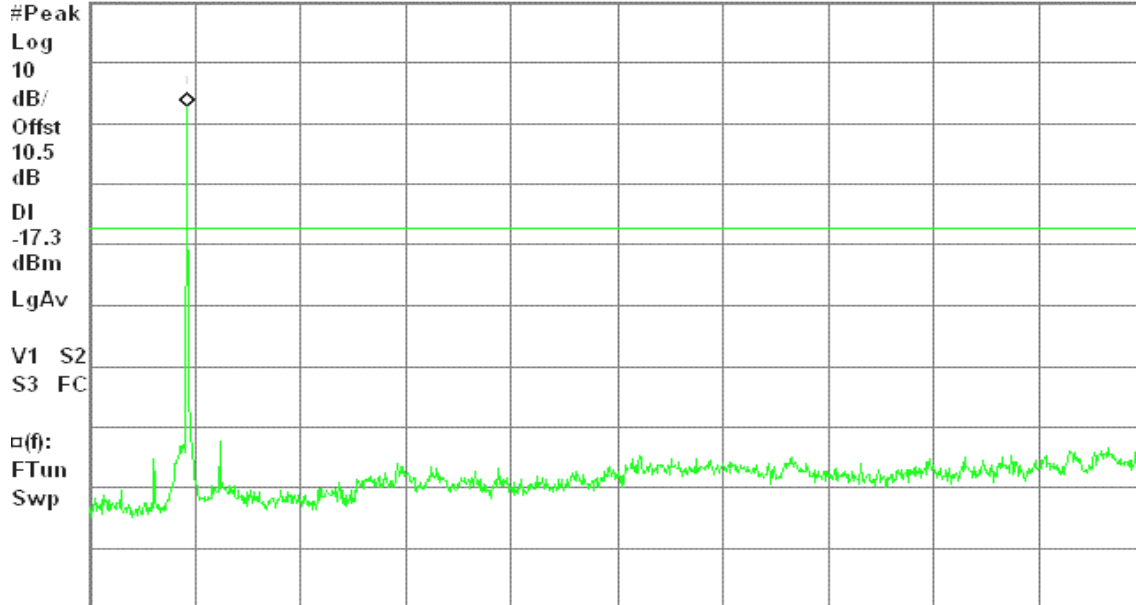

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)

CH High

Agilent 17:54:27 Sep 26, 2007

R T


Spurious, g Mode High Ch.

Mkr1 2.45 GHz

Ref 20 dBm

Atten 20 dB

1.85 dBm

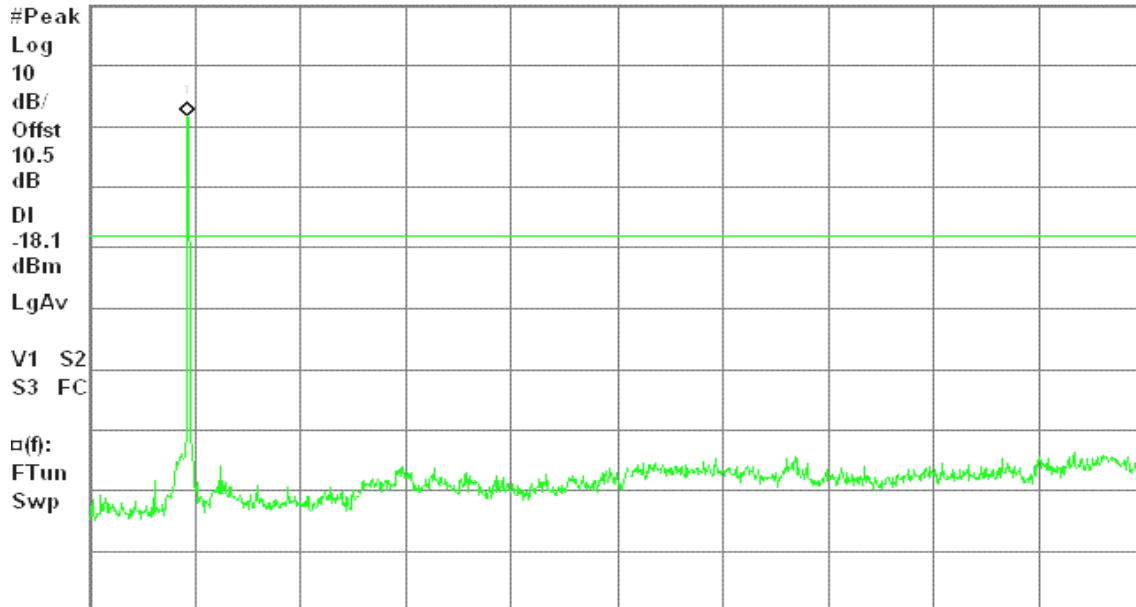

Center 13.02 GHz

Span 25.97 GHz

#Res BW 100 kHz

#VBW 100 kHz

Sweep 3.131 s (1001 pts)



7.6.2 RADIATED EMISSIONS

LIMIT

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength ($\mu\text{V/m}$ at 3-meter)	Field Strength (dB $\mu\text{V/m}$ at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Test Configuration

Below 1 GHz

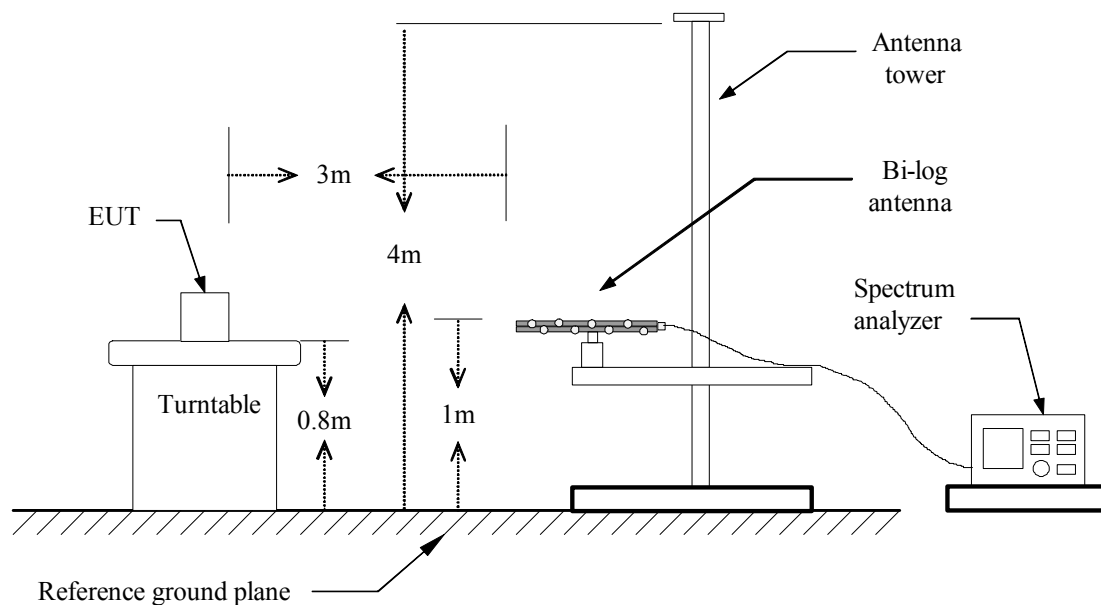

Above 1 GHz

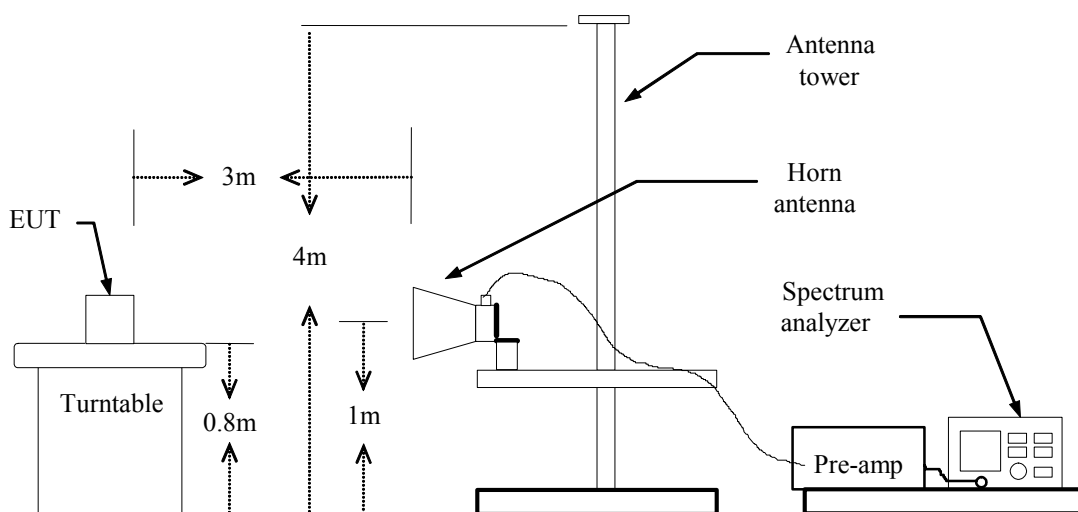



TEST PROCEDURE

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.



TEST RESULTS

No non-compliance noted

Below 1GHz

Operation Mode: Normal Link

Test Date: September 20, 2007

Temperature: 25°C

Tested by: Steven Young

Humidity: 55% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
30.00	V	35.28	-4.65	30.63	40.00	-9.37	QP
57.48	V	49.76	-19.39	30.37	40.00	-9.63	Peak
384.05	V	47.16	-10.08	37.08	46.00	-8.92	Peak
548.95	V	39.68	-6.92	32.76	46.00	-13.24	Peak
783.37	V	37.71	-3.24	34.46	46.00	-11.54	Peak
822.17	V	38.36	-2.60	35.75	46.00	-10.25	Peak
30.00	H	36.22	-4.65	31.57	40.00	-8.43	QP
107.60	H	46.73	-14.67	32.06	43.50	-11.44	Peak
384.05	H	47.50	-10.08	37.43	46.00	-8.57	Peak
713.85	H	38.69	-4.52	34.18	46.00	-11.82	Peak
857.73	H	40.00	-2.60	37.40	46.00	-8.60	Peak
899.77	H	38.49	-2.15	36.34	46.00	-9.66	Peak

Remark:

1. *Measuring frequencies from 30 MHz to the 1GHz.*
2. *Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.*
3. *Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit.*
4. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
5. *Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).*

**Above 1 GHz****Operation Mode:** TX / IEEE 802.11b / CH Low**Test Date:** September 28, 2007**Temperature:** 25°C**Tested by:** Steven Young**Humidity:** 55 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2410.00	V	92.16	89.41	-3.98	88.18	85.43	Fundamental			
1620.00	V	60.00	---	-8.78	51.22	---	74.00	54.00	-2.78	Peak
3216.67	V	48.85	---	-2.17	46.68	---	74.00	54.00	-7.32	Peak
4825.00	V	55.54	53.11	0.55	56.09	53.66	74.00	54.00	-0.34	AVG
6433.33	V	58.05	54.90	2.87	60.92	57.77	68.18	65.43	-7.66	AVG
N/A										
1330.00	H	60.56	---	-10.25	50.31	---	74.00	54.00	-3.69	Peak
3216.67	H	49.84	---	-2.17	47.67	---	74.00	54.00	-6.33	Peak
4825.00	H	48.30	---	0.55	48.85	---	74.00	54.00	-5.15	Peak
6433.33	H	47.16	---	2.87	50.03	---	74.00	54.00	-3.97	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

**Operation Mode:** TX / IEEE 802.11b / CH Mid**Test Date:** September 28, 2007**Temperature:** 25°C**Tested by:** Steven Young**Humidity:** 55 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2433.33	V	96.02	93.31	-3.91	92.11	89.40	Fundamental			
1743.33	V	58.66	---	-7.56	51.10	---	74.00	54.00	-2.90	Peak
3250.00	V	47.80	---	-2.13	45.67	---	74.00	54.00	-8.33	Peak
4875.00	V	55.54	52.86	0.60	56.14	53.46	74.00	54.00	-0.54	AVG
6500.00	V	58.07	54.81	2.99	61.06	57.80	72.11	69.40	-11.6	AVG
N/A										
1366.67	H	59.43	---	-10.19	49.24	---	74.00	54.00	-4.76	Peak
3250.00	H	49.26	---	-2.13	47.13	---	74.00	54.00	-6.87	Peak
4875.00	H	47.31	---	0.60	47.91	---	74.00	54.00	-6.09	Peak
6500.00	H	47.97	---	2.99	50.96	---	74.00	54.00	-3.04	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

**Operation Mode:** TX / IEEE 802.11b / CH High**Test Date:** September 28, 2007**Temperature:** 25°C**Tested by:** Steven Young**Humidity:** 55 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2433.33	V	96.02	93.31	-3.91	92.11	89.40	Fundamental			
1520.00	V	59.48	---	-9.78	49.70	---	74.00	54.00	-4.30	Peak
3283.33	V	50.80	---	-2.09	48.71	---	74.00	54.00	-5.29	Peak
4925.00	V	56.72	52.96	0.65	57.37	53.61	74.00	54.00	-0.39	AVG
6566.67	V	54.95	53.04	3.12	58.07	56.16	72.02	69.42	-13.26	AVG
N/A										
1603.33	H	59.37	---	-8.95	50.43	---	74.00	54.00	-3.57	Peak
3283.33	H	50.71	---	-2.09	48.63	---	74.00	54.00	-5.37	Peak
4925.00	H	49.92	---	0.65	50.57	---	74.00	54.00	-3.43	Peak
6566.67	H	48.04	---	3.12	51.16	---	74.00	54.00	-2.84	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

**Operation Mode:** TX / IEEE 802.11g / CH Low**Test Date:** September 28, 2007**Temperature:** 25°C**Tested by:** Steven Young**Humidity:** 55 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2416.67	V	101.21	91.81	-3.96	97.25	87.85	Fundamental			
1530.00	V	59.24	---	-9.68	49.56	---	74.00	54.00	-4.44	Peak
3216.67	V	48.23	---	-2.17	46.06	---	74.00	54.00	-7.94	Peak
4825.00	V	65.94	52.00	0.55	66.49	52.55	74.00	54.00	-1.45	AVG
6433.33	V	57.87	54.39	2.87	60.74	57.26	77.25	67.85	-10.59	AVG
N/A										
1650.00	H	59.78	---	-8.48	51.30	---	74.00	54.00	-2.70	Peak
3216.67	H	48.05	---	-2.17	45.88	---	74.00	54.00	-8.12	Peak
4825.00	H	60.77	47.05	0.55	61.32	47.60	74.00	54.00	-6.40	AVG
6433.33	H	47.29	---	2.87	50.16	---	74.00	54.00	-3.84	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

**Operation Mode:** TX / IEEE 802.11g / CH Mid**Test Date:** September 28, 2007**Temperature:** 25°C**Tested by:** Steven Young**Humidity:** 55 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2440.00	V	105.25	96.53	-3.90	101.35	92.63	Fundamental			
1510.00	V	60.59	---	-9.87	50.71	---	74.00	54.00	-3.29	Peak
3250.00	V	47.70	---	-2.13	45.57	---	74.00	54.00	-8.43	Peak
4875.00	V	61.03	48.86	0.60	61.63	49.46	74.00	54.00	-4.54	AVG
6500.00	V	57.14	51.39	2.99	60.13	54.38	81.35	72.63	-18.25	AVG
N/A										
1360.00	H	60.27	---	-10.20	50.07	---	74.00	54.00	-3.93	Peak
3250.00	H	49.41	---	-2.13	47.28	---	74.00	54.00	-6.72	Peak
4875.00	H	60.27	47.27	0.60	60.87	47.87	74.00	54.00	-6.13	AVG
6500.00	H	47.43	---	2.99	50.41	---	74.00	54.00	-3.59	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

**Operation Mode:** TX / IEEE 802.11g / CH High**Test Date:** September 28, 2007**Temperature:** 25°C**Tested by:** Steven Young**Humidity:** 55 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
2456.67	V	105.25	96.53	-3.90	101.35	92.63	Fundamental			
1616.67	V	58.86	---	-8.81	50.05	---	74.00	54.00	-3.95	Peak
3283.33	V	48.31	---	-2.09	46.22	---	74.00	54.00	-7.78	Peak
4916.67	V	65.02	52.31	0.64	65.66	52.95	74.00	54.00	-1.05	AVG
6566.67	V	54.61	55.21	3.12	57.73	58.33	82.04	73.32	-14.99	AVG
7391.67	V	44.42	---	3.25	47.68	---	74.00	54.00	-6.32	Peak
N/A										
1750.00	H	59.11	---	-7.49	51.62	---	74.00	54.00	-2.38	Peak
3283.33	H	49.99	---	-2.09	47.90	---	74.00	54.00	-6.10	Peak
4925.00	H	58.69	50.63	0.65	59.34	51.28	74.00	54.00	-2.72	AVG
6566.67	H	48.60	47.42	3.12	51.72	50.54	74.00	54.00	-2.28	AVG
7383.33	H	44.37	---	3.27	47.64	---	74.00	54.00	-6.36	Peak
N/A										

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit .
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser; with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).
7. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.



7.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.



TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

Test Data

Operation Mode: Normal Link **Test Date:** September 19, 2007
Temperature: 25°C **Tested by:** Snake Shan
Humidity: 55% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB)	QP Result (dBuV)	AV Result (dBuV)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.201	43.450	36.360	0.110	43.560	36.470	63.556	53.556	-19.996	-17.086	L1
0.271	32.910	26.420	0.084	32.994	26.504	61.087	51.087	-28.093	-24.583	L1
0.341	26.920	22.670	0.058	26.978	22.728	59.179	49.179	-32.201	-26.451	L1
0.611	20.710	20.450	0.000	20.710	20.450	56.000	46.000	-35.290	-25.550	L1
7.614	26.800	24.470	0.205	27.005	24.675	60.000	50.000	-32.995	-25.325	L1
15.352	24.700	20.400	0.422	25.122	20.822	60.000	50.000	-34.878	-29.178	L1
0.201	42.060	34.690	0.110	42.170	34.800	63.569	53.569	-21.400	-18.770	L2
0.271	31.770	27.020	0.084	31.854	27.104	61.087	51.087	-29.233	-23.983	L2
0.338	26.210	22.140	0.059	26.269	22.199	59.252	49.252	-32.983	-27.053	L2
7.325	24.890	24.190	0.193	25.083	24.383	60.000	50.000	-34.917	-25.617	L2
12.102	26.010	24.040	0.349	26.359	24.389	60.000	50.000	-33.641	-25.611	L2
15.867	24.610	21.740	0.430	25.040	22.170	60.000	50.000	-34.960	-27.830	L2


Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)




Test Plots

Conducted emissions (Line 1)

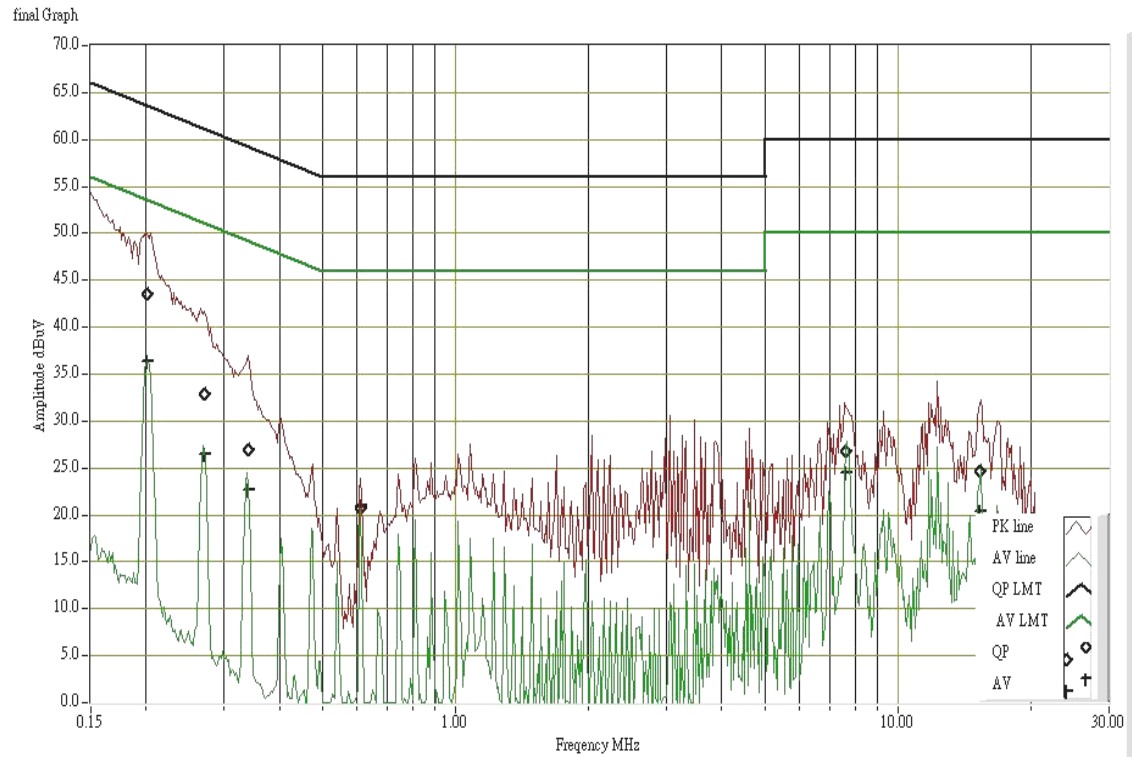

Conducted emissions (Line 2)

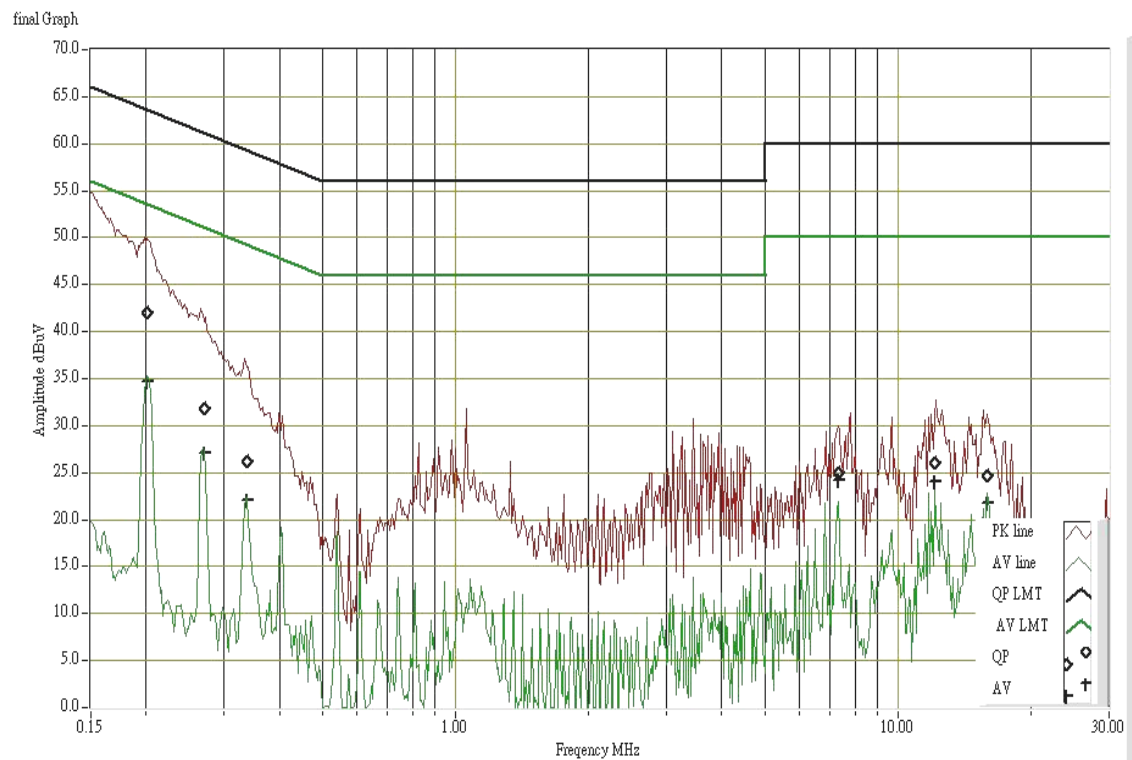



APPENDIX I

RADIO FREQUENCY EXPOSURE

LIMIT

According to §15.247(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See § 1.1307(b)(1) of this chapter.

EUT Specification

EUT	UMPC
Frequency band (Operating)	☒ WLAN: 2.412GHz ~ 2.462GHz ☐ WLAN: 5.18GHz ~ 5.32GHz / 5.50GHz ~ 5.70GHz ☐ WLAN: 5.745GHz ~ 5.825GHz ☐ Others
Device category	☒ Portable (<20cm separation) ☐ Mobile (>20cm separation) ☐ Others
Exposure classification	☐ Occupational/Controlled exposure ($S = 5\text{mW}/\text{cm}^2$) ☒ General Population/Uncontrolled exposure ($S=1\text{mW}/\text{cm}^2$)
Antenna diversity	☒ Single antenna ☐ Multiple antennas ☐ Tx diversity ☐ Rx diversity ☐ Tx/Rx diversity
Max. output power	IEEE 802.11b: 13.91 dBm (24.60mW) IEEE 802.11g: 21.02 dBm (126.47mW)
Antenna gain (Max)	0.13 dBi (Numeric gain: 1.03)
Evaluation applied	☐ MPE Evaluation ☒ SAR Evaluation* ☐ N/A

Remark:

1. The maximum output power is 21.02dBm (126.47mW) at 2437MHz (with 1.03 numeric antenna gain.)
2. DTS device is not subject to routine RF evaluation; MPE estimate is used to justify the compliance.

TEST RESULTS

No non-compliance noted.

Remark: Please refer to the separated SAR report.