

FCC TEST REPORT  
for  
SEANYWELL COMPANY LIMITED

Wi-Fi Module  
Model No.: XLW-002X

Prepared for : SEANYWELL COMPANY LIMITED  
Address : RM 1502, 15/F FU LEE COMM BLDG, NO. 14-20 M PIKEM  
ST JORDAN KL, HK

Prepared By : Anbotek Compliance Laboratory Limited  
Address : 1/F, 1 /Building, SEC Industrial Park, No.4 Qianhai Road,  
Nanshan District, Shenzhen, 518054, China  
Tel: (86) 755-26014771  
Fax: (86) 755-26014772

Report Number : 201210790F  
Date of Test : Oct. 26, 2012 to Nov. 12, 2012  
Date of Report : Nov.12, 2012

## TABLE OF CONTENT

Description	Page
Test Report	1
<b>1. GENERAL INFORMATION.....</b>	<b>4</b>
1.1. Description of Device (EUT) .....	4
1.2. Auxiliary Equipment Used during Test .....	5
1.3. Description of Test Facility.....	6
1.4. Measurement Uncertainty .....	6
<b>2. MEASURING DEVICE AND TEST EQUIPMENT.....</b>	<b>7</b>
<b>3. TEST METHODOLOGY .....</b>	<b>8</b>
3.1. Summary of Test Results .....	8
3.2. Description of Test Modes.....	8
3.3. List of channels:.....	9
<b>4. CONDUCTED EMISSION TEST.....</b>	<b>10</b>
4.1. Block Diagram of Test Setup .....	10
4.2. Power Line Conducted Emission Measurement Limits (15.207).....	10
4.3. Configuration of EUT on Measurement.....	10
4.4. Operating Condition of EUT .....	10
4.5. Test Procedure .....	11
4.6. Power Line Conducted Emission Measurement Results .....	11
<b>5. FCC PART 15.247 REQUIREMENTS FOR DSSS &amp; OFDM MODULATION.....</b>	<b>14</b>
5.1. Test Setup .....	14
5.2. 6dB Bandwidth .....	14
5.3 Maximum Peak output power test .....	18
5.4 Band Edges Measurement .....	22
5.5 Peak Power Spectral Density.....	27
5.6 Radiated Emissions.....	31
<b>6. PHOTOGRAPH.....</b>	<b>40</b>
6.1. Photo of Conducted Emission Measurement.....	40
6.2. Photo of Radiation Emission Test .....	40
<b>APPENDIX I (EXTERNAL PHOTOS).....</b>	<b>42</b>
<b>APPENDIX II (INTERNAL PHOTOS) .....</b>	<b>43</b>

Appendix I (1 Page)

Appendix II (1 Page)

## TEST REPORT

Applicant : SEANYWELL COMPANY LIMITED  
Manufacturer : SEANYWELL COMPANY LIMITED  
EUT : Wi-Fi Module  
Model No. : XLW-002X  
Serial No. : N/A  
Rating : DC 5V VIA ADAPTER  
Trade Mark : N/A

Measurement Procedure Used:  
FCC Part15 Subpart C, Paragraph 15.247: 2010

The device described above is tested by Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Anbotek Compliance Laboratory Limited


Date of Test : Oct. 11~21, 2012



Prepared by : (Tested Engineer / Rock Zeng )



Reviewer : (Project Manager / Andy Chen )

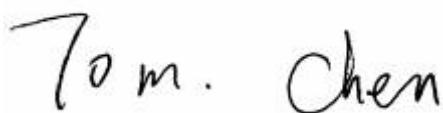

Approved & Authorized Signer : (Manager / Tom Chen)

## 1. GENERAL INFORMATION

### 1.1. Description of Device (EUT)

EUT : Wi-Fi Module

Model Number : XLW-002X

Test Power Supply : 120V~, 60Hz for Adapter

RF Transmission : 2412-2462MHz(802.11b/g)  
Frequency

Channels : 11

Antenna Type : External antenna

Antenna Gain : 0dBi

Applicant : SEANYWELL COMPANY LIMITED  
Address : RM 1502, 15/F FU LEE COMM BLDG, NO. 14-20 M PIKEM ST  
JORDAN KL, HK

Manufacturer : SEANYWELL COMPANY LIMITED  
Address : RM 1502, 15/F FU LEE COMM BLDG, NO. 14-20 M PIKEM ST  
JORDAN KL, HK

Date of receiver : Oct. 26, 2012

Date of Test : Oct.26, 2012 to Nov.12, 2012

## 1.2. Auxiliary Equipment Used during Test

PC	: Manufacturer: DELL M/N: OPTIPLEX 380 S/N: 1J63X2X CE , FCC: DOC
MONITOR	: Manufacturer: DELL M/N: E170Sc S/N: CN-00V539-64180-055-0UPS CE , FCC: DOC
KEYBOARD	: Manufacturer: DELL M/N: SK-8115 S/N: CN-0DJ313-71616-06C-02XN CE , FCC: DOC Cable: 1m, unshielded
MOUSE	: Manufacturer: DELL M/N: M-UARDEL7 S/N: N/A CE , FCC: DOC Cable: 1m, unshielded
Printer	: Manufacturer: Brother M/N: MFC-3360C S/N: N/A CE, FCC:DOC
Power Line	: Non-Shielded, 1.5m
VGA Cable	: Non-Shielded, 1.5m
Network Cable	: Non-Shielded, 1.5m

### 1.3. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### **CNAS - LAB Code: L3503**

Anbotech Compliance Laboratory Limited., Laboratory has been assessed and in compliance with CNAS/CL01: 2006 accreditation criteria for testing laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of Testing Laboratories.

#### **FCC-Registration No.: 752021**

Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 752021, August 20, 2010.

#### **IC-Registration No.: 8058A-1**

Anbotech Compliance Laboratory Limited., EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration 8058A, August 30, 2010.

#### **Test Location**

All Emissions tests were performed at

Anbotech Compliance Laboratory Limited. at 1/F, 1 /Building, SEC Industrial Park, No.4 Qianhai Road, Nanshan District, Shenzhen, 518054, China

### 1.4. Measurement Uncertainty

Radiation Uncertainty : Ur = 4.3dB

Conduction Uncertainty : Uc = 3.4dB

## 2. MEASURING DEVICE AND TEST EQUIPMENT

The following test equipments were used during test:

Equipment	Manufacturer	Model #	Serial #	Data of Cal.	Due Data
EMI Test Receiver	Rohde & Schwarz	ESCI	100119	May.03, 2011	May.02, 2012
EMI Test Receiver	Rohde & Schwarz	ESIB26	100249	Sep.22, 2011	Sep.21, 2012
EMI Test Software	SHURPLE	ESK1	N/A	N/A	N/A
Spectrum Analyzer	Agilent	E7405A	MY45114970	Jun.21, 2011	Jun.20, 2012
Signal Generator	Rohde & Schwarz	SMR27	100124	Jul.06, 2011	Jul.05, 2012
Signal Generator	Rohde & Schwarz	SML03	102319	Aug.01, 2011	Aug.01, 2012
AC Power Source	Sepcial power system	YF650	N/A	N/A	N/A
Absorbing Clamp	Rohde & Schwarz	MDS21	100218	Apr.30, 2011	Apr.29, 2012
Power Meter	Rohde & Schwarz	NRVD	101287	Jul.19, 2011	Jul.18, 2012
Coaxial Cable	N/A	N/A	N/A	May.31, 2011	May.30, 2012
Coaxial Cable	N/A	N/A	N/A	May.31, 2011	May.30, 2012
Coaxial Cable	N/A	N/A	N/A	May.31, 2011	May.30, 2012
Universal radio					
Communication tester	Rohde & Schwarz	CMU200	101724	Sep.08, 2011	Sep.07, 2012
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	N/A	N/A	N/A
BiConilog Antenna	ETS-LINDGREN	3142C	00042670	May.03, 2011	May.02, 2012
BiConilog Antenna	ETS-LINDGREN	3142C	00042673	May.03, 2011	May.02, 2012
Loop Antenna	ETS-LINGREN	6502	00071730	May.03, 2011	May.02, 2012
Double-ridged Waveguide horn	ETS-LINDGREN	3117	00035926	Dec.30, 2011	Dec.29, 2012
Double-ridged Waveguide horn	ETS-LINDGREN	3117	00041545	Dec.30, 2011	Dec.29, 2012
Pre-amplifier	CD	PAM0203	804203	Jun.21, 2011	Jun.20, 2012
RF Switch	CD	RSU-M3	706543	Jun.21, 2011	Jun.20, 2012
Thermo-/Hygrometer	N/A	TH01	N/A	May.03, 2011	May.02, 2012
Shielding Room	Zhong Yu Electronic	N/A	N/A	N/A	N/A
3m Anechoic Chamber	Zhong Yu Electronic	N/A	N/A	Apr.28, 2011	Apr.27, 2012

### 3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4: 2009 and FCC Part 15, Paragraph 15.247

#### 3.1. Summary of Test Results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.107, 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15, Paragraph 15.247(b)(1)	Peak Output Power	PASS	Complies
FCC Part 15, Paragraph 15.247(a)(2)	6dB Bandwidth	PASS	Complies
FCC Part 15, Paragraph 15.247(c)	100kHz Bandwidth of Frequency Band Edges	PASS	Complies
FCC Part 15, Paragraph 15.209(a)(f)	Spurious Emission	PASS	Complies
FCC Part 15, Paragraph 15.247(a)(1)	Frequency Separation	-	N/A
FCC Part 15, Paragraph 15.247(a)(1)(iii)	Number of Hopping Frequency	-	N/A
FCC Part 15, Paragraph 15.247(a)(1)(iii)	Time of Occupancy	-	N/A
FCC Part 15, Paragraph 15.247(c)	Peak Power Density	PASS	Complies

\* The digital circuit porting of the EUT has been tested and verified to comply with FCC Part 15, Subpart B., Class B Digital Devices and the associated Radio Receiver has also been tested and found to comply with FCC Part 15, Subpart B – Radio Receivers.

#### 3.2. Description of Test Modes

The EUT has been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

IEEE802.11b: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 11Mbps highest data rate (worst case) are chosen for the final testing.

IEEE802.11g: Channel 1(2412MHz), Channel 6(2437MHz) and Channel 11(2462MHz) with 54Mbps data rate (the worst case) are chosen for the final testing.

## 3.3. List of channels:

✓ - available


X - tested

Number	Frequency(MHz)	802.11 b/g	
1	2412	✓	X
2	2417	✓	
3	2422	✓	
4	2427	✓	
5	2432	✓	
6	2437	✓	X
7	2442	✓	
8	2447	✓	
9	2452	✓	
10	2457	✓	
11	2462	✓	X

## 4. Conducted Emission Test

### 4.1. Block Diagram of Test Setup

#### 4.1.1. Block diagram of connection between the EUT and simulators

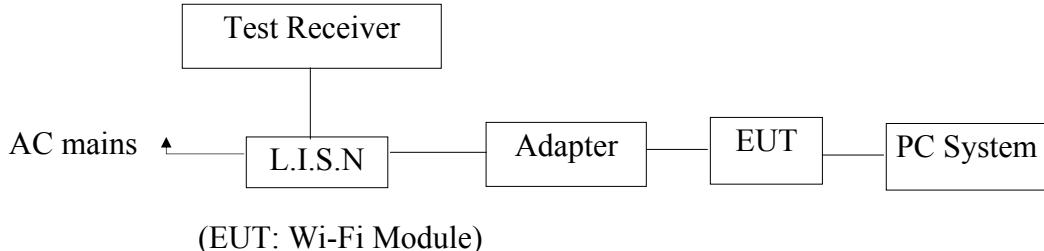

### 4.2. Power Line Conducted Emission Measurement Limits (15.207)

Frequency MHz	Limits dB( $\mu$ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. \*Decreasing linearly with logarithm of frequency.  
 2. The lower limit shall apply at the transition frequencies.

### 4.3. Configuration of EUT on Measurement

The following equipments are installed on Power Line Conducted Emission Measurement to meet the commission requirement and operating regulations in a manner which tends to maximize its emission characteristics in a normal application.

EUT : Wi-Fi Module  
 Model Number : XLW-002X  
 Applicant : SEANYWELL COMPANY LIMITED

### 4.4. Operating Condition of EUT

4.4.1. Setup the EUT and simulator as shown as Section 4.1.

4.4.2. Turn on the power of all equipment.

4.4.3. Let the EUT work in test mode (ON) and measure it.

#### 4.5. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.4-2003 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9KHz.

The frequency range from 150KHz to 30MHz is checked.

The test results are reported on Section 4.6.

#### 4.6. Power Line Conducted Emission Measurement Results

**PASS.**

The frequency range from 150KHz to 30 MHz is investigated.

Please refer the following pages.


FCC ID: R53XLW-002X

**CONDUCTED EMISSION TEST DATA**

EUT: Wi-Fi Module M/N: XLW-002X  
 Operating Condition: On  
 Test Site: 1# Shielded Room  
 Operator: Andy Chen  
 Test Specification: AC 120V/60Hz for Adapter  
 Comment: Live Line  
 Tem:25°C Hum:50%

**SCAN TABLE: "Voltage (150K~30M) FIN"**

Short Description: 150K-30M Disturbance Voltages

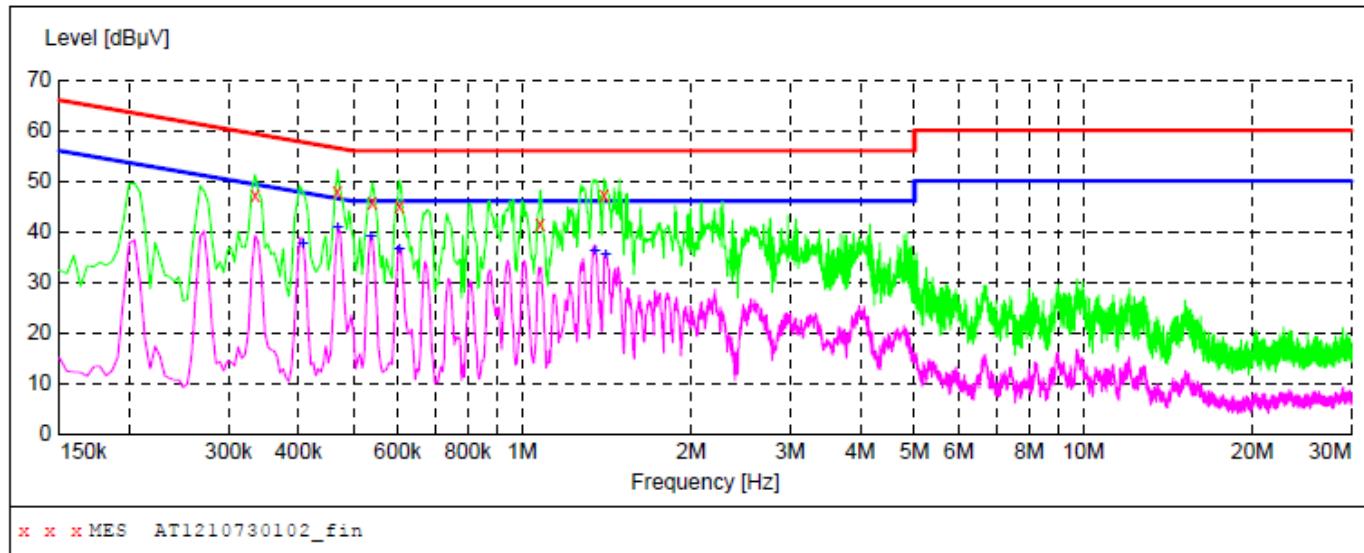**MEASUREMENT RESULT: "AT1210730102\_fin"**

10/31/2012 2:04PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.334500	47.20	20.1	59	12.1	QP	L1	GND
0.469500	48.00	20.1	57	8.5	QP	L1	GND
0.541500	45.70	20.1	56	10.3	QP	L1	GND
0.604500	45.20	20.1	56	10.8	QP	L1	GND
1.076500	41.70	20.2	56	14.3	QP	L1	GND
1.400500	47.10	20.2	56	8.9	QP	L1	GND

**MEASUREMENT RESULT: "AT1210730102\_fin2"**

10/31/2012 2:04PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.406500	37.60	20.1	48	10.1	AV	L1	GND
0.469500	40.70	20.1	47	5.8	AV	L1	GND
0.537000	39.00	20.1	46	7.0	AV	L1	GND
0.604500	36.60	20.1	46	9.4	AV	L1	GND
1.346500	36.10	20.2	46	9.9	AV	L1	GND
1.409500	35.50	20.2	46	10.5	AV	L1	GND


FCC ID: R53XLW-002X

**CONDUCTED EMISSION TEST DATA**

EUT: Wi-Fi Module M/N: XLW-002X  
 Operating Condition: On  
 Test Site: 1# Shielded Room  
 Operator: Andy Chen  
 Test Specification: AC 120V/60Hz for Adapter  
 Comment: Neutral Line  
 Tem:25°C Hum:50%

**SCAN TABLE: "Voltage (150K~30M) FIN"**

Short Description: 150K-30M Disturbance Voltages

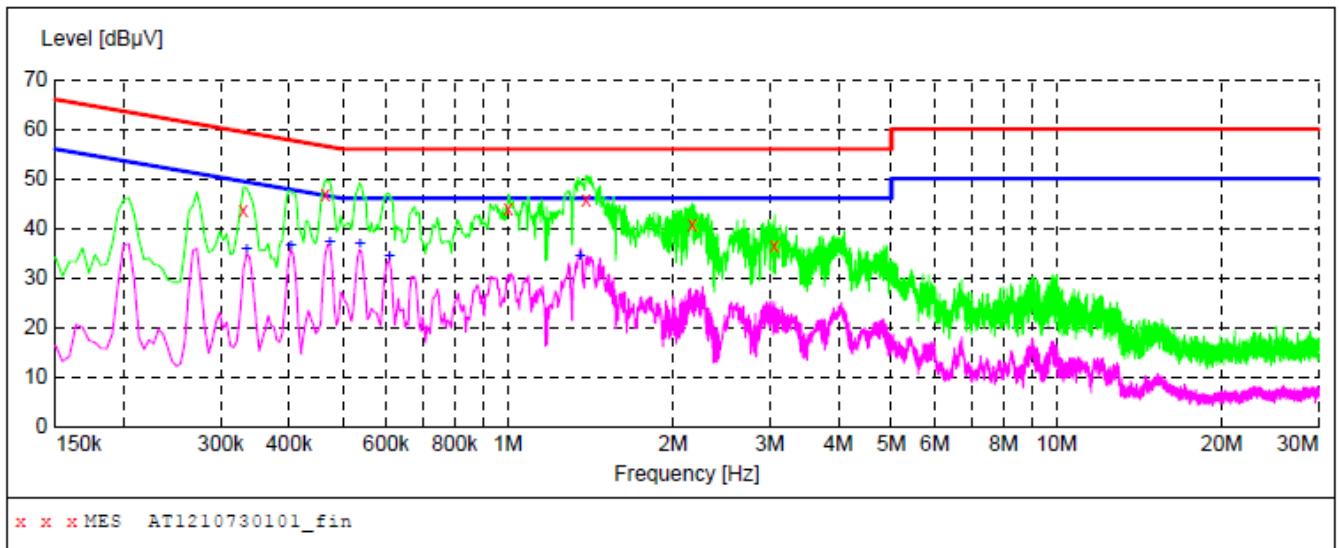**MEASUREMENT RESULT: "AT1210730101\_fin"**

10/31/2012 2:01PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.330000	43.50	20.1	60	16.0	QP	N	GND
0.465000	47.00	20.1	57	9.6	QP	N	GND
1.004500	44.00	20.2	56	12.0	QP	N	GND
1.391500	45.80	20.2	56	10.2	QP	N	GND
2.170000	40.70	20.3	56	15.3	QP	N	GND
3.065500	36.60	20.4	56	19.4	QP	N	GND


**MEASUREMENT RESULT: "AT1210730101\_fin2"**

10/31/2012 2:01PM

Frequency MHz	Level dB $\mu$ V	Transd dB	Limit dB $\mu$ V	Margin dB	Detector	Line	PE
0.334500	35.70	20.1	49	13.6	AV	N	GND
0.402000	36.50	20.1	48	11.3	AV	N	GND
0.474000	37.20	20.1	46	9.2	AV	N	GND
0.537000	37.00	20.1	46	9.0	AV	N	GND
0.609000	34.30	20.1	46	11.7	AV	N	GND
1.355500	34.50	20.2	46	11.5	AV	N	GND

## 5. FCC Part 15.247 Requirements for DSSS & OFDM Modulation

### 5.1. Test Setup



### 5.2. 6dB Bandwidth

#### a. Limit

For the direct sequence systems, the minimum 6dB bandwidth shall be at least 500kHz.

#### b. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = RBW, Span = 50MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

#### c. Test Setup

See 5.1

#### d. Test Results

Pass

#### e. Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Results
Low	2412	9.3		Pass
Mid	2437	9.8	>500	Pass
High	2462	9.9		Pass

Test mode: IEEE 802.11g


Channel	Frequency (MHz)	Bandwidth (MHz)	Limit (kHz)	Results
Low	2412	16.5		Pass
Mid	2437	16.4	>500	Pass
High	2462	16.4		Pass

#### Test Plots

See the following page.


FCC ID: R53XLW-002X

## Test Mode: 802.11b---Low

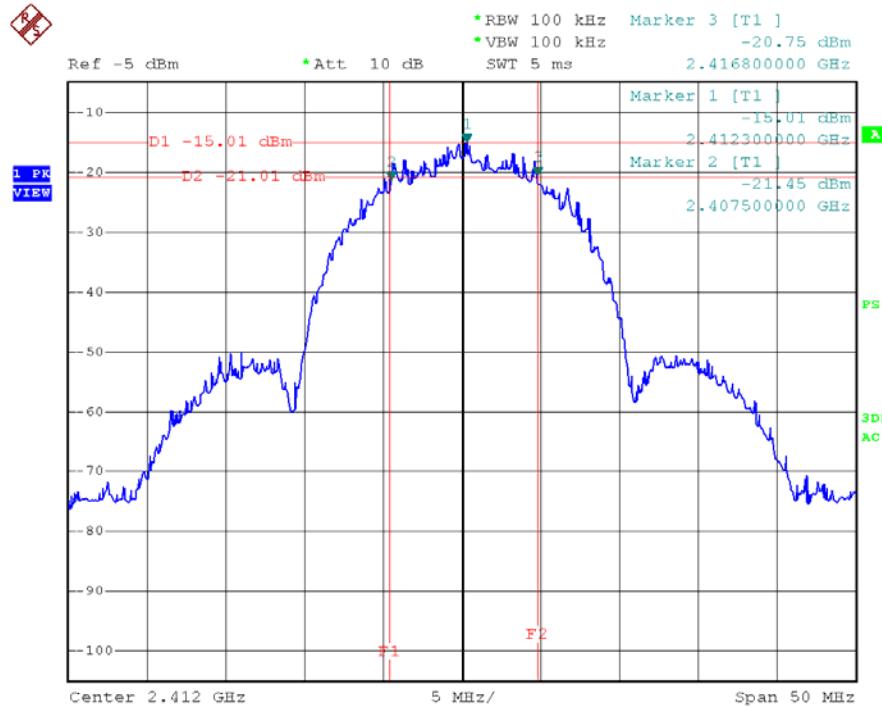

6dB-L-b


## Test Mode: 802.11b---Mid

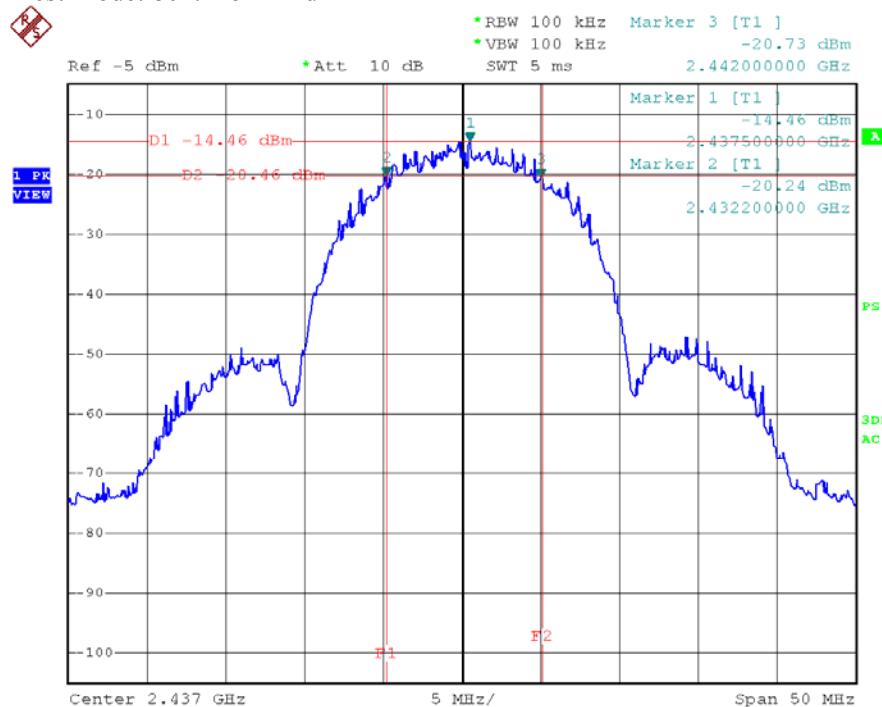

6dB-M-b


FCC ID: R53XLW-002X

## Test Mode: 802.11b---High

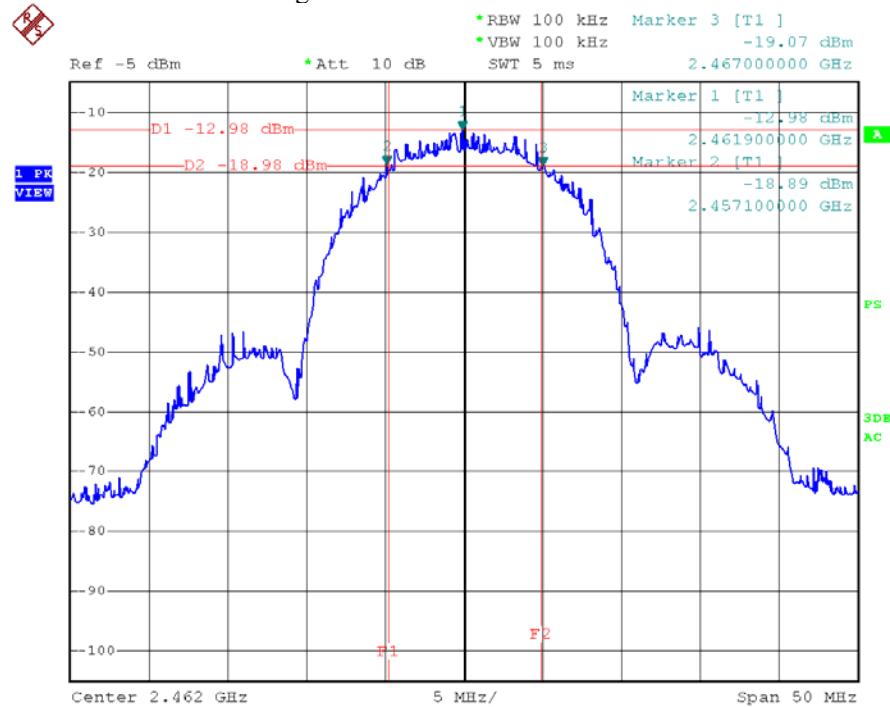

6dB-H-b


## Test Mode: 802.11g---Low

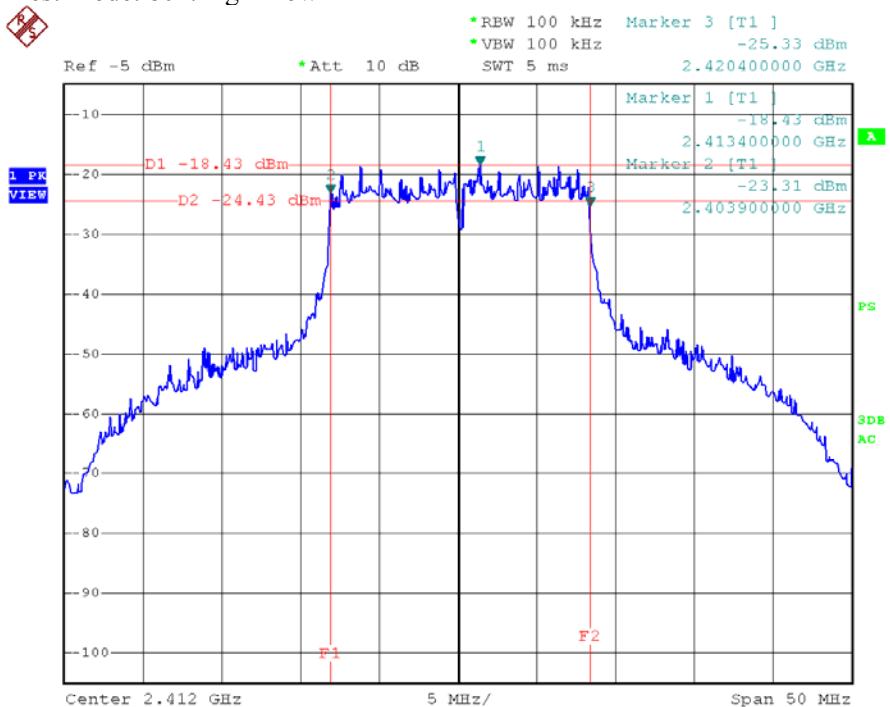

6dB-L-g


FCC ID: R53XLW-002X

## Test Mode: 802.11g---Mid

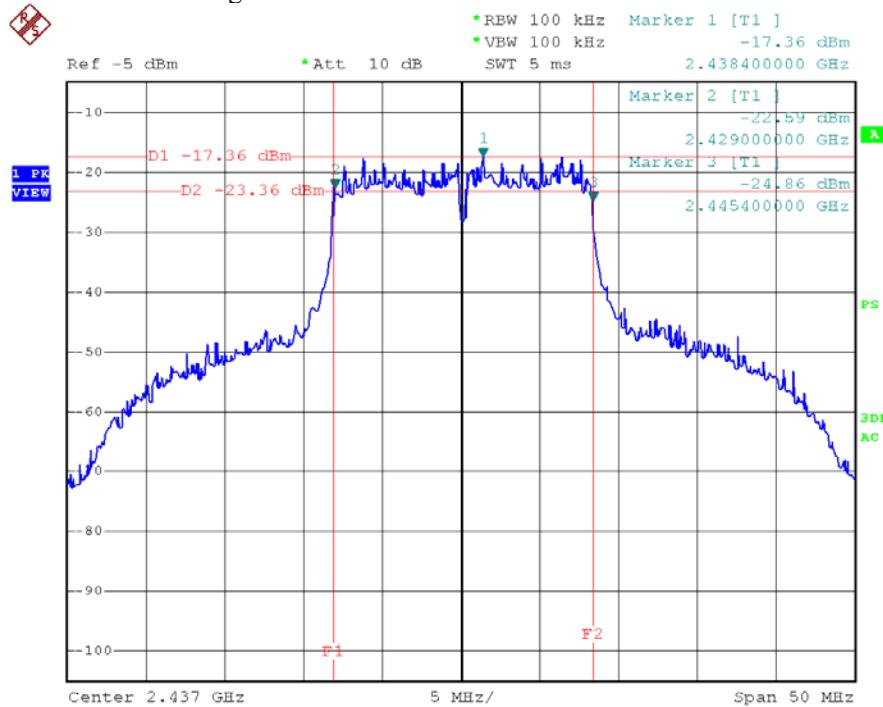

6dB-M-g

## Test Mode: 802.11g---High

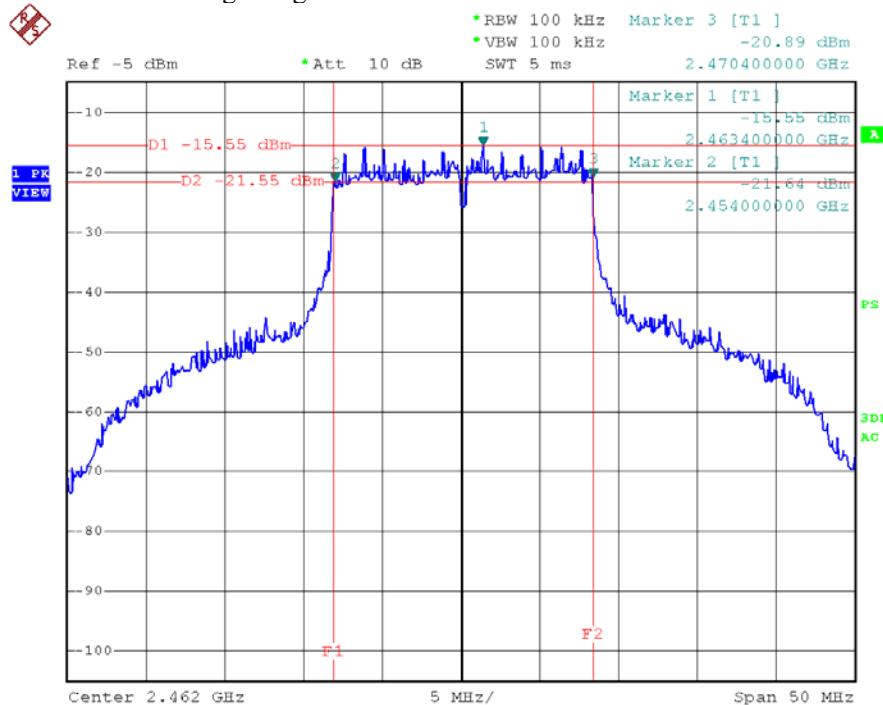

6dB-H-g


### 5.3 Maximum Peak output power test

#### a. Limit

The maximum peak output power of the intentional radiator shall not exceed the following:

1. For systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 watt (30dBm).
2. Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antenna of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### b. Configuration of Measurement

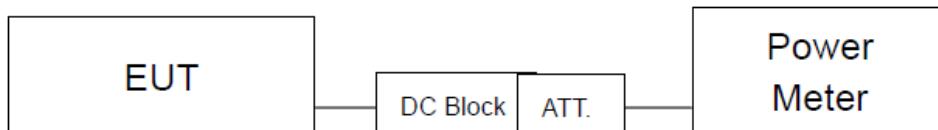

#### c. Test Procedure

The EUT was setup to ANSI C63.4, 2003; tested to DTS test procedure of Oct 2007 KDB558074 for compliance to FCC 47CFR 15.247 requirements. For FCC §15.247(b) the power output was measured on the EUT using a 50 ohm SMA cable connected to peak power meter via power sensor. Peak output power was read directly from power meter. The test was performed at 3 channels (lowest, middle and highest).

#### d. Test Results

Pass

#### e. Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	Maximum transmit power		Limit		Result
		(dBm)	(watts)	(dBm)	(watts)	
Low	2412	15.87	0.038	30	1	Pass
Mid	2437	15.51	0.035			Pass
High	2462	15.61	0.036			Pass

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Maximum transmit power		Limit		Result
		(dBm)	(watts)	(dBm)	(watts)	
Low	2412	15.21	0.033	30	1	Pass
Mid	2437	15.52	0.035			Pass
High	2462	15.51	0.035			Pass

FCC ID: R53XLW-002X

## Test Mode: 802.11b ---Low




## Test Mode: 802.11b---Mid




P

FCC ID: R53XLW-002X

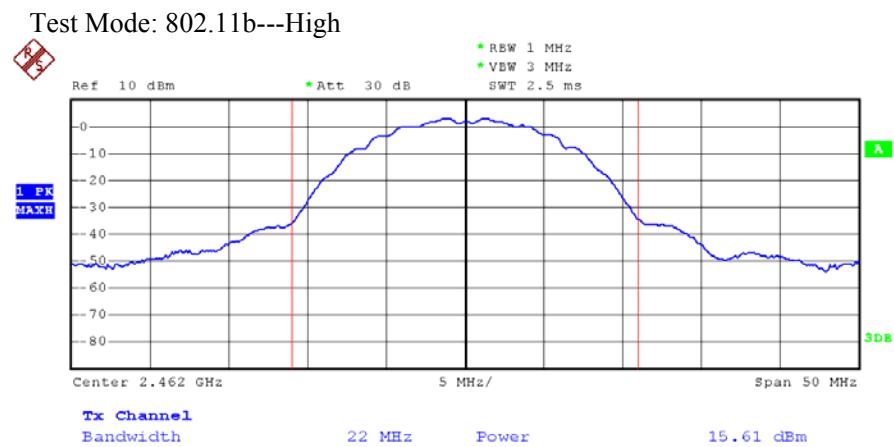


P

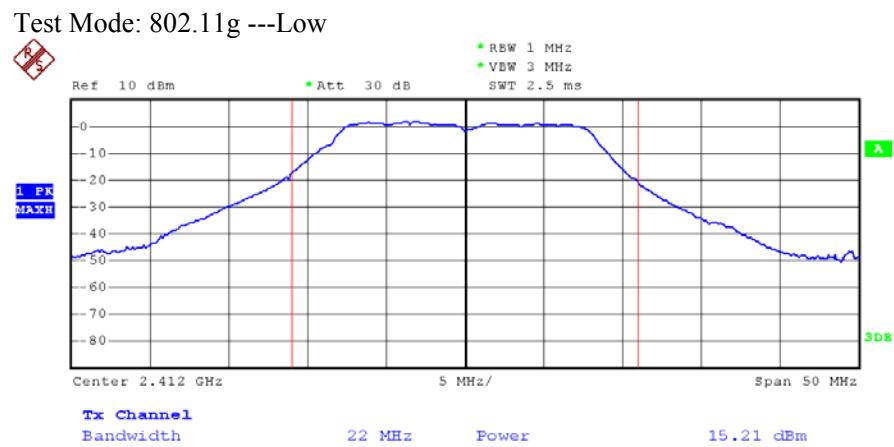


P

FCC ID: R53XLW-002X

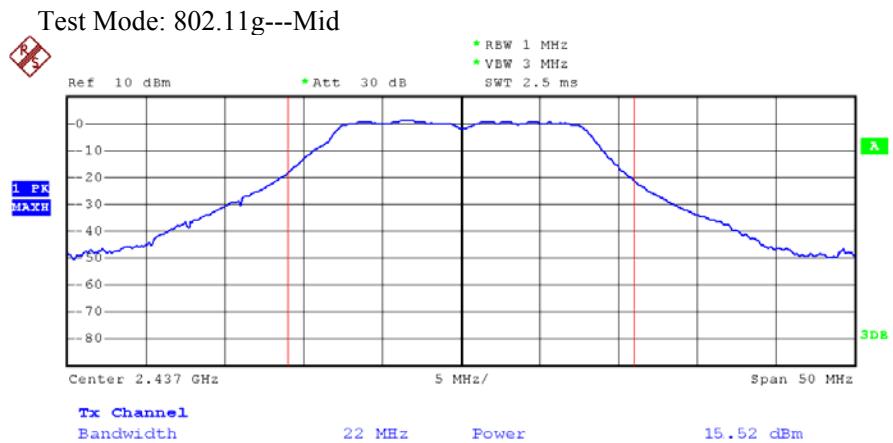

P

Test Mode: 802.11g---High

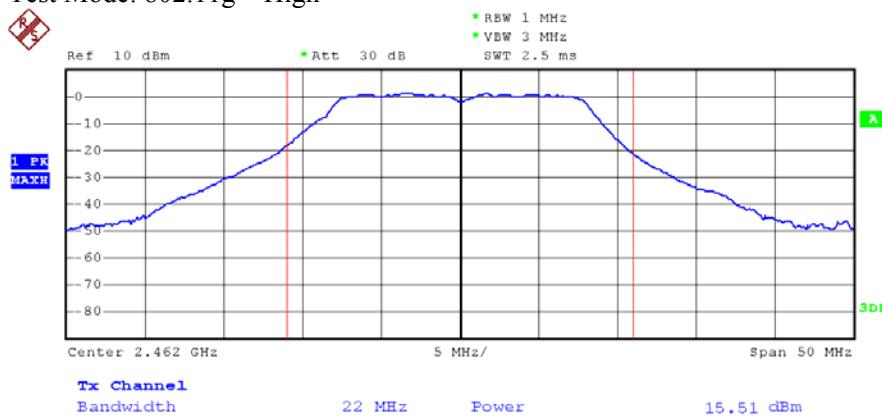

P

## 5.4 Band Edges Measurement


### a. Limit

According to §15.247(c), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

### b. Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Peak detector: RBW=100KHz, VBW=100KHz, SWT=AUTO  
Average detector: RBW=1MHz, VBW=10Hz, SWT=AUTO  
The EUT is tested in 9\*6\*6 Chamber.
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.

### c. Test Setup

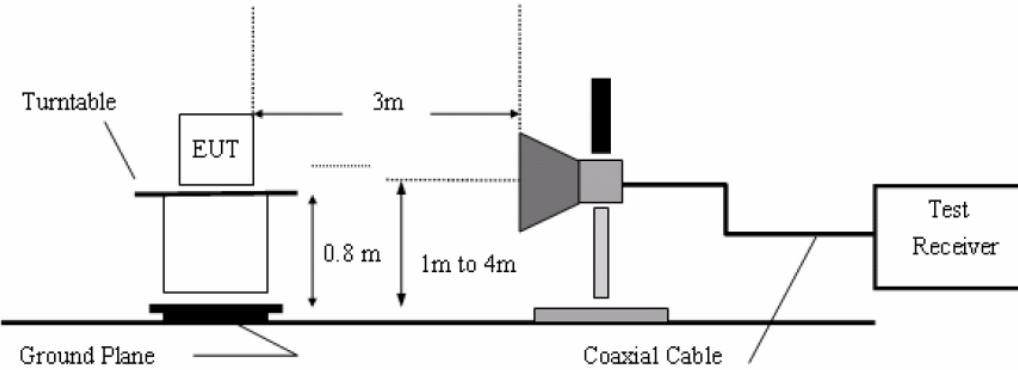

### d. Test Results

Pass

### e. Test Data

Test mode: IEEE 802.11b

Channel	Restrict Freq. Band (MHz)	Detector Mode	Maximum level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
Low	2310~2390	PK	33.05	74	-40.95
		AV	25.03	54	-28.97
High	2483.5~2500	PK	38.51	74	-35.49
		AV	34.05	54	-19.95

Test mode: IEEE 802.11g


Channel	Restrict Freq. Band (MHz)	Detector Mode	Maximum level (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
Low	2310~2390	PK	44.50	74	-29.5
		AV	35.33	54	-18.67
High	2483.5~2500	PK	52.45	74	-21.55
		AV	45.24	54	-8.76

### f. Test Plots


See the following page.

FCC ID: R53XLW-002X

Test Mode: 802.11b ---Low

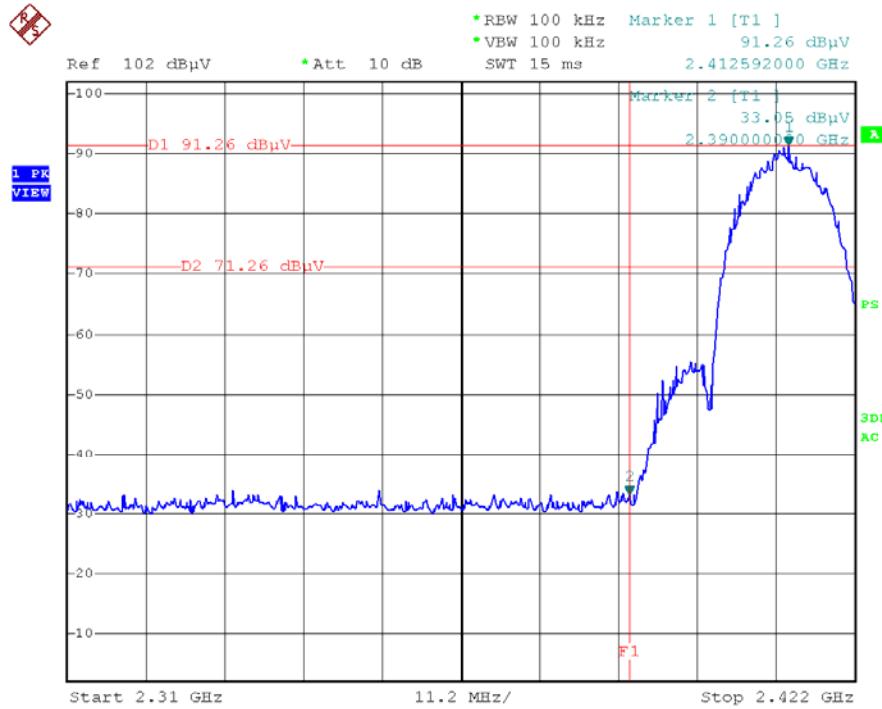


BE-L-b

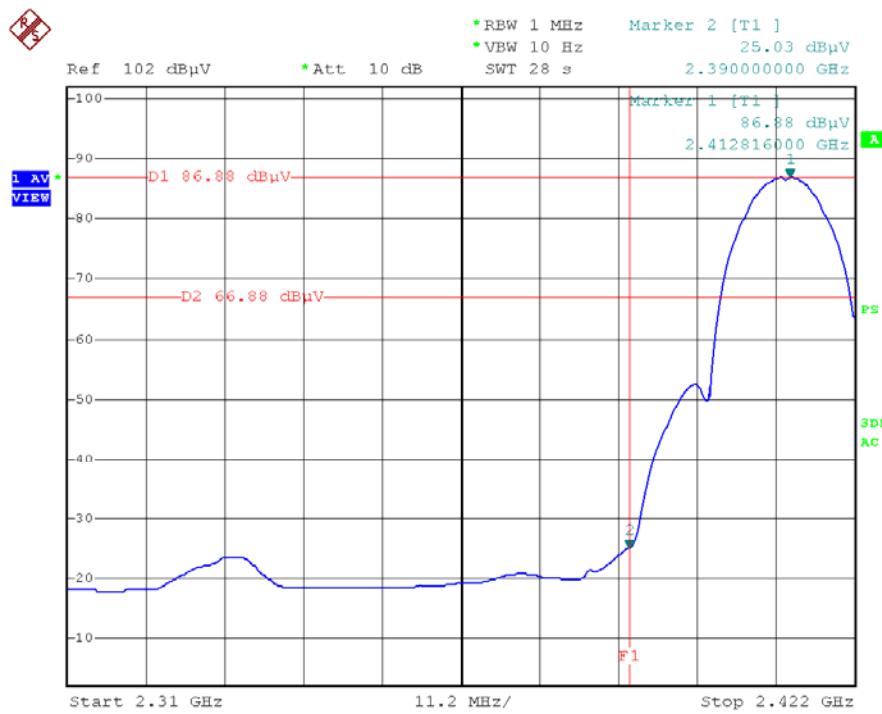


BE-L-b-AV

FCC ID: R53XLW-002X

## Test Mode: 802.11b ---High

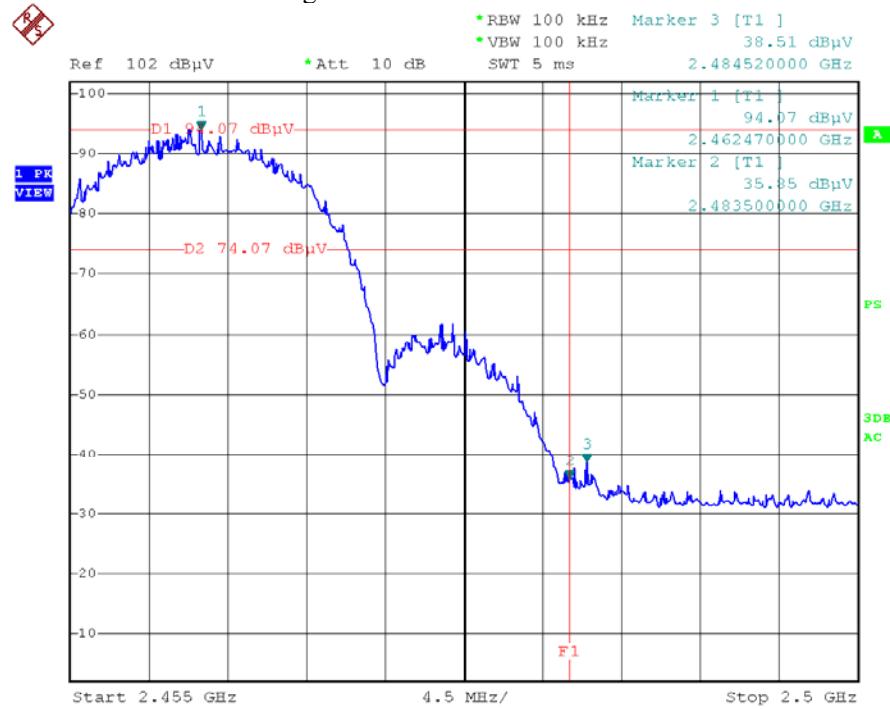


BE-H-b

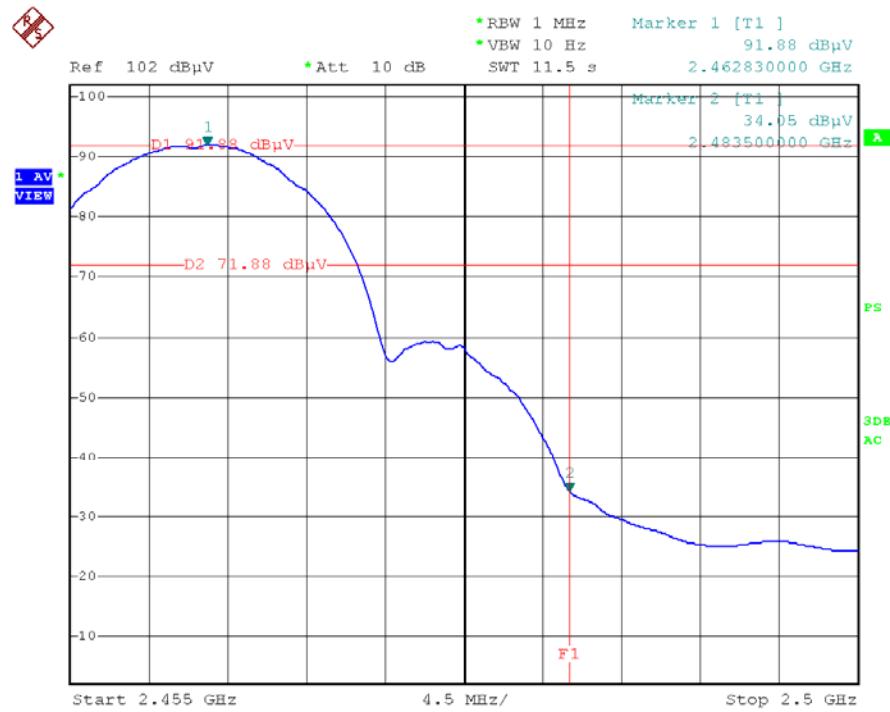


BE-H-b-AV

FCC ID: R53XLW-002X

## Test Mode: 802.11g ---Low

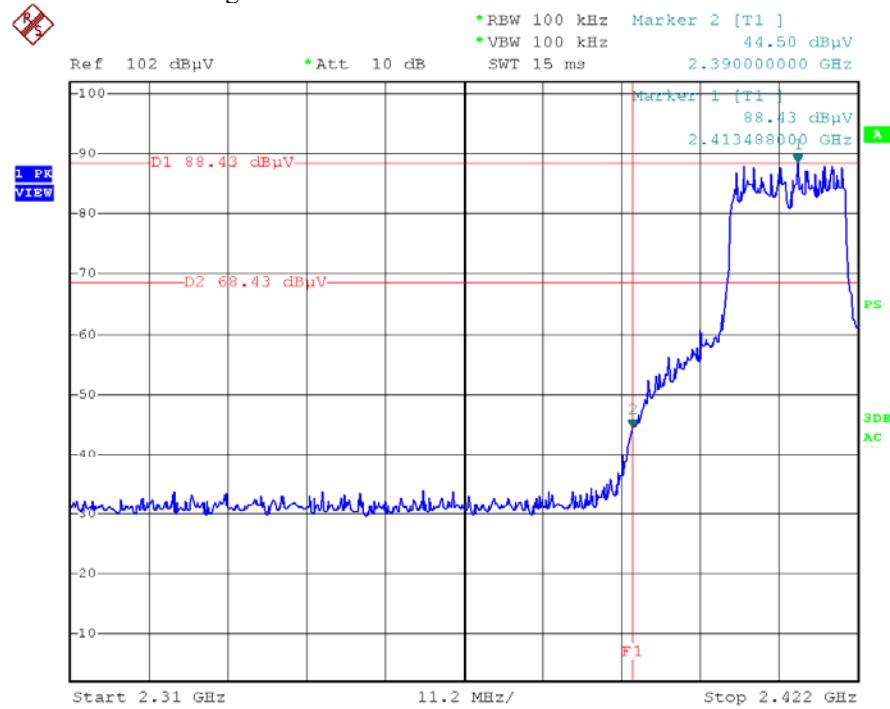


BE-L-g

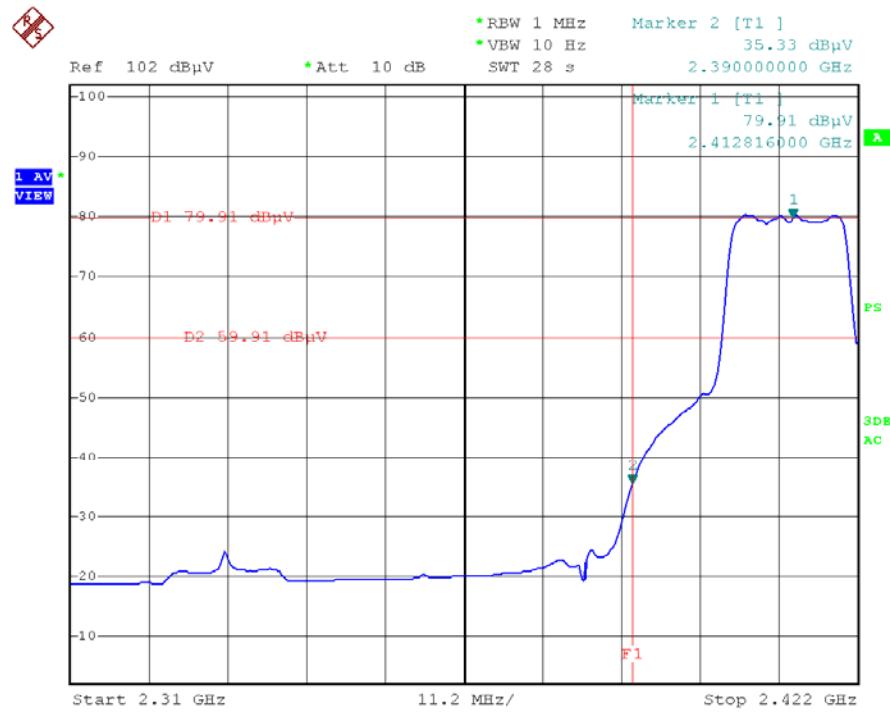


BE-L-g-AV

FCC ID: R53XLW-002X

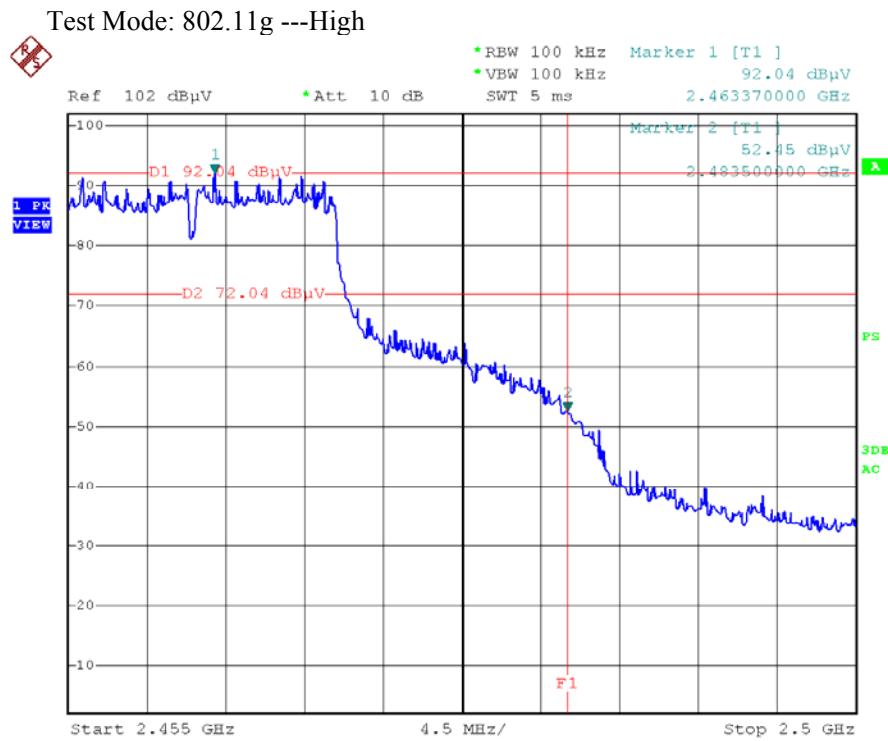

BE-H-g

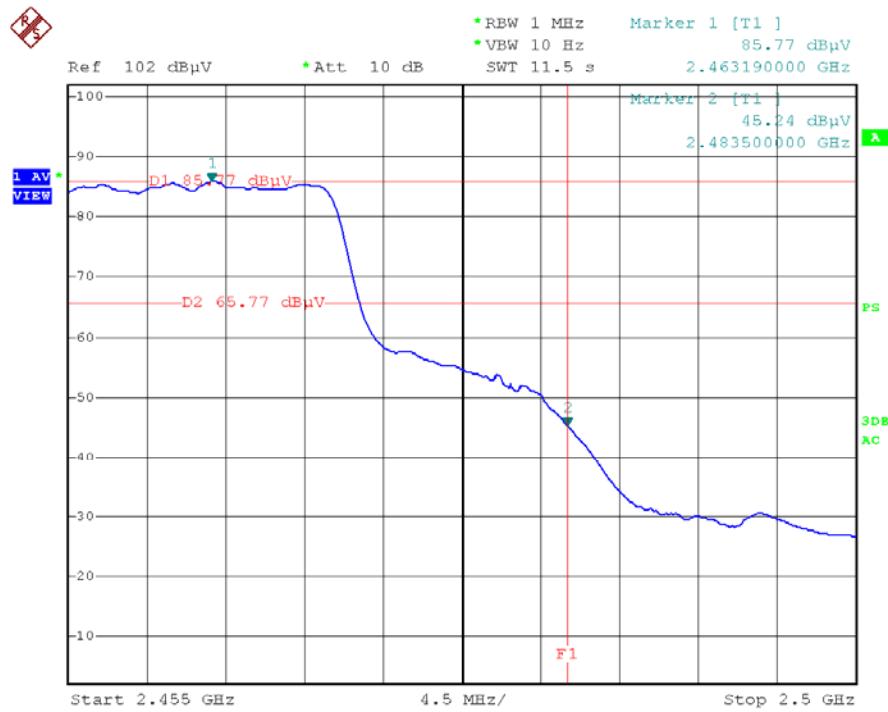

BE-H-g-AV

## 5.5 Peak Power Spectral Density

### a. Limit

1. For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band during any time interval of continuous transmission.
2. The direct sequence operating of the hybrid system, with the frequency hopping operation turned off, shall comply with the power density requirements of paragraph (d) of this section.

### b. Test Procedure

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 1.5MHz, Sweep=500s
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

### c. Test Setup

See 5.1

### d. Test Results

Pass

### e. Test Data

Test mode: IEEE 802.11b

Channel	Frequency (MHz)	PPSD (dBm/3KHz)	$\Sigma$ PPSD (dBm/3KHz)	Limit (dBm)	Result
Low	2412	-22.05	-		Pass
Mid	2437	-18.31	-	8.00	Pass
High	2462	-20.04	-		Pass

Test mode: IEEE 802.11g


Channel	Frequency (MHz)	PPSD (dBm)	$\Sigma$ PPSD (dBm)	Limit (dBm)	Result
Low	2412	-35.45	-		Pass
Mid	2437	-33.11	-	8.00	Pass
High	2462	-31.26	-		Pass

### f. Test Plot

See the following pages


FCC ID: R53XLW-002X

## 802.11 b CH--Low

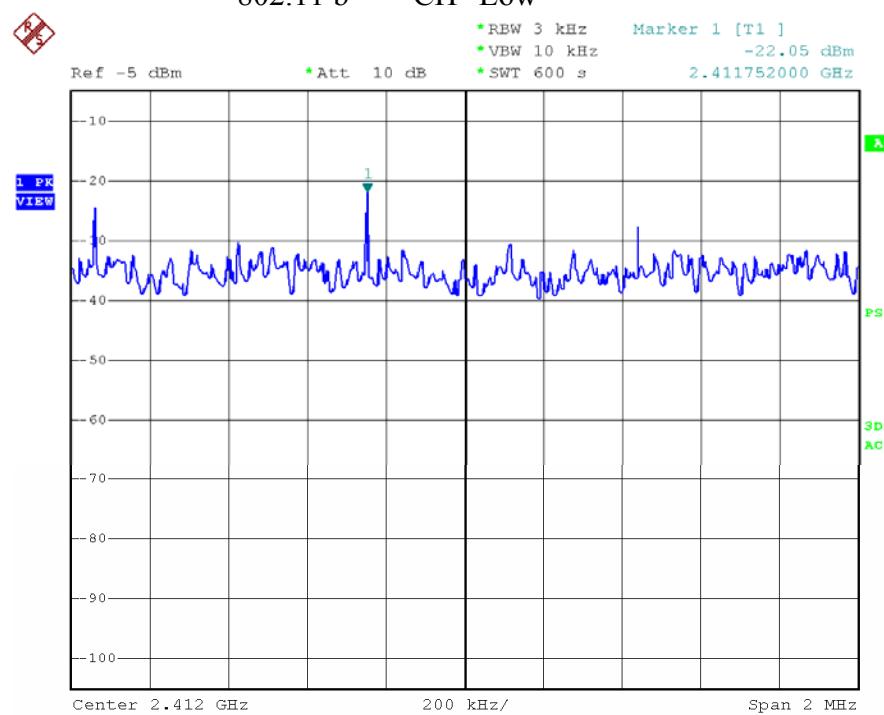


Power Density-L-b

## CH--Mid

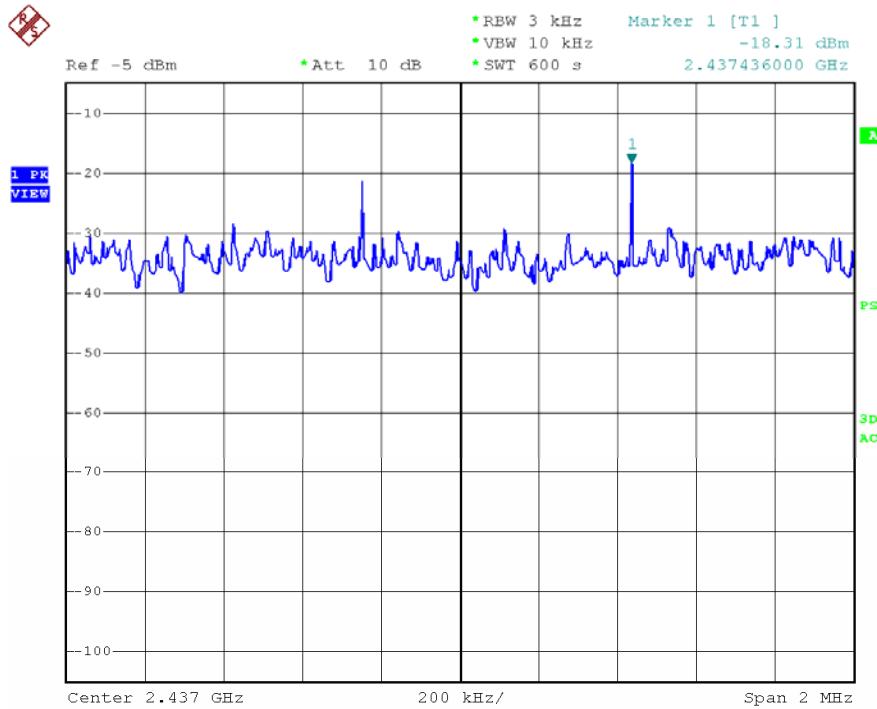


Power Density-M-b

FCC ID: R53XLW-002X

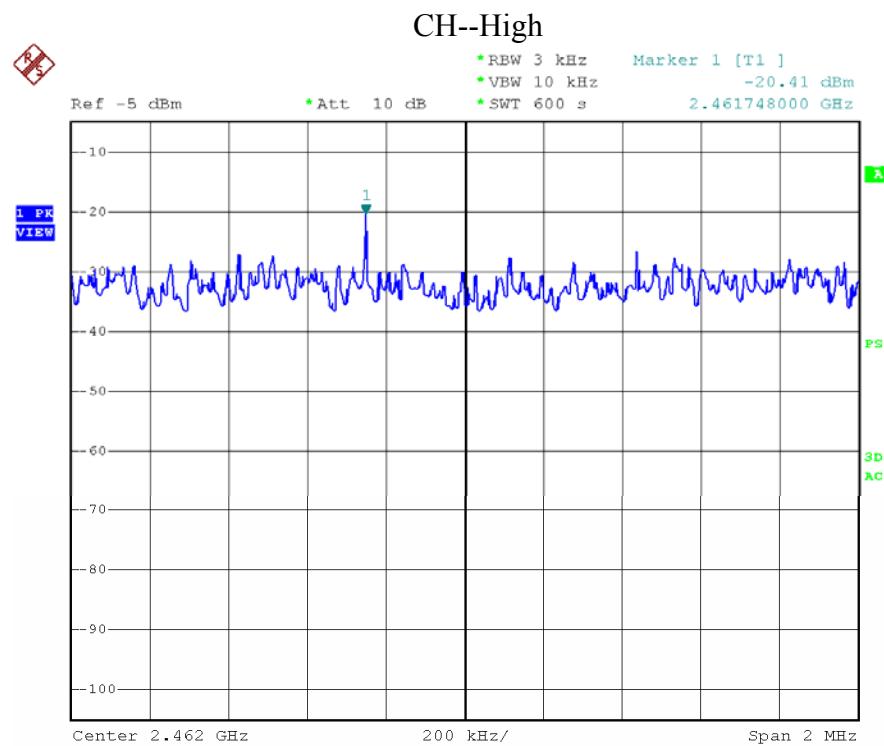


Power Density-H-b

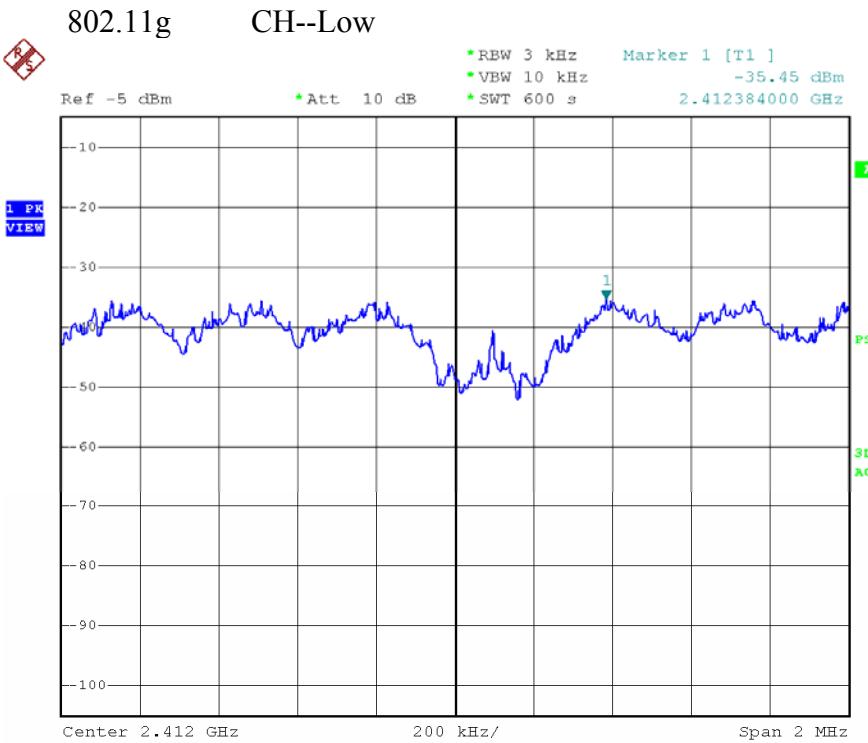


Power Density-L-g

## CH--Mid

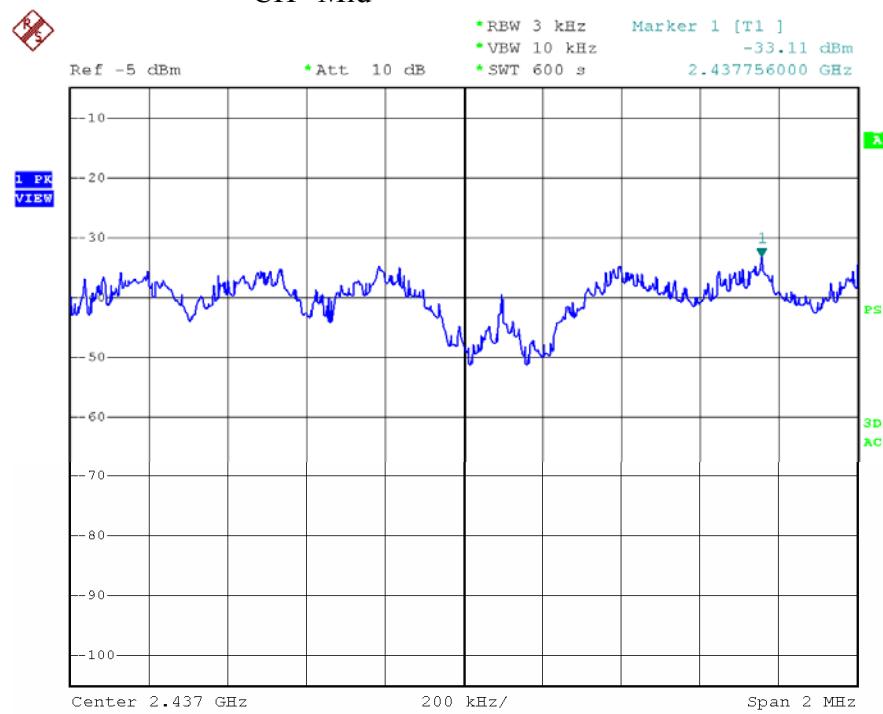

Power Density-M-g

## CH--High

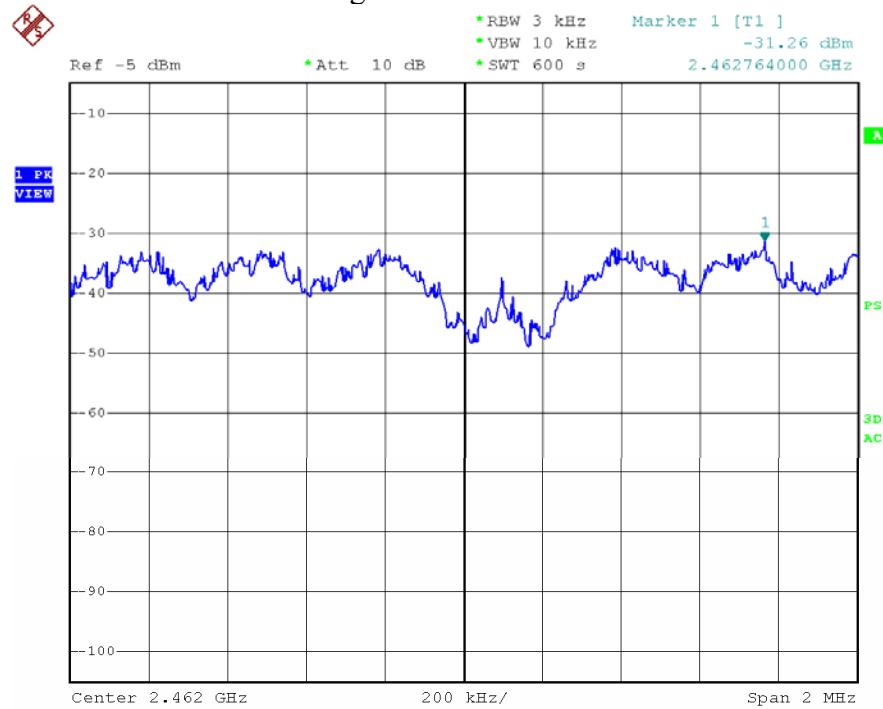

Power Density-H-g

## 5.6 Radiated Emissions

### 5.6.1. Requirements (15.209 & 15.205):

#### 5.6.1.1. Test Limits (< 30 MHZ)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30


#### 5.6.1.2. Test Limits ( $\geq$ 30 MHZ)

FIELD STRENGTH of Fundamental: 902-928 MHZ 2.4-2.4835 GHz 94 dB $\mu$ V/m @3m	FIELD STRENGTH of Harmonics 54 dB $\mu$ V/m @3m	S15.209 30 - 88 MHz 88 - 216 MHz 216 - 960 MHz ABOVE 960 MHz	40 dB $\mu$ V/m @3M 43.5 46 54dB $\mu$ V/m
---	---	--	---


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

### 5.6.2. Test Configuration:


#### 5.6.2.1. 9k to 30MHz emissions:

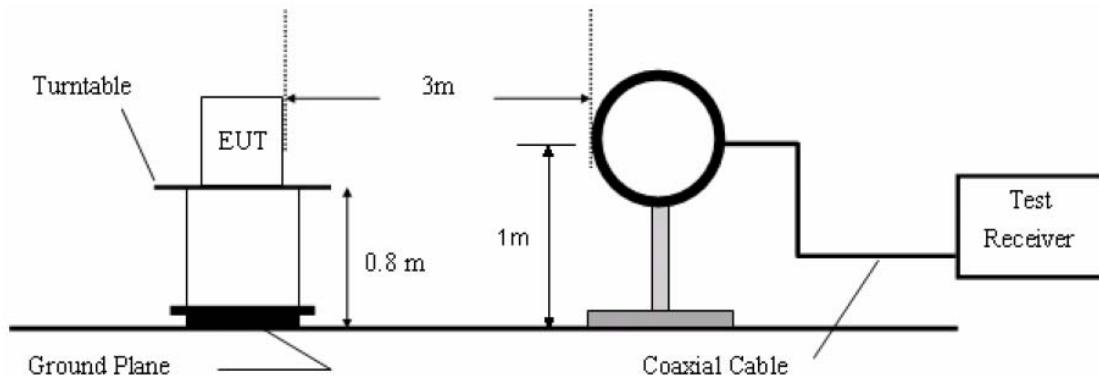

### 5.6.2.2. 30M to 1G emissions:

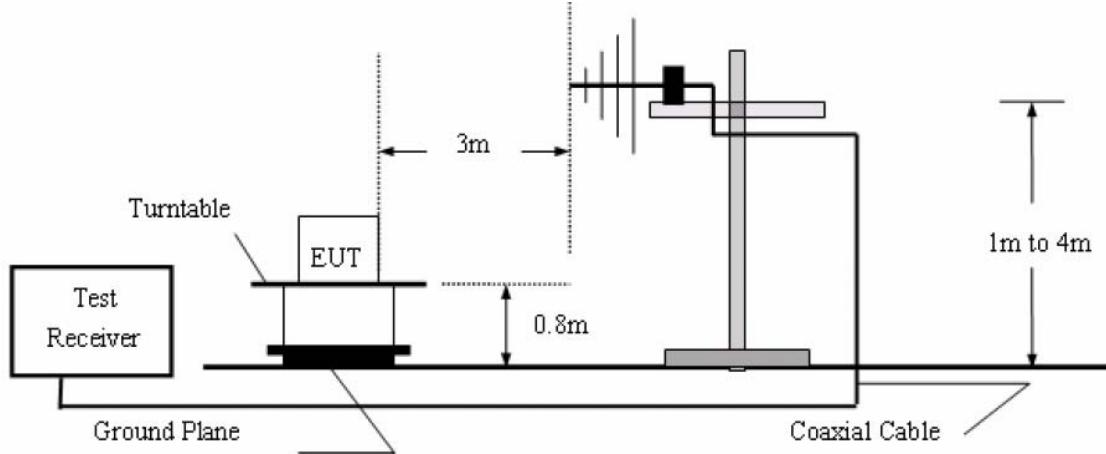

### 5.6.2.3. 1G to 40G emissions:

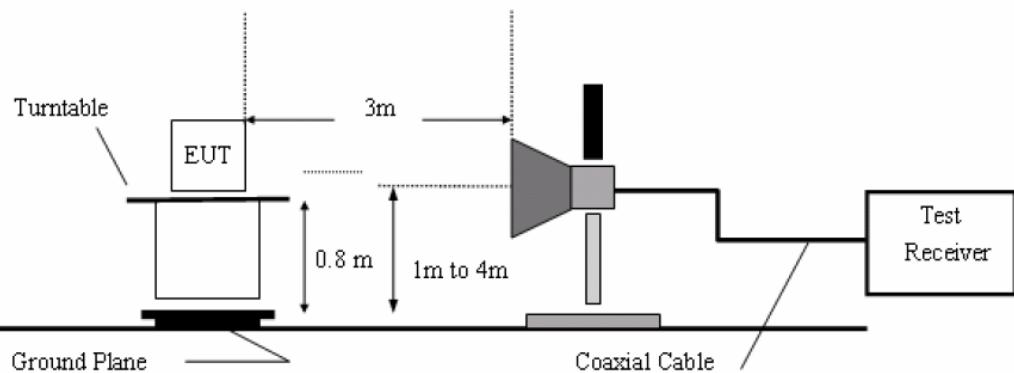

### 5.6.3. Test Procedure

The EUT is placed on a turn table which is 0.8 meter high above the ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on test.

Measurements are made on 9KHz to 30MHz and 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.

All readings from 30MHz to 1GHz are quasi-peak values with a resolution bandwidth of 120kHz.

All reading are above 1GHz, peak & average values with a resolution bandwidth of 1MHz.

The EUT is tested in 9\*6\*6 Chamber.

The test results are listed in Section 5.6.4.

### 5.6.4. Test Results

**Below 30MHz**

There is no emissions were detected below 30MHz

**From 30MHz to 1 GHz**

Operation Mode: Normal link

Temperature: 25°C

Humidity: 70 % RH

Test Date: Mar. 14, 2012

Tested by: Andy Chen

Polarity: Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Detector Mode (PK/QP)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
60.0690	V	Peak	61.00	-25.23	35.77	40.00	-4.23
125.0066	V	Peak	64.63	-25.20	39.43	43.50	-4.07
159.7844	V	Peak	64.33	-26.49	37.84	43.50	-5.66
250.3011	V	Peak	63.83	-22.54	41.29	46.00	-4.71
480.5276	V	Peak	58.56	-19.63	38.89	46.00	-7.11
801.7862	V	Peak	53.24	-12.59	40.65	46.00	-5.35
125.0066	H	Peak	64.81	-30.00	34.81	43.50	-8.69
159.7844	H	Peak	71.35	-31.49	39.86	43.50	-3.64
250.3011	H	Peak	69.22	-26.27	42.95	46.00	-3.05
375.9384	H	Peak	60.96	-21.90	39.06	46.00	-6.94
480.5276	H	Peak	62.34	-19.90	42.44	46.00	-3.56
801.7862	H	Peak	55.41	-13.58	41.83	46.00	-4.17

Notes:

1. Measuring frequencies from 30 MHz to the 1GHz and the IF bandwidth of SPA between 30MHz to 1GHz was 100kHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using Peak/Quasi-peak detector mode.
3. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

**Above 1 GHz**

Operation Mode: TX / IEEE 802.11b / CH Low  
 Temperature: 25°C  
 Humidity: 70 % RH

Test Date: Mar. 14, 2012  
 Tested by: Andy Chen  
 Polarity: Ver. / Hor.

Item	Freq. (MHz)	Ant.Pol H/V	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level		Peak Limi (dBuV/)	AV Limit (dBuV/)	Margin (dB)	Remark
							Peak (dBuV/)	AV (dBuV/)				
1.	4824	H	46.20	35.76	4.58	34.94	51.60	---	74.00	54.00	-22.40	Peak
2.	4824	H	38.55	35.76	4.58	34.94	---	43.91	74.00	54.00	-10.09	AVG
3.	7240	H	43.48	37.85	5.63	35.25	51.71	---	74.00	---	-22.29	Peak
4.	9648	H	44.48	39.39	6.34	35.70	54.51	---	74.00	---	-19.49	Peak
5.	12060	H	---	---	---	---	---	---	---	---	---	---
6.	14472	H	---	---	---	---	---	---	---	---	---	---
7.	16884	H	---	---	---	---	---	---	---	---	---	---
8.	19296	H	---	---	---	---	---	---	---	---	---	---
9.	21708	H	---	---	---	---	---	---	---	---	---	---
10.	24120	H	---	---	---	---	---	---	---	---	---	---

Note: An item 3 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emission

1.	4824	V	46.38	35.13	4.58	34.94	---	51.15	74.00	54.00	-2.85	AVG
2.	4824	V	51.24	35.13	4.58	34.94	56.01	---	74.00	54.00	-17.99	Peak
3.	7240	V	41.45	36.90	5.63	35.25	48.73	---	74.00	---	-25.27	Peak
4.	9648	V	43.14	38.57	6.34	35.70	52.35	---	74.00	---	-21.65	Peak
5.	12060	V	---	---	---	---	---	---	---	---	---	---
6.	14472	V	---	---	---	---	---	---	---	---	---	---
7.	16884	V	---	---	---	---	---	---	---	---	---	---
8.	19296	V	---	---	---	---	---	---	---	---	---	---
9.	21708	V	---	---	---	---	---	---	---	---	---	---
10.	24120	V	---	---	---	---	---	---	---	---	---	---

Note: An item 3 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emission

Operation Mode: TX / IEEE 802.11b / CH Mid  
 Temperature: 25°C  
 Humidity: 70 % RH

Test Date: Mar. 14, 2012  
 Tested by: Andy Chen  
 Polarity: Ver. / Hor.

Item	Freq. (MHz)	Ant.Pol H/V	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level		Peak Limi (dBuV/)	AV Limit (dBuV/)	Margin (dB)	Remark
							Peak (dBuV/)	AV (dBuV/)				
1.	4874	H	41.17	35.83	4.61	34.93	---	46.68	74.00	54.00	-7.32	AVG
2.	4874	H	45.34	35.83	4.61	34.93	50.85	---	74.00	54.00	-23.15	Peak
3.	7311	H	42.14	37.86	5.64	35.26	50.38	---	74.00	54.00	-23.64	Peak
4.	9748	H	42.15	39.51	6.36	35.70	52.32	---	74.00	---	-21.68	Peak
5.	12185	H	---	---	---	---	---	---	---	---	---	---
6.	14622	H	---	---	---	---	---	---	---	---	---	---
7.	17059	H	---	---	---	---	---	---	---	---	---	---
8.	19496	H	---	---	---	---	---	---	---	---	---	---
9.	21933	H	---	---	---	---	---	---	---	---	---	---
10.	24370	H	---	---	---	---	---	---	---	---	---	---

Note: An item 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emission

1.	4874	V	45.20	35.18	4.61	34.93	---	49.56	74.00	54.00	-4.04	AVG
2.	4874	V	51.26	35.18	4.61	34.93	56.12	---	74.00	54.00	-17.88	Peak
3.	7311	V	42.27	36.92	5.64	35.26	49.57	---	74.00	54.00	-24.43	Peak
4.	9748	V	41.28	38.71	6.36	35.70	50.65	---	74.00	---	-23.35	Peak
5.	12185	V	---	---	---	---	---	---	---	---	---	---
6.	14622	V	---	---	---	---	---	---	---	---	---	---
7.	17059	V	---	---	---	---	---	---	---	---	---	---
8.	19496	V	---	---	---	---	---	---	---	---	---	---
9.	21933	V	---	---	---	---	---	---	---	---	---	---
10.	24370	V	---	---	---	---	---	---	---	---	---	---

Note: An item 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emission

Operation Mode: TX / IEEE 802.11b / CH High  
 Temperature: 25°C  
 Humidity: 70 % RH

Test Date: Mar. 14, 2012  
 Tested by: Andy Chen  
 Polarity: Ver. / Hor.

Item	Freq. (MHz)	Ant.Pol H/V	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level		Peak Limi (dBuV/)	AV Limit (dBuV/)	Margin (dB)	Remark
							Peak (dBuV/)	AV (dBuV/)				
1.	4924	H	39.25	35.90	4.68	34.92	---	44.95	74.00	54.00	-9.05	AVG
2.	4924	H	46.21	35.90	4.68	34.92	51.87	---	74.00	54.00	-22.13	Peak
3.	7386	H	41.12	37.88	5.65	35.28	49.37	---	74.00	54.00	-24.63	Peak
4.	9848	H	42.20	39.61	6.38	35.70	52.49	---	74.00	---	-21.87	Peak
5.	12310	H	---	---	---	---	---	---	---	---	---	---
6.	14772	H	---	---	---	---	---	---	---	---	---	---
7.	17234	H	---	---	---	---	---	---	---	---	---	---
8.	19696	H	---	---	---	---	---	---	---	---	---	---
9.	22158	H	---	---	---	---	---	---	---	---	---	---
10.	24620	H	---	---	---	---	---	---	---	---	---	---

Note: An item 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emission

1.	4924	V	48.12	35.23	4.68	34.92	53.11	---	74.00	54.00	-20.89	Peak
2.	4924	V	44.44	35.23	4.68	34.92	---	49.43	74.00	54.00	-4.77	AVG
3.	7386	V	42.36	36.96	5.65	35.28	49.69	---	74.00	54.00	-24.31	Peak
4.	9848	V	42.24	38.81	6.38	35.70	51.73	---	74.00	---	-22.27	Peak
5.	12310	V	---	---	---	---	---	---	---	---	---	---
6.	14772	V	---	---	---	---	---	---	---	---	---	---
7.	17234	V	---	---	---	---	---	---	---	---	---	---
8.	19696	V	---	---	---	---	---	---	---	---	---	---
9.	22158	V	---	---	---	---	---	---	---	---	---	---
10.	24620	V	---	---	---	---	---	---	---	---	---	---

Note: An item 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emission

Operation Mode: TX / IEEE 802.11g / CH Low  
 Temperature: 25°C  
 Humidity: 70 % RH

Test Date: Feb. 27 2012  
 Tested by: Andy Chen  
 Polarity: Ver. / Hor.

Item	Freq. (MHz)	Ant.Pol H/V	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level		Peak Limi (dBuV/)	AV Limit (dBuV/)	Margin (dB)	Remark
							Peak (dBuV/)	AV (dBuV/)				
1.	4824	H	43.16	35.76	4.58	34.94	48.58	---	74.00	---	-25.42	Peak
2.	4824	H	31.06	35.76	4.58	34.94	---	36.46	---	54.00	-17.64	AVG
3.	7240	H	43.13	37.85	5.63	35.25	51.36	---	74.00	---	-22.64	Peak
4.	9648	H	41.35	39.39	6.34	35.70	51.38	---	74.00	---	-22.62	Peak
5.	12060	H	---	---	---	---	---	---	---	---	---	---
6.	14472	H	---	---	---	---	---	---	---	---	---	---
7.	16884	H	---	---	---	---	---	---	---	---	---	---
8.	19296	H	---	---	---	---	---	---	---	---	---	---
9.	21708	H	---	---	---	---	---	---	---	---	---	---
10.	24120	H	---	---	---	---	---	---	---	---	---	---

Note: An item 3 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emission

1.	4824	V	32.11	35.13	4.58	34.94	---	36.88	74.00	54.00	-17.12	AVG
2.	4824	V	44.02	35.13	4.58	34.94	48.79	---	74.00	54.00	-25.21	Peak
3.	7240	V	42.60	36.90	5.63	35.25	49.88	---	74.00	---	-24.12	Peak
4.	9648	V	42.22	38.59	6.34	35.70	51.45	---	74.00	---	-22.55	Peak
5.	12060	V	---	---	---	---	---	---	---	---	---	---
6.	14472	V	---	---	---	---	---	---	---	---	---	---
7.	16884	V	---	---	---	---	---	---	---	---	---	---
8.	19296	V	---	---	---	---	---	---	---	---	---	---
9.	21708	V	---	---	---	---	---	---	---	---	---	---
10.	24120	V	---	---	---	---	---	---	---	---	---	---

Note: An item 3 and 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emission

Operation Mode: TX / IEEE 802.11g / CH Mid  
 Temperature: 25°C  
 Humidity: 70 % RH

Test Date: Mar. 14, 2012  
 Tested by: Andy Chen  
 Polarity: Ver. / Hor.

Item	Freq. (MHz)	Ant.Pol H/V	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level		Peak Limi (dBuV/)	AV Limit (dBuV/)	Margin (dB)	Remark
							Peak (dBuV/)	AV (dBuV/)				
1.	4874	H	41.17	35.83	4.61	34.93	46.68	---	74.00	54.00	-27.32	Peak
2.	7311	H	42.00	37.86	5.64	35.26	50.24	---	74.00	54.00	-23.76	Peak
3.	9748	H	41.12	39.51	6.36	35.70	51.29	---	74.00	---	-22.17	Peak
4.	12185	H	---	---	---	---	---	---	---	---	---	---
5.	14622	H	---	---	---	---	---	---	---	---	---	---
6.	17059	H	---	---	---	---	---	---	---	---	---	---
7.	19496	H	---	---	---	---	---	---	---	---	---	---
8.	21933	H	---	---	---	---	---	---	---	---	---	---
9.	24370	H	---	---	---	---	---	---	---	---	---	---

Note: An item 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emission

1.	4874	V	42.24	35.18	4.61	34.93	46.78	---	74.00	54.00	-27.22	Peak
2.	7311	V	41.14	36.92	5.64	35.26	50.61	---	74.00	54.00	-23.39	Peak
3.	9748	V	41.64	38.71	6.36	35.70	51.29	---	74.00	---	-22.17	Peak
4.	12185	V	---	---	---	---	---	---	---	---	---	---
5.	14622	V	---	---	---	---	---	---	---	---	---	---
6.	17059	V	---	---	---	---	---	---	---	---	---	---
7.	19496	V	---	---	---	---	---	---	---	---	---	---
8.	21933	V	---	---	---	---	---	---	---	---	---	---
9.	24370	V	---	---	---	---	---	---	---	---	---	---

Note: An item 3 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emission

Operation Mode: TX / IEEE 802.11g / CH High  
 Temperature: 25°C  
 Humidity: 70 % RH

Test Date: Mar. 14, 2012  
 Tested by: Andy Chen  
 Polarity: Ver. / Hor.

Item	Freq. (MHz)	Ant.Pol H/V	Read Level (dBuV)	Antenna Factor (dB)	Cable Loss (dB)	Preamp Factor (dB)	Level		Peak Limi (dBuV/)	AV Limit (dBuV/)	Margin (dB)	Remark
							Peak (dBuV/)	AV (dBuV/)				
1.	4924	H	41.08	35.90	4.68	34.92	46.74	---	74.00	54.00	-27.06	Peak
2.	7386	H	41.35	37.88	5.65	35.28	49.60	---	74.00	54.00	-24.40	Peak
3.	9848	H	42.26	39.61	6.38	35.70	52.55	---	74.00	---	-21.45	Peak
4.	12310	H	---	---	---	---	---	---	---	---	---	---
5.	14772	H	---	---	---	---	---	---	---	---	---	---
6.	17234	H	---	---	---	---	---	---	---	---	---	---
7.	19696	H	---	---	---	---	---	---	---	---	---	---
8.	22158	H	---	---	---	---	---	---	---	---	---	---
9.	24620	H	---	---	---	---	---	---	---	---	---	---

Note: An item 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emission

1.	4924	V	43.13	35.23	4.68	34.92	48.12	---	74.00	54.00	-25.88	Peak
2.	7386	V	41.13	36.96	5.65	35.28	48.46	---	74.00	54.00	-25.54	Peak
3.	9848	V	42.05	38.81	6.38	35.70	51.54	---	74.00	---	-22.46	Peak
4.	12310	V	---	---	---	---	---	---	---	---	---	---
5.	14772	V	---	---	---	---	---	---	---	---	---	---
6.	17234	V	---	---	---	---	---	---	---	---	---	---
7.	19696	V	---	---	---	---	---	---	---	---	---	---
8.	22158	V	---	---	---	---	---	---	---	---	---	---
9.	24620	V	---	---	---	---	---	---	---	---	---	---

Note: An item 4 are on un-restricted band, so the limit is -20dB for the field strength of the fundamental emission

Notes:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
4. Spectrum setting:
  - a. Peak Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = 200 ms.
  - b. AV Setting 1GHz - 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = 200 ms.
5. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.