


9. Number of Hopping Channel

9.1. Block diagram of test setup

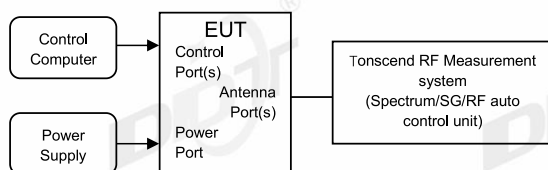

9.2. Limits

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

9.3. Test procedure

- (1) The test according to ANSI C63.10-2013 clause 7.8.3.
- (2) Connect EUT's antenna output to spectrum analyzer by RF cable, the path loss was compensated to the results.
- (3) Set the EUT as maximum power setting and enable the EUT transmit continuously.
- (4) Use the following spectrum analyzer settings for the maximum peak output power measurement:

RBW:	RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
VBW:	VBW $\geq$ RBW.
Span:	The frequency band of operation
Detector Mode:	Peak
Sweep time:	Auto
Trace mode:	Max hold


- (5) Measure the hopping number and record the results in the report.
- (6) Measure and record the results in the report.

9.4. Test result

Test Site:	RF Measurement System 4#	Test Date:	2023.11.28
Ambient Condition:	24.4℃,47.6%RH	Test Engineer:	Haofeng CHEN
Equipment under Test:	DAC and Headphone Amplifier	Model No.:	F3021Q
Sample Number:	S23100918-02	Test Power Supply:	Battery


Test Mode	Antenna	Frequency [MHz]	Result [Num]	Limit [Num]	Verdict
DH5	Ant1	Hop	79	≥ 15	PASS
2DH5	Ant1	Hop	79	≥ 15	PASS
3DH5	Ant1	Hop	79	≥ 15	PASS

9.5. Test graphs

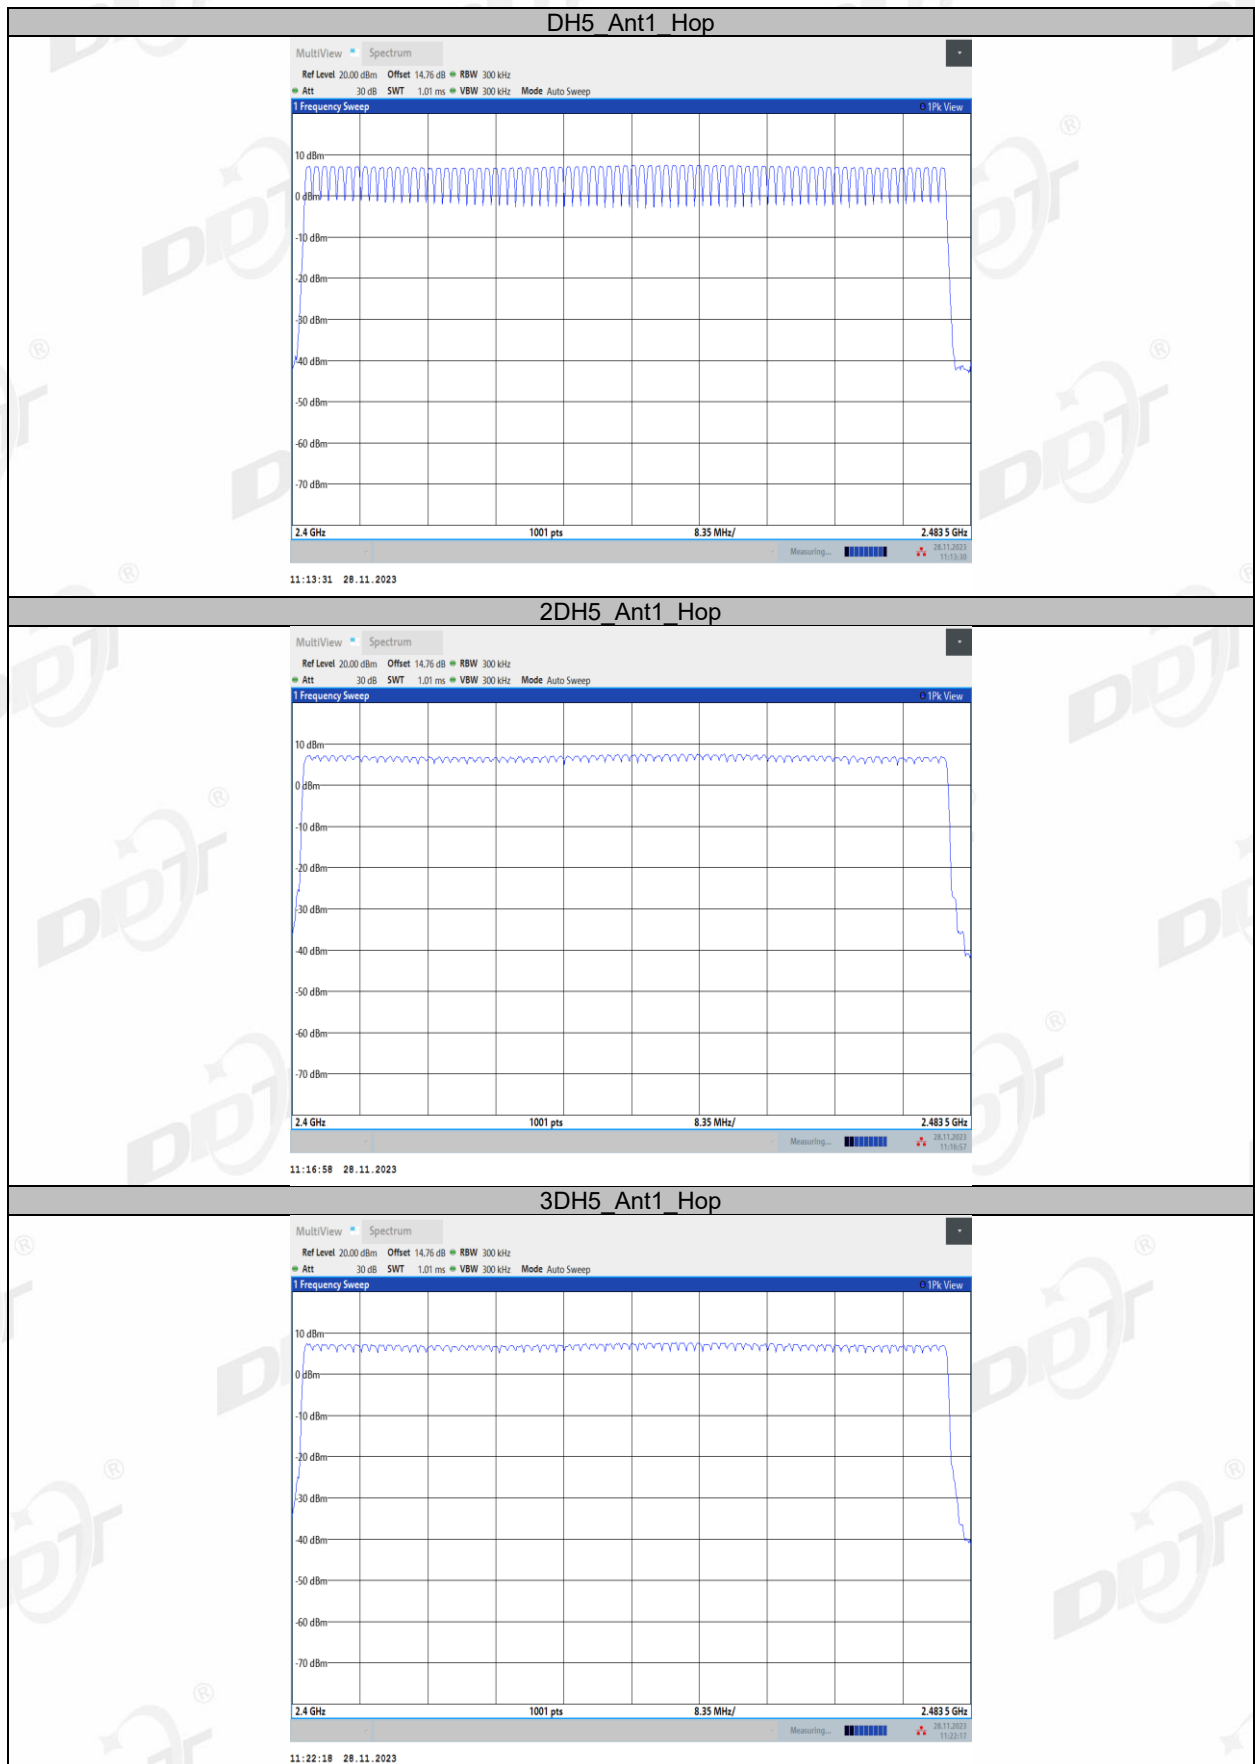

10. Band Edge Compliance (Conducted Method)

10.1. Block diagram of test setup

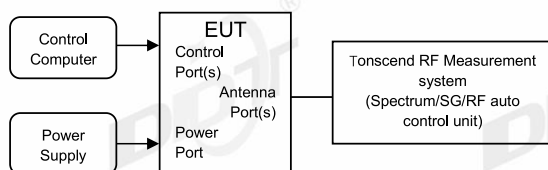

10.2. Limit

All restriction band should comply with 15.209, other emission should be at least 20dB below the fundamental.

10.3. Test procedure

- Connect EUT's antenna output to spectrum analyzer by RF cable.
- Establish a reference level by using the following procedure:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- Then mark the maximum amplitude of all unwanted emissions outside of the authorized frequency band.


10.4. Test result

Test Site:	RF Measurement System 4#	Test Date:	2023.11.28-2023.12.11
Ambient Condition:	24.4℃,47.6%RH	Test Engineer:	Haofeng CHEN
Equipment under Test:	DAC and Headphone Amplifier	Model No.:	F3021Q
Sample Number:	S23100918-02	Test Power Supply:	Battery


Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
$\pi/4$ -DQPSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass
8DPSK	Hopping off 2402	Pass
	Hopping off 2480	Pass
	Hopping on	Pass

10.5. Test graphs




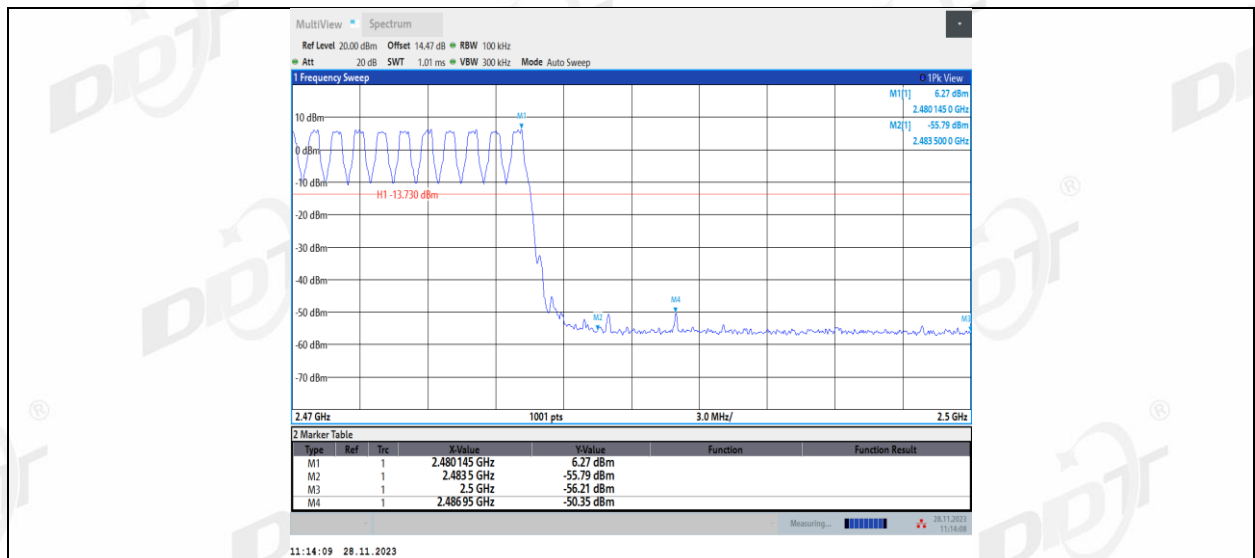


2DH5_Ant1_Low_2402

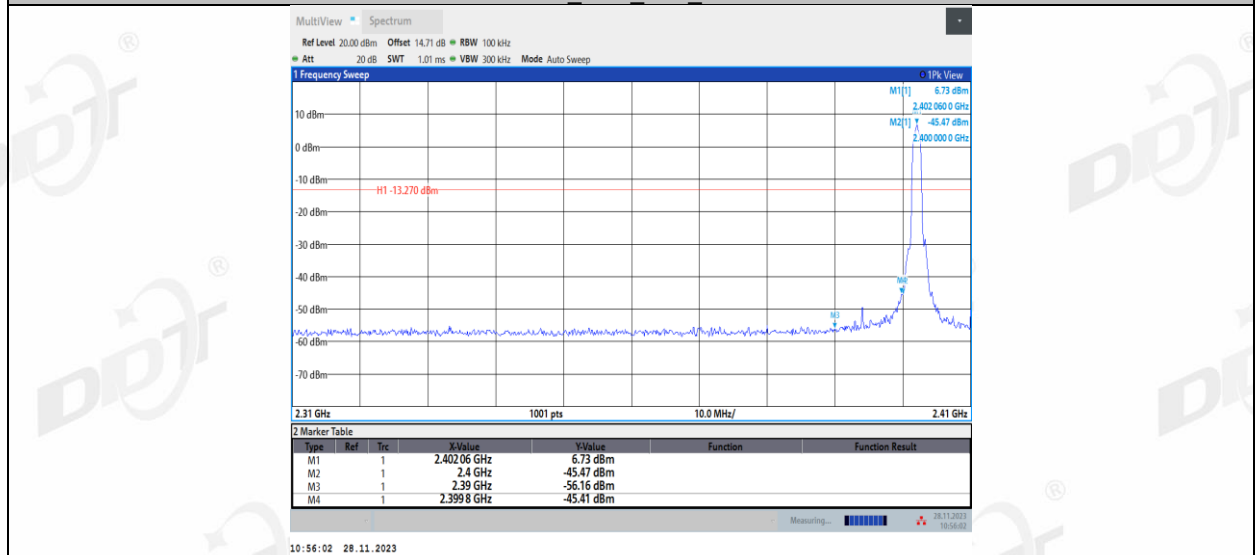

2DH5_Ant1_High_2480

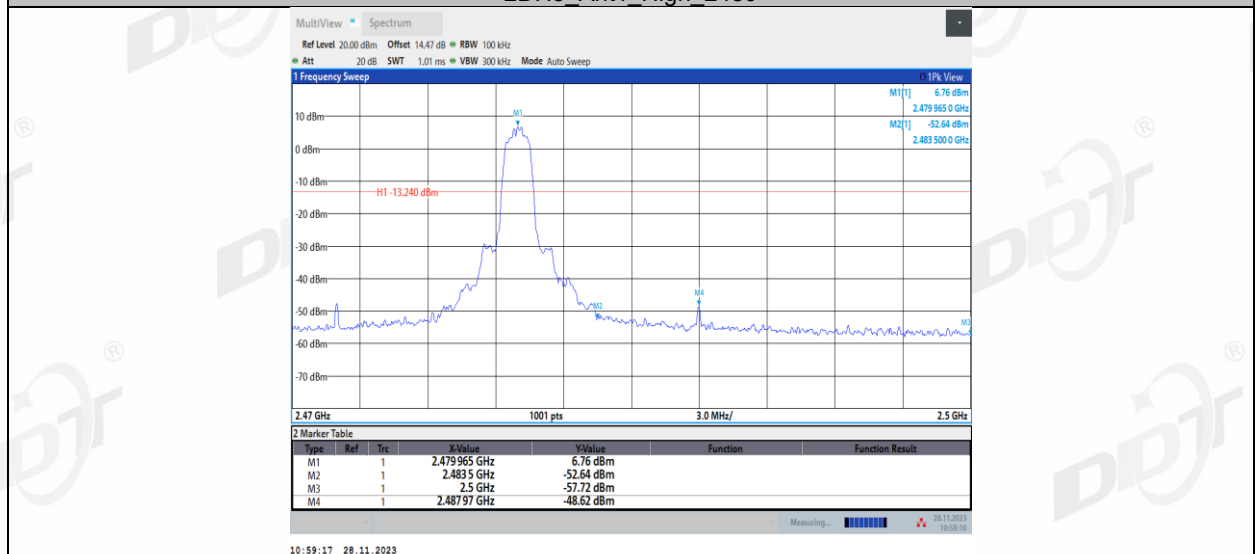


2DH5_Ant1_Low_Hop_2402

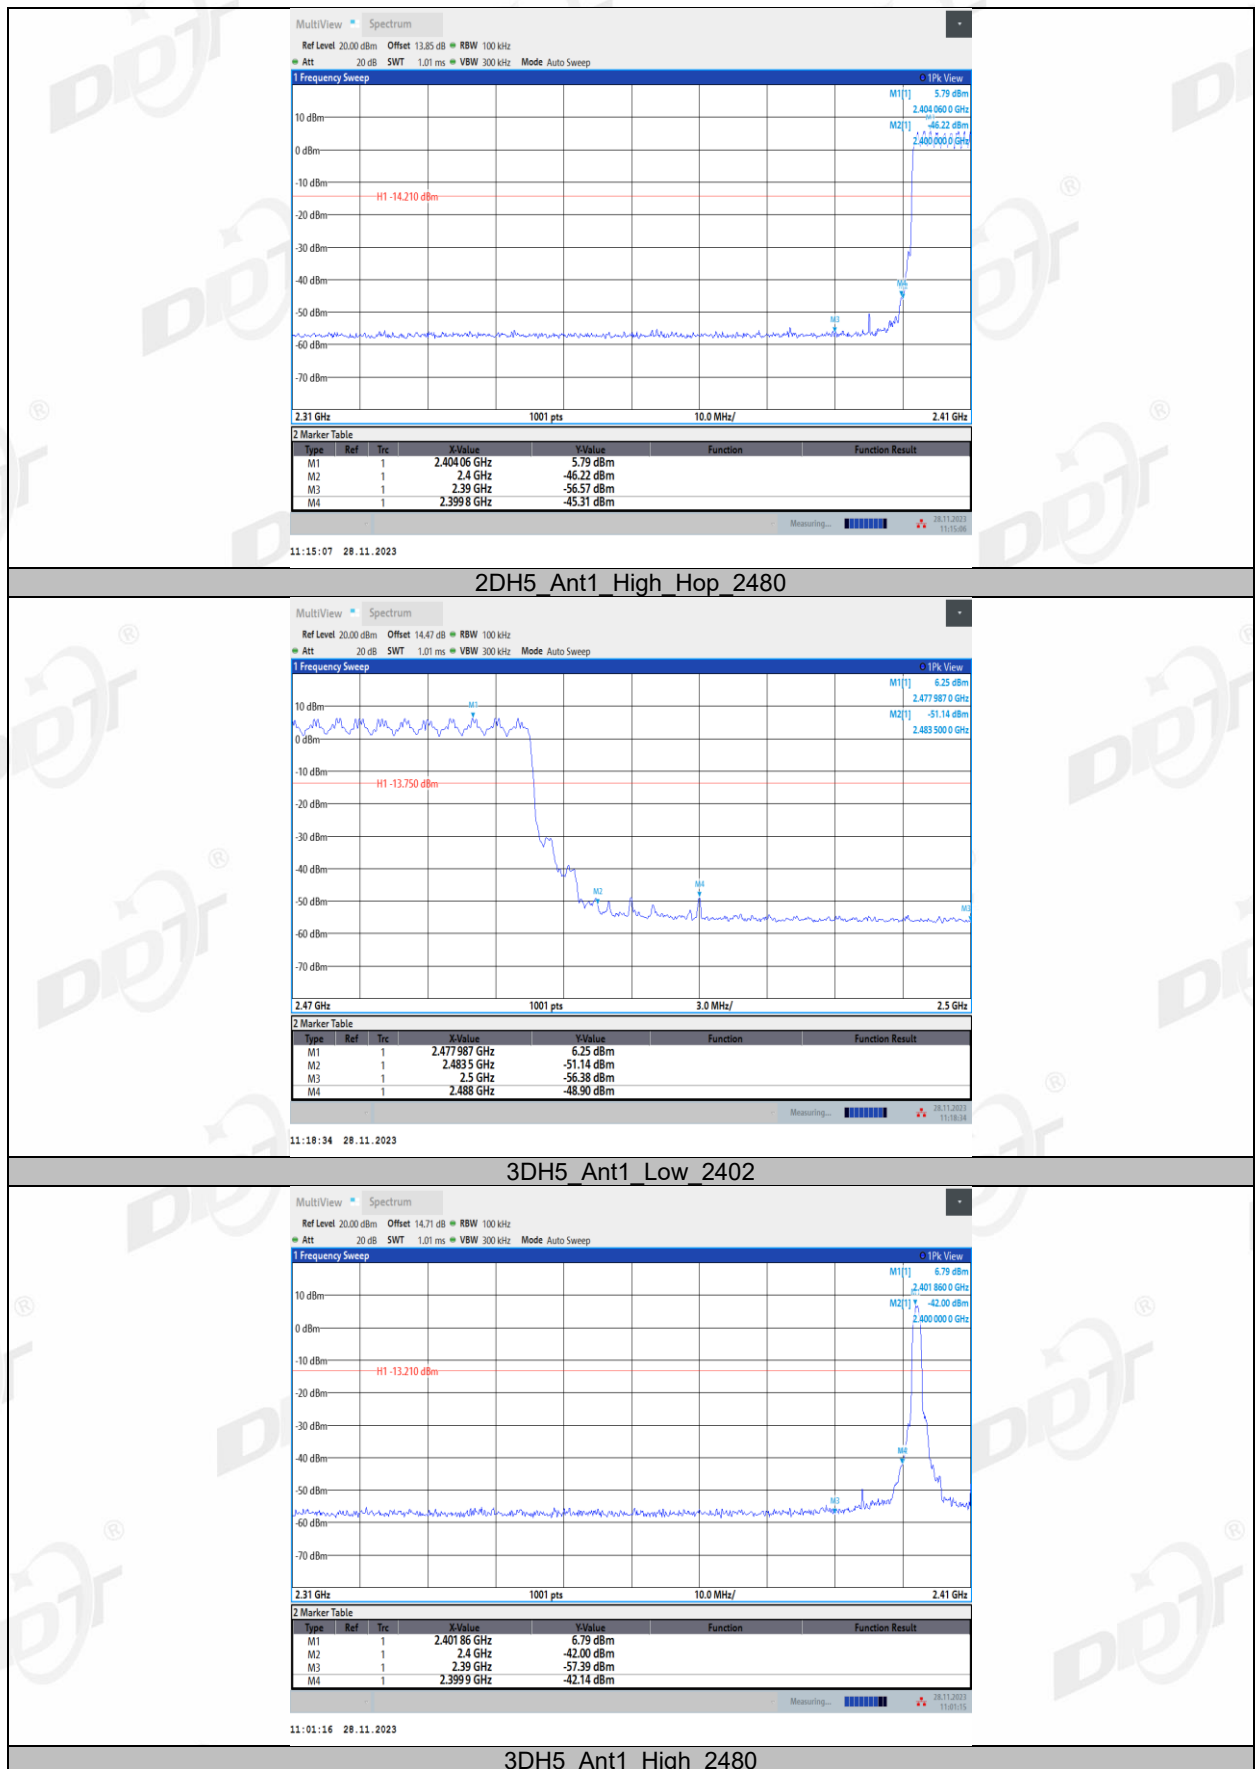



11. RF Conducted Spurious Emissions

11.1. Block diagram of test setup

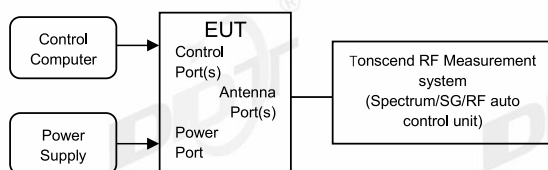

11.2. Limits

In any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

11.3. Test procedure

- (1) Connect EUT's antenna output to spectrum analyzer by RF cable.
- (2) Establish a reference level by using the following procedure:

Center frequency	Test frequency
RBW:	100 kHz
VBW:	300 kHz
Span	Wide enough to capture the peak level of the in-band emission
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold
- (3) Allow the trace to stabilize, use the peak marker function to determine the maximum peak power level to establish the reference level.
- (4) Set the spectrum analyzer as follows:

RBW:	100 kHz
VBW:	300 kHz
Span	Encompass frequency range to be measured
Number of measurement points	$\geq \text{Span/RBW}$
Detector Mode:	Peak
Sweep time:	Auto
Trace mode	Max hold


Allow the trace to stabilize, use the peak marker function to determine the maximum amplitude of all unwanted emissions outside of the authorized frequency band


11.4. Test result


Test Site:	RF Measurement System 4#	Test Date:	2023.11.28-2023.12.11
Ambient Condition:	24.4℃,47.6%RH	Test Engineer:	Haofeng CHEN
Equipment under Test:	DAC and Headphone Amplifier	Model No.:	F3021Q
Sample Number:	S23100918-02	Test Power Supply:	Battery


Mode	Freq. (MHz)	Verdict
GFSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
$\pi/4$ -DQPSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass
8DPSK	Hopping off 2402	Pass
	Hopping off 2441	Pass
	Hopping off 2480	Pass


11.5. Test graphs

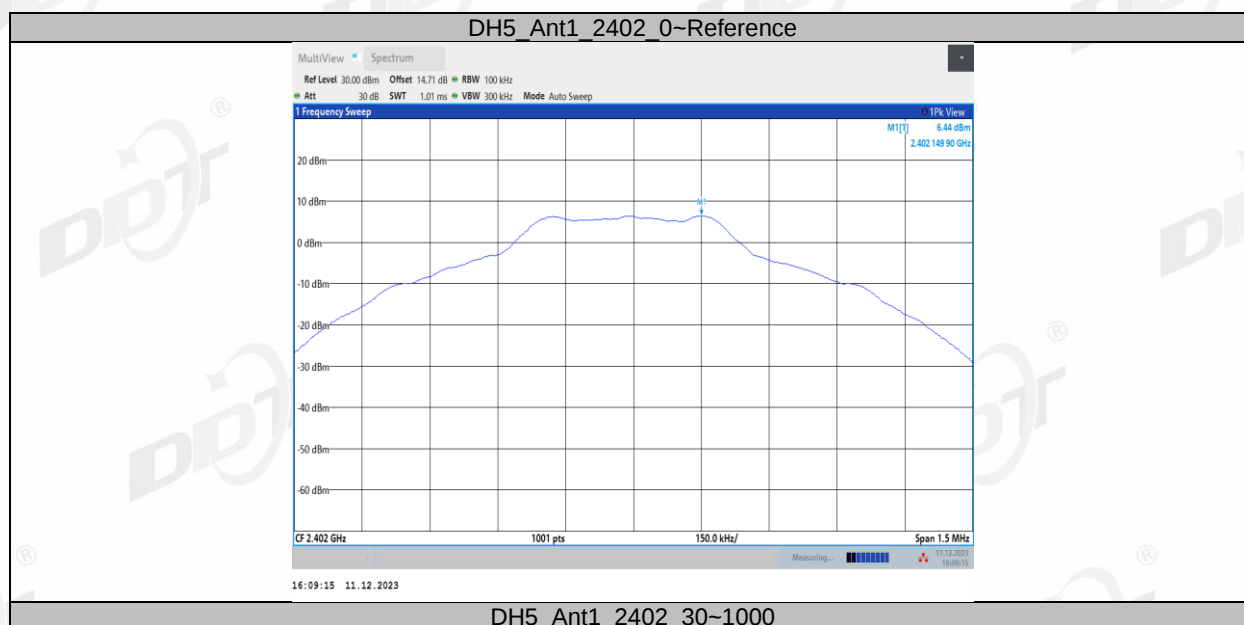


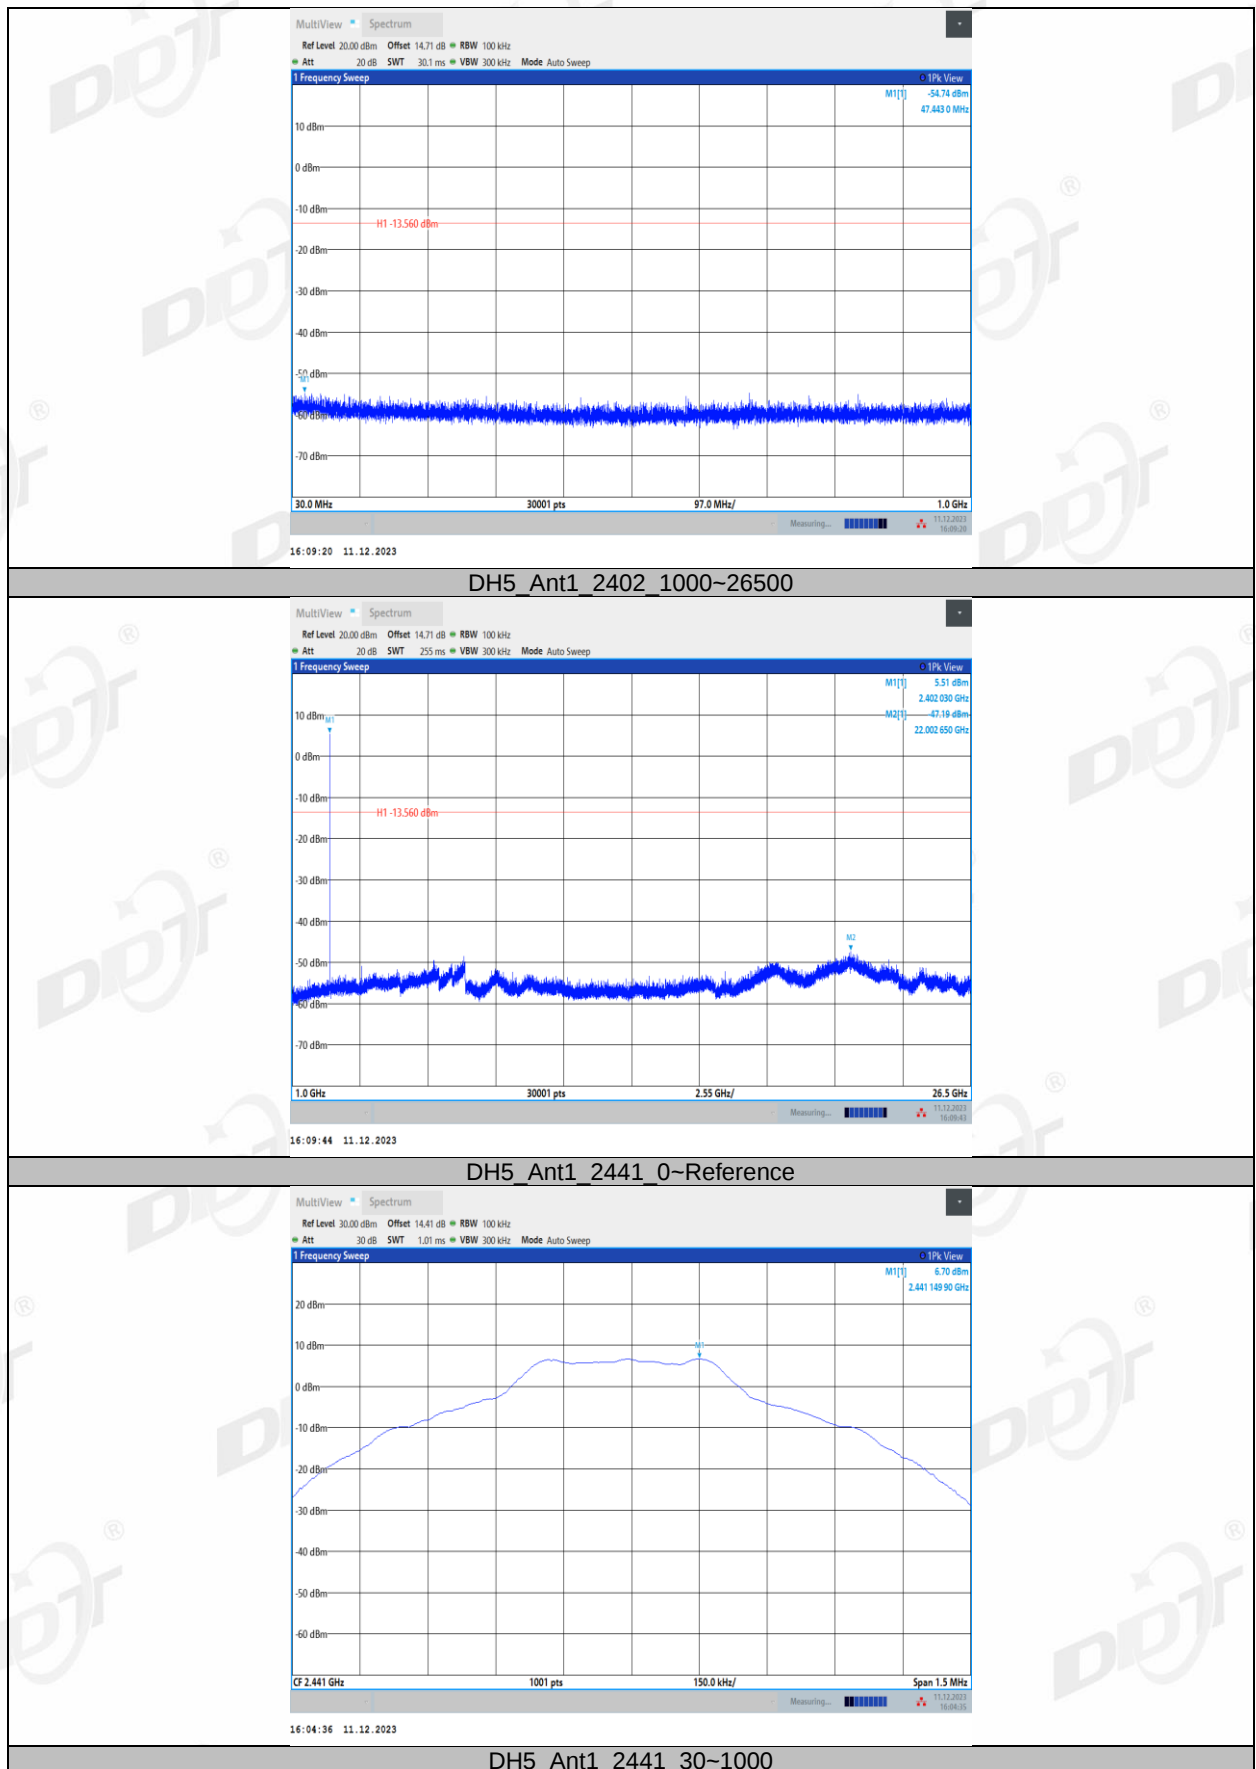


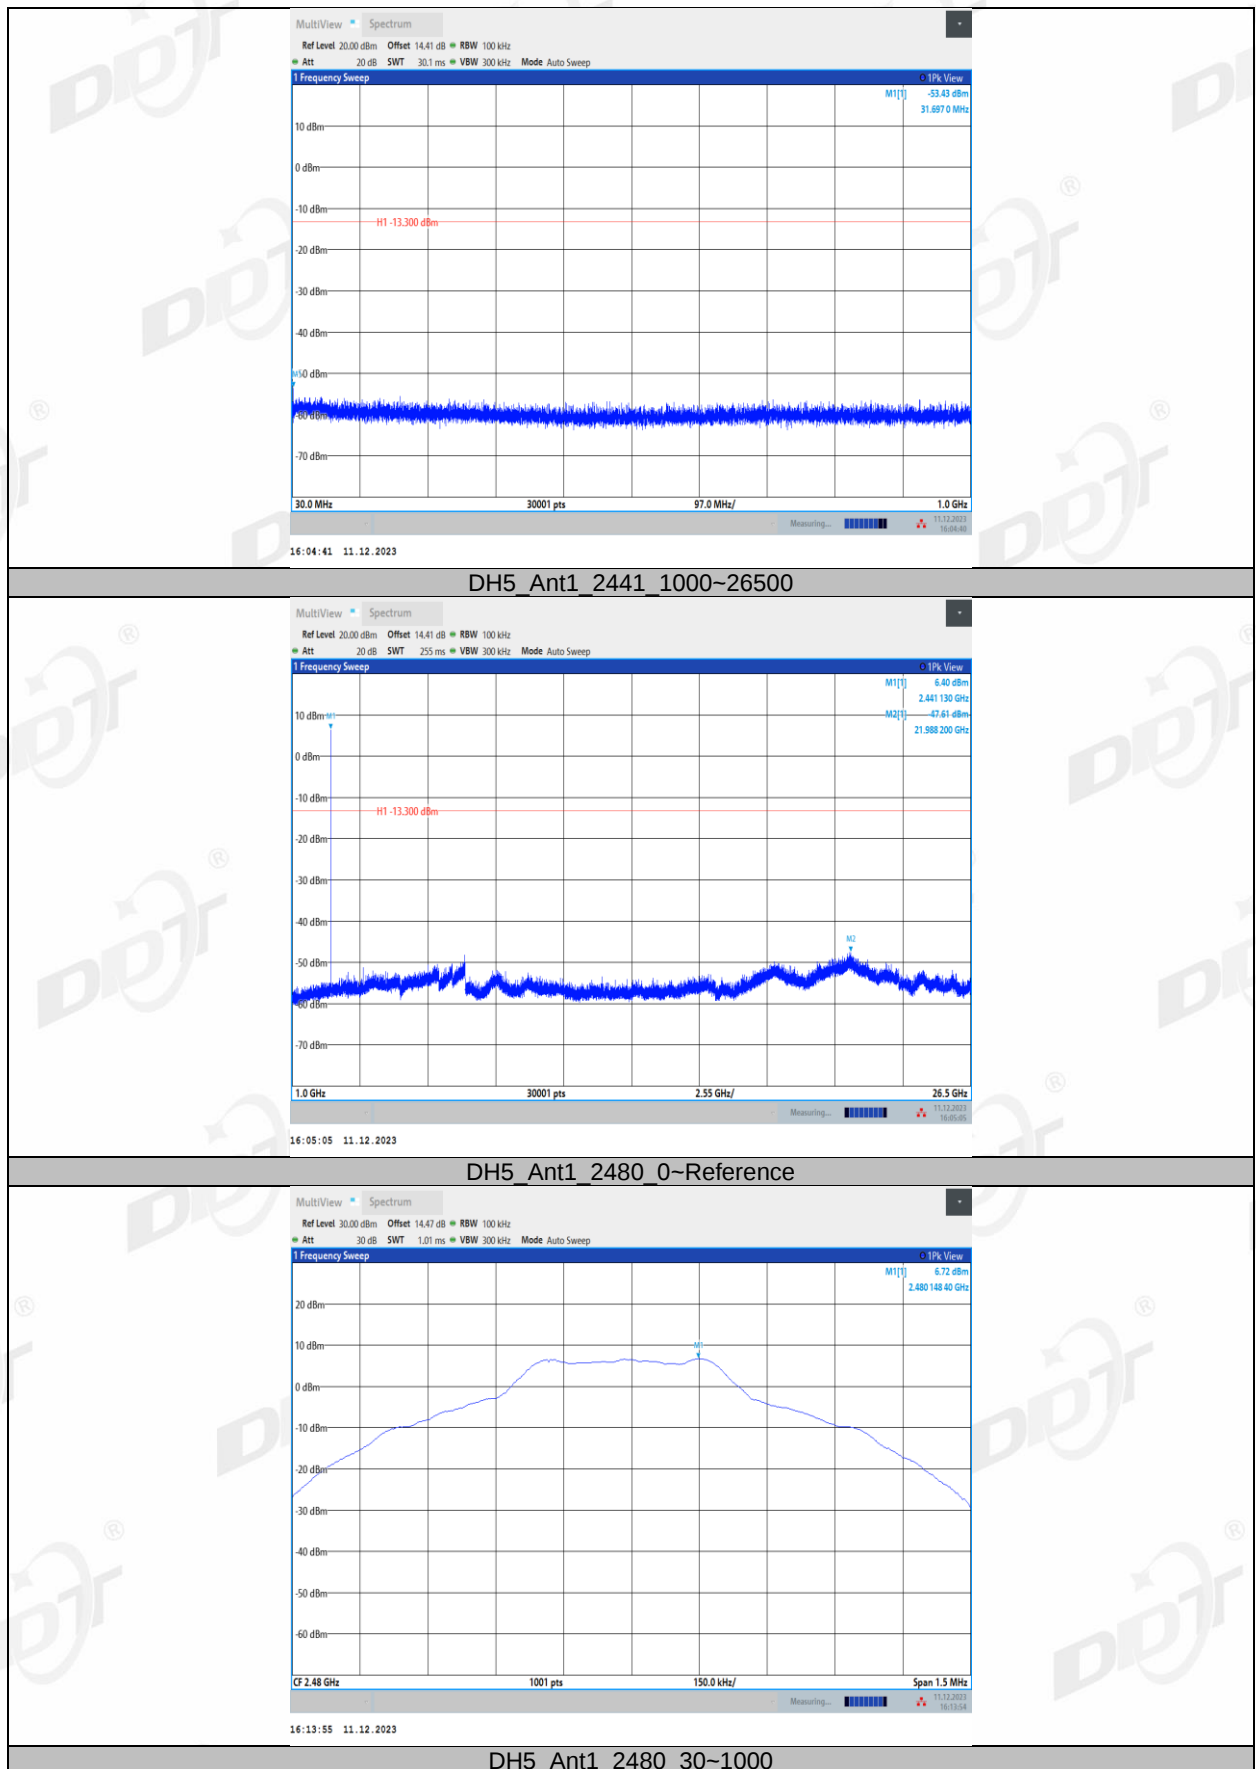


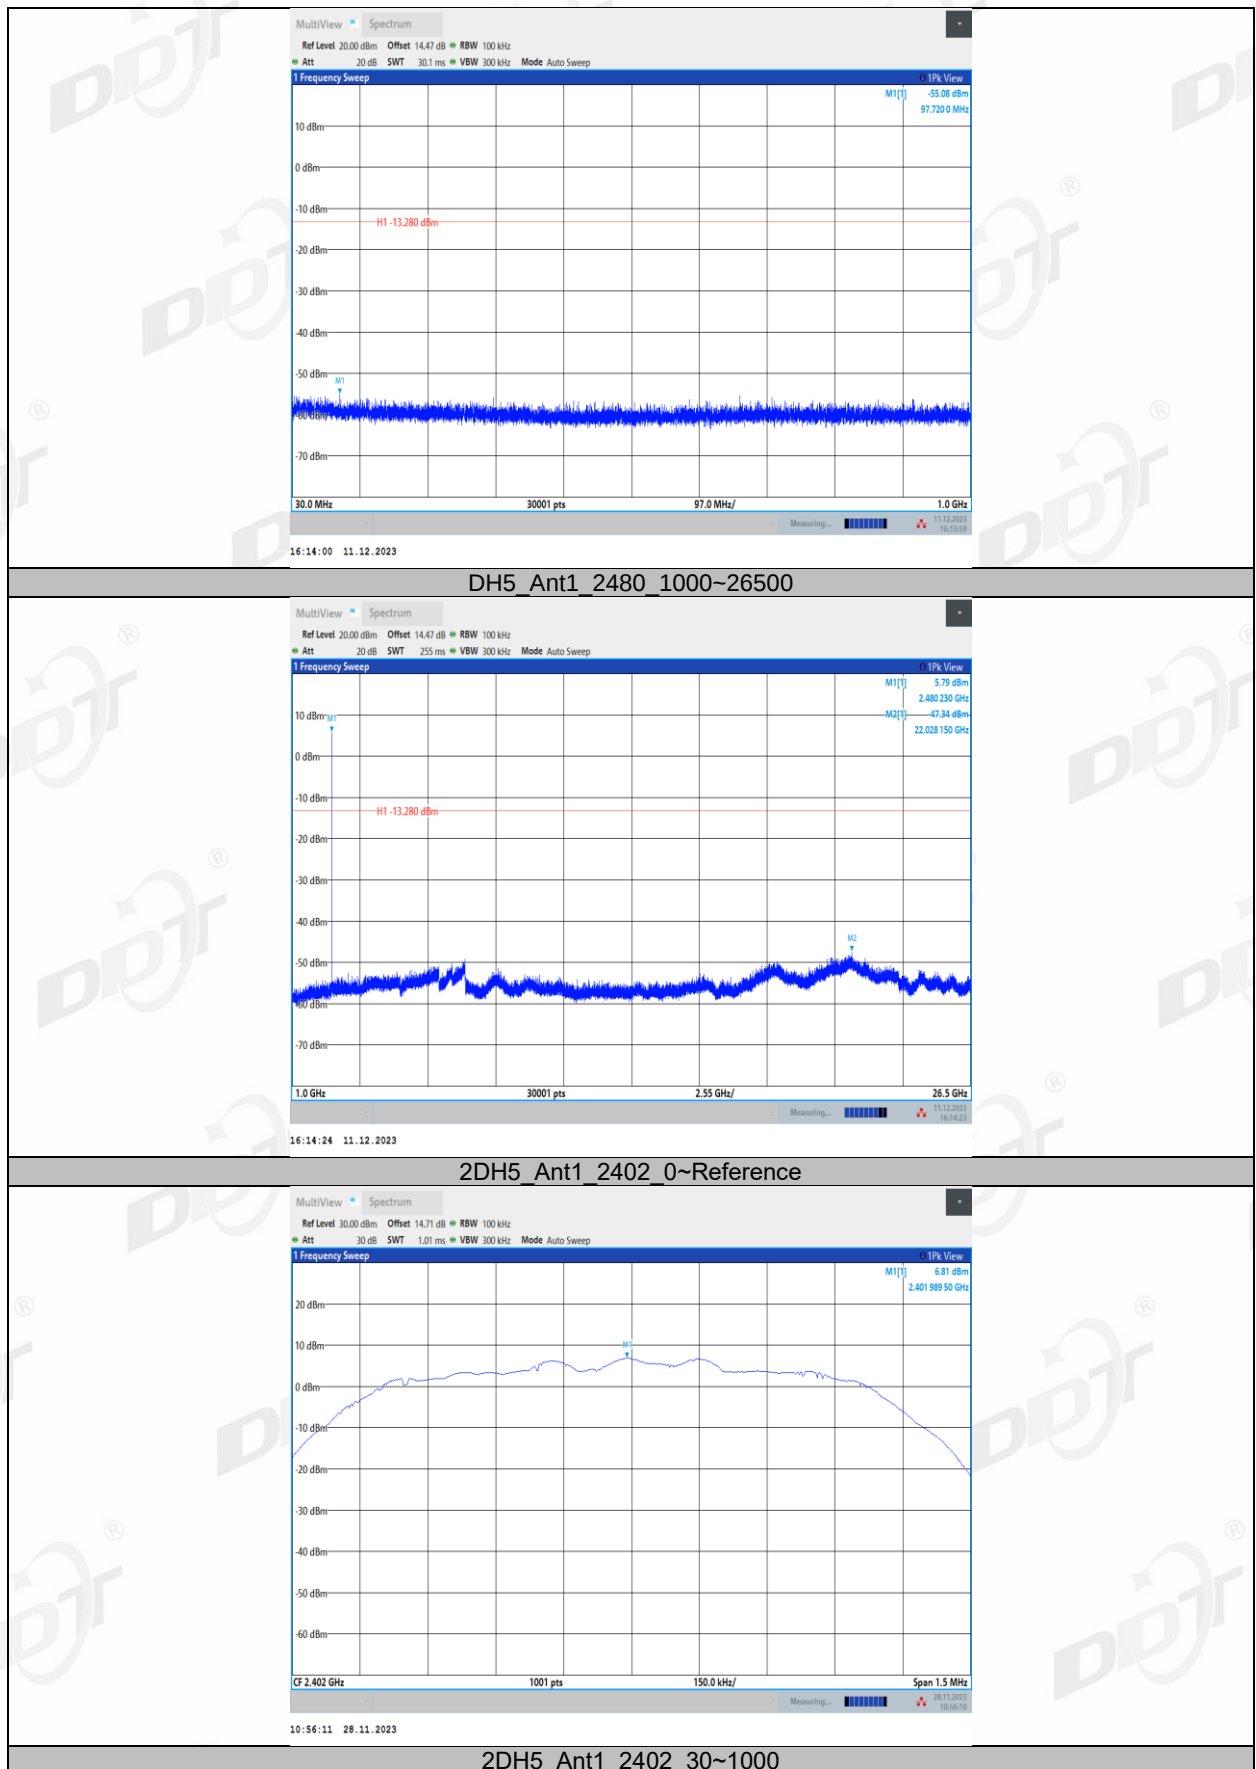


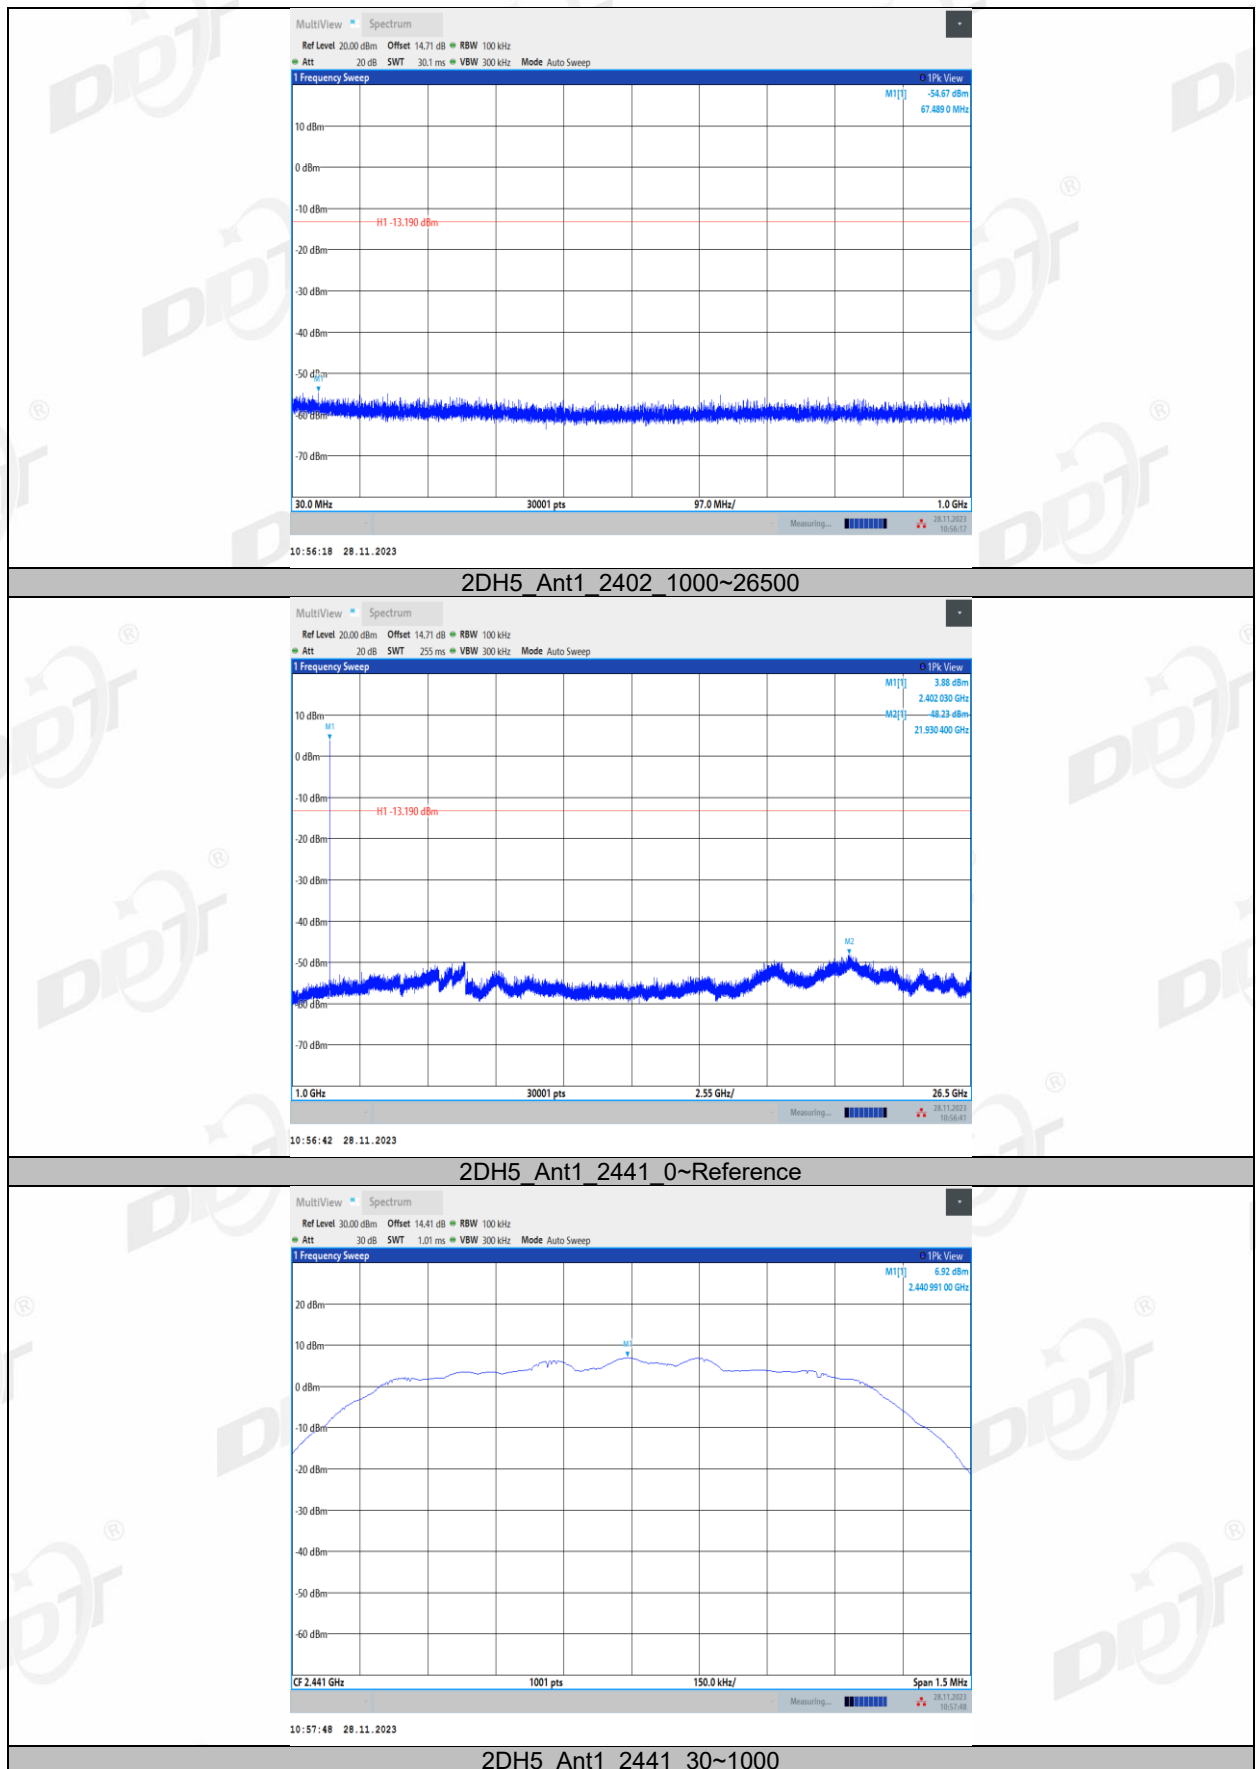


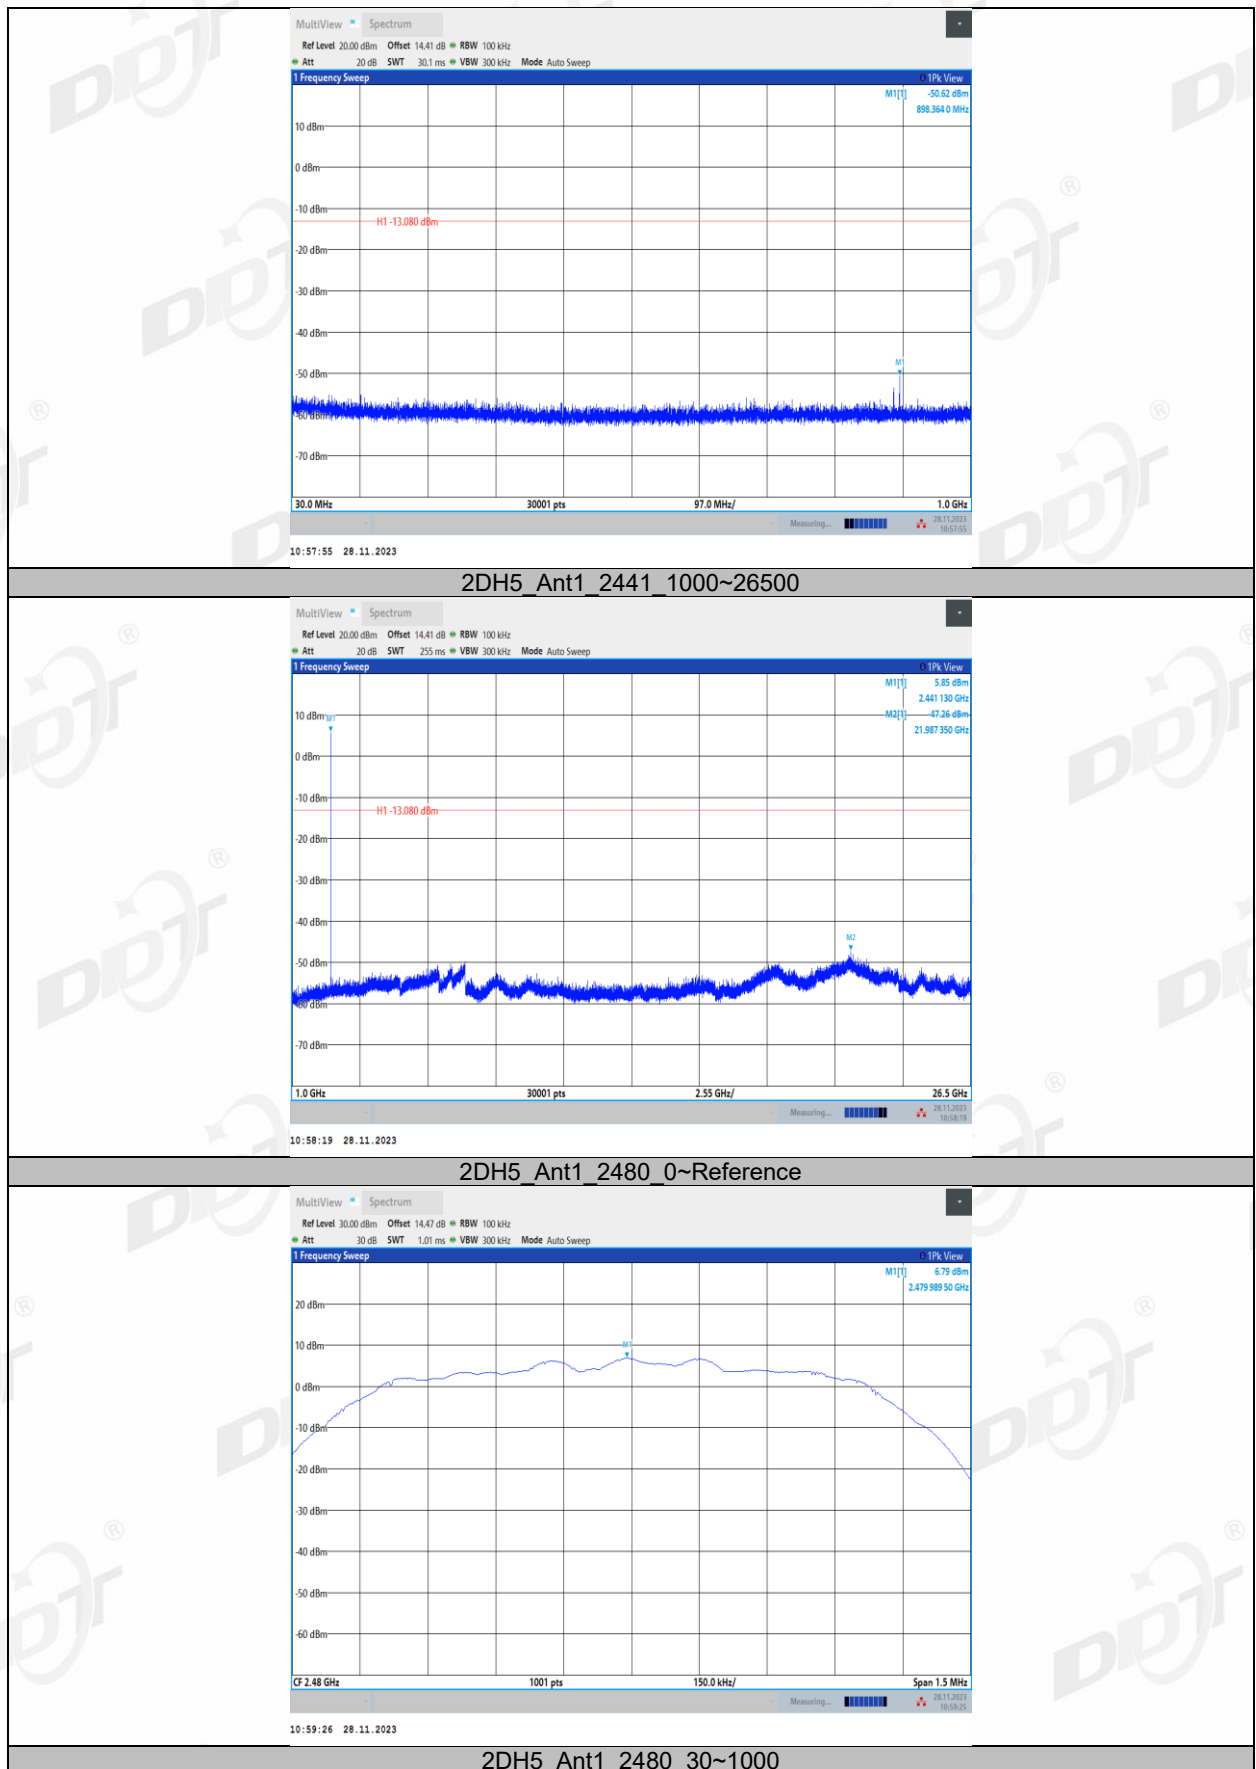

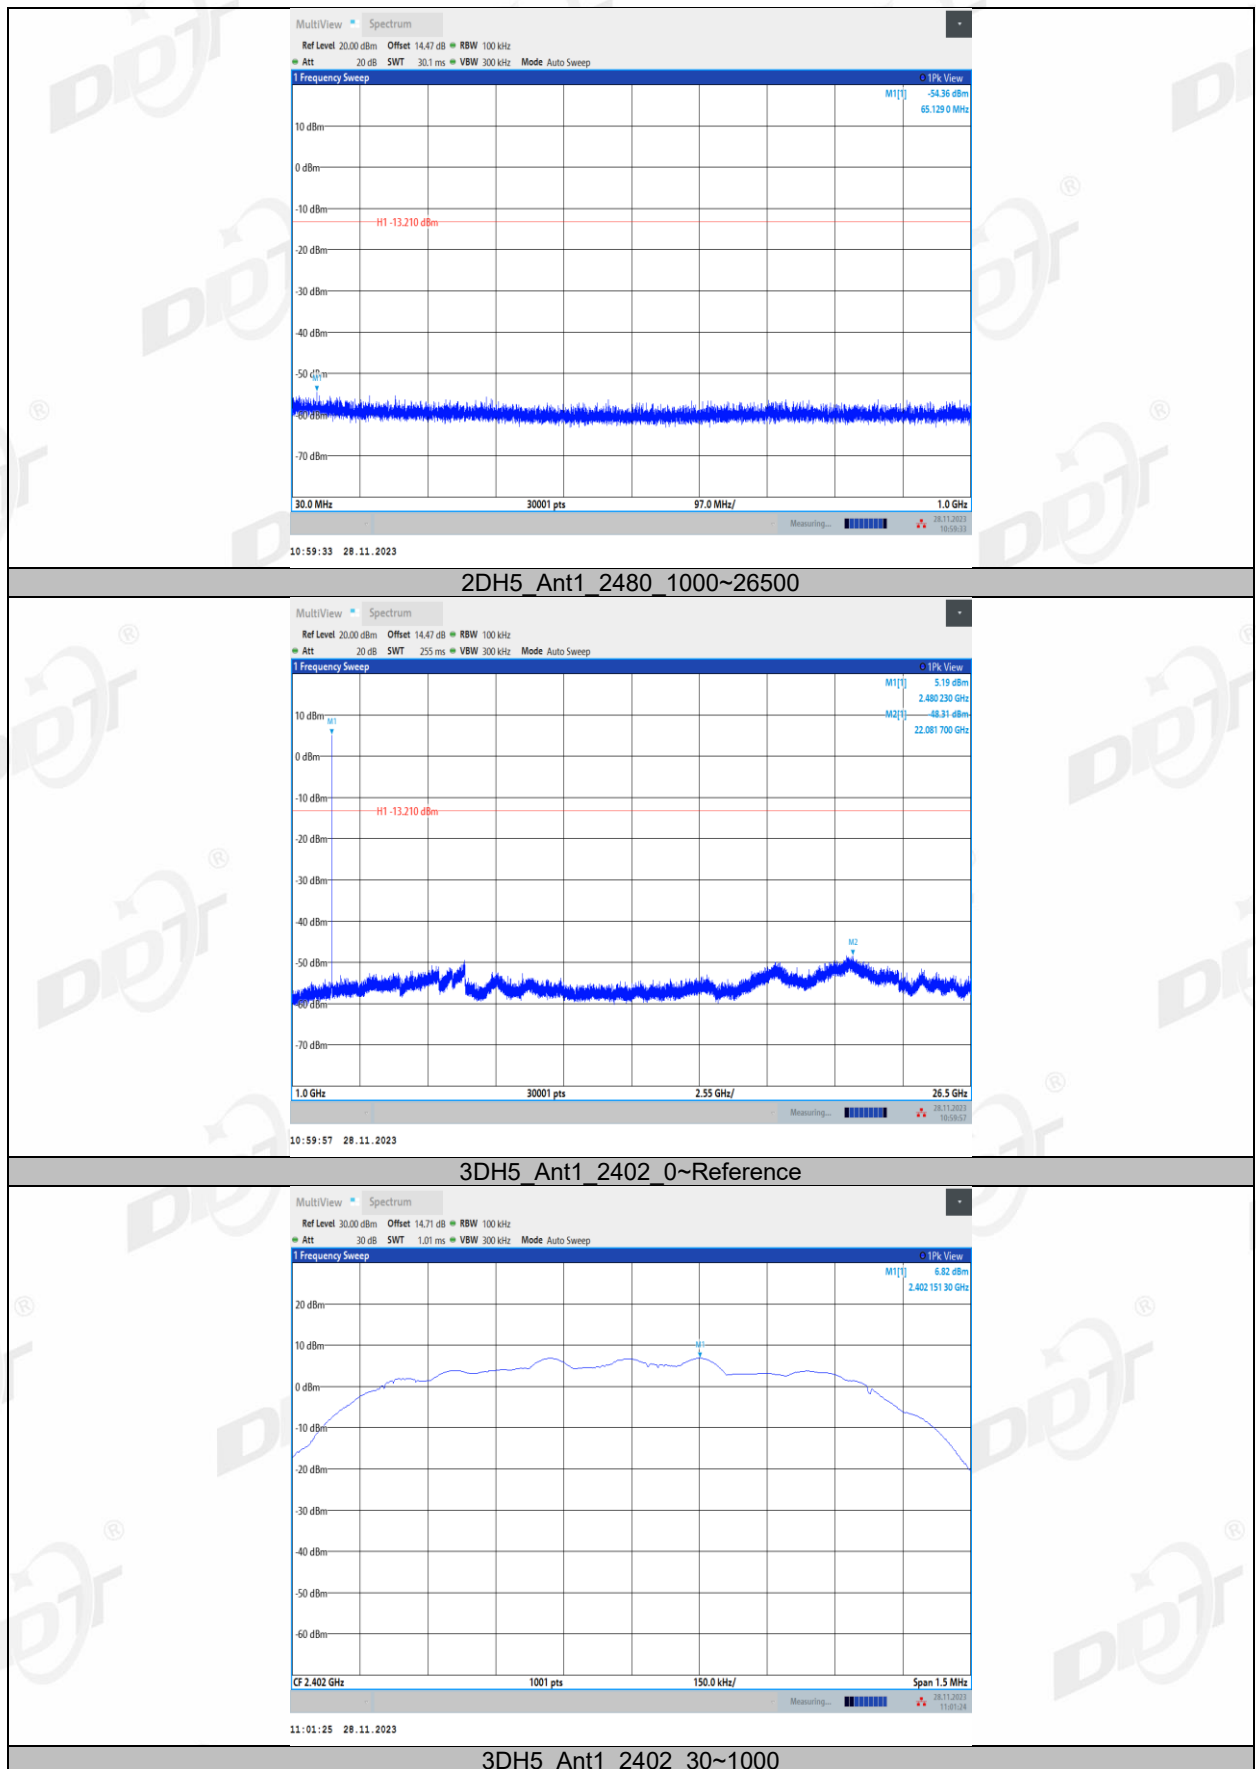

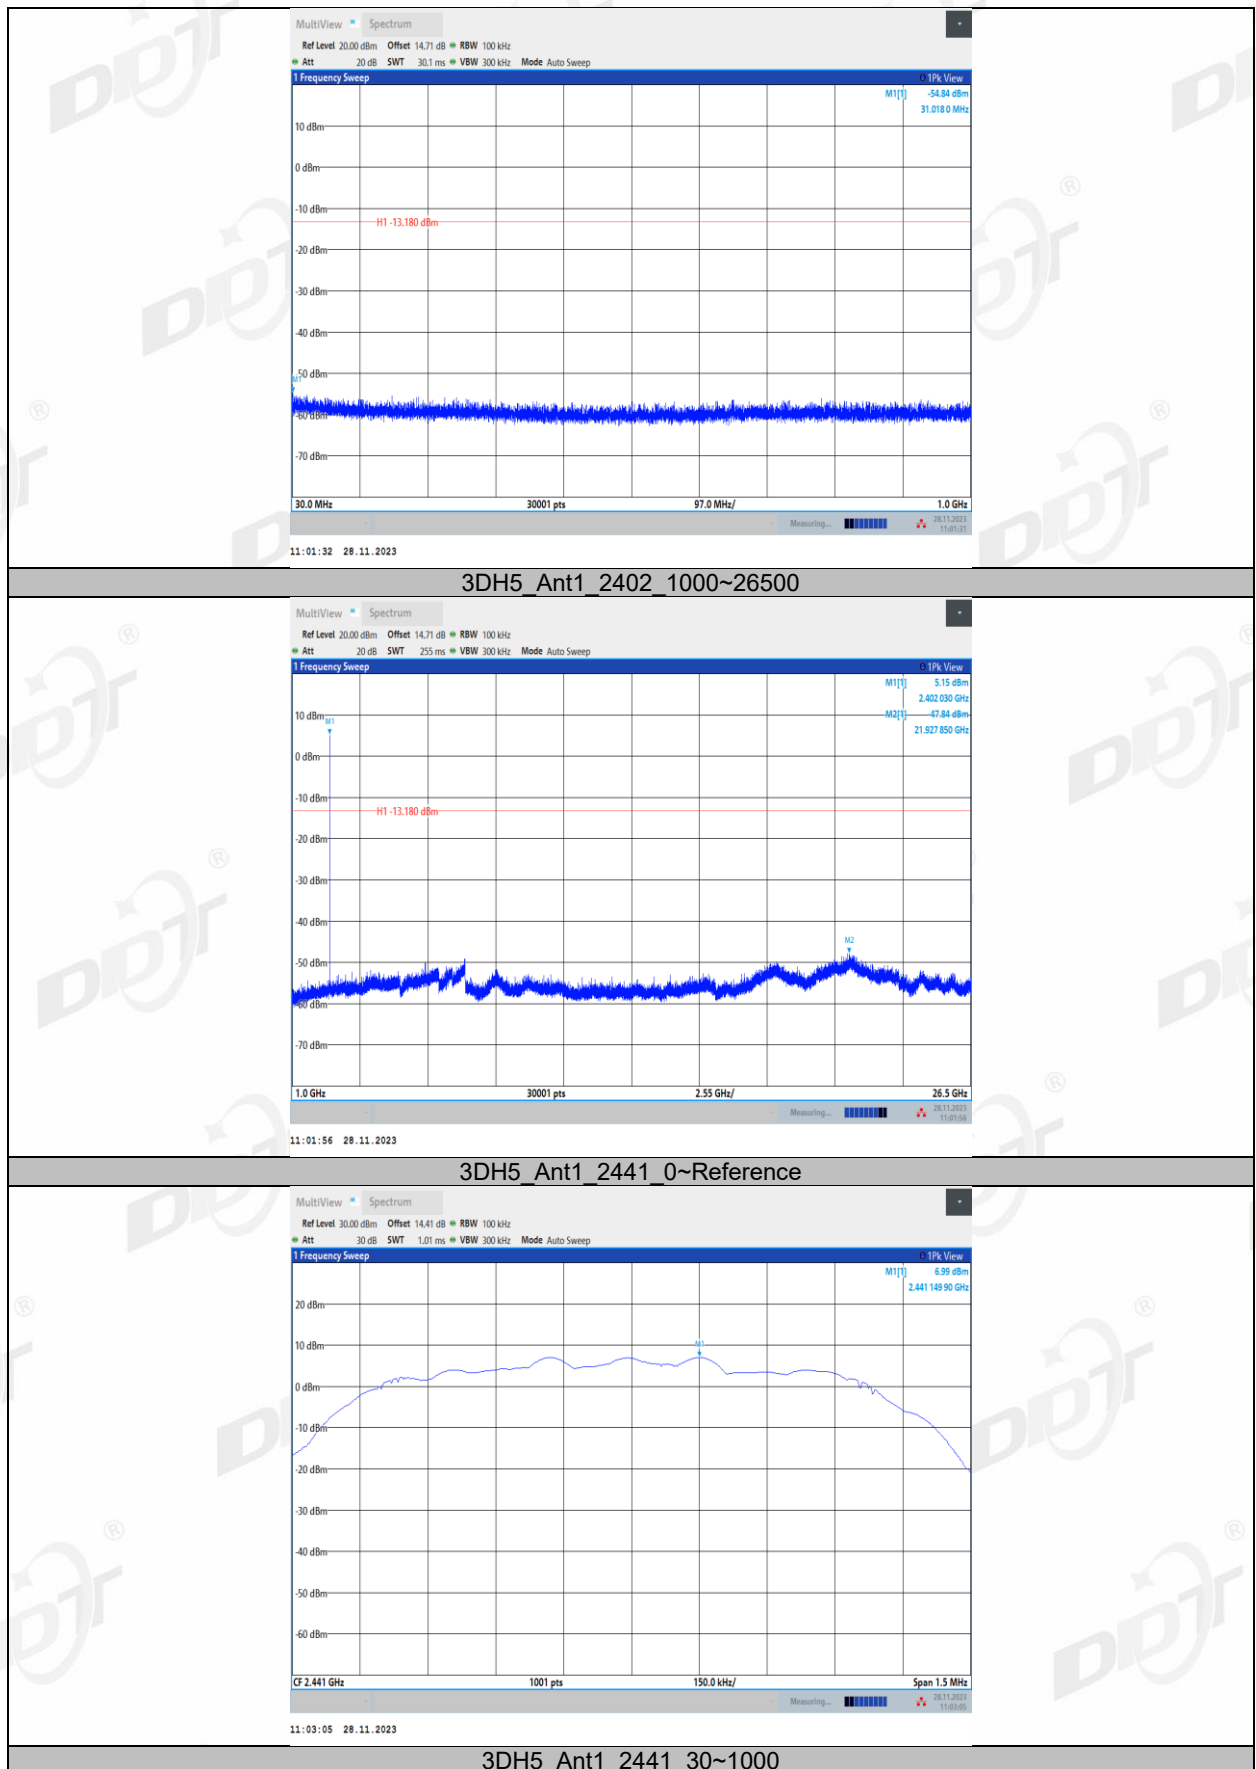


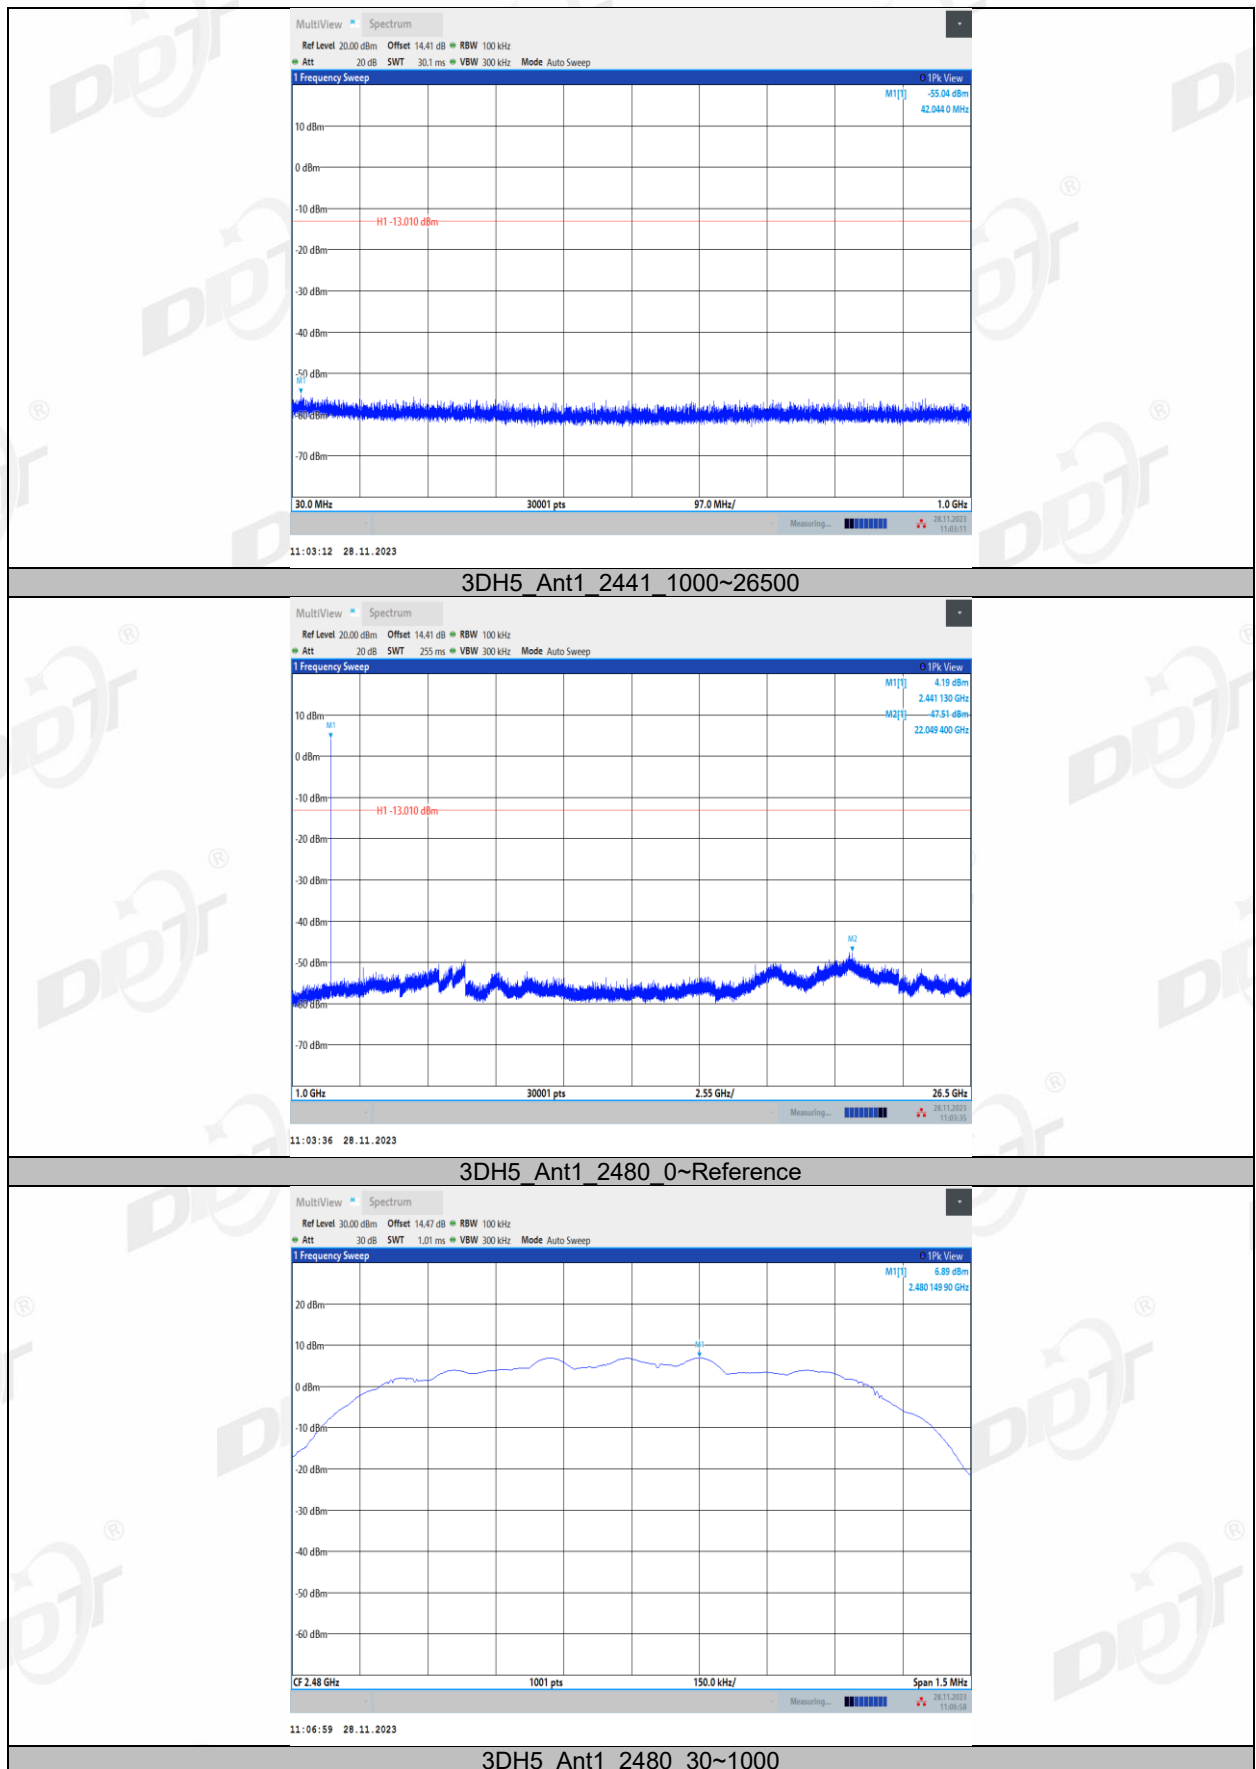

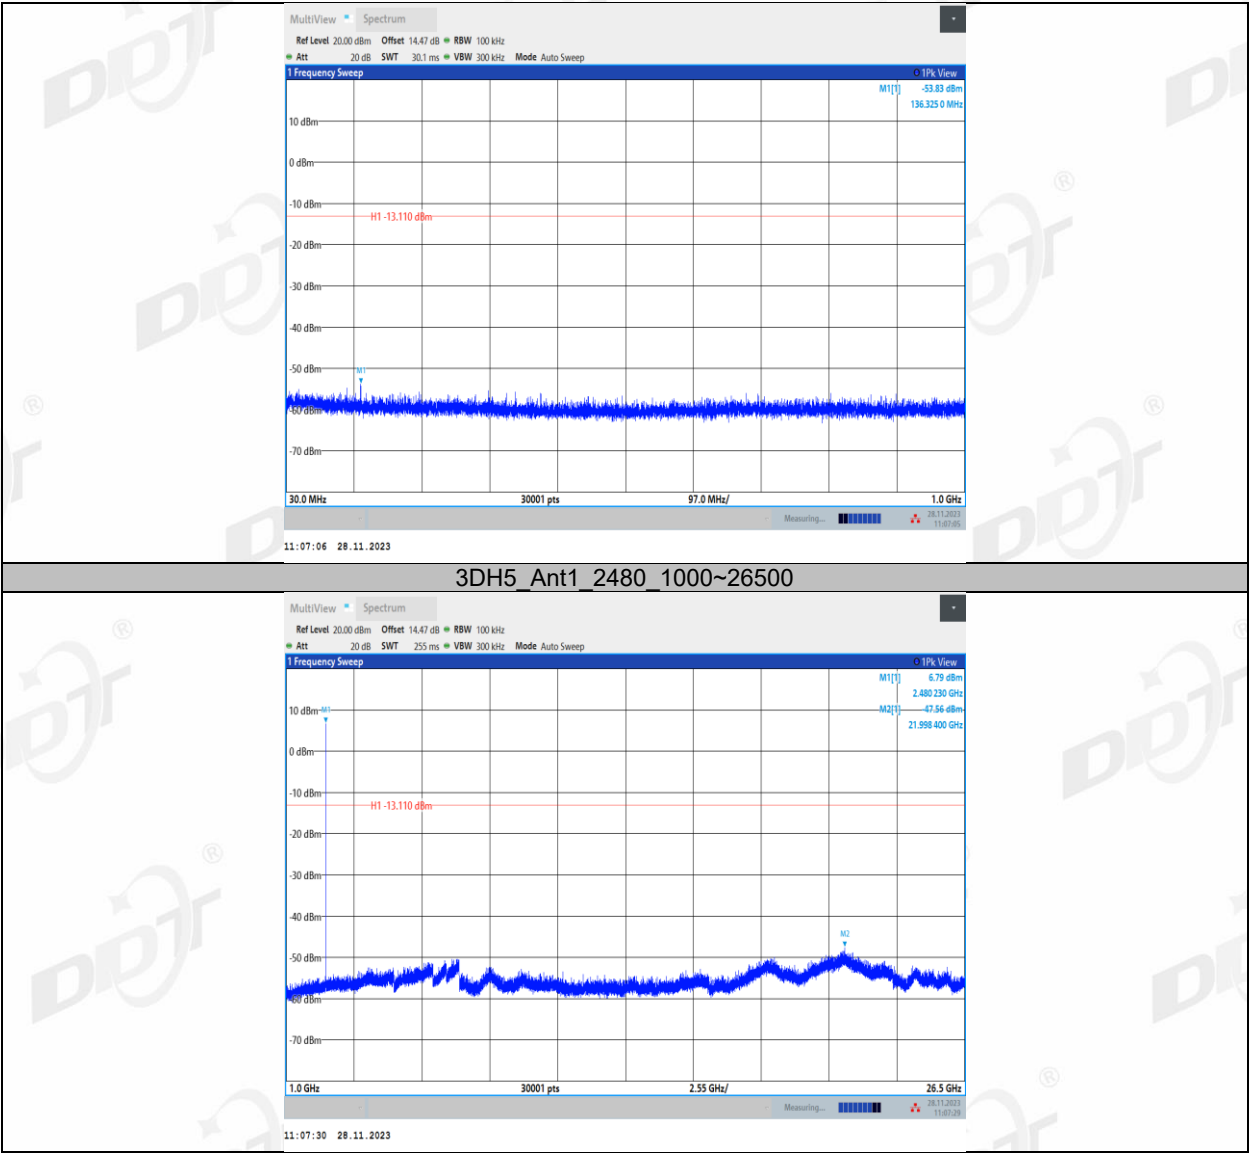

12. Duty cycle

12.1. Block diagram of test setup

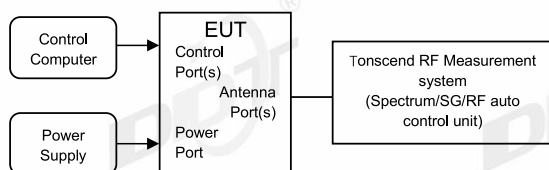

12.2. Limit

Just for Report.

12.3. Test procedure

- (1) Connected the EUT's antenna port to the Spectrum Analyzer by suitable attenuator, The cable loss and attenuator loss have been put into spectrum analyzer as amplitude offset.

set the Spectrum Analyzer as below:

Centre Frequency: The centre frequency of the middle hopping channel.

Resolution BW: 10 MHz.

Video BW: 10 MHz.

Span: Zero span.

Detector: Peak.

Trace Mode: Clear Write.

Sweep: Video Trigger

- (2) When the trace is complete, measure the sending time of 1 burst and the duty cycle of 1 burst cycle.

- (3) Calculate dwell time follow below formula:


Duty cycle= Pulse's on time / Burst cycle

12.4. Test result


Test Site:	RF Measurement System 4#	Test Date:	2023.11.28
Ambient Condition:	24.4℃,47.6%RH	Test Engineer:	Haofeng CHEN
Equipment under Test:	DAC and Headphone Amplifier	Model No.:	F3021Q
Sample Number:	S23100918-02	Test Power Supply:	Battery

Test Mode	Antenna	Frequency [MHz]	ON Time [ms]	Period [ms]	Duty Cycle [%]	Duty Cycle Factor[dB]
DH5	Ant1	2402	2.89	3.75	77.07	1.13
		2441	2.90	3.76	77.13	1.13
		2480	2.89	3.75	77.07	1.13
2DH5	Ant1	2402	2.90	3.75	77.33	1.12
		2441	2.90	3.76	77.13	1.13
		2480	2.90	3.76	77.13	1.13
3DH5	Ant1	2402	2.90	3.75	77.33	1.12
		2441	2.90	3.75	77.33	1.12
		2480	2.90	3.75	77.33	1.12

12.5. Test graphs

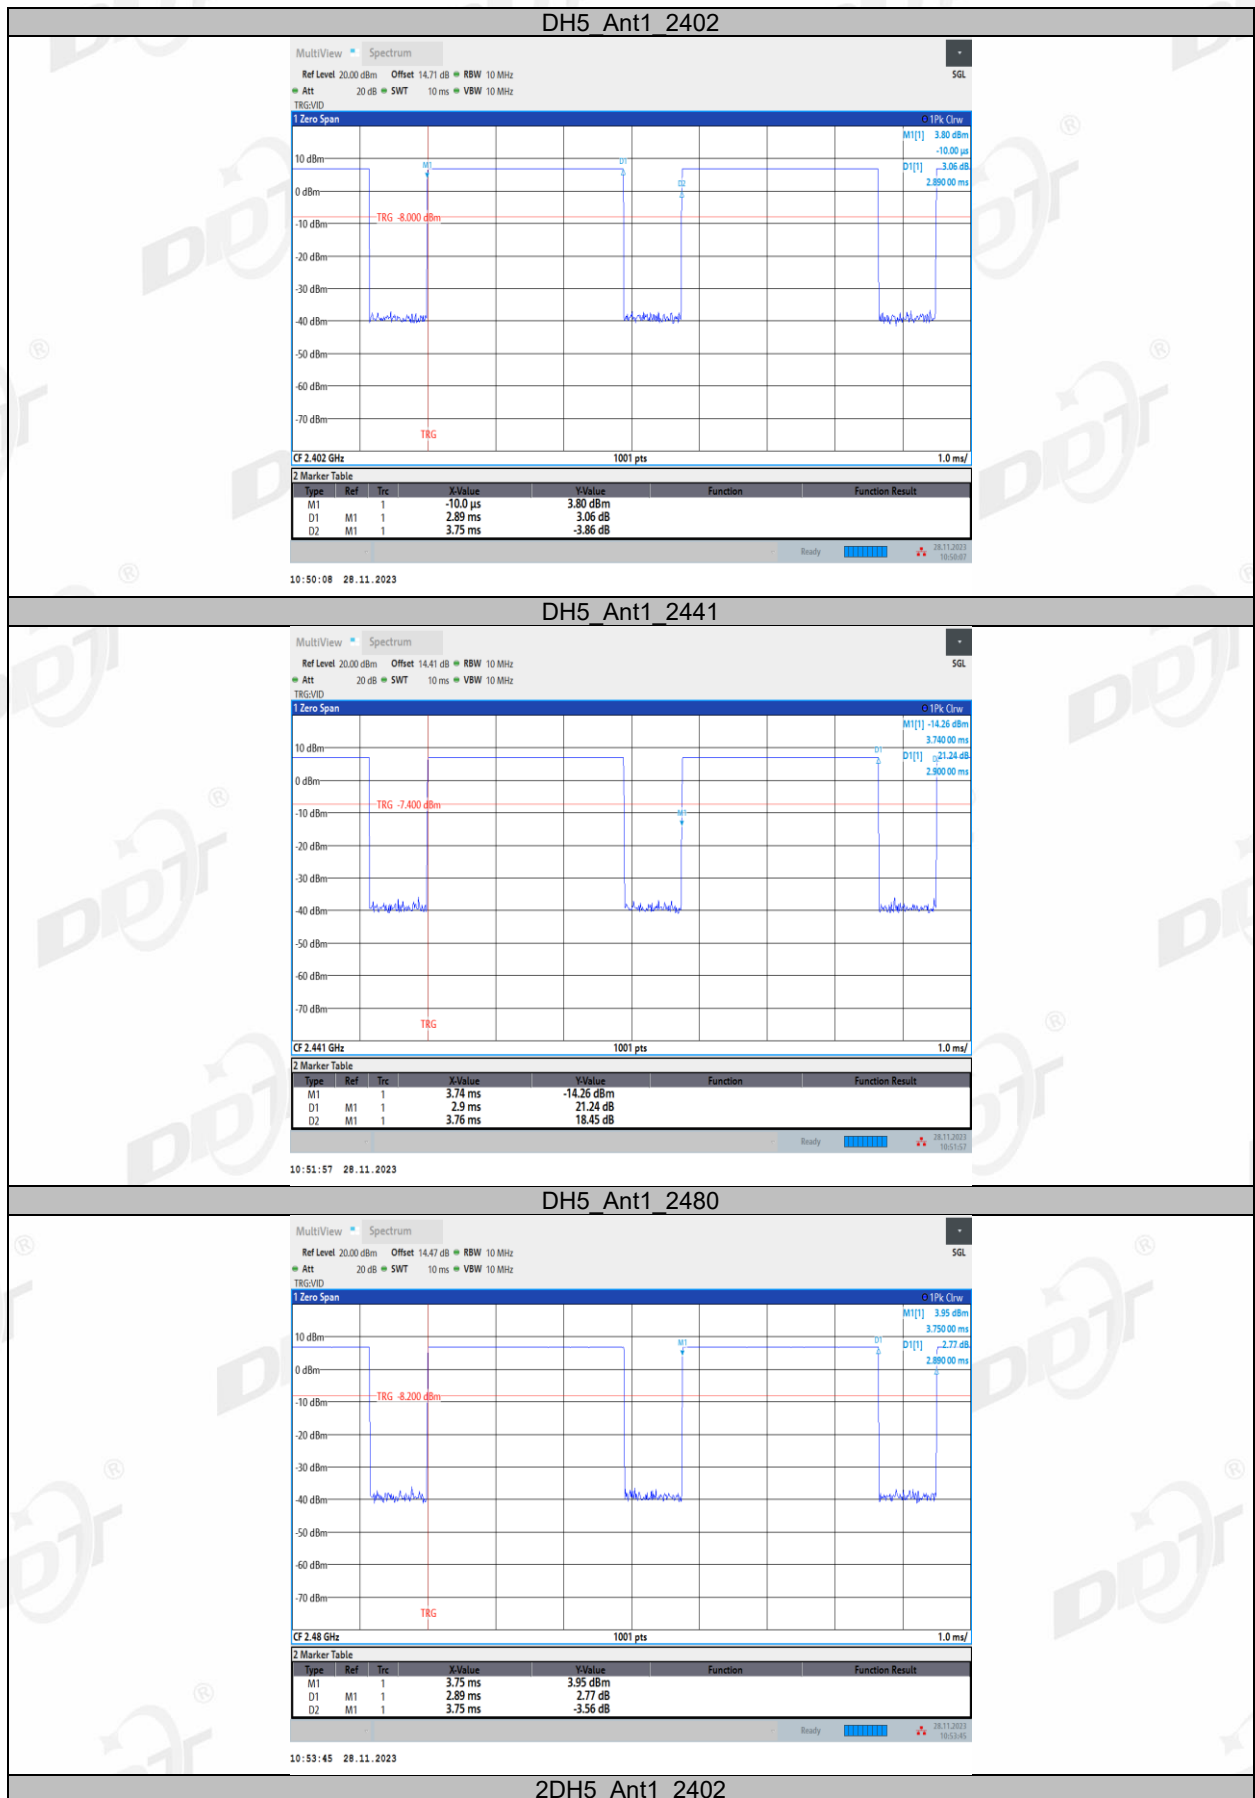



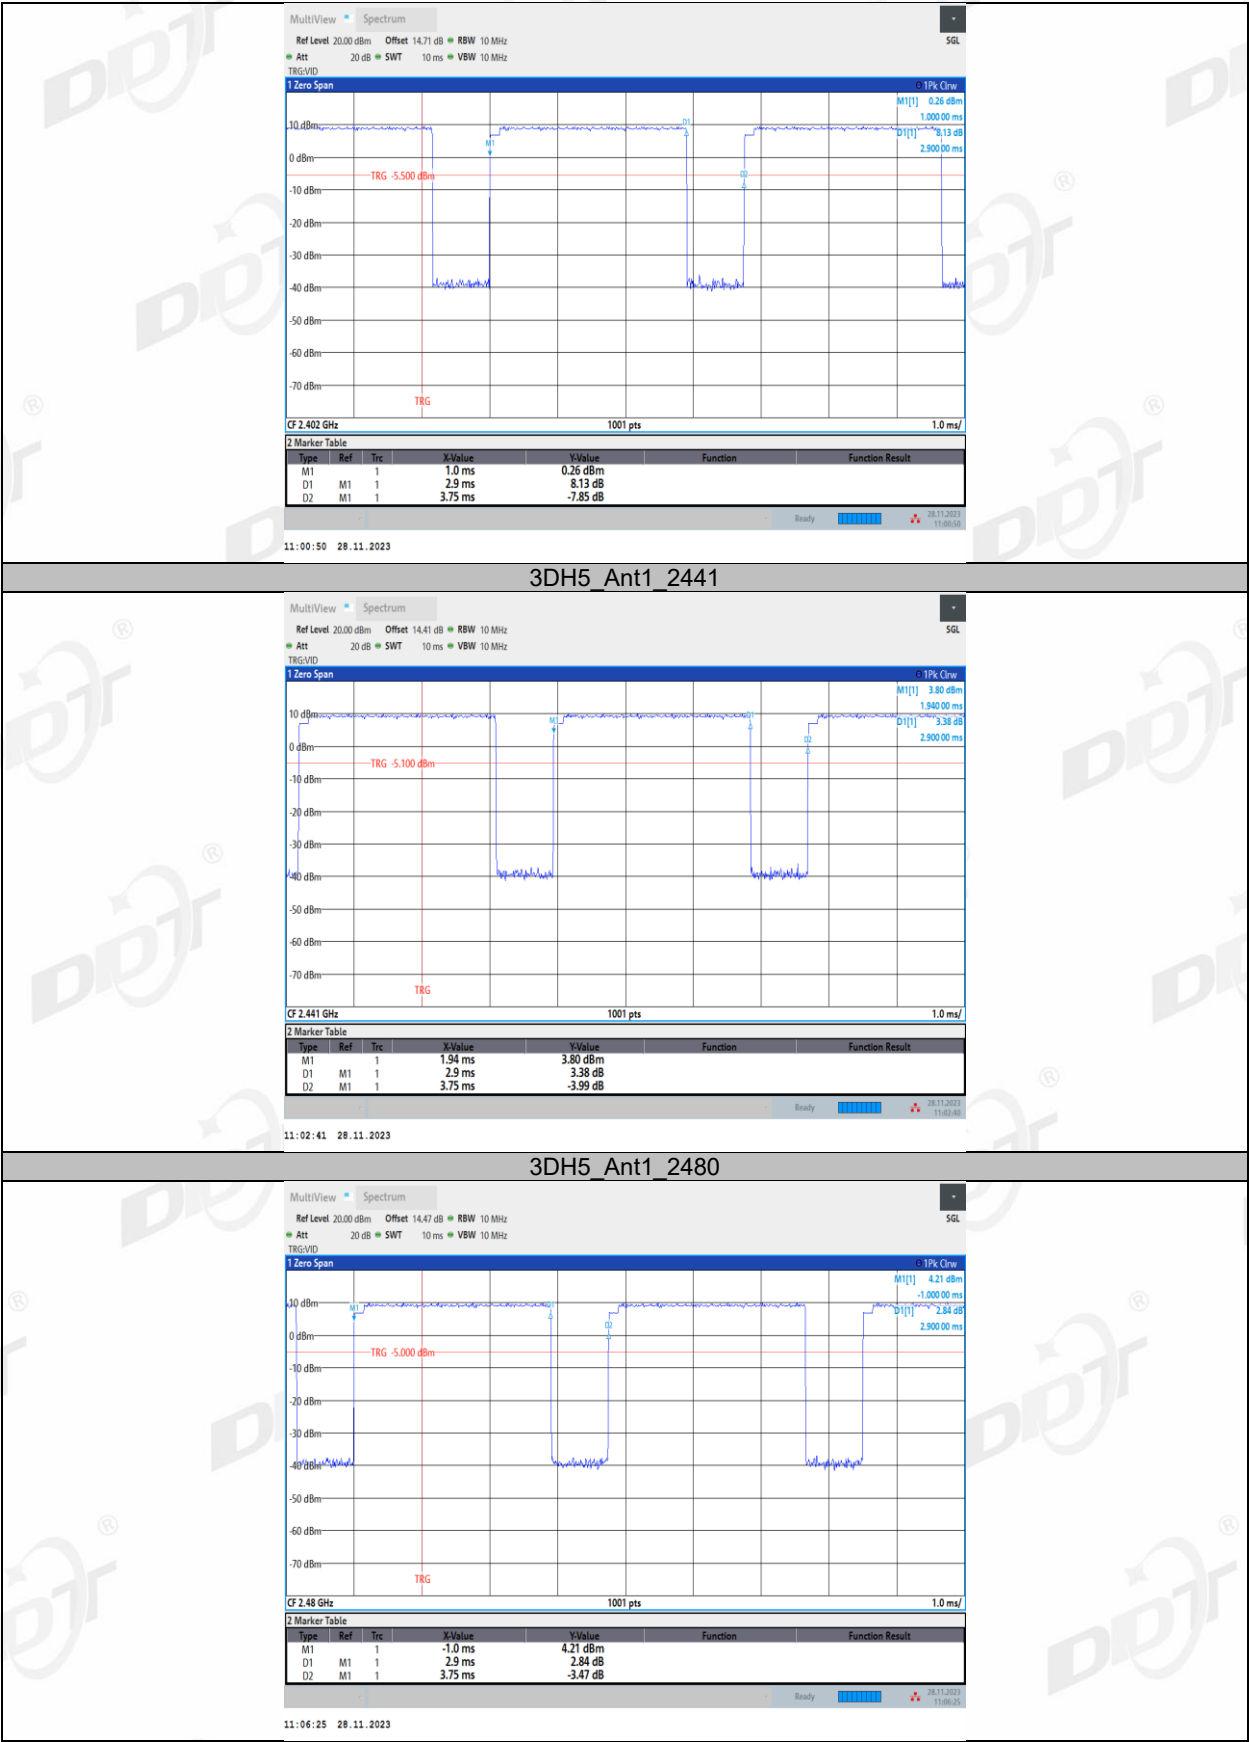


13. Radiated Emission

13.1. Test equipment


Equipment	Manufacturer	Model No.	Serial Number	Due Date
☑Radiation 3#Chamber				
EMI TEST RECEIVER	R&S	ESU26	100472	2024/04/22
PSA Series Spectrum Analyzer	Agilent	E4447A	MY50180031	2024/04/22
Active Loop Antenna	Schwarzbeck	FMZB-1519	1519-038	2024/09/10
Trilog Broadband Antenna	Schwarzbeck	VULB 9163	01429	2024/07/11
Double Ridged Horn Antenna	Schwarzbeck	BBHA 9120 D	02468	2024/09/17
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	790	2024/04/25
Pre-amplifier	COM-POWER	PAM-118A	18040084	2024/07/14
Pre-amplifier	COM-POWER	PAM-840A	461369	2024/04/26
RE Cable	N/A	W23.02 CP1-X2 + W23.09 AP1-X8+ JCT26S-NJ-NJ- 1.5M	4.5M+8M+1.5 M	2024/04/20
RF Cable	Yuhu	JCTB810-NJ-NJ- 9M+ ZT26S- SMAJ-SMAJ-1M	21123964	2024/04/22
Band Reject Filter(2400-2500 MHz)	REBES	BRM50702	G555	N/A
Test Software	Tonscend	JS32-RE	V 5.0.0.1	N/A

13.2. Block diagram of test setup


In 3 m Anechoic Chamber, test setup diagram for 9 kHz- 30 MHz:

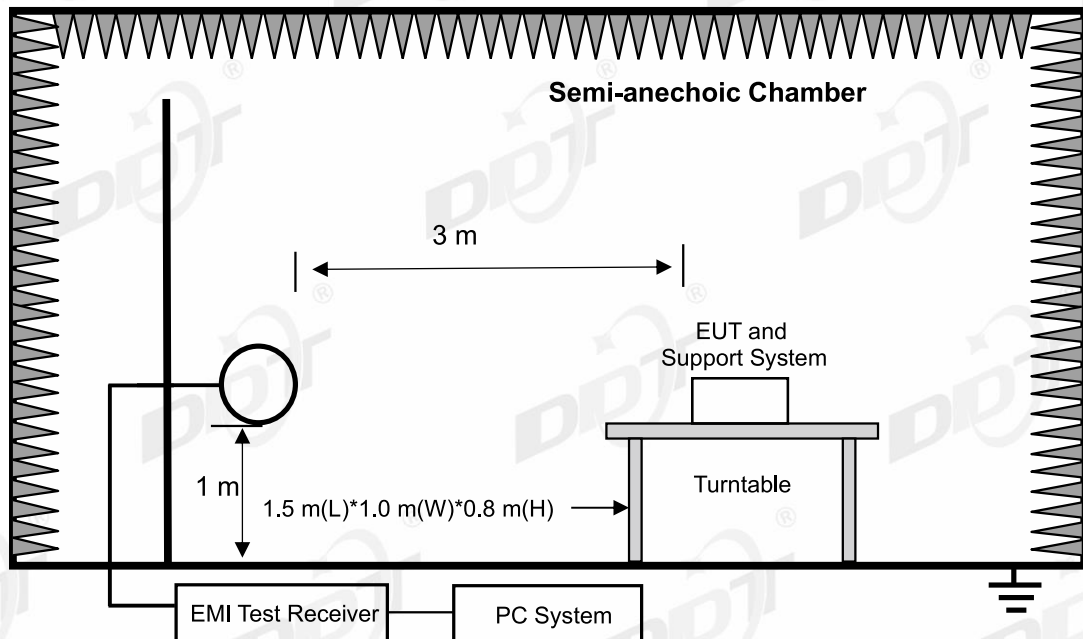

In 3 m Anechoic Chamber, test setup diagram for 30 MHz - 1 GHz:

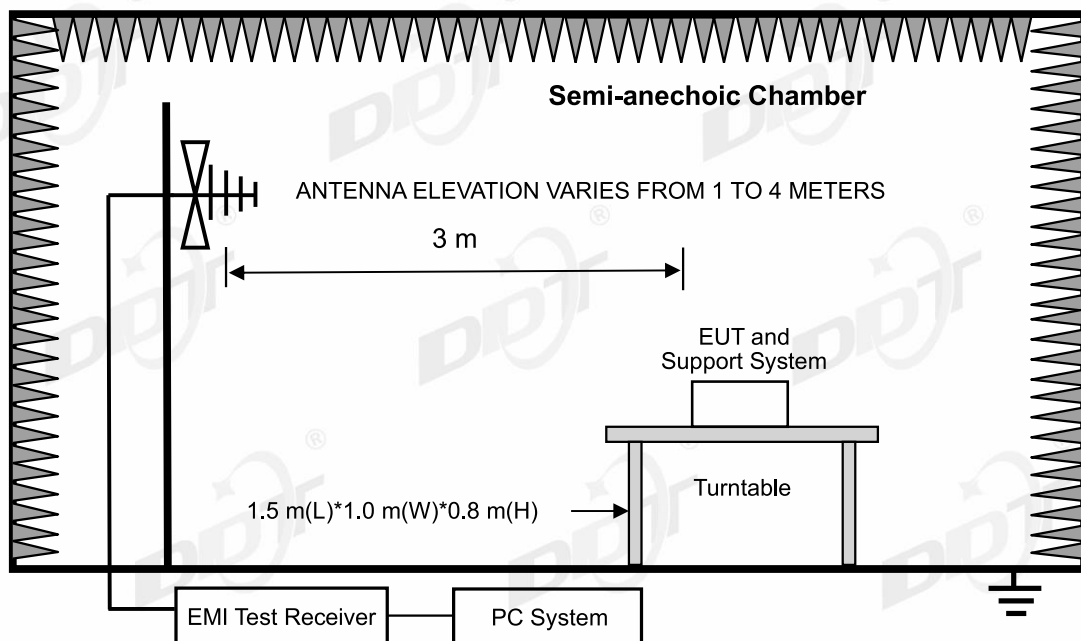

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

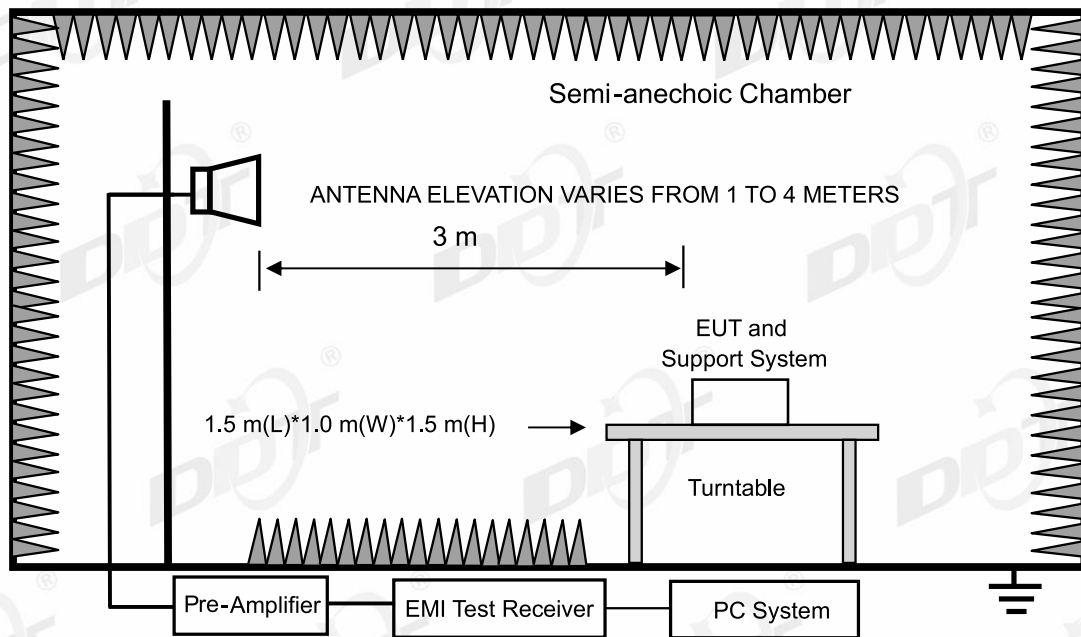

Note: Install an appropriate filter at the input of the measurement system power amplifier. This filter can attenuate the fundamental emission of the EUT and allow an accurate measurement of the associated harmonics and spurious emissions. The filter had been characterized, and the attenuation loss factors had been accounted for in the measurement results.

13.3. Limit**(1) FCC 15.205 Restricted frequency band**

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.1772&4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.2072&4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

²Above 38.6

(2) FCC 15.209 Limit

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
0.009 ~ 0.490	300	$2400/\text{F}(\text{kHz})$	$67.6-20\log(\text{F})$
0.490 ~ 1.705	30	$24000/\text{F}(\text{kHz})$	$87.6-20\log(\text{F})$
1.705 ~ 30.0	30	30	29.54
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

Note: (1) The emission limits shown in the above table are based on measurements employing a CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz and above 1000 MHz, radiated emissions limits in these three bands are based on measurements employing an average detector.

(2) At frequencies below 30 MHz, measurement may be performed at a distance closer than that specified, and the limit at closer measurement distance can be extrapolated by below formula:

$$\text{Limit}_{3\text{m}}(\text{dB}\mu\text{V}/\text{m}) = \text{Limit}_{30\text{m}}(\text{dB}\mu\text{V}/\text{m}) + 40\log(30\text{m}/3\text{m})$$

(3) Limit for this EUT

The emissions appearing within 15.205 restricted frequency bands shall not exceed the limits shown in 15.209, all the other emissions shall be at least 20 dB below the fundamental emissions or comply with 15.209 limits.

13.4. Test procedure

(1) EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber for below 1G and 150 cm above the ground plane inside a fully-anechoic chamber for above 1G.

(2) Test antenna was located 3 m from the EUT on an adjustable mast, and the antenna used as below table.

Test frequency range	Test antenna used	Test antenna distance
9 kHz - 30 MHz	Active Loop antenna	3 m
30 MHz - 1 GHz	Trilog Broadband Antenna	3 m
1 GHz - 18 GHz	Double Ridged Horn Antenna(1 GHz-18 GHz)	3 m
18 GHz - 40 GHz	Horn Antenna(18 GHz-40 GHz)	1 m

According ANSI C63.10:2013 clause 6.4.6 and 6.5.3, for measurements below 30 MHz, Antenna was located 3 m from EUT, the loop antenna was positioned in three antenna orientations (parallel, perpendicular, and round-parallel), for each measurement antenna alignment, the EUT shall be rotated through 0° to 360° on a turntable, and the lowest height of the magnetic antenna shall be 1 m above the ground. For measurement above 30MHz, the trilog Broadband Antenna or Horn

Antenna was located 3m from EUT, Measurements were made with the antenna positioned in both the horizontal and vertical planes of Polarization, and the measurement antenna was varied from 1 m to 4 m. in height above the reference ground plane to obtain the maximum signal strength.

(3) Below pre-scan procedure was first performed in order to find prominent frequency spectrum radiated emissions from 9 kHz to 25 GHz:

(a) Scanning the peak frequency spectrum with the antenna specified in step (3), and the EUT was rotated 360 degree, the antenna height was varied from 1 m to 4 m (Except loop antenna, it's fixed 1 m above ground.)

(b) Change work frequency or channel of device if practicable.

(c) Change modulation type of device if practicable.

(d) Change power supply range from 85% to 115% of the rated supply voltage

(e) Rotated EUT though three orthogonal axes to determine the attitude of EUT arrangement produces highest emissions.

Spectrum frequency from 9 kHz to 25 GHz (tenth harmonic of fundamental frequency) was investigated, and no any obvious emission were detected from 18 GHz to 25 GHz, so below final test was performed with frequency range from 9 kHz to 18 GHz.

(4) For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. In order to find the maximum emission, the relative positions of equipment and all of the interface cables were changed according to ANSI C63.10:2013 on Radiated Emission test.

(5) The emissions from 9 kHz to 1 GHz were measured based on CISPR QP detector except for the frequency bands 9 - 90 kHz, 110 - 490 kHz, for emissions from 9 kHz - 90 kHz, 110 kHz - 490 kHz and above 1 GHz were measured based on average detector, for emissions above 1 GHz, peak emissions also be measured and need comply with Peak limit.

(6) The emissions from 9 kHz to 1 GHz, QP or average values were measured with EMI receiver with below RBW.

Frequency band	RBW
9 kHz - 150 kHz	200 Hz
150 kHz - 30 MHz	9 kHz
30 MHz - 1 GHz	120 kHz

(7) For emissions above 1GHz, both Peak and Average level were measured with Spectrum Analyzer, and the RBW is set at 1 MHz, VBW is set at 3 MHz for Peak measure; According ANSI C63.10:2013 clause 4.1.4.2.2 procedure for average measure.

(8) For portable device, X axis, Y axis, Z axis are tested, and worse setup is reported.

13.5. Test result

Pass. (See below detailed test result)

All the emissions except fundamental emission from 9 kHz to 25 GHz were comply with 15.209 limits.

Note1: According exploratory test, the emission levels are 20 dB below the limit detected from 9 kHz to 30 MHz and 18 GHz to 25 GHz, so the final test was performed with frequency range from 30 MHz to 18 GHz and recorded in below.

Note2: 30 MHz ~ 25 GHz: (Scan with GFSK, $\pi/4$ -DQPSK and 8DPSK, the worst case is GFSK Mode)


Note3: For emissions below 1 GHz, according exploratory explorer test, when change Tx mode and channel, have no distinct influence on emissions level, so for emissions below 1 GHz, the final test was only performed with EUT working in GFSK, Tx 2480 MHz mode.

Note4: For emissions above 1 GHz. If peak results comply with AV limit, AV Result is deemed to comply with AV limit.

Radiated Emission Test Result (below 1 GHz)

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-16 **Tested By:** Bairong
EUT: DAC and Headphone Amplifier **Model Number:** F3021Q
Test Mode: BT **Power Supply:** Battery
Condition: Temp:23.0°C;Humi:69.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23100918-2E F3021Q\FCC BELOW 1G\20231016-222758_H
Memo: Sample Number:S23100918-01 Power Setting:NA

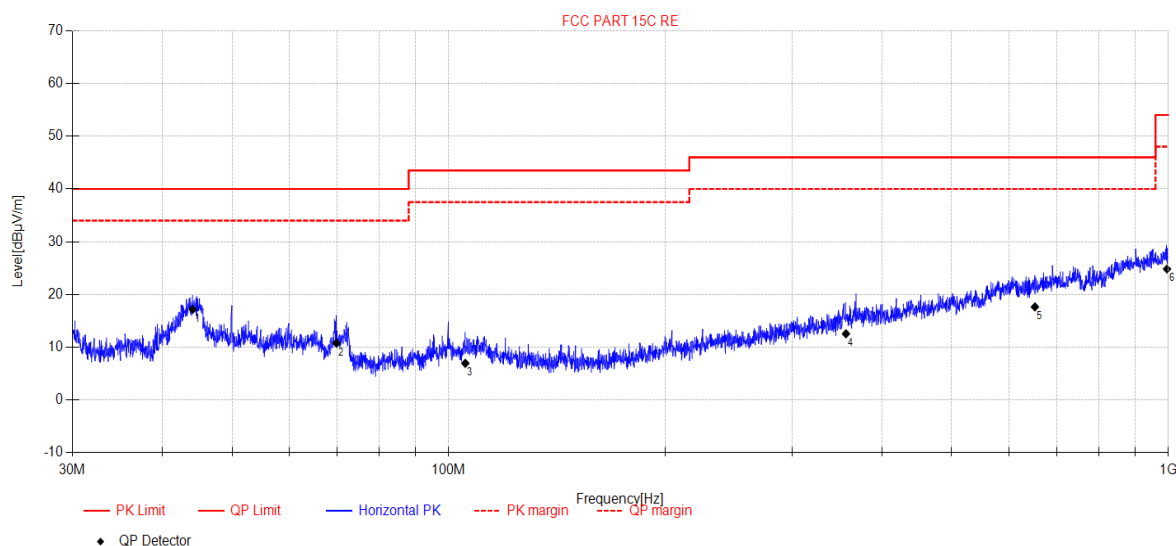


Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	44.09	30.3	13.02	4.65	-30.79	17.18	40.00	22.82	QP	Horizontal
2	69.83	26.63	9.92	4.79	-30.57	10.77	40.00	29.23	QP	Horizontal
3	105.47	21.23	11.51	5.10	-30.88	6.96	43.50	36.54	QP	Horizontal
4	356.50	20.97	15.32	6.46	-30.19	12.56	46.00	33.44	QP	Horizontal
5	652.45	21.03	18.96	7.56	-29.90	17.65	46.00	28.35	QP	Horizontal
6	995.80	21.85	22.44	8.68	-28.14	24.83	54.00	29.17	QP	Horizontal

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-10-16 **Tested By:** Bairong
EUT: DAC and Headphone Amplifier **Model Number:** F3021Q
Test Mode: BT **Power Supply:** Battery
Condition: Temp:23.0°C;Humi:69.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23100918-2E F3021Q\FCC BELOW 1G\20231016-222816_V
Memo: Sample Number:S23100918-01 Power Setting:NA

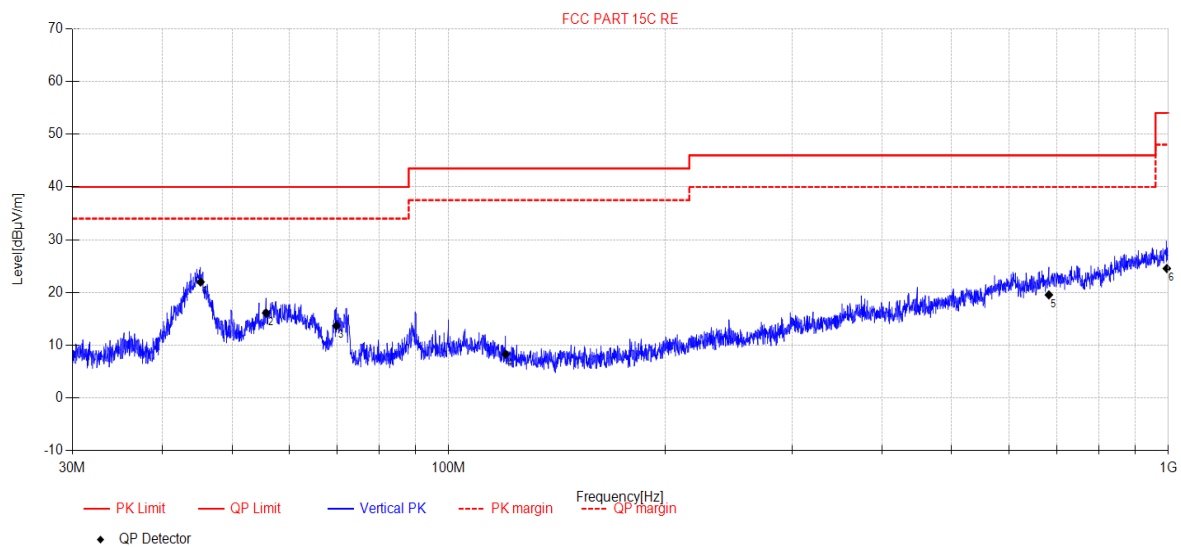

Data List										
NO.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable Loss [dB]	AMP [dB]	Result [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	45.21	35.08	13.01	4.67	-30.77	21.99	40.00	18.01	QP	Vertical
2	55.76	29.63	12.40	4.75	-30.66	16.12	40.00	23.88	QP	Vertical
3	69.83	29.55	9.92	4.79	-30.57	13.69	40.00	26.31	QP	Vertical
4	119.99	23.97	10.00	5.17	-30.84	8.30	43.50	35.20	QP	Vertical
5	682.40	22.52	19.25	7.68	-29.90	19.55	46.00	26.45	QP	Vertical
6	995.10	21.44	22.58	8.67	-28.14	24.55	54.00	29.45	QP	Vertical

Note:

1. Result Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.
3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

Radiated Emission Test Result (above 1 GHz)

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-25 **Tested By:** Junchang Du

EUT: DAC and Headphone Amplifier **Model Number:** F3021Q


Test Mode: DH5 TX 2402MHz **Power Supply:** Battery

Condition: Temp:23.0°C;Humi:69.5% **Test Site:** DDT 3# Chamber

File Path: d:\ts\2023 report data\Q23100918-2E F3021Q\FCC ABOVE 1G\99

Memo: Sample Number:S23100918-01 Power Setting:NA

Test Graph

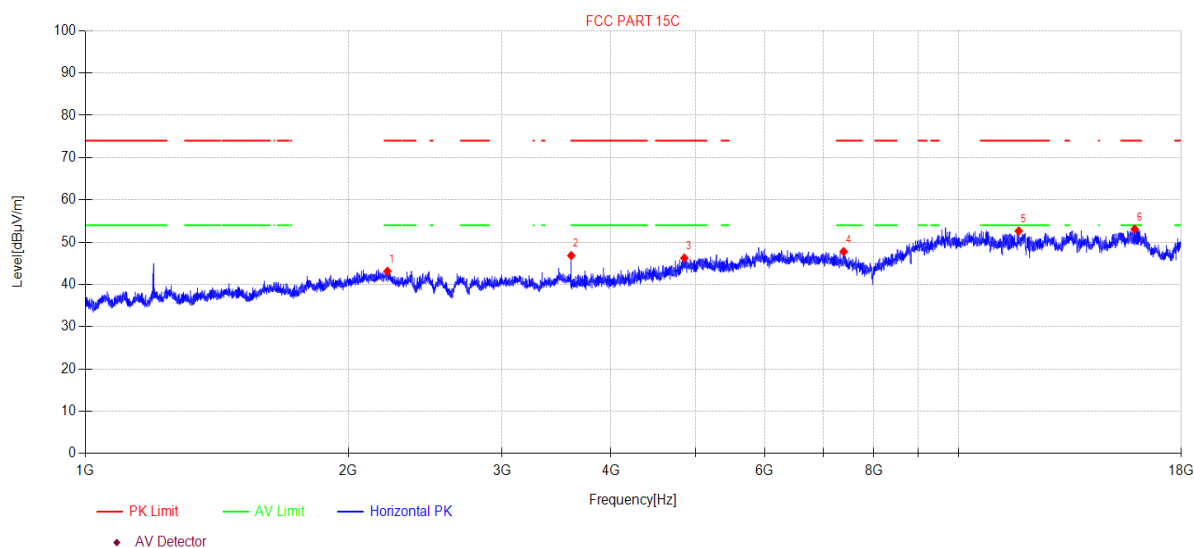

Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2218.42	47.18	27.62	5.97	-37.63	43.14	74.00	30.86	PK	Horizontal
2	3601.90	51.26	30.01	5.76	-40.21	46.82	74.00	27.18	PK	Horizontal
3	4853.59	45.07	33.74	7.57	-40.13	46.25	74.00	27.75	PK	Horizontal
4	7388.59	45.07	36.72	7.64	-41.67	47.76	74.00	26.24	PK	Horizontal
5	11722.19	42.80	38.98	10.29	-39.43	52.64	74.00	21.36	PK	Horizontal
6	15914.88	38.81	38.09	15.49	-39.31	53.08	74.00	20.92	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-25 **Tested By:** Junchang Du
EUT: DAC and Headphone Amplifier **Model Number:** F3021Q
Test Mode: DH5 TX 2402MHz **Power Supply:** Battery
Condition: Temp:23.0°C;Humi:69.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23100918-2E F3021Q\FCC ABOVE 1G\100
Memo: Sample Number:S23100918-01 Power Setting:NA

Test Graph

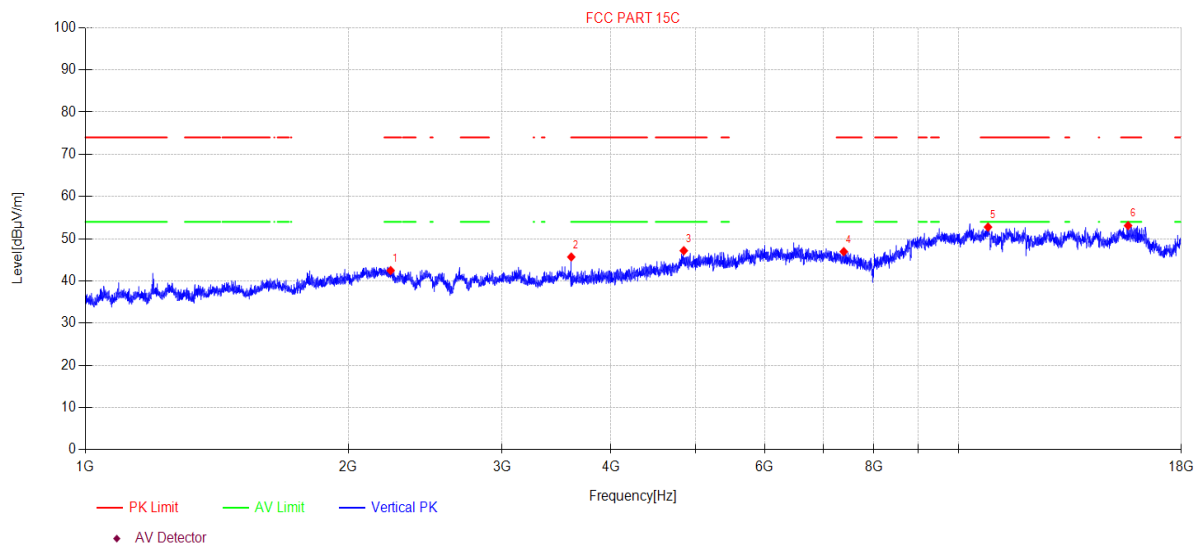

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2237.09	46.75	27.43	5.97	-37.68	42.47	74.00	31.53	PK	Vertical
2	3601.90	50.12	30.01	5.76	-40.21	45.68	74.00	28.32	PK	Vertical
3	4846.58	46.04	33.71	7.56	-40.14	47.17	74.00	26.83	PK	Vertical
4	7390.73	44.26	36.72	7.64	-41.68	46.94	74.00	27.06	PK	Vertical
5	10810.97	42.87	39.39	9.52	-39.02	52.76	74.00	21.24	PK	Vertical
6	15641.28	39.43	38.56	14.26	-39.14	53.11	74.00	20.89	PK	Vertical


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-25 **Tested By:** Junchang Du
EUT: DAC and Headphone Amplifier **Model Number:** F3021Q
Test Mode: DH5 TX 2441MHz **Power Supply:** Battery
Condition: Temp:23.0°C;Humi:69.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23100918-2E F3021Q\FCC ABOVE 1G\115
Memo: Sample Number:S23100918-01 Power Setting:NA

Test Graph

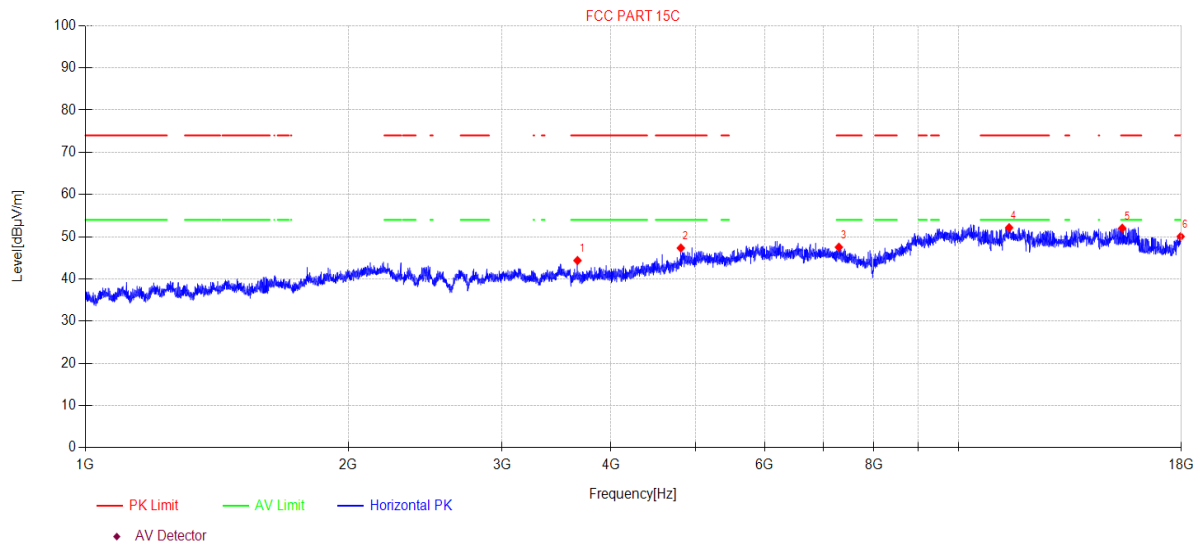

Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3661.73	48.57	30.25	5.78	-40.24	44.36	74.00	29.64	PK	Horizontal
2	4808.91	47.26	32.73	7.48	-40.15	47.32	74.00	26.68	PK	Horizontal
3	7295.23	44.44	36.89	7.63	-41.44	47.52	74.00	26.48	PK	Horizontal
4	11431.12	42.12	39.27	10.03	-39.29	52.13	74.00	21.87	PK	Horizontal
5	15403.52	38.84	38.99	13.18	-39.00	52.01	74.00	21.99	PK	Horizontal
6	17968.81	37.05	42.24	13.09	-42.33	50.05	74.00	23.95	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-25 **Tested By:** Junchang Du
EUT: DAC and Headphone Amplifier **Model Number:** F3021Q
Test Mode: DH5 TX 2441MHz **Power Supply:** Battery
Condition: Temp:23.0°C;Humi:69.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23100918-2E F3021Q\FCC ABOVE 1G\116
Memo: Sample Number:S23100918-01 Power Setting:NA

Test Graph

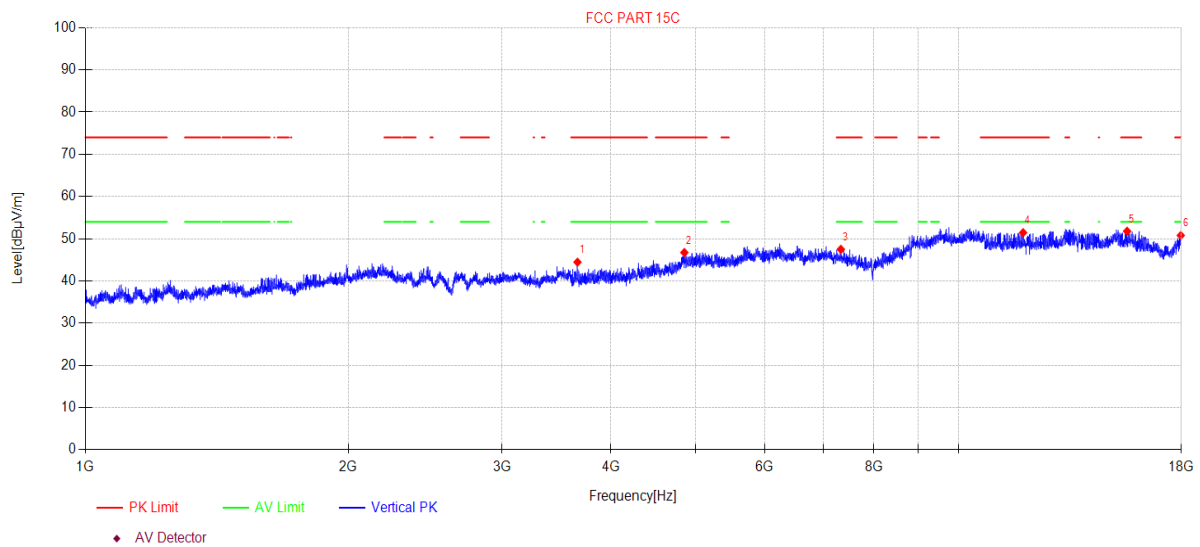

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3661.73	48.66	30.25	5.78	-40.24	44.45	74.00	29.55	PK	Vertical
2	4853.59	45.55	33.74	7.57	-40.13	46.73	74.00	27.27	PK	Vertical
3	7333.28	44.56	36.83	7.63	-41.53	47.49	74.00	26.51	PK	Vertical
4	11858.49	41.62	38.90	10.41	-39.49	51.44	74.00	22.56	PK	Vertical
5	15600.65	38.23	38.60	14.07	-39.12	51.78	74.00	22.22	PK	Vertical
6	17974.01	37.76	42.27	13.10	-42.34	50.79	74.00	23.21	PK	Vertical


Note:

- Level = Reading + Cable loss + Antenna Factor + AMP
- If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
- Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-25 **Tested By:** Junchang Du
EUT: DAC and Headphone Amplifier **Model Number:** F3021Q
Test Mode: DH5 TX 2480MHz **Power Supply:** Battery
Condition: Temp:23.0°C;Humi:69.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23100918-2E F3021Q\FCC ABOVE 1G\117
Memo: Sample Number:S23100918-01 Power Setting:NA

Test Graph

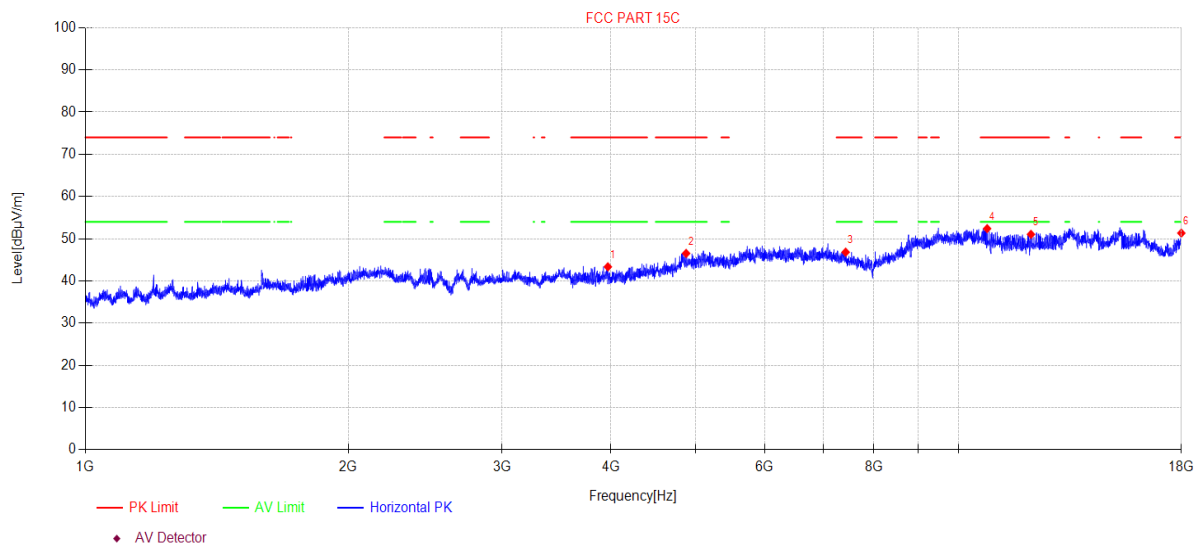

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3966.93	46.91	31.03	5.84	-40.43	43.35	74.00	30.65	PK	Horizontal
2	4876.09	45.65	33.38	7.62	-40.13	46.52	74.00	27.48	PK	Horizontal
3	7427.13	44.29	36.65	7.64	-41.77	46.81	74.00	27.19	PK	Horizontal
4	10786.00	42.51	39.40	9.50	-39.01	52.40	74.00	21.60	PK	Horizontal
5	12107.83	40.80	39.30	10.54	-39.60	51.04	74.00	22.96	PK	Horizontal
6	18000.00	38.20	42.40	13.13	-42.40	51.33	74.00	22.67	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-25 **Tested By:** Junchang Du
EUT: DAC and Headphone Amplifier **Model Number:** F3021Q
Test Mode: DH5 TX 2480MHz **Power Supply:** Battery
Condition: Temp:23.0°C;Humi:69.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23100918-2E F3021Q\FCC ABOVE 1G\118
Memo: Sample Number:S23100918-01 Power Setting:NA

Test Graph

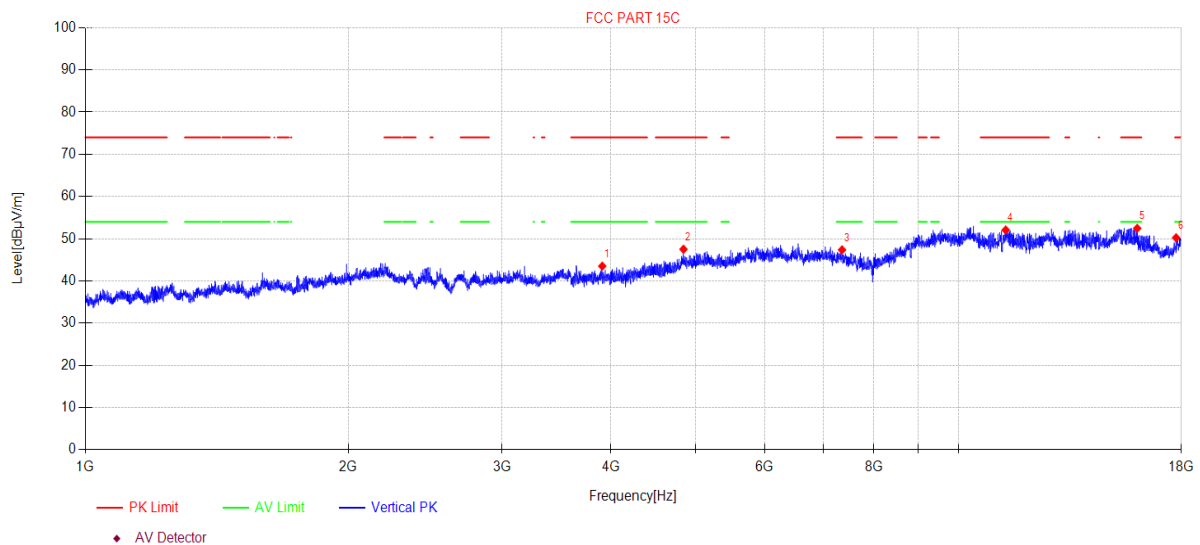

Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	3908.88	46.89	31.18	5.83	-40.39	43.51	74.00	30.49	PK	Vertical
2	4842.38	46.50	33.60	7.55	-40.14	47.51	74.00	26.49	PK	Vertical
3	7356.63	44.54	36.79	7.63	-41.59	47.37	74.00	26.63	PK	Vertical
4	11325.89	42.14	39.23	9.94	-39.24	52.07	74.00	21.93	PK	Vertical
5	16021.02	38.06	37.98	15.80	-39.38	52.46	74.00	21.54	PK	Vertical
6	17752.02	38.65	40.61	12.83	-41.85	50.24	74.00	23.76	PK	Vertical

Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.


14. Band Edge Compliance (Radiated Method)

14.1. Test equipment

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☑Radiation 3#Chamber				
EMI TEST RECEIVER	R&S	ESU26	100472	2024/04/22
Double Ridged Horn Antenna	Schwarzbeck	BBHA 9120 D	02468	2024/09/17
Pre-amplifier	COM-POWER	PAM-118A	18040084	2024/07/14
RF Cable	Yuhu	JCTB810-NJ-NJ-9M+ ZT26S-SMAJ-SMAJ-1M	21123964	2024/04/22
Test Software	Tonscend	JS32-RE	V 5.0.0.1	N/A

14.2. Block diagram of test setup

In 3 m Anechoic Chamber, test setup diagram for frequency above 1 GHz:

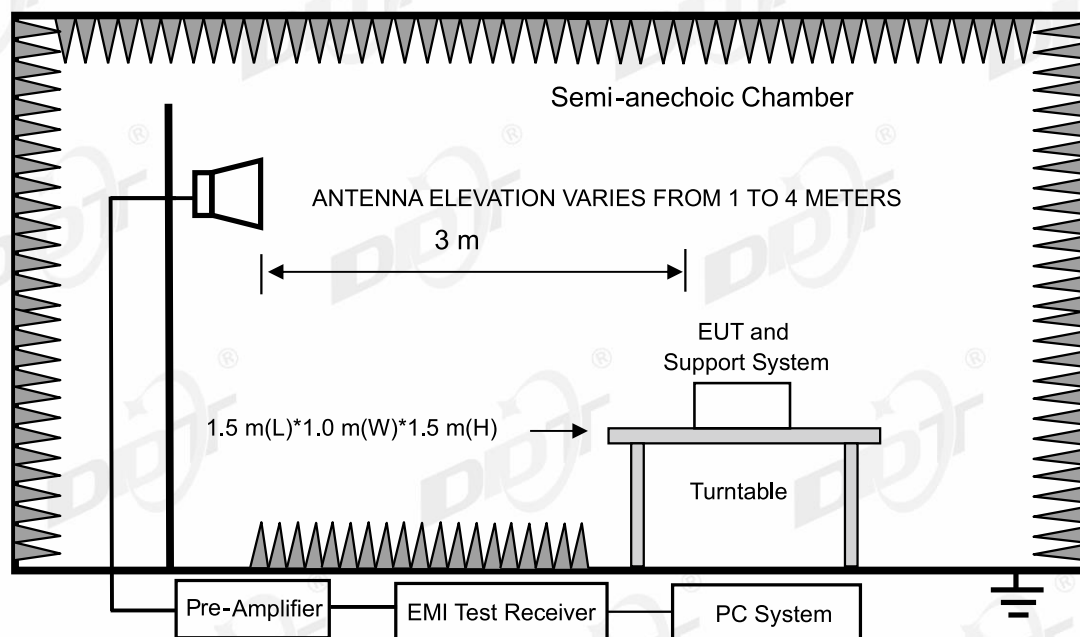

14.3. Limit

All restriction band should comply with 15.209 limits, other emission should be at least 20 dB below the fundamental.

14.4. Test procedure

Same with Radiated Emission except change investigated frequency range.

Remark: All restriction band have been tested, and only the worst case is shown in report.

14.5. Test result


Pass. (See below detailed test result)

Remark: hopping on and hopping off mode all have been test, hopping off mode is worse and reported only. Scan with all mode, the worst case is recorded in this report.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-25 **Tested By:** Junchang Du
EUT: DAC and Headphone Amplifier **Model Number:** F3021Q
Test Mode: DH5 TX 2402MHz **Power Supply:** Battery
Condition: Temp:23.0°C;Humi:69.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23100918-2E F3021Q\FCC ABOVE 1G\101
Memo: Sample Number:S23100918-01 Power Setting:NA

Test Graph

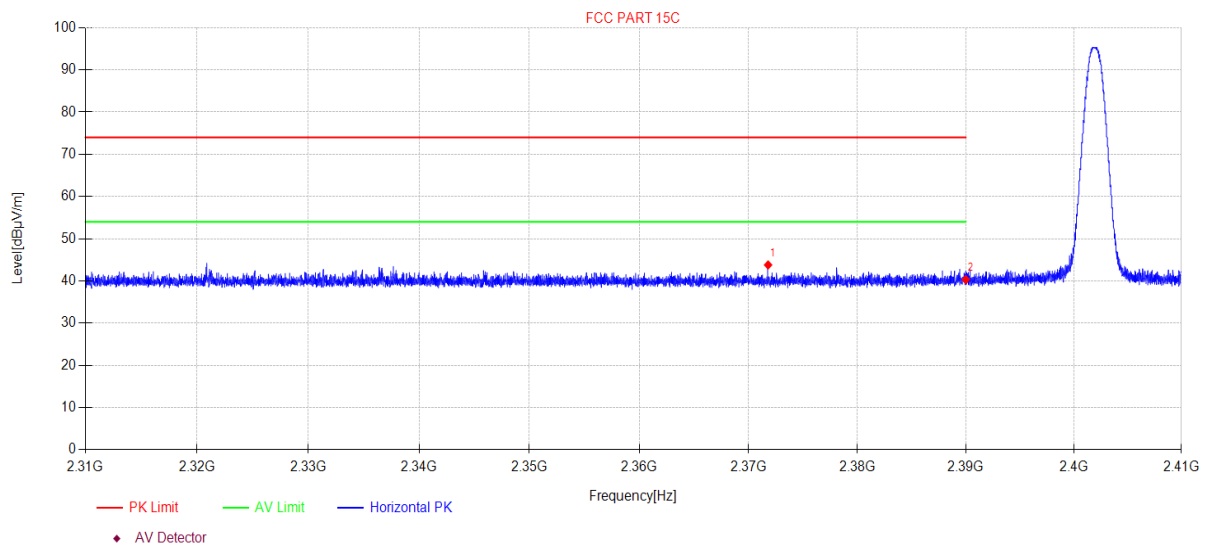

Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2371.80	50.81	27.19	3.85	-38.06	43.79	74.00	30.21	PK	Horizontal
2	2390.00	47.30	27.26	3.87	-38.11	40.32	74.00	33.68	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-25 **Tested By:** Junchang Du
EUT: DAC and Headphone Amplifier **Model Number:** F3021Q
Test Mode: DH5 TX 2402MHz **Power Supply:** Battery
Condition: Temp:23.0°C;Humi:69.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23100918-2E F3021Q\FCC ABOVE 1G\102
Memo: Sample Number:S23100918-01 Power Setting:NA

Test Graph

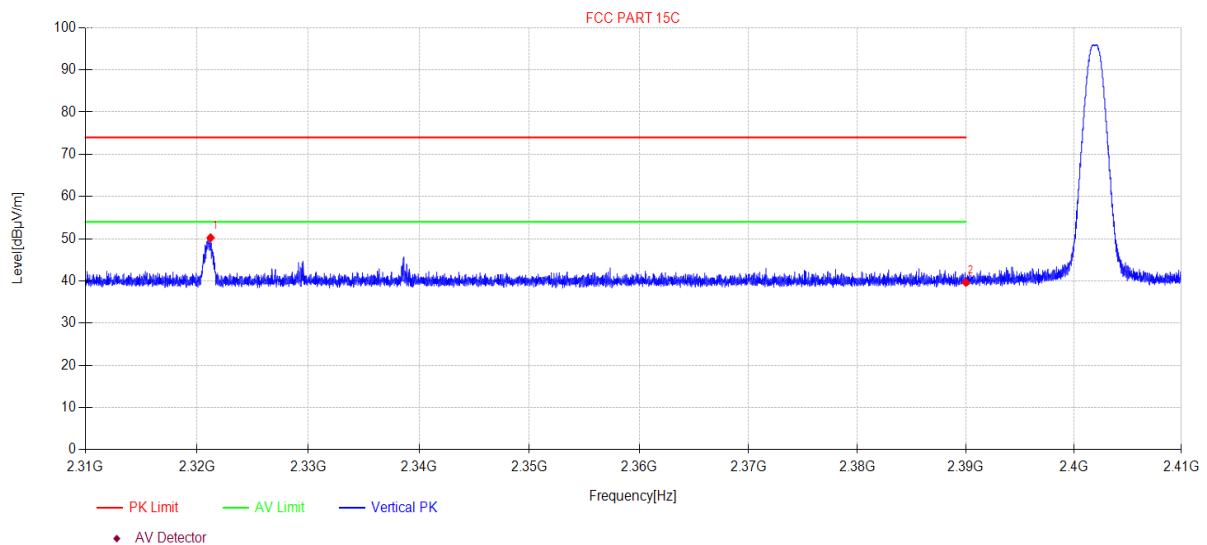

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2321.21	57.41	26.93	3.81	-37.92	50.23	74.00	23.77	PK	Vertical
2	2390.00	46.62	27.26	3.87	-38.11	39.64	74.00	34.36	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-25 **Tested By:** Junchang Du
EUT: DAC and Headphone Amplifier **Model Number:** F3021Q
Test Mode: DH5 TX 2480MHz **Power Supply:** Battery
Condition: Temp:23.0°C;Humi:69.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23100918-2E F3021Q\FCC ABOVE 1G\105
Memo: Sample Number:S23100918-01 Power Setting:NA

Test Graph

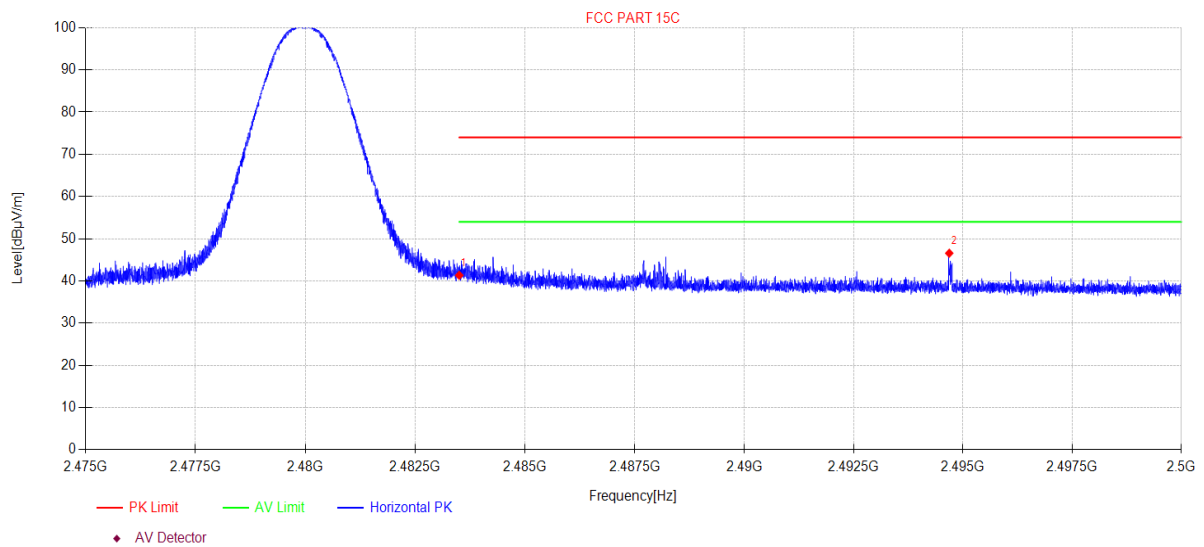

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	48.24	27.53	3.94	-38.38	41.33	74.00	32.67	PK	Horizontal
2	2494.69	53.45	27.58	3.95	-38.41	46.57	74.00	27.43	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-25 **Tested By:** Junchang Du
EUT: DAC and Headphone Amplifier **Model Number:** F3021Q
Test Mode: DH5 TX 2480MHz **Power Supply:** Battery
Condition: Temp:23.0°C;Humi:69.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23100918-2E F3021Q\FCC ABOVE 1G\106
Memo: Sample Number:S23100918-01 Power Setting:NA

Test Graph

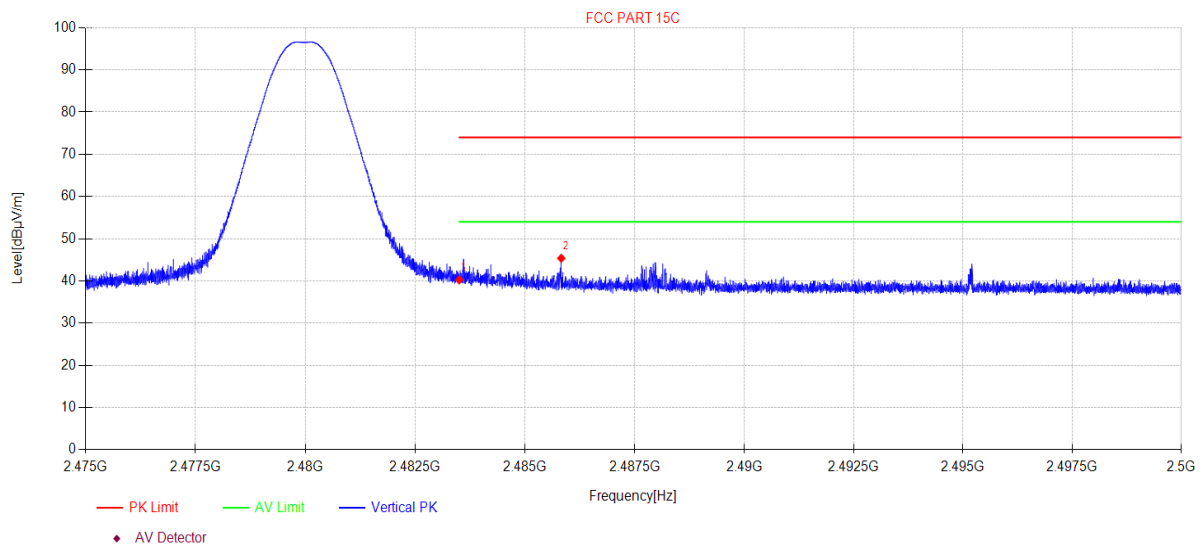

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	47.17	27.53	3.94	-38.38	40.26	74.00	33.74	PK	Vertical
2	2485.83	52.27	27.54	3.94	-38.38	45.37	74.00	28.63	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-25 **Tested By:** Junchang Du
EUT: DAC and Headphone Amplifier **Model Number:** F3021Q
Test Mode: 2DH5 TX 2402MHz **Power Supply:** Battery
Condition: Temp:23.0°C;Humi:69.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23100918-2E F3021Q\FCC ABOVE 1G\111
Memo: Sample Number:S23100918-01 Power Setting:NA

Test Graph

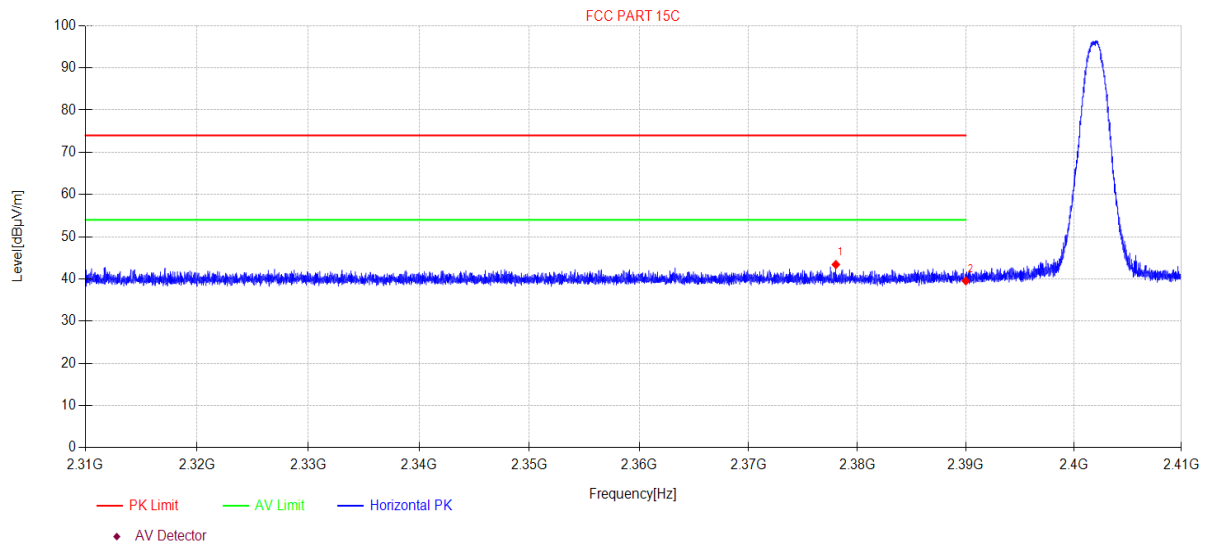

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2378.02	50.42	27.21	3.86	-38.08	43.41	74.00	30.59	PK	Horizontal
2	2390.00	46.52	27.26	3.87	-38.11	39.54	74.00	34.46	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-25 **Tested By:** Junchang Du
EUT: DAC and Headphone Amplifier **Model Number:** F3021Q
Test Mode: 2DH5 TX 2402MHz **Power Supply:** Battery
Condition: Temp:23.0°C;Humi:69.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23100918-2E F3021Q\FCC ABOVE 1G\112
Memo: Sample Number:S23100918-01 Power Setting:NA

Test Graph

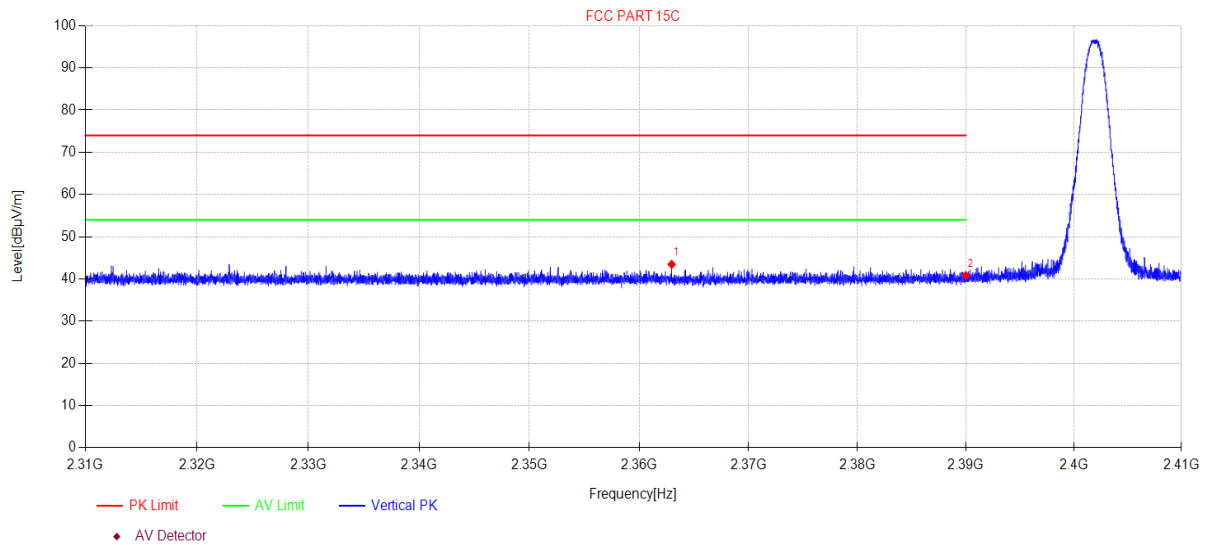

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2362.97	50.50	27.15	3.85	-38.04	43.46	74.00	30.54	PK	Vertical
2	2390.00	47.81	27.26	3.87	-38.11	40.83	74.00	33.17	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-25 **Tested By:** Junchang Du
EUT: DAC and Headphone Amplifier **Model Number:** F3021Q
Test Mode: 2DH5 TX 2480MHz **Power Supply:** Battery
Condition: Temp:23.0°C;Humi:69.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23100918-2E F3021Q\FCC ABOVE 1G\107
Memo: Sample Number:S23100918-01 Power Setting:NA

Test Graph

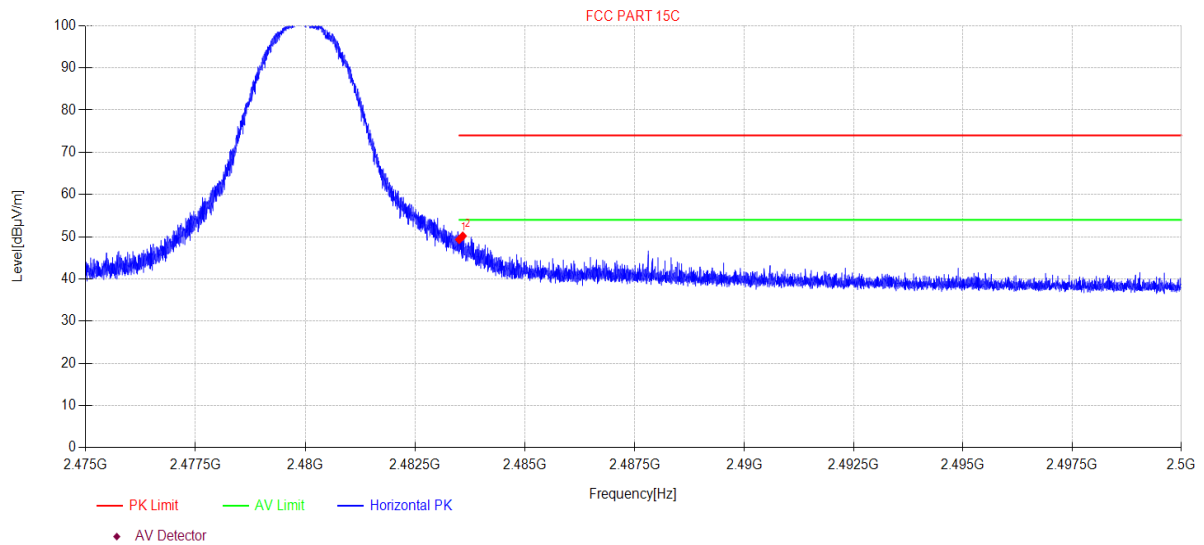

Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	56.25	27.53	3.94	-38.38	49.34	74.00	24.66	PK	Horizontal
2	2483.58	57.07	27.53	3.94	-38.38	50.16	74.00	23.84	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-25 **Tested By:** Junchang Du
EUT: DAC and Headphone Amplifier **Model Number:** F3021Q
Test Mode: 2DH5 TX 2480MHz **Power Supply:** Battery
Condition: Temp:23.0°C;Humi:69.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23100918-2E F3021Q\FCC ABOVE 1G\108
Memo: Sample Number:S23100918-01 Power Setting:NA

Test Graph

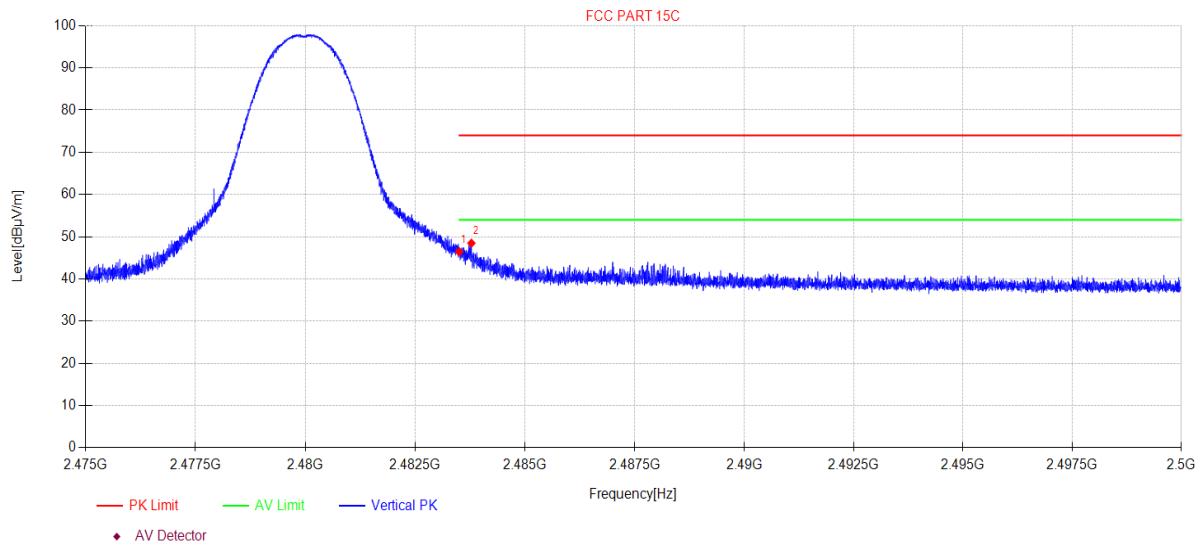

Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	53.37	27.53	3.94	-38.38	46.46	74.00	27.54	PK	Vertical
2	2483.78	55.38	27.54	3.94	-38.38	48.48	74.00	25.52	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-25 **Tested By:** Junchang Du
EUT: DAC and Headphone Amplifier **Model Number:** F3021Q
Test Mode: 3DH5 TX 2402MHz **Power Supply:** Battery
Condition: Temp:23.0°C;Humi:69.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23100918-2E F3021Q\FCC ABOVE 1G\113
Memo: Sample Number:S23100918-01 Power Setting:NA

Test Graph

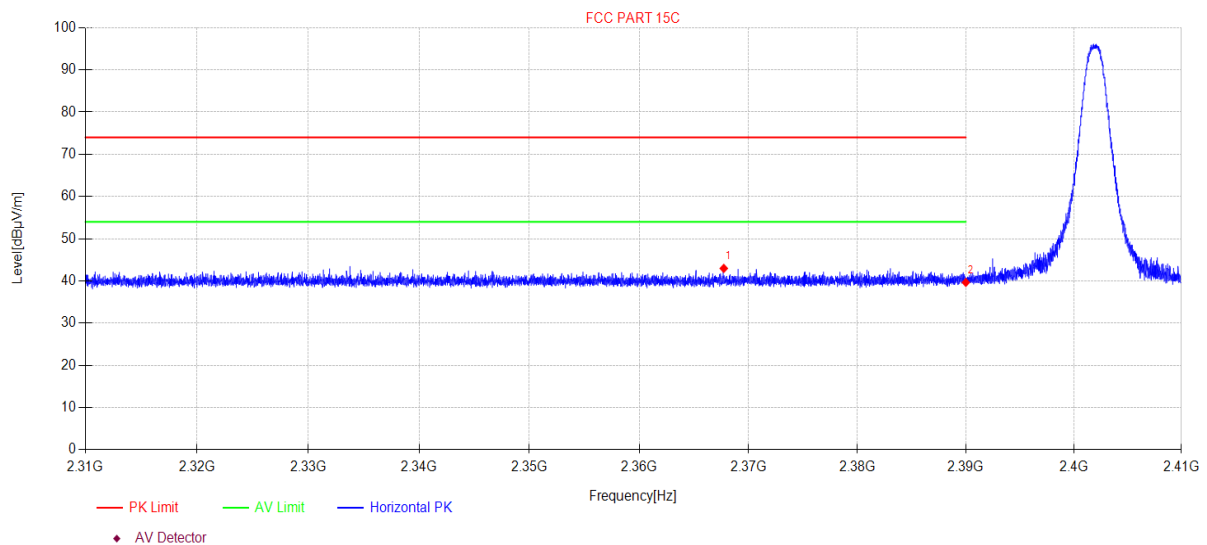

Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2367.74	50.00	27.17	3.85	-38.05	42.97	74.00	31.03	PK	Horizontal
2	2390.00	46.63	27.26	3.87	-38.11	39.65	74.00	34.35	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-25 **Tested By:** Junchang Du
EUT: DAC and Headphone Amplifier **Model Number:** F3021Q
Test Mode: 3DH5 TX 2402MHz **Power Supply:** Battery
Condition: Temp:23.0°C;Humi:69.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23100918-2E F3021Q\FCC ABOVE 1G\114
Memo: Sample Number:S23100918-01 Power Setting:NA

Test Graph

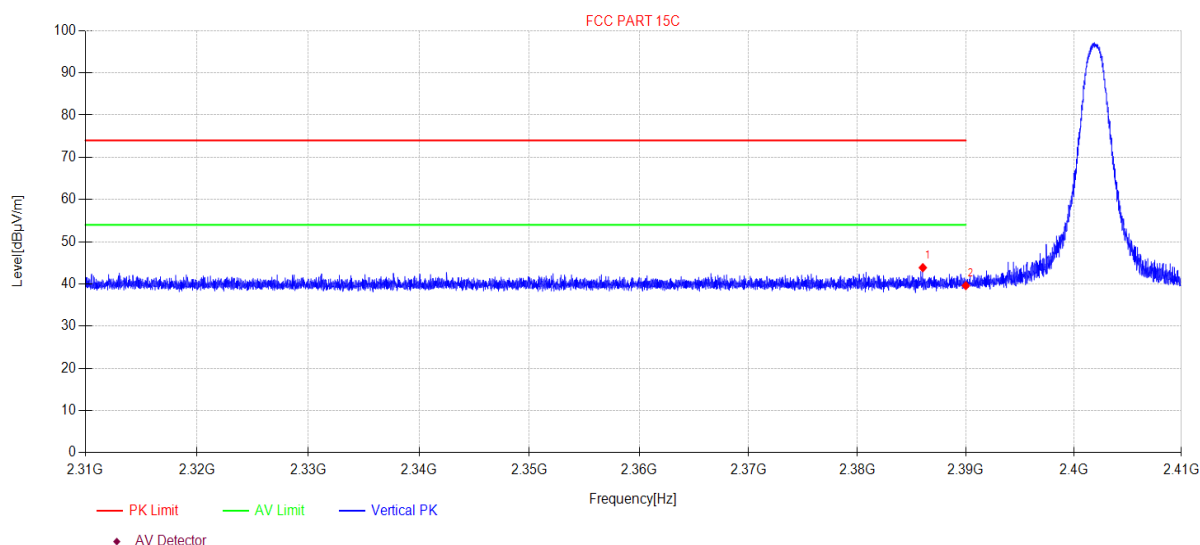

Data List										
N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2386.03	50.86	27.24	3.86	-38.10	43.86	74.00	30.14	PK	Vertical
2	2390.00	46.57	27.26	3.87	-38.11	39.59	74.00	34.41	PK	Vertical


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-25 **Tested By:** Junchang Du
EUT: DAC and Headphone Amplifier **Model Number:** F3021Q
Test Mode: 3DH5 TX 2480MHz **Power Supply:** Battery
Condition: Temp:23.0°C;Humi:69.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23100918-2E F3021Q\FCC ABOVE 1G\109
Memo: Sample Number:S23100918-01 Power Setting:NA

Test Graph

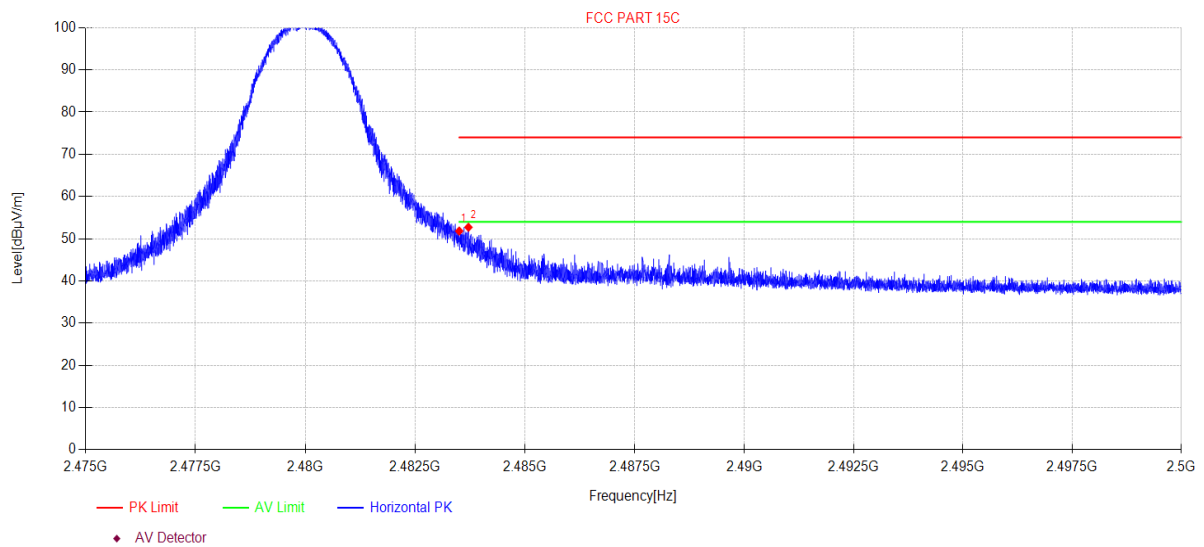

Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.50	58.73	27.53	3.94	-38.38	51.82	74.00	22.18	PK	Horizontal
2	2483.71	59.63	27.53	3.94	-38.38	52.72	74.00	21.28	PK	Horizontal


Note:

1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

TR-4-E-009 Radiated Emission Test Result

Test Date: 2023-11-25 **Tested By:** Junchang Du
EUT: DAC and Headphone Amplifier **Model Number:** F3021Q
Test Mode: 3DH5 TX 2480MHz **Power Supply:** Battery
Condition: Temp:23.0°C;Humi:69.5% **Test Site:** DDT 3# Chamber
File Path: d:\ts\2023 report data\Q23100918-2E F3021Q\FCC ABOVE 1G\110
Memo: Sample Number:S23100918-01 Power Setting:NA

Test Graph

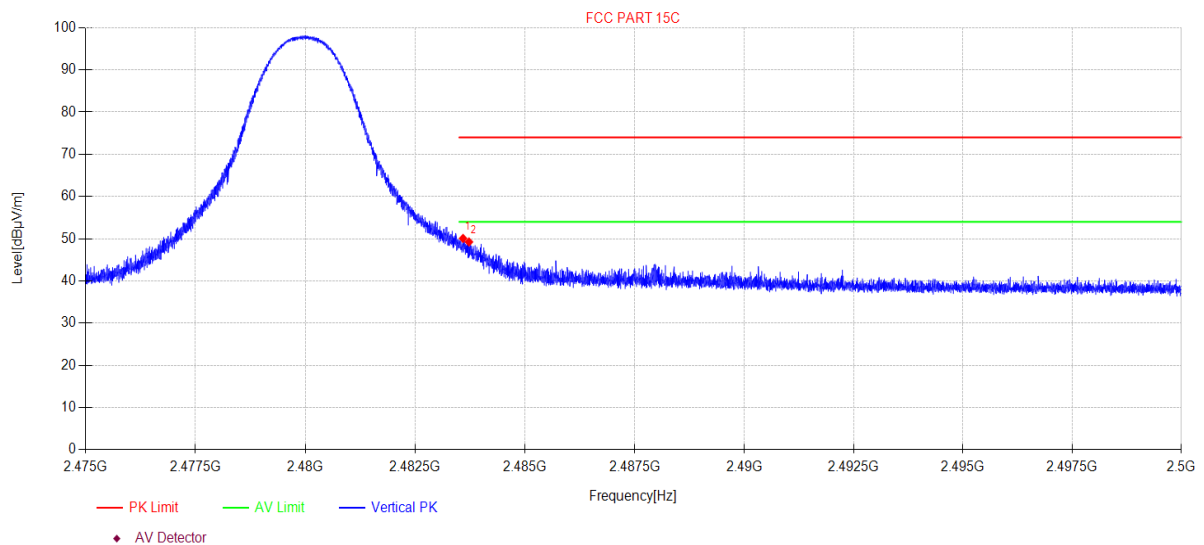

Data List

N O.	Freq. [MHz]	Reading [dBμV/m]	Antenna Factor [dB]	Cable loss [dB]	AMP [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detector	Polarity
1	2483.59	56.98	27.53	3.94	-38.38	50.07	74.00	23.93	PK	Vertical
2	2483.72	56.15	27.53	3.94	-38.38	49.24	74.00	24.76	PK	Vertical

Note:


1. Level = Reading + Cable loss + Antenna Factor + AMP
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.

15. Power Line Conducted Emission

15.1. Test equipment

Equipment	Manufacturer	Model No.	Serial Number	Due Date
☑Power Line Conducted Emissions Test 1#				
Test Receiver	R&S	ESCI	100551	2024/07/10
LISN 1	R&S	ENV216	101109	2024/07/10
LISN 2	R&S	ESH2-Z5	100309	2024/07/11
Pulse Limiter	R&S	ESH3-Z2	101242	2024/07/14
CE Cable 1	HUBSER	N/A	W10.01	2024/07/14
Test software	Audix	E3	V 6.11111b	N/A

15.2. Block diagram of test setup

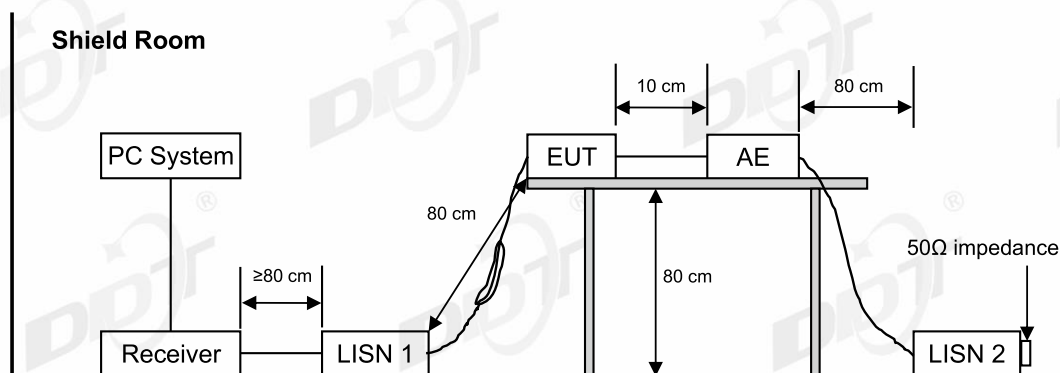

15.3. Power line conducted emission limits

Frequency	Quasi-Peak Level dB(μV)	Average Level dB(μV)
150 kHz ~ 500 kHz	66 ~ 56*	56 ~ 46*
500 kHz ~ 5 MHz	56	46
5 MHz ~ 30 MHz	60	50

Note 1: * Decreasing linearly with logarithm of frequency.

Note 2: The lower limit shall apply at the transition frequencies.

15.4. Test procedure

The EUT and Support equipment, if needed, were put placed on a non-metallic table, 80cm above the ground plane.

All support equipment power received from a second LISN.

Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.

The Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.

During the above scans, the emissions were maximized by cable manipulation.

The test mode(s) described in clause 2.4 were scanned during the preliminary test.

After the preliminary scan, we found the test mode producing the highest emission level.

The EUT configuration and worse cable configuration of the above highest emission levels were recorded for reference of the final test.

EUT and support equipment were set up on the test bench as per the configuration with highest emission level in the preliminary test.

A scan was taken on both power lines, Neutral and Line, recording at least the six highest emissions.

Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit.

The test data of the worst-case condition(s) was recorded.

The bandwidth of test receiver is set at 9 kHz.

15.5. Test result

Pass. (See below detailed test result)

Note1: All emissions not reported below are too low against the prescribed limits.


Note2: “----” means Peak detection; “-----” means Average detection.

Note3: Pre-test AC conducted emission at both voltage AC 120V/60Hz and AC 240V/50Hz, recorded the worst case.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2023 CE report data\Q23100918-2E\FCC CE.EM6**
Test Date : 2023-10-17 **Tested By** : Junchang Du
EUT : DAC and Headphone Amplifier **Model Number** : F3021Q
Power Supply : AC 120V/60Hz **Test Mode** : TX
Condition : TEMP:23.4°C, RH:52.6% **LISN** : 2023 1# ENV216/LINE
Memo : BT

Data: 2

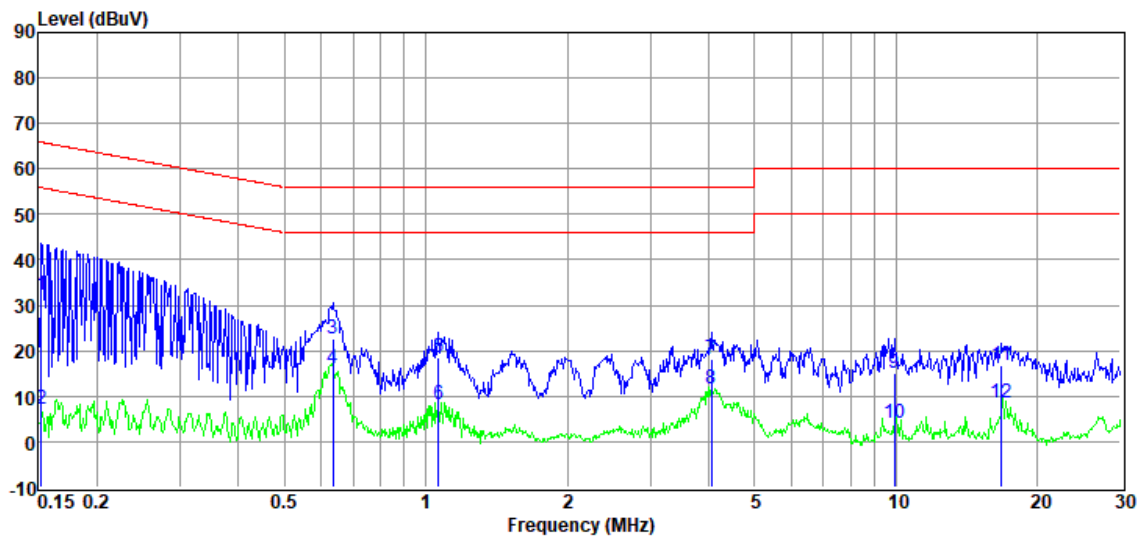

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.15	11.77	9.84	0.92	9.68	32.21	65.87	-33.66	QP	LINE
2	0.15	-13.28	9.84	0.92	9.68	7.16	55.87	-48.71	Average	LINE
3	0.63	2.25	9.77	0.80	9.72	22.54	56.00	-33.46	QP	LINE
4	0.63	-4.09	9.77	0.80	9.72	16.20	46.00	-29.80	Average	LINE
5	1.07	-1.46	9.65	0.67	9.73	18.59	56.00	-37.41	QP	LINE
6	1.07	-11.93	9.65	0.67	9.73	8.12	46.00	-37.88	Average	LINE
7	4.05	-1.78	9.65	0.56	9.78	18.21	56.00	-37.79	QP	LINE
8	4.05	-8.20	9.65	0.56	9.78	11.79	46.00	-34.21	Average	LINE
9	9.91	-4.88	9.82	0.21	9.82	14.97	60.00	-45.03	QP	LINE
10	9.91	-15.92	9.82	0.21	9.82	3.93	50.00	-46.07	Average	LINE
11	16.75	-3.33	9.83	0.34	9.89	16.73	60.00	-43.27	QP	LINE
12	16.75	-11.36	9.83	0.34	9.89	8.70	50.00	-41.30	Average	LINE


Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

TR-4-E-010 Conducted Emission Test Result

Test Site : DDT 1# Shield Room **D:\2023 CE report data\Q23100918-2E\FCC CE.EM6**
Test Date : 2023-10-17 **Tested By** : Junchang Du
EUT : DAC and Headphone Amplifier **Model Number** : F3021Q
Power Supply : AC 120V/60Hz **Test Mode** : TX
Condition : TEMP:23.4°C, RH:52.6% **LISN** : 2023 1# ENV216/NEUTRAL
Memo : BT

Data: 4

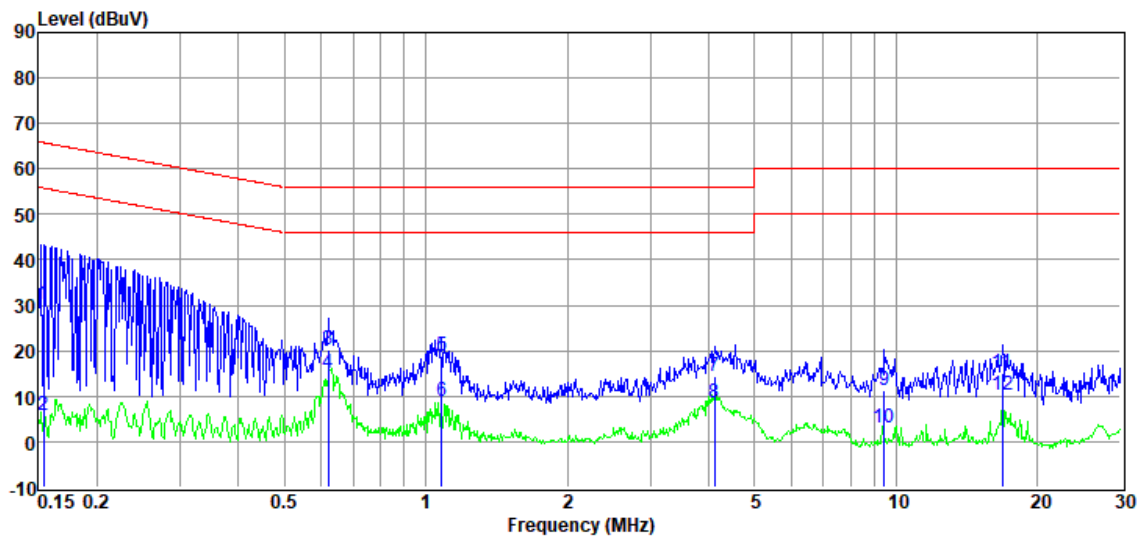

Item	Freq.	Read Level	LISN Factor	Cable Loss	Pulse Limiter Factor	Result Level	Limit Line	Over Limit	Detector	Phase
(Mark)	(MHz)	(dBμV)	(dB)	(dB)	(dB)	(dBμV)	(dBμV)	(dB)		
1	0.15	9.62	9.84	0.92	9.68	30.06	65.78	-35.72	QP	NEUTRAL
2	0.15	-14.65	9.84	0.92	9.68	5.79	55.78	-49.99	Average	NEUTRAL
3	0.62	-0.24	9.83	0.81	9.72	20.12	56.00	-35.88	QP	NEUTRAL
4	0.62	-5.18	9.83	0.81	9.72	15.18	46.00	-30.82	Average	NEUTRAL
5	1.08	-1.17	9.74	0.67	9.73	18.97	56.00	-37.03	QP	NEUTRAL
6	1.08	-11.27	9.74	0.67	9.73	8.87	46.00	-37.13	Average	NEUTRAL
7	4.11	-5.78	9.75	0.55	9.79	14.31	56.00	-41.69	QP	NEUTRAL
8	4.11	-11.50	9.75	0.55	9.79	8.59	46.00	-37.41	Average	NEUTRAL
9	9.45	-8.53	9.79	0.24	9.82	11.32	60.00	-48.68	QP	NEUTRAL
10	9.45	-16.67	9.79	0.24	9.82	3.18	50.00	-46.82	Average	NEUTRAL
11	16.84	-4.92	9.82	0.34	9.90	15.14	60.00	-44.86	QP	NEUTRAL
12	16.84	-9.94	9.82	0.34	9.90	10.12	50.00	-39.88	Average	NEUTRAL

Note:

1. Result Level = Read Level + LISN Factor + Pulse Limiter Factor + Cable loss.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
4. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.

16. Antenna Requirements

16.1. Limit

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

16.2. Result

The antenna used for this product as Antenna information described in section 2.1 of the report, and there is no other antenna than that furnished by the responsible party shall be used with the device.

18. Photos of the EUT

Please refer to appendix I.

END OF REPORT