



Appendix F. FCC 3G SAR Measurement Procedures

Conducted Output Power:


The EUT was tested according to the requirements of the FCC 3G procedures and the 3.1.2.3.4.

A detailed analysis of the output power verification is provided as the table below:

Function Type	Reverse Traffic Channel	Test Mode	Radio Configuration		Service Option	Data Rates (kbps)	Power Control	Low Ch	Mid. Ch	High Ch
			Forward Traffic Channel (Fwd)	Reverse Traffic Channel (Rvs)				25	600	1175
CDMA2000 PCS	FCH	1	1	1	55	Full	All Up	24.17	23.49	23.74
		3	3	3	55	Full	All Up	24.22	23.57	23.84



CDMA2000 Setup Configuration:

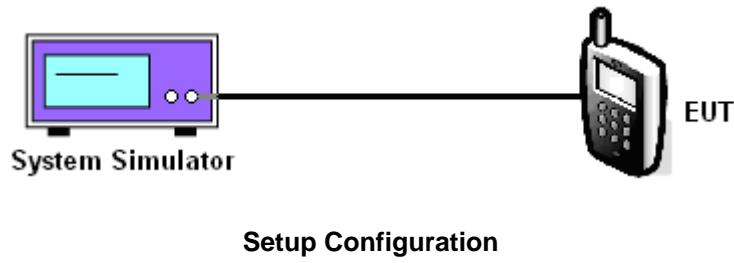

1. The EUT was connected to System Simulator, Agilent 8960. Refer to the drawing of Setup Configuration.
2. The RF path losses were compensated into the measurements.
3. A call was established between EUT and System Simulator with following setting:
 - a. For 1xRTT, set the Radio Configuration and the Service Option
 - b. Set the Power Control to All Up Bits
4. The transmitted maximum output power was recorded.

1xRTT setting for Radio Configuration 1 with Service Option 55



Call Setup Screen		
Call Control	Active Cell Operating Mode	
Mobile Station Information		CallParms
ESN (Hex):		Cell Power
ESN (Dec):		-86.00
IMC:		dBm/1.23 MHz
IMC:		Cell Band
ISIN:		US PCS
Slot Class:		Channel
Slot Cycle Index: ----		1175
Protocol Revision:		Protocol Rev
FCH Service Option Setup		6 (IS-2000-0)
Service Option f	Service Option	Radio Config
S01 (Voice)	S09 (Loopback)	(Fud3, Rus3)
S02 (Loopback)	S055 (Loopback)	S055 (Loopback)
S03 (Voice)	S055 (Loopback)	FCH Service
S06 (SMS)	S055 (Loopback)	Option Setup
S055 (Loopback)		▼
S032 (+ F-SCH)		1 of 4
Close	Active Cell	Sys Type: IS-2000
Menu	Idle	
	IntRef	Offset

1xRTT setting for Radio Configuration 3 with Service Option 55**Reference:**

- [1] SAR Measurement Procedures for 3G Devices CDMA 2000/Ev-Do/WCDMA/HSDPA, June 2006
Laboratory Division Office of Engineering and Technology Federal Communications Commission
- [2] 3.1.2.3.4 Maximum RF Output Power 3GPP2 C.S0033-0 Version 2.0, Date: 12 December 2003
Recommended Minimum Performance Standards for cdma2000 High Rate Packet Data Access Terminal