



Shenzhen CTL Testing Technology Co., Ltd.
Tel: +86-755-89486194 Fax: +86-755-26636041

MPE TEST REPORT

FCC Per 47 CFR 2.1091(b)

Report Reference No.....: CTL1404240848-WM

FCC ID.....:

Compiled by

(position+printed name+signature)...: File administrators Jennifer NI

Jennifer NI

Name of the organization performing the tests

Test Engineer Jacky Chen

Jacky Chen

(position+printed name+signature)...:

Approved by

(position+printed name+signature)...: Manager Tracy Qi

Tracy Qi

Date of issue.....: Apr. 29, 2014

Test Firm.....: Shenzhen CTL Testing Technology Co., Ltd.

Address.....: Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

Applicant's name.....: Huizhou TCL Mobile Communication Co., Ltd.

Address.....: No. 23 Zone, ZhongKai High-Technology Development Zone, Huizhou, 518057 China

Test specification:

Standard.....: FCC Per 47 CFR 2.1091(b)

TRF Originator.....: Shenzhen CTL Testing Technology Co., Ltd.

Master TRF.....: Dated 2011-01

Shenzhen CTL Testing Technology Co., Ltd.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTL Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen CTL Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: CARFONE

FCC ID.....: R5CCP100

IC ID.....: 11940A-CP100

Trade Mark.....: Truckfone

Model/Type reference.....: CP100

I/O Type of EUT.....: MiniUSB Port/ Earphone Port

I/O Q'TY.....: 1/1

GSM/WCDMA


Transmit.....: 2G:GSM 850: 824~849MHz, PCS 1900: 1850~1910MHz
3G:WCDMA Band II: 1850-1910MHz,
WCDMA Band V: 824~849MHz

Receive.....: 2G:GSM 850: 869~894MHz, PCS 1900: 1930~1990MHz
3G:WCDMA Band II: 1930~1990MHz,
WCDMA Band V: 869~894MHz

Release Version: 2G:R99
3G:Rel-6
Type of modulation: 2G: GMSK for GSM/GPRS/EDGE
3G: QPSK
GPRS Type: Class B
GPRS Class: Class 12

GPS

work frequency: 1575.42MHz
Type of modulation: BPSK
Antenna Gain: 2.0 dBi for GSM850 and WCDMA Band V
5.0 dBi for PCS1900 and WCDMA Band II
Antenna type: External
IMEI: 357782049812060
Result.....: **Positive**

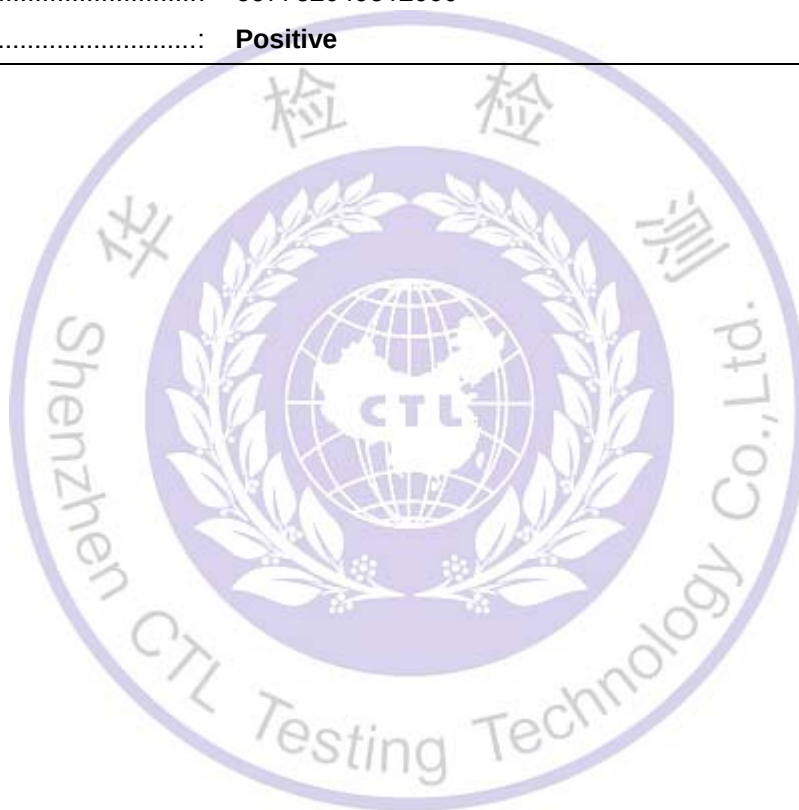

Test Report

Test Report No. :	CTL1404240848-WM	Apr. 29, 2014
		Date of issue

Equipment under Test : CARFONE

Model /Type : CP100

Applicant : **Huizhou TCL Mobile Communication Co., Ltd.**

Address : No. 23 Zone, ZhongKai High-Technology Development Zone,
Huizhou, 518057 China

Manufacturer : **Huizhou TCL Mobile Communication Co., Ltd.**

Address : No. 23 Zone, ZhongKai High-Technology Development Zone,
Huizhou, 518057 China

Test Result	 Positive
--------------------	---

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Content

1.	SUMMARY	5
1.1.	EUT configuration	5
1.2.	Equipment Under Test	5
1.3.	Description of the test mode	5
2.	TEST ENVIRONMENT	6
2.1.	Address of the test laboratory	6
2.2.	Environmental conditions	6
2.3.	Statement of the measurement uncertainty	6
3.	METHOD OF MEASUREMENT.....	7



1. SUMMARY

1.1. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- o - supplied by the lab

1.2. Equipment Under Test

Power supply system utilised

Power supply voltage : o 120V / 60 Hz o 115V / 60Hz
 ■ 12 V DC o 24 V DC
 o Other (specified in blank below)

1.3. Description of the test mode

CTL has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
Mode 1: GSM850
Mode 2: PCS1900
Mode 3: GPRS850
Mode 4: GPRS1900
Mode 5: EDGE 850
Mode 6: EDGE 1900
Mode 7: WCDMA Band II
Mode 8: WCDMA Band V

Note:

1. Regards to the frequency band operation: the lowest, middle and highest frequency of channel were selected to perform the test, then shown on this report.
2. For the ERP/EIRP and radiated emission test, every axis (X, Y, Z) was verified, and show the worst result on this report.

2. TEST ENVIRONMENT

2.1. Address of the test laboratory

Shenzhen CTL Testing Technology Co., Ltd.

Floor 1-A, Baisha Technology Park, No.3011, Shahexi Road, Nanshan District, Shenzhen, China 518055

The sites are constructed in conformance with the requirements of ANSI C6230, ANSI C63.4 (2003) and CISPR Publication 22.

2.2. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

2.3. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen CTL Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for CTL laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.10dB	(1)
Radiated Emission	1~12.75GHz	4.32dB	(1)
Conducted Disturbance	0.15~30MHz	3.22dB	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

3. Method of measurement

3.1. Applicable Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated.

3.2. Limit

Limits for Maximum Permissible Exposure (MPE)/Controlled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for Occupational/Controlled Exposure				
0.3 – 3.0	614	1.63	(100) *	6
3.0 – 30	1842/f	4.89/f	(900/f)*	6
30 – 300	61.4	0.163	1.0	6
300 – 1500	/	/	f/300	6
1500 – 100,000	/	/	5	6

Limits for Maximum Permissible Exposure (MPE)/Uncontrolled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm ²)	Averaging Time (minute)
Limits for Occupational/Controlled Exposure				
0.3 – 3.0	614	1.63	(100) *	30
3.0 – 30	824/f	2.19/f	(180/f)*	30
30 – 300	27.5	0.073	0.2	30
300 – 1500	/	/	f/1500	30
1500 – 100,000	/	/	1.0	30

F=frequency in MHz

*=Plane-wave equivalent power density

3.3. MPE Calculation Method

Predication of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = PG/4\pi R^2$$

Where: S=power density

P=power input to antenna

G=power gain of the antenna in the direction of interest relative to an isotropic radiator

R=distance to the center of radiation of the antenna

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna is 2.0dBi for GSM850/WCDMA Band V, 5.0 dBi for PCS1900/WCDMA Band II, 0 dBi for WIFI, Bluetooth and BLE, the RF power density can be obtained.

TEST RESULTS

GSM 850/GPRS 850/EDGE 850/WCDMA Band V

Test Frequency (MHz)	Minimum Separation Distance (cm)	Maximum Output Power (dBm)	Maximum Output Power (mW)	Antenna Gain (Nemeric)	Power Density Limit (mW/cm ²)	Power Density At 20 cm (mW/cm ²)	Test Results
824.2	20.00	32.31	1702.1585	1.5849	0.5495	0.5367	Pass
836.6	20.00	31.82	1520.5475	1.5849	0.5577	0.4794	Pass
848.6	20.00	31.65	1462.1772	1.5849	0.5659	0.4610	Pass

PCS1900/GPRS 1900/EDGE/1900/WCDMA Band II

Test Frequency (MHz)	Minimum Separation Distance (cm)	Maximum Output Power (dBm)	Maximum Output Power (mW)	Antenna Gain (Nemeric)	Power Density Limit (mW/cm ²)	Power Density At 20 cm (mW/cm ²)	Test Results
1850.2	20.00	29.98	995.4054	3.1623	1.0000	0.6262	Pass
1880.0	20.00	30.24	1056.8175	3.1623	1.0000	0.6649	Pass
1909.8	20.00	30.42	1101.5393	3.1623	1.0000	0.6930	Pass

4. Conclusion

The measurement results comply with the FCC Limit per 47 CFR 2.1091 (b) for the controlled RF Exposure.

.....End of Report.....

