



No. DAT-P-114/01-10

TEST REPORT

No. SAR2005025

Test name	Electromagnetic Field (Specific Absorption Rate)
Product	CDMA 800MHz Frequency Mobile Station
Model	CT300
Client	TCL Mobile Communication Co., Ltd
Type of test	Non Type Approval

Telecommunication Metrology Center
of Ministry of Information Industry

NOTES

1. . The test report shall be invalid if there is no “specified stamp for the test report” or the stamp of the test organization on it.
2. Copies of the test report shall be invalid if there is no “specified stamp for the test report” or the stamp of the test organization on it.
3. The test report shall be invalid if there are no signatures of the testing person, reviewing person and approving person on it.
4. The test report shall be invalid if it is altered.
5. Any demurrals about the test shall be put forward to the testing organization within 15 days after the receiving of the test report.
6. This test report standalone does not constitute or imply by its own an approval of the product by any Certification Authorities or Competent Bodies.
7. This report is only valid if complete, and test report shall not be reproduced except in full, without written approval of the laboratory.
8. This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of Telecommunication Metrology Center of MII and the Accreditation Bodies, if it applies.

Address: No. 52, Huayuan Bei Road, Haidian District, Beijing, P. R. China
(Telecommunication Metrology Center of MII)

Post code: 100083

Telephone: +86 10 62302041

Fax: +86 10 62304793

Web site: <http://www.emcite.com>

E-mail: welcome@emcite.com

TABLE OF CONTENT

1 COMPETENCE AND WARRANTIES.....	5
2 GENERAL CONDITIONS	5
3 DESCRIPTION OF EUT	5
3.1 Addressing Information Related to EUT	5
3.2 Constituents of EUT	6
3.3 General Description	10
4 OPERATIONAL CONDITIONS DURING TEST	10
4.1 Schematic Test Configuration	10
4.2 SAR Measurement Set-up	12
4.3 Dasy4 E-field Probe System	12
4.4 E-field Probe Calibration	13
4.5 Other Test Equipment	14
4.6 Equivalent Tissues.....	14
4.7 System Specifications.....	15
5 CHARACTERISTICS OF THE TEST.....	16
5.1 Applicable Limit Regulations.....	16
5.2 Applicable Measurement Standards.....	16
5.3 Characteristic of the Test.....	16
6 LABORATORY ENVIRONMENT	17
7 TEST RESULTS.....	17
7.1 Dielectric Performance	17
7.2 System Validation.....	17
7.3 Summary of Measurement Results((Head, 835 MHz Band)	18
7.4 Summary of Measurement Results (Body-Worn, 835 MHz Band)	19
7.5 Conclusion	20
8 MEASUREMENT UNCERTAINTY	20
9 MAIN TEST INSTRUMENTS	21
10 TEST PERIOD	21
11 TEST LOCATION	21
ANNEX A MEASUREMENT PROCESS.....	22
ANNEX B TEST LAYOUT	23
ANNEX C GRAPH RESULTS	27
ANNEX D CONDUCTED OUTPUT POWER MEASUREMENT	63
ANNEX E SYSTEM VALIDATION RESULTS	64
ANNEX F PROBE CALIBRATION CERTIFICATE.....	65

**Telecommunication Metrology Center
of Ministry of Information Industry**

No. SAR2005025

Page 4 of 73

Product Name	CDMA 800MHz Frequency Mobile Station	Sample Model	CT300
Client	TCL Mobile Communication Co., Ltd.	Type of test	Non Type Approval
Factory	TCL Mobile Communication Co., Ltd.	Sampling arrival date	September 14 th , 2005
Manufacturer	TCL Mobile Communication Co., Ltd.		
Sampling/ Sending sample	Sending sample	Sample sent by	Wang Jianhong
Sampling location	/	Sampling person	/
Sample quantity	1	Sample matrix	/
Series number of the Sample	/		
Test basis	EN 50360–2001: Product standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones. EN 50361–2001: Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones. IEC 62209-1-2005: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1:Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz) ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz OET Bulletin 65 (Edition 97-01) and Supplement C (Edition 01-01): Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits. IEEE 1528–2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.		
Test conclusion	Localized Specific Absorption Rate (SAR) of this portable wireless equipment has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this test report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report. General Judgment: Pass (Stamp) Date of issue: September 29th, 2005		
Note	TX Freq. Band: 824-849 MHz (CDMA) Max. Power: 0.25 Watt (CDMA) Antenna Character: / The test results relate only to the items tested of the sample(s).		

Approved by

(Lu Bingsong- Deputy Director of the laboratory)

Reviewed by

(Wang Hongbo)

Tested by

(Sun Qian)

1 COMPETENCE AND WARRANTIES

Telecommunication Metrology Center of Ministry of Information Industry is a test laboratory accredited by DAR (DATech) – Deutschen Akkreditierungs Rat (Deutsche Akkreditierungsstelle Technik) for the tests indicated in the Certificate No. **DAT-P-114/01-10**.

Telecommunication Metrology Center of Ministry of Information Industry is a test laboratory competent to carry out the tests described in this test report.

Telecommunication Metrology Center of Ministry of Information Industry guarantees the reliability of the data presented in this test report, which is the results of measurements and tests performed for the items under test on the date and under the conditions stated in this test report and is based on the knowledge and technical facilities available at **Telecommunication Metrology Center of Ministry of Information Industry** at the time of execution of the test.

Telecommunication Metrology Center of Ministry of Information Industry is liable to the client for the maintenance by its personnel of the confidentiality of all information related to the items under test and the results of the test.

2 GENERAL CONDITIONS

- 2.1 This report only refers to the item that has undergone the test.
- 2.2 This report standalone dose not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities.
- 2.3 This document is only valid if complete; no partial reproduction can be made without written approval of Telecommunication Metrology Center of Ministry of Information Industry.
- 2.4 This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of Telecommunication Metrology Center of Ministry of Information Industry and the Accreditation Bodies, if it applies.

3 DESCRIPTION OF EUT

3.1 Addressing Information Related to EUT

Table 1: Applicant (The Client)

Name or Company	TCL Mobile Communication Co., Ltd.
Address/Post	No.23 Zone, Zhongkai High Technology Development Zone, Huizhou, Guangdong
City	Hui Zhou
Postal Code	516006
Country	China
Telephone	0752-2616189
Fax	0752-2636525

**Telecommunication Metrology Center
of Ministry of Information Industry**

No. SAR2005025

Page 6 of 73

Table 2: Manufacturer

Name or Company	TCL Mobile Communication Co., Ltd.
Address/Post	No.23 Zone, Zhongkai High Technology Development Zone, Huizhou, Guangdong
City	Hui Zhou
Postal Code	516006
Country	China
Telephone	0752-2616189
Fax	0752-2636525

3.2 Constituents of EUT

Table 3: Constituents of Samples

Description	Model	Serial Number	Manufacturer
Handset	CT300	/	TCL Mobile Communication Co., Ltd.
Lithium Battery	TB-04B	TB-04B0000115	BYD Inc.
AC/DC Adapter	WYS-036	OT1520002943	Huizhou Weiyeshun Electronics Co., Ltd

External Photo



Mobile Phone



Mobile Phone



Mobile Phone



Mobile phone



Charger (AC/DC Adapter)




Charger (AC/DC Adapter)

Internal Photo



Mobile phone Disassembly

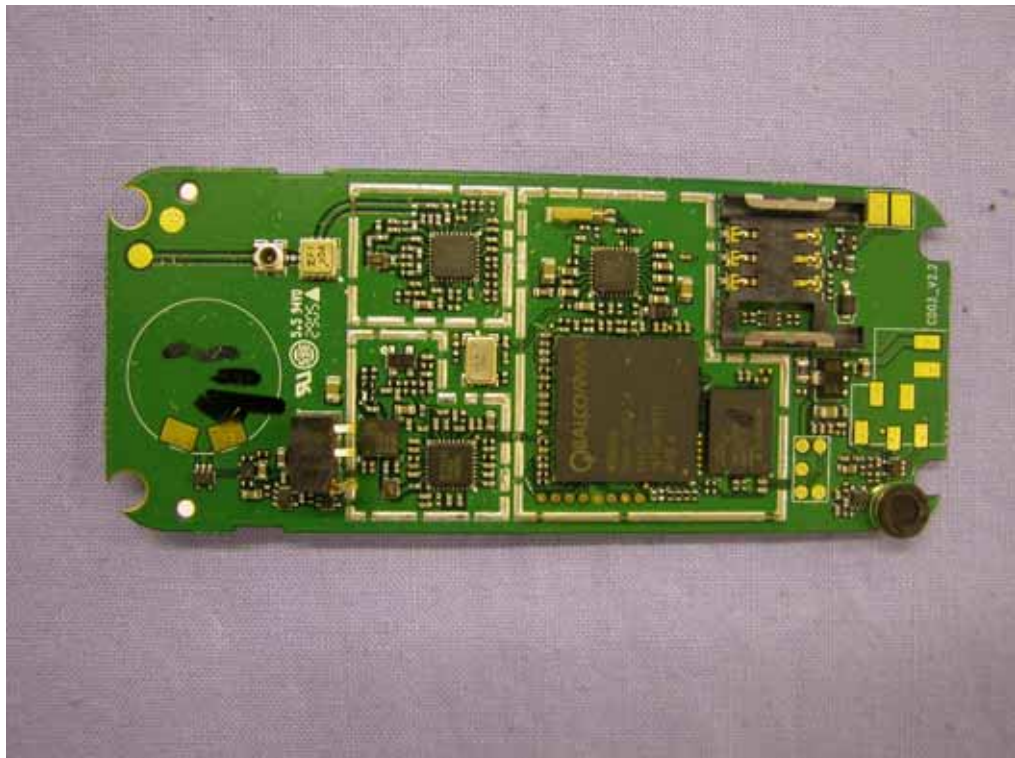

mobile phone PCB front view

Figure 1: Constituents of the sample (Lithium Battery is in the Handset)

3.3 General Description

Equipment Under Test (EUT) is a model of CDMA portable Mobile Station (MS) with integrated antenna. It consists of Handset and normal options: Lithium Battery and AC/DC Adapter as Table 3 and Fig.1.

EUT's CDMA MS Protocol Revision number is CDMA2000 1x Release 0 and it applies to TIA/EIA-98-D <Recommended Minimum Performance Standards for cdma2000 Spread Spectrum Mobile Stations>.

The sample undergoing test was selected by the Client.

Components list please refer to documents of the manufacturer.

4 OPERATIONAL CONDITIONS DURING TEST

4.1 Schematic Test Configuration

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established. The Absolute Radio Frequency Channel Number (ARFCN) is allocated to 1013, 384 and 777 respectively in the case of CDMA 835 MHz. The EUT is commanded to operate at maximum transmitting power.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. The antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset. The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 30 dB.

Test communication setup meet as followings:

Communication standard between mobile station and base station simulator	TIA/EIA-98-D
Radio configuration	RC3 (Supporting CDMA 1X)
Spreading Rate	SR1
Data Rate	9600bps
Service Options	SO55 (loop back mode)
Service Options	SO3 (voice mode)
Multiplex Options	The mobile station does not support this service.

Base station Simulator: CMU200

Test Parameter setup for maximum RF output power according to section 4.4.5 of TIA/EIA-98-D:

Parameter	Units	Value
I_{or}	dBm/1.23MHz	-104
$\frac{PilotE_c}{I_{or}}$	dB	-7
$\frac{TrafficE_c}{I_{or}}$	dB	-7.4

For SAR test, the maximum power output is very important and essential; it does not matter with radio configurations. In this report, we use typical RC3 to estimate.

Under the loop back mode between mobile station and CMU200, the transmitter continuously emits with maximum power more strong than voice mode, so the SAR test was done with loop back mode. To make the mobile emits maximum power; the output power of CMU200 would be adjusted to minimum power with the sensitivity of the mobile station to build steady connection with mobile station. The power level control parameter in the CMU200 is "0", it means "all up" and requires mobile station to emit with maximum power.

4.2 SAR Measurement Set-up

These measurements were performed with the automated near-field scanning system DASY4 Professional from Schmid & Partner Engineering AG (SPEAG). The system is based on a high precision robot (working range greater than 0.9m) which positions the probes with a positional repeatability of better than $\pm 0.02\text{mm}$. Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines (length = 300mm) to the data acquisition unit.

A cell controller system contains the power supply, robot controller, teaches pendant (Joystick), and remote control, is used to drive the robot motors. The PC consists of the Micron Pentium III 800 MHz computer with Windows 2000 system and SAR Measurement Software DASY4, A/D interface card, monitor, mouse, and keyboard. The Stäubli Robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC plug-in card.

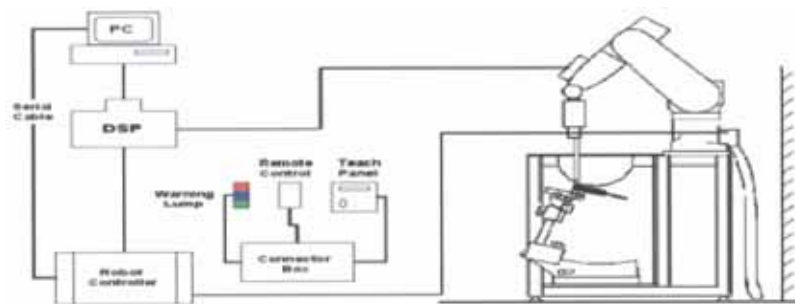


Figure2. SAR Lab Test Measurement Set-up

The DAE consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the PC-card is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe mounting device includes two different sensor systems for frontal and sidewise probe contacts. They are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.

4.3 Dasy4 E-field Probe System

The SAR measurements were conducted with the dosimetric probe ET3DV6 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the standard procedure with an accuracy of better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than $\pm 0.25\text{dB}$.

ET3DV6 Probe Specification

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection System(ET3DV6 only) Built-in shielding against static charges PEEK enclosure material(resistant to organic solvents, e.q., glycol)
Calibration	In air from 10 MHz to 2.5 GHz In brain and muscle simulating tissue at frequencies of 450MHz, 900MHz and 1.8GHz (accuracy $\pm 8\%$) Calibration for other liquids and frequencies upon request
Frequency	10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)
Directivity	± 0.2 dB in brain tissue (rotation around probe axis) ± 0.4 dB in brain tissue (rotation normal probe axis)
Dynamic Range	5u W/g to > 100mW/g; Linearity: ± 0.2 dB
Surface Detection	± 0.2 mm repeatability in air and clear liquids over diffuse reflecting surface(ET3DV6 only)
Dimensions	Overall length: 330mm Tip length: 16mm Body diameter: 12mm Tip diameter: 6.8mm Distance from probe tip to dipole centers: 2.7mm
Application	General dosimetry up to 3GHz Compliance tests of mobile phones Fast automatic scanning in arbitrary phantoms

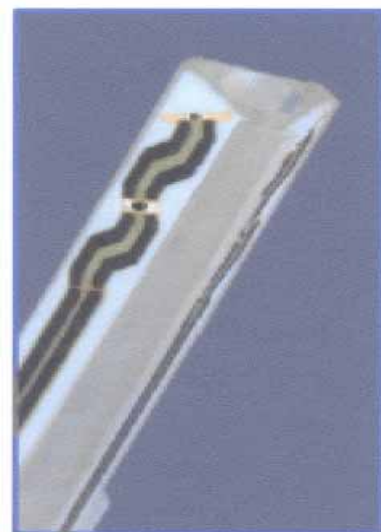


Figure3. ET3DV6 E-field Probe



Figure4. ET3DV6 E-field probe

4.4 E-field Probe Calibration

Each probe is calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy was evaluated and found to be better than ± 0.25 dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies below 1 GHz, and in a wave guide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in a dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where: Δt = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

ΔT = Temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \sigma}{\rho}$$

Or

Where:

σ = Simulated tissue conductivity,

ρ = Tissue density (kg/m³).

Note : please see Annex E to check the probe calibration certificate.



Figure5. Device Holder

4.5 Other Test Equipment

4.5.1 Device Holder for Transmitters

In combination with the Generic Twin Phantom V3.0, the Mounting Device (POM) enables the rotation of the mounted transmitter in spherical coordinates whereby the rotation points is the ear opening. The devices can be easily, accurately, and repeat ably positioned according to the FCC and CENELEC specifications. The device holder can be locked at different phantom locations (left head, right head, flat phantom).



Figure6. Generic Twin Phantom

4.5.2 Phantom

The Generic Twin Phantom is constructed of a fiberglass shell integrated in a wooden table. The shape of the shell is based on data from an anatomical study designed to determine the maximum exposure in at least 90% of all users. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents the evaporation of the liquid. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

Shell Thickness	2±0.1 mm
Filling Volume	Approx. 20 liters
Dimensions	810 x 1000 x 500 mm (H x L x W)
Available	Special

4.6 Equivalent Tissues

The liquid used for the frequency range of 800-2000 MHz consisted of water, sugar, salt and Cellulose. The liquid has previously been proven to be suited for worst-case. The Table 4 shows the

detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE 1528.

Table 4. Composition of the Head Tissue Equivalent Matter

MIXTURE %	FREQUENCY 835MHz
Water	41.45
Sugar	56.0
Salt	1.45
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=41.5$ $\sigma=0.90$

Table 5. Composition of the Body Tissue Equivalent Matter

MIXTURE %	FREQUENCY 835MHz
Water	52.5
Sugar	45.0
Salt	1.4
Preventol	0.1
Cellulose	1.0
Dielectric Parameters Target Value	f=835MHz $\epsilon=55.2$ $\sigma=0.97$

4.7 System Specifications

4.7.1 Robotic System Specifications

Specifications

Positioner: Stäubli Unimation Corp. Robot Model: RX90L

Repeatability: ± 0.02 mm

No. of Axis: 6

Data Acquisition Electronic (DAE) System

Cell Controller

Processor: Pentium III

Clock Speed: 800 MHz

Operating System: Windows 2000

Data Converter

Features: Signal Amplifier, multiplexer, A/D converter, and control logic

Software: DASY4 software

Connecting Lines: Optical downlink for data and status info.

Optical uplink for commands and clock

5 CHARACTERISTICS OF THE TEST

5.1 Applicable Limit Regulations

EN 50360–2001: Product standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.

It specifies the maximum exposure limit of **2.0 W/kg** as averaged over any 10 gram of tissue for portable devices being used within 20 mm of the user in the uncontrolled environment.

ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.

It specifies the maximum exposure limit of **1.6 W/kg** as averaged over any 1 gram of tissue for portable devices being used within 20 mm of the user in the uncontrolled environment.

5.2 Applicable Measurement Standards

EN 50361–2001: Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones.

IEC 62209-1-2005: Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Human models, instrumentation, and procedures –Part 1: Procedure to determine the specific absorption rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)

IEEE 1528–2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

OET Bulletin 65 (Edition 97-01) and Supplement C (Edition 01-01): Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits.

They specify the measurement method for demonstration of compliance with the SAR limits for such equipments.

5.3 Characteristic of the Test

Since it may be used for body-worn situation, the EUT is also test with the flat phantom to simulate this case.

6 LABORATORY ENVIRONMENT

Table 6: The Ambient Conditions during EMF Test

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 30%, Max. = 70%
Ground system resistance	< 0.5 Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

7 TEST RESULTS

7.1 Dielectric Performance

Table 7: Dielectric Performance of Head Tissue Simulating Liquid

Measurement is made at temperature 22.5 °C and relative humidity 49%. Liquid temperature during the test: 21.4°C			
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)
Target value	835 MHz	41.5	0.90
Measurement value (Average of 10 tests)	835 MHz	41.7	0.88

Table 8: Dielectric Performance of Body Tissue Simulating Liquid

Measurement is made at temperature 22.6 °C and relative humidity 51%. Liquid temperature during the test: 22.0°C			
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)
Target value	835 MHz	55.2	0.97
Measurement value (Average of 10 tests)	835 MHz	54.3	0.97

7.2 System Validation

Table 9: System Validation

Measurement is made at temperature 23.3 °C, relative humidity 47%, input power 250 mW. Liquid temperature during the test: 22.5°C					
Liquid parameters		Frequency	Permittivity ϵ	Conductivity σ (S/m)	
		835 MHz	41.7	0.88	
Verification results	Frequency	Target value (W/kg)		Measurement value (W/kg)	
		10 g Average	1 g Average	10 g Average	1 g Average
	835 MHz	1.55	2.375	1.62	2.48

Note : Target Values used are one fourth of those in IEEE Std 1528-2003 (feeding power is normalized to 1 Watt), i.e. 250 mW is used as feeding power to the validation dipole (SPEAG using).

**Telecommunication Metrology Center
of Ministry of Information Industry**

No. SAR2005025

Page 18 of 73

7.3 Summary of Measurement Results((Head, 835 MHz Band)

Table 10: SAR Values ((835 MHz Band, head)

Temperature: 22 °C, humidity: 50%.			
Liquid temperature during the test: 22.2°C			
Limit of SAR (W/kg)	10 g Average	1 g Average	Conducted Power before/after each test (dBm)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		
	10 g Average	1 g Average	
Left hand, Touch cheek, Top frequency (See ANNEX C GRAPH RESULTS Fig.1)	0.169	0.280	25.56/25.54
Left hand, Touch cheek, Mid frequency (See ANNEX C GRAPH RESULTS Fig.3)	0.129	0.194	25.24/25.26
Left hand, Touch cheek, Bottom frequency (See ANNEX C GRAPH RESULTS Fig.5)	0.105	0.167	25.71/25.70
Left hand, Tilt 15 Degree, Top frequency (See ANNEX C GRAPH RESULTS Fig.7)	0.096	0.164	25.55/25.54
Left hand, Tilt 15 Degree, Mid frequency (See ANNEX C GRAPH RESULTS Fig.9)	0.060	0.093	25.25/25.26
Left hand, Tilt 15 Degree, Bottom frequency (See ANNEX C GRAPH RESULTS Fig.11)	0.027	0.050	25.72/25.73
Right hand, Touch cheek, Top frequency (See ANNEX C GRAPH RESULTS Fig.13)	0.170	0.262	25.54/25.56
Right hand, Touch cheek, Mid frequency (See ANNEX C GRAPH RESULTS Fig.15)	0.124	0.216	25.26/25.28
Right hand, Touch cheek, Bottom frequency (See ANNEX C GRAPH RESULTS Fig.17)	0.132	0.204	25.73/25.72
Right hand, Tilt 15 Degree, Top frequency (See ANNEX C GRAPH RESULTS Fig.19)	0.091	0.140	25.55/25.54
Right hand, Tilt 15 Degree, Mid frequency (See ANNEX C GRAPH RESULTS Fig.21)	0.056	0.091	25.26/25.25
Right hand, Tilt 15 Degree, Bottom frequency (See ANNEX C GRAPH RESULTS Fig.23)	0.075	0.116	25.70/25.72

7.4 Summary of Measurement Results (Body-Worn, 835 MHz Band)

Table 11: SAR Values (835 MHz Band, body-worn)

Temperature: 22 °C, humidity: 50%. Liquid temperature during the test: 22.2°C			
Limit of SAR (W/kg)	10 g Average	1 g Average	Conducted Power before/after each test (dBm)
	2.0	1.6	
Test Case	Measurement Result (W/kg)		
	10 g Average	1 g Average	
Display of EUT towards the ground, Top frequency (See ANNEX C GRAPH RESULTS Fig.25)	0.152	0.218	25.55/25.54
Display of EUT towards the ground, Mid frequency (See ANNEX C GRAPH RESULTS Fig.27)	0.174	0.246	25.26/25.25
Display of EUT towards the ground, Bottom frequency (See ANNEX C GRAPH RESULTS Fig.29)	0.152	0.274	25.72/25.73
Display of EUT towards the phantom, Top frequency (See ANNEX C GRAPH RESULTS Fig.31)	0.097	0.188	25.55/25.54
Display of EUT towards the phantom, Mid frequency (See ANNEX C GRAPH RESULTS Fig.33)	0.084	0.122	25.25/25.27
Display of EUT towards the phantom, Bottom frequency (See ANNEX C GRAPH RESULTS Fig.35)	0.096	0.146	25.72/25.73

**Telecommunication Metrology Center
of Ministry of Information Industry**

No. SAR2005025

Page 20 of 73

7.5 Conclusion

Localized Specific Absorption Rate (SAR) of this portable wireless device has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.

8 MEASUREMENT UNCERTAINTY

<i>SN</i>	<i>a</i>	<i>Type</i>	<i>c</i>	<i>d</i>	$e = f(d,k)$	<i>f</i>	$h = c \times f / e$	<i>k</i>
	Uncertainty Component		Tol. (± %)	Prob. Dist.	Div.	c_i (1 g)	$1 g$ u_i (±%)	v_i
1	System repetivity	A	0.5	N	1	1	0.5	9
	Measurement System							
2	Probe Calibration	B	5	N	2	1	2.5	∞
3	Axial Isotropy	B	4.7	R	$\sqrt{3}$	$(1-c_p)^{1/2}$	4.3	∞
4	Hemispherical Isotropy	B	9.4	R	$\sqrt{3}$	$\sqrt{c_p}$		∞
5	Boundary Effect	B	0.4	R	$\sqrt{3}$	1	0.23	∞
6	Linearity	B	4.7	R	$\sqrt{3}$	1	2.7	∞
7	System Detection Limits	B	1.0	R	$\sqrt{3}$	1	0.6	∞
8	Readout Electronics	B	1.0	N	1	1	1.0	∞
9	RF Ambient Conditions	B	3.0	R	$\sqrt{3}$	1	1.73	∞
10	Probe Positioner Mechanical Tolerance	B	0.4	R	$\sqrt{3}$	1	0.2	∞
11	Probe Positioning with respect to Phantom Shell	B	2.9	R	$\sqrt{3}$	1	1.7	∞
12	Extrapolation, interpolation and Integration Algorithms for Max. SAR Evaluation	B	3.9	R	$\sqrt{3}$	1	2.3	∞
	Test sample Related							
13	Test Sample Positioning	A	4.9	N	1	1	4.9	N-1
14	Device Holder Uncertainty	A	6.1	N	1	1	6.1	N-1

**Telecommunication Metrology Center
of Ministry of Information Industry**

No. SAR2005025

Page 21 of 73

15	Output Power Variation - SAR drift measurement	B	5.0	R	$\sqrt{3}$	1	2.9	∞
	Phantom and Tissue Parameters							
16	Phantom Uncertainty (shape and thickness tolerances)	B	1.0	R	$\sqrt{3}$	1	0.6	∞
17	Liquid Conductivity - deviation from target values	B	5.0	R	$\sqrt{3}$	0.64	1.7	∞
18	Liquid Conductivity - measurement uncertainty	B	5.0	N	1	0.64	1.7	M
19	Liquid Permittivity - deviation from target values	B	5.0	R	$\sqrt{3}$	0.6	1.7	∞
20	Liquid Permittivity - measurement uncertainty	B	5.0	N	1	0.6	1.7	M
	Combined Standard Uncertainty			RSS			11.2 5	
	Expanded Uncertainty (95% CONFIDENCE INTERVAL)			K=2			22.5	

9 MAIN TEST INSTRUMENTS

Table 12: List of Main Instruments

No.	Name	Type	Serial Number	Calibration Date	Valid Period
01	Network analyzer	HP 8753E	US38433212	August 29,2005	One year
02	Dielectric Probe Kit	Agilent 85070C	US99360113	No Calibration Requested	
03	Power meter	NRVD	101253	June 3,2005	One year
04	Power sensor	NRV-Z5	100331	June 20,2005	
05	Power sensor	NRV-Z6	100011	December 12,2004	
06	Signal Generator	MG 3633A	M73386	No Calibration Requested	
07	Amplifier	AT 50S1G4A	26549	No Calibration Requested	
08	BTS	CMU 200	105948	August 15,2005	One year
09	E-field Probe	SPEAG ET3DV6	1736	July 14, 2005	One year
10	DAE	SPEAG DAE3	536	July 11, 2005	One year

10 TEST PERIOD

The test is performed from September 26th, 2005 to September 28th, 2005

11 TEST LOCATION

The test is performed at Radio Communication & Electromagnetic Compatibility Laboratory of Telecommunication Metrology Center

END OF REPORT BODY

ANNEX A MEASUREMENT PROCESS

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the reference point was measured and was used as a reference value for assessing the power drop.

Step 2: The SAR distribution at the exposed side of the phantom was measured at a distance of 3.9 mm from the inner surface of the shell. The area covered the entire dimension of the flat phantom and the horizontal grid spacing was 10 mm x 10 mm. Based on this data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7 x 7x 7 points. On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

a. The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

b. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the "Not a knot"-condition (in x ~ y and z-directions). The volume was integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the average.

c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation is repeated.

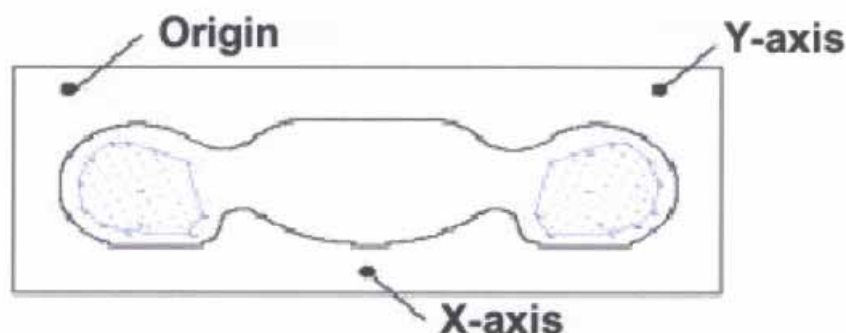


Figure 1 SAR Measurement Points in Area Scan

ANNEX B TEST LAYOUT



Picture 1 Specific Absorption Rate Test Layout



Picture 2 Left Hand Touch Cheek Position




Picture 3 Left Hand Tilt 15° Position



Picture 4 Right Hand Touch Cheek Position



Picture 5 Right Hand Tilt 15° Position

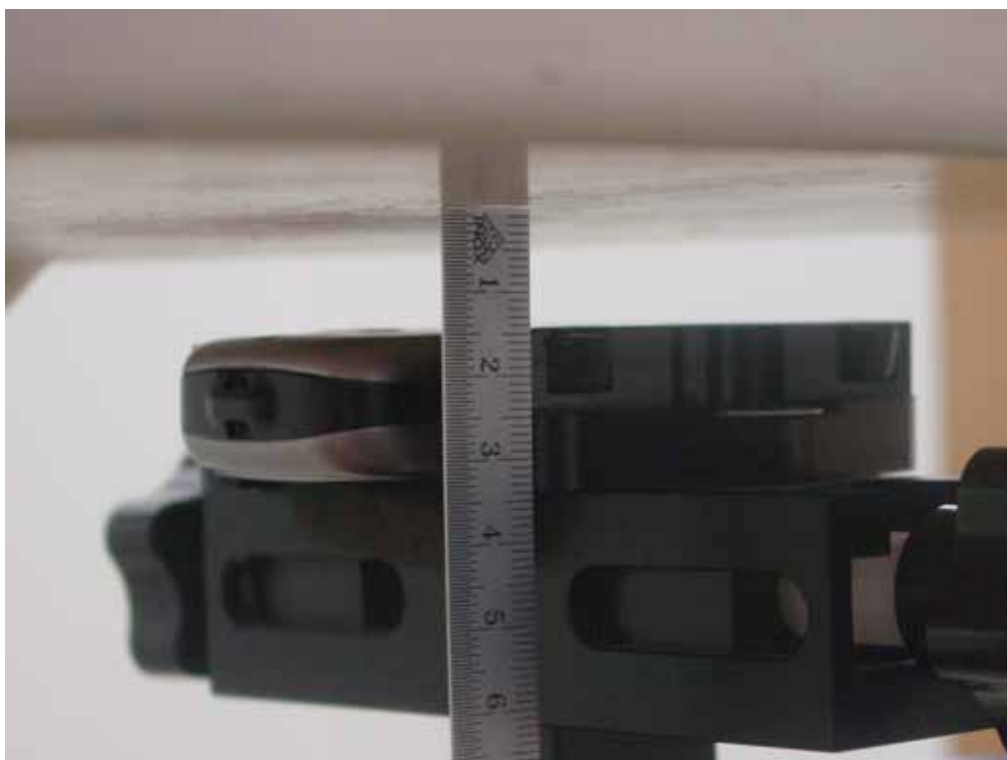

Picture 6 Flat Phantom -- Body-worn Position (towards ground, the distance from handset to the bottom of the Phantom is 1.5cm)



Picture 7 Flat Phantom -- Body-worn Position (towards phantom, the distance from handset to the bottom of the Phantom is 1.5cm)

ANNEX C GRAPH RESULTS

835 Left Cheek High

Electronics: DAE3 Sn536

Communication System: CDMA 1X-new Frequency: 848.31 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(6.51, 6.51, 6.51)

Cheek High/Area Scan (51x81x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 15.3 V/m; Power Drift = -0.008 dB

Maximum value of SAR (interpolated) = 0.337 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.3 V/m; Power Drift = -0.008 dB

Maximum value of SAR (measured) = 0.591 mW/g

Peak SAR (extrapolated) = 0.591 W/kg

SAR(1 g) = 0.280 mW/g; SAR(10 g) = 0.169 mW/g

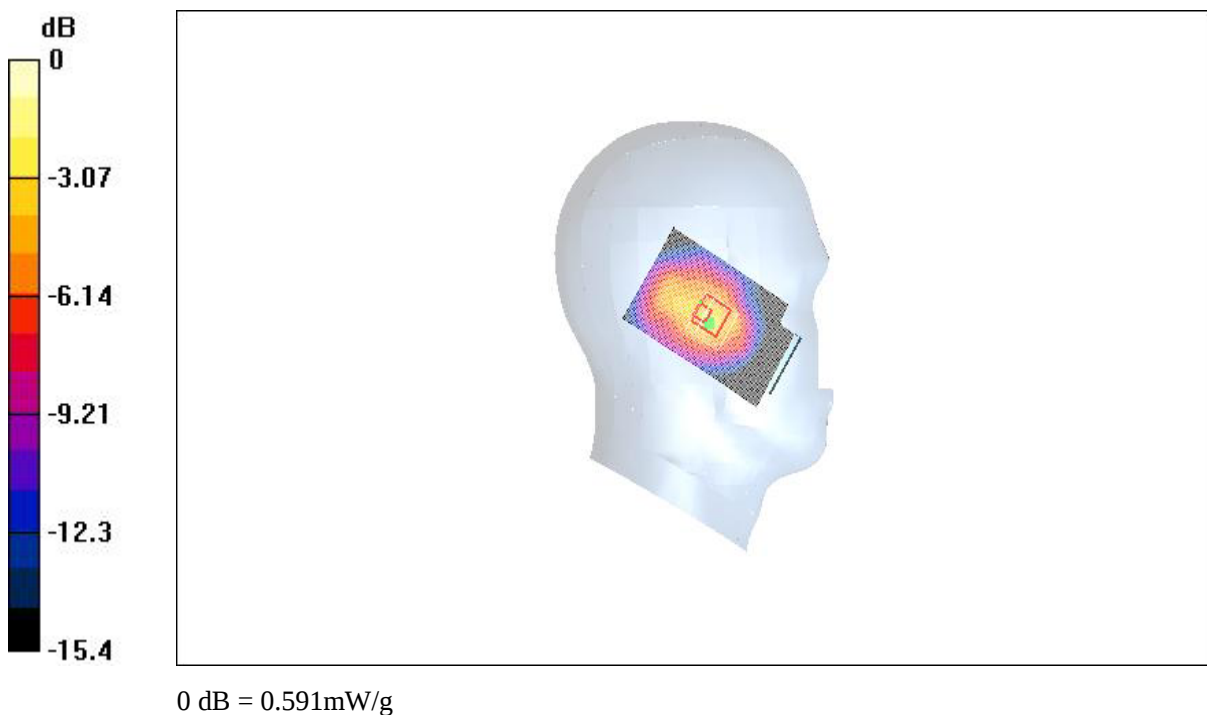


Fig. 1 Left Hand Touch Cheek 835MHz CH777

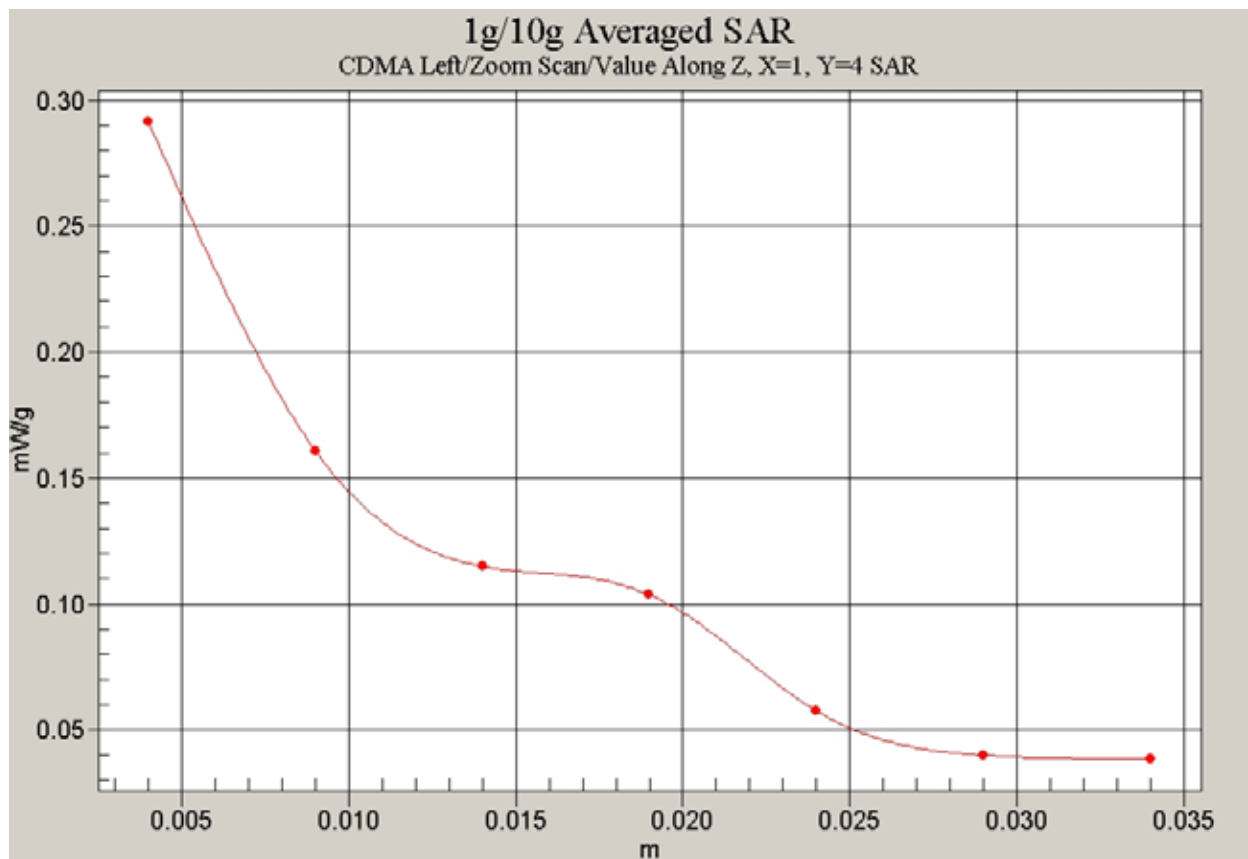


Fig. 2 Z-Scan at power reference point (Left Hand Touch Cheek 835MHz CH777)

835 Left Cheek Middle

Electronics: DAE3 Sn536

Communication System: CDMA 1X-new Frequency: 836.52 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(6.51, 6.51, 6.51)

Cheek Middle/Area Scan (71x121x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 13 V/m; Power Drift = 0.2 dB

Maximum value of SAR (interpolated) = 0.224 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13 V/m; Power Drift = 0.2 dB

Maximum value of SAR (measured) = 0.224 mW/g

Peak SAR (extrapolated) = 0.360 W/kg

SAR(1 g) = 0.194 mW/g; SAR(10 g) = 0.129 mW/g

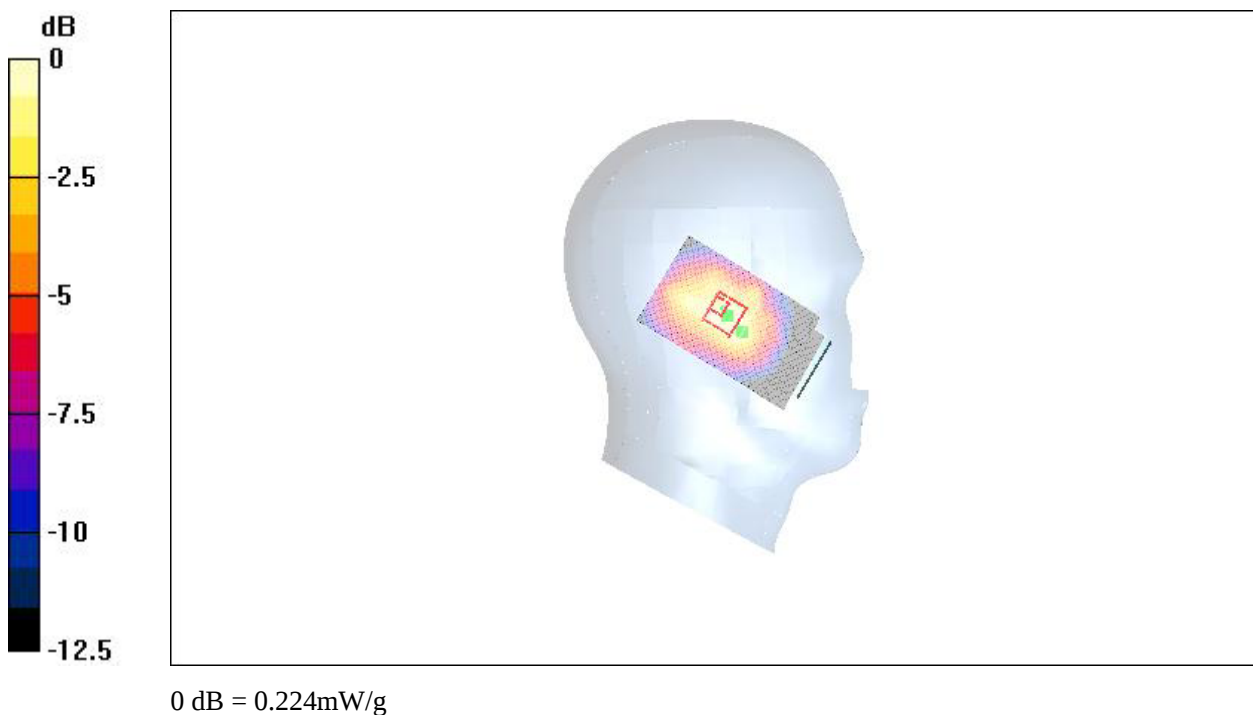


Fig. 3 Left Hand Touch Cheek 835MHz CH384

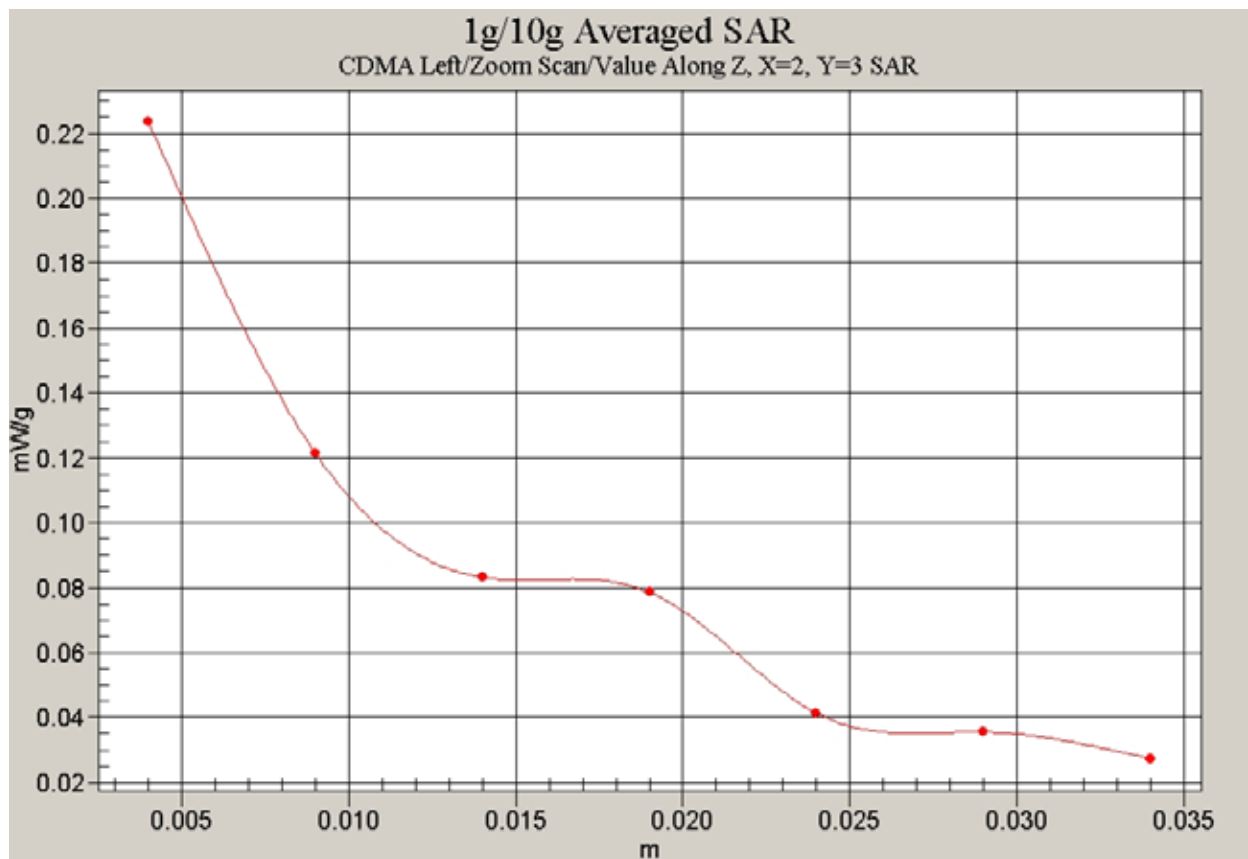


Fig. 4 Z-Scan at power reference point (Left Hand Touch Cheek 835MHz CH384)

835 Left Cheek Low

Electronics: DAE3 Sn536

Communication System: CDMA 1X-new Frequency: 824.7 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(6.51, 6.51, 6.51)

Cheek Low/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 11.4 V/m; Power Drift = 0.2 dB

Maximum value of SAR (interpolated) = 0.204 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.4 V/m; Power Drift = 0.2 dB

Maximum value of SAR (measured) = 0.501 mW/g

Peak SAR (extrapolated) = 0.641 W/kg

SAR(1 g) = 0.167 mW/g; SAR(10 g) = 0.105 mW/g

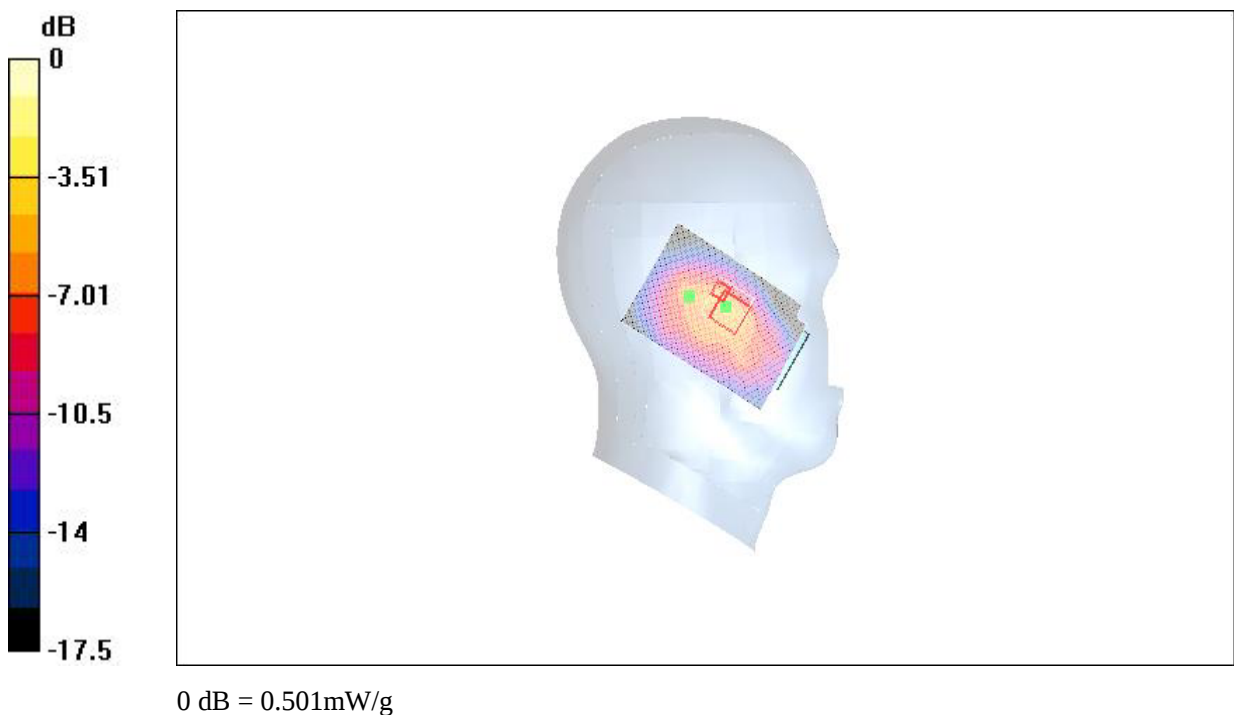


Fig. 5 Left Hand Touch Cheek 835MHz CH1013

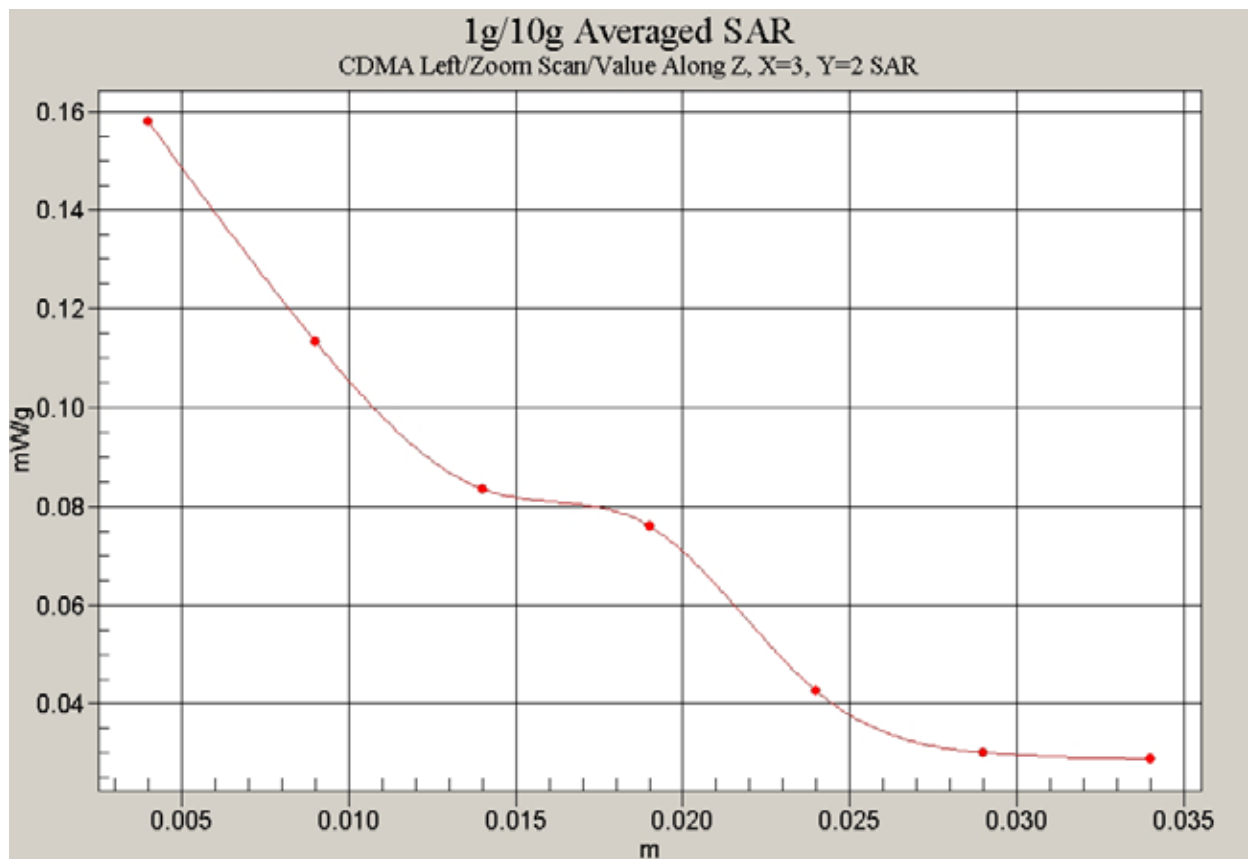


Fig. 6 Z-Scan at power reference point (Left Hand Touch Cheek 835MHz CH1013)

835 Left Tilt High

Electronics: DAE3 Sn536

Communication System: CDMA 1X-new Frequency: 848.31 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(6.51, 6.51, 6.51)

Tilt High/Area Scan (51x81x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 13.2 V/m; Power Drift = -0.2 dB

Maximum value of SAR (interpolated) = 0.161 mW/g

Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.2 V/m; Power Drift = -0.2 dB

Maximum value of SAR (measured) = 0.244 mW/g

Peak SAR (extrapolated) = 0.305 W/kg

SAR(1 g) = 0.164 mW/g; SAR(10 g) = 0.096 mW/g

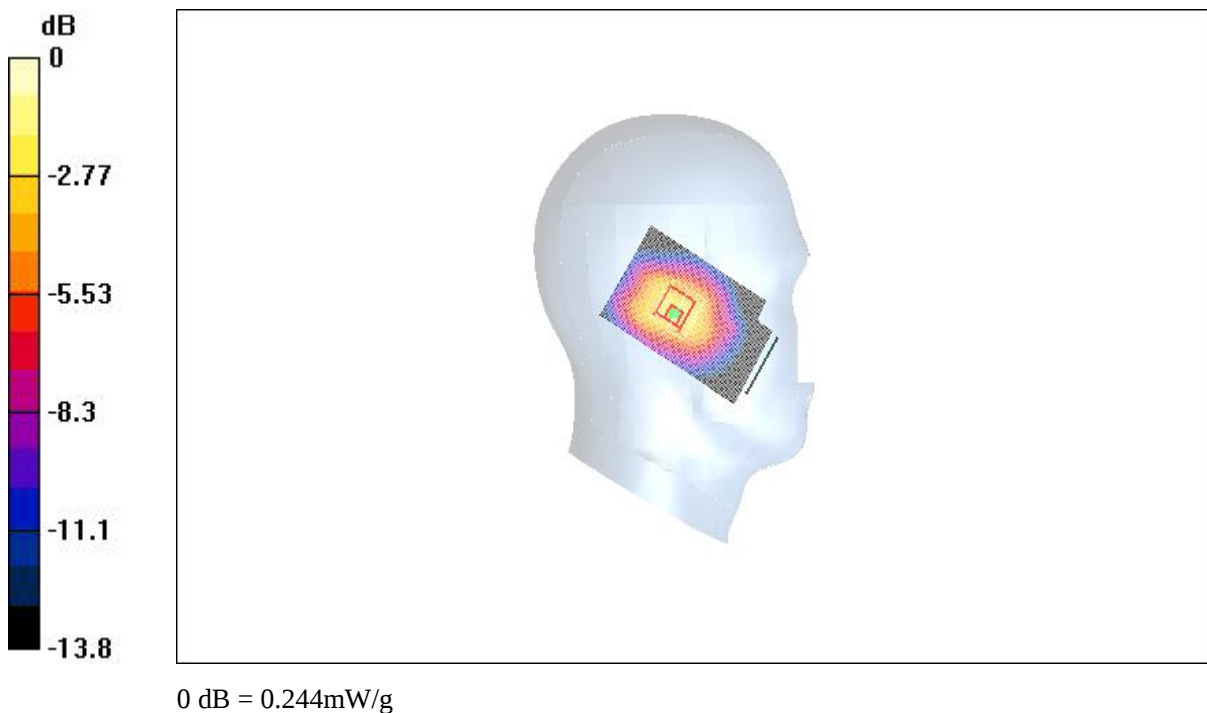


Fig. 7 Left Hand Tilt 15° 835MHz CH777

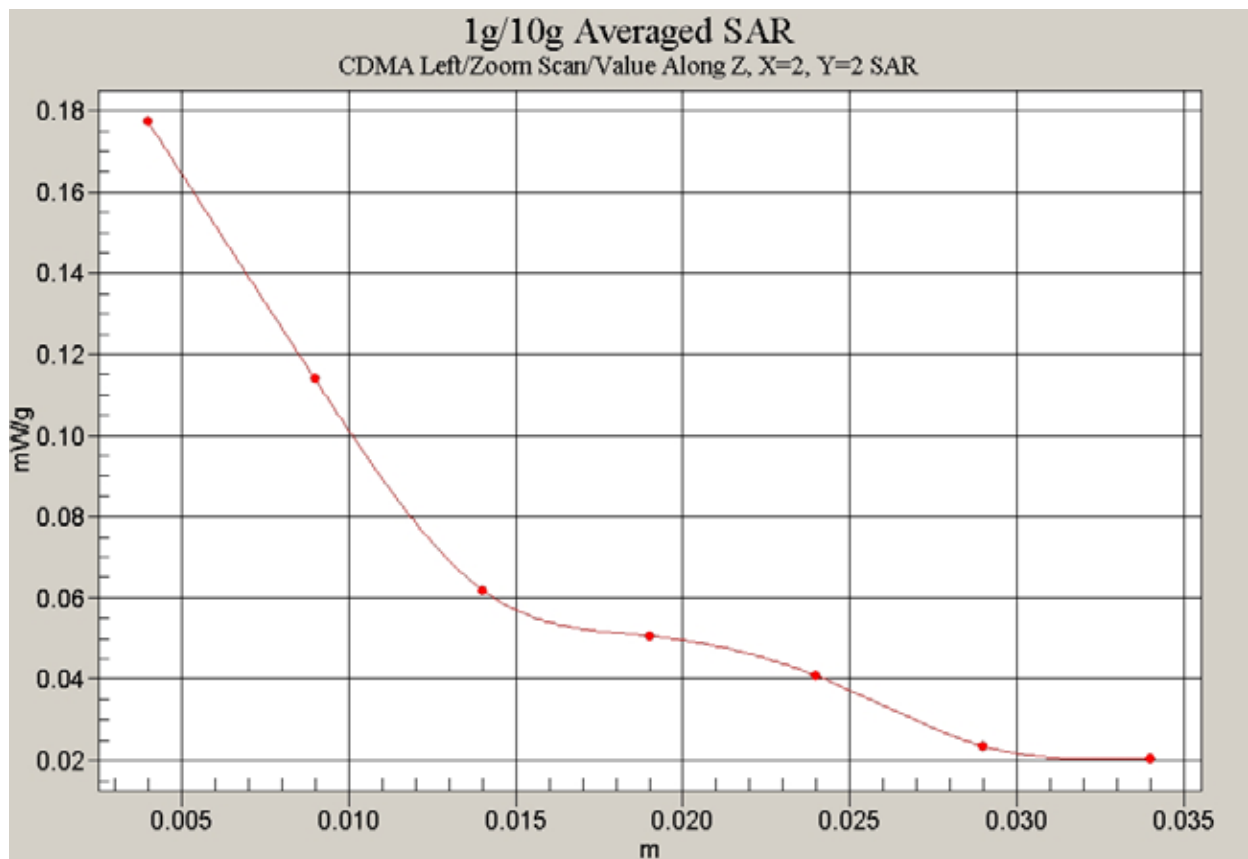


Fig. 8 Z-Scan at power reference point (Left Hand Tilt 15° 835MHz CH777)

835 Left Tilt Middle

Electronics: DAE3 Sn536

Communication System: CDMA 1X-new Frequency: 836.52 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(6.51, 6.51, 6.51)

Tilt Middle/Area Scan (51x81x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 10.6 V/m; Power Drift = -0.2 dB

Maximum value of SAR (interpolated) = 0.107 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.6 V/m; Power Drift = -0.2 dB

Maximum value of SAR (measured) = 0.175 mW/g

Peak SAR (extrapolated) = 0.175 W/kg

SAR(1 g) = 0.093 mW/g; SAR(10 g) = 0.060 mW/g

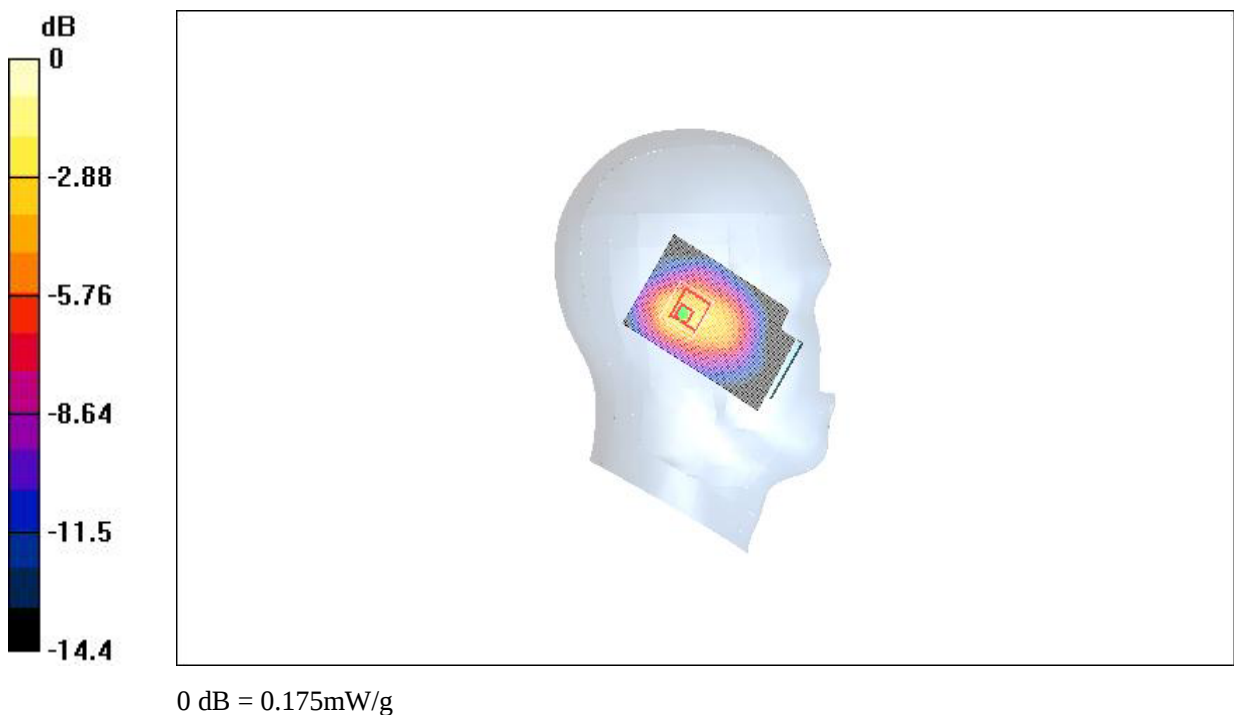


Fig. 9 Left Hand Tilt 15° 835MHz CH384

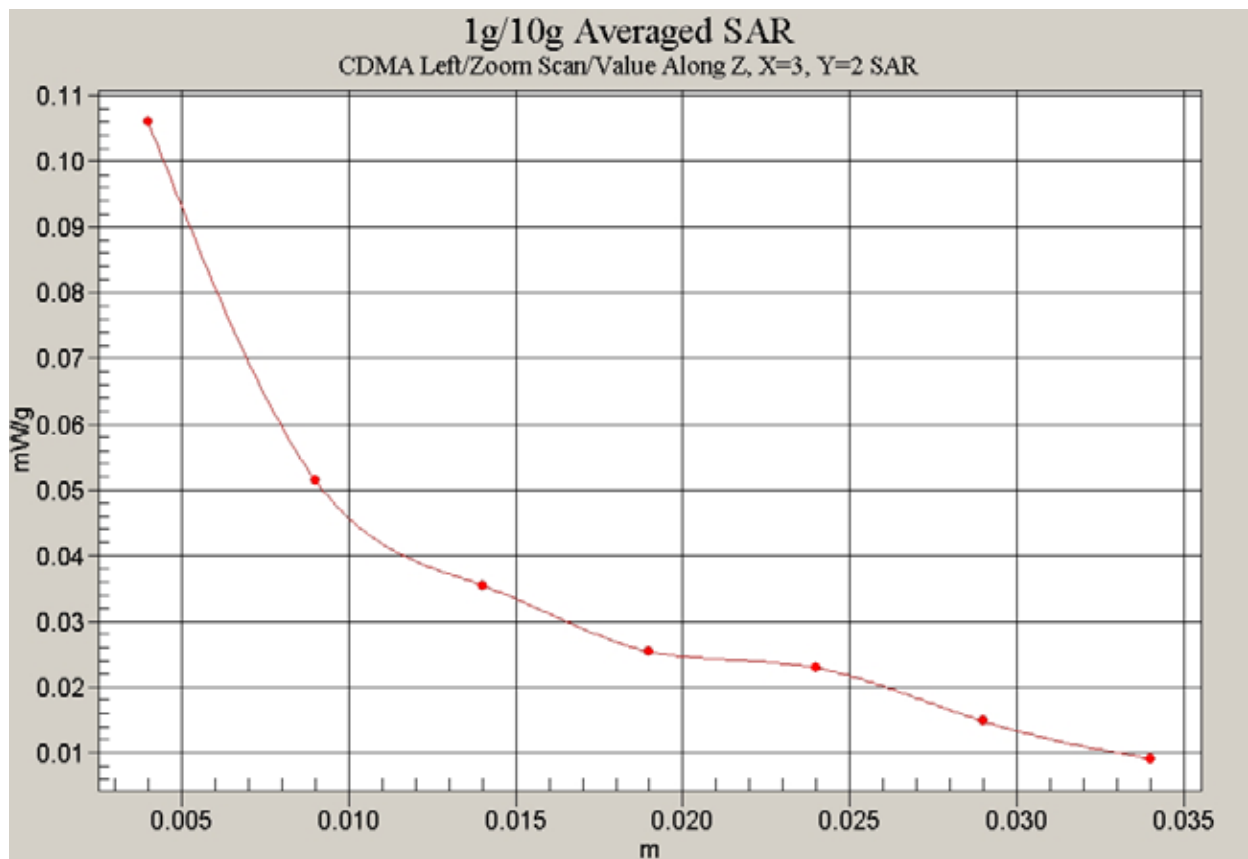


Fig. 10 Z-Scan at power reference point (Left Hand Tilt 15° 835MHz CH384)

835 Left Tilt Low

Electronics: DAE3 Sn536

Communication System: CDMA 1X-new Frequency: 824.7 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(6.51, 6.51, 6.51)

Tilt Low/Area Scan (81x121x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 8.85 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.159 mW/g

Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.85 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.060 mW/g

Peak SAR (extrapolated) = 0.092 W/kg

SAR(1 g) = 0.050 mW/g; SAR(10 g) = 0.027 mW/g

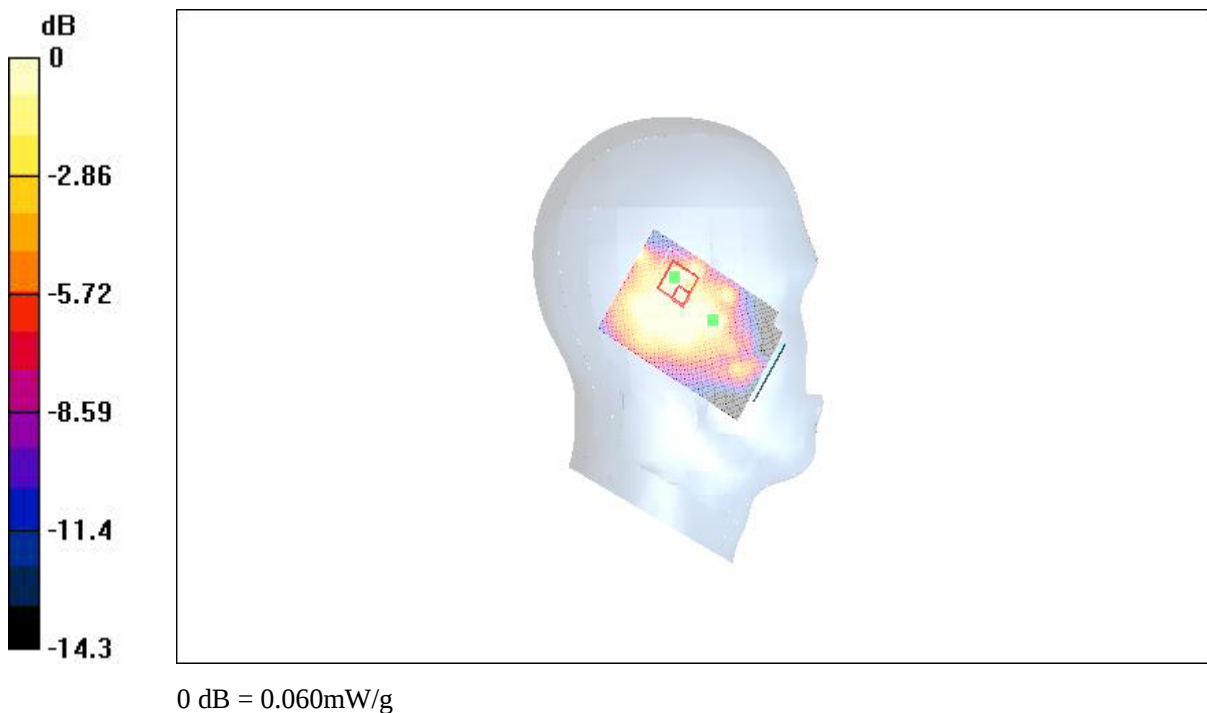


Fig. 11 Left Hand Tilt 15° 835MHz CH1013

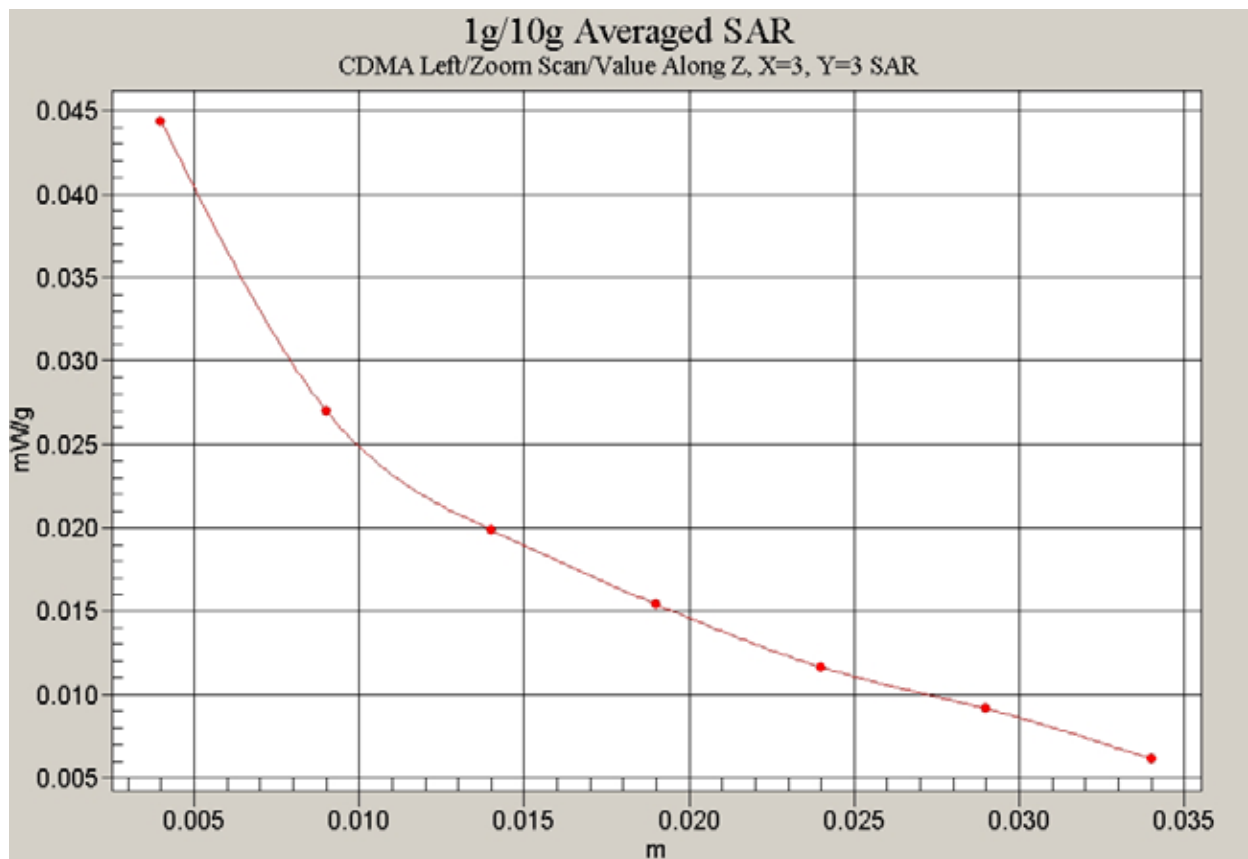


Fig. 12 Z-Scan at power reference point (Left Hand Tilt 15° 835MHz CH1013)

835 Right Cheek High

Electronics: DAE3 Sn536

Communication System: CDMA 1X-new Frequency: 848.31 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(6.51, 6.51, 6.51)

Cheek High/Area Scan (51x81x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 14.5 V/m; Power Drift = 0.1 dB

Maximum value of SAR (interpolated) = 0.301 mW/g

Cheek High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.5 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 0.311 mW/g

Peak SAR (extrapolated) = 0.434 W/kg

SAR(1 g) = 0.262 mW/g; SAR(10 g) = 0.170 mW/g

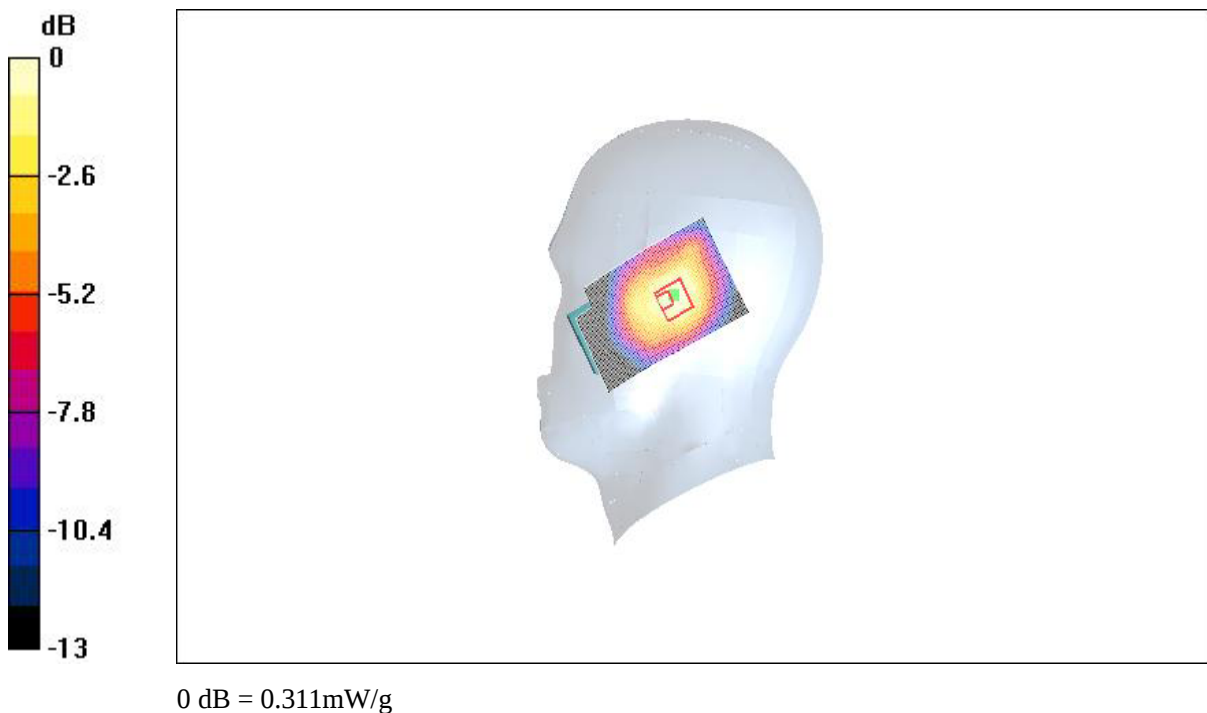


Fig. 13 Right Hand Touch Cheek 835MHz CH777

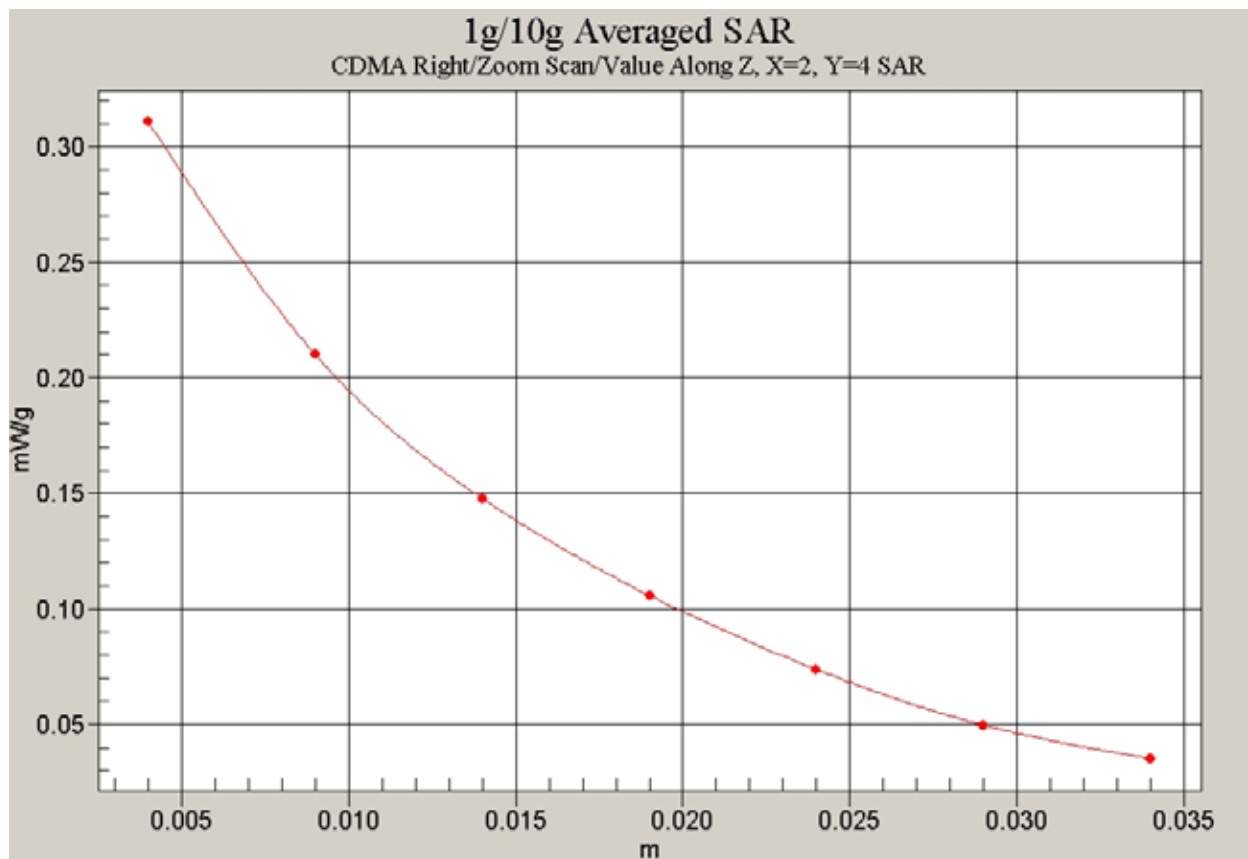


Fig. 14 Z-Scan at power reference point (Right Hand Touch Cheek 835MHz CH777)

835 Right Cheek Middle

Electronics: DAE3 Sn536

Communication System: CDMA 1X-new Frequency: 836.52 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(6.51, 6.51, 6.51)

Cheek Middle/Area Scan (51x81x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 12.2 V/m; Power Drift = 0.1 dB

Maximum value of SAR (interpolated) = 0.322 mW/g

Cheek Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.2 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 0.290 mW/g

Peak SAR (extrapolated) = 0.432 W/kg

SAR(1 g) = 0.216 mW/g; SAR(10 g) = 0.124 mW/g

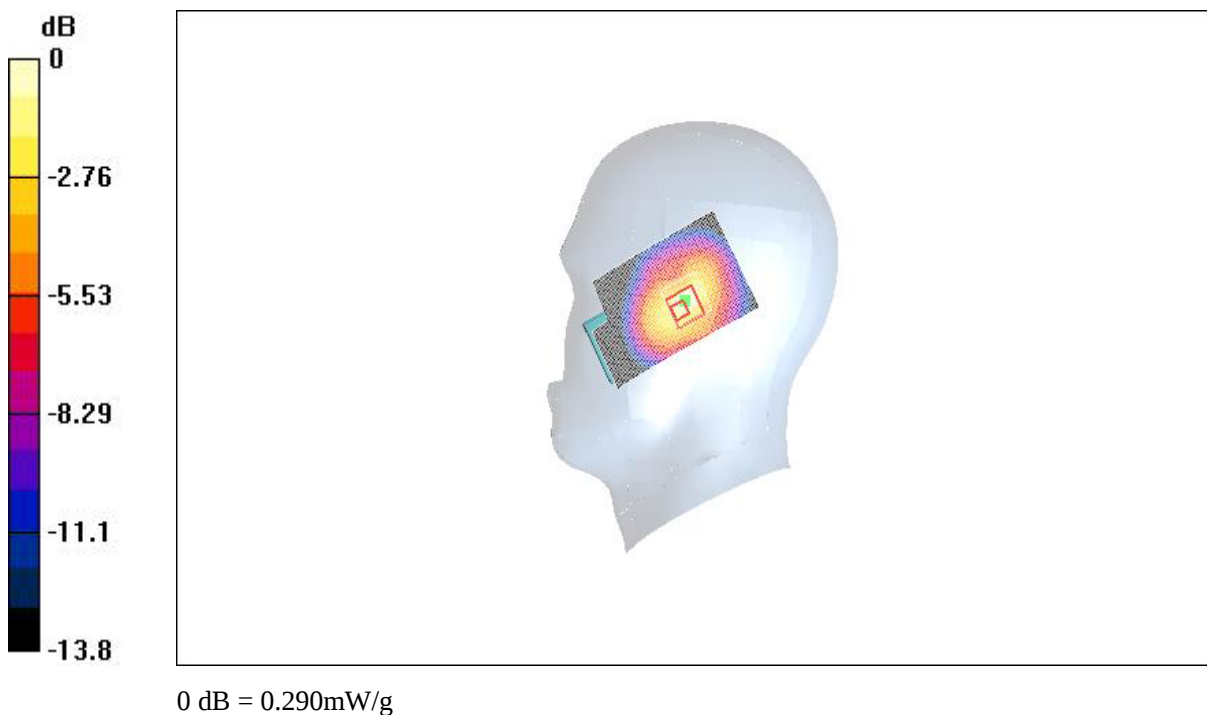


Fig.15 Right Hand Touch Cheek 835MHz CH384

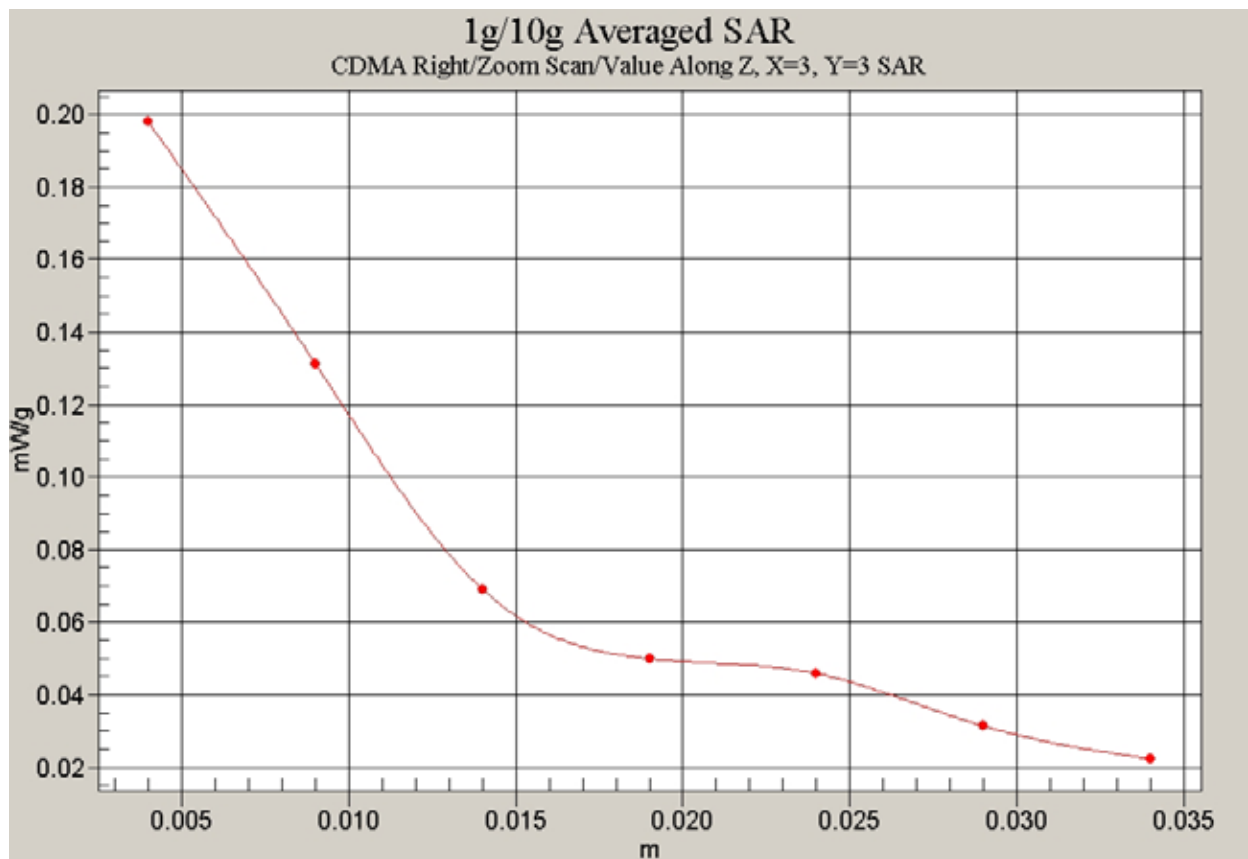


Fig. 16 Z-Scan at power reference point (Right Hand Touch Cheek 835MHz CH384)

835 Right Cheek Low

Electronics: DAE3 Sn536

Communication System: CDMA 1X-new Frequency: 824.7 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(6.51, 6.51, 6.51)

Cheek Low/Area Scan (51x81x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 13.7 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.200 mW/g

Cheek Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.7 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.251 mW/g

Peak SAR (extrapolated) = 0.274 W/kg

SAR(1 g) = 0.204 mW/g; SAR(10 g) = 0.132 mW/g

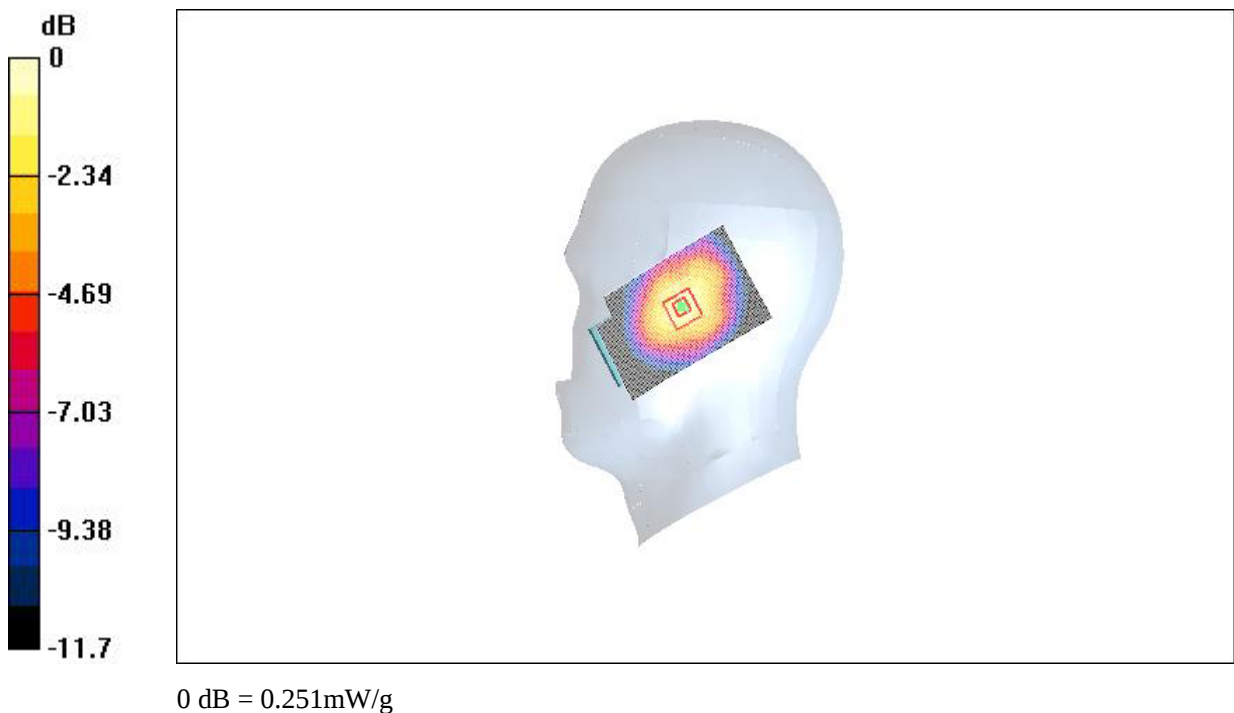


Fig. 17 Right Hand Touch Cheek 835MHz CH1013

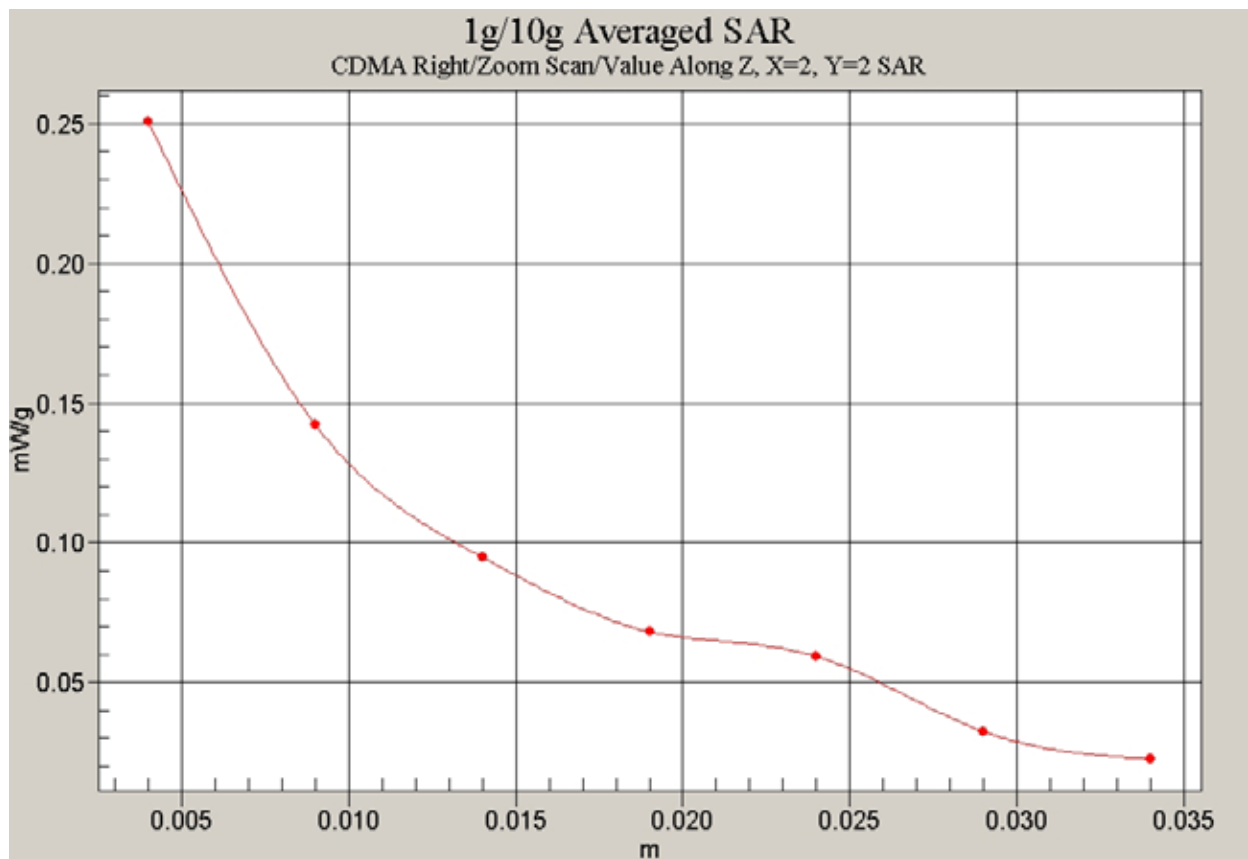


Fig. 18 Z-Scan at power reference point (Right Hand Touch Cheek 835MHz CH1013)

835 Right Tilt High

Electronics: DAE3 Sn536

Communication System: CDMA 1X-new Frequency: 848.31 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(6.51, 6.51, 6.51)

Tilt High/Area Scan (71x121x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 11.2 V/m; Power Drift = 0.2 dB

Maximum value of SAR (interpolated) = 0.161 mW/g

Tilt High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = 0.2 dB

Maximum value of SAR (measured) = 0.213 mW/g

Peak SAR (extrapolated) = 0.256 W/kg

SAR(1 g) = 0.140 mW/g; SAR(10 g) = 0.091 mW/g

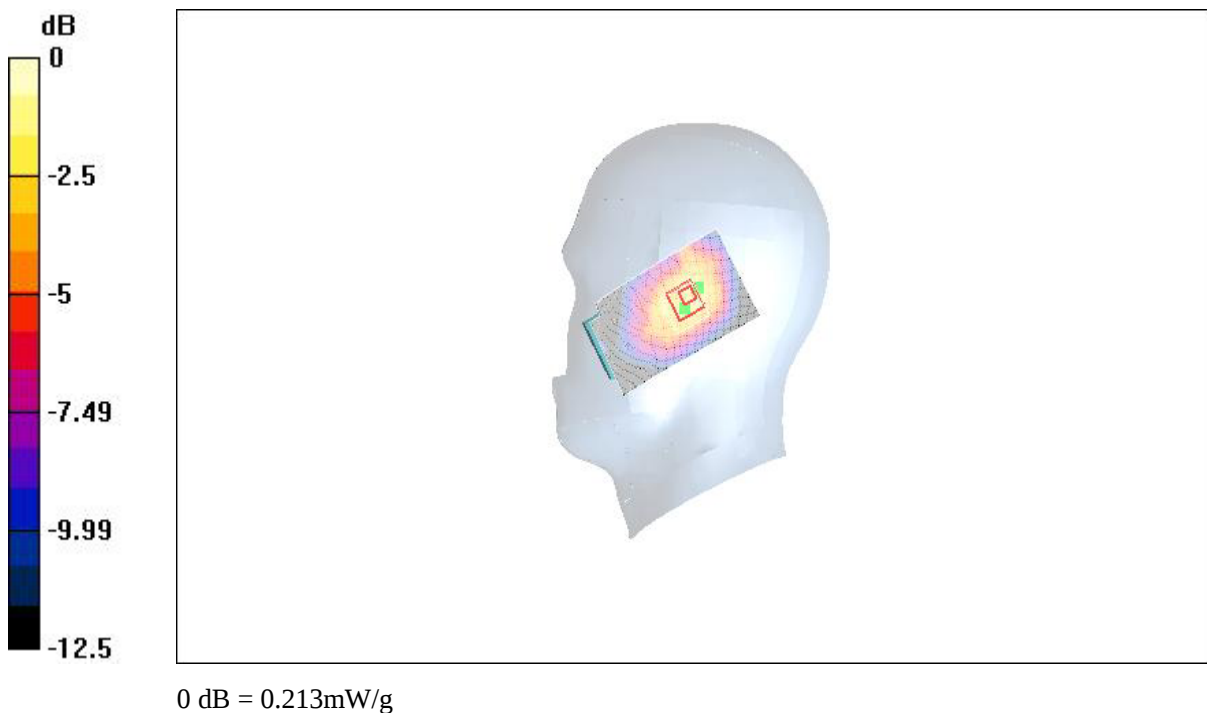


Fig. 19 Right Hand Tilt 15°835MHz CH777

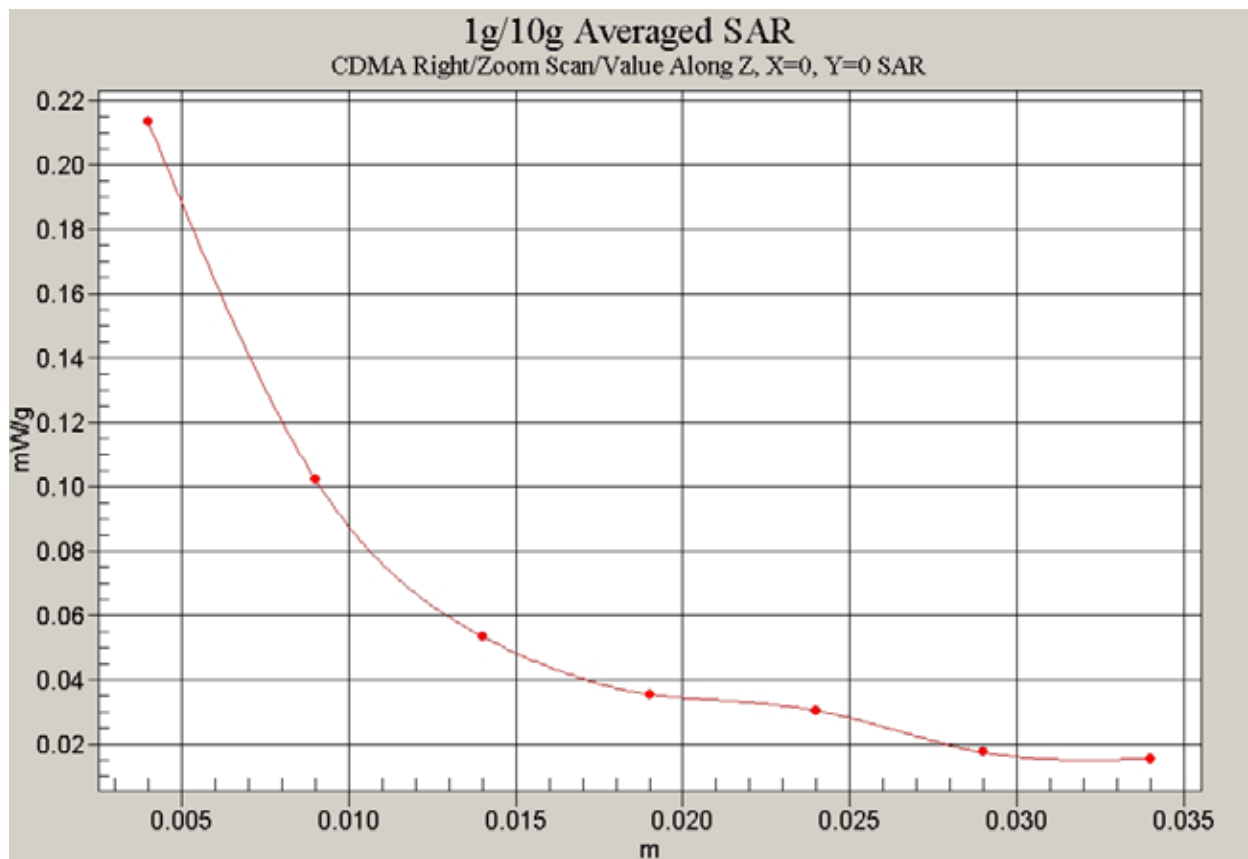


Fig. 20 Z-Scan at power reference point (Right Hand Tilt 15° 835MHz CH777)

835 Right Tilt Middle

Electronics: DAE3 Sn536

Communication System: CDMA 1X-new Frequency: 836.52 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(6.51, 6.51, 6.51)

Tilt Middle/Area Scan (71x121x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 9.76 V/m; Power Drift = 0.2 dB

Maximum value of SAR (interpolated) = 0.119 mW/g

Tilt Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.76 V/m; Power Drift = 0.2 dB

Maximum value of SAR (measured) = 0.109 mW/g

Peak SAR (extrapolated) = 0.157 W/kg

SAR(1 g) = 0.091 mW/g; SAR(10 g) = 0.056 mW/g

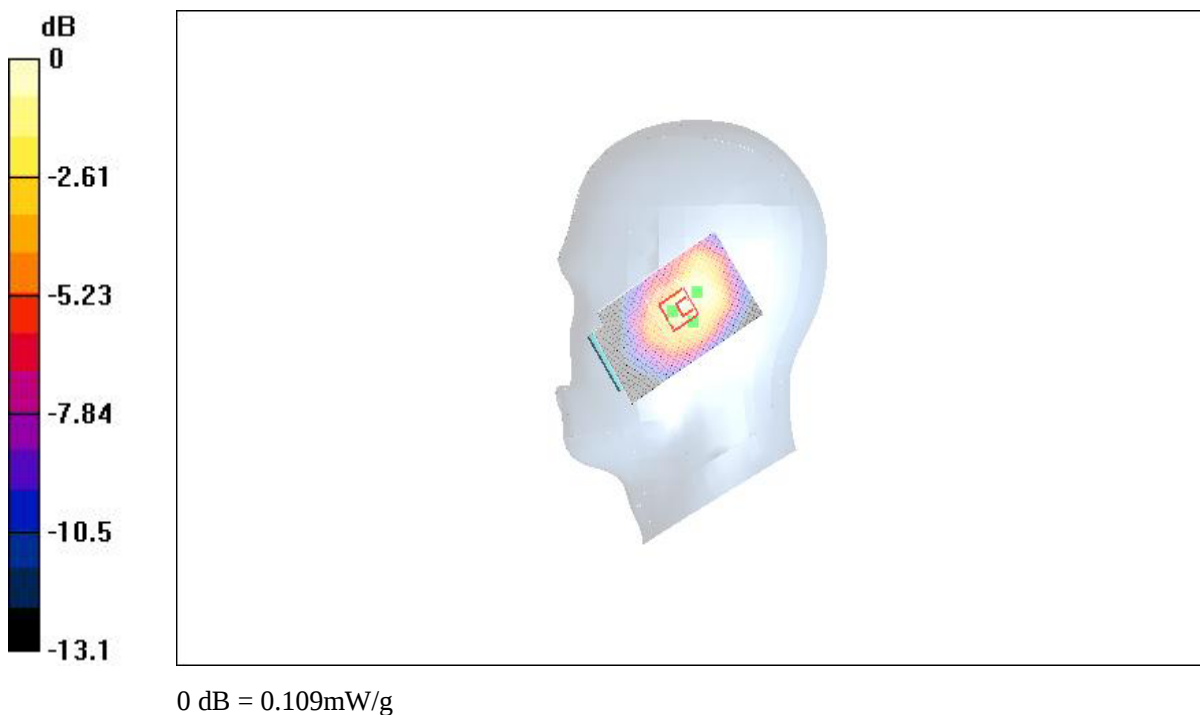


Fig. 21 Right Hand Tilt 15°835MHz CH384

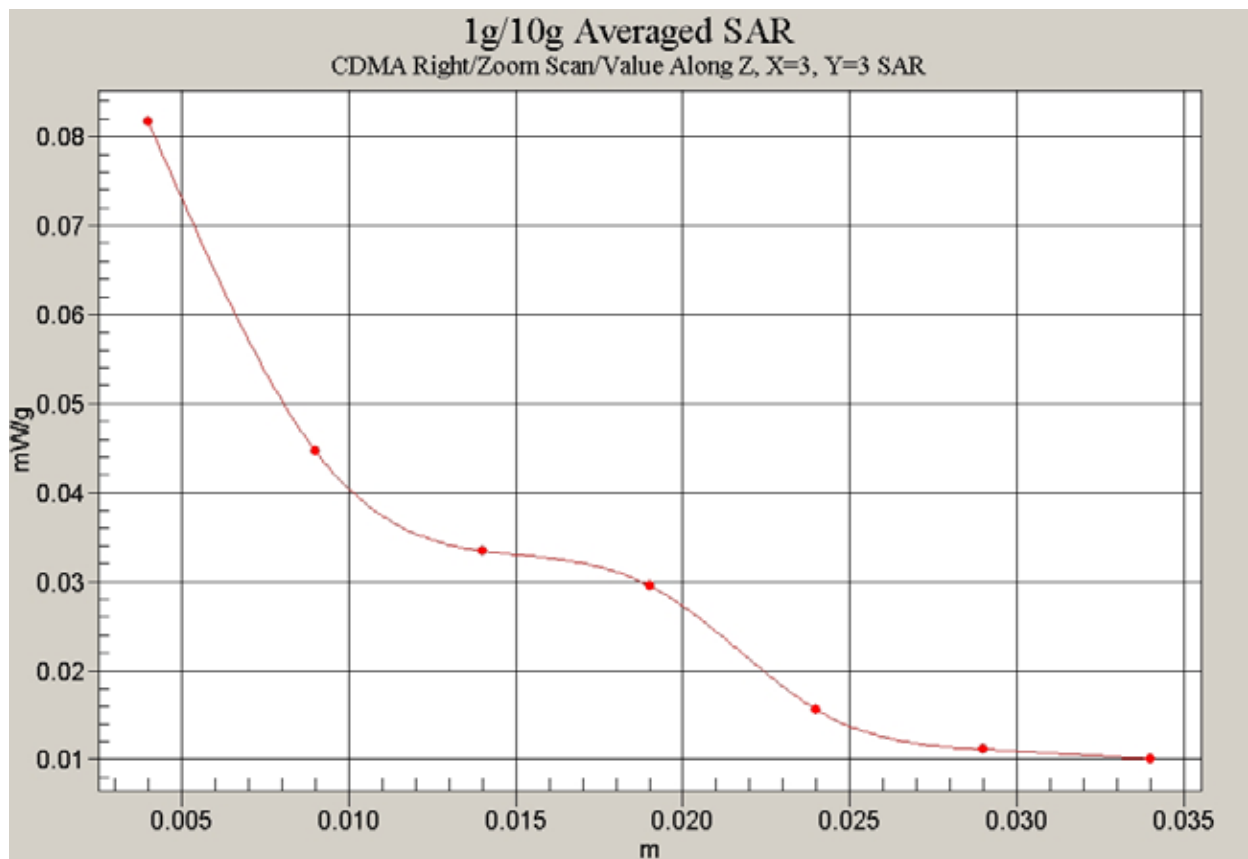


Fig. 22 Z-Scan at power reference point (Right Hand Tilt 15° 835MHz CH384)

835 Right Tilt Low

Electronics: DAE3 Sn536

Communication System: CDMA 1X-new Frequency: 824.7 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(6.51, 6.51, 6.51)

Tilt Low/Area Scan (51x81x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 10.7 V/m; Power Drift = 0.002 dB

Maximum value of SAR (interpolated) = 0.116 mW/g

Tilt Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.7 V/m; Power Drift = 0.002 dB

Maximum value of SAR (measured) = 0.126 mW/g

Peak SAR (extrapolated) = 0.225 W/kg

SAR(1 g) = 0.116 mW/g; SAR(10 g) = 0.075 mW/g

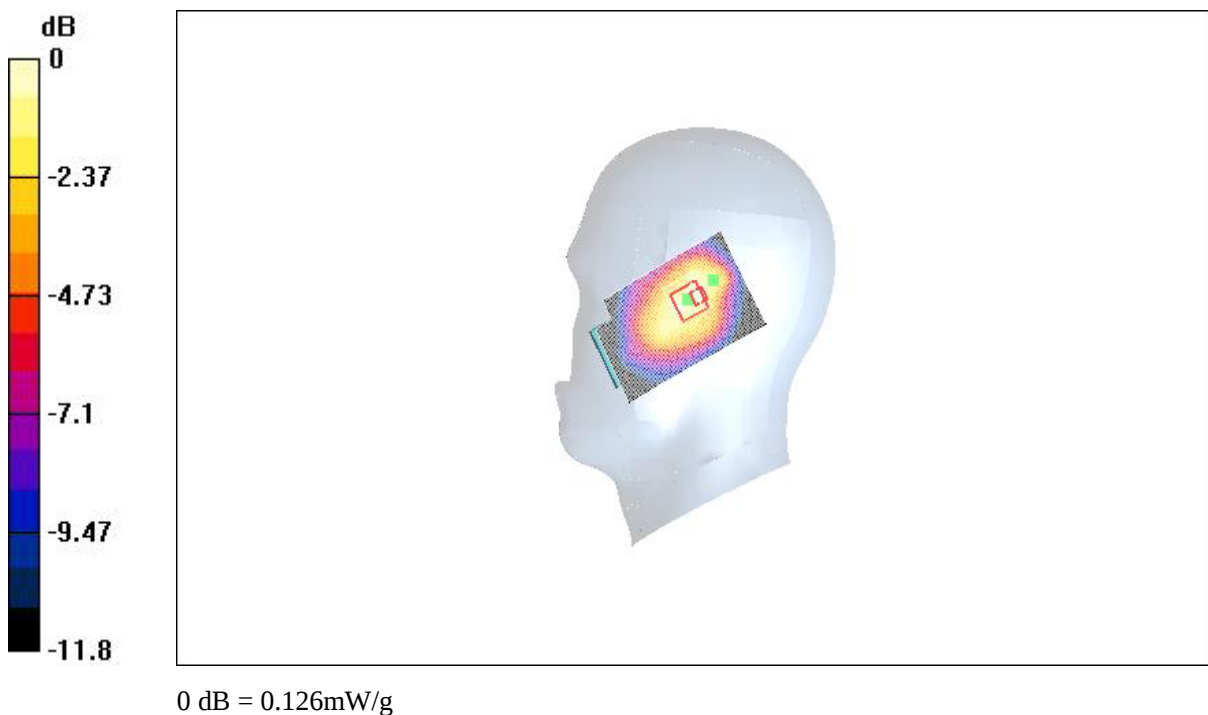


Fig. 23 Right Hand Tilt 15° 835MHz CH1013

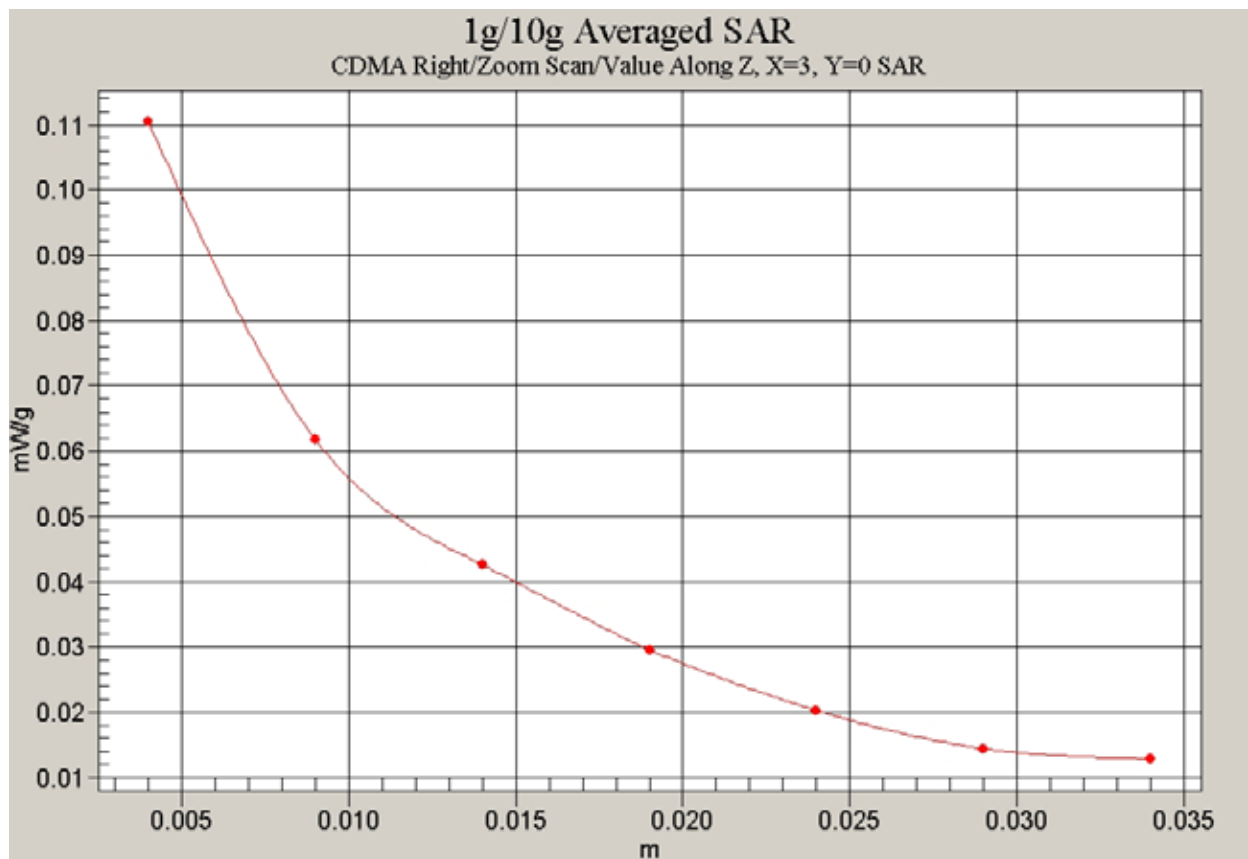


Fig. 24 Z-Scan at power reference point (Right Hand Tilt 15° 835MHz CH1013)

835 Body Towards Ground High

Electronics: DAE3 Sn536

Communication System: CDMA 1X-new Frequency: 848.31 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(6.45, 6.45, 6.45)

Toward Ground High/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 12.1 V/m; Power Drift = -0.2 dB

Maximum value of SAR (interpolated) = 0.287 mW/g

Toward Ground High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.1 V/m; Power Drift = -0.2 dB

Maximum value of SAR (measured) = 0.251 mW/g

Peak SAR (extrapolated) = 0.364 W/kg

SAR(1 g) = 0.218 mW/g; SAR(10 g) = 0.152 mW/g

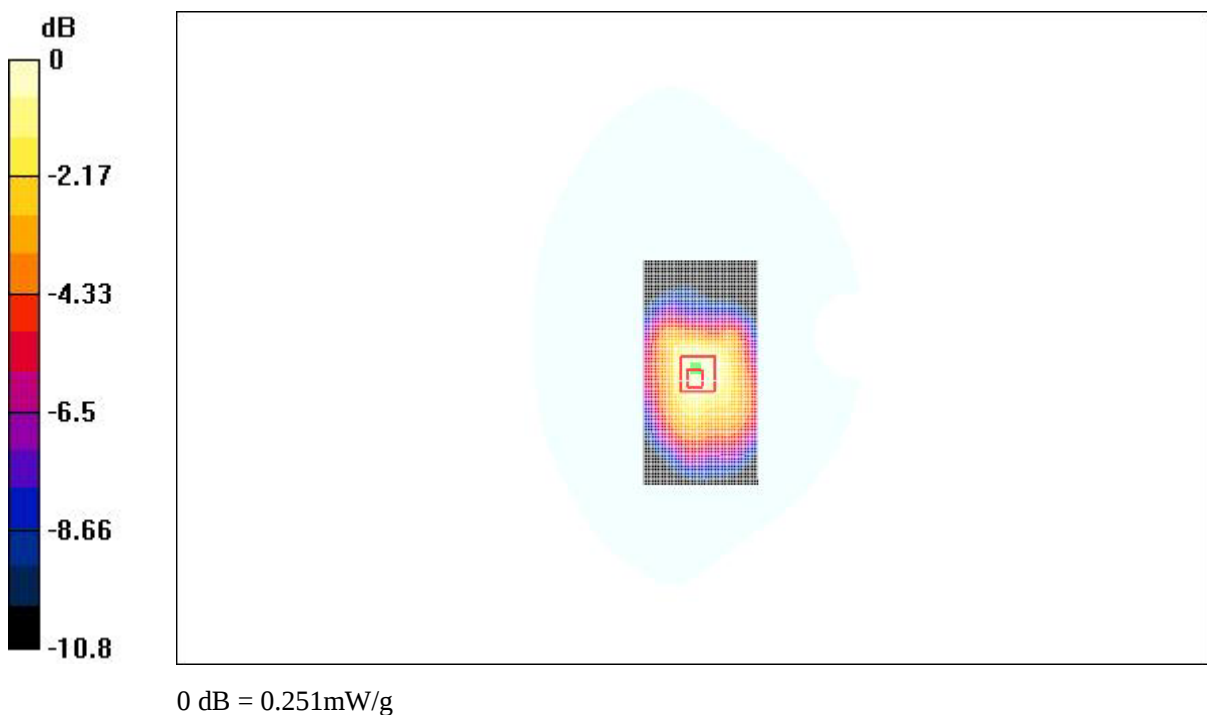


Fig. 25 Flat Phantom Body-worn Position 835MHz CH777 with the display of the handset towards the ground

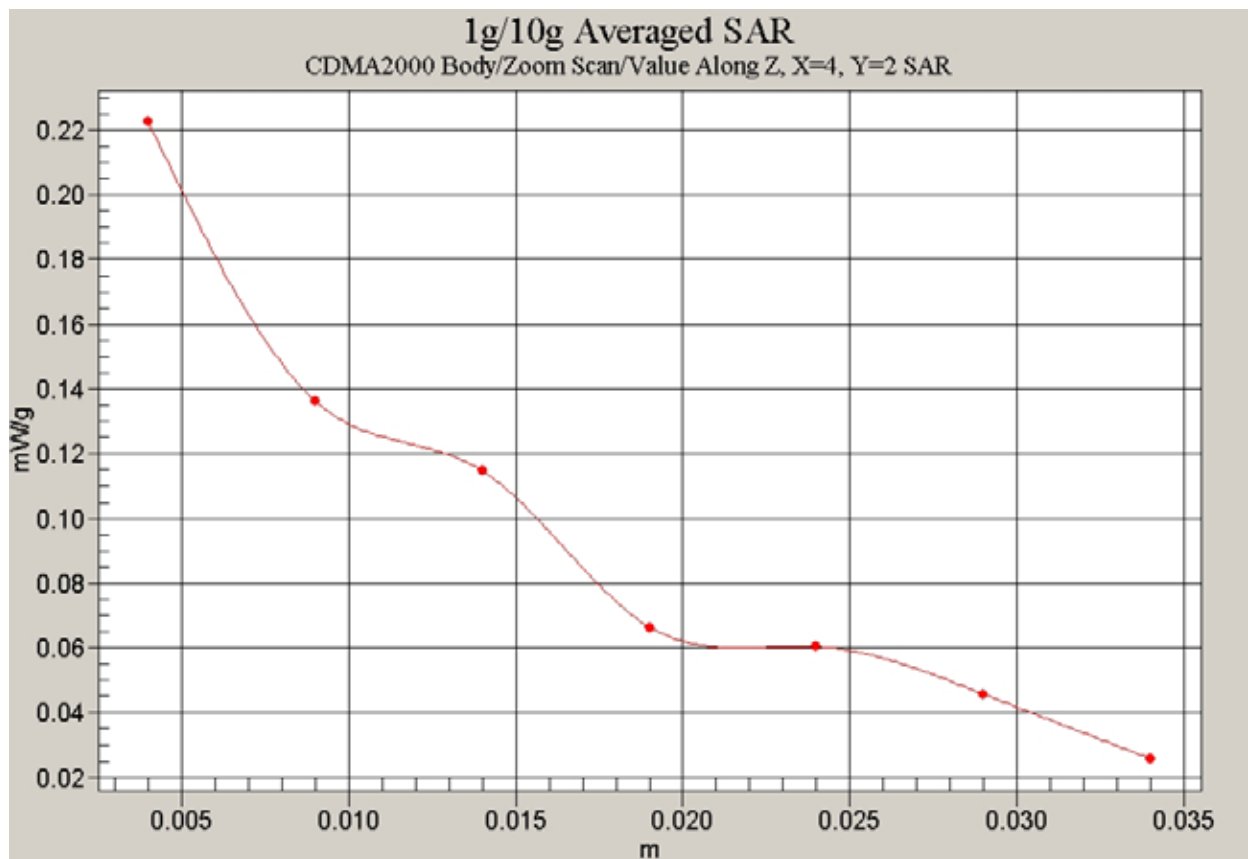


Fig. 26 Z-Scan at power reference point (Flat Phantom 835MHz CH777 with the display of the handset towards the ground)

835 Body Towards Ground Middle

Electronics: DAE3 Sn536

Communication System: CDMA 1X-new Frequency: 836.52 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(6.45, 6.45, 6.45)

Toward Ground Middle/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 12.8 V/m; Power Drift = -0.1 dB

Maximum value of SAR (interpolated) = 0.303 mW/g

Toward Ground Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.8 V/m; Power Drift = -0.1 dB

Maximum value of SAR (measured) = 0.280 mW/g

Peak SAR (extrapolated) = 0.431 W/kg

SAR(1 g) = 0.246 mW/g; SAR(10 g) = 0.174 mW/g

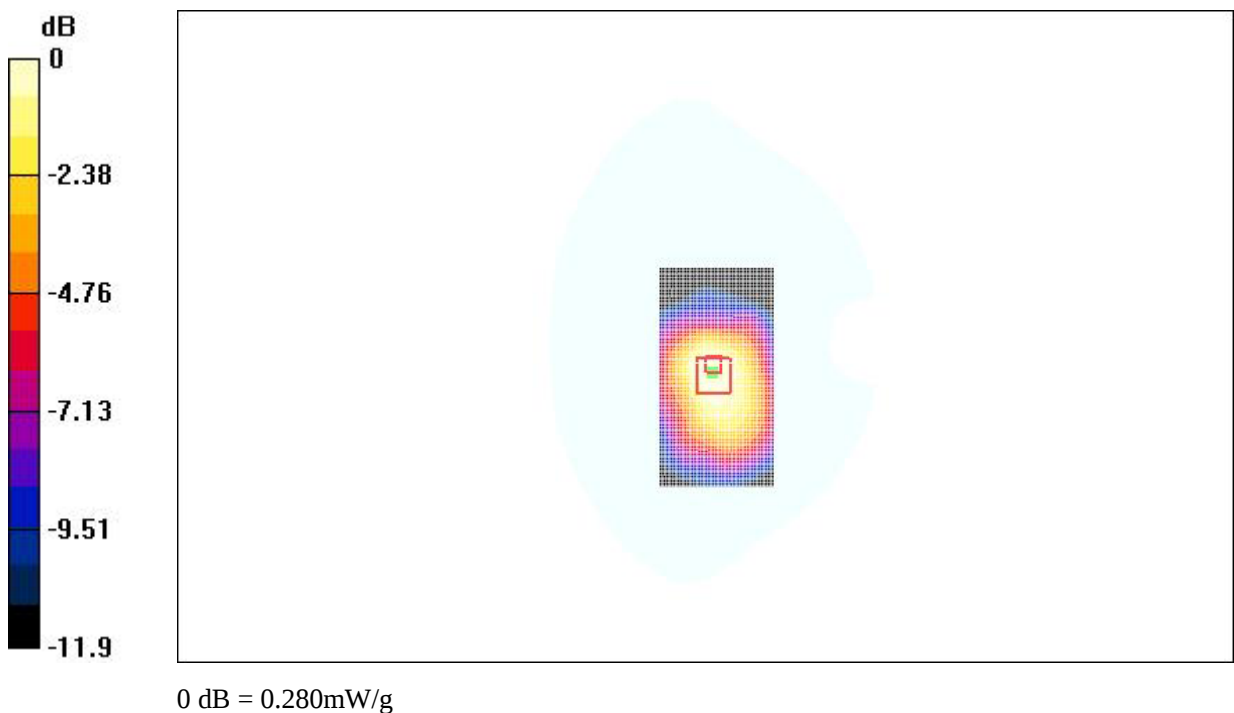


Fig. 27 Flat Phantom Body-worn Position 835MHz CH384 with the display of the handset towards the ground

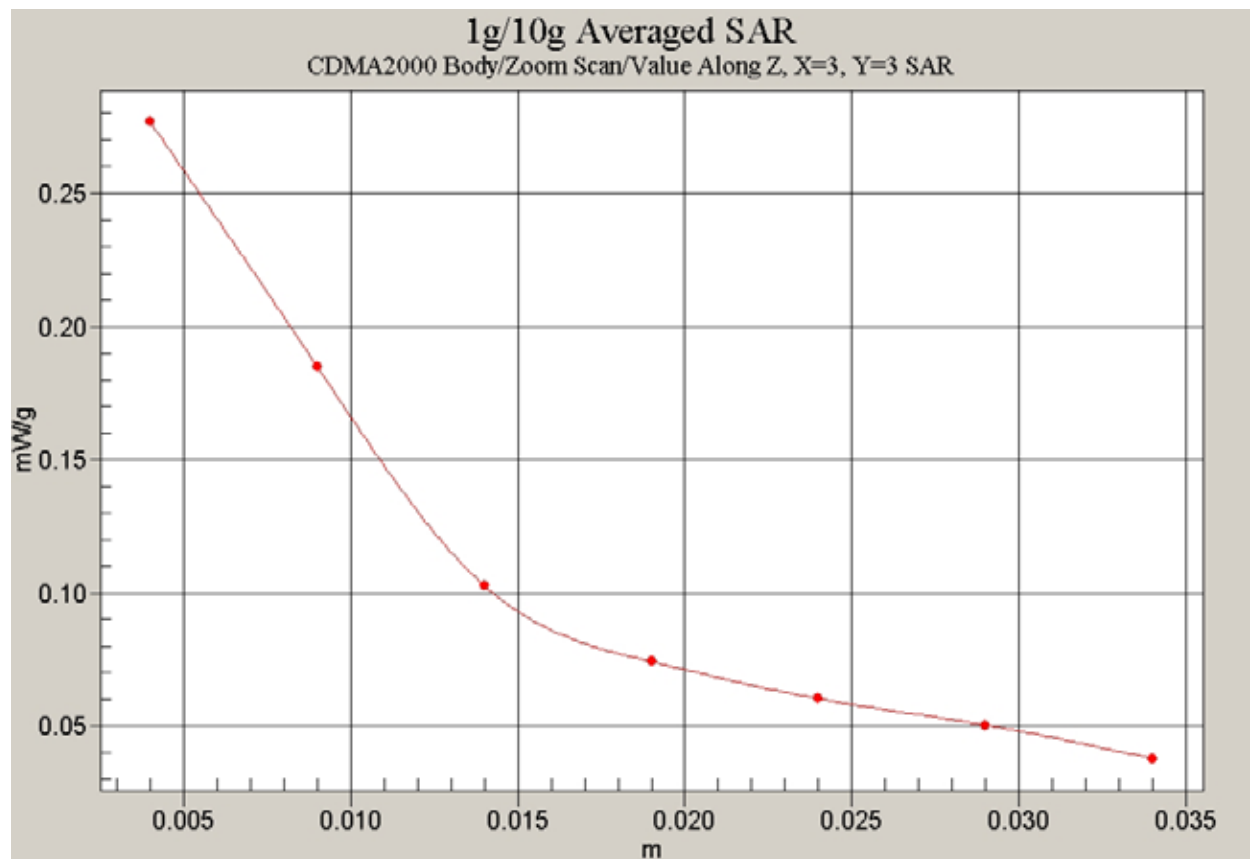


Fig. 28 Z-Scan at power reference point (Flat Phantom 835MHz CH384 with the display of the handset towards the ground)

835 Body Towards Ground Low

Electronics: DAE3 Sn536

Communication System: CDMA 1X-new Frequency: 824.7 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(6.45, 6.45, 6.45)

Toward Ground Low/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 11.9 V/m; Power Drift = 0.2 dB

Maximum value of SAR (interpolated) = 0.483 mW/g

Toward Ground Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.9 V/m; Power Drift = 0.2 dB

Maximum value of SAR (measured) = 0.295 mW/g

Peak SAR (extrapolated) = 0.515 W/kg

SAR(1 g) = 0.274 mW/g; SAR(10 g) = 0.152 mW/g

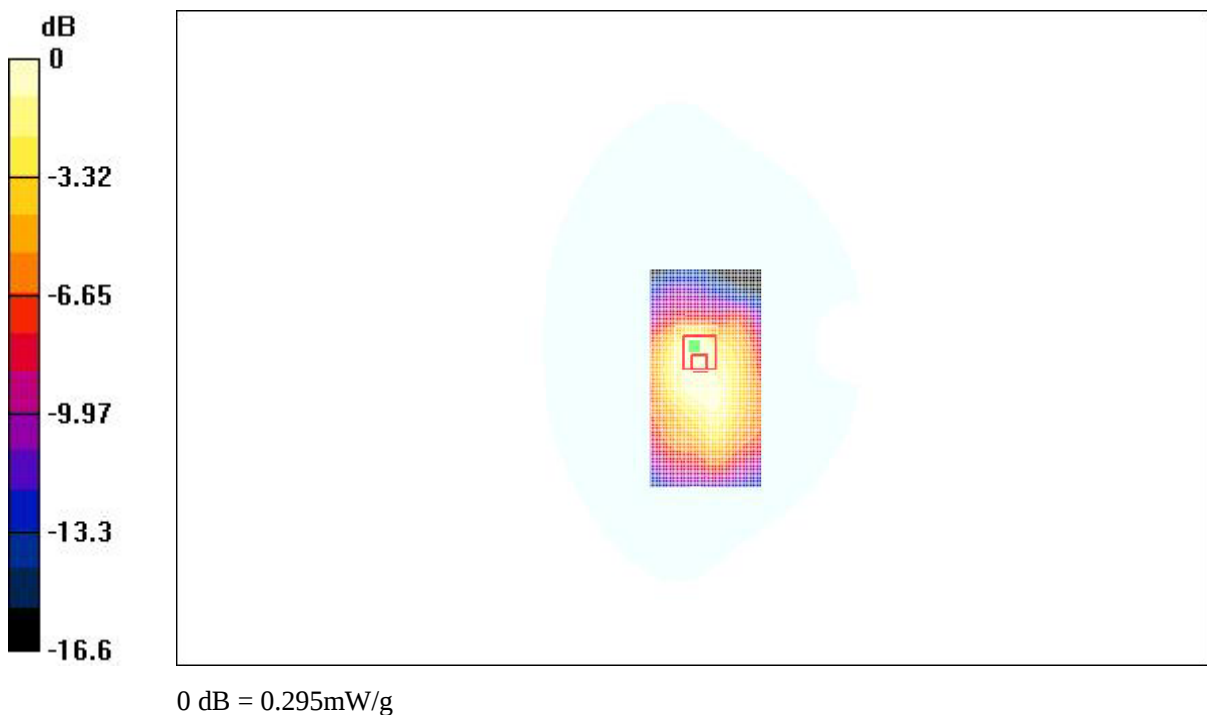


Fig. 29 Flat Phantom Body-worn Position 835MHz CH1013 with the display of the handset towards the ground

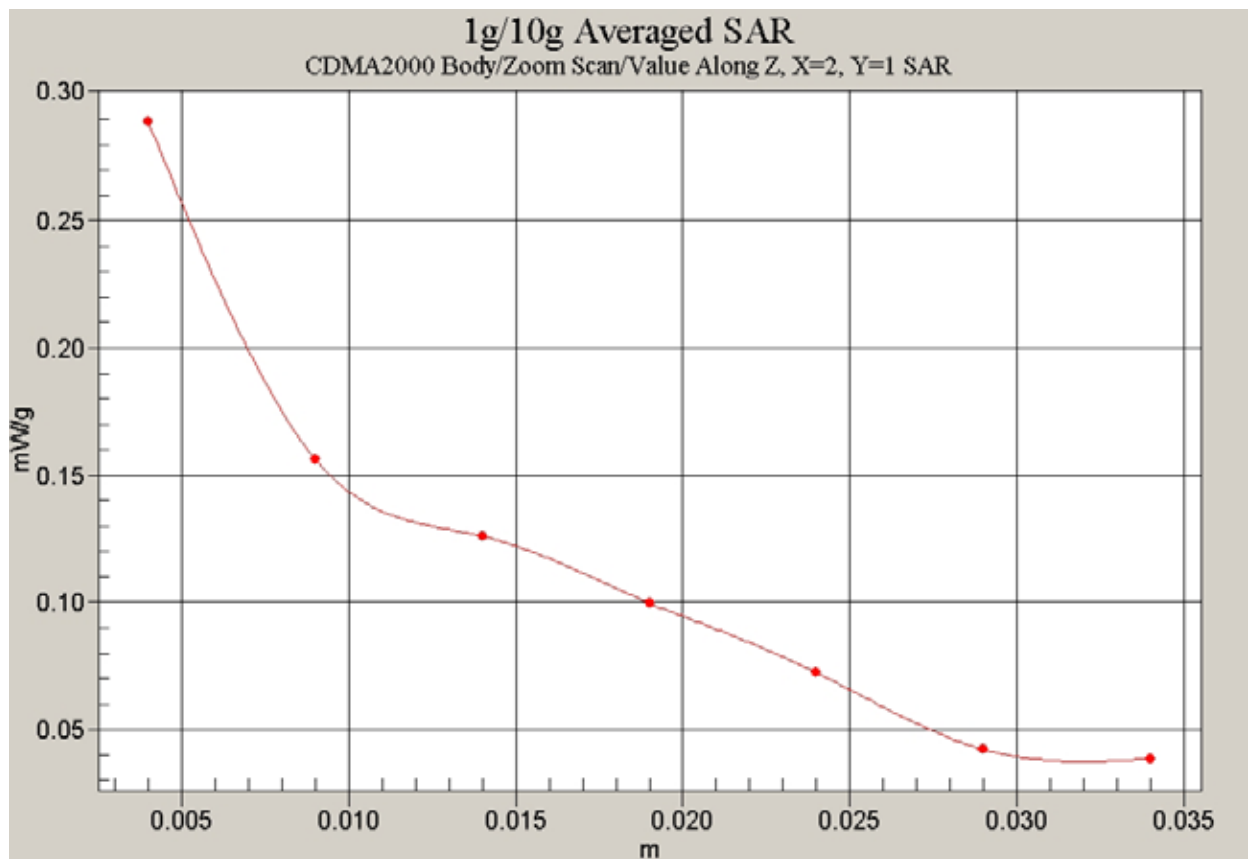


Fig. 30 Z-Scan at power reference point (Flat Phantom 835MHz CH1013 with the display of the handset towards the ground)

835 Body Towards Phantom High

Electronics: DAE3 Sn536

Communication System: CDMA 1X-new Frequency: 848.31 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(6.45, 6.45, 6.45)

Toward Phantom High/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 9.53 V/m; Power Drift = 0.2 dB

Maximum value of SAR (interpolated) = 0.151 mW/g

Toward Phantom High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.53 V/m; Power Drift = 0.2 dB

Maximum value of SAR (measured) = 0.816 mW/g

Peak SAR (extrapolated) = 2.7 W/kg

SAR(1 g) = 0.188 mW/g; SAR(10 g) = 0.097 mW/g

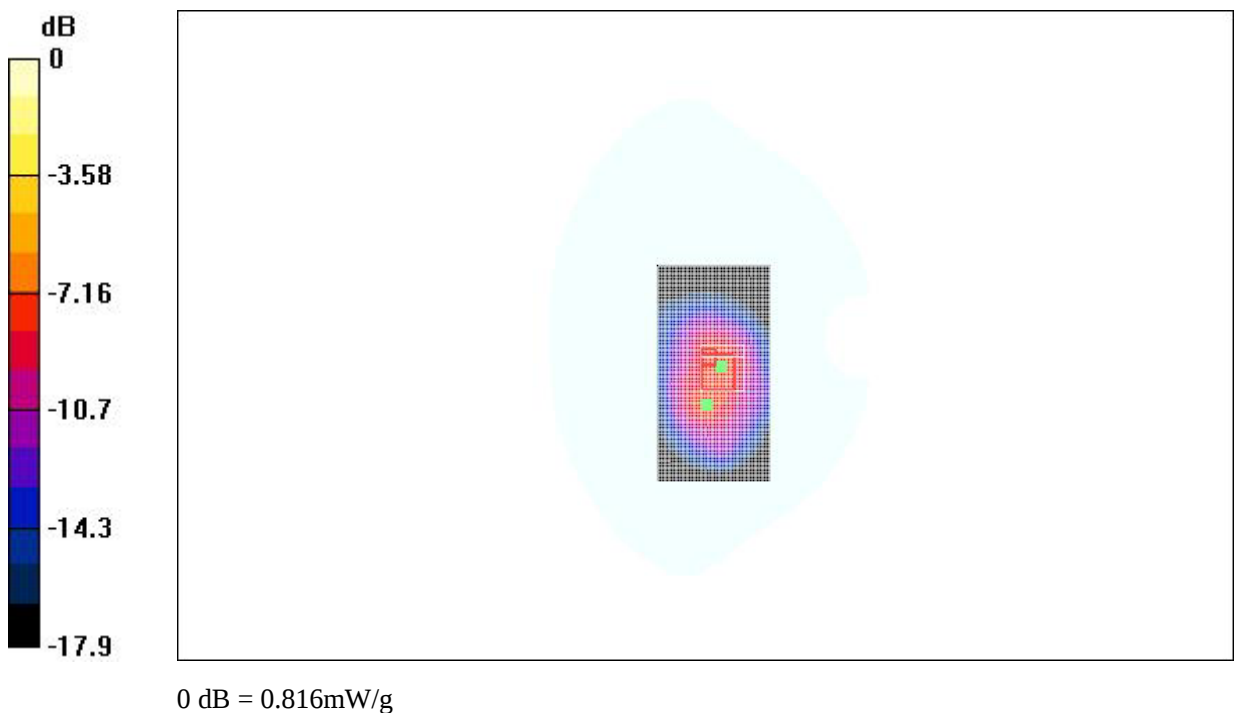


Fig. 31 Flat Phantom Body-worn Position 835MHz CH777 with the display of the handset towards the phantom

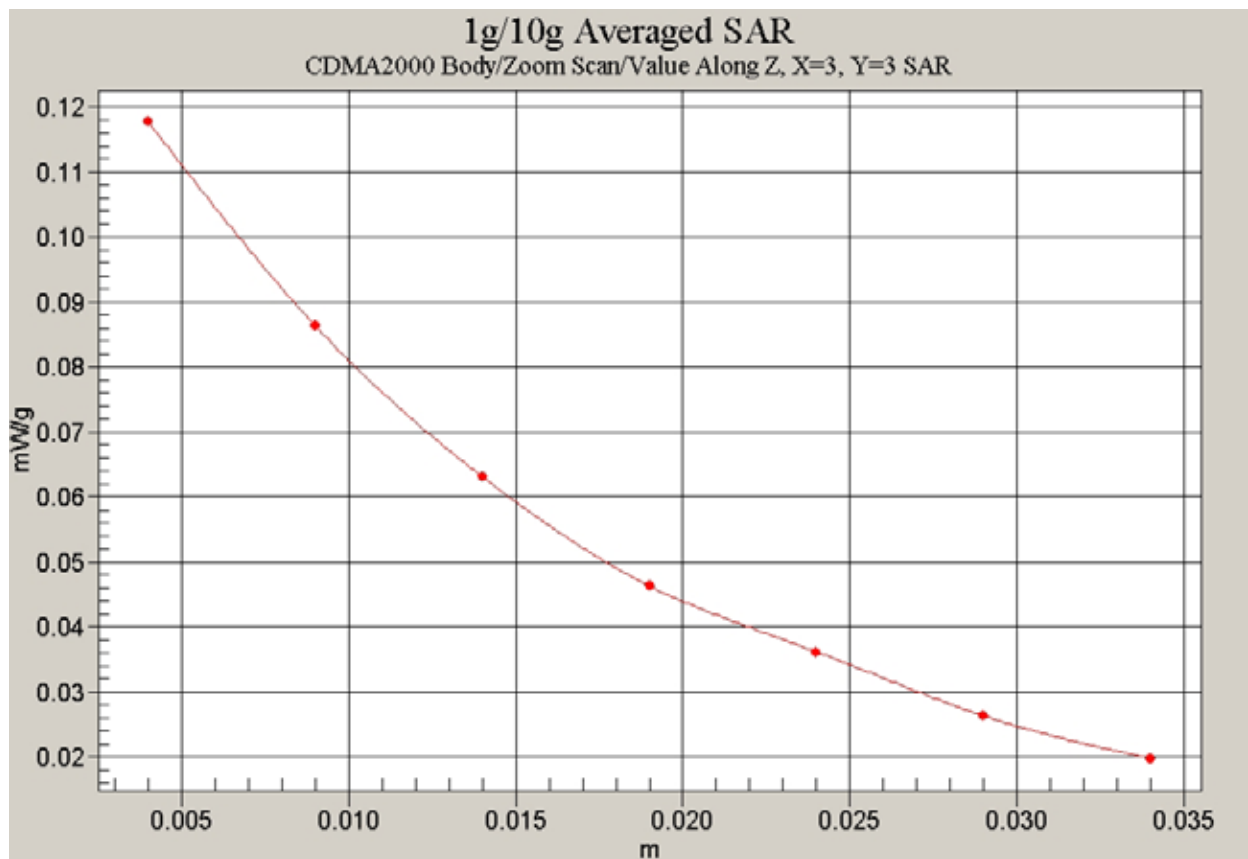


Fig. 32 Z-Scan at power reference point (Flat Phantom 835MHz CH777 with the display of the handset towards the phantom)

835 Body Towards Phantom Middle

Electronics: DAE3 Sn536

Communication System: CDMA 1X-new Frequency: 836.52 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(6.45, 6.45, 6.45)

Toward Phantom Middle/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 8.65 V/m; Power Drift = 0.1 dB

Maximum value of SAR (interpolated) = 0.114 mW/g

Toward Phantom Middle/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.65 V/m; Power Drift = 0.1 dB

Maximum value of SAR (measured) = 0.135 mW/g

Peak SAR (extrapolated) = 0.213 W/kg

SAR(1 g) = 0.122 mW/g; SAR(10 g) = 0.084 mW/g

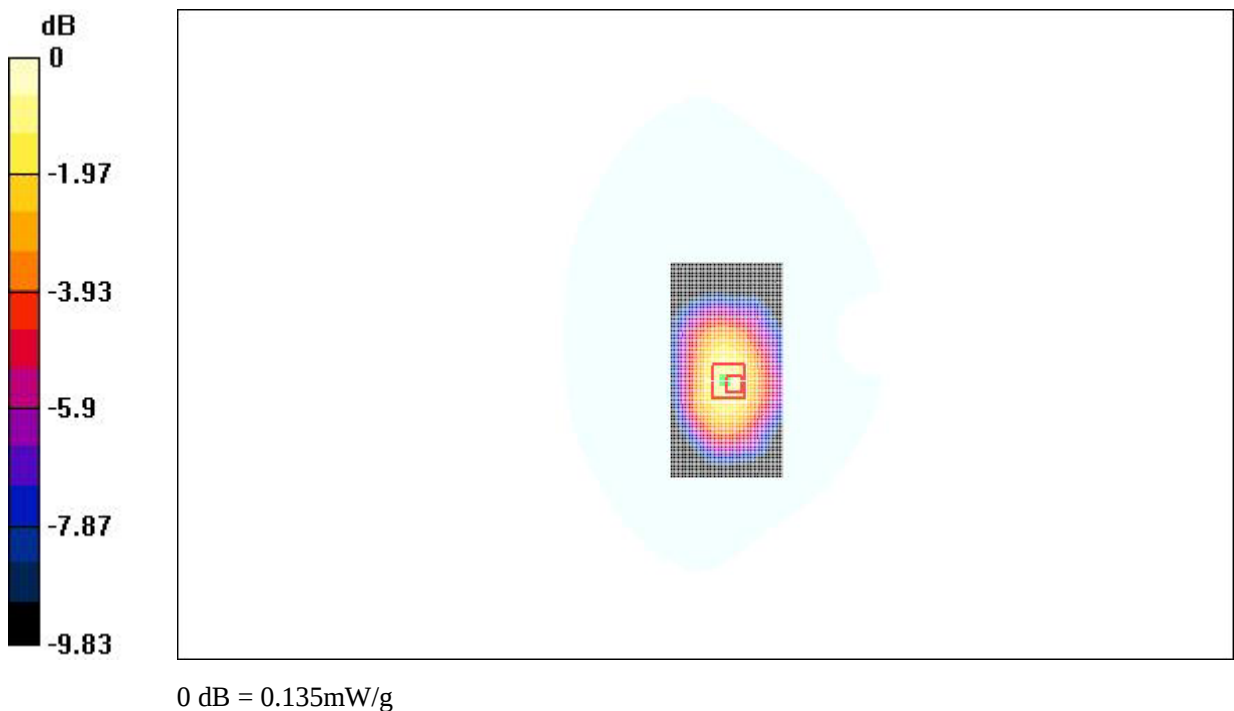


Fig. 33 Flat Phantom Body-worn Position 835MHz CH384 with the display of the handset towards the phantom

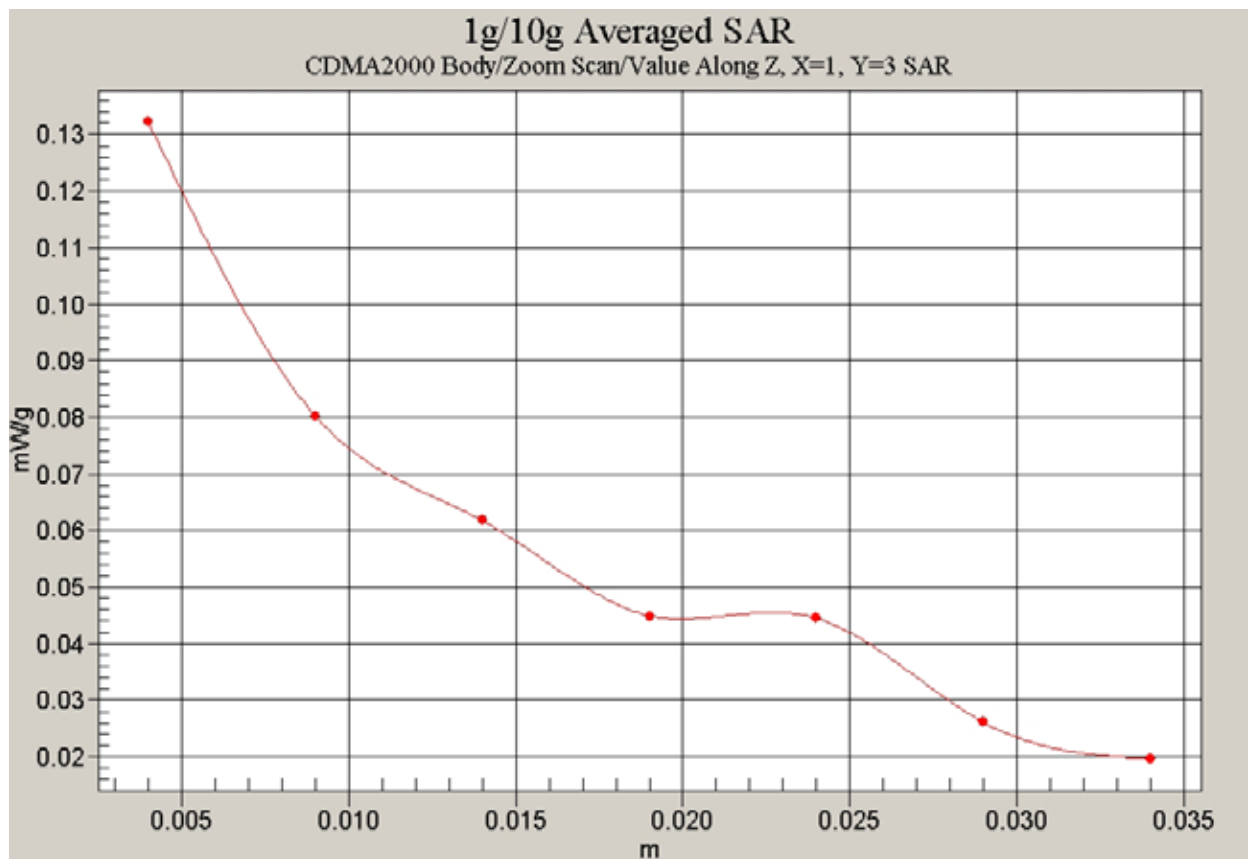


Fig. 34 Z-Scan at power reference point (Flat Phantom 835MHz CH384 with the display of the handset towards the phantom)

835 Body Towards Phantom Low

Electronics: DAE3 Sn536

Communication System: CDMA 1X-new Frequency: 824.7 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(6.45, 6.45, 6.45)

Toward Phantom Low/Area Scan (51x91x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 10.8 V/m; Power Drift = 0.2 dB

Maximum value of SAR (interpolated) = 0.156 mW/g

Toward Phantom Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.8 V/m; Power Drift = 0.2 dB

Maximum value of SAR (measured) = 0.173 mW/g

Peak SAR (extrapolated) = 0.255 W/kg

SAR(1 g) = 0.146 mW/g; SAR(10 g) = 0.096 mW/g

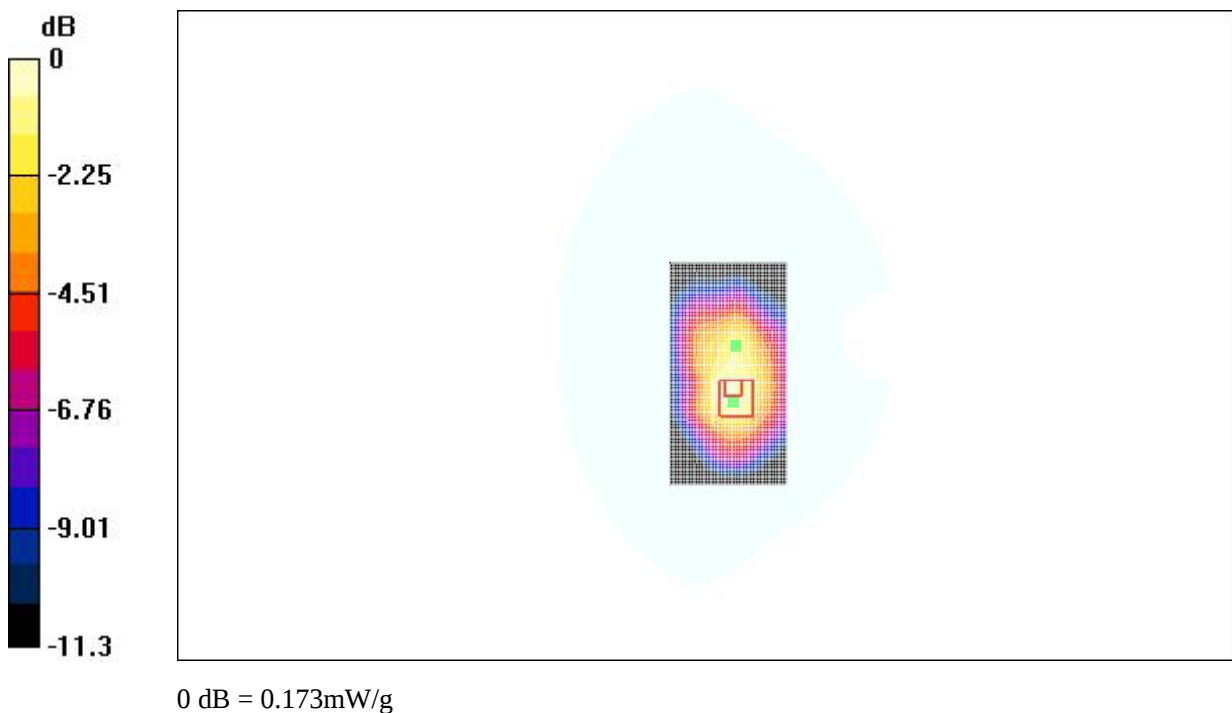


Fig. 35 Flat Phantom Body-worn Position 835MHz CH1013 with the display of the handset towards the phantom

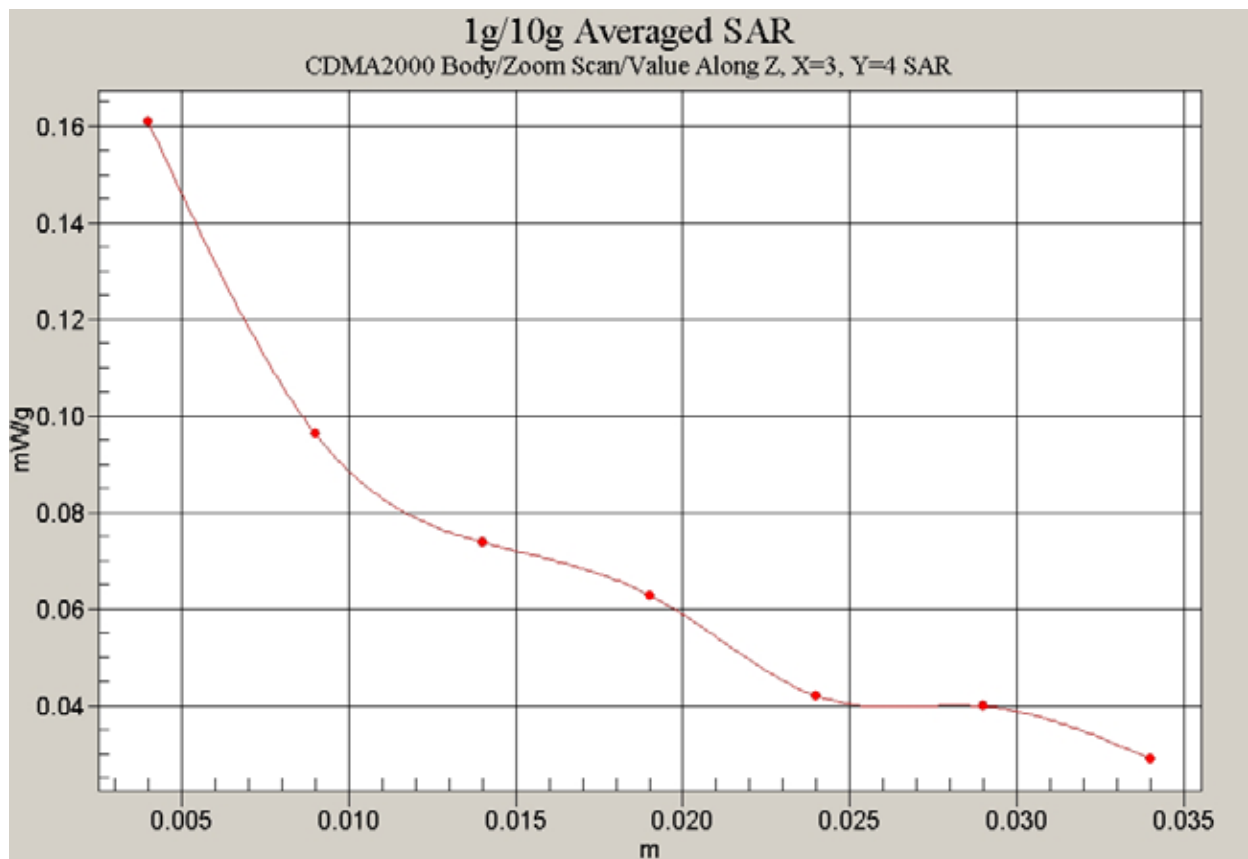


Fig. 36 Z-Scan at power reference point (Flat Phantom 835MHz CH1013 with the display of the handset towards the phantom)

ANNEX D CONDUCTED OUTPUT POWER MEASUREMENT

D.1 Summary

During the process of testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication tester (CMU-200) to ensure max power transmission and proper modulation.

This result contains conducted output power and ERP for the EUT.

In all cases, the measured peak output power should be greater and within 5% than EMI measurement.

D.2 Conducted

D.2.1 Method of Measurements

The EUT was set up for the max output power.

The channel power was measured with Agilent Spectrum Analyzer E4440A.

These measurements were done at 3 channels, 1013, 363 and 777 .

D.2.2 Measurement result

Please refer to the results in Table 10 and Table 11.

ANNEX E SYSTEM VALIDATION RESULTS

835MHzDAE536Probe1736

Electronics: DAE3 Sn536

Communication System: CW Frequency: 835 MHz Duty Cycle: 1:1

Probe: ET3DV6 - SN1736 ConvF(6.51, 6.51, 6.51)

835MHz/Area Scan (101x101x1): Measurement grid: dx=10mm, dy=10mm

Reference Value = 56.8 V/m; Power Drift = -0.0 dB

Maximum value of SAR (interpolated) = 2.68 mW/g

835MHz/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 56.8 V/m; Power Drift = -0.0 dB

Maximum value of SAR (measured) = 2.69 mW/g

Peak SAR (extrapolated) = 3.67 W/kg

SAR(1 g) = 2.48 mW/g; SAR(10 g) = 1.62 mW/g

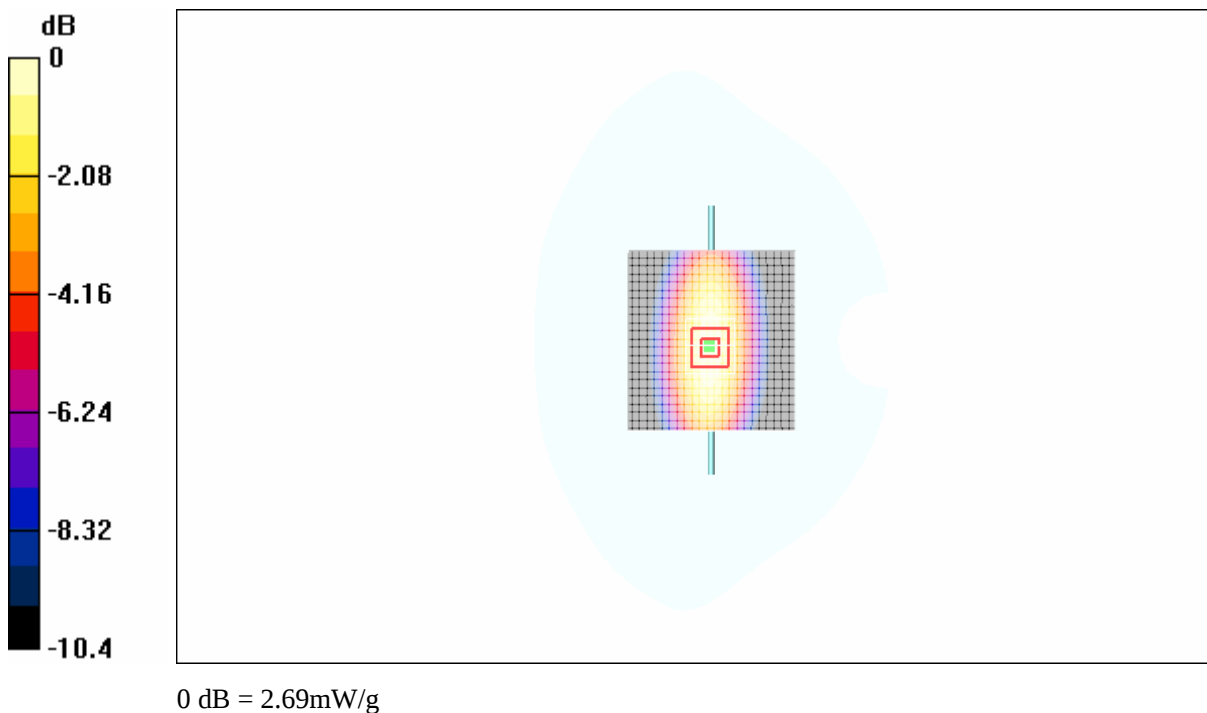


Fig.97 validation 835MHz 250mW

ANNEX F PROBE CALIBRATION CERTIFICATE

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client TMC-Auden

Certificate No: ET3-1736_Jul05

CALIBRATION CERTIFICATE

Object ET3DV6 - SN:1736

Calibration procedure(s) QA CAL-01.v5
Calibration procedure for dosimetric E-field probes

Calibration date: July 14, 2005

Condition of the calibrated item In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^{\circ}\text{C}$ and humidity $< 70\%$.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	3-May-05 (METAS, No. 251-00466)	May-06
Power sensor E4412A	MY41495277	3-May-05 (METAS, No. 251-00466)	May-06
Power sensor E4412A	MY41498087	3-May-05 (METAS, No. 251-00466)	May-06
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-04 (METAS, No. 251-00403)	Aug-05
Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-05 (METAS, No. 251-00467)	May-06
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-04 (METAS, No. 251-00404)	Aug-05
Reference Probe ES3DV2	SN: 3013	7-Jan-05 (SPEAG, No. ES3-3013_Jan05)	Jan-06
DAE4	SN: 907	21-Jun-05 (SPEAG, No. DAE4-907_Jun05)	Jun-06
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov 05

Calibrated by:	Name Nico Vetterli	Function Laboratory Technician	Signature
----------------	-----------------------	-----------------------------------	---------------

Approved by:	Katja Pokovic	Technical Manager	
--------------	---------------	-------------------	--

Issued: July 18, 2005

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- b) CENELEC EN 50361, "Basic standard for the measurement of Specific Absorption Rate related to human exposure to electromagnetic fields from mobile phones (300 MHz - 3 GHz), July 2001

Methods Applied and Interpretation of Parameters:

- *NORM_{x,y,z}*: Assessed for E-field polarization $\vartheta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). *NORM_{x,y,z}* are only intermediate values, i.e., the uncertainties of *NORM_{x,y,z}* does not effect the E^2 -field uncertainty inside TSL (see below *ConvF*).
- *NORM(f)_{x,y,z}* = *NORM_{x,y,z}* * *frequency_response* (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of *ConvF*.
- *DCP_{x,y,z}*: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency nor media.
- *ConvF and Boundary Effect Parameters*: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to *NORM_{x,y,z}* * *ConvF* whereby the uncertainty corresponds to that given for *ConvF*. A frequency dependent *ConvF* is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- *Spherical isotropy (3D deviation from isotropy)*: in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

ET3DV6 SN:1736

July 14, 2005

Probe ET3DV6

SN:1736

Manufactured:	September 27, 2002
Last calibrated:	November 25, 2004
Recalibrated:	July 14, 2005

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

ET3DV6 SN:1736

July 14, 2005

DASY - Parameters of Probe: ET3DV6 SN:1736

Sensitivity in Free Space^A

Diode Compression^B

NormX	1.86 ± 10.1%	$\mu V/(V/m)^2$	DCP X	97 mV
NormY	1.90 ± 10.1%	$\mu V/(V/m)^2$	DCP Y	97 mV
NormZ	1.89 ± 10.1%	$\mu V/(V/m)^2$	DCP Z	97 mV

Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 8.

Boundary Effect

TSL	900 MHz	Typical SAR gradient: 5 % per mm		
	Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
	SAR _{be} [%]	Without Correction Algorithm	8.3	4.4
	SAR _{be} [%]	With Correction Algorithm	0.1	0.2
TSL	1810 MHz	Typical SAR gradient: 10 % per mm		
	Sensor Center to Phantom Surface Distance		3.7 mm	4.7 mm
	SAR _{be} [%]	Without Correction Algorithm	13.6	9.5
	SAR _{be} [%]	With Correction Algorithm	0.9	0.1

Sensor Offset

Probe Tip to Sensor Center	2.7 mm
----------------------------	---------------

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Page 8).


^B Numerical linearization parameter; uncertainty not required.

ET3DV6 SN:1736

July 14, 2005

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide: R22)

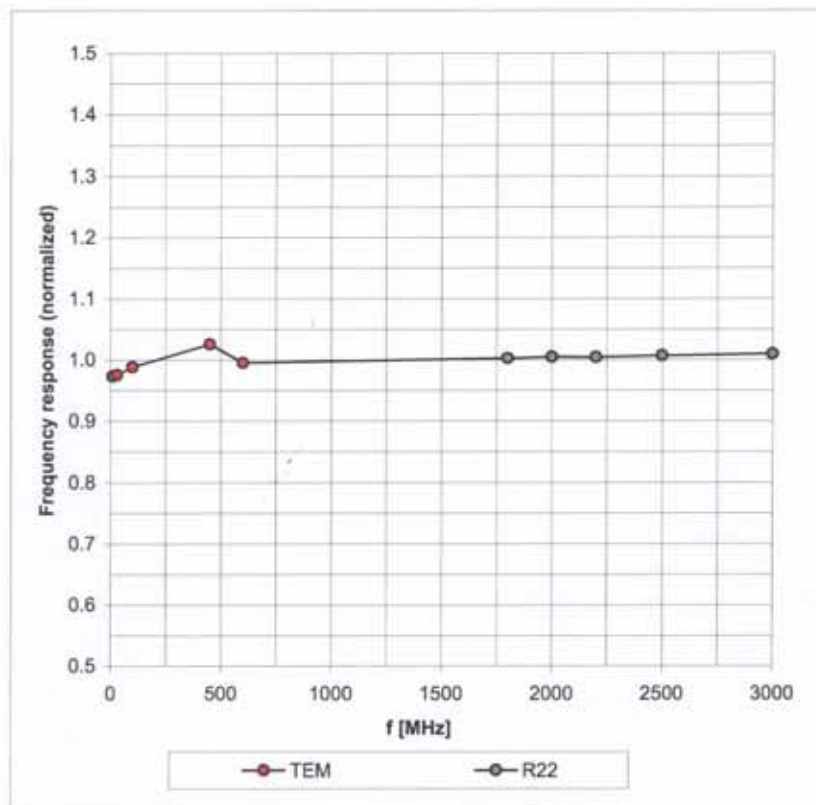


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

ET3DV6 SN:1736

July 14, 2005

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

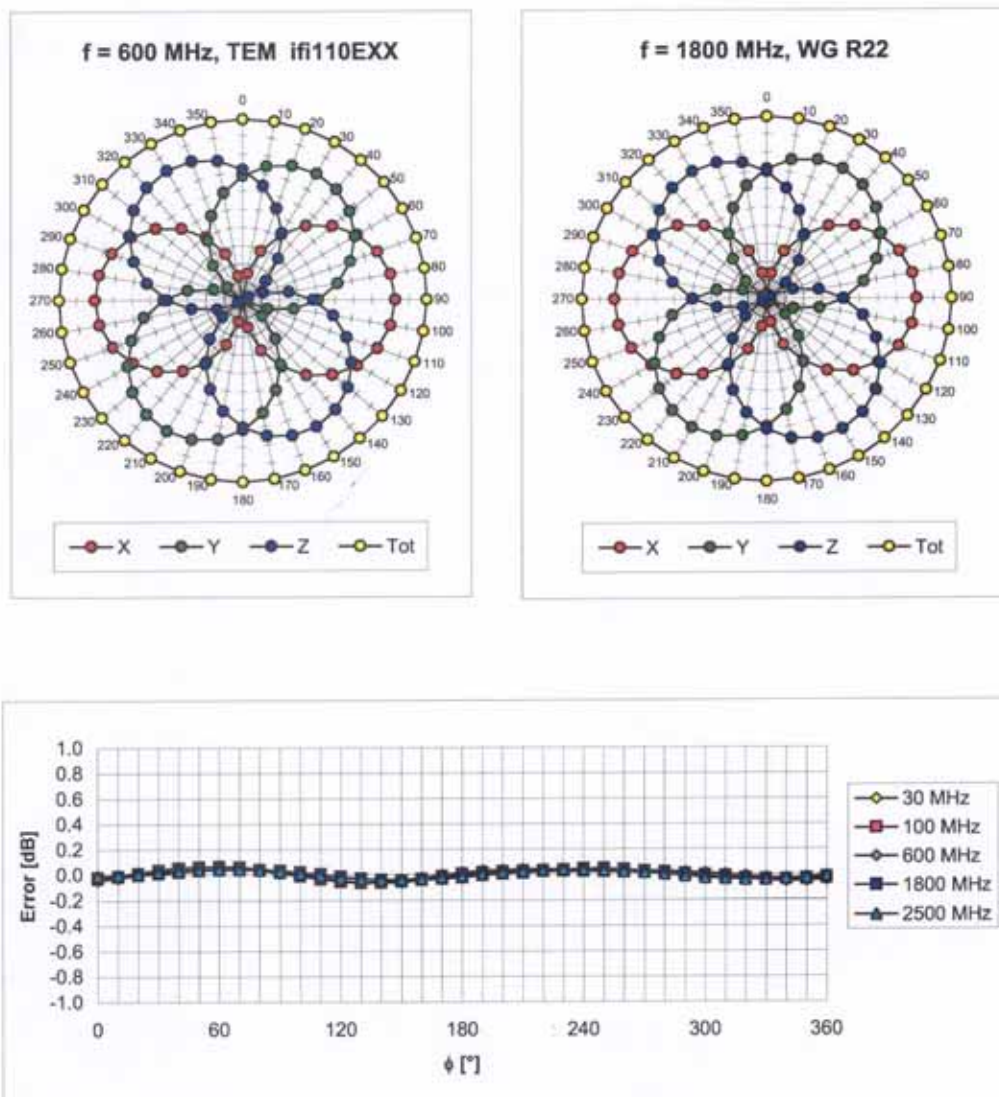


Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

ET3DV6 SN:1736

July 14, 2005

Dynamic Range $f(\text{SAR}_{\text{head}})$
(Waveguide R22, $f = 1800 \text{ MHz}$)


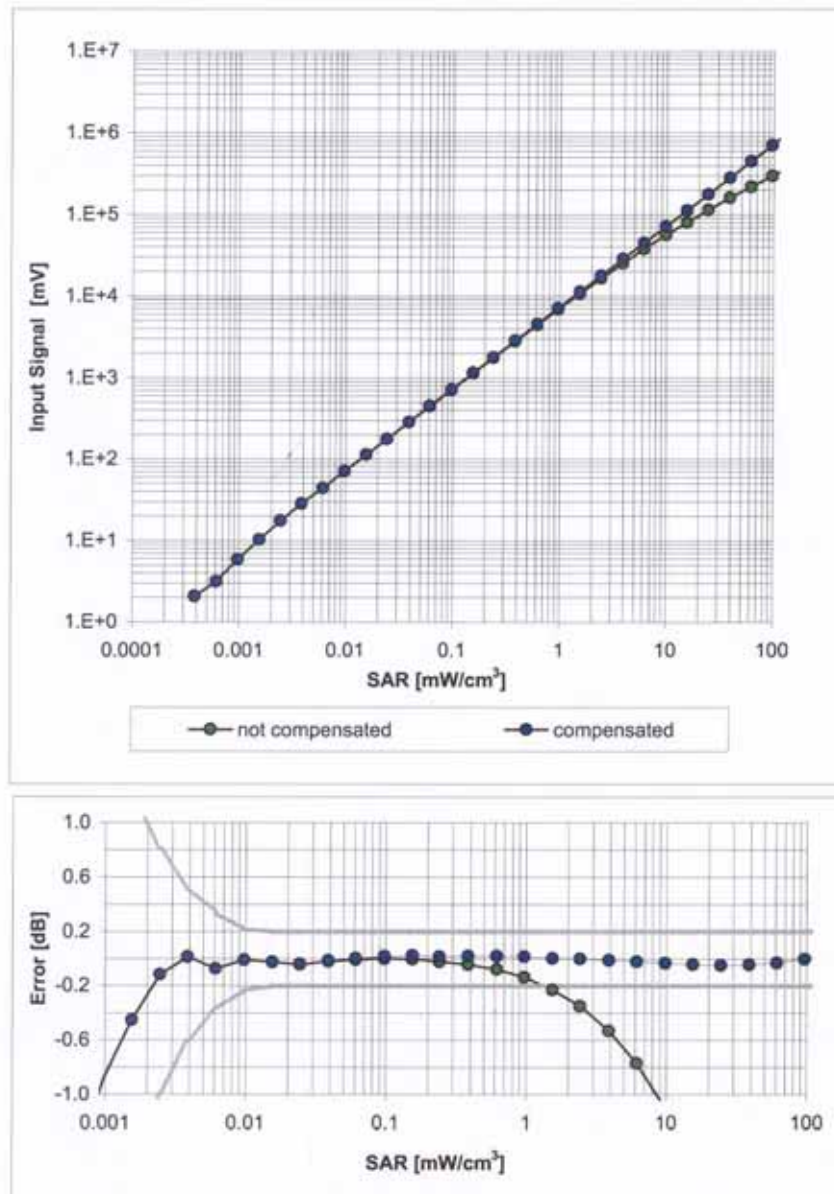


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

ET3DV6 SN:1736

July 14, 2005

Conversion Factor Assessment

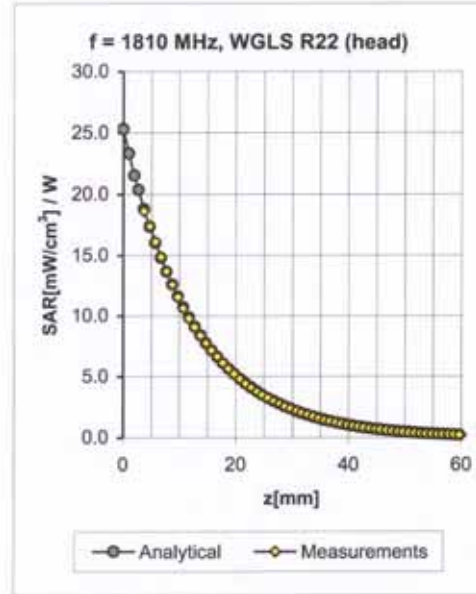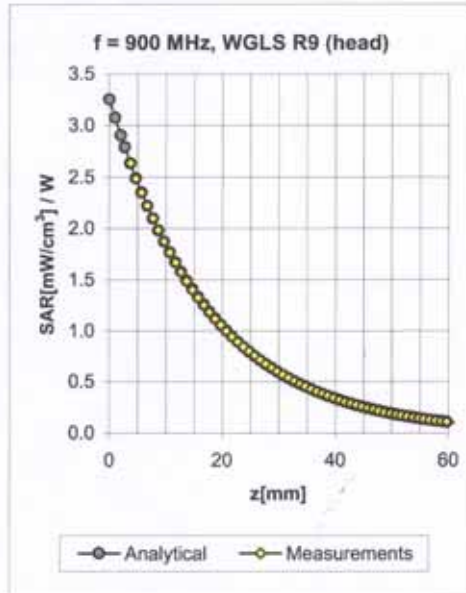

f [MHz]	Validity [MHz] ^c	TSL	Permittivity	Conductivity	Alpha	Depth	ConvF Uncertainty
900	± 50 / ± 100	Head	41.5 ± 5%	0.97 ± 5%	0.56	1.85	6.51 ± 11.0% (k=2)
1810	± 50 / ± 100	Head	40.0 ± 5%	1.40 ± 5%	0.57	2.47	5.40 ± 11.0% (k=2)
2450	± 50 / ± 100	Head	39.2 ± 5%	1.80 ± 5%	0.62	2.29	4.67 ± 11.8% (k=2)
2450	± 50 / ± 100	Body	52.7 ± 5%	1.95 ± 5%	0.72	1.94	4.39 ± 11.8% (k=2)


^c The validity of ± 100 MHz only applies for DASY v4.4 and higher (see Page 2). The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

ET3DV6 SN:1736

July 14, 2005

Deviation from Isotropy in HSL

Error (ϕ , θ), $f = 900$ MHz

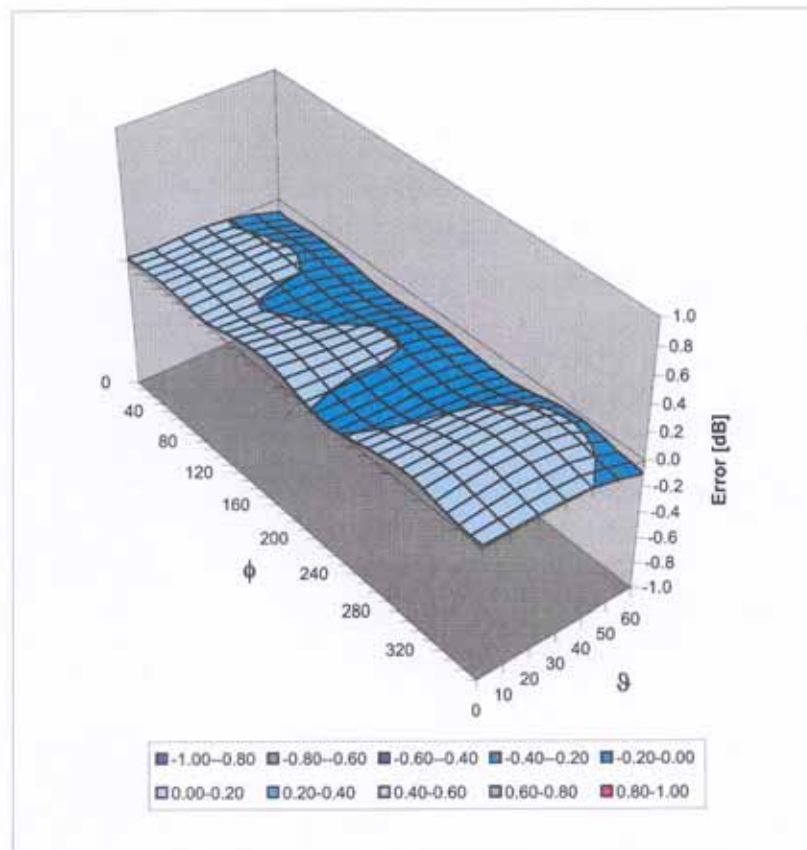

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)